



**FCC OET BULLETIN 65 SUPPLEMENT C 01-01
IEEE Std 1528-2003**

SAR EVALUATION REPORT

For
GSM & W-CDMA Phone + BT

**Model: LG440G
FCC ID: ZNFLG440G**

**Report Number: 12U14353-4, Revision A
Issue Date: 5/15/2012**

Prepared for
**LG ELECTRONICS MOBILECOMM U.S.A., INC.
1000 SYLVAN AVE.
ENGLEWOOD CLIFFS, NJ 07632**

Prepared by
**COMPLIANCE CERTIFICATION SERVICES (UL CCS)
47173 BENICIA STREET
FREMONT, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888**



NVLAP LAB CODE 200065-0

Revision History


<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
--	5/10/2012	Initial Issue	--
A	05/15/12	Updated Client address	A. Zaffar

Table of Contents

1. Attestation of Test Results	5
2. Test Methodology	6
3. Facilities and Accreditation	6
4. Calibration and Uncertainty	7
4.1. Measuring Instrument Calibration.....	7
4.2. Measurement Uncertainty.....	8
5. Measurement System Description and Setup.....	9
6. SAR Measurement Procedures	10
6.1. Normal SAR Measurement Procedure	10
6.2. Volume Scan Procedures.....	11
7. Device Under Test	12
7.1. Air Interfaces and Frequency Ranges	12
7.2. Simultaneous Transmission.....	12
7.3. Hotspot (Wireless router) Exposure Condition	12
8. Summary of Test Configurations	13
8.1. Head Exposure Condition.....	13
8.2. Body Exposure Conditions	13
9. RF Output Power Measurement	14
9.1. GSM850	14
9.2. GSM1900	15
9.3. W-CDMA (UMTS) Band V	16
9.4. W-CDMA (UMTS) Band II.....	18
9.5. Bluetooth	20
10. Tissue Dielectric Properties	21
10.1. Composition of Ingredients for the Tissue Material Used in the SAR Tests	22
10.2. Tissue Dielectric Parameter Check Results.....	23
11. System Performance Check.....	24
11.1. System Performance Check Measurement Conditions	24
11.2. Reference SAR Values for System Performance Check	24
11.3. System Performance Check Results	25
12. SAR Test Results	26

12.1.	GSM850	26
12.1.1.	Head SAR	26
12.1.2.	Body SAR	26
12.2.	GSM1900	27
12.2.1.	Head SAR	27
12.2.2.	Body SAR	27
12.3.	WCDMA (UMTS) Band V	28
12.3.1.	Head SAR	28
12.3.2.	Body SAR	28
12.4.	WCDMA (UMTS) Band II	29
12.4.1.	Head SAR	29
12.4.2.	Body SAR	29
13.	Summary of Highest SAR Values	30
13.1.	SAR Plots (from Summary of Highest SAR Values)	31
14.	Simultaneous Transmission SAR Analysis	47
14.1.	Sum of the 1g SAR for Head Exposure Condition	47
14.2.	SAR to Peak Location Separation Ratio (SPLSR)	47
14.3.	Sum of the 1g SAR for Body Exposure Condition	47
14.4.	SAR to Peak Location Separation Ratio (SPLSR)	47
14.5.	SAR Peak Location Separation Distance	47
15.	Appendixes	48
15.1.	System Performance Check Plots	48
15.2.	SAR Test Plots for GSM850	48
15.3.	SAR Test Plots for GSM1900	48
15.4.	SAR Test Plots for WCDMA (UMTS) Band V	48
15.5.	SAR Test Plots for WCDMA (UMTS) Band II	48
15.6.	Calibration Certificate for E-Field Probe EX3DV4 - SN 3749	48
15.7.	Calibration Certificate for D835V2 - SN 4d002	48
15.8.	Calibration Certificate for D1900V2 - SN 5d043	48
16.	External Photos	49
17.	Antenna Locations & Separation Distances	51
18.	Setup Photos	52

1. Attestation of Test Results

Applicant	LG ELECTRONICS MOBILECOMM U.S.A., INC.		
DUT description	GSM & W-CDMA Phone +BT		
Model	LG440G		
Test device is	An identical prototype		
Device category	Portable		
Exposure category	General Population/Uncontrolled Exposure		
Date tested	4/4/2012 – 4/5/2012		
FCC Rule Parts	Freq. Range	Highest 1-g SAR	Limit
22	824-849 MHz	Head: 0.775 W/kg (Left Touch) Body: 0.482 W/kg (Rear w/ 15mm distance)	1.6 W/kg
24	1850-1910 MHz	Head: 0.468 W/kg (Left Touch) Body: 0.242 W/kg (Rear w/ 15 mm distance)	
Applicable Standards			Test Results
FCC OET Bulletin 65 Supplement C 01-01, IEEE Std 1528-2003			Pass
Compliance Certification Services, Inc. (UL CCS) tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL CCS based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report. Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL CCS and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL CCS will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government (NIST Handbook 150, Annex A). This report is written to support regulatory compliance of the applicable standards stated above.			
Approved & Released For UL CCS By:		Tested By:	
			
Sunny Shih Engineering Leader Compliance Certification Services (UL CCS)		Bobby Bayani SAR Engineer Compliance Certification Services (UL CCS)	

2. Test Methodology

The tests documented in this report were performed in accordance with FCC OET Bulletin 65 Supplement C Edition 01-01, IEEE STD 1528-2003 and the following KDB Procedures:

- 648474 D01 SAR Handsets Multi Xmitter and Ant, v01r05
- 941225 D01 SAR test for 3G devices v02
- 941225 D03 SAR Test Reduction GSM GPRS EDGE v01

3. Facilities and Accreditation

The test sites and measurement facilities used to collect data are located at 47173 Benicia Street, Fremont, California, USA.

UL CCS is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://www.ccsemc.com>.

4. Calibration and Uncertainty

4.1. Measuring Instrument Calibration

The measuring equipment used to perform the tests documented in this report has been calibrated in accordance with the manufacturers' recommendations, and is traceable to recognized national standards.


Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due date		
				MM	DD	Year
Dielectronic Probe kit	HP	85070C	N/A	N/A		
Base Station Simulator	R & S	CMU 200	106291	6	24	2012
ESA Series Network Analyzer	Agilent	E5071B	MY42100131	2	11	2013
Synthesized Signal Generator	HP	83732B	US34490599	7	14	2012
E-Field Probe	SPEAG	EX3DV4	3749	1	27	2013
Thermometer	ERTCO	639-1S	1718	7	19	2012
Data Acquisition Electronics	SPEAG	DAE3	427	1	17	2013
System Validation Dipole	SPEAG	D835V2	4d002	3	6	2013
System Validation Dipole	SPEAG	D1900V2	5d043	11	10	2012
Power Meter	HP	437B	3125U16345	5	13	2012
Power Sensor	HP	8481A	2702A60780	5	13	2012
Amplifier	MITEQ	4D00400600-50-30P	1620606	N/A		
Directional coupler	Werlatone	C8060-102	2141	N/A		

4.2. Measurement Uncertainty

Measurement uncertainty for 300 MHz to 3 GHz averaged over 1 gram					
Component	Error, %	Distribution	Divisor	Sensitivity	U (X), %
Measurement System					
Probe Calibration (k=1)	6.00	Normal	1	1	6.00
Axial Isotropy	1.15	Rectangular	1.732	0.7071	0.47
Hemispherical Isotropy	2.30	Rectangular	1.732	0.7071	0.94
Boundary Effect	0.90	Rectangular	1.732	1	0.52
Probe Linearity	3.45	Rectangular	1.732	1	1.99
System Detection Limits	1.00	Rectangular	1.732	1	0.58
Readout Electronics	0.30	Normal	1	1	0.30
Response Time	0.80	Rectangular	1.732	1	0.46
Integration Time	2.60	Rectangular	1.732	1	1.50
RF Ambient Conditions - Noise	3.00	Rectangular	1.732	1	1.73
RF Ambient Conditions - Reflections	3.00	Rectangular	1.732	1	1.73
Probe Positioner Mechanical Tolerance	0.40	Rectangular	1.732	1	0.23
Probe Positioning with respect to Phantom	2.90	Rectangular	1.732	1	1.67
Extrapolation, Interpolation and Integration	1.00	Rectangular	1.732	1	0.58
Test Sample Related					
Test Sample Positioning	2.90	Normal	1	1	2.90
Device Holder Uncertainty	3.60	Normal	1	1	3.60
Output Power Variation - SAR Drift	5.00	Rectangular	1.732	1	2.89
Phantom and Tissue Parameters					
Phantom Uncertainty (shape and thickness)	4.00	Rectangular	1.732	1	2.31
Liquid Conductivity - deviation from target	5.00	Rectangular	1.732	0.64	1.85
Liquid Conductivity - measurement	-4.73	Normal	1	0.64	-3.03
Liquid Permittivity - deviation from target	5.00	Rectangular	1.732	0.6	1.73
Liquid Permittivity - measurement uncertainty	-4.49	Normal	1	0.6	-2.69
Combined Standard Uncertainty Uc(y) =					10.55
Expanded Uncertainty U, Coverage Factor = 2, > 95 % Confidence =				21.10 %	
Expanded Uncertainty U, Coverage Factor = 2, > 95 % Confidence =				1.66 dB	

5. Measurement System Description and Setup

The DASY4 system used for performing compliance tests consists of the following items:

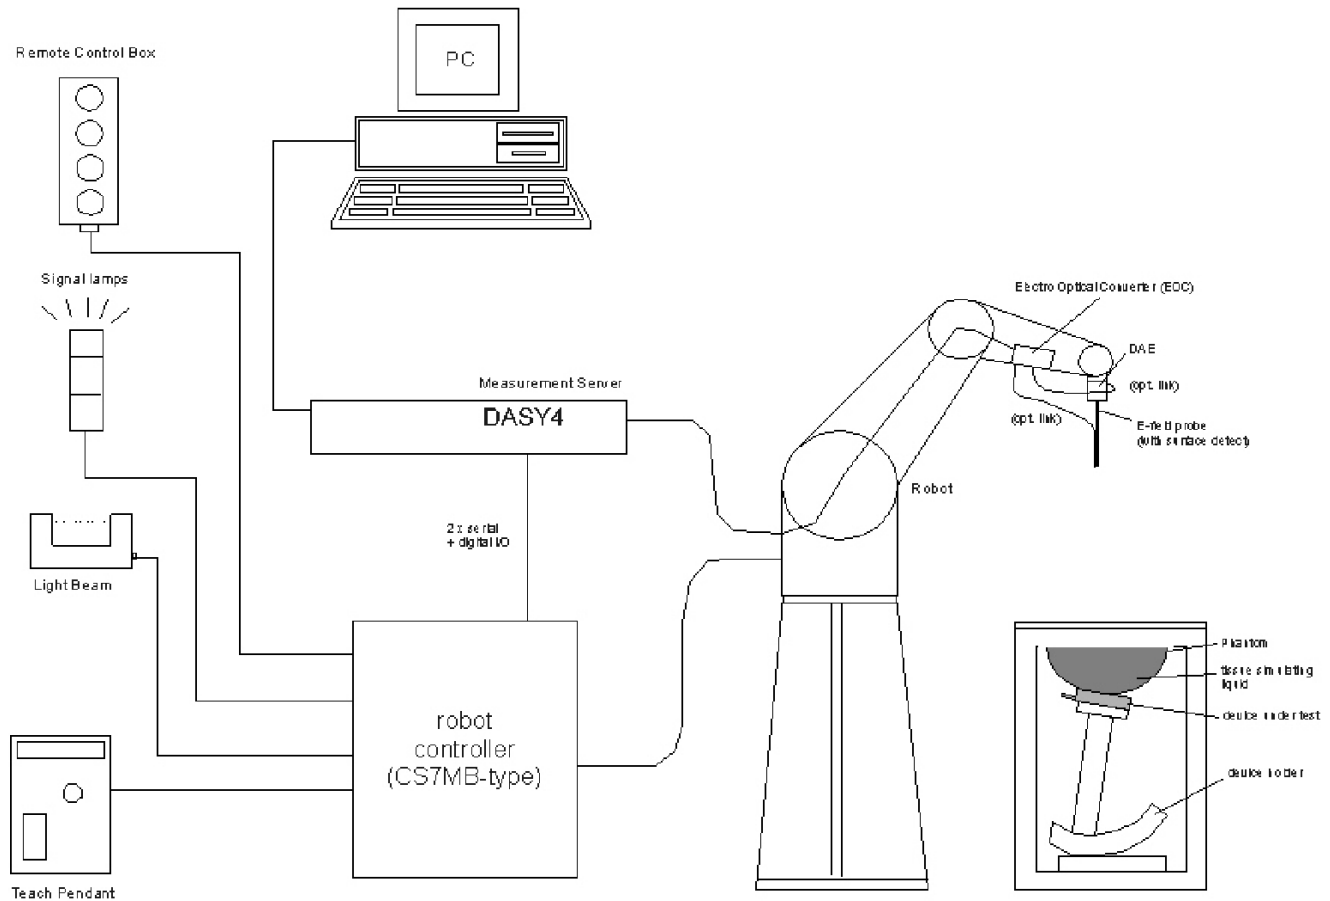

- A standard high precision 6-axis robot (Stäubli RX family) with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- A dosimetric probe, i.e., an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- A probe alignment unit which improves the (absolute) accuracy of the probe positioning.
- A computer operating Windows XP.
- DASY software.
- Remote controls with teach pendant and additional circuitry for robot safety such as warning lamps, etc.
- The SAM twin phantom enabling testing left-hand and right-hand usage.
- The device holder for handheld mobile phones.
- Tissue simulating liquid mixed according to the given recipes.
- Validation dipole kits allowing validating the proper functioning of the system.

6. SAR Measurement Procedures

6.1. Normal SAR Measurement Procedure

Step 1: Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. The minimum distance of probe sensors to surface is 2.1 mm. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

Step 2: Area Scan

The Area Scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum locations even in relatively coarse grids. When an Area Scan has measured all reachable points, it computes the field maximal found in the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE Standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan). If only one Zoom Scan follows the Area Scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of Zoom Scans has to be increased accordingly.

Step 3: Zoom Scan

Zoom Scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 g and 10 g of simulated tissue. The Zoom Scan measures $\geq 7 \times 7 \times 9$ (above 4.5 GHz) or $5 \times 5 \times 7$ (below 3 GHz) points within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the Zoom Scan evaluates the averaged SAR for 1 g and 10 g and displays these values next to the job's label.

Step 4: Power drift measurement

The Power Drift Measurement measures the field at the same location as the most recent power reference measurement within the same procedure, and with the same settings. The Power Drift Measurement gives the field difference in dB from the reading conducted within the last Power Reference Measurement. This allows a user to monitor the power drift of the device under test within a batch process. The measurement procedure is the same as Step 1.

Step 5: Z-Scan (FCC only)

The Z Scan measures points along a vertical straight line. The line runs along the Z-axis of a one-dimensional grid. In order to get a reasonable extrapolation the extrapolated distance should not be larger than the step size in Z-direction.

6.2. Volume Scan Procedures

Step 1: Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. The minimum distance of probe sensors to surface is 2.1 mm. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

Step 2: Area Scan

The Area Scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum locations even in relatively coarse grids. When an Area Scan has measured all reachable points, it computes the field maximal found in the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE Standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan). If only one Zoom Scan follows the Area Scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of Zoom Scans has to be increased accordingly.

Step 3: Zoom Scan

Zoom Scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 g and 10 g of simulated tissue. The Zoom Scan measures $\geq 7 \times 7 \times 9$ (above 4.5 GHz) or $5 \times 5 \times 7$ (below 3 GHz) points within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the Zoom Scan evaluates the averaged SAR for 1 g and 10 g and displays these values next to the job's label.

Step 4: Volume Scan

Volume Scans are used to assess peak SAR and averaged SAR measurements in largely extended 3-dimensional volumes within any phantom. This measurement does not need any previous area scan. The grid can be anchored to a user specific point or to the current probe location.

Step 5: Power drift measurement

The Power Drift Measurement measures the field at the same location as the most recent power reference measurement within the same procedure, and with the same settings. The Power Drift Measurement gives the field difference in dB from the reading conducted within the last Power Reference Measurement. This allows a user to monitor the power drift of the device under test within a batch process. The measurement procedure is the same as Step 1.

7. Device Under Test

GSM & W-CDMA Phone + BT Model: LG440G	
Normal operation	- Held to head, - Body (Rear and Front sides) with 15 mm separation distance.
Accessory	1. Headset 2. Battery Cover - o Normal Battery Cover

7.1. Air Interfaces and Frequency Ranges

Air Interfaces	- GSM, GPRS and EGPRS (Rx only) - UMTS (WCDMA) Rel 99, HSDPA (Rel 5, CAT 8), HSUPA (Not supported) - Bluetooth Ver 2.1 with EDR
Tx Frequency Ranges	- GSM850: 824 - 849 MHz - GSM1900: 1850 - 1910 MHz - W-CDMA (UMTS) Band V: 824 - 849 MHz - W-CDMA (UMTS) Band II: 1850 - 1910 MHz - Bluetooth: 2402 - 2480 MHz

7.2. Simultaneous Transmission

No.	Conditions
1	GSM850 Voice + BT
2	GSM1900 Voice + BT
3	GSM850 GPRS + BT
4	GSM1900 GPRS + BT
5	W-CDMA (UMTS) Band V+ BT
6	W-CDMA (UMTS) Band II+ BT

Notes:

1. EGPRS is Rx only

7.3. Hotspot (Wireless router) Exposure Condition

The device is not capable of personal hotspot mode.

8. Summary of Test Configurations

Refer to Section 17 "Antenna Location and Separation Distances" for the specific details of the antenna-to-antenna distances and Section 18 "Setup Photos" for the details of the test positions.

8.1. Head Exposure Condition

Test Configurations	SAR Required	Note
Left Touch	Yes	
Left Tilt (15°)	Yes	
Right Touch	Yes	
Right Tilt (15°)	Yes	

8.2. Body Exposure Conditions

Test Configurations	Separation distance	SAR Required	Note
Rear	15 mm	Yes	
Front	15 mm	Yes	

9. RF Output Power Measurement

9.1. GSM850

GMSK (Voice) Mode

Band	Ch No.	Freq. (MHz)	Avg burst Pwr (dBm)
850	128	824.2	33.0
	190	836.6	33.2
	251	848.8	33.2

GMSK (GPRS) Mode - Coding Scheme: CS1

Band	Ch No.	Freq. (MHz)	Avg burst Pwr (dBm)			
			1 slot	Frame Avg Pwr	2 slots	Frame Avg Pwr
850	128	824.2	33.0	24.0	30.5	24.5
	190	836.6	33.2	24.2	30.7	24.7
	251	848.8	33.2	24.2	30.8	24.8

Notes:

The worst-case configuration and mode for SAR testing is determined to be as follows:

- Head: GMSK Voice Mode
- Body: GMSK (GPRS) mode with 2 time slots, based on the output power measurements above

8PSK (EGPRS) Mode - Coding Scheme: MCS5

This mode is Rx only

9.2. GSM1900

GMSK (Voice) Mode

Band	Ch No.	Freq. (MHz)	Avg burst Pwr (dBm)
1900	512	1850.2	30.1
	661	1880.0	29.7
	810	1909.8	29.6

GMSK (GPRS) Mode - Coding Scheme: CS1

Band	Ch No.	Freq. (MHz)	Avg burst Pwr (dBm)			
			1 slot	Frame Avg Pwr	2 slots	Frame Avg Pwr
1900	512	1850.2	30.1	21.1	28.3	22.3
	661	1880.0	29.7	20.7	27.9	21.9
	810	1909.8	29.6	20.6	27.8	21.8

Notes:

The worst-case configuration and mode for SAR testing is determined to be as follows:

- Head: GMSK Voice Mode
- Body: GMSK (GPRS) mode with 2 time slots, based on the output power measurements above

8PSK (EGPRS) Mode - Coding Scheme: MCS5

N/A: This mode is Rx only

9.3. W-CDMA (UMTS) Band V

Release 99 (RMC, 12.2kbps)

The following tests were completed according to the test requirements outlined in section 5.2 of the 3GPP TS34.121-1 specification. The DUT supports power Class 3, which has a nominal maximum output power of 24 dBm (+1.7/-3.7).

Mode	Subtest	Rel99
WCDMA General Settings	Loopback Mode	Test Mode 1
	Rel99 RMC	12.2kbps RMC
	Power Control Algorithm	Algorithm2
	β_c/β_d	8/15

Output power table

Band	Ch No.	Freq. (MHz)	Avg Pwr (dBm)
850 (Band V)	4132	826.4	23.4
	4183	836.6	23.5
	4233	846.6	23.6

HSDPA

The following 4 Sub-tests were completed according to Release 5 procedures in section 5.2 of 3GPP TS34.121. A summary of these settings are illustrated below:

	Mode	HSDPA	HSDPA	HSDPA	HSDPA
	Subtest	1	2	3	4
WCDMA General Settings	Loopback Mode	Test Mode 1			
	Rel99 RMC	12.2kbps RMC			
	HSDPA FRC	H-Set1			
	Power Control Algorithm	Algorithm 2			
	β_c	2/15	12/15	15/15	15/15
	β_d	15/15	15/15	8/15	4/15
	Bd (SF)	64			
	β_c/β_d	2/15	12/15	15/8	15/4
	β_{hs}	4/15	24/15	30/15	30/15
HSDPA Specific Settings	CM (dB)	0	1	1.5	1.5
	D_{ACK}	8			
	D_{NAK}	8			
	DCQI	8			
	Ack-Nack repetition factor	3			
	CQI Feedback (Table 5.2B.4)	4ms			
	CQI Repetition Factor (Table 5.2B.4)	2			
	$A_{hs} = \beta_{hs}/\beta_c$	30/15			

Output power table

Band	Subtest	Ch No.	Freq. (MHz)	Avg Pwr (dBm)
850 (Band V)	1	4132	826.4	23.3
		4183	836.6	23.5
		4233	846.6	23.4
	2	4132	826.4	23.4
		4183	836.6	23.4
		4233	846.6	23.5
	3	4132	826.4	23.2
		4183	836.6	23.3
		4233	846.6	23.2
	4	4132	826.4	23.2
		4183	836.6	23.4
		4233	846.6	23.2

9.4. W-CDMA (UMTS) Band II

Release 99 (RMC, 12.2kbps)

The following tests were completed according to the test requirements outlined in section 5.2 of the 3GPP TS34.121-1 specification. The DUT supports power Class 3, which has a nominal maximum output power of 24 dBm (+1.7/-3.7).

Mode	Subtest	Rel99
WCDMA General Settings	Loopback Mode	Test Mode 1
	Rel99 RMC	12.2kbps RMC
	Power Control Algorithm	Algorithm2
	β_c/β_d	8/15

Output power table

Band	Ch No.	Freq. (MHz)	Avg Pwr (dBm)
1900 (Band II)	9262	1852.4	23.2
	9400	1880.0	23.1
	9538	1907.6	23.2

HSDPA

The following 4 Sub-tests were completed according to Release 5 procedures in section 5.2 of 3GPP TS34.121. A summary of these settings are illustrated below:

	Mode	HSDPA	HSDPA	HSDPA	HSDPA
	Subtest	1	2	3	4
WCDMA General Settings	Loopback Mode	Test Mode 1			
	Rel99 RMC	12.2kbps RMC			
	HSDPA FRC	H-Set1			
	Power Control Algorithm	Algorithm 2			
	β_c	2/15	12/15	15/15	15/15
	β_d	15/15	15/15	8/15	4/15
	Bd (SF)	64			
	β_c/β_d	2/15	12/15	15/8	15/4
	β_{hs}	4/15	24/15	30/15	30/15
HSDPA Specific Settings	CM (dB)	0	1	1.5	1.5
	D_{ACK}	8			
	D_{NAK}	8			
	DCQI	8			
	Ack-Nack repetition factor	3			
	CQI Feedback (Table 5.2B.4)	4ms			
	CQI Repetition Factor (Table 5.2B.4)	2			
	$A_{hs} = \beta_{hs}/\beta_c$	30/15			

Output power table

Band	Subtest	Ch No.	Freq. (MHz)	Avg Pwr (dBm)
1900 (Band II)	1	9262	1852.4	23.2
		9400	1880.0	23.3
		9538	1907.6	23.1
	2	9262	1852.4	23.2
		9400	1880.0	23.3
		9538	1907.6	23.1
	3	9262	1852.4	23.0
		9400	1880.0	23.0
		9538	1907.6	22.7
	4	9262	1852.4	23.0
		9400	1880.0	23.0
		9538	1907.6	22.9

9.5. Bluetooth

Version 2.1+EDR, Power class: 1 (100 mW/20 dBm)

Mode	Channel #	Freq. (MHz)	Conducted Avg Power	
			(dBm)	(mW)
GFSK	0	2402	8.60	7.24
	39	2441	9.10	8.13
	78	2480	9.00	7.94
8PSK	0	2402	8.70	7.41
	39	2441	9.10	8.13
	78	2480	9.00	7.94

Note(s):

According to KDB 648474, Table 2, Unlicensed transmitters

When there is simultaneous transmission, Stand-alone SAR not required due to

- ☒ Output $\leq 2 \cdot P_{\text{Ref}}$ (13.8dBm / 24 mW) and antenna is ≥ 5.0 cm from other antennas
- ☒ Output $\leq P_{\text{Ref}}$ (10.79dBm / 12 mW)

10. Tissue Dielectric Properties

IEEE Std 1528-2003 Table 2

Target Frequency (MHz)	Head	
	ϵ_r	σ (S/m)
300	45.3	0.87
450	43.5	0.87
835	41.5	0.90
900	41.5	0.97
1450	40.5	1.20
1800 – 2000	40.0	1.40
2450	39.2	1.80
2600	39.0	1.96
3000	38.5	2.40

FCC OET Bulletin 65 Supplement C 01-01

Target Frequency (MHz)	Head		Body	
	ϵ_r	σ (S/m)	ϵ_r	σ (S/m)
150	52.3	0.76	61.9	0.80
300	45.3	0.87	58.2	0.92
450	43.5	0.87	56.7	0.94
835	41.5	0.90	55.2	0.97
900	41.5	0.97	55.0	1.05
915	41.5	0.98	55.0	1.06
1450	40.5	1.20	54.0	1.30
1610	40.3	1.29	53.8	1.40
1800 – 2000	40.0	1.40	53.3	1.52
2450	39.2	1.80	52.7	1.95
3000	38.5	2.40	52.0	2.73
5000	36.2	4.45	49.3	5.07
5100	36.1	4.55	49.1	5.18
5200	36.0	4.66	49.0	5.30
5300	35.9	4.76	48.9	5.42
5400	35.8	4.86	48.7	5.53
5500	35.6	4.96	48.6	5.65
5600	35.5	5.07	48.5	5.77
5700	35.4	5.17	48.3	5.88
5800	35.3	5.27	48.2	6.00

10.1. Composition of Ingredients for the Tissue Material Used in the SAR Tests

The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target tissue parameters required for routine SAR evaluation.

Ingredients (% by weight)	Frequency (MHz)									
	450		835		915		1900		2450	
Tissue Type	Head	Body	Head	Body	Head	Body	Head	Body	Head	Body
Water	38.56	51.16	41.45	52.4	41.05	56.0	54.9	40.4	62.7	73.2
Salt (NaCl)	3.95	1.49	1.45	1.4	1.35	0.76	0.18	0.5	0.5	0.04
Sugar	56.32	46.78	56.0	45.0	56.5	41.76	0.0	58.0	0.0	0.0
HEC	0.98	0.52	1.0	1.0	1.0	1.21	0.0	1.0	0.0	0.0
Bactericide	0.19	0.05	0.1	0.1	0.1	0.27	0.0	0.1	0.0	0.0
Triton X-100	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	36.8	0.0
DGBE	0.0	0.0	0.0	0.0	0.0	0.0	44.92	0.0	0.0	26.7
Dielectric Constant	43.42	58.0	42.54	56.1	42.0	56.8	39.9	54.0	39.8	52.5
Conductivity (S/m)	0.85	0.83	0.91	0.95	1.0	1.07	1.42	1.45	1.88	1.78

Salt: 99+% Pure Sodium Chloride

Sugar: 98+% Pure Sucrose

Water: De-ionized, 16 MΩ+ resistivity

HEC: Hydroxyethyl Cellulose

DGBE: 99+% Di(ethylene glycol) butyl ether, [2-(2-butoxyethoxy)ethanol]

Triton X-100 (ultra pure): Polyethylene glycol mono [4-(1,1, 3, 3-tetramethylbutyl)phenyl]ether

10.2. Tissue Dielectric Parameter Check Results

Tissue dielectric parameters were measured at the low, middle and high frequency of each operating frequency range of the test device.

Date	Freq. (MHz)		Liquid Parameters		Measured	Target	Delta (%)	Limit $\pm$ (%)
4/4/2012	Body 835	e'	52.8396	Relative Permittivity (ϵ_r):	52.84	55.20	-4.28	5
		e''	20.9789	Conductivity (σ):	0.97	0.97	0.41	5
	Body 815	e'	53.0779	Relative Permittivity (ϵ_r):	53.08	55.30	-4.01	5
		e''	21.0507	Conductivity (σ):	0.95	0.97	-1.46	5
	Body 820	e'	53.0135	Relative Permittivity (ϵ_r):	53.01	55.28	-4.09	5
		e''	21.0361	Conductivity (σ):	0.96	0.97	-0.96	5
	Body 825	e'	52.9554	Relative Permittivity (ϵ_r):	52.96	55.26	-4.17	5
		e''	21.0145	Conductivity (σ):	0.96	0.97	-0.50	5
4/4/2012	Body 850	e'	52.6809	Relative Permittivity (ϵ_r):	52.68	55.16	-4.49	5
		e''	20.9310	Conductivity (σ):	0.99	0.99	0.21	5
	Head 835	e'	41.6185	Relative Permittivity (ϵ_r):	41.62	41.50	0.29	5
		e''	19.0028	Conductivity (σ):	0.88	0.90	-1.97	5
	Head 825	e'	41.7504	Relative Permittivity (ϵ_r):	41.75	41.58	0.42	5
		e''	19.0253	Conductivity (σ):	0.87	0.90	-2.90	5
	Head 850	e'	41.4342	Relative Permittivity (ϵ_r):	41.43	41.50	-0.16	5
		e''	18.9685	Conductivity (σ):	0.90	0.92	-2.02	5
4/4/2012	Body 1900	e'	53.8071	Relative Permittivity (ϵ_r):	53.81	53.30	0.95	5
		e''	14.2903	Conductivity (σ):	1.51	1.52	-0.68	5
	Body 1850	e'	53.9857	Relative Permittivity (ϵ_r):	53.99	53.30	1.29	5
		e''	14.0783	Conductivity (σ):	1.45	1.52	-4.73	5
	Body 1880	e'	53.8783	Relative Permittivity (ϵ_r):	53.88	53.30	1.08	5
		e''	14.2052	Conductivity (σ):	1.48	1.52	-2.31	5
	Body 1910	e'	53.7786	Relative Permittivity (ϵ_r):	53.78	53.30	0.90	5
		e''	14.3350	Conductivity (σ):	1.52	1.52	0.16	5
4/5/2012	Head 1900	e'	39.5366	Relative Permittivity (ϵ_r):	39.54	40.00	-1.16	5
		e''	13.4518	Conductivity (σ):	1.42	1.40	1.51	5
	Head 1850	e'	39.7701	Relative Permittivity (ϵ_r):	39.77	40.00	-0.57	5
		e''	13.2854	Conductivity (σ):	1.37	1.40	-2.38	5
	Head 1880	e'	39.6334	Relative Permittivity (ϵ_r):	39.63	40.00	-0.92	5
		e''	13.3834	Conductivity (σ):	1.40	1.40	-0.07	5
	Head 1915	e'	39.4765	Relative Permittivity (ϵ_r):	39.48	40.00	-1.31	5
		e''	13.5043	Conductivity (σ):	1.44	1.40	2.71	5

11. System Performance Check

The system performance check is performed prior to any usage of the system in order to verify SAR system measurement accuracy. The system performance check verifies that the system operates within its specifications of $\pm 10\%$.

11.1. System Performance Check Measurement Conditions

- The measurements were performed in the flat section of the TWIN SAM or ELI phantom, shell thickness: 2.0 ± 0.2 mm (bottom plate) filled with Body or Head simulating liquid of the following parameters.
- The DASY system with an E-Field Probe was used for the measurements.
- The dipole was mounted on the small tripod so that the dipole feed point was positioned below the center marking of the flat phantom section and the dipole was oriented parallel to the body axis (the long side of the phantom). The standard measuring distance was 10 mm (above 1 GHz) and 15 mm (below 1 GHz) from dipole center to the simulating liquid surface.
- The coarse grid with a grid spacing of 15 mm was aligned with the dipole.
For 5 GHz band - The coarse grid with a grid spacing of 10 mm was aligned with the dipole.
- Special 7x7x7 (below 3 GHz) and/or 8x8x7 (above 3 GHz) fine cube was chosen for the cube.
- Distance between probe sensors and phantom surface was set to 3 mm.
For 5 GHz band - Distance between probe sensors and phantom surface was set to 2.5 mm
- The dipole input power (forward power) was 100 mW.
- The results are normalized to 1 W input power.

11.2. Reference SAR Values for System Performance Check

The reference SAR values can be obtained from the calibration certificate of system validation dipoles

System Dipole	Serial No.	Cal. Date	Freq. (MHz)	SAR Measured (mW/g)		
				1g/10g	Head	Body
D835V2	4d002	3/6/12	835	1g	9.24	9.64
				10g	6.04	6.32
D1900V2	5d043	11/10/11	1900	1g	40.8	42.0
				10g	21.16	21.96
				10g	24.8	23.64

11.3. System Performance Check Results

Date Tested	System Dipole		T.S. Liquid	SAR Measured (Normalized to 1 W)		Target (Ref. Value)	Delta (%)	Tolerance (%)
	Type	Serial No.						
4/4/2012	D835V2	4d002	Body	1g	10.10	9.64	4.77	±10
				10g	6.64	6.32	5.06	
4/4/2012	D835V2	4d002	Head	1g	9.92	9.24	7.36	±10
				10g	6.52	6.04	7.95	
4/4/2012	D1900V2	5d043	Body	1g	40.20	42.00	-4.29	±10
				10g	21.10	21.96	-3.92	
4/5/2012	D1900V2	5d043	Head	1g	40.80	40.80	0.00	±10
				10g	21.00	21.16	-0.76	

12. SAR Test Results

12.1. GSM850

12.1.1. Head SAR

Test Position	Mode	Ch #.	Freq. (MHz)	Avg Pwr (dBm)	SAR (mW/g)		Note
					1-g	10-g	
Left Touch	GMSK (Voice)	128	824.20	33.0			1
		190	836.60	33.2	0.679	0.444	
		251	848.80	33.2			1
Left Tilt (15°)	GMSK (Voice)	128	824.20	33.0			1
		190	836.60	33.2	0.254	0.187	
		251	848.80	33.2			1
Right Touch	GMSK (Voice)	128	824.20	33.0			1
		190	836.60	33.2	0.494	0.326	
		251	848.80	33.2			1
Right Tilt (15°)	GMSK (Voice)	128	824.20	33.0			1
		190	836.60	33.2	0.207	0.150	
		251	848.80	33.2			1

12.1.2. Body SAR

Test Position	Mode	Dist. (mm)	Ch #.	Freq. (MHz)	Avg Pwr (dBm)	SAR (mW/g)		Note
						1-g	10-g	
Rear	GPRS 2 slots	15	128	824.20	30.5			1
			190	836.60	30.7	0.482	0.345	
			251	848.80	30.8			1
Rear	GMSK (Voice)	15	190	836.60	33.2	0.415	0.295	2
Front	GPRS 2 slots	15	128	824.20	30.5			1
			190	836.60	30.7	0.174	0.126	
			251	848.80	30.8			1

Note(s):

- SAR test was performed in the middle channel only as the measured level was < 50% of the SAR limit as stated in FCC "Public Notice DA 02-1438" by the SCC-34/SC-2. Testing in the low and high channel is optional.
- With headset attached.

12.2. GSM1900

12.2.1. Head SAR

Test Position	Mode	Ch #.	Freq. (MHz)	Avg Pwr (dBm)	SAR (mW/g)		Note
					1-g	10-g	
Left Touch	GMSK (Voice)	512	1850.2	30.1			1
		661	1880.0	29.7	0.239	0.144	
		810	1909.8	29.6			1
Left Tilt (15°)	GMSK (Voice)	512	1850.2	30.1			1
		661	1880.0	29.7	0.104	0.063	
		810	1909.8	29.6			1
Right Touch	GMSK (Voice)	512	1850.2	30.1			1
		661	1880.0	29.7	0.184	0.116	
		810	1909.8	29.6			1
Right Tilt (15°)	GMSK (Voice)	512	1850.2	30.1			1
		661	1880.0	29.7	0.103	0.061	
		810	1909.8	29.6			1

12.2.2. Body SAR

Test Position	Mode	Dist. (mm)	Ch #.	Freq. (MHz)	Avg Pwr (dBm)	SAR (mW/g)		Note
						1-g	10-g	
Rear	GPRS 2 slots	15	512	1850.2	28.3			1
			661	1880.0	27.9	0.141	0.090	
			810	1909.8	27.8			1
Rear	GMSK (Voice)	15	661	1880.0	29.7	0.097	0.063	2
Front	GPRS 2 slots	15	512	1850.2	28.3			1
			661	1880.0	27.9	0.089	0.056	
			810	1909.8	27.8			1

Note(s):

- SAR test was performed in the middle channel only as the measured level was < 50% of the SAR limit as stated in FCC "Public Notice DA 02-1438" by the SCC-34/SC-2. Testing in the low and high channel is optional.
- With headset attached.

12.3. WCDMA (UMTS) Band V

Test mode reduction considerations

Body SAR is not required for handsets with HSPA capabilities when the maximum average output of each RF channel with HSUPA/HSDPA active is less than ¼ dB higher than that measured without HSUPA/HSDPA using 12.2 kbps RMC and the maximum SAR for 12.2kbps RMC is ≤ 75% of the SAR limit as per KDB 941225 D01

12.3.1. Head SAR

Test Position	Mode	Ch #.	Freq. (MHz)	Avg Pwr (dBm)	SAR (mW/g)		Note
					1-g	10-g	
Left Touch	Rel 99 RMC 12.2kbps	4132	826.4	23.4			1
		4183	836.6	23.5	0.775	0.512	
		4233	846.6	23.6			1
Left Tilt (15°)	Rel 99 RMC 12.2kbps	4132	826.4	23.4			1
		4183	836.6	23.5	0.362	0.279	
		4233	846.6	23.6			1
Right Touch	Rel 99 RMC 12.2kbps	4132	826.4	23.4			1
		4183	836.6	23.5	0.324	0.205	
		4233	846.6	23.6			1
Right Tilt (15°)	Rel 99 RMC 12.2kbps	4132	826.4	23.4			1
		4183	836.6	23.5	0.340	0.255	
		4233	846.6	23.6			1

12.3.2. Body SAR

Test Position	Mode	Dist. (mm)	Ch #.	Freq. (MHz)	Avg Pwr (dBm)	SAR (mW/g)		Note
						1-g	10-g	
Rear	Rel 99 RMC 12.2kbps	15	4132	826.4	23.4			1
			4183	836.6	23.5	0.344	0.244	
			4183	836.6	23.5	0.315	0.221	2
			4233	846.6	23.6			1
Front	Rel 99 RMC 12.2kbps	15	4132	826.4	23.4			1
			4183	836.6	23.5	0.126	0.091	
			4233	846.6	23.6			1

Note(s):

- SAR test was performed in the middle channel only as the measured level was < 50% of the SAR limit as stated in FCC "Public Notice DA 02-1438" by the SCC-34/SC-2. Testing in the low and high channel is optional.
- With headset attached.

12.4. WCDMA (UMTS) Band II

Test mode reduction considerations

Body SAR is not required for handsets with HSPA capabilities when the maximum average output of each RF channel with HSUPA/HSDPA active is less than ¼ dB higher than that measured without HSUPA/HSDPA using 12.2 kbps RMC and the maximum SAR for 12.2kbps RMC is ≤ 75% of the SAR limit as per KDB 941225 D01

12.4.1. Head SAR

Test Position	Mode	Ch #.	Freq. (MHz)	Avg Pwr (dBm)	SAR (mW/g)		Note
					1-g	10-g	
Left Touch	Rel 99 RMC 12.2kbps	9262	1852.4	23.2			1
		9400	1880.0	23.1	0.468	0.280	
		9538	1907.6	23.2			1
Left Tilt (15°)	Rel 99 RMC 12.2kbps	9262	1852.4	23.2			1
		9400	1880.0	23.1	0.168	0.103	
		9538	1907.6	23.2			1
Right Touch	Rel 99 RMC 12.2kbps	9262	1852.4	23.2			1
		9400	1880.0	23.1	0.330	0.209	
		9538	1907.6	23.2			1
Right Tilt (15°)	Rel 99 RMC 12.2kbps	9262	1852.4	23.2			1
		9400	1880.0	23.1	0.176	0.104	
		9538	1907.6	23.2			1

12.4.2. Body SAR

Test Position	Mode	Dist. (mm)	Ch #.	Freq. (MHz)	Avg Pwr (dBm)	SAR (mW/g)		Note
						1-g	10-g	
Rear	Rel 99 RMC 12.2kbps	15	9262	1852.4	23.2			1
			9400	1880.0	23.1	0.242	0.155	
			9400	1880.0	23.1	0.170	0.109	2
			9538	1907.6	23.2			1
Front	Rel 99 RMC 12.2kbps	15	9262	1852.4	23.2			1
			9400	1880.0	23.1	0.130	0.082	
			9538	1907.6	23.2			1

Note(s):

- SAR test was performed in the middle channel only as the measured level was < 50% of the SAR limit as stated in FCC "Public Notice DA 02-1438" by the SCC-34/SC-2. Testing in the low and high channel is optional.
- With headset attached.

13. Summary of Highest SAR Values

Results for highest SAR values for each frequency band and mode

Technology/Band	Test configuration		Mode	Highest 1g SAR (W/kg)
GSM850	Head	Left Touch	GMSK (Voice)	0.679
	Body	Rear	GPRS 2 slots	0.482
GSM1900	Head	Left Touch	GMSK (Voice)	0.239
	Body	Rear	GPRS 2 slots	0.141
WCDMA (UMTS) band V	Head	Left Touch	Rel99 (RMC, 12.2 kbps)	0.775
	Body	Rear	Rel99 (RMC, 12.2 kbps)	0.344
WCDMA (UMTS) band II	Head	Left Touch	Rel99 (RMC, 12.2 kbps)	0.468
	Body	Rear	Rel99 (RMC, 12.2 kbps)	0.242

13.1. SAR Plots (from Summary of Highest SAR Values)

Test Laboratory: UL CCS SAR Lab D

Date: 4/4/2012

GSM850

Frequency: 836.6 MHz; Duty Cycle: 1:8; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.884$ mho/m; $\epsilon_r = 41.6$; $\rho = 1000$ kg/m³;

DASY4 Configuration:

- Electronics: DAE3 Sn427; Calibrated: 1/17/2012
- Probe: EX3DV4 - SN3749; ConvF(8.68, 8.68, 8.68); Calibrated: 1/27/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: SAM B (Twin); Type: SAM B; Serial: TP-105

Left Touch/GMSK (Voice)/Ch 190/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.783 mW/g

Left Touch/GMSK (Voice)/Ch 190/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 30.2 V/m; Power Drift = 0.065 dB

Peak SAR (extrapolated) = 1.00 W/kg

SAR(1 g) = 0.679 mW/g; SAR(10 g) = 0.444 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.828 mW/g

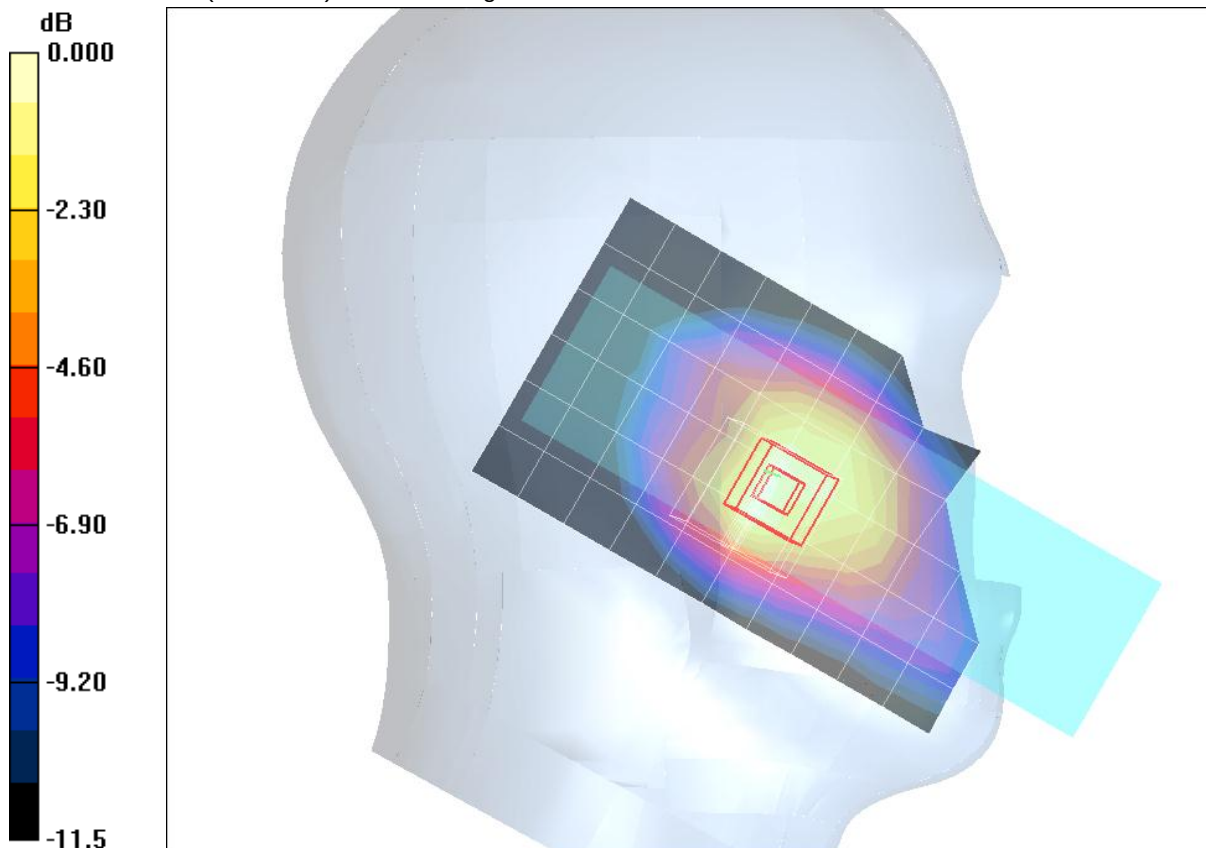


GSM850

Frequency: 836.6 MHz; Duty Cycle: 1:8

Left Touch/GMSK (Voice)/Ch 190/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.739 mW/g

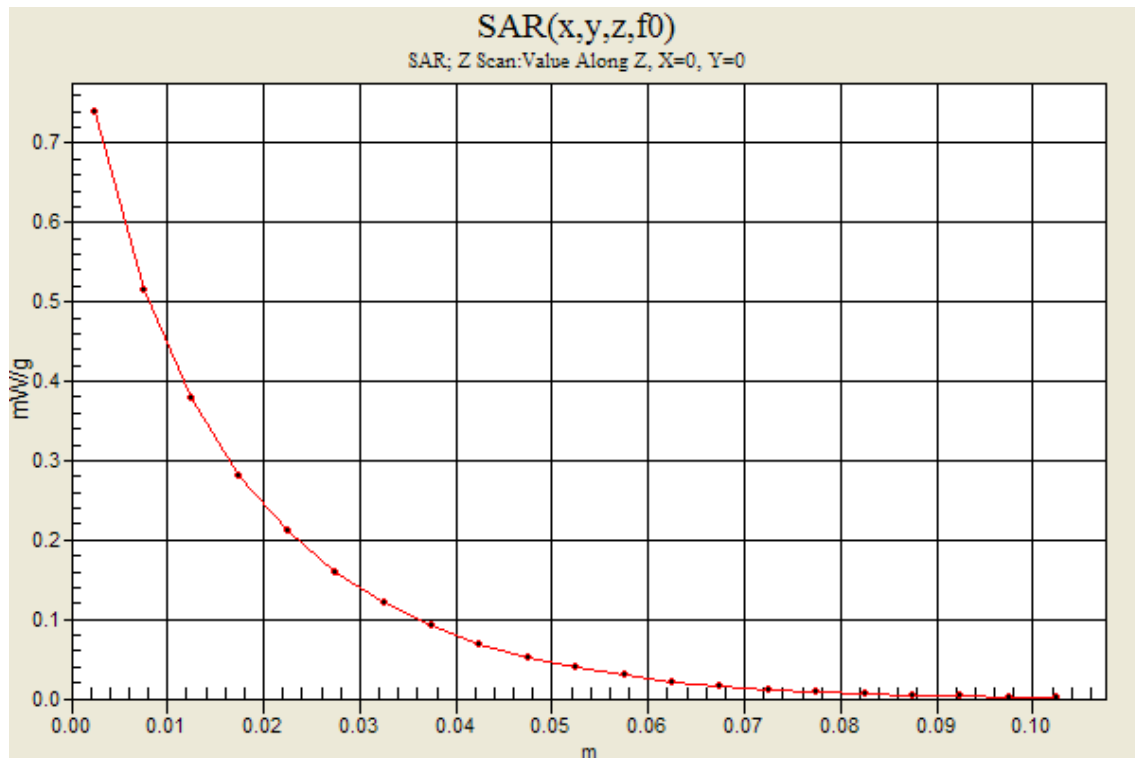

Test Laboratory: UL CCS SAR Lab D

Date: 4/4/2012

GSM850

Frequency: 836.6 MHz; Duty Cycle: 1:4; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.976$ mho/m; $\epsilon_r = 52.8$; $\rho = 1000$ kg/m³;

DASY4 Configuration:

- Electronics: DAE3 Sn427; Calibrated: 1/17/2012
- Probe: EX3DV4 - SN3749; ConvF(8.84, 8.84, 8.84); Calibrated: 1/27/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BB; Serial: SN:1017

Rear/GPRS 2 slots/Ch 190/Area Scan (8x11x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.521 mW/g

Rear/GPRS 2 slots/Ch 190/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 23.3 V/m; Power Drift = -0.126 dB

Peak SAR (extrapolated) = 0.635 W/kg

SAR(1 g) = 0.482 mW/g; SAR(10 g) = 0.345 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.551 mW/g

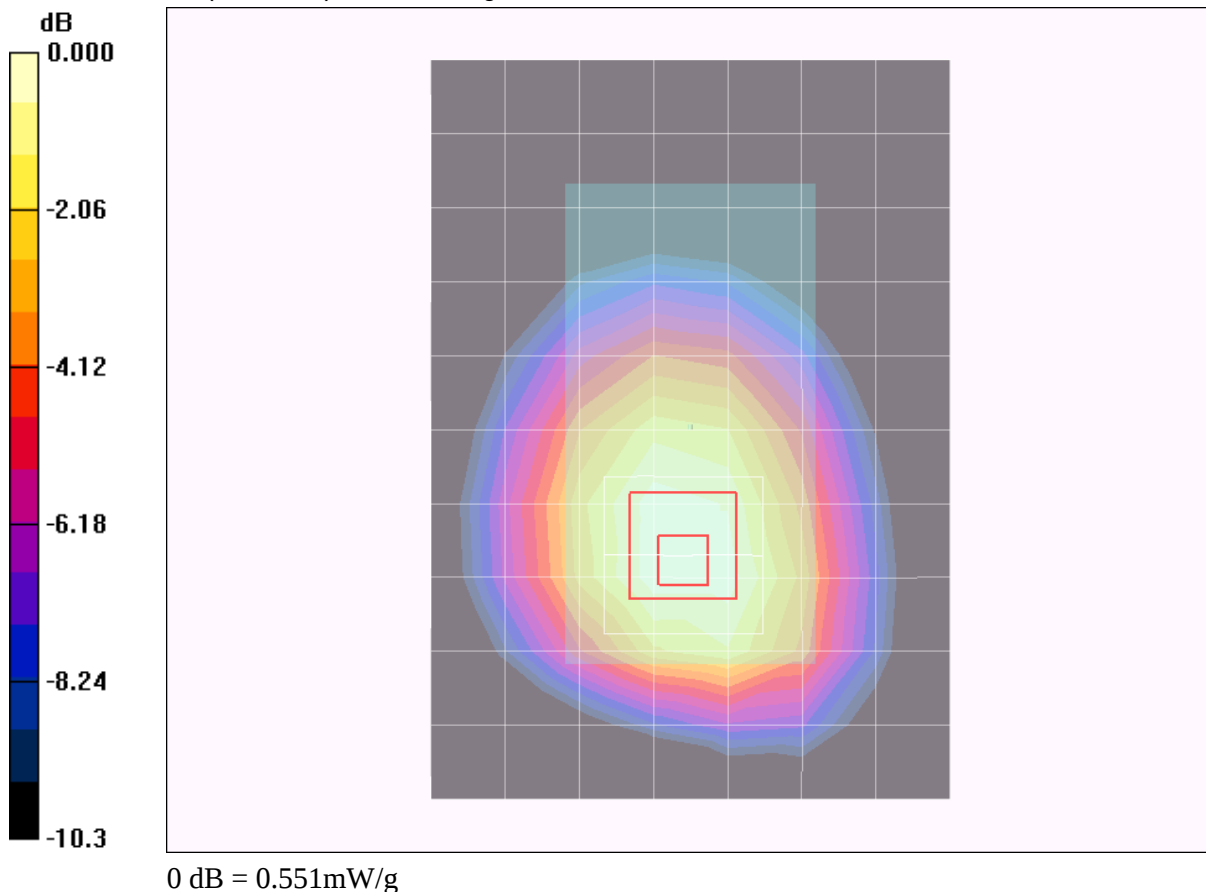


GSM850

Frequency: 836.6 MHz; Duty Cycle: 1:4

Rear/GPRS 2 slots/Ch 190/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.513 mW/g

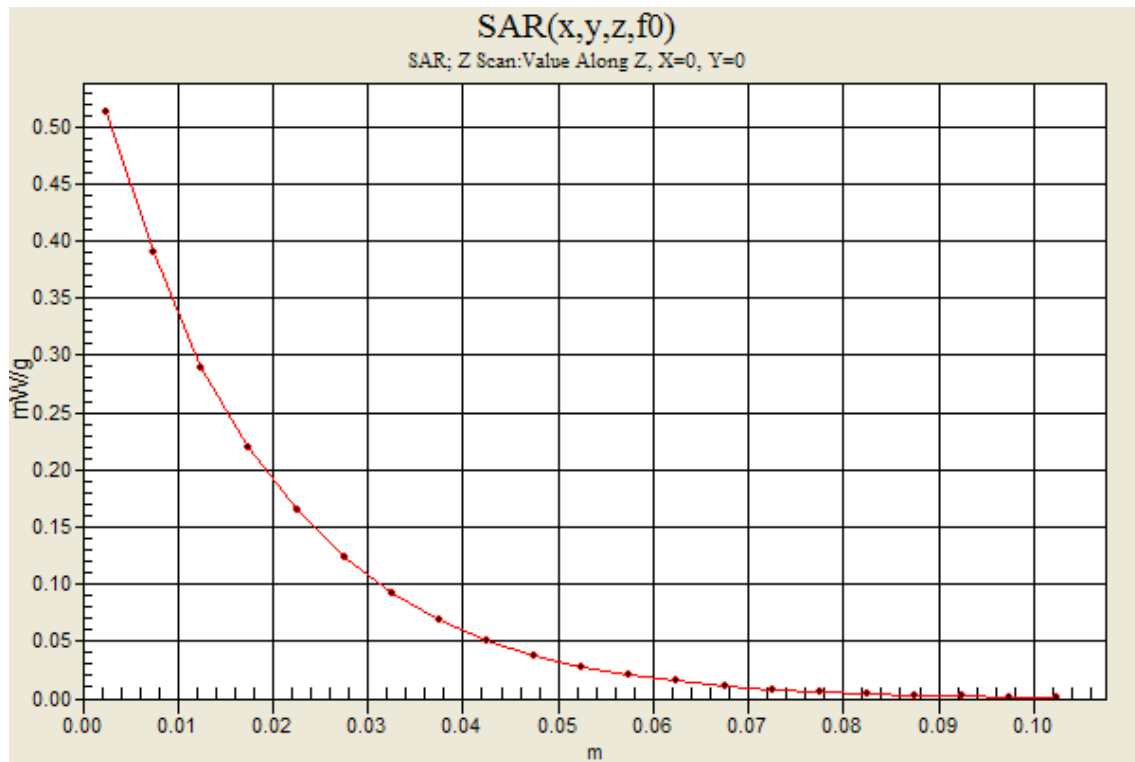

Test Laboratory: UL CCS SAR Lab D

Date: 4/5/2012

GSM1900

Frequency: 1880 MHz; Duty Cycle: 1:8; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.4$ mho/m; $\epsilon_r = 39.6$; $\rho = 1000$ kg/m³;


DASY4 Configuration:

- Electronics: DAE3 Sn427; Calibrated: 1/17/2012
- Probe: EX3DV4 - SN3749; ConvF(7.67, 7.67, 7.67); Calibrated: 1/27/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: SAM A (Twin); Type: SAM A; Serial: 1050

Left Touch/GMSK (Voice)/Ch 661/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.259 mW/g

Left Touch/GMSK (Voice)/Ch 661/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 14.1 V/m; Power Drift = -0.026 dB
Peak SAR (extrapolated) = 0.361 W/kg
SAR(1 g) = 0.239 mW/g; SAR(10 g) = 0.144 mW/g
Maximum value of SAR (measured) = 0.295 mW/g

Left Touch/GMSK (Voice)/Ch 661/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 14.1 V/m; Power Drift = -0.026 dB
Peak SAR (extrapolated) = 0.347 W/kg
SAR(1 g) = 0.195 mW/g; SAR(10 g) = 0.104 mW/g
Maximum value of SAR (measured) = 0.261 mW/g

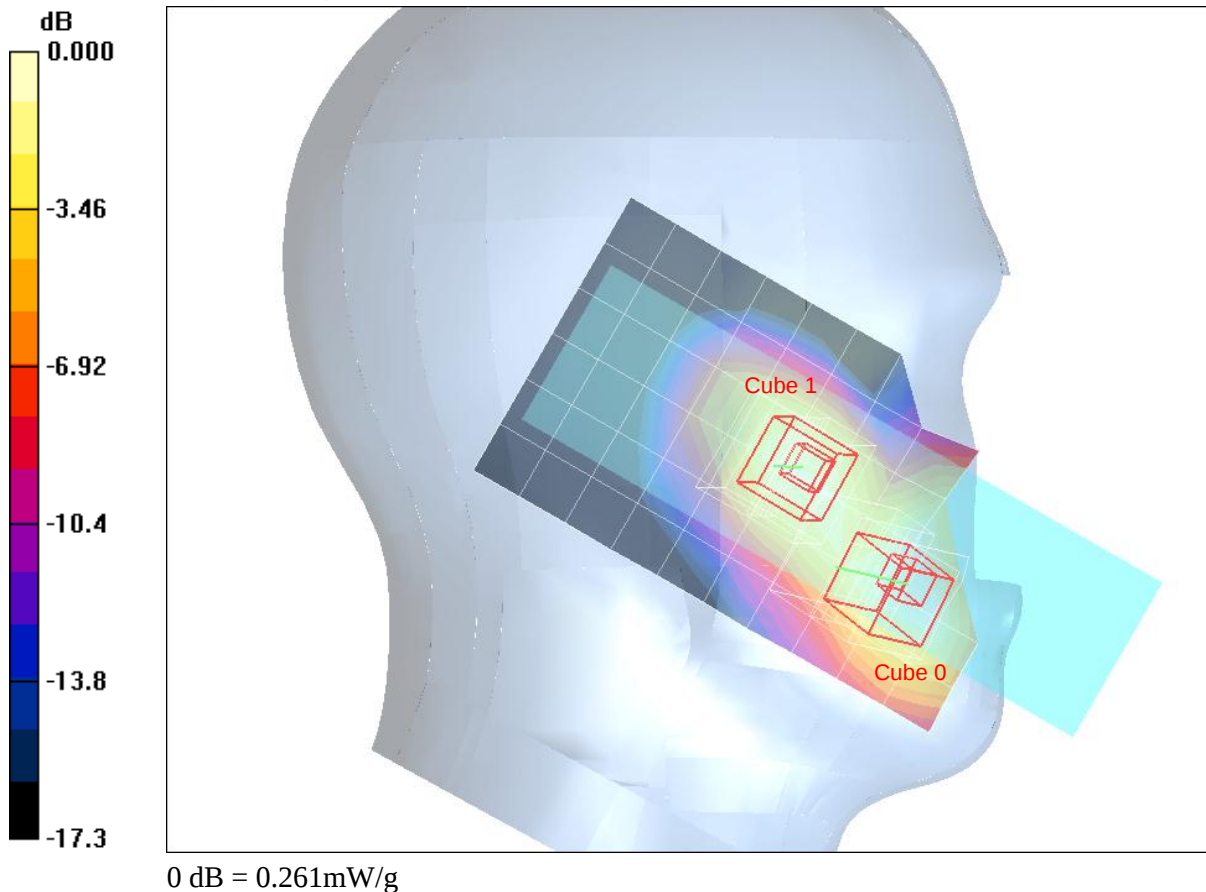


GSM1900

Frequency: 1880 MHz; Duty Cycle: 1:8

Left Touch/GMSK (Voice)/Ch 661/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.259 mW/g

Left Touch/GMSK (Voice)/Ch 661/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm
Maximum value of SAR (measured) = 0.275 mW/g

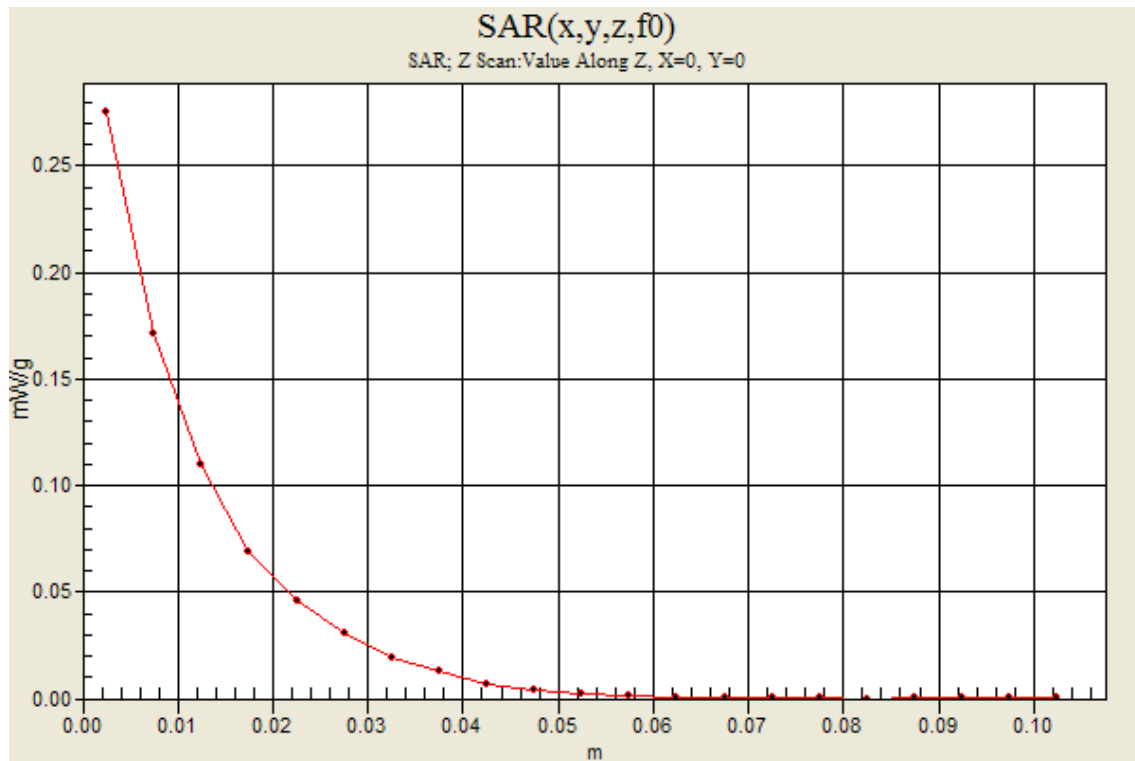

Test Laboratory: UL CCS SAR Lab D

Date: 4/4/2012

GSM1900


Frequency: 1880 MHz; Duty Cycle: 1:4; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.49$ mho/m; $\epsilon_r = 53.9$; $\rho = 1000$ kg/m³;
DASY4 Configuration:

- Electronics: DAE3 Sn427; Calibrated: 1/17/2012
- Probe: EX3DV4 - SN3749; ConvF(6.97, 6.97, 6.97); Calibrated: 1/27/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BB; Serial: SN:1017

Rear/GPRS 2 slots/Ch 661/Area Scan (8x11x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.168 mW/g

Rear/GPRS 2 slots/Ch 661/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 10.8 V/m; Power Drift = 0.003 dB
Peak SAR (extrapolated) = 0.212 W/kg
SAR(1 g) = 0.141 mW/g; SAR(10 g) = 0.090 mW/g
Maximum value of SAR (measured) = 0.172 mW/g

Rear/GPRS 2 slots/Ch 661/Zoom Scan 2 (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 10.8 V/m; Power Drift = 0.003 dB
Peak SAR (extrapolated) = 0.194 W/kg
SAR(1 g) = 0.113 mW/g; SAR(10 g) = 0.063 mW/g
Maximum value of SAR (measured) = 0.147 mW/g

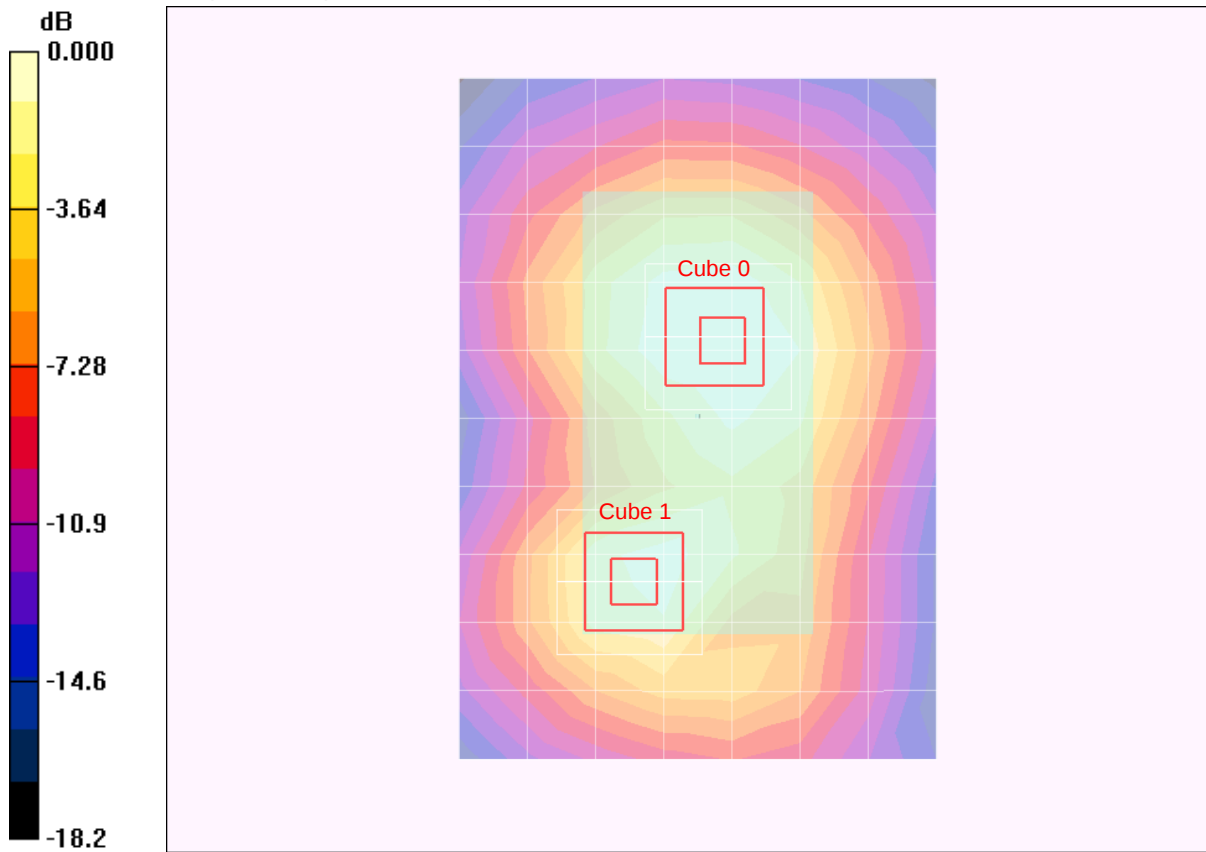


Test Laboratory: UL CCS SAR Lab D

Date: 4/4/2012

GSM1900

Frequency: 1880 MHz; Duty Cycle: 1:4

Rear/GPRS 2 slots/Ch 661/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm
Maximum value of SAR (measured) = 0.172 mW/g

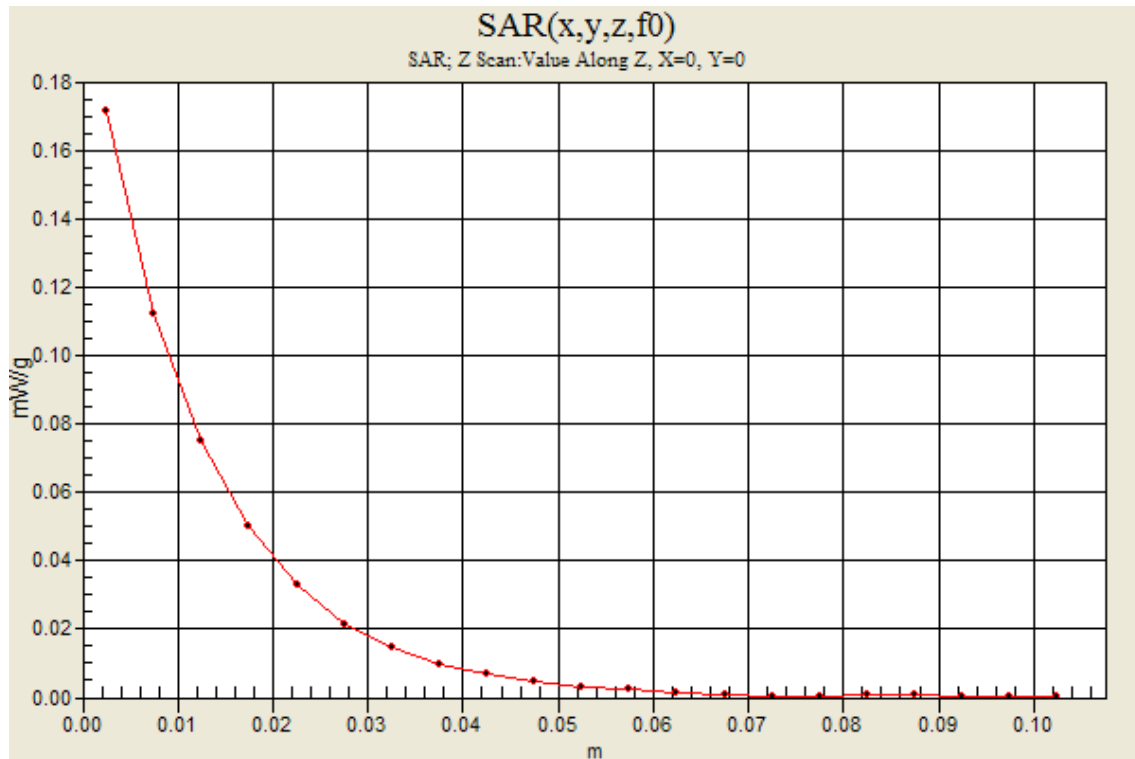

Test Laboratory: UL CCS SAR Lab D

Date: 4/4/2012

W-CDMA (UMTS) Band V

Frequency: 836.6 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.884$ mho/m; $\epsilon_r = 41.6$; $\rho = 1000$ kg/m³;

DASY4 Configuration:

- Electronics: DAE3 Sn427; Calibrated: 1/17/2012
- Probe: EX3DV4 - SN3749; ConvF(8.68, 8.68, 8.68); Calibrated: 1/27/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: SAM B (Twin); Type: SAM B; Serial: TP-105

Left Touch/Rel.99_RMC_12.2kbps/Ch 4183/Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.918 mW/g

Left Touch/Rel.99_RMC_12.2kbps/Ch 4183/Zoom Scan (5x5x7)/Cube 0: Measurement grid:

dx=8mm, dy=8mm, dz=5mm


Reference Value = 33.1 V/m; Power Drift = -0.005 dB

Peak SAR (extrapolated) = 1.16 W/kg

SAR(1 g) = 0.775 mW/g; SAR(10 g) = 0.512 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.933 mW/g

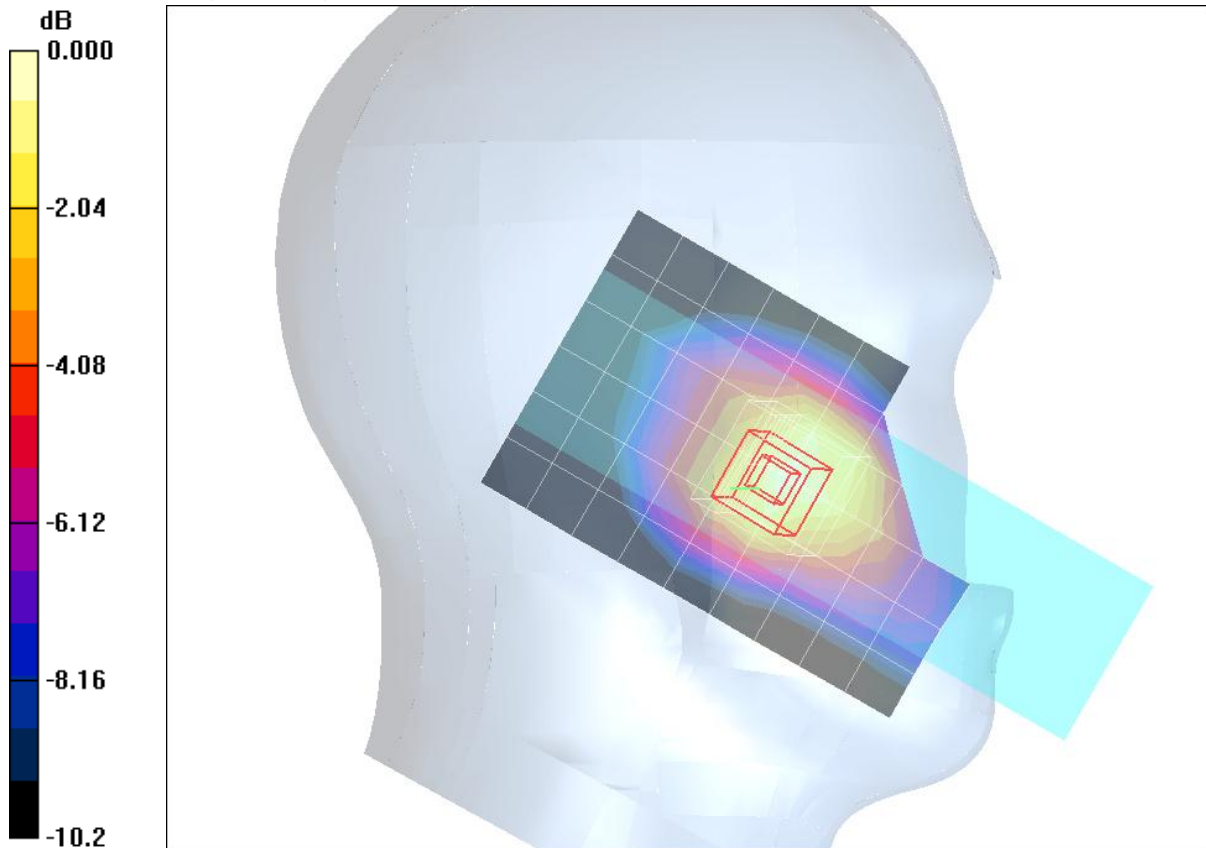

0 dB = 0.933mW/g

Test Laboratory: UL CCS SAR Lab D

Date: 4/4/2012


W-CDMA (UMTS) Band V

Frequency: 836.6 MHz; Duty Cycle: 1:1

Left Touch/Rel.99_RMC_12.2kbps/Ch 4183/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.896 mW/g

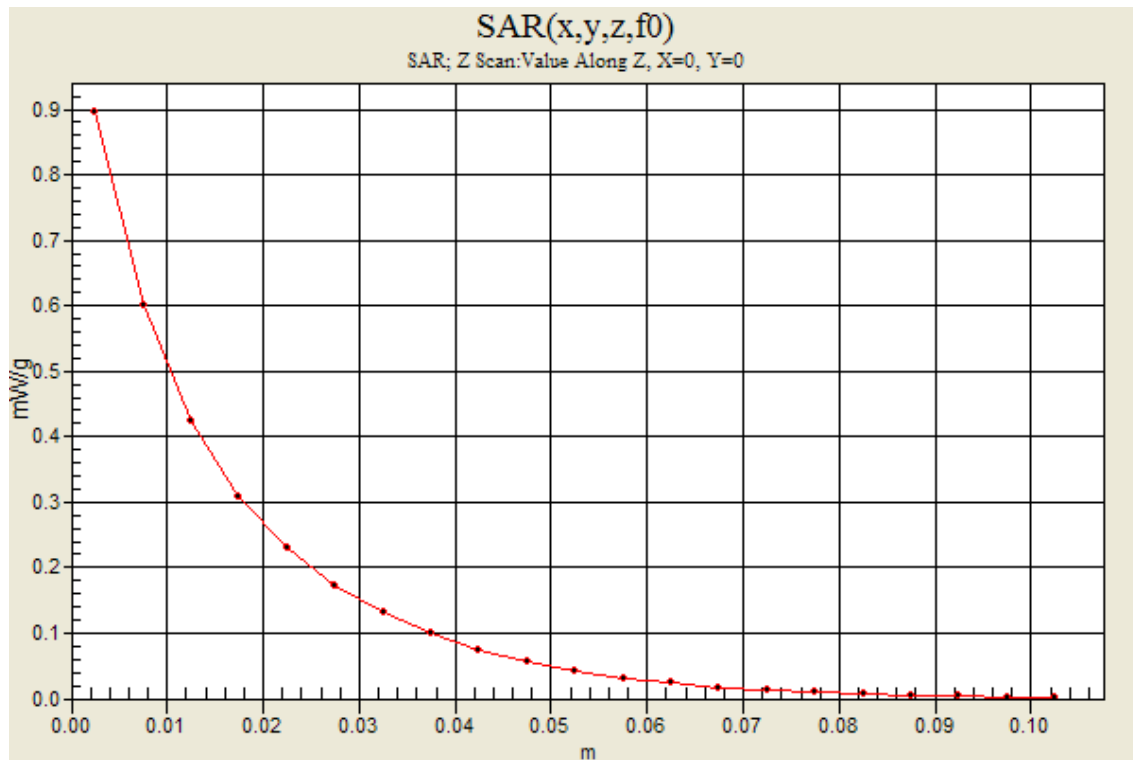

Test Laboratory: UL CCS SAR Lab D

Date: 4/4/2012

W-CDMA (UMTS) Band V

Frequency: 836.6 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.976$ mho/m; $\epsilon_r = 52.8$; $\rho = 1000$ kg/m³;

DASY4 Configuration:

- Electronics: DAE3 Sn427; Calibrated: 1/17/2012
- Probe: EX3DV4 - SN3749; ConvF(8.84, 8.84, 8.84); Calibrated: 1/27/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BB; Serial: SN:1017

Rear/Rel.99_RMC_12.2kbps/Ch 4183/Area Scan (8x11x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.368 mW/g

Rear/Rel.99_RMC_12.2kbps/Ch 4183/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 19.7 V/m; Power Drift = -0.141 dB

Peak SAR (extrapolated) = 0.454 W/kg

SAR(1 g) = 0.344 mW/g; SAR(10 g) = 0.244 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.397 mW/g

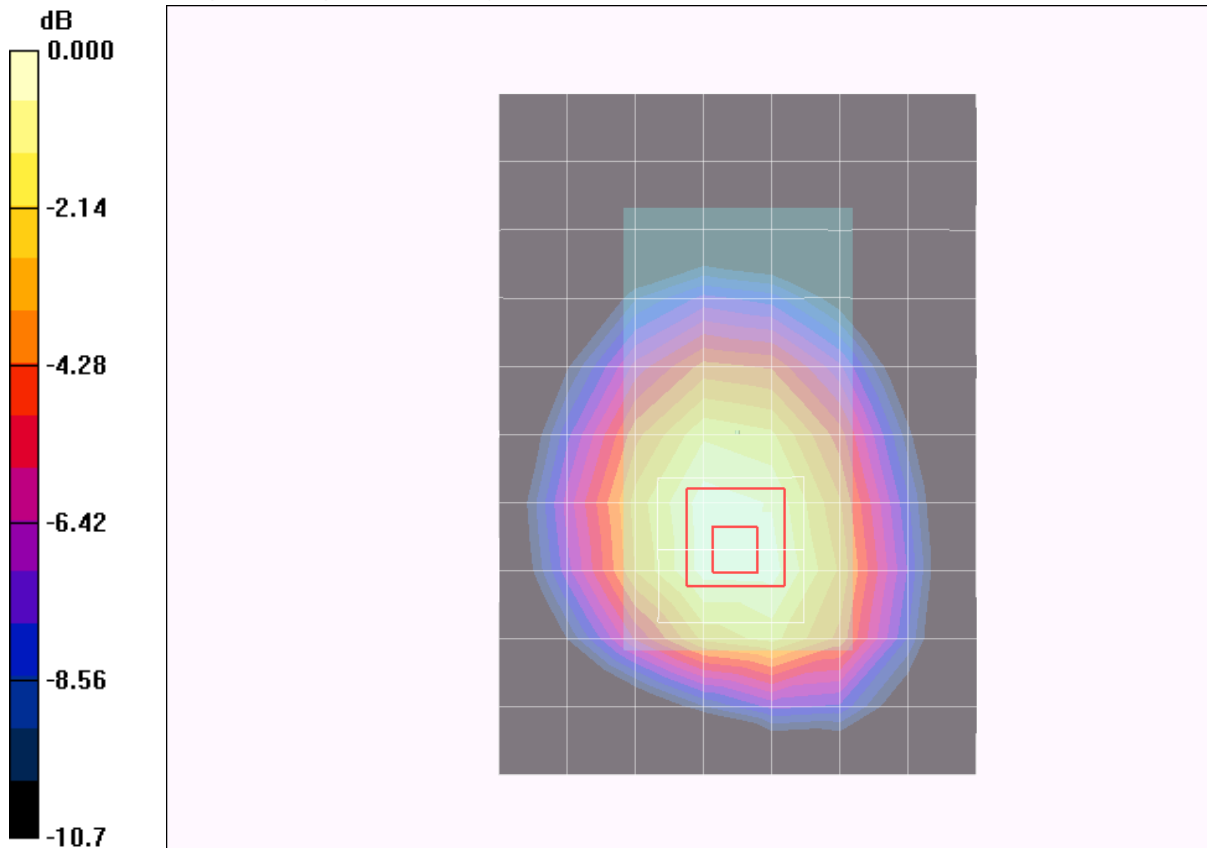

0 dB = 0.397mW/g

Test Laboratory: UL CCS SAR Lab D

Date: 4/4/2012


W-CDMA (UMTS) Band V

Frequency: 836.6 MHz; Duty Cycle: 1:1

Rear/Rel.99_RMC_12.2kbps/Ch 4183/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.367 mW/g

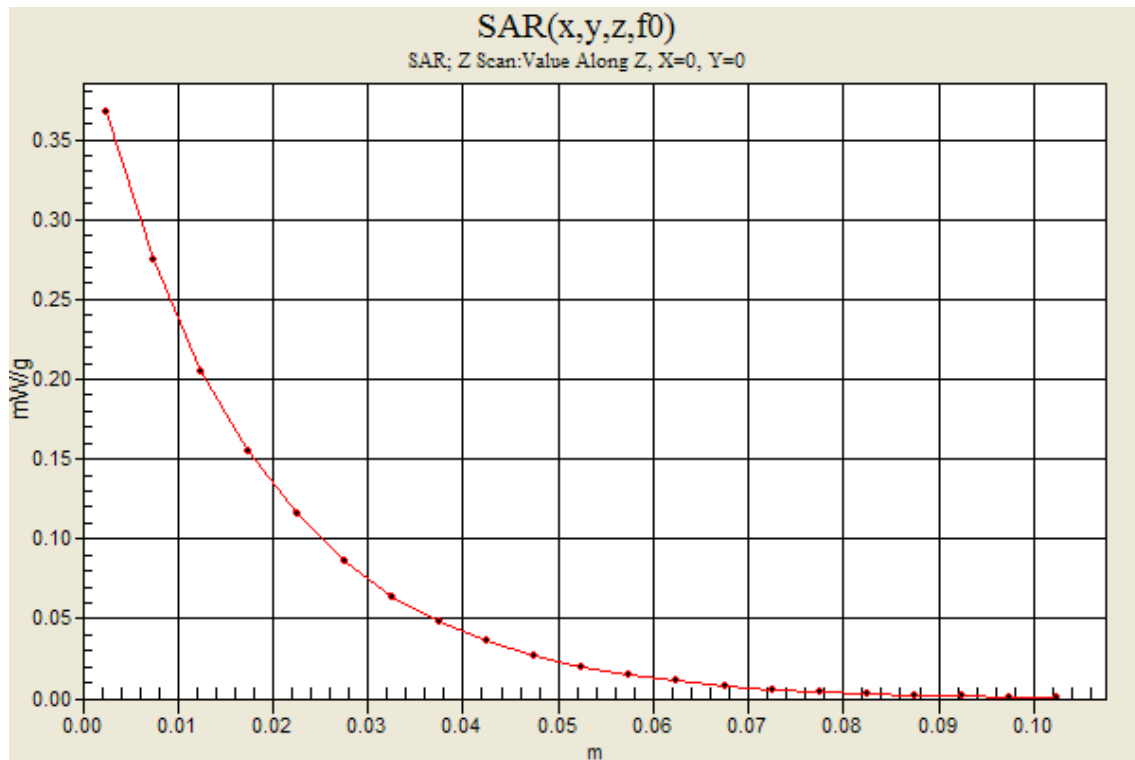

Test Laboratory: UL CCS SAR Lab D

Date: 4/5/2012

W-CDMA (UMTS) Band II

Frequency: 1880 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.4$ mho/m; $\epsilon_r = 39.6$; $\rho = 1000$ kg/m³;

DASY4 Configuration:

- Electronics: DAE3 Sn427; Calibrated: 1/17/2012
- Probe: EX3DV4 - SN3749; ConvF(7.67, 7.67, 7.67); Calibrated: 1/27/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: SAM A (Twin); Type: SAM A; Serial: 1050

Left Touch/Rel.99_RMC_12.2kbps/Ch 9400/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.547 mW/g

Left Touch/Rel.99_RMC_12.2kbps/Ch 9400/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.2 V/m; Power Drift = -0.050 dB

Peak SAR (extrapolated) = 0.742 W/kg

SAR(1 g) = 0.468 mW/g; SAR(10 g) = 0.280 mW/g

Maximum value of SAR (measured) = 0.585 mW/g


Left Touch/Rel.99_RMC_12.2kbps/Ch 9400/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.2 V/m; Power Drift = -0.050 dB

Peak SAR (extrapolated) = 0.628 W/kg

SAR(1 g) = 0.350 mW/g; SAR(10 g) = 0.182 mW/g

Maximum value of SAR (measured) = 0.471 mW/g

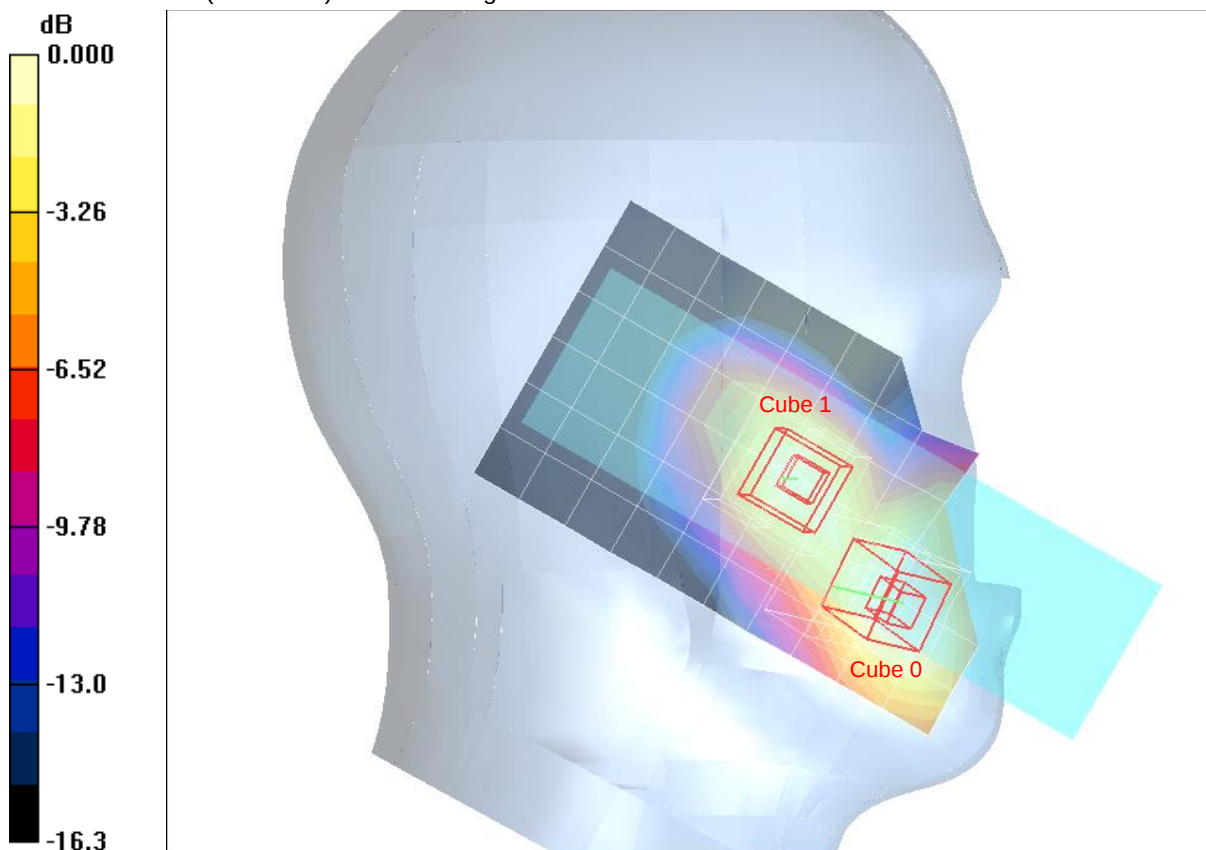

0 dB = 0.471mW/g

Test Laboratory: UL CCS SAR Lab D


Date: 4/5/2012

W-CDMA (UMTS) Band II

Frequency: 1880 MHz; Duty Cycle: 1:1

Left Touch/Rel.99_RMC_12.2kbps/Ch 9400/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm

Maximum value of SAR (measured) = 0.545 mW/g

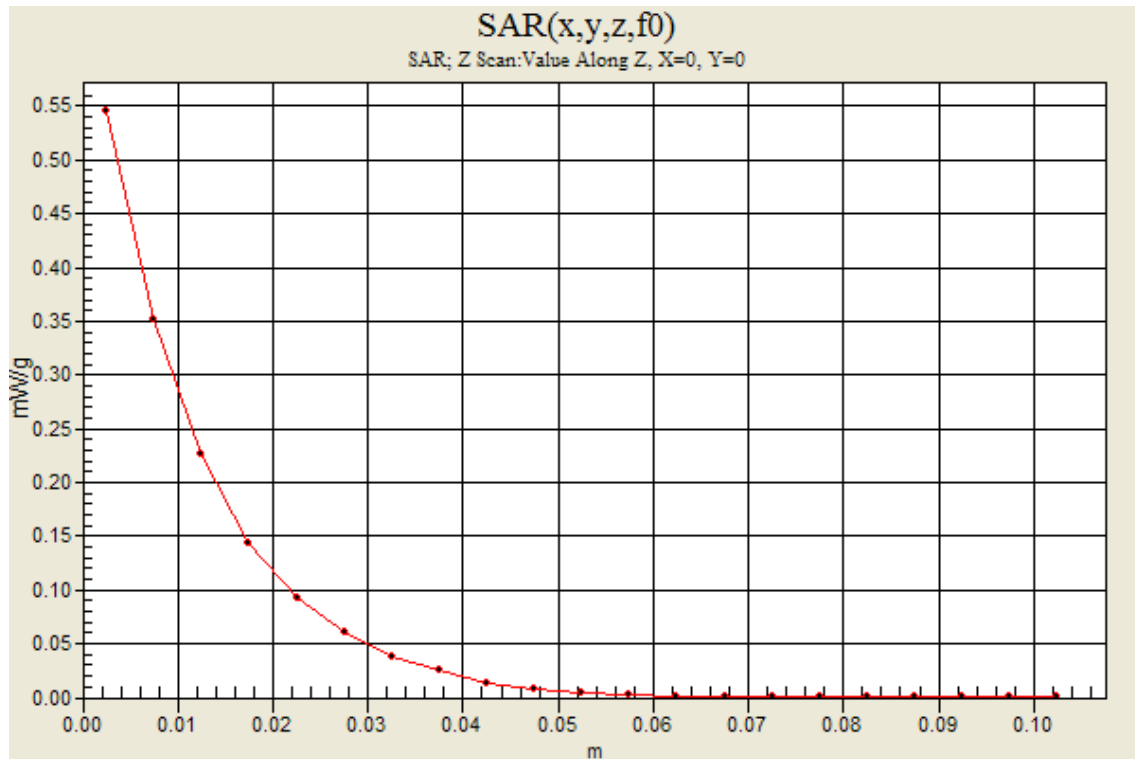

Test Laboratory: UL CCS SAR Lab D

Date: 4/5/2012

W-CDMA (UMTS) Band II


Frequency: 1880 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.49$ mho/m; $\epsilon_r = 53.9$; $\rho = 1000$ kg/m³;
DASY4 Configuration:

- Electronics: DAE3 Sn427; Calibrated: 1/17/2012
- Probe: EX3DV4 - SN3749; ConvF(6.97, 6.97, 6.97); Calibrated: 1/27/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BB; Serial: SN:1017

Rear/Rel.99_RMC_12.2kbps/Ch 9400/Area Scan (8x11x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.279 mW/g

Rear/Rel.99_RMC_12.2kbps/Ch 9400/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 14.0 V/m; Power Drift = 0.093 dB
Peak SAR (extrapolated) = 0.362 W/kg
SAR(1 g) = 0.242 mW/g; SAR(10 g) = 0.155 mW/g
Maximum value of SAR (measured) = 0.294 mW/g

Rear/Rel.99_RMC_12.2kbps/Ch 9400/Zoom Scan 2 (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 14.0 V/m; Power Drift = 0.093 dB
Peak SAR (extrapolated) = 0.311 W/kg
SAR(1 g) = 0.179 mW/g; SAR(10 g) = 0.100 mW/g
Maximum value of SAR (measured) = 0.234 mW/g

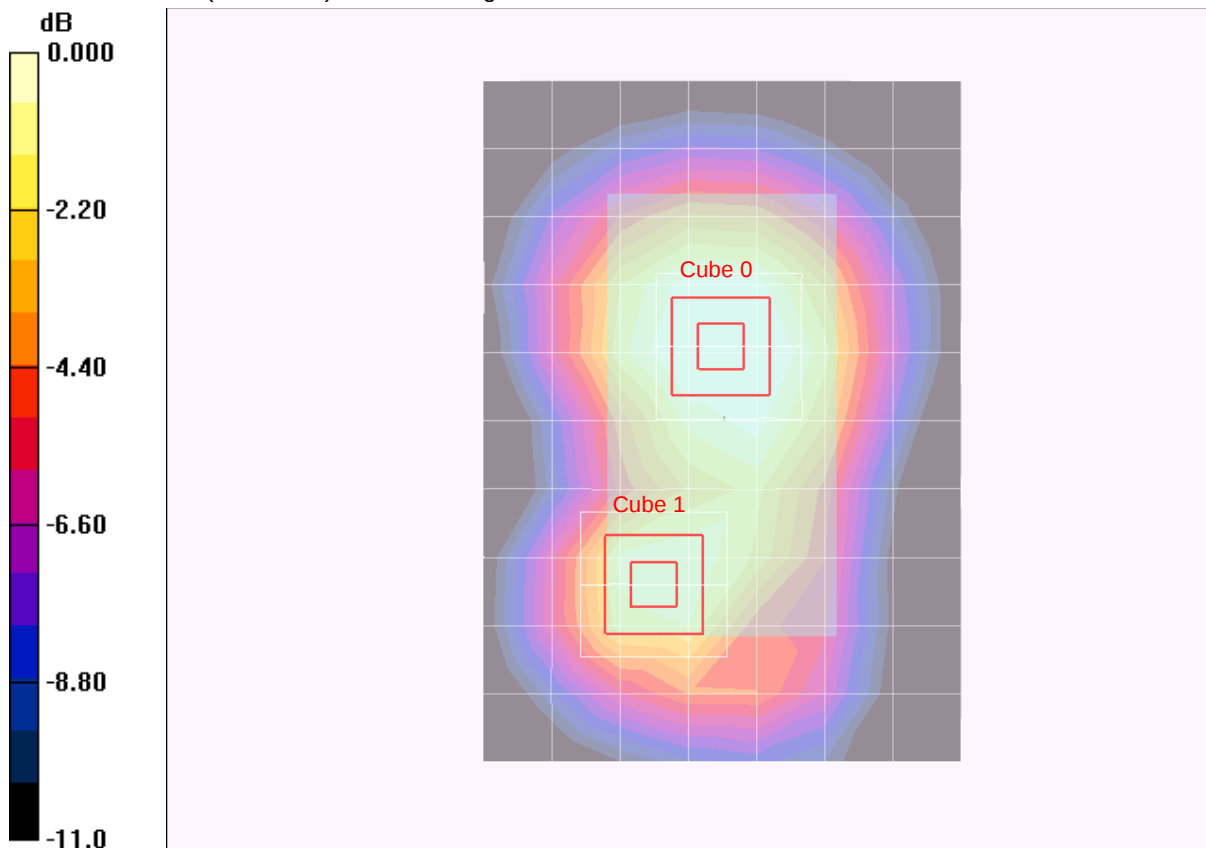

0 dB = 0.234mW/g

Test Laboratory: UL CCS SAR Lab D


Date: 4/5/2012

W-CDMA (UMTS) Band II

Frequency: 1880 MHz; Duty Cycle: 1:1

Rear/Rel.99_RMC_12.2kbps/Ch 9400/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm

Maximum value of SAR (measured) = 0.280 mW/g

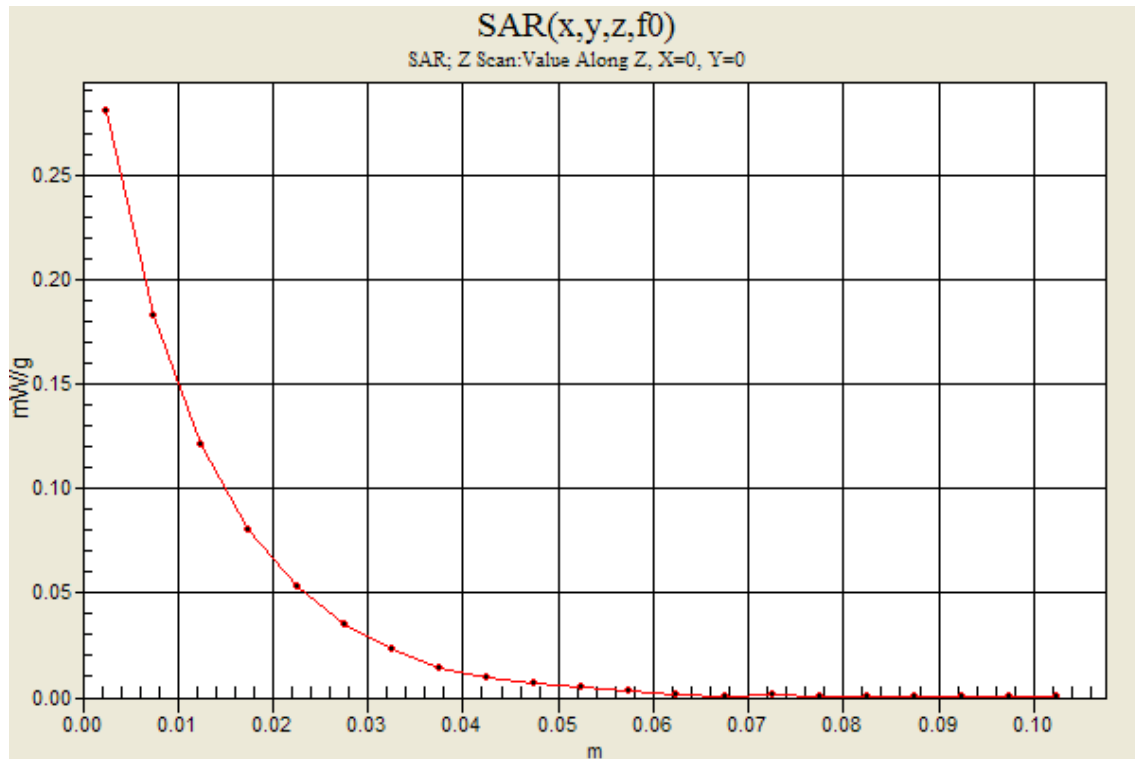

14. Simultaneous Transmission SAR Analysis

The Bluetooth's output power is $\leq 2 \cdot P_{\text{Ref}}$ (13.8 dBm / 24 mW), which stand-alone SAR evaluation is not required. Therefore, simultaneous transmission SAR evaluation is not required.

14.1. Sum of the 1g SAR for Head Exposure Condition

Test Position	GSM850	GSM1900	UMTS (WCDMA) Band V	UMTS (WCDMA) Band II	BT	Σ 1g SAR (mW/g)
Left Touch	0.679				0	0.679
		0.239			0	0.239
			0.775		0	0.775
				0.468	0	0.468
Left Tilt	0.254				0	0.254
		0.104			0	0.104
			0.362		0	0.362
				0.168	0	0.168
Right Touch	0.494				0	0.494
		0.184			0	0.184
			0.324		0	0.324
				0.330	0	0.330
Right Tilt	0.207				0	0.207
		0.103			0	0.103
			0.340		0	0.340
				0.176	0	0.176

14.2. SAR to Peak Location Separation Ratio (SPLSR)

N/A: Sum of the SAR is not greater than 1.6 W/kg, therefore SPLSR does not need to be calculated.

14.3. Sum of the 1g SAR for Body Exposure Condition

Test Position	GSM850	GSM1900	W-CDMA Band V	W-CDMA Band II	BT	Σ 1g SAR (mW/g)
Rear	0.482				0	0.482
		0.141			0	0.141
			0.344		0	0.344
				0.242	0	0.242
Front	0.174				0	0.174
		0.089			0	0.089
			0.126		0	0.126
				0.130	0	0.130

14.4. SAR to Peak Location Separation Ratio (SPLSR)

N/A: Sum of the SAR is not greater than 1.6 W/kg, therefore SPLSR does not need to be calculated

14.5. SAR Peak Location Separation Distance

N/A

15. Appendixes

Refer to separated files for the following appendixes.

- 15.1. System Performance Check Plots**
- 15.2. SAR Test Plots for GSM850**
- 15.3. SAR Test Plots for GSM1900**
- 15.4. SAR Test Plots for WCDMA (UMTS) Band V**
- 15.5. SAR Test Plots for WCDMA (UMTS) Band II**
- 15.6. Calibration Certificate for E-Field Probe EX3DV4 - SN 3749**
- 15.7. Calibration Certificate for D835V2 - SN 4d002**
- 15.8. Calibration Certificate for D1900V2 - SN 5d043**