

HCT CO., LTD.

CERTIFICATE OF COMPLIANCE

FCC Certification

Applicant Name: LG Electronics MobileComm U.S.A., Inc.	Date of Issue: September 24, 2013
Address: 1000 Sylvan Avenue, Englewood Cliffs NJ 07632	Test Site/Location: HCT CO., LTD., 105-1, Jangam-ri, Majang-Myeon, Icheon-si, Kyunggi-Do, Korea
	Report No.: HCTR1309FR12-1
	HCT FRN: 0005866421

FCC ID : ZNFLGL22

APPLICANT : LG Electronics MobileComm U.S.A., Inc.

FCC Model(s): KS1204

EUT Type: Cellular/PCS GSM/GPRS/EDGE Cellular WCDMA/HSDPA/HSUPA Phone with Bluetooth/WLAN/NFC

Max. RF Output Power: Wi-Fi 802.11b (19.37 dBm) / Wi-Fi 802.11g (23.91 dBm) / Wi-Fi 802.11n (2.4 GHz) (23.91 dBm)
/ Wi-Fi 802.11a (5.8 GHz) (22.87 dBm) / Wi-Fi 802.11n_20 MHz BW (5.8 GHz) (22.69 dBm)
/ Wi-Fi 802.11n_40 MHz BW (5.8 GHz) (22.20 dBm) / Wi-Fi 802.11ac_20 MHz BW (5.8 GHz) (21.64 dBm)
/ Wi-Fi 802.11ac_40 MHz BW (5.8 GHz) (21.35 dBm) / Wi-Fi 802.11ac_80 MHz BW (5.8 GHz) (20.91 dBm)

Frequency Range: 2412 MHz - 2462 MHz (2.4 GHz Band)
5745 MHz - 5825 MHz (5.8 GHz Band)_20 MHz BW, 5755 MHz - 5795 MHz (5.8 GHz Band)_40 MHz BW
5775 MHz (5.8 GHz Band)_80 MHz BW

Modulation type: CCK/DSSS/OFDM

FCC Classification: Digital Transmission System(DTS)

FCC Rule Part(s): Part 15.247

Engineering Statement:

The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998, 21 U.S. C.853(a)



Report prepared by
: Jong Seok Lee
Test engineer of RF Team



Approved by
: Chang Seok Choi
Manager of RF Team

This report only responds to the tested sample and may not be reproduced, except in full, without written approval of the HCT Co., Ltd.

FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1309FR12-1	Date of Issue: September 24, 2013	EUT Type: Cellular/PCS GSM/GPRS/EDGE Cellular WCDMA/HSDPA/HSUPA Phone with Bluetooth/WLAN/NFC		FCC ID: ZNFLGL22

Version

TEST REPORT NO.	DATE	DESCRIPTION
HCTR1309FR12	September 16, 2013	- First Approval Report
HCTR1309FR12-1	September 24, 2013	- Retest The Conducted Spurious Emission - Revised KDB644545 Document No. from D02 to D01 on Page 89 and 91

Table of Contents

1. GENERAL INFORMATION	4
2. EUT DESCRIPTION	4
3. TEST METHODOLOGY	5
3.1 EUT CONFIGURATION	5
3.2 EUT EXERCISE	5
3.3 GENERAL TEST PROCEDURES	5
3.4 DESCRIPTION OF TEST MODES	5
4. INSTRUMENT CALIBRATION.....	6
5. FACILITIES AND ACCREDITATIONS	6
5.1 FACILITIES	6
5.2 EQUIPMENT	6
6. ANTENNA REQUIREMENTS	6
7. SUMMARY TEST OF RESULTS	7
8. TEST RESULT	8
8.1 DUTY CYCLE(802.11a/b/g/n/ac)	8
8.2 6dB BANDWIDTH (802.11a/b/g/n/ac)	1 1
8.3 OUTPUT POWER (802.11a/b/g/n/ac).....	2 0
8.4 POWER SPECTRAL DENSITY (802.11a/b/g/n/ac).....	3 9
8.5 OUT OF BAND EMISSIONS AT THE BAND EDGE/ CONDUCTED SPURIOUS EMISSIONS ...	4 7
8.6 RADIATED MEASUREMENT.....	7 9
8.6.1 RADIATED SPURIOUS EMISSIONS.....	7 9
8.6.2 RADIATED RESTRICTED BAND EDGES	1 0 1
8.7 POWERLINE CONDUCTED EMISSIONS	1 0 5
9. LIST OF TEST EQUIPMENT	1 1 0



1. GENERAL INFORMATION

Applicant: LG Electronics MobileComm U.S.A., Inc.
Address: 1000 Sylvan Avenue, Englewood Cliffs NJ 07632
FCC ID: ZNFLGL22
EUT Type: Cellular/PCS GSM/GPRS/EDGE Cellular WCDMA/HSDPA/HSUPA Phone with Bluetooth/WLAN/NFC
Model name(s): KS1204
Date(s) of Tests: August 27, 2013 ~ September 09, 2013
Place of Tests: HCT Co., Ltd.
 105-1, Jangam-ri, Majang-Myeon, Icheon-si, Kyunggi-Do, 467-811, KOREA.
 (IC Recognition No. : 5944A-3)

2. EUT DESCRIPTION

EUT Type	Cellular/PCS GSM/GPRS/EDGE Cellular WCDMA/HSDPA/HSUPA Phone with Bluetooth/WLAN/NFC	
FCC Model Name	KS1204	
Power Supply	DC 3.8 V	
Battery type	Li-ion Battery(Standard)	
Frequency Range	TX	: 2412 MHz~2462 MHz, 5745 MHz~5825 MHz_20 MHz, 5755 MHz~5795 MHz_40 MHz 5775 MHz_80 MHz
	RX	: 2412 MHz~2462 MHz, 5745 MHz~5825 MHz_20 MHz, 5755 MHz~5795 MHz_40 MHz 5775 MHz_80 MHz
Max. RF Output Power	Peak	Wi-Fi 802.11b (19.37 dBm) / Wi-Fi 802.11g (23.91 dBm)/ Wi-Fi 802.11n (2.4 GHz) (23.91 dBm) / Wi-Fi 802.11a (5.8 GHz) (22.87 dBm)/ Wi-Fi 802.11n_20 MHz BW (5.8 GHz) (22.69 dBm) / Wi-Fi 802.11n_40 MHz BW (5.8 GHz) (22.20 dBm) / Wi-Fi 802.11ac_20 MHz BW (5.8 GHz) (21.64 dBm) / Wi-Fi 802.11ac_40 MHz BW (5.8 GHz) (21.35 dBm) / Wi-Fi 802.11ac_80 MHz BW (5.8 GHz) (20.91 dBm)
	Average	Wi-Fi 802.11b (15.84 dBm) / Wi-Fi 802.11g (13.44 dBm)/ Wi-Fi 802.11n (2.4 GHz) (12.36 dBm) / Wi-Fi 802.11a (5.8 GHz) (11.20 dBm)/ Wi-Fi 802.11n_20 MHz BW (5.8 GHz) (10.34 dBm) / Wi-Fi 802.11n_40 MHz BW (5.8 GHz) (10.02 dBm) / Wi-Fi 802.11ac_20 MHz BW (5.8 GHz) (9.29 dBm) / Wi-Fi 802.11ac_40 MHz BW (5.8 GHz) (9.05 dBm) / Wi-Fi 802.11ac_80 MHz BW (5.8 GHz) (9.20 dBm)
Modulation Type	DSSS/CCK(802.11b), OFDM(802.11a, 802.11g, 802.11n, 802.11ac)	
Antenna Specification	Manufacturer: Ace Technology Antenna type: PIFA Antenna Peak Gain : -1.3 dBi (2.4 GHz Band), -1.3 dBi (5.8 GHz Band)	

FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1309FR12-1	Date of Issue: September 24, 2013	EUT Type: Cellular/PCS GSM/GPRS/EDGE Cellular WCDMA/HSDPA/HSUPA Phone with Bluetooth/WLAN/NFC	FCC ID: ZNFLGL22

3. TEST METHODOLOGY

FCC KDB 558074 D01 DTS Meas Guidance v03r01 dated April 09, 2013 entitled “Guidance for Performing Compliance Measurements on Digital Transmission Systems(DTS) and the measurement procedure described in the American National Standard for Testing Unlicensed Wireless Devices(ANSI C63.4-2003) Operating Under §15.247” were used in the measurement. For 802.11ac, KDB644545 D01 v01r01 dated April 08, 2013.

3.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

3.2 EUT EXERCISE

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

3.3 GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4. (Version :2003) Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 13.1.4.1 of ANSI C63.4. (Version: 2003)

Conducted Antenna Terminal

See Section from 9.1 to 9.2.(KDB 558074)

3.4 DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

Channel low, mid and high with highest data rate (worst case) is chosen for full testing.

FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1309FR12-1	Date of Issue: September 24, 2013	EUT Type: Cellular/PCS GSM/GPRS/EDGE Cellular WCDMA/HSDPA/HSUPA Phone with Bluetooth/WLAN/NFC		FCC ID: ZNFLGL22

4. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipments, which is traceable to recognized national standards.

5. FACILITIES AND ACCREDITATIONS

5.1 FACILITIES

The SAC(Semi-Anechoic Chamber) and conducted measurement facility used to collect the radiated data are located at the 105-1, Jangam-ri, Majang-Myeon, Icheon-si, Kyunggi-Do, 467-811, Korea. The site is constructed in conformance with the requirements of ANSI C63.4. (Version :2003) and CISPR Publication 22. Detailed description of test facility was submitted to the Commission and accepted dated June 21, 2011 (Registration Number: 90661)

5.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of Linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements. Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers. Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

6. ANTENNA REQUIREMENTS

According to FCC 47 CFR §15.203:

"An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section."

* The antennas of this E.U.T are permanently attached.

*The E.U.T Complies with the requirement of §15.203

FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1309FR12-1	Date of Issue: September 24, 2013	EUT Type: Cellular/PCS GSM/GPRS/EDGE Cellular WCDMA/HSDPA/HSUPA Phone with Bluetooth/WLAN/NFC	FCC ID: ZNFLGL22

7. SUMMARY TEST OF RESULTS


Test Description	FCC Part Section(s)	Test Limit	Test Condition	Test Result
6 dB Bandwidth	§15.247(a)(2)	> 500 kHz	CONDUCTED	PASS
Conducted Maximum Peak Output Power	§15.247(b)(3)	< 1 Watt		PASS
Power Spectral Density	§15.247(e)	< 8 dBm / 3 kHz Band		PASS
Band Edge(Out of Band Emissions)	§15.247(d)	Conducted < 20 dBc		PASS
AC Power line Conducted Emissions	§15.207	cf. Section 8.6		PASS
Radiated Spurious Emissions	§15.205, 15.209	cf. Section 8.5.1	RADIATED	PASS
Radiated Restricted Band Edge	§15.247(d), 15.205, 15.209	cf. Section 8.5.2		PASS

8. TEST RESULT

8.1 DUTY CYCLE(802.11a/b/g/n/ac)

The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the on and off times of the transmitted signal. Set the center frequency of the instrument to the center frequency of the transmission. Set $RBW \geq OBW$ if possible; otherwise, set RBW to the largest available value. Set $VBW \geq RBW$. Set detector = peak or average. The zero-span measurement method shall not be used unless both RBW and VBW are $> 50/T$ and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring duty cycle shall not be used if $T \leq 16.7$ microseconds.)

TEST CONFIGURATION

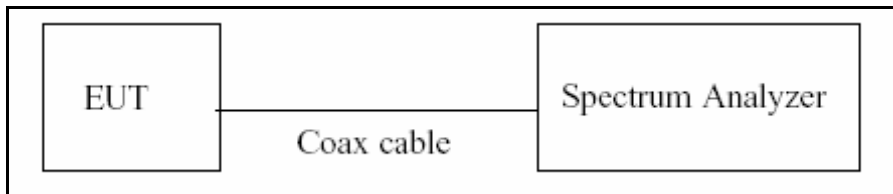

TEST PROCEDURE

The transmitter output is connected to the Spectrum Analyzer. We tested according to the zero-span measurement method, 6.0)b) in KDB 558074(issued 04/09/2013)

The largest available value of RBW is 8 MHz and VBW is 50 MHz. The zero-span method of measuring duty cycle shall not be used if $T \leq 6.25$ microseconds. ($50/6.25 = 8$)

The zero-span method was used because all measured T data are > 6.25 microseconds and both RBW and VBW are $> 50/T$.

1. RBW = 8 MHz (the largest available value)
2. VBW = 8 MHz ($\geq$ RBW)
3. SPAN = 0 Hz
4. Detector = Peak
5. Number of points in sweep > 100
6. Trace mode = Clear write
7. Measure T_{total} and T_{on}
8. Calculate Duty Cycle = T_{on} / T_{total} and Duty Cycle Factor = $10 \cdot \log(1/\text{Duty Cycle})$

Duty Cycle Factor

Mode	Data Rate	T _{on} (ms)	T _{total} (ms)	Duty Cycle	Duty Cycle Factor (dB)
2.4 GHz Band 802.11b	1	12.420	12.540	0.99043062	0.042
	2	6.200	6.300	0.98412698	0.069
	5.5	2.313	2.411	0.95935297	0.180
	11	1.205	1.300	0.92692308	0.330
2.4 GHz Band 802.11g and 5.8 GHz Band 802.11a	6	2.064	2.162	0.95467160	0.201
	9	1.380	1.485	0.92929293	0.318
	12	1.044	1.146	0.91099476	0.405
	18	0.705	0.804	0.87686567	0.571
	24	0.531	0.633	0.83886256	0.763
	36	0.363	0.464	0.78318966	1.061
	48	0.276	0.377	0.73209549	1.354
	54	0.248	0.350	0.70857143	1.496
2.4 GHz Band 802.11n_20 MHz BW and 5.8 GHz Band 802.11n_20 MHz BW	6.5	1.921	2.019	0.95146112	0.216
	13	0.975	1.080	0.90277778	0.444
	19.5	0.664	0.764	0.86910995	0.609
	26	0.508	0.610	0.83196721	0.799
	39	0.351	0.452	0.77654867	1.098
	52	0.271	0.373	0.72654155	1.387
	58.5	0.248	0.349	0.71060172	1.484
	65	0.227	0.328	0.69207317	1.598
2.4 GHz & 5.8 GHz Band 802.11n_40 MHz BW	13.5	0.945	1.045	0.90430622	0.437
	27	0.492	0.593	0.82967960	0.811
	40.5	0.340	0.440	0.77272727	1.120
	54	0.264	0.363	0.72727273	1.383
	81	0.188	0.288	0.65277778	1.852
	108	0.152	0.252	0.60317460	2.196
	121.5	0.140	0.240	0.58333333	2.341
	135	0.128	0.228	0.56140351	2.507
2.4 GHz Band 802.11ac_20 MHz BW and 5.8 GHz Band 802.11ac_20 MHz BW	6.5	1.935	2.035	0.95085995	0.219
	13	0.987	1.089	0.90633609	0.427
	19.5	0.672	0.772	0.87046632	0.602
	26	0.516	0.616	0.83766234	0.769
	39	0.356	0.457	0.77850733	1.087
	52	0.280	0.382	0.73298429	1.349
	58.5	0.252	0.353	0.71388102	1.464
	65	0.232	0.333	0.69669670	1.570
	78	0.199	0.301	0.66223404	1.790

Mode	Data Rate	T _{on} (ms)	T _{total} (ms)	Duty Cycle	Duty Cycle Factor (dB)
5.8 GHz Band 802.11ac_40 MHz BW	13.5	0.952	1.052	0.90494297	0.434
	27	0.496	0.596	0.83221477	0.798
	40.5	0.344	0.444	0.77477477	1.108
	54	0.268	0.368	0.72826087	1.377
	81	0.192	0.292	0.65753425	1.821
	108	0.156	0.256	0.60937500	2.151
	121.5	0.144	0.245	0.58895706	2.299
	135	0.132	0.232	0.56896552	2.449
	162	0.116	0.216	0.53703704	2.700
	180	0.112	0.212	0.52830189	2.771
5.8 GHz Band 802.11ac_80 MHz BW	29.3	0.460	0.560	0.82142857	0.854
	58.5	0.252	0.352	0.71590909	1.451
	87.8	0.180	0.280	0.64285714	1.919
	117	0.148	0.248	0.59677419	2.242
	175.5	0.112	0.212	0.52830189	2.771
	234	0.096	0.196	0.48979592	3.100
	263.3	0.088	0.188	0.46808511	3.297
	292.5	0.084	0.184	0.45652174	3.405
	351	0.076	0.176	0.43181818	3.647
	390	0.072	0.172	0.41860465	3.782


8.2 6dB BANDWIDTH (802.11a/b/g/n/ac)

Test Requirements and limit, §15.247(a)(2)

The bandwidth at 6dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the receive antenna while the EUT is operating in transmission mode at the appropriate frequencies.

The minimum permissible 6dB bandwidth is 500 kHz.

TEST CONFIGURATION



TEST PROCEDURE

The transmitter output is connected to the Spectrum Analyzer.

The Spectrum Analyzer is set to (Page 5 in KDB 558074, issued 04/09/2013)

RBW = 100 kHz

VBW $\geq 3 \times$ RBW

Detector = Peak

Trace mode = max hold

Sweep = auto couple

Allow the trace to stabilize

Note : We tested 6 dB bandwidth using the automatic bandwidth measurement capability of a spectrum analyzer. X dB is set 6 dB.

TEST RESULTS

2.4 GHz Band

Conducted 6 dB Bandwidth Measurements for 802.11b

802.11b Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
2412	1	9.104	0.500	Pass
2437	6	9.097	0.500	Pass
2462	11	9.111	0.500	Pass

Conducted 6 dB Bandwidth Measurements for 802.11g

802.11g Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
2412	1	16.39	0.500	Pass
2437	6	16.40	0.500	Pass
2462	11	16.39	0.500	Pass

Conducted 6 dB Bandwidth Measurements for 802.11n_20 MHz BW

802.11n Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
2412	1	17.62	0.500	Pass
2437	6	17.64	0.500	Pass
2462	11	17.60	0.500	Pass

5.8 GHz Band

Conducted 6 dB Bandwidth Measurements for 802.11a

802.11a Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Frequency [MHz]			
5745	149	16.40	0.500	Pass
5785	157	16.39	0.500	Pass
5825	165	16.36	0.500	Pass

Conducted 6 dB Bandwidth Measurements for 802.11n_20 MHz BW

802.11n Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5745	149	17.65	0.500	Pass
5785	157	17.60	0.500	Pass
5825	165	17.64	0.500	Pass

Conducted 6 dB Bandwidth Measurements for 802.11n_40 MHz BW

802.11n Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5755	151	36.12	0.500	Pass
5795	159	36.08	0.500	Pass

Conducted 6 dB Bandwidth Measurements for 802.11ac_20 MHz BW

802.11a Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Frequency [MHz]			
5745	149	17.67	0.500	Pass
5785	157	17.60	0.500	Pass
5825	165	17.63	0.500	Pass

Conducted 6 dB Bandwidth Measurements for 802.11ac_40 MHz BW

802.11n Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5755	151	36.17	0.500	Pass
5795	159	36.08	0.500	Pass

Conducted 6 dB Bandwidth Measurements for 802.11ac_80 MHz BW


802.11n Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5775	155	75.35	0.500	Pass

Note : In order to simplify the report, attached plots were only the most wide 6 dB BW channel.


RESULT PLOTS

2.4 GHz Band


6dB Bandwidth plot (802.11b-CH 11)

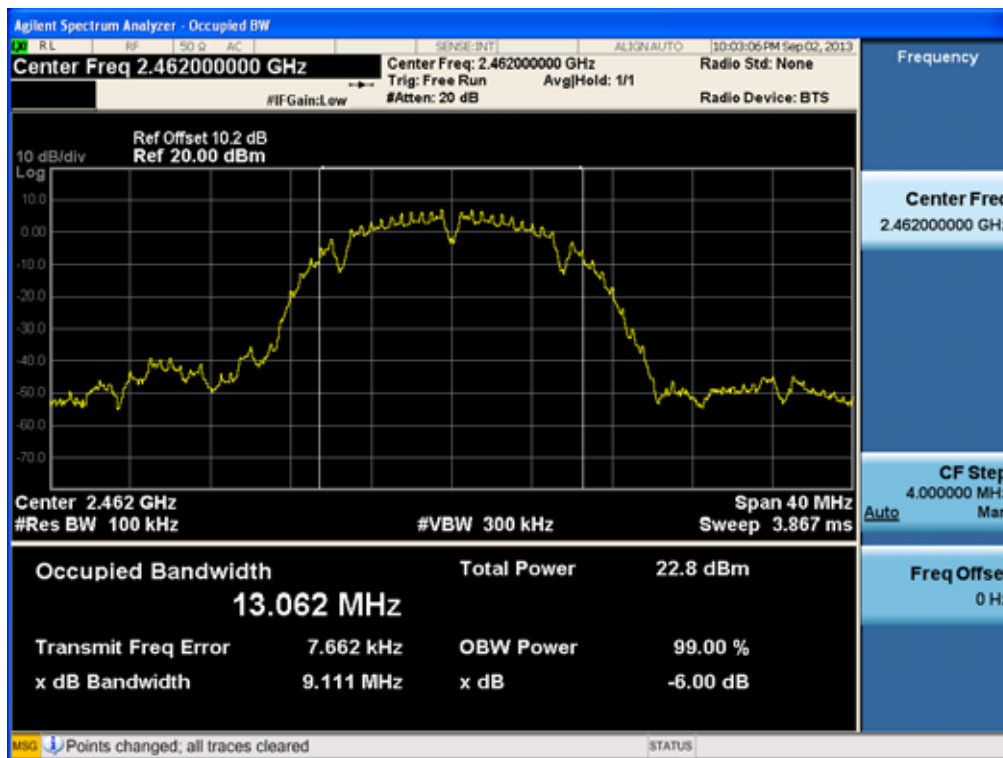

6dB Bandwidth plot (802.11g-CH 6)

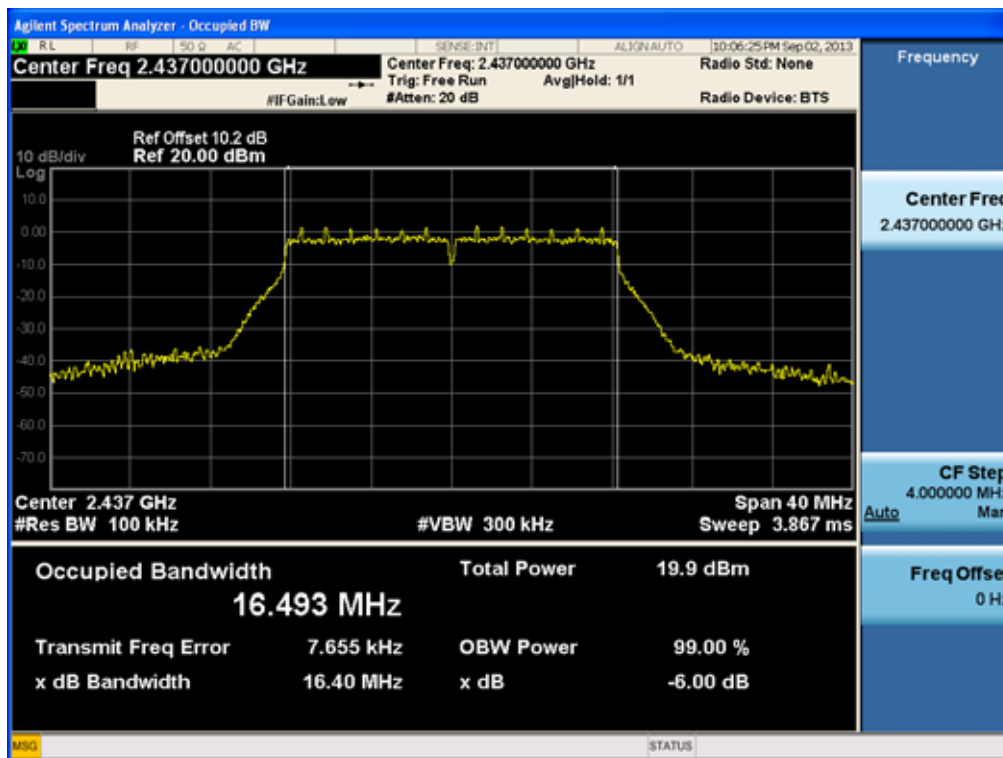


6dB Bandwidth plot (802.11n-CH 6)

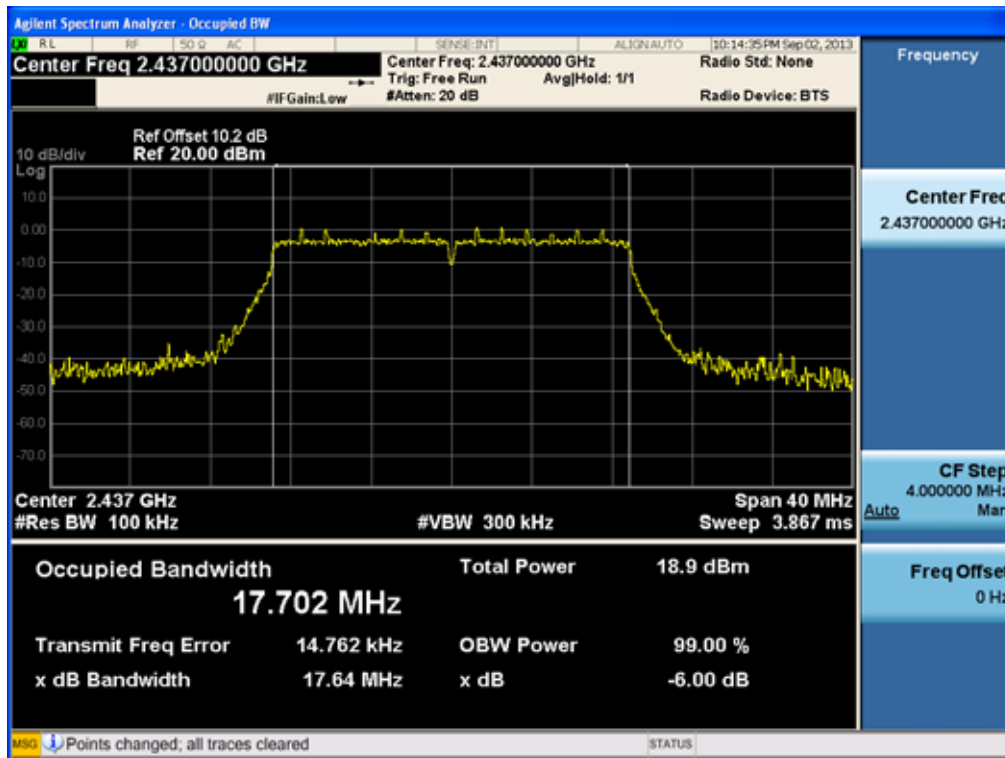


FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1309FR12-1	Date of Issue: September 24, 2013	EUT Type: Cellular/PCS GSM/GPRS/EDGE Cellular WCDMA/HSDPA/HSUPA Phone with Bluetooth/WLAN/NFC	FCC ID: ZNFLGL22

5.8 GHz Band


6dB Bandwidth plot (802.11a-CH 149)

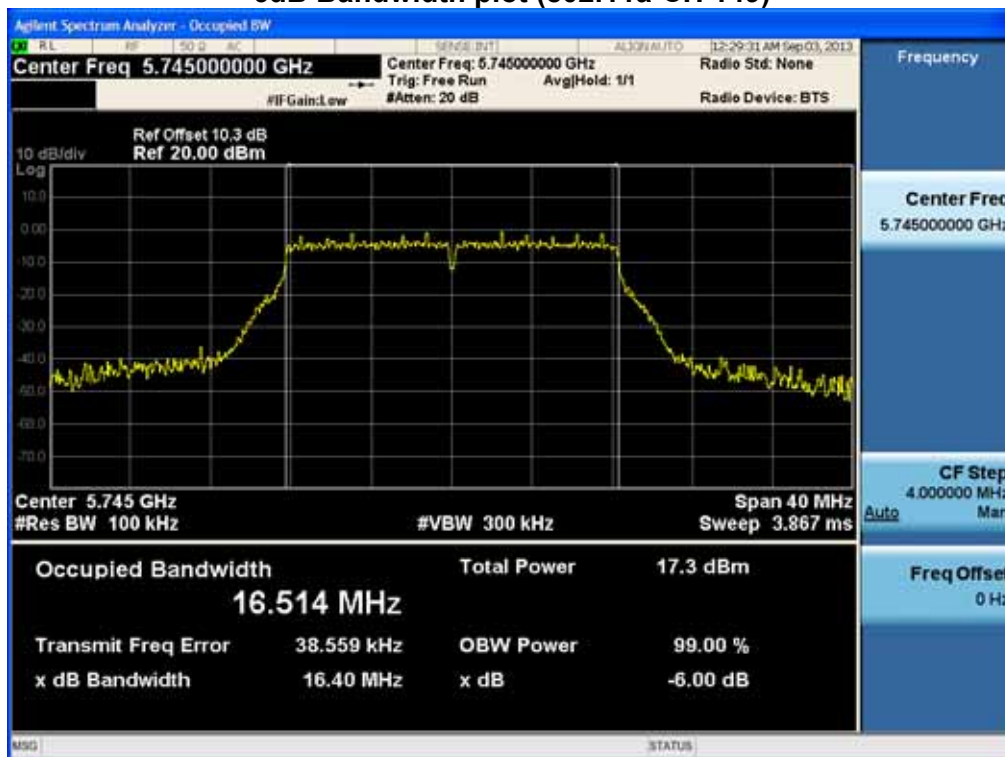


6dB Bandwidth plot (802.11n_20 MHz BW-CH 149)

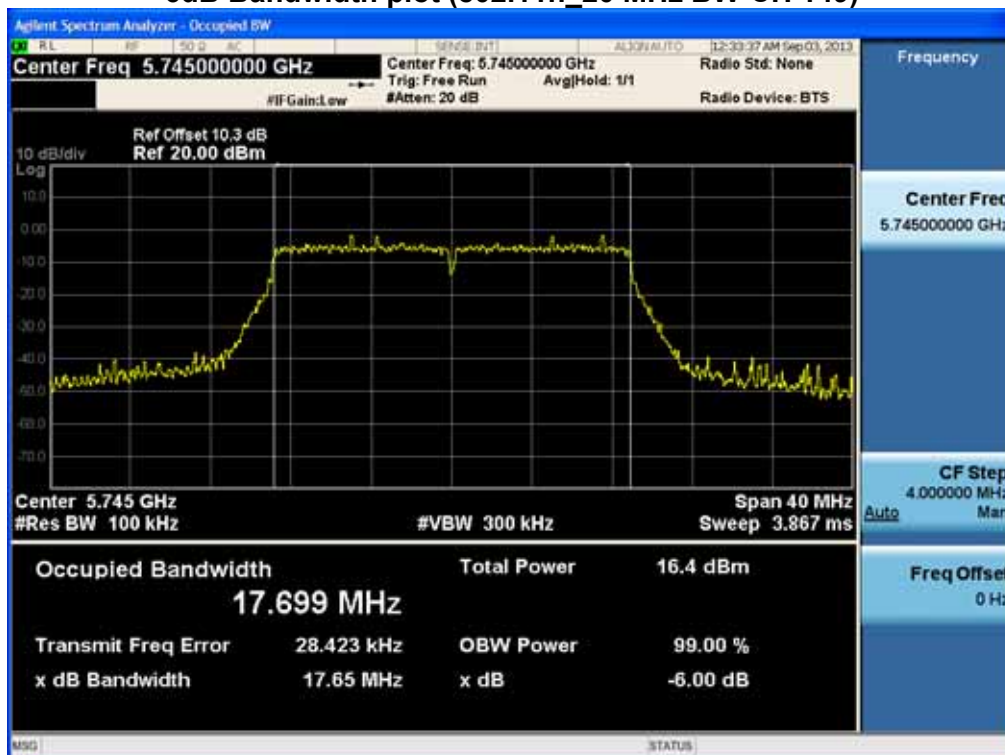


6dB Bandwidth plot (802.11n_40 MHz BW-CH 151)

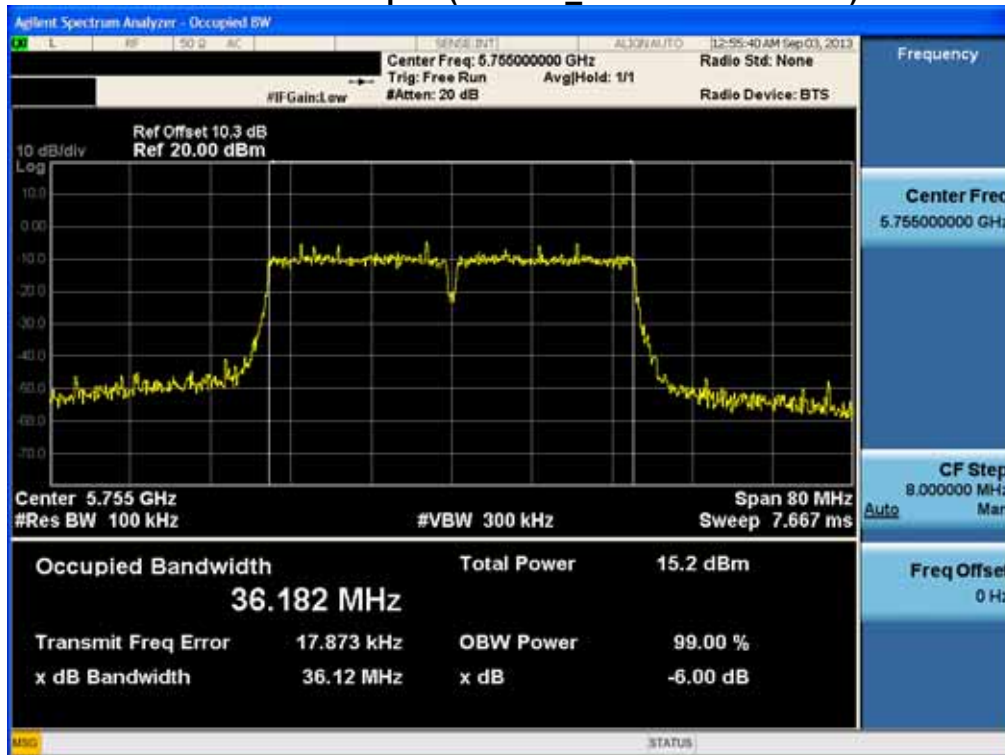


Conducted Output Power (802.11ac_20 MHz BW-CH 149)

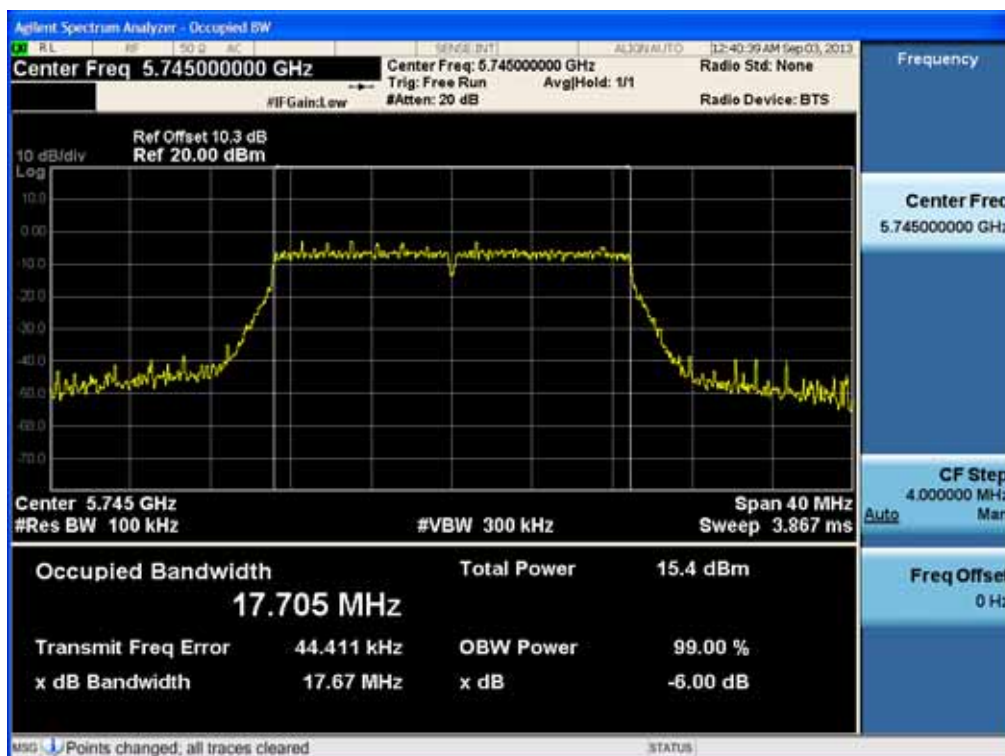

Conducted Output Power (802.11ac_40 MHz BW-CH 151)

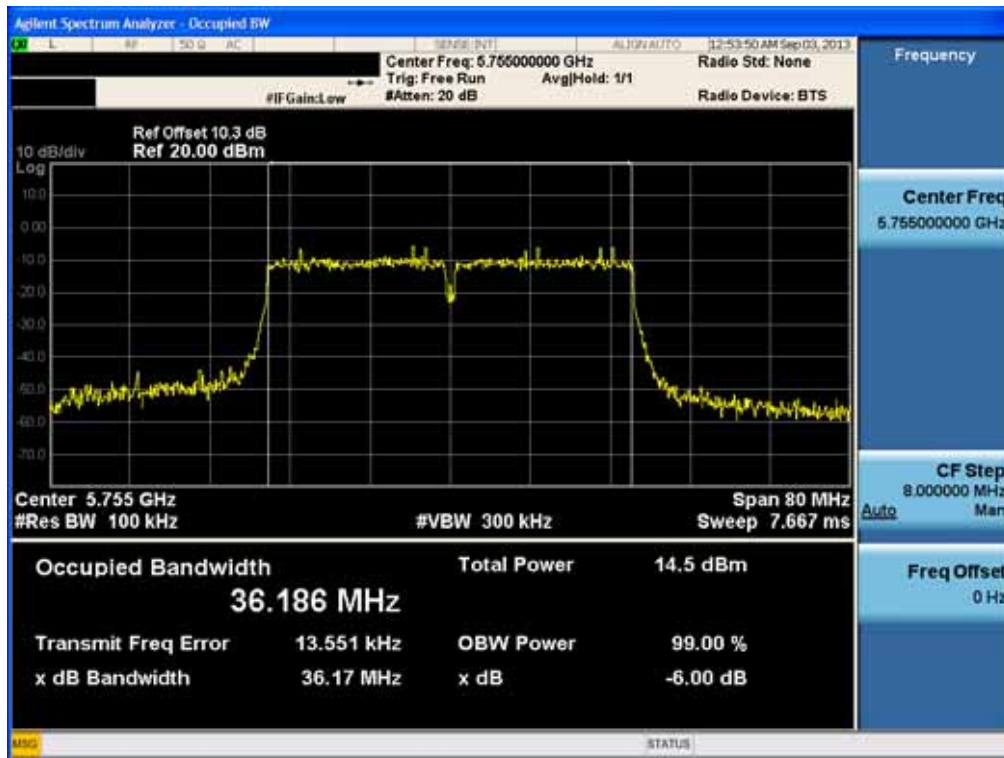

Conducted Output Power (802.11ac_80 MHz BW-CH 155)

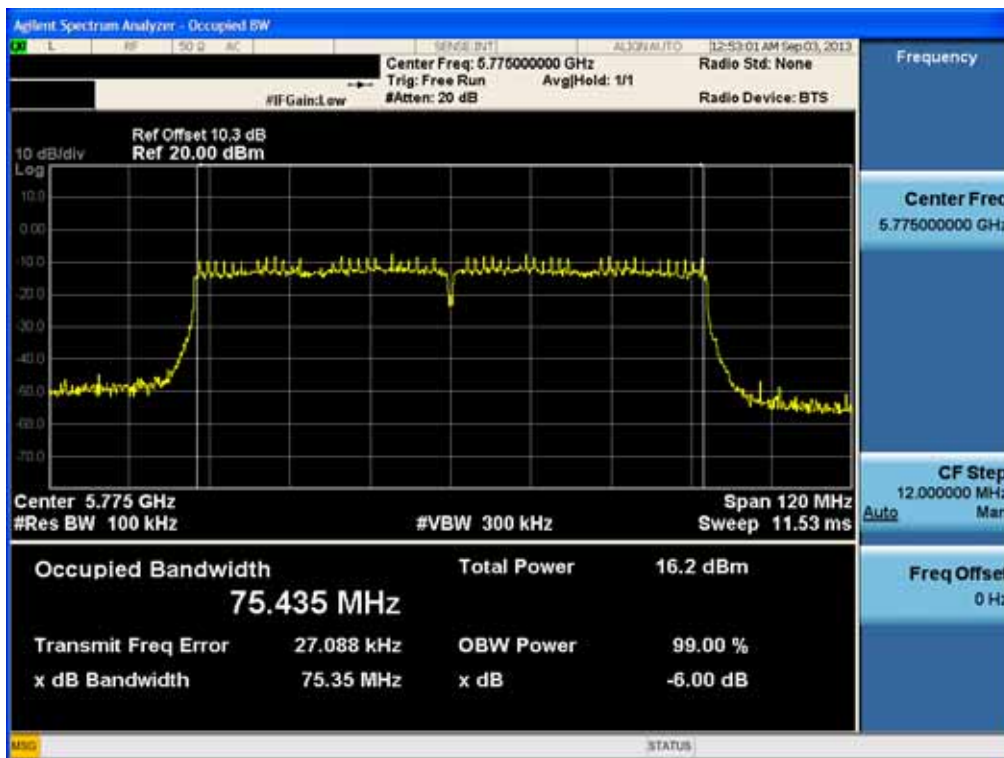


8.3 OUTPUT POWER (802.11a/b/g/n/ac)

Test Requirements and limit, §15.247(b)(3)

The transmitter output is connected to the input of an RF power sensor. Measurement is made using a broadband power meter capable of making peak and average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

The maximum permissible conducted output power is 1 Watt.

TEST CONFIGURATION



TEST PROCEDURE

TX condition of EUT is actual operating mode by BT LE mode test program.

- Peak Power (Procedure 9.1.3 in KDB 558074, issued 04/09/2013)
 1. Measure the peak power of the transmitter.
- Average Power (Procedure 9.2.3.1 in KDB 558074, issued 04/09/2013)
 1. Measure the duty cycle.
 2. Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.
 3. Add $10 \log (1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times.

Note :

1. We apply to the offset in the 2.4 GHz range that was rounded off to the closest tenth dB. So, 10.2 dB is offset for 2.4 GHz Band. Actual value of loss for the attenuator and cable combination is below table.

Band	Frequency(MHz)	Loss(dB)
2.4 GHz	2412	10.21
	2437	10.24
	2462	10.24

(Actual value of loss for the attenuator and cable combination)

TEST RESULTS-Peak

2.4 GHz Band

Conducted Output Power Measurements (802.11b Mode)

802.11b Mode		Rate (Mbps)	Measured Power(dBm)	Limit (dBm)
Frequency[MHz]	Channel No.			
2412	1	1 Mbps	19.23	30
		2 Mbps	19.31	30
		5.5 Mbps	19.31	30
		11 Mbps	19.34	30
2437	6	1 Mbps	19.22	30
		2 Mbps	19.19	30
		5.5 Mbps	19.28	30
		11 Mbps	19.37	30
2462	11	1 Mbps	19.14	30
		2 Mbps	19.15	30
		5.5 Mbps	19.34	30
		11 Mbps	19.27	30

Conducted Output Power Measurements (802.11g Mode)

802.11g Mode		Rate (Mbps)	Measured Power(dBm)	Limit (dBm)
Frequency[MHz]	Channel No.			
2412	1	6 Mbps	22.93	30
		9 Mbps	22.97	30
		12 Mbps	23.19	30
		18 Mbps	23.25	30
		24 Mbps	22.93	30
		36 Mbps	22.89	30
		48 Mbps	23.75	30
		54 Mbps	23.25	30
2437	6	6 Mbps	23.02	30
		9 Mbps	23.03	30
		12 Mbps	23.07	30
		18 Mbps	22.99	30
		24 Mbps	22.70	30
		36 Mbps	22.66	30
		48 Mbps	23.39	30
		54 Mbps	22.88	30
2462	11	6 Mbps	22.71	30
		9 Mbps	22.95	30
		12 Mbps	23.01	30
		18 Mbps	23.24	30
		24 Mbps	22.81	30
		36 Mbps	22.84	30
		48 Mbps	23.91	30
		54 Mbps	23.05	30

Conducted Output Power Measurements (802.11n Mode)

802.11n Mode		Rate (Mbps)	Measured Power(dBm)	Limit (dBm)
Frequency[MHz]	Channel No.			
2412	1	6.5 Mbps	22.79	30
		13 Mbps	23.91	30
		19.5 Mbps	23.41	30
		26 Mbps	23.12	30
		39 Mbps	22.88	30
		52 Mbps	22.85	30
		58.5 Mbps	23.20	30
		65 Mbps	22.88	30
2437	6	6.5 Mbps	22.55	30
		13 Mbps	22.94	30
		19.5 Mbps	22.46	30
		26 Mbps	22.77	30
		39 Mbps	22.90	30
		52 Mbps	22.92	30
		58.5 Mbps	23.08	30
		65 Mbps	22.84	30
2462	11	6.5 Mbps	22.75	30
		13 Mbps	22.80	30
		19.5 Mbps	23.00	30
		26 Mbps	23.20	30
		39 Mbps	22.91	30
		52 Mbps	22.69	30
		58.5 Mbps	23.13	30
		65 Mbps	23.02	30

5.8 GHz Band

Conducted Output Power Measurements (802.11a Mode: 5745~5825)

802.11a Mode		Rate (Mbps)	Measured Power(dBm)	Limit (dBm)
Frequency[MHz]	Channel No.			
5745	149	6 Mbps	21.85	30
		9 Mbps	21.49	30
		12 Mbps	22.16	30
		18 Mbps	22.24	30
		24 Mbps	21.79	30
		36 Mbps	21.50	30
		48 Mbps	22.87	30
		54 Mbps	21.67	30
5785	157	6 Mbps	21.60	30
		9 Mbps	21.21	30
		12 Mbps	21.79	30
		18 Mbps	21.88	30
		24 Mbps	21.32	30
		36 Mbps	21.34	30
		48 Mbps	22.83	30
		54 Mbps	21.21	30
5825	165	6 Mbps	21.11	30
		9 Mbps	20.94	30
		12 Mbps	21.70	30
		18 Mbps	21.66	30
		24 Mbps	21.23	30
		36 Mbps	21.11	30
		48 Mbps	22.87	30
		54 Mbps	21.00	30

Conducted Output Power Measurements (802.11n_20 MHz BW Mode: 5745~5825)

802.11n Mode		Rate (Mbps)	Measured Power(dBm)	Limit (dBm)
Frequency[MHz]	Channel No.			
5745	149	6.5 Mbps	21.39	30
		13 Mbps	21.82	30
		19.5 Mbps	21.88	30
		26 Mbps	21.85	30
		39 Mbps	21.87	30
		52 Mbps	22.69	30
		58.5 Mbps	21.81	30
		65 Mbps	21.65	30
5785	157	6.5 Mbps	21.39	30
		13 Mbps	21.88	30
		19.5 Mbps	21.71	30
		26 Mbps	21.45	30
		39 Mbps	21.79	30
		52 Mbps	21.75	30
		58.5 Mbps	21.62	30
		65 Mbps	21.46	30
5825	165	6.5 Mbps	21.44	30
		13 Mbps	21.91	30
		19.5 Mbps	21.52	30
		26 Mbps	21.39	30
		39 Mbps	21.38	30
		52 Mbps	22.25	30
		58.5 Mbps	21.63	30
		65 Mbps	21.00	30

Conducted Output Power Measurements (802.11n_40 MHz BW Mode: 5755~5795)

802.11n Mode		Rate (Mbps)	Measured Power(dBm)	Limit (dBm)
Frequency[MHz]	Channel No.			
5755	151	13.5 Mbps	21.94	30
		27 Mbps	21.56	30
		40.5 Mbps	21.08	30
		54 Mbps	21.30	30
		81 Mbps	21.71	30
		108 Mbps	21.89	30
		121.5 Mbps	21.54	30
		135 Mbps	21.34	30
5795	159	13.5 Mbps	22.13	30
		27 Mbps	22.20	30
		40.5 Mbps	21.14	30
		54 Mbps	20.98	30
		81 Mbps	21.19	30
		108 Mbps	21.83	30
		121.5 Mbps	21.05	30
		135 Mbps	21.45	30

Conducted Output Power Measurements (802.11ac_20 MHz BW Mode: 5745~5825)

802.11ac Mode		Rate (Mbps)	Measured Power(dBm)	Limit (dBm)
Frequency[MHz]	Channel No.			
5745	149	6.5	21.19	30
		13	21.05	30
		19.5	20.63	30
		26	21.64	30
		39	20.29	30
		52	21.07	30
		58.5	20.57	30
		65	20.76	30
		78	20.45	30
5785	157	6.5	20.57	30
		13	20.62	30
		19.5	20.60	30
		26	20.96	30
		39	20.67	30
		52	20.62	30
		58.5	21.31	30
		65	20.52	30
		78	20.64	30
5825	165	6.5	20.47	30
		13	20.49	30
		19.5	20.62	30
		26	20.76	30
		39	20.30	30
		52	20.41	30
		58.5	21.13	30
		65	20.05	30
		78	20.36	30

Conducted Output Power Measurements (802.11ac_40 MHz BW Mode: 5755~5795)

802.11ac Mode		Rate (Mbps)	Measured Power(dBm)	Limit (dBm)
Frequency[MHz]	Channel No.			
5755	151	13.5	20.62	30
		27	21.10	30
		40.5	20.35	30
		54	20.61	30
		81	20.08	30
		108	21.35	30
		121.5	20.10	30
		135	20.27	30
		162	20.52	30
		180	21.08	30
5795	159	13.5	20.49	30
		27	20.22	30
		40.5	21.02	30
		54	19.84	30
		81	20.08	30
		108	20.14	30
		121.5	19.64	30
		135	20.07	30
		162	20.73	30
		180	20.17	30

Conducted Output Power Measurements (802.11ac_80 MHz BW Mode: 5775)

802.11ac Mode		Rate (Mbps)	Measured Power(dBm)	Limit (dBm)
Frequency[MHz]	Channel No.			
5775	155	29.3	20.30	30
		58.5	20.16	30
		87.8	19.23	30
		117	20.50	30
		175.5	19.51	30
		234	20.91	30
		263.3	19.89	30
		292.5	20.85	30
		351	19.90	30
		390	20.29	30

TEST RESULTS-Average

2.4 GHz Band

Conducted Output Power Measurements (802.11b Mode)

802.11b Mode		Rate (Mbps)	Measured Power(dBm)	Duty Cycle Factor	Measured Power(dBm) + Duty Cycle Factor	Limit (dBm)
Frequency [MHz]	Channel No.					
2412	1	1 Mbps	15.77	0.042	15.82	30
		2 Mbps	15.75	0.069	15.81	30
		5.5 Mbps	15.60	0.180	15.78	30
		11 Mbps	15.46	0.330	15.79	30
2437	6	1 Mbps	15.79	0.042	15.84	30
		2 Mbps	15.71	0.069	15.78	30
		5.5 Mbps	15.63	0.180	15.81	30
		11 Mbps	15.51	0.330	15.84	30
2462	11	1 Mbps	15.60	0.042	15.64	30
		2 Mbps	15.47	0.069	15.54	30
		5.5 Mbps	15.39	0.180	15.57	30
		11 Mbps	15.29	0.330	15.62	30

Conducted Output Power Measurements (802.11g Mode)

802.11g Mode		Rate (Mbps)	Measured Power(dBm)	Duty Cycle Factor	Measured Power(dBm) + Duty Cycle Factor	Limit (dBm)
Frequency [MHz]	Channel No.					
2412	1	6 Mbps	13.03	0.201	13.24	30
		9 Mbps	12.93	0.318	13.25	30
		12 Mbps	12.86	0.405	13.26	30
		18 Mbps	12.76	0.571	13.33	30
		24 Mbps	12.53	0.763	13.29	30
		36 Mbps	12.21	1.061	13.27	30
		48 Mbps	12.09	1.354	13.44	30
		54 Mbps	11.90	1.496	13.40	30
2437	6	6 Mbps	12.97	0.201	13.17	30
		9 Mbps	12.89	0.318	13.21	30
		12 Mbps	12.74	0.405	13.14	30
		18 Mbps	12.70	0.571	13.27	30
		24 Mbps	12.42	0.763	13.18	30
		36 Mbps	12.19	1.061	13.25	30
		48 Mbps	12.05	1.354	13.41	30
		54 Mbps	11.87	1.496	13.36	30
2462	11	6 Mbps	12.72	0.201	12.92	30
		9 Mbps	12.70	0.318	13.01	30
		12 Mbps	12.63	0.405	13.03	30
		18 Mbps	12.50	0.571	13.07	30
		24 Mbps	12.33	0.763	13.09	30
		36 Mbps	12.03	1.061	13.10	30
		48 Mbps	11.91	1.354	13.27	30
		54 Mbps	11.74	1.496	13.24	30

Conducted Output Power Measurements (802.11n_20 MHz BW Mode)

802.11n Mode		Rate (Mbps)	Measured Power(dBm)	Duty Cycle Factor	Measured Power(dBm) + Duty Cycle Factor	Limit (dBm)
Frequency [MHz]	Channel No.					
2412	1	6.5 Mbps	11.93	0.216	12.15	30
		13 Mbps	11.81	0.444	12.26	30
		19.5 Mbps	11.63	0.609	12.24	30
		26 Mbps	11.50	0.799	12.30	30
		39 Mbps	11.21	1.098	12.31	30
		52 Mbps	10.94	1.387	12.33	30
		58.5 Mbps	10.84	1.484	12.32	30
		65 Mbps	10.72	1.598	12.32	30
2437	6	6.5 Mbps	11.83	0.216	12.05	30
		13 Mbps	11.72	0.444	12.16	30
		19.5 Mbps	11.55	0.609	12.16	30
		26 Mbps	11.43	0.799	12.23	30
		39 Mbps	11.16	1.098	12.26	30
		52 Mbps	10.88	1.387	12.27	30
		58.5 Mbps	10.79	1.484	12.28	30
		65 Mbps	10.76	1.598	12.36	30
2462	11	6.5 Mbps	11.74	0.216	11.95	30
		13 Mbps	11.48	0.444	11.92	30
		19.5 Mbps	11.37	0.609	11.98	30
		26 Mbps	11.25	0.799	12.05	30
		39 Mbps	11.02	1.098	12.12	30
		52 Mbps	10.68	1.387	12.07	30
		58.5 Mbps	10.61	1.484	12.10	30
		65 Mbps	10.55	1.598	12.15	30

5.8 GHz Band

Conducted Output Power Measurements (802.11a Mode: 5745~5825)

802.11a Mode		Rate (Mbps)	Measured Power(dBm)	Duty Cycle Factor	Measured Power(dBm) + Duty Cycle Factor	Limit (dBm)
Frequency [MHz]	Channel No.					
5745	149	6 Mbps	10.84	0.201	11.04	30
		9 Mbps	10.83	0.318	11.15	30
		12 Mbps	10.77	0.405	11.18	30
		18 Mbps	10.61	0.571	11.18	30
		24 Mbps	10.42	0.763	11.18	30
		36 Mbps	10.05	1.061	11.11	30
		48 Mbps	9.85	1.354	11.20	30
		54 Mbps	9.65	1.496	11.15	30
5785	157	6 Mbps	10.57	0.201	10.77	30
		9 Mbps	10.59	0.318	10.91	30
		12 Mbps	10.59	0.405	10.99	30
		18 Mbps	10.37	0.571	10.94	30
		24 Mbps	10.16	0.763	10.92	30
		36 Mbps	9.85	1.061	10.91	30
		48 Mbps	9.73	1.354	11.08	30
		54 Mbps	9.44	1.496	10.94	30
5825	165	6 Mbps	10.38	0.201	10.59	30
		9 Mbps	10.42	0.318	10.74	30
		12 Mbps	10.31	0.405	10.72	30
		18 Mbps	10.23	0.571	10.80	30
		24 Mbps	9.98	0.763	10.75	30
		36 Mbps	9.66	1.061	10.72	30
		48 Mbps	9.49	1.354	10.84	30
		54 Mbps	9.25	1.496	10.75	30

Conducted Output Power Measurements (802.11n_20 MHz BW Mode: 5745~5825)

802.11n Mode		Rate (Mbps)	Measured Power(dBm)	Duty Cycle Factor	Measured Power(dBm) + Duty Cycle Factor	Limit (dBm)
Frequency [MHz]	Channel No.					
5745	149	6.5 Mbps	9.89	0.216	10.11	30
		13 Mbps	9.81	0.444	10.25	30
		19.5 Mbps	9.69	0.609	10.30	30
		26 Mbps	9.55	0.799	10.34	30
		39 Mbps	9.10	1.098	10.19	30
		52 Mbps	8.86	1.387	10.25	30
		58.5 Mbps	8.82	1.484	10.30	30
		65 Mbps	8.67	1.598	10.27	30
5785	157	6.5 Mbps	9.77	0.216	9.98	30
		13 Mbps	9.61	0.444	10.06	30
		19.5 Mbps	9.48	0.609	10.09	30
		26 Mbps	9.33	0.799	10.13	30
		39 Mbps	8.91	1.098	10.01	30
		52 Mbps	8.67	1.387	10.06	30
		58.5 Mbps	8.59	1.484	10.07	30
		65 Mbps	8.50	1.598	10.09	30
5825	165	6.5 Mbps	9.53	0.216	9.74	30
		13 Mbps	9.39	0.444	9.84	30
		19.5 Mbps	9.25	0.609	9.86	30
		26 Mbps	9.10	0.799	9.90	30
		39 Mbps	8.74	1.098	9.84	30
		52 Mbps	8.44	1.387	9.83	30
		58.5 Mbps	8.34	1.484	9.83	30
		65 Mbps	8.31	1.598	9.91	30

Conducted Output Power Measurements (802.11n_40 MHz BW Mode: 5755~5795)

802.11n Mode		Rate (Mbps)	Measured Power(dBm)	Duty Cycle Factor	Measured Power(dBm) + Duty Cycle Factor	Limit (dBm)
Frequency [MHz]	Channel No.					
5755	151	13.5 Mbps	9.44	0.437	9.88	30
		27 Mbps	9.08	0.811	9.89	30
		40.5 Mbps	8.60	1.120	9.72	30
		54 Mbps	8.40	1.383	9.78	30
		81 Mbps	7.97	1.852	9.82	30
		108 Mbps	7.46	2.196	9.65	30
		121.5 Mbps	7.34	2.341	9.68	30
		135 Mbps	7.25	2.507	9.75	30
5795	159	13.5 Mbps	9.52	0.437	9.96	30
		27 Mbps	9.13	0.811	9.94	30
		40.5 Mbps	8.90	1.120	10.02	30
		54 Mbps	8.00	1.383	9.39	30
		81 Mbps	7.59	1.852	9.44	30
		108 Mbps	7.19	2.196	9.39	30
		121.5 Mbps	7.03	2.341	9.37	30
		135 Mbps	6.84	2.507	9.35	30

Conducted Output Power Measurements (802.11ac_20 MHz BW Mode: 5745~5825)

802.11ac Mode		Rate (Mbps)	Measured Power(dBm)	Duty Cycle Factor	Measured Power(dBm) + Duty Cycle Factor	Limit (dBm)
Frequency [MHz]	Channel No.					
5745	149	6.5	8.94	0.219	9.16	30
		13	8.80	0.427	9.23	30
		19.5	8.58	0.602	9.18	30
		26	8.43	0.769	9.20	30
		39	8.17	1.087	9.26	30
		52	7.94	1.349	9.29	30
		58.5	7.81	1.464	9.27	30
		65	7.70	1.570	9.26	30
		78	7.47	1.790	9.26	30
5785	157	6.5	8.78	0.219	9.00	30
		13	8.63	0.427	9.06	30
		19.5	8.53	0.602	9.13	30
		26	8.28	0.769	9.05	30
		39	7.98	1.087	9.07	30
		52	7.76	1.349	9.11	30
		58.5	7.62	1.464	9.08	30
		65	7.54	1.570	9.11	30
		78	7.36	1.790	9.15	30
5825	165	6.5	8.59	0.219	8.81	30
		13	8.48	0.427	8.91	30
		19.5	8.30	0.602	8.90	30
		26	8.10	0.769	8.87	30
		39	7.83	1.087	8.91	30
		52	7.60	1.349	8.95	30
		58.5	7.46	1.464	8.92	30
		65	7.27	1.570	8.84	30
		78	7.09	1.790	8.88	30

Conducted Output Power Measurements (802.11ac_40 MHz BW Mode: 5755~5795)

802.11ac Mode		Rate (Mbps)	Measured Power(dBm)	Duty Cycle Factor	Measured Power(dBm) + Duty Cycle Factor	Limit (dBm)
Frequency [MHz]	Channel No.					
5755	151	13.5	8.37	0.434	8.80	30
		27	7.96	0.798	8.75	30
		40.5	7.94	1.108	9.05	30
		54	7.40	1.377	8.78	30
		81	6.97	1.821	8.79	30
		108	6.86	2.151	9.01	30
		121.5	6.51	2.299	8.81	30
		135	6.51	2.449	8.96	30
		162	6.30	2.700	9.00	30
		180	6.21	2.771	8.98	30
5795	159	13.5	8.20	0.434	8.64	30
		27	7.85	0.798	8.64	30
		40.5	7.47	1.108	8.58	30
		54	7.22	1.377	8.60	30
		81	6.70	1.821	8.52	30
		108	6.42	2.151	8.57	30
		121.5	6.17	2.299	8.47	30
		135	6.09	2.449	8.54	30
		162	5.77	2.700	8.47	30
		180	5.72	2.771	8.49	30

Conducted Output Power Measurements (802.11ac_80 MHz BW Mode: 5775)

802.11ac Mode		Rate (Mbps)	Measured Power(dBm)	Duty Cycle Factor	Measured Power(dBm) + Duty Cycle Factor	Limit (dBm)
Frequency [MHz]	Channel No.					
5775	155	29.3	8.24	0.854	9.09	30
		58.5	7.58	1.451	9.03	30
		87.8	7.04	1.919	8.96	30
		117	6.84	2.242	9.08	30
		175.5	6.19	2.771	8.96	30
		234	6.10	3.100	9.20	30
		263.3	5.67	3.297	8.97	30
		292.5	5.68	3.405	9.09	30
		351	5.43	3.647	9.08	30
		390	5.36	3.782	9.14	30


8.4 POWER SPECTRAL DENSITY (802.11a/b/g/n/ac)

Test Requirements and limit, §15.247(e)

The peak power spectral density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating in transmission mode at the appropriate frequencies.

Minimum Standard – the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

TEST CONFIGURATION



TEST PROCEDURE

We tested according to Procedure 10.2 in KDB 558074, issued 04/09/2013

The spectrum analyzer is set to :

Set analyzer center frequency to DTS channel center frequency.

Span = 1.5 times the DTS channel bandwidth.

RBW = 3 kHz ≤ RBW ≤ 100 kHz.

VBW ≥ 3 x RBW.

Sweep = auto couple

Detector = peak

Trace Mode = max hold

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum amplitude level within the RBW.

If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

Sample Calculation

$$\begin{aligned} \text{PSD} &= \text{Reading Value} + \text{ATT loss} + \text{Cable loss}(1 \text{ ea}) \\ &= -5 \text{ dBm} + 10 \text{ dB} + 0.8 \text{ dB} = 5.8 \text{ dBm} \end{aligned}$$

Note :

1. Spectrum reading values are not plot data. The PSD results in plot is already including the actual values of loss for the attenuator and cable combination.
2. Spectrum offset = Attenuator loss + Cable loss
3. We apply to the offset in the 2.4 GHz and 5.8 GHz range that was rounded off to the closest tenth dB. So, 10.2 dB is offset for 2.4 GHz Band and 10.3 dB is offset for 5.8 GHz Band.
Actual value of loss for the attenuator and cable combination is below table.

FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1309FR12-1	Date of Issue: September 24, 2013	EUT Type: Cellular/PCS GSM/GPRS/EDGE Cellular WCDMA/HSDPA/HSUPA Phone with Bluetooth/WLAN/NFC	FCC ID: ZNFLGL22

Band	Frequency(MHz)	Loss(dB)
2.4 GHz	2412	10.21
	2437	10.24
	2462	10.24
5.8 GHz	5745	10.31
	5755	10.30
	5785	10.29
	5795	10.26
	5825	10.28

(Actual value of loss for the attenuator and cable combination)

TEST RESULTS

Conducted Power Density Measurements

Frequency (MHz)	Channel No.	Mode	Test Result		
			PSD (dBm)	Limit (dBm)	Pass/Fail
2412	1	802.11b	-6.129	8	Pass
2437	6		-7.870		Pass
2462	11		-7.311		Pass
2412	1	802.11g	-12.936		Pass
2437	6		-12.764		Pass
2462	11		-13.032		Pass
2412	1	802.11n 2.4 GHz Band	-13.831		Pass
2437	6		-13.528		Pass
2462	11		-13.616		Pass
5745	149	802.11a	-14.941		Pass
5785	157		-15.020		Pass
5825	165		-15.020		Pass
5745	149	802.11n_ 20 MHz BW 5.8 GHz Band	-15.828		Pass
5785	157		-15.223		Pass
5825	165		-15.417		Pass
5755	151	802.11n_ 40 MHz BW 5.8 GHz Band	-17.883		Pass
5795	159		-18.715		Pass
5745	149	802.11ac _20 MHz BW 5.8 GHz Band	-17.612		Pass
5785	157		-15.028		Pass
5825	165		-16.910		Pass
5755	151	802.11ac _40 MHz BW 5.8 GHz Band	-19.008		Pass
5795	159		-18.976		Pass
5775	155	802.11ac _80MHz BW 5.8 GHz Band	-21.982		Pass

Note : In order to simplify the report, attached plots were only the highest PSD channel.


RESULT PLOTS

2.4 GHz Band

Power Spectral Density (802.11b-CH 1)




Power Spectral Density (802.11g-CH 6)

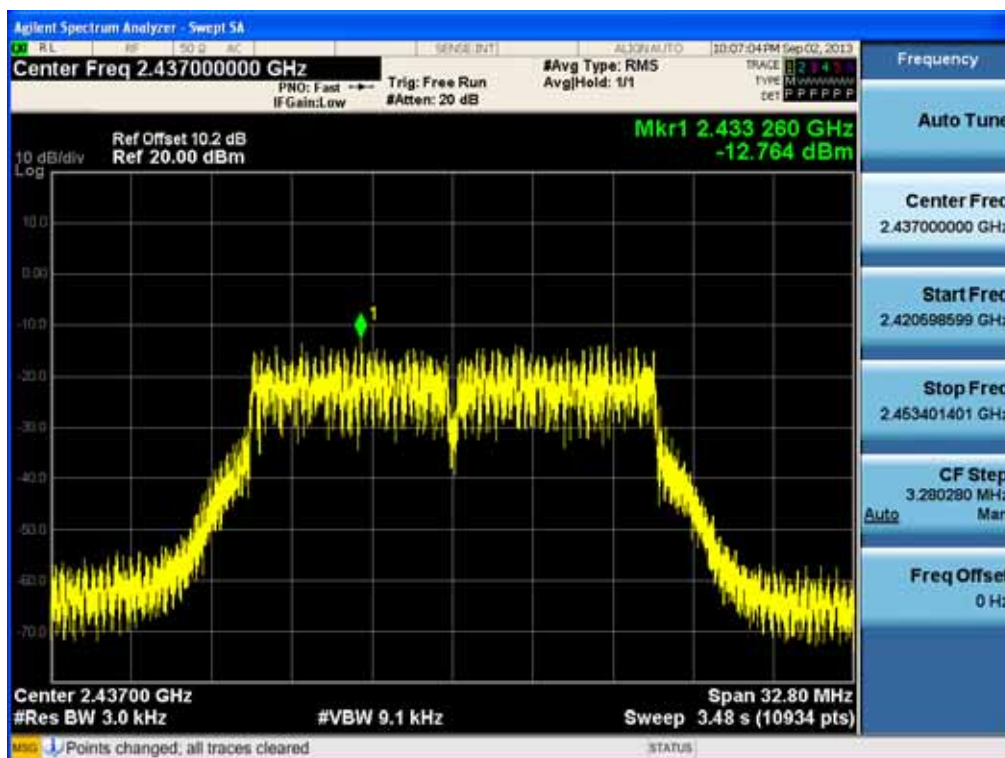

FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1309FR12-1	Date of Issue: September 24, 2013	EUT Type: Cellular/PCS GSM/GPRS/EDGE Cellular WCDMA/HSDPA/HSUPA Phone with Bluetooth/WLAN/NFC		FCC ID: ZNFLGL22


Power Spectral Density (802.11n-CH 6)

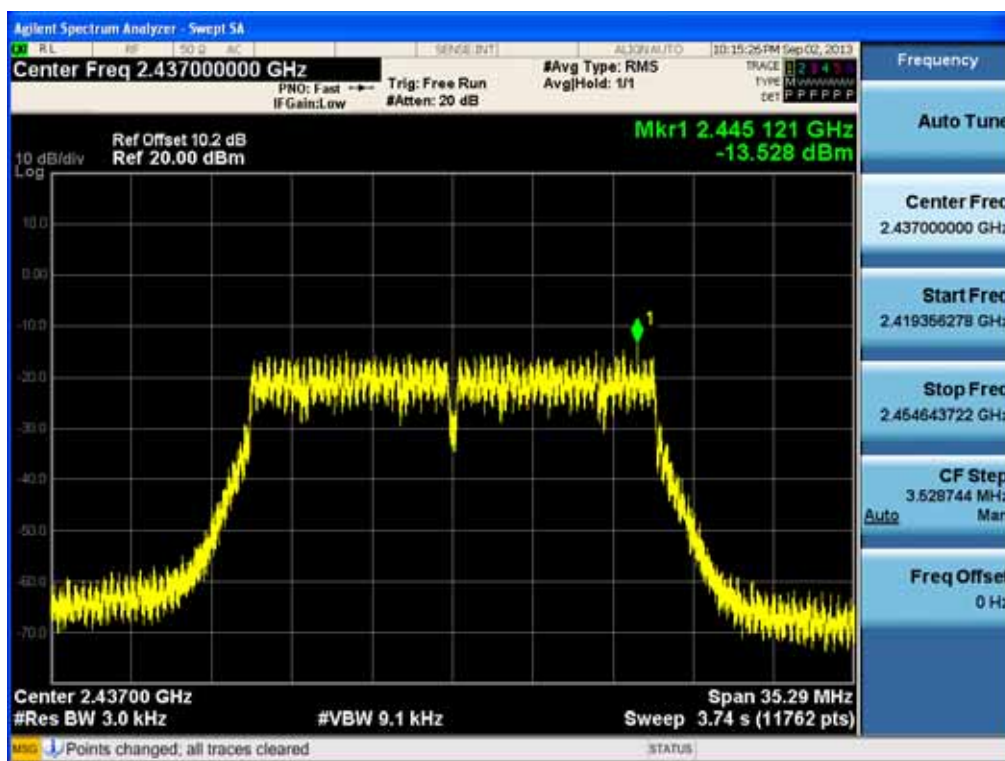


FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1309FR12-1	Date of Issue: September 24, 2013	EUT Type: Cellular/PCS GSM/GPRS/EDGE Cellular WCDMA/HSDPA/HSUPA Phone with Bluetooth/WLAN/NFC	FCC ID: ZNFLGL22	

5.8 GHz Band

Power Spectral Density (802.11a-CH 149)

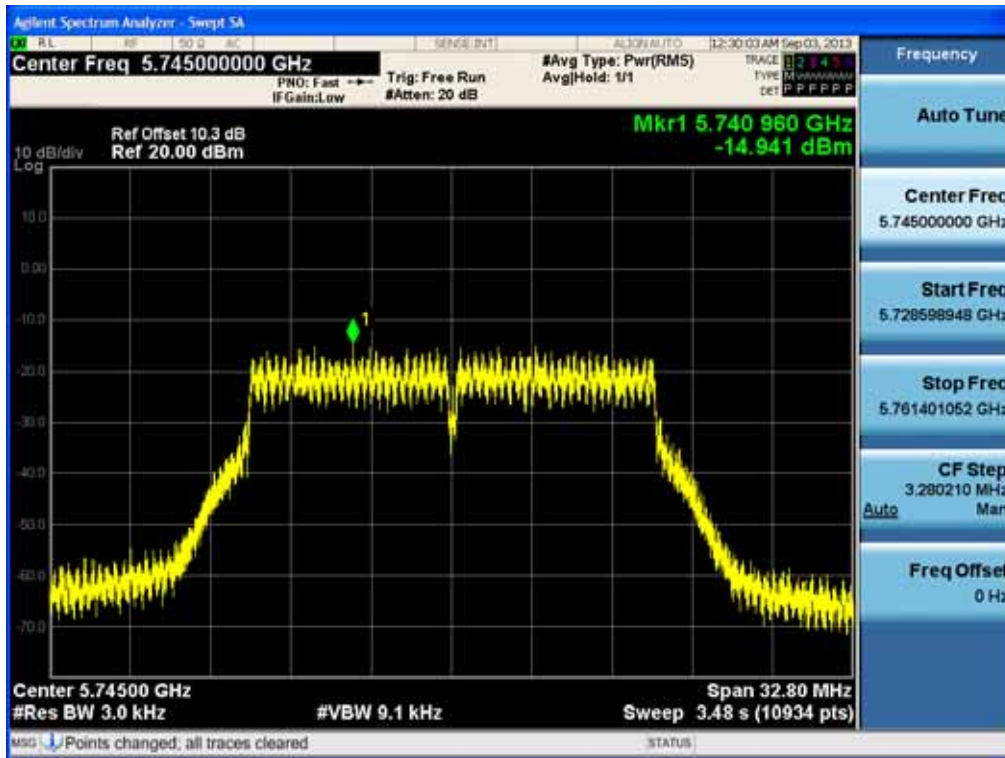


Power Spectral Density (802.11n_20 MHz BW-CH 157)

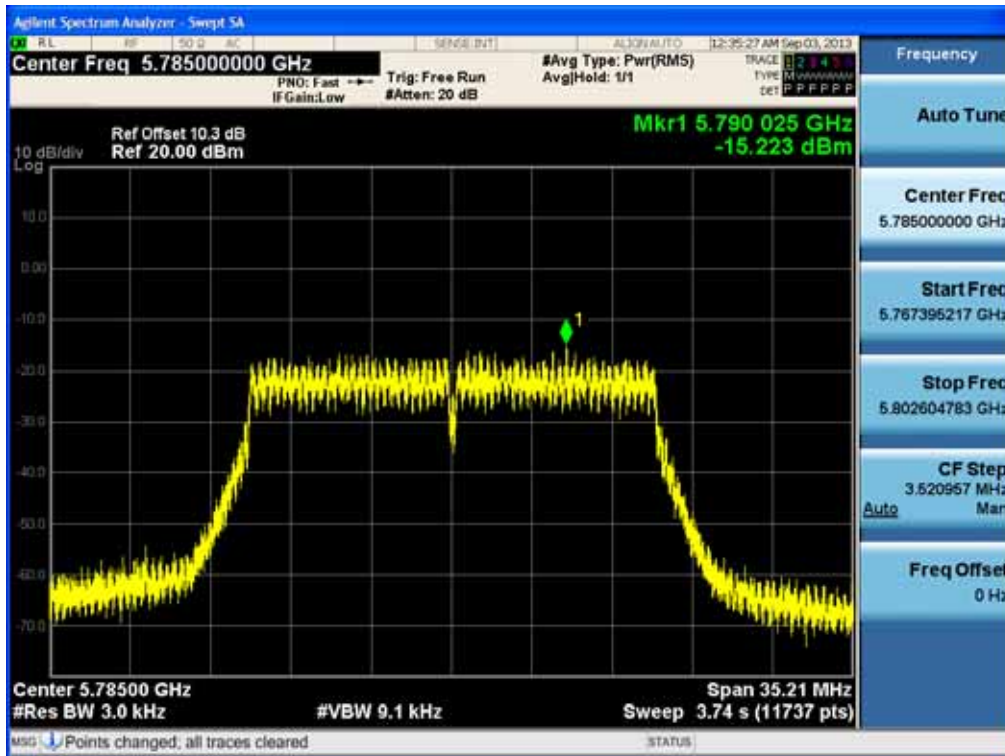


FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1309FR12-1	Date of Issue: September 24, 2013	EUT Type: Cellular/PCS GSM/GPRS/EDGE Cellular WCDMA/HSDPA/HSUPA Phone with Bluetooth/WLAN/NFC		FCC ID: ZNFLGL22


Power Spectral Density (802.11n_40 MHz BW-CH 151)

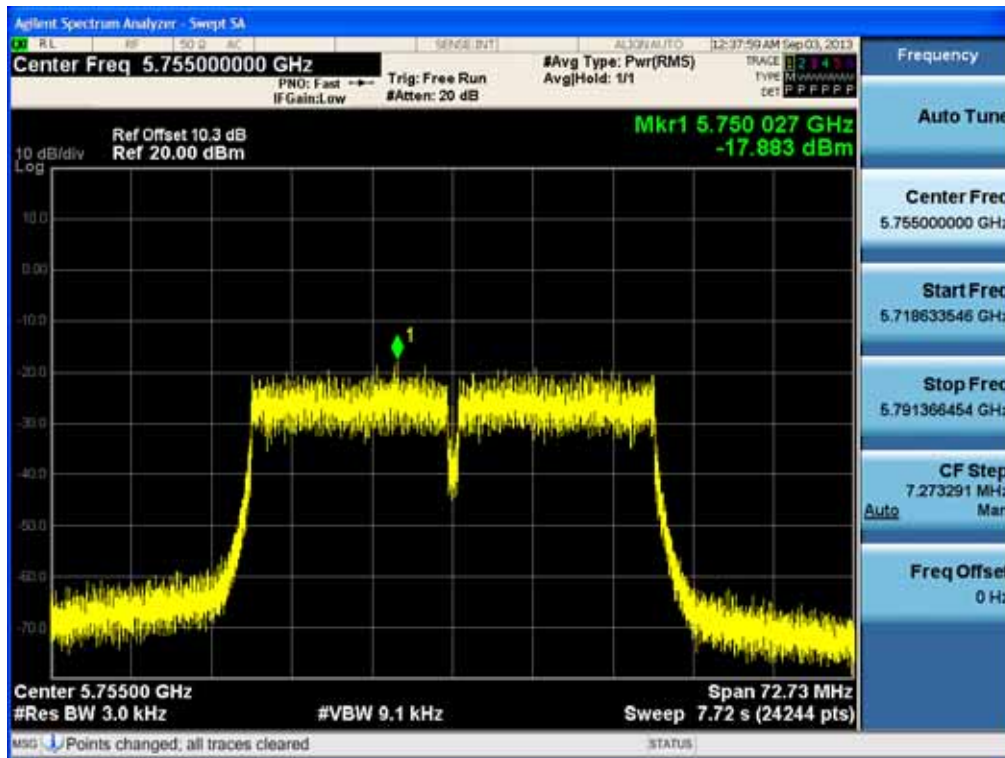


Power Spectral Density (802.11ac_20 MHz BW-CH 157)

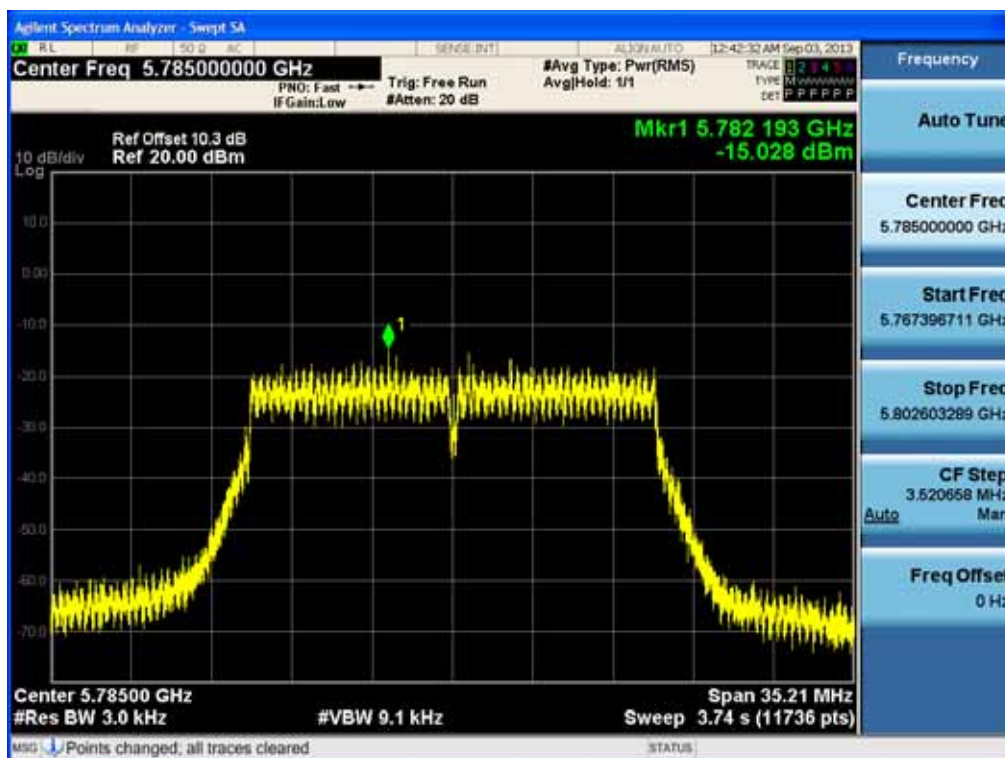

Power Spectral Density (802.11ac_40 MHz BW-CH 159)

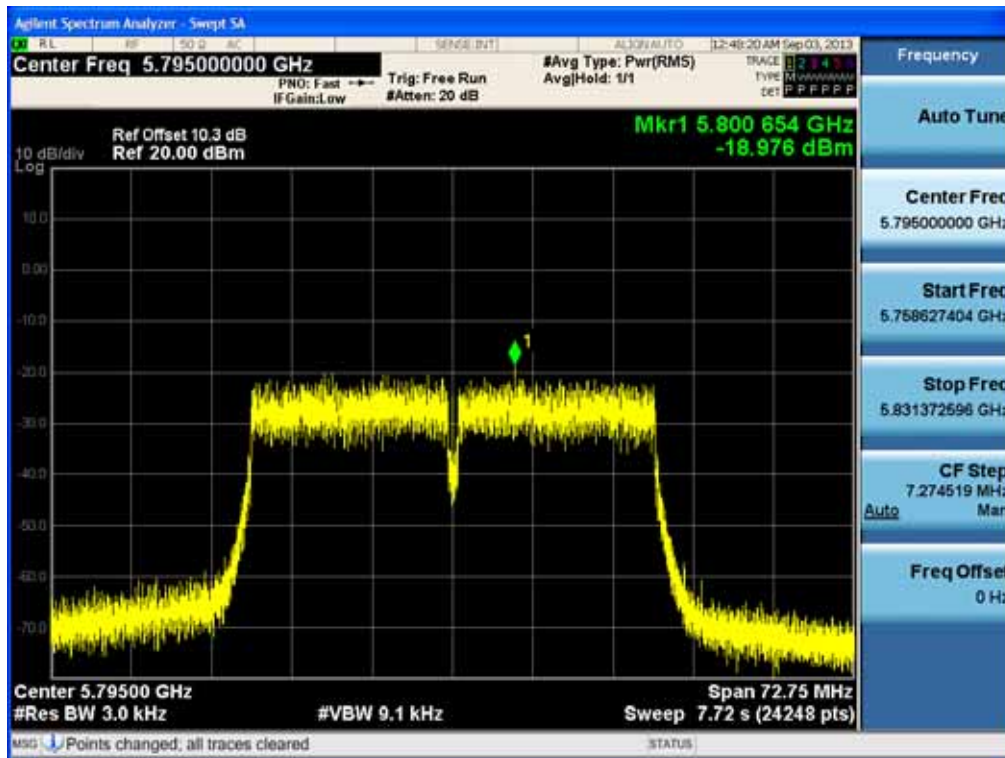

Power Spectral Density (802.11ac_80 MHz BW-CH 155)

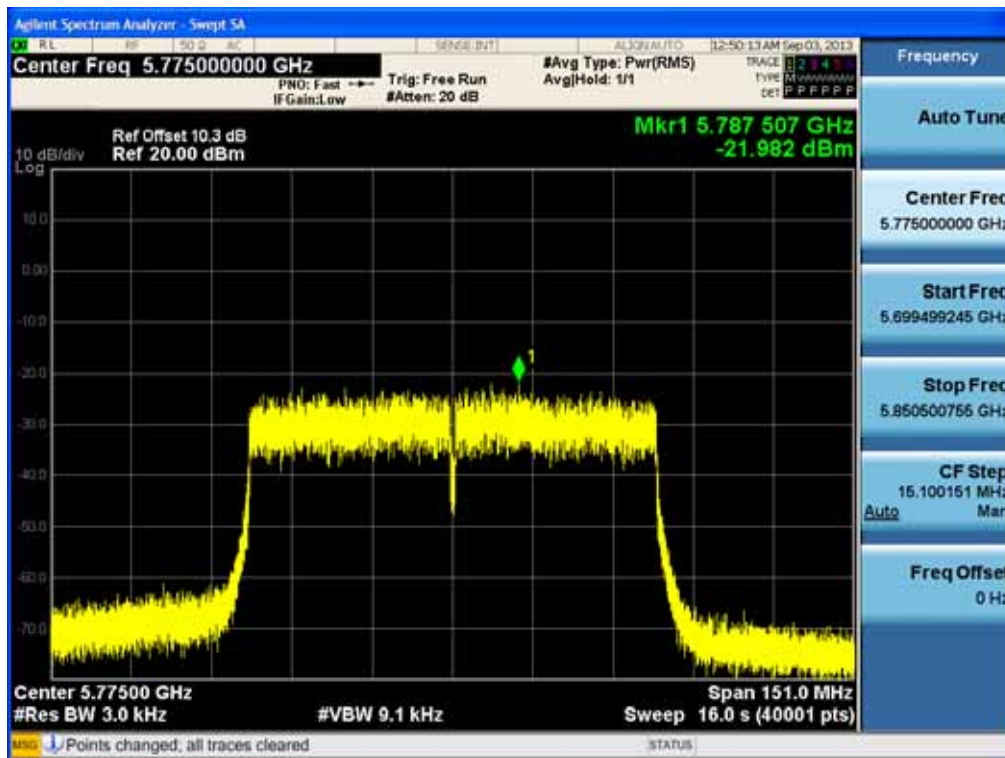


8.5 OUT OF BAND EMISSIONS AT THE BAND EDGE/ CONDUCTED SPURIOUS EMISSIONS

Test Requirements and limit, §15.247(d)

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

Limit : 20 dBc

TEST CONFIGURATION



TEST PROCEDURE

The transmitter output is connected to the spectrum analyzer. (Procedure 11.0 in KDB 558074, issued 04/09/2013)

RBW = 100 kHz

VBW $\geq 3 \times$ RBW

Set span to encompass the spectrum to be examined

Detector = Peak

Trace Mode = max hold

Sweep time = auto couple

Ensure that the number of measurement points $\geq$ Span/RBW

Allow trace to fully stabilize.

Use peak marker function to determine the maximum amplitude level.

Measurements are made over the 30 MHz to 10th harmonic range with the transmitter set to the lowest, middle, and highest channels.

Note :

1. The band edge results in plot is already including the actual values of loss for the attenuator and cable combination.
2. Spectrum offset = Attenuator loss + Cable loss
3. We apply to the offset in the 2.4 GHz and 5.8 GHz range that was rounded off to the closest tenth dB. So,

FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1309FR12-1	Date of Issue: September 24, 2013	EUT Type: Cellular/PCS GSM/GPRS/EDGE Cellular WCDMA/HSDPA/HSUPA Phone with Bluetooth/WLAN/NFC		FCC ID: ZNFLGL22

10.2 dB is offset for 2.4 GHz Band and 10.3 dB is offset for 5.8 GHz Band.

Actual value of loss for the attenuator and cable combination is below table.

Band	Frequency(MHz)	Loss(dB)
2.4 GHz	2412	10.21
	2437	10.24
	2462	10.24
5.8 GHz	5745	10.31
	5755	10.30
	5785	10.29
	5795	10.26
	5825	10.28

(Actual value of loss for the attenuator and cable combination)

4. In case of conducted spurious emissions test, please check factors blow table.

5. In order to simplify the report, attached plots were only the worst case channel and data rate.

FACTORS FOR FREQUENCY

Freq(MHz)	Factor(dB)
30	9.95
100	10.01
200	10.03
300	10.04
400	10.05
500	10.04
600	10.03
700	10.09
800	10.10
900	10.08
1000	10.11
2000	10.25
2400*	10.19
2500*	10.26
3000	10.27
4000	10.22
5000	10.48
5700*	10.42
5800*	10.48
6000	10.48

7000	10.57
8000	10.45
9000	10.50
10000	10.64
11000	10.69
12000	10.75
13000	10.92
14000	11.90
15000	11.00
16000	11.03
17000	10.93
18000	10.96
19000	10.85
20000	12.11
21000	11.17
22000	10.99
23000	11.12
24000	11.10
25000	11.42
26000	11.28
27000	10.83
28000	11.03
29000	10.99
30000	12.08
31000	10.99
32000	11.32
33000	11.33
34000	12.62
35000	14.85
36000	14.78
37000	15.73
38000	15.81
39000	13.47
40000	14.89

Note : 1. ‘*’ is fundamental frequency range.

2. Factor = Cable loss + Attenuator loss

FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1309FR12-1	Date of Issue: September 24, 2013	EUT Type: Cellular/PCS GSM/GPRS/EDGE Cellular WCDMA/HSDPA/HSUPA Phone with Bluetooth/WLAN/NFC		FCC ID: ZNFLGL22




RESULT PLOTS

2.4 GHz Band

BandEdge (802.11b-CH1)




BandEdge (802.11b-CH11)

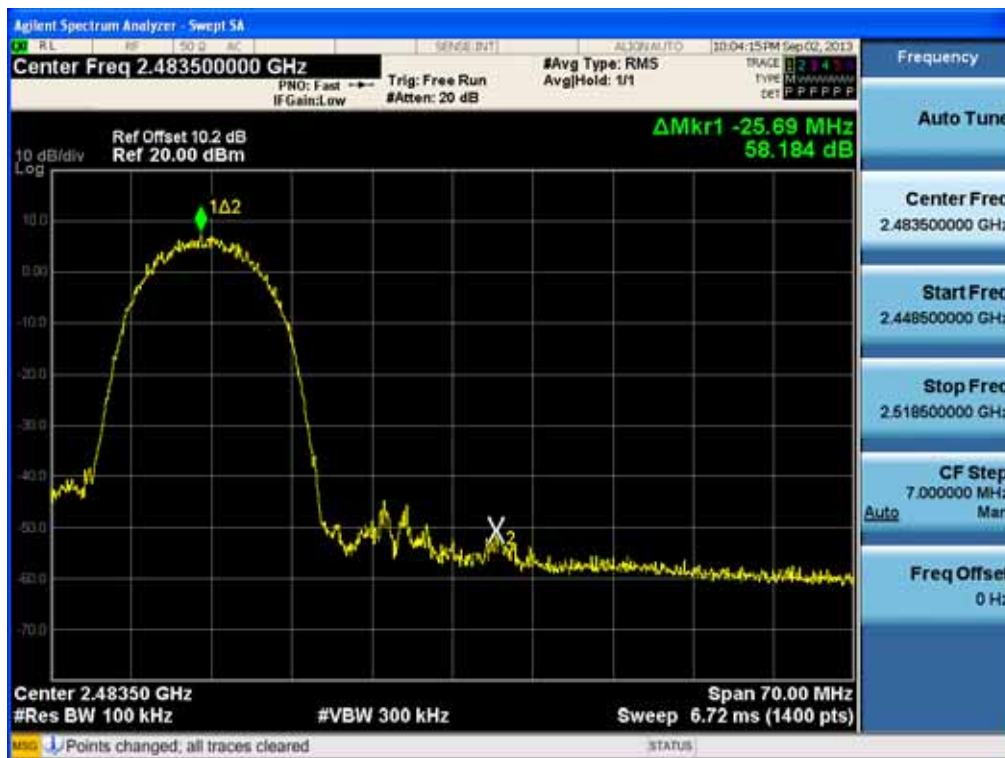


FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1309FR12-1	Date of Issue: September 24, 2013	EUT Type: Cellular/PCS GSM/GPRS/EDGE Cellular WCDMA/HSDPA/HSUPA Phone with Bluetooth/WLAN/NFC		FCC ID: ZNFLGL22

BandEdge (802.11g-CH1)

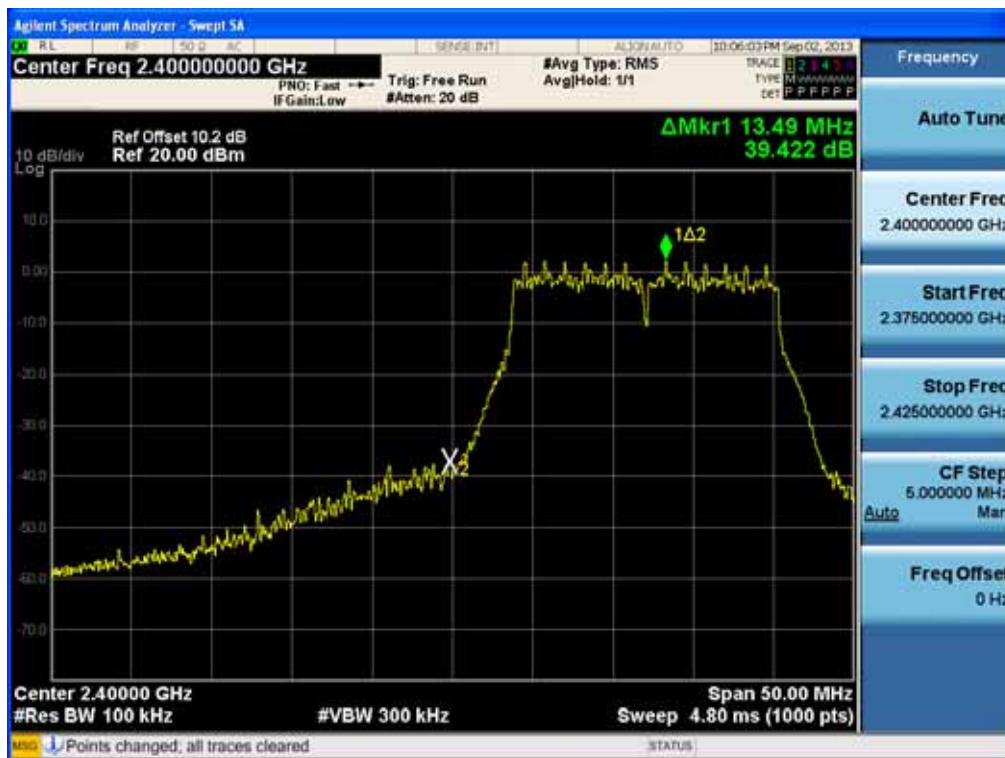

BandEdge (802.11g-CH11)

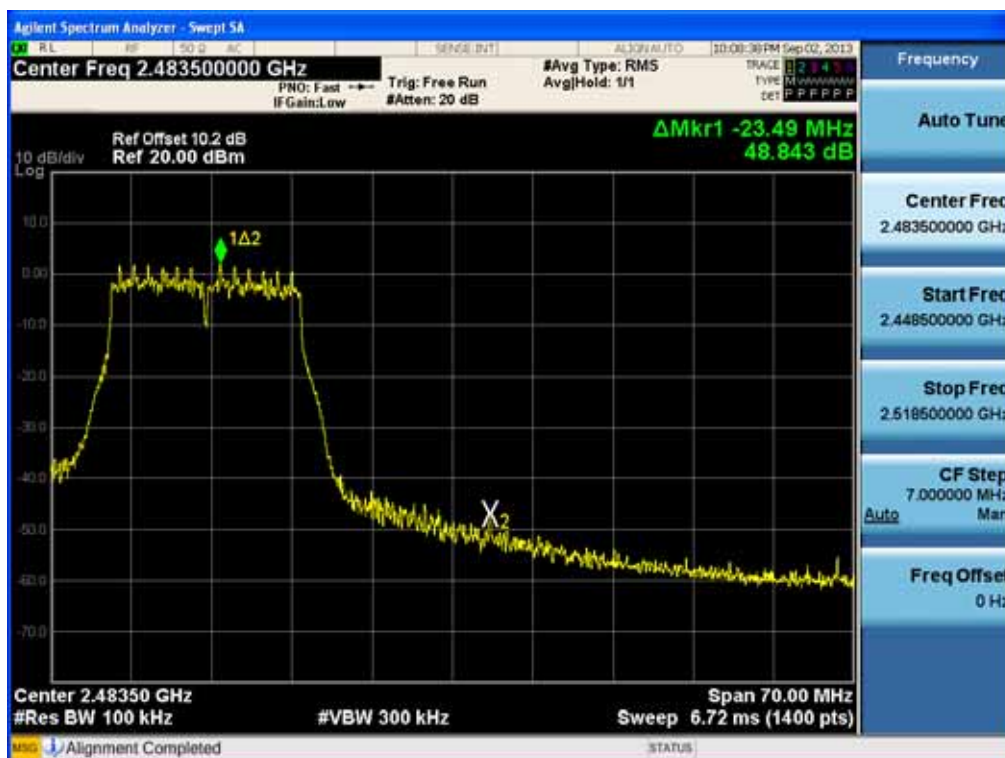


FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1309FR12-1	Date of Issue: September 24, 2013	EUT Type: Cellular/PCS GSM/GPRS/EDGE Cellular WCDMA/HSDPA/HSUPA Phone with Bluetooth/WLAN/NFC		FCC ID: ZNFLGL22

BandEdge (802.11n-CH1)




BandEdge (802.11n-CH11)

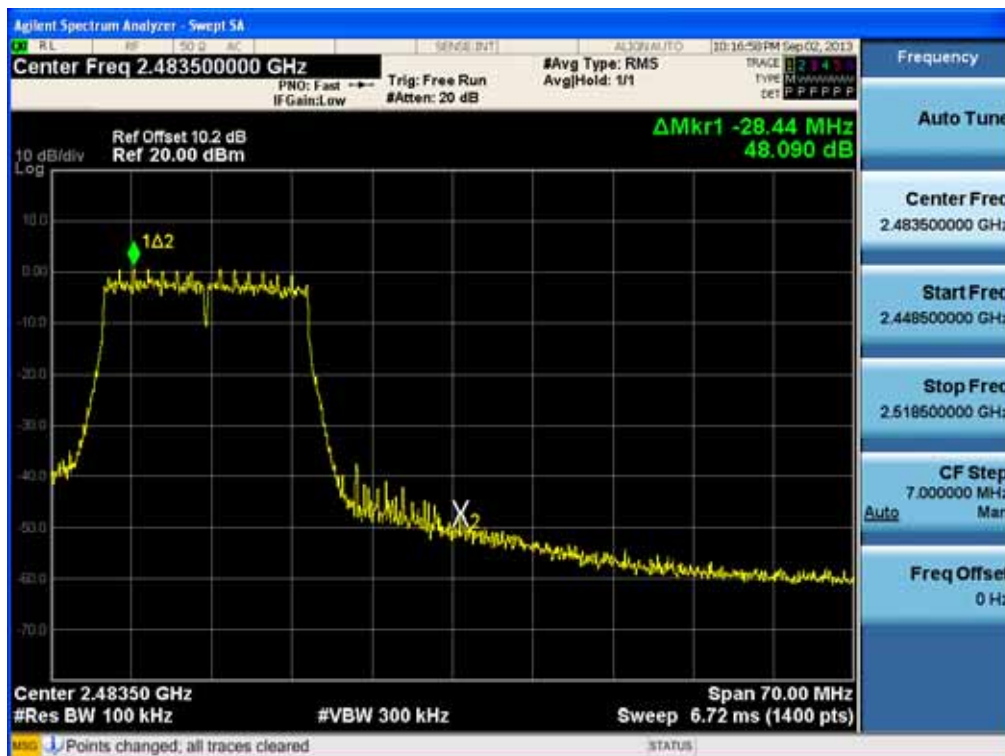

FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1309FR12-1	Date of Issue: September 24, 2013	EUT Type: Cellular/PCS GSM/GPRS/EDGE Cellular WCDMA/HSDPA/HSUPA Phone with Bluetooth/WLAN/NFC		FCC ID: ZNFLGL22

5.8 GHz Band


BandEdge (802.11a-CH 149)

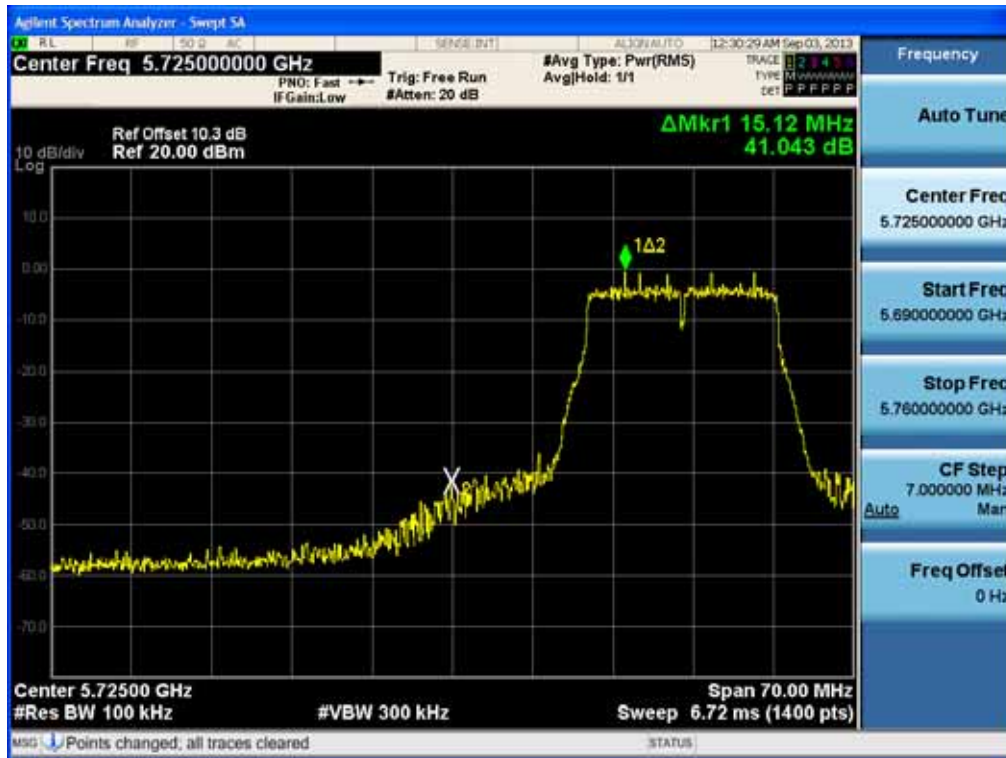


BandEdge (802.11a-CH 165)




BandEdge (802.11n_20 MHz BW-CH 149)

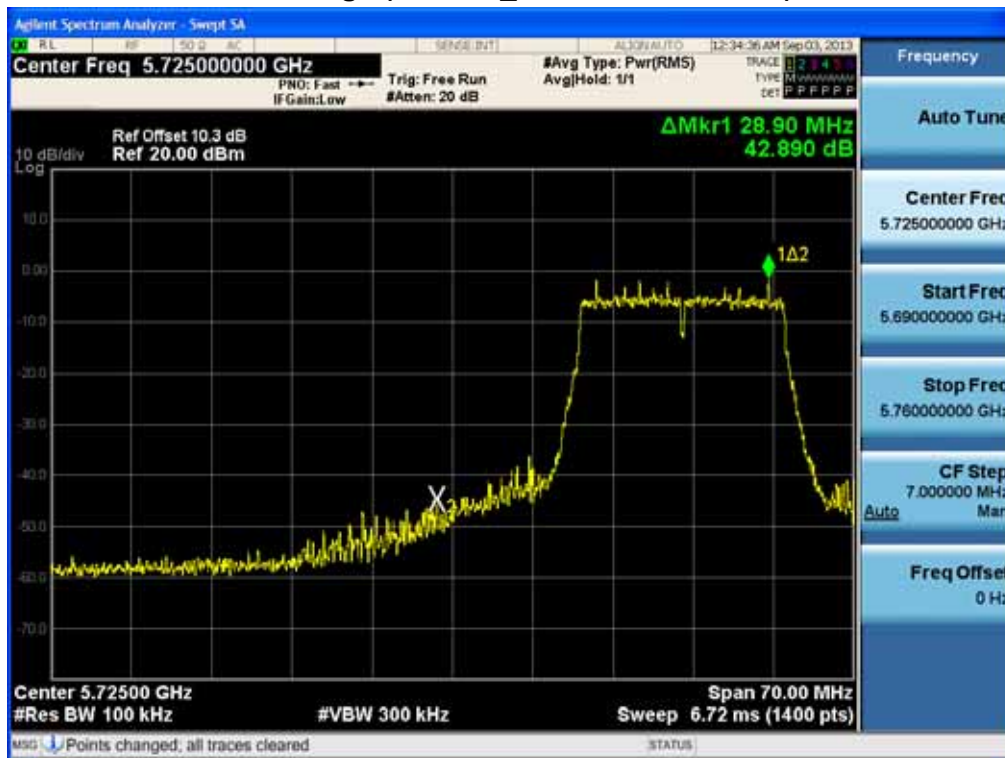


BandEdge (802.11n_20 MHz BW-CH 165)

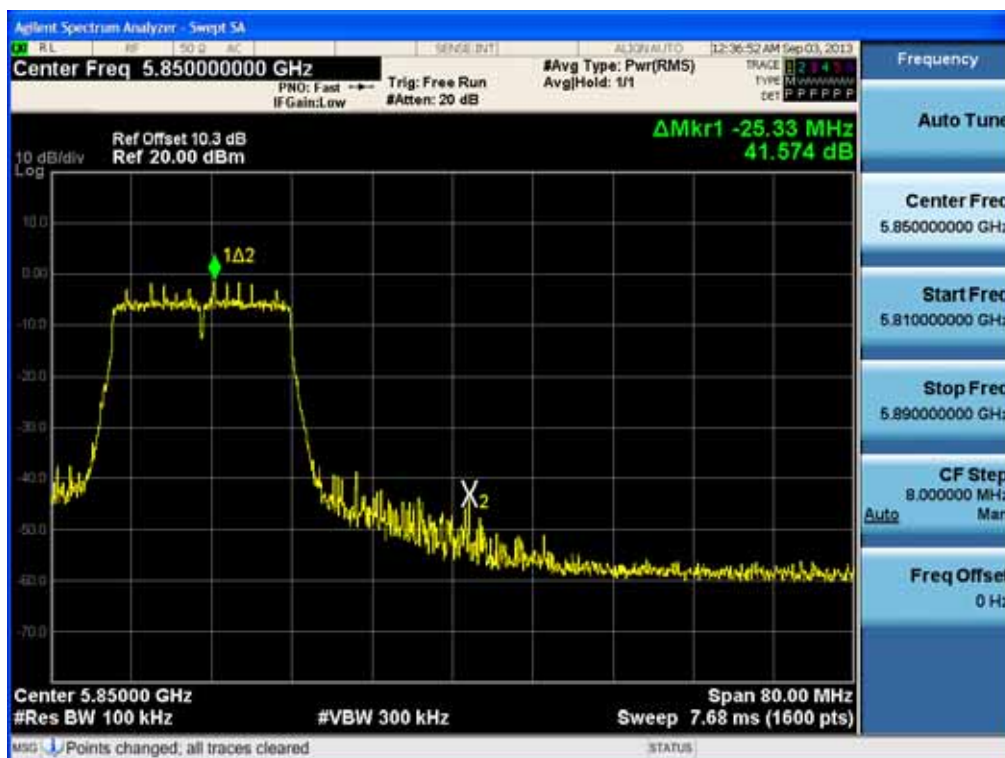


BandEdge (802.11n_40 MHz BW-CH 151)

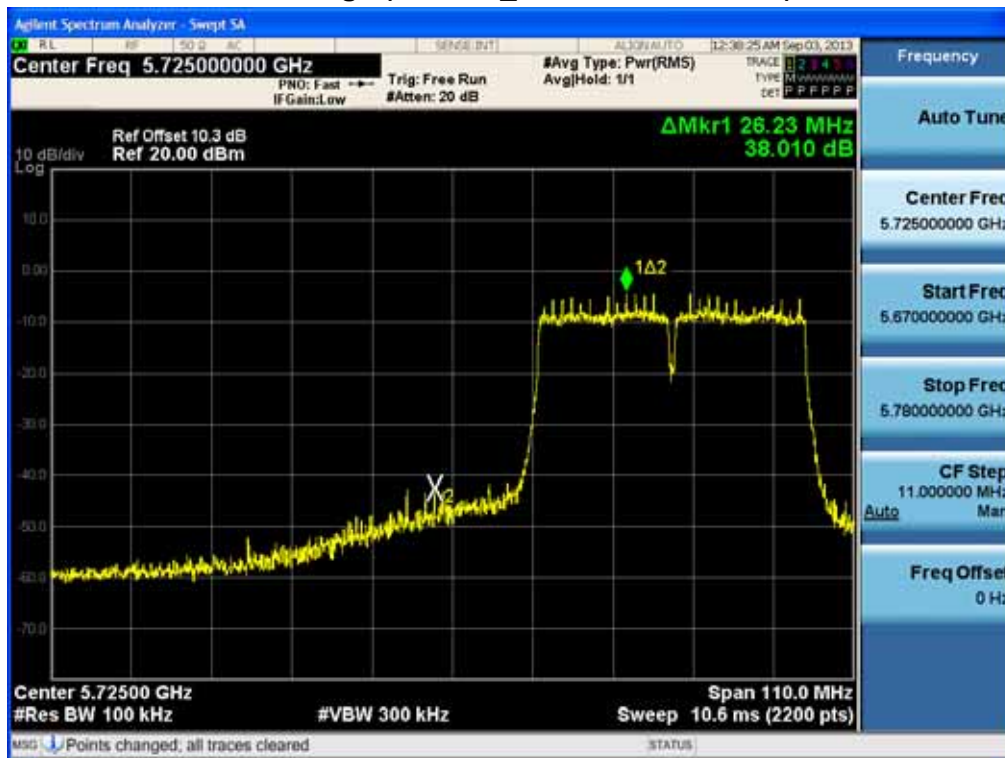


BandEdge (802.11n_40 MHz BW-CH 159)

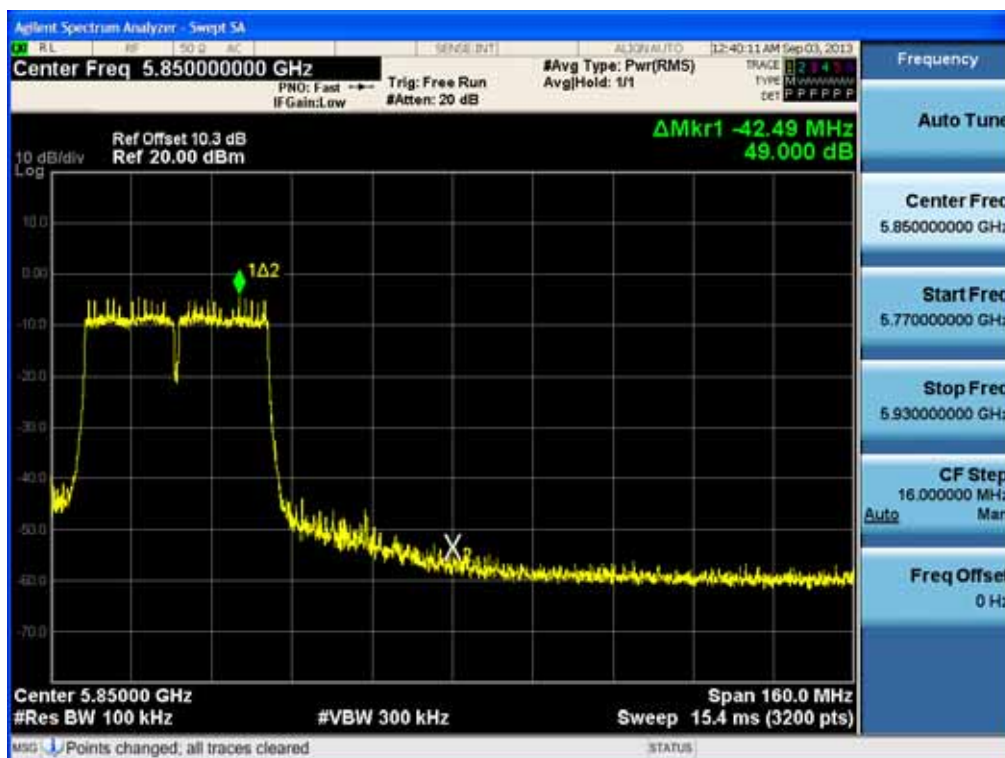


BandEdge (802.11ac_20 MHz BW-CH 149)

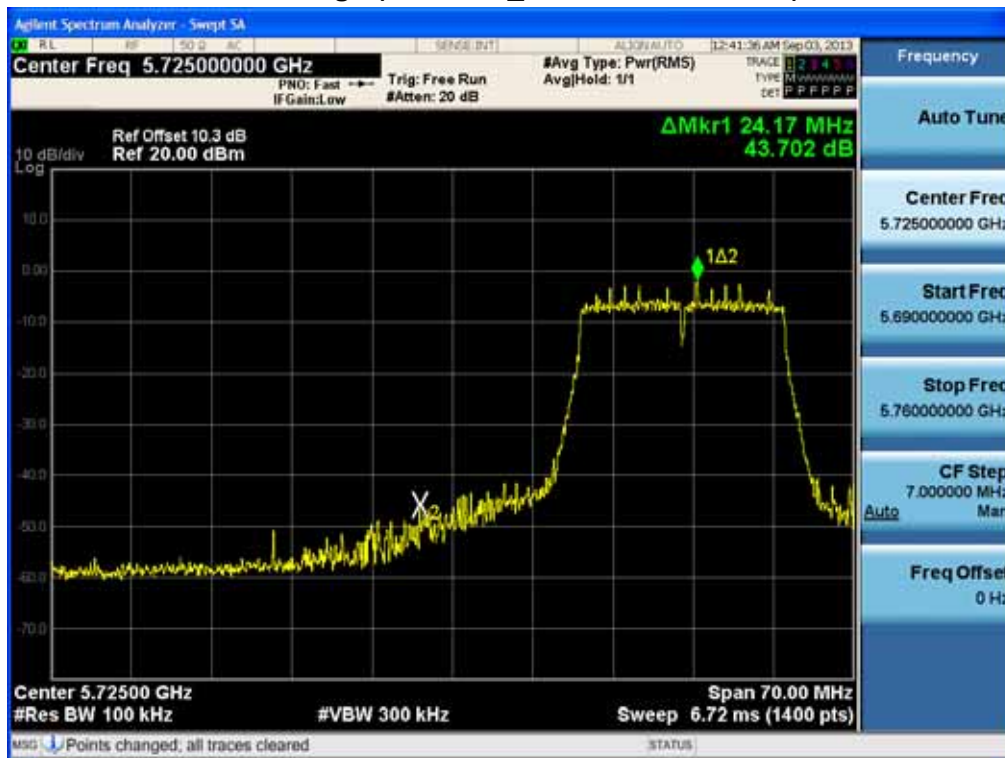


BandEdge (802.11ac_20 MHz BW-CH 165)

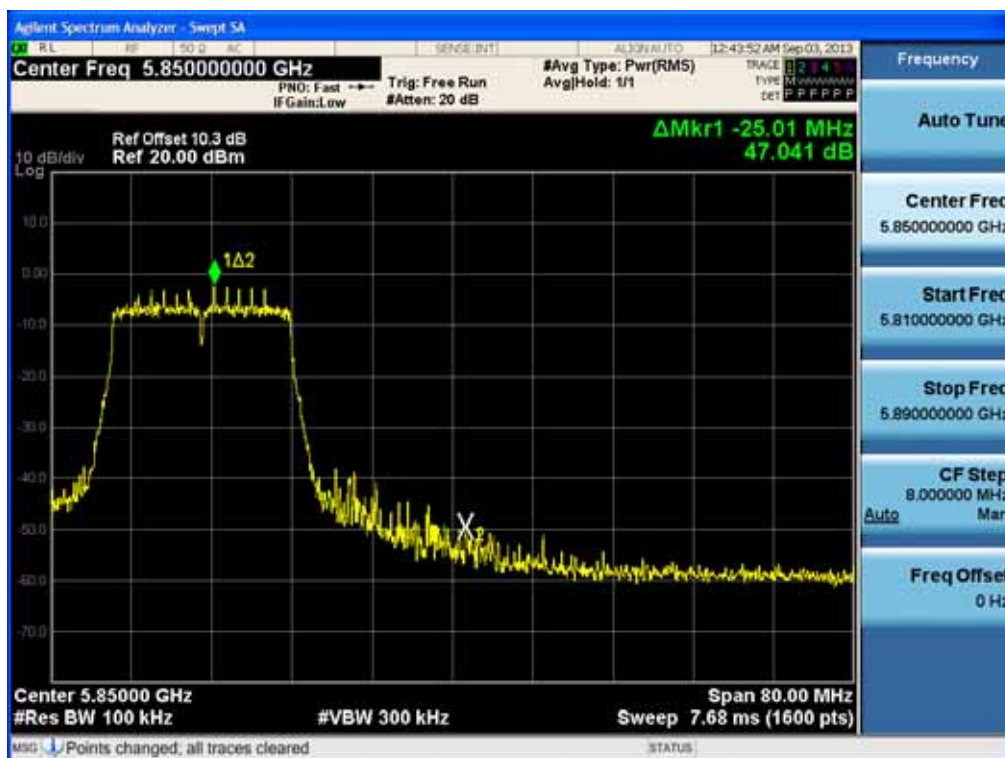

BandEdge (802.11ac_40 MHz BW-CH 151)

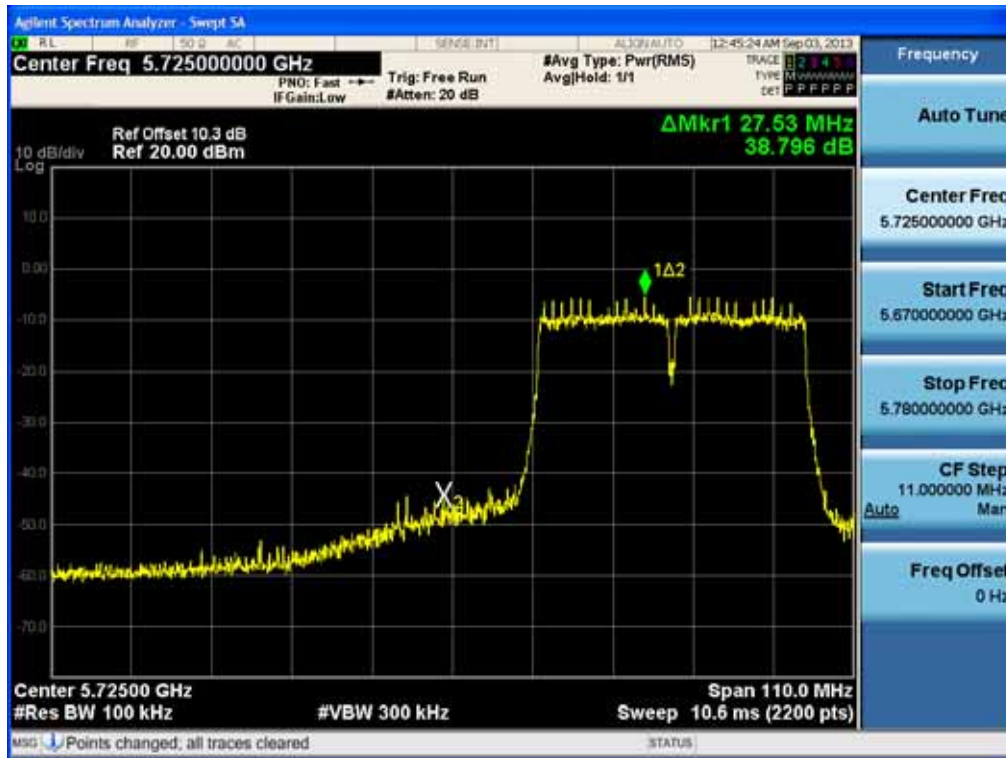


BandEdge (802.11ac_40 MHz BW-CH 159)

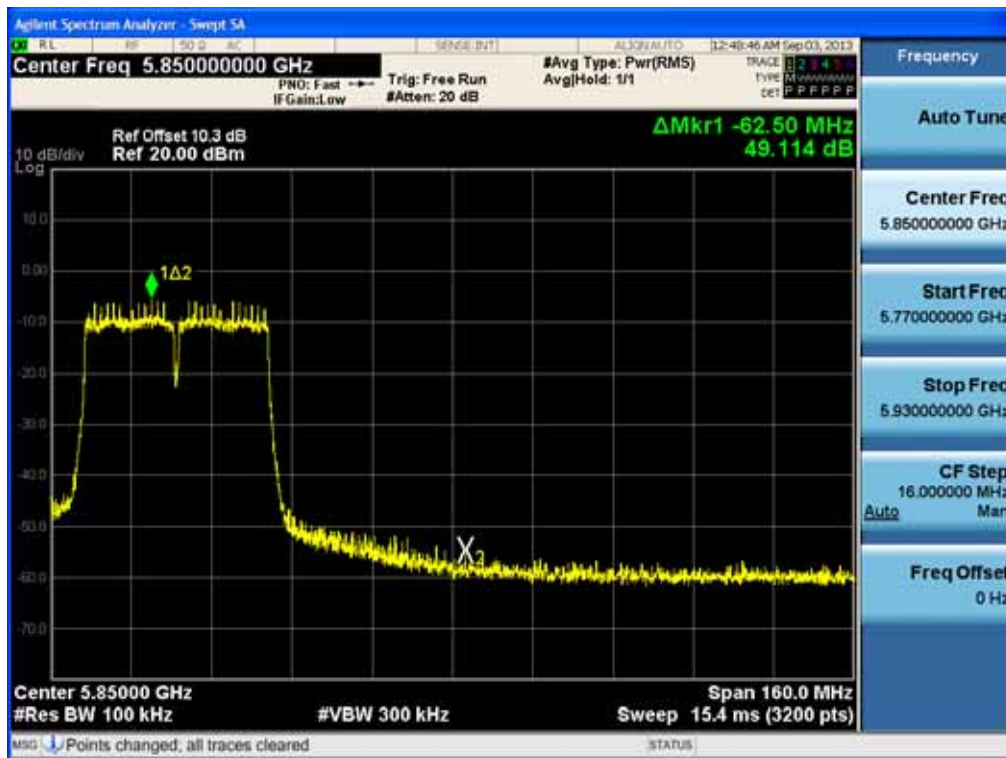

BandEdge (802.11ac_80 MHz BW-CH 155)




BandEdge (802.11ac_80 MHz BW-CH 155)

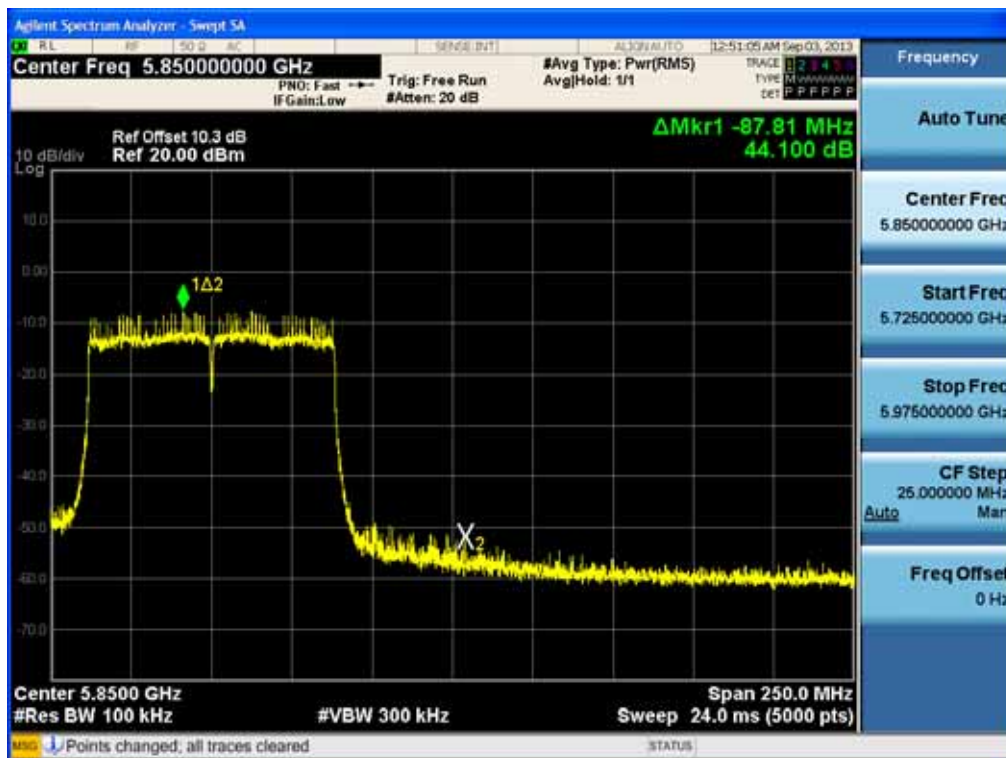

2.4 GHz Band


30 MHz ~ 1 GHz

Conducted Spurious Emission (802.11n-CH1)

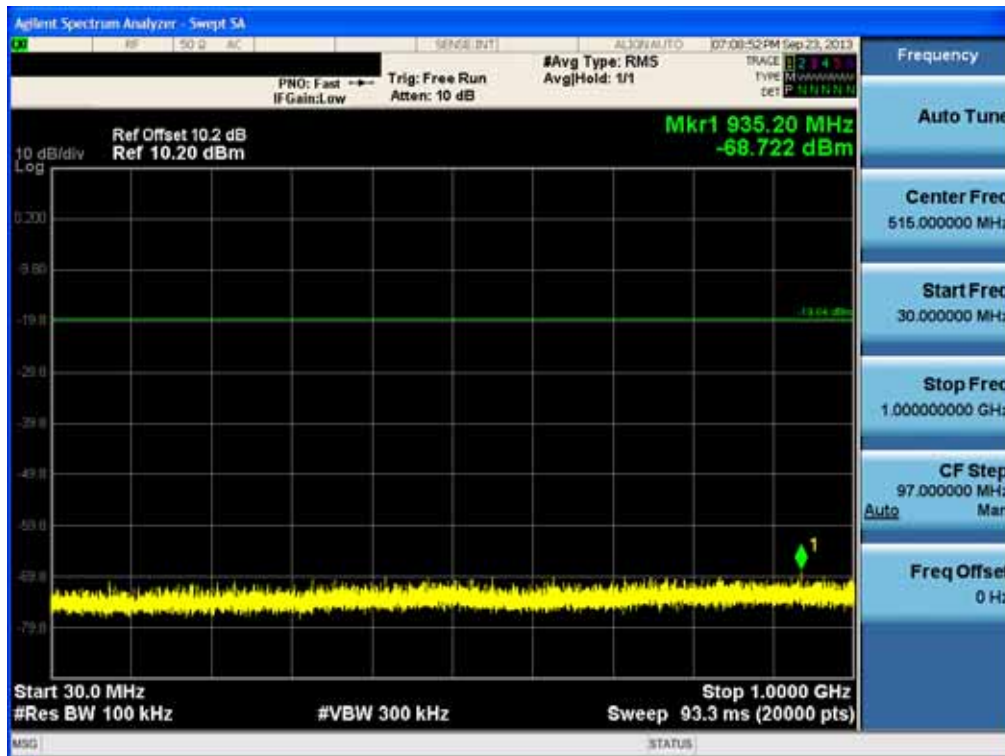

1 GHz ~ 3 GHz


Conducted Spurious Emission (802.11n-CH1)

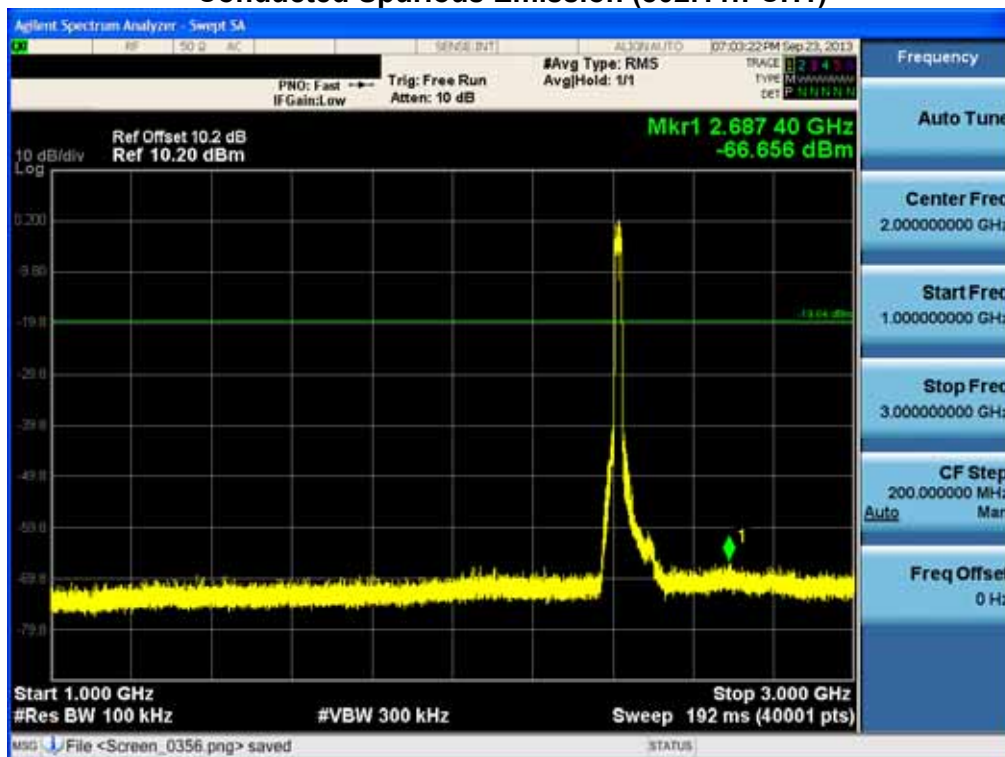

FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1309FR12-1	Date of Issue: September 24, 2013	EUT Type: Cellular/PCS GSM/GPRS/EDGE Cellular WCDMA/HSDPA/HSUPA Phone with Bluetooth/WLAN/NFC		FCC ID: ZNFLGL22


3 GHz ~ 5 GHz

Conducted Spurious Emission (802.11n-CH1)

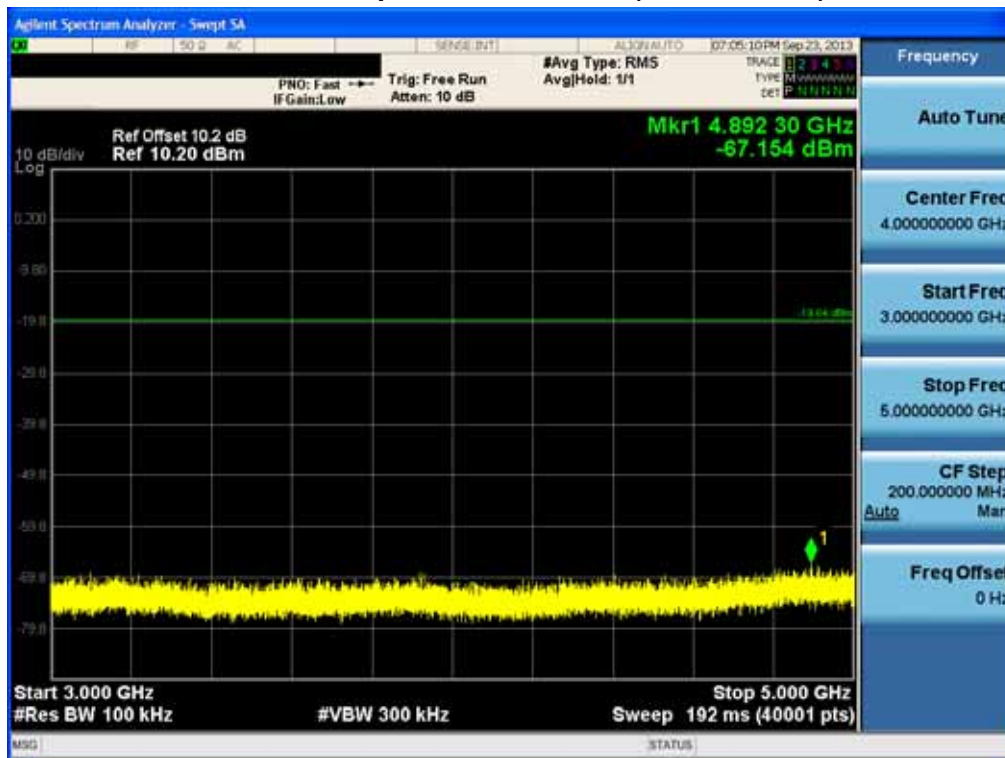

5 GHz ~ 7 GHz

Conducted Spurious Emission (802.11n-CH1)

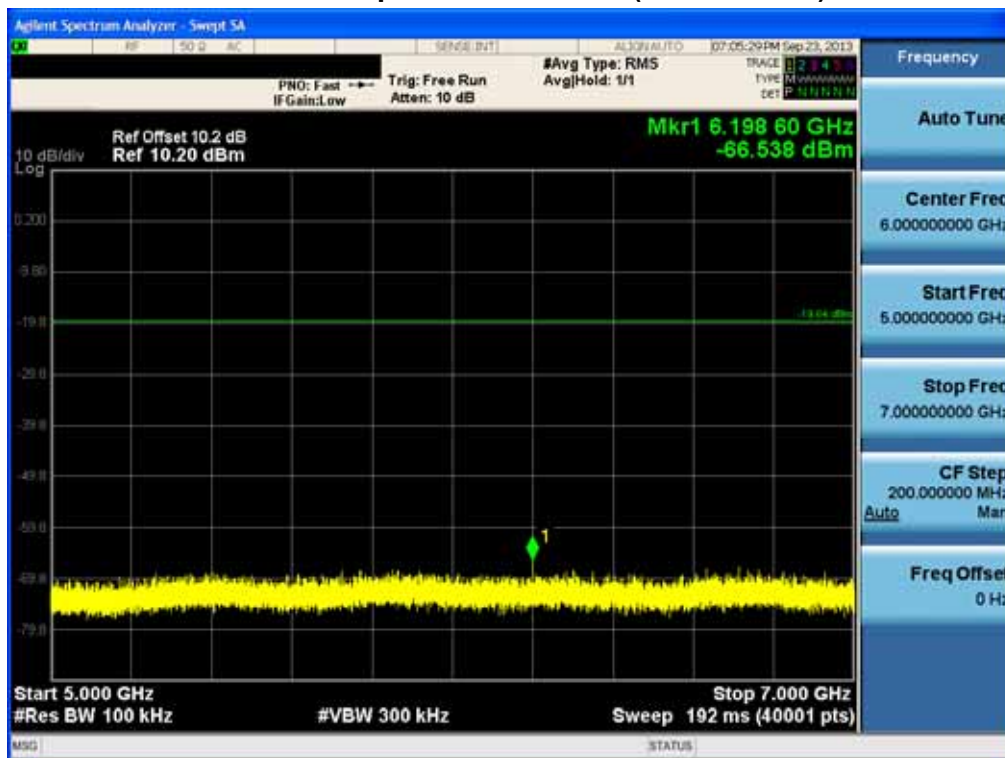

FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1309FR12-1	Date of Issue: September 24, 2013	EUT Type: Cellular/PCS GSM/GPRS/EDGE Cellular WCDMA/HSDPA/HSUPA Phone with Bluetooth/WLAN/NFC		FCC ID: ZNFLGL22