



FCC CFR47 PART 15 SUBPART C

**BLUETOOTH LOW ENERGY
CERTIFICATION TEST REPORT**

FOR

CDMA/ LTE Phone + Bluetooth, and DTS b/g/n

MODEL NUMBER: LG-LS660, LGLS660, LS660

FCC ID: ZNFLS660

REPORT NUMBER: 14U18147-3

ISSUE DATE: JUNE 25, 2014

Prepared for
LG ELECTRONICS MOBILECOMM U.S.A., INC
1000 SYLVAN AVENUE
ENGLEWOOD CLIFFS,
NEW JERSEY, 07632, U.S.A.

Prepared by
UL VERIFICATION SERVICES INC.
47173 BENICIA STREET
FREMONT, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888



NVLAP LAB CODE 200065-0

Revision History

<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
--	06/25/14	Initial Issue	P. Zhang

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	4
2. TEST METHODOLOGY	5
3. FACILITIES AND ACCREDITATION	5
4. CALIBRATION AND UNCERTAINTY	5
4.1. <i>MEASURING INSTRUMENT CALIBRATION</i>	<i>5</i>
4.2. <i>SAMPLE CALCULATION</i>	<i>5</i>
4.3. <i>MEASUREMENT UNCERTAINTY.....</i>	<i>5</i>
5. EQUIPMENT UNDER TEST	6
5.1. <i>DESCRIPTION OF EUT</i>	<i>6</i>
5.2. <i>MAXIMUM OUTPUT POWER.....</i>	<i>6</i>
5.3. <i>DESCRIPTION OF AVAILABLE ANTENNAS</i>	<i>6</i>
5.4. <i>WORST-CASE CONFIGURATION AND MODE.....</i>	<i>7</i>
5.5. <i>DESCRIPTION OF TEST SETUP.....</i>	<i>8</i>
6. TEST AND MEASUREMENT EQUIPMENT	10
7. SUMMARY	11
8. ANTENNA PORT TEST RESULTS	11
8.1. <i>6 dB BANDWIDTH.....</i>	<i>12</i>
8.2. <i>99% BANDWIDTH.....</i>	<i>15</i>
8.3. <i>OUTPUT POWER.....</i>	<i>18</i>
8.4. <i>AVERAGE POWER.....</i>	<i>21</i>
8.5. <i>POWER SPECTRAL DENSITY.....</i>	<i>22</i>
8.6. <i>CONDUCTED SPURIOUS EMISSIONS.....</i>	<i>25</i>
9. RADIATED TEST RESULTS.....	29
9.1. <i>LIMITS AND PROCEDURE.....</i>	<i>29</i>
9.2. <i>TRANSMITTER ABOVE 1 GHz.....</i>	<i>30</i>
9.3. <i>WORST-CASE BELOW 1 GHz.....</i>	<i>43</i>
10. AC POWER LINE CONDUCTED EMISSIONS	46
11. SETUP PHOTOS	50

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: LG ELECTRONICS MOBILECOMM U.S.A., INC.
EUT DESCRIPTION: CDMA/LTE Phone + Bluetooth, and DTS b/g/n.
MODEL: LG-LS660, LGLS660, LS660
SERIAL NUMBER: 1BYFL (Conducted), 1BYFM (Radiated)
DATE TESTED: JUNE 23-25, 2014

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C	Pass

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For
UL Verification Services Inc. By:



PENG ZHANG
CONSUMER TECHNOLOGY DIVISION
PROJECT LEAD
UL Verification Services Inc.

Tested By:



CHARLES VERGONIO
CONSUMER TECHNOLOGY DIVISION
LAB ENGINEER
UL Verification Services Inc.

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4-2009, FCC CFR 47 Part 2, FCC CFR 47 Part 15.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 and 47266 Benicia Street, Fremont, California, USA. Line conducted emissions are measured only at the 47173 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

47173 Benicia Street	47266 Benicia Street
<input type="checkbox"/> Chamber A	<input type="checkbox"/> Chamber D
<input checked="" type="checkbox"/> Chamber B	<input type="checkbox"/> Chamber E
<input type="checkbox"/> Chamber C	<input type="checkbox"/> Chamber F

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://ts.nist.gov/standards/scopes/2000650.htm>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamp Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	3.52 dB
Radiated Disturbance, 30 to 18000 MHz	4.94 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is a CDMA/LTE Phone + Bluetooth, DTS b/g/n.

5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum peak conducted output power as follows:

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
2402-2480	BLE	1.02	1.26

5.3. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes an FPCB antenna, with a maximum gain of -2.45 dBi.

5.4. WORST-CASE CONFIGURATION AND MODE

Radiated emission and power line conducted emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario.

The fundamental of the EUT was investigated in three orthogonal orientations X, Y, Z it was determined that X orientation was worst-case orientation; therefore, all final radiated testing was performed with the EUT in X orientation.

5.5. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
AC Adapter	LG	STA-U34WRI	N/A	N/A
AC Adapter	LG	MCS-02WR	N/A	N/A
AC Adapter	LG	MCS-02WD	N/A	N/A
Earphone	LG	N/A	N/A	N/A


I/O CABLES

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	DC Power	1	Mini-USB	Shielded	1.2m	N/A
2	Audio	1	Mini-Jack	Unshielded	1m	N/A

TEST SETUP

EUT was set in the Hidden menu mode to enable BLE communications.

SETUP DIAGRAM FOR TESTS

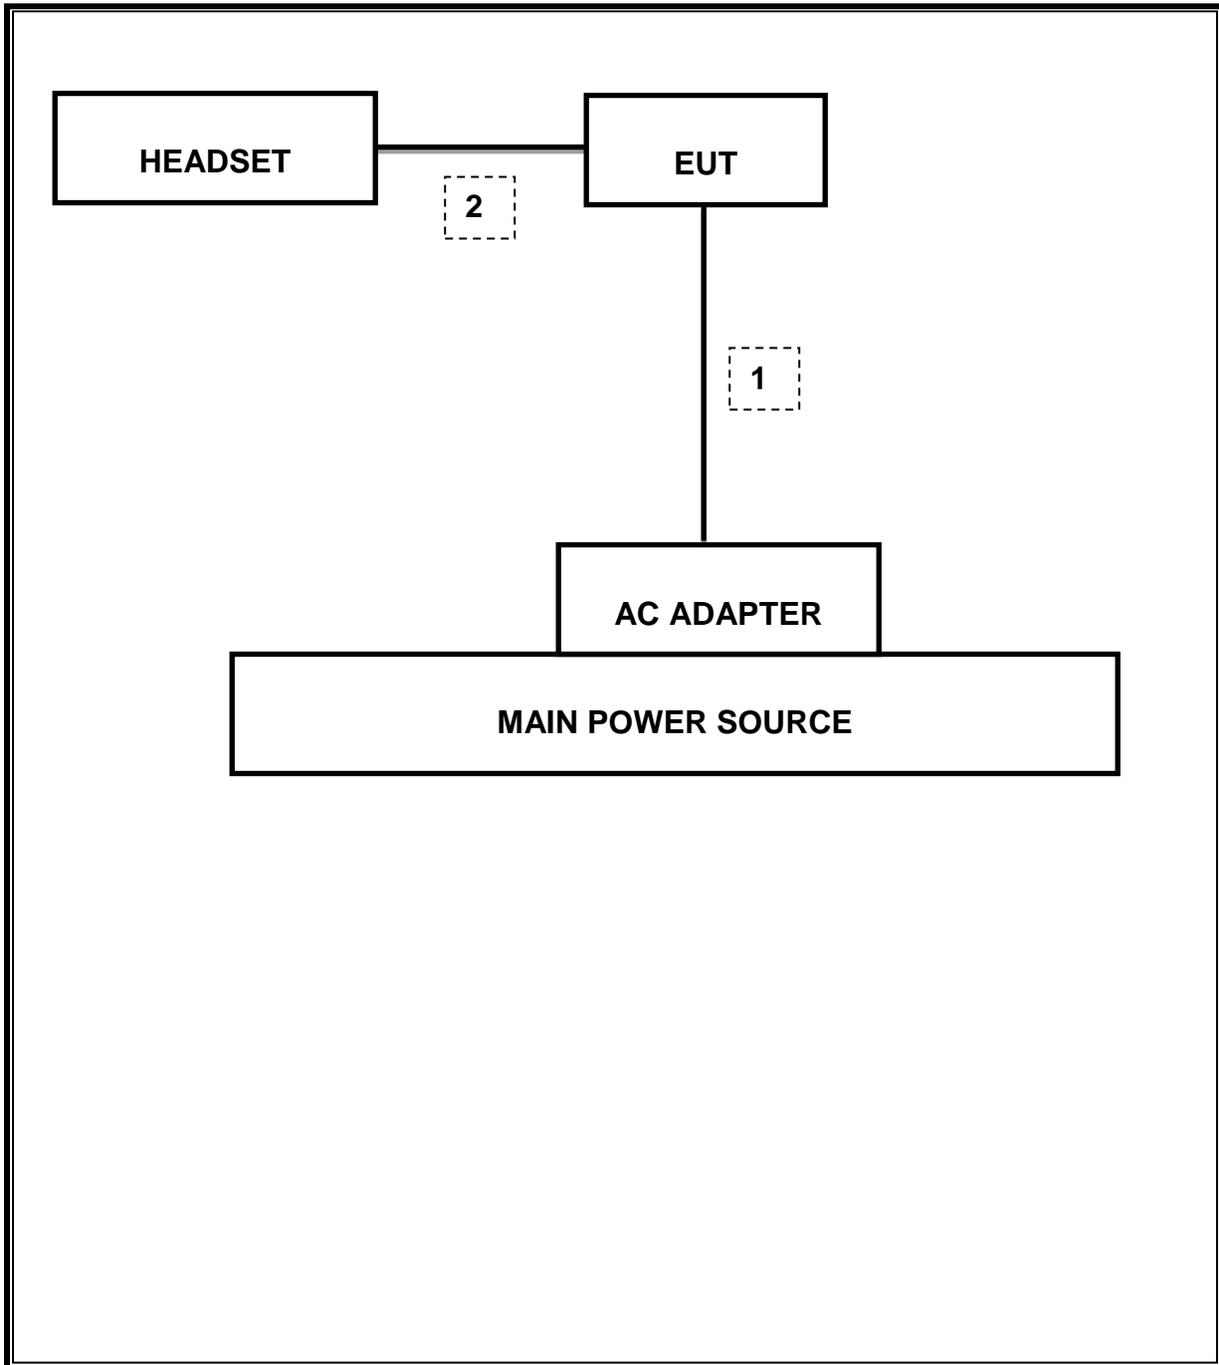

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Test Equipment List				
Description	Manufacturer	Model	Asset	Cal Due
Spectrum Analyzer, 44 GHz	Agilent / HP	E4446A	C00986	4/1/2015
Spectrum Analyzer, 26.5 GHz	Agilent / HP	E4440A	C01179	2/26/2015
EMI Test Receiver, 30 MHz	R & S	ESHS 20	N02396	8/8/2014
Preamplifier, 1300 MHz	Agilent / HP	8447D	C00580	5/8/2015
Preamplifier, 26.5 GHz	Agilent / HP	8449B	C01063	10/22/2014
Antenna, Bilog, 30MHz-1 GHz	Sunol Sciences	JB1	N/A	3/6/2015
Antenna, Horn, 18 GHz	ETS	3117	C01022	2/21/2015
Antenna, Horn, 26.5 GHz	ARA	MWH-1826/B	C00589	12/17/2014
Peak Power Meter	Agilent / HP	E4416A	C00963	12/13/2014
Peak / Average Power Sensor	Agilent / HP	E9327A	C00964	12/13/2014
LISN, 30 MHz	FCC	50/250-25-2	C00626	1/14/2015

7. SUMMARY

8.

FCC Part Section	RSS Section(s)	Test Description	Test Limit	Test Condition	Test Result	Worst Case
15.247 (a)(2)	RSS-210 A8.2(a)	Occupied Band width (6dB)	>500KHz	Conducted	Pass	0.7121MHz
2.1051, 15.247 (d)	RSS-210 A8.5	Band Edge / Conducted Spurious Emission	-20dBc		Pass	-55.29dBm
15.247	RSS-210 A8.4	TX conducted output power	<30dBm		Pass	1.02dBm
15.247	RSS-210 A8.2	PSD	<8dBm		Pass	-14.06dBm
15.207 (a)	RSS-GEN 7.2.2	AC Power Line conducted emissions	Section 10	Radiated	Pass	49.62dBuV
15.205, 15.209	RSS-210 Clause 2.6, RSS-210 Clause 6	Radiated Spurious Emission	< 54dBuV/m		Pass	42.05dBuV/m

ANTENNA PORT TEST RESULTS

8.1. 6 dB BANDWIDTH

LIMITS

FCC §15.247 (a) (2)

IC RSS-210 A8.2 (a)

The minimum 6 dB bandwidth shall be at least 500 kHz.



TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The RBW is set to 100 kHz and the VBW is set to 300 kHz. The sweep time is coupled.

RESULTS

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)
Low	2402	0.7121	0.5
Middle	2440	0.7161	0.5
High	2480	0.7202	0.5

6 dB BANDWIDTH

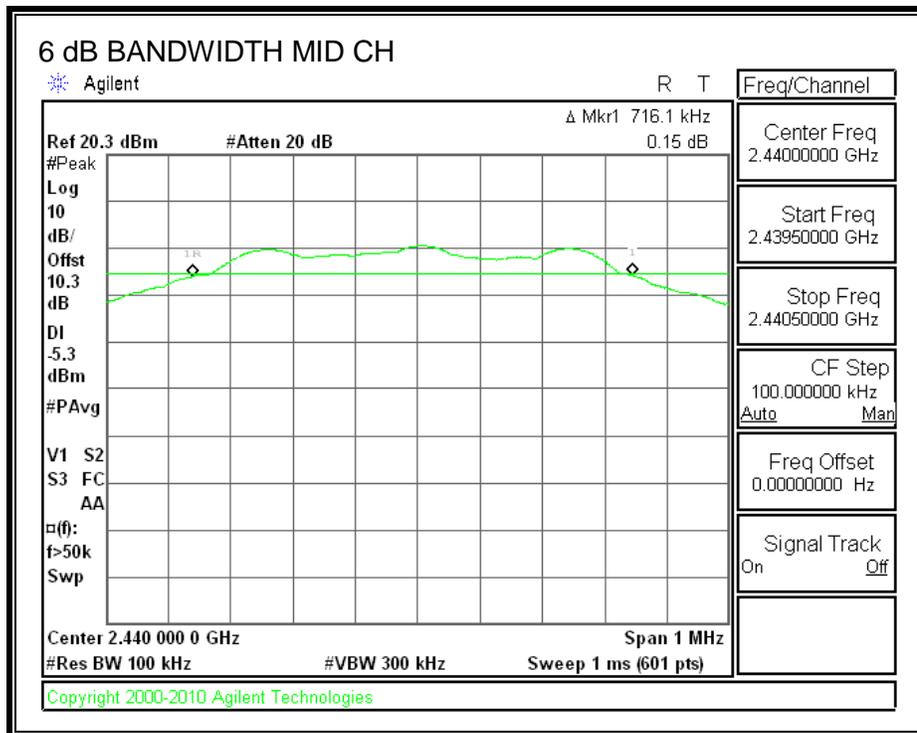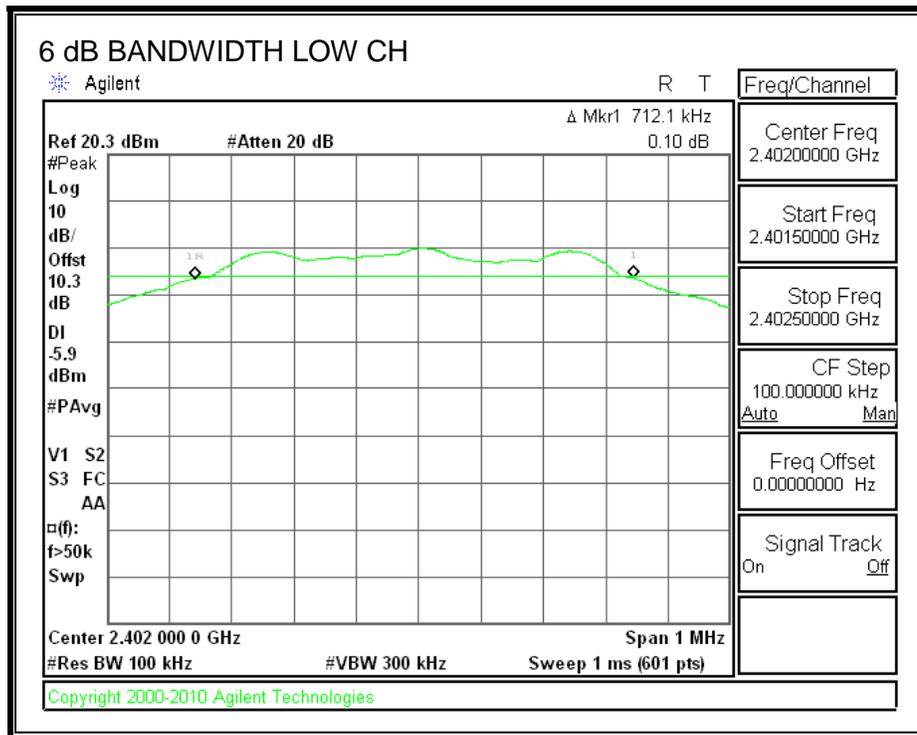

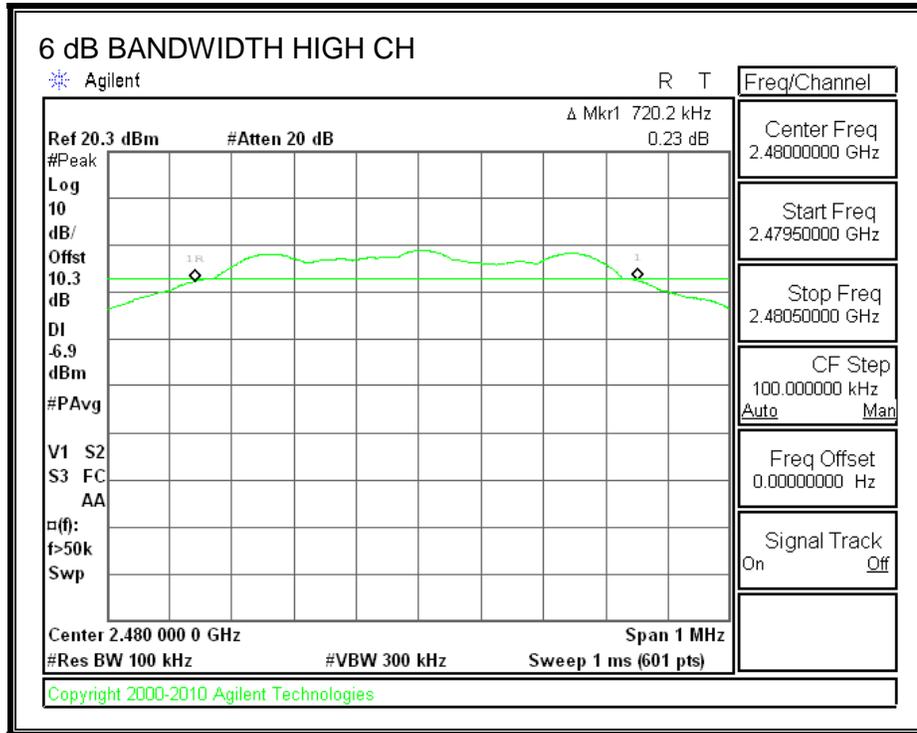

8.2. 99% BANDWIDTH

LIMITS

None; for reporting purposes only.



TEST PROCEDURE


Reference to KDB558074 D01 DTS Meas Guidance v03r01: The transmitter output is connected to the spectrum analyzer. The RBW is set to 1% to 3% of the 99 % bandwidth and to 1% of the span. The VBW is set to 3 times the RBW. The sweep time is coupled. The spectrum analyzer internal 99% bandwidth function is utilized.

RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2402	1.0491
Middle	2440	1.0537
High	2480	1.0496

99% BANDWIDTH

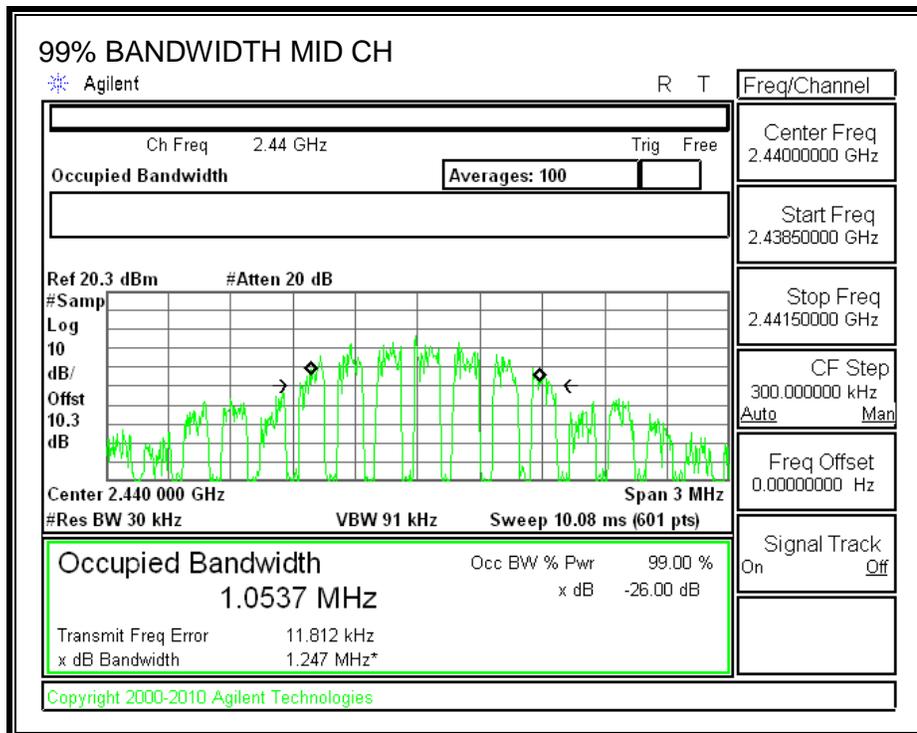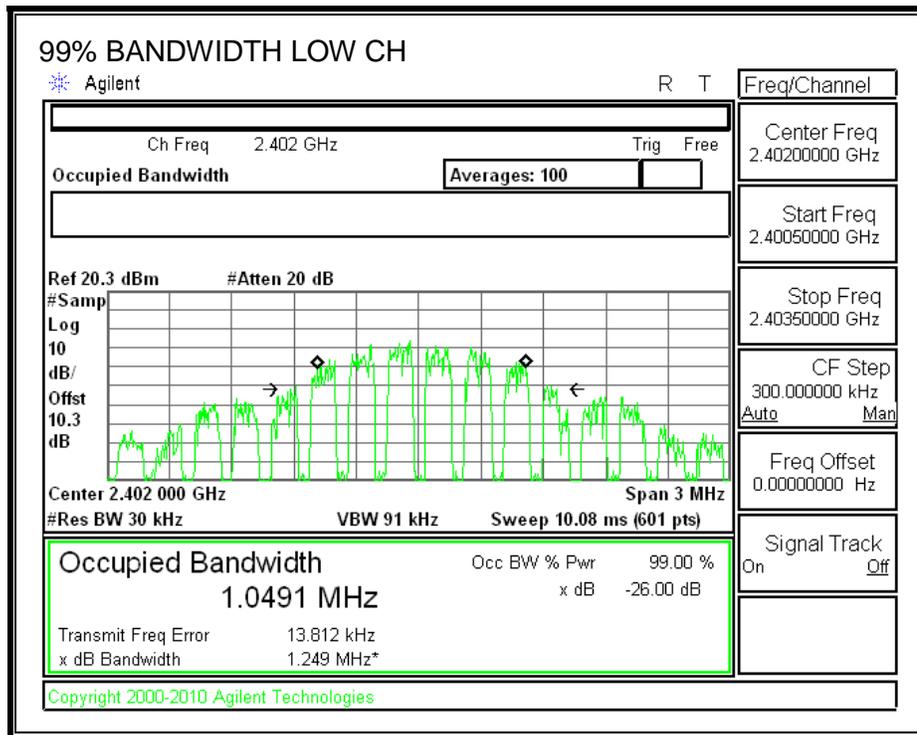

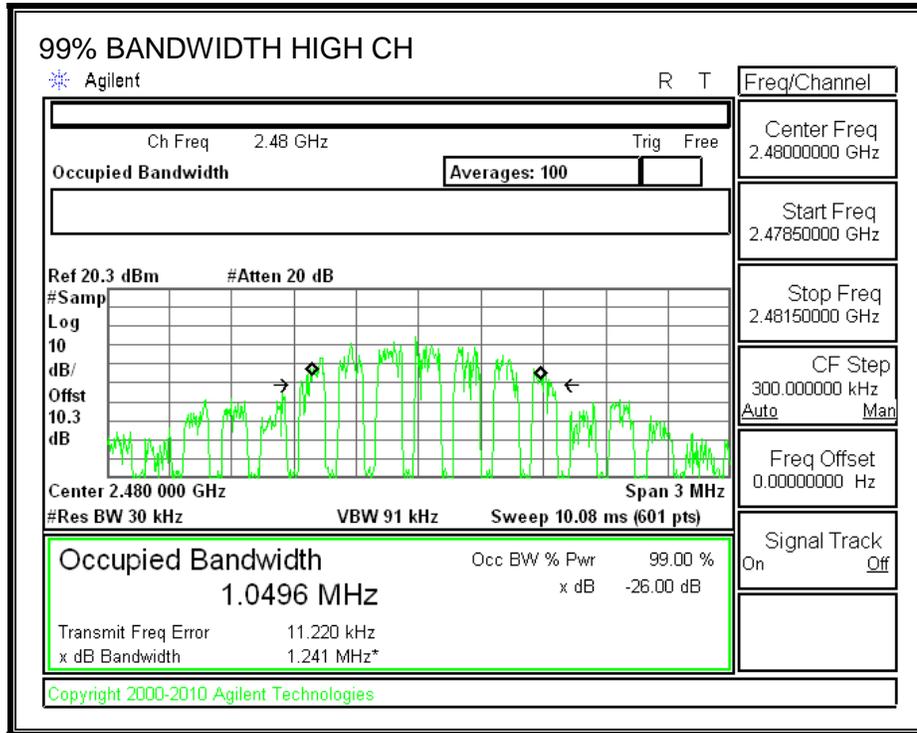

8.3. OUTPUT POWER

LIMITS

FCC §15.247 (b)

IC RSS-210 A8.4

The maximum antenna gain is less than or equal to 6 dBi, therefore the limit is 30 dBm.



TEST PROCEDURE


Peak power is measured using KDB558074 D01 DTS Meas Guidance v03r01 April 9, 2013 under section 9.1.1 utilizing spectrum analyzer.

RESULTS

Channel	Frequency (MHz)	Peak Power Reading (dBm)	Limit (dBm)	Margin (dB)
Low	2402	0.410	30	-29.590
Middle	2440	1.020	30	-28.980
High	2480	-0.590	30	-30.590

OUTPUT POWER

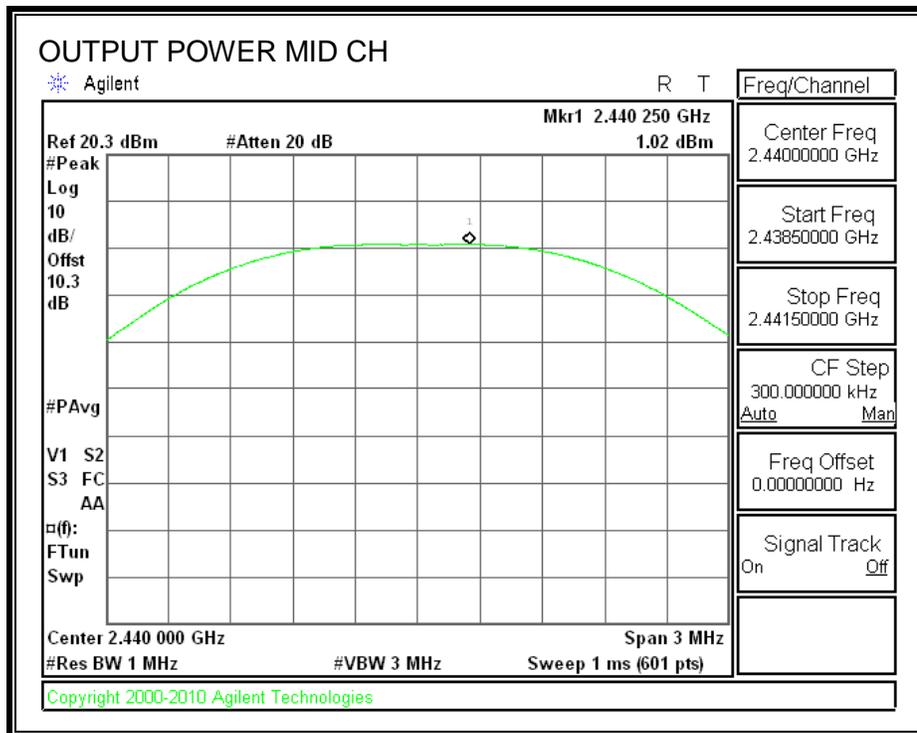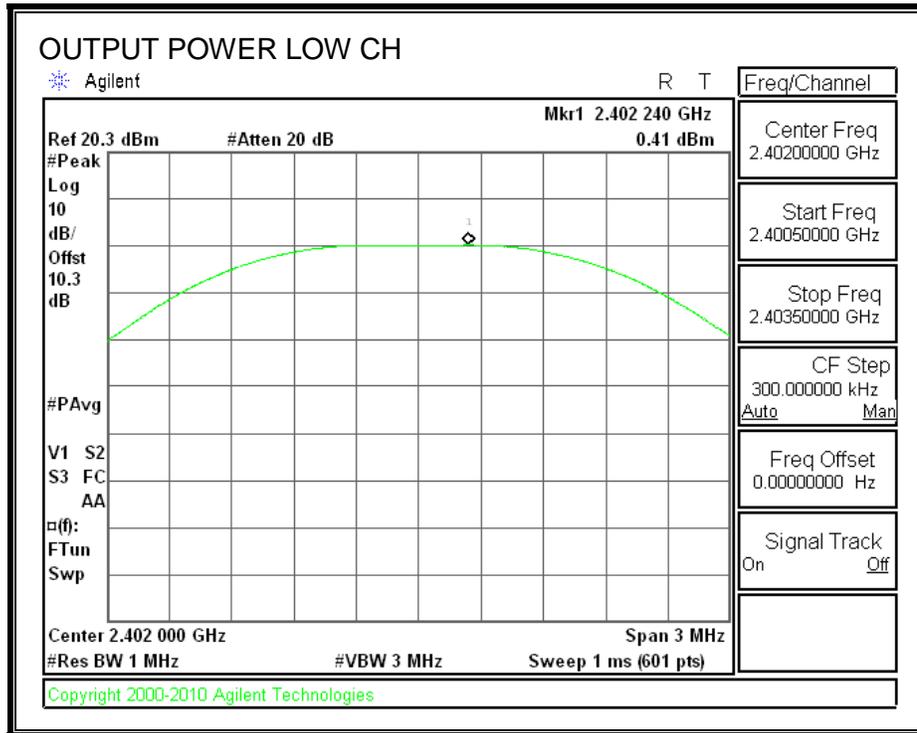

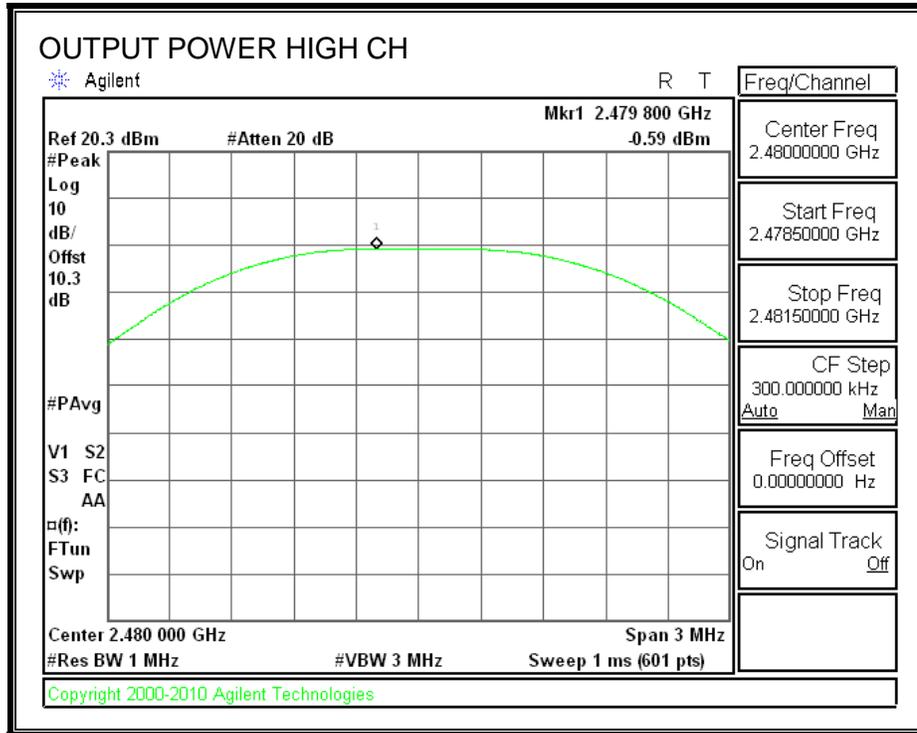

8.4. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter.

RESULTS

The cable assembly insertion loss of 11 dB (including 10 dB pad and 1 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

Channel	Frequency (MHz)	AV power (dBm)
Low	2402	0.2
Middle	2440	0.5
High	2480	-1

8.5. POWER SPECTRAL DENSITY

LIMITS

FCC §15.247 (e)

IC RSS-210 A8.2 (b)

The power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.



TEST PROCEDURE


Power Spectral Density was performed utilizing the “Method PKPSD (Peak PSD)” under KDB558074 D01 DTS Meas Guidance v03r01, April 9, 2013

RESULTS

Channel	Frequency (MHz)	PSD (dBm)	Limit (dBm)	Margin (dB)
Low	2402	-14.65	8	-22.65
Middle	2440	-14.06	8	-22.06
High	2480	-15.63	8	-23.63

POWER SPECTRAL DENSITY

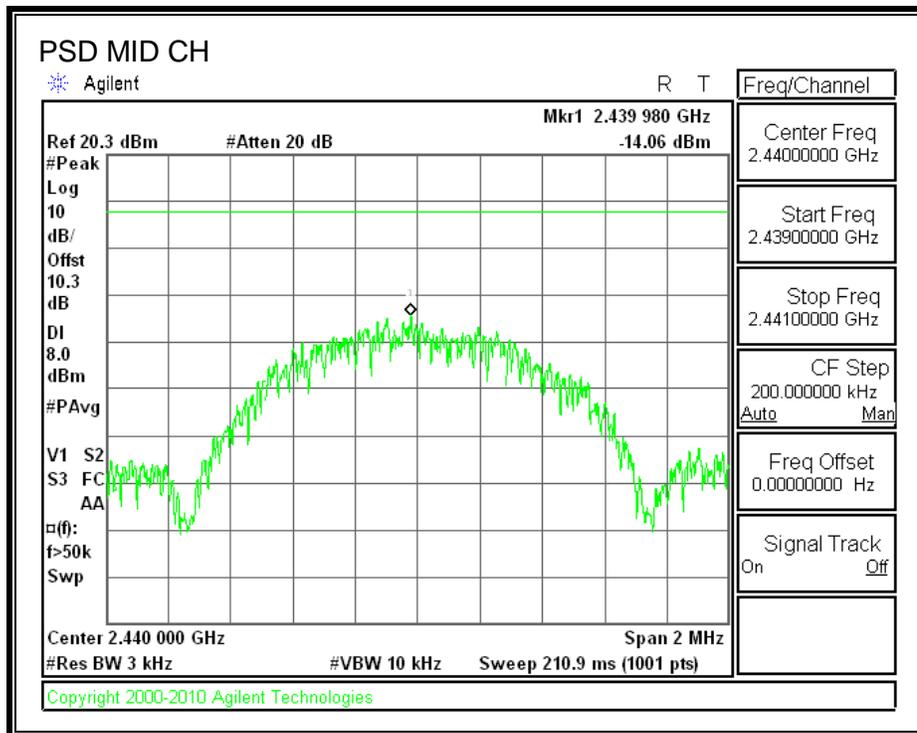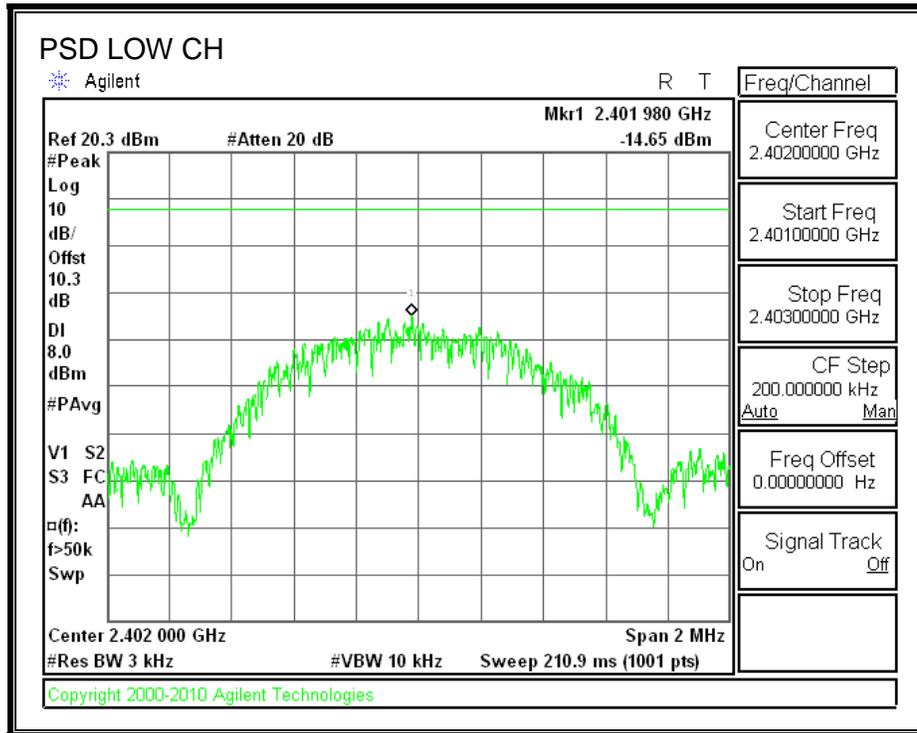

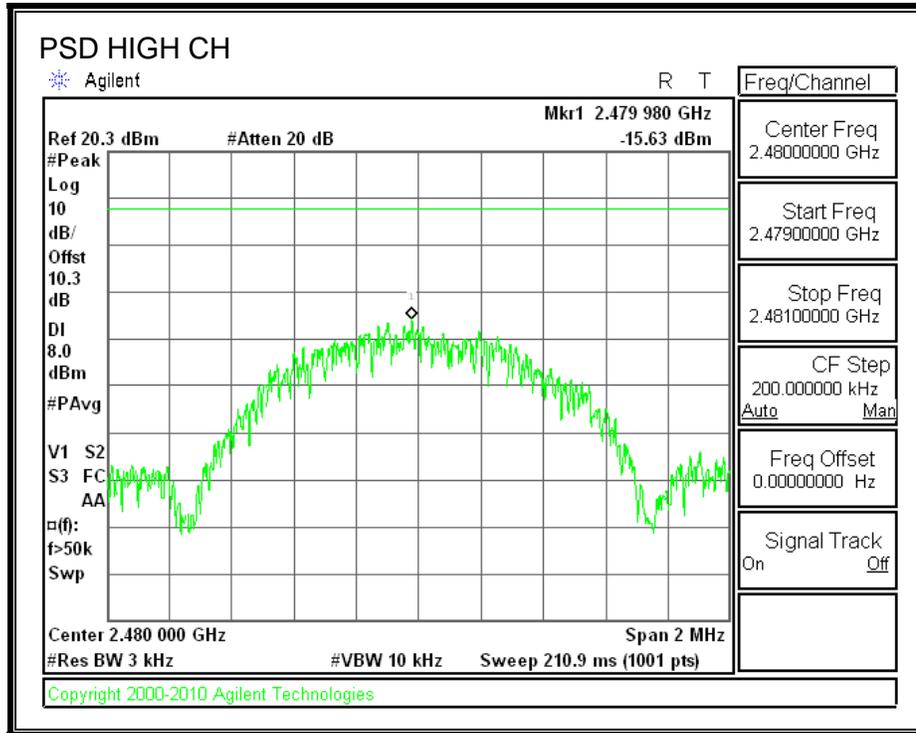

8.6. CONDUCTED SPURIOUS EMISSIONS

LIMITS

FCC §15.247 (d)

IC RSS-210 A8.5

Output power was measured based on the use of a peak measurement, therefore the required attenuation is 20 dB.



TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.



The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.

RESULTS



SPURIOUS EMISSIONS, LOW CHANNEL

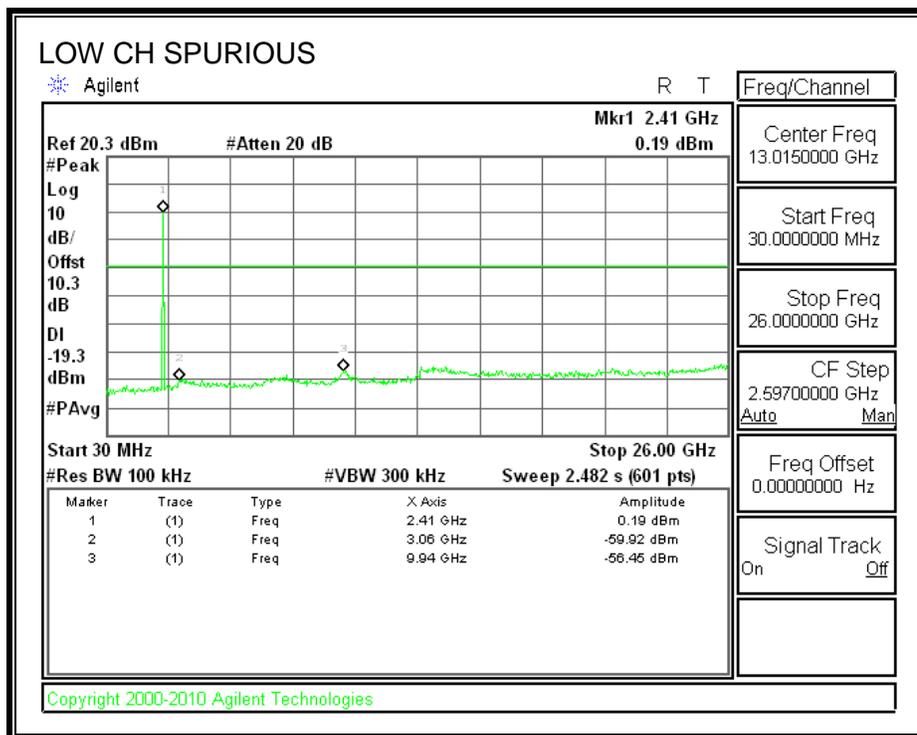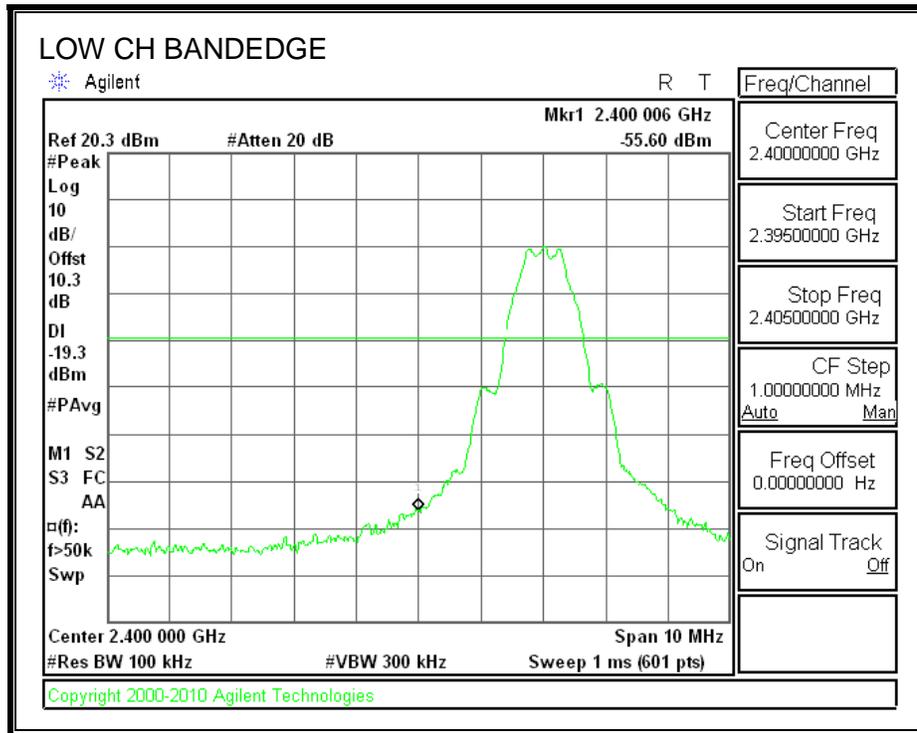

SPURIOUS EMISSIONS, MID CHANNEL

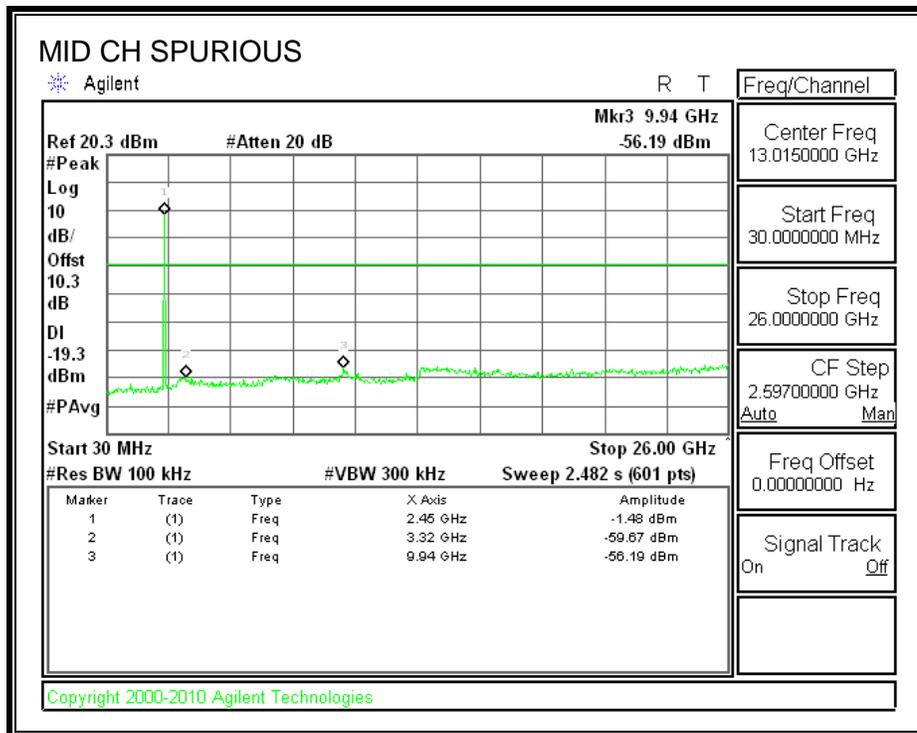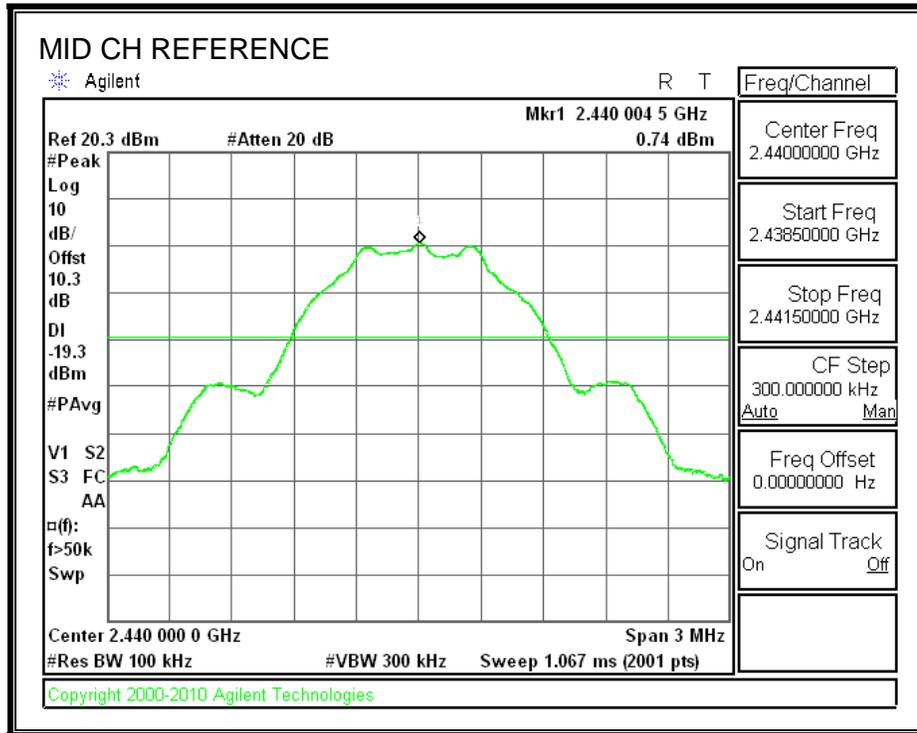

SPURIOUS EMISSIONS, HIGH CHANNEL

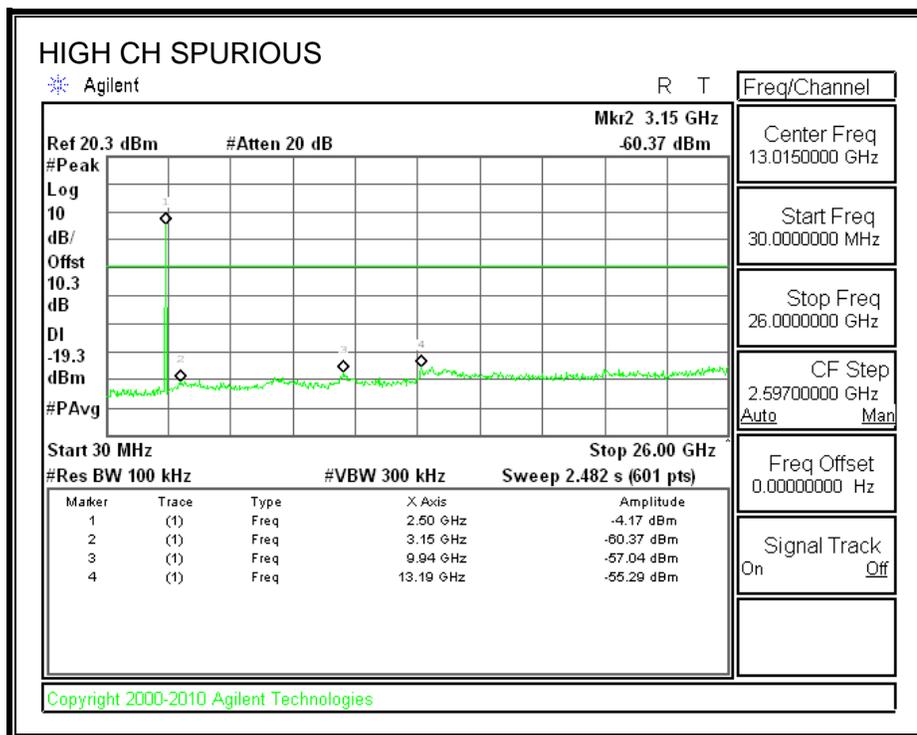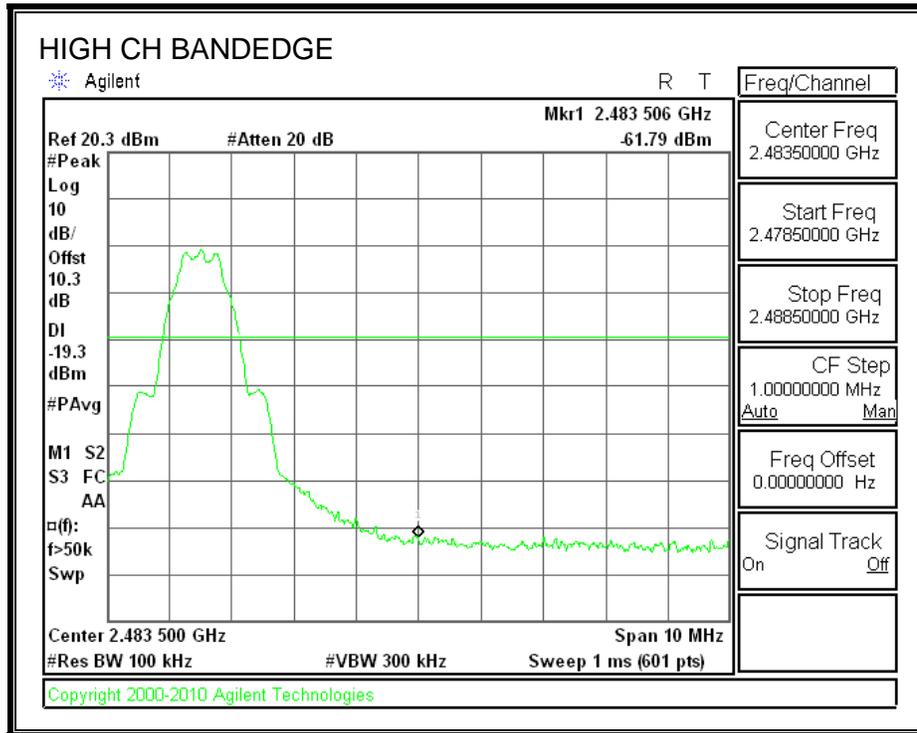

9. RADIATED TEST RESULTS

9.1. LIMITS AND PROCEDURE

LIMITS

FCC §15.205 and §15.209

IC RSS-210 Clause 2.6 (Transmitter)

IC RSS-GEN Clause 6 (Receiver)

Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m
30 - 88	100	40
88 - 216	150	43.5
216 - 960	200	46
Above 960	500	54

TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.4 - 2009. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.


For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 1 MHz for peak measurements and add duty cycle factor for average measurements. Duty cycle factor = $10 \log(1/x)$. For this sample: $DCF = 10\log(1/0.618)=2.08\text{dB}$ (Spectrum Analyzer round it up to 2.1dB)

The spectrum from 1GHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in the 2.4 GHz band.

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

9.2. TRANSMITTER ABOVE 1 GHz

RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

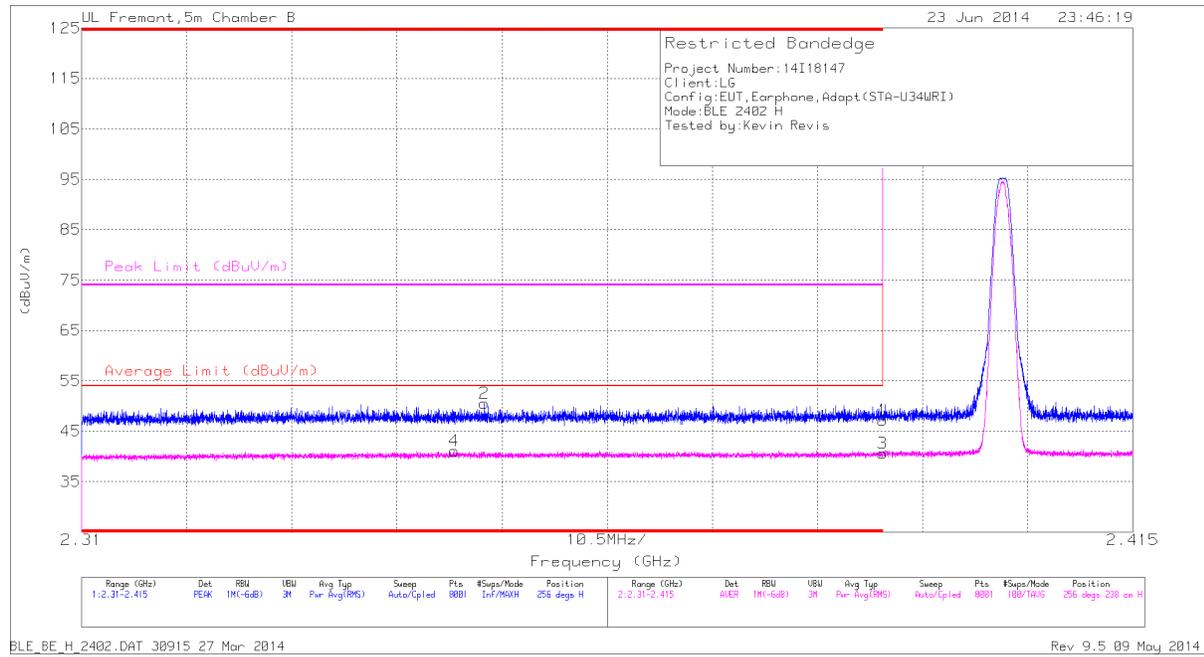


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cb/Filter/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	37.93	PK	32.1	-22.8	0	47.23	-	-	74	-26.77	256	238	H
2	* 2.35	41.49	PK	31.9	-22.9	0	50.49	-	-	74	-23.51	256	238	H
3	* 2.39	29.23	RMS	32.1	-22.8	2.1	40.63	54	-13.37	-	-	256	238	H
4	* 2.347	30.03	RMS	31.9	-22.9	2.1	41.13	54	-12.87	-	-	256	238	H

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

RMS - RMS detection

RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)

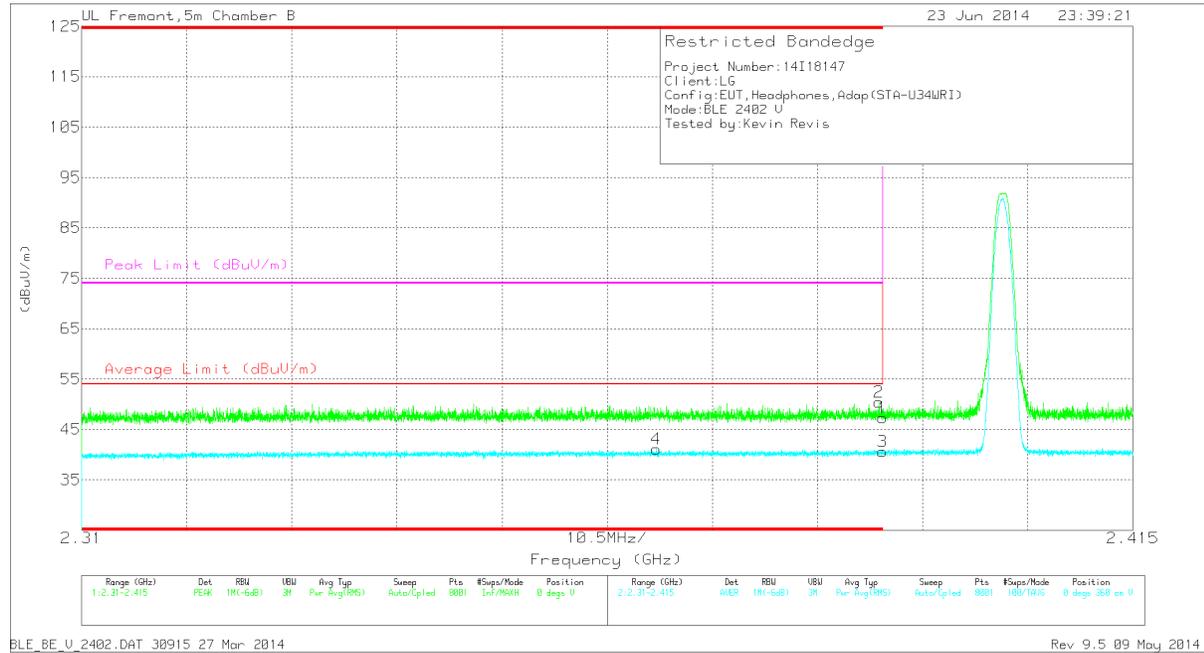


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cb/Fit r/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	37.96	PK	32.1	-22.8	0	47.26	-	-	74	-26.74	0	360	V
2	* 2.39	41.11	PK	32.1	-22.8	0	50.41	-	-	74	-23.59	0	360	V
3	* 2.39	29.26	RMS	32.1	-22.8	2.1	40.66	54	-13.34	-	-	0	360	V
4	* 2.367	29.76	RMS	32	-22.8	2.1	41.06	54	-12.94	-	-	0	360	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

RMS - RMS detection

RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)

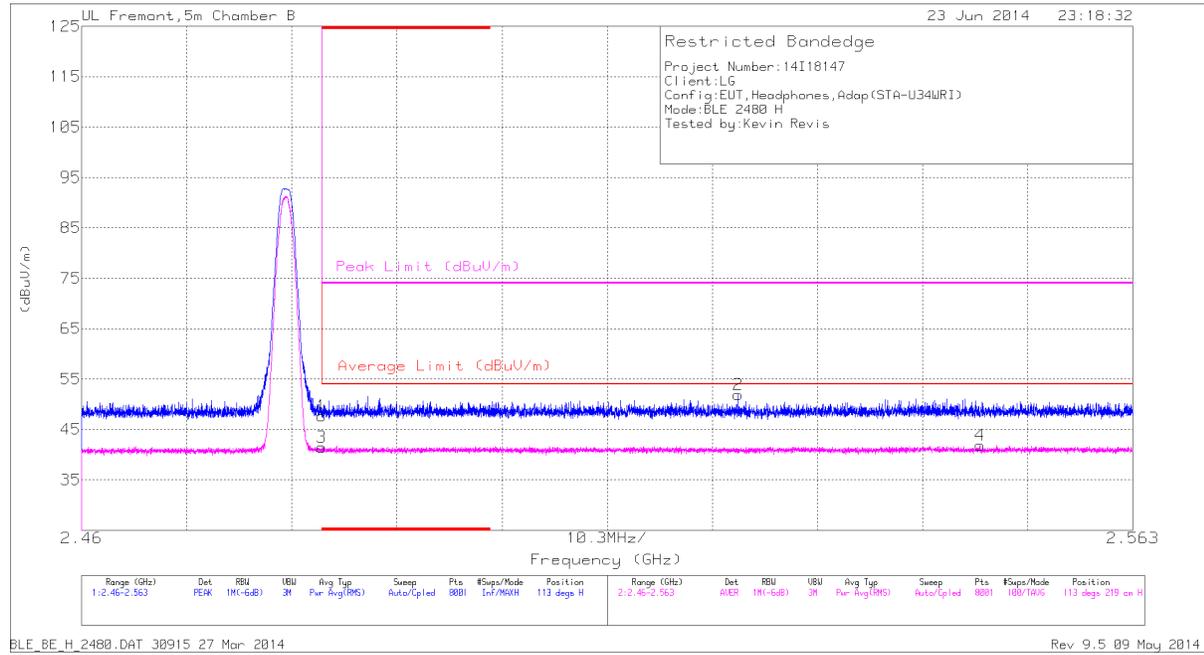


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cb/Filter/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	38.03	PK	32.4	-22.7	0	47.73	-	-	74	-26.27	113	219	H
3	* 2.484	29.63	RMS	32.4	-22.7	2.1	41.43	54	-12.57	-	-	113	219	H
2	2.524	42.06	PK	32.5	-22.6	0	51.96	-	-	74	-22.04	113	219	H
4	2.548	29.88	RMS	32.5	-22.6	2.1	41.88	54	-12.12	-	-	113	219	H

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

RMS - RMS detection

RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)

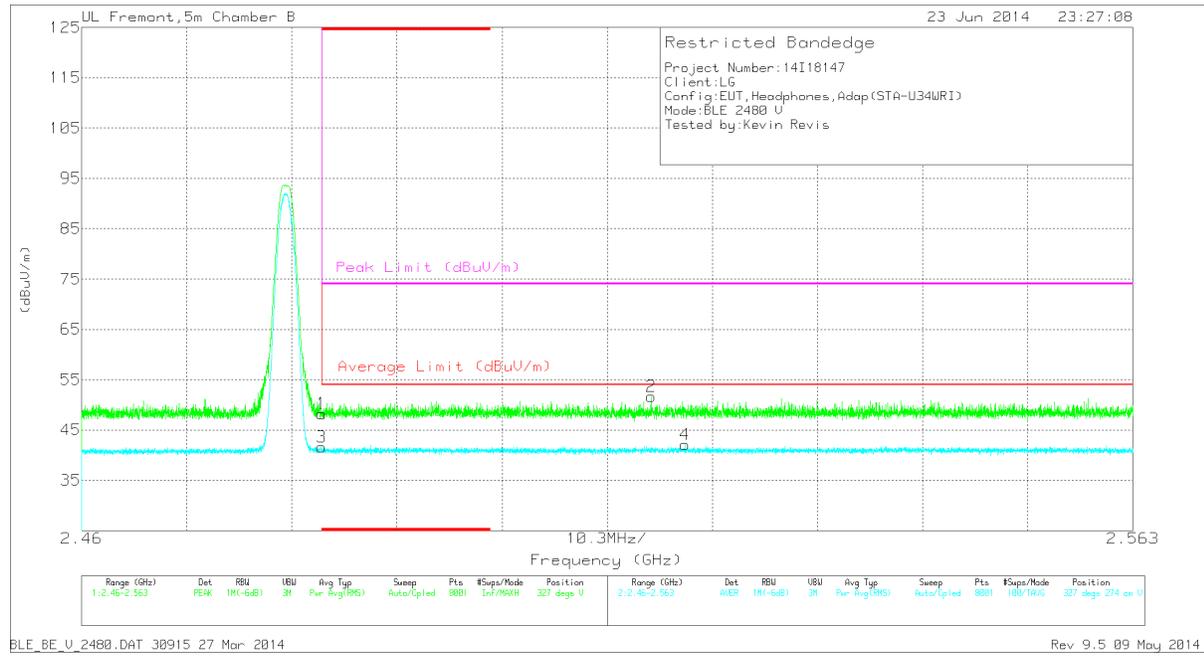

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cb/Fitter/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	38.54	PK	32.4	-22.7	0	48.24	-	-	74	-25.76	327	274	V
3	* 2.484	29.77	RMS	32.4	-22.7	2.1	41.57	54	-12.43	-	-	327	274	V
2	2.516	41.82	PK	32.5	-22.7	0	51.62	-	-	74	-22.38	327	274	V
4	2.519	30.05	RMS	32.5	-22.6	2.1	42.05	54	-11.95	-	-	327	274	V


* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

RMS - RMS detection


HARMONICS AND SPURIOUS EMISSIONS

**LOW CHANNEL
 HORIZONTAL**

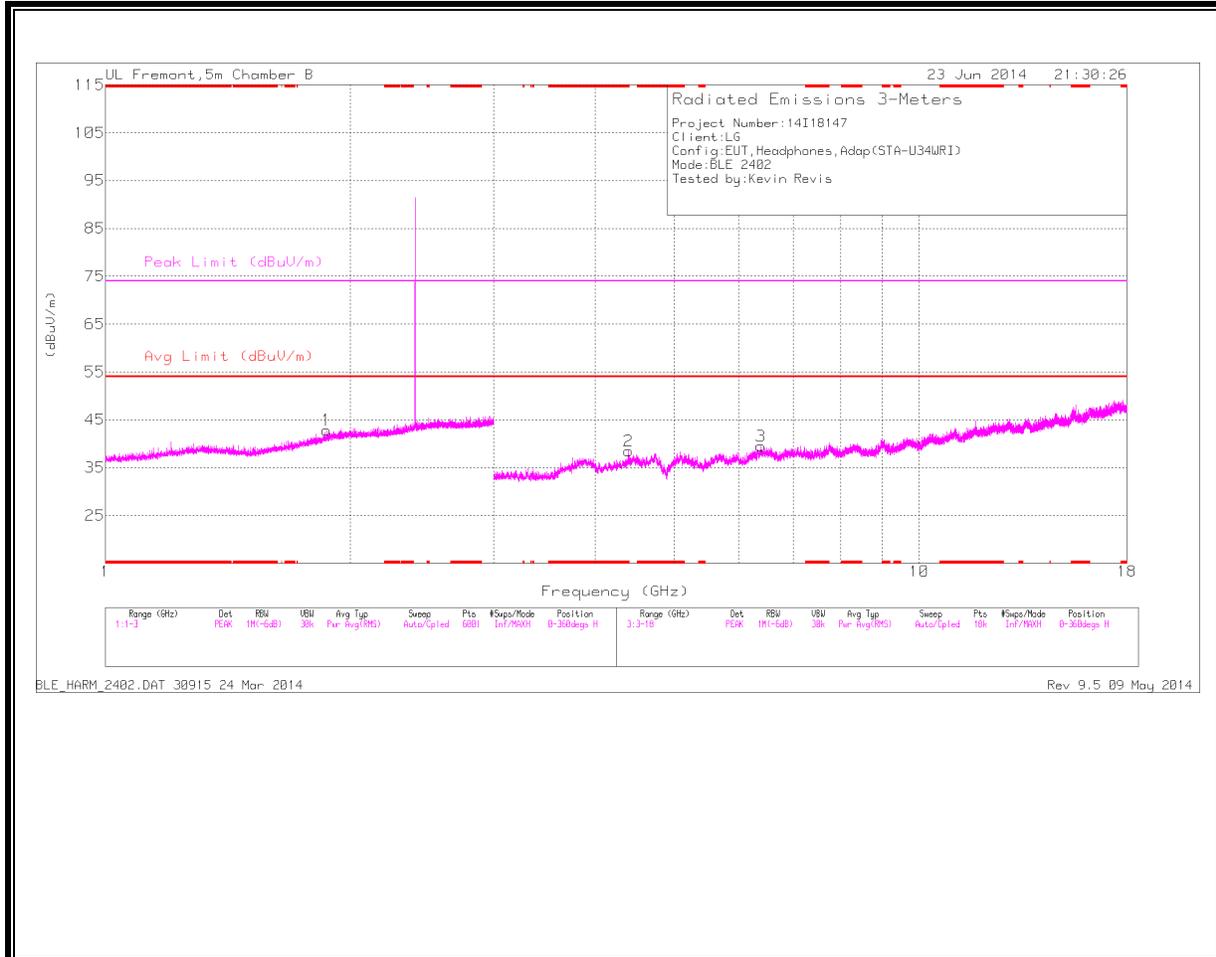

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

VERTICAL

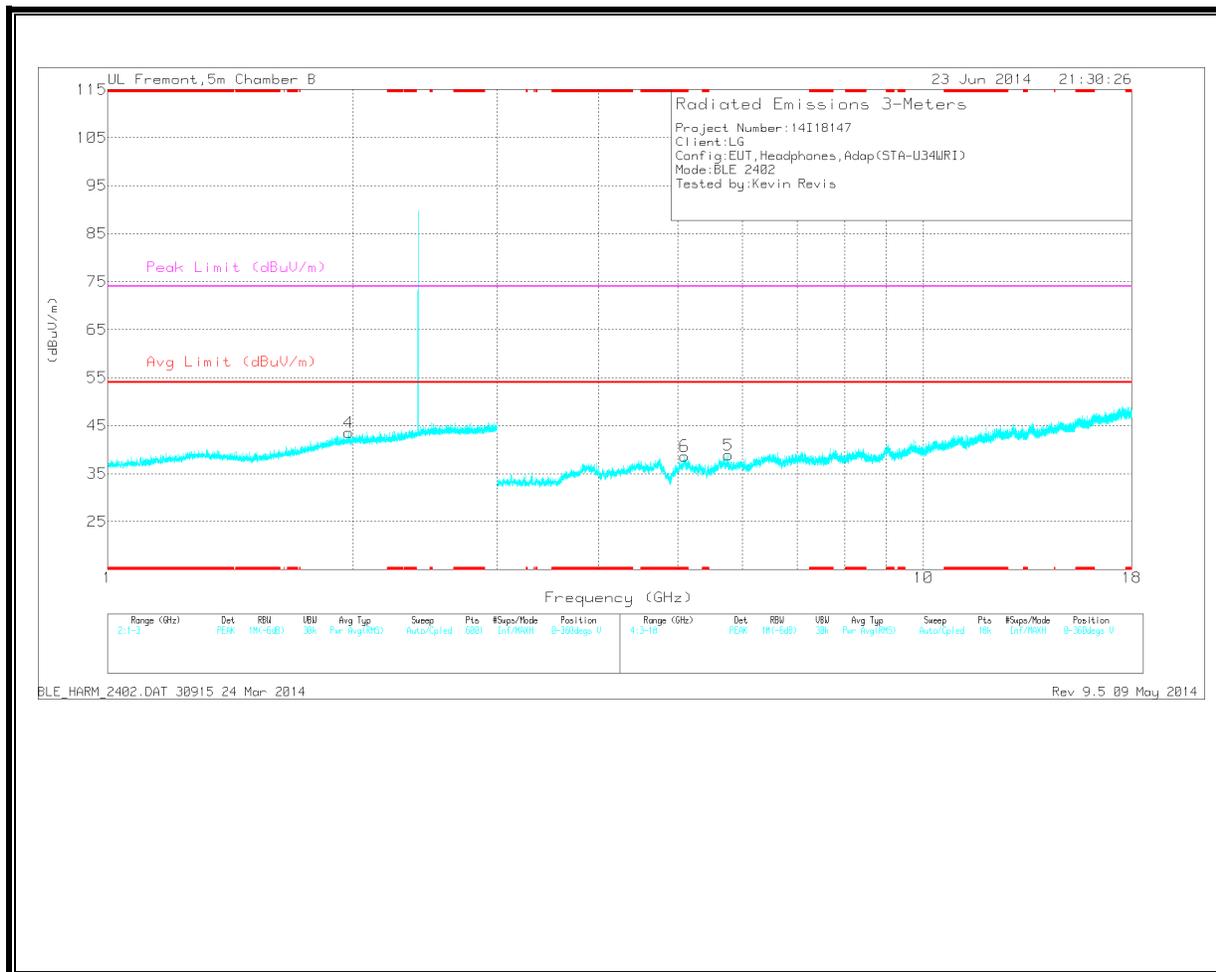

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

LOW CHANNEL DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 4.391	34.77	PK	33.8	-30.1	0	38.47	-	-	74	-35.53	0-360	99	H
6	* 5.098	32.98	PK	34.2	-28.5	0	38.68	-	-	74	-35.32	0-360	99	V
1	1.87	35.67	PK	30.8	-23.6	0	42.87	-	-	-	-	0-360	202	H
4	1.974	35.68	PK	31.3	-23.4	0	43.58	-	-	-	-	0-360	201	V
5	5.767	34.03	PK	34.6	-29.8	0	38.83	-	-	-	-	0-360	201	V
3	6.386	32.86	PK	35.6	-29	0	39.46	-	-	-	-	0-360	99	H

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

Radiated Emissions


Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 4.39	41.43	PK2	33.8	-30.2	0	45.03	-	-	74	-28.97	360	101	H
* 5.098	40.08	PK2	34.2	-28.5	0	45.78	-	-	74	-28.22	360	101	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK2 - KDB558074 Method: Maximum Peak


MID CHANNEL

HORIZONTAL

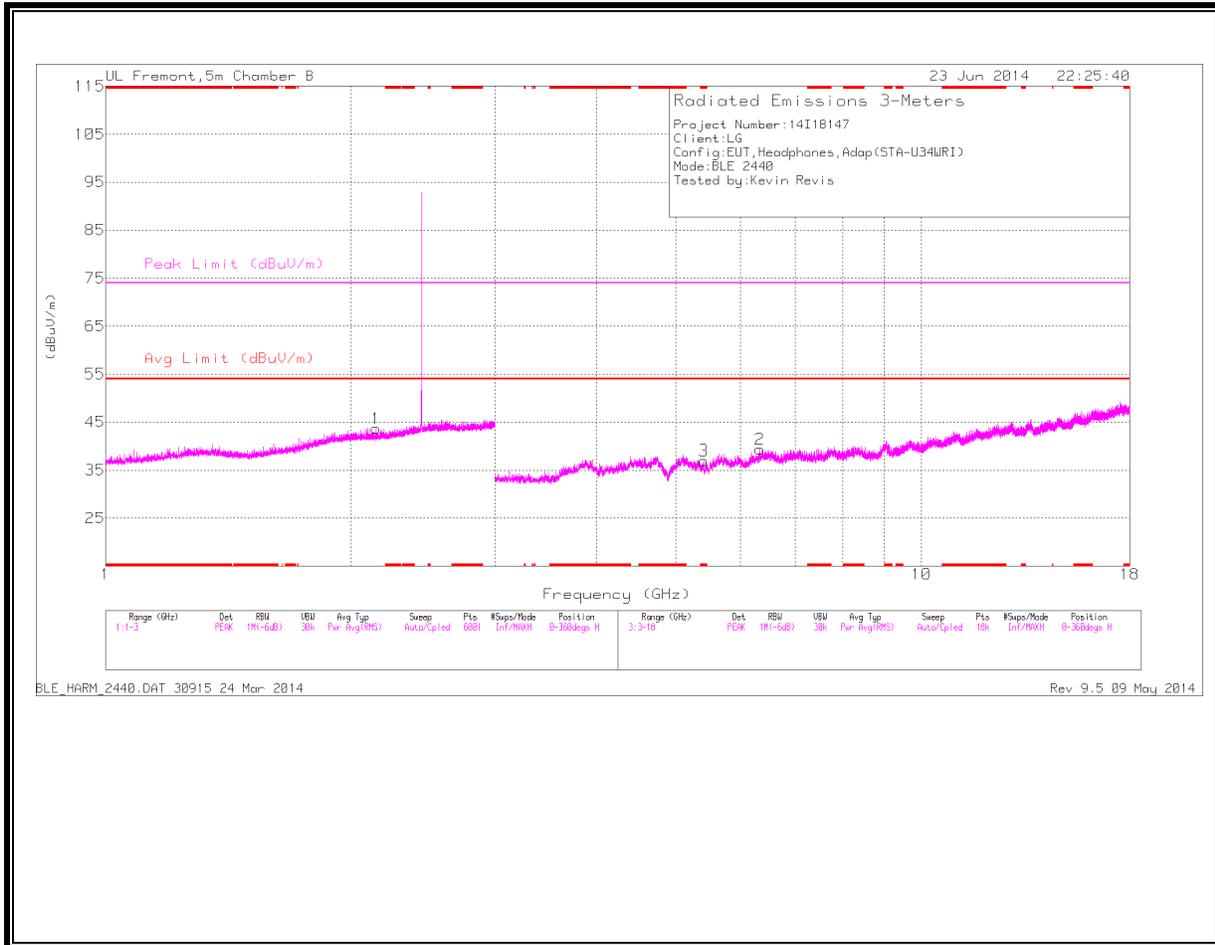

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

VERTICAL

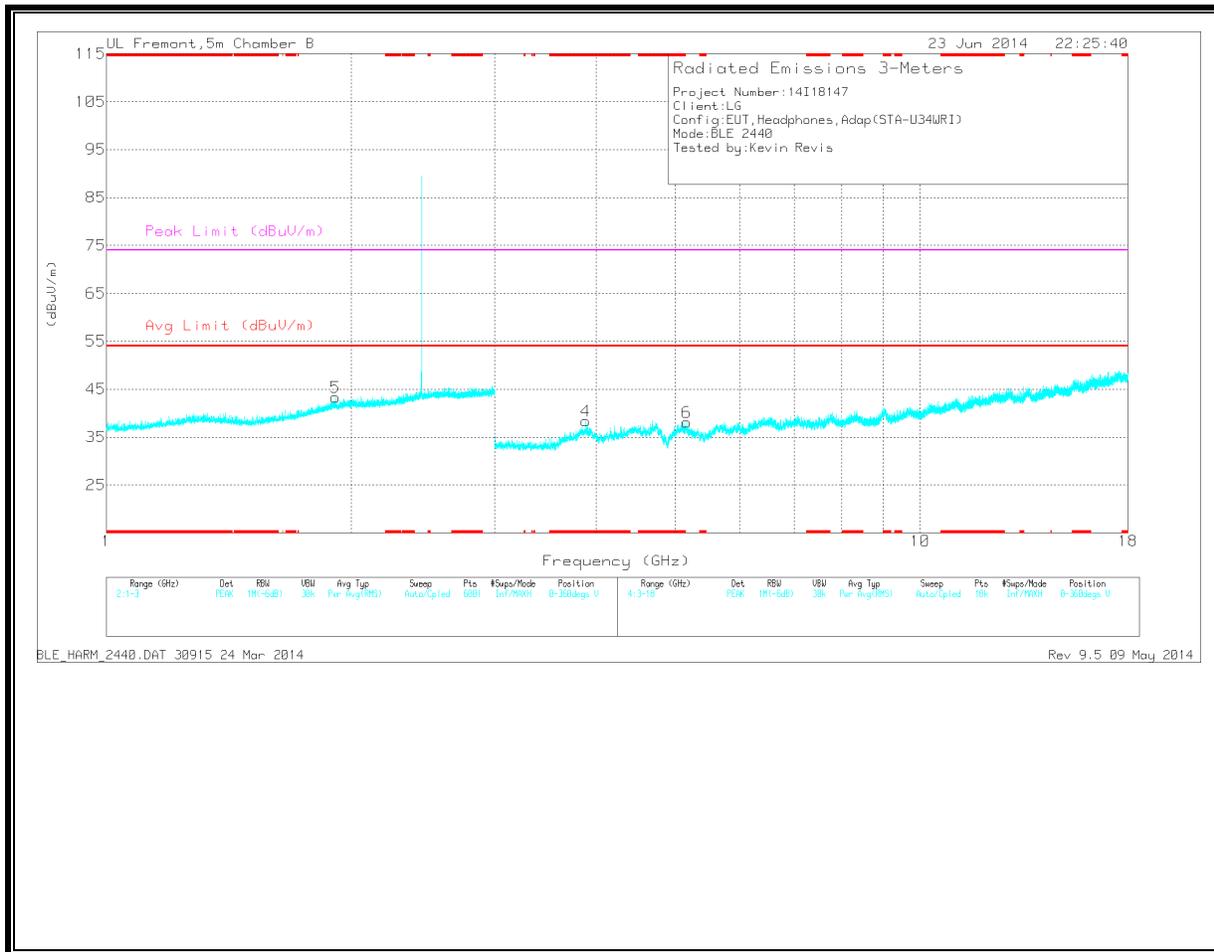

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

MID CHANNEL DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
3	* 5.406	31.73	PK	34.5	-29.2	0	37.03	-	-	74	-36.97	0-360	99	H
4	* 3.882	34.79	PK	33.8	-30.2	0	38.39	-	-	74	-35.61	0-360	201	V
5	1.912	35.77	PK	31.1	-23.5	0	43.37	-	-	-	-	0-360	200	V
1	2.146	35.54	PK	31.3	-23.2	0	43.64	-	-	-	-	0-360	203	H
6	5.165	33.95	PK	34.3	-30.1	0	38.15	-	-	-	-	0-360	99	V
2	6.332	32.41	PK	35.5	-28.5	0	39.41	-	-	-	-	0-360	99	H

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

Radiated Emissions


Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 5.407	38.9	PK2	34.5	-29.2	0	44.2	-	-	74	-29.8	360	100	H
* 5.407	26.66	Avg	34.5	-29.2	0	31.96	54	-22.04	-	-	360	204	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

Avg - Video bandwidth < Resolution bandwidth


PK2 - KDB558074 Method: Maximum Peak

HIGH CHANNEL
 HORIZONTAL

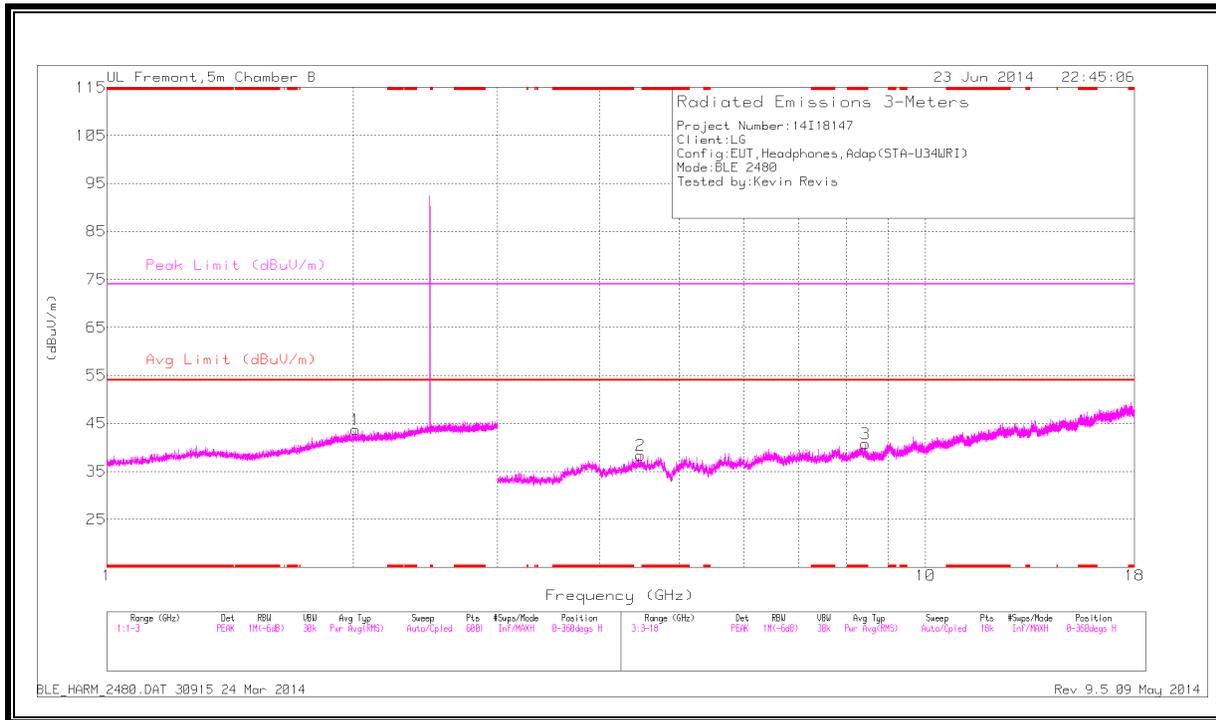

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

VERTICAL

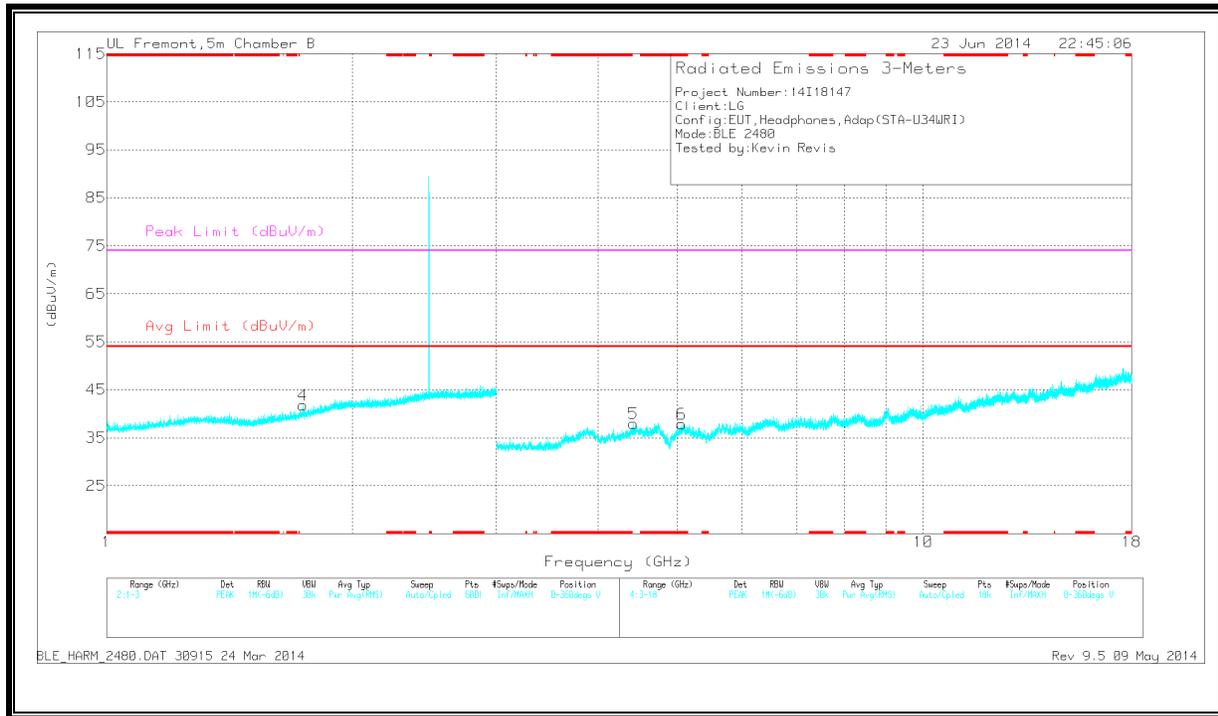

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

HIGH CHANNEL DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
3	* 8.449	29.99	PK	35.8	-25	0	40.79	-	-	74	-33.21	0-360	99	H
6	* 5.061	32.36	PK	34.2	-28.7	0	37.86	-	-	74	-36.14	0-360	99	V
4	1.738	35.91	PK	29.5	-23.6	0	41.81	-	-	-	-	0-360	99	V
1	2.013	35.95	PK	31.3	-23.5	0	43.75	-	-	-	-	0-360	200	H
5	4.42	33.81	PK	33.8	-29.6	0	38.01	-	-	-	-	0-360	201	V
2	4.482	33.62	PK	34	-29.2	0	38.42	-	-	-	-	0-360	99	H

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

Radiated Emissions


Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 8.45	36.78	PK2	35.8	-25.1	0	47.48	-	-	74	-26.52	359	101	H
* 5.06	38.86	PK2	34.2	-28.8	0	44.26	-	-	74	-29.74	359	101	V


* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK2 - KDB558074 Method: Maximum Peak

9.3. WORST-CASE BELOW 1 GHz

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION WITH U34WDI CHARGER)

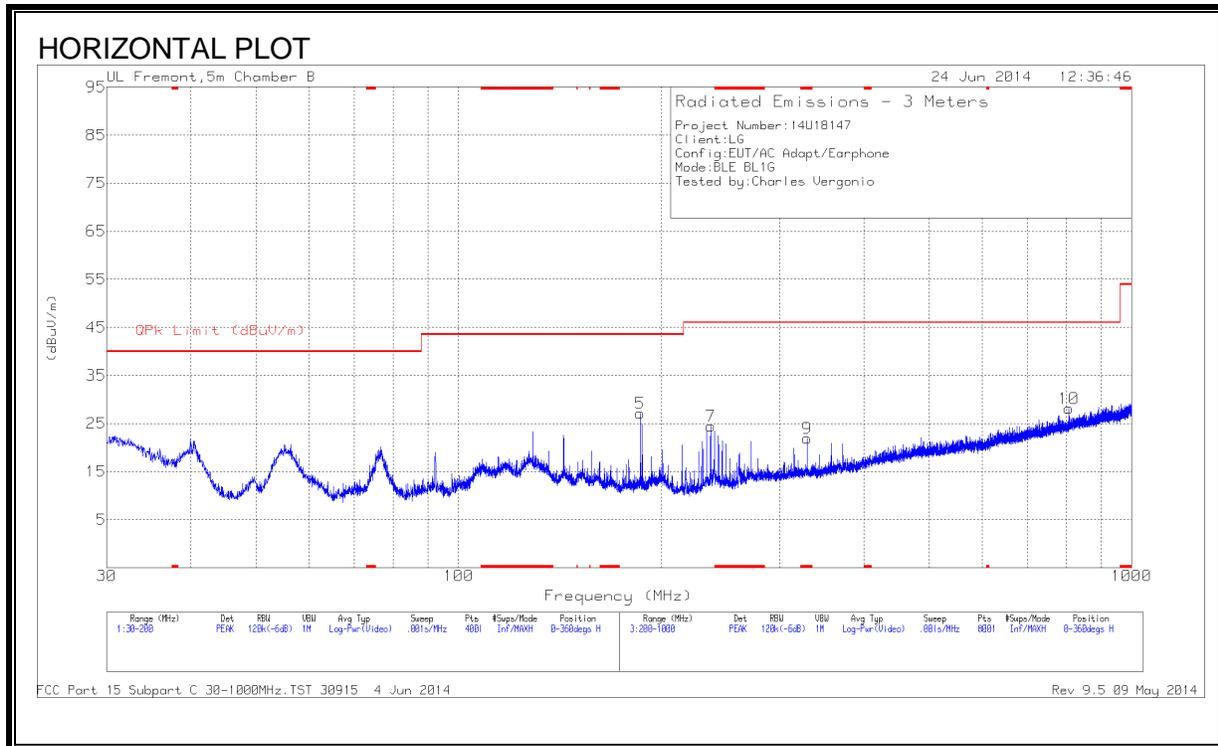

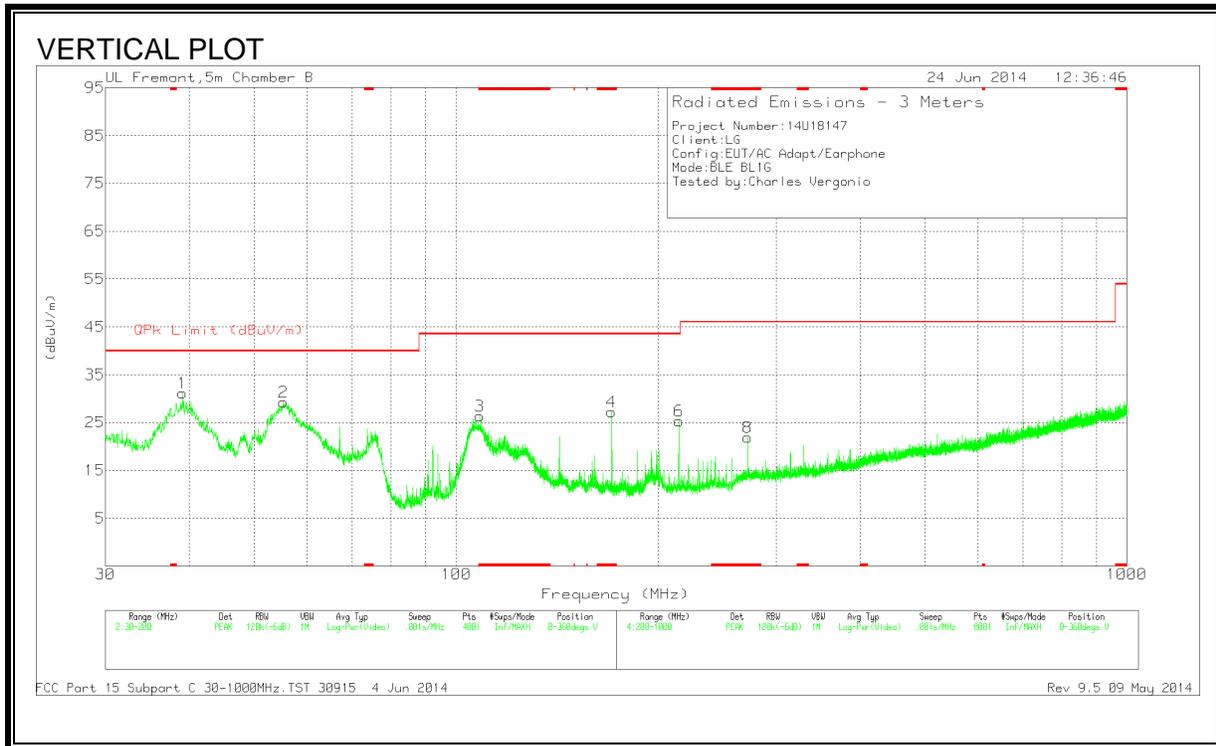

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF T243 (dB/m)	Amp/Cbl (dB)	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
3	* 108.455	41.95	PK	12.3	-27.9	26.35	43.52	-17.17	0-360	101	V
4	* 170.3775	42.99	PK	11.5	-27.2	27.29	43.52	-16.23	0-360	101	V
9	* 329.3	33.68	PK	14	-25.8	21.88	46.02	-24.14	0-360	200	H
8	* 272	34.81	PK	13.3	-26.2	21.91	46.02	-24.11	0-360	200	V
1	39.095	45.24	PK	14.6	-28.7	31.14	40	-8.86	0-360	101	V
2	55.245	50.55	PK	7.2	-28.5	29.25	40	-10.75	0-360	101	V
5	186.145	43.17	PK	10.9	-27	27.07	43.52	-16.45	0-360	100	H
6	214.8	41.5	PK	10.6	-26.8	25.3	43.52	-18.22	0-360	200	V
7	236.8	39.6	PK	11.5	-26.6	24.5	46.02	-21.52	0-360	101	H
10	806.1	30.62	PK	21.2	-23.7	28.12	46.02	-17.9	0-360	200	H

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

10. AC POWER LINE CONDUCTED EMISSIONS

LIMITS

FCC §15.207 (a)

RSS-Gen 7.2.2

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

TEST PROCEDURE

ANSI C63.4 - 2009

RESULTS

6 WORST EMISSIONS WITH WORST CASE CONFIGURATION U34WDI CHARGER

Line-L1 .15 - 30MHz

Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	T24 IL L1 (dB)	LC Cables 1&3 (dB)	Corrected Reading dBuV	CISPR 22 Class B QP	Margin to Limit (dB)	CISPR 22 Class B Avg	Margin to Limit (dB)
1	.465	37.21	PK	.4	0	37.61	56.6	-18.99	-	-
2	.465	25.96	Av	.4	0	26.36	-	-	46.6	-20.24
3	1.707	38.67	PK	.2	.1	38.97	56	-17.03	-	-
4	1.707	21.57	Av	.2	.1	21.87	-	-	46	-24.13
5	2.148	38.25	PK	.2	.1	38.55	56	-17.45	-	-
6	2.148	21.76	Av	.2	.1	22.06	-	-	46	-23.94
7	4.1775	41.08	PK	.2	.1	41.38	56	-14.62	-	-
8	4.1775	23.31	Av	.2	.1	23.61	-	-	46	-22.39
9	5.838	49.32	PK	.2	.1	49.62	60	-10.38	-	-
10	5.838	32.51	Av	.2	.1	32.81	-	-	50	-17.19
11	18.852	40.88	PK	.3	.2	41.38	60	-18.62	-	-
12	18.852	13.84	Av	.3	.2	14.34	-	-	50	-35.66


Line-L2 .15 - 30MHz

Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	T24 IL L2 (dB)	LC Cables 2&3 (dB)	Corrected Reading dBuV	CISPR 22 Class B QP	Margin to Limit (dB)	CISPR 22 Class B Avg	Margin to Limit (dB)
13	.465	42.51	PK	.4	0	42.91	56.6	-13.69	-	-
14	.465	23.64	Av	.4	0	24.04	-	-	46.6	-22.56
15	1.6215	41.51	PK	.2	.1	41.81	56	-14.19	-	-
16	1.6215	21.09	Av	.2	.1	21.39	-	-	46	-24.61
17	3.084	42.14	PK	.2	.1	42.44	56	-13.56	-	-
18	3.084	22.87	Av	.2	.1	23.17	-	-	46	-22.83
19	3.336	42.2	PK	.2	.1	42.5	56	-13.5	-	-
20	3.336	22.16	Av	.2	.1	22.46	-	-	46	-23.54
21	5.7165	48.81	PK	.2	.1	49.11	60	-10.89	-	-
22	5.7165	29.28	Av	.2	.1	29.58	-	-	50	-20.42
23	15.1935	40.41	PK	.3	.2	40.91	60	-19.09	-	-
24	15.1935	19.52	Av	.3	.2	20.02	-	-	50	-29.98

PK - Peak detector
 Av - average detection

LINE 1 RESULTS

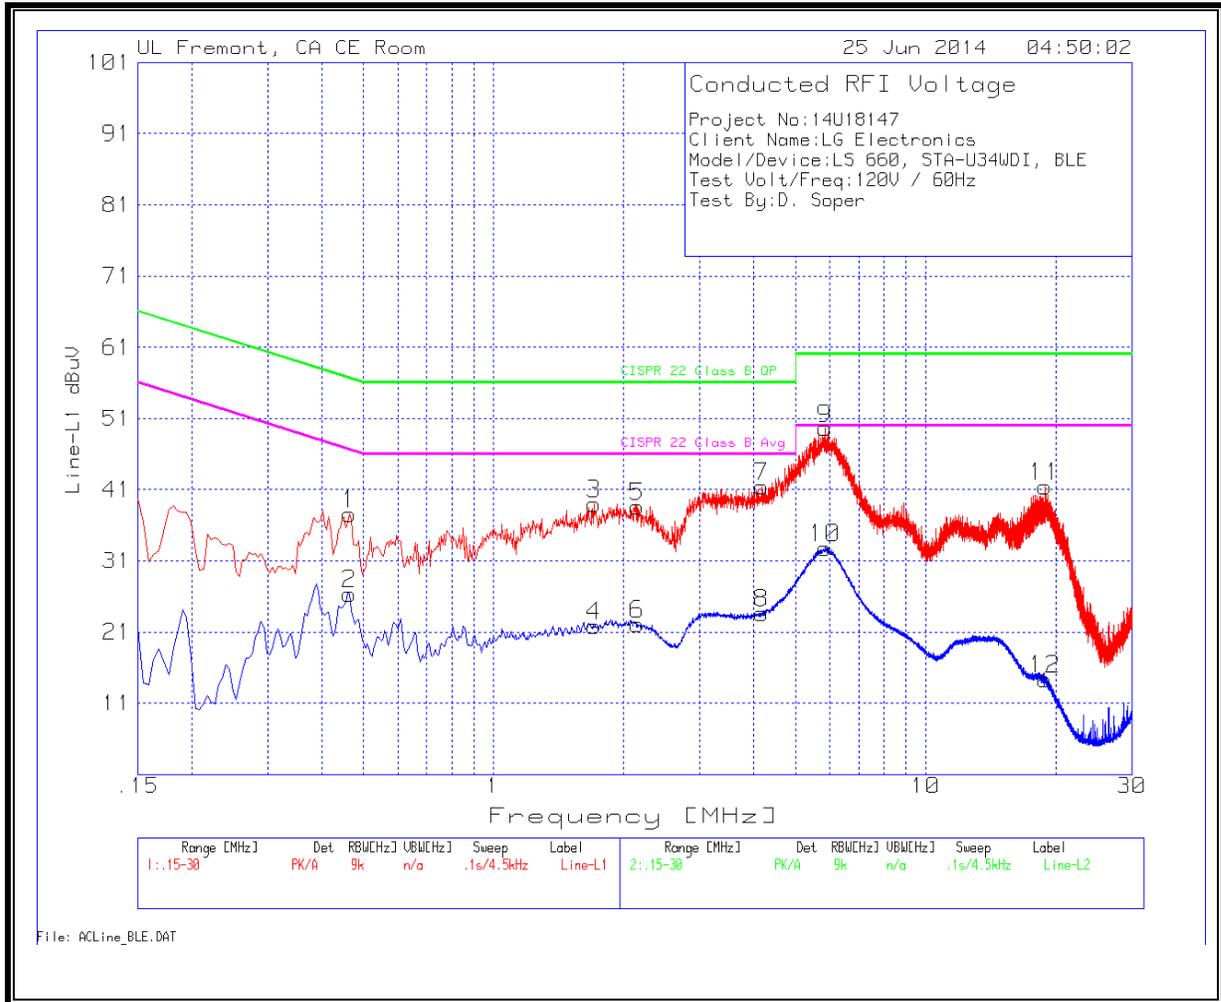

LINE 2 RESULTS

