


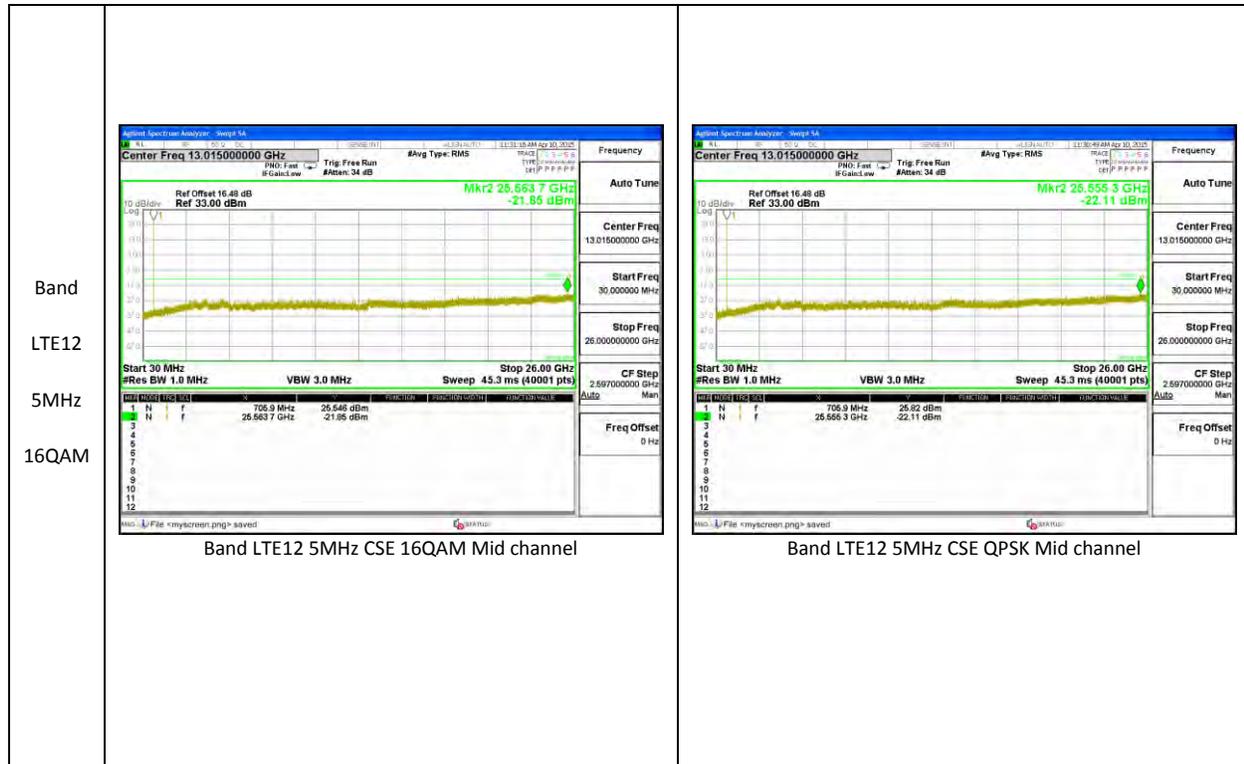
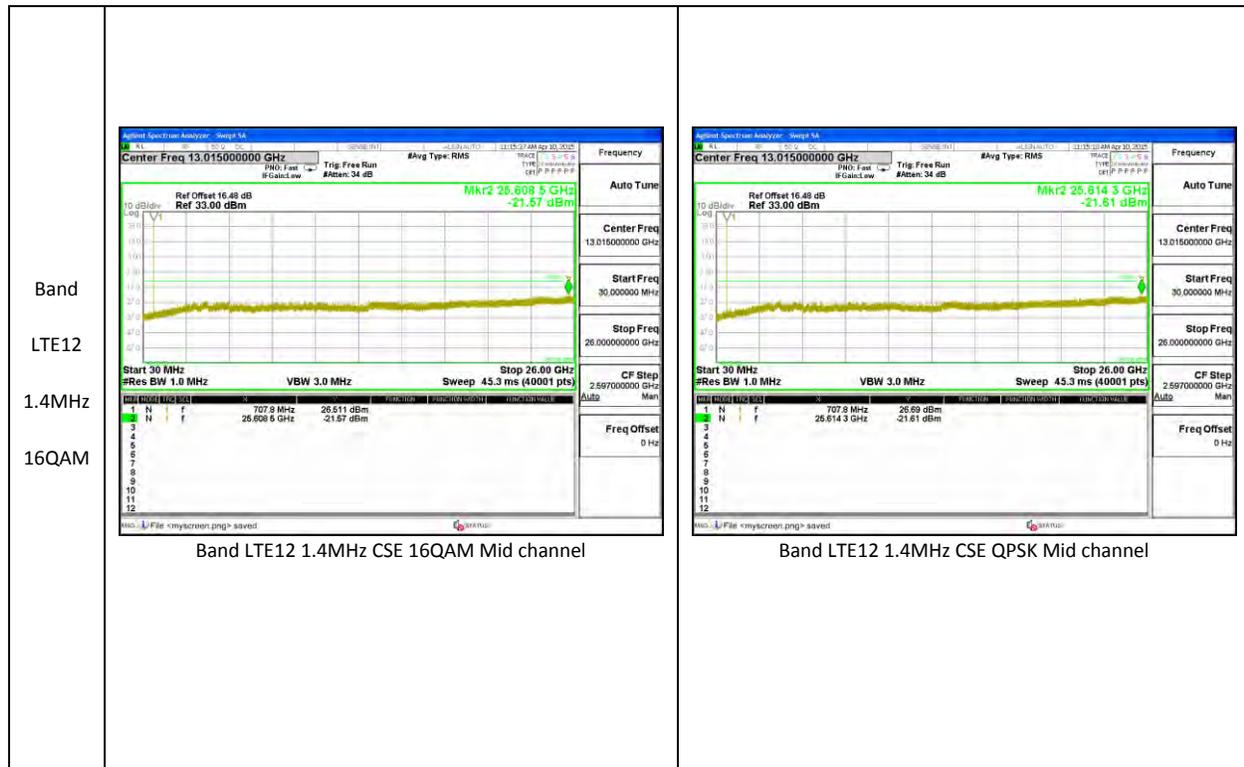



LTE Band 12


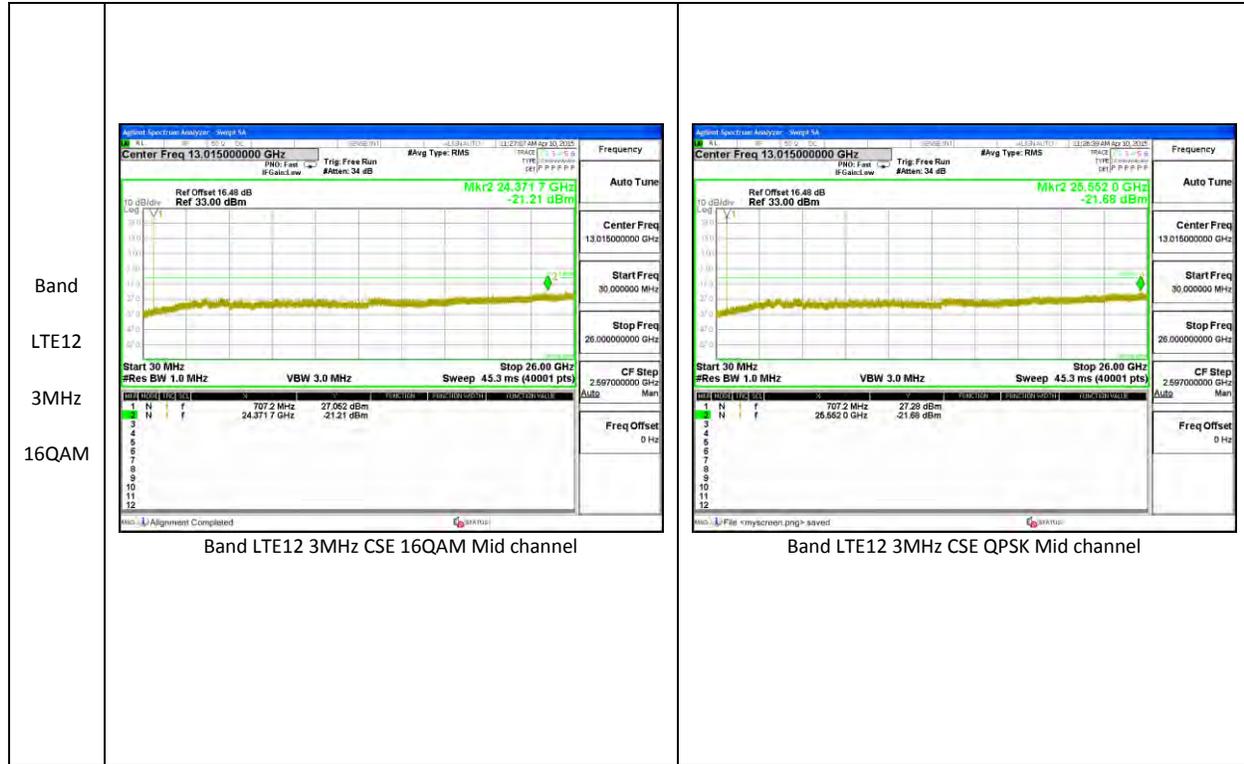


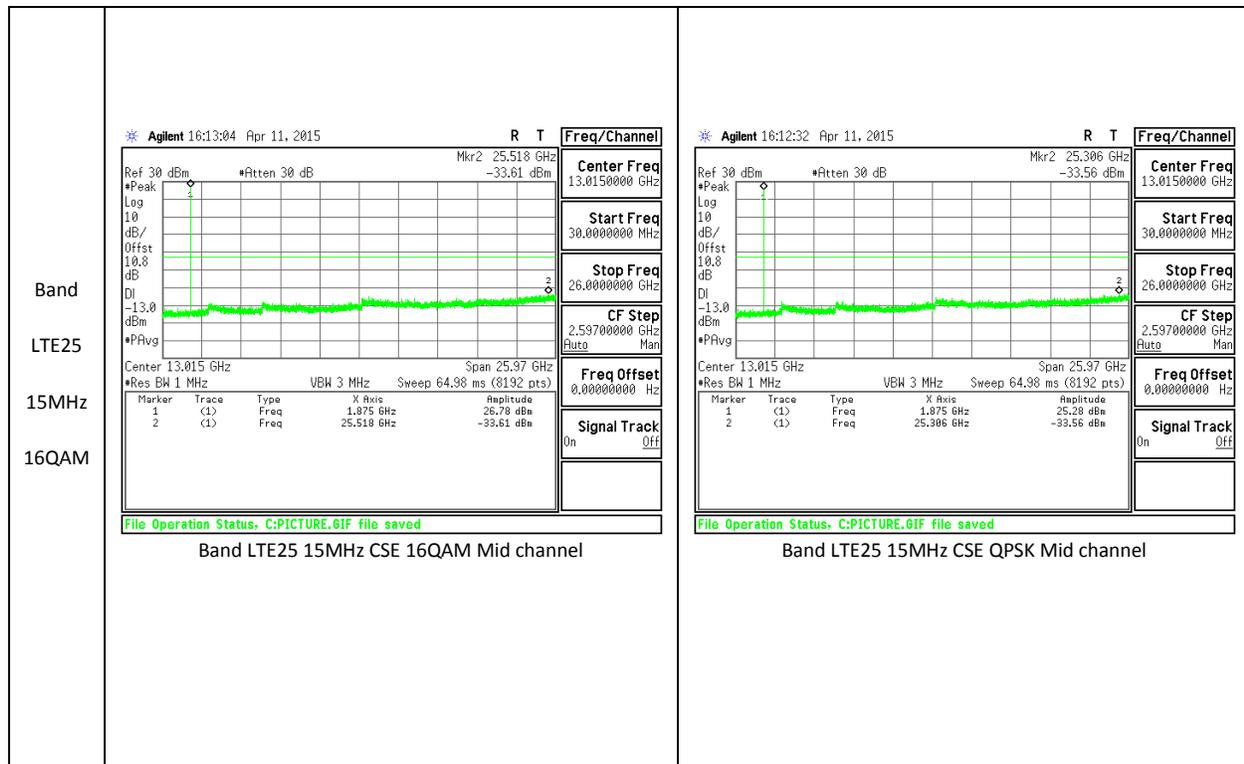





LTE Band 25

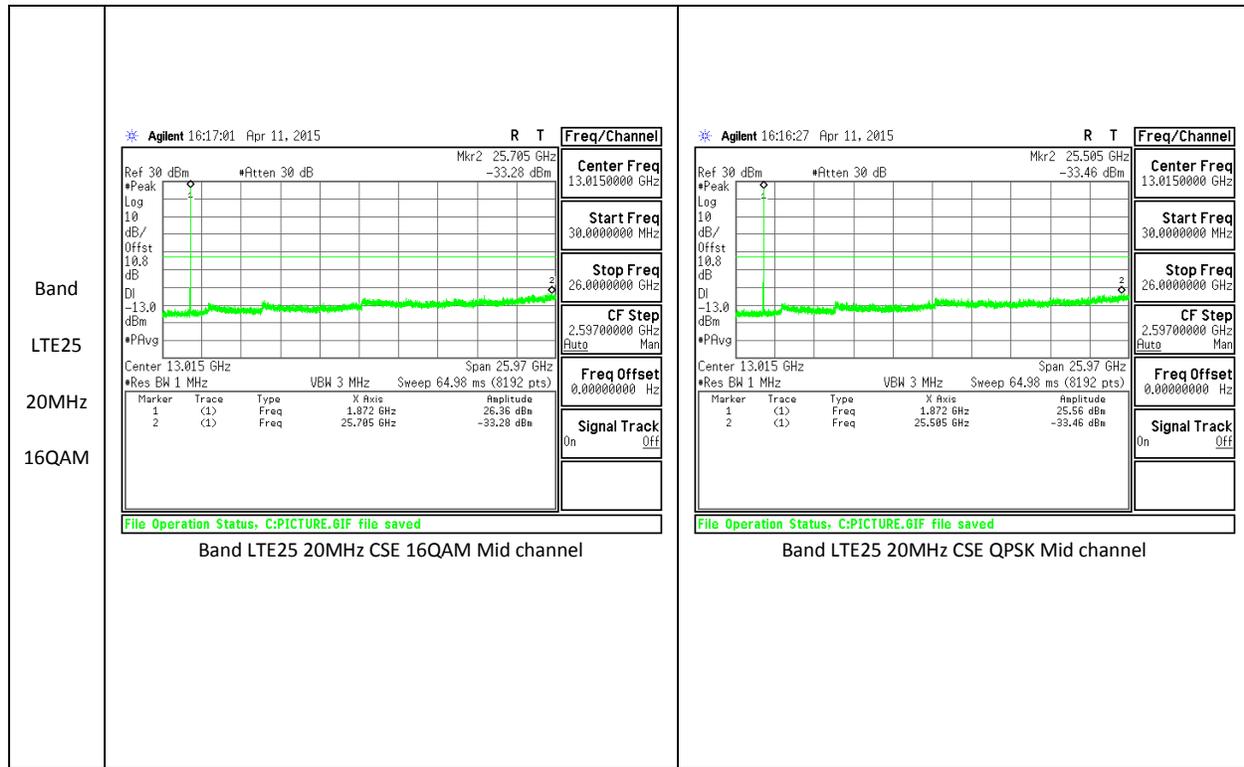


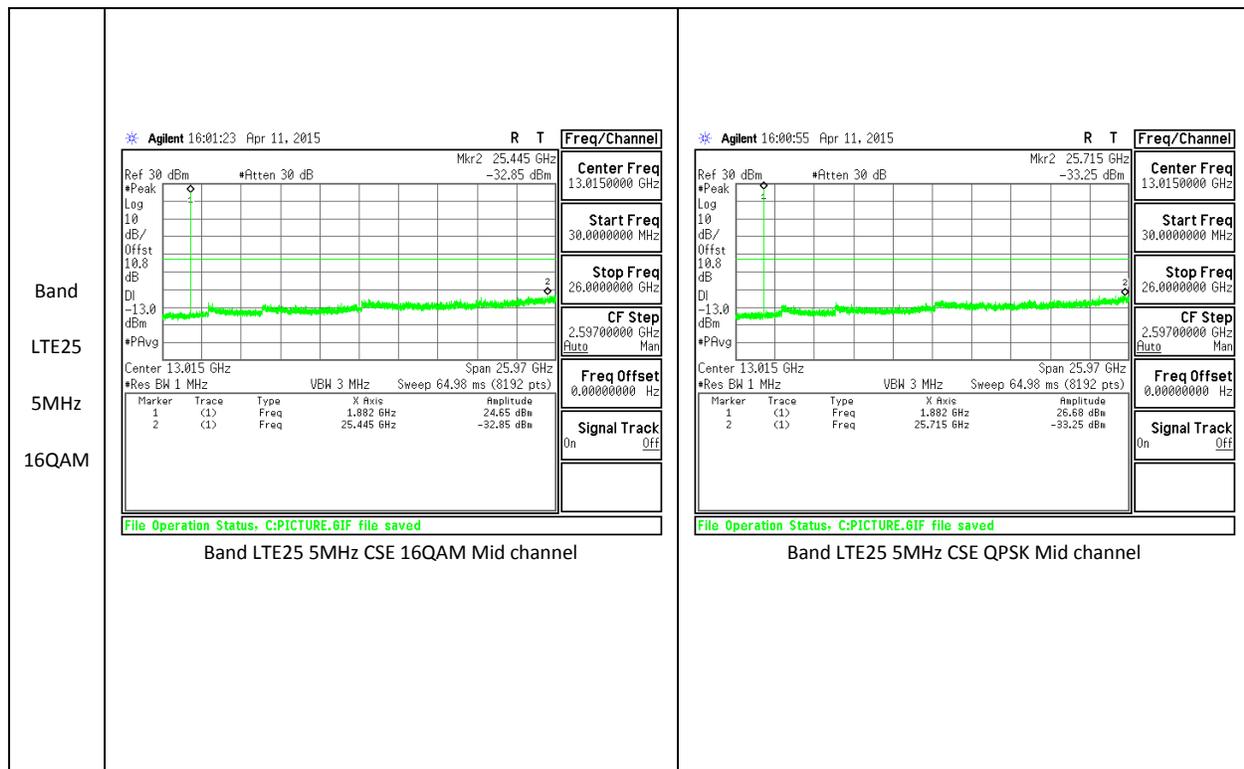

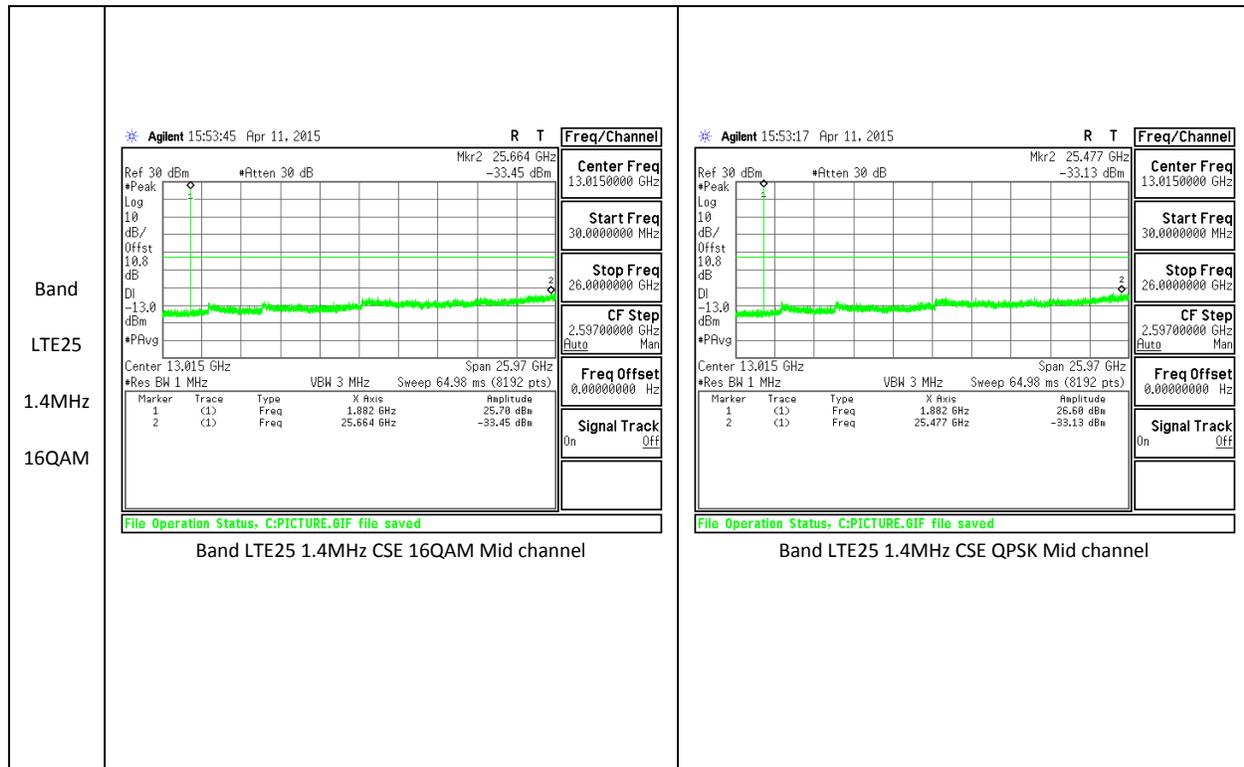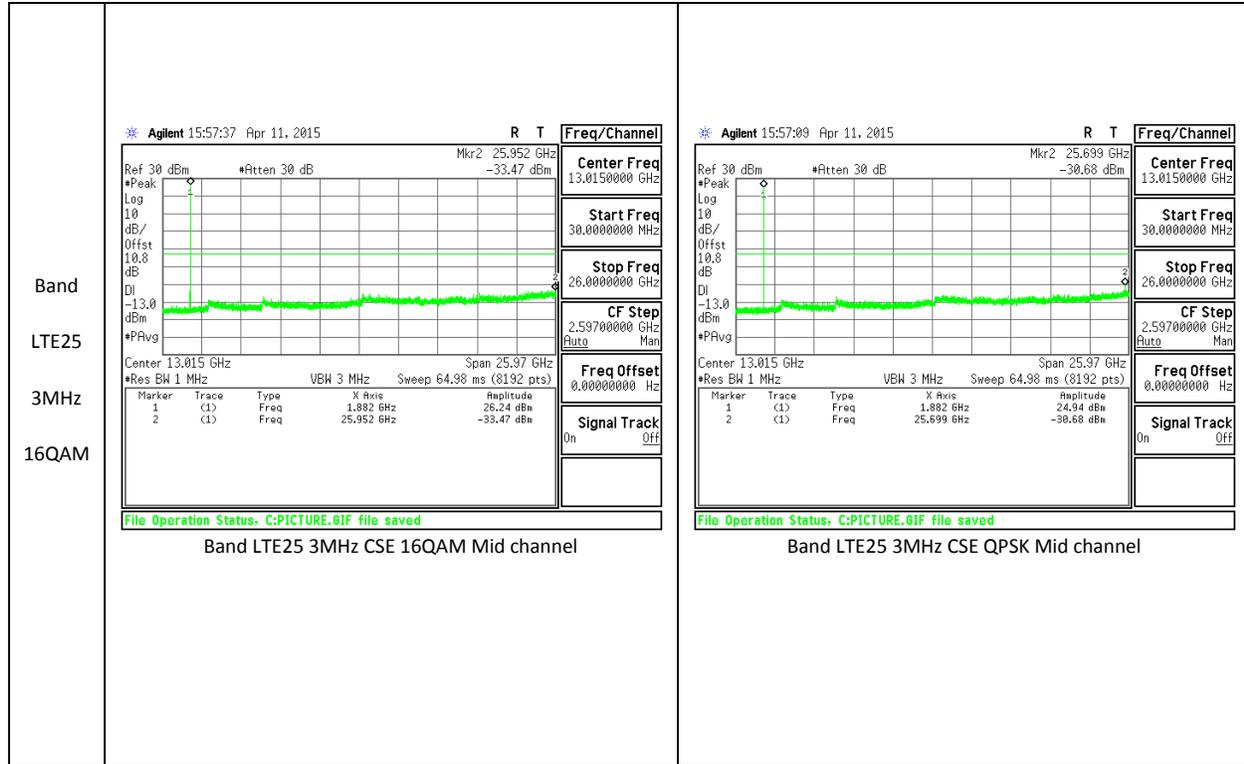





LTE Band 26
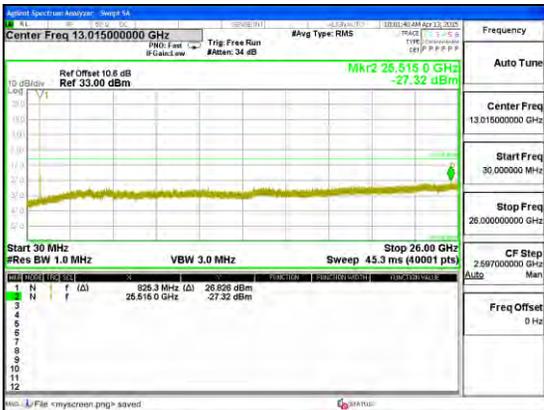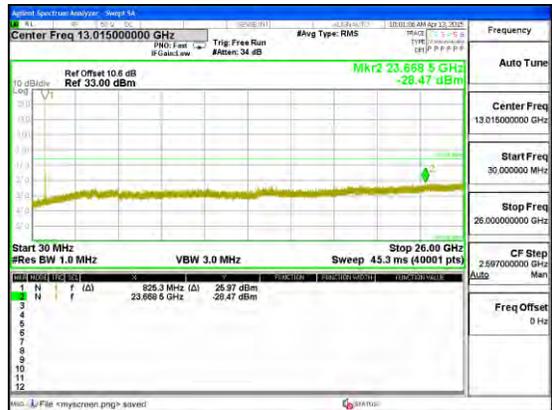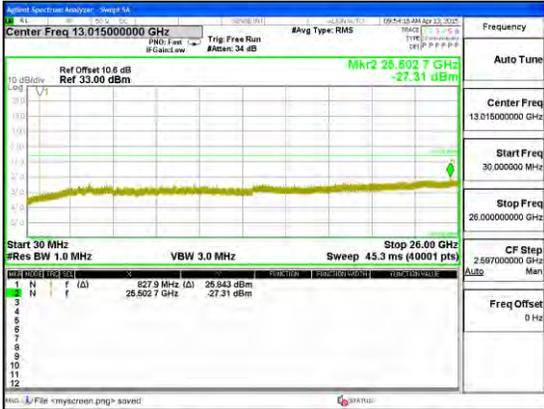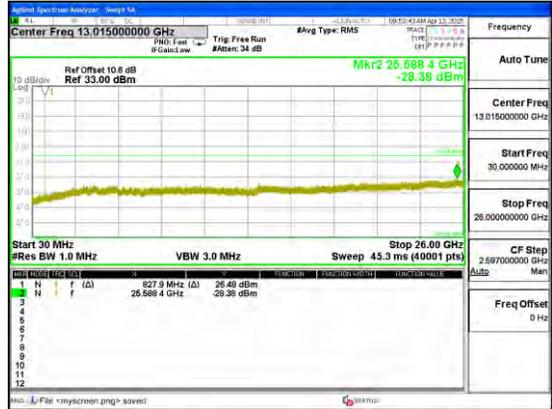
<p>Band LTE26 15MHz 16QAM</p>	 <p>Band LTE26 15MHz CSE 16QAM Mid channel</p>	 <p>Band LTE26 15MHz CSE QPSK Mid channel</p>
<p>Band LTE26 10MHz 16QAM</p>	 <p>Band LTE26 10MHz CSE 16QAM Mid channel</p>	 <p>Band LTE26 10MHz CSE QPSK Mid channel</p>

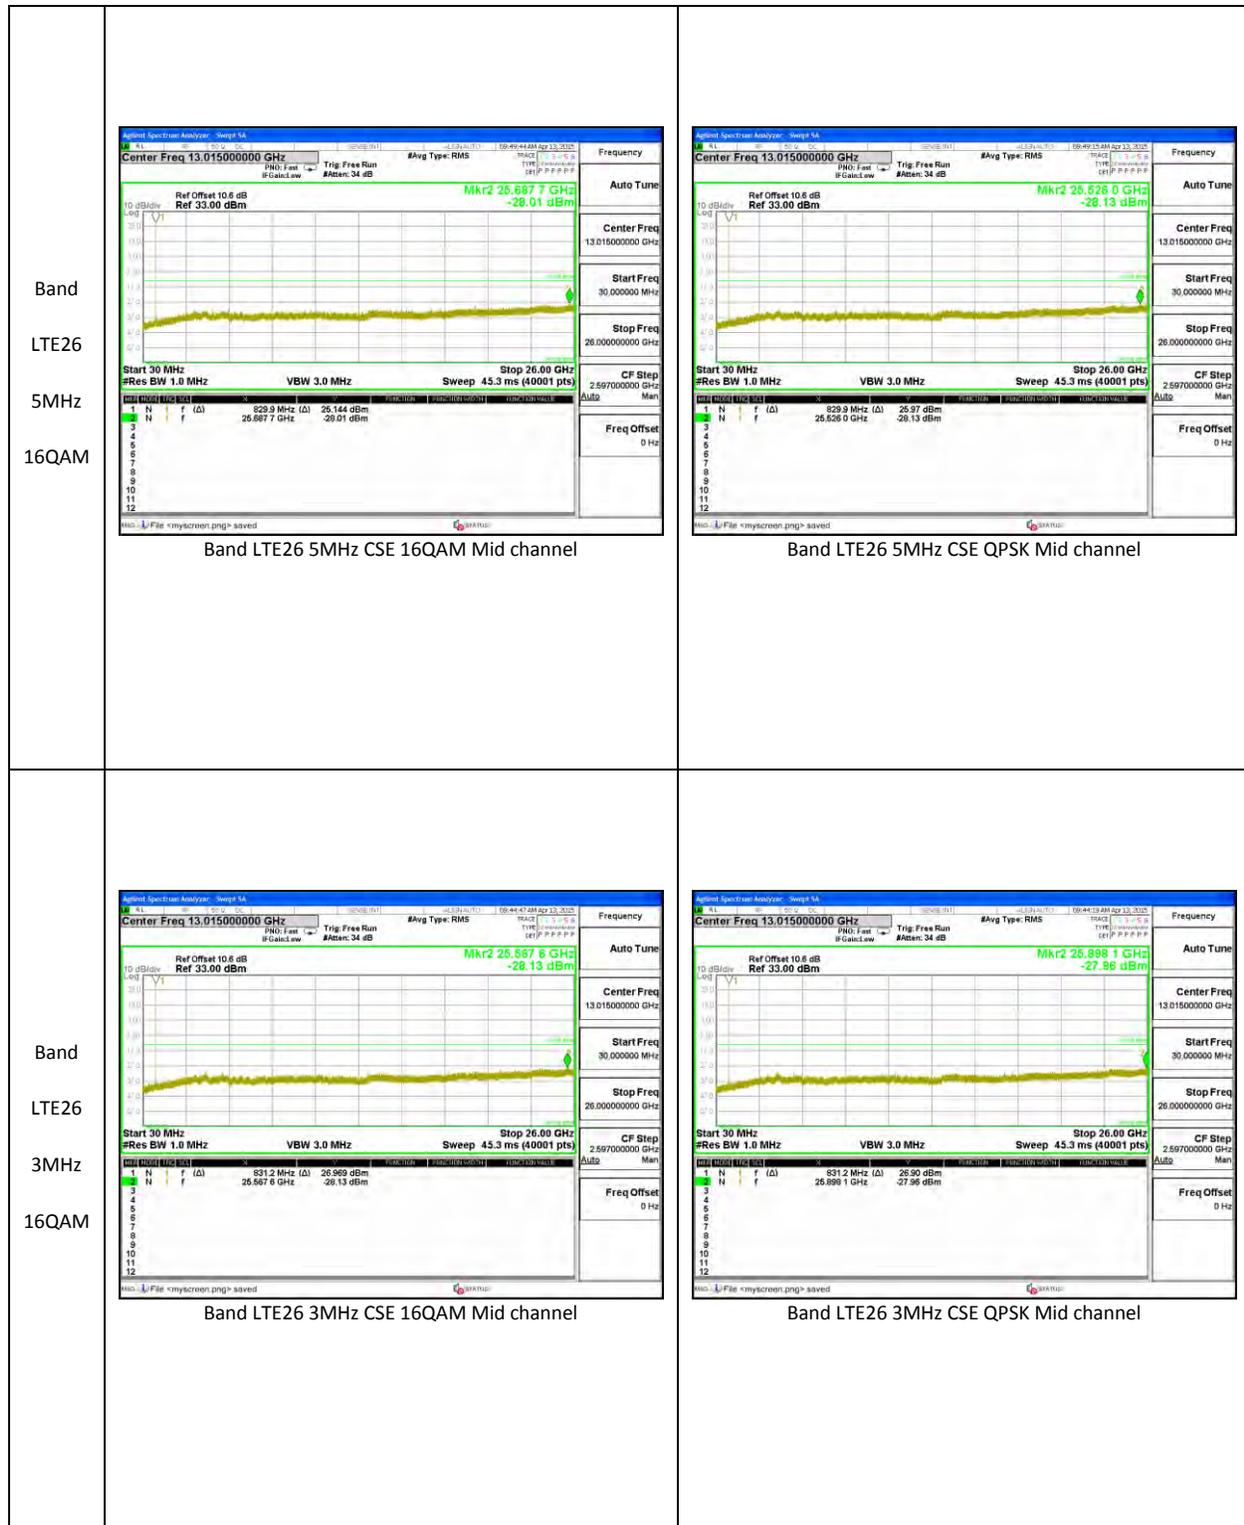



LTE Band 41
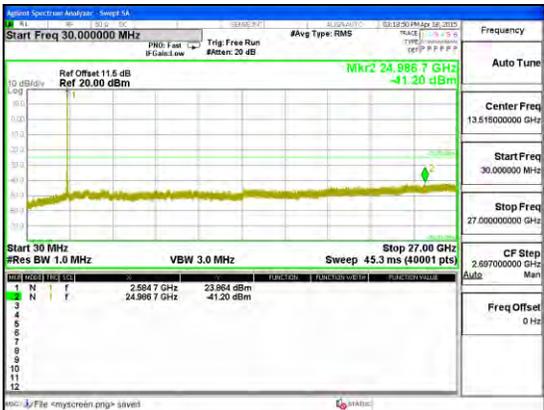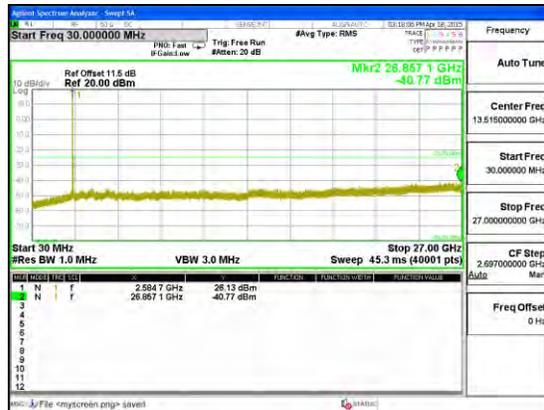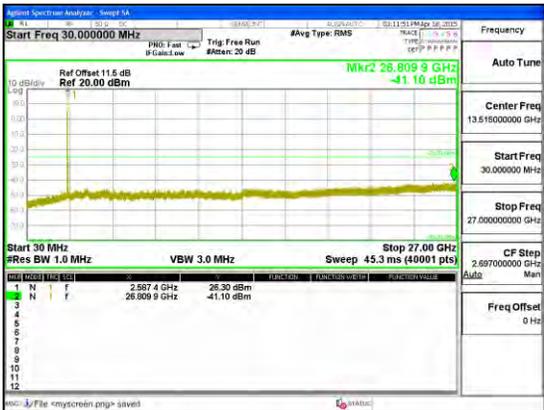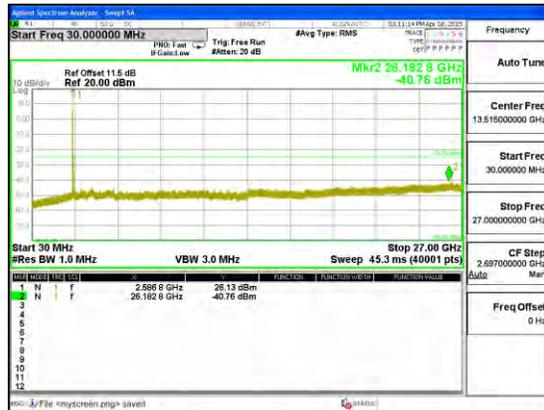
<p>Band LTE41 20MHz 16QAM</p>	 <p>Band LTE41 20MHz CSE 16QAM Mid channel</p>	 <p>Band LTE41 20MHz CSE QPSK Mid channel</p>
<p>Band LTE41 15MHz 16QAM</p>	 <p>Band LTE41 15MHz CSE 16QAM Mid channel</p>	 <p>Band LTE41 15MHz CSE QPSK Mid channel</p>



10.4. FREQUENCY STABILITY

RULE PART(S)

FCC: §2.1055, §22.355, §24.235, §27.54 and §90.213

LIMITS

§22.355 - The carrier frequency shall not depart from the reference frequency in excess of ± 2.5 ppm for mobile stations.

§24.235 - The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

§27.54 - The frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

§90.213 - The carrier frequency shall not depart from the reference frequency in excess of ± 2.5 ppm for mobile stations.

TEST PROCEDURE

Per KDB 971168 D01 Power Meas License Digital Systems v02r02

MODES TESTED

CDMA, LTE

RESULTS

See the following pages.

10.4.1. FREQUENCY STABILITY RESULTS

LTE Band 2, Freq: 1880MHz- MID CHANNEL

Reference Frequency: PCS Mid Channel		1880	MHz @ 20°C	
Limit: to stay +/- 2.5 ppm =		4700.000	Hz	
Power Supply (Vdc)	Environment Temperature (°C)	Frequency Deviation Measured with Time Elapse		
		(MHz)	Delta (ppm)	Limit (ppm)
3.80	50	1879.999991	0.002	2.5
3.80	40	1879.999991	0.002	2.5
3.80	30	1879.999991	0.002	2.5
3.80	20	1879.999995	0	2.5
3.80	10	1879.999995	0.000	2.5
3.80	0	1879.999995	0.000	2.5
3.80	-10	1879.999994	0.001	2.5
3.80	-20	1879.999994	0.001	2.5
3.80	-30	1879.999994	0.001	2.5

Reference Frequency: PCS Mid Channel		1880	MHz @ 20°C	
Limit: to stay +/- 2.5 ppm =		4700.000	Hz	
Power Supply (Vdc)	Environment Temperature (°C)	Frequency Deviation Measured with Time Elapse		
		(MHz)	Delta (ppm)	Limit (ppm)
3.80	20	1879.999995	0	2.5
4.37	20	1879.999994	0.001	2.5
3.23(End of volt)	20	1879.999994	0.001	2.5

LTE Band 4, Freq: 1732.5MHz- MID CHANNEL

Reference Frequency: PCS Mid Channel 1732.5 MHz @ 20°C Limit: to stay +/- 2.5 ppm = 4331.250 Hz				
Power Supply (Vdc)	Environment Temperature (°C)	Frequency Deviation Measured with Time Elapse		
		(MHz)	Delta (ppm)	Limit (ppm)
3.80	50	1732.500000	0.002	2.5
3.80	40	1732.499994	0.006	2.5
3.80	30	1732.499992	0.007	2.5
3.80	20	1732.500004	0	2.5
3.80	10	1732.500004	0.000	2.5
3.80	0	1732.500005	-0.001	2.5
3.80	-10	1732.500005	0.000	2.5
3.80	-20	1732.500003	0.000	2.5
3.80	-30	1732.500008	-0.003	2.5

Reference Frequency: PCS Mid Channel 1732.5 MHz @ 20°C Limit: to stay +/- 2.5 ppm = 4331.250 Hz				
Power Supply (Vdc)	Environment Temperature (°C)	Frequency Deviation Measured with Time Elapse		
		(MHz)	Delta (ppm)	Limit (ppm)
3.80	20	1732.500004	0	2.5
4.37	20	1732.500005	-0.001	2.5
3.23(End of volt)	20	1732.500003	0.000	2.5

LTE Band 12, Freq: 707.5 MHz-- MID CHANNEL

Reference Frequency: PCS Mid Channel 707.5 MHz @ 20°C				
Limit: to stay +/- 2.5 ppm = 1768.750 Hz				
Power Supply (Vdc)	Environment Temperature (°C)	Frequency Deviation Measured with Time Elapse		
		(MHz)	Delta (ppm)	Limit (ppm)
3.80	50	707.499980	0.032	2.5
3.80	40	707.499997	0.007	2.5
3.80	30	707.499998	0.006	2.5
3.80	20	707.500002	0	2.5
3.80	10	707.500002	0.001	2.5
3.80	0	707.500002	0.000	2.5
3.80	-10	707.500003	-0.001	2.5
3.80	-20	707.500001	0.001	2.5
3.80	-30	707.500002	0.000	2.5

707.500000 0.003

Reference Frequency: PCS Mid Channel 707.5 MHz @ 20°C				
Limit: to stay +/- 2.5 ppm = 1768.750 Hz				
Power Supply (Vdc)	Environment Temperature (°C)	Frequency Deviation Measured with Time Elapse		
		(MHz)	Delta (ppm)	Limit (ppm)
3.80	20	707.500002	0	2.5
4.37	20	707.5000021	0.000	2.5
3.23(End of volt)	20	707.500002	0.001	2.5

LTE Band 26, Freq: 831.5 MHz– MID CHANNEL

Reference Frequency: PCS Mid Channel 831.5 MHz @ 20°C				
Limit: to stay +/- 2.5 ppm = 2078.750 Hz				
Power Supply (Vdc)	Environment Temperature (°C)	Frequency Deviation Measured with Time Elapse		
		(MHz)	Delta (ppm)	Limit (ppm)
3.80	50	831.499998	0.002	2.5
3.80	40	831.499997	0.002	2.5
3.80	30	831.499997	0.002	2.5
3.80	20	831.499999	0	2.5
3.80	10	831.500002	-0.003	2.5
3.80	0	831.500003	-0.004	2.5
3.80	-10	831.500002	-0.004	2.5
3.80	-20	831.500003	-0.005	2.5
3.80	-30	831.500003	-0.005	2.5

Reference Frequency: PCS Mid Channel 831.5 MHz @ 20°C				
Limit: to stay +/- 2.5 ppm = 2078.750 Hz				
Power Supply (Vdc)	Environment Temperature (°C)	Frequency Deviation Measured with Time Elapse		
		(MHz)	Delta (ppm)	Limit (ppm)
3.80	20	831.499999	0	2.5
4.37	20	831.5000032	-0.005	2.5
3.23(End of volt)	20	831.5000031	-0.005	2.5

LTE Band 41, Freq: 2593 MHz- MID CHANNEL

Reference Frequency: PCS Mid Channel 2593 MHz @ 20°C Limit: to stay +/- 2.5 ppm = 6482.500 Hz				
Power Supply (Vdc)	Environment Temperature (°C)	Frequency Deviation Measured with Time Elapse		
		(MHz)	Delta (ppm)	Limit (ppm)
3.80	50	2593.000017	-0.003	2.5
3.80	40	2593.000014	-0.001	2.5
3.80	30	2593.000013	-0.001	2.5
3.80	20	2593.000010	0	2.5
3.80	10	2593.000010	0.000	2.5
3.80	0	2593.000010	0.000	2.5
3.80	-10	2593.000012	-0.001	2.5
3.80	-20	2593.000016	-0.002	2.5
3.80	-30	2593.000017	-0.002	2.5

Reference Frequency: PCS Mid Channel 2593 MHz @ 20°C Limit: to stay +/- 2.5 ppm = 6482.500 Hz				
Power Supply (Vdc)	Environment Temperature (°C)	Frequency Deviation Measured with Time Elapse		
		(MHz)	Delta (ppm)	Limit (ppm)
3.80	20	2593.000010	0	2.5
4.37	20	2593.000022	-0.005	2.5
3.23(End of volt)	20	2593.000012	-0.001	2.5

11. RADIATED TEST RESULTS

11.1. RADIATED POWER (ERP & EIRP)

RULE PART(S)

FCC: §2.1046, §22.913, §24.232, §27 and § 90.635.

LIMITS

22.913(a) - The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts.

24.232(c) - Mobile/portable stations are limited to 2 watts e.i.r.p. peak power and the equipment must employ means to limit the power to the minimum necessary for successful communications.

27.50(b) - (10) Portable stations (hand-held devices) transmitting in the 746-757 MHz, 776-788 MHz, and 805-806 MHz bands are limited to 3 watts ERP. (LTE B13)

27.50(c) - (10) Portable stations (hand-held devices) are limited to 3 watts ERP; (LTE B17)

27.50(d) - (4) Fixed, mobile, and portable (hand-held) stations operating in the 1710-1755 MHz band and mobile and portable stations operating in the 1695-1710 MHz and 1755-1780 MHz bands are limited to 1 watt EIRP.(Band 4)

27.50(h) - (2) Mobile stations are limited to 2.0 watts EIRP. All user stations are limited to 2.0 watts transmitter output power.(LTE B41 & 7)

90.635(b) - The maximum output power of the transmitter for mobile stations is 100 watts (20 dBw). (LTE B26)
In addition, when the transmitter power is measured in terms of average value, the peak-to-average ratio of the power shall not exceed 13dB.

TEST PROCEDURE

ANSI / TIA / EIA 603C Clause 2.2.17; PSA setting reference to 971168 D01 v02r02

For peak power measurement with a PSA:

a) Set the RBW \geq OBW; b) Set VBW $\geq 3 \times$ RBW; c) Set span $\geq 2 \times$ RBW; d) Sweep time = auto couple; e) Detector = peak; f) Ensure that the number of measurement points \geq span/RBW; g) Trace mode = max hold;

For average power measurement with a PSA:

a) Set span to at least 1.5 times the OBW; b) Set RBW = 1-5% of the OBW, not to exceed 1 MHz; c) Set VBW $\geq 3 \times$ RBW; d) Set number of points in sweep $\geq 2 \times$ span / RBW; e) Sweep time = auto-couple; f) Detector = RMS (power averaging); g) Use free run trigger If burst duty cycle ≥ 98 ; h) Use trigger to capture bursts If burst duty cycle < 98 ; i) Trace average at least 100 traces in power averaging (*i.e.*, RMS) mode. j) Compute the power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function.

MODES TESTED

CDMA, LTE

RESULTS

11.1.1. ERP/EIRP RESULTS

CDMA

Band	Mode	Channel	f(MHz)	ERP / EIRP	
				dBm	mW
BC10	1xRTT	476	817.9	22.50	177.87
		580	820.5	22.74	187.97
		684	823.1	23.30	213.85
	EVDO REL. 0	476	817.9	22.60	181.97
		580	820.5	22.62	182.81
		684	823.1	23.30	213.80

Band	Mode	Channel	f(MHz)	ERP / EIRP	
				dBm	mW
BC0	1xRTT	1013	824.7	22.40	173.82
		384	836.52	22.60	182.01
		777	848.31	23.50	223.92
	EVDO REL. 0	1013	824.7	21.20	131.83
		384	836.52	21.70	147.91
		777	848.31	22.70	186.21

Band	Mode	Channel	f(MHz)	ERP / EIRP	
				dBm	mW
BC1	1xRTT	25	1851.25	25.30	338.84
		600	1880	26.00	398.11
		1175	1908.75	26.50	446.68
	EVDO REL. 0	25	1851.25	25.50	354.81
		600	1880	25.90	389.05
		1175	1908.75	26.38	434.51

11.1.2. LTE ERP/EIRP RESULTS

LTE Band 2

Band	BW (MHz)	Mode	RB/RB Size	f (MHz)	EIRP	
					dBm	mW
LTE2	20	QPSK	1/0	1860	24.68	293.76
			1/0	1880	25.10	323.59
			1/0	1900	26.30	426.58
		16QAM	1/0	1860	24.20	263.03
			1/0	1880	24.50	281.84
			1/0	1900	25.80	380.19
	15	QPSK	1/0	1857.5	24.80	302
			1/0	1880	25.30	338.84
			1/0	1902.5	26.10	407.38
		16QAM	1/0	1857.5	24.30	269.15
			1/0	1880	24.70	295.12
			1/0	1902.5	25.60	363.08
	10	QPSK	1/0	1855	25.20	331.13
			1/0	1880	25.00	316.23
			1/0	1905	26.10	407.38
		16QAM	1/0	1855	24.60	288.4
			1/0	1880	24.38	274.16
			1/0	1905	25.50	354.81
	5	QPSK	1/0	1852.5	25.10	323.59
			1/0	1880	24.70	295.12
			1/0	1907.5	25.80	380.19
		16QAM	1/0	1852.5	24.70	295.12
			1/0	1880	24.16	260.62
			1/0	1907.5	25.30	338.84

Band	BW (MHz)	Mode	RB/RB Size	f (MHz)	EIRP	
					dBm	mW
LTE2	3	QPSK	1/0	1851.5	24.70	295.12
			1/0	1880	25.44	349.95
			1/0	1908.5	26.66	463.45
		16QAM	1/0	1851.5	24.28	267.92
			1/0	1880	24.86	306.2
			1/0	1908.5	26.28	424.62
	1.4	QPSK	1/0	1850.7	24.84	304.44
			1/0	1880	24.95	312.61
			1/0	1909.3	25.47	352.05
		16QAM	1/0	1850.7	24.38	274.16
			1/0	1880	24.60	288.4
			1/0	1909.3	25.10	323.59

LTE Band 4

Band	BW (MHz)	Mode	RB/RB Size	f (MHz)	ERP / EIRP	
					dBm	mW
LTE4	20	QPSK	1/0	1720	22.68	185.22
			1/0	1732.5	22.97	198.2
			1/0	1745	24.23	264.56
		16QAM	1/0	1720	22.12	162.81
			1/0	1732.5	22.47	176.65
			1/0	1745	23.73	235.79
	15	QPSK	1/0	1717.5	22.83	191.69
			1/0	1732.5	23.92	246.66
			1/0	1747.5	24.52	282.89
		16QAM	1/0	1717.5	22.39	173.22
			1/0	1732.5	23.35	216.32
			1/0	1747.5	24.02	252.12
	10	QPSK	1/0	1715	23.02	200.22
			1/0	1732.5	23.02	200.5
			1/0	1750	24.71	295.6
		16QAM	1/0	1715	22.54	179.27
			1/0	1732.5	22.46	176.24
			1/0	1750	24.21	263.45
	5	QPSK	1/0	1712.5	22.54	179.65
			1/0	1732.5	23.57	227.56
			1/0	1752.5	23.96	248.76
		16QAM	1/0	1712.5	22.14	163.84
			1/0	1732.5	22.94	196.84
			1/0	1752.5	23.55	226.35

Band	BW (MHz)	Mode	RB/RB Size	f (MHz)	ERP / EIRP	
					dBm	mW
LTE4	3	QPSK	1/0	1711.5	22.72	186.98
			1/0	1732.5	23.04	201.42
			1/0	1753.5	24.06	254.93
		16QAM	1/0	1711.5	22.38	172.9
			1/0	1732.5	22.67	184.97
			1/0	1753.5	23.67	233.03
	1.4	QPSK	1/0	1710.7	22.65	184.11
			1/0	1732.5	22.87	193.69
			1/0	1754.3	24.09	256.52
		16QAM	1/0	1710.7	22.25	167.91
			1/0	1732.5	22.50	177.87
			1/0	1754.3	23.69	233.95

LTE Band 5

Band	BW (MHz)	Mode	RB/RB Size	f (MHz)	ERP / EIRP	
					dBm	mW
LTE5	10	QPSK	1/0	829	21.73	148.94
			1/0	836.5	21.60	144.54
			1/0	844	22.80	190.55
		16QAM	1/0	829	20.76	119.12
			1/0	836.5	20.68	116.95
			1/0	844	21.87	153.82
	5	QPSK	1/0	826.5	21.54	142.56
			1/0	836.5	21.63	145.55
			1/0	846.5	22.70	186.21
		16QAM	1/0	826.5	20.50	112.2
			1/0	836.5	20.70	117.49
			1/0	846.5	21.80	151.36
	3	QPSK	1/0	825.5	21.67	146.89
			1/0	836.5	21.79	151.01
			1/0	847.5	22.80	190.55
		16QAM	1/0	825.5	20.80	120.23
			1/0	836.5	20.96	124.74
			1/0	847.5	21.94	156.31
	1.4	QPSK	1/0	824.7	21.48	140.6
			1/0	836.5	21.80	151.36
			1/0	848.3	22.70	186.21
		16QAM	1/0	824.7	20.50	112.2
			1/0	836.5	20.90	123.03
			1/0	848.3	21.70	147.91

LTE Band 12

Band	BW (MHz)	Mode	RB/RB Size	f (MHz)	ERP / EIRP	
					dBm	mW
LTE12	10	QPSK	1/0	704	19.70	93.33
			1/0	707.5	19.98	99.54
			1/0	711	20.20	104.71
		16QAM	1/0	704	19.24	83.95
			1/0	707.5	19.66	92.47
			1/0	711	19.78	95.06
	5	QPSK	1/0	701.5	19.40	87.1
			1/0	707.5	19.90	97.72
			1/0	713.5	20.30	107.15
		16QAM	1/0	701.5	18.93	78.16
			1/0	707.5	19.46	88.31
			1/0	713.5	19.78	95.06
	3	QPSK	1/0	700.5	19.80	95.5
			1/0	707.5	19.96	99.08
			1/0	714.5	20.40	109.65
		16QAM	1/0	700.5	19.28	84.72
			1/0	707.5	19.50	89.13
			1/0	714.5	19.90	97.72
	1.4	QPSK	1/0	699.7	19.60	91.2
			1/0	707.5	19.85	96.61
			1/0	715.3	20.42	110.15
		16QAM	1/0	699.7	19.08	80.91
			1/0	707.5	19.40	87.1
			1/0	715.3	19.90	97.72

LTE Band 25

Band	BW (MHz)	Mode	RB/RB Size	f (MHz)	ERP / EIRP	
					dBm	mW
LTE25	20	QPSK	1/0	1860	24.68	293.76
			1/0	1882.5	25.10	323.59
			1/0	1905	26.30	426.58
		16QAM	1/0	1860	24.20	263.03
			1/0	1882.5	24.50	281.84
			1/0	1905	25.80	380.19
	15	QPSK	1/0	1857.5	24.80	302
			1/0	1882.5	25.30	338.84
			1/0	1907.5	26.10	407.38
		16QAM	1/0	1857.5	24.30	269.15
			1/0	1882.5	24.70	295.12
			1/0	1907.5	25.60	363.08
	10	QPSK	1/0	1855	25.20	331.13
			1/0	1882.5	25.00	316.23
			1/0	1910	26.10	407.38
		16QAM	1/0	1855	24.60	288.4
			1/0	1882.5	24.38	274.16
			1/0	1910	25.50	354.81
	5	QPSK	1/0	1852.5	25.10	323.59
			1/0	1882.5	24.70	295.12
			1/0	1912.5	25.80	380.19
		16QAM	1/0	1852.5	24.70	295.12
			1/0	1882.5	24.16	260.62
			1/0	1912.5	25.30	338.84

Band	BW (MHz)	Mode	RB/RB Size	f (MHz)	ERP / EIRP	
					dBm	mW
LTE25	3	QPSK	1/0	1851.5	24.70	295.12
			1/0	1882.5	25.44	349.95
			1/0	1913.5	26.66	463.45
		16QAM	1/0	1851.5	24.28	267.92
			1/0	1882.5	24.86	306.2
			1/0	1913.5	26.28	424.62
	1.4	QPSK	1/0	1850.7	24.84	304.44
			1/0	1882.5	24.95	312.61
			1/0	1914.3	25.47	352.05
		16QAM	1/0	1850.7	24.38	274.16
			1/0	1882.5	24.60	288.4
			1/0	1914.3	25.10	323.59

LTE Band 26

Band	BW (MHz)	Mode	RB/RB Size	f (MHz)	ERP / EIRP	
					dBm	mW
LTE26	15	QPSK	1/0	831.5	20.96	124.74
			1/0	836.5	21.88	154.17
			1/0	841.5	22.77	189.23
		16QAM	1/0	821.5	21.88	154.17
			1/0	831.5	20.96	124.74
			1/0	841.5	21.90	154.88
	10	QPSK	1/0	819	21.73	148.94
			1/0	831.5	21.60	144.54
			1/0	844	22.80	190.55
		16QAM	1/0	819	20.76	119.12
			1/0	831.5	20.68	116.95
			1/0	844	21.87	153.82
	5	QPSK	1/0	816.5	21.54	142.56
			1/0	831.5	21.63	145.55
			1/0	846.5	22.70	186.21
		16QAM	1/0	816.5	20.50	112.20
			1/0	831.5	20.70	117.49
			1/0	846.5	21.80	151.36
	3	QPSK	1/0	815.5	21.67	146.89
			1/0	831.5	21.79	151.01
			1/0	847.5	22.80	190.55
		16QAM	1/0	815.5	20.80	120.23
			1/0	831.5	20.96	124.74
			1/0	847.5	21.94	156.31
	1.4	QPSK	1/0	814.7	21.48	140.60
			1/0	831.5	21.80	151.36
			1/0	848.3	22.70	186.21
		16QAM	1/0	814.7	20.50	112.20
			1/0	831.5	20.90	123.03
			1/0	848.3	21.70	147.91

LTE Band 41

Band	BW (MHz)	Mode	RB/RB Size	f (MHz)	ERP / EIRP	
					dBm	mW
LTE41	20	QPSK	1/0	2506	24.10	257.03
			1/0	2593	24.21	263.38
			1/0	2680	24.43	277.05
		16QAM	1/0	2506	23.38	217.76
			1/0	2593	23.59	228.34
			1/0	2680	23.83	241.3
LTE41	15	QPSK	1/0	2503.5	24.27	267.24
			1/0	2593	24.32	270.14
			1/0	2682.5	25.13	326.02
		16QAM	1/0	2503.5	23.68	233.29
			1/0	2593	23.69	233.66
			1/0	2682.5	24.43	277.49
LTE41	10	QPSK	1/0	2501	24.28	267.75
			1/0	2593	23.61	229.4
			1/0	2685	24.75	298.48
		16QAM	1/0	2501	23.78	238.69
			1/0	2593	23.01	199.8
			1/0	2685	24.18	261.77
LTE41	5	QPSK	1/0	2498.5	24.57	286.67
			1/0	2593	25.09	322.54
			1/0	2687.5	24.35	272.02
		16QAM	1/0	2498.5	23.47	222.52
			1/0	2593	23.91	245.8
			1/0	2687.5	23.25	211.15

11.1.3. ERP/EIRP PLOTS

CDMA

Band BC1	High Frequency Substitution Measurement UL Verification Services Chamber G								
	Company: LG Project #: 15I20413 Date: 4/7/2015 Test Engineer: R.Z Configuration: EUT Only Mode: CDMA EVDO BC1								
	Test Equipment: Receiving: Horn T711, and Chamber G SMA Cables Substitution: Horn T59 Substitution, 6ft SMA Cable								
	f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
	Low Ch								
	1.8513	15.8	V	0.90	9.20	24.10	33.0	-8.9	
	1.8513	17.2	H	0.90	9.20	25.50	33.0	-7.5	
	Mid Ch								
	1.8800	15.8	V	0.90	9.20	24.10	33.0	-8.9	
	1.8800	17.6	H	0.90	9.20	25.90	33.0	-7.1	
High Ch									
1.9088	16.7	V	0.90	9.10	24.90	33.0	-8.1		
1.9088	18.2	H	0.90	9.10	26.38	33.0	-6.6		
Rev. 3.17.11									

Band BC1 1xRTT	High Frequency Substitution Measurement UL Verification Services Chamber G								
	Company: LG Project #: 15I20413 Date: 4/7/2015 Test Engineer: R.Z Configuration: EUT Only Mode: CDMA RTT BC1								
	Test Equipment: Receiving: Horn T711, and Chamber G SMA Cables Substitution: Horn T59 Substitution, 6ft SMA Cable								
	f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
	Low Ch								
	1.8513	15.9	V	0.90	9.20	24.20	33.0	-8.8	
	1.8513	17.0	H	0.90	9.20	25.30	33.0	-7.7	
	Mid Ch								
	1.8800	15.9	V	0.90	9.20	24.20	33.0	-8.8	
	1.8800	17.7	H	0.90	9.20	26.00	33.0	-7.0	
High Ch									
1.9088	16.9	V	0.90	9.10	25.06	33.0	-7.9		
1.9088	18.3	H	0.90	9.10	26.50	33.0	-6.5		
Rev. 3.17.11									

Band BC0	High Frequency Substitution Measurement UL Verification Services Chamber G																																																																																																					
	Company:		LG																																																																																																			
	Project #:		15I20413																																																																																																			
	Date:		4/8/2015																																																																																																			
	Test Engineer:		R.Z																																																																																																			
	Configuration:		EUT Only																																																																																																			
	Mode:		CDMA EVDO BC0																																																																																																			
	Test Equipment:																																																																																																					
	Receiving: T899, and Chamber G Cable																																																																																																					
	Substitution: Dipole T273, 6ft SMA Cable																																																																																																					
<table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBd)</th> <th>ERP (dBm)</th> <th>Limit (dBm)</th> <th>Margin (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="10">Low Ch</td> </tr> <tr> <td>824.70</td> <td>16.80</td> <td>V</td> <td>0.9</td> <td>0.0</td> <td>15.90</td> <td>38.5</td> <td>-22.5</td> <td>-20.6</td> </tr> <tr> <td>824.70</td> <td>22.10</td> <td>H</td> <td>0.9</td> <td>0.0</td> <td>21.20</td> <td>38.5</td> <td>-17.2</td> <td>-12.8</td> </tr> <tr> <td colspan="10">Mid Ch</td> </tr> <tr> <td>836.52</td> <td>16.58</td> <td>V</td> <td>0.9</td> <td>0.0</td> <td>15.68</td> <td>38.5</td> <td>-22.8</td> <td>-20.3</td> </tr> <tr> <td>836.52</td> <td>22.60</td> <td>H</td> <td>0.9</td> <td>0.0</td> <td>21.70</td> <td>38.5</td> <td>-16.7</td> <td>-12.4</td> </tr> <tr> <td colspan="10">High Ch</td> </tr> <tr> <td>848.31</td> <td>18.60</td> <td>V</td> <td>0.9</td> <td>0.0</td> <td>17.70</td> <td>38.5</td> <td>-20.7</td> <td>-20.0</td> </tr> <tr> <td>848.31</td> <td>23.60</td> <td>H</td> <td>0.9</td> <td>0.0</td> <td>22.70</td> <td>38.5</td> <td>-15.7</td> <td>-12.1</td> </tr> </tbody> </table>										f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)	Notes	Low Ch										824.70	16.80	V	0.9	0.0	15.90	38.5	-22.5	-20.6	824.70	22.10	H	0.9	0.0	21.20	38.5	-17.2	-12.8	Mid Ch										836.52	16.58	V	0.9	0.0	15.68	38.5	-22.8	-20.3	836.52	22.60	H	0.9	0.0	21.70	38.5	-16.7	-12.4	High Ch										848.31	18.60	V	0.9	0.0	17.70	38.5	-20.7	-20.0	848.31	23.60	H	0.9	0.0	22.70	38.5	-15.7	-12.1
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)	Notes																																																																																														
Low Ch																																																																																																						
824.70	16.80	V	0.9	0.0	15.90	38.5	-22.5	-20.6																																																																																														
824.70	22.10	H	0.9	0.0	21.20	38.5	-17.2	-12.8																																																																																														
Mid Ch																																																																																																						
836.52	16.58	V	0.9	0.0	15.68	38.5	-22.8	-20.3																																																																																														
836.52	22.60	H	0.9	0.0	21.70	38.5	-16.7	-12.4																																																																																														
High Ch																																																																																																						
848.31	18.60	V	0.9	0.0	17.70	38.5	-20.7	-20.0																																																																																														
848.31	23.60	H	0.9	0.0	22.70	38.5	-15.7	-12.1																																																																																														
Rev. 3.17.11																																																																																																						

Band BC0 1xRTT	High Frequency Substitution Measurement UL Verification Services Chamber G																																																																																																					
	Company:		LG																																																																																																			
	Project #:		15I20415																																																																																																			
	Date:		4/7/2015																																																																																																			
	Test Engineer:		R.Z																																																																																																			
	Configuration:		EUT Only																																																																																																			
	Mode:		CDMA RTT BC0																																																																																																			
	Test Equipment:																																																																																																					
	Receiving: T899, and Chamber G Cable																																																																																																					
	Substitution: Dipole T273, 6ft SMA Cable																																																																																																					
<table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBd)</th> <th>ERP (dBm)</th> <th>Limit (dBm)</th> <th>Margin (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="10">Low Ch</td> </tr> <tr> <td>824.70</td> <td>16.85</td> <td>V</td> <td>0.9</td> <td>0.0</td> <td>15.95</td> <td>38.5</td> <td>-22.5</td> <td>-20.6</td> </tr> <tr> <td>824.70</td> <td>23.30</td> <td>H</td> <td>0.9</td> <td>0.0</td> <td>22.40</td> <td>38.5</td> <td>-16.0</td> <td>-11.6</td> </tr> <tr> <td colspan="10">Mid Ch</td> </tr> <tr> <td>836.52</td> <td>16.49</td> <td>V</td> <td>0.9</td> <td>0.0</td> <td>15.59</td> <td>38.5</td> <td>-22.9</td> <td>-20.4</td> </tr> <tr> <td>836.52</td> <td>23.50</td> <td>H</td> <td>0.9</td> <td>0.0</td> <td>22.60</td> <td>38.5</td> <td>-15.8</td> <td>-11.5</td> </tr> <tr> <td colspan="10">High Ch</td> </tr> <tr> <td>848.31</td> <td>18.40</td> <td>V</td> <td>0.9</td> <td>0.0</td> <td>17.50</td> <td>38.5</td> <td>-20.9</td> <td>-20.2</td> </tr> <tr> <td>848.31</td> <td>24.40</td> <td>H</td> <td>0.9</td> <td>0.0</td> <td>23.50</td> <td>38.5</td> <td>-14.9</td> <td>-11.3</td> </tr> </tbody> </table>										f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)	Notes	Low Ch										824.70	16.85	V	0.9	0.0	15.95	38.5	-22.5	-20.6	824.70	23.30	H	0.9	0.0	22.40	38.5	-16.0	-11.6	Mid Ch										836.52	16.49	V	0.9	0.0	15.59	38.5	-22.9	-20.4	836.52	23.50	H	0.9	0.0	22.60	38.5	-15.8	-11.5	High Ch										848.31	18.40	V	0.9	0.0	17.50	38.5	-20.9	-20.2	848.31	24.40	H	0.9	0.0	23.50	38.5	-14.9	-11.3
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)	Notes																																																																																														
Low Ch																																																																																																						
824.70	16.85	V	0.9	0.0	15.95	38.5	-22.5	-20.6																																																																																														
824.70	23.30	H	0.9	0.0	22.40	38.5	-16.0	-11.6																																																																																														
Mid Ch																																																																																																						
836.52	16.49	V	0.9	0.0	15.59	38.5	-22.9	-20.4																																																																																														
836.52	23.50	H	0.9	0.0	22.60	38.5	-15.8	-11.5																																																																																														
High Ch																																																																																																						
848.31	18.40	V	0.9	0.0	17.50	38.5	-20.9	-20.2																																																																																														
848.31	24.40	H	0.9	0.0	23.50	38.5	-14.9	-11.3																																																																																														
Rev. 3.17.11																																																																																																						

Band BC10	High Frequency Substitution Measurement UL Verification Services Chamber G																																																																																																	
	Company:		LG																																																																																															
	Project #:		15I20413																																																																																															
	Date:		4/8/2015																																																																																															
	Test Engineer:		R.Z																																																																																															
	Configuration:		EUT Only																																																																																															
	Mode:		CDMA EVDO BC10																																																																																															
	Test Equipment:																																																																																																	
	Receiving: T899, and Chamber G Cable																																																																																																	
	Substitution: Dipole T273, 6ft SMA Cable																																																																																																	
<table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBd)</th> <th>ERP (dBm)</th> <th>Limit (dBm)</th> <th>Margin (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="9">Low Ch</td> </tr> <tr> <td>817.90</td> <td>17.10</td> <td>V</td> <td>0.9</td> <td>0.0</td> <td>16.20</td> <td>38.5</td> <td>-22.2</td> <td></td> </tr> <tr> <td>817.90</td> <td>23.50</td> <td>H</td> <td>0.9</td> <td>0.0</td> <td>22.60</td> <td>38.5</td> <td>-15.8</td> <td></td> </tr> <tr> <td colspan="9">Mid Ch</td> </tr> <tr> <td>820.50</td> <td>16.49</td> <td>V</td> <td>0.9</td> <td>0.0</td> <td>15.59</td> <td>38.5</td> <td>-22.9</td> <td></td> </tr> <tr> <td>820.50</td> <td>23.52</td> <td>H</td> <td>0.9</td> <td>0.0</td> <td>22.62</td> <td>38.5</td> <td>-15.8</td> <td></td> </tr> <tr> <td colspan="9">High Ch</td> </tr> <tr> <td>823.10</td> <td>18.10</td> <td>V</td> <td>0.9</td> <td>0.0</td> <td>17.20</td> <td>38.5</td> <td>-21.2</td> <td></td> </tr> <tr> <td>823.10</td> <td>24.20</td> <td>H</td> <td>0.9</td> <td>0.0</td> <td>23.30</td> <td>38.5</td> <td>-15.1</td> <td></td> </tr> </tbody> </table>									f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)	Notes	Low Ch									817.90	17.10	V	0.9	0.0	16.20	38.5	-22.2		817.90	23.50	H	0.9	0.0	22.60	38.5	-15.8		Mid Ch									820.50	16.49	V	0.9	0.0	15.59	38.5	-22.9		820.50	23.52	H	0.9	0.0	22.62	38.5	-15.8		High Ch									823.10	18.10	V	0.9	0.0	17.20	38.5	-21.2		823.10	24.20	H	0.9	0.0	23.30	38.5	-15.1	
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)	Notes																																																																																										
Low Ch																																																																																																		
817.90	17.10	V	0.9	0.0	16.20	38.5	-22.2																																																																																											
817.90	23.50	H	0.9	0.0	22.60	38.5	-15.8																																																																																											
Mid Ch																																																																																																		
820.50	16.49	V	0.9	0.0	15.59	38.5	-22.9																																																																																											
820.50	23.52	H	0.9	0.0	22.62	38.5	-15.8																																																																																											
High Ch																																																																																																		
823.10	18.10	V	0.9	0.0	17.20	38.5	-21.2																																																																																											
823.10	24.20	H	0.9	0.0	23.30	38.5	-15.1																																																																																											
Rev. 3.17.11																																																																																																		

Band BC10 1xRTT	High Frequency Substitution Measurement UL Verification Services Chamber G																																																																																																	
	Company:		LG																																																																																															
	Project #:		15I20413																																																																																															
	Date:		4/7/2015																																																																																															
	Test Engineer:		R.Z																																																																																															
	Configuration:		EUT Only																																																																																															
	Mode:		CDMA RTT BC10																																																																																															
	Test Equipment:																																																																																																	
	Receiving: T899, and Chamber G Cable																																																																																																	
	Substitution: Dipole T273, 6ft SMA Cable																																																																																																	
<table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBd)</th> <th>ERP (dBm)</th> <th>Limit (dBm)</th> <th>Margin (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="9">Low Ch</td> </tr> <tr> <td>817.90</td> <td>16.06</td> <td>V</td> <td>0.9</td> <td>0.0</td> <td>15.16</td> <td>38.5</td> <td>-23.3</td> <td></td> </tr> <tr> <td>817.90</td> <td>23.40</td> <td>H</td> <td>0.9</td> <td>0.0</td> <td>22.50</td> <td>38.5</td> <td>-15.9</td> <td></td> </tr> <tr> <td colspan="9">Mid Ch</td> </tr> <tr> <td>820.50</td> <td>15.68</td> <td>V</td> <td>0.9</td> <td>0.0</td> <td>14.78</td> <td>38.5</td> <td>-23.7</td> <td></td> </tr> <tr> <td>820.50</td> <td>23.64</td> <td>H</td> <td>0.9</td> <td>0.0</td> <td>22.74</td> <td>38.5</td> <td>-15.7</td> <td></td> </tr> <tr> <td colspan="9">High Ch</td> </tr> <tr> <td>823.10</td> <td>17.20</td> <td>V</td> <td>0.9</td> <td>0.0</td> <td>16.30</td> <td>38.5</td> <td>-22.1</td> <td></td> </tr> <tr> <td>823.10</td> <td>24.20</td> <td>H</td> <td>0.9</td> <td>0.0</td> <td>23.30</td> <td>38.5</td> <td>-15.1</td> <td></td> </tr> </tbody> </table>									f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)	Notes	Low Ch									817.90	16.06	V	0.9	0.0	15.16	38.5	-23.3		817.90	23.40	H	0.9	0.0	22.50	38.5	-15.9		Mid Ch									820.50	15.68	V	0.9	0.0	14.78	38.5	-23.7		820.50	23.64	H	0.9	0.0	22.74	38.5	-15.7		High Ch									823.10	17.20	V	0.9	0.0	16.30	38.5	-22.1		823.10	24.20	H	0.9	0.0	23.30	38.5	-15.1	
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)	Notes																																																																																										
Low Ch																																																																																																		
817.90	16.06	V	0.9	0.0	15.16	38.5	-23.3																																																																																											
817.90	23.40	H	0.9	0.0	22.50	38.5	-15.9																																																																																											
Mid Ch																																																																																																		
820.50	15.68	V	0.9	0.0	14.78	38.5	-23.7																																																																																											
820.50	23.64	H	0.9	0.0	22.74	38.5	-15.7																																																																																											
High Ch																																																																																																		
823.10	17.20	V	0.9	0.0	16.30	38.5	-22.1																																																																																											
823.10	24.20	H	0.9	0.0	23.30	38.5	-15.1																																																																																											
Rev. 3.17.11																																																																																																		

LTE Band 2

Band LTE2 20MHz 16QAM	High Frequency Substitution Measurement UL Verification Services, Inc.																																																																																																	
	Company:		LG																																																																																															
	Project #:		15I20413																																																																																															
	Date:		4/6/2015																																																																																															
	Test Engineer:		R.Z																																																																																															
	Configuration:		EUT Only																																																																																															
	Location:		Chamber G																																																																																															
	Mode:		LTE_16QAM Band 2 Fundamentals, 20MHz Bandwidth																																																																																															
	Test Equipment:		Receiving: Horn T711, and Chamber G SMA Cables Substitution: Horn T59, 6ft SMA Cable																																																																																															
	<table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBi)</th> <th>EIRP (dBm)</th> <th>Limit (dBm)</th> <th>Delta (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="9">Low Ch</td> </tr> <tr> <td>1860.00</td> <td>7.60</td> <td>V</td> <td>0.9</td> <td>9.2</td> <td>15.90</td> <td>33.0</td> <td>-17.1</td> <td></td> </tr> <tr> <td>1860.00</td> <td>15.90</td> <td>H</td> <td>0.9</td> <td>9.2</td> <td>24.20</td> <td>33.0</td> <td>-8.8</td> <td></td> </tr> <tr> <td colspan="9">Mid Ch</td> </tr> <tr> <td>1880.00</td> <td>8.75</td> <td>V</td> <td>0.9</td> <td>9.2</td> <td>17.05</td> <td>33.0</td> <td>-16.0</td> <td></td> </tr> <tr> <td>1880.00</td> <td>16.20</td> <td>H</td> <td>0.9</td> <td>9.2</td> <td>24.50</td> <td>33.0</td> <td>-8.5</td> <td></td> </tr> <tr> <td colspan="9">High Ch</td> </tr> <tr> <td>1900.00</td> <td>9.80</td> <td>V</td> <td>0.9</td> <td>9.1</td> <td>18.00</td> <td>33.0</td> <td>-15.0</td> <td></td> </tr> <tr> <td>1900.00</td> <td>17.60</td> <td>H</td> <td>0.9</td> <td>9.1</td> <td>25.80</td> <td>33.0</td> <td>-7.2</td> <td></td> </tr> </tbody> </table>									f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									1860.00	7.60	V	0.9	9.2	15.90	33.0	-17.1		1860.00	15.90	H	0.9	9.2	24.20	33.0	-8.8		Mid Ch									1880.00	8.75	V	0.9	9.2	17.05	33.0	-16.0		1880.00	16.20	H	0.9	9.2	24.50	33.0	-8.5		High Ch									1900.00	9.80	V	0.9	9.1	18.00	33.0	-15.0		1900.00	17.60	H	0.9	9.1	25.80	33.0	-7.2
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																										
Low Ch																																																																																																		
1860.00	7.60	V	0.9	9.2	15.90	33.0	-17.1																																																																																											
1860.00	15.90	H	0.9	9.2	24.20	33.0	-8.8																																																																																											
Mid Ch																																																																																																		
1880.00	8.75	V	0.9	9.2	17.05	33.0	-16.0																																																																																											
1880.00	16.20	H	0.9	9.2	24.50	33.0	-8.5																																																																																											
High Ch																																																																																																		
1900.00	9.80	V	0.9	9.1	18.00	33.0	-15.0																																																																																											
1900.00	17.60	H	0.9	9.1	25.80	33.0	-7.2																																																																																											

Band LTE2 20MHz QPSK	High Frequency Substitution Measurement UL Verification Services, Inc.																																																																																																					
	Company:		LG																																																																																																			
	Project #:		15I20413																																																																																																			
	Date:		4/6/2015																																																																																																			
	Test Engineer:		R.Z																																																																																																			
	Configuration:		EUT Only																																																																																																			
	Location:		Chamber G																																																																																																			
	Mode:		LTE_QPSK Band 2 Fundamentals, 20MHz Bandwidth																																																																																																			
	Test Equipment:		Receiving: Horn T711, and Chamber G SMA Cables Substitution: Horn T59, 6ft SMA Cable																																																																																																			
	<table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBi)</th> <th>EIRP (dBm)</th> <th>Limit (dBm)</th> <th>Delta (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="10">Low Ch</td> </tr> <tr> <td>1860.00</td> <td>8.10</td> <td>V</td> <td>0.9</td> <td>9.2</td> <td>16.40</td> <td>33.0</td> <td>-16.6</td> <td></td> </tr> <tr> <td>1860.00</td> <td>16.38</td> <td>H</td> <td>0.9</td> <td>9.2</td> <td>24.68</td> <td>33.0</td> <td>-8.3</td> <td></td> </tr> <tr> <td colspan="10">Mid Ch</td> </tr> <tr> <td>1880.00</td> <td>9.30</td> <td>V</td> <td>0.9</td> <td>9.2</td> <td>17.60</td> <td>33.0</td> <td>-15.4</td> <td></td> </tr> <tr> <td>1880.00</td> <td>16.80</td> <td>H</td> <td>0.9</td> <td>9.2</td> <td>25.10</td> <td>33.0</td> <td>-7.9</td> <td></td> </tr> <tr> <td colspan="10">High Ch</td> </tr> <tr> <td>1900.00</td> <td>10.30</td> <td>V</td> <td>0.9</td> <td>9.1</td> <td>18.50</td> <td>33.0</td> <td>-14.5</td> <td></td> </tr> <tr> <td>1900.00</td> <td>18.10</td> <td>H</td> <td>0.9</td> <td>9.1</td> <td>26.30</td> <td>33.0</td> <td>-6.7</td> <td></td> </tr> </tbody> </table>										f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch										1860.00	8.10	V	0.9	9.2	16.40	33.0	-16.6		1860.00	16.38	H	0.9	9.2	24.68	33.0	-8.3		Mid Ch										1880.00	9.30	V	0.9	9.2	17.60	33.0	-15.4		1880.00	16.80	H	0.9	9.2	25.10	33.0	-7.9		High Ch										1900.00	10.30	V	0.9	9.1	18.50	33.0	-14.5		1900.00	18.10	H	0.9	9.1	26.30	33.0	-6.7
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																														
Low Ch																																																																																																						
1860.00	8.10	V	0.9	9.2	16.40	33.0	-16.6																																																																																															
1860.00	16.38	H	0.9	9.2	24.68	33.0	-8.3																																																																																															
Mid Ch																																																																																																						
1880.00	9.30	V	0.9	9.2	17.60	33.0	-15.4																																																																																															
1880.00	16.80	H	0.9	9.2	25.10	33.0	-7.9																																																																																															
High Ch																																																																																																						
1900.00	10.30	V	0.9	9.1	18.50	33.0	-14.5																																																																																															
1900.00	18.10	H	0.9	9.1	26.30	33.0	-6.7																																																																																															

Band LTE2 15MHz 16QAM	High Frequency Substitution Measurement UL Verification Services, Inc.																																																																																																					
	Company:		LG																																																																																																			
	Project #:		15I20413																																																																																																			
	Date:		4/6/2015																																																																																																			
	Test Engineer:		R.Z																																																																																																			
	Configuration:		EUT Only																																																																																																			
	Location:		Chamber G																																																																																																			
	Mode:		LTE_16QAM Band 2 Fundamentals, 15MHz Bandwidth																																																																																																			
	Test Equipment:		Receiving: Horn T711, and Chamber G SMA Cables Substitution: Horn T59, 6ft SMA Cable																																																																																																			
	<table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBi)</th> <th>EIRP (dBm)</th> <th>Limit (dBm)</th> <th>Delta (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="10">Low Ch</td> </tr> <tr> <td>1857.50</td> <td>7.70</td> <td>V</td> <td>0.9</td> <td>9.2</td> <td>16.00</td> <td>33.0</td> <td>-17.0</td> <td></td> </tr> <tr> <td>1857.50</td> <td>16.00</td> <td>H</td> <td>0.9</td> <td>9.2</td> <td>24.30</td> <td>33.0</td> <td>-8.7</td> <td></td> </tr> <tr> <td colspan="10">Mid Ch</td> </tr> <tr> <td>1880.00</td> <td>8.63</td> <td>V</td> <td>0.9</td> <td>9.2</td> <td>16.93</td> <td>33.0</td> <td>-16.1</td> <td></td> </tr> <tr> <td>1880.00</td> <td>16.40</td> <td>H</td> <td>0.9</td> <td>9.2</td> <td>24.70</td> <td>33.0</td> <td>-8.3</td> <td></td> </tr> <tr> <td colspan="10">High Ch</td> </tr> <tr> <td>1902.50</td> <td>9.30</td> <td>V</td> <td>0.9</td> <td>9.1</td> <td>17.50</td> <td>33.0</td> <td>-15.5</td> <td></td> </tr> <tr> <td>1902.50</td> <td>17.40</td> <td>H</td> <td>0.9</td> <td>9.1</td> <td>25.60</td> <td>33.0</td> <td>-7.4</td> <td></td> </tr> </tbody> </table>										f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch										1857.50	7.70	V	0.9	9.2	16.00	33.0	-17.0		1857.50	16.00	H	0.9	9.2	24.30	33.0	-8.7		Mid Ch										1880.00	8.63	V	0.9	9.2	16.93	33.0	-16.1		1880.00	16.40	H	0.9	9.2	24.70	33.0	-8.3		High Ch										1902.50	9.30	V	0.9	9.1	17.50	33.0	-15.5		1902.50	17.40	H	0.9	9.1	25.60	33.0	-7.4
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																														
Low Ch																																																																																																						
1857.50	7.70	V	0.9	9.2	16.00	33.0	-17.0																																																																																															
1857.50	16.00	H	0.9	9.2	24.30	33.0	-8.7																																																																																															
Mid Ch																																																																																																						
1880.00	8.63	V	0.9	9.2	16.93	33.0	-16.1																																																																																															
1880.00	16.40	H	0.9	9.2	24.70	33.0	-8.3																																																																																															
High Ch																																																																																																						
1902.50	9.30	V	0.9	9.1	17.50	33.0	-15.5																																																																																															
1902.50	17.40	H	0.9	9.1	25.60	33.0	-7.4																																																																																															

Band LTE2 15MHz QPSK	High Frequency Substitution Measurement UL Verification Services, Inc.																																																																																																	
	Company:		LG																																																																																															
	Project #:		15I20413																																																																																															
	Date:		4/6/2015																																																																																															
	Test Engineer:		R.Z																																																																																															
	Configuration:		EUT Only																																																																																															
	Location:		Chamber G																																																																																															
	Mode:		LTE_QPSK Band 2 Fundamentals, 15MHz Bandwidth																																																																																															
	Test Equipment:		Receiving: Horn T711, and Chamber G SMA Cables Substitution: Horn T59, 6ft SMA Cable																																																																																															
	<table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBi)</th> <th>EIRP (dBm)</th> <th>Limit (dBm)</th> <th>Delta (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="9">Low Ch</td> </tr> <tr> <td>1857.50</td> <td>8.20</td> <td>V</td> <td>0.9</td> <td>9.2</td> <td>16.50</td> <td>33.0</td> <td>-16.5</td> <td></td> </tr> <tr> <td>1857.50</td> <td>16.50</td> <td>H</td> <td>0.9</td> <td>9.2</td> <td>24.80</td> <td>33.0</td> <td>-8.2</td> <td></td> </tr> <tr> <td colspan="9">Mid Ch</td> </tr> <tr> <td>1880.00</td> <td>9.20</td> <td>V</td> <td>0.9</td> <td>9.2</td> <td>17.50</td> <td>33.0</td> <td>-15.5</td> <td></td> </tr> <tr> <td>1880.00</td> <td>17.00</td> <td>H</td> <td>0.9</td> <td>9.2</td> <td>25.30</td> <td>33.0</td> <td>-7.7</td> <td></td> </tr> <tr> <td colspan="9">High Ch</td> </tr> <tr> <td>1902.50</td> <td>9.90</td> <td>V</td> <td>0.9</td> <td>9.1</td> <td>18.10</td> <td>33.0</td> <td>-14.9</td> <td></td> </tr> <tr> <td>1902.50</td> <td>17.90</td> <td>H</td> <td>0.9</td> <td>9.1</td> <td>26.10</td> <td>33.0</td> <td>-6.9</td> <td></td> </tr> </tbody> </table>									f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									1857.50	8.20	V	0.9	9.2	16.50	33.0	-16.5		1857.50	16.50	H	0.9	9.2	24.80	33.0	-8.2		Mid Ch									1880.00	9.20	V	0.9	9.2	17.50	33.0	-15.5		1880.00	17.00	H	0.9	9.2	25.30	33.0	-7.7		High Ch									1902.50	9.90	V	0.9	9.1	18.10	33.0	-14.9		1902.50	17.90	H	0.9	9.1	26.10	33.0	-6.9
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																										
Low Ch																																																																																																		
1857.50	8.20	V	0.9	9.2	16.50	33.0	-16.5																																																																																											
1857.50	16.50	H	0.9	9.2	24.80	33.0	-8.2																																																																																											
Mid Ch																																																																																																		
1880.00	9.20	V	0.9	9.2	17.50	33.0	-15.5																																																																																											
1880.00	17.00	H	0.9	9.2	25.30	33.0	-7.7																																																																																											
High Ch																																																																																																		
1902.50	9.90	V	0.9	9.1	18.10	33.0	-14.9																																																																																											
1902.50	17.90	H	0.9	9.1	26.10	33.0	-6.9																																																																																											

Band LTE2 10MHz 16QAM	High Frequency Substitution Measurement UL Verification Services, Inc.																																																																																																					
	Company:		LG																																																																																																			
	Project #:		15I20413																																																																																																			
	Date:		4/6/2015																																																																																																			
	Test Engineer:		R.Z																																																																																																			
	Configuration:		EUT Only																																																																																																			
	Location:		Chamber G																																																																																																			
	Mode:		LTE_16QAM Band 2 Fundamentals, 10MHz Bandwidth																																																																																																			
	Test Equipment:		Receiving: Horn T711, and Chamber G SMA Cables Substitution: Horn T59, 6ft SMA Cable																																																																																																			
	<table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBi)</th> <th>EIRP (dBm)</th> <th>Limit (dBm)</th> <th>Delta (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="10">Low Ch</td> </tr> <tr> <td>1855.00</td> <td>8.80</td> <td>V</td> <td>0.9</td> <td>9.2</td> <td>17.10</td> <td>33.0</td> <td>-15.9</td> <td></td> </tr> <tr> <td>1855.00</td> <td>16.30</td> <td>H</td> <td>0.9</td> <td>9.2</td> <td>24.60</td> <td>33.0</td> <td>-8.4</td> <td></td> </tr> <tr> <td colspan="10">Mid Ch</td> </tr> <tr> <td>1880.00</td> <td>8.30</td> <td>V</td> <td>0.9</td> <td>9.2</td> <td>16.60</td> <td>33.0</td> <td>-16.4</td> <td></td> </tr> <tr> <td>1880.00</td> <td>16.08</td> <td>H</td> <td>0.9</td> <td>9.2</td> <td>24.38</td> <td>33.0</td> <td>-8.6</td> <td></td> </tr> <tr> <td colspan="10">High Ch</td> </tr> <tr> <td>1905.00</td> <td>9.40</td> <td>V</td> <td>0.9</td> <td>9.1</td> <td>17.60</td> <td>33.0</td> <td>-15.4</td> <td></td> </tr> <tr> <td>1905.00</td> <td>17.30</td> <td>H</td> <td>0.9</td> <td>9.1</td> <td>25.50</td> <td>33.0</td> <td>-7.5</td> <td></td> </tr> </tbody> </table>										f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch										1855.00	8.80	V	0.9	9.2	17.10	33.0	-15.9		1855.00	16.30	H	0.9	9.2	24.60	33.0	-8.4		Mid Ch										1880.00	8.30	V	0.9	9.2	16.60	33.0	-16.4		1880.00	16.08	H	0.9	9.2	24.38	33.0	-8.6		High Ch										1905.00	9.40	V	0.9	9.1	17.60	33.0	-15.4		1905.00	17.30	H	0.9	9.1	25.50	33.0	-7.5
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																														
Low Ch																																																																																																						
1855.00	8.80	V	0.9	9.2	17.10	33.0	-15.9																																																																																															
1855.00	16.30	H	0.9	9.2	24.60	33.0	-8.4																																																																																															
Mid Ch																																																																																																						
1880.00	8.30	V	0.9	9.2	16.60	33.0	-16.4																																																																																															
1880.00	16.08	H	0.9	9.2	24.38	33.0	-8.6																																																																																															
High Ch																																																																																																						
1905.00	9.40	V	0.9	9.1	17.60	33.0	-15.4																																																																																															
1905.00	17.30	H	0.9	9.1	25.50	33.0	-7.5																																																																																															

Band LTE2 10MHz QPSK	High Frequency Substitution Measurement UL Verification Services, Inc.																																																																																																					
	Company:		LG																																																																																																			
	Project #:		15I20413																																																																																																			
	Date:		4/6/2015																																																																																																			
	Test Engineer:		R.Z																																																																																																			
	Configuration:		EUT Only																																																																																																			
	Location:		Chamber G																																																																																																			
	Mode:		LTE_QPSK Band 2 Fundamentals, 10MHz Bandwidth																																																																																																			
	Test Equipment:		Receiving: Horn T711, and Chamber G SMA Cables Substitution: Horn T59, 6ft SMA Cable																																																																																																			
	<table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBi)</th> <th>EIRP (dBm)</th> <th>Limit (dBm)</th> <th>Delta (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="10">Low Ch</td> </tr> <tr> <td>1855.00</td> <td>9.40</td> <td>V</td> <td>0.9</td> <td>9.2</td> <td>17.70</td> <td>33.0</td> <td>-15.3</td> <td></td> </tr> <tr> <td>1855.00</td> <td>16.90</td> <td>H</td> <td>0.9</td> <td>9.2</td> <td>25.20</td> <td>33.0</td> <td>-7.8</td> <td></td> </tr> <tr> <td colspan="10">Mid Ch</td> </tr> <tr> <td>1880.00</td> <td>8.90</td> <td>V</td> <td>0.9</td> <td>9.2</td> <td>17.20</td> <td>33.0</td> <td>-15.8</td> <td></td> </tr> <tr> <td>1880.00</td> <td>16.70</td> <td>H</td> <td>0.9</td> <td>9.2</td> <td>25.00</td> <td>33.0</td> <td>-8.0</td> <td></td> </tr> <tr> <td colspan="10">High Ch</td> </tr> <tr> <td>1905.00</td> <td>9.87</td> <td>V</td> <td>0.9</td> <td>9.1</td> <td>18.07</td> <td>33.0</td> <td>-14.9</td> <td></td> </tr> <tr> <td>1905.00</td> <td>17.90</td> <td>H</td> <td>0.9</td> <td>9.1</td> <td>26.10</td> <td>33.0</td> <td>-6.9</td> <td></td> </tr> </tbody> </table>										f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch										1855.00	9.40	V	0.9	9.2	17.70	33.0	-15.3		1855.00	16.90	H	0.9	9.2	25.20	33.0	-7.8		Mid Ch										1880.00	8.90	V	0.9	9.2	17.20	33.0	-15.8		1880.00	16.70	H	0.9	9.2	25.00	33.0	-8.0		High Ch										1905.00	9.87	V	0.9	9.1	18.07	33.0	-14.9		1905.00	17.90	H	0.9	9.1	26.10	33.0	-6.9
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																														
Low Ch																																																																																																						
1855.00	9.40	V	0.9	9.2	17.70	33.0	-15.3																																																																																															
1855.00	16.90	H	0.9	9.2	25.20	33.0	-7.8																																																																																															
Mid Ch																																																																																																						
1880.00	8.90	V	0.9	9.2	17.20	33.0	-15.8																																																																																															
1880.00	16.70	H	0.9	9.2	25.00	33.0	-8.0																																																																																															
High Ch																																																																																																						
1905.00	9.87	V	0.9	9.1	18.07	33.0	-14.9																																																																																															
1905.00	17.90	H	0.9	9.1	26.10	33.0	-6.9																																																																																															

Band LTE2 5MHz 16QAM	High Frequency Substitution Measurement UL Verification Services, Inc.																																																																																																	
	Company:		LG																																																																																															
	Project #:		15I20413																																																																																															
	Date:		4/6/2015																																																																																															
	Test Engineer:		R.Z																																																																																															
	Configuration:		EUT Only																																																																																															
	Location:		Chamber G																																																																																															
	Mode:		LTE_16QAM Band 2 Fundamentals, 5MHz Bandwidth																																																																																															
	Test Equipment:		Receiving: Horn T711, and Chamber G SMA Cables Substitution: Horn T59, 6ft SMA Cable																																																																																															
	<table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBi)</th> <th>EIRP (dBm)</th> <th>Limit (dBm)</th> <th>Delta (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="9">Low Ch</td> </tr> <tr> <td>1852.50</td> <td>8.70</td> <td>V</td> <td>0.9</td> <td>9.2</td> <td>17.00</td> <td>33.0</td> <td>-16.0</td> <td></td> </tr> <tr> <td>1852.50</td> <td>16.40</td> <td>H</td> <td>0.9</td> <td>9.2</td> <td>24.70</td> <td>33.0</td> <td>-8.3</td> <td></td> </tr> <tr> <td colspan="9">Mid Ch</td> </tr> <tr> <td>1880.00</td> <td>8.66</td> <td>V</td> <td>0.9</td> <td>9.2</td> <td>16.96</td> <td>33.0</td> <td>-16.0</td> <td></td> </tr> <tr> <td>1880.00</td> <td>15.86</td> <td>H</td> <td>0.9</td> <td>9.2</td> <td>24.16</td> <td>33.0</td> <td>-8.8</td> <td></td> </tr> <tr> <td colspan="9">High Ch</td> </tr> <tr> <td>1907.50</td> <td>9.80</td> <td>V</td> <td>0.9</td> <td>9.1</td> <td>18.00</td> <td>33.0</td> <td>-15.0</td> <td></td> </tr> <tr> <td>1907.50</td> <td>17.10</td> <td>H</td> <td>0.9</td> <td>9.1</td> <td>25.30</td> <td>33.0</td> <td>-7.7</td> <td></td> </tr> </tbody> </table>									f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									1852.50	8.70	V	0.9	9.2	17.00	33.0	-16.0		1852.50	16.40	H	0.9	9.2	24.70	33.0	-8.3		Mid Ch									1880.00	8.66	V	0.9	9.2	16.96	33.0	-16.0		1880.00	15.86	H	0.9	9.2	24.16	33.0	-8.8		High Ch									1907.50	9.80	V	0.9	9.1	18.00	33.0	-15.0		1907.50	17.10	H	0.9	9.1	25.30	33.0	-7.7
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																										
Low Ch																																																																																																		
1852.50	8.70	V	0.9	9.2	17.00	33.0	-16.0																																																																																											
1852.50	16.40	H	0.9	9.2	24.70	33.0	-8.3																																																																																											
Mid Ch																																																																																																		
1880.00	8.66	V	0.9	9.2	16.96	33.0	-16.0																																																																																											
1880.00	15.86	H	0.9	9.2	24.16	33.0	-8.8																																																																																											
High Ch																																																																																																		
1907.50	9.80	V	0.9	9.1	18.00	33.0	-15.0																																																																																											
1907.50	17.10	H	0.9	9.1	25.30	33.0	-7.7																																																																																											

Band LTE2 5MHz QPSK	High Frequency Substitution Measurement UL Verification Services, Inc.																																																																																																					
	Company:		LG																																																																																																			
	Project #:		15I20413																																																																																																			
	Date:		4/6/2015																																																																																																			
	Test Engineer:		R.Z																																																																																																			
	Configuration:		EUT Only																																																																																																			
	Location:		Chamber G																																																																																																			
	Mode:		LTE_QPSK Band 2 Fundamentals, 5MHz Bandwidth																																																																																																			
	Test Equipment:		Receiving: Horn T711, and Chamber G SMA Cables Substitution: Horn T59, 6ft SMA Cable																																																																																																			
	<table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBi)</th> <th>EIRP (dBm)</th> <th>Limit (dBm)</th> <th>Delta (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="10">Low Ch</td> </tr> <tr> <td>1852.50</td> <td>9.30</td> <td>V</td> <td>0.9</td> <td>9.2</td> <td>17.60</td> <td>33.0</td> <td>-15.4</td> <td></td> </tr> <tr> <td>1852.50</td> <td>16.80</td> <td>H</td> <td>0.9</td> <td>9.2</td> <td>25.10</td> <td>33.0</td> <td>-7.9</td> <td></td> </tr> <tr> <td colspan="10">Mid Ch</td> </tr> <tr> <td>1880.00</td> <td>9.20</td> <td>V</td> <td>0.9</td> <td>9.2</td> <td>17.50</td> <td>33.0</td> <td>-15.5</td> <td></td> </tr> <tr> <td>1880.00</td> <td>16.40</td> <td>H</td> <td>0.9</td> <td>9.2</td> <td>24.70</td> <td>33.0</td> <td>-8.3</td> <td></td> </tr> <tr> <td colspan="10">High Ch</td> </tr> <tr> <td>1907.50</td> <td>10.30</td> <td>V</td> <td>0.9</td> <td>9.1</td> <td>18.50</td> <td>33.0</td> <td>-14.5</td> <td></td> </tr> <tr> <td>1907.50</td> <td>17.60</td> <td>H</td> <td>0.9</td> <td>9.1</td> <td>25.80</td> <td>33.0</td> <td>-7.2</td> <td></td> </tr> </tbody> </table>										f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch										1852.50	9.30	V	0.9	9.2	17.60	33.0	-15.4		1852.50	16.80	H	0.9	9.2	25.10	33.0	-7.9		Mid Ch										1880.00	9.20	V	0.9	9.2	17.50	33.0	-15.5		1880.00	16.40	H	0.9	9.2	24.70	33.0	-8.3		High Ch										1907.50	10.30	V	0.9	9.1	18.50	33.0	-14.5		1907.50	17.60	H	0.9	9.1	25.80	33.0	-7.2
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																														
Low Ch																																																																																																						
1852.50	9.30	V	0.9	9.2	17.60	33.0	-15.4																																																																																															
1852.50	16.80	H	0.9	9.2	25.10	33.0	-7.9																																																																																															
Mid Ch																																																																																																						
1880.00	9.20	V	0.9	9.2	17.50	33.0	-15.5																																																																																															
1880.00	16.40	H	0.9	9.2	24.70	33.0	-8.3																																																																																															
High Ch																																																																																																						
1907.50	10.30	V	0.9	9.1	18.50	33.0	-14.5																																																																																															
1907.50	17.60	H	0.9	9.1	25.80	33.0	-7.2																																																																																															

Band LTE2 3MHz 16QAM	High Frequency Substitution Measurement UL Verification Services, Inc.																																																																																																					
	Company:		LG																																																																																																			
	Project #:		15I20413																																																																																																			
	Date:		4/6/2015																																																																																																			
	Test Engineer:		R.Z																																																																																																			
	Configuration:		EUT Only																																																																																																			
	Location:		Chamber G																																																																																																			
	Mode:		LTE_16QAM Band 2 Fundamentals, 3MHz Bandwidth																																																																																																			
	Test Equipment:		Receiving: Horn T711, and Chamber G SMA Cables Substitution: Horn T59, 6ft SMA Cable																																																																																																			
	<table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBi)</th> <th>EIRP (dBm)</th> <th>Limit (dBm)</th> <th>Delta (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="10">Low Ch</td> </tr> <tr> <td>1851.50</td> <td>8.00</td> <td>V</td> <td>0.9</td> <td>9.2</td> <td>16.30</td> <td>33.0</td> <td>-16.7</td> <td></td> </tr> <tr> <td>1851.50</td> <td>15.98</td> <td>H</td> <td>0.9</td> <td>9.2</td> <td>24.28</td> <td>33.0</td> <td>-8.7</td> <td></td> </tr> <tr> <td colspan="10">Mid Ch</td> </tr> <tr> <td>1880.00</td> <td>8.79</td> <td>V</td> <td>0.9</td> <td>9.2</td> <td>17.09</td> <td>33.0</td> <td>-15.9</td> <td></td> </tr> <tr> <td>1880.00</td> <td>16.56</td> <td>H</td> <td>0.9</td> <td>9.2</td> <td>24.86</td> <td>33.0</td> <td>-8.1</td> <td></td> </tr> <tr> <td colspan="10">High Ch</td> </tr> <tr> <td>1908.50</td> <td>9.63</td> <td>V</td> <td>0.9</td> <td>9.1</td> <td>17.83</td> <td>33.0</td> <td>-15.2</td> <td></td> </tr> <tr> <td>1908.50</td> <td>18.08</td> <td>H</td> <td>0.9</td> <td>9.1</td> <td>26.28</td> <td>33.0</td> <td>-6.7</td> <td></td> </tr> </tbody> </table>										f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch										1851.50	8.00	V	0.9	9.2	16.30	33.0	-16.7		1851.50	15.98	H	0.9	9.2	24.28	33.0	-8.7		Mid Ch										1880.00	8.79	V	0.9	9.2	17.09	33.0	-15.9		1880.00	16.56	H	0.9	9.2	24.86	33.0	-8.1		High Ch										1908.50	9.63	V	0.9	9.1	17.83	33.0	-15.2		1908.50	18.08	H	0.9	9.1	26.28	33.0	-6.7
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																														
Low Ch																																																																																																						
1851.50	8.00	V	0.9	9.2	16.30	33.0	-16.7																																																																																															
1851.50	15.98	H	0.9	9.2	24.28	33.0	-8.7																																																																																															
Mid Ch																																																																																																						
1880.00	8.79	V	0.9	9.2	17.09	33.0	-15.9																																																																																															
1880.00	16.56	H	0.9	9.2	24.86	33.0	-8.1																																																																																															
High Ch																																																																																																						
1908.50	9.63	V	0.9	9.1	17.83	33.0	-15.2																																																																																															
1908.50	18.08	H	0.9	9.1	26.28	33.0	-6.7																																																																																															

Band LTE2 3MHz QPSK	High Frequency Substitution Measurement UL Verification Services, Inc.								
	Company: LG Project #: 15I20413 Date: 4/6/2015 Test Engineer: R.Z Configuration: EUT Only Location: Chamber G Mode: LTE_QPSK Band 2 Fundamentals, 3MHz Bandwidth								
	Test Equipment: Receiving: Horn T711, and Chamber G SMA Cables Substitution: Horn T59, 6ft SMA Cable								
	f	SG reading	Ant. Pol.	Cable Loss	Antenna Gain	EIRP	Limit	Delta	Notes
	MHz	(dBm)	(H/V)	(dB)	(dBi)	(dBm)	(dBm)	(dB)	
	Low Ch								
	1851.50	8.30	V	0.9	9.2	16.60	33.0	-16.4	
	1851.50	16.40	H	0.9	9.2	24.70	33.0	-8.3	
	Mid Ch								
	1880.00	9.30	V	0.9	9.2	17.60	33.0	-15.4	
1880.00	17.14	H	0.9	9.2	25.44	33.0	-7.6		
High Ch									
1908.50	10.00	V	0.9	9.1	18.20	33.0	-14.8		
1908.50	18.46	H	0.9	9.1	26.66	33.0	-6.3		

Band LTE2 1.4MHz 16QAM	High Frequency Substitution Measurement UL Verification Services, Inc.																																																																																																					
	Company:		LG																																																																																																			
	Project #:		15I20413																																																																																																			
	Date:		4/6/2015																																																																																																			
	Test Engineer:		R.Z																																																																																																			
	Configuration:		EUT Only																																																																																																			
	Location:		Chamber G																																																																																																			
	Mode:		LTE_16QAM Band 2 Fundamentals, 1.4MHz Bandwidth																																																																																																			
	Test Equipment:		Receiving: Horn T711, and Chamber G SMA Cables Substitution: Horn T59, 6ft SMA Cable																																																																																																			
	<table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBi)</th> <th>EIRP (dBm)</th> <th>Limit (dBm)</th> <th>Delta (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="10">Low Ch</td> </tr> <tr> <td>1850.70</td> <td>8.70</td> <td>V</td> <td>0.9</td> <td>9.2</td> <td>17.00</td> <td>33.0</td> <td>-16.0</td> <td></td> </tr> <tr> <td>1850.70</td> <td>16.08</td> <td>H</td> <td>0.9</td> <td>9.2</td> <td>24.38</td> <td>33.0</td> <td>-8.6</td> <td></td> </tr> <tr> <td colspan="10">Mid Ch</td> </tr> <tr> <td>1880.00</td> <td>8.50</td> <td>V</td> <td>0.9</td> <td>9.2</td> <td>16.80</td> <td>33.0</td> <td>-16.2</td> <td></td> </tr> <tr> <td>1880.00</td> <td>16.30</td> <td>H</td> <td>0.9</td> <td>9.2</td> <td>24.60</td> <td>33.0</td> <td>-8.4</td> <td></td> </tr> <tr> <td colspan="10">High Ch</td> </tr> <tr> <td>1909.30</td> <td>9.00</td> <td>V</td> <td>0.9</td> <td>9.1</td> <td>17.20</td> <td>33.0</td> <td>-15.8</td> <td></td> </tr> <tr> <td>1909.30</td> <td>16.90</td> <td>H</td> <td>0.9</td> <td>9.1</td> <td>25.10</td> <td>33.0</td> <td>-7.9</td> <td></td> </tr> </tbody> </table>										f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch										1850.70	8.70	V	0.9	9.2	17.00	33.0	-16.0		1850.70	16.08	H	0.9	9.2	24.38	33.0	-8.6		Mid Ch										1880.00	8.50	V	0.9	9.2	16.80	33.0	-16.2		1880.00	16.30	H	0.9	9.2	24.60	33.0	-8.4		High Ch										1909.30	9.00	V	0.9	9.1	17.20	33.0	-15.8		1909.30	16.90	H	0.9	9.1	25.10	33.0	-7.9
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																														
Low Ch																																																																																																						
1850.70	8.70	V	0.9	9.2	17.00	33.0	-16.0																																																																																															
1850.70	16.08	H	0.9	9.2	24.38	33.0	-8.6																																																																																															
Mid Ch																																																																																																						
1880.00	8.50	V	0.9	9.2	16.80	33.0	-16.2																																																																																															
1880.00	16.30	H	0.9	9.2	24.60	33.0	-8.4																																																																																															
High Ch																																																																																																						
1909.30	9.00	V	0.9	9.1	17.20	33.0	-15.8																																																																																															
1909.30	16.90	H	0.9	9.1	25.10	33.0	-7.9																																																																																															

Band LTE2 1.4MHz QPSK	High Frequency Substitution Measurement UL Verification Services, Inc.																																																																																																	
	Company:		LG																																																																																															
	Project #:		15I20413																																																																																															
	Date:		4/6/2015																																																																																															
	Test Engineer:		R.Z																																																																																															
	Configuration:		EUT Only																																																																																															
	Location:		Chamber G																																																																																															
	Mode:		LTE_QPSK Band 2 Fundamentals, 1.4MHz Bandwidth																																																																																															
	Test Equipment:		Receiving: Horn T711, and Chamber G SMA Cables Substitution: Horn T59, 6ft SMA Cable																																																																																															
	<table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBi)</th> <th>EIRP (dBm)</th> <th>Limit (dBm)</th> <th>Delta (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="9">Low Ch</td> </tr> <tr> <td>1850.70</td> <td>9.10</td> <td>V</td> <td>0.9</td> <td>9.2</td> <td>17.44</td> <td>33.0</td> <td>-15.6</td> <td></td> </tr> <tr> <td>1850.70</td> <td>16.50</td> <td>H</td> <td>0.9</td> <td>9.2</td> <td>24.84</td> <td>33.0</td> <td>-8.2</td> <td></td> </tr> <tr> <td colspan="9">Mid Ch</td> </tr> <tr> <td>1880.00</td> <td>9.00</td> <td>V</td> <td>0.9</td> <td>9.2</td> <td>17.25</td> <td>33.0</td> <td>-15.8</td> <td></td> </tr> <tr> <td>1880.00</td> <td>16.70</td> <td>H</td> <td>0.9</td> <td>9.2</td> <td>24.95</td> <td>33.0</td> <td>-8.1</td> <td></td> </tr> <tr> <td colspan="9">High Ch</td> </tr> <tr> <td>1909.30</td> <td>9.50</td> <td>V</td> <td>0.9</td> <td>9.1</td> <td>17.67</td> <td>33.0</td> <td>-15.3</td> <td></td> </tr> <tr> <td>1909.30</td> <td>17.30</td> <td>H</td> <td>0.9</td> <td>9.1</td> <td>25.47</td> <td>33.0</td> <td>-7.5</td> <td></td> </tr> </tbody> </table>									f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									1850.70	9.10	V	0.9	9.2	17.44	33.0	-15.6		1850.70	16.50	H	0.9	9.2	24.84	33.0	-8.2		Mid Ch									1880.00	9.00	V	0.9	9.2	17.25	33.0	-15.8		1880.00	16.70	H	0.9	9.2	24.95	33.0	-8.1		High Ch									1909.30	9.50	V	0.9	9.1	17.67	33.0	-15.3		1909.30	17.30	H	0.9	9.1	25.47	33.0	-7.5
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																										
Low Ch																																																																																																		
1850.70	9.10	V	0.9	9.2	17.44	33.0	-15.6																																																																																											
1850.70	16.50	H	0.9	9.2	24.84	33.0	-8.2																																																																																											
Mid Ch																																																																																																		
1880.00	9.00	V	0.9	9.2	17.25	33.0	-15.8																																																																																											
1880.00	16.70	H	0.9	9.2	24.95	33.0	-8.1																																																																																											
High Ch																																																																																																		
1909.30	9.50	V	0.9	9.1	17.67	33.0	-15.3																																																																																											
1909.30	17.30	H	0.9	9.1	25.47	33.0	-7.5																																																																																											

LTE Band 4

Band LTE4 20MHz 16QAM	High Frequency Substitution Measurement UL Verification Services, Inc.																																																																																																	
	Company:		LG Electronics																																																																																															
	Project #:		15I20413																																																																																															
	Date:		4/6/2015																																																																																															
	Test Engineer:		R.Z																																																																																															
	Configuration:		EUT ONLY																																																																																															
	Location:		Chamber G																																																																																															
	Mode:		LTE_16QAM Band 4 Fundamentals, 20MHz Bandwidth																																																																																															
	Test Equipment:		Receiving: Horn T711, and Chamber G SMA Cables Substitution: Horn T60, 6ft SMA Cable																																																																																															
	<table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBi)</th> <th>EIRP (dBm)</th> <th>Limit (dBm)</th> <th>Delta (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="9">Low Ch</td> </tr> <tr> <td>1720.00</td> <td>12.60</td> <td>V</td> <td>0.9</td> <td>8.2</td> <td>19.92</td> <td>30.0</td> <td>-10.1</td> <td></td> </tr> <tr> <td>1720.00</td> <td>14.80</td> <td>H</td> <td>0.9</td> <td>8.2</td> <td>22.12</td> <td>30.0</td> <td>-7.9</td> <td></td> </tr> <tr> <td colspan="9">Mid Ch</td> </tr> <tr> <td>1732.50</td> <td>12.88</td> <td>V</td> <td>0.9</td> <td>8.2</td> <td>20.15</td> <td>30.0</td> <td>-9.8</td> <td></td> </tr> <tr> <td>1732.50</td> <td>15.20</td> <td>H</td> <td>0.9</td> <td>8.2</td> <td>22.47</td> <td>30.0</td> <td>-7.5</td> <td></td> </tr> <tr> <td colspan="9">High Ch</td> </tr> <tr> <td>1745.00</td> <td>13.78</td> <td>V</td> <td>0.9</td> <td>8.1</td> <td>21.01</td> <td>30.0</td> <td>-9.0</td> <td></td> </tr> <tr> <td>1745.00</td> <td>16.50</td> <td>H</td> <td>0.9</td> <td>8.1</td> <td>23.73</td> <td>30.0</td> <td>-6.3</td> <td></td> </tr> </tbody> </table>									f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									1720.00	12.60	V	0.9	8.2	19.92	30.0	-10.1		1720.00	14.80	H	0.9	8.2	22.12	30.0	-7.9		Mid Ch									1732.50	12.88	V	0.9	8.2	20.15	30.0	-9.8		1732.50	15.20	H	0.9	8.2	22.47	30.0	-7.5		High Ch									1745.00	13.78	V	0.9	8.1	21.01	30.0	-9.0		1745.00	16.50	H	0.9	8.1	23.73	30.0	-6.3
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																										
Low Ch																																																																																																		
1720.00	12.60	V	0.9	8.2	19.92	30.0	-10.1																																																																																											
1720.00	14.80	H	0.9	8.2	22.12	30.0	-7.9																																																																																											
Mid Ch																																																																																																		
1732.50	12.88	V	0.9	8.2	20.15	30.0	-9.8																																																																																											
1732.50	15.20	H	0.9	8.2	22.47	30.0	-7.5																																																																																											
High Ch																																																																																																		
1745.00	13.78	V	0.9	8.1	21.01	30.0	-9.0																																																																																											
1745.00	16.50	H	0.9	8.1	23.73	30.0	-6.3																																																																																											

Band LTE4 20MHz QPSK	High Frequency Substitution Measurement UL Verification Services, Inc.																																																																																																					
	Company:		LG Electronics																																																																																																			
	Project #:		15I20413																																																																																																			
	Date:		4/6/2015																																																																																																			
	Test Engineer:		R.Z																																																																																																			
	Configuration:		EUT ONLY																																																																																																			
	Location:		Chamber G																																																																																																			
	Mode:		LTE_QPSK Band 4 Fundamentals, 20MHz Bandwidth																																																																																																			
	Test Equipment:		Receiving: Horn T711, and Chamber G SMA Cables Substitution: Horn T60, 6ft SMA Cable																																																																																																			
	<table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBi)</th> <th>EIRP (dBm)</th> <th>Limit (dBm)</th> <th>Delta (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="10">Low Ch</td> </tr> <tr> <td>1720.00</td> <td>13.00</td> <td>V</td> <td>0.9</td> <td>8.2</td> <td>20.32</td> <td>30.0</td> <td>-9.7</td> <td></td> </tr> <tr> <td>1720.00</td> <td>15.36</td> <td>H</td> <td>0.9</td> <td>8.2</td> <td>22.68</td> <td>30.0</td> <td>-7.3</td> <td></td> </tr> <tr> <td colspan="10">Mid Ch</td> </tr> <tr> <td>1732.50</td> <td>13.40</td> <td>V</td> <td>0.9</td> <td>8.2</td> <td>20.67</td> <td>30.0</td> <td>-9.3</td> <td></td> </tr> <tr> <td>1732.50</td> <td>15.70</td> <td>H</td> <td>0.9</td> <td>8.2</td> <td>22.97</td> <td>30.0</td> <td>-7.0</td> <td></td> </tr> <tr> <td colspan="10">High Ch</td> </tr> <tr> <td>1745.00</td> <td>14.34</td> <td>V</td> <td>0.9</td> <td>8.1</td> <td>21.57</td> <td>30.0</td> <td>-8.4</td> <td></td> </tr> <tr> <td>1745.00</td> <td>17.00</td> <td>H</td> <td>0.9</td> <td>8.1</td> <td>24.23</td> <td>30.0</td> <td>-5.8</td> <td></td> </tr> </tbody> </table>										f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch										1720.00	13.00	V	0.9	8.2	20.32	30.0	-9.7		1720.00	15.36	H	0.9	8.2	22.68	30.0	-7.3		Mid Ch										1732.50	13.40	V	0.9	8.2	20.67	30.0	-9.3		1732.50	15.70	H	0.9	8.2	22.97	30.0	-7.0		High Ch										1745.00	14.34	V	0.9	8.1	21.57	30.0	-8.4		1745.00	17.00	H	0.9	8.1	24.23	30.0	-5.8
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																														
Low Ch																																																																																																						
1720.00	13.00	V	0.9	8.2	20.32	30.0	-9.7																																																																																															
1720.00	15.36	H	0.9	8.2	22.68	30.0	-7.3																																																																																															
Mid Ch																																																																																																						
1732.50	13.40	V	0.9	8.2	20.67	30.0	-9.3																																																																																															
1732.50	15.70	H	0.9	8.2	22.97	30.0	-7.0																																																																																															
High Ch																																																																																																						
1745.00	14.34	V	0.9	8.1	21.57	30.0	-8.4																																																																																															
1745.00	17.00	H	0.9	8.1	24.23	30.0	-5.8																																																																																															

Band LTE4 15MHz 16QAM	High Frequency Substitution Measurement UL Verification Services, Inc.																																																																																																					
	Company:		LG Electronics																																																																																																			
	Project #:		15I20413																																																																																																			
	Date:		4/6/2015																																																																																																			
	Test Engineer:		R.Z																																																																																																			
	Configuration:		EUT ONLY																																																																																																			
	Location:		Chamber G																																																																																																			
	Mode:		LTE_16QAM Band 4 Fundamentals, 15MHz Bandwidth																																																																																																			
	Test Equipment:		Receiving: Horn T711, and Chamber G SMA Cables Substitution: Horn T60, 6ft SMA Cable																																																																																																			
	<table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBi)</th> <th>EIRP (dBm)</th> <th>Limit (dBm)</th> <th>Delta (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="10">Low Ch</td> </tr> <tr> <td>1717.50</td> <td>12.30</td> <td>V</td> <td>0.9</td> <td>8.2</td> <td>19.63</td> <td>30.0</td> <td>-10.4</td> <td></td> </tr> <tr> <td>1717.50</td> <td>15.06</td> <td>H</td> <td>0.9</td> <td>8.2</td> <td>22.39</td> <td>30.0</td> <td>-7.6</td> <td></td> </tr> <tr> <td colspan="10">Mid Ch</td> </tr> <tr> <td>1732.50</td> <td>13.30</td> <td>V</td> <td>0.9</td> <td>8.2</td> <td>20.57</td> <td>30.0</td> <td>-9.4</td> <td></td> </tr> <tr> <td>1732.50</td> <td>16.08</td> <td>H</td> <td>0.9</td> <td>8.2</td> <td>23.35</td> <td>30.0</td> <td>-6.6</td> <td></td> </tr> <tr> <td colspan="10">High Ch</td> </tr> <tr> <td>1747.50</td> <td>13.75</td> <td>V</td> <td>0.9</td> <td>8.1</td> <td>20.97</td> <td>30.0</td> <td>-9.0</td> <td></td> </tr> <tr> <td>1747.50</td> <td>16.80</td> <td>H</td> <td>0.9</td> <td>8.1</td> <td>24.02</td> <td>30.0</td> <td>-6.0</td> <td></td> </tr> </tbody> </table>										f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch										1717.50	12.30	V	0.9	8.2	19.63	30.0	-10.4		1717.50	15.06	H	0.9	8.2	22.39	30.0	-7.6		Mid Ch										1732.50	13.30	V	0.9	8.2	20.57	30.0	-9.4		1732.50	16.08	H	0.9	8.2	23.35	30.0	-6.6		High Ch										1747.50	13.75	V	0.9	8.1	20.97	30.0	-9.0		1747.50	16.80	H	0.9	8.1	24.02	30.0	-6.0
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																														
Low Ch																																																																																																						
1717.50	12.30	V	0.9	8.2	19.63	30.0	-10.4																																																																																															
1717.50	15.06	H	0.9	8.2	22.39	30.0	-7.6																																																																																															
Mid Ch																																																																																																						
1732.50	13.30	V	0.9	8.2	20.57	30.0	-9.4																																																																																															
1732.50	16.08	H	0.9	8.2	23.35	30.0	-6.6																																																																																															
High Ch																																																																																																						
1747.50	13.75	V	0.9	8.1	20.97	30.0	-9.0																																																																																															
1747.50	16.80	H	0.9	8.1	24.02	30.0	-6.0																																																																																															

Band LTE4 15MHz QPSK	High Frequency Substitution Measurement UL Verification Services, Inc.																																																																																																	
	Company:		LG Electronics																																																																																															
	Project #:		15I20413																																																																																															
	Date:		4/6/2015																																																																																															
	Test Engineer:		R.Z																																																																																															
	Configuration:		EUT ONLY																																																																																															
	Location:		Chamber G																																																																																															
	Mode:		LTE_QPSK Band 4 Fundamentals, 15MHz Bandwidth																																																																																															
	Test Equipment:		Receiving: Horn T711, and Chamber G SMA Cables Substitution: Horn T60, 6ft SMA Cable																																																																																															
	<table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBi)</th> <th>EIRP (dBm)</th> <th>Limit (dBm)</th> <th>Delta (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="9">Low Ch</td> </tr> <tr> <td>1717.50</td> <td>13.10</td> <td>V</td> <td>0.9</td> <td>8.2</td> <td>20.43</td> <td>30.0</td> <td>-9.6</td> <td></td> </tr> <tr> <td>1717.50</td> <td>15.50</td> <td>H</td> <td>0.9</td> <td>8.2</td> <td>22.83</td> <td>30.0</td> <td>-7.2</td> <td></td> </tr> <tr> <td colspan="9">Mid Ch</td> </tr> <tr> <td>1732.50</td> <td>13.79</td> <td>V</td> <td>0.9</td> <td>8.2</td> <td>21.06</td> <td>30.0</td> <td>-8.9</td> <td></td> </tr> <tr> <td>1732.50</td> <td>16.65</td> <td>H</td> <td>0.9</td> <td>8.2</td> <td>23.92</td> <td>30.0</td> <td>-6.1</td> <td></td> </tr> <tr> <td colspan="9">High Ch</td> </tr> <tr> <td>1747.50</td> <td>14.35</td> <td>V</td> <td>0.9</td> <td>8.1</td> <td>21.57</td> <td>30.0</td> <td>-8.4</td> <td></td> </tr> <tr> <td>1747.50</td> <td>17.30</td> <td>H</td> <td>0.9</td> <td>8.1</td> <td>24.52</td> <td>30.0</td> <td>-5.5</td> <td></td> </tr> </tbody> </table>									f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									1717.50	13.10	V	0.9	8.2	20.43	30.0	-9.6		1717.50	15.50	H	0.9	8.2	22.83	30.0	-7.2		Mid Ch									1732.50	13.79	V	0.9	8.2	21.06	30.0	-8.9		1732.50	16.65	H	0.9	8.2	23.92	30.0	-6.1		High Ch									1747.50	14.35	V	0.9	8.1	21.57	30.0	-8.4		1747.50	17.30	H	0.9	8.1	24.52	30.0	-5.5
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																										
Low Ch																																																																																																		
1717.50	13.10	V	0.9	8.2	20.43	30.0	-9.6																																																																																											
1717.50	15.50	H	0.9	8.2	22.83	30.0	-7.2																																																																																											
Mid Ch																																																																																																		
1732.50	13.79	V	0.9	8.2	21.06	30.0	-8.9																																																																																											
1732.50	16.65	H	0.9	8.2	23.92	30.0	-6.1																																																																																											
High Ch																																																																																																		
1747.50	14.35	V	0.9	8.1	21.57	30.0	-8.4																																																																																											
1747.50	17.30	H	0.9	8.1	24.52	30.0	-5.5																																																																																											

Band LTE4 10MHz 16QAM	High Frequency Substitution Measurement UL Verification Services, Inc.																																																																																																					
	Company:		LG Electronics																																																																																																			
	Project #:		15I20413																																																																																																			
	Date:		4/6/2015																																																																																																			
	Test Engineer:		R.Z																																																																																																			
	Configuration:		EUT ONLY																																																																																																			
	Location:		Chamber G																																																																																																			
	Mode:		LTE_16QAM Band 4 Fundamentals, 10MHz Bandwidth																																																																																																			
	Test Equipment:		Receiving: Horn T711, and Chamber G SMA Cables Substitution: Horn T60, 6ft SMA Cable																																																																																																			
	<table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBi)</th> <th>EIRP (dBm)</th> <th>Limit (dBm)</th> <th>Delta (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="10">Low Ch</td> </tr> <tr> <td>1715.00</td> <td>12.67</td> <td>V</td> <td>0.9</td> <td>8.2</td> <td>20.01</td> <td>30.0</td> <td>-10.0</td> <td></td> </tr> <tr> <td>1715.00</td> <td>15.20</td> <td>H</td> <td>0.9</td> <td>8.2</td> <td>22.54</td> <td>30.0</td> <td>-7.5</td> <td></td> </tr> <tr> <td colspan="10">Mid Ch</td> </tr> <tr> <td>1732.50</td> <td>12.88</td> <td>V</td> <td>0.9</td> <td>8.2</td> <td>20.15</td> <td>30.0</td> <td>-9.8</td> <td></td> </tr> <tr> <td>1732.50</td> <td>15.19</td> <td>H</td> <td>0.9</td> <td>8.2</td> <td>22.46</td> <td>30.0</td> <td>-7.5</td> <td></td> </tr> <tr> <td colspan="10">High Ch</td> </tr> <tr> <td>1750.00</td> <td>13.90</td> <td>V</td> <td>0.9</td> <td>8.1</td> <td>21.11</td> <td>30.0</td> <td>-8.9</td> <td></td> </tr> <tr> <td>1750.00</td> <td>17.00</td> <td>H</td> <td>0.9</td> <td>8.1</td> <td>24.21</td> <td>30.0</td> <td>-5.8</td> <td></td> </tr> </tbody> </table>										f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch										1715.00	12.67	V	0.9	8.2	20.01	30.0	-10.0		1715.00	15.20	H	0.9	8.2	22.54	30.0	-7.5		Mid Ch										1732.50	12.88	V	0.9	8.2	20.15	30.0	-9.8		1732.50	15.19	H	0.9	8.2	22.46	30.0	-7.5		High Ch										1750.00	13.90	V	0.9	8.1	21.11	30.0	-8.9		1750.00	17.00	H	0.9	8.1	24.21	30.0	-5.8
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																														
Low Ch																																																																																																						
1715.00	12.67	V	0.9	8.2	20.01	30.0	-10.0																																																																																															
1715.00	15.20	H	0.9	8.2	22.54	30.0	-7.5																																																																																															
Mid Ch																																																																																																						
1732.50	12.88	V	0.9	8.2	20.15	30.0	-9.8																																																																																															
1732.50	15.19	H	0.9	8.2	22.46	30.0	-7.5																																																																																															
High Ch																																																																																																						
1750.00	13.90	V	0.9	8.1	21.11	30.0	-8.9																																																																																															
1750.00	17.00	H	0.9	8.1	24.21	30.0	-5.8																																																																																															

Band LTE4 10MHz QPSK	High Frequency Substitution Measurement UL Verification Services, Inc.																																																																																																					
	Company:		LG Electronics																																																																																																			
	Project #:		15I20413																																																																																																			
	Date:		4/6/2015																																																																																																			
	Test Engineer:		R.Z																																																																																																			
	Configuration:		EUT ONLY																																																																																																			
	Location:		Chamber G																																																																																																			
	Mode:		LTE_QPSK Band 4 Fundamentals, 10MHz Bandwidth																																																																																																			
	Test Equipment:		Receiving: Horn T711, and Chamber G SMA Cables Substitution: Horn T60, 6ft SMA Cable																																																																																																			
	<table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBi)</th> <th>EIRP (dBm)</th> <th>Limit (dBm)</th> <th>Delta (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="10">Low Ch</td> </tr> <tr> <td>1715.00</td> <td>13.20</td> <td>V</td> <td>0.9</td> <td>8.2</td> <td>20.54</td> <td>30.0</td> <td>-9.5</td> <td></td> </tr> <tr> <td>1715.00</td> <td>15.68</td> <td>H</td> <td>0.9</td> <td>8.2</td> <td>23.02</td> <td>30.0</td> <td>-7.0</td> <td></td> </tr> <tr> <td colspan="10">Mid Ch</td> </tr> <tr> <td>1732.50</td> <td>13.50</td> <td>V</td> <td>0.9</td> <td>8.2</td> <td>20.77</td> <td>30.0</td> <td>-9.2</td> <td></td> </tr> <tr> <td>1732.50</td> <td>15.75</td> <td>H</td> <td>0.9</td> <td>8.2</td> <td>23.02</td> <td>30.0</td> <td>-7.0</td> <td></td> </tr> <tr> <td colspan="10">High Ch</td> </tr> <tr> <td>1750.00</td> <td>14.55</td> <td>V</td> <td>0.9</td> <td>8.1</td> <td>21.76</td> <td>30.0</td> <td>-8.2</td> <td></td> </tr> <tr> <td>1750.00</td> <td>17.50</td> <td>H</td> <td>0.9</td> <td>8.1</td> <td>24.71</td> <td>30.0</td> <td>-5.3</td> <td></td> </tr> </tbody> </table>										f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch										1715.00	13.20	V	0.9	8.2	20.54	30.0	-9.5		1715.00	15.68	H	0.9	8.2	23.02	30.0	-7.0		Mid Ch										1732.50	13.50	V	0.9	8.2	20.77	30.0	-9.2		1732.50	15.75	H	0.9	8.2	23.02	30.0	-7.0		High Ch										1750.00	14.55	V	0.9	8.1	21.76	30.0	-8.2		1750.00	17.50	H	0.9	8.1	24.71	30.0	-5.3
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																														
Low Ch																																																																																																						
1715.00	13.20	V	0.9	8.2	20.54	30.0	-9.5																																																																																															
1715.00	15.68	H	0.9	8.2	23.02	30.0	-7.0																																																																																															
Mid Ch																																																																																																						
1732.50	13.50	V	0.9	8.2	20.77	30.0	-9.2																																																																																															
1732.50	15.75	H	0.9	8.2	23.02	30.0	-7.0																																																																																															
High Ch																																																																																																						
1750.00	14.55	V	0.9	8.1	21.76	30.0	-8.2																																																																																															
1750.00	17.50	H	0.9	8.1	24.71	30.0	-5.3																																																																																															

Band LTE4 3MHz 16QAM	High Frequency Substitution Measurement UL Verification Services, Inc.																																																																																																					
	Company:		LG Electronics																																																																																																			
	Project #:		15I20413																																																																																																			
	Date:		4/6/2015																																																																																																			
	Test Engineer:		R.Z																																																																																																			
	Configuration:		EUT ONLY																																																																																																			
	Location:		Chamber G																																																																																																			
	Mode:		LTE_16QAM Band 4 Fundamentals, 3MHz Bandwidth																																																																																																			
	Test Equipment:		Receiving: Horn T711, and Chamber G SMA Cables Substitution: Horn T60, 6ft SMA Cable																																																																																																			
	<table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBi)</th> <th>EIRP (dBm)</th> <th>Limit (dBm)</th> <th>Delta (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="10">Low Ch</td> </tr> <tr> <td>1711.50</td> <td>13.10</td> <td>V</td> <td>0.9</td> <td>8.2</td> <td>20.45</td> <td>30.0</td> <td>-9.6</td> <td></td> </tr> <tr> <td>1711.50</td> <td>15.03</td> <td>H</td> <td>0.9</td> <td>8.2</td> <td>22.38</td> <td>30.0</td> <td>-7.6</td> <td></td> </tr> <tr> <td colspan="10">Mid Ch</td> </tr> <tr> <td>1732.50</td> <td>13.63</td> <td>V</td> <td>0.9</td> <td>8.2</td> <td>20.90</td> <td>30.0</td> <td>-9.1</td> <td></td> </tr> <tr> <td>1732.50</td> <td>15.40</td> <td>H</td> <td>0.9</td> <td>8.2</td> <td>22.67</td> <td>30.0</td> <td>-7.3</td> <td></td> </tr> <tr> <td colspan="10">High Ch</td> </tr> <tr> <td>1753.50</td> <td>14.40</td> <td>V</td> <td>0.9</td> <td>8.1</td> <td>21.59</td> <td>30.0</td> <td>-8.4</td> <td></td> </tr> <tr> <td>1753.50</td> <td>16.48</td> <td>H</td> <td>0.9</td> <td>8.1</td> <td>23.67</td> <td>30.0</td> <td>-6.3</td> <td></td> </tr> </tbody> </table>										f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch										1711.50	13.10	V	0.9	8.2	20.45	30.0	-9.6		1711.50	15.03	H	0.9	8.2	22.38	30.0	-7.6		Mid Ch										1732.50	13.63	V	0.9	8.2	20.90	30.0	-9.1		1732.50	15.40	H	0.9	8.2	22.67	30.0	-7.3		High Ch										1753.50	14.40	V	0.9	8.1	21.59	30.0	-8.4		1753.50	16.48	H	0.9	8.1	23.67	30.0	-6.3
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																														
Low Ch																																																																																																						
1711.50	13.10	V	0.9	8.2	20.45	30.0	-9.6																																																																																															
1711.50	15.03	H	0.9	8.2	22.38	30.0	-7.6																																																																																															
Mid Ch																																																																																																						
1732.50	13.63	V	0.9	8.2	20.90	30.0	-9.1																																																																																															
1732.50	15.40	H	0.9	8.2	22.67	30.0	-7.3																																																																																															
High Ch																																																																																																						
1753.50	14.40	V	0.9	8.1	21.59	30.0	-8.4																																																																																															
1753.50	16.48	H	0.9	8.1	23.67	30.0	-6.3																																																																																															

Band LTE4 1.4MHz QPSK	High Frequency Substitution Measurement UL Verification Services, Inc.																																																																																																	
	Company:		LG Electronics																																																																																															
	Project #:		15I20413																																																																																															
	Date:		4/6/2015																																																																																															
	Test Engineer:		R.Z																																																																																															
	Configuration:		EUT ONLY																																																																																															
	Location:		Chamber G																																																																																															
	Mode:		LTE_QPSK Band 4 Fundamentals, 1.4MHz Bandwidth																																																																																															
	Test Equipment:		Receiving: Horn T711, and Chamber G SMA Cables Substitution: Horn T60, 6ft SMA Cable																																																																																															
	<table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBi)</th> <th>EIRP (dBm)</th> <th>Limit (dBm)</th> <th>Delta (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="9">Low Ch</td> </tr> <tr> <td>1710.70</td> <td>13.80</td> <td>V</td> <td>0.9</td> <td>8.3</td> <td>21.15</td> <td>30.0</td> <td>-8.8</td> <td></td> </tr> <tr> <td>1710.70</td> <td>15.30</td> <td>H</td> <td>0.9</td> <td>8.3</td> <td>22.65</td> <td>30.0</td> <td>-7.3</td> <td></td> </tr> <tr> <td colspan="9">Mid Ch</td> </tr> <tr> <td>1732.50</td> <td>14.10</td> <td>V</td> <td>0.9</td> <td>8.2</td> <td>21.37</td> <td>30.0</td> <td>-8.6</td> <td></td> </tr> <tr> <td>1732.50</td> <td>15.60</td> <td>H</td> <td>0.9</td> <td>8.2</td> <td>22.87</td> <td>30.0</td> <td>-7.1</td> <td></td> </tr> <tr> <td colspan="9">High Ch</td> </tr> <tr> <td>1754.30</td> <td>15.10</td> <td>V</td> <td>0.9</td> <td>8.1</td> <td>22.29</td> <td>30.0</td> <td>-7.7</td> <td></td> </tr> <tr> <td>1754.30</td> <td>16.90</td> <td>H</td> <td>0.9</td> <td>8.1</td> <td>24.09</td> <td>30.0</td> <td>-5.9</td> <td></td> </tr> </tbody> </table>									f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									1710.70	13.80	V	0.9	8.3	21.15	30.0	-8.8		1710.70	15.30	H	0.9	8.3	22.65	30.0	-7.3		Mid Ch									1732.50	14.10	V	0.9	8.2	21.37	30.0	-8.6		1732.50	15.60	H	0.9	8.2	22.87	30.0	-7.1		High Ch									1754.30	15.10	V	0.9	8.1	22.29	30.0	-7.7		1754.30	16.90	H	0.9	8.1	24.09	30.0	-5.9
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																										
Low Ch																																																																																																		
1710.70	13.80	V	0.9	8.3	21.15	30.0	-8.8																																																																																											
1710.70	15.30	H	0.9	8.3	22.65	30.0	-7.3																																																																																											
Mid Ch																																																																																																		
1732.50	14.10	V	0.9	8.2	21.37	30.0	-8.6																																																																																											
1732.50	15.60	H	0.9	8.2	22.87	30.0	-7.1																																																																																											
High Ch																																																																																																		
1754.30	15.10	V	0.9	8.1	22.29	30.0	-7.7																																																																																											
1754.30	16.90	H	0.9	8.1	24.09	30.0	-5.9																																																																																											

LTE Band 5

Band LTE5 10MHz 16QAM	High Frequency Substitution Measurement UL Verification Services, Inc.																																																																																																	
	Company:		LG Electronics																																																																																															
	Project #:		15I20413																																																																																															
	Date:		4/8/2015																																																																																															
	Test Engineer:		R.Z																																																																																															
	Configuration:		EUT Only																																																																																															
	Location:		Chamber G																																																																																															
	Mode:		LTE_16QAM Band 5 Fundamentals, 10MHz Bandwidth																																																																																															
	Test Equipment:		Receiving: Hybrid T899, and Chamber G SMA Cables Substitution: Dipole T273, 6ft SMA Cable Warehouse																																																																																															
			<table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBd)</th> <th>ERP (dBm)</th> <th>Limit (dBm)</th> <th>Delta (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="9">Low Ch</td> </tr> <tr> <td>829.00</td> <td>15.20</td> <td>V</td> <td>0.9</td> <td>0.0</td> <td>14.30</td> <td>38.5</td> <td>-24.2</td> <td></td> </tr> <tr> <td>829.00</td> <td>21.66</td> <td>H</td> <td>0.9</td> <td>0.0</td> <td>20.76</td> <td>38.5</td> <td>-17.7</td> <td></td> </tr> <tr> <td colspan="9">Mid Ch</td> </tr> <tr> <td>836.50</td> <td>14.50</td> <td>V</td> <td>0.9</td> <td>0.0</td> <td>13.60</td> <td>38.5</td> <td>-24.9</td> <td></td> </tr> <tr> <td>836.50</td> <td>21.58</td> <td>H</td> <td>0.9</td> <td>0.0</td> <td>20.68</td> <td>38.5</td> <td>-17.8</td> <td></td> </tr> <tr> <td colspan="9">High Ch</td> </tr> <tr> <td>844.00</td> <td>16.50</td> <td>V</td> <td>0.9</td> <td>0.0</td> <td>15.60</td> <td>38.5</td> <td>-22.9</td> <td></td> </tr> <tr> <td>844.00</td> <td>22.77</td> <td>H</td> <td>0.9</td> <td>0.0</td> <td>21.87</td> <td>38.5</td> <td>-16.6</td> <td></td> </tr> </tbody> </table>							f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									829.00	15.20	V	0.9	0.0	14.30	38.5	-24.2		829.00	21.66	H	0.9	0.0	20.76	38.5	-17.7		Mid Ch									836.50	14.50	V	0.9	0.0	13.60	38.5	-24.9		836.50	21.58	H	0.9	0.0	20.68	38.5	-17.8		High Ch									844.00	16.50	V	0.9	0.0	15.60	38.5	-22.9		844.00	22.77	H	0.9	0.0	21.87	38.5	-16.6
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																										
Low Ch																																																																																																		
829.00	15.20	V	0.9	0.0	14.30	38.5	-24.2																																																																																											
829.00	21.66	H	0.9	0.0	20.76	38.5	-17.7																																																																																											
Mid Ch																																																																																																		
836.50	14.50	V	0.9	0.0	13.60	38.5	-24.9																																																																																											
836.50	21.58	H	0.9	0.0	20.68	38.5	-17.8																																																																																											
High Ch																																																																																																		
844.00	16.50	V	0.9	0.0	15.60	38.5	-22.9																																																																																											
844.00	22.77	H	0.9	0.0	21.87	38.5	-16.6																																																																																											

Band LTE5 10MHz QPSK	High Frequency Substitution Measurement UL Verification Services, Inc.																																																																																																					
	Company:		LG Electronics																																																																																																			
	Project #:		15I20413																																																																																																			
	Date:		4/8/2015																																																																																																			
	Test Engineer:		R.Z																																																																																																			
	Configuration:		EUT Only																																																																																																			
	Location:		Chamber G																																																																																																			
	Mode:		LTE_QPSK Band 5 Fundamentals, 10MHz Bandwidth																																																																																																			
	Test Equipment:		Receiving: Hybrid T899, and Chamber G SMA Cables Substitution: Dipole T273, 6ft SMA Cable Warehouse																																																																																																			
	<table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBd)</th> <th>ERP (dBm)</th> <th>Limit (dBm)</th> <th>Delta (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="10">Low Ch</td> </tr> <tr> <td>829.00</td> <td>16.00</td> <td>V</td> <td>0.9</td> <td>0.0</td> <td>15.10</td> <td>38.5</td> <td>-23.4</td> <td></td> </tr> <tr> <td>829.00</td> <td>22.63</td> <td>H</td> <td>0.9</td> <td>0.0</td> <td>21.73</td> <td>38.5</td> <td>-16.8</td> <td></td> </tr> <tr> <td colspan="10">Mid Ch</td> </tr> <tr> <td>836.50</td> <td>15.30</td> <td>V</td> <td>0.9</td> <td>0.0</td> <td>14.40</td> <td>38.5</td> <td>-24.1</td> <td></td> </tr> <tr> <td>836.50</td> <td>22.50</td> <td>H</td> <td>0.9</td> <td>0.0</td> <td>21.60</td> <td>38.5</td> <td>-16.9</td> <td></td> </tr> <tr> <td colspan="10">High Ch</td> </tr> <tr> <td>844.00</td> <td>17.40</td> <td>V</td> <td>0.9</td> <td>0.0</td> <td>16.50</td> <td>38.5</td> <td>-22.0</td> <td></td> </tr> <tr> <td>844.00</td> <td>23.70</td> <td>H</td> <td>0.9</td> <td>0.0</td> <td>22.80</td> <td>38.5</td> <td>-15.7</td> <td></td> </tr> </tbody> </table>										f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch										829.00	16.00	V	0.9	0.0	15.10	38.5	-23.4		829.00	22.63	H	0.9	0.0	21.73	38.5	-16.8		Mid Ch										836.50	15.30	V	0.9	0.0	14.40	38.5	-24.1		836.50	22.50	H	0.9	0.0	21.60	38.5	-16.9		High Ch										844.00	17.40	V	0.9	0.0	16.50	38.5	-22.0		844.00	23.70	H	0.9	0.0	22.80	38.5	-15.7
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																														
Low Ch																																																																																																						
829.00	16.00	V	0.9	0.0	15.10	38.5	-23.4																																																																																															
829.00	22.63	H	0.9	0.0	21.73	38.5	-16.8																																																																																															
Mid Ch																																																																																																						
836.50	15.30	V	0.9	0.0	14.40	38.5	-24.1																																																																																															
836.50	22.50	H	0.9	0.0	21.60	38.5	-16.9																																																																																															
High Ch																																																																																																						
844.00	17.40	V	0.9	0.0	16.50	38.5	-22.0																																																																																															
844.00	23.70	H	0.9	0.0	22.80	38.5	-15.7																																																																																															

Band LTE5 5MHz QPSK	High Frequency Substitution Measurement UL Verification Services, Inc.																																																																																																					
	Company:		LG Electronics																																																																																																			
	Project #:		15I20413																																																																																																			
	Date:		4/8/2015																																																																																																			
	Test Engineer:		R.Z																																																																																																			
	Configuration:		EUT Only																																																																																																			
	Location:		Chamber G																																																																																																			
	Mode:		LTE_QPSK Band 5 Fundamentals, 5MHz Bandwidth																																																																																																			
	Test Equipment:		Receiving: Hybrid T899, and Chamber G SMA Cables Substitution: Dipole T273, 6ft SMA Cable Warehouse																																																																																																			
	<table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBd)</th> <th>ERP (dBm)</th> <th>Limit (dBm)</th> <th>Delta (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="10">Low Ch</td> </tr> <tr> <td>826.50</td> <td>15.60</td> <td>V</td> <td>0.9</td> <td>0.0</td> <td>14.70</td> <td>38.5</td> <td>-23.8</td> <td></td> </tr> <tr> <td>826.50</td> <td>22.44</td> <td>H</td> <td>0.9</td> <td>0.0</td> <td>21.54</td> <td>38.5</td> <td>-17.0</td> <td></td> </tr> <tr> <td colspan="10">Mid Ch</td> </tr> <tr> <td>836.50</td> <td>15.20</td> <td>V</td> <td>0.9</td> <td>0.0</td> <td>14.30</td> <td>38.5</td> <td>-24.2</td> <td></td> </tr> <tr> <td>836.50</td> <td>22.53</td> <td>H</td> <td>0.9</td> <td>0.0</td> <td>21.63</td> <td>38.5</td> <td>-16.9</td> <td></td> </tr> <tr> <td colspan="10">High Ch</td> </tr> <tr> <td>846.50</td> <td>17.10</td> <td>V</td> <td>0.9</td> <td>0.0</td> <td>16.20</td> <td>38.5</td> <td>-22.3</td> <td></td> </tr> <tr> <td>846.50</td> <td>23.60</td> <td>H</td> <td>0.9</td> <td>0.0</td> <td>22.70</td> <td>38.5</td> <td>-15.8</td> <td></td> </tr> </tbody> </table>										f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch										826.50	15.60	V	0.9	0.0	14.70	38.5	-23.8		826.50	22.44	H	0.9	0.0	21.54	38.5	-17.0		Mid Ch										836.50	15.20	V	0.9	0.0	14.30	38.5	-24.2		836.50	22.53	H	0.9	0.0	21.63	38.5	-16.9		High Ch										846.50	17.10	V	0.9	0.0	16.20	38.5	-22.3		846.50	23.60	H	0.9	0.0	22.70	38.5	-15.8
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																														
Low Ch																																																																																																						
826.50	15.60	V	0.9	0.0	14.70	38.5	-23.8																																																																																															
826.50	22.44	H	0.9	0.0	21.54	38.5	-17.0																																																																																															
Mid Ch																																																																																																						
836.50	15.20	V	0.9	0.0	14.30	38.5	-24.2																																																																																															
836.50	22.53	H	0.9	0.0	21.63	38.5	-16.9																																																																																															
High Ch																																																																																																						
846.50	17.10	V	0.9	0.0	16.20	38.5	-22.3																																																																																															
846.50	23.60	H	0.9	0.0	22.70	38.5	-15.8																																																																																															

Band LTE5 3MHz QPSK	High Frequency Substitution Measurement UL Verification Services, Inc.																																																																																																					
	Company:		LG Electronics																																																																																																			
	Project #:		15I20413																																																																																																			
	Date:		4/8/2015																																																																																																			
	Test Engineer:		R.Z																																																																																																			
	Configuration:		EUT Only																																																																																																			
	Location:		Chamber G																																																																																																			
	Mode:		LTE_QPSK Band 5 Fundamentals, 3MHz Bandwidth																																																																																																			
	Test Equipment:		Receiving: Hybrid T899, and Chamber G SMA Cables Substitution: Dipole T273, 6ft SMA Cable Warehouse																																																																																																			
	<table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBd)</th> <th>ERP (dBm)</th> <th>Limit (dBm)</th> <th>Delta (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="10">Low Ch</td> </tr> <tr> <td>825.50</td> <td>15.93</td> <td>V</td> <td>0.9</td> <td>0.0</td> <td>15.03</td> <td>38.5</td> <td>-23.5</td> <td></td> </tr> <tr> <td>825.50</td> <td>22.57</td> <td>H</td> <td>0.9</td> <td>0.0</td> <td>21.67</td> <td>38.5</td> <td>-16.8</td> <td></td> </tr> <tr> <td colspan="10">Mid Ch</td> </tr> <tr> <td>836.50</td> <td>15.30</td> <td>V</td> <td>0.9</td> <td>0.0</td> <td>14.40</td> <td>38.5</td> <td>-24.1</td> <td></td> </tr> <tr> <td>836.50</td> <td>22.69</td> <td>H</td> <td>0.9</td> <td>0.0</td> <td>21.79</td> <td>38.5</td> <td>-16.7</td> <td></td> </tr> <tr> <td colspan="10">High Ch</td> </tr> <tr> <td>847.50</td> <td>17.50</td> <td>V</td> <td>0.9</td> <td>0.0</td> <td>16.60</td> <td>38.5</td> <td>-21.9</td> <td></td> </tr> <tr> <td>847.50</td> <td>23.70</td> <td>H</td> <td>0.9</td> <td>0.0</td> <td>22.80</td> <td>38.5</td> <td>-15.7</td> <td></td> </tr> </tbody> </table>										f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch										825.50	15.93	V	0.9	0.0	15.03	38.5	-23.5		825.50	22.57	H	0.9	0.0	21.67	38.5	-16.8		Mid Ch										836.50	15.30	V	0.9	0.0	14.40	38.5	-24.1		836.50	22.69	H	0.9	0.0	21.79	38.5	-16.7		High Ch										847.50	17.50	V	0.9	0.0	16.60	38.5	-21.9		847.50	23.70	H	0.9	0.0	22.80	38.5	-15.7
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																														
Low Ch																																																																																																						
825.50	15.93	V	0.9	0.0	15.03	38.5	-23.5																																																																																															
825.50	22.57	H	0.9	0.0	21.67	38.5	-16.8																																																																																															
Mid Ch																																																																																																						
836.50	15.30	V	0.9	0.0	14.40	38.5	-24.1																																																																																															
836.50	22.69	H	0.9	0.0	21.79	38.5	-16.7																																																																																															
High Ch																																																																																																						
847.50	17.50	V	0.9	0.0	16.60	38.5	-21.9																																																																																															
847.50	23.70	H	0.9	0.0	22.80	38.5	-15.7																																																																																															

Band LTE5 1.4MHz 16QAM	High Frequency Substitution Measurement UL Verification Services, Inc.																																																																																																					
	Company:		LG Electronics																																																																																																			
	Project #:		15I20413																																																																																																			
	Date:		4/8/2015																																																																																																			
	Test Engineer:		R.Z																																																																																																			
	Configuration:		EUT Only																																																																																																			
	Location:		Chamber G																																																																																																			
	Mode:		LTE_16QAM Band 5 Fundamentals, 1.4MHz Bandwidth																																																																																																			
	Test Equipment:		Receiving: Hybrid T899, and Chamber G SMA Cables Substitution: Dipole T273, 6ft SMA Cable Warehouse																																																																																																			
	<table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBd)</th> <th>ERP (dBm)</th> <th>Limit (dBm)</th> <th>Delta (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="10">Low Ch</td> </tr> <tr> <td>824.70</td> <td>16.00</td> <td>V</td> <td>0.9</td> <td>0.0</td> <td>15.10</td> <td>38.5</td> <td>-23.4</td> <td></td> </tr> <tr> <td>824.70</td> <td>21.40</td> <td>H</td> <td>0.9</td> <td>0.0</td> <td>20.50</td> <td>38.5</td> <td>-18.0</td> <td></td> </tr> <tr> <td colspan="10">Mid Ch</td> </tr> <tr> <td>836.50</td> <td>15.60</td> <td>V</td> <td>0.9</td> <td>0.0</td> <td>14.70</td> <td>38.5</td> <td>-23.8</td> <td></td> </tr> <tr> <td>836.50</td> <td>21.80</td> <td>H</td> <td>0.9</td> <td>0.0</td> <td>20.90</td> <td>38.5</td> <td>-17.6</td> <td></td> </tr> <tr> <td colspan="10">High Ch</td> </tr> <tr> <td>848.30</td> <td>17.50</td> <td>V</td> <td>0.9</td> <td>0.0</td> <td>16.60</td> <td>38.5</td> <td>-21.9</td> <td></td> </tr> <tr> <td>848.30</td> <td>22.60</td> <td>H</td> <td>0.9</td> <td>0.0</td> <td>21.70</td> <td>38.5</td> <td>-16.8</td> <td></td> </tr> </tbody> </table>										f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch										824.70	16.00	V	0.9	0.0	15.10	38.5	-23.4		824.70	21.40	H	0.9	0.0	20.50	38.5	-18.0		Mid Ch										836.50	15.60	V	0.9	0.0	14.70	38.5	-23.8		836.50	21.80	H	0.9	0.0	20.90	38.5	-17.6		High Ch										848.30	17.50	V	0.9	0.0	16.60	38.5	-21.9		848.30	22.60	H	0.9	0.0	21.70	38.5	-16.8
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																														
Low Ch																																																																																																						
824.70	16.00	V	0.9	0.0	15.10	38.5	-23.4																																																																																															
824.70	21.40	H	0.9	0.0	20.50	38.5	-18.0																																																																																															
Mid Ch																																																																																																						
836.50	15.60	V	0.9	0.0	14.70	38.5	-23.8																																																																																															
836.50	21.80	H	0.9	0.0	20.90	38.5	-17.6																																																																																															
High Ch																																																																																																						
848.30	17.50	V	0.9	0.0	16.60	38.5	-21.9																																																																																															
848.30	22.60	H	0.9	0.0	21.70	38.5	-16.8																																																																																															

Band LTE5 1.4MHz QPSK	High Frequency Substitution Measurement UL Verification Services, Inc.																																																																																																					
	Company:		LG Electronics																																																																																																			
	Project #:		15I20413																																																																																																			
	Date:		4/8/2015																																																																																																			
	Test Engineer:		R.Z																																																																																																			
	Configuration:		EUT Only																																																																																																			
	Location:		Chamber G																																																																																																			
	Mode:		LTE_QPSK Band 5 Fundamentals, 1.4MHz Bandwidth																																																																																																			
	Test Equipment:		Receiving: Hybrid T899, and Chamber G SMA Cables Substitution: Dipole T273, 6ft SMA Cable Warehouse																																																																																																			
	<table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBd)</th> <th>ERP (dBm)</th> <th>Limit (dBm)</th> <th>Delta (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="10">Low Ch</td> </tr> <tr> <td>824.70</td> <td>16.80</td> <td>V</td> <td>0.9</td> <td>0.0</td> <td>15.90</td> <td>38.5</td> <td>-22.6</td> <td></td> </tr> <tr> <td>824.70</td> <td>22.38</td> <td>H</td> <td>0.9</td> <td>0.0</td> <td>21.48</td> <td>38.5</td> <td>-17.0</td> <td></td> </tr> <tr> <td colspan="10">Mid Ch</td> </tr> <tr> <td>836.50</td> <td>16.48</td> <td>V</td> <td>0.9</td> <td>0.0</td> <td>15.58</td> <td>38.5</td> <td>-22.9</td> <td></td> </tr> <tr> <td>836.50</td> <td>22.70</td> <td>H</td> <td>0.9</td> <td>0.0</td> <td>21.80</td> <td>38.5</td> <td>-16.7</td> <td></td> </tr> <tr> <td colspan="10">High Ch</td> </tr> <tr> <td>848.30</td> <td>18.20</td> <td>V</td> <td>0.9</td> <td>0.0</td> <td>17.30</td> <td>38.5</td> <td>-21.2</td> <td></td> </tr> <tr> <td>848.30</td> <td>23.60</td> <td>H</td> <td>0.9</td> <td>0.0</td> <td>22.70</td> <td>38.5</td> <td>-15.8</td> <td></td> </tr> </tbody> </table>										f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch										824.70	16.80	V	0.9	0.0	15.90	38.5	-22.6		824.70	22.38	H	0.9	0.0	21.48	38.5	-17.0		Mid Ch										836.50	16.48	V	0.9	0.0	15.58	38.5	-22.9		836.50	22.70	H	0.9	0.0	21.80	38.5	-16.7		High Ch										848.30	18.20	V	0.9	0.0	17.30	38.5	-21.2		848.30	23.60	H	0.9	0.0	22.70	38.5	-15.8
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																														
Low Ch																																																																																																						
824.70	16.80	V	0.9	0.0	15.90	38.5	-22.6																																																																																															
824.70	22.38	H	0.9	0.0	21.48	38.5	-17.0																																																																																															
Mid Ch																																																																																																						
836.50	16.48	V	0.9	0.0	15.58	38.5	-22.9																																																																																															
836.50	22.70	H	0.9	0.0	21.80	38.5	-16.7																																																																																															
High Ch																																																																																																						
848.30	18.20	V	0.9	0.0	17.30	38.5	-21.2																																																																																															
848.30	23.60	H	0.9	0.0	22.70	38.5	-15.8																																																																																															

LTE Band 12

Band LTE12 10MHz 16QAM	High Frequency Substitution Measurement UL Verification Services, Inc.																																																																																																	
	Company:		LG																																																																																															
	Project #:		15I20413																																																																																															
	Date:		4/8/2015																																																																																															
	Test Engineer:		R.Z																																																																																															
	Configuration:		EUT Only																																																																																															
	Location:		Chamber G																																																																																															
	Mode:		LTE_16QAM Band 12 Fundamentals, 10MHz Bandwidth																																																																																															
	Test Equipment:		Receiving: Hybrid T899, and Chamber G SMA Cables Substitution: Dipole T273, 6ft SMA Cable																																																																																															
			<table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBd)</th> <th>ERP (dBm)</th> <th>Limit (dBm)</th> <th>Delta (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="9">Low Ch</td> </tr> <tr> <td>704.00</td> <td>10.20</td> <td>V</td> <td>0.9</td> <td>0.0</td> <td>9.30</td> <td>38.5</td> <td>-29.2</td> <td></td> </tr> <tr> <td>704.00</td> <td>20.14</td> <td>H</td> <td>0.9</td> <td>0.0</td> <td>19.24</td> <td>38.5</td> <td>-19.3</td> <td></td> </tr> <tr> <td colspan="9">Mid Ch</td> </tr> <tr> <td>707.50</td> <td>10.30</td> <td>V</td> <td>0.9</td> <td>0.0</td> <td>9.40</td> <td>38.5</td> <td>-29.1</td> <td></td> </tr> <tr> <td>707.50</td> <td>20.56</td> <td>H</td> <td>0.9</td> <td>0.0</td> <td>19.66</td> <td>38.5</td> <td>-18.8</td> <td></td> </tr> <tr> <td colspan="9">High Ch</td> </tr> <tr> <td>711.00</td> <td>10.60</td> <td>V</td> <td>0.9</td> <td>0.0</td> <td>9.70</td> <td>38.5</td> <td>-28.8</td> <td></td> </tr> <tr> <td>711.00</td> <td>20.68</td> <td>H</td> <td>0.9</td> <td>0.0</td> <td>19.78</td> <td>38.5</td> <td>-18.7</td> <td></td> </tr> </tbody> </table>							f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									704.00	10.20	V	0.9	0.0	9.30	38.5	-29.2		704.00	20.14	H	0.9	0.0	19.24	38.5	-19.3		Mid Ch									707.50	10.30	V	0.9	0.0	9.40	38.5	-29.1		707.50	20.56	H	0.9	0.0	19.66	38.5	-18.8		High Ch									711.00	10.60	V	0.9	0.0	9.70	38.5	-28.8		711.00	20.68	H	0.9	0.0	19.78	38.5	-18.7
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																										
Low Ch																																																																																																		
704.00	10.20	V	0.9	0.0	9.30	38.5	-29.2																																																																																											
704.00	20.14	H	0.9	0.0	19.24	38.5	-19.3																																																																																											
Mid Ch																																																																																																		
707.50	10.30	V	0.9	0.0	9.40	38.5	-29.1																																																																																											
707.50	20.56	H	0.9	0.0	19.66	38.5	-18.8																																																																																											
High Ch																																																																																																		
711.00	10.60	V	0.9	0.0	9.70	38.5	-28.8																																																																																											
711.00	20.68	H	0.9	0.0	19.78	38.5	-18.7																																																																																											

Band LTE12 10MHz QPSK	High Frequency Substitution Measurement UL Verification Services, Inc.																																																																																																					
	Company:		LG																																																																																																			
	Project #:		15I20413																																																																																																			
	Date:		4/8/2015																																																																																																			
	Test Engineer:		R.Z																																																																																																			
	Configuration:		EUT Only																																																																																																			
	Location:		Chamber G																																																																																																			
	Mode:		LTE_QPSK Band 12 Fundamentals, 10MHz Bandwidth																																																																																																			
	Test Equipment:		Receiving: Hybrid T899, and Chamber G SMA Cables Substitution: Dipole T273, 6ft SMA Cable																																																																																																			
	<table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBd)</th> <th>ERP (dBm)</th> <th>Limit (dBm)</th> <th>Delta (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="10">Low Ch</td> </tr> <tr> <td>704.00</td> <td>10.90</td> <td>V</td> <td>0.9</td> <td>0.0</td> <td>10.00</td> <td>38.5</td> <td>-28.5</td> <td></td> </tr> <tr> <td>704.00</td> <td>20.60</td> <td>H</td> <td>0.9</td> <td>0.0</td> <td>19.70</td> <td>38.5</td> <td>-18.8</td> <td></td> </tr> <tr> <td colspan="10">Mid Ch</td> </tr> <tr> <td>707.50</td> <td>10.87</td> <td>V</td> <td>0.9</td> <td>0.0</td> <td>9.97</td> <td>38.5</td> <td>-28.5</td> <td></td> </tr> <tr> <td>707.50</td> <td>20.88</td> <td>H</td> <td>0.9</td> <td>0.0</td> <td>19.98</td> <td>38.5</td> <td>-18.5</td> <td></td> </tr> <tr> <td colspan="10">High Ch</td> </tr> <tr> <td>711.00</td> <td>11.10</td> <td>V</td> <td>0.9</td> <td>0.0</td> <td>10.20</td> <td>38.5</td> <td>-28.3</td> <td></td> </tr> <tr> <td>711.00</td> <td>21.10</td> <td>H</td> <td>0.9</td> <td>0.0</td> <td>20.20</td> <td>38.5</td> <td>-18.3</td> <td></td> </tr> </tbody> </table>										f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch										704.00	10.90	V	0.9	0.0	10.00	38.5	-28.5		704.00	20.60	H	0.9	0.0	19.70	38.5	-18.8		Mid Ch										707.50	10.87	V	0.9	0.0	9.97	38.5	-28.5		707.50	20.88	H	0.9	0.0	19.98	38.5	-18.5		High Ch										711.00	11.10	V	0.9	0.0	10.20	38.5	-28.3		711.00	21.10	H	0.9	0.0	20.20	38.5	-18.3
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																														
Low Ch																																																																																																						
704.00	10.90	V	0.9	0.0	10.00	38.5	-28.5																																																																																															
704.00	20.60	H	0.9	0.0	19.70	38.5	-18.8																																																																																															
Mid Ch																																																																																																						
707.50	10.87	V	0.9	0.0	9.97	38.5	-28.5																																																																																															
707.50	20.88	H	0.9	0.0	19.98	38.5	-18.5																																																																																															
High Ch																																																																																																						
711.00	11.10	V	0.9	0.0	10.20	38.5	-28.3																																																																																															
711.00	21.10	H	0.9	0.0	20.20	38.5	-18.3																																																																																															

Band LTE12 5MHz QPSK	High Frequency Substitution Measurement UL Verification Services, Inc.																																																																																																					
	Company:		LG																																																																																																			
	Project #:		15I20413																																																																																																			
	Date:		4/8/2015																																																																																																			
	Test Engineer:		R.Z																																																																																																			
	Configuration:		EUT Only																																																																																																			
	Location:		Chamber G																																																																																																			
	Mode:		LTE_QPSK Band 12 Fundamentals, 5MHz Bandwidth																																																																																																			
	Test Equipment:		Receiving: Hybrid T899, and Chamber G SMA Cables Substitution: Dipole T273, 6ft SMA Cable																																																																																																			
	<table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBd)</th> <th>ERP (dBm)</th> <th>Limit (dBm)</th> <th>Delta (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="10">Low Ch</td> </tr> <tr> <td>701.50</td> <td>10.58</td> <td>V</td> <td>0.9</td> <td>0.0</td> <td>9.68</td> <td>38.5</td> <td>-28.8</td> <td></td> </tr> <tr> <td>701.50</td> <td>20.30</td> <td>H</td> <td>0.9</td> <td>0.0</td> <td>19.40</td> <td>38.5</td> <td>-19.1</td> <td></td> </tr> <tr> <td colspan="10">Mid Ch</td> </tr> <tr> <td>707.50</td> <td>10.80</td> <td>V</td> <td>0.9</td> <td>0.0</td> <td>9.90</td> <td>38.5</td> <td>-28.6</td> <td></td> </tr> <tr> <td>707.50</td> <td>20.80</td> <td>H</td> <td>0.9</td> <td>0.0</td> <td>19.90</td> <td>38.5</td> <td>-18.6</td> <td></td> </tr> <tr> <td colspan="10">High Ch</td> </tr> <tr> <td>713.50</td> <td>11.20</td> <td>V</td> <td>0.9</td> <td>0.0</td> <td>10.30</td> <td>38.5</td> <td>-28.2</td> <td></td> </tr> <tr> <td>713.50</td> <td>21.20</td> <td>H</td> <td>0.9</td> <td>0.0</td> <td>20.30</td> <td>38.5</td> <td>-18.2</td> <td></td> </tr> </tbody> </table>										f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch										701.50	10.58	V	0.9	0.0	9.68	38.5	-28.8		701.50	20.30	H	0.9	0.0	19.40	38.5	-19.1		Mid Ch										707.50	10.80	V	0.9	0.0	9.90	38.5	-28.6		707.50	20.80	H	0.9	0.0	19.90	38.5	-18.6		High Ch										713.50	11.20	V	0.9	0.0	10.30	38.5	-28.2		713.50	21.20	H	0.9	0.0	20.30	38.5	-18.2
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																														
Low Ch																																																																																																						
701.50	10.58	V	0.9	0.0	9.68	38.5	-28.8																																																																																															
701.50	20.30	H	0.9	0.0	19.40	38.5	-19.1																																																																																															
Mid Ch																																																																																																						
707.50	10.80	V	0.9	0.0	9.90	38.5	-28.6																																																																																															
707.50	20.80	H	0.9	0.0	19.90	38.5	-18.6																																																																																															
High Ch																																																																																																						
713.50	11.20	V	0.9	0.0	10.30	38.5	-28.2																																																																																															
713.50	21.20	H	0.9	0.0	20.30	38.5	-18.2																																																																																															

Band LTE12 3MHz 16QAM	High Frequency Substitution Measurement UL Verification Services, Inc.																																																																																																					
	Company:		LG																																																																																																			
	Project #:		15I20413																																																																																																			
	Date:		4/8/2015																																																																																																			
	Test Engineer:		R.Z																																																																																																			
	Configuration:		EUT Only																																																																																																			
	Location:		Chamber G																																																																																																			
	Mode:		LTE_16QAM Band 12 Fundamentals, 3MHz Bandwidth																																																																																																			
	Test Equipment:		Receiving: Hybrid T899, and Chamber G SMA Cables Substitution: Dipole T273, 6ft SMA Cable																																																																																																			
	<table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBd)</th> <th>ERP (dBm)</th> <th>Limit (dBm)</th> <th>Delta (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="10">Low Ch</td> </tr> <tr> <td>700.50</td> <td>10.90</td> <td>V</td> <td>0.9</td> <td>0.0</td> <td>10.00</td> <td>38.5</td> <td>-28.5</td> <td></td> </tr> <tr> <td>700.50</td> <td>20.18</td> <td>H</td> <td>0.9</td> <td>0.0</td> <td>19.28</td> <td>38.5</td> <td>-19.2</td> <td></td> </tr> <tr> <td colspan="10">Mid Ch</td> </tr> <tr> <td>707.50</td> <td>10.70</td> <td>V</td> <td>0.9</td> <td>0.0</td> <td>9.80</td> <td>38.5</td> <td>-28.7</td> <td></td> </tr> <tr> <td>707.50</td> <td>20.40</td> <td>H</td> <td>0.9</td> <td>0.0</td> <td>19.50</td> <td>38.5</td> <td>-19.0</td> <td></td> </tr> <tr> <td colspan="10">High Ch</td> </tr> <tr> <td>714.50</td> <td>11.10</td> <td>V</td> <td>0.9</td> <td>0.0</td> <td>10.20</td> <td>38.5</td> <td>-28.3</td> <td></td> </tr> <tr> <td>714.50</td> <td>20.80</td> <td>H</td> <td>0.9</td> <td>0.0</td> <td>19.90</td> <td>38.5</td> <td>-18.6</td> <td></td> </tr> </tbody> </table>										f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch										700.50	10.90	V	0.9	0.0	10.00	38.5	-28.5		700.50	20.18	H	0.9	0.0	19.28	38.5	-19.2		Mid Ch										707.50	10.70	V	0.9	0.0	9.80	38.5	-28.7		707.50	20.40	H	0.9	0.0	19.50	38.5	-19.0		High Ch										714.50	11.10	V	0.9	0.0	10.20	38.5	-28.3		714.50	20.80	H	0.9	0.0	19.90	38.5	-18.6
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																														
Low Ch																																																																																																						
700.50	10.90	V	0.9	0.0	10.00	38.5	-28.5																																																																																															
700.50	20.18	H	0.9	0.0	19.28	38.5	-19.2																																																																																															
Mid Ch																																																																																																						
707.50	10.70	V	0.9	0.0	9.80	38.5	-28.7																																																																																															
707.50	20.40	H	0.9	0.0	19.50	38.5	-19.0																																																																																															
High Ch																																																																																																						
714.50	11.10	V	0.9	0.0	10.20	38.5	-28.3																																																																																															
714.50	20.80	H	0.9	0.0	19.90	38.5	-18.6																																																																																															

Band LTE12 3MHz QPSK	High Frequency Substitution Measurement UL Verification Services, Inc.																																																																																																	
	Company: LG																																																																																																	
	Project #: 15I20413																																																																																																	
	Date: 4/8/2015																																																																																																	
	Test Engineer: R.Z																																																																																																	
	Configuration: EUT Only																																																																																																	
	Location: Chamber G																																																																																																	
	Mode: LTE_QPSK Band 12 Fundamentals, 3MHz Bandwidth																																																																																																	
	Test Equipment:																																																																																																	
	Receiving: Hybrid T899, and Chamber G SMA Cables Substitution: Dipole T273, 6ft SMA Cable																																																																																																	
<table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBd)</th> <th>ERP (dBm)</th> <th>Limit (dBm)</th> <th>Delta (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="9">Low Ch</td> </tr> <tr> <td>700.50</td> <td>11.40</td> <td>V</td> <td>0.9</td> <td>0.0</td> <td>10.50</td> <td>38.5</td> <td>-28.0</td> <td></td> </tr> <tr> <td>700.50</td> <td>20.70</td> <td>H</td> <td>0.9</td> <td>0.0</td> <td>19.80</td> <td>38.5</td> <td>-18.7</td> <td></td> </tr> <tr> <td colspan="9">Mid Ch</td> </tr> <tr> <td>707.50</td> <td>11.40</td> <td>V</td> <td>0.9</td> <td>0.0</td> <td>10.50</td> <td>38.5</td> <td>-28.0</td> <td></td> </tr> <tr> <td>707.50</td> <td>20.86</td> <td>H</td> <td>0.9</td> <td>0.0</td> <td>19.96</td> <td>38.5</td> <td>-18.5</td> <td></td> </tr> <tr> <td colspan="9">High Ch</td> </tr> <tr> <td>714.50</td> <td>11.80</td> <td>V</td> <td>0.9</td> <td>0.0</td> <td>10.90</td> <td>38.5</td> <td>-27.6</td> <td></td> </tr> <tr> <td>714.50</td> <td>21.30</td> <td>H</td> <td>0.9</td> <td>0.0</td> <td>20.40</td> <td>38.5</td> <td>-18.1</td> <td></td> </tr> </tbody> </table>									f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									700.50	11.40	V	0.9	0.0	10.50	38.5	-28.0		700.50	20.70	H	0.9	0.0	19.80	38.5	-18.7		Mid Ch									707.50	11.40	V	0.9	0.0	10.50	38.5	-28.0		707.50	20.86	H	0.9	0.0	19.96	38.5	-18.5		High Ch									714.50	11.80	V	0.9	0.0	10.90	38.5	-27.6		714.50	21.30	H	0.9	0.0	20.40	38.5	-18.1	
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																										
Low Ch																																																																																																		
700.50	11.40	V	0.9	0.0	10.50	38.5	-28.0																																																																																											
700.50	20.70	H	0.9	0.0	19.80	38.5	-18.7																																																																																											
Mid Ch																																																																																																		
707.50	11.40	V	0.9	0.0	10.50	38.5	-28.0																																																																																											
707.50	20.86	H	0.9	0.0	19.96	38.5	-18.5																																																																																											
High Ch																																																																																																		
714.50	11.80	V	0.9	0.0	10.90	38.5	-27.6																																																																																											
714.50	21.30	H	0.9	0.0	20.40	38.5	-18.1																																																																																											

Band LTE12 1.4MHz 16QAM	High Frequency Substitution Measurement UL Verification Services, Inc.																																																																																																					
	Company:		LG																																																																																																			
	Project #:		15I20413																																																																																																			
	Date:		4/8/2015																																																																																																			
	Test Engineer:		R.Z																																																																																																			
	Configuration:		EUT Only																																																																																																			
	Location:		Chamber G																																																																																																			
	Mode:		LTE_16QAM Band 12 Fundamentals, 1.4MHz Bandwidth																																																																																																			
	Test Equipment:		Receiving: Hybrid T899, and Chamber G SMA Cables Substitution: Dipole T273, 6ft SMA Cable																																																																																																			
	<table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBd)</th> <th>ERP (dBm)</th> <th>Limit (dBm)</th> <th>Delta (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="10">Low Ch</td> </tr> <tr> <td>699.70</td> <td>10.20</td> <td>V</td> <td>0.9</td> <td>0.0</td> <td>9.30</td> <td>38.5</td> <td>-29.2</td> <td></td> </tr> <tr> <td>699.70</td> <td>19.98</td> <td>H</td> <td>0.9</td> <td>0.0</td> <td>19.08</td> <td>38.5</td> <td>-19.4</td> <td></td> </tr> <tr> <td colspan="10">Mid Ch</td> </tr> <tr> <td>707.50</td> <td>10.30</td> <td>V</td> <td>0.9</td> <td>0.0</td> <td>9.40</td> <td>38.5</td> <td>-29.1</td> <td></td> </tr> <tr> <td>707.50</td> <td>20.30</td> <td>H</td> <td>0.9</td> <td>0.0</td> <td>19.40</td> <td>38.5</td> <td>-19.1</td> <td></td> </tr> <tr> <td colspan="10">High Ch</td> </tr> <tr> <td>715.30</td> <td>10.70</td> <td>V</td> <td>0.9</td> <td>0.0</td> <td>9.80</td> <td>38.5</td> <td>-28.7</td> <td></td> </tr> <tr> <td>715.30</td> <td>20.80</td> <td>H</td> <td>0.9</td> <td>0.0</td> <td>19.90</td> <td>38.5</td> <td>-18.6</td> <td></td> </tr> </tbody> </table>										f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch										699.70	10.20	V	0.9	0.0	9.30	38.5	-29.2		699.70	19.98	H	0.9	0.0	19.08	38.5	-19.4		Mid Ch										707.50	10.30	V	0.9	0.0	9.40	38.5	-29.1		707.50	20.30	H	0.9	0.0	19.40	38.5	-19.1		High Ch										715.30	10.70	V	0.9	0.0	9.80	38.5	-28.7		715.30	20.80	H	0.9	0.0	19.90	38.5	-18.6
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																														
Low Ch																																																																																																						
699.70	10.20	V	0.9	0.0	9.30	38.5	-29.2																																																																																															
699.70	19.98	H	0.9	0.0	19.08	38.5	-19.4																																																																																															
Mid Ch																																																																																																						
707.50	10.30	V	0.9	0.0	9.40	38.5	-29.1																																																																																															
707.50	20.30	H	0.9	0.0	19.40	38.5	-19.1																																																																																															
High Ch																																																																																																						
715.30	10.70	V	0.9	0.0	9.80	38.5	-28.7																																																																																															
715.30	20.80	H	0.9	0.0	19.90	38.5	-18.6																																																																																															

LTE Band 25

Band LTE25 20MHz 16QAM	High Frequency Substitution Measurement UL Verification Services, Inc.																																																																																																	
	Company:		LG																																																																																															
	Project #:		15I20413																																																																																															
	Date:		4/6/2015																																																																																															
	Test Engineer:		R.Z																																																																																															
	Configuration:		EUT Only																																																																																															
	Location:		Chamber G																																																																																															
	Mode:		LTE_16QAM Band 25 Fundamentals, 20MHz Bandwidth																																																																																															
	Test Equipment:		Receiving: Horn T711, and Chamber G SMA Cables Substitution: Horn T59, 6ft SMA Cable																																																																																															
	<table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBi)</th> <th>EIRP (dBm)</th> <th>Limit (dBm)</th> <th>Delta (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="9">Low Ch</td> </tr> <tr> <td>1860.00</td> <td>7.60</td> <td>V</td> <td>0.9</td> <td>9.2</td> <td>15.90</td> <td>33.0</td> <td>-17.1</td> <td></td> </tr> <tr> <td>1860.00</td> <td>15.90</td> <td>H</td> <td>0.9</td> <td>9.2</td> <td>24.20</td> <td>33.0</td> <td>-8.8</td> <td></td> </tr> <tr> <td colspan="9">Mid Ch</td> </tr> <tr> <td>1882.50</td> <td>8.75</td> <td>V</td> <td>0.9</td> <td>9.2</td> <td>17.05</td> <td>33.0</td> <td>-16.0</td> <td></td> </tr> <tr> <td>1882.50</td> <td>16.20</td> <td>H</td> <td>0.9</td> <td>9.2</td> <td>24.50</td> <td>33.0</td> <td>-8.5</td> <td></td> </tr> <tr> <td colspan="9">High Ch</td> </tr> <tr> <td>1905.00</td> <td>9.80</td> <td>V</td> <td>0.9</td> <td>9.1</td> <td>18.00</td> <td>33.0</td> <td>-15.0</td> <td></td> </tr> <tr> <td>1905.00</td> <td>17.60</td> <td>H</td> <td>0.9</td> <td>9.1</td> <td>25.80</td> <td>33.0</td> <td>-7.2</td> <td></td> </tr> </tbody> </table>									f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									1860.00	7.60	V	0.9	9.2	15.90	33.0	-17.1		1860.00	15.90	H	0.9	9.2	24.20	33.0	-8.8		Mid Ch									1882.50	8.75	V	0.9	9.2	17.05	33.0	-16.0		1882.50	16.20	H	0.9	9.2	24.50	33.0	-8.5		High Ch									1905.00	9.80	V	0.9	9.1	18.00	33.0	-15.0		1905.00	17.60	H	0.9	9.1	25.80	33.0	-7.2
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																										
Low Ch																																																																																																		
1860.00	7.60	V	0.9	9.2	15.90	33.0	-17.1																																																																																											
1860.00	15.90	H	0.9	9.2	24.20	33.0	-8.8																																																																																											
Mid Ch																																																																																																		
1882.50	8.75	V	0.9	9.2	17.05	33.0	-16.0																																																																																											
1882.50	16.20	H	0.9	9.2	24.50	33.0	-8.5																																																																																											
High Ch																																																																																																		
1905.00	9.80	V	0.9	9.1	18.00	33.0	-15.0																																																																																											
1905.00	17.60	H	0.9	9.1	25.80	33.0	-7.2																																																																																											

Band LTE25 20MHz QPSK	High Frequency Substitution Measurement UL Verification Services, Inc.																																																																																																					
	Company:		LG																																																																																																			
	Project #:		15I20413																																																																																																			
	Date:		4/6/2015																																																																																																			
	Test Engineer:		R.Z																																																																																																			
	Configuration:		EUT Only																																																																																																			
	Location:		Chamber G																																																																																																			
	Mode:		LTE_QPSK Band 25 Fundamentals, 20MHz Bandwidth																																																																																																			
	Test Equipment:		Receiving: Horn T711, and Chamber G SMA Cables Substitution: Horn T59, 6ft SMA Cable																																																																																																			
	<table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBi)</th> <th>EIRP (dBm)</th> <th>Limit (dBm)</th> <th>Delta (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="10">Low Ch</td> </tr> <tr> <td>1860.00</td> <td>8.10</td> <td>V</td> <td>0.9</td> <td>9.2</td> <td>16.40</td> <td>33.0</td> <td>-16.6</td> <td></td> </tr> <tr> <td>1860.00</td> <td>16.38</td> <td>H</td> <td>0.9</td> <td>9.2</td> <td>24.68</td> <td>33.0</td> <td>-8.3</td> <td></td> </tr> <tr> <td colspan="10">Mid Ch</td> </tr> <tr> <td>1882.50</td> <td>9.30</td> <td>V</td> <td>0.9</td> <td>9.2</td> <td>17.60</td> <td>33.0</td> <td>-15.4</td> <td></td> </tr> <tr> <td>1882.50</td> <td>16.80</td> <td>H</td> <td>0.9</td> <td>9.2</td> <td>25.10</td> <td>33.0</td> <td>-7.9</td> <td></td> </tr> <tr> <td colspan="10">High Ch</td> </tr> <tr> <td>1905.00</td> <td>10.30</td> <td>V</td> <td>0.9</td> <td>9.1</td> <td>18.50</td> <td>33.0</td> <td>-14.5</td> <td></td> </tr> <tr> <td>1905.00</td> <td>18.10</td> <td>H</td> <td>0.9</td> <td>9.1</td> <td>26.30</td> <td>33.0</td> <td>-6.7</td> <td></td> </tr> </tbody> </table>										f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch										1860.00	8.10	V	0.9	9.2	16.40	33.0	-16.6		1860.00	16.38	H	0.9	9.2	24.68	33.0	-8.3		Mid Ch										1882.50	9.30	V	0.9	9.2	17.60	33.0	-15.4		1882.50	16.80	H	0.9	9.2	25.10	33.0	-7.9		High Ch										1905.00	10.30	V	0.9	9.1	18.50	33.0	-14.5		1905.00	18.10	H	0.9	9.1	26.30	33.0	-6.7
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																														
Low Ch																																																																																																						
1860.00	8.10	V	0.9	9.2	16.40	33.0	-16.6																																																																																															
1860.00	16.38	H	0.9	9.2	24.68	33.0	-8.3																																																																																															
Mid Ch																																																																																																						
1882.50	9.30	V	0.9	9.2	17.60	33.0	-15.4																																																																																															
1882.50	16.80	H	0.9	9.2	25.10	33.0	-7.9																																																																																															
High Ch																																																																																																						
1905.00	10.30	V	0.9	9.1	18.50	33.0	-14.5																																																																																															
1905.00	18.10	H	0.9	9.1	26.30	33.0	-6.7																																																																																															

Band LTE25 15MHz 16QAM	High Frequency Substitution Measurement UL Verification Services, Inc.																																																																																																					
	Company:		LG																																																																																																			
	Project #:		15I20413																																																																																																			
	Date:		4/6/2015																																																																																																			
	Test Engineer:		R.Z																																																																																																			
	Configuration:		EUT Only																																																																																																			
	Location:		Chamber G																																																																																																			
	Mode:		LTE_16QAM Band 25 Fundamentals, 15MHz Bandwidth																																																																																																			
	Test Equipment:		Receiving: Horn T711, and Chamber G SMA Cables Substitution: Horn T59, 6ft SMA Cable																																																																																																			
	<table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBi)</th> <th>EIRP (dBm)</th> <th>Limit (dBm)</th> <th>Delta (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="10">Low Ch</td> </tr> <tr> <td>1857.50</td> <td>7.70</td> <td>V</td> <td>0.9</td> <td>9.2</td> <td>16.00</td> <td>33.0</td> <td>-17.0</td> <td></td> </tr> <tr> <td>1857.50</td> <td>16.00</td> <td>H</td> <td>0.9</td> <td>9.2</td> <td>24.30</td> <td>33.0</td> <td>-8.7</td> <td></td> </tr> <tr> <td colspan="10">Mid Ch</td> </tr> <tr> <td>1882.50</td> <td>8.63</td> <td>V</td> <td>0.9</td> <td>9.2</td> <td>16.93</td> <td>33.0</td> <td>-16.1</td> <td></td> </tr> <tr> <td>1882.50</td> <td>16.40</td> <td>H</td> <td>0.9</td> <td>9.2</td> <td>24.70</td> <td>33.0</td> <td>-8.3</td> <td></td> </tr> <tr> <td colspan="10">High Ch</td> </tr> <tr> <td>1907.50</td> <td>9.30</td> <td>V</td> <td>0.9</td> <td>9.1</td> <td>17.50</td> <td>33.0</td> <td>-15.5</td> <td></td> </tr> <tr> <td>1907.50</td> <td>17.40</td> <td>H</td> <td>0.9</td> <td>9.1</td> <td>25.60</td> <td>33.0</td> <td>-7.4</td> <td></td> </tr> </tbody> </table>										f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch										1857.50	7.70	V	0.9	9.2	16.00	33.0	-17.0		1857.50	16.00	H	0.9	9.2	24.30	33.0	-8.7		Mid Ch										1882.50	8.63	V	0.9	9.2	16.93	33.0	-16.1		1882.50	16.40	H	0.9	9.2	24.70	33.0	-8.3		High Ch										1907.50	9.30	V	0.9	9.1	17.50	33.0	-15.5		1907.50	17.40	H	0.9	9.1	25.60	33.0	-7.4
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																														
Low Ch																																																																																																						
1857.50	7.70	V	0.9	9.2	16.00	33.0	-17.0																																																																																															
1857.50	16.00	H	0.9	9.2	24.30	33.0	-8.7																																																																																															
Mid Ch																																																																																																						
1882.50	8.63	V	0.9	9.2	16.93	33.0	-16.1																																																																																															
1882.50	16.40	H	0.9	9.2	24.70	33.0	-8.3																																																																																															
High Ch																																																																																																						
1907.50	9.30	V	0.9	9.1	17.50	33.0	-15.5																																																																																															
1907.50	17.40	H	0.9	9.1	25.60	33.0	-7.4																																																																																															

Band LTE25 15MHz QPSK	High Frequency Substitution Measurement UL Verification Services, Inc.																																																																																																					
	Company:		LG																																																																																																			
	Project #:		15I20413																																																																																																			
	Date:		4/6/2015																																																																																																			
	Test Engineer:		R.Z																																																																																																			
	Configuration:		EUT Only																																																																																																			
	Location:		Chamber G																																																																																																			
	Mode:		LTE_QPSK Band 25 Fundamentals, 15MHz Bandwidth																																																																																																			
	Test Equipment:		Receiving: Horn T711, and Chamber G SMA Cables Substitution: Horn T59, 6ft SMA Cable																																																																																																			
	<table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBi)</th> <th>EIRP (dBm)</th> <th>Limit (dBm)</th> <th>Delta (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="10">Low Ch</td> </tr> <tr> <td>1857.50</td> <td>8.20</td> <td>V</td> <td>0.9</td> <td>9.2</td> <td>16.50</td> <td>33.0</td> <td>-16.5</td> <td></td> </tr> <tr> <td>1857.50</td> <td>16.50</td> <td>H</td> <td>0.9</td> <td>9.2</td> <td>24.80</td> <td>33.0</td> <td>-8.2</td> <td></td> </tr> <tr> <td colspan="10">Mid Ch</td> </tr> <tr> <td>1882.50</td> <td>9.20</td> <td>V</td> <td>0.9</td> <td>9.2</td> <td>17.50</td> <td>33.0</td> <td>-15.5</td> <td></td> </tr> <tr> <td>1882.50</td> <td>17.00</td> <td>H</td> <td>0.9</td> <td>9.2</td> <td>25.30</td> <td>33.0</td> <td>-7.7</td> <td></td> </tr> <tr> <td colspan="10">High Ch</td> </tr> <tr> <td>1907.50</td> <td>9.90</td> <td>V</td> <td>0.9</td> <td>9.1</td> <td>18.10</td> <td>33.0</td> <td>-14.9</td> <td></td> </tr> <tr> <td>1907.50</td> <td>17.90</td> <td>H</td> <td>0.9</td> <td>9.1</td> <td>26.10</td> <td>33.0</td> <td>-6.9</td> <td></td> </tr> </tbody> </table>										f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch										1857.50	8.20	V	0.9	9.2	16.50	33.0	-16.5		1857.50	16.50	H	0.9	9.2	24.80	33.0	-8.2		Mid Ch										1882.50	9.20	V	0.9	9.2	17.50	33.0	-15.5		1882.50	17.00	H	0.9	9.2	25.30	33.0	-7.7		High Ch										1907.50	9.90	V	0.9	9.1	18.10	33.0	-14.9		1907.50	17.90	H	0.9	9.1	26.10	33.0	-6.9
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																														
Low Ch																																																																																																						
1857.50	8.20	V	0.9	9.2	16.50	33.0	-16.5																																																																																															
1857.50	16.50	H	0.9	9.2	24.80	33.0	-8.2																																																																																															
Mid Ch																																																																																																						
1882.50	9.20	V	0.9	9.2	17.50	33.0	-15.5																																																																																															
1882.50	17.00	H	0.9	9.2	25.30	33.0	-7.7																																																																																															
High Ch																																																																																																						
1907.50	9.90	V	0.9	9.1	18.10	33.0	-14.9																																																																																															
1907.50	17.90	H	0.9	9.1	26.10	33.0	-6.9																																																																																															

Band LTE25 10MHz 16QAM	High Frequency Substitution Measurement UL Verification Services, Inc.																																																																																																					
	Company:		LG																																																																																																			
	Project #:		15I20413																																																																																																			
	Date:		4/6/2015																																																																																																			
	Test Engineer:		R.Z																																																																																																			
	Configuration:		EUT Only																																																																																																			
	Location:		Chamber G																																																																																																			
	Mode:		LTE_16QAM Band 25 Fundamentals, 10MHz Bandwidth																																																																																																			
	Test Equipment:		Receiving: Horn T711, and Chamber G SMA Cables Substitution: Horn T59, 6ft SMA Cable																																																																																																			
	<table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBi)</th> <th>EIRP (dBm)</th> <th>Limit (dBm)</th> <th>Delta (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="10">Low Ch</td> </tr> <tr> <td>1855.00</td> <td>8.80</td> <td>V</td> <td>0.9</td> <td>9.2</td> <td>17.10</td> <td>33.0</td> <td>-15.9</td> <td></td> </tr> <tr> <td>1855.00</td> <td>16.30</td> <td>H</td> <td>0.9</td> <td>9.2</td> <td>24.60</td> <td>33.0</td> <td>-8.4</td> <td></td> </tr> <tr> <td colspan="10">Mid Ch</td> </tr> <tr> <td>1882.50</td> <td>8.30</td> <td>V</td> <td>0.9</td> <td>9.2</td> <td>16.60</td> <td>33.0</td> <td>-16.4</td> <td></td> </tr> <tr> <td>1882.50</td> <td>16.08</td> <td>H</td> <td>0.9</td> <td>9.2</td> <td>24.38</td> <td>33.0</td> <td>-8.6</td> <td></td> </tr> <tr> <td colspan="10">High Ch</td> </tr> <tr> <td>1910.00</td> <td>9.40</td> <td>V</td> <td>0.9</td> <td>9.1</td> <td>17.60</td> <td>33.0</td> <td>-15.4</td> <td></td> </tr> <tr> <td>1910.00</td> <td>17.30</td> <td>H</td> <td>0.9</td> <td>9.1</td> <td>25.50</td> <td>33.0</td> <td>-7.5</td> <td></td> </tr> </tbody> </table>										f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch										1855.00	8.80	V	0.9	9.2	17.10	33.0	-15.9		1855.00	16.30	H	0.9	9.2	24.60	33.0	-8.4		Mid Ch										1882.50	8.30	V	0.9	9.2	16.60	33.0	-16.4		1882.50	16.08	H	0.9	9.2	24.38	33.0	-8.6		High Ch										1910.00	9.40	V	0.9	9.1	17.60	33.0	-15.4		1910.00	17.30	H	0.9	9.1	25.50	33.0	-7.5
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																														
Low Ch																																																																																																						
1855.00	8.80	V	0.9	9.2	17.10	33.0	-15.9																																																																																															
1855.00	16.30	H	0.9	9.2	24.60	33.0	-8.4																																																																																															
Mid Ch																																																																																																						
1882.50	8.30	V	0.9	9.2	16.60	33.0	-16.4																																																																																															
1882.50	16.08	H	0.9	9.2	24.38	33.0	-8.6																																																																																															
High Ch																																																																																																						
1910.00	9.40	V	0.9	9.1	17.60	33.0	-15.4																																																																																															
1910.00	17.30	H	0.9	9.1	25.50	33.0	-7.5																																																																																															

Band LTE25 10MHz QPSK	High Frequency Substitution Measurement UL Verification Services, Inc.																																																																																																					
	Company:		LG																																																																																																			
	Project #:		15I20413																																																																																																			
	Date:		4/6/2015																																																																																																			
	Test Engineer:		R.Z																																																																																																			
	Configuration:		EUT Only																																																																																																			
	Location:		Chamber G																																																																																																			
	Mode:		LTE_QPSK Band 25 Fundamentals, 10MHz Bandwidth																																																																																																			
	Test Equipment:		Receiving: Horn T711, and Chamber G SMA Cables Substitution: Horn T59, 6ft SMA Cable																																																																																																			
	<table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBi)</th> <th>EIRP (dBm)</th> <th>Limit (dBm)</th> <th>Delta (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="10">Low Ch</td> </tr> <tr> <td>1855.00</td> <td>9.40</td> <td>V</td> <td>0.9</td> <td>9.2</td> <td>17.70</td> <td>33.0</td> <td>-15.3</td> <td></td> </tr> <tr> <td>1855.00</td> <td>16.90</td> <td>H</td> <td>0.9</td> <td>9.2</td> <td>25.20</td> <td>33.0</td> <td>-7.8</td> <td></td> </tr> <tr> <td colspan="10">Mid Ch</td> </tr> <tr> <td>1882.50</td> <td>8.90</td> <td>V</td> <td>0.9</td> <td>9.2</td> <td>17.20</td> <td>33.0</td> <td>-15.8</td> <td></td> </tr> <tr> <td>1882.50</td> <td>16.70</td> <td>H</td> <td>0.9</td> <td>9.2</td> <td>25.00</td> <td>33.0</td> <td>-8.0</td> <td></td> </tr> <tr> <td colspan="10">High Ch</td> </tr> <tr> <td>1910.00</td> <td>9.87</td> <td>V</td> <td>0.9</td> <td>9.1</td> <td>18.07</td> <td>33.0</td> <td>-14.9</td> <td></td> </tr> <tr> <td>1910.00</td> <td>17.90</td> <td>H</td> <td>0.9</td> <td>9.1</td> <td>26.10</td> <td>33.0</td> <td>-6.9</td> <td></td> </tr> </tbody> </table>										f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch										1855.00	9.40	V	0.9	9.2	17.70	33.0	-15.3		1855.00	16.90	H	0.9	9.2	25.20	33.0	-7.8		Mid Ch										1882.50	8.90	V	0.9	9.2	17.20	33.0	-15.8		1882.50	16.70	H	0.9	9.2	25.00	33.0	-8.0		High Ch										1910.00	9.87	V	0.9	9.1	18.07	33.0	-14.9		1910.00	17.90	H	0.9	9.1	26.10	33.0	-6.9
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																														
Low Ch																																																																																																						
1855.00	9.40	V	0.9	9.2	17.70	33.0	-15.3																																																																																															
1855.00	16.90	H	0.9	9.2	25.20	33.0	-7.8																																																																																															
Mid Ch																																																																																																						
1882.50	8.90	V	0.9	9.2	17.20	33.0	-15.8																																																																																															
1882.50	16.70	H	0.9	9.2	25.00	33.0	-8.0																																																																																															
High Ch																																																																																																						
1910.00	9.87	V	0.9	9.1	18.07	33.0	-14.9																																																																																															
1910.00	17.90	H	0.9	9.1	26.10	33.0	-6.9																																																																																															

Band LTE25 5MHz 16QAM	High Frequency Substitution Measurement UL Verification Services, Inc.																																																																																																					
	Company:		LG																																																																																																			
	Project #:		15I20413																																																																																																			
	Date:		4/6/2015																																																																																																			
	Test Engineer:		R.Z																																																																																																			
	Configuration:		EUT Only																																																																																																			
	Location:		Chamber G																																																																																																			
	Mode:		LTE_16QAM Band 25 Fundamentals, 5MHz Bandwidth																																																																																																			
	Test Equipment:		Receiving: Horn T711, and Chamber G SMA Cables Substitution: Horn T59, 6ft SMA Cable																																																																																																			
	<table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBi)</th> <th>EIRP (dBm)</th> <th>Limit (dBm)</th> <th>Delta (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="10">Low Ch</td> </tr> <tr> <td>1852.50</td> <td>8.70</td> <td>V</td> <td>0.9</td> <td>9.2</td> <td>17.00</td> <td>33.0</td> <td>-16.0</td> <td></td> </tr> <tr> <td>1852.50</td> <td>16.40</td> <td>H</td> <td>0.9</td> <td>9.2</td> <td>24.70</td> <td>33.0</td> <td>-8.3</td> <td></td> </tr> <tr> <td colspan="10">Mid Ch</td> </tr> <tr> <td>1882.50</td> <td>8.66</td> <td>V</td> <td>0.9</td> <td>9.2</td> <td>16.96</td> <td>33.0</td> <td>-16.0</td> <td></td> </tr> <tr> <td>1882.50</td> <td>15.86</td> <td>H</td> <td>0.9</td> <td>9.2</td> <td>24.16</td> <td>33.0</td> <td>-8.8</td> <td></td> </tr> <tr> <td colspan="10">High Ch</td> </tr> <tr> <td>1912.50</td> <td>9.80</td> <td>V</td> <td>0.9</td> <td>9.1</td> <td>18.00</td> <td>33.0</td> <td>-15.0</td> <td></td> </tr> <tr> <td>1912.50</td> <td>17.10</td> <td>H</td> <td>0.9</td> <td>9.1</td> <td>25.30</td> <td>33.0</td> <td>-7.7</td> <td></td> </tr> </tbody> </table>										f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch										1852.50	8.70	V	0.9	9.2	17.00	33.0	-16.0		1852.50	16.40	H	0.9	9.2	24.70	33.0	-8.3		Mid Ch										1882.50	8.66	V	0.9	9.2	16.96	33.0	-16.0		1882.50	15.86	H	0.9	9.2	24.16	33.0	-8.8		High Ch										1912.50	9.80	V	0.9	9.1	18.00	33.0	-15.0		1912.50	17.10	H	0.9	9.1	25.30	33.0	-7.7
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																														
Low Ch																																																																																																						
1852.50	8.70	V	0.9	9.2	17.00	33.0	-16.0																																																																																															
1852.50	16.40	H	0.9	9.2	24.70	33.0	-8.3																																																																																															
Mid Ch																																																																																																						
1882.50	8.66	V	0.9	9.2	16.96	33.0	-16.0																																																																																															
1882.50	15.86	H	0.9	9.2	24.16	33.0	-8.8																																																																																															
High Ch																																																																																																						
1912.50	9.80	V	0.9	9.1	18.00	33.0	-15.0																																																																																															
1912.50	17.10	H	0.9	9.1	25.30	33.0	-7.7																																																																																															

Band LTE25 5MHz QPSK	High Frequency Substitution Measurement UL Verification Services, Inc.																																																																																																					
	Company:		LG																																																																																																			
	Project #:		15I20413																																																																																																			
	Date:		4/6/2015																																																																																																			
	Test Engineer:		R.Z																																																																																																			
	Configuration:		EUT Only																																																																																																			
	Location:		Chamber G																																																																																																			
	Mode:		LTE_QPSK Band 25 Fundamentals, 5MHz Bandwidth																																																																																																			
	Test Equipment:		Receiving: Horn T711, and Chamber G SMA Cables Substitution: Horn T59, 6ft SMA Cable																																																																																																			
	<table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBi)</th> <th>EIRP (dBm)</th> <th>Limit (dBm)</th> <th>Delta (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="10">Low Ch</td> </tr> <tr> <td>1852.50</td> <td>9.30</td> <td>V</td> <td>0.9</td> <td>9.2</td> <td>17.60</td> <td>33.0</td> <td>-15.4</td> <td></td> </tr> <tr> <td>1852.50</td> <td>16.80</td> <td>H</td> <td>0.9</td> <td>9.2</td> <td>25.10</td> <td>33.0</td> <td>-7.9</td> <td></td> </tr> <tr> <td colspan="10">Mid Ch</td> </tr> <tr> <td>1882.50</td> <td>9.20</td> <td>V</td> <td>0.9</td> <td>9.2</td> <td>17.50</td> <td>33.0</td> <td>-15.5</td> <td></td> </tr> <tr> <td>1882.50</td> <td>16.40</td> <td>H</td> <td>0.9</td> <td>9.2</td> <td>24.70</td> <td>33.0</td> <td>-8.3</td> <td></td> </tr> <tr> <td colspan="10">High Ch</td> </tr> <tr> <td>1912.50</td> <td>10.30</td> <td>V</td> <td>0.9</td> <td>9.1</td> <td>18.50</td> <td>33.0</td> <td>-14.5</td> <td></td> </tr> <tr> <td>1912.50</td> <td>17.60</td> <td>H</td> <td>0.9</td> <td>9.1</td> <td>25.80</td> <td>33.0</td> <td>-7.2</td> <td></td> </tr> </tbody> </table>										f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch										1852.50	9.30	V	0.9	9.2	17.60	33.0	-15.4		1852.50	16.80	H	0.9	9.2	25.10	33.0	-7.9		Mid Ch										1882.50	9.20	V	0.9	9.2	17.50	33.0	-15.5		1882.50	16.40	H	0.9	9.2	24.70	33.0	-8.3		High Ch										1912.50	10.30	V	0.9	9.1	18.50	33.0	-14.5		1912.50	17.60	H	0.9	9.1	25.80	33.0	-7.2
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																														
Low Ch																																																																																																						
1852.50	9.30	V	0.9	9.2	17.60	33.0	-15.4																																																																																															
1852.50	16.80	H	0.9	9.2	25.10	33.0	-7.9																																																																																															
Mid Ch																																																																																																						
1882.50	9.20	V	0.9	9.2	17.50	33.0	-15.5																																																																																															
1882.50	16.40	H	0.9	9.2	24.70	33.0	-8.3																																																																																															
High Ch																																																																																																						
1912.50	10.30	V	0.9	9.1	18.50	33.0	-14.5																																																																																															
1912.50	17.60	H	0.9	9.1	25.80	33.0	-7.2																																																																																															

Band LTE25 3MHz 16QAM	High Frequency Substitution Measurement UL Verification Services, Inc.																																																																																																					
	Company:		LG																																																																																																			
	Project #:		15I20413																																																																																																			
	Date:		4/6/2015																																																																																																			
	Test Engineer:		R.Z																																																																																																			
	Configuration:		EUT Only																																																																																																			
	Location:		Chamber G																																																																																																			
	Mode:		LTE_16QAM Band 25 Fundamentals, 3MHz Bandwidth																																																																																																			
	Test Equipment:		Receiving: Horn T711, and Chamber G SMA Cables Substitution: Horn T59, 6ft SMA Cable																																																																																																			
	<table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBi)</th> <th>EIRP (dBm)</th> <th>Limit (dBm)</th> <th>Delta (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="10">Low Ch</td> </tr> <tr> <td>1851.50</td> <td>8.00</td> <td>V</td> <td>0.9</td> <td>9.2</td> <td>16.30</td> <td>33.0</td> <td>-16.7</td> <td></td> </tr> <tr> <td>1851.50</td> <td>15.98</td> <td>H</td> <td>0.9</td> <td>9.2</td> <td>24.28</td> <td>33.0</td> <td>-8.7</td> <td></td> </tr> <tr> <td colspan="10">Mid Ch</td> </tr> <tr> <td>1882.50</td> <td>8.79</td> <td>V</td> <td>0.9</td> <td>9.2</td> <td>17.09</td> <td>33.0</td> <td>-15.9</td> <td></td> </tr> <tr> <td>1882.50</td> <td>16.56</td> <td>H</td> <td>0.9</td> <td>9.2</td> <td>24.86</td> <td>33.0</td> <td>-8.1</td> <td></td> </tr> <tr> <td colspan="10">High Ch</td> </tr> <tr> <td>1913.50</td> <td>9.63</td> <td>V</td> <td>0.9</td> <td>9.1</td> <td>17.83</td> <td>33.0</td> <td>-15.2</td> <td></td> </tr> <tr> <td>1913.50</td> <td>18.08</td> <td>H</td> <td>0.9</td> <td>9.1</td> <td>26.28</td> <td>33.0</td> <td>-6.7</td> <td></td> </tr> </tbody> </table>										f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch										1851.50	8.00	V	0.9	9.2	16.30	33.0	-16.7		1851.50	15.98	H	0.9	9.2	24.28	33.0	-8.7		Mid Ch										1882.50	8.79	V	0.9	9.2	17.09	33.0	-15.9		1882.50	16.56	H	0.9	9.2	24.86	33.0	-8.1		High Ch										1913.50	9.63	V	0.9	9.1	17.83	33.0	-15.2		1913.50	18.08	H	0.9	9.1	26.28	33.0	-6.7
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																														
Low Ch																																																																																																						
1851.50	8.00	V	0.9	9.2	16.30	33.0	-16.7																																																																																															
1851.50	15.98	H	0.9	9.2	24.28	33.0	-8.7																																																																																															
Mid Ch																																																																																																						
1882.50	8.79	V	0.9	9.2	17.09	33.0	-15.9																																																																																															
1882.50	16.56	H	0.9	9.2	24.86	33.0	-8.1																																																																																															
High Ch																																																																																																						
1913.50	9.63	V	0.9	9.1	17.83	33.0	-15.2																																																																																															
1913.50	18.08	H	0.9	9.1	26.28	33.0	-6.7																																																																																															

Band LTE25 3MHz QPSK	High Frequency Substitution Measurement UL Verification Services, Inc.																																																																																																					
	Company:		LG																																																																																																			
	Project #:		15I20413																																																																																																			
	Date:		4/6/2015																																																																																																			
	Test Engineer:		R.Z																																																																																																			
	Configuration:		EUT Only																																																																																																			
	Location:		Chamber G																																																																																																			
	Mode:		LTE_QPSK Band 25 Fundamentals, 3MHz Bandwidth																																																																																																			
	Test Equipment:		Receiving: Horn T711, and Chamber G SMA Cables Substitution: Horn T59, 6ft SMA Cable																																																																																																			
	<table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBi)</th> <th>EIRP (dBm)</th> <th>Limit (dBm)</th> <th>Delta (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="10">Low Ch</td> </tr> <tr> <td>1851.50</td> <td>8.30</td> <td>V</td> <td>0.9</td> <td>9.2</td> <td>16.60</td> <td>33.0</td> <td>-16.4</td> <td></td> </tr> <tr> <td>1851.50</td> <td>16.40</td> <td>H</td> <td>0.9</td> <td>9.2</td> <td>24.70</td> <td>33.0</td> <td>-8.3</td> <td></td> </tr> <tr> <td colspan="10">Mid Ch</td> </tr> <tr> <td>1882.50</td> <td>9.30</td> <td>V</td> <td>0.9</td> <td>9.2</td> <td>17.60</td> <td>33.0</td> <td>-15.4</td> <td></td> </tr> <tr> <td>1882.50</td> <td>17.14</td> <td>H</td> <td>0.9</td> <td>9.2</td> <td>25.44</td> <td>33.0</td> <td>-7.6</td> <td></td> </tr> <tr> <td colspan="10">High Ch</td> </tr> <tr> <td>1913.50</td> <td>10.00</td> <td>V</td> <td>0.9</td> <td>9.1</td> <td>18.20</td> <td>33.0</td> <td>-14.8</td> <td></td> </tr> <tr> <td>1913.50</td> <td>18.46</td> <td>H</td> <td>0.9</td> <td>9.1</td> <td>26.66</td> <td>33.0</td> <td>-6.3</td> <td></td> </tr> </tbody> </table>										f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch										1851.50	8.30	V	0.9	9.2	16.60	33.0	-16.4		1851.50	16.40	H	0.9	9.2	24.70	33.0	-8.3		Mid Ch										1882.50	9.30	V	0.9	9.2	17.60	33.0	-15.4		1882.50	17.14	H	0.9	9.2	25.44	33.0	-7.6		High Ch										1913.50	10.00	V	0.9	9.1	18.20	33.0	-14.8		1913.50	18.46	H	0.9	9.1	26.66	33.0	-6.3
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																														
Low Ch																																																																																																						
1851.50	8.30	V	0.9	9.2	16.60	33.0	-16.4																																																																																															
1851.50	16.40	H	0.9	9.2	24.70	33.0	-8.3																																																																																															
Mid Ch																																																																																																						
1882.50	9.30	V	0.9	9.2	17.60	33.0	-15.4																																																																																															
1882.50	17.14	H	0.9	9.2	25.44	33.0	-7.6																																																																																															
High Ch																																																																																																						
1913.50	10.00	V	0.9	9.1	18.20	33.0	-14.8																																																																																															
1913.50	18.46	H	0.9	9.1	26.66	33.0	-6.3																																																																																															

Band LTE25 1.4MHz 16QAM	High Frequency Substitution Measurement UL Verification Services, Inc.																																																																																																					
	Company:		LG																																																																																																			
	Project #:		15I20413																																																																																																			
	Date:		4/6/2015																																																																																																			
	Test Engineer:		R.Z																																																																																																			
	Configuration:		EUT Only																																																																																																			
	Location:		Chamber G																																																																																																			
	Mode:		LTE_16QAM Band 25 Fundamentals, 1.4MHz Bandwidth																																																																																																			
	Test Equipment:		Receiving: Horn T711, and Chamber G SMA Cables Substitution: Horn T59, 6ft SMA Cable																																																																																																			
	<table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBi)</th> <th>EIRP (dBm)</th> <th>Limit (dBm)</th> <th>Delta (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="10">Low Ch</td> </tr> <tr> <td>1850.70</td> <td>8.70</td> <td>V</td> <td>0.9</td> <td>9.2</td> <td>17.00</td> <td>33.0</td> <td>-16.0</td> <td></td> </tr> <tr> <td>1850.70</td> <td>16.08</td> <td>H</td> <td>0.9</td> <td>9.2</td> <td>24.38</td> <td>33.0</td> <td>-8.6</td> <td></td> </tr> <tr> <td colspan="10">Mid Ch</td> </tr> <tr> <td>1882.50</td> <td>8.50</td> <td>V</td> <td>0.9</td> <td>9.2</td> <td>16.80</td> <td>33.0</td> <td>-16.2</td> <td></td> </tr> <tr> <td>1882.50</td> <td>16.30</td> <td>H</td> <td>0.9</td> <td>9.2</td> <td>24.60</td> <td>33.0</td> <td>-8.4</td> <td></td> </tr> <tr> <td colspan="10">High Ch</td> </tr> <tr> <td>1914.30</td> <td>9.00</td> <td>V</td> <td>0.9</td> <td>9.1</td> <td>17.20</td> <td>33.0</td> <td>-15.8</td> <td></td> </tr> <tr> <td>1914.30</td> <td>16.90</td> <td>H</td> <td>0.9</td> <td>9.1</td> <td>25.10</td> <td>33.0</td> <td>-7.9</td> <td></td> </tr> </tbody> </table>										f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch										1850.70	8.70	V	0.9	9.2	17.00	33.0	-16.0		1850.70	16.08	H	0.9	9.2	24.38	33.0	-8.6		Mid Ch										1882.50	8.50	V	0.9	9.2	16.80	33.0	-16.2		1882.50	16.30	H	0.9	9.2	24.60	33.0	-8.4		High Ch										1914.30	9.00	V	0.9	9.1	17.20	33.0	-15.8		1914.30	16.90	H	0.9	9.1	25.10	33.0	-7.9
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																														
Low Ch																																																																																																						
1850.70	8.70	V	0.9	9.2	17.00	33.0	-16.0																																																																																															
1850.70	16.08	H	0.9	9.2	24.38	33.0	-8.6																																																																																															
Mid Ch																																																																																																						
1882.50	8.50	V	0.9	9.2	16.80	33.0	-16.2																																																																																															
1882.50	16.30	H	0.9	9.2	24.60	33.0	-8.4																																																																																															
High Ch																																																																																																						
1914.30	9.00	V	0.9	9.1	17.20	33.0	-15.8																																																																																															
1914.30	16.90	H	0.9	9.1	25.10	33.0	-7.9																																																																																															

Band LTE25 1.4MHz QPSK	High Frequency Substitution Measurement UL Verification Services, Inc.									
	Company: LG Project #: 15I20413 Date: 4/6/2015 Test Engineer: R.Z Configuration: EUT Only Location: Chamber G Mode: LTE_QPSK Band 25 Fundamentals, 1.4MHz Bandwidth									
	Test Equipment: Receiving: Horn T711, and Chamber G SMA Cables Substitution: Horn T59, 6ft SMA Cable									
	f	SG reading	Ant. Pol.	Cable Loss	Antenna Gain	EIRP	Limit	Delta	Notes	
	MHz	(dBm)	(H/V)	(dB)	(dBi)	(dBm)	(dBm)	(dB)		
	Low Ch									
	1850.70	9.10	V	0.9	9.2	17.44	33.0	-15.6		
	1850.70	16.50	H	0.9	9.2	24.84	33.0	-8.2		
	Mid Ch									
	1882.50	9.00	V	0.9	9.2	17.25	33.0	-15.8		
1882.50	16.70	H	0.9	9.2	24.95	33.0	-8.1			
High Ch										
1914.30	9.50	V	0.9	9.1	17.67	33.0	-15.3			
1914.30	17.30	H	0.9	9.1	25.47	33.0	-7.5			

LTE Band 26

Band LTE26 15MHz 16QAM	High Frequency Substitution Measurement UL Verification Services, Inc.																																																																																																	
	Company:		LG Electronics																																																																																															
	Project #:		15I20413																																																																																															
	Date:		4/8/2015																																																																																															
	Test Engineer:		R.Z																																																																																															
	Configuration:		EUT Only																																																																																															
	Location:		Chamber G																																																																																															
	Mode:		LTE_16QAM Band 26 Fundamentals, 15MHz Bandwidth																																																																																															
	Test Equipment:		Receiving: Hybrid T899, and Chamber G SMA Cables Substitution: Dipole T273, 6ft SMA Cable Warehouse																																																																																															
	<table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBd)</th> <th>ERP (dBm)</th> <th>Limit (dBm)</th> <th>Delta (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="9">Low Ch</td> </tr> <tr> <td>831.50</td> <td>14.70</td> <td>V</td> <td>0.9</td> <td>0.0</td> <td>13.80</td> <td>38.5</td> <td>-24.7</td> <td></td> </tr> <tr> <td>831.50</td> <td>21.86</td> <td>H</td> <td>0.9</td> <td>0.0</td> <td>20.96</td> <td>38.5</td> <td>-17.5</td> <td></td> </tr> <tr> <td colspan="9">Mid Ch</td> </tr> <tr> <td>836.50</td> <td>14.00</td> <td>V</td> <td>0.9</td> <td>0.0</td> <td>13.10</td> <td>38.5</td> <td>-25.4</td> <td></td> </tr> <tr> <td>836.50</td> <td>21.70</td> <td>H</td> <td>0.9</td> <td>0.0</td> <td>20.80</td> <td>38.5</td> <td>-17.7</td> <td></td> </tr> <tr> <td colspan="9">High Ch</td> </tr> <tr> <td>841.50</td> <td>16.10</td> <td>V</td> <td>0.9</td> <td>0.0</td> <td>15.20</td> <td>38.5</td> <td>-23.3</td> <td></td> </tr> <tr> <td>841.50</td> <td>22.80</td> <td>H</td> <td>0.9</td> <td>0.0</td> <td>21.90</td> <td>38.5</td> <td>-16.6</td> <td></td> </tr> </tbody> </table>									f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									831.50	14.70	V	0.9	0.0	13.80	38.5	-24.7		831.50	21.86	H	0.9	0.0	20.96	38.5	-17.5		Mid Ch									836.50	14.00	V	0.9	0.0	13.10	38.5	-25.4		836.50	21.70	H	0.9	0.0	20.80	38.5	-17.7		High Ch									841.50	16.10	V	0.9	0.0	15.20	38.5	-23.3		841.50	22.80	H	0.9	0.0	21.90	38.5	-16.6
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																										
Low Ch																																																																																																		
831.50	14.70	V	0.9	0.0	13.80	38.5	-24.7																																																																																											
831.50	21.86	H	0.9	0.0	20.96	38.5	-17.5																																																																																											
Mid Ch																																																																																																		
836.50	14.00	V	0.9	0.0	13.10	38.5	-25.4																																																																																											
836.50	21.70	H	0.9	0.0	20.80	38.5	-17.7																																																																																											
High Ch																																																																																																		
841.50	16.10	V	0.9	0.0	15.20	38.5	-23.3																																																																																											
841.50	22.80	H	0.9	0.0	21.90	38.5	-16.6																																																																																											

Band LTE26 15MHz QPSK	High Frequency Substitution Measurement UL Verification Services, Inc.																																																																																																	
	Company:		LG Electronics																																																																																															
	Project #:		15I20413																																																																																															
	Date:		4/8/2015																																																																																															
	Test Engineer:		R.Z																																																																																															
	Configuration:		EUT Only																																																																																															
	Location:		Chamber G																																																																																															
	Mode:		LTE_QPSK Band 26 Fundamentals, 15MHz Bandwidth																																																																																															
	Test Equipment:		Receiving: Hybrid T899, and Chamber G SMA Cables Substitution: Dipole T273, 6ft SMA Cable Warehouse																																																																																															
	<table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBd)</th> <th>ERP (dBm)</th> <th>Limit (dBm)</th> <th>Delta (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="9">Low Ch</td> </tr> <tr> <td>831.50</td> <td>15.60</td> <td>V</td> <td>0.9</td> <td>0.0</td> <td>14.70</td> <td>38.5</td> <td>-23.8</td> <td></td> </tr> <tr> <td>831.50</td> <td>22.78</td> <td>H</td> <td>0.9</td> <td>0.0</td> <td>21.88</td> <td>38.5</td> <td>-16.6</td> <td></td> </tr> <tr> <td colspan="9">Mid Ch</td> </tr> <tr> <td>836.50</td> <td>14.90</td> <td>V</td> <td>0.9</td> <td>0.0</td> <td>14.00</td> <td>38.5</td> <td>-24.5</td> <td></td> </tr> <tr> <td>836.50</td> <td>22.58</td> <td>H</td> <td>0.9</td> <td>0.0</td> <td>21.68</td> <td>38.5</td> <td>-16.8</td> <td></td> </tr> <tr> <td colspan="9">High Ch</td> </tr> <tr> <td>841.50</td> <td>16.90</td> <td>V</td> <td>0.9</td> <td>0.0</td> <td>16.00</td> <td>38.5</td> <td>-22.5</td> <td></td> </tr> <tr> <td>841.50</td> <td>23.67</td> <td>H</td> <td>0.9</td> <td>0.0</td> <td>22.77</td> <td>38.5</td> <td>-15.7</td> <td></td> </tr> </tbody> </table>									f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									831.50	15.60	V	0.9	0.0	14.70	38.5	-23.8		831.50	22.78	H	0.9	0.0	21.88	38.5	-16.6		Mid Ch									836.50	14.90	V	0.9	0.0	14.00	38.5	-24.5		836.50	22.58	H	0.9	0.0	21.68	38.5	-16.8		High Ch									841.50	16.90	V	0.9	0.0	16.00	38.5	-22.5		841.50	23.67	H	0.9	0.0	22.77	38.5	-15.7
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																										
Low Ch																																																																																																		
831.50	15.60	V	0.9	0.0	14.70	38.5	-23.8																																																																																											
831.50	22.78	H	0.9	0.0	21.88	38.5	-16.6																																																																																											
Mid Ch																																																																																																		
836.50	14.90	V	0.9	0.0	14.00	38.5	-24.5																																																																																											
836.50	22.58	H	0.9	0.0	21.68	38.5	-16.8																																																																																											
High Ch																																																																																																		
841.50	16.90	V	0.9	0.0	16.00	38.5	-22.5																																																																																											
841.50	23.67	H	0.9	0.0	22.77	38.5	-15.7																																																																																											

Band LTE26 10MHz QPSK	High Frequency Substitution Measurement UL Verification Services, Inc.																																																																																																	
	Company:		LG Electronics																																																																																															
	Project #:		15I20413																																																																																															
	Date:		4/8/2015																																																																																															
	Test Engineer:		R.Z																																																																																															
	Configuration:		EUT Only																																																																																															
	Location:		Chamber G																																																																																															
	Mode:		LTE_QPSK Band 26 Fundamentals, 10MHz Bandwidth																																																																																															
	Test Equipment:																																																																																																	
	Receiving: Hybrid T899, and Chamber G SMA Cables Substitution: Dipole T273, 6ft SMA Cable Warehouse																																																																																																	
<table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBd)</th> <th>ERP (dBm)</th> <th>Limit (dBm)</th> <th>Delta (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="9">Low Ch</td> </tr> <tr> <td>819.00</td> <td>16.00</td> <td>V</td> <td>0.9</td> <td>0.0</td> <td>15.10</td> <td>50.0</td> <td>-34.9</td> <td></td> </tr> <tr> <td>819.00</td> <td>22.63</td> <td>H</td> <td>0.9</td> <td>0.0</td> <td>21.73</td> <td>50.0</td> <td>-28.3</td> <td></td> </tr> <tr> <td colspan="9">Mid Ch</td> </tr> <tr> <td>831.50</td> <td>15.30</td> <td>V</td> <td>0.9</td> <td>0.0</td> <td>14.40</td> <td>38.5</td> <td>-24.1</td> <td></td> </tr> <tr> <td>831.50</td> <td>22.50</td> <td>H</td> <td>0.9</td> <td>0.0</td> <td>21.60</td> <td>38.5</td> <td>-16.9</td> <td></td> </tr> <tr> <td colspan="9">High Ch</td> </tr> <tr> <td>844.00</td> <td>17.40</td> <td>V</td> <td>0.9</td> <td>0.0</td> <td>16.50</td> <td>38.5</td> <td>-22.0</td> <td></td> </tr> <tr> <td>844.00</td> <td>23.70</td> <td>H</td> <td>0.9</td> <td>0.0</td> <td>22.80</td> <td>38.5</td> <td>-15.7</td> <td></td> </tr> </tbody> </table>									f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									819.00	16.00	V	0.9	0.0	15.10	50.0	-34.9		819.00	22.63	H	0.9	0.0	21.73	50.0	-28.3		Mid Ch									831.50	15.30	V	0.9	0.0	14.40	38.5	-24.1		831.50	22.50	H	0.9	0.0	21.60	38.5	-16.9		High Ch									844.00	17.40	V	0.9	0.0	16.50	38.5	-22.0		844.00	23.70	H	0.9	0.0	22.80	38.5	-15.7	
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																										
Low Ch																																																																																																		
819.00	16.00	V	0.9	0.0	15.10	50.0	-34.9																																																																																											
819.00	22.63	H	0.9	0.0	21.73	50.0	-28.3																																																																																											
Mid Ch																																																																																																		
831.50	15.30	V	0.9	0.0	14.40	38.5	-24.1																																																																																											
831.50	22.50	H	0.9	0.0	21.60	38.5	-16.9																																																																																											
High Ch																																																																																																		
844.00	17.40	V	0.9	0.0	16.50	38.5	-22.0																																																																																											
844.00	23.70	H	0.9	0.0	22.80	38.5	-15.7																																																																																											

Band LTE26 5MHz 16QAM	High Frequency Substitution Measurement UL Verification Services, Inc.																																																																																																	
	Company:		LG Electronics																																																																																															
	Project #:		15I20413																																																																																															
	Date:		4/8/2015																																																																																															
	Test Engineer:		R.Z																																																																																															
	Configuration:		EUT Only																																																																																															
	Location:		Chamber G																																																																																															
	Mode:		LTE_16QAM Band 26 Fundamentals, 5MHz Bandwidth																																																																																															
	Test Equipment:		Receiving: Hybrid T899, and Chamber G SMA Cables Substitution: Dipole T273, 6ft SMA Cable Warehouse																																																																																															
	<table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBd)</th> <th>ERP (dBm)</th> <th>Limit (dBm)</th> <th>Delta (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="9">Low Ch</td> </tr> <tr> <td>816.50</td> <td>14.80</td> <td>V</td> <td>0.9</td> <td>0.0</td> <td>13.90</td> <td>50.0</td> <td>-36.1</td> <td></td> </tr> <tr> <td>816.50</td> <td>21.40</td> <td>H</td> <td>0.9</td> <td>0.0</td> <td>20.50</td> <td>50.0</td> <td>-29.5</td> <td></td> </tr> <tr> <td colspan="9">Mid Ch</td> </tr> <tr> <td>831.50</td> <td>14.40</td> <td>V</td> <td>0.9</td> <td>0.0</td> <td>13.50</td> <td>38.5</td> <td>-25.0</td> <td></td> </tr> <tr> <td>831.50</td> <td>21.60</td> <td>H</td> <td>0.9</td> <td>0.0</td> <td>20.70</td> <td>38.5</td> <td>-17.8</td> <td></td> </tr> <tr> <td colspan="9">High Ch</td> </tr> <tr> <td>846.50</td> <td>16.50</td> <td>V</td> <td>0.9</td> <td>0.0</td> <td>15.60</td> <td>38.5</td> <td>-22.9</td> <td></td> </tr> <tr> <td>846.50</td> <td>22.70</td> <td>H</td> <td>0.9</td> <td>0.0</td> <td>21.80</td> <td>38.5</td> <td>-16.7</td> <td></td> </tr> </tbody> </table>									f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									816.50	14.80	V	0.9	0.0	13.90	50.0	-36.1		816.50	21.40	H	0.9	0.0	20.50	50.0	-29.5		Mid Ch									831.50	14.40	V	0.9	0.0	13.50	38.5	-25.0		831.50	21.60	H	0.9	0.0	20.70	38.5	-17.8		High Ch									846.50	16.50	V	0.9	0.0	15.60	38.5	-22.9		846.50	22.70	H	0.9	0.0	21.80	38.5	-16.7
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																										
Low Ch																																																																																																		
816.50	14.80	V	0.9	0.0	13.90	50.0	-36.1																																																																																											
816.50	21.40	H	0.9	0.0	20.50	50.0	-29.5																																																																																											
Mid Ch																																																																																																		
831.50	14.40	V	0.9	0.0	13.50	38.5	-25.0																																																																																											
831.50	21.60	H	0.9	0.0	20.70	38.5	-17.8																																																																																											
High Ch																																																																																																		
846.50	16.50	V	0.9	0.0	15.60	38.5	-22.9																																																																																											
846.50	22.70	H	0.9	0.0	21.80	38.5	-16.7																																																																																											

Band LTE26 5MHz QPSK	High Frequency Substitution Measurement UL Verification Services, Inc.																																																																																																
	Company:		LG Electronics																																																																																														
	Project #:		15I20413																																																																																														
	Date:		4/8/2015																																																																																														
	Test Engineer:		R.Z																																																																																														
	Configuration:		EUT Only																																																																																														
	Location:		Chamber G																																																																																														
	Mode:		LTE_QPSK Band 26 Fundamentals, 5MHz Bandwidth																																																																																														
	Test Equipment:																																																																																																
	Receiving: Hybrid T899, and Chamber G SMA Cables Substitution: Dipole T273, 6ft SMA Cable Warehouse																																																																																																
<table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBd)</th> <th>ERP (dBm)</th> <th>Limit (dBm)</th> <th>Delta (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="9">Low Ch</td> </tr> <tr> <td>816.50</td> <td>15.60</td> <td>V</td> <td>0.9</td> <td>0.0</td> <td>14.70</td> <td>50.0</td> <td>-35.3</td> <td></td> </tr> <tr> <td>816.50</td> <td>22.44</td> <td>H</td> <td>0.9</td> <td>0.0</td> <td>21.54</td> <td>50.0</td> <td>-28.5</td> <td></td> </tr> <tr> <td colspan="9">Mid Ch</td> </tr> <tr> <td>831.50</td> <td>15.20</td> <td>V</td> <td>0.9</td> <td>0.0</td> <td>14.30</td> <td>38.5</td> <td>-24.2</td> <td></td> </tr> <tr> <td>831.50</td> <td>22.53</td> <td>H</td> <td>0.9</td> <td>0.0</td> <td>21.63</td> <td>38.5</td> <td>-16.9</td> <td></td> </tr> <tr> <td colspan="9">High Ch</td> </tr> <tr> <td>846.50</td> <td>17.10</td> <td>V</td> <td>0.9</td> <td>0.0</td> <td>16.20</td> <td>38.5</td> <td>-22.3</td> <td></td> </tr> <tr> <td>846.50</td> <td>23.60</td> <td>H</td> <td>0.9</td> <td>0.0</td> <td>22.70</td> <td>38.5</td> <td>-15.8</td> <td></td> </tr> </tbody> </table>								f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									816.50	15.60	V	0.9	0.0	14.70	50.0	-35.3		816.50	22.44	H	0.9	0.0	21.54	50.0	-28.5		Mid Ch									831.50	15.20	V	0.9	0.0	14.30	38.5	-24.2		831.50	22.53	H	0.9	0.0	21.63	38.5	-16.9		High Ch									846.50	17.10	V	0.9	0.0	16.20	38.5	-22.3		846.50	23.60	H	0.9	0.0	22.70	38.5	-15.8	
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																									
Low Ch																																																																																																	
816.50	15.60	V	0.9	0.0	14.70	50.0	-35.3																																																																																										
816.50	22.44	H	0.9	0.0	21.54	50.0	-28.5																																																																																										
Mid Ch																																																																																																	
831.50	15.20	V	0.9	0.0	14.30	38.5	-24.2																																																																																										
831.50	22.53	H	0.9	0.0	21.63	38.5	-16.9																																																																																										
High Ch																																																																																																	
846.50	17.10	V	0.9	0.0	16.20	38.5	-22.3																																																																																										
846.50	23.60	H	0.9	0.0	22.70	38.5	-15.8																																																																																										

Band LTE26 3MHz 16QAM	High Frequency Substitution Measurement UL Verification Services, Inc.																																																																																																	
	Company:		LG Electronics																																																																																															
	Project #:		15I20413																																																																																															
	Date:		4/8/2015																																																																																															
	Test Engineer:		R.Z																																																																																															
	Configuration:		EUT Only																																																																																															
	Location:		Chamber G																																																																																															
	Mode:		LTE_16QAM Band 26 Fundamentals, 3MHz Bandwidth																																																																																															
	Test Equipment:		Receiving: Hybrid T899, and Chamber G SMA Cables Substitution: Dipole T273, 6ft SMA Cable Warehouse																																																																																															
	<table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBd)</th> <th>ERP (dBm)</th> <th>Limit (dBm)</th> <th>Delta (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="9">Low Ch</td> </tr> <tr> <td>815.50</td> <td>15.06</td> <td>V</td> <td>0.9</td> <td>0.0</td> <td>14.16</td> <td>50.0</td> <td>-35.8</td> <td></td> </tr> <tr> <td>815.50</td> <td>21.70</td> <td>H</td> <td>0.9</td> <td>0.0</td> <td>20.80</td> <td>50.0</td> <td>-29.2</td> <td></td> </tr> <tr> <td colspan="9">Mid Ch</td> </tr> <tr> <td>831.50</td> <td>14.90</td> <td>V</td> <td>0.9</td> <td>0.0</td> <td>14.00</td> <td>38.5</td> <td>-24.5</td> <td></td> </tr> <tr> <td>831.50</td> <td>21.86</td> <td>H</td> <td>0.9</td> <td>0.0</td> <td>20.96</td> <td>38.5</td> <td>-17.5</td> <td></td> </tr> <tr> <td colspan="9">High Ch</td> </tr> <tr> <td>847.50</td> <td>16.60</td> <td>V</td> <td>0.9</td> <td>0.0</td> <td>15.70</td> <td>38.5</td> <td>-22.8</td> <td></td> </tr> <tr> <td>847.50</td> <td>22.84</td> <td>H</td> <td>0.9</td> <td>0.0</td> <td>21.94</td> <td>38.5</td> <td>-16.6</td> <td></td> </tr> </tbody> </table>									f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									815.50	15.06	V	0.9	0.0	14.16	50.0	-35.8		815.50	21.70	H	0.9	0.0	20.80	50.0	-29.2		Mid Ch									831.50	14.90	V	0.9	0.0	14.00	38.5	-24.5		831.50	21.86	H	0.9	0.0	20.96	38.5	-17.5		High Ch									847.50	16.60	V	0.9	0.0	15.70	38.5	-22.8		847.50	22.84	H	0.9	0.0	21.94	38.5	-16.6
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																										
Low Ch																																																																																																		
815.50	15.06	V	0.9	0.0	14.16	50.0	-35.8																																																																																											
815.50	21.70	H	0.9	0.0	20.80	50.0	-29.2																																																																																											
Mid Ch																																																																																																		
831.50	14.90	V	0.9	0.0	14.00	38.5	-24.5																																																																																											
831.50	21.86	H	0.9	0.0	20.96	38.5	-17.5																																																																																											
High Ch																																																																																																		
847.50	16.60	V	0.9	0.0	15.70	38.5	-22.8																																																																																											
847.50	22.84	H	0.9	0.0	21.94	38.5	-16.6																																																																																											

Band LTE26 3MHz QPSK	High Frequency Substitution Measurement UL Verification Services, Inc.																																																																																																	
	Company:		LG Electronics																																																																																															
	Project #:		15I20413																																																																																															
	Date:		4/8/2015																																																																																															
	Test Engineer:		R.Z																																																																																															
	Configuration:		EUT Only																																																																																															
	Location:		Chamber G																																																																																															
	Mode:		LTE_QPSK Band 26 Fundamentals, 3MHz Bandwidth																																																																																															
	Test Equipment:		Receiving: Hybrid T899, and Chamber G SMA Cables Substitution: Dipole T273, 6ft SMA Cable Warehouse																																																																																															
	<table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBd)</th> <th>ERP (dBm)</th> <th>Limit (dBm)</th> <th>Delta (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="9">Low Ch</td> </tr> <tr> <td>815.50</td> <td>15.93</td> <td>V</td> <td>0.9</td> <td>0.0</td> <td>15.03</td> <td>50.0</td> <td>-35.0</td> <td></td> </tr> <tr> <td>815.50</td> <td>22.57</td> <td>H</td> <td>0.9</td> <td>0.0</td> <td>21.67</td> <td>50.0</td> <td>-28.3</td> <td></td> </tr> <tr> <td colspan="9">Mid Ch</td> </tr> <tr> <td>831.50</td> <td>15.30</td> <td>V</td> <td>0.9</td> <td>0.0</td> <td>14.40</td> <td>38.5</td> <td>-24.1</td> <td></td> </tr> <tr> <td>831.50</td> <td>22.69</td> <td>H</td> <td>0.9</td> <td>0.0</td> <td>21.79</td> <td>38.5</td> <td>-16.7</td> <td></td> </tr> <tr> <td colspan="9">High Ch</td> </tr> <tr> <td>847.50</td> <td>17.50</td> <td>V</td> <td>0.9</td> <td>0.0</td> <td>16.60</td> <td>38.5</td> <td>-21.9</td> <td></td> </tr> <tr> <td>847.50</td> <td>23.70</td> <td>H</td> <td>0.9</td> <td>0.0</td> <td>22.80</td> <td>38.5</td> <td>-15.7</td> <td></td> </tr> </tbody> </table>									f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									815.50	15.93	V	0.9	0.0	15.03	50.0	-35.0		815.50	22.57	H	0.9	0.0	21.67	50.0	-28.3		Mid Ch									831.50	15.30	V	0.9	0.0	14.40	38.5	-24.1		831.50	22.69	H	0.9	0.0	21.79	38.5	-16.7		High Ch									847.50	17.50	V	0.9	0.0	16.60	38.5	-21.9		847.50	23.70	H	0.9	0.0	22.80	38.5	-15.7
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																										
Low Ch																																																																																																		
815.50	15.93	V	0.9	0.0	15.03	50.0	-35.0																																																																																											
815.50	22.57	H	0.9	0.0	21.67	50.0	-28.3																																																																																											
Mid Ch																																																																																																		
831.50	15.30	V	0.9	0.0	14.40	38.5	-24.1																																																																																											
831.50	22.69	H	0.9	0.0	21.79	38.5	-16.7																																																																																											
High Ch																																																																																																		
847.50	17.50	V	0.9	0.0	16.60	38.5	-21.9																																																																																											
847.50	23.70	H	0.9	0.0	22.80	38.5	-15.7																																																																																											

Band LTE26 1.4MHz QPSK	High Frequency Substitution Measurement UL Verification Services, Inc.																																																																																																	
	Company:		LG Electronics																																																																																															
	Project #:		15I20413																																																																																															
	Date:		4/8/2015																																																																																															
	Test Engineer:		R.Z																																																																																															
	Configuration:		EUT Only																																																																																															
	Location:		Chamber G																																																																																															
	Mode:		LTE_QPSK Band 26 Fundamentals, 1.4MHz Bandwidth																																																																																															
	Test Equipment:		Receiving: Hybrid T899, and Chamber G SMA Cables Substitution: Dipole T273, 6ft SMA Cable Warehouse																																																																																															
	<table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBd)</th> <th>ERP (dBm)</th> <th>Limit (dBm)</th> <th>Delta (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="9">Low Ch</td> </tr> <tr> <td>814.70</td> <td>16.80</td> <td>V</td> <td>0.9</td> <td>0.0</td> <td>15.90</td> <td>50.0</td> <td>-34.1</td> <td></td> </tr> <tr> <td>814.70</td> <td>22.38</td> <td>H</td> <td>0.9</td> <td>0.0</td> <td>21.48</td> <td>50.0</td> <td>-28.5</td> <td></td> </tr> <tr> <td colspan="9">Mid Ch</td> </tr> <tr> <td>831.50</td> <td>16.48</td> <td>V</td> <td>0.9</td> <td>0.0</td> <td>15.58</td> <td>38.5</td> <td>-22.9</td> <td></td> </tr> <tr> <td>831.50</td> <td>22.70</td> <td>H</td> <td>0.9</td> <td>0.0</td> <td>21.80</td> <td>38.5</td> <td>-16.7</td> <td></td> </tr> <tr> <td colspan="9">High Ch</td> </tr> <tr> <td>848.30</td> <td>18.20</td> <td>V</td> <td>0.9</td> <td>0.0</td> <td>17.30</td> <td>38.5</td> <td>-21.2</td> <td></td> </tr> <tr> <td>848.30</td> <td>23.60</td> <td>H</td> <td>0.9</td> <td>0.0</td> <td>22.70</td> <td>38.5</td> <td>-15.8</td> <td></td> </tr> </tbody> </table>									f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									814.70	16.80	V	0.9	0.0	15.90	50.0	-34.1		814.70	22.38	H	0.9	0.0	21.48	50.0	-28.5		Mid Ch									831.50	16.48	V	0.9	0.0	15.58	38.5	-22.9		831.50	22.70	H	0.9	0.0	21.80	38.5	-16.7		High Ch									848.30	18.20	V	0.9	0.0	17.30	38.5	-21.2		848.30	23.60	H	0.9	0.0	22.70	38.5	-15.8
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																										
Low Ch																																																																																																		
814.70	16.80	V	0.9	0.0	15.90	50.0	-34.1																																																																																											
814.70	22.38	H	0.9	0.0	21.48	50.0	-28.5																																																																																											
Mid Ch																																																																																																		
831.50	16.48	V	0.9	0.0	15.58	38.5	-22.9																																																																																											
831.50	22.70	H	0.9	0.0	21.80	38.5	-16.7																																																																																											
High Ch																																																																																																		
848.30	18.20	V	0.9	0.0	17.30	38.5	-21.2																																																																																											
848.30	23.60	H	0.9	0.0	22.70	38.5	-15.8																																																																																											

LTE Band 41

Band LTE41 20MHz 16QAM	High Frequency Substitution Measurement UL Verification Services, Inc.																																																																																																	
	Company:		LG Electronics																																																																																															
	Project #:		15I20413																																																																																															
	Date:		4/7/2015																																																																																															
	Test Engineer:		R.Z																																																																																															
	Configuration:		EUT ONLY																																																																																															
	Location:		Chamber G																																																																																															
	Mode:		LTE_16QAM Band 41 Fundamentals, 20MHz Bandwidth																																																																																															
	Test Equipment:		Receiving: Horn T711, and Chamber G SMA Cables Substitution: Horn T60, 6ft SMA Cable																																																																																															
	<table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBi)</th> <th>EIRP (dBm)</th> <th>Limit (dBm)</th> <th>Delta (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="9">Low Ch</td> </tr> <tr> <td>2506.00</td> <td>13.90</td> <td>V</td> <td>0.9</td> <td>9.5</td> <td>22.48</td> <td>33.0</td> <td>-10.5</td> <td></td> </tr> <tr> <td>2506.00</td> <td>14.80</td> <td>H</td> <td>0.9</td> <td>9.5</td> <td>23.38</td> <td>33.0</td> <td>-9.6</td> <td></td> </tr> <tr> <td colspan="9">Mid Ch</td> </tr> <tr> <td>2593.00</td> <td>14.40</td> <td>V</td> <td>0.9</td> <td>9.5</td> <td>23.01</td> <td>33.0</td> <td>-10.0</td> <td></td> </tr> <tr> <td>2593.00</td> <td>14.98</td> <td>H</td> <td>0.9</td> <td>9.5</td> <td>23.59</td> <td>33.0</td> <td>-9.4</td> <td></td> </tr> <tr> <td colspan="9">High Ch</td> </tr> <tr> <td>2680.00</td> <td>13.70</td> <td>V</td> <td>0.9</td> <td>9.7</td> <td>22.53</td> <td>33.0</td> <td>-10.5</td> <td></td> </tr> <tr> <td>2680.00</td> <td>15.00</td> <td>H</td> <td>0.9</td> <td>9.7</td> <td>23.83</td> <td>33.0</td> <td>-9.2</td> <td></td> </tr> </tbody> </table>									f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									2506.00	13.90	V	0.9	9.5	22.48	33.0	-10.5		2506.00	14.80	H	0.9	9.5	23.38	33.0	-9.6		Mid Ch									2593.00	14.40	V	0.9	9.5	23.01	33.0	-10.0		2593.00	14.98	H	0.9	9.5	23.59	33.0	-9.4		High Ch									2680.00	13.70	V	0.9	9.7	22.53	33.0	-10.5		2680.00	15.00	H	0.9	9.7	23.83	33.0	-9.2
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																										
Low Ch																																																																																																		
2506.00	13.90	V	0.9	9.5	22.48	33.0	-10.5																																																																																											
2506.00	14.80	H	0.9	9.5	23.38	33.0	-9.6																																																																																											
Mid Ch																																																																																																		
2593.00	14.40	V	0.9	9.5	23.01	33.0	-10.0																																																																																											
2593.00	14.98	H	0.9	9.5	23.59	33.0	-9.4																																																																																											
High Ch																																																																																																		
2680.00	13.70	V	0.9	9.7	22.53	33.0	-10.5																																																																																											
2680.00	15.00	H	0.9	9.7	23.83	33.0	-9.2																																																																																											

Band LTE41 20MHz QPSK	High Frequency Substitution Measurement UL Verification Services, Inc.																																																																																																					
	Company:		LG Electronics																																																																																																			
	Project #:		15I20413																																																																																																			
	Date:		4/7/2015																																																																																																			
	Test Engineer:		R.Z																																																																																																			
	Configuration:		EUT ONLY																																																																																																			
	Location:		Chamber G																																																																																																			
	Mode:		LTE_QPSK Band 41 Fundamentals, 20MHz Bandwidth																																																																																																			
	Test Equipment:		Receiving: Horn T711, and Chamber G SMA Cables Substitution: Horn T60, 6ft SMA Cable																																																																																																			
	<table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBi)</th> <th>EIRP (dBm)</th> <th>Limit (dBm)</th> <th>Delta (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="10">Low Ch</td> </tr> <tr> <td>2506.00</td> <td>14.50</td> <td>V</td> <td>0.9</td> <td>9.5</td> <td>23.08</td> <td>33.0</td> <td>-9.9</td> <td></td> </tr> <tr> <td>2506.00</td> <td>15.52</td> <td>H</td> <td>0.9</td> <td>9.5</td> <td>24.10</td> <td>33.0</td> <td>-8.9</td> <td></td> </tr> <tr> <td colspan="10">Mid Ch</td> </tr> <tr> <td>2593.00</td> <td>15.10</td> <td>V</td> <td>0.9</td> <td>9.5</td> <td>23.71</td> <td>33.0</td> <td>-9.3</td> <td></td> </tr> <tr> <td>2593.00</td> <td>15.60</td> <td>H</td> <td>0.9</td> <td>9.5</td> <td>24.21</td> <td>33.0</td> <td>-8.8</td> <td></td> </tr> <tr> <td colspan="10">High Ch</td> </tr> <tr> <td>2680.00</td> <td>14.30</td> <td>V</td> <td>0.9</td> <td>9.7</td> <td>23.13</td> <td>33.0</td> <td>-9.9</td> <td></td> </tr> <tr> <td>2680.00</td> <td>15.60</td> <td>H</td> <td>0.9</td> <td>9.7</td> <td>24.43</td> <td>33.0</td> <td>-8.6</td> <td></td> </tr> </tbody> </table>										f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch										2506.00	14.50	V	0.9	9.5	23.08	33.0	-9.9		2506.00	15.52	H	0.9	9.5	24.10	33.0	-8.9		Mid Ch										2593.00	15.10	V	0.9	9.5	23.71	33.0	-9.3		2593.00	15.60	H	0.9	9.5	24.21	33.0	-8.8		High Ch										2680.00	14.30	V	0.9	9.7	23.13	33.0	-9.9		2680.00	15.60	H	0.9	9.7	24.43	33.0	-8.6
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																														
Low Ch																																																																																																						
2506.00	14.50	V	0.9	9.5	23.08	33.0	-9.9																																																																																															
2506.00	15.52	H	0.9	9.5	24.10	33.0	-8.9																																																																																															
Mid Ch																																																																																																						
2593.00	15.10	V	0.9	9.5	23.71	33.0	-9.3																																																																																															
2593.00	15.60	H	0.9	9.5	24.21	33.0	-8.8																																																																																															
High Ch																																																																																																						
2680.00	14.30	V	0.9	9.7	23.13	33.0	-9.9																																																																																															
2680.00	15.60	H	0.9	9.7	24.43	33.0	-8.6																																																																																															

Band LTE41 15MHz 16QAM	High Frequency Substitution Measurement UL Verification Services, Inc.																																																																																																					
	Company:		LG Electronics																																																																																																			
	Project #:		15I20413																																																																																																			
	Date:		4/7/2015																																																																																																			
	Test Engineer:		R.Z																																																																																																			
	Configuration:		EUT ONLY																																																																																																			
	Location:		Chamber G																																																																																																			
	Mode:		LTE_16QAM Band 41 Fundamentals, 15MHz Bandwidth																																																																																																			
	Test Equipment:		Receiving: Horn T711, and Chamber G SMA Cables Substitution: Horn T60, 6ft SMA Cable																																																																																																			
	<table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBi)</th> <th>EIRP (dBm)</th> <th>Limit (dBm)</th> <th>Delta (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="10">Low Ch</td> </tr> <tr> <td>2503.50</td> <td>14.18</td> <td>V</td> <td>0.9</td> <td>9.5</td> <td>22.76</td> <td>33.0</td> <td>-10.2</td> <td></td> </tr> <tr> <td>2503.50</td> <td>15.10</td> <td>H</td> <td>0.9</td> <td>9.5</td> <td>23.68</td> <td>33.0</td> <td>-9.3</td> <td></td> </tr> <tr> <td colspan="10">Mid Ch</td> </tr> <tr> <td>2593.00</td> <td>14.60</td> <td>V</td> <td>0.9</td> <td>9.5</td> <td>23.21</td> <td>33.0</td> <td>-9.8</td> <td></td> </tr> <tr> <td>2593.00</td> <td>15.08</td> <td>H</td> <td>0.9</td> <td>9.5</td> <td>23.69</td> <td>33.0</td> <td>-9.3</td> <td></td> </tr> <tr> <td colspan="10">High Ch</td> </tr> <tr> <td>2682.50</td> <td>14.10</td> <td>V</td> <td>0.9</td> <td>9.7</td> <td>22.93</td> <td>33.0</td> <td>-10.1</td> <td></td> </tr> <tr> <td>2682.50</td> <td>15.60</td> <td>H</td> <td>0.9</td> <td>9.7</td> <td>24.43</td> <td>33.0</td> <td>-8.6</td> <td></td> </tr> </tbody> </table>										f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch										2503.50	14.18	V	0.9	9.5	22.76	33.0	-10.2		2503.50	15.10	H	0.9	9.5	23.68	33.0	-9.3		Mid Ch										2593.00	14.60	V	0.9	9.5	23.21	33.0	-9.8		2593.00	15.08	H	0.9	9.5	23.69	33.0	-9.3		High Ch										2682.50	14.10	V	0.9	9.7	22.93	33.0	-10.1		2682.50	15.60	H	0.9	9.7	24.43	33.0	-8.6
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																														
Low Ch																																																																																																						
2503.50	14.18	V	0.9	9.5	22.76	33.0	-10.2																																																																																															
2503.50	15.10	H	0.9	9.5	23.68	33.0	-9.3																																																																																															
Mid Ch																																																																																																						
2593.00	14.60	V	0.9	9.5	23.21	33.0	-9.8																																																																																															
2593.00	15.08	H	0.9	9.5	23.69	33.0	-9.3																																																																																															
High Ch																																																																																																						
2682.50	14.10	V	0.9	9.7	22.93	33.0	-10.1																																																																																															
2682.50	15.60	H	0.9	9.7	24.43	33.0	-8.6																																																																																															

Band LTE41 15MHz QPSK	High Frequency Substitution Measurement UL Verification Services, Inc.																																																																																																					
	Company:		LG Electronics																																																																																																			
	Project #:		15I20413																																																																																																			
	Date:		4/7/2015																																																																																																			
	Test Engineer:		R.Z																																																																																																			
	Configuration:		EUT ONLY																																																																																																			
	Location:		Chamber G																																																																																																			
	Mode:		LTE_QPSK Band 41 Fundamentals, 15MHz Bandwidth																																																																																																			
	Test Equipment:		Receiving: Horn T711, and Chamber G SMA Cables Substitution: Horn T60, 6ft SMA Cable																																																																																																			
	<table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBi)</th> <th>EIRP (dBm)</th> <th>Limit (dBm)</th> <th>Delta (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="10">Low Ch</td> </tr> <tr> <td>2503.50</td> <td>14.80</td> <td>V</td> <td>0.9</td> <td>9.5</td> <td>23.38</td> <td>33.0</td> <td>-9.6</td> <td></td> </tr> <tr> <td>2503.50</td> <td>15.69</td> <td>H</td> <td>0.9</td> <td>9.5</td> <td>24.27</td> <td>33.0</td> <td>-8.7</td> <td></td> </tr> <tr> <td colspan="10">Mid Ch</td> </tr> <tr> <td>2593.00</td> <td>15.30</td> <td>V</td> <td>0.9</td> <td>9.5</td> <td>23.91</td> <td>33.0</td> <td>-9.1</td> <td></td> </tr> <tr> <td>2593.00</td> <td>15.71</td> <td>H</td> <td>0.9</td> <td>9.5</td> <td>24.32</td> <td>33.0</td> <td>-8.7</td> <td></td> </tr> <tr> <td colspan="10">High Ch</td> </tr> <tr> <td>2682.50</td> <td>15.00</td> <td>V</td> <td>0.9</td> <td>9.7</td> <td>23.83</td> <td>33.0</td> <td>-9.2</td> <td></td> </tr> <tr> <td>2682.50</td> <td>16.30</td> <td>H</td> <td>0.9</td> <td>9.7</td> <td>25.13</td> <td>33.0</td> <td>-7.9</td> <td></td> </tr> </tbody> </table>										f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch										2503.50	14.80	V	0.9	9.5	23.38	33.0	-9.6		2503.50	15.69	H	0.9	9.5	24.27	33.0	-8.7		Mid Ch										2593.00	15.30	V	0.9	9.5	23.91	33.0	-9.1		2593.00	15.71	H	0.9	9.5	24.32	33.0	-8.7		High Ch										2682.50	15.00	V	0.9	9.7	23.83	33.0	-9.2		2682.50	16.30	H	0.9	9.7	25.13	33.0	-7.9
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																														
Low Ch																																																																																																						
2503.50	14.80	V	0.9	9.5	23.38	33.0	-9.6																																																																																															
2503.50	15.69	H	0.9	9.5	24.27	33.0	-8.7																																																																																															
Mid Ch																																																																																																						
2593.00	15.30	V	0.9	9.5	23.91	33.0	-9.1																																																																																															
2593.00	15.71	H	0.9	9.5	24.32	33.0	-8.7																																																																																															
High Ch																																																																																																						
2682.50	15.00	V	0.9	9.7	23.83	33.0	-9.2																																																																																															
2682.50	16.30	H	0.9	9.7	25.13	33.0	-7.9																																																																																															

Band LTE41 10MHz 16QAM	High Frequency Substitution Measurement UL Verification Services, Inc.																																																																																																					
	Company:		LG Electronics																																																																																																			
	Project #:		15I20413																																																																																																			
	Date:		4/7/2015																																																																																																			
	Test Engineer:		R.Z																																																																																																			
	Configuration:		EUT ONLY																																																																																																			
	Location:		Chamber G																																																																																																			
	Mode:		LTE_16QAM Band 41 Fundamentals, 10MHz Bandwidth																																																																																																			
	Test Equipment:		Receiving: Horn T711, and Chamber G SMA Cables Substitution: Horn T60, 6ft SMA Cable																																																																																																			
	<table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBi)</th> <th>EIRP (dBm)</th> <th>Limit (dBm)</th> <th>Delta (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="10">Low Ch</td> </tr> <tr> <td>2501.00</td> <td>14.08</td> <td>V</td> <td>0.9</td> <td>9.5</td> <td>22.66</td> <td>33.0</td> <td>-10.3</td> <td></td> </tr> <tr> <td>2501.00</td> <td>15.20</td> <td>H</td> <td>0.9</td> <td>9.5</td> <td>23.78</td> <td>33.0</td> <td>-9.2</td> <td></td> </tr> <tr> <td colspan="10">Mid Ch</td> </tr> <tr> <td>2593.00</td> <td>14.40</td> <td>V</td> <td>0.9</td> <td>9.5</td> <td>23.01</td> <td>33.0</td> <td>-10.0</td> <td></td> </tr> <tr> <td>2593.00</td> <td>14.40</td> <td>H</td> <td>0.9</td> <td>9.5</td> <td>23.01</td> <td>33.0</td> <td>-10.0</td> <td></td> </tr> <tr> <td colspan="10">High Ch</td> </tr> <tr> <td>2685.00</td> <td>13.86</td> <td>V</td> <td>0.9</td> <td>9.7</td> <td>22.70</td> <td>33.0</td> <td>-10.3</td> <td></td> </tr> <tr> <td>2685.00</td> <td>15.34</td> <td>H</td> <td>0.9</td> <td>9.7</td> <td>24.18</td> <td>33.0</td> <td>-8.8</td> <td></td> </tr> </tbody> </table>										f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch										2501.00	14.08	V	0.9	9.5	22.66	33.0	-10.3		2501.00	15.20	H	0.9	9.5	23.78	33.0	-9.2		Mid Ch										2593.00	14.40	V	0.9	9.5	23.01	33.0	-10.0		2593.00	14.40	H	0.9	9.5	23.01	33.0	-10.0		High Ch										2685.00	13.86	V	0.9	9.7	22.70	33.0	-10.3		2685.00	15.34	H	0.9	9.7	24.18	33.0	-8.8
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																														
Low Ch																																																																																																						
2501.00	14.08	V	0.9	9.5	22.66	33.0	-10.3																																																																																															
2501.00	15.20	H	0.9	9.5	23.78	33.0	-9.2																																																																																															
Mid Ch																																																																																																						
2593.00	14.40	V	0.9	9.5	23.01	33.0	-10.0																																																																																															
2593.00	14.40	H	0.9	9.5	23.01	33.0	-10.0																																																																																															
High Ch																																																																																																						
2685.00	13.86	V	0.9	9.7	22.70	33.0	-10.3																																																																																															
2685.00	15.34	H	0.9	9.7	24.18	33.0	-8.8																																																																																															

Band LTE41 10MHz QPSK	High Frequency Substitution Measurement UL Verification Services, Inc.																																																																																																					
	Company:		LG Electronics																																																																																																			
	Project #:		15I20413																																																																																																			
	Date:		4/7/2015																																																																																																			
	Test Engineer:		R.Z																																																																																																			
	Configuration:		EUT ONLY																																																																																																			
	Location:		Chamber G																																																																																																			
	Mode:		LTE_QPSK Band 41 Fundamentals, 10MHz Bandwidth																																																																																																			
	Test Equipment:		Receiving: Horn T711, and Chamber G SMA Cables Substitution: Horn T60, 6ft SMA Cable																																																																																																			
	<table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBi)</th> <th>EIRP (dBm)</th> <th>Limit (dBm)</th> <th>Delta (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="10">Low Ch</td> </tr> <tr> <td>2501.00</td> <td>14.69</td> <td>V</td> <td>0.9</td> <td>9.5</td> <td>23.27</td> <td>33.0</td> <td>-9.7</td> <td></td> </tr> <tr> <td>2501.00</td> <td>15.70</td> <td>H</td> <td>0.9</td> <td>9.5</td> <td>24.28</td> <td>33.0</td> <td>-8.7</td> <td></td> </tr> <tr> <td colspan="10">Mid Ch</td> </tr> <tr> <td>2593.00</td> <td>14.80</td> <td>V</td> <td>0.9</td> <td>9.5</td> <td>23.41</td> <td>33.0</td> <td>-9.6</td> <td></td> </tr> <tr> <td>2593.00</td> <td>15.00</td> <td>H</td> <td>0.9</td> <td>9.5</td> <td>23.61</td> <td>33.0</td> <td>-9.4</td> <td></td> </tr> <tr> <td colspan="10">High Ch</td> </tr> <tr> <td>2685.00</td> <td>14.50</td> <td>V</td> <td>0.9</td> <td>9.7</td> <td>23.34</td> <td>33.0</td> <td>-9.7</td> <td></td> </tr> <tr> <td>2685.00</td> <td>15.91</td> <td>H</td> <td>0.9</td> <td>9.7</td> <td>24.75</td> <td>33.0</td> <td>-8.3</td> <td></td> </tr> </tbody> </table>										f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch										2501.00	14.69	V	0.9	9.5	23.27	33.0	-9.7		2501.00	15.70	H	0.9	9.5	24.28	33.0	-8.7		Mid Ch										2593.00	14.80	V	0.9	9.5	23.41	33.0	-9.6		2593.00	15.00	H	0.9	9.5	23.61	33.0	-9.4		High Ch										2685.00	14.50	V	0.9	9.7	23.34	33.0	-9.7		2685.00	15.91	H	0.9	9.7	24.75	33.0	-8.3
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																														
Low Ch																																																																																																						
2501.00	14.69	V	0.9	9.5	23.27	33.0	-9.7																																																																																															
2501.00	15.70	H	0.9	9.5	24.28	33.0	-8.7																																																																																															
Mid Ch																																																																																																						
2593.00	14.80	V	0.9	9.5	23.41	33.0	-9.6																																																																																															
2593.00	15.00	H	0.9	9.5	23.61	33.0	-9.4																																																																																															
High Ch																																																																																																						
2685.00	14.50	V	0.9	9.7	23.34	33.0	-9.7																																																																																															
2685.00	15.91	H	0.9	9.7	24.75	33.0	-8.3																																																																																															

Band LTE41 5MHz 16QAM	High Frequency Substitution Measurement UL Verification Services, Inc.																																																																																																					
	Company:		LG Electronics																																																																																																			
	Project #:		15I20413																																																																																																			
	Date:		4/7/2015																																																																																																			
	Test Engineer:		R.Z																																																																																																			
	Configuration:		EUT ONLY																																																																																																			
	Location:		Chamber G																																																																																																			
	Mode:		LTE_16QAM Band 41 Fundamentals, 5MHz Bandwidth																																																																																																			
	Test Equipment:		Receiving: Horn T711, and Chamber G SMA Cables Substitution: Horn T60, 6ft SMA Cable																																																																																																			
	<table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBi)</th> <th>EIRP (dBm)</th> <th>Limit (dBm)</th> <th>Delta (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="10">Low Ch</td> </tr> <tr> <td>2498.50</td> <td>14.40</td> <td>V</td> <td>0.9</td> <td>9.5</td> <td>22.97</td> <td>33.0</td> <td>-10.0</td> <td></td> </tr> <tr> <td>2498.50</td> <td>14.90</td> <td>H</td> <td>0.9</td> <td>9.5</td> <td>23.47</td> <td>33.0</td> <td>-9.5</td> <td></td> </tr> <tr> <td colspan="10">Mid Ch</td> </tr> <tr> <td>2593.00</td> <td>15.20</td> <td>V</td> <td>0.9</td> <td>9.5</td> <td>23.81</td> <td>33.0</td> <td>-9.2</td> <td></td> </tr> <tr> <td>2593.00</td> <td>15.30</td> <td>H</td> <td>0.9</td> <td>9.5</td> <td>23.91</td> <td>33.0</td> <td>-9.1</td> <td></td> </tr> <tr> <td colspan="10">High Ch</td> </tr> <tr> <td>2687.50</td> <td>13.80</td> <td>V</td> <td>0.9</td> <td>9.7</td> <td>22.65</td> <td>33.0</td> <td>-10.4</td> <td></td> </tr> <tr> <td>2687.50</td> <td>14.40</td> <td>H</td> <td>0.9</td> <td>9.7</td> <td>23.25</td> <td>33.0</td> <td>-9.8</td> <td></td> </tr> </tbody> </table>										f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch										2498.50	14.40	V	0.9	9.5	22.97	33.0	-10.0		2498.50	14.90	H	0.9	9.5	23.47	33.0	-9.5		Mid Ch										2593.00	15.20	V	0.9	9.5	23.81	33.0	-9.2		2593.00	15.30	H	0.9	9.5	23.91	33.0	-9.1		High Ch										2687.50	13.80	V	0.9	9.7	22.65	33.0	-10.4		2687.50	14.40	H	0.9	9.7	23.25	33.0	-9.8
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																														
Low Ch																																																																																																						
2498.50	14.40	V	0.9	9.5	22.97	33.0	-10.0																																																																																															
2498.50	14.90	H	0.9	9.5	23.47	33.0	-9.5																																																																																															
Mid Ch																																																																																																						
2593.00	15.20	V	0.9	9.5	23.81	33.0	-9.2																																																																																															
2593.00	15.30	H	0.9	9.5	23.91	33.0	-9.1																																																																																															
High Ch																																																																																																						
2687.50	13.80	V	0.9	9.7	22.65	33.0	-10.4																																																																																															
2687.50	14.40	H	0.9	9.7	23.25	33.0	-9.8																																																																																															

Band LTE41 5MHz QPSK	High Frequency Substitution Measurement UL Verification Services, Inc.																																																																																																
	Company:		LG Electronics																																																																																														
	Project #:		15I20413																																																																																														
	Date:		4/7/2015																																																																																														
	Test Engineer:		R.Z																																																																																														
	Configuration:		EUT ONLY																																																																																														
	Location:		Chamber G																																																																																														
	Mode:		LTE_QPSK Band 41 Fundamentals, 5MHz Bandwidth																																																																																														
	Test Equipment: Receiving: Horn T711, and Chamber G SMA Cables Substitution: Horn T60, 6ft SMA Cable																																																																																																
	<table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBi)</th> <th>EIRP (dBm)</th> <th>Limit (dBm)</th> <th>Delta (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="9">Low Ch</td> </tr> <tr> <td>2498.50</td> <td>15.10</td> <td>V</td> <td>0.9</td> <td>9.5</td> <td>23.67</td> <td>33.0</td> <td>-9.3</td> <td></td> </tr> <tr> <td>2498.50</td> <td>16.00</td> <td>H</td> <td>0.9</td> <td>9.5</td> <td>24.57</td> <td>33.0</td> <td>-8.4</td> <td></td> </tr> <tr> <td colspan="9">Mid Ch</td> </tr> <tr> <td>2593.00</td> <td>16.10</td> <td>V</td> <td>0.9</td> <td>9.5</td> <td>24.71</td> <td>33.0</td> <td>-8.3</td> <td></td> </tr> <tr> <td>2593.00</td> <td>16.48</td> <td>H</td> <td>0.9</td> <td>9.5</td> <td>25.09</td> <td>33.0</td> <td>-7.9</td> <td></td> </tr> <tr> <td colspan="9">High Ch</td> </tr> <tr> <td>2687.50</td> <td>14.40</td> <td>V</td> <td>0.9</td> <td>9.7</td> <td>23.25</td> <td>33.0</td> <td>-9.8</td> <td></td> </tr> <tr> <td>2687.50</td> <td>15.50</td> <td>H</td> <td>0.9</td> <td>9.7</td> <td>24.35</td> <td>33.0</td> <td>-8.7</td> <td></td> </tr> </tbody> </table>								f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									2498.50	15.10	V	0.9	9.5	23.67	33.0	-9.3		2498.50	16.00	H	0.9	9.5	24.57	33.0	-8.4		Mid Ch									2593.00	16.10	V	0.9	9.5	24.71	33.0	-8.3		2593.00	16.48	H	0.9	9.5	25.09	33.0	-7.9		High Ch									2687.50	14.40	V	0.9	9.7	23.25	33.0	-9.8		2687.50	15.50	H	0.9	9.7	24.35	33.0	-8.7
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																									
Low Ch																																																																																																	
2498.50	15.10	V	0.9	9.5	23.67	33.0	-9.3																																																																																										
2498.50	16.00	H	0.9	9.5	24.57	33.0	-8.4																																																																																										
Mid Ch																																																																																																	
2593.00	16.10	V	0.9	9.5	24.71	33.0	-8.3																																																																																										
2593.00	16.48	H	0.9	9.5	25.09	33.0	-7.9																																																																																										
High Ch																																																																																																	
2687.50	14.40	V	0.9	9.7	23.25	33.0	-9.8																																																																																										
2687.50	15.50	H	0.9	9.7	24.35	33.0	-8.7																																																																																										

11.2. FIELD STRENGTH OF SPURIOUS RADIATION

RULE PART(S)

FCC: §2.1053, §22.917, §24.238, §27.53 and §90.691

LIMIT

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

Part 27: (m)(4) For mobile station, the attenuation factor shall be not less than $43+10\log(P)$ dB at the channel edge and $(55+10\log(P)$ dB) at 5.5MHz from the channel edges.

TEST PROCEDURE

For Cellular equipment - Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 100 kHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

For PCS equipment - Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 1 MHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

MODES TESTED

CDMA, LTE

RESULTS

11.2.1. SPURIOUS RADIATION PLOTS

CDMA

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement									
Company:		LG Electronics							
Project #:		15I20413							
Date:		4/13/2015							
Test Engineer:		R.Z							
Configuration:		EUT , AC Adapter, Headset							
Location:		Chamber G							
Mode:		CDMA EVDO BC1 Harmonics							
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 1851.25									
3702.50	-10.6	V	3.0	35.9	1.0	-45.5	-13.0	-32.5	
5553.75	-21.1	V	3.0	35.5	1.0	-55.6	-13.0	-42.6	
7405.00	-18.8	V	3.0	35.7	1.0	-53.6	-13.0	-40.6	
3702.50	-8.1	H	3.0	35.9	1.0	-43.0	-13.0	-30.0	
5553.75	-21.7	H	3.0	35.5	1.0	-56.1	-13.0	-43.1	
7405.00	-17.4	H	3.0	35.7	1.0	-52.1	-13.0	-39.1	
Mid Ch, 1880									
3760.00	-12.2	V	3.0	35.8	1.0	-47.1	-13.0	-34.1	
5640.00	-20.9	V	3.0	35.5	1.0	-55.4	-13.0	-42.4	
7520.00	-19.4	V	3.0	35.7	1.0	-54.2	-13.0	-41.2	
3760.00	-13.4	H	3.0	35.8	1.0	-48.2	-13.0	-35.2	
5640.00	-21.1	H	3.0	35.5	1.0	-55.6	-13.0	-42.6	
7520.00	-18.6	H	3.0	35.7	1.0	-53.4	-13.0	-40.4	
High Ch, 1908.75									
3817.50	-11.2	V	3.0	35.8	1.0	-46.0	-13.0	-33.0	
5726.25	-20.4	V	3.0	35.5	1.0	-54.9	-13.0	-41.9	
7635.00	-19.0	V	3.0	35.8	1.0	-53.7	-13.0	-40.7	
3817.50	-15.5	H	3.0	35.8	1.0	-50.3	-13.0	-37.3	
5726.25	-20.1	H	3.0	35.5	1.0	-54.6	-13.0	-41.6	
7635.00	-17.2	H	3.0	35.8	1.0	-52.0	-13.0	-39.0	

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement									
Company:		LG Electronics							
Project #:		15I20413							
Date:		4/13/2015							
Test Engineer:		R.Z							
Configuration:		EUT , AC Adapter, Headset							
Location:		Chamber G							
Mode:		CDMA 1xRTT BC1 Harmonics							
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 1851.25									
3702.50	-4.8	V	3.0	35.9	1.0	-39.7	-13.0	-26.7	
5553.75	-14.5	V	3.0	35.5	1.0	-49.0	-13.0	-36.0	
7405.00	-13.6	V	3.0	35.7	1.0	-48.4	-13.0	-35.4	
BC1									
3702.50	-7.9	H	3.0	35.9	1.0	-42.8	-13.0	-29.8	
5553.75	-14.7	H	3.0	35.5	1.0	-49.1	-13.0	-36.1	
7405.00	-12.3	H	3.0	35.7	1.0	-47.0	-13.0	-34.0	
1xRTT									
Mid Ch, 1880									
3760.00	-11.9	V	3.0	35.8	1.0	-46.7	-13.0	-33.7	
5640.00	-15.6	V	3.0	35.5	1.0	-50.1	-13.0	-37.1	
7520.00	-13.4	V	3.0	35.7	1.0	-48.2	-13.0	-35.2	
3760.00	-18.2	H	3.0	35.8	1.0	-53.0	-13.0	-40.0	
5640.00	-14.4	H	3.0	35.5	1.0	-48.9	-13.0	-35.9	
7520.00	-12.5	H	3.0	35.7	1.0	-47.3	-13.0	-34.3	
High Ch, 1908.75									
3817.50	-17.1	V	3.0	35.8	1.0	-51.9	-13.0	-38.9	
5726.25	-15.6	V	3.0	35.5	1.0	-50.1	-13.0	-37.1	
7635.00	-13.4	V	3.0	35.8	1.0	-48.1	-13.0	-35.1	
3817.50	-16.4	H	3.0	35.8	1.0	-51.2	-13.0	-38.2	
5726.25	-14.6	H	3.0	35.5	1.0	-49.1	-13.0	-36.1	
7635.00	-12.0	H	3.0	35.8	1.0	-46.8	-13.0	-33.8	

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement									
Company:		LG Electronics							
Project #:		15I20415							
Date:		4/14/2015							
Test Engineer:		R.Z							
Configuration:		EUT , AC Adapter, Headset							
Location:		Chamber G							
Mode:		CDMA EVDO BC0 Harmonics							
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 824.7									
1649.40	-32.3	V	3.0	37.4	1.0	-68.7	-13.0	-55.7	
2474.10	-28.7	V	3.0	36.4	1.0	-64.1	-13.0	-51.1	
3298.80	-26.9	V	3.0	35.8	1.0	-61.7	-13.0	-48.7	
Mid Ch, 836.52									
1673.04	-27.2	V	3.0	37.3	1.0	-63.5	-13.0	-50.5	
2509.56	-20.5	V	3.0	36.4	1.0	-55.9	-13.0	-42.9	
3346.08	-24.6	V	3.0	35.8	1.0	-59.4	-13.0	-46.4	
1673.04	-31.5	H	3.0	37.3	1.0	-67.8	-13.0	-54.8	
2509.56	-25.0	H	3.0	36.4	1.0	-60.4	-13.0	-47.4	
3346.08	-24.7	H	3.0	35.8	1.0	-59.5	-13.0	-46.5	
High Ch, 848.31									
1696.62	-31.2	V	3.0	37.3	1.0	-67.5	-13.0	-54.5	
2544.93	-28.9	V	3.0	36.3	1.0	-64.2	-13.0	-51.2	
3393.24	-26.3	V	3.0	35.7	1.0	-61.0	-13.0	-48.0	
1696.62	-30.2	H	3.0	37.3	1.0	-66.5	-13.0	-53.5	
2544.93	-27.9	H	3.0	36.3	1.0	-63.2	-13.0	-50.2	
3393.24	-25.6	H	3.0	35.7	1.0	-60.3	-13.0	-47.3	

Band
BC0

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement									
Company:		LG Electronics							
Project #:		15I20413							
Date:		4/13/2015							
Test Engineer:		R.Z							
Configuration:		EUT , AC Adapter, Headset							
Location:		Chamber G							
Mode:		CDMA 1xRTT BC0 Harmonics							
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 824.7									
1649.40	-27.7	V	3.0	37.4	1.0	-64.1	-13.0	-51.1	
2474.10	2.8	V	3.0	36.4	1.0	-32.6	-13.0	-19.6	
3298.80	-20.9	V	3.0	35.8	1.0	-55.7	-13.0	-42.7	
BC0									
1649.40	-27.8	H	3.0	37.4	1.0	-64.2	-13.0	-51.2	
2474.10	4.2	H	3.0	36.4	1.0	-31.2	-13.0	-18.2	
3298.80	-18.9	H	3.0	35.8	1.0	-53.7	-13.0	-40.7	
1xRTT									
Mid Ch, 836.52									
1673.04	-22.4	V	3.0	37.3	1.0	-58.7	-13.0	-45.7	
2509.56	-24.1	V	3.0	36.4	1.0	-59.5	-13.0	-46.5	
3346.08	-20.6	V	3.0	35.8	1.0	-55.4	-13.0	-42.4	
1673.04	-22.6	H	3.0	37.3	1.0	-58.9	-13.0	-45.9	
2509.56	-22.9	H	3.0	36.4	1.0	-58.3	-13.0	-45.3	
3346.08	-21.1	H	3.0	35.8	1.0	-55.9	-13.0	-42.9	
High Ch, 848.31									
1696.62	-26.8	V	3.0	37.3	1.0	-63.1	-13.0	-50.1	
2544.93	-23.8	V	3.0	36.3	1.0	-59.1	-13.0	-46.1	
3393.24	-22.2	V	3.0	35.7	1.0	-56.9	-13.0	-43.9	
1696.62	-24.9	H	3.0	37.3	1.0	-61.2	-13.0	-48.2	
2544.93	-21.5	H	3.0	36.3	1.0	-56.8	-13.0	-43.8	
3393.24	-20.8	H	3.0	35.7	1.0	-55.5	-13.0	-42.5	

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement									
Company:		LG Electronics							
Project #:		15I20415							
Date:		4/14/2015							
Test Engineer:		R.Z							
Configuration:		EUT , AC Adapter, Headset							
Location:		Chamber G							
Mode:		CDMA EVDO BC10 Harmonics							
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 817.9MHz									
1.636	-30.5	V	3.0	37.4	1.0	-66.9	-13.0	-53.9	
2.454	-26.0	V	3.0	36.4	1.0	-61.4	-13.0	-48.4	
3.272	-26.0	V	3.0	35.8	1.0	-60.8	-13.0	-47.8	
Mid Ch, 820.5MHz									
1.636	-31.8	H	3.0	37.4	1.0	-68.2	-13.0	-55.2	
2.454	-27.5	H	3.0	36.4	1.0	-62.9	-13.0	-49.9	
3.272	-24.6	H	3.0	35.8	1.0	-59.4	-13.0	-46.4	
High Ch, 823.1MHz									
1.641	-31.0	V	3.0	37.3	1.0	-67.3	-13.0	-54.3	
2.462	-26.2	V	3.0	36.4	1.0	-61.6	-13.0	-48.6	
3.282	-25.2	V	3.0	35.8	1.0	-60.0	-13.0	-47.0	
1.641	-29.6	H	3.0	37.3	1.0	-65.9	-13.0	-52.9	
2.462	-25.8	H	3.0	36.4	1.0	-61.2	-13.0	-48.2	
3.282	-25.2	H	3.0	35.8	1.0	-60.0	-13.0	-47.0	
High Ch, 823.1MHz									
1.646	-30.5	V	3.0	37.3	1.0	-66.8	-13.0	-53.8	
2.469	-26.0	V	3.0	36.3	1.0	-61.3	-13.0	-48.3	
3.292	-25.4	V	3.0	35.7	1.0	-60.1	-13.0	-47.1	
1.646	-30.2	H	3.0	37.3	1.0	-66.5	-13.0	-53.5	
2.469	-26.5	H	3.0	36.3	1.0	-61.8	-13.0	-48.8	
3.292	-25.0	H	3.0	35.7	1.0	-59.7	-13.0	-46.7	

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement									
Company:		LG Electronics							
Project #:		15I20413							
Date:		4/13/2015							
Test Engineer:		R.Z							
Configuration:		EUT , AC Adapter, Headset							
Location:		Chamber G							
Mode:		CDMA 1xRTT BC10 Harmonics							
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 817.9MHz									
1.636	-23.2	V	3.0	37.4	1.0	-59.6	-13.0	-46.6	
2.454	-22.8	V	3.0	36.4	1.0	-58.2	-13.0	-45.2	
3.272	-21.0	V	3.0	35.8	1.0	-55.8	-13.0	-42.8	
BC10									
1.636	-19.7	H	3.0	37.4	1.0	-56.1	-13.0	-43.1	
2.454	-21.9	H	3.0	36.4	1.0	-57.3	-13.0	-44.3	
3.272	-20.6	H	3.0	35.8	1.0	-55.4	-13.0	-42.4	
1xRTT									
Mid Ch, 820.5MHz									
1.641	-22.1	V	3.0	37.3	1.0	-58.4	-13.0	-45.4	
2.462	-24.0	V	3.0	36.4	1.0	-59.4	-13.0	-46.4	
3.282	-21.8	V	3.0	35.8	1.0	-56.6	-13.0	-43.6	
1.641	-27.2	H	3.0	37.3	1.0	-63.5	-13.0	-50.5	
2.462	-22.2	H	3.0	36.4	1.0	-57.6	-13.0	-44.6	
3.282	-21.9	H	3.0	35.8	1.0	-56.7	-13.0	-43.7	
High Ch, 823.1MHz									
1.646	-21.6	V	3.0	37.3	1.0	-57.9	-13.0	-44.9	
2.469	-23.9	V	3.0	36.3	1.0	-59.2	-13.0	-46.2	
3.292	-21.1	V	3.0	35.7	1.0	-55.8	-13.0	-42.8	
1.646	-22.7	H	3.0	37.3	1.0	-59.0	-13.0	-46.0	
2.469	-21.0	H	3.0	36.3	1.0	-56.3	-13.0	-43.3	
3.292	-19.6	H	3.0	35.7	1.0	-54.3	-13.0	-41.3	

LTE Band 2

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement									
Company:		LG Electronics							
Project #:		15I20413							
Date:		4/3/2015							
Test Engineer:		R.Z							
Configuration:		EUT/ AC Charger/ Headset							
Location:		Chamber G							
Mode:		LTE_16QAM Band 2 Harmonics, 20MHz Bandwidth							
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 1860									
3720.00	-9.2	V	3.0	35.8	1.0	-44.1	-13.0	-31.1	
5580.00	-16.5	V	3.0	35.5	1.0	-51.0	-13.0	-38.0	
7440.00	-14.6	V	3.0	35.7	1.0	-49.4	-13.0	-36.4	
3720.00	-4.8	H	3.0	35.8	1.0	-39.6	-13.0	-26.6	
5580.00	-16.5	H	3.0	35.5	1.0	-51.0	-13.0	-38.0	
7440.00	-14.0	H	3.0	35.7	1.0	-48.8	-13.0	-35.8	
Mid Ch, 1880									
3760.00	-7.3	V	3.0	35.8	1.0	-42.1	-13.0	-29.1	
5640.00	-16.3	V	3.0	35.5	1.0	-50.8	-13.0	-37.8	
7520.00	-14.2	V	3.0	35.7	1.0	-49.0	-13.0	-36.0	
3760.00	-10.2	H	3.0	35.8	1.0	-45.0	-13.0	-32.0	
5640.00	-15.6	H	3.0	35.5	1.0	-50.1	-13.0	-37.1	
7520.00	-13.3	H	3.0	35.7	1.0	-48.0	-13.0	-35.0	
High Ch, 1900									
3800.00	-11.1	V	3.0	35.8	1.0	-45.8	-13.0	-32.8	
5700.00	-16.3	V	3.0	35.5	1.0	-50.8	-13.0	-37.8	
7600.00	-14.0	V	3.0	35.8	1.0	-48.8	-13.0	-35.8	
3800.00	-11.4	H	3.0	35.8	1.0	-46.2	-13.0	-33.2	
5700.00	-16.7	H	3.0	35.5	1.0	-51.2	-13.0	-38.2	
7600.00	-13.5	H	3.0	35.8	1.0	-48.2	-13.0	-35.2	

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement										
Company:		LG Electronics								
Project #:		15I20413								
Date:		4/3/2015								
Test Engineer:		R.Z								
Configuration:		EUT/ AC Charger/ Headset								
Location:		Chamber G								
Mode:		LTE_QPSK Band 2 Harmonics, 20MHz Bandwidth								
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Band	Low Ch, 1860									
	3720.00	-8.1	V	3.0	35.8	1.0	-43.0	-13.0	-30.0	
	5580.00	-15.3	V	3.0	35.5	1.0	-49.8	-13.0	-36.8	
LTE2	7440.00	-13.7	V	3.0	35.7	1.0	-48.5	-13.0	-35.5	
	3720.00	-5.9	H	3.0	35.8	1.0	-40.7	-13.0	-27.7	
	5580.00	-17.6	H	3.0	35.5	1.0	-52.1	-13.0	-39.1	
20MHz	7440.00	-13.0	H	3.0	35.7	1.0	-47.8	-13.0	-34.8	
	Mid Ch, 1880									
	3760.00	-9.1	V	3.0	35.8	1.0	-43.9	-13.0	-30.9	
QPSK	5640.00	-16.9	V	3.0	35.5	1.0	-51.4	-13.0	-38.4	
	7520.00	-15.1	V	3.0	35.7	1.0	-49.9	-13.0	-36.9	
	3760.00	-12.2	H	3.0	35.8	1.0	-47.0	-13.0	-34.0	
	5640.00	-16.3	H	3.0	35.5	1.0	-50.8	-13.0	-37.8	
	7520.00	-13.1	H	3.0	35.7	1.0	-47.9	-13.0	-34.9	
	High Ch, 1900									
	3800.00	-9.8	V	3.0	35.8	1.0	-44.5	-13.0	-31.5	
	5700.00	-16.8	V	3.0	35.5	1.0	-51.3	-13.0	-38.3	
	7600.00	-13.5	V	3.0	35.8	1.0	-48.3	-13.0	-35.3	
	3800.00	-19.7	H	3.0	35.8	1.0	-54.5	-13.0	-41.5	
	5700.00	-15.2	H	3.0	35.5	1.0	-49.7	-13.0	-36.7	
	7600.00	-13.2	H	3.0	35.8	1.0	-47.9	-13.0	-34.9	

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement									
Company:		LG Electronics							
Project #:		15I20413							
Date:		4/3/2015							
Test Engineer:		R.Z							
Configuration:		EUT/ AC Charger/ Headset							
Location:		Chamber G							
Mode:		LTE_16QAM Band 2 Harmonics, 15MHz Bandwidth							
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Band									
Low Ch, 1857.5									
3715.00	-7.2	V	3.0	35.8	1.0	-42.1	-13.0	-29.1	
5572.50	-17.0	V	3.0	35.5	1.0	-51.5	-13.0	-38.5	
LTE2									
7430.00	-14.7	V	3.0	35.7	1.0	-49.5	-13.0	-36.5	
3715.00	-3.4	H	3.0	35.8	1.0	-38.2	-13.0	-25.2	
5572.50	-17.5	H	3.0	35.5	1.0	-52.0	-13.0	-39.0	
15MHz									
7430.00	-13.1	H	3.0	35.7	1.0	-47.8	-13.0	-34.8	
Mid Ch, 1880									
3760.00	-6.0	V	3.0	35.8	1.0	-40.8	-13.0	-27.8	
16QAM									
5640.00	-16.2	V	3.0	35.5	1.0	-50.7	-13.0	-37.7	
7520.00	-12.6	V	3.0	35.7	1.0	-47.4	-13.0	-34.4	
3760.00	-8.7	H	3.0	35.8	1.0	-43.5	-13.0	-30.5	
5640.00	-14.8	H	3.0	35.5	1.0	-49.3	-13.0	-36.3	
7520.00	-12.2	H	3.0	35.7	1.0	-47.0	-13.0	-34.0	
High Ch, 1902.5									
3805.00	-12.0	V	3.0	35.8	1.0	-46.8	-13.0	-33.8	
5707.50	-16.6	V	3.0	35.5	1.0	-51.1	-13.0	-38.1	
7610.00	-13.1	V	3.0	35.8	1.0	-47.9	-13.0	-34.9	
3805.00	-10.3	H	3.0	35.8	1.0	-45.1	-13.0	-32.1	
5707.50	-15.7	H	3.0	35.5	1.0	-50.2	-13.0	-37.2	
7610.00	-12.5	H	3.0	35.8	1.0	-47.3	-13.0	-34.3	

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement									
Company:		LG Electronics							
Project #:		15I20413							
Date:		4/3/2015							
Test Engineer:		R.Z							
Configuration:		EUT/ AC Charger/ Headset							
Location:		Chamber G							
Mode:		LTE_QPSK Band 2 Harmonics, 15MHz Bandwidth							
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 1857.5									
Band	3715.00	-7.3	V	3.0	35.8	1.0	-42.2	-13.0	-29.2
	5572.50	-16.2	V	3.0	35.5	1.0	-50.7	-13.0	-37.7
LTE2	7430.00	-13.8	V	3.0	35.7	1.0	-48.6	-13.0	-35.6
	3715.00	-4.9	H	3.0	35.8	1.0	-39.7	-13.0	-26.7
	5572.50	-16.6	H	3.0	35.5	1.0	-51.1	-13.0	-38.1
15MHz	7430.00	-13.4	H	3.0	35.7	1.0	-48.1	-13.0	-35.1
Mid Ch, 1880									
QPSK	3760.00	-8.6	V	3.0	35.8	1.0	-43.4	-13.0	-30.4
	5640.00	-16.0	V	3.0	35.5	1.0	-50.5	-13.0	-37.5
	7520.00	-13.2	V	3.0	35.7	1.0	-48.0	-13.0	-35.0
	3760.00	-10.5	H	3.0	35.8	1.0	-45.3	-13.0	-32.3
	5640.00	-16.1	H	3.0	35.5	1.0	-50.6	-13.0	-37.6
	7520.00	-12.6	H	3.0	35.7	1.0	-47.4	-13.0	-34.4
High Ch, 1902.5									
	3805.00	-8.1	V	3.0	35.8	1.0	-42.9	-13.0	-29.9
	5707.50	-15.9	V	3.0	35.5	1.0	-50.4	-13.0	-37.4
	7610.00	-12.6	V	3.0	35.8	1.0	-47.4	-13.0	-34.4
	3805.00	-20.2	H	3.0	35.8	1.0	-55.0	-13.0	-42.0
	5707.50	-14.5	H	3.0	35.5	1.0	-49.0	-13.0	-36.0
	7610.00	-11.7	H	3.0	35.8	1.0	-46.5	-13.0	-33.5

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement									
Company:		LG Electronics							
Project #:		15I20413							
Date:		4/3/2015							
Test Engineer:		R.Z							
Configuration:		EUT/ AC Charger/ Headset							
Location:		Chamber G							
Mode:		LTE_16QAM Band 2 Harmonics, 10MHz Bandwidth							
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Band									
LTE2									
10MHz									
16QAM									
Low Ch, 1855									
3710.00	-7.6	V	3.0	35.9	1.0	-42.5	-13.0	-29.5	
5565.00	-16.8	V	3.0	35.5	1.0	-51.3	-13.0	-38.3	
7420.00	-15.1	V	3.0	35.7	1.0	-49.8	-13.0	-36.8	
3710.00	-5.6	H	3.0	35.9	1.0	-40.5	-13.0	-27.5	
5565.00	-15.3	H	3.0	35.5	1.0	-49.7	-13.0	-36.7	
7420.00	-12.4	H	3.0	35.7	1.0	-47.1	-13.0	-34.1	
Mid Ch, 1880									
3760.00	-8.4	V	3.0	35.8	1.0	-43.2	-13.0	-30.2	
5640.00	-17.4	V	3.0	35.5	1.0	-51.9	-13.0	-38.9	
7520.00	-14.9	V	3.0	35.7	1.0	-49.7	-13.0	-36.7	
3760.00	-7.8	H	3.0	35.8	1.0	-42.6	-13.0	-29.6	
5640.00	-16.1	H	3.0	35.5	1.0	-50.6	-13.0	-37.6	
7520.00	-13.6	H	3.0	35.7	1.0	-48.4	-13.0	-35.4	
High Ch, 1905									
3810.00	-9.9	V	3.0	35.8	1.0	-44.7	-13.0	-31.7	
5715.00	-16.9	V	3.0	35.5	1.0	-51.4	-13.0	-38.4	
7620.00	-13.6	V	3.0	35.8	1.0	-48.3	-13.0	-35.3	
3810.00	-14.4	H	3.0	35.8	1.0	-49.2	-13.0	-36.2	
5715.00	-15.5	H	3.0	35.5	1.0	-50.0	-13.0	-37.0	
7620.00	-13.7	H	3.0	35.8	1.0	-48.5	-13.0	-35.5	

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement										
Company:		LG Electronics								
Project #:		15I20413								
Date:		4/3/2015								
Test Engineer:		R.Z								
Configuration:		EUT/ AC Charger/ Headset								
Location:		Chamber G								
Mode:		LTE_QPSK Band 2 Harmonics, 10MHz Bandwidth								
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Band	Low Ch, 1855									
	3710.00	-9.3	V	3.0	35.9	1.0	-44.2	-13.0	-31.2	
	5565.00	-16.3	V	3.0	35.5	1.0	-50.8	-13.0	-37.8	
LTE2	7420.00	-14.3	V	3.0	35.7	1.0	-49.1	-13.0	-36.1	
	3710.00	-7.1	H	3.0	35.9	1.0	-41.9	-13.0	-28.9	
	5565.00	-16.8	H	3.0	35.5	1.0	-51.2	-13.0	-38.2	
10MHz	7420.00	-13.3	H	3.0	35.7	1.0	-48.0	-13.0	-35.0	
QPSK	Mid Ch, 1880									
	3760.00	-8.9	V	3.0	35.8	1.0	-43.7	-13.0	-30.7	
	5640.00	-16.6	V	3.0	35.5	1.0	-51.1	-13.0	-38.1	
	7520.00	-14.1	V	3.0	35.7	1.0	-48.9	-13.0	-35.9	
	3760.00	-5.8	H	3.0	35.8	1.0	-40.6	-13.0	-27.6	
	5640.00	-15.0	H	3.0	35.5	1.0	-49.5	-13.0	-36.5	
	7520.00	-13.2	H	3.0	35.7	1.0	-48.0	-13.0	-35.0	
	High Ch, 1905									
	3810.00	-12.3	V	3.0	35.8	1.0	-47.1	-13.0	-34.1	
	5715.00	-16.8	V	3.0	35.5	1.0	-51.3	-13.0	-38.3	
	7620.00	-13.8	V	3.0	35.8	1.0	-48.6	-13.0	-35.6	
	3810.00	-13.7	H	3.0	35.8	1.0	-48.5	-13.0	-35.5	
	5715.00	-16.3	H	3.0	35.5	1.0	-50.8	-13.0	-37.8	
	7620.00	-13.1	H	3.0	35.8	1.0	-47.9	-13.0	-34.9	

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement												
Company:		LG Electronics										
Project #:		15I20413										
Date:		4/3/2015										
Test Engineer:		R.Z										
Configuration:		EUT/ AC Charger/ Headset										
Location:		Chamber G										
Mode:		LTE_16QAM Band 2 Harmonics, 5MHz Bandwidth										
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes		
Band	Low Ch, 1852.5											
		3705.00	-8.3	V	3.0	35.9	1.0	-43.1	-13.0	-30.1		
		5557.50	-17.3	V	3.0	35.5	1.0	-51.7	-13.0	-38.7		
	LTE2	7410.00	-14.4	V	3.0	35.7	1.0	-49.1	-13.0	-36.1		
		3705.00	-5.6	H	3.0	35.9	1.0	-40.5	-13.0	-27.5		
	5MHz	5557.50	-15.8	H	3.0	35.5	1.0	-50.2	-13.0	-37.2		
		7410.00	-11.9	H	3.0	35.7	1.0	-46.6	-13.0	-33.6		
	16QAM	Mid Ch, 1880										
			3760.00	-7.9	V	3.0	35.8	1.0	-42.7	-13.0	-29.7	
			5640.00	-16.7	V	3.0	35.5	1.0	-51.2	-13.0	-38.2	
			7520.00	-15.0	V	3.0	35.7	1.0	-49.8	-13.0	-36.8	
			3760.00	-10.3	H	3.0	35.8	1.0	-45.1	-13.0	-32.1	
		5640.00	-15.9	H	3.0	35.5	1.0	-50.4	-13.0	-37.4		
	7520.00	-12.0	H	3.0	35.7	1.0	-46.8	-13.0	-33.8			
	High Ch, 1907.5											
	3815.00	-13.9	V	3.0	35.8	1.0	-48.7	-13.0	-35.7			
	5722.50	-15.9	V	3.0	35.5	1.0	-50.4	-13.0	-37.4			
	7630.00	-13.6	V	3.0	35.8	1.0	-48.3	-13.0	-35.3			
	3815.00	-12.4	H	3.0	35.8	1.0	-47.2	-13.0	-34.2			
	5722.50	-16.1	H	3.0	35.5	1.0	-50.6	-13.0	-37.6			
	7630.00	-13.6	H	3.0	35.8	1.0	-48.4	-13.0	-35.4			

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement										
Company:		LG Electronics								
Project #:		15I20413								
Date:		4/3/2015								
Test Engineer:		R.Z								
Configuration:		EUT/ AC Charger/ Headset								
Location:		Chamber G								
Mode:		LTE_QPSK Band 2 Harmonics, 5MHz Bandwidth								
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Band	Low Ch, 1852.5									
	3705.00	-9.4	V	3.0	35.9	1.0	-44.2	-13.0	-31.2	
	5557.50	-16.1	V	3.0	35.5	1.0	-50.6	-13.0	-37.6	
LTE2	7410.00									
	3705.00	-6.5	H	3.0	35.9	1.0	-41.4	-13.0	-28.4	
	5557.50	-16.5	H	3.0	35.5	1.0	-50.9	-13.0	-37.9	
5MHz	7410.00									
	3705.00	-6.5	H	3.0	35.9	1.0	-41.4	-13.0	-28.4	
	5557.50	-16.5	H	3.0	35.5	1.0	-50.9	-13.0	-37.9	
QPSK	Mid Ch, 1880									
	3760.00	-9.5	V	3.0	35.8	1.0	-44.4	-13.0	-31.4	
	5640.00	-16.2	V	3.0	35.5	1.0	-50.7	-13.0	-37.7	
	7520.00	-13.4	V	3.0	35.7	1.0	-48.2	-13.0	-35.2	
	3760.00	-7.7	H	3.0	35.8	1.0	-42.5	-13.0	-29.5	
	5640.00	-16.3	H	3.0	35.5	1.0	-50.8	-13.0	-37.8	
	7520.00	-13.1	H	3.0	35.7	1.0	-47.9	-13.0	-34.9	
	High Ch, 1907.5									
	3815.00	-15.0	V	3.0	35.8	1.0	-49.8	-13.0	-36.8	
	5722.50	-16.3	V	3.0	35.5	1.0	-50.8	-13.0	-37.8	
	7630.00	-15.3	V	3.0	35.8	1.0	-50.0	-13.0	-37.0	
	3815.00	-10.1	H	3.0	35.8	1.0	-44.9	-13.0	-31.9	
5722.50	-15.8	H	3.0	35.5	1.0	-50.3	-13.0	-37.3		
7630.00	-12.8	H	3.0	35.8	1.0	-47.6	-13.0	-34.6		

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement										
Company:		LG Electronics								
Project #:		15I20413								
Date:		4/3/2015								
Test Engineer:		R.Z								
Configuration:		EUT/ AC Charger/ Headset								
Location:		Chamber G								
Mode:		LTE_16QAM Band 2 Harmonics, 3MHz Bandwidth								
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Band	Low Ch, 1851.5									
	3703.00	-7.6	V	3.0	35.9	1.0	-42.4	-13.0	-29.4	
LTE2	5554.50	-16.6	V	3.0	35.5	1.0	-51.1	-13.0	-38.1	
	7406.00	-14.3	V	3.0	35.7	1.0	-49.0	-13.0	-36.0	
3MHz	3703.00	-4.3	H	3.0	35.9	1.0	-39.2	-13.0	-26.2	
	5554.50	-16.2	H	3.0	35.5	1.0	-50.7	-13.0	-37.7	
16QAM	7406.00	-13.1	H	3.0	35.7	1.0	-47.8	-13.0	-34.8	
	Mid Ch, 1880									
	3760.00	-6.1	V	3.0	35.8	1.0	-40.9	-13.0	-27.9	
	5640.00	-16.5	V	3.0	35.5	1.0	-51.0	-13.0	-38.0	
	7520.00	-14.4	V	3.0	35.7	1.0	-49.2	-13.0	-36.2	
	3760.00	-7.8	H	3.0	35.8	1.0	-42.6	-13.0	-29.6	
	5640.00	-15.9	H	3.0	35.5	1.0	-50.4	-13.0	-37.4	
	7520.00	-14.0	H	3.0	35.7	1.0	-48.8	-13.0	-35.8	
	High Ch, 1908.5									
	3817.00	-7.3	V	3.0	35.8	1.0	-42.1	-13.0	-29.1	
5725.50	-15.5	V	3.0	35.5	1.0	-50.0	-13.0	-37.0		
7634.00	-12.8	V	3.0	35.8	1.0	-47.5	-13.0	-34.5		
3817.00	-8.4	H	3.0	35.8	1.0	-43.2	-13.0	-30.2		
5725.50	-16.1	H	3.0	35.5	1.0	-50.6	-13.0	-37.6		
7634.00	-13.4	H	3.0	35.8	1.0	-48.2	-13.0	-35.2		

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement											
Company:		LG Electronics									
Project #:		15I20413									
Date:		4/3/2015									
Test Engineer:		R.Z									
Configuration:		EUT/ AC Charger/ Headset									
Location:		Chamber G									
Mode:		LTE_QPSK Band 2 Harmonics, 3MHz Bandwidth									
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	
Band	Low Ch, 1851.5										
	3703.00	-8.6	V	3.0	35.9	1.0	-43.4	-13.0	-30.4		
	5554.50	-16.9	V	3.0	35.5	1.0	-51.4	-13.0	-38.4		
	LTE2	7406.00	-11.9	V	3.0	35.7	1.0	-46.6	-13.0	-33.6	
		3703.00	-5.1	H	3.0	35.9	1.0	-40.0	-13.0	-27.0	
	3MHz	5554.50	-16.3	H	3.0	35.5	1.0	-50.8	-13.0	-37.8	
7406.00		-13.4	H	3.0	35.7	1.0	-48.1	-13.0	-35.1		
QPSK	Mid Ch, 1880										
	3760.00	-6.9	V	3.0	35.8	1.0	-41.7	-13.0	-28.7		
	5640.00	-17.1	V	3.0	35.5	1.0	-51.6	-13.0	-38.6		
	7520.00	-13.8	V	3.0	35.7	1.0	-48.6	-13.0	-35.6		
	3760.00	-8.3	H	3.0	35.8	1.0	-43.1	-13.0	-30.1		
	5640.00	-16.0	H	3.0	35.5	1.0	-50.5	-13.0	-37.5		
	High Ch, 1908.5										
	3817.00	-9.4	V	3.0	35.8	1.0	-44.2	-13.0	-31.2		
	5725.50	-15.8	V	3.0	35.5	1.0	-50.3	-13.0	-37.3		
	7634.00	-14.1	V	3.0	35.8	1.0	-48.8	-13.0	-35.8		
	3817.00	-7.5	H	3.0	35.8	1.0	-42.3	-13.0	-29.3		
	5725.50	-15.6	H	3.0	35.5	1.0	-50.1	-13.0	-37.1		
	7634.00	-12.5	H	3.0	35.8	1.0	-47.3	-13.0	-34.3		

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement									
Company:		LG Electronics							
Project #:		15I20413							
Date:		4/3/2015							
Test Engineer:		R.Z							
Configuration:		EUT/ AC Charger/ Headset							
Location:		Chamber G							
Mode:		LTE_16QAM Band 2 Harmonics, 1.4MHz Bandwidth							
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 1850.7									
Band	3701.40	-8.8	V	3.0	35.9	1.0	-43.6	-13.0	-30.6
	5552.10	-17.0	V	3.0	35.5	1.0	-51.5	-13.0	-38.5
LTE2	7402.80	-13.5	V	3.0	35.7	1.0	-48.2	-13.0	-35.2
	3701.40	-5.2	H	3.0	35.9	1.0	-40.1	-13.0	-27.1
	5552.10	-16.1	H	3.0	35.5	1.0	-50.6	-13.0	-37.6
1.4MHz	7402.80	-11.7	H	3.0	35.7	1.0	-46.4	-13.0	-33.4
Mid Ch, 1880									
16QAM	3760.00	-6.3	V	3.0	35.8	1.0	-44.7	-13.0	-31.7
	5640.00	-15.9	V	3.0	35.5	1.0	-50.4	-13.0	-37.4
	7520.00	-13.9	V	3.0	35.7	1.0	-48.7	-13.0	-35.7
	3760.00	-6.4	H	3.0	35.8	1.0	-41.2	-13.0	-28.2
	5640.00	-15.5	H	3.0	35.5	1.0	-50.0	-13.0	-37.0
	7520.00	-13.3	H	3.0	35.7	1.0	-48.0	-13.0	-35.0
High Ch, 1909.3									
	3818.60	-18.1	V	3.0	35.8	1.0	-52.9	-13.0	-39.9
	5727.90	-15.9	V	3.0	35.5	1.0	-50.4	-13.0	-37.4
	7637.20	-13.6	V	3.0	35.8	1.0	-48.3	-13.0	-35.3
	3818.60	-19.2	H	3.0	35.8	1.0	-54.0	-13.0	-41.0
	5727.90	-15.3	H	3.0	35.5	1.0	-49.8	-13.0	-36.8
	7637.20	-12.3	H	3.0	35.8	1.0	-47.1	-13.0	-34.1

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement									
Company:		LG Electronics							
Project #:		15I20413							
Date:		4/3/2015							
Test Engineer:		R.Z							
Configuration:		EUT/ AC Charger/ Headset							
Location:		Chamber G							
Mode:		LTE_QPSK Band 2 Harmonics, 1.4MHz Bandwidth							
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 1850.7									
Band	3701.40	-5.4	V	3.0	35.9	1.0	-40.2	-13.0	-27.2
	5552.10	-16.6	V	3.0	35.5	1.0	-51.1	-13.0	-38.1
LTE2	7402.80	-11.9	V	3.0	35.7	1.0	-46.6	-13.0	-33.6
	3701.40	-6.6	H	3.0	35.9	1.0	-41.5	-13.0	-28.5
	5552.10	-15.4	H	3.0	35.5	1.0	-49.9	-13.0	-36.9
1.4MHz	7402.80	-11.4	H	3.0	35.7	1.0	-46.1	-13.0	-33.1
Mid Ch, 1880									
QPSK	3760.00	-10.1	V	3.0	35.8	1.0	-44.9	-13.0	-31.9
	5640.00	-17.4	V	3.0	35.5	1.0	-51.9	-13.0	-38.9
	7520.00	-13.3	V	3.0	35.7	1.0	-48.1	-13.0	-35.1
	3760.00	-10.4	H	3.0	35.8	1.0	-45.2	-13.0	-32.2
	5640.00	-15.9	H	3.0	35.5	1.0	-50.4	-13.0	-37.4
	7520.00	-13.0	H	3.0	35.7	1.0	-47.8	-13.0	-34.8
High Ch, 1909.3									
	3818.60	-17.7	V	3.0	35.8	1.0	-52.5	-13.0	-39.5
	5727.90	-15.7	V	3.0	35.5	1.0	-50.2	-13.0	-37.2
	7637.20	-13.5	V	3.0	35.8	1.0	-48.2	-13.0	-35.2
	3818.60	-19.2	H	3.0	35.8	1.0	-54.0	-13.0	-41.0
	5727.90	-15.5	H	3.0	35.5	1.0	-50.0	-13.0	-37.0
	7637.20	-12.6	H	3.0	35.8	1.0	-47.4	-13.0	-34.4

LTE Band 4

Compliance Certification Services Above 1GHz High Frequency Substitution Measurement									
Company:		LG Electronics							
Project #:		15I20413							
Date:		4/10/2015							
Test Engineer:		R.Z							
Configuration:		X-pos EUT/ AC Charger/ Headset							
Location:		Chamber G							
Mode:		LTE_16QAM Band 4 Harmonics, 20MHz Bandwidth							
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 1720									
Band	3440.00	1.5	V	3.0	36.0	1.0	-33.6	-13.0	-20.6
	5160.00	-11.5	V	3.0	35.4	1.0	-45.9	-13.0	-32.9
LTE4	6880.00	-14.7	V	3.0	35.7	1.0	-49.4	-13.0	-36.4
	3440.00	4.4	H	3.0	36.0	1.0	-30.6	-13.0	-17.6
20MHz	5160.00	-12.9	H	3.0	35.4	1.0	-47.3	-13.0	-34.3
	6880.00	-13.1	H	3.0	35.7	1.0	-47.8	-13.0	-34.8
Mid Ch, 1732.5									
16QAM	3465.00	5.6	V	3.0	36.0	1.0	-29.5	-13.0	-16.5
	5197.50	-11.7	V	3.0	35.4	1.0	-46.1	-13.0	-33.1
	6930.00	-14.5	V	3.0	35.7	1.0	-49.1	-13.0	-36.1
	3465.00	-3.9	H	3.0	36.0	1.0	-39.0	-13.0	-26.0
	5197.50	-12.6	H	3.0	35.4	1.0	-47.0	-13.0	-34.0
	6930.00	-13.3	H	3.0	35.7	1.0	-48.0	-13.0	-35.0
High Ch, 1745									
	3490.00	6.8	V	3.0	36.0	1.0	-28.2	-13.0	-15.2
	5235.00	-12.2	V	3.0	35.4	1.0	-46.6	-13.0	-33.6
	6980.00	-15.2	V	3.0	35.7	1.0	-49.9	-13.0	-36.9
	3490.00	4.8	H	3.0	36.0	1.0	-30.2	-13.0	-17.2
	5235.00	-11.2	H	3.0	35.4	1.0	-45.7	-13.0	-32.7
	6980.00	-12.9	H	3.0	35.7	1.0	-47.6	-13.0	-34.6

Compliance Certification Services Above 1GHz High Frequency Substitution Measurement										
Company:		LG Electronics								
Project #:		15I20413								
Date:		4/10/2015								
Test Engineer:		R.Z								
Configuration:		X-pos EUT/ AC Charger/ Headset								
Location:		Chamber G								
Mode:		LTE_QPSK Band 4 Harmonics, 20MHz Bandwidth								
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Band LTE4 20MHz QPSK	Low Ch, 1720									
	3440.00	6.7	V	3.0	36.0	1.0	-28.4	-13.0	-15.4	
	5160.00	-10.7	V	3.0	35.4	1.0	-45.1	-13.0	-32.1	
	6880.00	-14.7	V	3.0	35.7	1.0	-49.4	-13.0	-36.4	
	3440.00	5.9	H	3.0	36.0	1.0	-29.1	-13.0	-16.1	
	5160.00	-13.1	H	3.0	35.4	1.0	-47.5	-13.0	-34.5	
	6880.00	-13.5	H	3.0	35.7	1.0	-48.2	-13.0	-35.2	
	Mid Ch, 1732.5									
	3465.00	-4.4	V	3.0	36.0	1.0	-39.5	-13.0	-26.5	
	5197.50	-13.2	V	3.0	35.4	1.0	-47.6	-13.0	-34.6	
	6930.00	-14.5	V	3.0	35.7	1.0	-49.1	-13.0	-36.1	
	3465.00	-3.0	H	3.0	36.0	1.0	-38.1	-13.0	-25.1	
5197.50	-9.3	H	3.0	35.4	1.0	-43.7	-13.0	-30.7		
6930.00	-13.3	H	3.0	35.7	1.0	-48.0	-13.0	-35.0		
High Ch, 1745										
3490.00	1.6	V	3.0	36.0	1.0	-33.4	-13.0	-20.4		
5235.00	-11.8	V	3.0	35.4	1.0	-46.2	-13.0	-33.2		
6980.00	-14.5	V	3.0	35.7	1.0	-49.2	-13.0	-36.2		
3490.00	4.4	H	3.0	36.0	1.0	-30.6	-13.0	-17.6		
5235.00	-12.5	H	3.0	35.4	1.0	-47.0	-13.0	-34.0		
6980.00	-12.8	H	3.0	35.7	1.0	-47.5	-13.0	-34.5		

Compliance Certification Services Above 1GHz High Frequency Substitution Measurement									
Company:		LG Electronics							
Project #:		15I20413							
Date:		4/10/2015							
Test Engineer:		R.Z							
Configuration:		X-pos EUT/ AC Charger/ Headset							
Location:		Chamber G							
Mode:		LTE_16QAM Band 4 Harmonics, 15MHz Bandwidth							
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Band									
LTE4									
15MHz									
16QAM									
Low Ch, 1717.5									
3435.00	2.7	V	3.0	36.1	1.0	-32.4	-13.0	-19.4	
5152.50	-10.9	V	3.0	35.4	1.0	-45.4	-13.0	-32.4	
6870.00	-14.5	V	3.0	35.7	1.0	-49.2	-13.0	-36.2	
3435.00	5.2	H	3.0	36.1	1.0	-29.8	-13.0	-16.8	
5152.50	-13.7	H	3.0	35.4	1.0	-48.1	-13.0	-35.1	
6870.00	-13.1	H	3.0	35.7	1.0	-47.8	-13.0	-34.8	
Mid Ch, 1732.5									
3465.00	-1.5	V	3.0	36.0	1.0	-36.6	-13.0	-23.6	
5197.50	-11.1	V	3.0	35.4	1.0	-45.5	-13.0	-32.5	
6930.00	-13.8	V	3.0	35.7	1.0	-48.4	-13.0	-35.4	
3465.00	-2.9	H	3.0	36.0	1.0	-38.0	-13.0	-25.0	
5197.50	-9.8	H	3.0	35.4	1.0	-44.2	-13.0	-31.2	
6930.00	-13.2	H	3.0	35.7	1.0	-47.9	-13.0	-34.9	
High Ch, 1747.5									
3495.00	7.8	V	3.0	36.0	1.0	-27.2	-13.0	-14.2	
5242.50	-11.5	V	3.0	35.4	1.0	-45.9	-13.0	-32.9	
6990.00	-15.2	V	3.0	35.7	1.0	-49.9	-13.0	-36.9	
3495.00	7.3	H	3.0	36.0	1.0	-27.7	-13.0	-14.7	
5242.50	-11.3	H	3.0	35.4	1.0	-45.8	-13.0	-32.8	
6990.00	-13.2	H	3.0	35.7	1.0	-47.9	-13.0	-34.9	

Compliance Certification Services Above 1GHz High Frequency Substitution Measurement									
Company:		LG Electronics							
Project #:		15I20413							
Date:		4/10/2015							
Test Engineer:		R.Z							
Configuration:		X-pos EUT/ AC Charger/ Headset							
Location:		Chamber G							
Mode:		LTE_QPSK Band 4 Harmonics, 15MHz Bandwidth							
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 1717.5									
Band	3435.00	5.7	V	3.0	36.1	1.0	-29.4	-13.0	-16.4
	5152.50	-11.0	V	3.0	35.4	1.0	-45.4	-13.0	-32.4
LTE4	6870.00	-14.9	V	3.0	35.7	1.0	-49.6	-13.0	-36.6
	3435.00	6.6	H	3.0	36.1	1.0	-28.4	-13.0	-15.4
	5152.50	-12.7	H	3.0	35.4	1.0	-47.1	-13.0	-34.1
15MHz	6870.00	-13.9	H	3.0	35.7	1.0	-48.6	-13.0	-35.6
Mid Ch, 1732.5									
QPSK	3465.00	-2.6	V	3.0	36.0	1.0	-37.7	-13.0	-24.7
	5197.50	-11.6	V	3.0	35.4	1.0	-46.0	-13.0	-33.0
	6930.00	-12.3	V	3.0	35.7	1.0	-46.9	-13.0	-33.9
	3465.00	-0.7	H	3.0	36.0	1.0	-35.7	-13.0	-22.7
	5197.50	-9.9	H	3.0	35.4	1.0	-44.3	-13.0	-31.3
	6930.00	-13.2	H	3.0	35.7	1.0	-47.9	-13.0	-34.9
High Ch, 1747.5									
	3495.00	3.4	V	3.0	36.0	1.0	-31.6	-13.0	-18.6
	5242.50	-11.9	V	3.0	35.4	1.0	-46.3	-13.0	-33.3
	6990.00	-14.3	V	3.0	35.7	1.0	-49.0	-13.0	-36.0
	3495.00	5.3	H	3.0	36.0	1.0	-29.7	-13.0	-16.7
	5242.50	-11.5	H	3.0	35.4	1.0	-46.0	-13.0	-33.0
	6990.00	-12.5	H	3.0	35.7	1.0	-47.2	-13.0	-34.2

Compliance Certification Services Above 1GHz High Frequency Substitution Measurement									
Company:		LG Electronics							
Project #:		15I20413							
Date:		4/10/2015							
Test Engineer:		R.Z							
Configuration:		X-pos EUT/ AC Charger/ Headset							
Location:		Chamber G							
Mode:		LTE_16QAM Band 4 Harmonics, 10MHz Bandwidth							
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 1715									
3430.00	3.9	V	3.0	36.1	1.0	-31.2	-13.0	-18.2	
5145.00	-10.8	V	3.0	35.4	1.0	-45.3	-13.0	-32.3	
6860.00	-15.2	V	3.0	35.7	1.0	-49.8	-13.0	-36.8	
LTE4									
3430.00	8.4	H	3.0	36.1	1.0	-26.7	-13.0	-13.7	
5145.00	-11.1	H	3.0	35.4	1.0	-45.6	-13.0	-32.6	
6860.00	-12.9	H	3.0	35.7	1.0	-47.6	-13.0	-34.6	
10MHz									
Mid Ch, 1732.5									
3465.00	-4.3	V	3.0	36.0	1.0	-39.4	-13.0	-26.4	
5197.50	-11.6	V	3.0	35.4	1.0	-46.0	-13.0	-33.0	
6930.00	-14.5	V	3.0	35.7	1.0	-49.1	-13.0	-36.1	
3465.00	-0.3	H	3.0	36.0	1.0	-35.3	-13.0	-22.3	
5197.50	-10.5	H	3.0	35.4	1.0	-44.9	-13.0	-31.9	
6930.00	-13.5	H	3.0	35.7	1.0	-48.2	-13.0	-35.2	
16QAM									
High Ch, 1750									
3500.00	0.1	V	3.0	36.0	1.0	-34.9	-13.0	-21.9	
5250.00	-11.6	V	3.0	35.4	1.0	-46.1	-13.0	-33.1	
7000.00	-14.4	V	3.0	35.7	1.0	-49.1	-13.0	-36.1	
3500.00	4.7	H	3.0	36.0	1.0	-30.3	-13.0	-17.3	
5250.00	-14.3	H	3.0	35.4	1.0	-48.7	-13.0	-35.7	
7000.00	-12.9	H	3.0	35.7	1.0	-47.6	-13.0	-34.6	

Compliance Certification Services Above 1GHz High Frequency Substitution Measurement									
Company:		LG Electronics							
Project #:		15I20413							
Date:		4/10/2015							
Test Engineer:		R.Z							
Configuration:		X-pos EUT/ AC Charger/ Headset							
Location:		Chamber G							
Mode:		LTE_QPSK Band 4 Harmonics, 10MHz Bandwidth							
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 1715									
Band	3430.00	5.1	V	3.0	36.1	1.0	-30.0	-13.0	-17.0
	5145.00	-10.4	V	3.0	35.4	1.0	-44.9	-13.0	-31.9
LTE4	6860.00	-14.6	V	3.0	35.7	1.0	-49.2	-13.0	-36.2
	3430.00	6.8	H	3.0	36.1	1.0	-28.3	-13.0	-15.3
	5145.00	-14.9	H	3.0	35.4	1.0	-49.4	-13.0	-36.4
10MHz	6860.00	-13.7	H	3.0	35.7	1.0	-48.4	-13.0	-35.4
Mid Ch, 1732.5									
QPSK	3465.00	-0.9	V	3.0	36.0	1.0	-36.0	-13.0	-23.0
	5197.50	-11.8	V	3.0	35.4	1.0	-46.2	-13.0	-33.2
	6930.00	-14.6	V	3.0	35.7	1.0	-49.2	-13.0	-36.2
	3465.00	-3.0	H	3.0	36.0	1.0	-38.1	-13.0	-25.1
	5197.50	-11.0	H	3.0	35.4	1.0	-45.4	-13.0	-32.4
	6930.00	-13.1	H	3.0	35.7	1.0	-47.8	-13.0	-34.8
High Ch, 1750									
	3500.00	1.5	V	3.0	36.0	1.0	-33.5	-13.0	-20.5
	5250.00	-12.2	V	3.0	35.4	1.0	-46.6	-13.0	-33.6
	7000.00	-14.7	V	3.0	35.7	1.0	-49.4	-13.0	-36.4
	3500.00	4.9	H	3.0	36.0	1.0	-30.1	-13.0	-17.1
	5250.00	-12.6	H	3.0	35.4	1.0	-47.0	-13.0	-34.0
	7000.00	-13.3	H	3.0	35.7	1.0	-48.0	-13.0	-35.0

Compliance Certification Services Above 1GHz High Frequency Substitution Measurement										
Company:		LG Electronics								
Project #:		15I20413								
Date:		4/10/2015								
Test Engineer:		R.Z								
Configuration:		X-pos EUT/ AC Charger/ Headset								
Location:		Chamber G								
Mode:		LTE_16QAM Band 4 Harmonics, 5MHz Bandwidth								
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Band	Low Ch, 1712.5									
	3425.00	3.9	V	3.0	36.1	1.0	-31.2	-13.0	-18.2	
	5137.50	-10.6	V	3.0	35.4	1.0	-45.0	-13.0	-32.0	
LTE4	6850.00									
	3425.00	5.6	H	3.0	36.1	1.0	-29.4	-13.0	-16.4	
	5137.50	-12.7	H	3.0	35.4	1.0	-47.1	-13.0	-34.1	
5MHz	6850.00									
	3425.00	5.6	H	3.0	36.1	1.0	-29.4	-13.0	-16.4	
	5137.50	-12.7	H	3.0	35.4	1.0	-47.1	-13.0	-34.1	
16QAM	Mid Ch, 1732.5									
	3465.00	-1.3	V	3.0	36.0	1.0	-36.4	-13.0	-23.4	
	5197.50	-10.5	V	3.0	35.4	1.0	-44.9	-13.0	-31.9	
	6930.00	-14.1	V	3.0	35.7	1.0	-48.7	-13.0	-35.7	
	3465.00	-2.0	H	3.0	36.0	1.0	-37.0	-13.0	-24.0	
	5197.50	-11.2	H	3.0	35.4	1.0	-45.6	-13.0	-32.6	
	6930.00	-13.6	H	3.0	35.7	1.0	-48.3	-13.0	-35.3	
	High Ch, 1752.5									
	3505.00	-3.5	V	3.0	36.0	1.0	-38.5	-13.0	-25.5	
5257.50	-10.1	V	3.0	35.4	1.0	-44.6	-13.0	-31.6		
7010.00	-14.0	V	3.0	35.7	1.0	-48.7	-13.0	-35.7		
3505.00	3.0	H	3.0	36.0	1.0	-32.0	-13.0	-19.0		
5257.50	-11.5	H	3.0	35.4	1.0	-45.9	-13.0	-32.9		
7010.00	-13.0	H	3.0	35.7	1.0	-47.7	-13.0	-34.7		

Compliance Certification Services Above 1GHz High Frequency Substitution Measurement										
Company:		LG Electronics								
Project #:		15I20413								
Date:		4/10/2015								
Test Engineer:		R.Z								
Configuration:		X-pos EUT/ AC Charger/ Headset								
Location:		Chamber G								
Mode:		LTE_QPSK Band 4 Harmonics, 5MHz Bandwidth								
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Band	Low Ch, 1712.5									
	3425.00	3.3	V	3.0	36.1	1.0	-31.8	-13.0	-18.8	
	5137.50	-12.3	V	3.0	35.4	1.0	-46.7	-13.0	-33.7	
LTE4	6850.00									
	3425.00	6.3	H	3.0	36.1	1.0	-28.8	-13.0	-15.8	
	5137.50	-12.5	H	3.0	35.4	1.0	-46.9	-13.0	-33.9	
5MHz	6850.00									
	3425.00	6.3	H	3.0	36.1	1.0	-28.8	-13.0	-15.8	
	5137.50	-12.5	H	3.0	35.4	1.0	-46.9	-13.0	-33.9	
QPSK	Mid Ch, 1732.5									
	3465.00	-2.6	V	3.0	36.0	1.0	-37.7	-13.0	-24.7	
	5197.50	-10.2	V	3.0	35.4	1.0	-44.6	-13.0	-31.6	
	6930.00	-14.6	V	3.0	35.7	1.0	-49.3	-13.0	-36.3	
	3465.00	0.6	H	3.0	36.0	1.0	-34.5	-13.0	-21.5	
	5197.50	-10.3	H	3.0	35.4	1.0	-44.7	-13.0	-31.7	
	6930.00	-13.6	H	3.0	35.7	1.0	-48.3	-13.0	-35.3	
	High Ch, 1752.5									
	3505.00	2.1	V	3.0	36.0	1.0	-32.9	-13.0	-19.9	
	5257.50	-12.6	V	3.0	35.4	1.0	-47.1	-13.0	-34.1	
	7010.00	-14.2	V	3.0	35.7	1.0	-48.9	-13.0	-35.9	
	3505.00	0.9	H	3.0	36.0	1.0	-34.1	-13.0	-21.1	
	5257.50	-4.7	H	3.0	35.4	1.0	-39.1	-13.0	-26.1	
	7010.00	-11.5	H	3.0	35.7	1.0	-46.2	-13.0	-33.2	

Compliance Certification Services Above 1GHz High Frequency Substitution Measurement									
Company:		LG Electronics							
Project #:		15I20413							
Date:		4/10/2015							
Test Engineer:		R.Z							
Configuration:		X-pos EUT/ AC Charger/ Headset							
Location:		Chamber G							
Mode:		LTE_16QAM Band 4 Harmonics, 3MHz Bandwidth							
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Band									
Low Ch, 1711.5									
3423.00	5.6	V	3.0	36.1	1.0	-29.5	-13.0	-16.5	
5134.50	-11.3	V	3.0	35.4	1.0	-45.7	-13.0	-32.7	
LTE4									
6846.00	-14.5	V	3.0	35.7	1.0	-49.1	-13.0	-36.1	
3423.00	3.9	H	3.0	36.1	1.0	-31.2	-13.0	-18.2	
5134.50	-13.4	H	3.0	35.4	1.0	-47.8	-13.0	-34.8	
3MHz									
6846.00	-12.6	H	3.0	35.7	1.0	-47.2	-13.0	-34.2	
16QAM									
Mid Ch, 1732.5									
3465.00	-1.5	V	3.0	36.0	1.0	-36.6	-13.0	-23.6	
5197.50	-11.4	V	3.0	35.4	1.0	-45.8	-13.0	-32.8	
6930.00	-14.1	V	3.0	35.7	1.0	-48.7	-13.0	-35.7	
3465.00	-1.4	H	3.0	36.0	1.0	-36.4	-13.0	-23.4	
5197.50	-10.2	H	3.0	35.4	1.0	-44.6	-13.0	-31.6	
6930.00	-12.7	H	3.0	35.7	1.0	-47.4	-13.0	-34.4	
High Ch, 1753.5									
3507.00	-1.8	V	3.0	36.0	1.0	-36.8	-13.0	-23.8	
5260.50	-13.6	V	3.0	35.4	1.0	-48.1	-13.0	-35.1	
7014.00	-13.5	V	3.0	35.7	1.0	-48.2	-13.0	-35.2	
3507.00	-2.0	H	3.0	36.0	1.0	-37.0	-13.0	-24.0	
5260.50	-15.5	H	3.0	35.4	1.0	-49.9	-13.0	-36.9	
7014.00	-12.3	H	3.0	35.7	1.0	-47.0	-13.0	-34.0	

Compliance Certification Services Above 1GHz High Frequency Substitution Measurement										
Company:		LG Electronics								
Project #:		15I20413								
Date:		4/10/2015								
Test Engineer:		R.Z								
Configuration:		X-pos EUT/ AC Charger/ Headset								
Location:		Chamber G								
Mode:		LTE_QPSK Band 4 Harmonics, 3MHz Bandwidth								
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Band	Low Ch, 1711.5									
	3423.00	4.8	V	3.0	36.1	1.0	-30.2	-13.0	-17.2	
	5134.50	-10.7	V	3.0	35.4	1.0	-45.1	-13.0	-32.1	
LTE4	6846.00	-14.3	V	3.0	35.7	1.0	-48.9	-13.0	-35.9	
	3423.00	6.2	H	3.0	36.1	1.0	-28.9	-13.0	-15.9	
	5134.50	-12.3	H	3.0	35.4	1.0	-46.7	-13.0	-33.7	
3MHz	6846.00	-12.4	H	3.0	35.7	1.0	-47.0	-13.0	-34.0	
	Mid Ch, 1732.5									
	3465.00	-4.0	V	3.0	36.0	1.0	-39.1	-13.0	-26.1	
QPSK	5197.50	-11.8	V	3.0	35.4	1.0	-46.2	-13.0	-33.2	
	6930.00	-15.5	V	3.0	35.7	1.0	-50.1	-13.0	-37.1	
	3465.00	-1.2	H	3.0	36.0	1.0	-36.2	-13.0	-23.2	
	5197.50	-9.3	H	3.0	35.4	1.0	-43.7	-13.0	-30.7	
	6930.00	-12.9	H	3.0	35.7	1.0	-47.6	-13.0	-34.6	
	High Ch, 1753.5									
	3507.00	1.0	V	3.0	36.0	1.0	-34.0	-13.0	-21.0	
	5260.50	-13.9	V	3.0	35.4	1.0	-48.4	-13.0	-35.4	
	7014.00	-14.4	V	3.0	35.7	1.0	-49.1	-13.0	-36.1	
	3507.00	-1.0	H	3.0	36.0	1.0	-36.0	-13.0	-23.0	
	5260.50	-13.6	H	3.0	35.4	1.0	-48.0	-13.0	-35.0	
	7014.00	-11.6	H	3.0	35.7	1.0	-46.3	-13.0	-33.3	

Compliance Certification Services Above 1GHz High Frequency Substitution Measurement									
Company:		LG Electronics							
Project #:		15I20413							
Date:		4/10/2015							
Test Engineer:		R.Z							
Configuration:		X-pos EUT/ AC Charger/ Headset							
Location:		Chamber G							
Mode:		LTE_16QAM Band 4 Harmonics, 1.4MHz Bandwidth							
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 1710.7									
3421.40	2.4	V	3.0	36.1	1.0	-32.6	-13.0	-19.6	-42.0
5132.10	-10.5	V	3.0	35.4	1.0	-44.9	-13.0	-31.9	-59.1
6842.80	-14.1	V	3.0	35.7	1.0	-48.7	-13.0	-35.7	-64.7
1.4MHz									
3421.40	3.5	H	3.0	36.1	1.0	-31.6	-13.0	-18.6	-40.9
5132.10	-6.3	H	3.0	35.4	1.0	-40.7	-13.0	-27.7	-55.5
6842.80	-11.2	H	3.0	35.7	1.0	-45.8	-13.0	-32.8	-63.4
Mid Ch, 1732.5									
3465.00	-2.6	V	3.0	36.0	1.0	-37.7	-13.0	-24.7	-47.2
5197.50	-10.1	V	3.0	35.4	1.0	-44.5	-13.0	-31.5	-58.9
6930.00	-13.8	V	3.0	35.7	1.0	-48.4	-13.0	-35.4	-64.5
3465.00	-0.4	H	3.0	36.0	1.0	-35.4	-13.0	-22.4	-44.9
5197.50	-10.6	H	3.0	35.4	1.0	-45.0	-13.0	-32.0	-60.0
6930.00	-11.6	H	3.0	35.7	1.0	-46.3	-13.0	-33.3	-64.0
High Ch, 1754.3									
3508.60	-2.2	V	3.0	36.0	1.0	-37.2	-13.0	-24.2	-46.9
5262.90	-12.1	V	3.0	35.4	1.0	-46.5	-13.0	-33.5	-61.0
7017.20	-14.9	V	3.0	35.7	1.0	-49.6	-13.0	-36.6	-65.7
3508.60	0.4	H	3.0	36.0	1.0	-34.5	-13.0	-21.5	-44.2
5262.90	-12.7	H	3.0	35.4	1.0	-47.1	-13.0	-34.1	-62.2
7017.20	-11.8	H	3.0	35.7	1.0	-46.5	-13.0	-33.5	-64.3

Compliance Certification Services Above 1GHz High Frequency Substitution Measurement									
Company:		LG Electronics							
Project #:		15I20413							
Date:		4/10/2015							
Test Engineer:		R.Z							
Configuration:		X-pos EUT/ AC Charger/ Headset							
Location:		Chamber G							
Mode:		LTE_QPSK Band 4 Harmonics, 1.4MHz Bandwidth							
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Band									
Low Ch, 1710.7									
3421.40	4.0	V	3.0	36.1	1.0	-31.1	-13.0	-18.1	
5132.10	-11.3	V	3.0	35.4	1.0	-45.7	-13.0	-32.7	
LTE4									
6842.80	-13.4	V	3.0	35.7	1.0	-48.0	-13.0	-35.0	
3421.40	5.0	H	3.0	36.1	1.0	-30.1	-13.0	-17.1	
5132.10	-12.3	H	3.0	35.4	1.0	-46.7	-13.0	-33.7	
1.4MHz									
6842.80	-12.6	H	3.0	35.7	1.0	-47.2	-13.0	-34.2	
QPSK									
Mid Ch, 1732.5									
3465.00	-1.7	V	3.0	36.0	1.0	-36.7	-13.0	-23.7	
5197.50	-8.8	V	3.0	35.4	1.0	-43.2	-13.0	-30.2	
6930.00	-14.3	V	3.0	35.7	1.0	-48.9	-13.0	-35.9	
3465.00	-0.1	H	3.0	36.0	1.0	-35.1	-13.0	-22.1	
5197.50	-10.0	H	3.0	35.4	1.0	-44.4	-13.0	-31.4	
6930.00	-9.5	H	3.0	35.7	1.0	-44.2	-13.0	-31.2	
High Ch, 1754.3									
3508.60	-0.6	V	3.0	36.0	1.0	-35.6	-13.0	-22.6	
5262.90	-15.3	V	3.0	35.4	1.0	-49.8	-13.0	-36.8	
7017.20	-14.6	V	3.0	35.7	1.0	-49.3	-13.0	-36.3	
3508.60	1.0	H	3.0	36.0	1.0	-34.0	-13.0	-21.0	
5262.90	-5.4	H	3.0	35.4	1.0	-39.8	-13.0	-26.8	
7017.20	-12.0	H	3.0	35.7	1.0	-46.7	-13.0	-33.7	

LTE Band 5

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement									
Company:		LG Electronics							
Project #:		15I20413							
Date:		4/14/2015							
Test Engineer:		R.Z							
Configuration:		EUT/ AC Charger/ Headset							
Location:		Chamber G							
Mode:		LTE_16QAM Band 5 Harmonics, 10MHz Bandwidth							
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Band									
Low Ch, 829									
1658.00	-33.2	V	3.0	37.0	1.0	-69.3	-13.0	-56.3	
2487.00	-28.0	V	3.0	36.4	1.0	-63.4	-13.0	-50.4	
LTES									
3316.00	-26.2	V	3.0	36.2	1.0	-61.4	-13.0	-48.4	
1658.00	-34.3	H	3.0	37.0	1.0	-70.3	-13.0	-57.3	
2487.00	-29.3	H	3.0	36.4	1.0	-64.7	-13.0	-51.7	
3316.00	-26.5	H	3.0	36.2	1.0	-61.7	-13.0	-48.7	
10MHz									
Mid Ch, 836.5									
16QAM									
1673.00	-31.4	V	3.0	37.0	1.0	-67.4	-13.0	-54.4	
2509.50	-22.2	V	3.0	36.4	1.0	-57.6	-13.0	-44.6	
3346.00	-24.7	V	3.0	36.1	1.0	-59.8	-13.0	-46.8	
1673.00	-32.2	H	3.0	37.0	1.0	-68.2	-13.0	-55.2	
2509.50	-24.7	H	3.0	36.4	1.0	-60.1	-13.0	-47.1	
3346.00	-26.5	H	3.0	36.1	1.0	-61.6	-13.0	-48.6	
High Ch, 844									
1688.00	-32.7	V	3.0	37.0	1.0	-68.7	-13.0	-55.7	
2532.00	-23.7	V	3.0	36.4	1.0	-59.1	-13.0	-46.1	
3376.00	-25.3	V	3.0	36.1	1.0	-60.4	-13.0	-47.4	
1688.00	-27.2	H	3.0	37.0	1.0	-63.2	-13.0	-50.2	
2532.00	-25.5	H	3.0	36.4	1.0	-60.9	-13.0	-47.9	
3376.00	-26.7	H	3.0	36.1	1.0	-61.8	-13.0	-48.8	

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement										
Company:		LG Electronics								
Project #:		15I20413								
Date:		4/14/2015								
Test Engineer:		R.Z								
Configuration:		EUT/ AC Charger/ Headset								
Location:		Chamber G								
Mode:		LTE_QPSK Band 5 Harmonics, 10MHz Bandwidth								
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Band	Low Ch, 829									
	1658.00	-32.8	V	3.0	37.0	1.0	-68.9	-13.0	-55.9	
	2487.00	-28.5	V	3.0	36.4	1.0	-63.9	-13.0	-50.9	
LTE5	3316.00	-25.8	V	3.0	36.2	1.0	-61.0	-13.0	-48.0	
	1658.00	-33.8	H	3.0	37.0	1.0	-69.8	-13.0	-56.8	
	2487.00	-28.9	H	3.0	36.4	1.0	-64.4	-13.0	-51.4	
10MHz	3316.00	-27.1	H	3.0	36.2	1.0	-62.3	-13.0	-49.3	
QPSK	Mid Ch, 836.5									
	1673.00	-31.7	V	3.0	37.0	1.0	-67.7	-13.0	-54.7	
	2509.50	-24.0	V	3.0	36.4	1.0	-59.4	-13.0	-46.4	
	3346.00	-25.5	V	3.0	36.1	1.0	-60.6	-13.0	-47.6	
	1673.00	-31.7	H	3.0	37.0	1.0	-67.7	-13.0	-54.7	
	2509.50	-25.6	H	3.0	36.4	1.0	-61.0	-13.0	-48.0	
	High Ch, 844									
	3346.00	-26.0	H	3.0	36.1	1.0	-61.1	-13.0	-48.1	
	1688.00	-32.0	V	3.0	37.0	1.0	-68.0	-13.0	-55.0	
	2532.00	-23.4	V	3.0	36.4	1.0	-58.8	-13.0	-45.8	
	3376.00	112.8	V	3.0	36.1	1.0	77.7	-13.0	90.7	
	1688.00	-26.8	H	3.0	37.0	1.0	-62.8	-13.0	-49.8	
	2532.00	-23.7	H	3.0	36.4	1.0	-59.1	-13.0	-46.1	
	3376.00	-25.6	H	3.0	36.1	1.0	-60.7	-13.0	-47.7	

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement									
Company:		LG Electronics							
Project #:		15I20413							
Date:		4/13/2015							
Test Engineer:		R.Z							
Configuration:		EUT/ AC Charger/ Headset							
Location:		Chamber G							
Mode:		LTE_16QAM Band 5 Harmonics, 5MHz Bandwidth							
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Band									
Low Ch, 826.5									
1653.00	-28.7	V	3.0	37.0	1.0	-64.7	-13.0	-51.7	
2479.50	-3.2	V	3.0	36.4	1.0	-38.7	-13.0	-25.7	
LTE5									
3306.00	-21.8	V	3.0	36.2	1.0	-56.9	-13.0	-43.9	
1653.00	-28.1	H	3.0	37.0	1.0	-64.2	-13.0	-51.2	
2479.50	-17.2	H	3.0	36.4	1.0	-52.6	-13.0	-39.6	
5MHz									
3306.00	-21.9	H	3.0	36.2	1.0	-57.0	-13.0	-44.0	
16QAM									
Mid Ch, 836.5									
1673.00	-26.8	V	3.0	37.0	1.0	-62.8	-13.0	-49.8	
2509.50	-21.6	V	3.0	36.4	1.0	-57.0	-13.0	-44.0	
3346.00	-22.0	V	3.0	36.1	1.0	-57.1	-13.0	-44.1	
1673.00	-28.3	H	3.0	37.0	1.0	-64.3	-13.0	-51.3	
2509.50	-24.8	H	3.0	36.4	1.0	-60.2	-13.0	-47.2	
3346.00	-21.8	H	3.0	36.1	1.0	-56.9	-13.0	-43.9	
High Ch, 846.5									
1693.00	-27.3	V	3.0	37.0	1.0	-63.3	-13.0	-50.3	
2539.50	-23.3	V	3.0	36.4	1.0	-58.8	-13.0	-45.8	
3386.00	-21.1	V	3.0	36.1	1.0	-56.2	-13.0	-43.2	
1693.00	-27.1	H	3.0	37.0	1.0	-63.1	-13.0	-50.1	
2539.50	-20.7	H	3.0	36.4	1.0	-56.1	-13.0	-43.1	
3386.00	-21.7	H	3.0	36.1	1.0	-56.8	-13.0	-43.8	

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement										
Company:		LG Electronics								
Project #:		15I20413								
Date:		4/13/2015								
Test Engineer:		R.Z								
Configuration:		EUT/ AC Charger/ Headset								
Location:		Chamber G								
Mode:		LTE_QPSK Band 5 Harmonics, 5MHz Bandwidth								
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Band	Low Ch, 826.5									
	1653.00	-27.6	V	3.0	37.0	1.0	-63.6	-13.0	-50.6	
	2479.50	-19.9	V	3.0	36.4	1.0	-55.4	-13.0	-42.4	
LTE5	3306.00	-21.4	V	3.0	36.2	1.0	-56.5	-13.0	-43.5	
	1653.00	-26.9	H	3.0	37.0	1.0	-63.0	-13.0	-50.0	
	2479.50	-14.4	H	3.0	36.4	1.0	-49.8	-13.0	-36.8	
5MHz	3306.00	-22.5	H	3.0	36.2	1.0	-57.6	-13.0	-44.6	
QPSK	Mid Ch, 836.5									
	1673.00	-26.6	V	3.0	37.0	1.0	-62.6	-13.0	-49.6	
	2509.50	-24.3	V	3.0	36.4	1.0	-59.7	-13.0	-46.7	
	3346.00	-21.0	V	3.0	36.1	1.0	-56.1	-13.0	-43.1	
	1673.00	-25.8	H	3.0	37.0	1.0	-61.8	-13.0	-48.8	
	2509.50	-23.1	H	3.0	36.4	1.0	-58.5	-13.0	-45.5	
	3346.00	-21.1	H	3.0	36.1	1.0	-56.2	-13.0	-43.2	
	High Ch, 846.5									
	1693.00	-27.6	V	3.0	37.0	1.0	-63.6	-13.0	-50.6	
	2539.50	-23.1	V	3.0	36.4	1.0	-58.6	-13.0	-45.6	
	3386.00	-20.6	V	3.0	36.1	1.0	-55.7	-13.0	-42.7	
	1693.00	-26.1	H	3.0	37.0	1.0	-62.1	-13.0	-49.1	
	2539.50	-21.9	H	3.0	36.4	1.0	-57.3	-13.0	-44.3	
	3386.00	-21.8	H	3.0	36.1	1.0	-56.9	-13.0	-43.9	

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement												
Company:		LG Electronics										
Project #:		15I20413										
Date:		4/13/2015										
Test Engineer:		R.Z										
Configuration:		EUT/ AC Charger/ Headset										
Location:		Chamber G										
Mode:		LTE_16QAM Band 5 Harmonics, 3MHz Bandwidth										
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes		
Band	Low Ch, 825.5											
		1651.00	-27.5	V	3.0	37.0	1.0	-63.6	-13.0	-50.6		
		2476.50	-19.0	V	3.0	36.4	1.0	-54.4	-13.0	-41.4		
	LTE5	3302.00	-21.9	V	3.0	36.2	1.0	-57.1	-13.0	-44.1		
		1651.00	-27.5	H	3.0	37.0	1.0	-63.6	-13.0	-50.6		
	3MHz	2476.50	-19.1	H	3.0	36.4	1.0	-54.5	-13.0	-41.5		
		3302.00	-22.1	H	3.0	36.2	1.0	-57.3	-13.0	-44.3		
	16QAM	Mid Ch, 836.5										
			1673.00	-29.7	V	3.0	37.0	1.0	-65.7	-13.0	-52.7	
			2509.50	-18.4	V	3.0	36.4	1.0	-53.8	-13.0	-40.8	
			3346.00	-19.7	V	3.0	36.1	1.0	-54.8	-13.0	-41.8	
			1673.00	-23.4	H	3.0	37.0	1.0	-59.4	-13.0	-46.4	
			2509.50	-20.9	H	3.0	36.4	1.0	-56.3	-13.0	-43.3	
		3346.00	-22.2	H	3.0	36.1	1.0	-57.3	-13.0	-44.3		
		High Ch, 847.5										
		1695.00	-21.6	V	3.0	37.0	1.0	-57.6	-13.0	-44.6		
		2542.50	-22.9	V	3.0	36.4	1.0	-58.4	-13.0	-45.4		
		3390.00	-21.0	V	3.0	36.1	1.0	-56.1	-13.0	-43.1		
	1695.00	-21.9	H	3.0	37.0	1.0	-57.9	-13.0	-44.9			
	2542.50	-25.2	H	3.0	36.4	1.0	-60.6	-13.0	-47.6			
	3390.00	-21.6	H	3.0	36.1	1.0	-56.7	-13.0	-43.7			

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement										
Company:		LG Electronics								
Project #:		15I20413								
Date:		4/13/2015								
Test Engineer:		R.Z								
Configuration:		EUT/ AC Charger/ Headset								
Location:		Chamber G								
Mode:		LTE_QPSK Band 5 Harmonics, 3MHz Bandwidth								
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Band	Low Ch, 825.5									
	1651.00	-27.8	V	3.0	37.0	1.0	-63.9	-13.0	-50.9	
	2476.50	-9.1	V	3.0	36.4	1.0	-44.5	-13.0	-31.5	
LTE5	3302.00	-22.0	V	3.0	36.2	1.0	-57.2	-13.0	-44.2	
	1651.00	-27.8	H	3.0	37.0	1.0	-63.9	-13.0	-50.9	
	2476.50	2.1	H	3.0	36.4	1.0	-33.3	-13.0	-20.3	
3MHz	3302.00	-20.9	H	3.0	36.2	1.0	-56.1	-13.0	-43.1	
	Mid Ch, 836.5									
	1673.00	-25.6	V	3.0	37.0	1.0	-61.6	-13.0	-48.6	
QPSK	2509.50	-17.6	V	3.0	36.4	1.0	-53.0	-13.0	-40.0	
	3346.00	-21.9	V	3.0	36.1	1.0	-57.0	-13.0	-44.0	
	1673.00	-25.1	H	3.0	37.0	1.0	-61.1	-13.0	-48.1	
	2509.50	-20.3	H	3.0	36.4	1.0	-55.7	-13.0	-42.7	
	3346.00	-21.8	H	3.0	36.1	1.0	-56.9	-13.0	-43.9	
	High Ch, 847.5									
	1695.00	-24.0	V	3.0	37.0	1.0	-60.0	-13.0	-47.0	
	2542.50	-24.0	V	3.0	36.4	1.0	-59.5	-13.0	-46.5	
	3390.00	-21.9	V	3.0	36.1	1.0	-57.0	-13.0	-44.0	
	1695.00	-28.5	H	3.0	37.0	1.0	-64.5	-13.0	-51.5	
	2542.50	-23.6	H	3.0	36.4	1.0	-59.1	-13.0	-46.1	
	3390.00	-21.1	H	3.0	36.1	1.0	-56.2	-13.0	-43.2	

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement									
Company:		LG Electronics							
Project #:		15I20413							
Date:		4/13/2015							
Test Engineer:		R.Z							
Configuration:		EUT/ AC Charger/ Headset							
Location:		Chamber G							
Mode:		LTE_16QAM Band 5 Harmonics, 1.4MHz Bandwidth							
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 824.7									
1649.40	-26.7	V	3.0	37.1	1.0	-62.8	-13.0	-49.8	
2474.10	-5.1	V	3.0	36.4	1.0	-40.5	-13.0	-27.5	
LTE5									
3298.80	-21.6	V	3.0	36.2	1.0	-56.8	-13.0	-43.8	
1649.40	-27.8	H	3.0	37.1	1.0	-63.9	-13.0	-50.9	
2474.10	-9.1	H	3.0	36.4	1.0	-44.6	-13.0	-31.6	
1.4MHz									
3298.80	-21.1	H	3.0	36.2	1.0	-56.3	-13.0	-43.3	
Mid Ch, 836.5									
1673.00	-26.9	V	3.0	37.0	1.0	-62.9	-13.0	-49.9	
16QAM									
2509.50	-7.3	V	3.0	36.4	1.0	-42.7	-13.0	-29.7	
3346.00	-21.3	V	3.0	36.1	1.0	-56.4	-13.0	-43.4	
1673.00	-27.9	H	3.0	37.0	1.0	-63.9	-13.0	-50.9	
2509.50	-17.4	H	3.0	36.4	1.0	-52.8	-13.0	-39.8	
3346.00	-21.9	H	3.0	36.1	1.0	-57.0	-13.0	-44.0	
High Ch, 848.3									
1696.60	-26.1	V	3.0	37.0	1.0	-62.1	-13.0	-49.1	
2544.90	-14.2	V	3.0	36.4	1.0	-49.6	-13.0	-36.6	
3393.20	-21.3	V	3.0	36.1	1.0	-56.3	-13.0	-43.3	
1696.60	-27.9	H	3.0	37.0	1.0	-63.9	-13.0	-50.9	
2544.90	-16.7	H	3.0	36.4	1.0	-52.1	-13.0	-39.1	
3393.20	-21.5	H	3.0	36.1	1.0	-56.6	-13.0	-43.6	

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement									
Company:		LG Electronics							
Project #:		15I20413							
Date:		4/13/2015							
Test Engineer:		R.Z							
Configuration:		EUT/ AC Charger/ Headset							
Location:		Chamber G							
Mode:		LTE_QPSK Band 5 Harmonics, 1.4MHz Bandwidth							
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 824.7									
1649.40	-28.1	V	3.0	37.1	1.0	-64.2	-13.0	-51.2	
2474.10	-8.3	V	3.0	36.4	1.0	-43.7	-13.0	-30.7	
LTE5									
3298.80	-21.2	V	3.0	36.2	1.0	-56.3	-13.0	-43.3	
1649.40	-28.9	H	3.0	37.1	1.0	-65.0	-13.0	-52.0	
2474.10	-19.3	H	3.0	36.4	1.0	-54.8	-13.0	-41.8	
1.4MHz									
3298.80	-22.3	H	3.0	36.2	1.0	-57.5	-13.0	-44.5	
Mid Ch, 836.5									
1673.00	-27.3	V	3.0	37.0	1.0	-63.3	-13.0	-50.3	
2509.50	-9.3	V	3.0	36.4	1.0	-44.7	-13.0	-31.7	
3346.00	-21.2	V	3.0	36.1	1.0	-56.3	-13.0	-43.3	
1673.00	-28.0	H	3.0	37.0	1.0	-64.0	-13.0	-51.0	
2509.50	-19.9	H	3.0	36.4	1.0	-55.3	-13.0	-42.3	
3346.00	-22.2	H	3.0	36.1	1.0	-57.3	-13.0	-44.3	
QPSK									
High Ch, 848.3									
1696.60	-27.1	V	3.0	37.0	1.0	-63.1	-13.0	-50.1	
2544.90	-13.1	V	3.0	36.4	1.0	-48.5	-13.0	-35.5	
3393.20	-21.3	V	3.0	36.1	1.0	-56.3	-13.0	-43.3	
1696.60	-27.7	H	3.0	37.0	1.0	-63.7	-13.0	-50.7	
2544.90	-15.6	H	3.0	36.4	1.0	-51.0	-13.0	-38.0	
3393.20	-21.0	H	3.0	36.1	1.0	-56.1	-13.0	-43.1	

LTE Band 12

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement											
		Company:	LG								
		Project #:	15I20413								
		Date:	4/13/2015								
		Test Engineer:	R.Z								
		Configuration:	EUT , AC Adapter /HS								
		Location:	Chamber G								
		Mode:	LTE_16QAM Band 12 Harmonics, 10MHz Bandwidth								
Band	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	
	Low Ch,704										
LTE12	1408.00	-23.9	V	3.0	37.4	1.0	-60.3	-13.0	-47.3		
	2112.00	-14.3	V	3.0	36.6	1.0	-49.9	-13.0	-36.9		
10MHz	2816.00	-2.1	V	3.0	36.4	1.0	-37.5	-13.0	-24.5		
	1408.00	-25.1	H	3.0	37.4	1.0	-61.4	-13.0	-48.4		
16QAM	2112.00	-16.5	H	3.0	36.6	1.0	-52.1	-13.0	-39.1		
	2816.00	-23.2	H	3.0	36.4	1.0	-58.6	-13.0	-45.6		
	Mid Ch,707.5										
	1415.00	-25.6	V	3.0	37.3	1.0	-61.9	-13.0	-48.9		
	2122.50	-14.7	V	3.0	36.6	1.0	-50.3	-13.0	-37.3		
	2830.00	2.8	V	3.0	36.4	1.0	-32.6	-13.0	-19.6		
	1415.00	-23.0	H	3.0	37.3	1.0	-59.4	-13.0	-46.4		
	2122.50	-17.5	H	3.0	36.6	1.0	-53.1	-13.0	-40.1		
	2830.00	-21.9	H	3.0	36.4	1.0	-57.2	-13.0	-44.2		
	High Ch,711										
	1422.00	-24.8	V	3.0	37.3	1.0	-61.1	-13.0	-48.1		
	2133.00	-16.1	V	3.0	36.6	1.0	-51.6	-13.0	-38.6		
	2844.00	-9.5	V	3.0	36.4	1.0	-44.8	-13.0	-31.8		
	1422.00	-24.9	H	3.0	37.3	1.0	-61.2	-13.0	-48.2		
	2133.00	-16.9	H	3.0	36.6	1.0	-52.4	-13.0	-39.4		
	2844.00	-22.9	H	3.0	36.4	1.0	-58.3	-13.0	-45.3		

UL Verification Services, Inc.										
Above 1GHz High Frequency Substitution Measurement										
Company:		LG								
Project #:		15I20413								
Date:		4/13/2015								
Test Engineer:		R.Z								
Configuration:		EUT , AC Adapter /HS								
Location:		Chamber G								
Mode:		LTE_QPSK Band 12 Harmonics, 10MHz Bandwidth								
Band	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
	Low Ch,704									
LTE12	1408.00	-23.8	V	3.0	37.4	1.0	-60.2	-13.0	-47.2	
	2112.00	-14.3	V	3.0	36.6	1.0	-49.9	-13.0	-36.9	
10MHz	2816.00	-3.4	V	3.0	36.4	1.0	-38.8	-13.0	-25.8	
	1408.00	-23.9	H	3.0	37.4	1.0	-60.2	-13.0	-47.2	
QPSK	2112.00	-16.9	H	3.0	36.6	1.0	-52.5	-13.0	-39.5	
	2816.00	-23.3	H	3.0	36.4	1.0	-58.7	-13.0	-45.7	
	Mid Ch,707.5									
	1415.00	-26.8	V	3.0	37.3	1.0	-63.1	-13.0	-50.1	
	2122.50	-14.1	V	3.0	36.6	1.0	-49.7	-13.0	-36.7	
	2830.00	3.4	V	3.0	36.4	1.0	-32.0	-13.0	-19.0	
	1415.00	-22.9	H	3.0	37.3	1.0	-59.3	-13.0	-46.3	
	2122.50	-16.8	H	3.0	36.6	1.0	-52.4	-13.0	-39.4	
	2830.00	-22.6	H	3.0	36.4	1.0	-57.9	-13.0	-44.9	
	High Ch,711									
	1422.00	-24.3	V	3.0	37.3	1.0	-60.6	-13.0	-47.6	
	2133.00	-15.2	V	3.0	36.6	1.0	-50.8	-13.0	-37.8	
	2844.00	-9.1	V	3.0	36.4	1.0	-44.4	-13.0	-31.4	
	1422.00	-24.0	H	3.0	37.3	1.0	-60.3	-13.0	-47.3	
	2133.00	-16.6	H	3.0	36.6	1.0	-52.1	-13.0	-39.1	
	2844.00	-23.2	H	3.0	36.4	1.0	-58.6	-13.0	-45.6	

UL Verification Services, Inc.										
Above 1GHz High Frequency Substitution Measurement										
Company:		LG								
Project #:		15I20413								
Date:		4/13/2015								
Test Engineer:		R.Z								
Configuration:		EUT , AC Adapter /HS								
Location:		Chamber G								
Mode:		LTE_16QAM Band 12 Harmonics, 5MHz Bandwidth								
Band	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
	Low Ch, 701.50									
LTE12	1403.00	-25.1	V	3.0	37.4	1.0	-61.5	-13.0	-48.5	
	2104.50	-15.7	V	3.0	36.6	1.0	-51.3	-13.0	-38.3	
5MHz	2806.00	-22.1	V	3.0	36.4	1.0	-57.5	-13.0	-44.5	
	1403.00	0.0	H	3.0	37.4	1.0	-36.4	-13.0	-23.4	
16QAM	2104.50	-16.9	H	3.0	36.6	1.0	-52.5	-13.0	-39.5	
	2806.00	4.3	H	3.0	36.4	1.0	-31.1	-13.0	-18.1	
	Mid Ch, 707.50									
	1415.00	-24.9	V	3.0	37.3	1.0	-61.2	-13.0	-48.2	
	2122.50	-14.7	V	3.0	36.6	1.0	-50.3	-13.0	-37.3	
	2830.00	-15.5	V	3.0	36.4	1.0	-50.9	-13.0	-37.9	
	1415.00	-20.7	H	3.0	37.3	1.0	-57.1	-13.0	-44.1	
	2122.50	-15.2	H	3.0	36.6	1.0	-50.8	-13.0	-37.8	
	2830.00	-16.6	H	3.0	36.4	1.0	-51.9	-13.0	-38.9	
	High Ch, 713.50									
	1427.00	-26.0	V	3.0	37.3	1.0	-62.3	-13.0	-49.3	
	2140.50	-15.6	V	3.0	36.6	1.0	-51.1	-13.0	-38.1	
	2854.00	10.1	V	3.0	36.4	1.0	-25.2	-13.0	-12.2	
	1427.00	-23.3	H	3.0	37.3	1.0	-59.6	-13.0	-46.6	
	2140.50	-19.1	H	3.0	36.6	1.0	-54.6	-13.0	-41.6	
	2854.00	2.8	H	3.0	36.4	1.0	-32.6	-13.0	-19.6	

UL Verification Services, Inc.										
Above 1GHz High Frequency Substitution Measurement										
Company:		LG								
Project #:		15I20413								
Date:		4/13/2015								
Test Engineer:		R.Z								
Configuration:		EUT , AC Adapter /HS								
Location:		Chamber G								
Mode:		LTE_QPSK Band 12 Harmonics, 5MHz Bandwidth								
Band	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 701.50										
LTE12	1403.00	-24.8	V	3.0	37.4	1.0	-61.2	-13.0	-48.2	
	2104.50	-16.9	V	3.0	36.6	1.0	-52.5	-13.0	-39.5	
5MHz	2806.00	2.2	V	3.0	36.4	1.0	-33.1	-13.0	-20.1	
	1403.00	-20.7	H	3.0	37.4	1.0	-57.1	-13.0	-44.1	
QPSK	2104.50	-18.6	H	3.0	36.6	1.0	-54.2	-13.0	-41.2	
	2806.00	-1.1	H	3.0	36.4	1.0	-36.5	-13.0	-23.5	
Mid Ch, 707.50										
	1415.00	-24.6	V	3.0	37.3	1.0	-60.9	-13.0	-47.9	
	2122.50	-15.2	V	3.0	36.6	1.0	-50.8	-13.0	-37.8	
	2830.00	-15.8	V	3.0	36.4	1.0	-51.2	-13.0	-38.2	
	1415.00	-20.9	H	3.0	37.3	1.0	-57.3	-13.0	-44.3	
	2122.50	-16.0	H	3.0	36.6	1.0	-51.6	-13.0	-38.6	
	2830.00	-15.9	H	3.0	36.4	1.0	-51.2	-13.0	-38.2	
High Ch, 713.50										
	1427.00	-26.6	V	3.0	37.3	1.0	-62.9	-13.0	-49.9	
	2140.50	-15.7	V	3.0	36.6	1.0	-51.2	-13.0	-38.2	
	2854.00	-17.2	V	3.0	36.4	1.0	-52.6	-13.0	-39.6	
	1427.00	-22.7	H	3.0	37.3	1.0	-59.0	-13.0	-46.0	
	2140.50	-19.5	H	3.0	36.6	1.0	-55.0	-13.0	-42.0	
	2854.00	-22.9	H	3.0	36.4	1.0	-58.3	-13.0	-45.3	

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement										
Company:		LG								
Project #:		15I20413								
Date:		4/13/2015								
Test Engineer:		R.Z								
Configuration:		EUT , AC Adapter /HS								
Location:		Chamber G								
Mode:		LTE_16QAM Band 12 Harmonics, 3MHz Bandwidth								
Band	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
	Low Ch, 700.5									
LTE12	1401.00	-30.2	V	3.0	37.4	1.0	-66.6	-13.0	-53.6	
	2101.50	-15.1	V	3.0	36.6	1.0	-50.7	-13.0	-37.7	
3MHz	2802.00	-17.3	V	3.0	36.4	1.0	-52.7	-13.0	-39.7	
	1401.00	-28.1	H	3.0	37.4	1.0	-64.4	-13.0	-51.4	
16QAM	2101.50	-19.2	H	3.0	36.6	1.0	-54.8	-13.0	-41.8	
	2802.00	-16.4	H	3.0	36.4	1.0	-51.8	-13.0	-38.8	
	Mid Ch, 707.50									
	1415.00	-24.2	V	3.0	37.3	1.0	-60.5	-13.0	-47.5	
	2122.00	-14.6	V	3.0	36.6	1.0	-50.2	-13.0	-37.2	
	2830.00	-22.0	V	3.0	36.4	1.0	-57.4	-13.0	-44.4	
	1415.00	-19.9	H	3.0	37.3	1.0	-56.3	-13.0	-43.3	
	2122.00	-12.8	H	3.0	36.6	1.0	-48.4	-13.0	-35.4	
	2830.00	1.2	H	3.0	36.4	1.0	-34.2	-13.0	-21.2	
	High Ch, 714.5									
	1429.00	-25.4	V	3.0	37.3	1.0	-61.7	-13.0	-48.7	
	2143.50	-15.3	V	3.0	36.6	1.0	-50.8	-13.0	-37.8	
	2858.00	4.5	V	3.0	36.4	1.0	-30.8	-13.0	-17.8	
	1429.00	-21.3	H	3.0	37.3	1.0	-57.6	-13.0	-44.6	
	2143.50	-19.6	H	3.0	36.6	1.0	-55.1	-13.0	-42.1	
	2858.00	-5.7	H	3.0	36.4	1.0	-41.1	-13.0	-28.1	

UL Verification Services, Inc.										
Above 1GHz High Frequency Substitution Measurement										
Company:		LG								
Project #:		15I20413								
Date:		4/13/2015								
Test Engineer:		R.Z								
Configuration:		EUT , AC Adapter /HS								
Location:		Chamber G								
Mode:		LTE_QPSK Band 12 Harmonics, 3MHz Bandwidth								
Band	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
	Low Ch, 700.5									
LTE12	1401.00	-28.9	V	3.0	37.4	1.0	-65.3	-13.0	-52.3	
	2101.50	-17.2	V	3.0	36.6	1.0	-52.8	-13.0	-39.8	
3MHz	2802.00	1.3	V	3.0	36.4	1.0	-34.1	-13.0	-21.1	
	1401.00	-27.6	H	3.0	37.4	1.0	-63.9	-13.0	-50.9	
QPSK	2101.50	-19.5	H	3.0	36.6	1.0	-55.1	-13.0	-42.1	
	2802.00	-20.3	H	3.0	36.4	1.0	-55.7	-13.0	-42.7	
	Mid Ch, 707.50									
	1415.00	-23.8	V	3.0	37.3	1.0	-60.1	-13.0	-47.1	
	2122.00	-15.3	V	3.0	36.6	1.0	-50.9	-13.0	-37.9	
	2830.00	-2.2	V	3.0	36.4	1.0	-37.6	-13.0	-24.6	
	1415.00	-21.2	H	3.0	37.3	1.0	-57.5	-13.0	-44.5	
	2122.00	-14.9	H	3.0	36.6	1.0	-50.5	-13.0	-37.5	
	2830.00	-21.8	H	3.0	36.4	1.0	-57.1	-13.0	-44.1	
	High Ch, 714.5									
	1429.00	-25.5	V	3.0	37.3	1.0	-61.8	-13.0	-48.8	
	2143.50	-15.2	V	3.0	36.6	1.0	-50.7	-13.0	-37.7	
	2858.00	-1.0	V	3.0	36.4	1.0	-36.3	-13.0	-23.3	
	1429.00	-21.4	H	3.0	37.3	1.0	-57.7	-13.0	-44.7	
	2143.50	-19.0	H	3.0	36.6	1.0	-54.5	-13.0	-41.5	
	2858.00	-17.9	H	3.0	36.4	1.0	-53.3	-13.0	-40.3	

UL Verification Services, Inc.										
Above 1GHz High Frequency Substitution Measurement										
Company:		LG								
Project #:		15I20413								
Date:		4/13/2015								
Test Engineer:		R.Z								
Configuration:		EUT , AC Adapter /HS								
Location:		Chamber G								
Mode:		LTE_16QAM Band 12 Harmonics, 1.4MHz Bandwidth								
Band	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 699.7										
LTE12	1399.40	-25.1	V	3.0	37.4	1.0	-61.5	-13.0	-48.5	
	2099.10	-15.0	V	3.0	36.6	1.0	-50.6	-13.0	-37.6	
1.4MHz	2798.80	-1.3	V	3.0	36.4	1.0	-36.6	-13.0	-23.6	
16QAM										
	1399.40	-21.3	H	3.0	37.4	1.0	-57.7	-13.0	-44.7	
	2099.10	-16.0	H	3.0	36.6	1.0	-51.6	-13.0	-38.6	
	2798.80	4.9	H	3.0	36.4	1.0	-30.5	-13.0	-17.5	
Mid Ch, 707.50										
	1415.00	-23.6	V	3.0	37.3	1.0	-59.9	-13.0	-46.9	
	2122.00	-9.8	V	3.0	36.6	1.0	-45.4	-13.0	-32.4	
	2830.00	-21.6	V	3.0	36.4	1.0	-57.0	-13.0	-44.0	
	1415.00	-18.9	H	3.0	37.3	1.0	-55.3	-13.0	-42.3	
	2122.00	-6.1	H	3.0	36.6	1.0	-41.7	-13.0	-28.7	
	2830.00	-23.1	H	3.0	36.4	1.0	-58.4	-13.0	-45.4	
High Ch, 715.3										
	1430.60	-24.5	V	3.0	37.3	1.0	-60.8	-13.0	-47.8	
	2145.90	-16.0	V	3.0	36.6	1.0	-51.5	-13.0	-38.5	
	2861.20	-15.8	V	3.0	36.4	1.0	-51.1	-13.0	-38.1	
	1430.60	-19.9	H	3.0	37.3	1.0	-56.2	-13.0	-43.2	
	2145.90	-18.3	H	3.0	36.6	1.0	-53.8	-13.0	-40.8	
	2861.20	-3.5	H	3.0	36.4	1.0	-38.9	-13.0	-25.9	

UL Verification Services, Inc.										
Above 1GHz High Frequency Substitution Measurement										
Company:		LG								
Project #:		15I20413								
Date:		4/13/2015								
Test Engineer:		R.Z								
Configuration:		EUT , AC Adapter /HS								
Location:		Chamber G								
Mode:		LTE_QPSK Band 12 Harmonics, 1.4MHz Bandwidth								
Band	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
	Low Ch, 699.7									
LTE12	1399.40	-24.8	V	3.0	37.4	1.0	-61.2	-13.0	-48.2	
	2099.10	-16.7	V	3.0	36.6	1.0	-52.3	-13.0	-39.3	
1.4MHz	2798.80	-17.3	V	3.0	36.4	1.0	-52.7	-13.0	-39.7	
	1399.40	-23.8	H	3.0	37.4	1.0	-60.1	-13.0	-47.1	
QPSK	2099.10	-18.6	H	3.0	36.6	1.0	-54.2	-13.0	-41.2	
	2798.80	2.9	H	3.0	36.4	1.0	-32.5	-13.0	-19.5	
	Mid Ch, 707.50									
	1415.00	-25.8	V	3.0	37.3	1.0	-62.1	-13.0	-49.1	
	2122.00	-16.6	V	3.0	36.6	1.0	-52.2	-13.0	-39.2	
	2830.00	-20.8	V	3.0	36.4	1.0	-56.2	-13.0	-43.2	
	1415.00	-19.2	H	3.0	37.3	1.0	-55.6	-13.0	-42.6	
	2122.00	-13.5	H	3.0	36.6	1.0	-49.1	-13.0	-36.1	
	2830.00	-22.4	H	3.0	36.4	1.0	-57.7	-13.0	-44.7	
	High Ch, 715.3									
	1430.60	-24.2	V	3.0	37.3	1.0	-60.5	-13.0	-47.5	
	2145.90	-16.9	V	3.0	36.6	1.0	-52.4	-13.0	-39.4	
	2861.20	-19.6	V	3.0	36.4	1.0	-54.9	-13.0	-41.9	
	1430.60	-19.9	H	3.0	37.3	1.0	-56.3	-13.0	-43.3	
	2145.90	-18.7	H	3.0	36.6	1.0	-54.2	-13.0	-41.2	
	2861.20	-9.0	H	3.0	36.4	1.0	-44.4	-13.0	-31.4	

LTE Band 25

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement									
Company:		LG Electronics							
Project #:		15I20413							
Date:		4/3/2015							
Test Engineer:		R.Z							
Configuration:		EUT/ AC Charger/ Headset							
Location:		Chamber G							
Mode:		LTE_16QAM Band 25 Harmonics, 20MHz Bandwidth							
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 1860									
Band	3720.00	-9.2	V	3.0	35.8	1.0	-44.1	-13.0	-31.1
	5580.00	-16.5	V	3.0	35.5	1.0	-51.0	-13.0	-38.0
LTE25	7440.00	-14.6	V	3.0	35.7	1.0	-49.4	-13.0	-36.4
	3720.00	-4.8	H	3.0	35.8	1.0	-39.6	-13.0	-26.6
20MHz	5580.00	-16.5	H	3.0	35.5	1.0	-51.0	-13.0	-38.0
	7440.00	-14.0	H	3.0	35.7	1.0	-48.8	-13.0	-35.8
Mid Ch, 1882.5									
16QAM	3765.00	97.5	V	3.0	35.8	1.0	62.7	-13.0	75.7
	5647.50	-16.3	V	3.0	35.5	1.0	-50.8	-13.0	-37.8
	7530.00	-14.2	V	3.0	35.7	1.0	-49.0	-13.0	-36.0
	3765.00	-10.2	H	3.0	35.8	1.0	-45.0	-13.0	-32.0
	5647.50	-15.6	H	3.0	35.5	1.0	-50.1	-13.0	-37.1
	7530.00	-13.3	H	3.0	35.7	1.0	-48.0	-13.0	-35.0
High Ch, 1905									
	3810.00	-11.1	V	3.0	35.8	1.0	-45.8	-13.0	-32.8
	5715.00	-16.3	V	3.0	35.5	1.0	-50.8	-13.0	-37.8
	7620.00	-14.0	V	3.0	35.8	1.0	-48.8	-13.0	-35.8
	3810.00	-11.4	H	3.0	35.8	1.0	-46.2	-13.0	-33.2
	5715.00	-16.7	H	3.0	35.5	1.0	-51.2	-13.0	-38.2
	7620.00	-13.5	H	3.0	35.8	1.0	-48.2	-13.0	-35.2

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement										
Company:		LG Electronics								
Project #:		15I20413								
Date:		4/3/2015								
Test Engineer:		R.Z								
Configuration:		EUT/ AC Charger/ Headset								
Location:		Chamber G								
Mode:		LTE_QPSK Band 25 Harmonics, 20MHz Bandwidth								
Band	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
	Low Ch, 1860									
	3720.00	-8.1	V	3.0	35.8	1.0	-43.0	-13.0	-30.0	
LTE25	5580.00	-15.3	V	3.0	35.5	1.0	-49.8	-13.0	-36.8	
	7440.00	-13.7	V	3.0	35.7	1.0	-48.5	-13.0	-35.5	
20MHz	3720.00	-5.9	H	3.0	35.8	1.0	-40.7	-13.0	-27.7	
	5580.00	-17.6	H	3.0	35.5	1.0	-52.1	-13.0	-39.1	
	7440.00	-13.0	H	3.0	35.7	1.0	-47.8	-13.0	-34.8	
QPSK	Mid Ch, 1882.5									
	3765.00	-9.1	V	3.0	35.8	1.0	-43.9	-13.0	-30.9	
	5647.50	-16.9	V	3.0	35.5	1.0	-51.4	-13.0	-38.4	
	7530.00	-15.1	V	3.0	35.7	1.0	-49.9	-13.0	-36.9	
	3765.00	-12.2	H	3.0	35.8	1.0	-47.0	-13.0	-34.0	
	5647.50	-16.3	H	3.0	35.5	1.0	-50.8	-13.0	-37.8	
	7530.00	-13.1	H	3.0	35.7	1.0	-47.9	-13.0	-34.9	
	High Ch, 1905									
	3810.00	-9.8	V	3.0	35.8	1.0	-44.5	-13.0	-31.5	
	5715.00	-16.8	V	3.0	35.5	1.0	-51.3	-13.0	-38.3	
	7620.00	-13.5	V	3.0	35.8	1.0	-48.3	-13.0	-35.3	
	3810.00	-19.7	H	3.0	35.8	1.0	-54.5	-13.0	-41.5	
	5715.00	-15.2	H	3.0	35.5	1.0	-49.7	-13.0	-36.7	
	7620.00	-13.2	H	3.0	35.8	1.0	-47.9	-13.0	-34.9	

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement									
Company:		LG Electronics							
Project #:		15I20413							
Date:		4/3/2015							
Test Engineer:		R.Z							
Configuration:		EUT/ AC Charger/ Headset							
Location:		Chamber G							
Mode:		LTE_16QAM Band 25 Harmonics, 15MHz Bandwidth							
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 1857.5									
Band LTE25 15MHz	3715.00	-7.2	V	3.0	35.8	1.0	-42.1	-13.0	-29.1
	5572.50	-17.0	V	3.0	35.5	1.0	-51.5	-13.0	-38.5
	7430.00	-14.7	V	3.0	35.7	1.0	-49.5	-13.0	-36.5
	3715.00	-3.4	H	3.0	35.8	1.0	-38.2	-13.0	-25.2
	5572.50	-17.5	H	3.0	35.5	1.0	-52.0	-13.0	-39.0
	7430.00	-13.1	H	3.0	35.7	1.0	-47.8	-13.0	-34.8
Mid Ch, 1882.5									
16QAM	3815.00	-6.0	V	3.0	35.8	1.0	-40.8	-13.0	-27.8
	5722.50	-16.2	V	3.0	35.5	1.0	-50.7	-13.0	-37.7
	7630.00	-12.6	V	3.0	35.7	1.0	-47.4	-13.0	-34.4
	3815.00	-8.7	H	3.0	35.8	1.0	-43.5	-13.0	-30.5
	5722.50	-14.8	H	3.0	35.5	1.0	-49.3	-13.0	-36.3
	7630.00	-12.2	H	3.0	35.7	1.0	-47.0	-13.0	-34.0
High Ch, 1907.5									
	3815.00	-12.0	V	3.0	35.8	1.0	-46.8	-13.0	-33.8
	5722.50	-16.6	V	3.0	35.5	1.0	-51.1	-13.0	-38.1
	7630.00	-13.1	V	3.0	35.8	1.0	-47.9	-13.0	-34.9
	3815.00	-10.3	H	3.0	35.8	1.0	-45.1	-13.0	-32.1
	5722.50	-15.7	H	3.0	35.5	1.0	-50.2	-13.0	-37.2
	7630.00	-12.5	H	3.0	35.8	1.0	-47.3	-13.0	-34.3

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement										
Company:		LG Electronics								
Project #:		15I20413								
Date:		4/3/2015								
Test Engineer:		R.Z								
Configuration:		EUT/ AC Charger/ Headset								
Location:		Chamber G								
Mode:		LTE_QPSK Band 25 Harmonics, 15MHz Bandwidth								
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Band	Low Ch, 1857.5									
	3715.00	-7.3	V	3.0	35.8	1.0	-42.2	-13.0	-29.2	
	5572.50	-16.2	V	3.0	35.5	1.0	-50.7	-13.0	-37.7	
LTE25	7430.00	-13.8	V	3.0	35.7	1.0	-48.6	-13.0	-35.6	
	3715.00	-4.9	H	3.0	35.8	1.0	-39.7	-13.0	-26.7	
	5572.50	-16.6	H	3.0	35.5	1.0	-51.1	-13.0	-38.1	
15MHz	7430.00	-13.4	H	3.0	35.7	1.0	-48.1	-13.0	-35.1	
	Mid Ch, 1882.5									
	3765.00	-8.6	V	3.0	35.8	1.0	-43.4	-13.0	-30.4	
QPSK	5647.50	-16.0	V	3.0	35.5	1.0	-50.5	-13.0	-37.5	
	7530.00	-13.2	V	3.0	35.7	1.0	-48.0	-13.0	-35.0	
	3765.00	-10.5	H	3.0	35.8	1.0	-45.3	-13.0	-32.3	
	5647.50	-16.1	H	3.0	35.5	1.0	-50.6	-13.0	-37.6	
	7530.00	-12.6	H	3.0	35.7	1.0	-47.4	-13.0	-34.4	
High Ch, 1907.5										
	3815.00	-8.1	V	3.0	35.8	1.0	-42.9	-13.0	-29.9	
	5722.50	-15.9	V	3.0	35.5	1.0	-50.4	-13.0	-37.4	
	7630.00	-12.6	V	3.0	35.8	1.0	-47.4	-13.0	-34.4	
	3815.00	-20.2	H	3.0	35.8	1.0	-55.0	-13.0	-42.0	
	5722.50	-14.5	H	3.0	35.5	1.0	-49.0	-13.0	-36.0	
	7630.00	-11.7	H	3.0	35.8	1.0	-46.5	-13.0	-33.5	

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement											
Company:		LG Electronics									
Project #:		15I20413									
Date:		4/3/2015									
Test Engineer:		R.Z									
Configuration:		EUT/ AC Charger/ Headset									
Location:		Chamber G									
Mode:		LTE_16QAM Band 25 Harmonics, 10MHz Bandwidth									
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	
Band LTE25 10MHz 16QAM	Low Ch, 1855										
		3710.00	-7.6	V	3.0	35.9	1.0	-42.5	-13.0	-29.5	
		5565.00	-16.8	V	3.0	35.5	1.0	-51.3	-13.0	-38.3	
		7420.00	-15.1	V	3.0	35.7	1.0	-49.8	-13.0	-36.8	
		3710.00	-5.6	H	3.0	35.9	1.0	-40.5	-13.0	-27.5	
		5565.00	-15.3	H	3.0	35.5	1.0	-49.7	-13.0	-36.7	
		7420.00	-12.4	H	3.0	35.7	1.0	-47.1	-13.0	-34.1	
		Mid Ch, 1882.5									
		3765.00	-8.4	V	3.0	35.8	1.0	-43.2	-13.0	-30.2	
		5647.50	-17.4	V	3.0	35.5	1.0	-51.9	-13.0	-38.9	
		7530.00	-14.9	V	3.0	35.7	1.0	-49.7	-13.0	-36.7	
		3765.00	-7.8	H	3.0	35.8	1.0	-42.6	-13.0	-29.6	
	5647.50	-16.1	H	3.0	35.5	1.0	-50.6	-13.0	-37.6		
	7530.00	-13.6	H	3.0	35.7	1.0	-48.4	-13.0	-35.4		
	High Ch, 1910										
	3820.00	-9.9	V	3.0	35.8	1.0	-44.7	-13.0	-31.7		
	5730.00	-16.9	V	3.0	35.5	1.0	-51.4	-13.0	-38.4		
	7640.00	-13.6	V	3.0	35.8	1.0	-48.3	-13.0	-35.3		
	3820.00	-14.4	H	3.0	35.8	1.0	-49.2	-13.0	-36.2		
	5730.00	-15.5	H	3.0	35.5	1.0	-50.0	-13.0	-37.0		
	7640.00	-13.7	H	3.0	35.8	1.0	-48.5	-13.0	-35.5		

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement											
Company:		LG Electronics									
Project #:		15I20413									
Date:		4/3/2015									
Test Engineer:		R.Z									
Configuration:		EUT/ AC Charger/ Headset									
Location:		Chamber G									
Mode:		LTE_QPSK Band 25 Harmonics, 10MHz Bandwidth									
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	
Band	Low Ch, 1855										
	3710.00	-9.3	V	3.0	35.9	1.0	-44.2	-13.0	-31.2		
	5565.00	-16.3	V	3.0	35.5	1.0	-50.8	-13.0	-37.8		
	LTE25	7420.00	-14.3	V	3.0	35.7	1.0	-49.1	-13.0	-36.1	
		3710.00	-7.1	H	3.0	35.9	1.0	-41.9	-13.0	-28.9	
	10MHz	5565.00	-16.8	H	3.0	35.5	1.0	-51.2	-13.0	-38.2	
7420.00		-13.3	H	3.0	35.7	1.0	-48.0	-13.0	-35.0		
QPSK	Mid Ch, 1882.5										
	3765.00	-8.9	V	3.0	35.8	1.0	-43.7	-13.0	-30.7		
	5647.50	-16.6	V	3.0	35.5	1.0	-51.1	-13.0	-38.1		
	7530.00	-14.1	V	3.0	35.7	1.0	-48.9	-13.0	-35.9		
	3765.00	-5.8	H	3.0	35.8	1.0	-40.6	-13.0	-27.6		
	5647.50	-15.0	H	3.0	35.5	1.0	-49.5	-13.0	-36.5		
	7530.00	-13.2	H	3.0	35.7	1.0	-48.0	-13.0	-35.0		
	High Ch, 1910										
3820.00	-12.3	V	3.0	35.8	1.0	-47.1	-13.0	-34.1			
5730.00	-16.8	V	3.0	35.5	1.0	-51.3	-13.0	-38.3			
7640.00	-13.8	V	3.0	35.8	1.0	-48.6	-13.0	-35.6			
3820.00	-13.7	H	3.0	35.8	1.0	-48.5	-13.0	-35.5			
5730.00	-16.3	H	3.0	35.5	1.0	-50.8	-13.0	-37.8			
7640.00	-13.1	H	3.0	35.8	1.0	-47.9	-13.0	-34.9			

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement										
Company:		LG Electronics								
Project #:		15I20413								
Date:		4/3/2015								
Test Engineer:		R.Z								
Configuration:		EUT/ AC Charger/ Headset								
Location:		Chamber G								
Mode:		LTE_16QAM Band 25 Harmonics, 5MHz Bandwidth								
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Band	Low Ch, 1852.5									
	3705.00	-8.3	V	3.0	35.9	1.0	-43.1	-13.0	-30.1	
	5557.50	-17.3	V	3.0	35.5	1.0	-51.7	-13.0	-38.7	
LTE25	7410.00	-14.4	V	3.0	35.7	1.0	-49.1	-13.0	-36.1	
	3705.00	-5.6	H	3.0	35.9	1.0	-40.5	-13.0	-27.5	
	5557.50	-15.8	H	3.0	35.5	1.0	-50.2	-13.0	-37.2	
5MHz	7410.00	-11.9	H	3.0	35.7	1.0	-46.6	-13.0	-33.6	
	Mid Ch, 1882.5									
16QAM	3765.00	-7.9	V	3.0	35.8	1.0	-42.7	-13.0	-29.7	
	5647.50	-16.7	V	3.0	35.5	1.0	-51.2	-13.0	-38.2	
	7530.00	-15.0	V	3.0	35.7	1.0	-49.8	-13.0	-36.8	
	3765.00	-10.3	H	3.0	35.8	1.0	-45.1	-13.0	-32.1	
	5647.50	-15.9	H	3.0	35.5	1.0	-50.4	-13.0	-37.4	
	7530.00	-12.0	H	3.0	35.7	1.0	-46.8	-13.0	-33.8	
High Ch, 1912.5										
	3825.00	-13.9	V	3.0	35.8	1.0	-48.7	-13.0	-35.7	
	5737.50	-15.9	V	3.0	35.5	1.0	-50.4	-13.0	-37.4	
	7650.00	-13.6	V	3.0	35.8	1.0	-48.3	-13.0	-35.3	
	3825.00	-12.4	H	3.0	35.8	1.0	-47.2	-13.0	-34.2	
	5737.50	-16.1	H	3.0	35.5	1.0	-50.6	-13.0	-37.6	
	7650.00	-13.6	H	3.0	35.8	1.0	-48.4	-13.0	-35.4	

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement										
Company:		LG Electronics								
Project #:		15I20413								
Date:		4/3/2015								
Test Engineer:		R.Z								
Configuration:		EUT/ AC Charger/ Headset								
Location:		Chamber G								
Mode:		LTE_QPSK Band 25 Harmonics, 5MHz Bandwidth								
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Band	Low Ch, 1852.5									
	3705.00	-9.4	V	3.0	35.9	1.0	-44.2	-13.0	-31.2	
	5557.50	-16.1	V	3.0	35.5	1.0	-50.6	-13.0	-37.6	
LTE25	7410.00 -14.3 V 3.0 35.7 1.0 -49.0 -13.0 -36.0									
	3705.00	-6.5	H	3.0	35.9	1.0	-41.4	-13.0	-28.4	
	5557.50	-16.5	H	3.0	35.5	1.0	-50.9	-13.0	-37.9	
5MHz	7410.00 -12.6 H 3.0 35.7 1.0 -47.3 -13.0 -34.3									
	Mid Ch, 1882.5									
	3765.00	-9.5	V	3.0	35.8	1.0	-44.4	-13.0	-31.4	
QPSK	5647.50 -16.2 V 3.0 35.5 1.0 -50.7 -13.0 -37.7									
	7530.00	-13.4	V	3.0	35.7	1.0	-48.2	-13.0	-35.2	
	3765.00	-7.7	H	3.0	35.8	1.0	-42.5	-13.0	-29.5	
5647.50 -16.3 H 3.0 35.5 1.0 -50.8 -13.0 -37.8										
7530.00 -13.1 H 3.0 35.7 1.0 -47.9 -13.0 -34.9										
High Ch, 1912.5										
3825.00 -15.0 V 3.0 35.8 1.0 -49.8 -13.0 -36.8										
5737.50 -16.3 V 3.0 35.5 1.0 -50.8 -13.0 -37.8										
7650.00 -15.3 V 3.0 35.8 1.0 -50.0 -13.0 -37.0										
3825.00 -10.1 H 3.0 35.8 1.0 -44.9 -13.0 -31.9										
5737.50 -15.8 H 3.0 35.5 1.0 -50.3 -13.0 -37.3										
7650.00 -12.8 H 3.0 35.8 1.0 -47.6 -13.0 -34.6										

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement									
Company:		LG Electronics							
Project #:		15I20413							
Date:		4/3/2015							
Test Engineer:		R.Z							
Configuration:		EUT/ AC Charger/ Headset							
Location:		Chamber G							
Mode:		LTE_16QAM Band 25 Harmonics, 3MHz Bandwidth							
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Band									
Low Ch, 1851.5									
3703.00	-7.6	V	3.0	35.9	1.0	-42.4	-13.0	-29.4	
5554.50	-16.6	V	3.0	35.5	1.0	-51.1	-13.0	-38.1	
LTE25									
7406.00	-14.3	V	3.0	35.7	1.0	-49.0	-13.0	-36.0	
3703.00	-4.3	H	3.0	35.9	1.0	-39.2	-13.0	-26.2	
5554.50	-16.2	H	3.0	35.5	1.0	-50.7	-13.0	-37.7	
3MHz									
7406.00	-13.1	H	3.0	35.7	1.0	-47.8	-13.0	-34.8	
16QAM									
Mid Ch, 1882.5									
3765.00	-6.1	V	3.0	35.8	1.0	-40.9	-13.0	-27.9	
5647.50	-16.5	V	3.0	35.5	1.0	-51.0	-13.0	-38.0	
7530.00	-14.4	V	3.0	35.7	1.0	-49.2	-13.0	-36.2	
3765.00	-7.8	H	3.0	35.8	1.0	-42.6	-13.0	-29.6	
5647.50	-15.9	H	3.0	35.5	1.0	-50.4	-13.0	-37.4	
7530.00	-14.0	H	3.0	35.7	1.0	-48.8	-13.0	-35.8	
High Ch, 1913.5									
3827.00	-7.3	V	3.0	35.8	1.0	-42.1	-13.0	-29.1	
5740.50	-15.5	V	3.0	35.5	1.0	-50.0	-13.0	-37.0	
7654.00	-12.8	V	3.0	35.8	1.0	-47.5	-13.0	-34.5	
3827.00	-8.4	H	3.0	35.8	1.0	-43.2	-13.0	-30.2	
5740.50	-16.1	H	3.0	35.5	1.0	-50.6	-13.0	-37.6	
7654.00	-13.4	H	3.0	35.8	1.0	-48.2	-13.0	-35.2	

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement										
Company:		LG Electronics								
Project #:		15I20413								
Date:		4/3/2015								
Test Engineer:		R.Z								
Configuration:		EUT/ AC Charger/ Headset								
Location:		Chamber G								
Mode:		LTE_QPSK Band 25 Harmonics, 3MHz Bandwidth								
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Band	Low Ch, 1851.5									
	3703.00	-8.6	V	3.0	35.9	1.0	-43.4	-13.0	-30.4	
	5554.50	-16.9	V	3.0	35.5	1.0	-51.4	-13.0	-38.4	
LTE25	7406.00	-11.9	V	3.0	35.7	1.0	-46.6	-13.0	-33.6	
	3703.00	-5.1	H	3.0	35.9	1.0	-40.0	-13.0	-27.0	
	5554.50	-16.3	H	3.0	35.5	1.0	-50.8	-13.0	-37.8	
3MHz	7406.00	-13.4	H	3.0	35.7	1.0	-48.1	-13.0	-35.1	
	Mid Ch, 1882.5									
QPSK	3765.00	-6.9	V	3.0	35.8	1.0	-41.7	-13.0	-28.7	
	5647.50	-17.1	V	3.0	35.5	1.0	-51.6	-13.0	-38.6	
	7530.00	-13.8	V	3.0	35.7	1.0	-48.6	-13.0	-35.6	
	3765.00	-8.3	H	3.0	35.8	1.0	-43.1	-13.0	-30.1	
	5647.50	-16.0	H	3.0	35.5	1.0	-50.5	-13.0	-37.5	
	7530.00	-12.7	H	3.0	35.7	1.0	-47.5	-13.0	-34.5	
High Ch, 1913.5										
	3827.00	-9.4	V	3.0	35.8	1.0	-44.2	-13.0	-31.2	
	5740.50	-15.8	V	3.0	35.5	1.0	-50.3	-13.0	-37.3	
	7654.00	-14.1	V	3.0	35.8	1.0	-48.8	-13.0	-35.8	
	3827.00	-7.5	H	3.0	35.8	1.0	-42.3	-13.0	-29.3	
	5740.50	-15.6	H	3.0	35.5	1.0	-50.1	-13.0	-37.1	
	7654.00	-12.5	H	3.0	35.8	1.0	-47.3	-13.0	-34.3	

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement									
Company:		LG Electronics							
Project #:		15I20413							
Date:		4/3/2015							
Test Engineer:		R.Z							
Configuration:		EUT/ AC Charger/ Headset							
Location:		Chamber G							
Mode:		LTE_16QAM Band 25 Harmonics, 1.4MHz Bandwidth							
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 1850.7									
Band	3701.40	-8.8	V	3.0	35.9	1.0	-43.6	-13.0	-30.6
	5552.10	-17.0	V	3.0	35.5	1.0	-51.5	-13.0	-38.5
LTE25	7402.80	-13.5	V	3.0	35.7	1.0	-48.2	-13.0	-35.2
	3701.40	-5.2	H	3.0	35.9	1.0	-40.1	-13.0	-27.1
	5552.10	-16.1	H	3.0	35.5	1.0	-50.6	-13.0	-37.6
1.4MHz	7402.80	-11.7	H	3.0	35.7	1.0	-46.4	-13.0	-33.4
Mid Ch, 1882.5									
16QAM	3765.00	-6.3	V	3.0	35.8	1.0	-44.7	-13.0	-31.7
	5647.50	-15.9	V	3.0	35.5	1.0	-50.4	-13.0	-37.4
	7530.00	-13.9	V	3.0	35.7	1.0	-48.7	-13.0	-35.7
	3765.00	-6.4	H	3.0	35.8	1.0	-41.2	-13.0	-28.2
	5647.50	-15.5	H	3.0	35.5	1.0	-50.0	-13.0	-37.0
	7530.00	-13.3	H	3.0	35.7	1.0	-48.0	-13.0	-35.0
High Ch, 1914.3									
	3828.60	-18.1	V	3.0	35.8	1.0	-52.9	-13.0	-39.9
	5742.90	-15.9	V	3.0	35.5	1.0	-50.4	-13.0	-37.4
	7657.20	-13.6	V	3.0	35.8	1.0	-48.3	-13.0	-35.3
	3828.60	-19.2	H	3.0	35.8	1.0	-54.0	-13.0	-41.0
	5742.90	-15.3	H	3.0	35.5	1.0	-49.8	-13.0	-36.8
	7657.20	-12.3	H	3.0	35.8	1.0	-47.1	-13.0	-34.1

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement									
Company:		LG Electronics							
Project #:		15I20413							
Date:		4/3/2015							
Test Engineer:		R.Z							
Configuration:		EUT/ AC Charger/ Headset							
Location:		Chamber G							
Mode:		LTE_QPSK Band 25 Harmonics, 1.4MHz Bandwidth							
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 1850.7									
Band	3701.40	-5.4	V	3.0	35.9	1.0	-40.2	-13.0	-27.2
	5552.10	-16.6	V	3.0	35.5	1.0	-51.1	-13.0	-38.1
LTE25	7402.80	-11.9	V	3.0	35.7	1.0	-46.6	-13.0	-33.6
	3701.40	-6.6	H	3.0	35.9	1.0	-41.5	-13.0	-28.5
	5552.10	-15.4	H	3.0	35.5	1.0	-49.9	-13.0	-36.9
1.4MHz	7402.80	-11.4	H	3.0	35.7	1.0	-46.1	-13.0	-33.1
Mid Ch, 1882.5									
QPSK	3765.00	-10.1	V	3.0	35.8	1.0	-44.9	-13.0	-31.9
	5647.50	-17.4	V	3.0	35.5	1.0	-51.9	-13.0	-38.9
	7530.00	-13.3	V	3.0	35.7	1.0	-48.1	-13.0	-35.1
	3765.00	-10.4	H	3.0	35.8	1.0	-45.2	-13.0	-32.2
	5647.50	-15.9	H	3.0	35.5	1.0	-50.4	-13.0	-37.4
	7530.00	-13.0	H	3.0	35.7	1.0	-47.8	-13.0	-34.8
High Ch, 1914.3									
	3828.60	-17.7	V	3.0	35.8	1.0	-52.5	-13.0	-39.5
	5742.90	-15.7	V	3.0	35.5	1.0	-50.2	-13.0	-37.2
	7657.20	-13.5	V	3.0	35.8	1.0	-48.2	-13.0	-35.2
	3828.60	-19.2	H	3.0	35.8	1.0	-54.0	-13.0	-41.0
	5742.90	-15.5	H	3.0	35.5	1.0	-50.0	-13.0	-37.0
	7657.20	-12.6	H	3.0	35.8	1.0	-47.4	-13.0	-34.4

LTE Band 26

<p>Company: LG Electronics Project #: 15I20413 Date: 4/14/2015 Test Engineer: R.Z Configuration: EUT/ AC Charger/ Headset Location: Chamber G Mode: LTE_16QAM Band 26 Harmonics, 15MHz Bandwidth</p>										
	f	SG reading	Ant. Pol.	Distance	Preamp	Filter	EIRP	Limit	Delta	Notes
	MHz	(dBm)	(H/V)	(m)	(dB)	(dB)	(dBm)	(dBm)	(dB)	
	Low Ch, 831.5									
Band	1643.00	-31.4	V	3.0	37.0	1.0	-67.4	-13.0	-54.4	
	2464.50	-28.3	V	3.0	36.4	1.0	-63.8	-13.0	-50.8	
LTE26	3286.00	-26.9	V	3.0	36.2	1.0	-62.1	-13.0	-49.1	
	1643.00	-32.1	H	3.0	37.0	1.0	-68.1	-13.0	-55.1	
	2464.50	-29.8	H	3.0	36.4	1.0	-65.2	-13.0	-52.2	
15MHz	3286.00	-27.2	H	3.0	36.2	1.0	-62.4	-13.0	-49.4	
	Mid Ch, 836.5									
	1673.00	-31.0	V	3.0	37.0	1.0	-67.0	-13.0	-54.0	
16QAM	2509.50	-26.5	V	3.0	36.4	1.0	-61.9	-13.0	-48.9	
	3346.00	-26.3	V	3.0	36.1	1.0	-61.4	-13.0	-48.4	
	1673.00	-29.1	H	3.0	37.0	1.0	-65.1	-13.0	-52.1	
	2509.50	-25.1	H	3.0	36.4	1.0	-60.5	-13.0	-47.5	
	3346.00	-26.5	H	3.0	36.1	1.0	-61.6	-13.0	-48.6	
	High Ch, 841.5									
	1683.00	-30.7	V	3.0	37.0	1.0	-66.7	-13.0	-53.7	
	2524.50	-27.4	V	3.0	36.4	1.0	-62.8	-13.0	-49.8	
	3366.00	-26.0	V	3.0	36.1	1.0	-61.2	-13.0	-48.2	
	1683.00	-30.4	H	3.0	37.0	1.0	-66.4	-13.0	-53.4	
	2524.50	-25.0	H	3.0	36.4	1.0	-60.4	-13.0	-47.4	
	3366.00	-25.9	H	3.0	36.1	1.0	-61.0	-13.0	-48.0	

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement										
Company:		LG Electronics								
Project #:		15I20413								
Date:		4/14/2015								
Test Engineer:		R.Z								
Configuration:		EUT/ AC Charger/ Headset								
Location:		Chamber G								
Mode:		LTE_QPSK Band 26 Harmonics, 15MHz Bandwidth								
Band	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
	Low Ch, 831.5									
LTE26	1643.00	-30.3	V	3.0	37.0	1.0	-66.3	-13.0	-53.3	
	2464.50	-28.4	V	3.0	36.4	1.0	-63.9	-13.0	-50.9	
	3286.00	-26.6	V	3.0	36.2	1.0	-61.8	-13.0	-48.8	
15MHz	1643.00	-30.9	H	3.0	37.0	1.0	-66.9	-13.0	-53.9	
	2464.50	-30.6	H	3.0	36.4	1.0	-66.0	-13.0	-53.0	
	3286.00	-26.6	H	3.0	36.2	1.0	-61.8	-13.0	-48.8	
QPSK	Mid Ch, 836.5									
	1673.00	-30.7	V	3.0	37.0	1.0	-66.7	-13.0	-53.7	
	2509.50	-26.0	V	3.0	36.4	1.0	-61.4	-13.0	-48.4	
	3346.00	-25.6	V	3.0	36.1	1.0	-60.7	-13.0	-47.7	
	1673.00	-29.5	H	3.0	37.0	1.0	-65.5	-13.0	-52.5	
	2509.50	-23.0	H	3.0	36.4	1.0	-58.4	-13.0	-45.4	
	3346.00	-26.3	H	3.0	36.1	1.0	-61.4	-13.0	-48.4	
	High Ch, 841.5									
	1683.00	-30.2	V	3.0	37.0	1.0	-66.2	-13.0	-53.2	
	2524.50	-26.4	V	3.0	36.4	1.0	-61.8	-13.0	-48.8	
	3366.00	-26.1	V	3.0	36.1	1.0	-61.3	-13.0	-48.3	
	1683.00	-30.1	H	3.0	37.0	1.0	-66.1	-13.0	-53.1	
	2524.50	-24.2	H	3.0	36.4	1.0	-59.6	-13.0	-46.6	
	3366.00	-25.2	H	3.0	36.1	1.0	-60.3	-13.0	-47.3	

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement										
Company:		LG Electronics								
Project #:		15I20413								
Date:		4/14/2015								
Test Engineer:		R.Z								
Configuration:		EUT/ AC Charger/ Headset								
Location:		Chamber G								
Mode:		LTE_16QAM Band 26 Harmonics, 10MHz Bandwidth								
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Band	Low Ch, 819									
	1638.00	-33.2	V	3.0	37.0	1.0	-69.3	-13.0	-56.3	
	2457.00	-28.0	V	3.0	36.4	1.0	-63.4	-13.0	-50.4	
LTE26	3276.00	-26.2	V	3.0	36.2	1.0	-61.4	-13.0	-48.4	
	1638.00	-34.3	H	3.0	37.0	1.0	-70.3	-13.0	-57.3	
	2457.00	-29.3	H	3.0	36.4	1.0	-64.7	-13.0	-51.7	
10MHz	3276.00	-26.5	H	3.0	36.2	1.0	-61.7	-13.0	-48.7	
16QAM	Mid Ch, 831.5									
	1663.00	-31.4	V	3.0	37.0	1.0	-67.4	-13.0	-54.4	
	2494.50	-22.2	V	3.0	36.4	1.0	-57.6	-13.0	-44.6	
	3326.00	-24.7	V	3.0	36.1	1.0	-59.8	-13.0	-46.8	
	1663.00	-32.2	H	3.0	37.0	1.0	-68.2	-13.0	-55.2	
	2494.50	-24.7	H	3.0	36.4	1.0	-60.1	-13.0	-47.1	
	High Ch, 844									
	3326.00	-26.5	H	3.0	36.1	1.0	-61.6	-13.0	-48.6	
	1688.00	-32.7	V	3.0	37.0	1.0	-68.7	-13.0	-55.7	
	2532.00	-23.7	V	3.0	36.4	1.0	-59.1	-13.0	-46.1	
	3376.00	-25.3	V	3.0	36.1	1.0	-60.4	-13.0	-47.4	
	1688.00	-27.2	H	3.0	37.0	1.0	-63.2	-13.0	-50.2	
	2532.00	-25.5	H	3.0	36.4	1.0	-60.9	-13.0	-47.9	
	3376.00	-26.7	H	3.0	36.1	1.0	-61.8	-13.0	-48.8	

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement										
Company:		LG Electronics								
Project #:		15I20413								
Date:		4/14/2015								
Test Engineer:		R.Z								
Configuration:		EUT/ AC Charger/ Headset								
Location:		Chamber G								
Mode:		LTE_QPSK Band 26 Harmonics, 10MHz Bandwidth								
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
	Low Ch, 819									
Band	1638.00	-32.8	V	3.0	37.0	1.0	-68.9	-13.0	-55.9	
	2457.00	-28.5	V	3.0	36.4	1.0	-63.9	-13.0	-50.9	
LTE26	3276.00	-25.8	V	3.0	36.2	1.0	-61.0	-13.0	-48.0	
	1638.00	-33.8	H	3.0	37.0	1.0	-69.8	-13.0	-56.8	
	2457.00	-28.9	H	3.0	36.4	1.0	-64.4	-13.0	-51.4	
10MHz	3276.00	-27.1	H	3.0	36.2	1.0	-62.3	-13.0	-49.3	
	Mid Ch, 831.5									
QPSK	1663.00	-31.7	V	3.0	37.0	1.0	-67.7	-13.0	-54.7	
	2494.50	-24.0	V	3.0	36.4	1.0	-59.4	-13.0	-46.4	
	3326.00	-25.5	V	3.0	36.1	1.0	-60.6	-13.0	-47.6	
	1663.00	-31.7	H	3.0	37.0	1.0	-67.7	-13.0	-54.7	
	2494.50	-25.6	H	3.0	36.4	1.0	-61.0	-13.0	-48.0	
	3326.00	-26.0	H	3.0	36.1	1.0	-61.1	-13.0	-48.1	
	High Ch, 844									
	1688.00	-32.0	V	3.0	37.0	1.0	-68.0	-13.0	-55.0	
	2532.00	-23.4	V	3.0	36.4	1.0	-58.8	-13.0	-45.8	
	3376.00	112.8	V	3.0	36.1	1.0	77.7	-13.0	90.7	
	1688.00	-26.8	H	3.0	37.0	1.0	-62.8	-13.0	-49.8	
	2532.00	-23.7	H	3.0	36.4	1.0	-59.1	-13.0	-46.1	
	3376.00	-25.6	H	3.0	36.1	1.0	-60.7	-13.0	-47.7	

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement									
Company:		LG Electronics							
Project #:		15I20413							
Date:		4/13/2015							
Test Engineer:		R.Z							
Configuration:		EUT/ AC Charger/ Headset							
Location:		Chamber G							
Mode:		LTE_16QAM Band 26 Harmonics, 5MHz Bandwidth							
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Band									
Low Ch, 816.5									
1633.00	-28.7	V	3.0	37.0	1.0	-64.7	-13.0	-51.7	
2449.50	-3.2	V	3.0	36.4	1.0	-38.7	-13.0	-25.7	
LTE26									
3266.00	-21.8	V	3.0	36.2	1.0	-56.9	-13.0	-43.9	
5MHz									
1633.00	-28.1	H	3.0	37.0	1.0	-64.2	-13.0	-51.2	
2449.50	-17.2	H	3.0	36.4	1.0	-52.6	-13.0	-39.6	
3266.00	-21.9	H	3.0	36.2	1.0	-57.0	-13.0	-44.0	
16QAM									
Mid Ch, 831.5									
1663.00	-26.8	V	3.0	37.0	1.0	-62.8	-13.0	-49.8	
2494.50	-21.6	V	3.0	36.4	1.0	-57.0	-13.0	-44.0	
3326.00	-22.0	V	3.0	36.1	1.0	-57.1	-13.0	-44.1	
1663.00	-28.3	H	3.0	37.0	1.0	-64.3	-13.0	-51.3	
2494.50	-24.8	H	3.0	36.4	1.0	-60.2	-13.0	-47.2	
3326.00	-21.8	H	3.0	36.1	1.0	-56.9	-13.0	-43.9	
High Ch, 846.5									
1693.00	-27.3	V	3.0	37.0	1.0	-63.3	-13.0	-50.3	
2539.50	-23.3	V	3.0	36.4	1.0	-58.8	-13.0	-45.8	
3386.00	-21.1	V	3.0	36.1	1.0	-56.2	-13.0	-43.2	
1693.00	-27.1	H	3.0	37.0	1.0	-63.1	-13.0	-50.1	
2539.50	-20.7	H	3.0	36.4	1.0	-56.1	-13.0	-43.1	
3386.00	-21.7	H	3.0	36.1	1.0	-56.8	-13.0	-43.8	

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement												
Company:		LG Electronics										
Project #:		15I20413										
Date:		4/13/2015										
Test Engineer:		R.Z										
Configuration:		EUT/ AC Charger/ Headset										
Location:		Chamber G										
Mode:		LTE_QPSK Band 26 Harmonics, 5MHz Bandwidth										
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes		
Band	Low Ch, 816.5											
		1633.00	-27.6	V	3.0	37.0	1.0	-63.6	-13.0	-50.6		
		2449.50	-19.9	V	3.0	36.4	1.0	-55.4	-13.0	-42.4		
	LTE26		3266.00	-21.4	V	3.0	36.2	1.0	-56.5	-13.0	-43.5	
			1633.00	-26.9	H	3.0	37.0	1.0	-63.0	-13.0	-50.0	
			2449.50	-14.4	H	3.0	36.4	1.0	-49.8	-13.0	-36.8	
	5MHz		3266.00	-22.5	H	3.0	36.2	1.0	-57.6	-13.0	-44.6	
		Mid Ch, 831.5										
			1663.00	-26.6	V	3.0	37.0	1.0	-62.6	-13.0	-49.6	
	QPSK		2494.50	-24.3	V	3.0	36.4	1.0	-59.7	-13.0	-46.7	
			3326.00	-21.0	V	3.0	36.1	1.0	-56.1	-13.0	-43.1	
			1663.00	-25.8	H	3.0	37.0	1.0	-61.8	-13.0	-48.8	
		2494.50	-23.1	H	3.0	36.4	1.0	-58.5	-13.0	-45.5		
		3326.00	-21.1	H	3.0	36.1	1.0	-56.2	-13.0	-43.2		
High Ch, 846.5												
	1693.00	-27.6	V	3.0	37.0	1.0	-63.6	-13.0	-50.6			
	2539.50	-23.1	V	3.0	36.4	1.0	-58.6	-13.0	-45.6			
	3386.00	-20.6	V	3.0	36.1	1.0	-55.7	-13.0	-42.7			
	1693.00	-26.1	H	3.0	37.0	1.0	-62.1	-13.0	-49.1			
	2539.50	-21.9	H	3.0	36.4	1.0	-57.3	-13.0	-44.3			
	3386.00	-21.8	H	3.0	36.1	1.0	-56.9	-13.0	-43.9			

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement											
Company:		LG Electronics									
Project #:		15I20413									
Date:		4/13/2015									
Test Engineer:		R.Z									
Configuration:		EUT/ AC Charger/ Headset									
Location:		Chamber G									
Mode:		LTE_16QAM Band 26 Harmonics, 3MHz Bandwidth									
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	
Band LTE26 3MHz 16QAM	Low Ch, 815.5										
		1631.00	-27.5	V	3.0	37.0	1.0	-63.6	-13.0	-50.6	
		2446.50	-19.0	V	3.0	36.4	1.0	-54.4	-13.0	-41.4	
		3262.00	-21.9	V	3.0	36.2	1.0	-57.1	-13.0	-44.1	
		1631.00	-27.5	H	3.0	37.0	1.0	-63.6	-13.0	-50.6	
		2446.50	-19.1	H	3.0	36.4	1.0	-54.5	-13.0	-41.5	
		3262.00	-22.1	H	3.0	36.2	1.0	-57.3	-13.0	-44.3	
	Mid Ch, 831.5										
		1663.00	-29.7	V	3.0	37.0	1.0	-65.7	-13.0	-52.7	
		2494.50	-18.4	V	3.0	36.4	1.0	-53.8	-13.0	-40.8	
		3326.00	-19.7	V	3.0	36.1	1.0	-54.8	-13.0	-41.8	
		1663.00	-23.4	H	3.0	37.0	1.0	-59.4	-13.0	-46.4	
	2494.50	-20.9	H	3.0	36.4	1.0	-56.3	-13.0	-43.3		
	3326.00	-22.2	H	3.0	36.1	1.0	-57.3	-13.0	-44.3		
High Ch, 847.5											
	1695.00	-21.6	V	3.0	37.0	1.0	-57.6	-13.0	-44.6		
	2542.50	-22.9	V	3.0	36.4	1.0	-58.4	-13.0	-45.4		
	3390.00	-21.0	V	3.0	36.1	1.0	-56.1	-13.0	-43.1		
	1695.00	-21.9	H	3.0	37.0	1.0	-57.9	-13.0	-44.9		
	2542.50	-25.2	H	3.0	36.4	1.0	-60.6	-13.0	-47.6		
	3390.00	-21.6	H	3.0	36.1	1.0	-56.7	-13.0	-43.7		