

## 7.4 Band Edge Emissions at Antenna Terminal

§2.1051 §22.917(a) §24.238(a) §27.53(m)

### Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

***The minimum permissible attenuation level for Band 41 is as noted in the Test Notes on the following page.***

***The minimum permissible attenuation level of any spurious emission is  $43 + \log_{10}(P_{[Watts]})$ , where  $P$  is the transmitter power in Watts.***

### Test Procedure Used


KDB 971168 D01 v02r02 – Section 6.0

### Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW  $\geq$  1% of the emission bandwidth
4. VBW  $\geq$  3 x RBW
5. Detector = RMS
6. Number of sweep points  $\geq$  2 x Span/RBW
7. Trace mode = trace average for continuous emissions, max hold for pulse emissions
8. Sweep time = auto couple
9. The trace was allowed to stabilize

### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

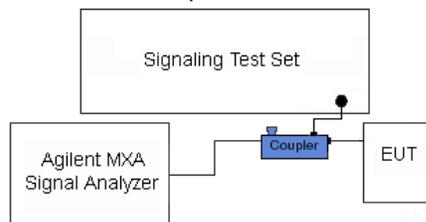

**Figure 7-3. Test Instrument & Measurement Setup**

### Test Notes

Per 22.917(b) 24.238(a) in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed to demonstrate compliance with the out-of-band emissions limit. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.

FCC ID: ZNFLS675		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1511161951.ZNF	Test Dates: 10/12-10/16/2015, 11/17 - 11/27/2015	EUT Type: Portable Handset		Page 58 of 110





Plot 7-86. Lower Extended Band Edge Plot (Band 26 – 1.4MHz QPSK – RB Size 6)




Plot 7-87. Upper Band Edge Plot (Band 26 – 1.4MHz QPSK – RB Size 6)

FCC ID: ZNFLS675		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1511161951.ZNF	Test Dates: 10/12-10/16/2015, 11/17 - 11/27/2015	EUT Type: Portable Handset		Page 60 of 110



Plot 7-88. Upper Extended Band Edge Plot (Band 26 – 1.4MHz QPSK – RB Size 6)

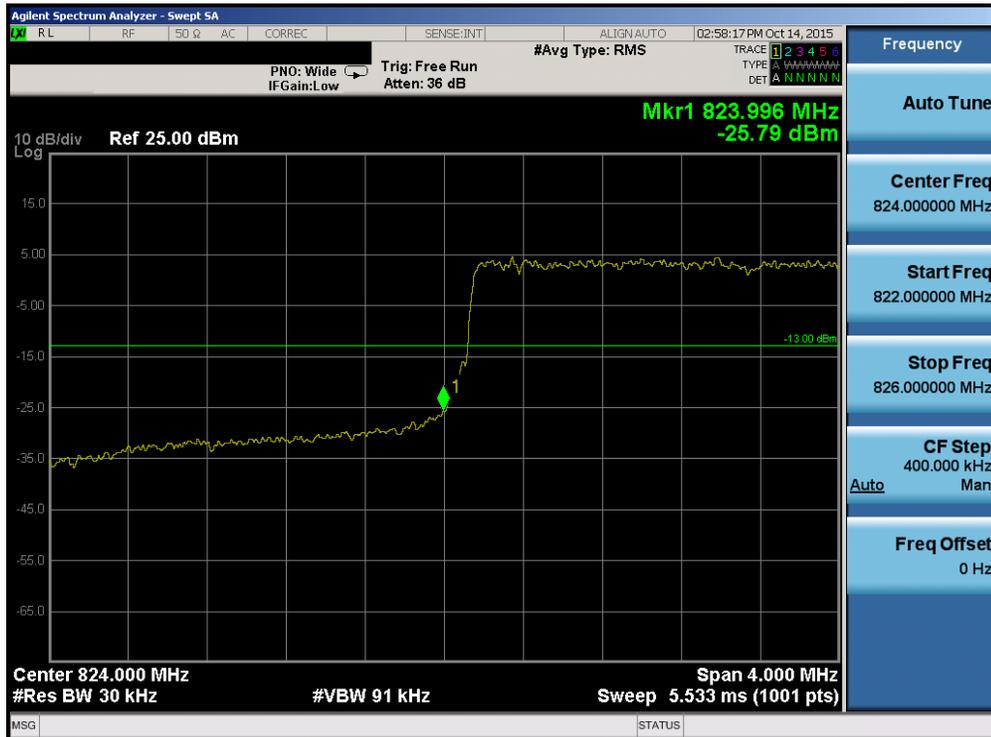

Plot 7-89. Lower Band Edge Plot (Band 26 – 3.0MHz QPSK – RB Size 15)

FCC ID: ZNFLS675		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1511161951.ZNF	Test Dates: 10/12-10/16/2015, 11/17 - 11/27/2015	EUT Type: Portable Handset		Page 61 of 110



Plot 7-90. Lower Extended Band Edge Plot (Band 26 – 3.0MHz QPSK – RB Size 15)




Plot 7-91. Upper Band Edge Plot (Band 26 – 3.0MHz QPSK – RB Size 15)

FCC ID: ZNFLS675		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1511161951.ZNF	Test Dates: 10/12-10/16/2015, 11/17 - 11/27/2015	EUT Type: Portable Handset		Page 62 of 110



Plot 7-92. Upper Extended Band Edge Plot (Band 26 – Band 5 – 3.0MHz QPSK – RB Size 15)

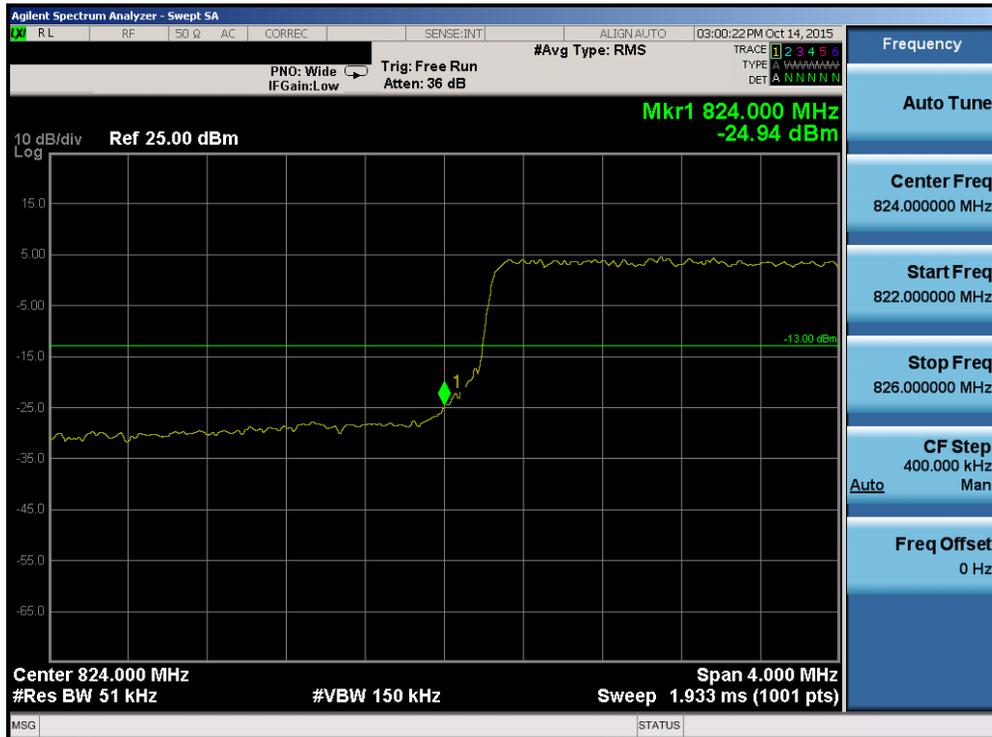


Plot 7-93. Lower Band Edge Plot (Band 26 – 5.0MHz QPSK – RB Size 25)

FCC ID: ZNFLS675		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1511161951.ZNF	Test Dates: 10/12-10/16/2015, 11/17 - 11/27/2015	EUT Type: Portable Handset		Page 63 of 110




Plot 7-94. Lower Extended Band Edge Plot (Band 26 – 5.0MHz QPSK – RB Size 25)

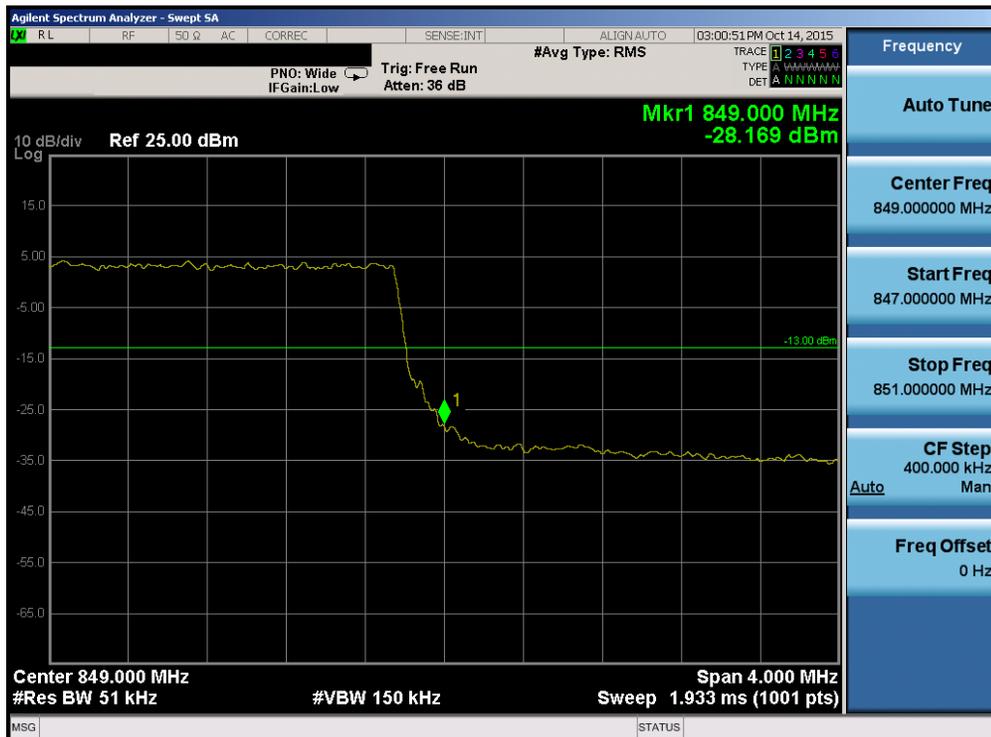


Plot 7-95. Upper Band Edge Plot (Band 26 – 5.0MHz QPSK – RB Size 25)

FCC ID: ZNFLS675		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1511161951.ZNF	Test Dates: 10/12-10/16/2015, 11/17 - 11/27/2015	EUT Type: Portable Handset		Page 64 of 110



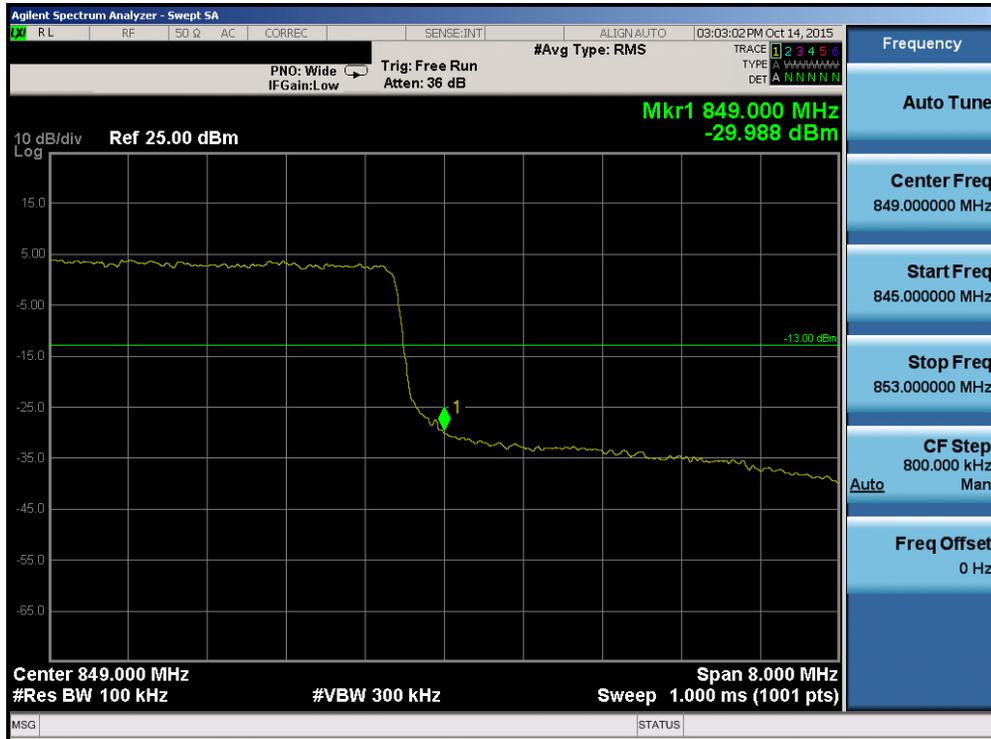


Plot 7-98. Upper Band Edge Plot (Band 26 – 10.0MHz QPSK – RB Size 50)

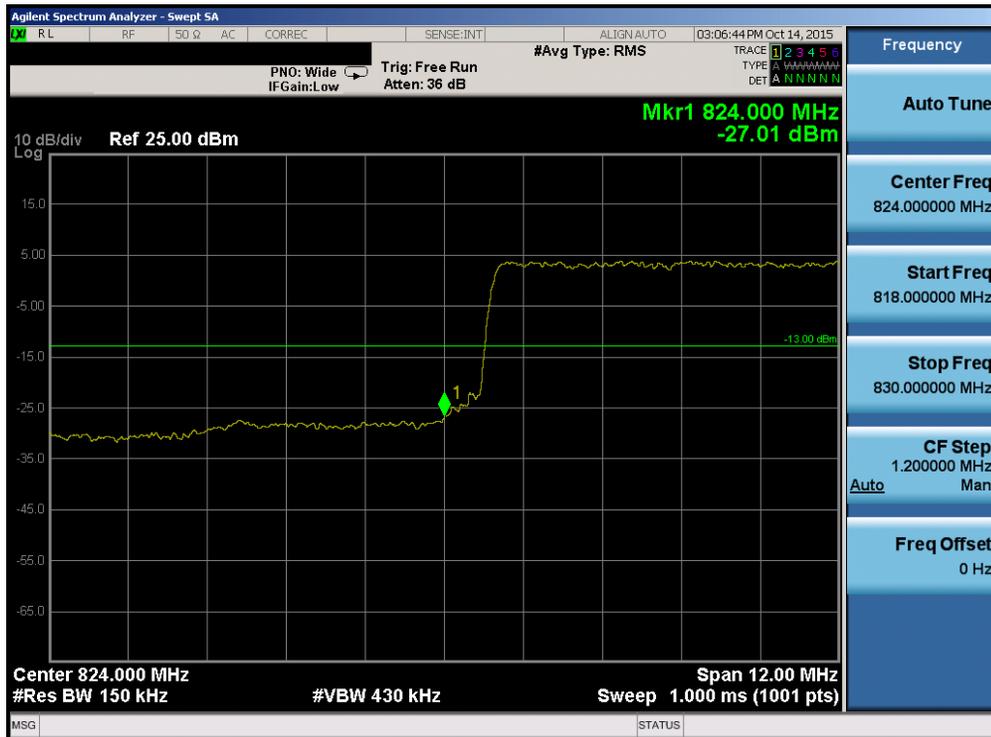


Plot 7-99. Lower Band Edge Plot (Band 26 – 15.0MHz QPSK – RB Size 75)

FCC ID: ZNFLS675		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1511161951.ZNF	Test Dates: 10/12-10/16/2015, 11/17 - 11/27/2015	EUT Type: Portable Handset		Page 66 of 110

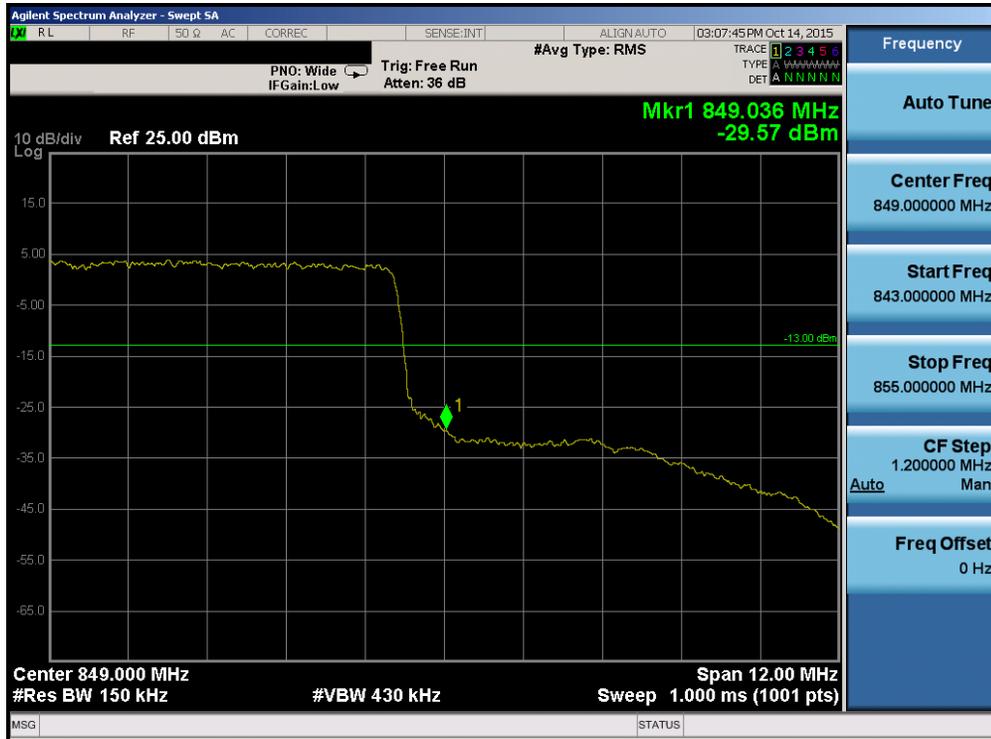


Plot 7-100. Upper Band Edge Plot (Band 26 – 15.0MHz QPSK – RB Size 75)

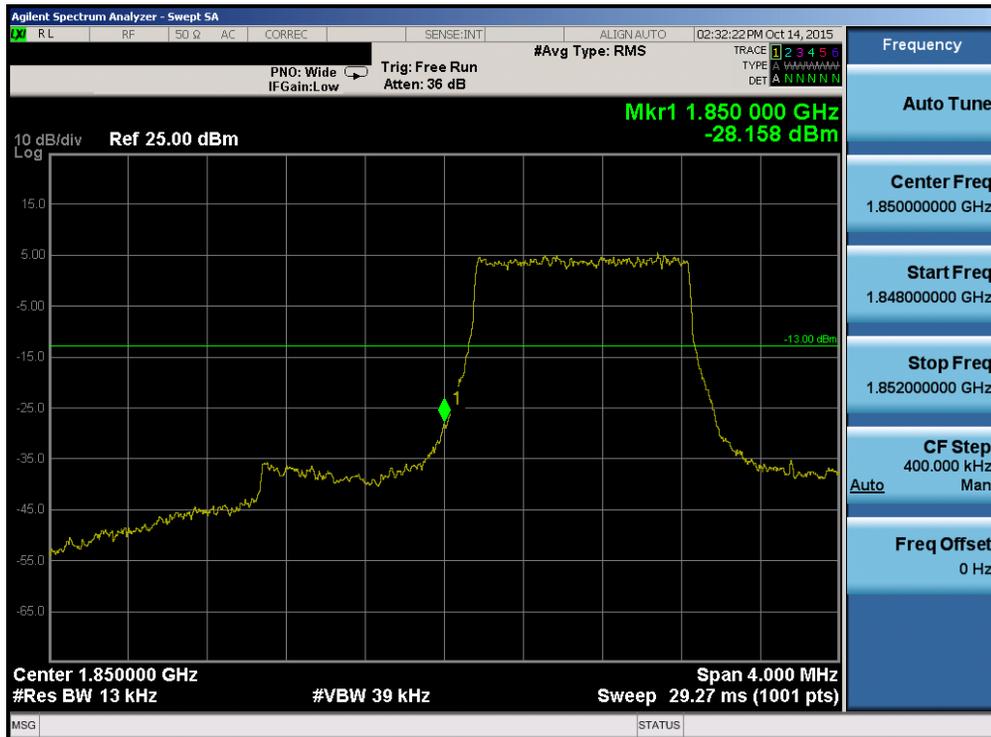

Plot 7-101. Lower Band Edge Plot (Band 25 – 1.4MHz QPSK – RB Size 6)

FCC ID: ZNFLS675		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1511161951.ZNF	Test Dates: 10/12-10/16/2015, 11/17 - 11/27/2015	EUT Type: Portable Handset		Page 67 of 110

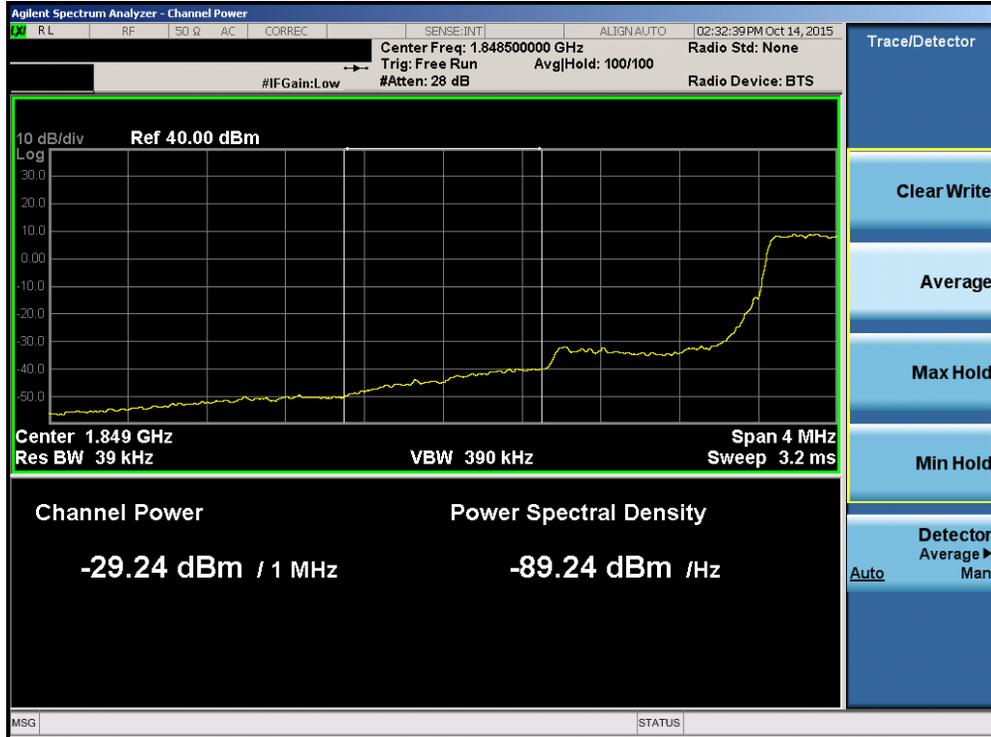

Plot 7-102. Lower Extended Band Edge Plot (Band 25 – 1.4MHz QPSK – RB Size 6)




Plot 7-103. Upper Band Edge Plot (Band 25 – 1.4MHz QPSK – RB Size 6)

FCC ID: ZNFLS675		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1511161951.ZNF	Test Dates: 10/12-10/16/2015, 11/17 - 11/27/2015	EUT Type: Portable Handset		Page 68 of 110




Plot 7-104. Upper Extended Band Edge Plot (Band 25 – 1.4MHz QPSK – RB Size 6)

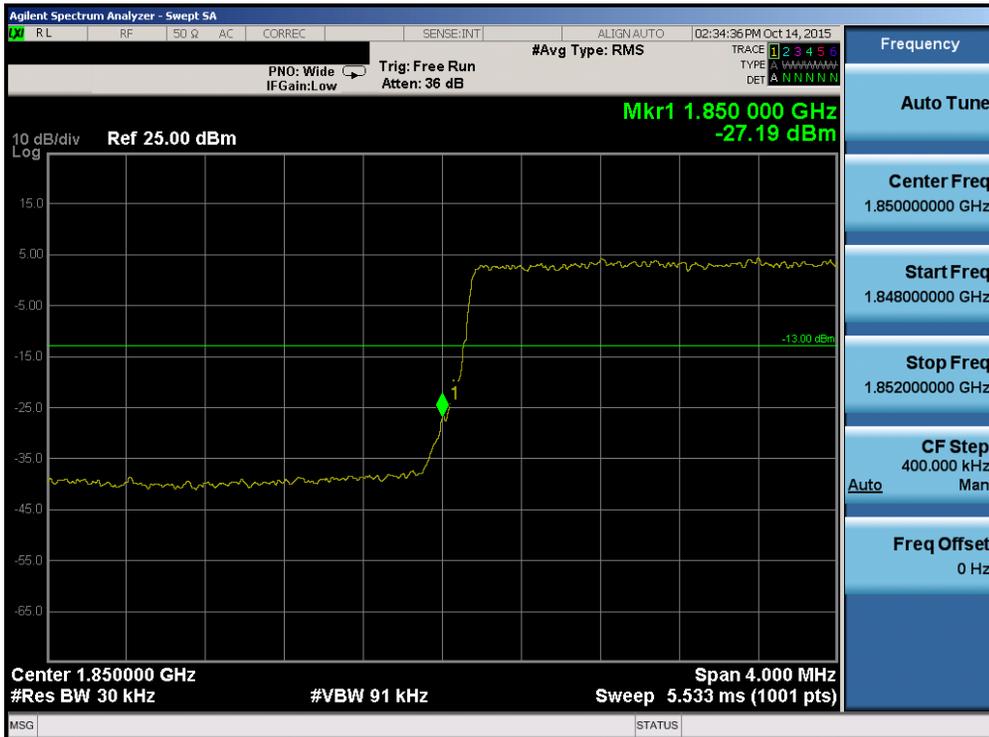


Plot 7-105. Lower Band Edge Plot (Band 25 – 3.0MHz QPSK – RB Size 15)

FCC ID: ZNFLS675		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1511161951.ZNF	Test Dates: 10/12-10/16/2015, 11/17 - 11/27/2015	EUT Type: Portable Handset		Page 69 of 110

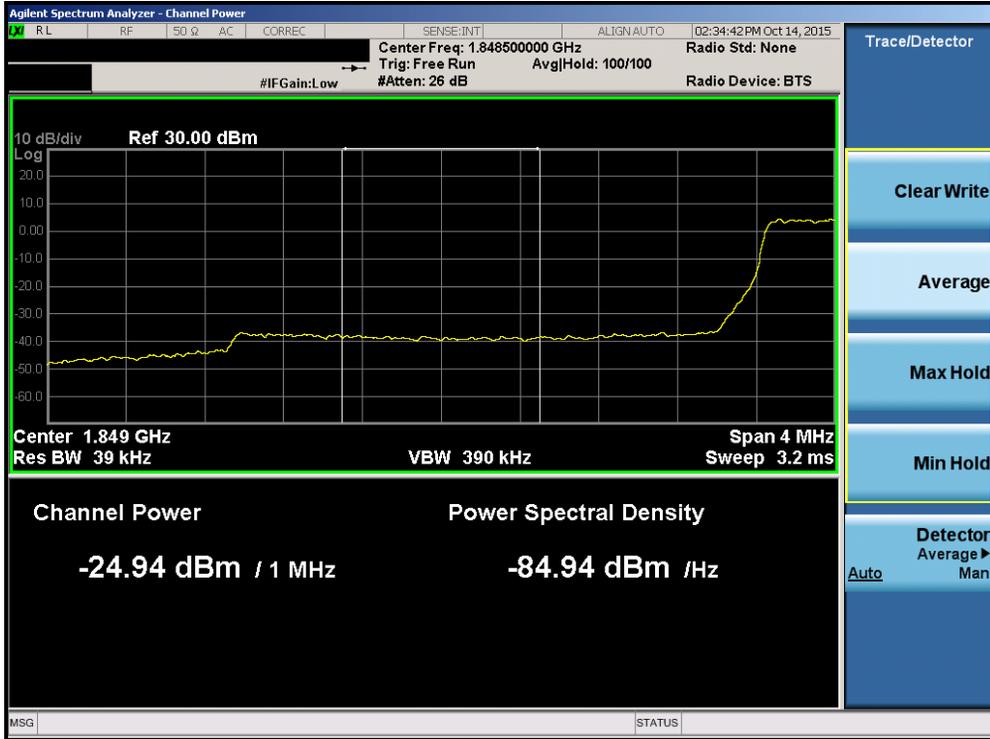

Plot 7-106. Lower Extended Band Edge Plot (Band 25 – 3.0MHz QPSK – RB Size 15)

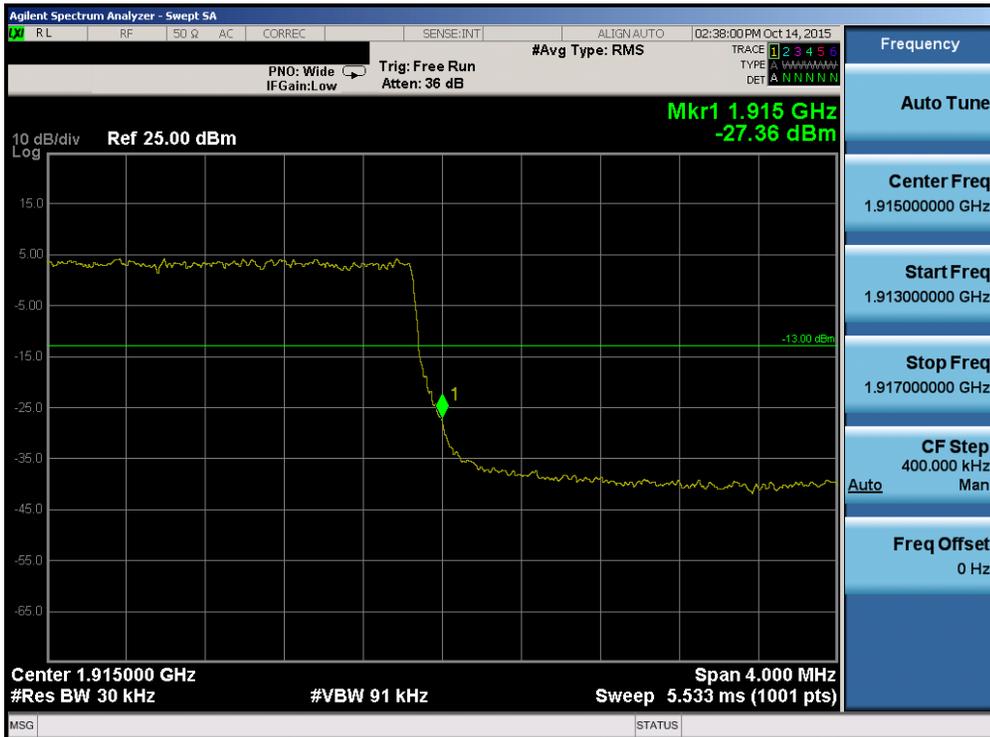


Plot 7-107. Upper Band Edge Plot (Band 25 – 3.0MHz QPSK – RB Size 15)

FCC ID: ZNFLS675		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1511161951.ZNF	Test Dates: 10/12-10/16/2015, 11/17 - 11/27/2015	EUT Type: Portable Handset		Page 70 of 110




Plot 7-108. Upper Extended Band Edge Plot (Band 25 – 3.0MHz QPSK – RB Size 15)

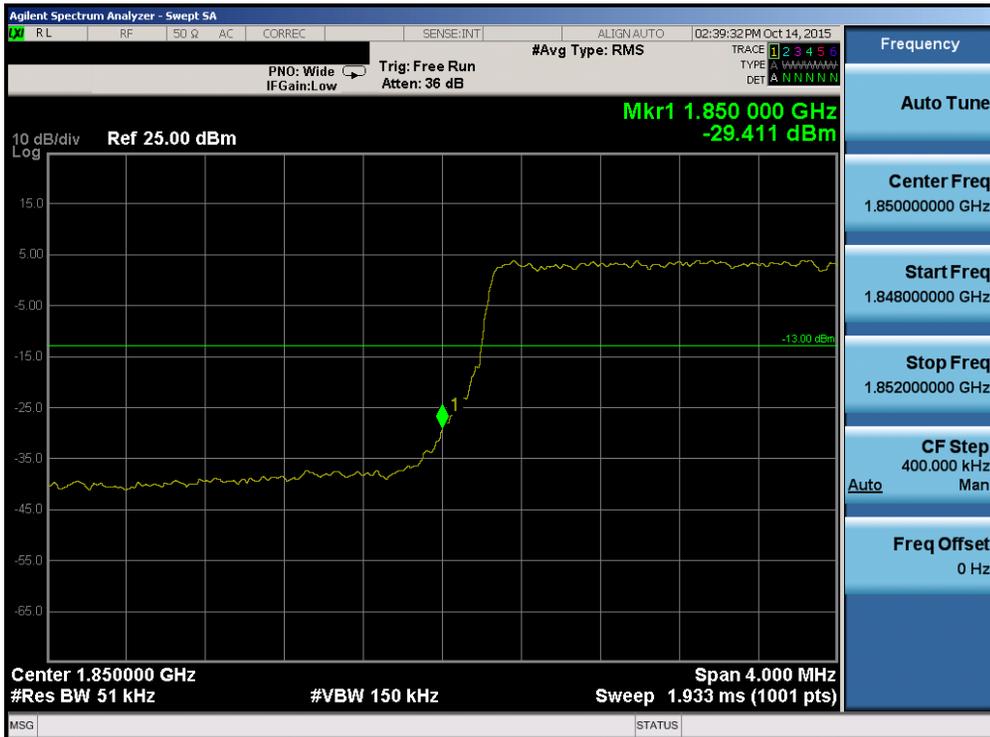


Plot 7-109. Lower Band Edge Plot (Band 25 – 5.0MHz QPSK – RB Size 25)

FCC ID: ZNFLS675		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1511161951.ZNF	Test Dates: 10/12-10/16/2015, 11/17 - 11/27/2015	EUT Type: Portable Handset		Page 71 of 110

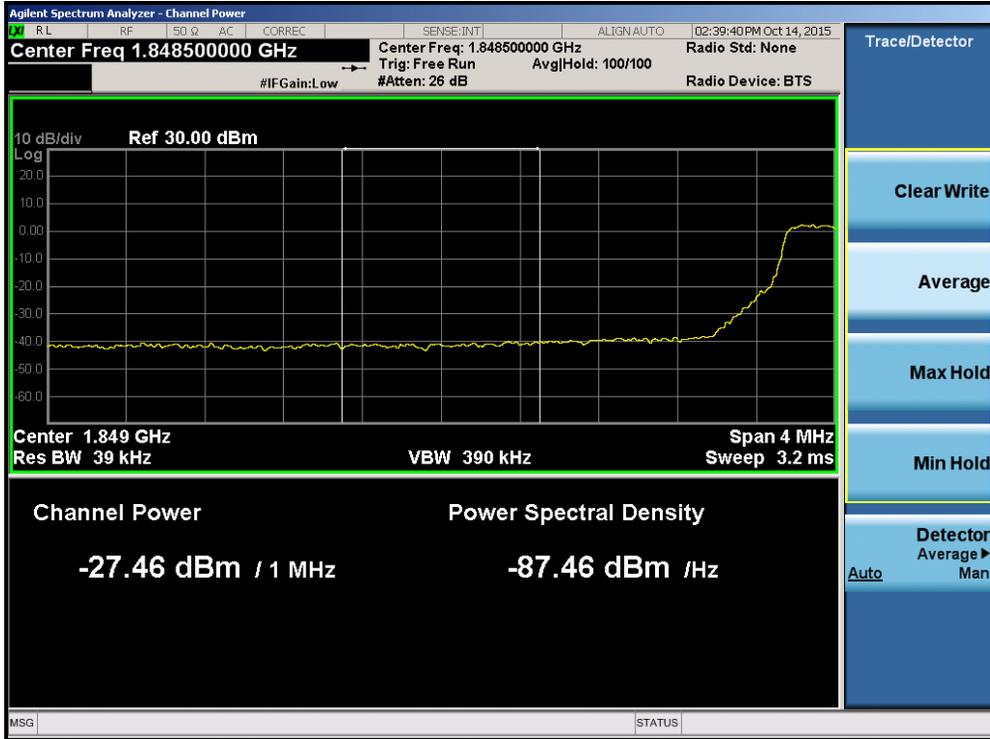

Plot 7-110. Lower Extended Band Edge Plot (Band 25 – 5.0MHz QPSK – RB Size 25)

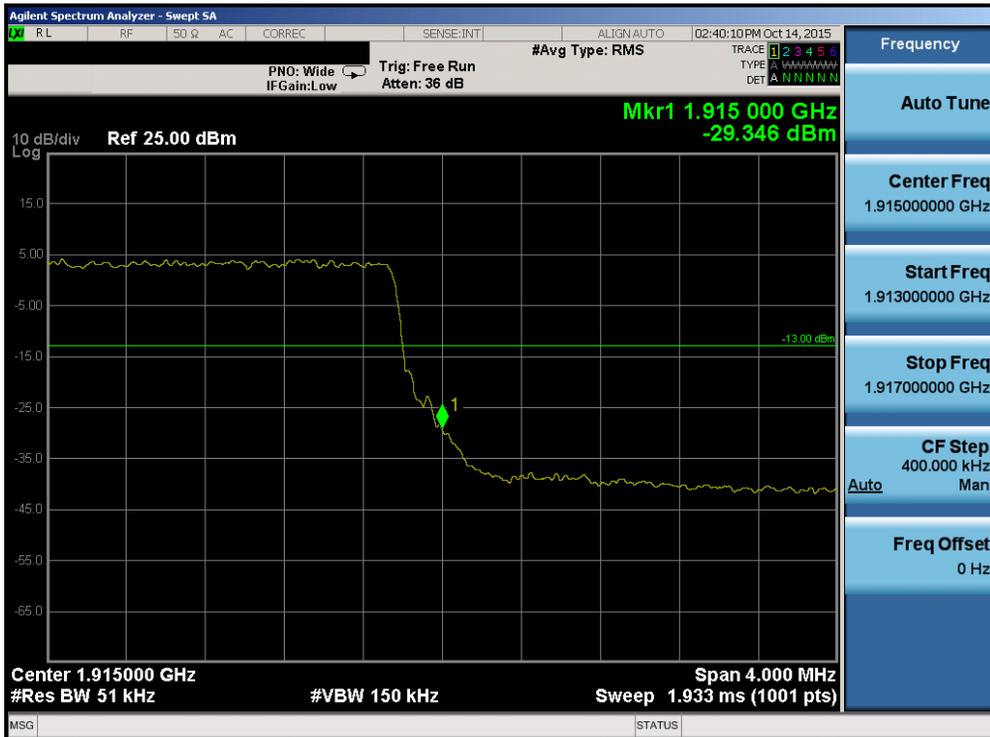


Plot 7-111. Upper Band Edge Plot (Band 25 – 5.0MHz QPSK – RB Size 25)

FCC ID: ZNFLS675		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1511161951.ZNF	Test Dates: 10/12-10/16/2015, 11/17 - 11/27/2015	EUT Type: Portable Handset		Page 72 of 110



Plot 7-112. Upper Extended Band Edge Plot (Band 25 – 5.0MHz QPSK – RB Size 25)

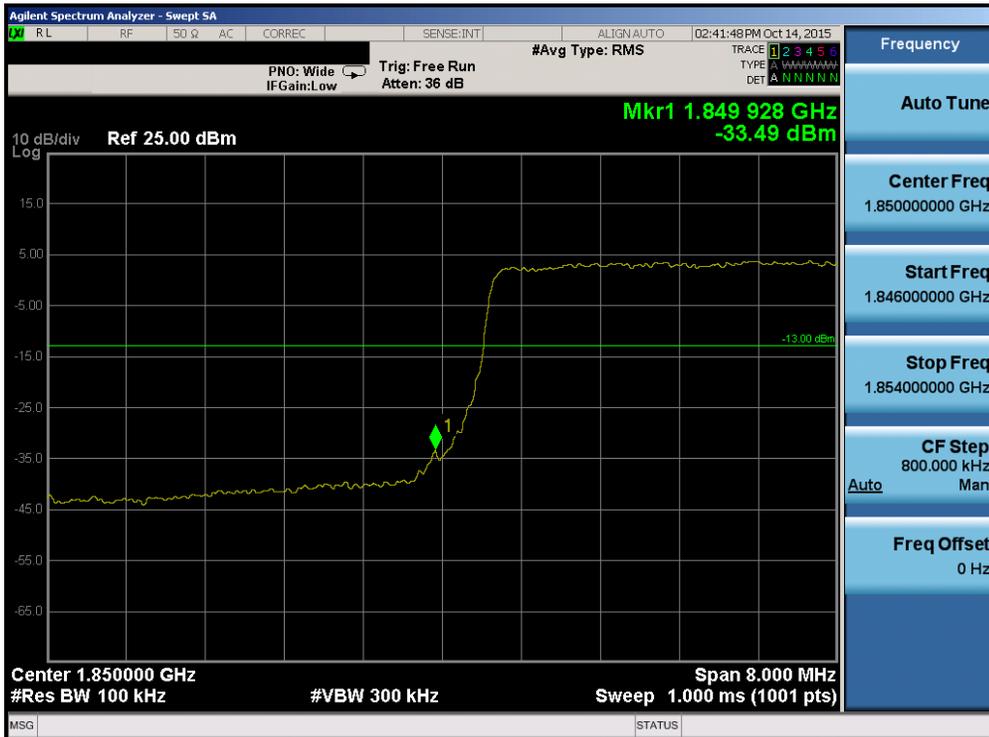

Plot 7-113. Lower Band Edge Plot (Band 25 – 10.0MHz QPSK – RB Size 50)

FCC ID: ZNFLS675		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1511161951.ZNF	Test Dates: 10/12-10/16/2015, 11/17 - 11/27/2015	EUT Type: Portable Handset		Page 73 of 110



Plot 7-114. Lower Extended Band Edge Plot (Band 25 – 10.0MHz QPSK – RB Size 50)




Plot 7-115. Upper Band Edge Plot (Band 25 – 10.0MHz QPSK – RB Size 50)

FCC ID: ZNFLS675		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1511161951.ZNF	Test Dates: 10/12-10/16/2015, 11/17 - 11/27/2015	EUT Type: Portable Handset		Page 74 of 110




Plot 7-116. Upper Extended Band Edge Plot (Band 25 – 10.0MHz QPSK – RB Size 50)

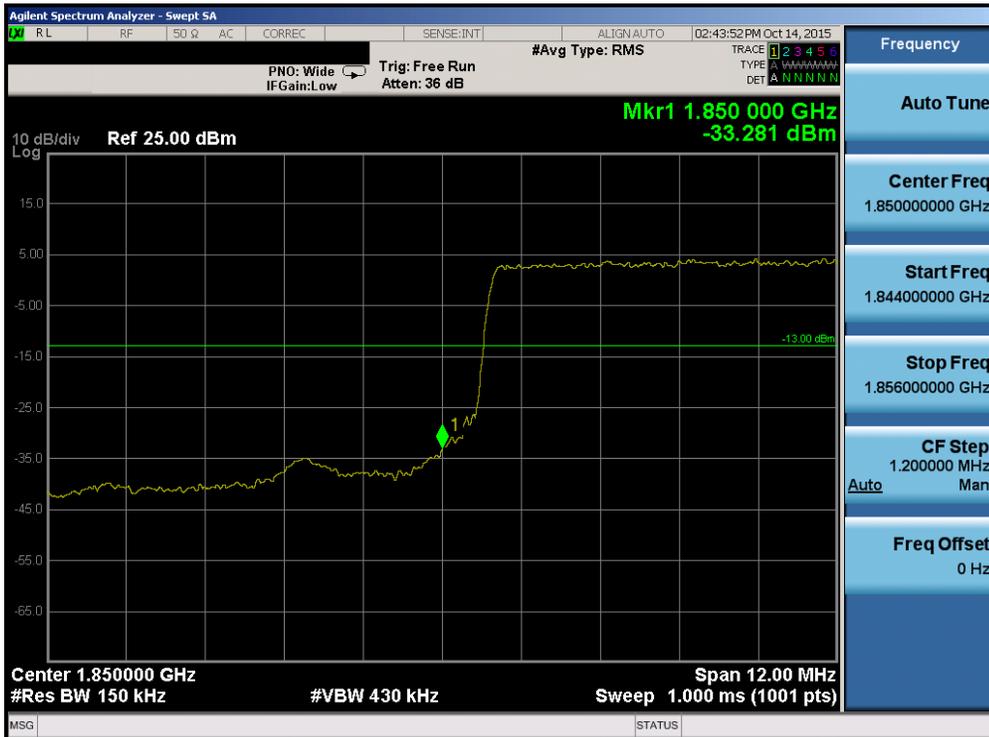


Plot 7-117. Lower Band Edge Plot (Band 25 – 15.0MHz QPSK – RB Size 75)

FCC ID: ZNFLS675		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1511161951.ZNF	Test Dates: 10/12-10/16/2015, 11/17 - 11/27/2015	EUT Type: Portable Handset		Page 75 of 110

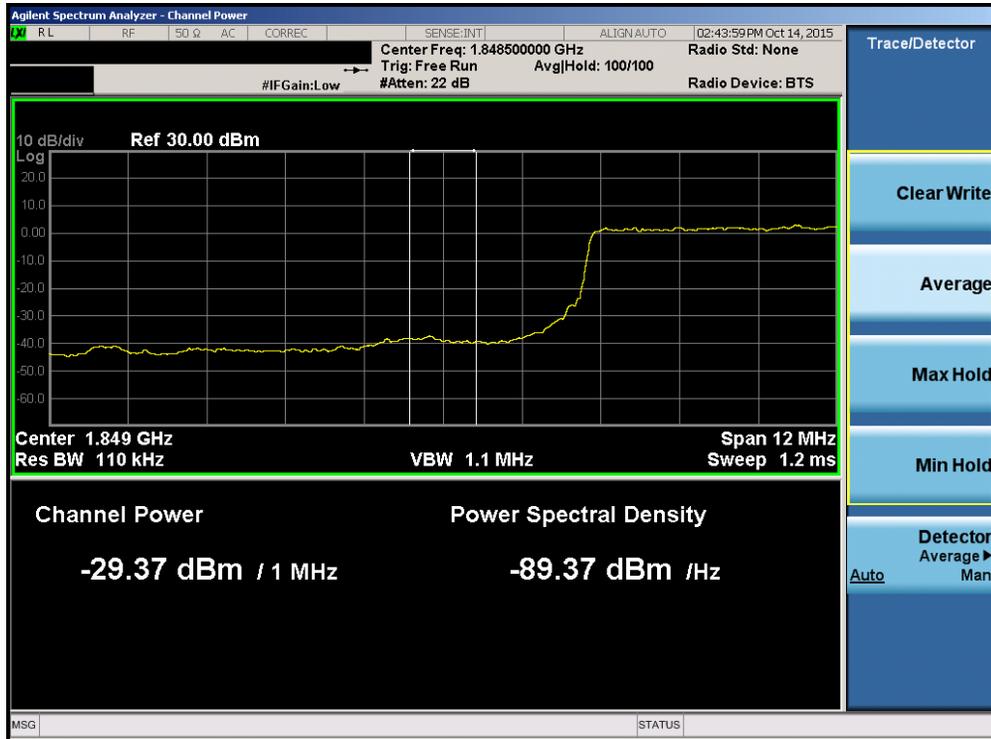

Plot 7-118. Lower Extended Band Edge Plot (Band 25 – 15.0MHz QPSK – RB Size 75)

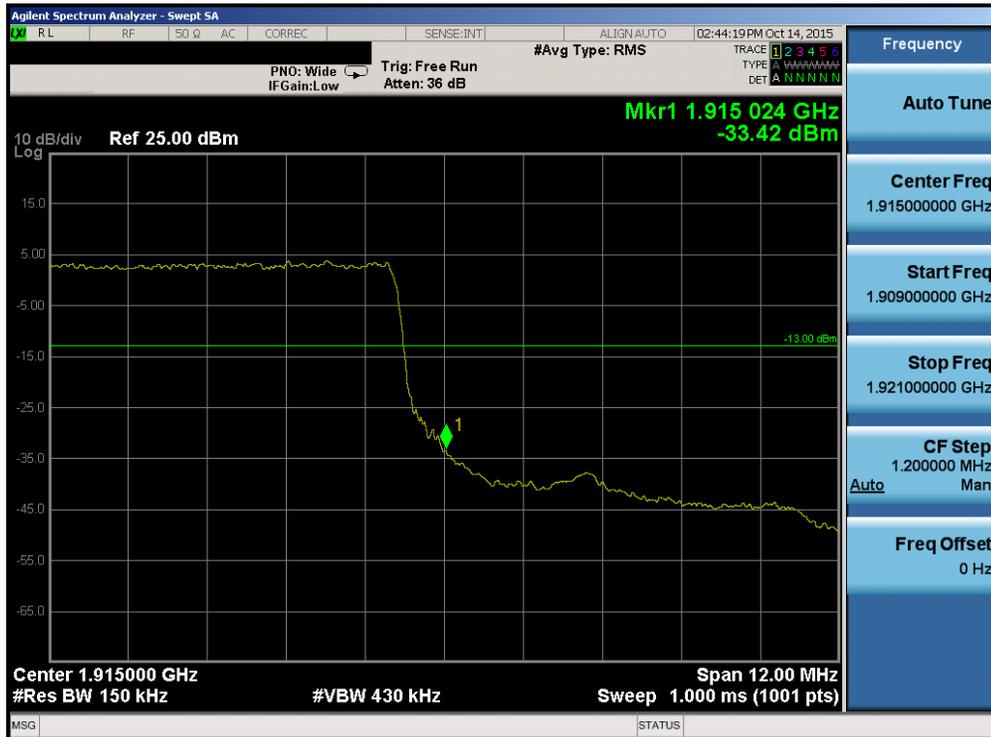


Plot 7-119. Upper Band Edge Plot (Band 25 – 15.0MHz QPSK – RB Size 75)

FCC ID: ZNFLS675		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1511161951.ZNF	Test Dates: 10/12-10/16/2015, 11/17 - 11/27/2015	EUT Type: Portable Handset		Page 76 of 110




Plot 7-120. Upper Extended Band Edge Plot (Band 25 – 15.0MHz QPSK – RB Size 75)

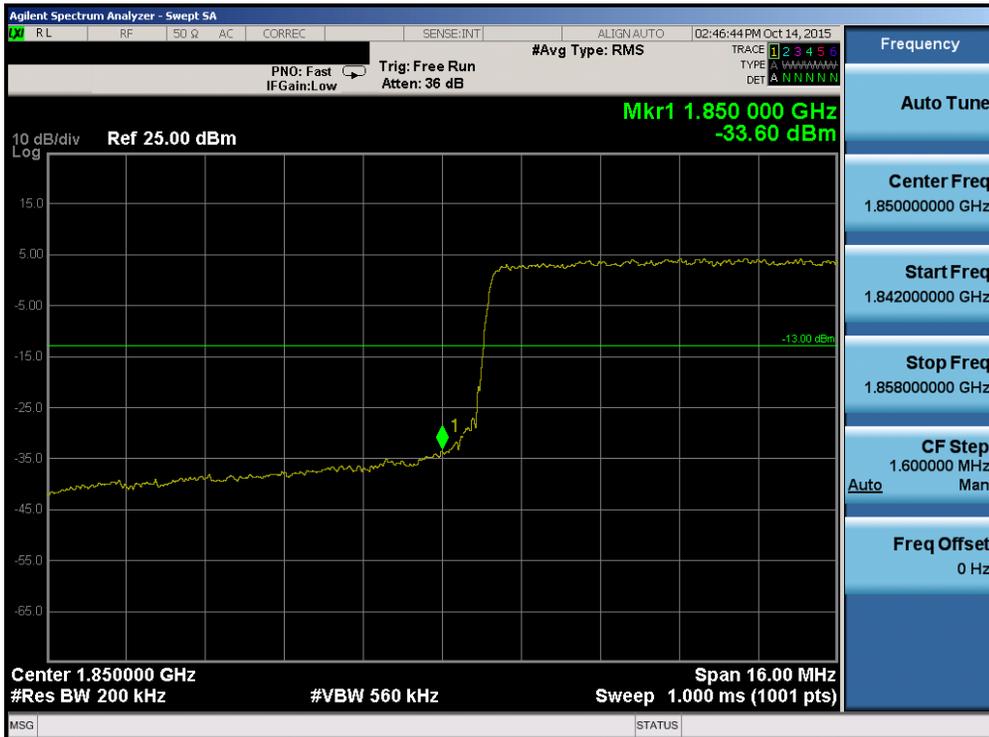

Plot 7-121. Lower Band Edge Plot (Band 25 – 20.0MHz QPSK – RB Size 100)

FCC ID: ZNFLS675		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1511161951.ZNF	Test Dates: 10/12-10/16/2015, 11/17 - 11/27/2015	EUT Type: Portable Handset		Page 77 of 110

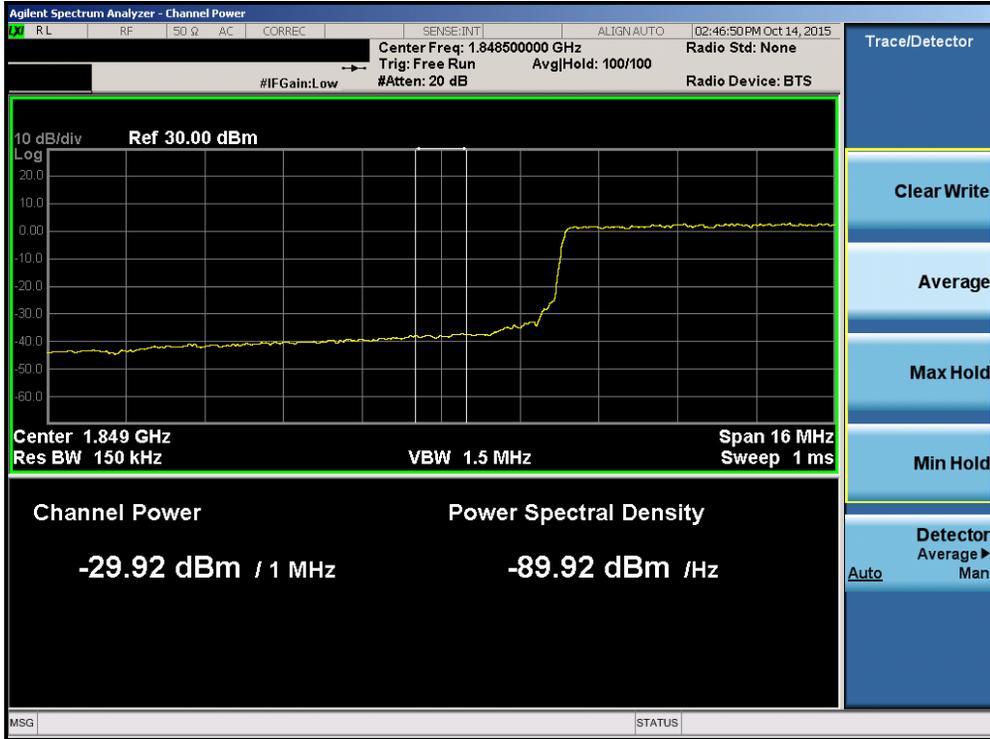


Plot 7-122. Lower Extended Band Edge Plot (Band 25 – 20.0MHz QPSK – RB Size 100)



Plot 7-123. Upper Band Edge Plot (Band 25 – 20.0MHz QPSK – RB Size 100)

FCC ID: ZNFLS675		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1511161951.ZNF	Test Dates: 10/12-10/16/2015, 11/17 - 11/27/2015	EUT Type: Portable Handset		Page 78 of 110

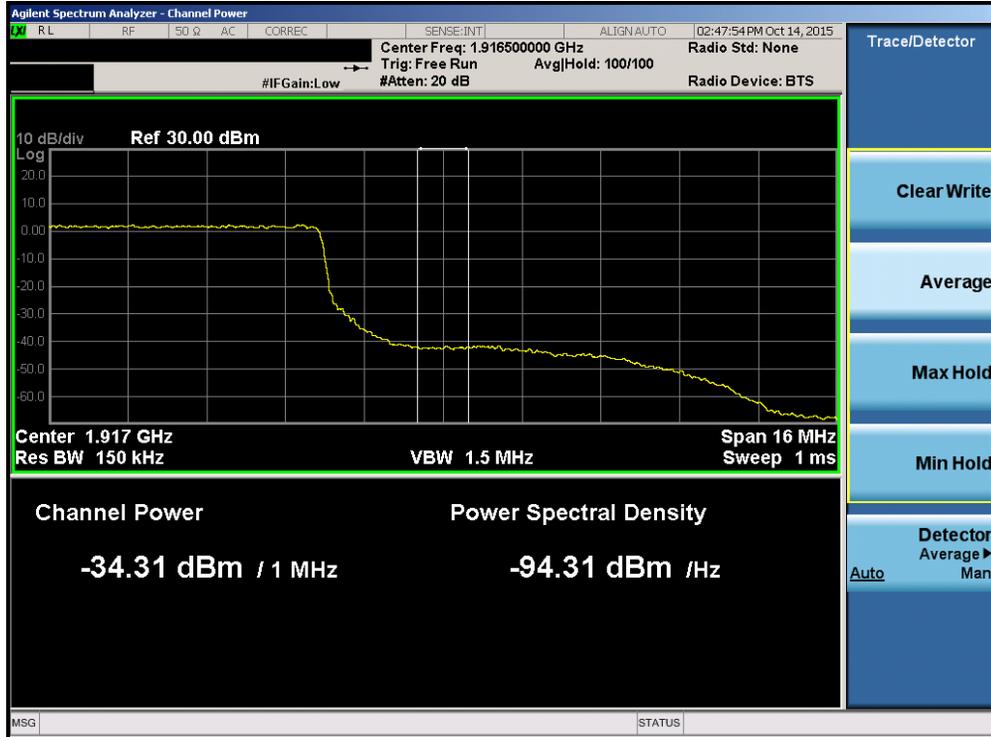


Plot 7-124. Upper Extended Band Edge Plot (Band 25 – 20.0MHz QPSK – RB Size 100)



Plot 7-125. Lower ACP Plot (Band 41 – 5.0MHz QPSK – RB Size 25)

FCC ID: ZNFLS675		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1511161951.ZNF	Test Dates: 10/12-10/16/2015, 11/17 - 11/27/2015	EUT Type: Portable Handset		Page 79 of 110

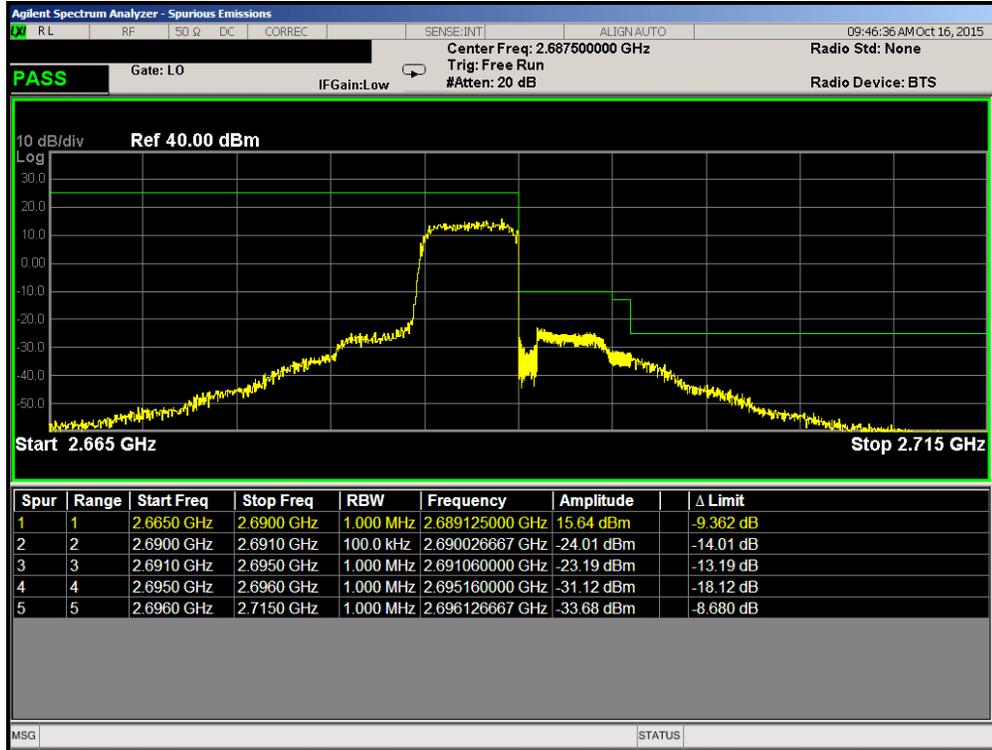

Plot 7-126. Upper ACP Plot (Band 41 – 5.0MHz QPSK – RB Size 25)



Plot 7-127. Lower ACP Plot (Band 41 – 10.0MHz QPSK – RB Size 50)

FCC ID: ZNFLS675		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1511161951.ZNF	Test Dates: 10/12-10/16/2015, 11/17 - 11/27/2015	EUT Type: Portable Handset		Page 80 of 110



Plot 7-128. Upper ACP Plot (Band 41 – 10.0MHz QPSK – RB Size 50)



Plot 7-129. Lower ACP Plot (Band 41 – 15.0MHz QPSK – RB Size 75)

FCC ID: ZNFLS675		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1511161951.ZNF	Test Dates: 10/12-10/16/2015, 11/17 - 11/27/2015	EUT Type: Portable Handset		Page 81 of 110



Plot 7-130. Upper ACP Plot (Band 41 – 15.0MHz QPSK – RB Size 75)



Plot 7-131. Lower ACP Plot (Band 41 – 20.0MHz QPSK – RB Size 100)

FCC ID: ZNFLS675		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1511161951.ZNF	Test Dates: 10/12-10/16/2015, 11/17 - 11/27/2015	EUT Type: Portable Handset		Page 82 of 110



Plot 7-132. Upper ACP Plot (Band 41 – 20.0MHz QPSK – RB Size 100)

FCC ID: ZNFLS675		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1511161951.ZNF	Test Dates: 10/12-10/16/2015, 11/17 - 11/27/2015	EUT Type: Portable Handset	Page 83 of 110	

## 7.5 Peak-Average Ratio

### §24.232(d)

#### Test Overview

A peak to average ratio measurement is performed at the conducted port of the EUT. The spectrum analyzers Complementary Cumulative Distribution Function (CCDF) measurement profile is used to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth. The CCDF curve shows how much time the peak waveform spends at or above a given average power level. The percent of time the signal spends at or above the level defines the probability for that particular power level.

#### Test Procedure Used


KDB 971168 D01 v02r02 – Section 5.7.1

#### Test Settings

1. The signal analyzer's CCDF measurement profile is enabled
2. Frequency = carrier center frequency
3. Measurement BW > Emission bandwidth of signal
4. The signal analyzer was set to collect one million samples to generate the CCDF curve
5. The measurement interval was set depending on the type of signal analyzed. For continuous signals (>98% duty cycle), the measurement interval was set to 1ms. For burst transmissions, the spectrum analyzer is set to use an internal "RF Burst" trigger that is synced with an incoming pulse and the measurement interval is set to less than the duration of the "on time" of one burst to ensure that energy is only captured during a time in which the transmitter is operating at maximum power

#### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

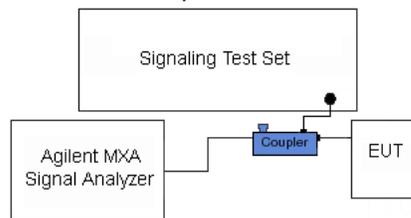


**Figure 7-4. Test Instrument & Measurement Setup**


#### Test Notes

None.

FCC ID: ZNFLS675		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1511161951.ZNF	Test Dates: 10/12-10/16/2015, 11/17 - 11/27/2015	EUT Type: Portable Handset		Page 84 of 110

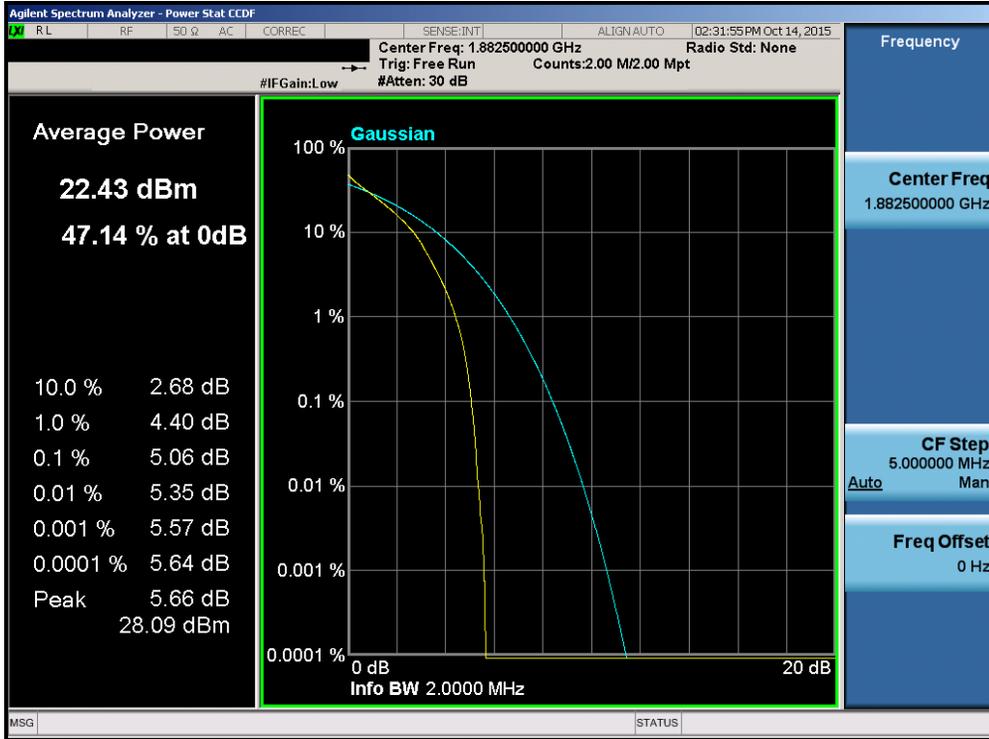


Plot 7-133. PAR Plot (Band 25 – 1.4MHz QPSK – RB Size 6)

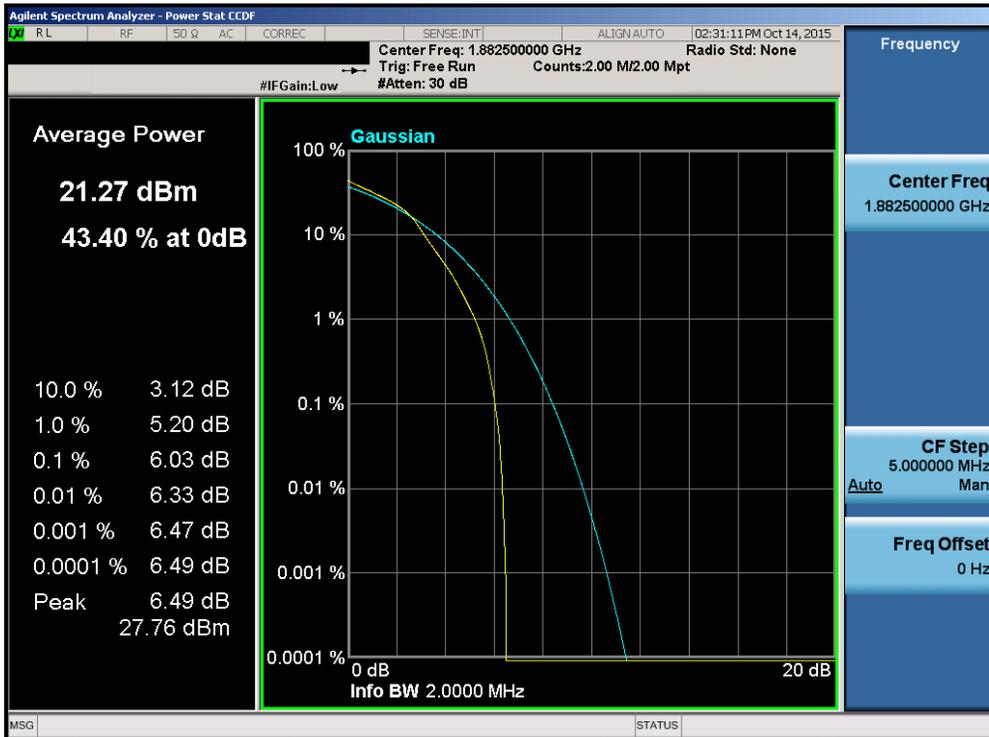


Plot 7-134. PAR Plot (Band 25 – 1.4MHz 16-QAM – RB Size 6)

FCC ID: ZNFLS675		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1511161951.ZNF	Test Dates: 10/12-10/16/2015, 11/17 - 11/27/2015	EUT Type: Portable Handset		Page 85 of 110

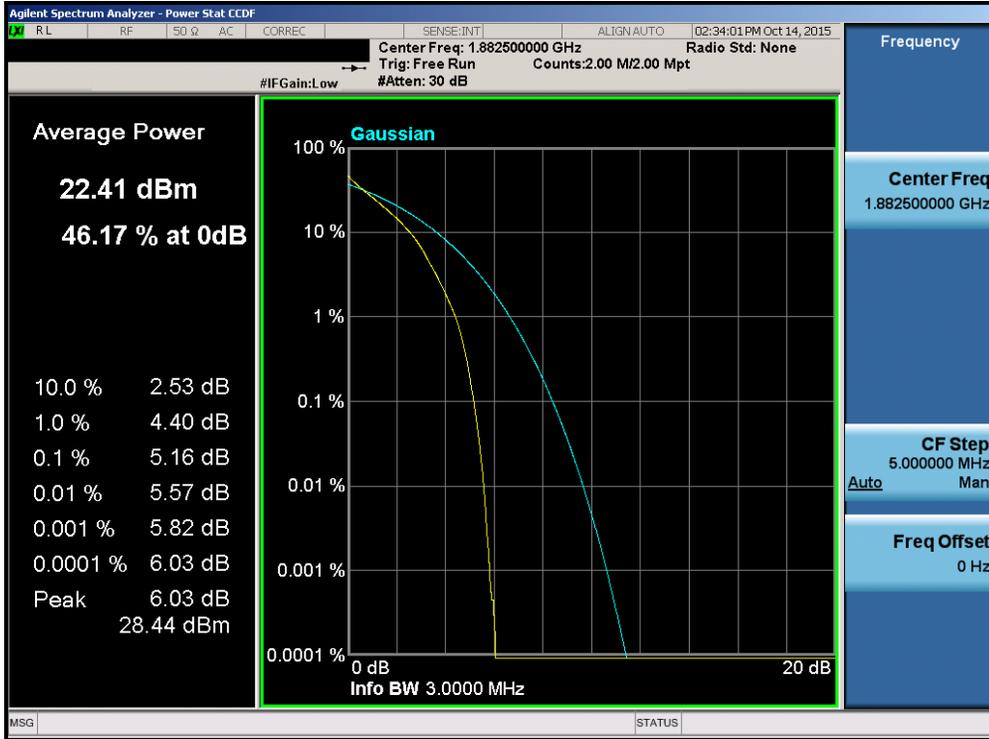


Plot 7-135. PAR Plot (Band 25 – 3.0MHz QPSK – RB Size 15)

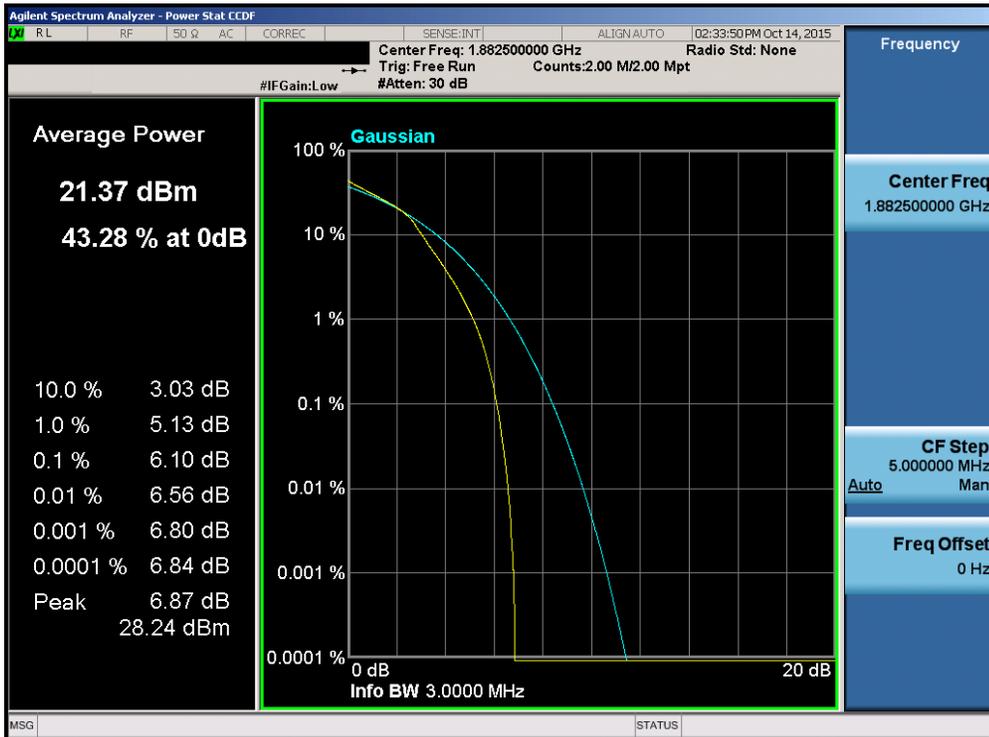


Plot 7-136. PAR Plot (Band 25 – 3.0MHz 16-QAM – RB Size 15)

FCC ID: ZNFLS675		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1511161951.ZNF	Test Dates: 10/12-10/16/2015, 11/17 - 11/27/2015	EUT Type: Portable Handset		Page 86 of 110

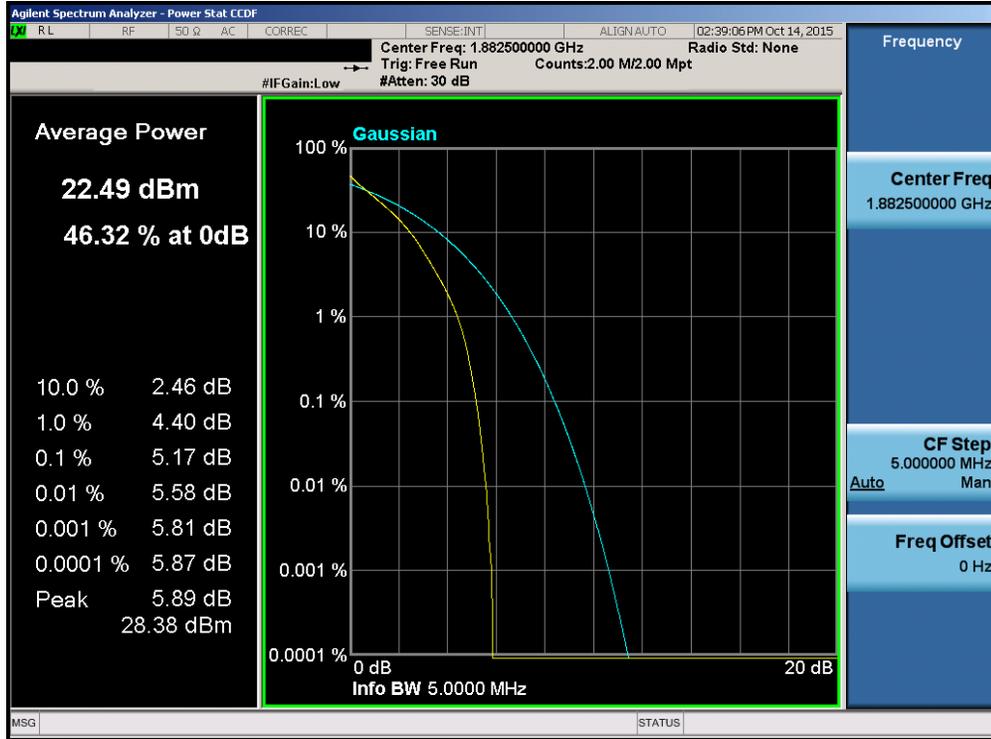


Plot 7-137. PAR Plot (Band 25 – 5.0MHz QPSK – RB Size 25)

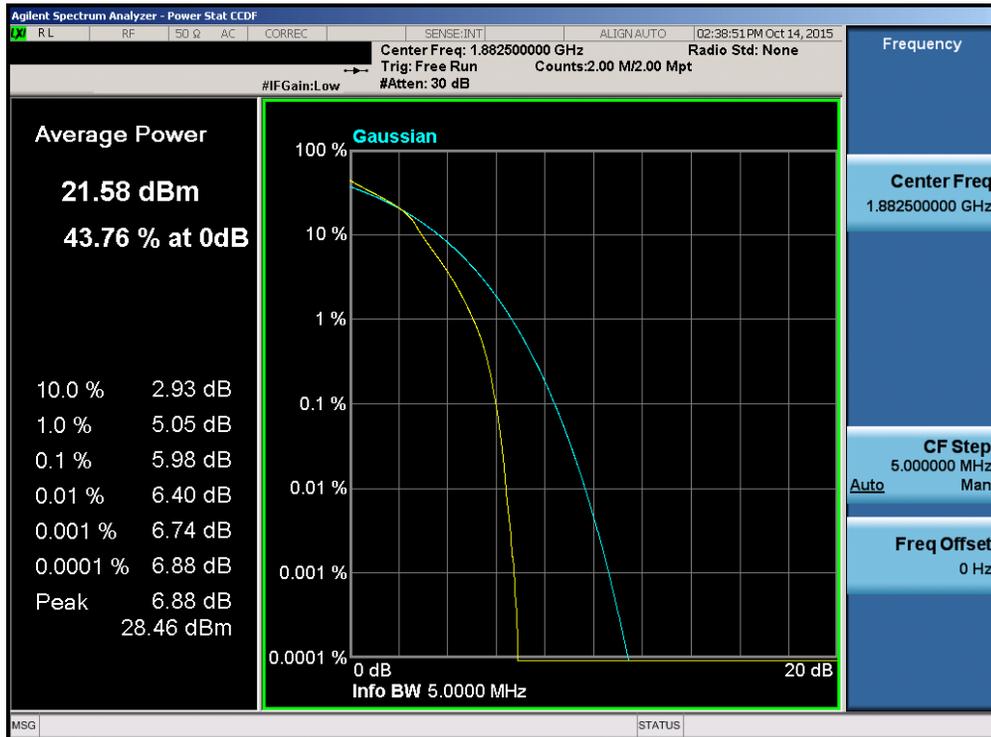


Plot 7-138. PAR Plot (Band 25 – 5.0MHz 16-QAM – RB Size 25)

FCC ID: ZNFLS675		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1511161951.ZNF	Test Dates: 10/12-10/16/2015, 11/17 - 11/27/2015	EUT Type: Portable Handset		Page 87 of 110

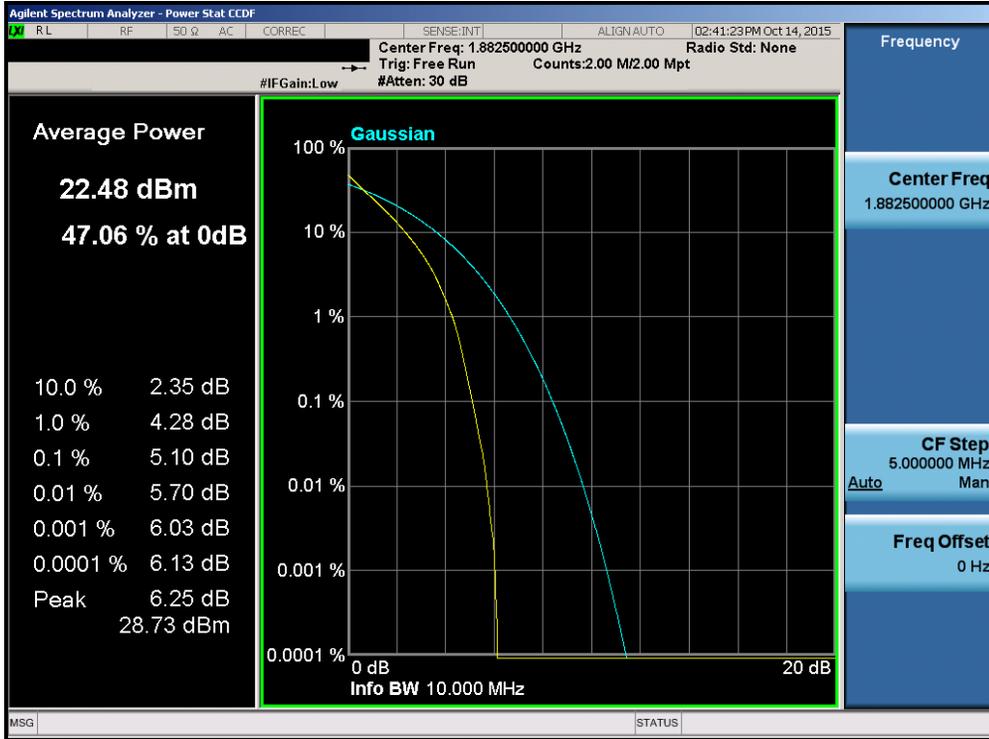


Plot 7-139. PAR Plot (Band 25 – 10.0MHz QPSK – RB Size 50)

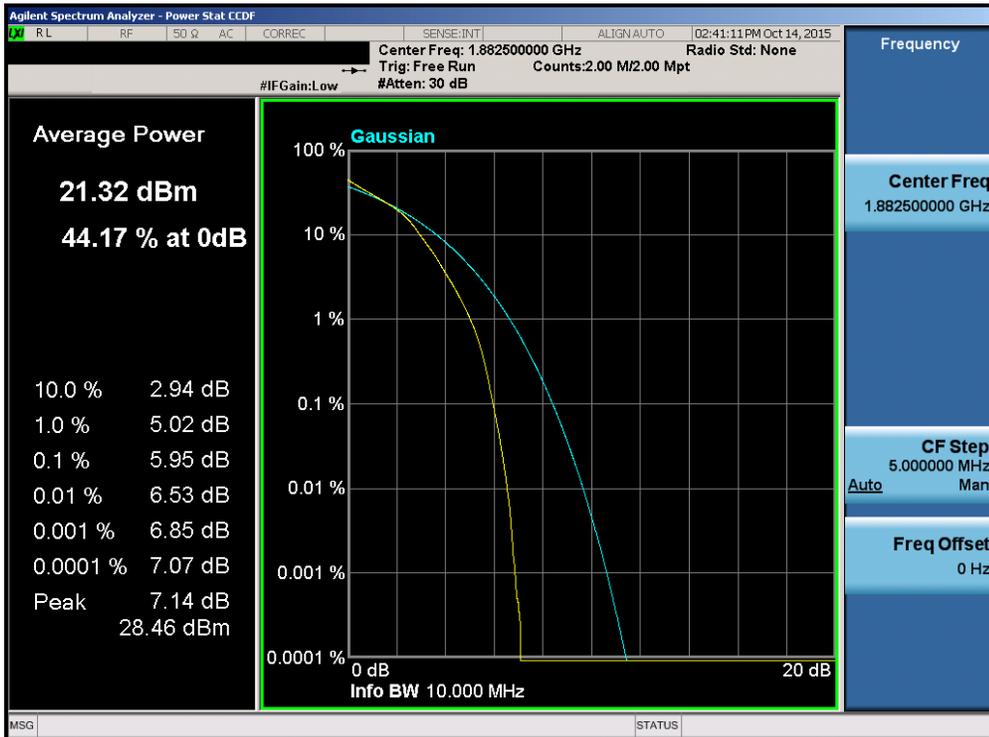


Plot 7-140. PAR Plot (Band 25 – 10.0MHz 16-QAM – RB Size 50)

FCC ID: ZNFLS675		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1511161951.ZNF	Test Dates: 10/12-10/16/2015, 11/17 - 11/27/2015	EUT Type: Portable Handset		Page 88 of 110

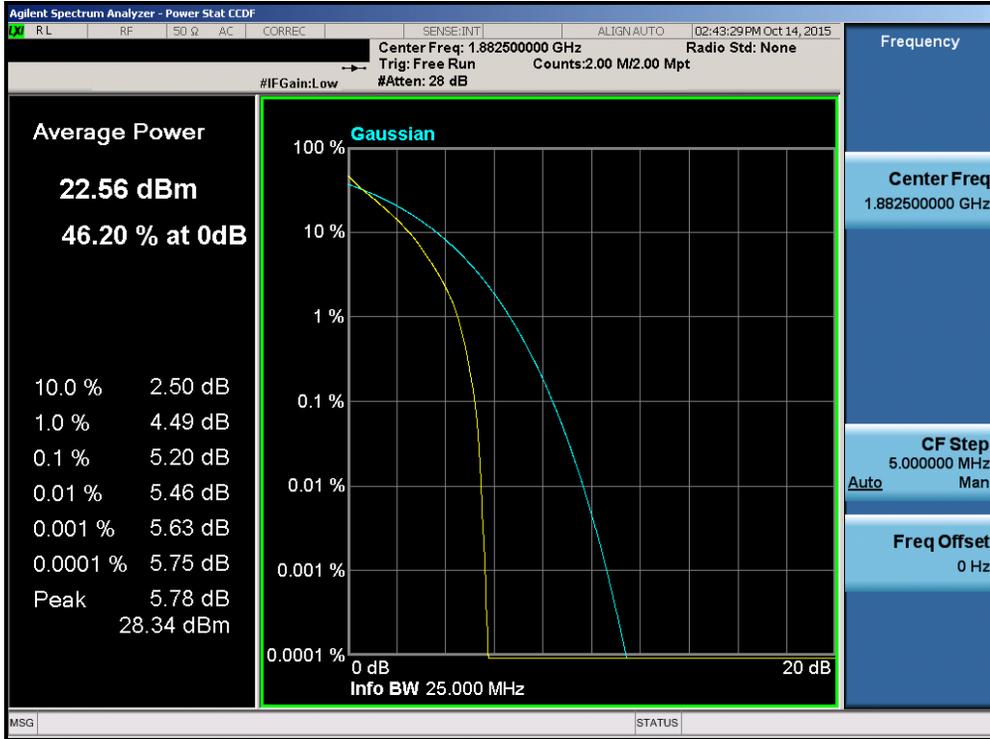


Plot 7-141. PAR Plot (Band 25 – 15.0MHz QPSK – RB Size 75)

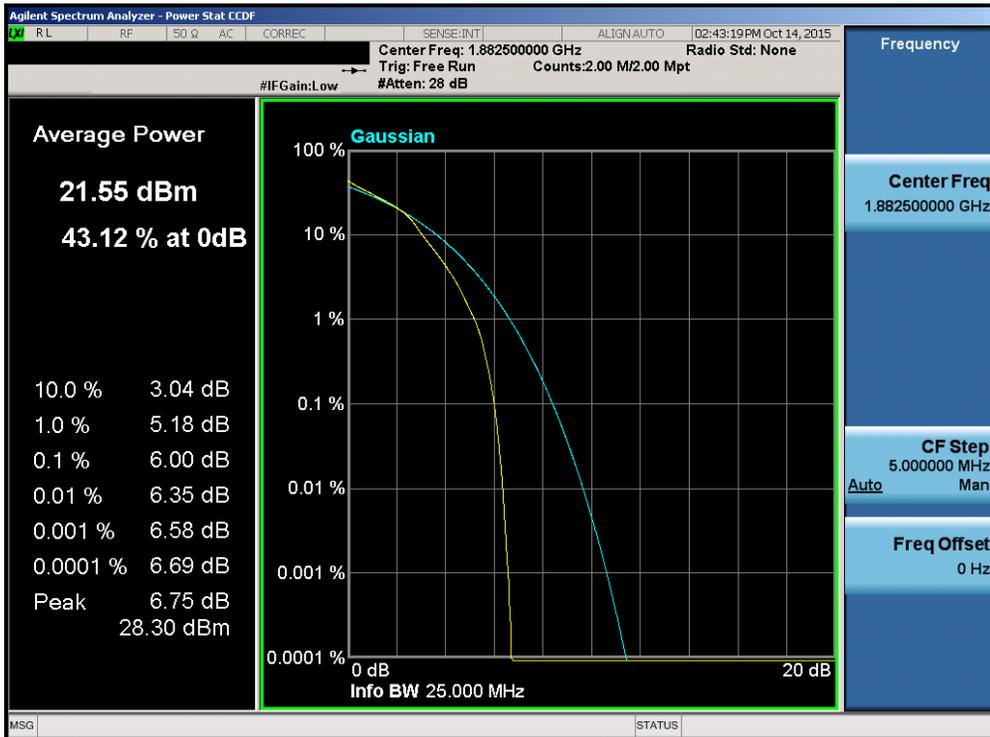


Plot 7-142. PAR Plot (Band 25 – 15.0MHz 16-QAM – RB Size 75)

FCC ID: ZNFLS675		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1511161951.ZNF	Test Dates: 10/12-10/16/2015, 11/17 - 11/27/2015	EUT Type: Portable Handset		Page 89 of 110

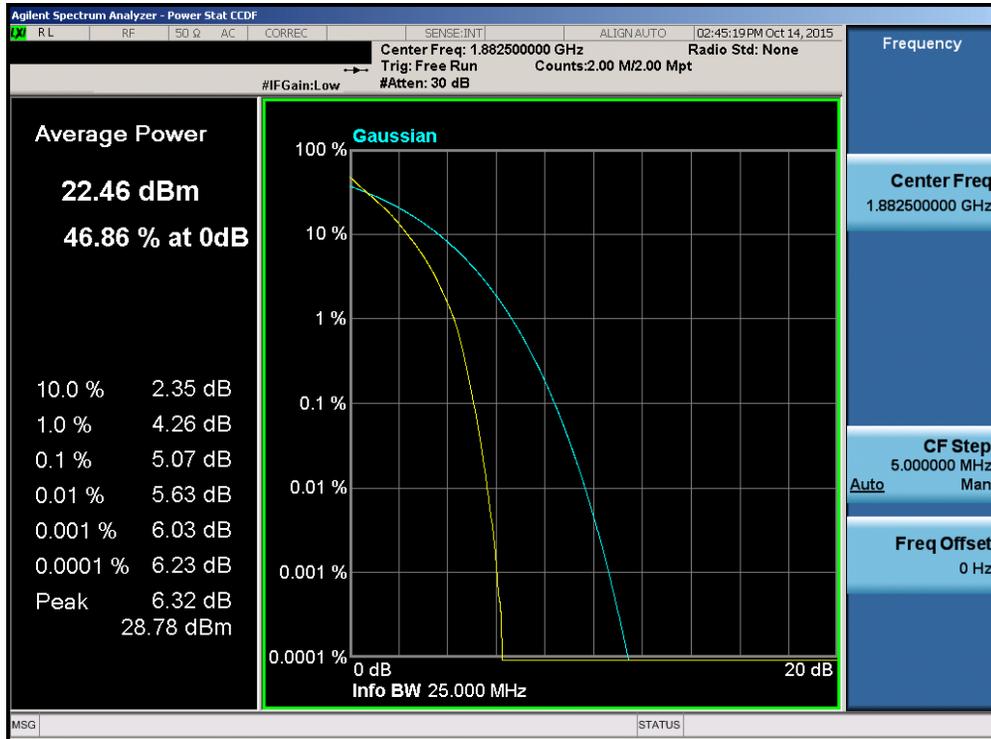

Plot 7-143. PAR Plot (Band 25 – 20.0MHz QPSK – RB Size 100)

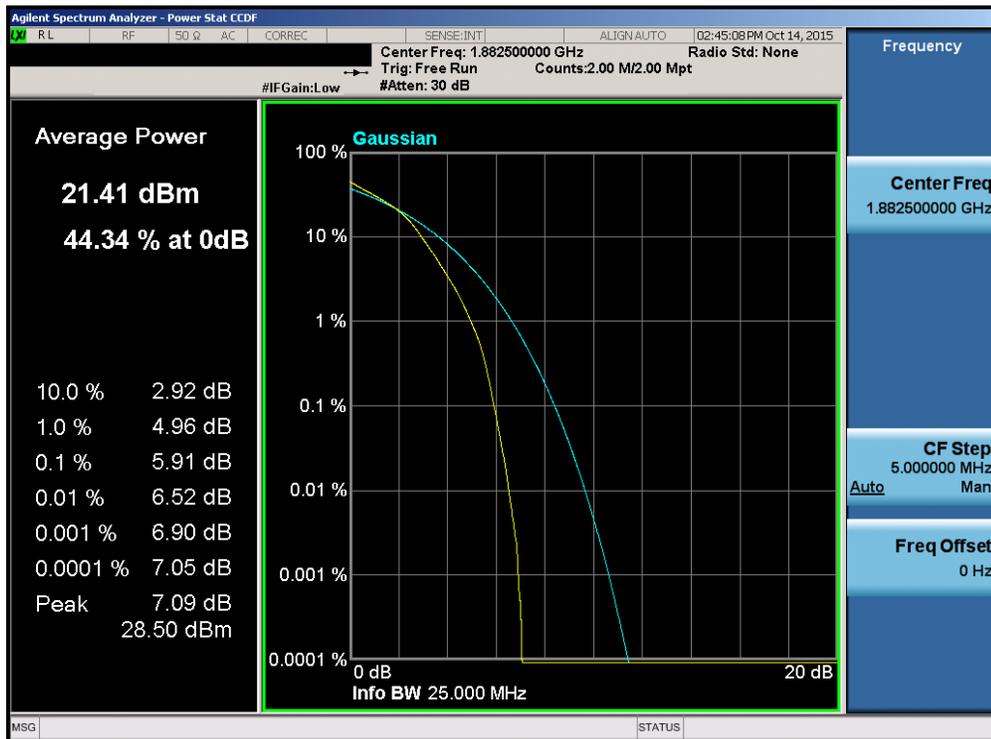

Plot 7-144. PAR Plot (Band 25 – 20.0MHz 16-QAM – RB Size 100)

FCC ID: ZNFLS675		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1511161951.ZNF	Test Dates: 10/12-10/16/2015, 11/17 - 11/27/2015	EUT Type: Portable Handset		Page 90 of 110

## 7.6 Radiated Power (ERP/EIRP)

§22.913(a.2) §24.232(c.2) §27.50(h.2)

### Test Overview

Effective Radiated Power (ERP) and Equivalent Isotropic Radiated Power (EIRP) measurements are performed using the substitution method described in ANSI/TIA-603-C-2004 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using vertically polarized tuned dipole antennas. Measurements on signals operating above 1GHz are performed using vertically polarized broadband horn antennas. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

### Test Procedures Used

KDB 971168 D01 v02r02 – Section 5.2.1

ANSI/TIA-603-C-2004 – Section 2.2.17


### Test Settings

1. Radiated power measurements are performed using the signal analyzer's "channel power" measurement capability for signals with continuous operation. For signals with burst transmission, the signal analyzer's "time domain power" measurement capability is used
2. RBW = 1 – 5% of the expected OBW, not to exceed 1MHz
3. VBW  $\geq$  3 x RBW
4. Span = 1.5 times the OBW
5. No. of sweep points  $\geq$  2 x span / RBW
6. Detector = RMS
7. Trigger is set to "free run" for signals with continuous operation with the sweep times set to "auto".  
Trigger is set to enable triggering only on full power bursts with the sweep time set less than or equal to the transmission burst duration
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation. For signals with burst transmission, the "gating" function was enabled to ensure that measurements are performed during times in which the transmitter is operating at its maximum power
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize


FCC ID: ZNFLS675		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1511161951.ZNF	Test Dates: 10/12-10/16/2015, 11/17 - 11/27/2015	EUT Type: Portable Handset	Page 91 of 110	

**Test Setup**

The EUT and measurement equipment were set up as shown in the diagram below.

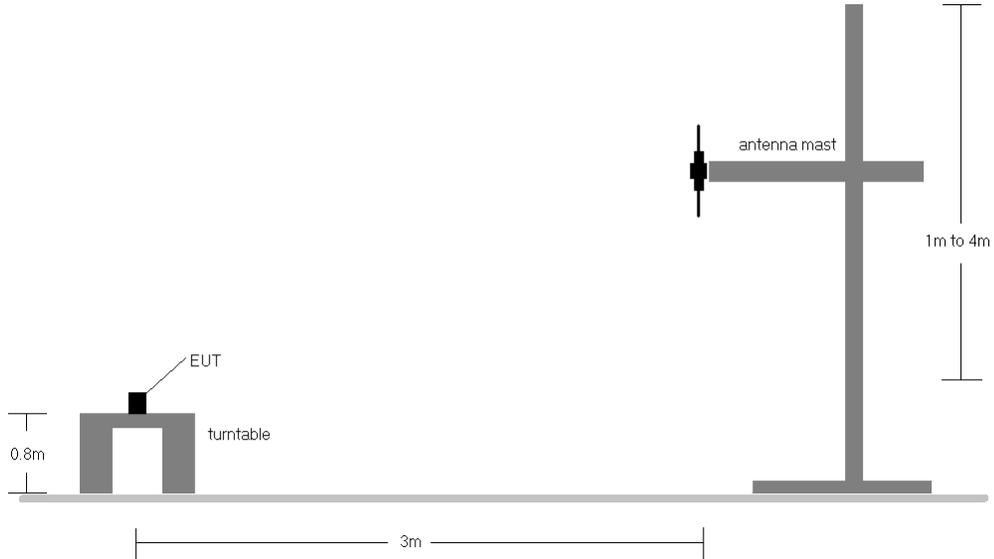

**Figure 7-5. Radiated Test Setup <1GHz**

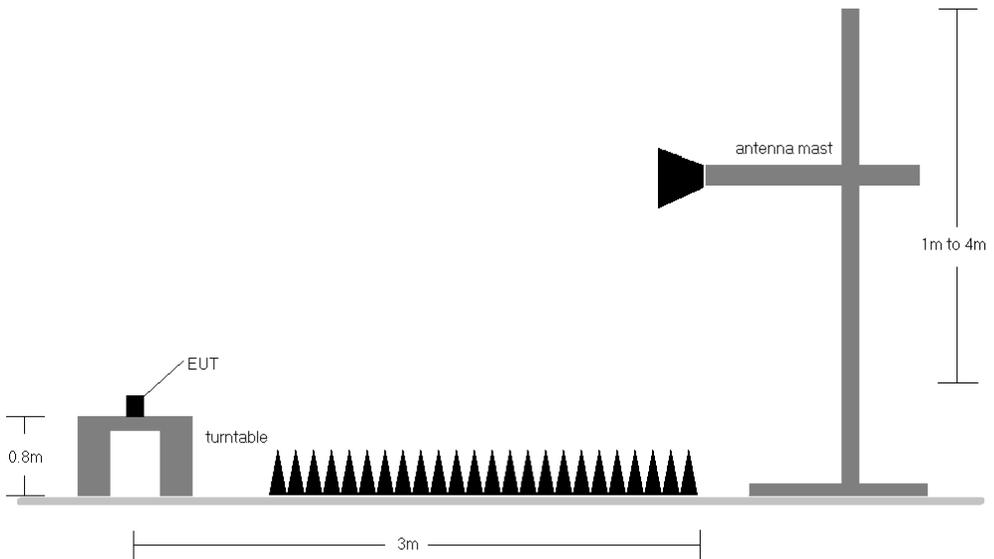

**Figure 7-6. Radiated Test Setup >1GHz**

**Test Notes**

- 1) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the tables below.
- 2) This unit was tested with its standard battery.

FCC ID: ZNFLS675		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1511161951.ZNF	Test Dates: 10/12-10/16/2015, 11/17 - 11/27/2015	EUT Type: Portable Handset		Page 92 of 110

Frequency [MHz]	Channel Bandwidth [MHz]	Mod.	Ant. Pol. [H/V]	Antenna Height [m]	Turntable Azimuth [degree]	RB Size/Offset	Substitute Level [dBm]	Ant. Gain [dBd]	ERP [dBm]	ERP Limit [dBm]	Margin [dB]
824.70	1.4	QPSK	V	1.27	354	1 / 5	14.06	2.98	17.04	38.45	-21.41
836.50	1.4	QPSK	V	1.27	354	1 / 0	15.24	3.04	18.28	38.45	-20.17
848.30	1.4	QPSK	V	1.27	354	1 / 0	14.94	3.10	18.04	38.45	-20.41
824.70	1.4	16-QAM	V	1.27	354	1 / 5	13.36	2.98	16.34	38.45	-22.11
836.50	1.4	16-QAM	V	1.27	354	1 / 0	14.41	3.04	17.45	38.45	-21.00
848.30	1.4	16-QAM	V	1.27	354	1 / 0	14.12	3.10	17.22	38.45	-21.23
825.50	3	QPSK	V	1.29	354	1 / 0	14.08	2.98	17.06	38.45	-21.39
836.50	3	QPSK	V	1.29	354	1 / 0	15.41	3.04	18.45	38.45	-20.00
847.50	3	QPSK	V	1.29	354	1 / 0	15.24	3.10	18.34	38.45	-20.11
825.50	3	16-QAM	V	1.29	354	1 / 0	13.35	2.98	16.33	38.45	-22.12
836.50	3	16-QAM	V	1.29	354	1 / 0	14.56	3.04	17.60	38.45	-20.85
847.50	3	16-QAM	V	1.29	354	1 / 0	14.45	3.10	17.55	38.45	-20.90
826.50	5	QPSK	V	1.53	0	1 / 24	15.28	2.99	18.27	38.45	-20.18
836.50	5	QPSK	V	1.53	0	1 / 24	15.43	3.04	18.47	38.45	-19.98
846.50	5	QPSK	V	1.53	0	1 / 0	16.47	3.09	19.56	38.45	-18.89
826.50	5	16-QAM	V	1.53	0	1 / 24	14.65	2.99	17.64	38.45	-20.81
836.50	5	16-QAM	V	1.53	0	1 / 24	14.62	3.04	17.66	38.45	-20.79
846.50	5	16-QAM	V	1.53	0	1 / 0	15.69	3.09	18.78	38.45	-19.67
829.00	10	QPSK	V	1.18	343	1 / 49	15.19	3.00	18.19	38.45	-20.26
836.50	10	QPSK	V	1.18	343	1 / 49	15.79	3.04	18.83	38.45	-19.62
844.00	10	QPSK	V	1.18	343	1 / 0	15.77	3.08	18.85	38.45	-19.60
829.00	10	16-QAM	V	1.18	343	1 / 49	14.33	3.00	17.33	38.45	-21.12
836.50	10	16-QAM	V	1.18	343	1 / 49	15.31	3.04	18.35	38.45	-20.10
844.00	10	16-QAM	V	1.18	343	1 / 0	15.41	3.08	18.49	38.45	-19.96
831.50	15	QPSK	V	1.35	350	1 / 74	15.00	3.01	18.01	38.45	-20.44
836.50	15	QPSK	V	1.35	350	1 / 74	16.02	3.04	19.06	38.45	-19.39
841.50	15	QPSK	V	1.35	350	1 / 0	14.92	3.07	17.99	38.45	-20.46
831.50	15	16-QAM	V	1.35	350	1 / 74	14.43	3.01	17.44	38.45	-21.01
836.50	15	16-QAM	V	1.35	350	1 / 74	15.02	3.04	18.06	38.45	-20.39
841.50	15	16-QAM	V	1.35	350	1 / 0	14.14	3.07	17.21	38.45	-21.24

**Table 7-2. ERP Data (Band 26)**

FCC ID: ZNFLS675		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1511161951.ZNF	Test Dates: 10/12-10/16/2015, 11/17 - 11/27/2015	EUT Type: Portable Handset	Page 93 of 110	

Frequency [MHz]	Channel Bandwidth [MHz]	Mod.	Ant. Pol. [H/V]	Antenna Height [m]	Turntable Azimuth [degree]	RB Size/Offset	Substitute Level [dBm]	Ant. Gain [dBi]	EIRP [dBm]	EIRP Limit [dBm]	Margin [dB]
1850.70	1.4	QPSK	V	1.00	272	1 / 5	14.49	8.34	22.83	33.01	-10.18
1882.50	1.4	QPSK	V	1.00	273	1 / 0	14.97	8.47	23.44	33.01	-9.57
1914.30	1.4	QPSK	V	1.00	273	1 / 0	15.70	8.70	24.40	33.01	-8.61
1850.70	1.4	16-QAM	V	1.00	272	1 / 0	13.63	8.34	21.97	33.01	-11.04
1882.50	1.4	16-QAM	V	1.00	273	1 / 0	14.80	8.47	23.27	33.01	-9.74
1914.30	1.4	16-QAM	V	1.00	273	1 / 0	14.87	8.70	23.57	33.01	-9.44
1851.50	3	QPSK	V	1.00	112	1 / 0	13.52	8.35	21.87	33.01	-11.14
1882.50	3	QPSK	V	1.00	111	1 / 0	15.57	8.47	24.04	33.01	-8.97
1913.50	3	QPSK	V	1.00	112	1 / 0	15.61	8.69	24.30	33.01	-8.71
1851.50	3	16-QAM	V	1.00	112	1 / 0	12.70	8.35	21.05	33.01	-11.96
1882.50	3	16-QAM	V	1.00	111	1 / 0	14.97	8.47	23.44	33.01	-9.57
1913.50	3	16-QAM	V	1.00	112	1 / 0	14.87	8.69	23.56	33.01	-9.45
1852.50	5	QPSK	V	1.00	106	1 / 24	14.00	8.35	22.35	33.01	-10.66
1882.50	5	QPSK	V	1.00	153	1 / 0	14.61	8.47	23.08	33.01	-9.93
1912.50	5	QPSK	V	1.00	102	1 / 24	15.35	8.68	24.03	33.01	-8.98
1852.50	5	16-QAM	V	1.00	106	1 / 24	12.89	8.35	21.24	33.01	-11.77
1882.50	5	16-QAM	V	1.00	153	1 / 0	12.55	8.47	21.02	33.01	-11.99
1912.50	5	16-QAM	V	1.00	102	1 / 0	14.51	8.68	23.19	33.01	-9.82
1855.00	10	QPSK	V	1.26	221	1 / 49	13.80	8.36	22.16	33.01	-10.85
1882.50	10	QPSK	V	1.26	216	1 / 0	13.65	8.47	22.12	33.01	-10.89
1910.00	10	QPSK	V	1.26	222	1 / 49	13.82	8.65	22.47	33.01	-10.54
1855.00	10	16-QAM	V	1.26	221	1 / 49	12.88	8.36	21.24	33.01	-11.77
1882.50	10	16-QAM	V	1.26	216	1 / 0	12.57	8.47	21.04	33.01	-11.97
1910.00	10	16-QAM	V	1.26	222	1 / 49	12.91	8.65	21.56	33.01	-11.45
1857.50	15	QPSK	V	117.20	220	1 / 0	13.97	8.37	22.34	33.01	-10.67
1882.50	15	QPSK	V	117.20	221	1 / 0	13.89	8.47	22.36	33.01	-10.65
1907.50	15	QPSK	V	117.20	216	1 / 74	14.03	8.62	22.65	33.01	-10.36
1857.50	15	16-QAM	V	117.20	220	1 / 0	12.95	8.37	21.32	33.01	-11.69
1882.50	15	16-QAM	V	117.20	221	1 / 0	12.97	8.47	21.44	33.01	-11.57
1907.50	15	16-QAM	V	117.20	216	1 / 74	13.60	8.62	22.22	33.01	-10.79
1860.00	20	QPSK	V	1.03	223	1 / 99	13.26	8.38	21.64	33.01	-11.37
1882.50	20	QPSK	V	1.03	219	1 / 0	14.34	8.47	22.81	33.01	-10.20
1905.00	20	QPSK	V	1.03	220	1 / 0	13.95	8.59	22.54	33.01	-10.47
1860.00	20	16-QAM	V	1.03	223	1 / 99	12.46	8.38	20.84	33.01	-12.17
1882.50	20	16-QAM	V	1.03	219	1 / 0	13.36	8.47	21.83	33.01	-11.18
1905.00	20	16-QAM	V	1.03	220	1 / 0	13.06	8.59	21.65	33.01	-11.36

**Table 7-3. EIRP Data (Band 25)**

FCC ID: ZNFLS675		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1511161951.ZNF	Test Dates: 10/12-10/16/2015, 11/17 - 11/27/2015	EUT Type: Portable Handset	Page 94 of 110	

Frequency [MHz]	Channel Bandwidth [MHz]	Mod.	Ant. Pol. [H/V]	Antenna Height [m]	Turntable Azimuth [degree]	RB Size/Offset	Substitute Level [dBm]	Ant. Gain [dBi]	EIRP [dBm]	EIRP Limit [dBm]	Margin [dB]
2498.50	5	QPSK	V	3.62	227	1 / 24	12.68	7.09	19.77	33.01	-13.24
2593.00	5	QPSK	V	3.62	227	1 / 0	12.41	7.55	19.96	33.01	-13.05
2687.50	5	QPSK	V	3.62	227	1 / 0	11.89	7.82	19.71	33.01	-13.30
2498.50	5	16-QAM	V	3.62	227	1 / 24	11.87	7.09	18.96	33.01	-14.05
2593.00	5	16-QAM	V	3.62	227	1 / 0	10.87	7.55	18.42	33.01	-14.59
2687.50	5	16-QAM	V	3.62	227	1 / 0	10.31	7.82	18.13	33.01	-14.88
2501.00	10	QPSK	V	3.22	277	1 / 0	12.63	7.08	19.71	33.01	-13.30
2593.00	10	QPSK	V	3.22	277	1 / 0	14.47	7.55	22.02	33.01	-10.99
2685.00	10	QPSK	V	3.22	277	1 / 49	12.56	7.81	20.37	33.01	-12.64
2501.00	10	16-QAM	V	3.22	277	1 / 0	12.57	7.08	19.65	33.01	-13.36
2593.00	10	16-QAM	V	3.22	277	1 / 0	13.10	7.55	20.65	33.01	-12.36
2685.00	10	16-QAM	V	3.22	277	1 / 49	11.36	7.81	19.17	33.01	-13.84
2503.50	15	QPSK	V	3.60	219	1 / 74	12.31	7.10	19.41	33.01	-13.60
2593.00	15	QPSK	V	3.60	219	1 / 0	11.55	7.55	19.10	33.01	-13.91
2682.50	15	QPSK	V	3.60	219	1 / 0	11.08	7.81	18.89	33.01	-14.12
2503.50	15	16-QAM	V	3.60	219	1 / 74	11.68	7.10	18.78	33.01	-14.23
2593.00	15	16-QAM	V	3.60	219	1 / 0	10.35	7.55	17.90	33.01	-15.11
2682.50	15	16-QAM	V	3.60	219	1 / 0	9.94	7.81	17.75	33.01	-15.26
2506.00	20	QPSK	V	3.54	220	1 / 99	12.05	7.11	19.16	33.01	-13.85
2593.00	20	QPSK	V	3.54	220	1 / 99	11.36	7.55	18.91	33.01	-14.10
2680.00	20	QPSK	V	3.54	220	1 / 99	11.47	7.80	19.27	33.01	-13.74
2506.00	20	16-QAM	V	3.54	220	1 / 99	11.13	7.11	18.24	33.01	-14.77
2593.00	20	16-QAM	V	3.54	220	1 / 99	10.56	7.55	18.11	33.01	-14.90
2680.00	20	16-QAM	V	3.54	220	1 / 99	11.25	7.80	19.05	33.01	-13.96

**Table 7-4. EIRP Data (Band 41)**

FCC ID: ZNFLS675		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1511161951.ZNF	Test Dates: 10/12-10/16/2015, 11/17 - 11/27/2015	EUT Type: Portable Handset	Page 95 of 110	

## 7.7 Radiated Spurious Emissions Measurements

§2.1053 §22.917(a) §24.238(a) §27.53(m)

### Test Overview

Radiated spurious emissions measurements are performed using the substitution method described in ANSI/TIA-603-C-2004 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using vertically and horizontally polarized tuned dipole antennas. Measurements on signals operating above 1GHz are performed using vertically and horizontally polarized broadband horn antennas. All measurements are performed as peak measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

### Test Procedures Used

KDB 971168 D01 v02r02 – Section 5.8

ANSI/TIA-603-C-2004 – Section 2.2.12


### Test Settings

1. RBW = 100kHz for emissions below 1GHz and 1MHz for emissions above 1GHz
2. VBW  $\geq$  3 x RBW
3. Span = 1.5 times the OBW
4. No. of sweep points  $\geq$  2 x span / RBW
5. Detector = Peak
6. Trace mode = max hold
7. The trace was allowed to stabilize

FCC ID: ZNFLS675		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1511161951.ZNF	Test Dates: 10/12-10/16/2015, 11/17 - 11/27/2015	EUT Type: Portable Handset		Page 96 of 110

## Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

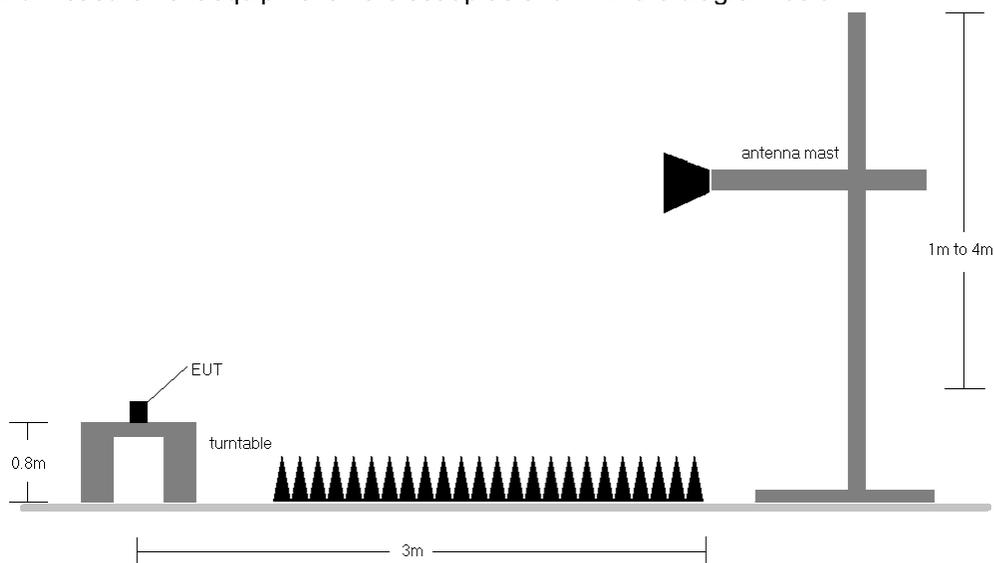

**Figure 7-7. Test Instrument & Measurement Setup**

## Test Notes

- 1) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the tables below.
- 2) This unit was tested with its standard battery.
- 3) The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter. The worst-case emissions are reported.
- 4) Emissions below 18GHz were measured at a 3 meter test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.

FCC ID: ZNFLS675		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1511161951.ZNF	Test Dates: 10/12-10/16/2015, 11/17 - 11/27/2015	EUT Type: Portable Handset		Page 97 of 110

OPERATING FREQUENCY: 826.50 MHz  
 CHANNEL: 26815  
 MEASURED OUTPUT POWER: 18.27 dBm = 0.067 W  
 MODULATION SIGNAL: QPSK  
 BANDWIDTH: 5.0 MHz  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10}(W) =$  31.27 dBc

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [m]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	[dBc]
1653.00	H	1.00	0	-66.85	6.56	-60.29	78.6
2479.50	H	1.00	0	-64.22	7.31	-56.91	75.2
3306.00	H	1.00	0	-61.13	7.38	-53.75	72.0

**Table 7-5. Radiated Spurious Data (Band 26 – Low Channel)**

OPERATING FREQUENCY: 836.50 MHz  
 CHANNEL: 26915  
 MEASURED OUTPUT POWER: 18.47 dBm = 0.070 W  
 MODULATION SIGNAL: QPSK  
 BANDWIDTH: 5.0 MHz  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10}(W) =$  31.47 dBc

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [m]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBd]	Spurious Emission Level [dBm]	[dBc]
1673.00	H	1.00	0	-64.31	6.55	-57.76	76.2
2509.50	H	1.00	0	-65.47	7.34	-58.12	76.6
3346.00	H	1.00	0	-61.11	7.44	-53.67	72.1

**Table 7-6. Radiated Spurious Data (Band 26 – Mid Channel)**

FCC ID: ZNFLS675		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1511161951.ZNF	Test Dates: 10/12-10/16/2015, 11/17 - 11/27/2015	EUT Type: Portable Handset	Page 98 of 110	

OPERATING FREQUENCY: 846.50 MHz  
 CHANNEL: 27015  
 MEASURED OUTPUT POWER: 19.56 dBm = 0.090 W  
 MODULATION SIGNAL: QPSK  
 BANDWIDTH: 5.0 MHz  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10}(W) =$  32.56 dBc

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [m]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBd]	Spurious Emission Level [dBm]	[dBc]
1693.00	H	1.30	12	-58.90	6.55	-52.35	71.9
2539.50	H	1.17	104	-61.44	7.36	-54.08	73.6
3386.00	H	1.00	0	-63.27	7.50	-55.77	75.3

**Table 7-7. Radiated Spurious Data (Band 26 – High Channel)**

OPERATING FREQUENCY: 1850.70 MHz  
 CHANNEL: 26047  
 MEASURED OUTPUT POWER: 22.83 dBm = 0.192 W  
 MODULATION SIGNAL: QPSK  
 BANDWIDTH: 1.4 MHz  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10}(W) =$  35.83 dBc

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [m]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	[dBc]
3701.40	H	1.80	340	-58.17	9.44	-48.74	71.6
5552.10	H	1.80	340	-54.86	10.79	-44.08	66.9
7402.80	H	1.80	340	-52.70	10.69	-42.01	64.8

**Table 7-8. Radiated Spurious Data (Band 25 – Low Channel)**

FCC ID: ZNFLS675		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1511161951.ZNF	Test Dates: 10/12-10/16/2015, 11/17 - 11/27/2015	EUT Type: Portable Handset	Page 99 of 110	

OPERATING FREQUENCY: 1882.50 MHz  
 CHANNEL: 26365  
 MEASURED OUTPUT POWER: 23.44 dBm = 0.221 W  
 MODULATION SIGNAL: QPSK  
 BANDWIDTH: 1.4 MHz  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10}(W) =$  36.44 dBc

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [m]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	[dBc]
3765.00	H	1.00	57	-55.57	9.27	-46.30	69.7
5647.50	H	1.00	57	-51.65	11.06	-40.59	64.0
7530.00	H	1.00	57	-51.84	10.99	-40.84	64.3

**Table 7-9. Radiated Spurious Data (Band 25 – Mid Channel)**

OPERATING FREQUENCY: 1914.30 MHz  
 CHANNEL: 26683  
 MEASURED OUTPUT POWER: 24.40 dBm = 0.276 W  
 MODULATION SIGNAL: QPSK  
 BANDWIDTH: 1.4 MHz  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10}(W) =$  37.40 dBc

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [m]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	[dBc]
3828.60	H	3.40	321	-54.99	9.20	-45.79	70.2
5742.90	H	3.40	321	-56.89	11.31	-45.58	70.0
7657.20	H	3.40	321	-52.15	11.19	-40.96	65.4

**Table 7-10. Radiated Spurious Data (Band 25 – High Channel)**

FCC ID: ZNFLS675		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1511161951.ZNF	Test Dates: 10/12-10/16/2015, 11/17 - 11/27/2015	EUT Type: Portable Handset		Page 100 of 110

OPERATING FREQUENCY: 2501.00 MHz  
 CHANNEL: 39700  
 MEASURED OUTPUT POWER: 19.71 dBm = 0.094 W  
 MODULATION SIGNAL: QPSK  
 BANDWIDTH: 10.0 MHz  
 DISTANCE: 3 meters  
 LIMIT:  $55 + 10 \log_{10}(W)$  44.71 dBc

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [m]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	[dBc]
5002.00	H	3.58	200	-52.86	10.93	-41.93	61.6
7503.00	H	3.58	200	-52.92	10.94	-41.98	61.7
10004.00	H	2.62	246	-43.84	12.03	-31.81	51.5
12505.00	H	3.58	200	-50.56	13.40	-37.16	56.9
15006.00	H	3.58	200	-49.32	13.32	-36.00	55.7
17507.00	H	3.58	200	-42.05	11.90	-30.15	49.9

**Table 7-11. Radiated Spurious Data (Band 41 – Low Channel)**

OPERATING FREQUENCY: 2593.00 MHz  
 CHANNEL: 40620  
 MEASURED OUTPUT POWER: 22.02 dBm = 0.159 W  
 MODULATION SIGNAL: QPSK  
 BANDWIDTH: 10.0 MHz  
 DISTANCE: 3 meters  
 LIMIT:  $55 + 10 \log_{10}(W)$  47.02 dBc

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [m]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	[dBc]
5186.00	H	3.59	315	-55.05	10.60	-44.45	66.5
7779.00	H	3.59	315	-52.54	11.22	-41.32	63.3
10372.00	H	1.11	315	-42.14	12.36	-29.78	51.8
12965.00	H	3.59	315	-48.79	13.16	-35.63	57.6
15558.00	H	3.59	315	-53.84	16.15	-37.69	59.7

**Table 7-12. Radiated Spurious Data (Band 41 – Mid Channel)**

FCC ID: ZNFLS675		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1511161951.ZNF	Test Dates: 10/12-10/16/2015, 11/17 - 11/27/2015	EUT Type: Portable Handset	Page 101 of 110	

OPERATING FREQUENCY: 2685.00 MHz  
 CHANNEL: 41540  
 MEASURED OUTPUT POWER: 20.37 dBm = 0.109 W  
 MODULATION SIGNAL: QPSK  
 BANDWIDTH: 10.0 MHz  
 DISTANCE: 3 meters  
 LIMIT:  $55 + 10 \log_{10}(W)$  45.37 dBc

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [m]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	[dBc]
5370.00	H	2.82	7	-56.10	10.59	-45.51	65.9
8055.00	H	2.82	7	-52.01	11.10	-40.91	61.3
10740.00	H	3.00	257	-48.04	12.58	-35.46	55.8
13425.00	H	2.82	7	-48.55	12.39	-36.16	56.5
16110.00	H	2.82	7	-53.74	16.66	-37.08	57.5

Table 7-13. Radiated Spurious Data (Band 41 – High Channel)

FCC ID: ZNFLS675		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1511161951.ZNF	Test Dates: 10/12-10/16/2015, 11/17 - 11/27/2015	EUT Type: Portable Handset		Page 102 of 110

## 7.8 Frequency Stability / Temperature Variation

§2.1055 §22.355 §24.235 §27.54

### Test Overview and Limit

Frequency stability testing is performed in accordance with the guidelines of ANSI/TIA-603-C-2004. The frequency stability of the transmitter is measured by:

- a.) **Temperature:** The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
- b.) **Primary Supply Voltage:** The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

***For Part 22, the frequency stability of the transmitter shall be maintained within  $\pm 0.00025\%$  ( $\pm 2.5$  ppm) of the center frequency. For Part 24 and Part 27, the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.***

### Test Procedure Used

ANSI/TIA-603-C-2004

### Test Settings

1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
2. The equipment is turned on in a “standby” condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

### Test Setup

The EUT was connected via an RF cable to a spectrum analyzer with the EUT placed inside an environmental chamber.

### Test Notes

None

FCC ID: ZNFLS675		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1511161951.ZNF	Test Dates: 10/12-10/16/2015, 11/17 - 11/27/2015	EUT Type: Portable Handset		Page 103 of 110

## Band 26 Frequency Stability Measurements

§2.1055 §22.355


OPERATING FREQUENCY: 831,500,000 Hz  
 CHANNEL: 26865  
 REFERENCE VOLTAGE: 3.80 VDC  
 DEVIATION LIMIT: ± 0.00025 % or 2.5 ppm

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.80	+ 20 (Ref)	831,500,073	73	0.0000088
100 %		- 30	831,500,037	37	0.0000044
100 %		- 20	831,500,081	81	0.0000097
100 %		- 10	831,500,072	72	0.0000087
100 %		0	831,499,781	-219	-0.0000263
100 %		+ 10	831,500,130	130	0.0000156
100 %		+ 20	831,499,567	-433	-0.0000521
100 %		+ 30	831,500,008	8	0.0000010
100 %		+ 40	831,499,926	-74	-0.0000089
100 %		+ 50	831,499,944	-56	-0.0000067
BATT. ENDPOINT	3.40	+ 20	831,500,021	21	0.0000025

Table 7-14. Frequency Stability Data (Band 26)

FCC ID: ZNFLS675		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)			Reviewed by: Quality Manager
Test Report S/N: 0Y1511161951.ZNF	Test Dates: 10/12-10/16/2015, 11/17 - 11/27/2015	EUT Type: Portable Handset			Page 104 of 110

**Band 26 Frequency Stability Measurements**  
**§2.1055 §22.355**

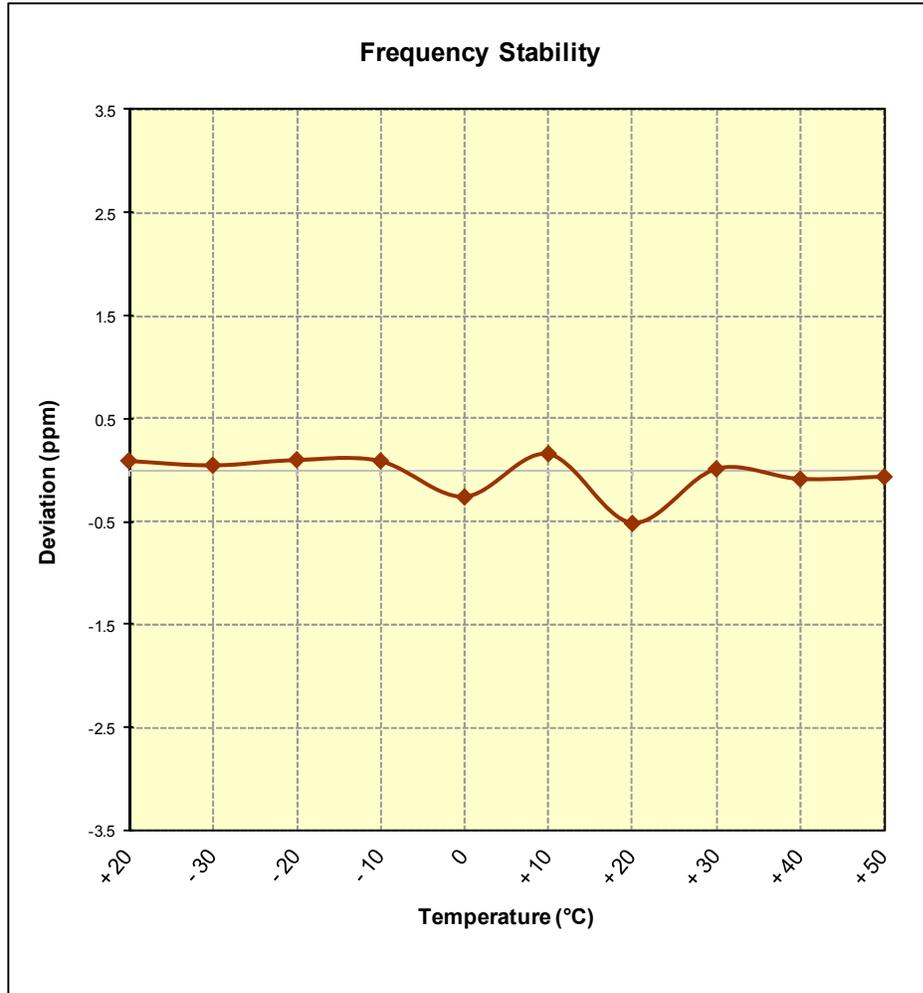

**Figure 7-8. Frequency Stability Graph (Band 26)**

FCC ID: ZNFLS675		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1511161951.ZNF	Test Dates: 10/12-10/16/2015, 11/17 - 11/27/2015	EUT Type: Portable Handset	Page 105 of 110	

## Band 25 Frequency Stability Measurements

§2.1055 §24.235

OPERATING FREQUENCY: 1,882,500,000 Hz  
 CHANNEL: 26365  
 REFERENCE VOLTAGE: 3.80 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.80	+ 20 (Ref)	1,882,499,750	-250	-0.0000133
100 %		- 30	1,882,500,013	13	0.0000007
100 %		- 20	1,882,499,904	-96	-0.0000051
100 %		- 10	1,882,499,771	-229	-0.0000122
100 %		0	1,882,500,098	98	0.0000052
100 %		+ 10	1,882,499,905	-95	-0.0000050
100 %		+ 20	1,882,500,300	300	0.0000159
100 %		+ 30	1,882,500,031	31	0.0000016
100 %		+ 40	1,882,499,605	-395	-0.0000210
100 %		+ 50	1,882,500,213	213	0.0000113
BATT. ENDPOINT	3.40	+ 20	1,882,500,093	93	0.0000049


**Table 7-15. Frequency Stability Data (Band 25)**

**Note:**

Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

FCC ID: ZNFLS675		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1511161951.ZNF	Test Dates: 10/12-10/16/2015, 11/17 - 11/27/2015	EUT Type: Portable Handset	Page 106 of 110	

**Band 25 Frequency Stability Measurements**  
**§2.1055 §24.235**

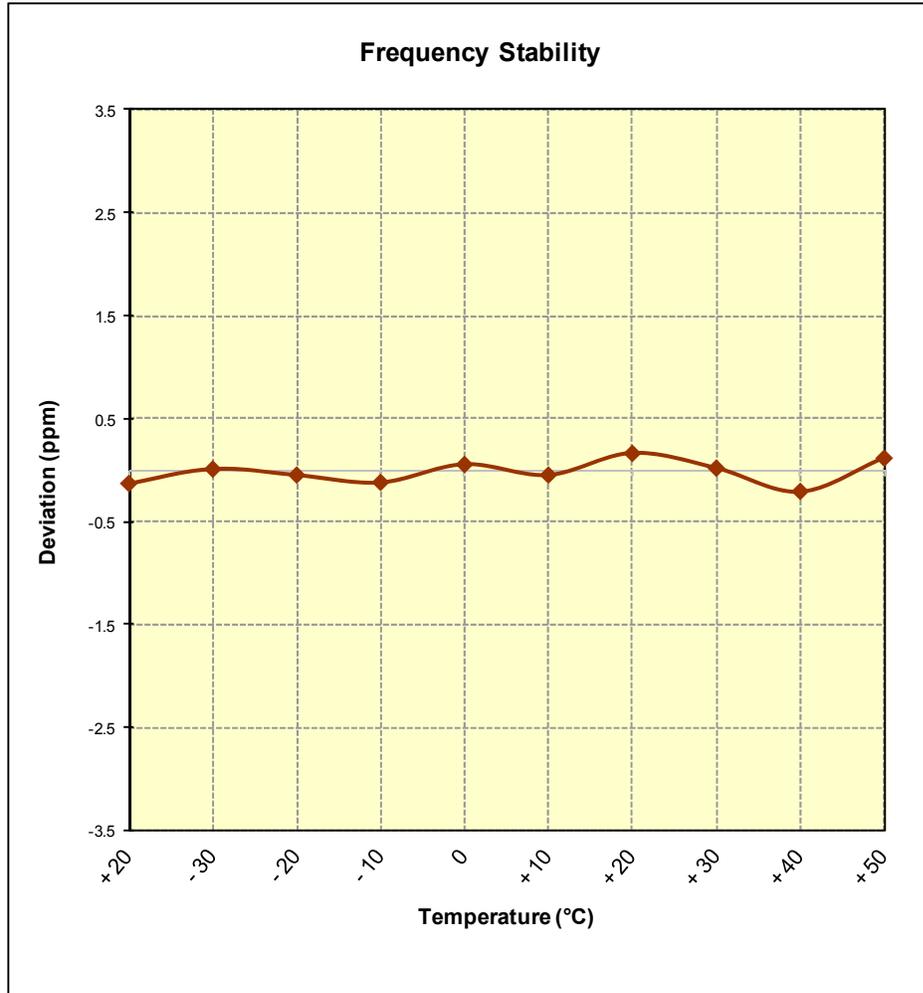

**Figure 7-9. Frequency Stability Graph (Band 25)**

FCC ID: ZNFLS675		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1511161951.ZNF	Test Dates: 10/12-10/16/2015, 11/17 - 11/27/2015	EUT Type: Portable Handset		Page 107 of 110

## Band 41 Frequency Stability Measurements

§2.1055 §27.54

OPERATING FREQUENCY: 2,593,000,000 Hz  
 CHANNEL: 40620  
 REFERENCE VOLTAGE: 3.80 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.80	+ 20 (Ref)	2,592,999,810	-190	-0.0000073
100 %		- 30	2,592,999,801	-199	-0.0000077
100 %		- 20	2,592,999,725	-275	-0.0000106
100 %		- 10	2,592,999,886	-114	-0.0000044
100 %		0	2,593,000,308	308	0.0000119
100 %		+ 10	2,593,000,007	7	0.0000003
100 %		+ 20	2,593,000,186	186	0.0000072
100 %		+ 30	2,592,999,848	-152	-0.0000059
100 %		+ 40	2,592,999,976	-24	-0.0000009
100 %		+ 50	2,592,999,971	-29	-0.0000011
BATT. ENDPOINT	3.40	+ 20	2,593,000,075	75	0.0000029


**Table 7-16. Frequency Stability Data (Band 41)**

**Note:**

Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

FCC ID: ZNFLS675		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1511161951.ZNF	Test Dates: 10/12-10/16/2015, 11/17 - 11/27/2015	EUT Type: Portable Handset	Page 108 of 110	

**Band 41 Frequency Stability Measurements**  
**§2.1055 §27.54**

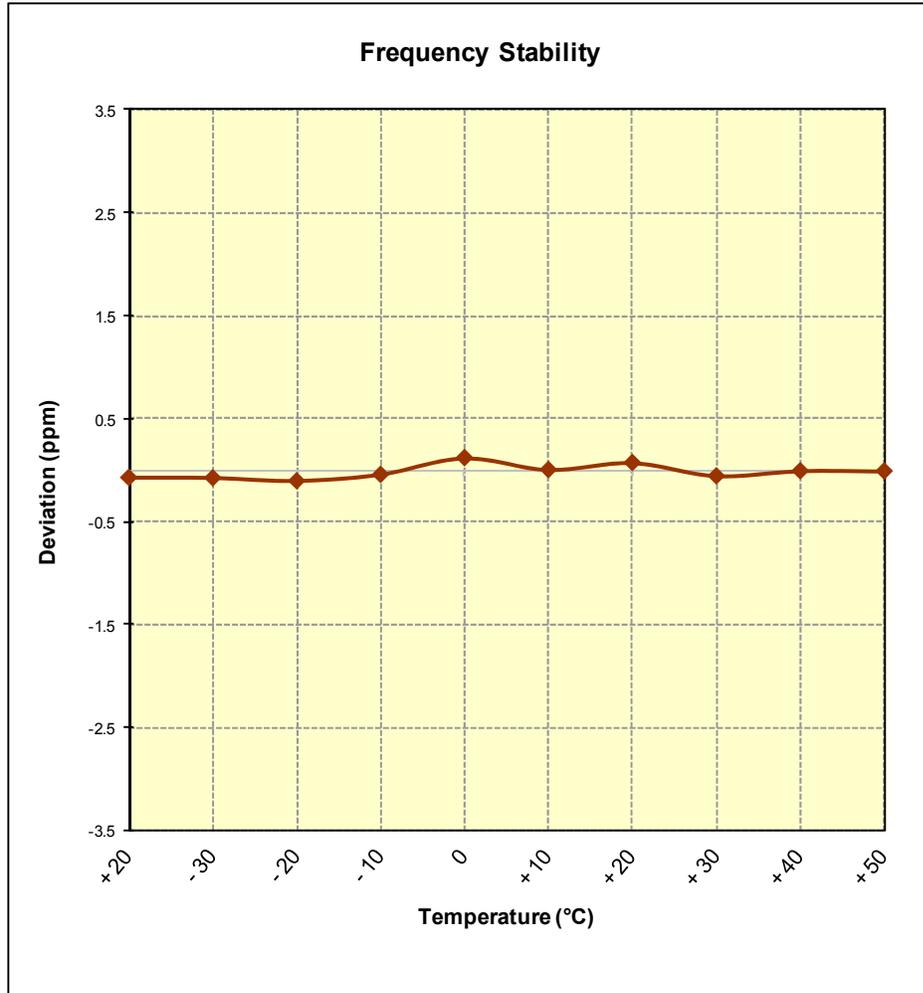

**Figure 7-10. Frequency Stability Graph (Band 41)**

FCC ID: ZNFLS675		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1511161951.ZNF	Test Dates: 10/12-10/16/2015, 11/17 - 11/27/2015	EUT Type: Portable Handset		Page 109 of 110

## 8.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the **LG Portable Handset FCC ID: ZNFLS675** complies with all the requirements of Parts 22, 24, & 27 of the FCC rules for LTE operation only.

FCC ID: ZNFLS675		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1511161951.ZNF	Test Dates: 10/12-10/16/2015, 11/17 - 11/27/2015	EUT Type: Portable Handset		Page 110 of 110