



PCTEST ENGINEERING LABORATORY, INC.

7185 Oakland Mills Road, Columbia, MD 21046 USA
Tel. 410.290.6652 / Fax 410.290.6654
http://www.pctestlab.com



MEASUREMENT REPORT FCC Part 24 LTE

Applicant Name:
LG Electronics MobileComm U.S.A
1000 Sylvan Avenue
Englewood Cliffs, NJ 07632
United States

Date of Testing:
January 21-31, 2013
Test Site/Location:
PCTEST Lab., Columbia, MD, USA
Test Report Serial No.:
0Y1301210120.ZNF

FCC ID :	ZNFLS720
APPLICANT:	LG ELECTRONICS MOBILECOMM U.S.A

FCC Classification: PCS Licensed Transmitter Held to Ear (PCE)
FCC Rule Part(s): §2; §24
EUT Type: Portable Handset
Model(s): LS720, LG-LS720, LGLS720, LG-VM720, VM720, LGVM720, L25L, LGL25L
Test Device Serial No.: *identical prototype* [S/N: 21JAN-9, 21JAN-10]

Mode	Tx Frequency (MHz)	Emission Designator	Modulation	ERP/EIRP	
				Max. Power (W)	Max. Power (dBm)
LTE Band 25	1851.5 - 1913.5	2M70G7W	QPSK	0.249	23.97
LTE Band 25	1851.5 - 1913.5	2M68W7W	16QAM	0.203	23.07
LTE Band 25	1852.5 - 1912.5	4M47G7W	QPSK	0.280	24.47
LTE Band 25	1852.5 - 1912.5	4M75W7W	16QAM	0.233	23.67
LTE Band 25	1855 - 1910	8M94G7W	QPSK	0.352	25.47
LTE Band 25	1855 - 1910	8M91W7W	16QAM	0.286	24.57

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in §2.947. Test results reported herein relate only to the item(s) tested. I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.


Randy Ortanez
President




FCC ID: ZNFLS720		FCC Pt. 24 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1301210120.ZNF	Test Dates: January 21-31, 2013	EUT Type: Portable Handset	Page 1 of 35	

T A B L E O F C O N T E N T S

FCC PART 24 MEASUREMENT REPORT.....		3
1.0 INTRODUCTION		4
1.1 SCOPE		4
1.2 TESTING FACILITY		4
2.0 PRODUCT INFORMATION.....		5
2.1 EQUIPMENT DESCRIPTION		5
2.2 DEVICE CAPABILITIES.....		5
2.3 EMI SUPPRESSION DEVICE(S)/MODIFICATIONS		5
2.4 LABELING REQUIREMENTS.....		5
3.0 DESCRIPTION OF TESTS		6
3.1 MEASUREMENT PROCEDURE		6
3.2 PCS - BASE FREQUENCY BLOCKS		6
3.3 PCS - MOBILE FREQUENCY BLOCKS.....		6
3.4 OCCUPIED BANDWIDTH		6
3.5 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL.....		6
3.6 PEAK-AVERAGE RATIO		7
3.7 SVLTE.....		7
3.8 RADIATED POWER AND RADIATED SPURIOUS EMISSIONS		8
3.9 FREQUENCY STABILITY / TEMPERATURE VARIATION		9
4.0 TEST EQUIPMENT CALIBRATION DATA		10
5.0 SAMPLE CALCULATIONS		11
6.0 TEST RESULTS.....		12
6.1 SUMMARY.....		12
6.2 EQUIVALENT ISOTROPIC RADIATED POWER (EIRP)		13
6.3 BAND 25 RADIATED SPURIOUS EMISSIONS		14
6.4 BAND 25 FREQUENCY STABILITY MEASUREMENTS.....		17
7.0 BAND 25 PLOTS OF EMISSIONS.....		19
8.0 CONCLUSION.....		35

FCC ID: ZNFLS720	 <small>ENGINEERING LABORATORY, INC.</small>	FCC Pt. 24 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1301210120.ZNF	Test Dates: January 21-31, 2013	EUT Type: Portable Handset		Page 2 of 35



MEASUREMENT REPORT

FCC Part 24





§2.1033 General Information

APPLICANT: LG Electronics MobileComm U.S.A
APPLICANT ADDRESS: 1000 Sylvan Avenue
 Englewood Cliffs, NJ 07632, United States
TEST SITE: PCTEST ENGINEERING LABORATORY, INC.
TEST SITE ADDRESS: 7185 Oakland Mills Road, Columbia, MD 21045 USA
FCC RULE PART(S): §2; §24
BASE MODEL: LS720
FCC ID: ZNFLS720
FCC CLASSIFICATION: PCS Licensed Transmitter Held to Ear (PCE)
FREQUENCY TOLERANCE: ±0.00025 % (2.5 ppm)
Test Device Serial No.: 21JAN-9, 21JAN-10 Production Pre-Production Engineering
DATE(S) OF TEST: January 21-31, 2013
TEST REPORT S/N: 0Y1301210120.ZNF

Test Facility / Accreditations

Measurements were performed at **PCTEST Engineering Lab. located in Columbia, MD 21045, U.S.A.**



- PCTEST facility is an FCC registered (PCTEST Reg. No. 159966) test facility with the site description report on file and has met all the requirements specified in Section 2.948 of the FCC Rules.
- PCTEST Lab is accredited to ISO 17025 by U.S. National Institute of Standards and Technology (NIST) under the National Voluntary Laboratory Accreditation Program (NVLAP Lab code: 100431-0) in EMC, FCC and Telecommunications.
- PCTEST Lab is accredited to ISO 17025-2005 by the American Association for Laboratory Accreditation (A2LA) in Specific Absorption Rate (SAR) testing, Hearing Aid Compatibility (HAC) testing, CTIA Test Plans, and wireless testing for FCC.
- PCTEST Lab is a recognized U.S. Conformity Assessment Body (CAB) in EMC and R&TTE (n.b. 0982) under the U.S.-EU Mutual Recognition Agreement (MRA).
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC Guide 65 by the American National Standards Institute (ANSI) in all scopes of FCC Rules and Industry Canada Standards (RSS).
- PCTEST is a CTIA Authorized Test Laboratory (CATL) for AMPS, CDMA, and EvDO wireless devices and for Over-the-Air (OTA) Antenna Performance testing for AMPS, CDMA, GSM, GPRS, EGPRS, UMTS (W-CDMA), CDMA 1xEVDO, and CDMA 1xRTT.

FCC ID: ZNFLS720		FCC Pt. 24 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1301210120.ZNF	Test Dates: January 21-31, 2013	EUT Type: Portable Handset	Page 3 of 35	

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EME) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Industry Canada Certification and Engineering Bureau.

1.2 Testing Facility

The map below shows the location of the PCTEST LABORATORY, its proximity to the FCC Laboratory, the Columbia vicinity, the Baltimore-Washington Intern't'l (BWI) airport, the city of Baltimore and the Washington, DC area. (See Figure 1-1).

These measurement tests were conducted at the PCTEST Engineering Laboratory, Inc. facility located at 7185 Oakland Mills Road, Columbia, MD 21046. The site coordinates are 39° 10'23" N latitude and 76° 49'50" W longitude. The facility is 0.4 miles North of the FCC laboratory, and the ambient signal and ambient signal strength are approximately equal to those of the FCC laboratory. The detailed description of the measurement facility was found to be in compliance with the requirements of § 2.948 according to ANSI C63.4-2003 on February 15, 2012.

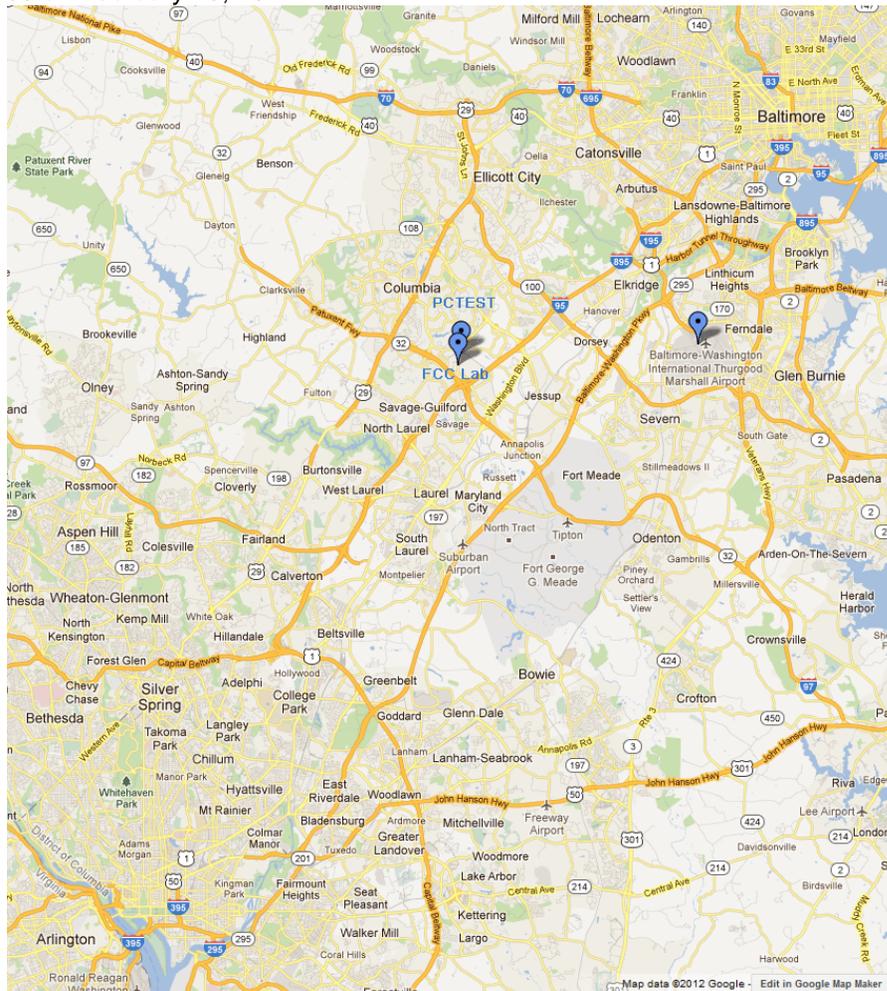


Figure 1-1. Map of the Greater Baltimore and Metropolitan Washington, D.C. area

FCC ID: ZNFLS720	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 24 LTE MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1301210120.ZNF	Test Dates: January 21-31, 2013	EUT Type: Portable Handset		Page 4 of 35

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **LG Portable Handset FCC ID: ZNFLS720**. The test data contained in this report pertains only to the emissions due to the EUT's LTE function.

2.2 Device Capabilities

This device contains the following capabilities:

850/1900 CDMA/EvDO Rev0/A (BC0, BC1, BC10), Band 25 LTE with 3/5/10 MHz BW, 802.11b/g/n WLAN, Bluetooth (1x,EDR, LE), NFC

2.3 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

2.4 Labeling Requirements

Per 2.925

The FCC identifier shall be permanently affixed to the equipment and shall be readily visible to the purchaser at the time of purchase.

FCC ID: ZNFLS720		FCC Pt. 24 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1301210120.ZNF	Test Dates: January 21-31, 2013	EUT Type: Portable Handset		Page 5 of 35

the emission bandwidth of the fundamental emission of the transmitter may be employed for PCS band,. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.

3.6 Peak-Average Ratio

§24.232(d)

A peak to average ratio measurement is performed at the conducted port of the EUT. For LTE signals, the spectrum analyzers Complementary Cumulative Distribution Function (CCDF) measurement profile is used to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth. The CCDF curve shows how much time the peak waveform spends at or above a given average power level. The percent of time the signal spends at or above the level defines the probability for that particular power level.

3.7 SVLTE

§2.1053 §24.238(a) RSS-133(6.5.1)

This device is capable of operating in SVLTE mode in the following cases:

	Capable Transmit Configurations	Notes
1	CDMA BC0 Voice + LTE B25	SVLTE
2	CDMA BC1 Voice + LTE B25	SVLTE
3	CDMA BC10 Voice + LTE B25	SVLTE

Table 3-1. SVLTE Transmit Configurations

All modes of SVLTE operation were investigated. It was determined that this device did not produce any intermodulation products that were within 25dB of the spurious emission limit so the emissions are not reported herein.

FCC ID: ZNFLS720	 FCC Pt. 24 LTE MEASUREMENT REPORT (CERTIFICATION) 		Reviewed by: Quality Manager
Test Report S/N: 0Y1301210120.ZNF	Test Dates: January 21-31, 2013	EUT Type: Portable Handset	Page 7 of 35

3.8 Radiated Power and Radiated Spurious Emissions

§2.1053

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. For measurements above 1GHz absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections. For measurements below 1GHz, the absorbers are removed. An ETS Lindgren Model 2188 raised turntable is used for radiated measurement. It is a continuously rotatable, remote-controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. A 78cm high PVC support structure is placed on top of the turntable. A ¾" (~1.9cm) sheet of high density polyethylene is used as the table top and is placed on top of the PVC supports to bring the total height of the table to 80cm.

The equipment under test was transmitting while connected to its integral antenna and is placed on a wooden turntable 80cm above the ground plane and 3 meters from the receive antenna. The receive antenna height is adjusted between 1 and 4 meter height, the turntable is rotated through 360 degrees, and the EUT is manipulated through all orthogonal planes representative of its typical use to achieve the highest reading on the receive spectrum analyzer. Radiated power levels are also investigated with the receive antenna horizontally and vertically polarized. The maximized power level is recorded using the spectrum analyzer "Channel Power" function with the integration band set to the emissions' occupied bandwidth, a RMS detector, RBW = 100kHz, VBW = 300kHz, and a 1 second sweep time over a minimum of 10 sweeps, per the guidelines of KDB 971168.

Per the guidance of ANSI/TIA-603-C-2004, a half-wave dipole is then substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator with the level of the signal generator being adjusted to obtain the same receive spectrum analyzer level previously recorded from the spurious emission from the EUT. The power of the emission is calculated using the following formula:

$$P_d \text{ [dBm]} = P_g \text{ [dBm]} - \text{cable loss} \text{ [dB]} + \text{antenna gain} \text{ [dBd/dBi]}$$

Where, P_d is the dipole equivalent power, P_g is the generator output into the substitution antenna, and the antenna gain is the gain of the substitute antenna used relative to either a half-wave dipole (dBd) or an isotropic source (dBi). The substitute level is equal to $P_g \text{ [dBm]} - \text{cable loss} \text{ [dB]}$.

FCC ID: ZNFLS720	 FCC Pt. 24 LTE MEASUREMENT REPORT (CERTIFICATION)			Reviewed by: Quality Manager
Test Report S/N: 0Y1301210120.ZNF	Test Dates: January 21-31, 2013	EUT Type: Portable Handset		Page 8 of 35

3.9 Frequency Stability / Temperature Variation

§2.1055

The frequency stability of the transmitter is measured by:

- a.) **Temperature:** The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
- b.) **Primary Supply Voltage:** The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

Specification – The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block for Part 24 and 27. The frequency stability of the transmitter shall be maintained within ±0.00025% (±2.5 ppm) of the center frequency for Part 22.

Time Period and Procedure:

1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
2. The equipment is turned on in a “standby” condition for one minute before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A sufficient stabilization period at each temperature shall be used prior to each frequency requirement.

FCC ID: ZNFLS720	 FCC Pt. 24 LTE MEASUREMENT REPORT (CERTIFICATION)			Reviewed by: Quality Manager
Test Report S/N: 0Y1301210120.ZNF	Test Dates: January 21-31, 2013	EUT Type: Portable Handset	Page 9 of 35	

4.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST).

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
-	LTx1	Licensed Transmitter Cable Set	1/17/2013	Annual	1/17/2014	N/A
-	RE1	Radiated Emissions Cable Set (UHF/EHF)	7/10/2012	Annual	7/10/2013	N/A
-	RE2	Radiated Emissions Cable Set (VHF/UHF)	2/13/2012	Annual	2/13/2013	N/A
-	LTx2	Licensed Transmitter Cable Set	1/17/2013	Annual	1/17/2014	N/A
Agilent	N9020A	MXA Signal Analyzer	10/9/2012	Annual	10/9/2013	US46470561
Agilent	N9030A	PXA Signal Analyzer (26.5GHz)	2/23/2012	Annual	2/23/2013	MY49432391
Espec	ESX-2CA	Environmental Chamber	4/4/2012	Annual	4/4/2013	17620
ETS Lindgren	3117	1-18 GHz DRG Horn (Medium)	7/22/2011	Biennial	7/22/2013	125518
ETS Lindgren	3160-09	18-26.5 GHz Standard Gain Horn	5/30/2012	Biennial	5/30/2014	135427
ETS Lindgren	3164-08	Quad Ridge Horn Antenna	11/7/2012	Biennial	11/7/2014	128338
Mini-Circuits	VHF-1200+	High Pass Filter	1/17/2013	Annual	1/17/2014	30923
Mini-Circuits	VHF-3100+	High Pass Filter	1/17/2013	Annual	1/17/2014	30841
Mini-Circuits	SSG-4000HP	Signal Generator	12/1/2012	Annual	12/1/2013	11208010032
Mini-Circuits	PWR-SEN-4RMS	USB Power Sensor	12/1/2012	Annual	12/1/2013	11210140001
Rohde & Schwarz	TS-PR18	1-18 GHz Pre-Amplifier	6/26/2012	Annual	6/26/2013	100071
Rohde & Schwarz	TS-PR26	18-26.5 GHz Pre-Amplifier	5/30/2012	Annual	5/30/2013	100040
Rohde & Schwarz	ESU26	EMI Test Receiver	2/15/2012	Annual	2/15/2013	100342
Rohde & Schwarz	CMW500	LTE Radio Communication Tester	3/5/2012	Annual	3/5/2013	102060
Schwarzbeck	UHA 9105	Dipole Antenna (400 - 1GHz) Rx	11/14/2011	Biennial	11/14/2013	9105-2404
Schwarzbeck	UHA 9105	Dipole Antenna (400 - 1GHz) Tx	11/14/2011	Biennial	11/14/2013	9105-2403
Seekonk	NC-100	Torque Wrench (8" lb)	3/5/2012	Triennial	3/5/2015	N/A
Sunol	JB5	Bi-Log Antenna (30M - 5GHz)	1/26/2012	Biennial	1/26/2014	A051107

Table 4-1. Test Equipment

FCC ID: ZNFLS720		FCC Pt. 24 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1301210120.ZNF	Test Dates: January 21-31, 2013	EUT Type: Portable Handset	Page 10 of 35	

5.0 SAMPLE CALCULATIONS

Emission Designator

QPSK Modulation

Emission Designator = 8M62G7D

LTE BW = 8.62 MHz
 G = Phase Modulation
 7 = Quantized/Digital Info
 D = Amplitude/Angle Modulated

16QAM Modulation

Emission Designator = 8M45W7D

LTE BW = 8.45 MHz
 W = Amplitude/Angle Modulated
 7 = Quantized/Digital Info
 D = Combination (Audio/Data)

Spurious Radiated Emission – LTE Band

Example: Middle Channel LTE Mode 2nd Harmonic (1564 MHz)

The average spectrum analyzer reading at 3 meters with the EUT on the turntable was -81.0 dBm. The gain of the substituted antenna is 8.1 dBi. The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of -81.0 dBm on the spectrum analyzer. The loss of the cable between the signal generator and the terminals of the substituted antenna is 2.0 dB at 1564 MHz. So 6.1 dB is added to the signal generator reading of -30.9 dBm yielding -24.80 dBm. The fundamental EIRP was 25.501 dBm so this harmonic was 25.501 dBm - (-24.80).

FCC ID: ZNFLS720	 FCC Pt. 24 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1301210120.ZNF	Test Dates: January 21-31, 2013	EUT Type: Portable Handset	Page 11 of 35

6.0 TEST RESULTS

6.1 Summary

Company Name: LG Electronics MobileComm U.S.A
 FCC ID: ZNFLS720
 FCC Classification: PCS Licensed Transmitter Held to Ear (PCE)
 Mode(s): LTE

FCC Part Section(s)	RSS Section(s)	Test Description	Test Limit	Test Condition	Result	Reference
TRANSMITTER MODE (TX)						
2.1049	RSS-133(2.3)	Occupied Bandwidth	N/A	CONDUCTED	PASS	Section 7.0
2.1051 24.238(a)	RSS-133(6.5.1)	Band Edge / Conducted Spurious Emissions	< 43 + 10log ₁₀ (P[Watts]) at Band Edge and for all out-of-band emissions		PASS	Section 7.0
24.232(d)	RSS-133(6.4)	Peak-Average Ratio	< 13 dB		PASS	Section 7.0
2.1046	RSS-133(4.1)	Transmitter Conducted Output Power	N/A		PASS	See RF Exposure Report
24.232(c)	RSS-133(6.4) [SRSP-510 (5.1.2)]	Equivalent Isotropic Radiated Power (Band 25)	< 2 Watts max. EIRP	RADIATED	PASS	Section 6.2
2.1053 24.238(a)	RSS-133(6.5.1)	Undesirable Emissions	< 43 + 10log ₁₀ (P[Watts]) for all out-of-band emissions		PASS	Section 6.3
2.1055.24.235	RSS-133(6.3)	Frequency Stability	fundamental emissions stay within authorized frequency block (Part 24)		PASS	Section 6.4

Table 6-1. Summary of Test Results

Notes:

- 1) All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots shown in Section 7.0 were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables, directional couplers, and attenuators used as part of the system to maintain a link between the call box and the EUT at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables, attenuators, and couplers.

FCC ID: ZNFLS720		FCC Pt. 24 LTE MEASUREMENT REPORT (CERTIFICATION)			Reviewed by: Quality Manager
Test Report S/N: 0Y1301210120.ZNF	Test Dates: January 21-31, 2013	EUT Type: Portable Handset			Page 12 of 35

6.2 Equivalent Isotropic Radiated Power (EIRP)

§24.232(c) RSS-133(6.4)

Frequency [MHz]	Channel Bandwidth [MHz]	Mod.	Battery	RB Size/Offset	Substitute Level [dBm]	Antenna Gain [dBi]	Pol [H/V]	EIRP [dBm]	EIRP [Watts]	Margin [dB]
1851.50	3	QPSK	Standard	1 / 0	14.38	9.59	H	23.97	0.249	-9.04
1882.50	3	QPSK	Standard	1 / 0	14.18	9.53	H	23.71	0.235	-9.30
1913.50	3	QPSK	Standard	1 / 14	13.78	9.47	H	23.25	0.211	-9.76
1851.50	3	16-QAM	Standard	1 / 0	13.48	9.59	H	23.07	0.203	-9.94
1882.50	3	16-QAM	Standard	1 / 0	13.38	9.53	H	22.91	0.195	-10.10
1913.50	3	16-QAM	Standard	1 / 14	12.68	9.47	H	22.15	0.164	-10.86
1852.50	5	QPSK	Standard	1 / 0	14.88	9.59	H	24.47	0.280	-8.54
1882.50	5	QPSK	Standard	1 / 0	14.48	9.53	H	24.01	0.251	-9.00
1912.50	5	QPSK	Standard	1 / 24	13.58	9.47	H	23.05	0.202	-9.96
1852.50	5	16-QAM	Standard	1 / 0	14.08	9.59	H	23.67	0.233	-9.34
1882.50	5	16-QAM	Standard	1 / 0	13.68	9.53	H	23.21	0.209	-9.80
1912.50	5	16-QAM	Standard	1 / 24	12.88	9.47	H	22.35	0.172	-10.66
1855.00	10	QPSK	Standard	1 / 0	15.88	9.59	H	25.47	0.352	-7.54
1882.50	10	QPSK	Standard	1 / 0	14.98	9.53	H	24.51	0.282	-8.50
1910.00	10	QPSK	Standard	1 / 0	14.38	9.47	H	23.85	0.243	-9.16
1855.00	10	16-QAM	Standard	1 / 0	14.98	9.59	H	24.57	0.286	-8.44
1882.50	10	16-QAM	Standard	1 / 0	14.18	9.53	H	23.71	0.235	-9.30
1910.00	10	16-QAM	Standard	1 / 0	12.88	9.47	H	22.35	0.172	-10.66

Table 6-2. EIRP Data (Band 25)

NOTES:

1. This device was tested under all modulations, RB configurations, and channel bandwidths. The maximum EIRP is reported above.
2. This unit was tested with its standard battery.
3. The worst case test configuration was found in the horizontal setup.

FCC ID: ZNFLS720		FCC Pt. 24 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1301210120.ZNF	Test Dates: January 21-31, 2013	EUT Type: Portable Handset	Page 13 of 35	

6.3 Band 25 Radiated Spurious Emissions §2.1053 §24.238(a) RSS-133(6.5.1)

Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 1855.00 MHz
 MEASURED OUTPUT POWER: 25.47 dBm = 0.352 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 10 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10}(W) =$ 38.47 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
3710.00	-47.82	8.40	-39.42	H	64.89
5565.00	-52.62	10.63	-42.00	H	67.46
7420.00	-51.18	11.84	-39.35	H	64.82
9275.00	-49.42	13.29	-36.13	H	61.60
11130.00	-34.98	13.50	-21.48	H	46.95
12985.00	-75.46	13.68	-61.79	H	87.25

Table 6-3. Radiated Spurious Data

NOTES:

1. This device was tested under all modulations, RB sizes and offsets, and channel bandwidth configurations and the worst case emissions are reported with QPSK, 1RB, zero offset, and 10MHz Bandwidth.
2. This unit was tested with its standard battery.
3. The worst case test configuration was found in the horizontal setup.

FCC ID: ZNFLS720		FCC Pt. 24 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1301210120.ZNF	Test Dates: January 21-31, 2013	EUT Type: Portable Handset		Page 14 of 35

Band 25 Radiated Spurious Measurements (continued)
§2.1053 §24.238(a) RSS-133(6.5.1)

Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 1882.50 MHz
 MEASURED OUTPUT POWER: 24.51 dBm = 0.282 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 10 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 37.51 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
3765.00	-49.95	8.44	-41.52	H	66.02
5647.50	-51.35	10.66	-40.69	H	65.20
7530.00	-42.07	11.94	-30.13	H	54.64
9412.50	-47.62	13.23	-34.38	H	58.89
11295.00	-38.88	13.48	-25.40	H	49.90
13177.50	-75.32	13.84	-61.48	H	85.99

Table 6-4. Radiated Spurious Data

NOTES:

1. This device was tested under all modulations, RB sizes and offsets, and channel bandwidth configurations and the worst case emissions are reported with QPSK, 1RB, zero offset, and 10MHz Bandwidth.
1. This unit was tested with its standard battery.
2. The worst case test configuration was found in the horizontal setup.

FCC ID: ZNFLS720		FCC Pt. 24 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1301210120.ZNF	Test Dates: January 21-31, 2013	EUT Type: Portable Handset	Page 15 of 35	

Band 25 Radiated Spurious Measurements (continued)
§2.1053 §24.238(a) RSS-133(6.5.1)

Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 1910.00 MHz
 MEASURED OUTPUT POWER: 23.85 dBm = 0.243 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 10 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 36.85 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
3820.00	-48.35	8.57	-39.78	H	63.63
5730.00	-50.96	10.69	-40.27	H	64.12
7640.00	-38.84	12.07	-26.77	H	50.62
9550.00	-46.47	13.20	-33.27	H	57.12
11460.00	-36.01	13.42	-22.59	H	46.44
13370.00	-75.24	14.04	-61.20	H	85.05

Table 6-5. Radiated Spurious Data

NOTES:

1. This device was tested under all modulations, RB sizes and offsets, and channel bandwidth configurations and the worst case emissions are reported with QPSK, 1RB, zero offset, and 10MHz Bandwidth.
1. This unit was tested with its standard battery.
2. The worst case test configuration was found in the horizontal setup.

FCC ID: ZNFLS720		FCC Pt. 24 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1301210120.ZNF	Test Dates: January 21-31, 2013	EUT Type: Portable Handset	Page 16 of 35	

6.4 Band 25 Frequency Stability Measurements

§2.1055 §22.355 §24.229 §24.235 RSS-133(6.3)

OPERATING FREQUENCY: 1,882,500,000 Hz

CHANNEL: 26365

REFERENCE VOLTAGE: 3.8 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.80	+ 20 (Ref)	1,882,500,017	17	0.000001
100 %		- 30	1,882,500,023	23	0.000001
100 %		- 20	1,882,500,031	31	0.000002
100 %		- 10	1,882,500,015	15	0.000001
100 %		0	1,882,500,017	17	0.000001
100 %		+ 10	1,882,500,017	17	0.000001
100 %		+ 20	1,882,500,021	21	0.000001
100 %		+ 30	1,882,500,027	27	0.000001
100 %		+ 40	1,882,500,021	21	0.000001
100 %		+ 50	1,882,500,025	25	0.000001
115 %	4.37	+ 20	1,882,500,025	25	0.000001
85 %	3.23	+ 20	1,882,500,019	19	0.000001

Table 6-6. Frequency Stability Data (Band 25)

Note:

Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

FCC ID: ZNFLS720		FCC Pt. 24 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1301210120.ZNF	Test Dates: January 21-31, 2013	EUT Type: Portable Handset	Page 17 of 35	

Band 25 Frequency Stability Measurements (Cont'd)
§2.1055 §22.355 §24.229 §24.235 RSS-133(6.3)


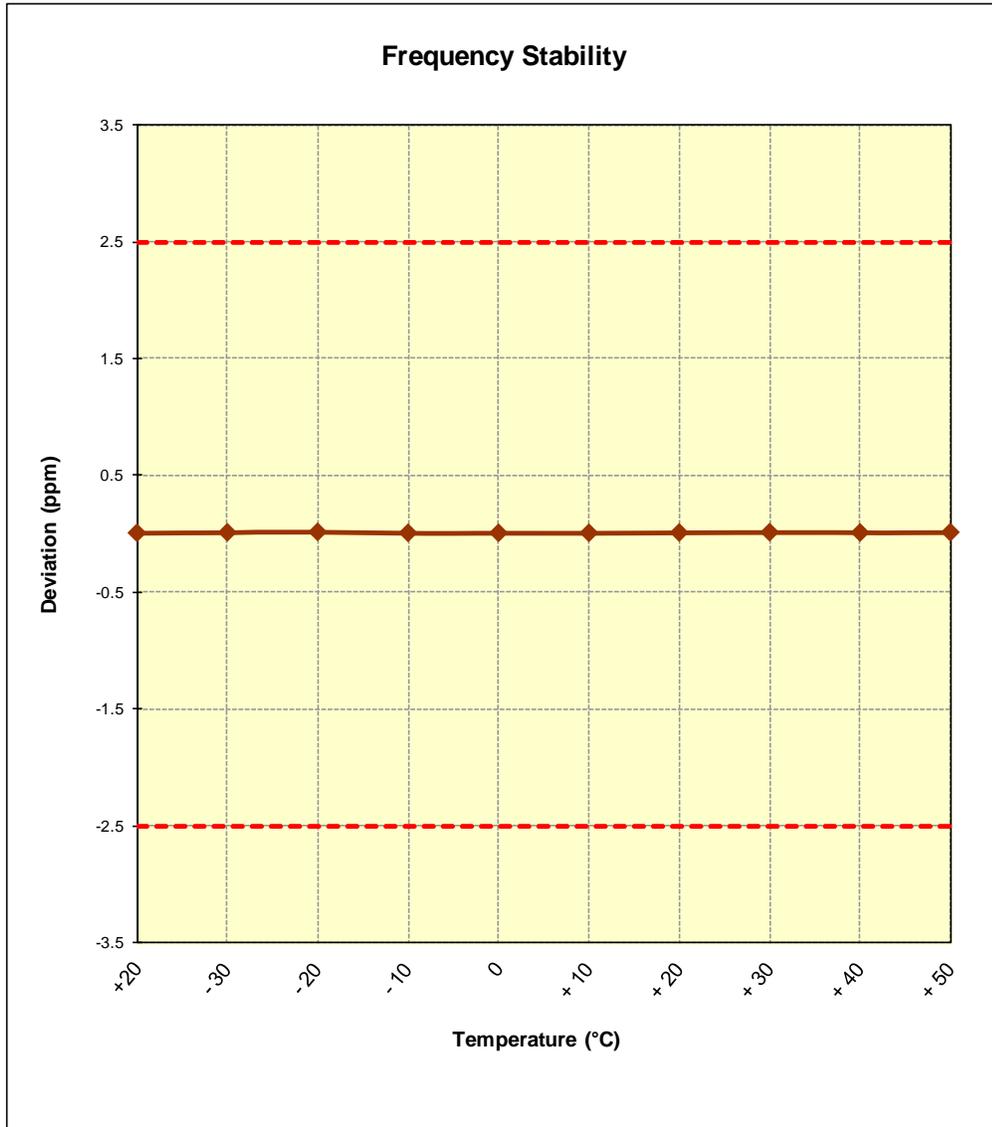


Figure 6-1. Frequency Stability Graph (Band 25)

FCC ID: ZNFLS720		FCC Pt. 24 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1301210120.ZNF	Test Dates: January 21-31, 2013	EUT Type: Portable Handset		Page 18 of 35




Plot 7-2. Lower Extended Band Edge Plot (3.0MHz QPSK – RB Size 15)

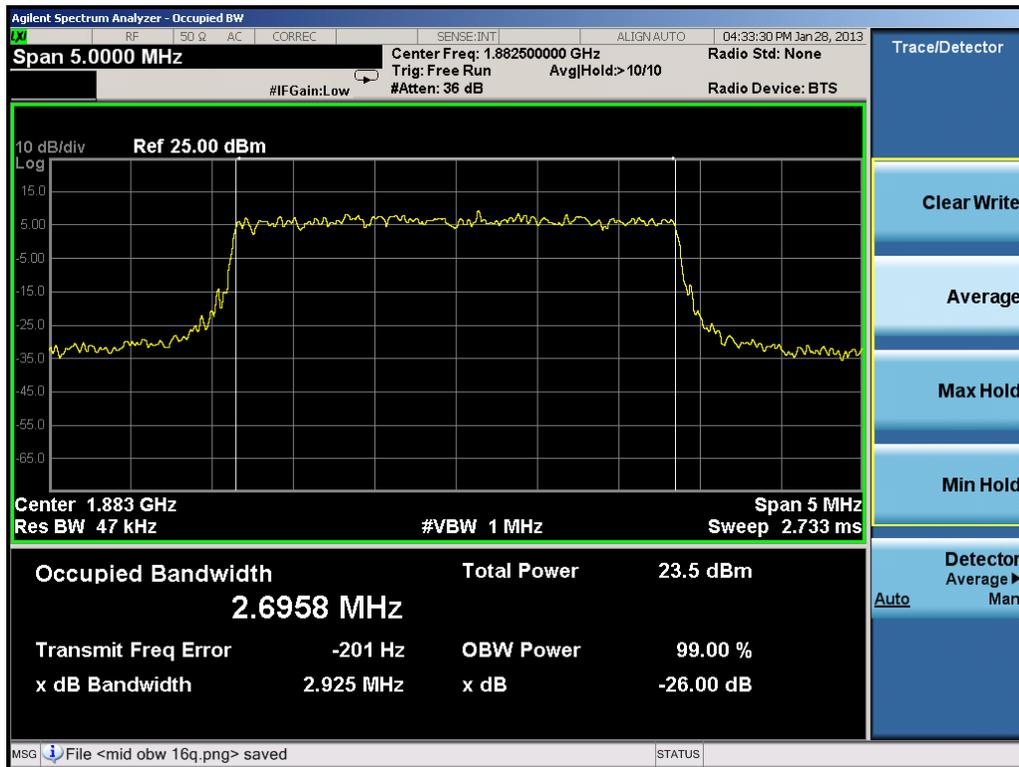

Plot 7-3. Occupied Bandwidth Plot (3.0MHz QPSK – RB Size 15)

FCC ID: ZNFLS720		FCC Pt. 24 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1301210120.ZNF	Test Dates: January 21-31, 2013	EUT Type: Portable Handset		Page 20 of 35

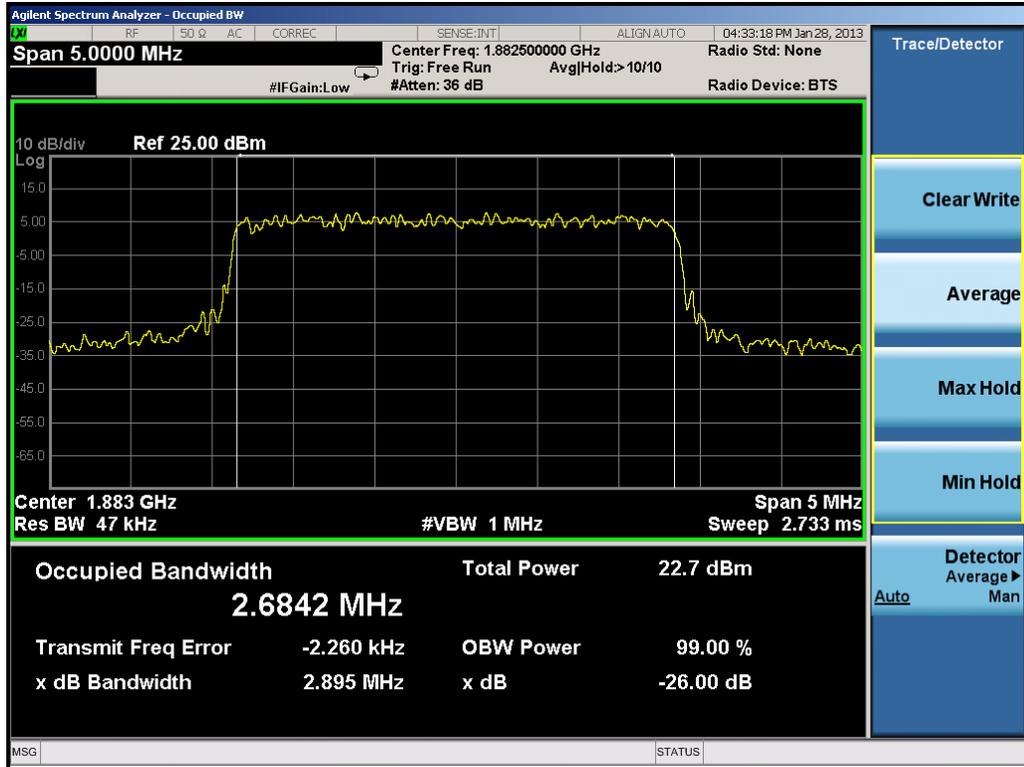

Plot 7-4. Occupied Bandwidth Plot (3.0MHz 16-QAM – RB Size 15)




Plot 7-5. Upper Band Edge Plot (3.0MHz QPSK – RB Size 15)

FCC ID: ZNFLS720		FCC Pt. 24 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1301210120.ZNF	Test Dates: January 21-31, 2013	EUT Type: Portable Handset		Page 21 of 35




Plot 7-6. Upper Extended Band Edge Plot (3.0MHz QPSK – RB Size 15)

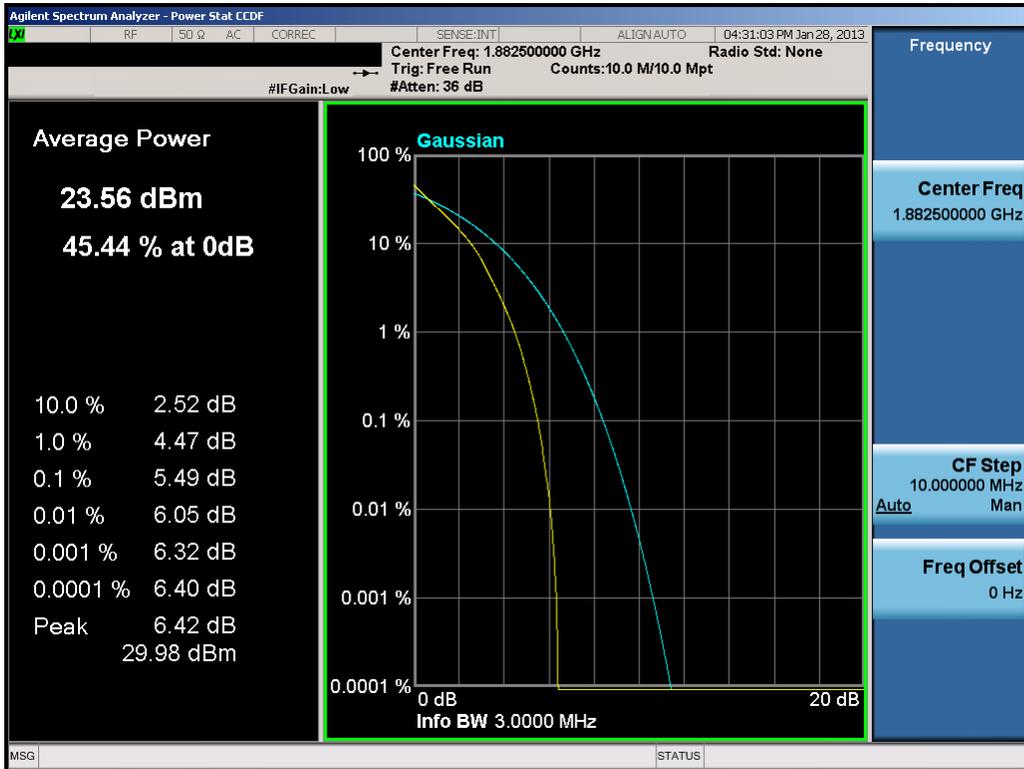


Plot 7-7. PAR Plot (3.0MHz QPSK – RB Size 15)

FCC ID: ZNFLS720		FCC Pt. 24 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1301210120.ZNF	Test Dates: January 21-31, 2013	EUT Type: Portable Handset		Page 22 of 35

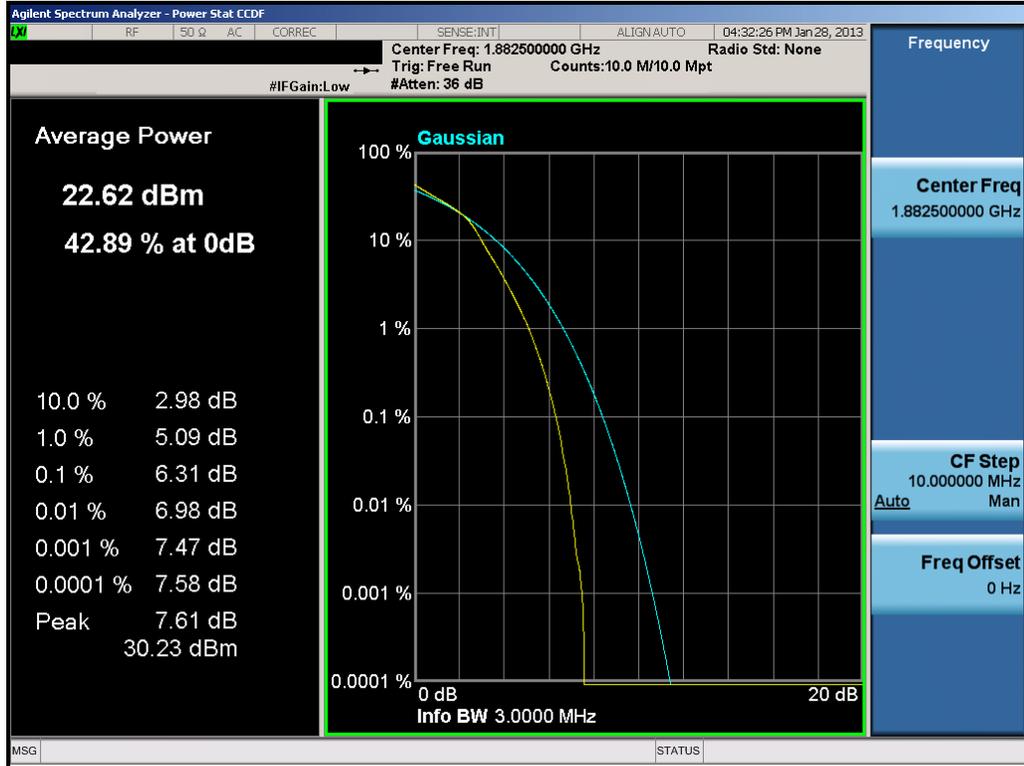

Plot 7-8. PAR Plot (3.0MHz 16-QAM – RB Size 15)

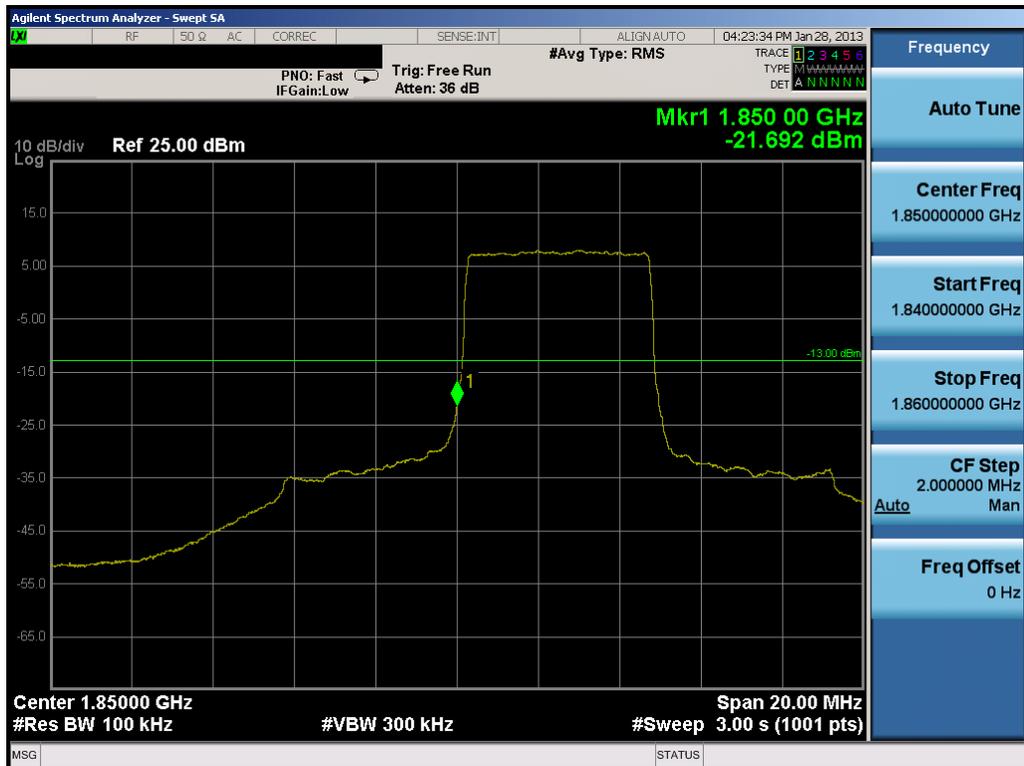


Plot 7-9. Lower Band Edge Plot (5.0MHz QPSK – RB Size 25)

FCC ID: ZNFLS720		FCC Pt. 24 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1301210120.ZNF	Test Dates: January 21-31, 2013	EUT Type: Portable Handset		Page 23 of 35



Plot 7-10. Lower Extended Band Edge Plot (5.0MHz QPSK – RB Size 25)

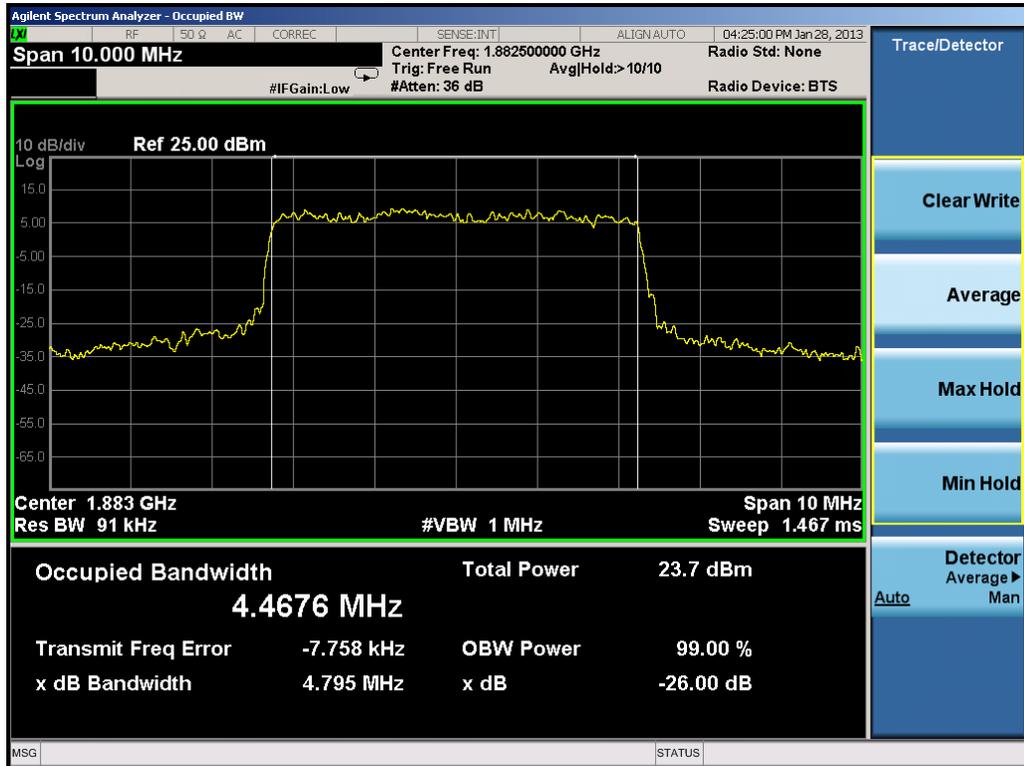


Plot 7-11. Occupied Bandwidth Plot (5.0MHz QPSK – RB Size 25)

FCC ID: ZNFLS720		FCC Pt. 24 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1301210120.ZNF	Test Dates: January 21-31, 2013	EUT Type: Portable Handset		Page 24 of 35




Plot 7-14. Upper Extended Band Edge Plot (5.0MHz QPSK – RB Size 25)

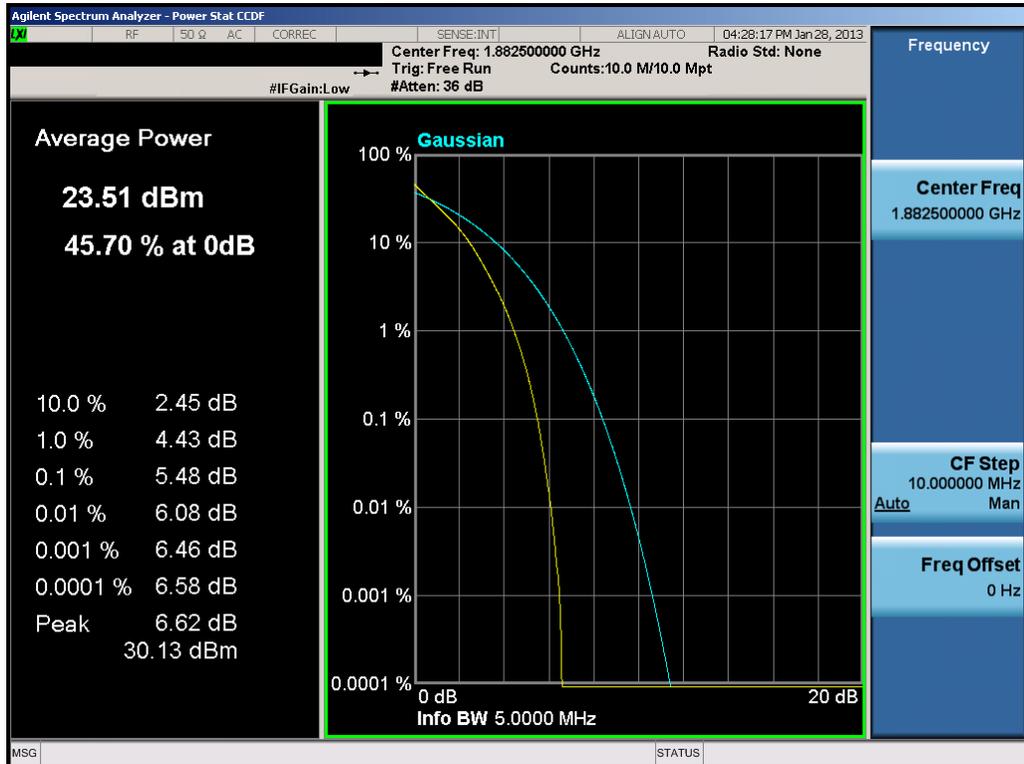


Plot 7-15. PAR Plot (5.0MHz QPSK – RB Size 25)

FCC ID: ZNFLS720		FCC Pt. 24 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1301210120.ZNF	Test Dates: January 21-31, 2013	EUT Type: Portable Handset		Page 26 of 35

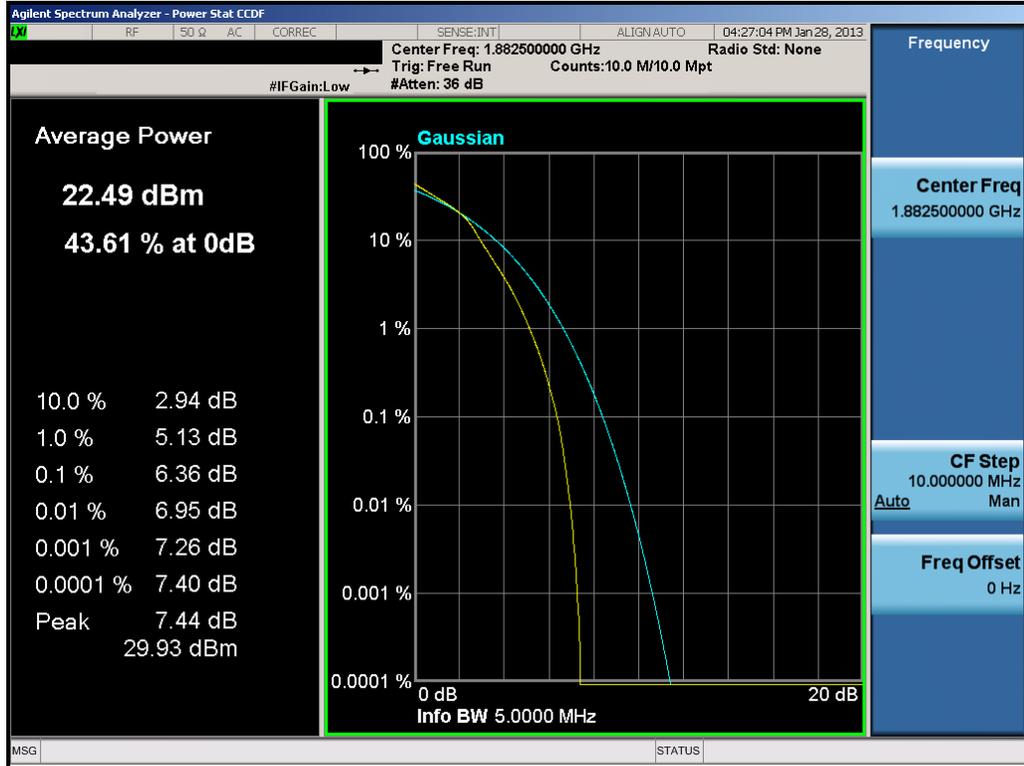

Plot 7-16. PAR Plot (5.0MHz 16-QAM – RB Size 25)

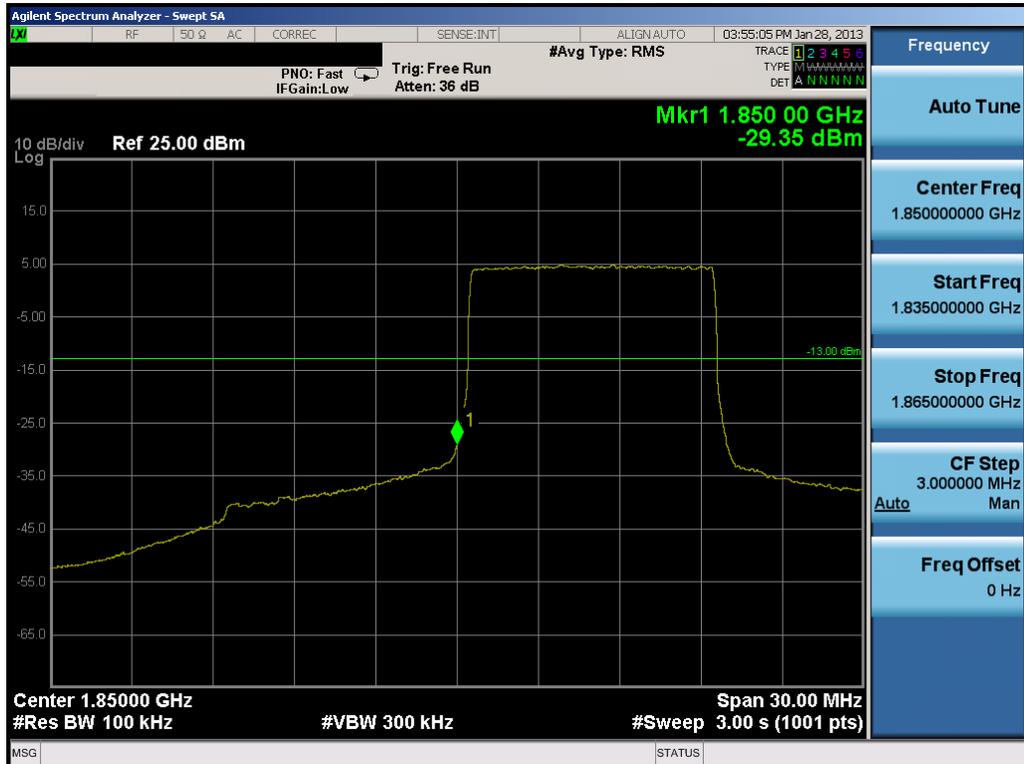


Plot 7-17. Lower Band Edge Plot (10.0MHz QPSK – RB Size 50)

FCC ID: ZNFLS720		FCC Pt. 24 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1301210120.ZNF	Test Dates: January 21-31, 2013	EUT Type: Portable Handset		Page 27 of 35




Plot 7-18. Lower Extended Band Edge Plot (10.0MHz QPSK – RB Size 50)

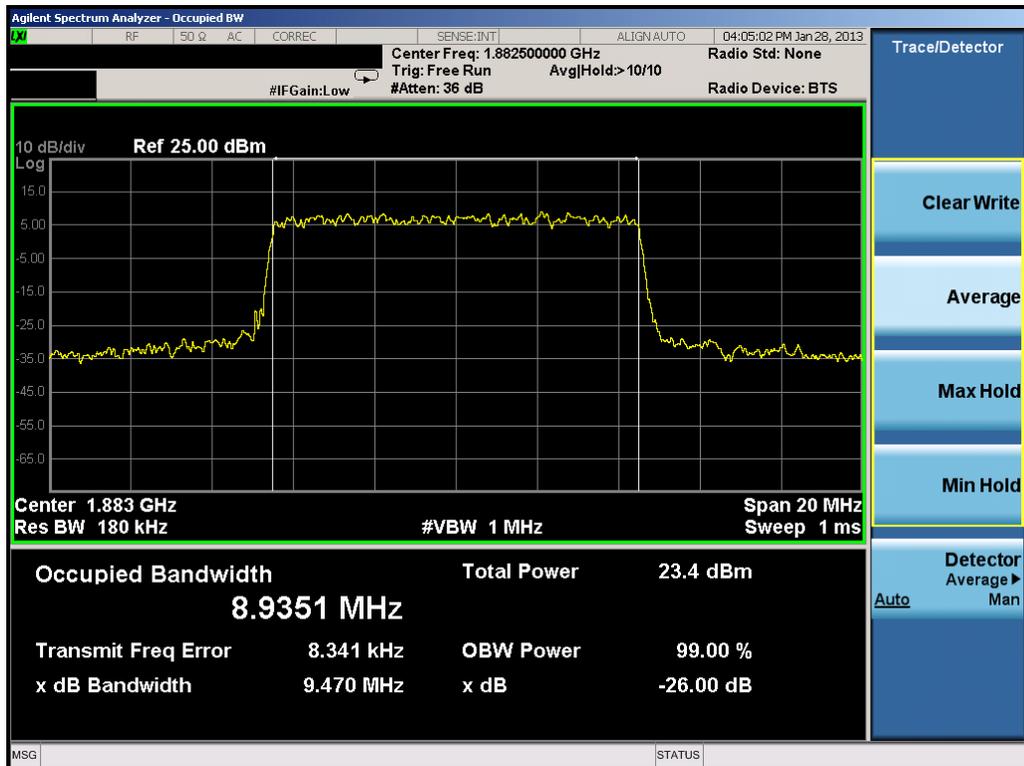


Plot 7-19. Occupied Bandwidth Plot (10.0MHz QPSK – RB Size 50)

FCC ID: ZNFLS720		FCC Pt. 24 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1301210120.ZNF	Test Dates: January 21-31, 2013	EUT Type: Portable Handset		Page 28 of 35

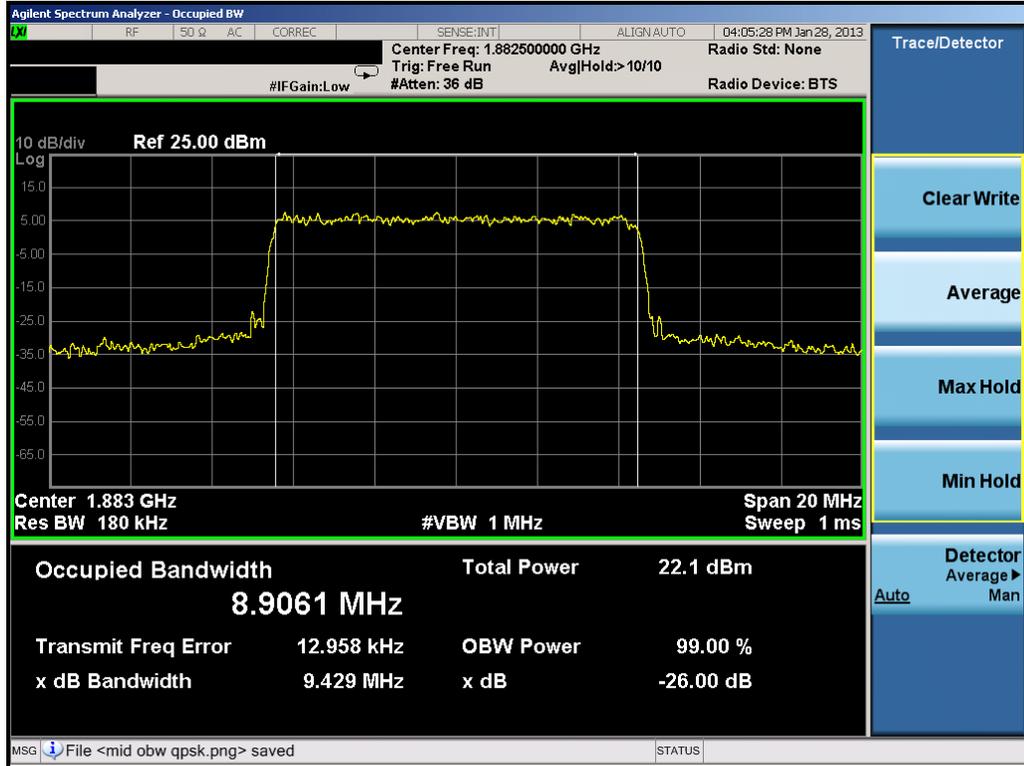


Plot 7-20. Occupied Bandwidth Plot (10.0MHz 16-QAM – RB Size 50)

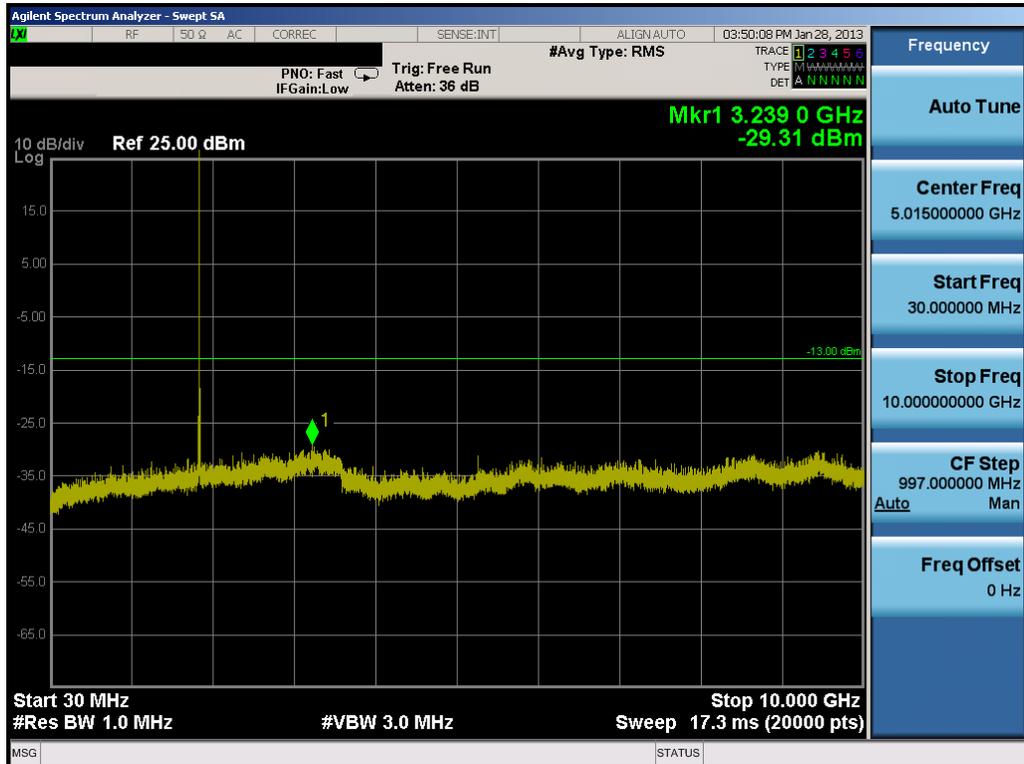


Plot 7-21. Conducted Spurious Plot (10.0MHz QPSK – RB Size 1, RB Offset 0– Low Channel)

FCC ID: ZNFLS720		FCC Pt. 24 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1301210120.ZNF	Test Dates: January 21-31, 2013	EUT Type: Portable Handset		Page 29 of 35

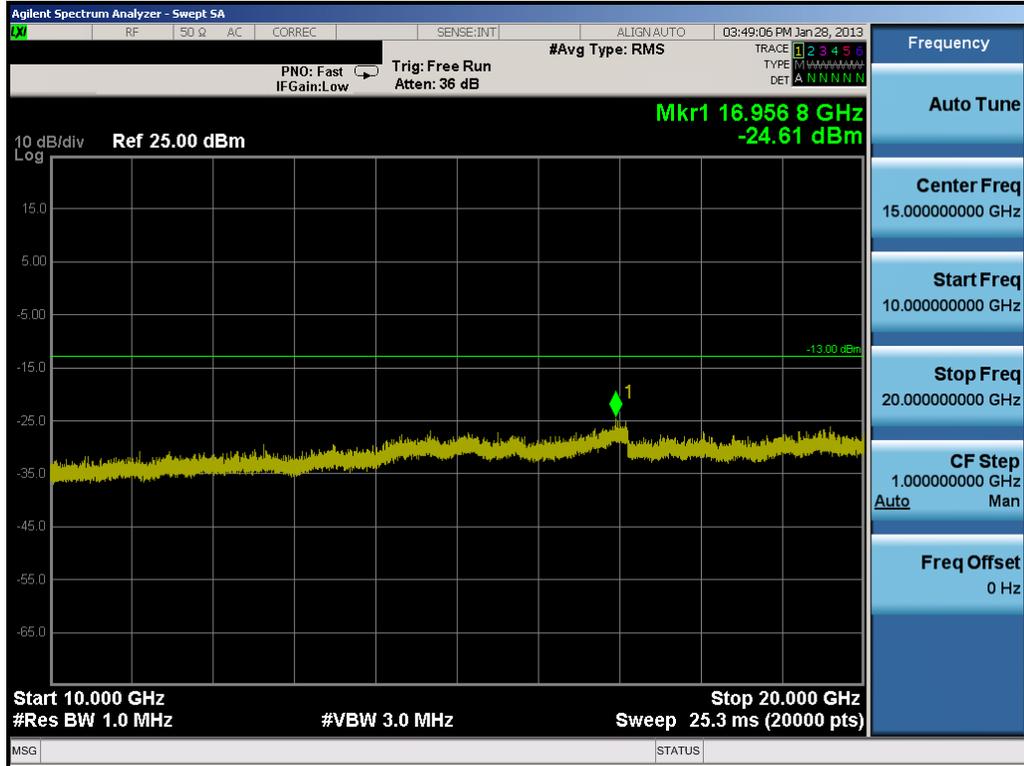


Plot 7-22. Conducted Spurious Plot (10.0MHz QPSK – RB Size 1, RB Offset 0 – Low Channel)

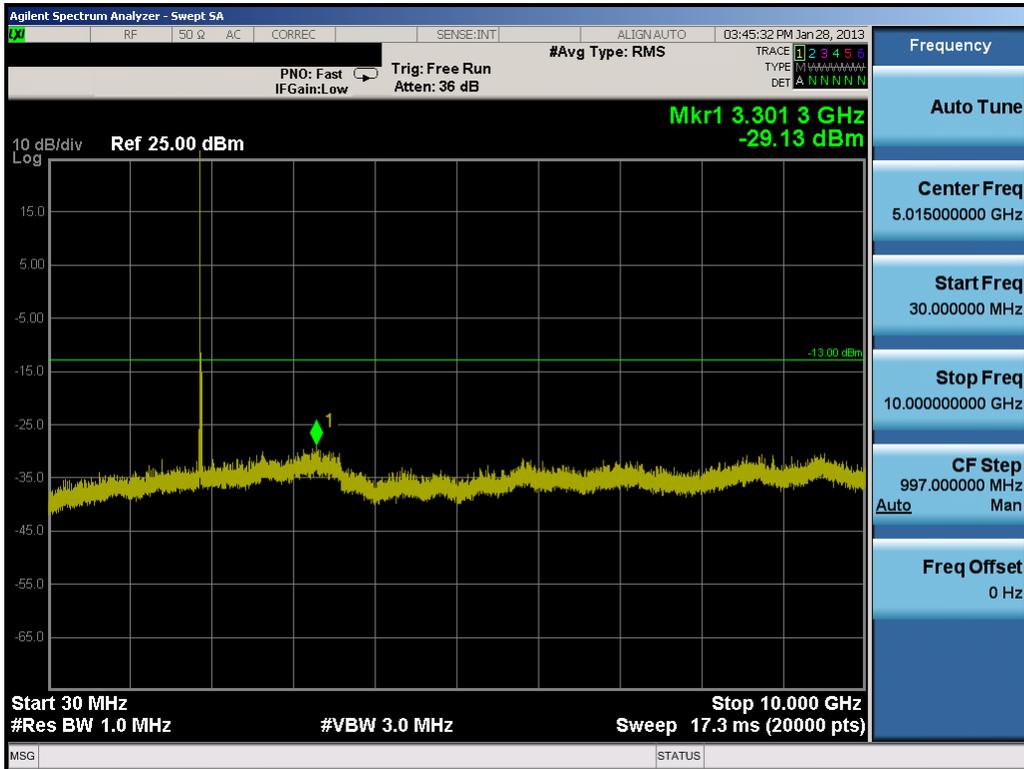


Plot 7-23. Conducted Spurious Plot (10.0MHz QPSK – RB Size 1, RB Offset 0 – Mid Channel)

FCC ID: ZNFLS720		FCC Pt. 24 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1301210120.ZNF	Test Dates: January 21-31, 2013	EUT Type: Portable Handset		Page 30 of 35

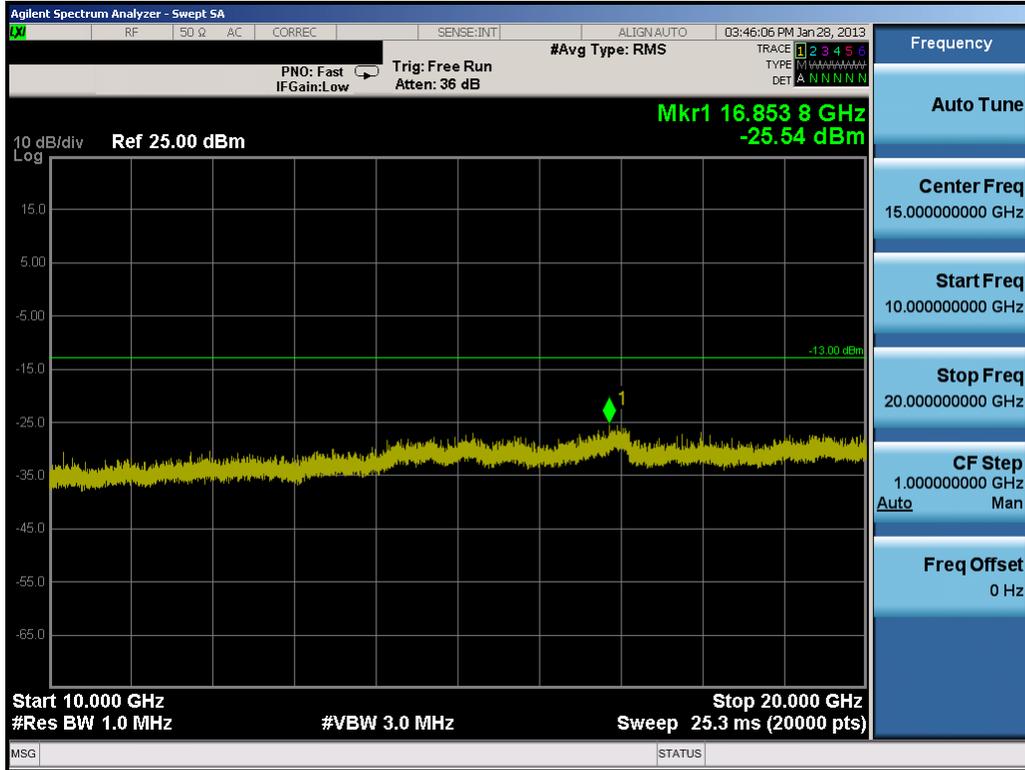


Plot 7-24. Conducted Spurious Plot (10.0MHz QPSK – RB Size 1, RB Offset 0 – Mid Channel)

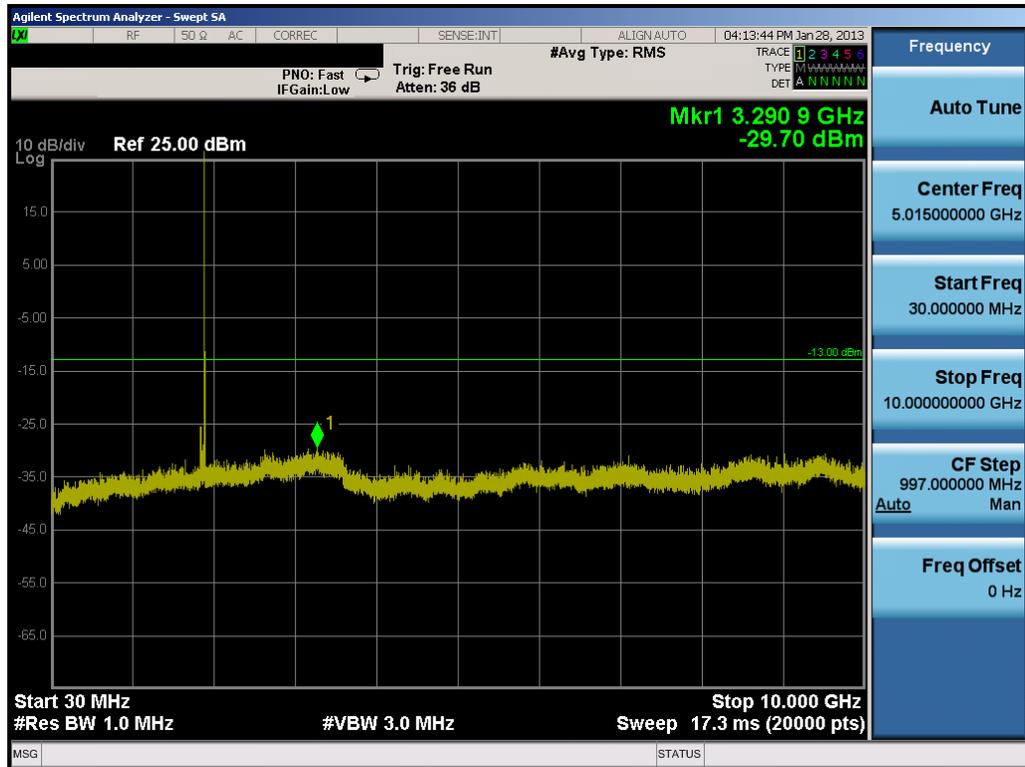

Plot 7-25. Conducted Spurious Plot (10.0MHz QPSK – RB Size 1, RB Offset 0 – High Channel)

FCC ID: ZNFLS720		FCC Pt. 24 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1301210120.ZNF	Test Dates: January 21-31, 2013	EUT Type: Portable Handset		Page 31 of 35

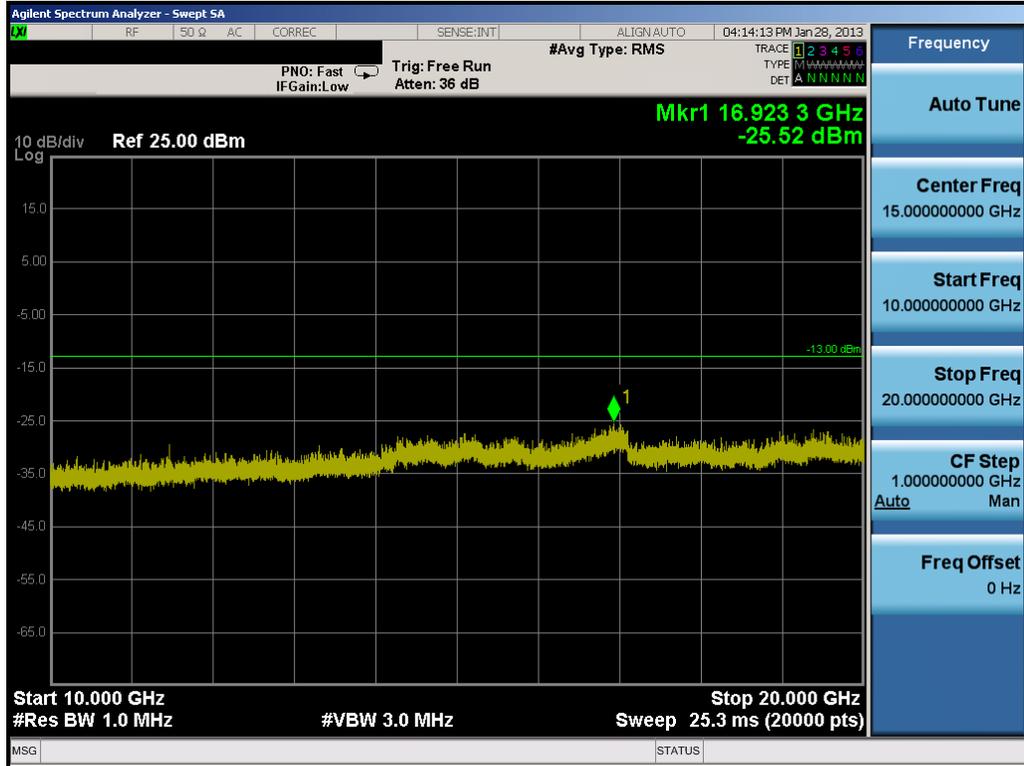

Plot 7-26. Conducted Spurious Plot (10.0MHz QPSK – RB Size 1, RB Offset 0 – High Channel)




Plot 7-27. Upper Band Edge Plot (10.0MHz QPSK – RB Size 50)

FCC ID: ZNFLS720	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 24 LTE MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1301210120.ZNF	Test Dates: January 21-31, 2013	EUT Type: Portable Handset		Page 32 of 35




Plot 7-28. Upper Extended Band Edge Plot (10.0MHz QPSK – RB Size 50)

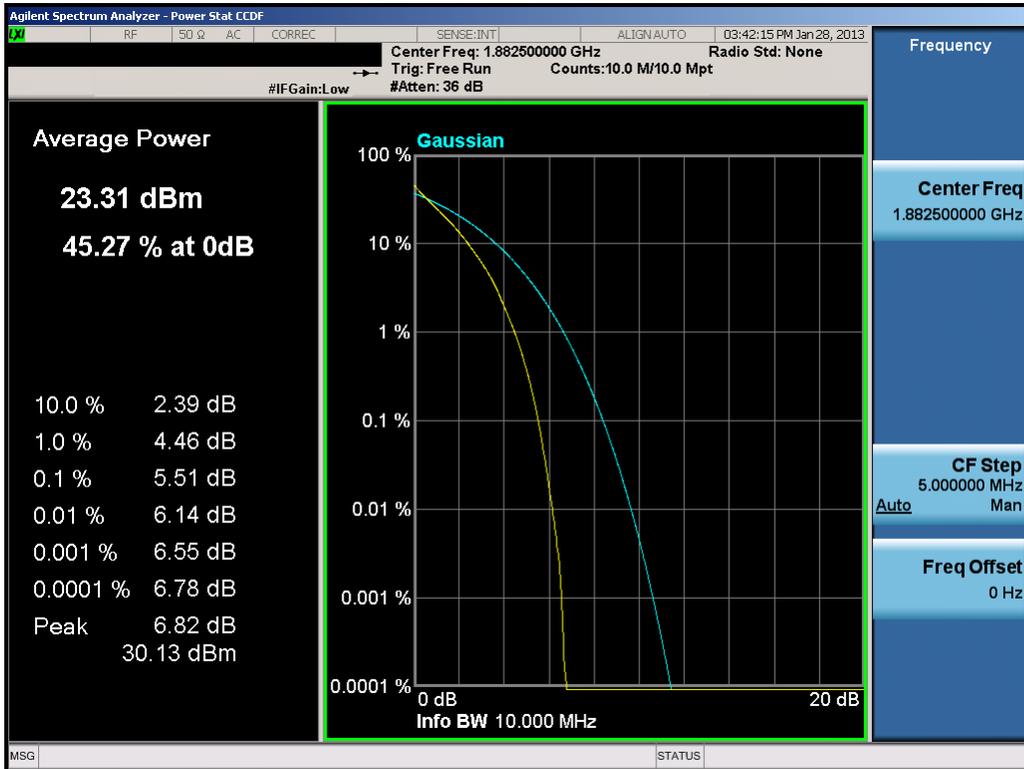

Plot 7-29. PAR Plot (10.0MHz QPSK – RB Size 50)

FCC ID: ZNFLS720		FCC Pt. 24 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1301210120.ZNF	Test Dates: January 21-31, 2013	EUT Type: Portable Handset		Page 33 of 35

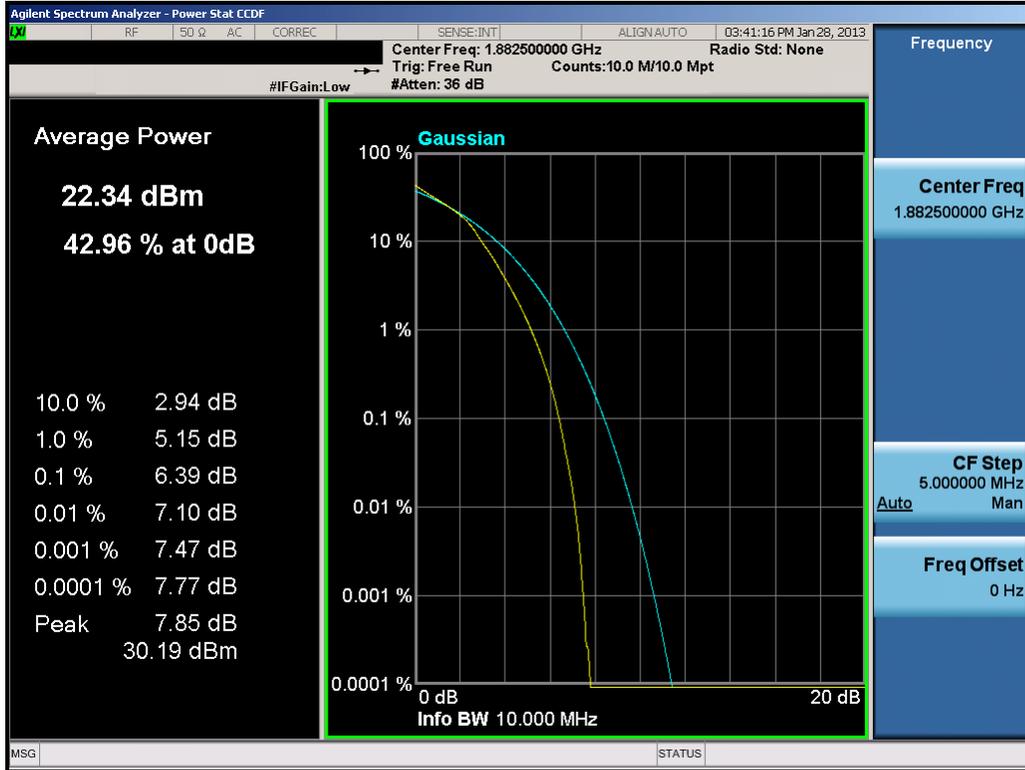

Plot 7-30. PAR Plot (10.0MHz 16-QAM – RB Size 50)

FCC ID: ZNFLS720	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 24 LTE MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1301210120.ZNF	Test Dates: January 21-31, 2013	EUT Type: Portable Handset		Page 34 of 35

8.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the **LG Portable Handset FCC ID: ZNFLS720** complies with all the requirements of Parts 2 and 24 of the FCC rules for LTE operation only.

FCC ID: ZNFLS720		FCC Pt. 24 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1301210120.ZNF	Test Dates: January 21-31, 2013	EUT Type: Portable Handset		Page 35 of 35