



# PCTEST ENGINEERING LABORATORY, INC.

7185 Oakland Mills Road, Columbia, MD 21046 USA  
Tel. 410.290.6652 / Fax 410.290.6654  
http://www.pctestlab.com



## MEASUREMENT REPORT FCC Part 22, 24, & 27

**Applicant Name:**  
LG Electronics MobileComm U.S.A  
1000 Sylvan Avenue  
Englewood Cliffs, NJ 07632  
United States

**Date of Testing:**  
May 31 - July 07, 2016  
**Test Site/Location:**  
PCTEST Lab., Columbia, MD, USA  
**Test Report Serial No.:**  
0Y1605310985.ZNF

<b>FCC ID:</b>	<b>ZNFLS755</b>
<b>APPLICANT:</b>	<b>LG ELECTRONICS MOBILECOMM U.S.A</b>

**Application Type:** Certification  
**Model(s):** LG-LS755, LGLS755, LS755  
**EUT Type:** Portable Handset  
**FCC Classification:** PCS Licensed Transmitter Held to Ear (PCE)  
**FCC Rule Part(s):** §2 §22(H) §24(E) §27(L)  
**Test Procedure(s):** ANSI/TIA-603-D-2010, KDB 971168 v02r02  
**Test Device Serial No.:** *identical prototype* [S/N: 2KV5A, 2KV52]

Mode	Tx Frequency (MHz)	Emission Designator	ERP/EIRP	
			Max. Power (W)	Max. Power (dBm)
GSM850	824.2 - 848.8	245KGXW	0.672	28.28
EDGE850	824.2 - 848.8	247KG7W	0.142	21.52
GSM1900	1850.2 - 1909.8	244KGXW	0.960	29.82
EDGE1900	1850.2 - 1909.8	253KG7W	0.291	24.63
CDMA850	824.70 - 848.31	1M28F9W	0.094	19.75
CDMA1900	1851.25 - 1908.75	1M28F9W	0.438	26.42
WCDMA850	826.4 - 846.6	4M16F9W	0.108	20.32
WCDMA1700	1712.4 - 1752.6	4M16F9W	0.314	24.97
WCDMA1900	1852.4 - 1907.6	4M16F9W	0.354	25.49

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in §2.947. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

  
Randy Ortanez  
President




<b>FCC ID:</b> ZNFLS755		<b>FCC Pt. 22, 24, &amp; 27 GSM / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1605310985.ZNF	<b>Test Dates:</b> May 31 - July 07, 2016	<b>EUT Type:</b> Portable Handset	Page 1 of 101	

# T A B L E O F C O N T E N T S


FCC PART 22, 24, & 27 MEASUREMENT REPORT .....		3
1.0 INTRODUCTION .....		4
1.1 Scope.....		4
1.2 Testing Facility.....		4
2.0 PRODUCT INFORMATION.....		5
2.1 Equipment Description.....		5
2.2 Device Capabilities .....		5
2.3 Test Configuration.....		5
2.4 EMI Suppression Device(s)/Modifications.....		5
3.0 DESCRIPTION OF TESTS .....		6
3.1 Evaluation Procedure.....		6
3.2 Cellular - Base Frequency Blocks .....		6
3.3 Cellular - Mobile Frequency Blocks.....		6
3.4 PCS - Base Frequency Blocks.....		6
3.5 PCS - Mobile Frequency Blocks .....		7
3.6 AWS - Base Frequency Blocks .....		7
3.7 AWS - Mobile Frequency Blocks.....		7
3.8 Radiated Measurements.....		8
4.0 MEASUREMENT UNCERTAINTY .....		9
5.0 TEST EQUIPMENT CALIBRATION DATA .....		10
6.0 SAMPLE CALCULATIONS .....		11
7.0 TEST RESULTS.....		12
7.1 Summary.....		12
7.2 Occupied Bandwidth .....		13
7.3 Spurious and Harmonic Emissions at Antenna Terminal.....		19
7.4 Band Edge Emissions at Antenna Terminal.....		52
7.5 Peak-Average Ratio.....		65
7.6 Radiated Power (ERP/EIRP) .....		68
7.7 Radiated Spurious Emissions Measurements.....		73
7.8 Frequency Stability / Temperature Variation.....		86
8.0 CONCLUSION.....		101

<b>FCC ID:</b> ZNFLS755		FCC Pt. 22, 24, & 27 GSM / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)		<b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1605310985.ZNF	<b>Test Dates:</b> May 31 - July 07, 2016	<b>EUT Type:</b> Portable Handset	Page 2 of 101	



## MEASUREMENT REPORT

### FCC Part 22, 24, & 27




### §2.1033 General Information

**APPLICANT:** LG Electronics MobileComm U.S.A  
**APPLICANT ADDRESS:** 1000 Sylvan Avenue  
 Englewood Cliffs, NJ 07632, United States  
**TEST SITE:** PCTEST ENGINEERING LABORATORY, INC.  
**TEST SITE ADDRESS:** 7185 Oakland Mills Road, Columbia, MD 21046 USA  
**FCC RULE PART(S):** §2 §22(H) §24(E) §27(L)  
**BASE MODEL:** LG-LS755  
**FCC ID:** ZNFLS755  
**FCC CLASSIFICATION:** PCS Licensed Transmitter Held to Ear (PCE)  
**MODE:** GSM / EDGE / CDMA / WCDMA  
**FREQUENCY TOLERANCE:** ±0.00025 % (2.5 ppm)  
**Test Device Serial No.:** 2KV5A, 2KV52       Production    Pre-Production    Engineering  
**DATE(S) OF TEST:** May 31 - July 07, 2016  
**TEST REPORT S/N:** 0Y1605310985.ZNF

### Test Facility / Accreditations

Measurements were performed at PCTEST Engineering Lab located in Columbia, MD 21046, U.S.A.

- PCTEST facility is an FCC registered (PCTEST Reg. No. 159966) test facility with the site description report on file and has met all the requirements specified in Section 2.948 of the FCC Rules and Industry Canada (2451B-1).
- PCTEST Lab is accredited to ISO 17025 by U.S. National Institute of Standards and Technology (NIST) under the National Voluntary Laboratory Accreditation Program (NVLAP Lab code: 100431-0) in EMC, FCC and Telecommunications.
- PCTEST Lab is accredited to ISO 17025-2005 by the American Association for Laboratory Accreditation (A2LA) in Specific Absorption Rate (SAR) testing, Hearing Aid Compatibility (HAC) testing, CTIA Test Plans, and wireless testing for FCC and Industry Canada Rules.
- PCTEST Lab is a recognized U.S. Conformity Assessment Body (CAB) in EMC and R&TTE (n.b. 0982) under the U.S.-EU Mutual Recognition Agreement (MRA).
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC Guide 65 by the American National Standards Institute (ANSI) in all scopes of FCC Rules and Industry Canada Standards (RSS).
- PCTEST facility is an IC registered (2451B-1) test laboratory with the site description on file at Industry Canada.
- PCTEST is a CTIA Authorized Test Laboratory (CATL) for AMPS, CDMA, and EvDO wireless devices and for Over-the-Air (OTA) Antenna Performance testing for AMPS, CDMA, GSM, GPRS, EGPRS, UMTS (W-CDMA), CDMA 1xEVDO, and CDMA 1xRTT.



<b>FCC ID:</b> ZNFLS755		FCC Pt. 22, 24, & 27 GSM / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)		<b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1605310985.ZNF	<b>Test Dates:</b> May 31 - July 07, 2016	<b>EUT Type:</b> Portable Handset	Page 3 of 101	

# 1.0 INTRODUCTION


## 1.1 Scope

Measurement and determination of electromagnetic emissions (EME) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Industry Canada Certification and Engineering Bureau.

## 1.2 Testing Facility

The map below shows the location of the PCTEST LABORATORY, its proximity to the FCC Laboratory, the Columbia vicinity, the Baltimore-Washington International (BWI) airport, the city of Baltimore and the Washington, DC area. (See Figure 1-1).

These measurement tests were conducted at the PCTEST Engineering Laboratory, Inc. facility located at 7185 Oakland Mills Road, Columbia, MD 21046. The site coordinates are 39° 10'23" N latitude and 76° 49'50" W longitude. The facility is 0.4 miles North of the FCC laboratory, and the ambient signal and ambient signal strength are approximately equal to those of the FCC laboratory. The detailed description of the measurement facility was found to be in compliance with the requirements of § 2.948 according to ANSI C63.4-2014 on January 22, 2015.

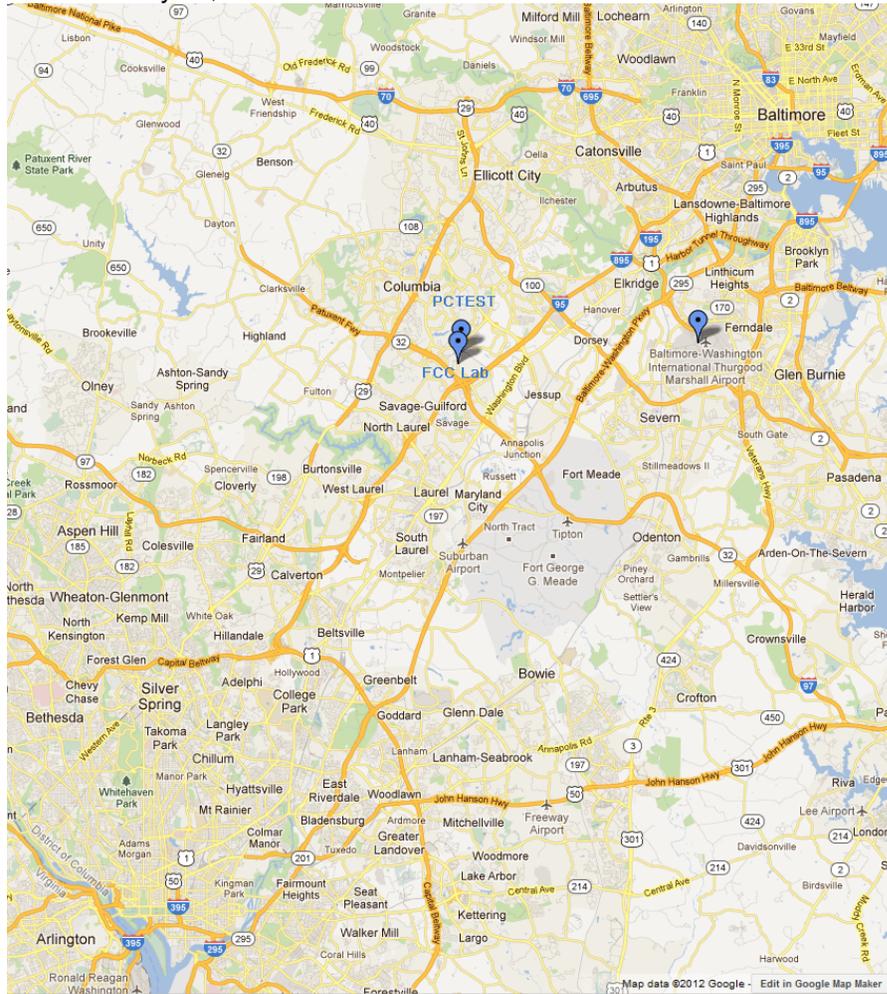

**Figure 1-1. Map of the Greater Baltimore and Metropolitan Washington, D.C. area**

FCC ID: ZNFLS755		FCC Pt. 22, 24, & 27 GSM / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1605310985.ZNF	Test Dates: May 31 - July 07, 2016	EUT Type: Portable Handset	Page 4 of 101	

## 2.0 PRODUCT INFORMATION

### 2.1 Equipment Description

The Equipment Under Test (EUT) is the **LG Portable Handset FCC ID: ZNFLS755**. The test data contained in this report pertains only to the emissions due to the EUT's 2G/3G licensed transmitters.

### 2.2 Device Capabilities

This device contains the following capabilities:

850/1900 CDMA (BC0, BC1, BC10), 850/1900 GSM/GPRS/EDGE, 850/1700/1900 WCDMA, Multi-band LTE, 802.11b/g/n WLAN, Bluetooth (1x, EDR, LE)

### 2.3 Test Configuration

The LG Portable Handset FCC ID: ZNFLS755 was tested per the guidance of ANSI/TIA-603-D-2010 and KDB 971168 v02r02. See Section 7.0 of this test report for a description of the radiated and antenna port conducted emissions tests.

### 2.4 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

FCC ID: ZNFLS755		FCC Pt. 22, 24, & 27 GSM / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1605310985.ZNF	Test Dates: May 31 - July 07, 2016	EUT Type: Portable Handset		Page 5 of 101

### 3.0 DESCRIPTION OF TESTS


#### 3.1 Evaluation Procedure

The measurement procedures described in the “Land Mobile FM or PM – Communications Equipment – Measurements and Performance Standards” (ANSI/TIA-603-D-2010) and “Measurement Guidance for Certification of Licensed Digital Transmitters” (KDB 971168 v02r02) were used in the measurement of the **LG Portable Handset FCC ID: ZNFLS755**.

Deviation from Measurement Procedure.....None

#### 3.2 Cellular - Base Frequency Blocks

§22.905

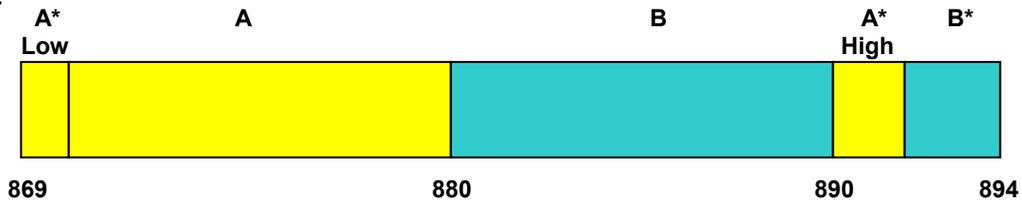

BLOCK 1: 869 – 880 MHz (A\* Low + A)


BLOCK 3: 890 – 891.5 MHz (A\* High)

BLOCK 2: 880 – 890 MHz (B)

BLOCK 4: 891.5 – 894 MHz (B\*)

#### 3.3 Cellular - Mobile Frequency Blocks

§22.905

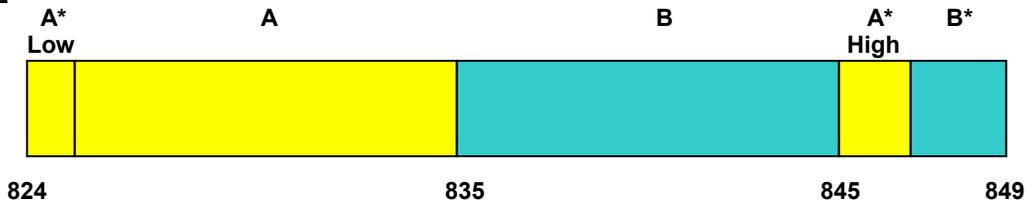

BLOCK 1: 824 – 835 MHz (A\* Low + A)


BLOCK 3: 845 – 846.5 MHz (A\* High)

BLOCK 2: 835 – 845 MHz (B)

BLOCK 4: 846.5 – 849 MHz (B\*)

#### 3.4 PCS - Base Frequency Blocks

§24.229

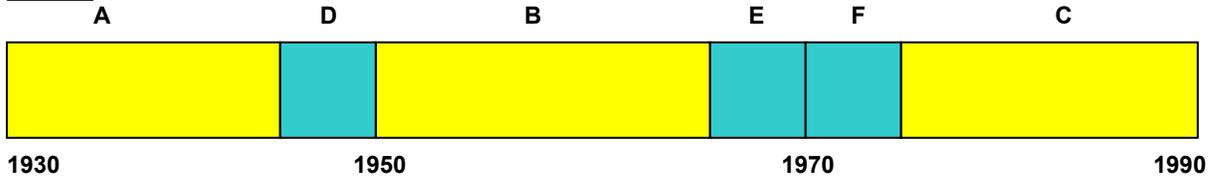

BLOCK 1: 1930 – 1945 MHz (A)

BLOCK 4: 1965 – 1970 MHz (E)

BLOCK 2: 1945 – 1950 MHz (D)

BLOCK 5: 1970 – 1975 MHz (F)


BLOCK 3: 1950 – 1965 MHz (B)

BLOCK 6: 1975 – 1990 MHz (C)

FCC ID: ZNFLS755	 PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 GSM / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)	 LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1605310985.ZNF	Test Dates: May 31 - July 07, 2016	EUT Type: Portable Handset	Page 6 of 101	

### 3.5 PCS - Mobile Frequency Blocks

§24.229

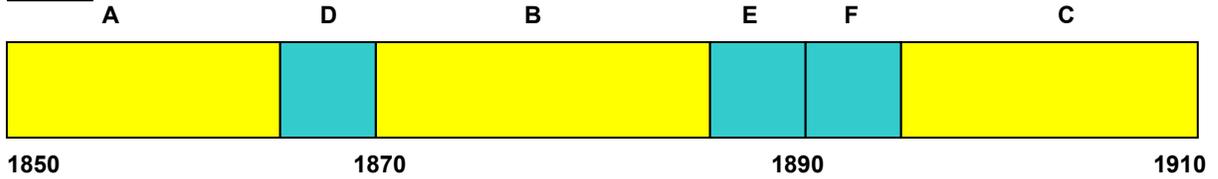

BLOCK 1: 1850 – 1865 MHz (A)

BLOCK 4: 1885 – 1890 MHz (E)

BLOCK 2: 1865 – 1870 MHz (D)


BLOCK 5: 1890 – 1895 MHz (F)

BLOCK 3: 1870 – 1885 MHz (B)

BLOCK 6: 1895 – 1910 MHz (C)

### 3.6 AWS - Base Frequency Blocks

§27.5(h)

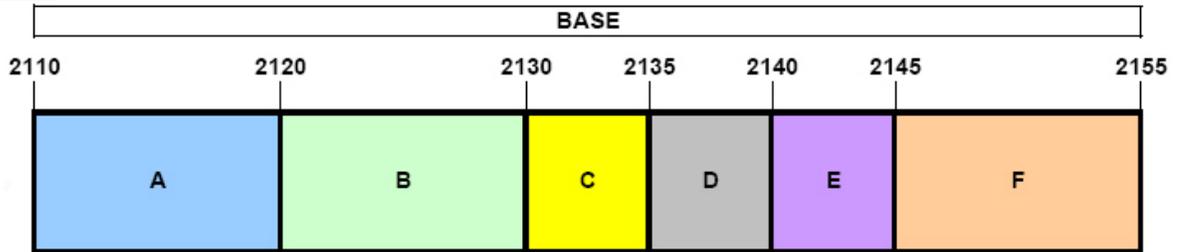

BLOCK 1: 2110 – 2120 MHz (A)

BLOCK 4: 2135 – 2140 MHz (D)

BLOCK 2: 2120 – 2130 MHz (B)


BLOCK 5: 2140 – 2145 MHz (E)

BLOCK 3: 2130 – 2135 MHz (C)

BLOCK 6: 2145 – 2155 MHz (F)

### 3.7 AWS - Mobile Frequency Blocks

§27.5(h)

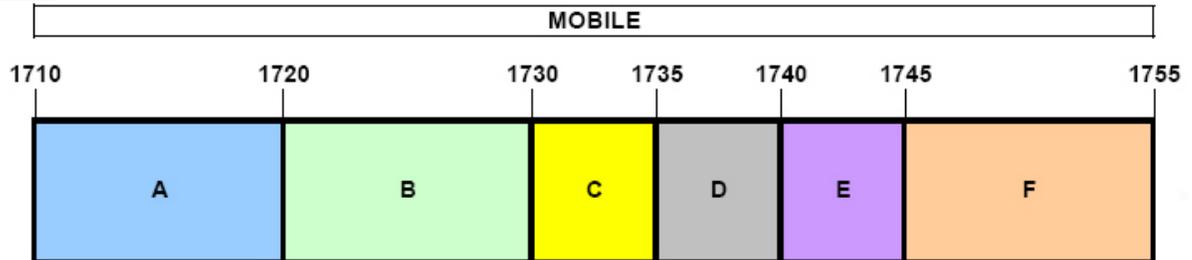

BLOCK 1: 1710 – 1720 MHz (A)

BLOCK 4: 1735 – 1740 MHz (D)

BLOCK 2: 1720 – 1730 MHz (B)

BLOCK 5: 1740 – 1745 MHz (E)

BLOCK 3: 1730 – 1735 MHz (C)

BLOCK 6: 1745 – 1755 MHz (F)

FCC ID: ZNFLS755		FCC Pt. 22, 24, & 27 GSM / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1605310985.ZNF	Test Dates: May 31 - July 07, 2016	EUT Type: Portable Handset		Page 7 of 101

### 3.8 Radiated Measurements

§2.1053 §22.913(a.2) §22.917(a) §24.232(c) §24.238(a) §27.50(d)(10) §27.53(h)

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Clause 5, Figure 5.7 of ANSI C63.4-2014. For measurements above 1GHz, absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections. For measurements above 1GHz absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections. For measurements below 1GHz, a 72.4cm high PVC support structure is placed on top of the turntable. A 3" (~7.6cm) sheet of high density polystyrene is used as the table top and is placed on top of the PVC supports to bring the total height of the table to 80cm.

The equipment under test is placed on a turntable 3 meters from the receive antenna. The receive antenna height is adjusted between 1 and 4 meter height, the turntable is rotated through 360 degrees, and the EUT is manipulated through all orthogonal planes representative of its typical use to achieve the highest reading on the receive spectrum analyzer.

Per the guidance of ANSI/TIA-603-D-2010, a half-wave dipole is then substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator with the level of the signal generator being adjusted to obtain the same receive spectrum analyzer level previously recorded from the spurious emission from the EUT. The power of the emission is calculated using the following formula:

$$P_d \text{ [dBm]} = P_g \text{ [dBm]} - \text{cable loss [dB]} + \text{antenna gain [dBd/dBi]}$$

Where,  $P_d$  is the dipole equivalent power,  $P_g$  is the generator output into the substitution antenna, and the antenna gain is the gain of the substitute antenna used relative to either a half-wave dipole (dBd) or an isotropic source (dBi). The substitute level is equal to  $P_g \text{ [dBm]} - \text{cable loss [dB]}$ .

Radiated power levels and radiated spurious levels are investigated with the receive antenna horizontally and vertically polarized per ANSI/TIA-603-D-2010.

FCC ID: ZNFLS755		FCC Pt. 22, 24, & 27 GSM / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1605310985.ZNF	Test Dates: May 31 - July 07, 2016	EUT Type: Portable Handset		Page 8 of 101

## 4.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4-2014. All measurement uncertainty values are shown with a coverage factor of  $k = 2$  to indicate a 95% level of confidence. The measurement data shown herein meets or exceeds the  $U_{\text{CISPR}}$  measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty ( $\pm$ dB)
Conducted Bench Top Measurements	1.13
Radiated Disturbance (<1GHz)	4.98
Radiated Disturbance (>1GHz)	5.07
Radiated Disturbance (>18GHz)	5.09

FCC ID: ZNFLS755	 PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 GSM / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)	 LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1605310985.ZNF	Test Dates: May 31 - July 07, 2016	EUT Type: Portable Handset	Page 9 of 101	

## 5.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST).

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
-	RE1	Radiated Emissions Cable Set (UHF/EHF)	4/28/2016	Annual	4/28/2017	RE1
-	LTX2	Licensed Transmitter Cable Set	4/20/2016	Annual	4/20/2017	LTX2
Agilent	8648D	(9kHz-4GHz) Signal Generator	11/4/2015	Annual	11/4/2016	3613A00315
Agilent	N9020A	MXA Signal Analyzer	11/5/2015	Annual	11/5/2016	US46470561
Agilent	N9038A	MXE EMI Receiver	4/21/2016	Annual	4/21/2017	MY51210133
Agilent	N9030A	PXA Signal Analyzer (26.5GHz)	7/22/2015	Annual	7/22/2016	MY49432391
Com-Power	PAM-118A	Pre-Amplifier	4/10/2016	Annual	4/10/2017	551042
Com-Power	PAM-103	Pre-Amplifier (1-1000MHz)	2/26/2016	Annual	2/26/2017	441128
Emco	6502	Active Loop Antenna (10k - 30 MHz)	6/24/2014	Biennial	6/24/2016	267
Espec	ESX-2CA	Environmental Chamber	3/4/2016	Annual	3/4/2017	17620
K & L	13SH10-1000/U1000	N Type High Pass Filter	7/18/2015	Annual	7/18/2016	13SH10-1000/U1000-4
K & L	11SH10-3075/U18000	High Pass Filter	12/1/2015	Annual	12/1/2016	3
Mini Circuits	TVA-11-422	RF Power Amp	N/A			QA1317001
Mini Circuits	PWR-SEN-4GHS	USB Power Sensor	3/4/2016	Annual	3/4/2017	11401010036
Mini-Circuits	SSG-4000HP	Synthesized Signal Generator	N/A			11208010032
Mini-Circuits	PWR-SENS-4RMS	USB Power Sensor	3/4/2016	Annual	3/4/2017	11210140001
Mini-Circuits	TVA-11-422	RF Power Amp	N/A			QA1303002
Mini-Circuits	SSG-4000HP	Synthesized Signal Generator	N/A			11403100002
Rohde & Schwarz	CMW500	Radio Communication Tester	4/13/2016	Annual	4/13/2017	140148
Schwarzbeck	UHA 9105	Dipole Antenna (400 - 1GHz) Tx	11/18/2015	Biennial	11/18/2017	91052522TX
Schwarzbeck	UHA 9105	Dipole Antenna (400 - 1GHz) Rx	11/18/2015	Biennial	11/18/2017	91052523RX
Seekonk	NC-100	Torque Wrench 5/16", 8" lbs	3/2/2016	Biennial	3/2/2018	N/A
Sunol	DRH-118	Horn Antenna (1-18GHz)	7/30/2015	Biennial	7/30/2017	A050307
Sunol	JB5	Bi-Log Antenna (30M - 5GHz)	3/14/2016	Biennial	3/14/2018	A051107
Sunol	DRH-118	Horn Antenna (1-18 GHz)	7/30/2015	Biennial	7/30/2017	A042511
VWR	62344-734	Thermometer with Clock	2/20/2016	Biennial	2/20/2018	140140336

**Table 5-1. Test Equipment**

**Notes:**

1. Equipment with a calibration date of "N/A" shown in this list was not used to make direct calibrated measurements.

<b>FCC ID:</b> ZNFLS755		FCC Pt. 22, 24, & 27 GSM / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)		<b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1605310985.ZNF	<b>Test Dates:</b> May 31 - July 07, 2016	<b>EUT Type:</b> Portable Handset	Page 10 of 101	

## 6.0 SAMPLE CALCULATIONS

### GSM Emission Designator

**Emission Designator = 250KGXW**

GSM BW = 250 kHz  
 G = Phase Modulation  
 X = Cases not otherwise covered  
 W = Combination (Audio/Data)

### EDGE Emission Designator

**Emission Designator = 250KG7W**

EDGE BW = 250 kHz  
 G = Phase Modulation  
 7 = Quantized/Digital Info  
 W = Combination (Audio/Data)

### CDMA Emission Designator

**Emission Designator = 1M25F9W**

CDMA BW = 1.25 MHz  
 F = Frequency Modulation  
 9 = Composite Digital Info  
 W = Combination (Audio/Data)

### WCDMA Emission Designator

**Emission Designator = 4M16F9W**

WCDMA BW = 4.16 MHz  
 F = Frequency Modulation  
 9 = Composite Digital Info  
 W = Combination (Audio/Data)

### Spurious Radiated Emission

**Example: Spurious emission at 3700.40 MHz**

The receive spectrum analyzer reading at 3 meters with the EUT on the turntable was  $-81.0$  dBm. The gain of the substituted antenna is 8.1 dBi. The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of  $-81.0$  dBm on the spectrum analyzer. The loss of the cable between the signal generator and the terminals of the substituted antenna is 2.0 dB at 3700.40 MHz. So 6.1 dB is added to the signal generator reading of  $-30.9$  dBm yielding  $-24.80$  dBm. The fundamental EIRP was 25.50 dBm so this harmonic was  $25.50$  dBm  $- (-24.80) = 50.3$  dBc.

FCC ID: ZNFLS755	 PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 GSM / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)	 LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1605310985.ZNF	Test Dates: May 31 - July 07, 2016	EUT Type: Portable Handset	Page 11 of 101	

## 7.0 TEST RESULTS

### 7.1 Summary

Company Name: LG Electronics MobileComm U.S.A  
 FCC ID: ZNFLS755  
 FCC Classification: PCS Licensed Transmitter Held to Ear (PCE)  
 Mode(s): GSM / EDGE / CDMA / WCDMA

FCC Part Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
<b>TRANSMITTER MODE (TX)</b>					
2.1049	Occupied Bandwidth	N/A	CONDUCTED	PASS	Section 7.2
2.1051 22.917(a) 24.238(a) 27.53(h)	Conducted Band Edge / Spurious Emissions	> 43 + log <sub>10</sub> (P[Watts]) at Band Edge and for all out-of-band emissions		PASS	Sections 7.3, 7.4
24.232(d)	Peak-Average Ratio	< 13 dB		PASS	Section 7.5
2.1046	Transmitter Conducted Output Power	N/A		PASS	RF Exposure Report
2.1055 22.355 24.235 27.54	Frequency Stability	< 2.5 ppm (Part 22) Emission must remain in band (Part 24, 27)		PASS	Section 7.8
22.913(a.2)	Effective Radiated Power	< 7 Watts max. ERP	RADIATED	PASS	Section 7.6
24.232(c)	Equivalent Isotropic Radiated Power	< 2 Watts max. EIRP		PASS	Section 7.6
27.50(d.4)	Equivalent Isotropic Radiated Power	< 1 Watts max. EIRP		PASS	Section 7.6
2.1053 22.917(a) 24.238(a) 27.53(h)	Radiated Spurious Emissions	> 43 + log <sub>10</sub> (P[Watts]) for all out-of-band emissions		PASS	Section 7.7

**Table 7-1. Summary of Test Results**

**Notes:**

- 1) All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables, directional couplers, and attenuators used as part of the system to maintain a link between the call box and the EUT at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables, attenuators, and couplers.
- 4) For conducted spurious emissions, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is PCTEST "2G/3G Automation," Version 3.2.

FCC ID: ZNFLS755	 PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 GSM / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)	 LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1605310985.ZNF	Test Dates: May 31 - July 07, 2016	EUT Type: Portable Handset	Page 12 of 101	

## 7.2 Occupied Bandwidth

### §2.1049

#### Test Overview

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. All modes of operation were investigated and the worst case configuration results are reported in this section.

#### Test Procedure Used


KDB 971168 v02r02 – Section 4.2

#### Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5% of the expected OBW
3. VBW  $\geq$  3 x RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5% of the 99% occupied bandwidth observed in Step 7

#### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

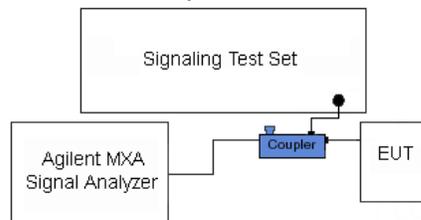

**Figure 7-1. Test Instrument & Measurement Setup**


#### Test Notes

None.

FCC ID: ZNFLS755	 PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 GSM / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)	 LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1605310985.ZNF	Test Dates: May 31 - July 07, 2016	EUT Type: Portable Handset	Page 13 of 101	




Plot 7-1. Occupied Bandwidth Plot (Cellular GSM Mode – Ch. 190)

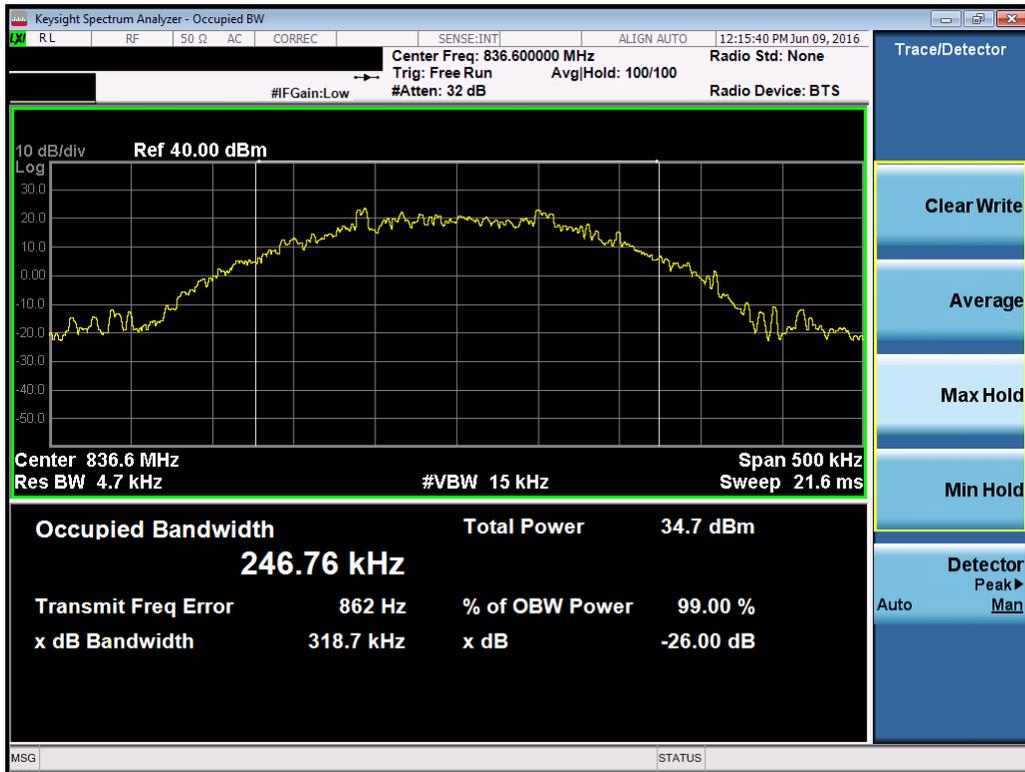


Plot 7-2. Occupied Bandwidth Plot (EDGE850 Mode – Ch. 190)

FCC ID: ZNFLS755	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 GSM / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1605310985.ZNF	Test Dates: May 31 - July 07, 2016	EUT Type: Portable Handset		Page 14 of 101

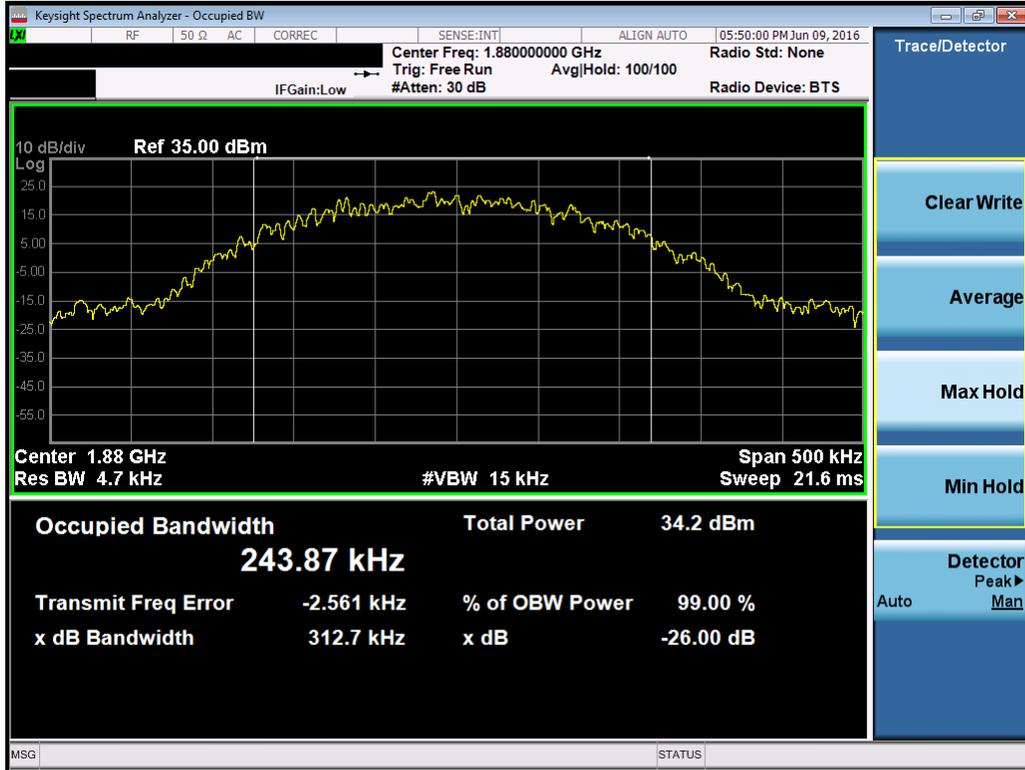


Plot 7-3. Occupied Bandwidth Plot (PCS GSM Mode – Ch. 661)

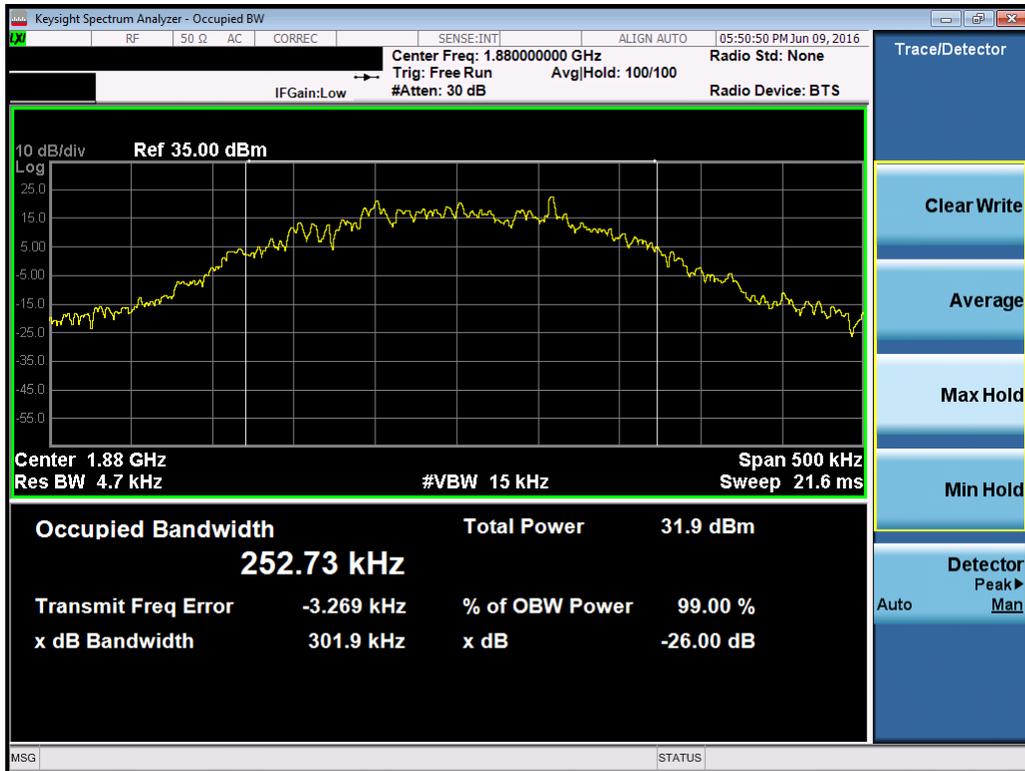


Plot 7-4. Occupied Bandwidth Plot (EDGE1900 Mode – Ch. 661)

FCC ID: ZNFLS755		FCC Pt. 22, 24, & 27 GSM / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1605310985.ZNF	Test Dates: May 31 - July 07, 2016	EUT Type: Portable Handset		Page 15 of 101

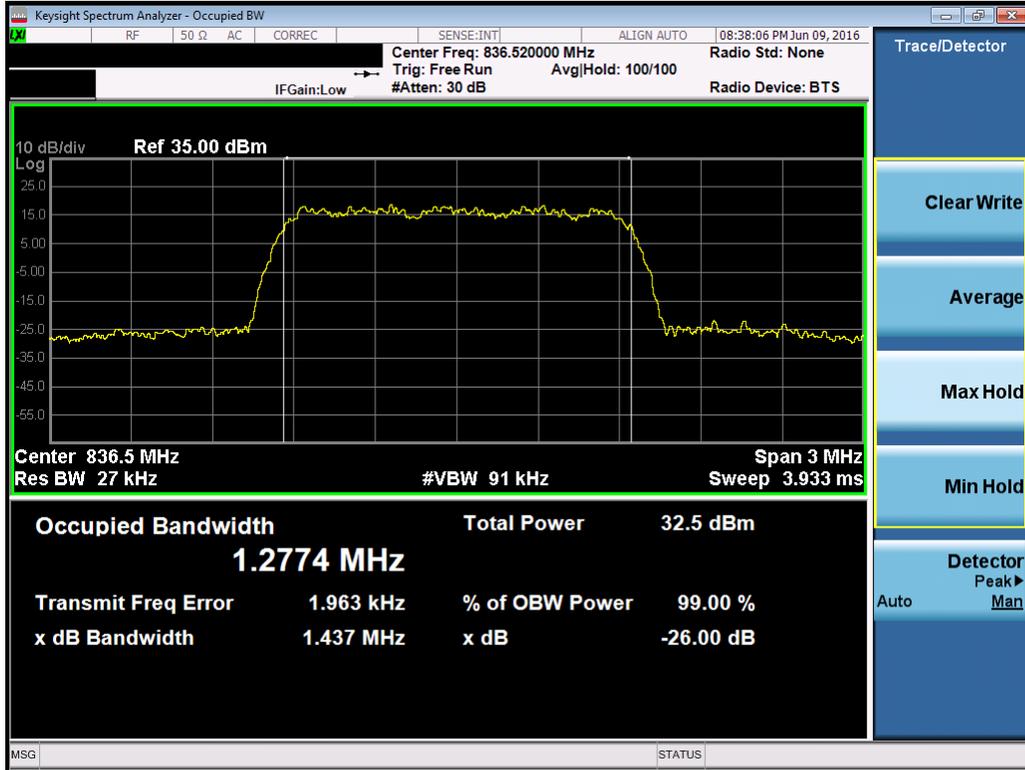


Plot 7-5. Occupied Bandwidth Plot (Cellular CDMA Mode – Ch. 384)

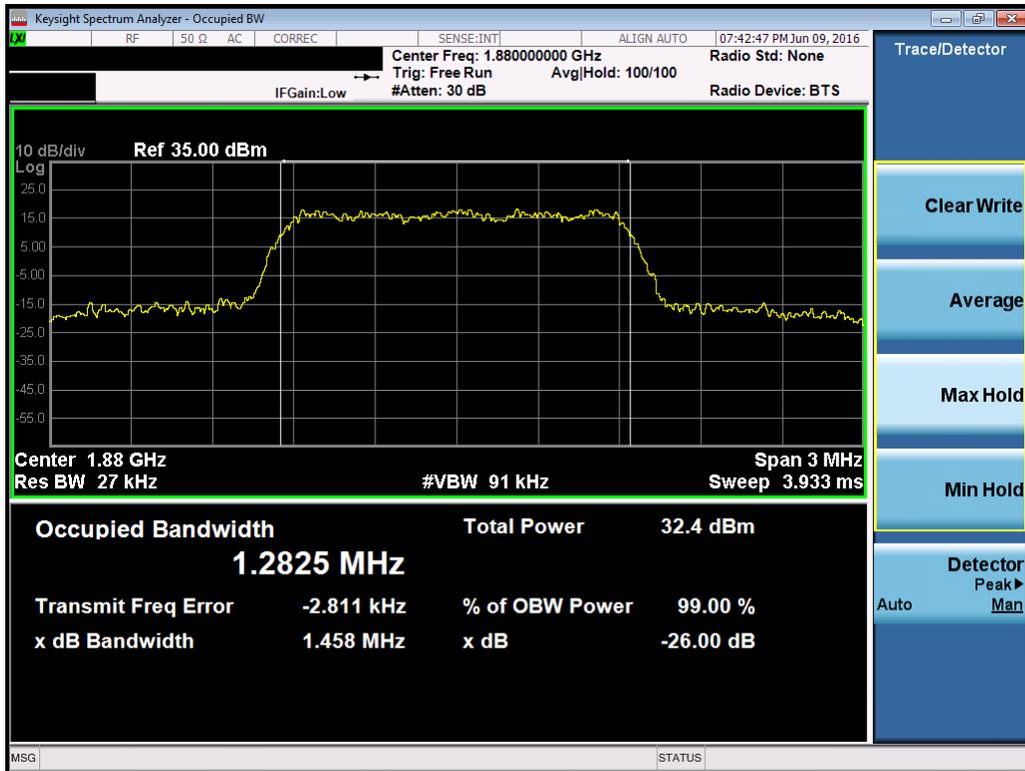


Plot 7-6. Occupied Bandwidth Plot (PCS CDMA Mode – Ch. 600)

FCC ID: ZNFLS755	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 GSM / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1605310985.ZNF	Test Dates: May 31 - July 07, 2016	EUT Type: Portable Handset	Page 16 of 101	

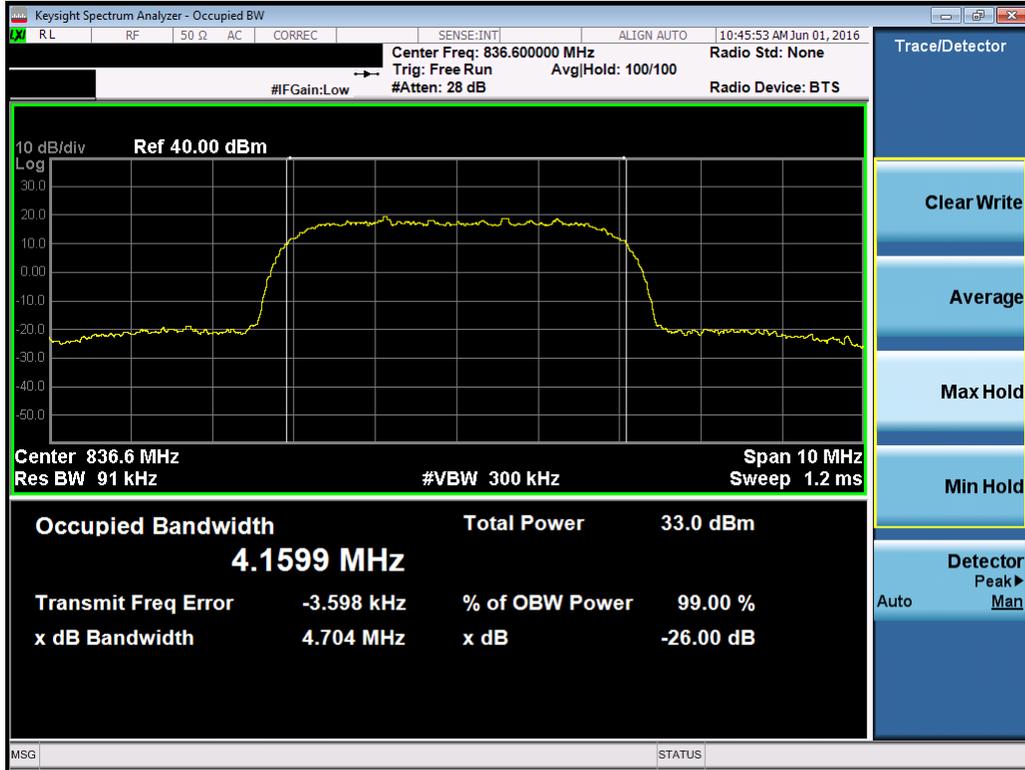


Plot 7-7. Occupied Bandwidth Plot (Cellular WCDMA Mode – Ch. 4183)

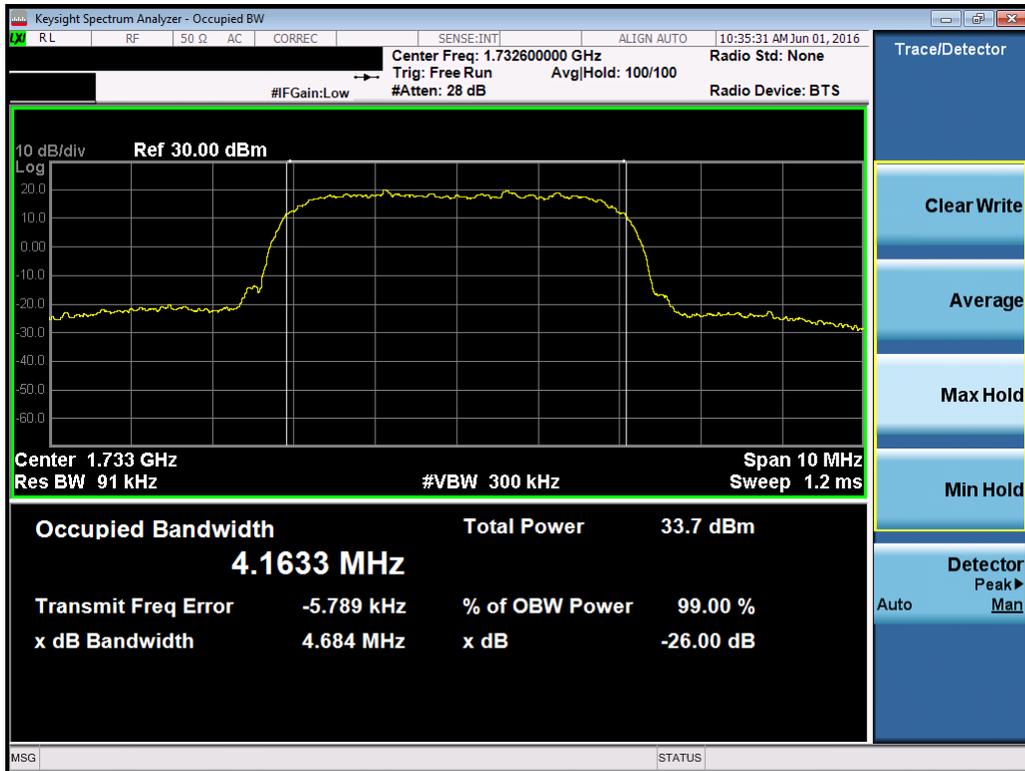

Plot 7-8. Occupied Bandwidth Plot (AWS WCDMA Mode – Ch. 1412)

FCC ID: ZNFLS755	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 GSM / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1605310985.ZNF	Test Dates: May 31 - July 07, 2016	EUT Type: Portable Handset		Page 17 of 101

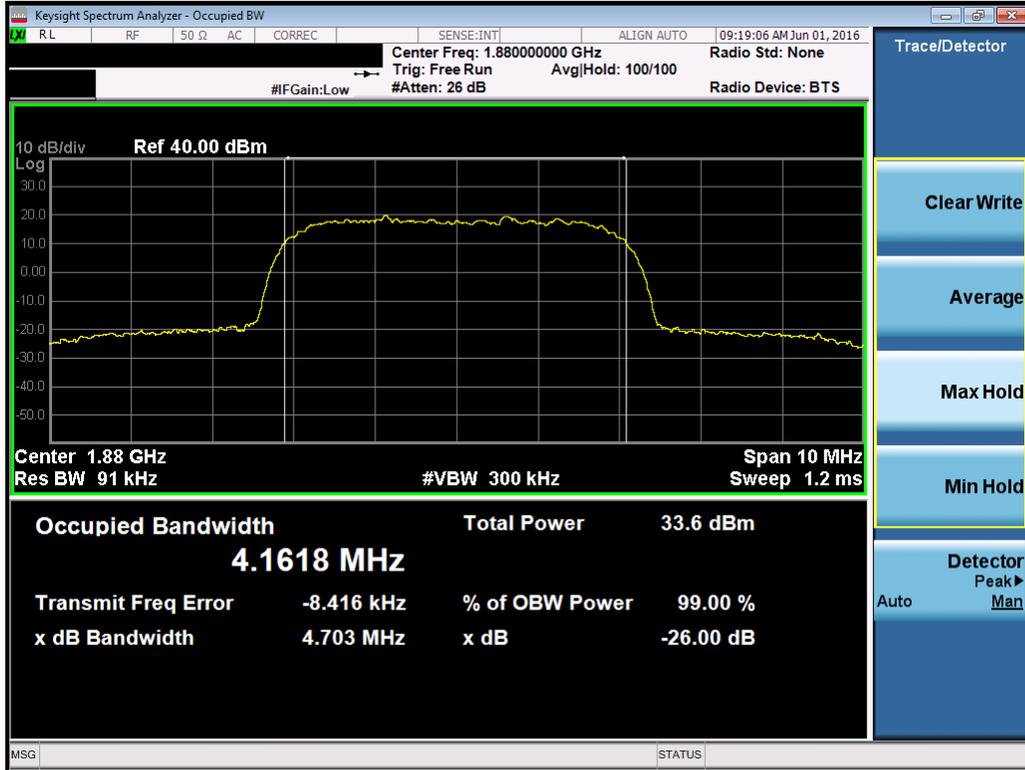

Plot 7-9. Occupied Bandwidth Plot (PCS WCDMA Mode – Ch. 9400)

FCC ID: ZNFLS755	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 GSM / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1605310985.ZNF	Test Dates: May 31 - July 07, 2016	EUT Type: Portable Handset		Page 18 of 101

### 7.3 Spurious and Harmonic Emissions at Antenna Terminal

§2.1051 §22.917(a) §24.238(a) §27.53(h)

#### Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10<sup>th</sup> harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

***The minimum permissible attenuation level of any spurious emission is  $43 + \log_{10}(P_{[Watts]})$ , where P is the transmitter power in Watts.***

#### Test Procedure Used


KDB 971168 v02r02 – Section 6.0

#### Test Settings

1. Start frequency was set to 30MHz and stop frequency was set to 10GHz for Cell, 20GHz for AWS, 20GHz for PCS (separated into at least two plots per channel)
2. Detector = RMS
3. Trace mode = trace average for continuous emissions, max hold for pulse emissions
4. Sweep time = auto couple
5. The trace was allowed to stabilize
6. Please see test notes below for RBW and VBW settings

#### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

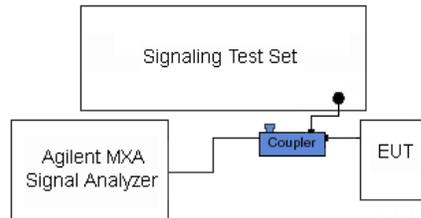


**Figure 7-2. Test Instrument & Measurement Setup**

#### Test Notes


Compliance with the applicable limits is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater for Part 22 and 1 MHz or greater for Part 24, Part 27. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.

FCC ID: ZNFLS755		FCC Pt. 22, 24, & 27 GSM / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1605310985.ZNF	Test Dates: May 31 - July 07, 2016	EUT Type: Portable Handset	Page 19 of 101	



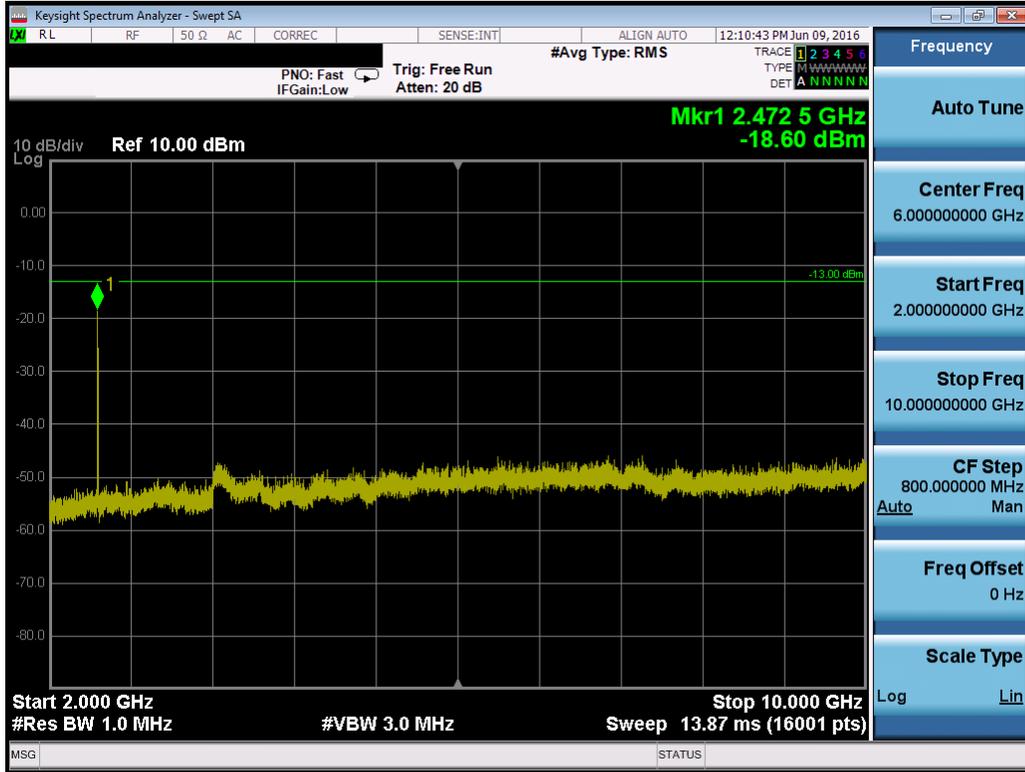


Plot 7-12. Conducted Spurious Plot (Cellular GSM Mode – Ch. 128)

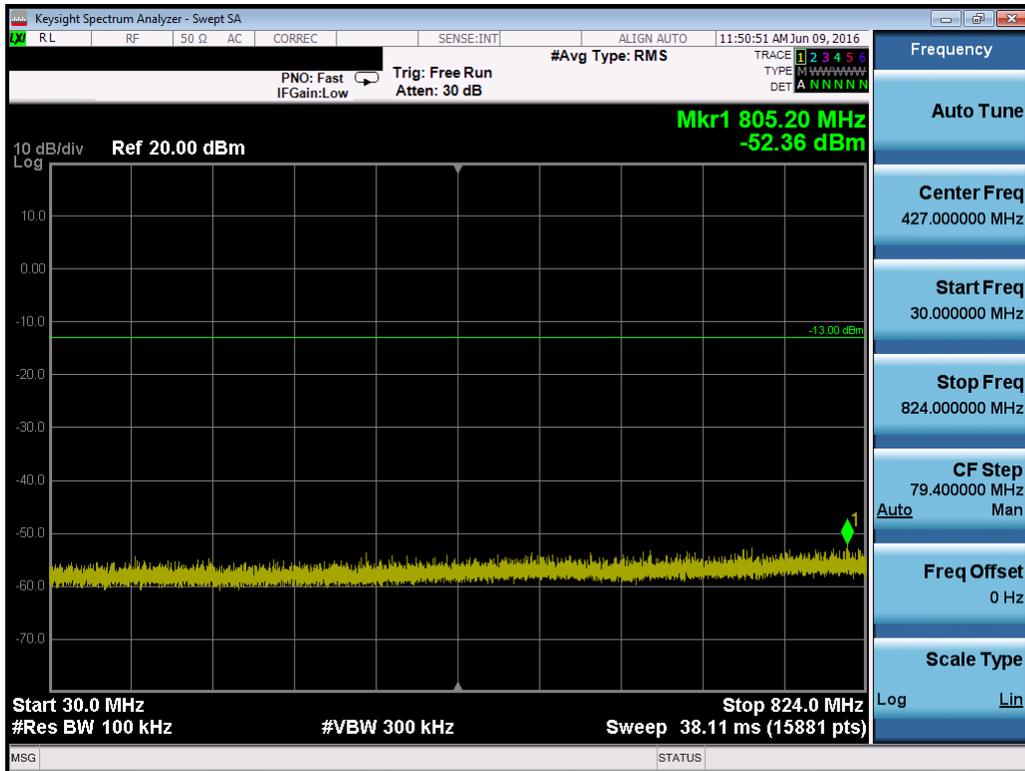


Plot 7-13. Conducted Spurious Plot (Cellular GSM Mode – Ch. 190)

FCC ID: ZNFLS755	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 GSM / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: OY1605310985.ZNF	Test Dates: May 31 - July 07, 2016	EUT Type: Portable Handset		Page 21 of 101

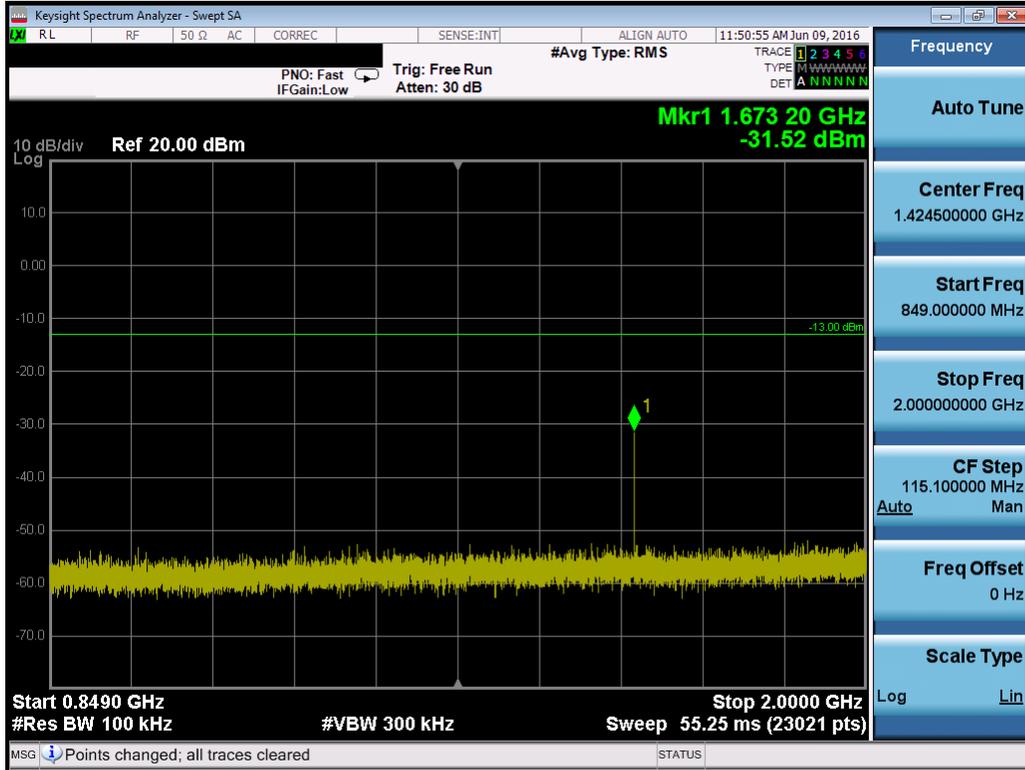


Plot 7-14. Conducted Spurious Plot (Cellular GSM Mode – Ch. 190)

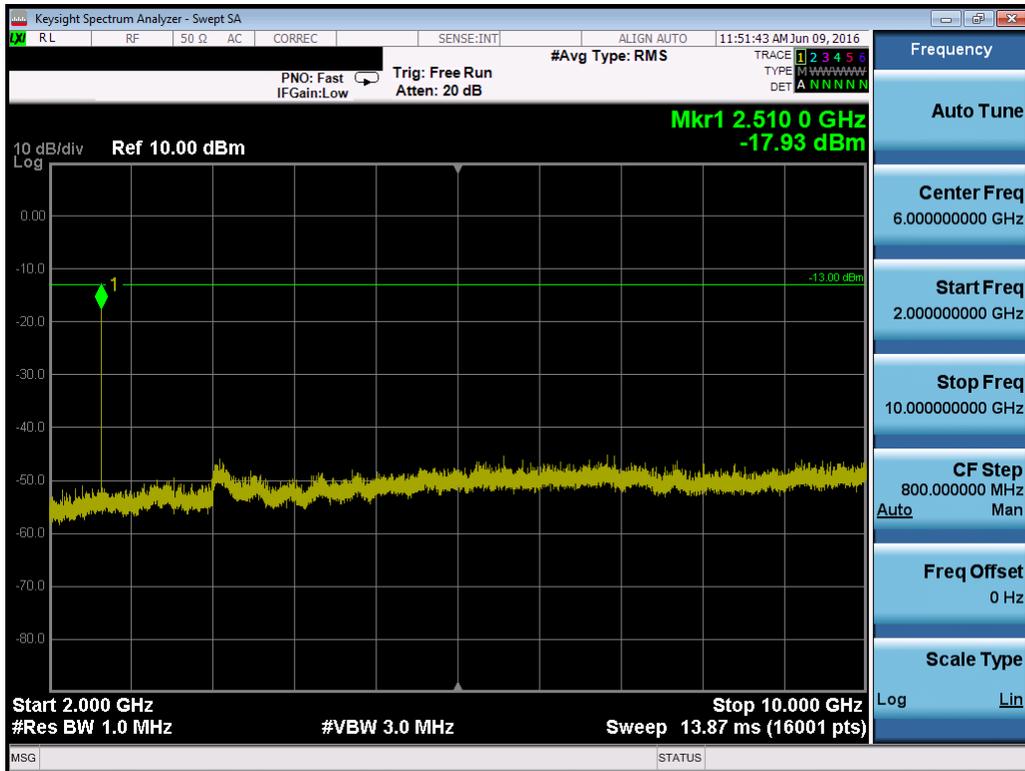


Plot 7-15. Conducted Spurious Plot (Cellular GSM Mode – Ch. 190)

FCC ID: ZNFLS755		FCC Pt. 22, 24, & 27 GSM / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1605310985.ZNF	Test Dates: May 31 - July 07, 2016	EUT Type: Portable Handset		Page 22 of 101

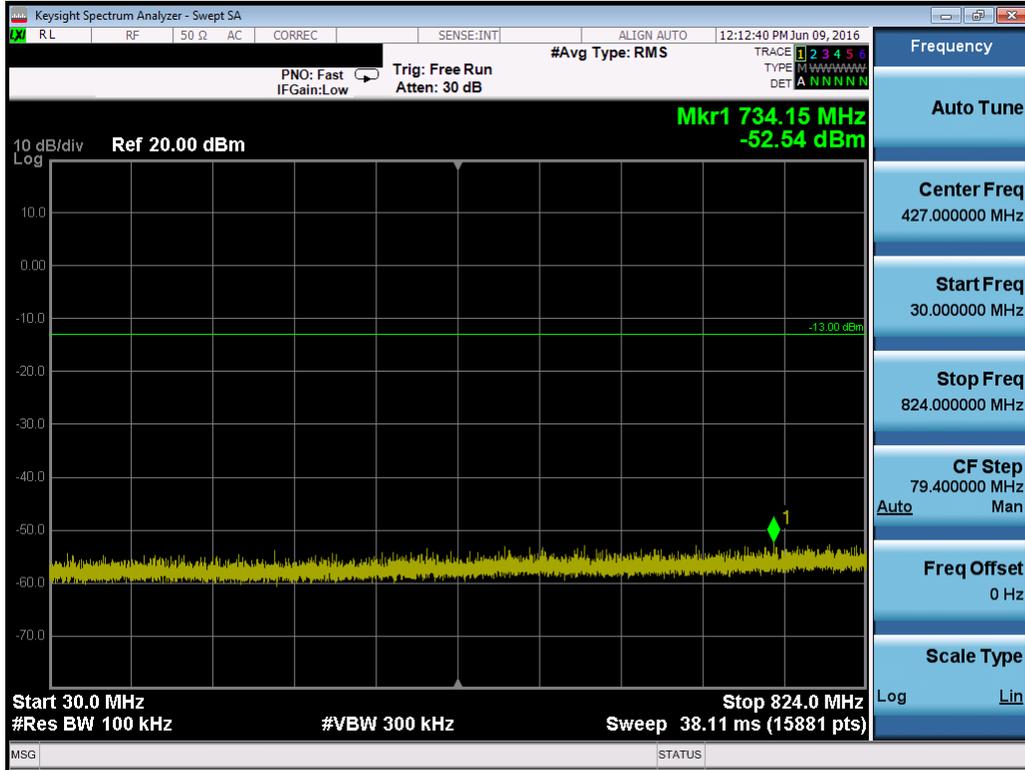


Plot 7-16. Conducted Spurious Plot (Cellular GSM Mode – Ch. 251)

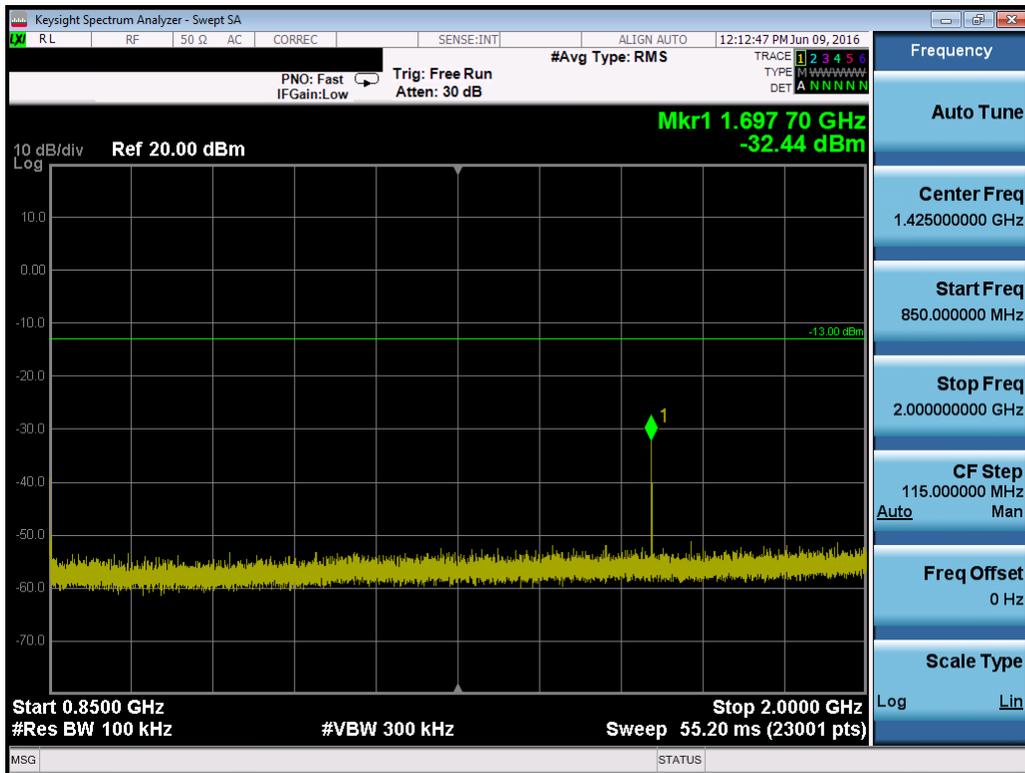


Plot 7-17. Conducted Spurious Plot (Cellular GSM Mode – Ch. 251)

FCC ID: ZNFLS755	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 GSM / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1605310985.ZNF	Test Dates: May 31 - July 07, 2016	EUT Type: Portable Handset		Page 23 of 101

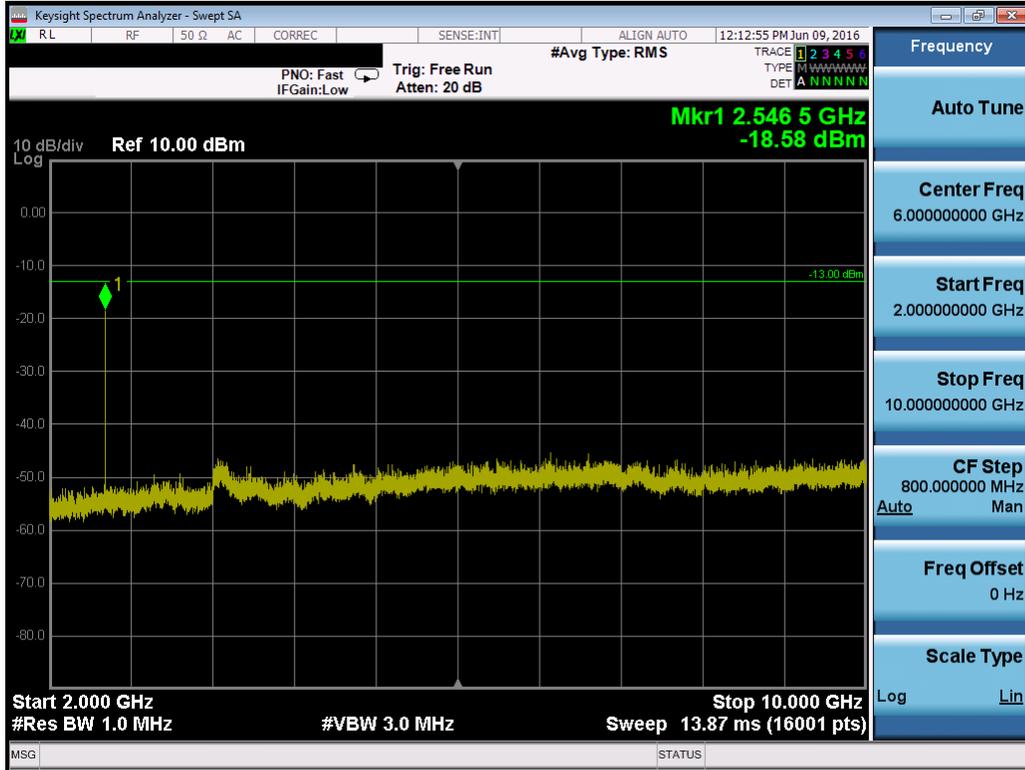


Plot 7-18. Conducted Spurious Plot (Cellular GSM Mode – Ch. 251)

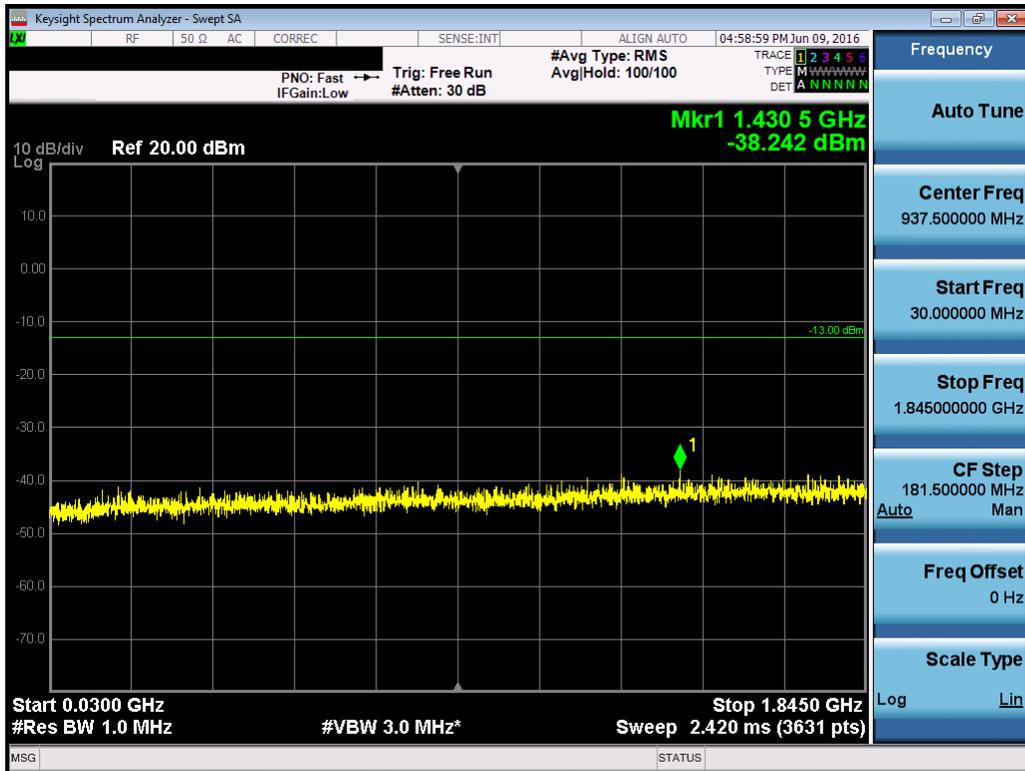


Plot 7-19. Conducted Spurious Plot (PCS GSM Mode – Ch. 512)

FCC ID: ZNFLS755		FCC Pt. 22, 24, & 27 GSM / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1605310985.ZNF	Test Dates: May 31 - July 07, 2016	EUT Type: Portable Handset		Page 24 of 101

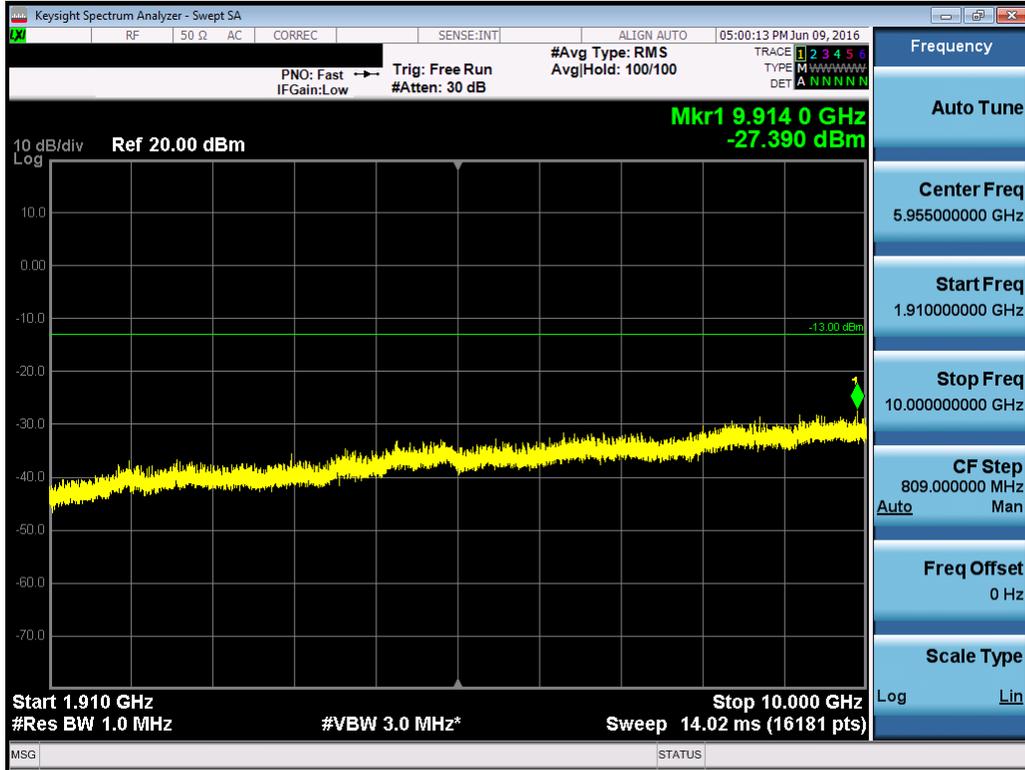


Plot 7-20. Conducted Spurious Plot (PCS GSM Mode – Ch. 512)

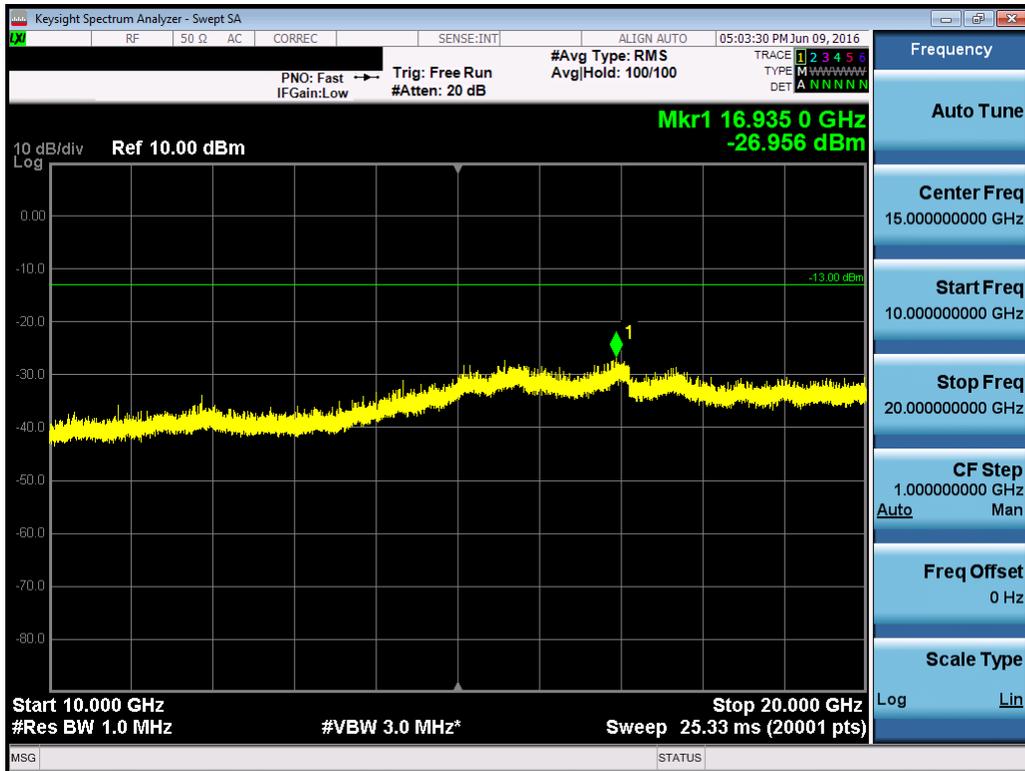


Plot 7-21. Conducted Spurious Plot (PCS GSM Mode – Ch. 512)

FCC ID: ZNFLS755		FCC Pt. 22, 24, & 27 GSM / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1605310985.ZNF	Test Dates: May 31 - July 07, 2016	EUT Type: Portable Handset		Page 25 of 101

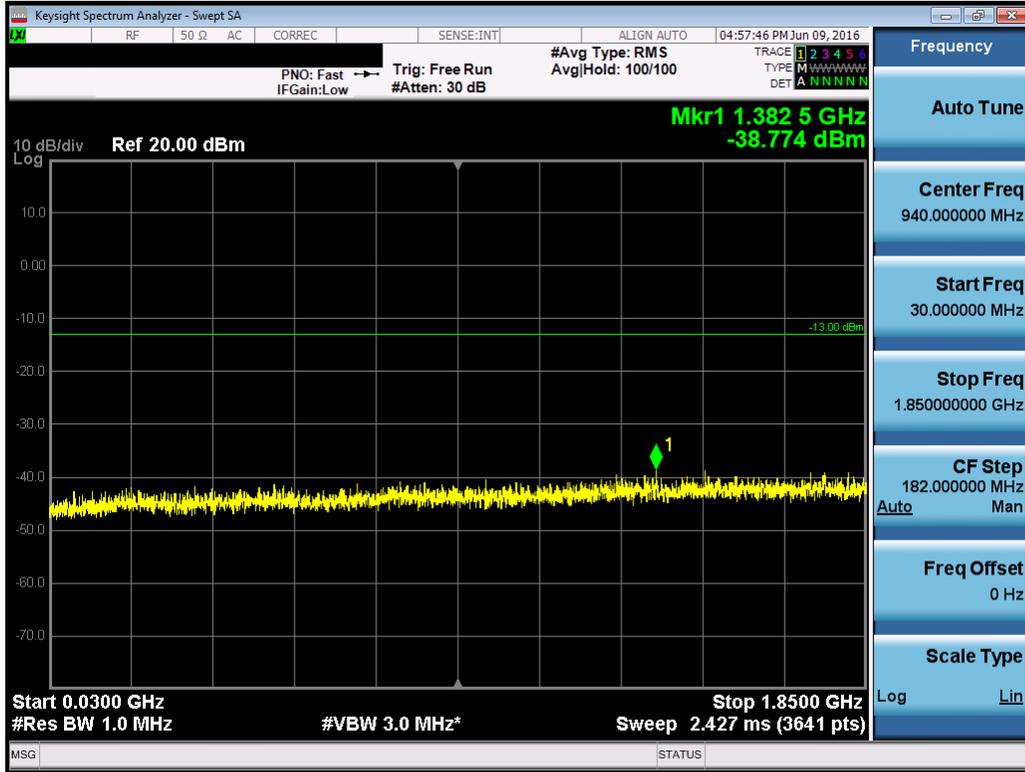


Plot 7-22. Conducted Spurious Plot (PCS GSM Mode – Ch. 661)

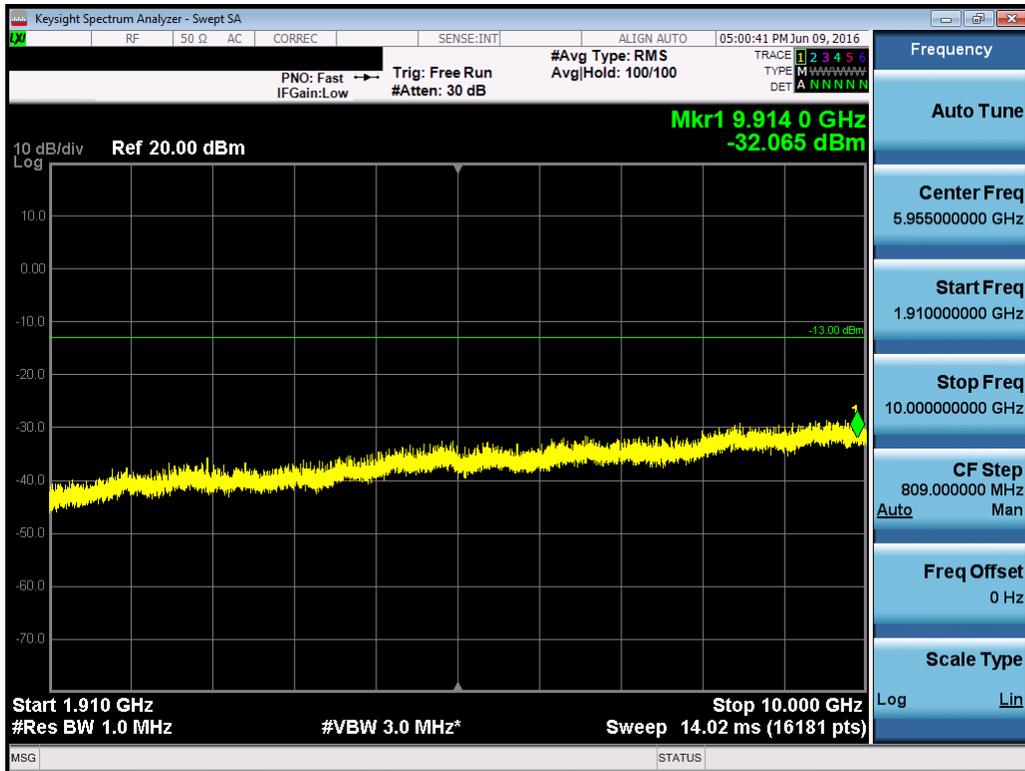


Plot 7-23. Conducted Spurious Plot (PCS GSM Mode – Ch. 661)

FCC ID: ZNFLS755	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 GSM / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: OY1605310985.ZNF	Test Dates: May 31 - July 07, 2016	EUT Type: Portable Handset		Page 26 of 101

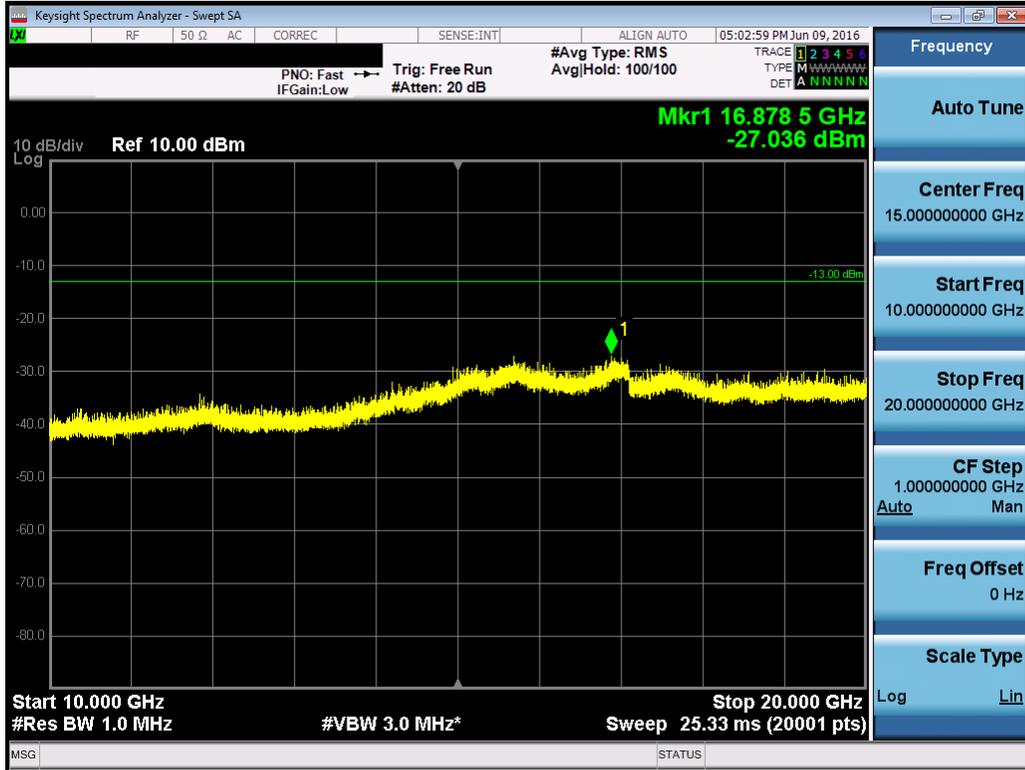


Plot 7-24. Conducted Spurious Plot (PCS GSM Mode – Ch. 661)

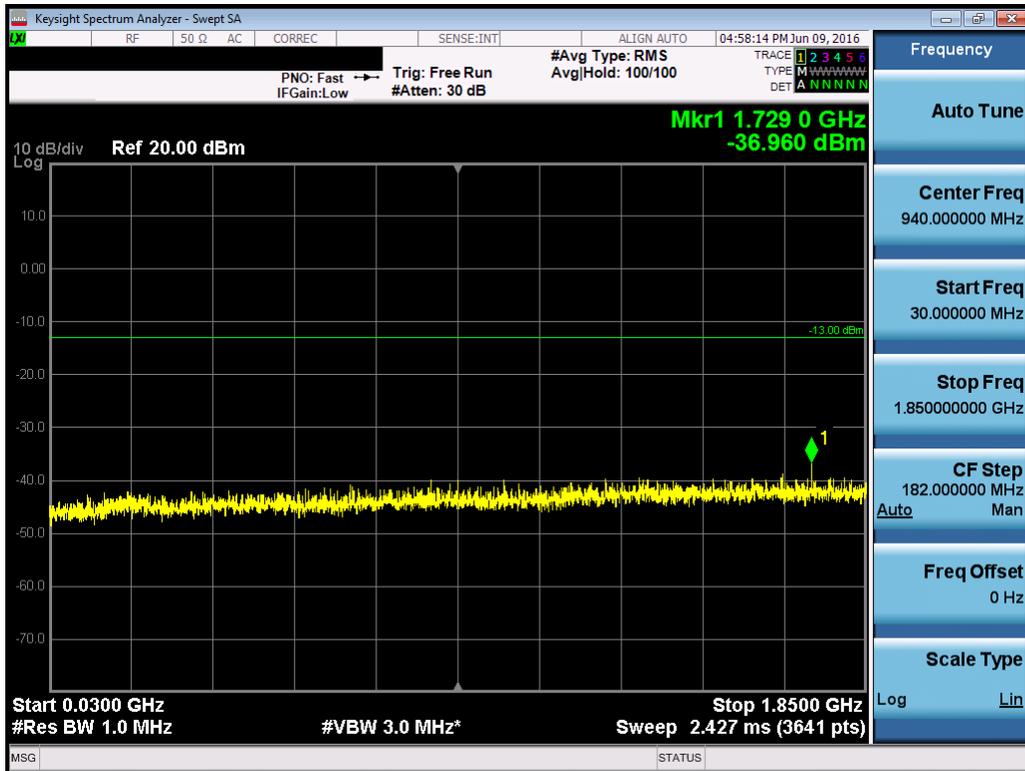


Plot 7-25. Conducted Spurious Plot (PCS GSM Mode – Ch. 810)

FCC ID: ZNFLS755	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 GSM / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1605310985.ZNF	Test Dates: May 31 - July 07, 2016	EUT Type: Portable Handset		Page 27 of 101

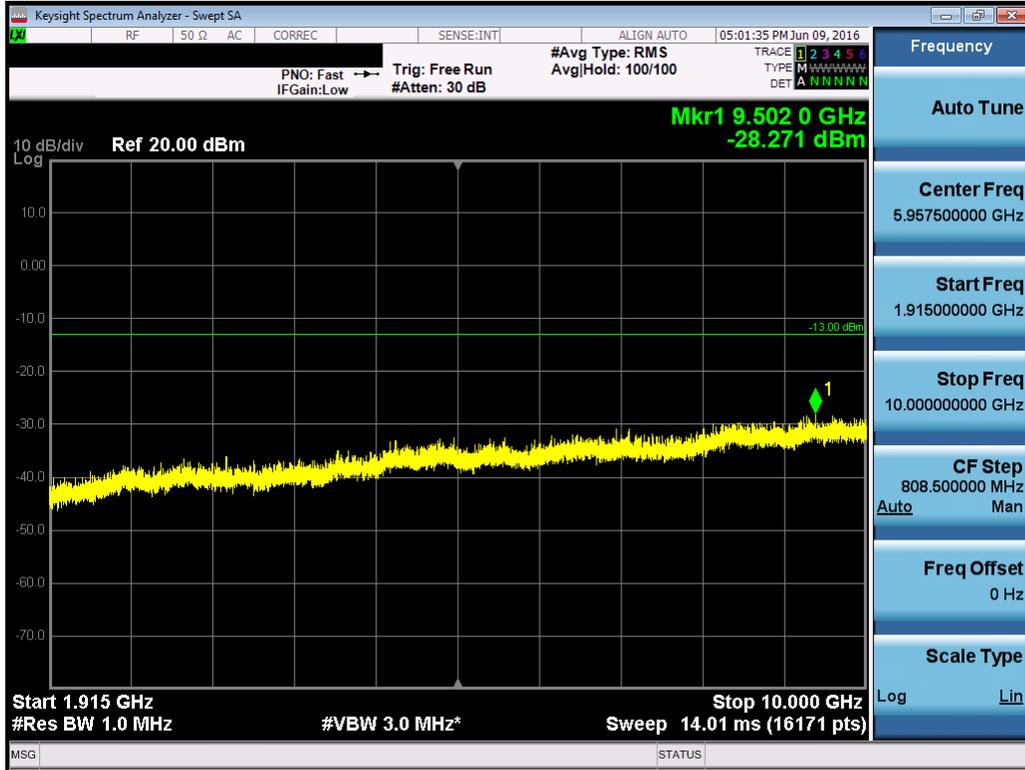


Plot 7-26. Conducted Spurious Plot (PCS GSM Mode – Ch. 810)

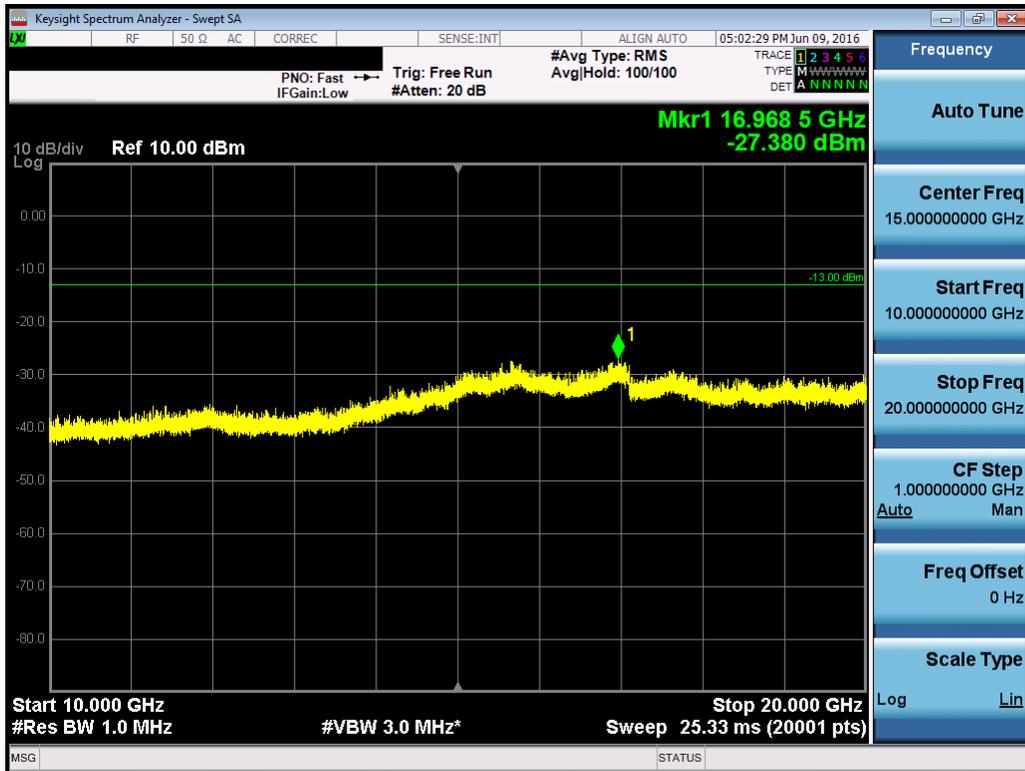


Plot 7-27. Conducted Spurious Plot (PCS GSM Mode – Ch. 810)

FCC ID: ZNFLS755	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 GSM / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1605310985.ZNF	Test Dates: May 31 - July 07, 2016	EUT Type: Portable Handset		Page 28 of 101

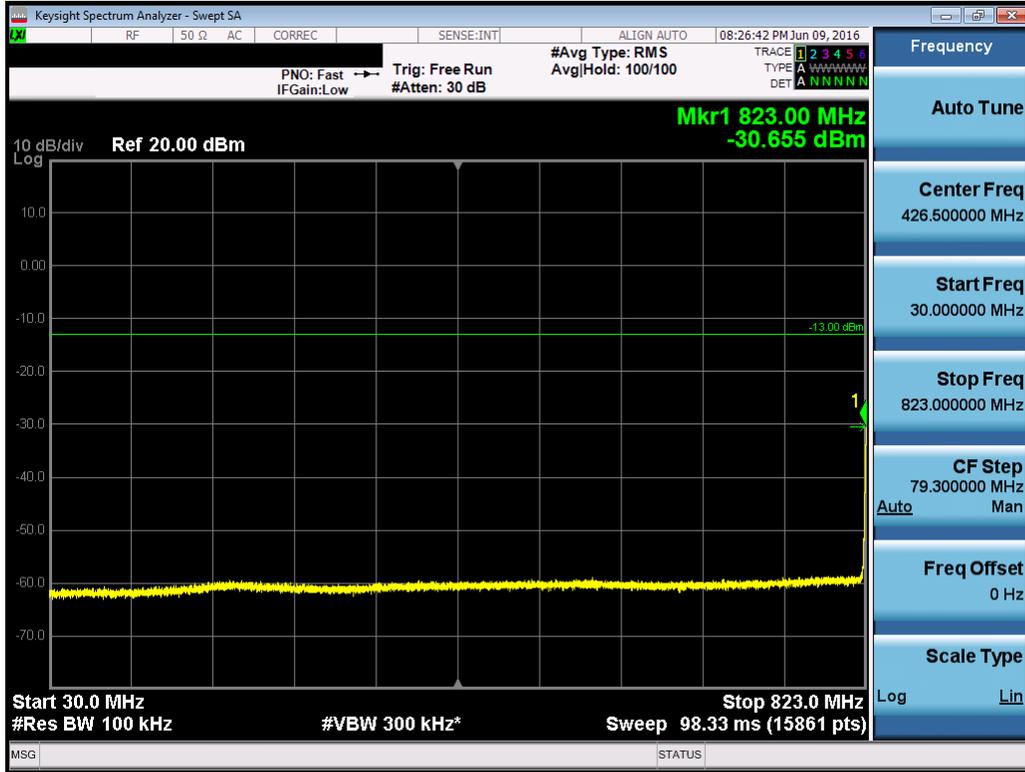

Plot 7-28. Conducted Spurious Plot (Cellular CDMA Mode – Ch. 1013)

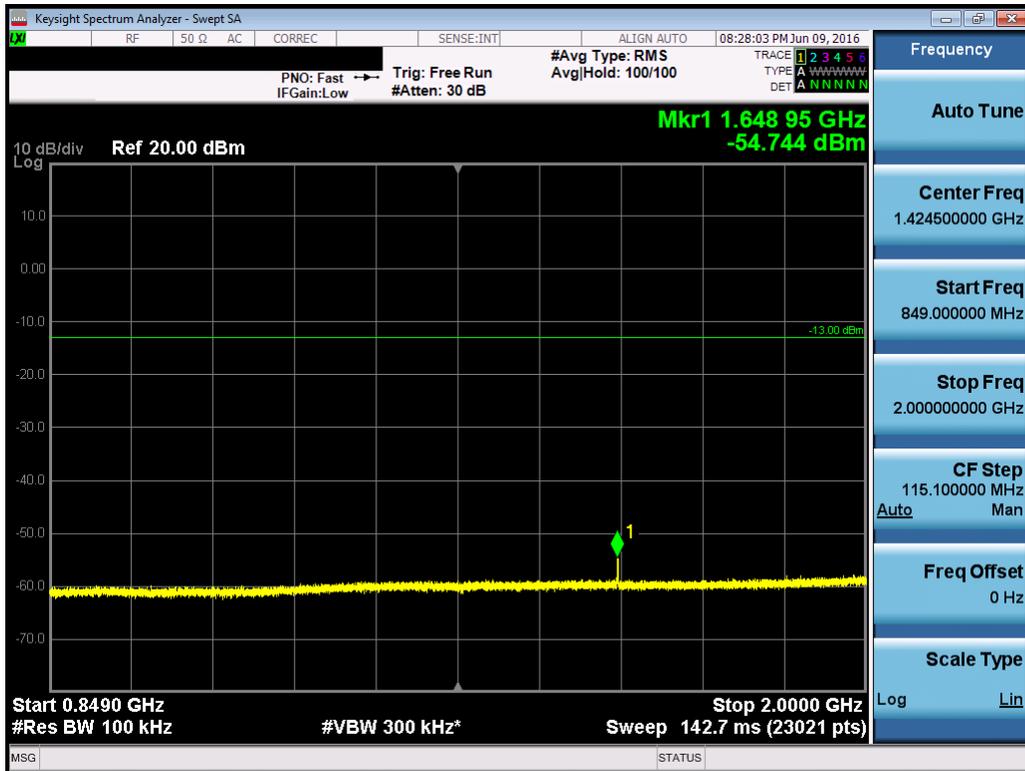


Plot 7-29. Conducted Spurious Plot (Cellular CDMA Mode – Ch. 1013)

FCC ID: ZNFLS755	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 GSM / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1605310985.ZNF	Test Dates: May 31 - July 07, 2016	EUT Type: Portable Handset		Page 29 of 101




Plot 7-30. Conducted Spurious Plot (Cellular CDMA Mode – Ch. 1013)

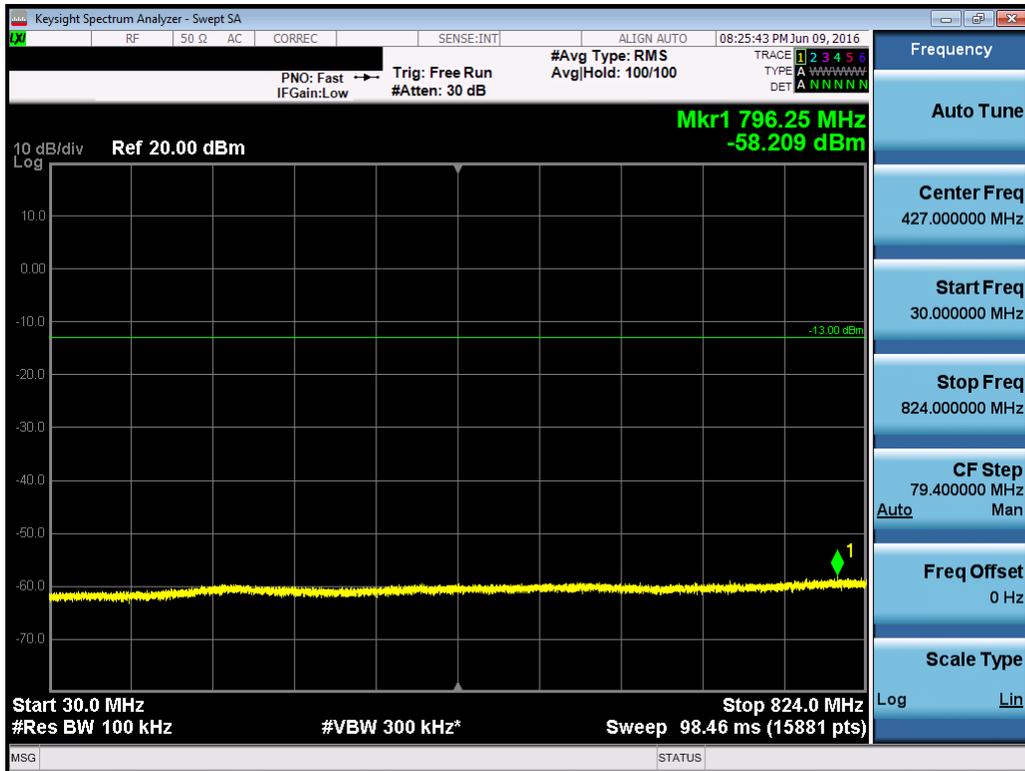


Plot 7-31. Conducted Spurious Plot (Cellular CDMA Mode – Ch. 384)

FCC ID: ZNFLS755		FCC Pt. 22, 24, & 27 GSM / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: OY1605310985.ZNF	Test Dates: May 31 - July 07, 2016	EUT Type: Portable Handset		Page 30 of 101

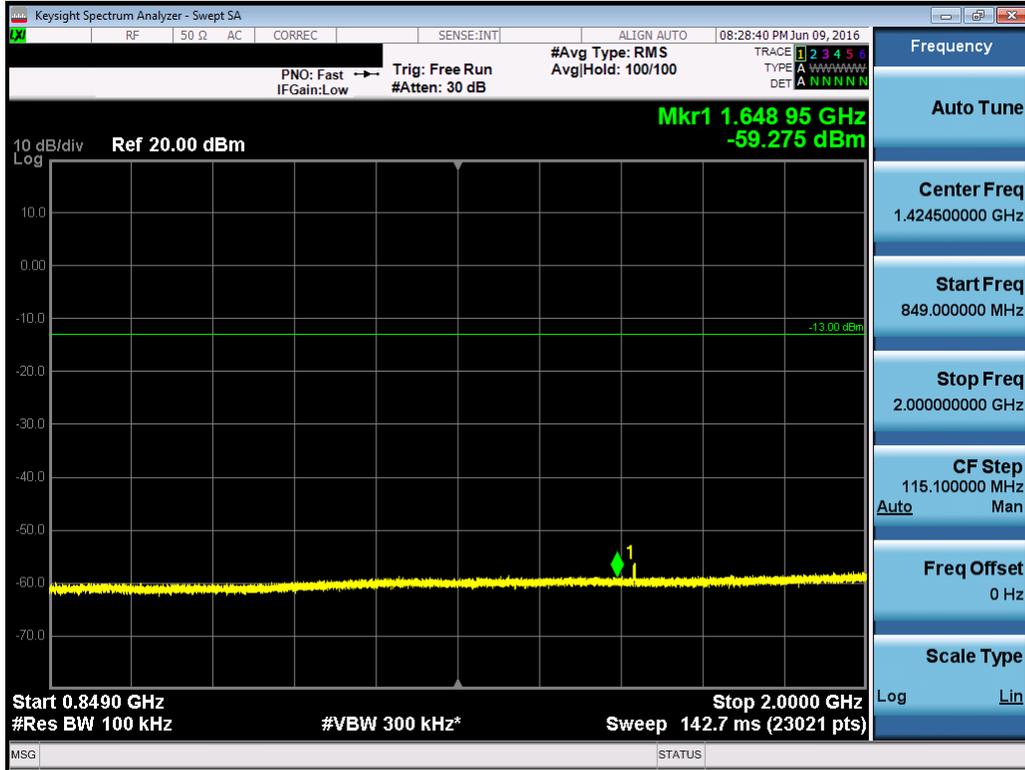


Plot 7-32. Conducted Spurious Plot (Cellular CDMA Mode – Ch. 384)

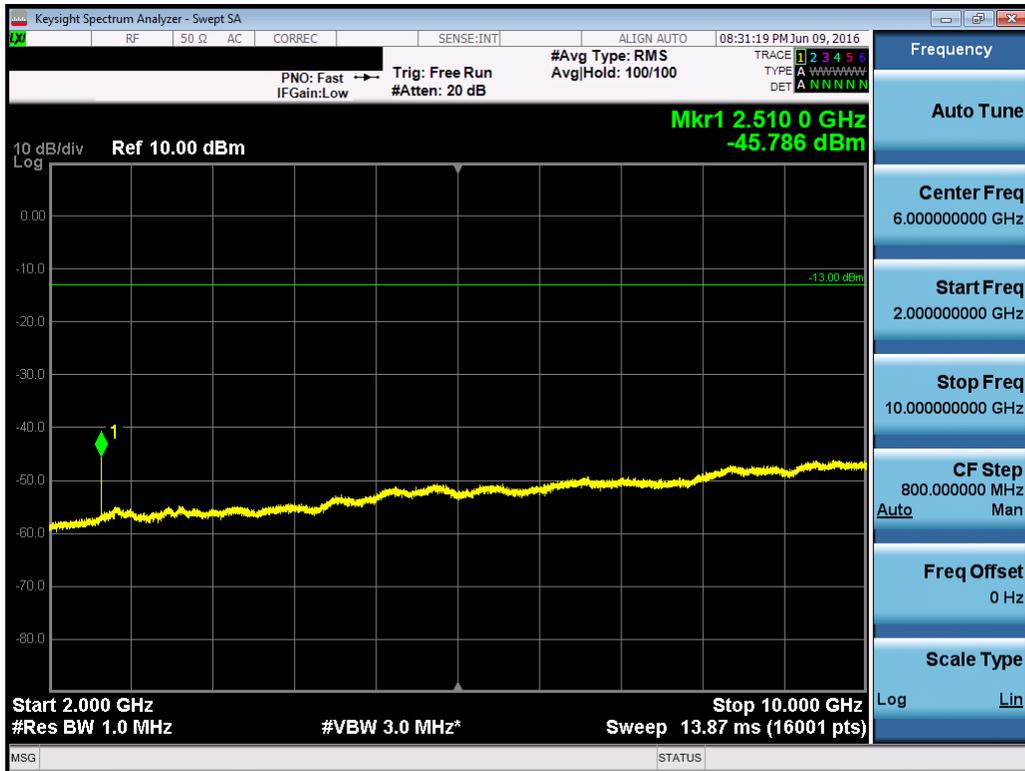


Plot 7-33. Conducted Spurious Plot (Cellular CDMA Mode – Ch. 384)

FCC ID: ZNFLS755		FCC Pt. 22, 24, & 27 GSM / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1605310985.ZNF	Test Dates: May 31 - July 07, 2016	EUT Type: Portable Handset		Page 31 of 101

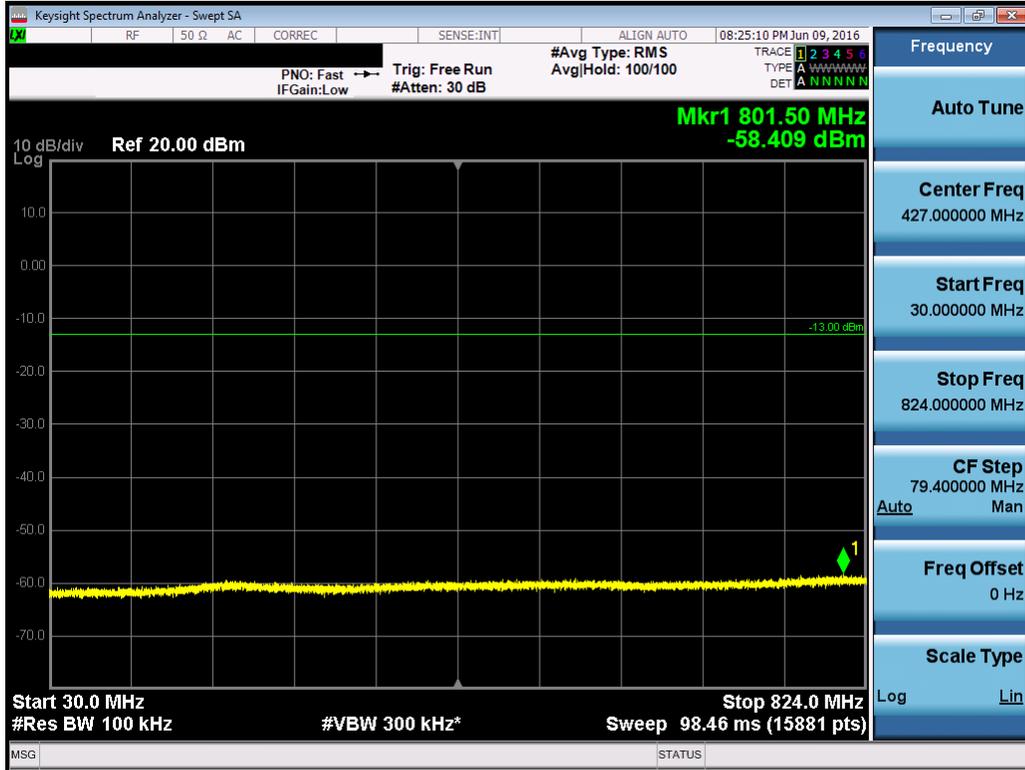

Plot 7-34. Conducted Spurious Plot (Cellular CDMA Mode – Ch. 777)

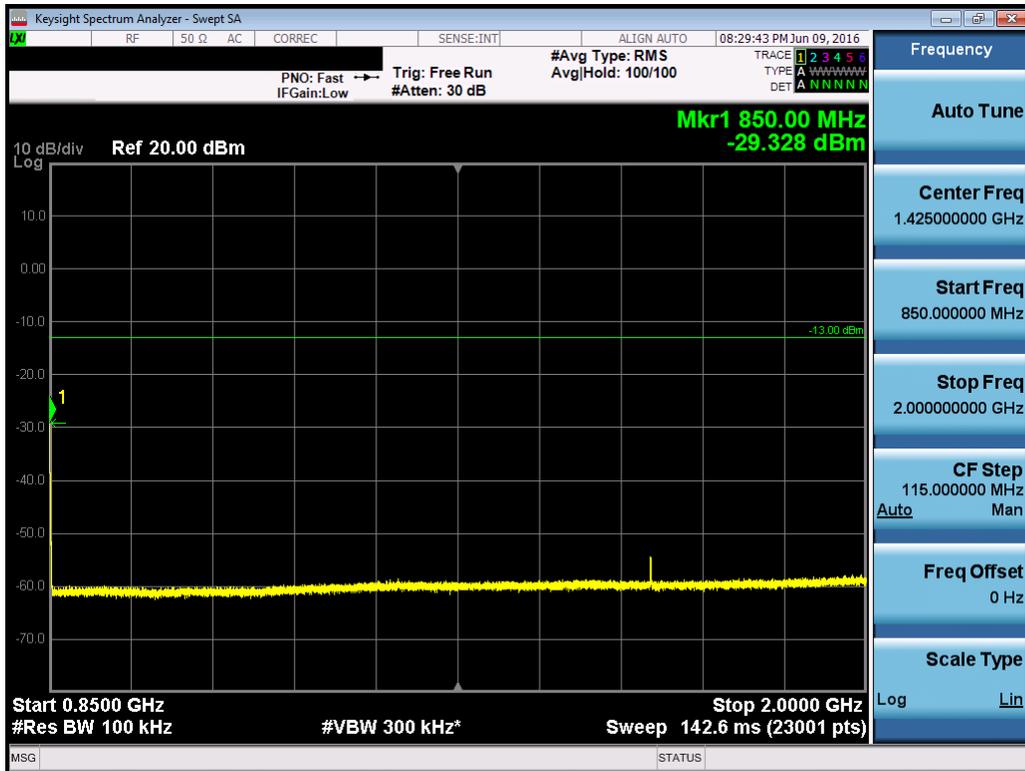


Plot 7-35. Conducted Spurious Plot (Cellular CDMA Mode – Ch. 777)

FCC ID: ZNFLS755	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 GSM / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: OY1605310985.ZNF	Test Dates: May 31 - July 07, 2016	EUT Type: Portable Handset		Page 32 of 101




Plot 7-36. Conducted Spurious Plot (Cellular CDMA Mode – Ch. 777)

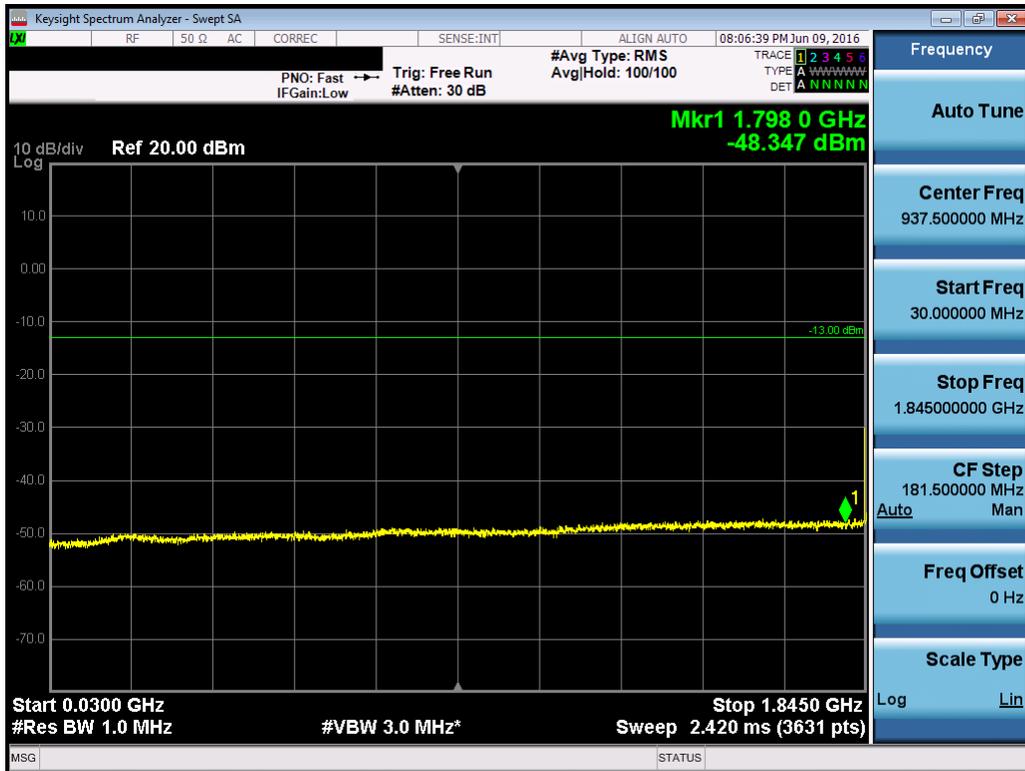

Plot 7-37. Conducted Spurious Plot (PCS CDMA Mode – Ch. 25)

FCC ID: ZNFLS755		FCC Pt. 22, 24, & 27 GSM / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1605310985.ZNF	Test Dates: May 31 - July 07, 2016	EUT Type: Portable Handset		Page 33 of 101

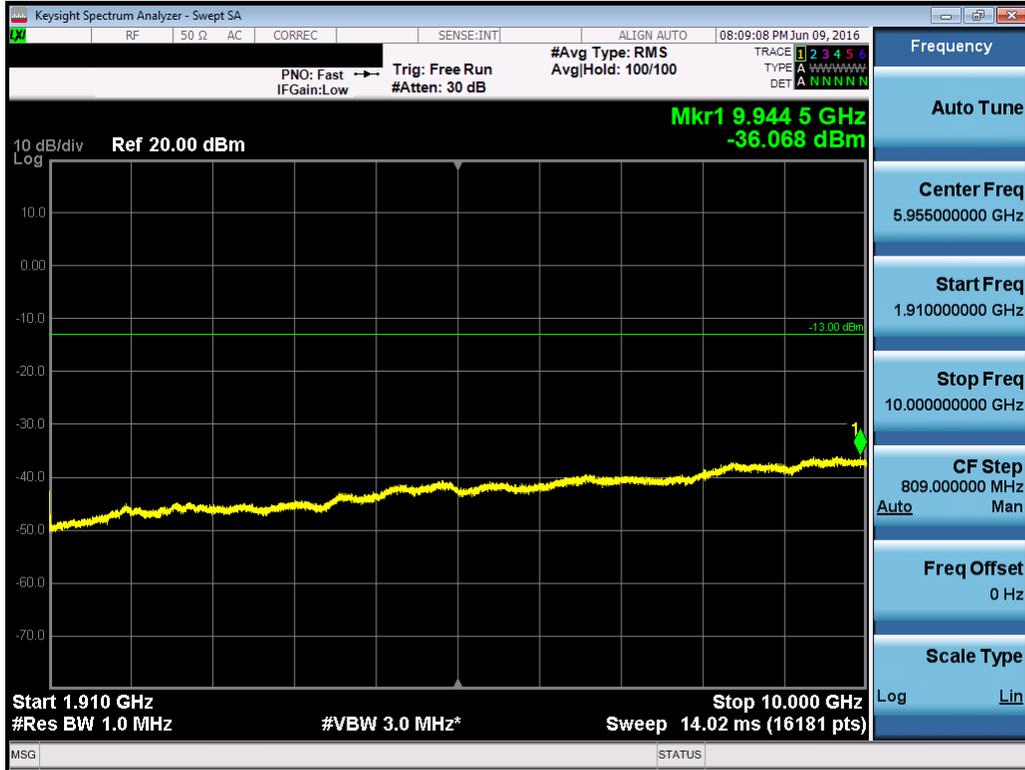


Plot 7-38. Conducted Spurious Plot (PCS CDMA Mode – Ch. 25)



Plot 7-39. Conducted Spurious Plot (PCS CDMA Mode – Ch. 25)

FCC ID: ZNFLS755	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 GSM / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1605310985.ZNF	Test Dates: May 31 - July 07, 2016	EUT Type: Portable Handset		Page 34 of 101

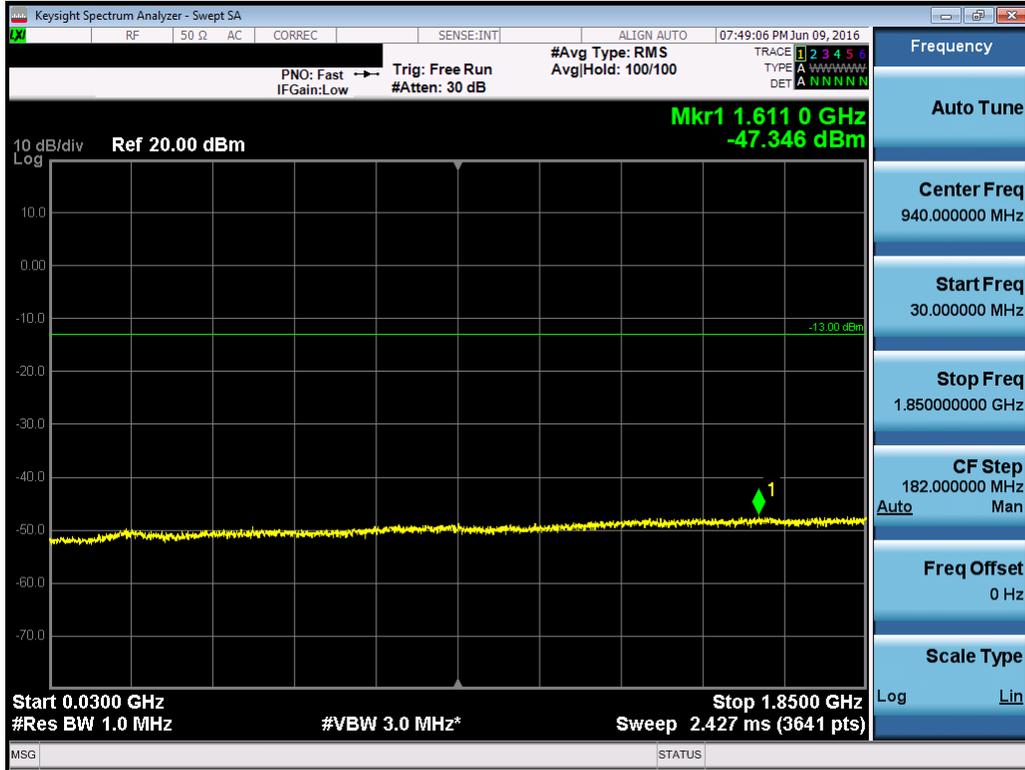

Plot 7-40. Conducted Spurious Plot (PCS CDMA Mode – Ch. 600)




Plot 7-41. Conducted Spurious Plot (PCS CDMA Mode – Ch. 600)

FCC ID: ZNFLS755		FCC Pt. 22, 24, & 27 GSM / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1605310985.ZNF	Test Dates: May 31 - July 07, 2016	EUT Type: Portable Handset		Page 35 of 101




Plot 7-42. Conducted Spurious Plot (PCS CDMA Mode – Ch. 600)

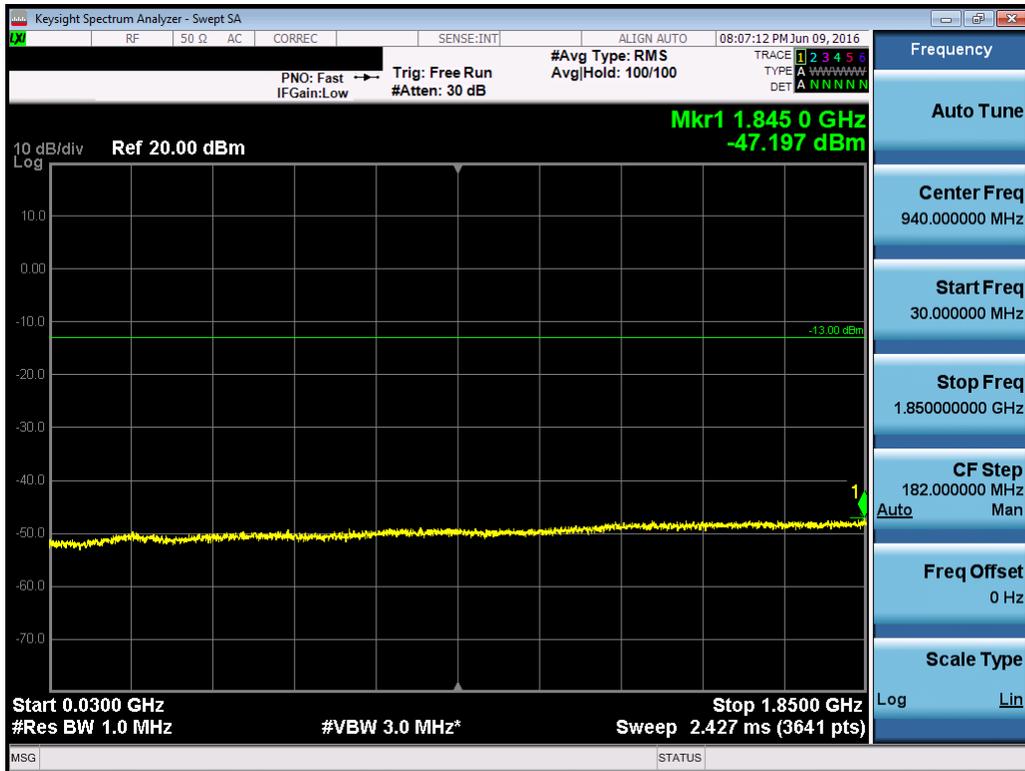

Plot 7-43. Conducted Spurious Plot (PCS CDMA Mode – Ch. 1175)

FCC ID: ZNFLS755	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 GSM / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1605310985.ZNF	Test Dates: May 31 - July 07, 2016	EUT Type: Portable Handset		Page 36 of 101

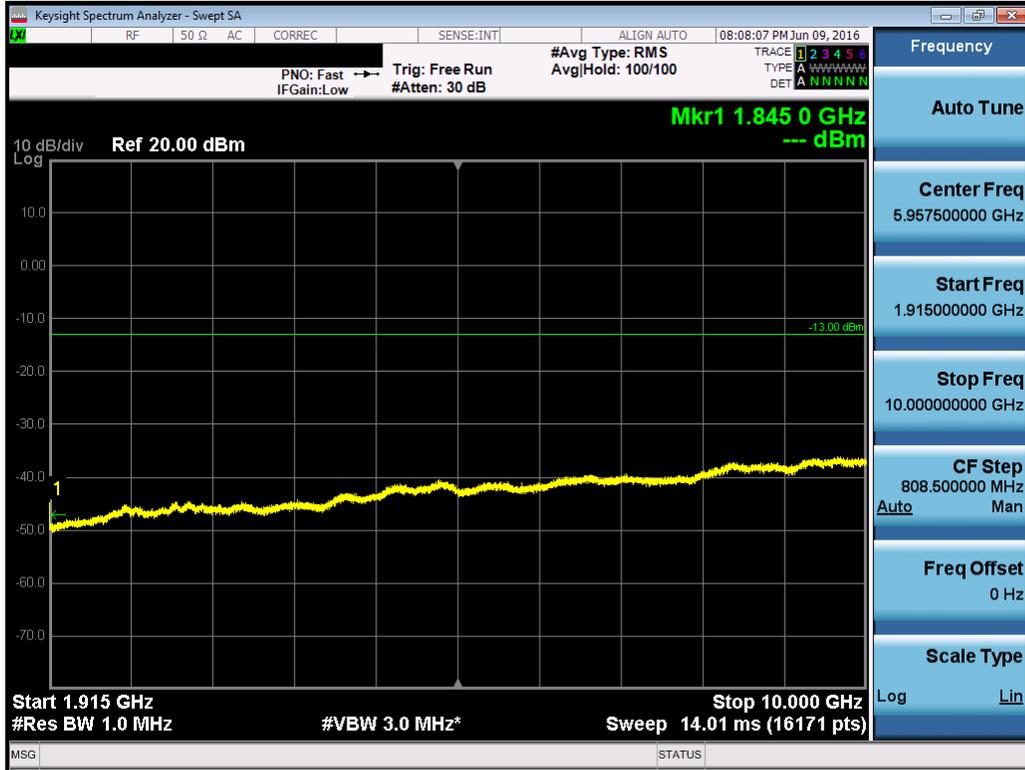


Plot 7-44. Conducted Spurious Plot (PCS CDMA Mode – Ch. 1175)




Plot 7-45. Conducted Spurious Plot (PCS CDMA Mode – Ch. 1175)

FCC ID: ZNFLS755	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 GSM / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1605310985.ZNF	Test Dates: May 31 - July 07, 2016	EUT Type: Portable Handset		Page 37 of 101

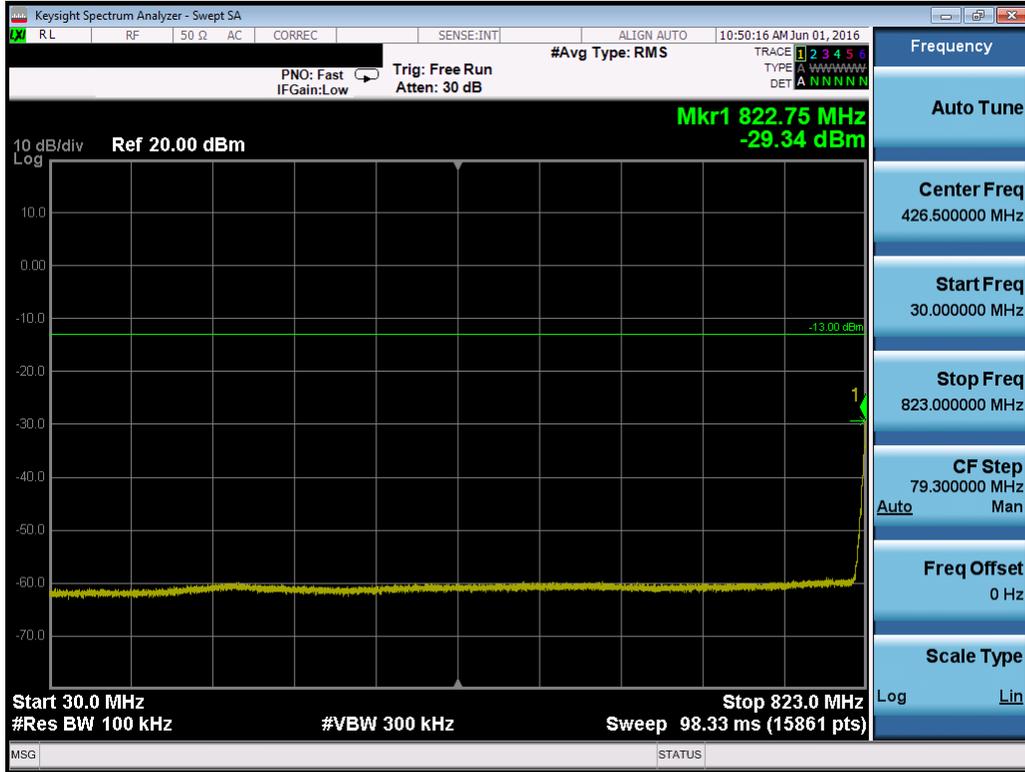


Plot 7-46. Conducted Spurious Plot (Cellular WCDMA Mode – Ch. 4132)

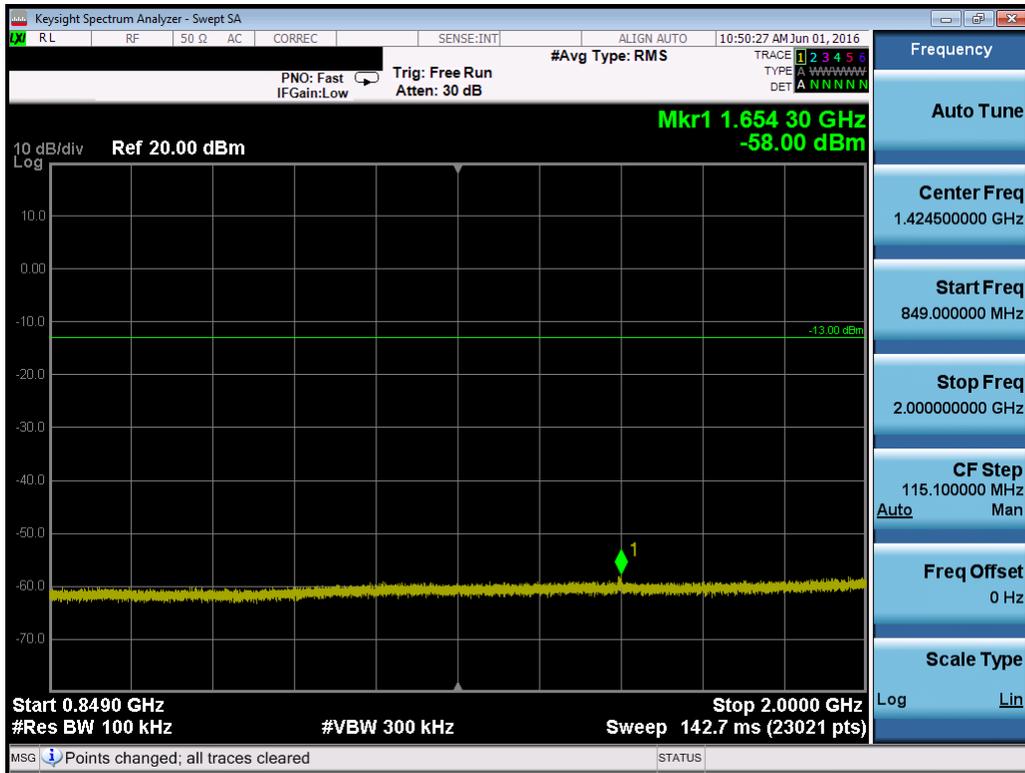


Plot 7-47. Conducted Spurious Plot (Cellular WCDMA Mode – Ch. 4132)

FCC ID: ZNFLS755		FCC Pt. 22, 24, & 27 GSM / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1605310985.ZNF	Test Dates: May 31 - July 07, 2016	EUT Type: Portable Handset		Page 38 of 101

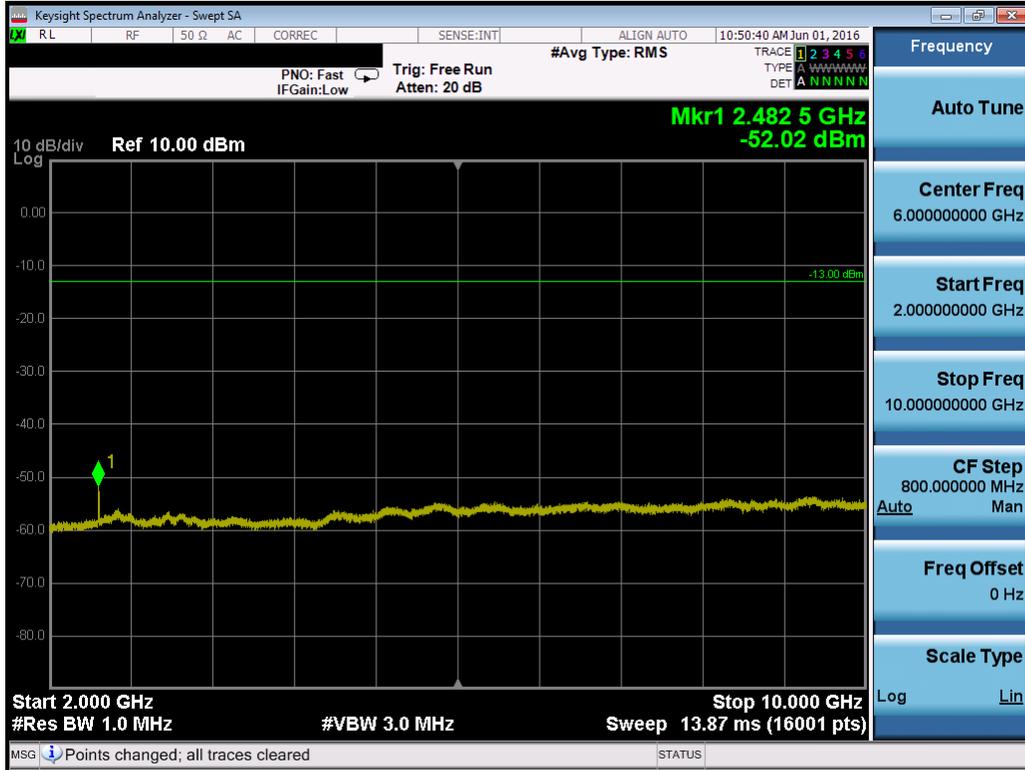


Plot 7-48. Conducted Spurious Plot (Cellular WCDMA Mode – Ch. 4132)

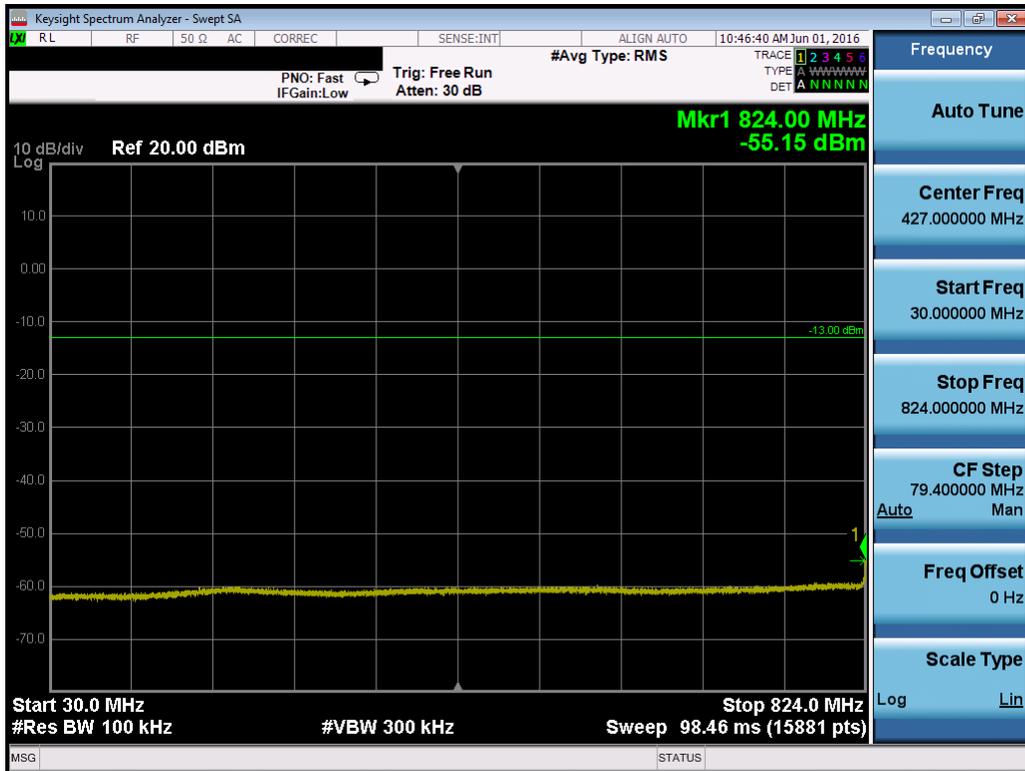


Plot 7-49. Conducted Spurious Plot (Cellular WCDMA Mode – Ch. 4183)

FCC ID: ZNFLS755	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 GSM / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1605310985.ZNF	Test Dates: May 31 - July 07, 2016	EUT Type: Portable Handset		Page 39 of 101

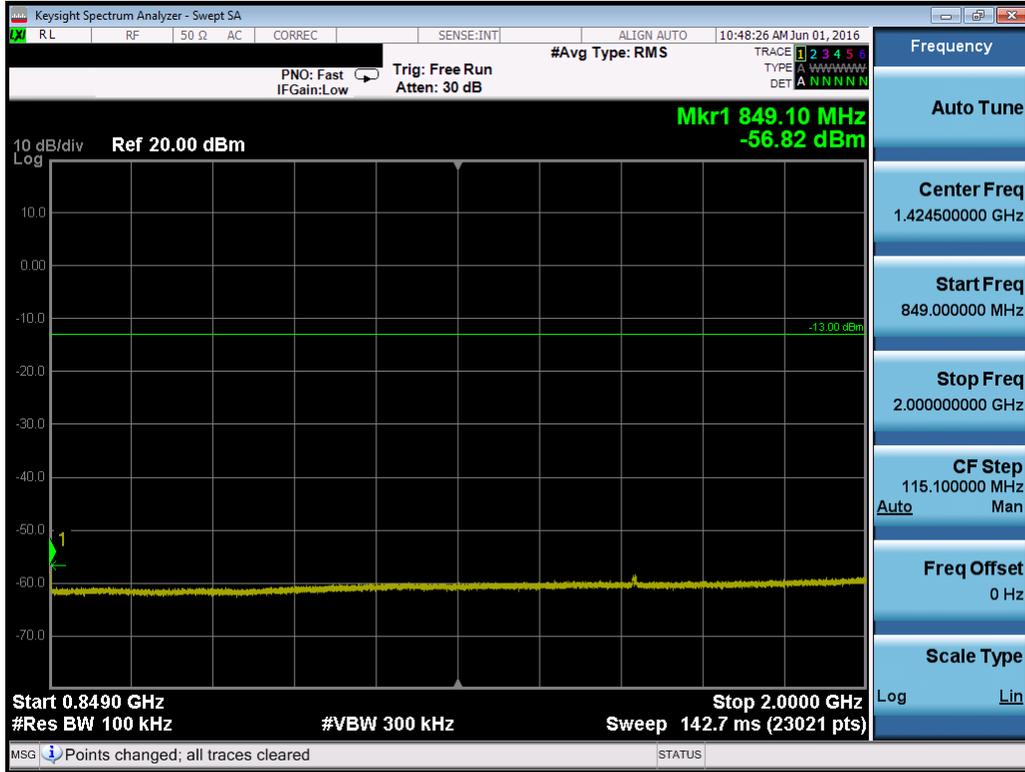


Plot 7-50. Conducted Spurious Plot (Cellular WCDMA Mode – Ch. 4183)

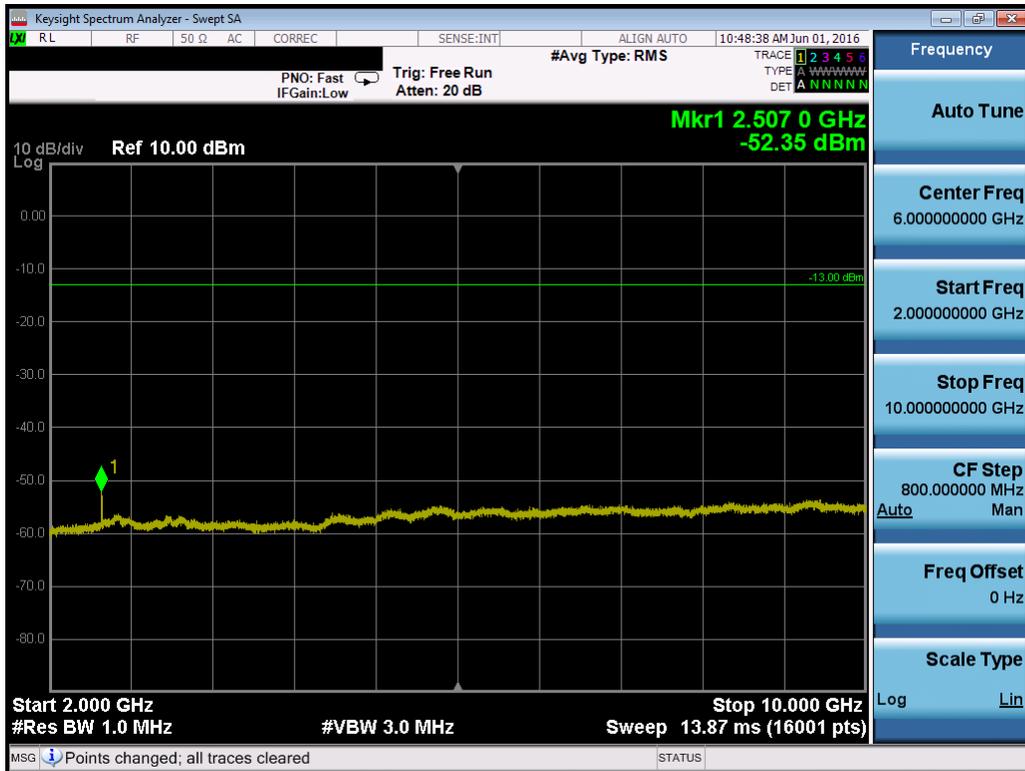


Plot 7-51. Conducted Spurious Plot (Cellular WCDMA Mode – Ch. 4183)

FCC ID: ZNFLS755		FCC Pt. 22, 24, & 27 GSM / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1605310985.ZNF	Test Dates: May 31 - July 07, 2016	EUT Type: Portable Handset		Page 40 of 101

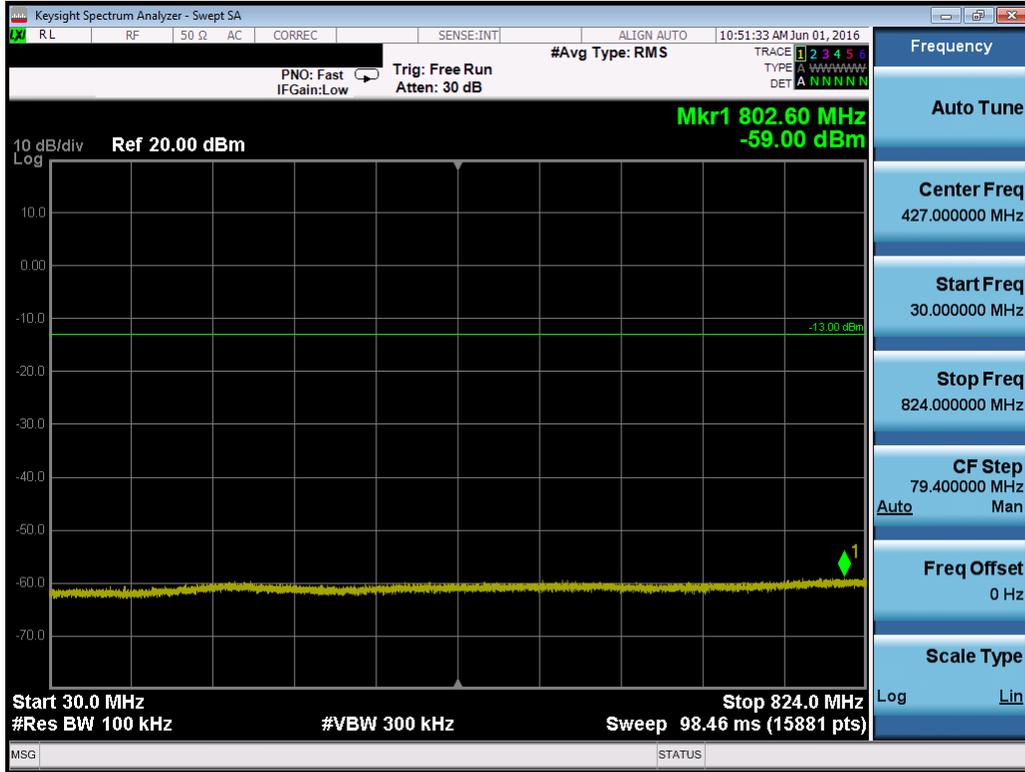


Plot 7-52. Conducted Spurious Plot (Cellular WCDMA Mode – Ch. 4233)

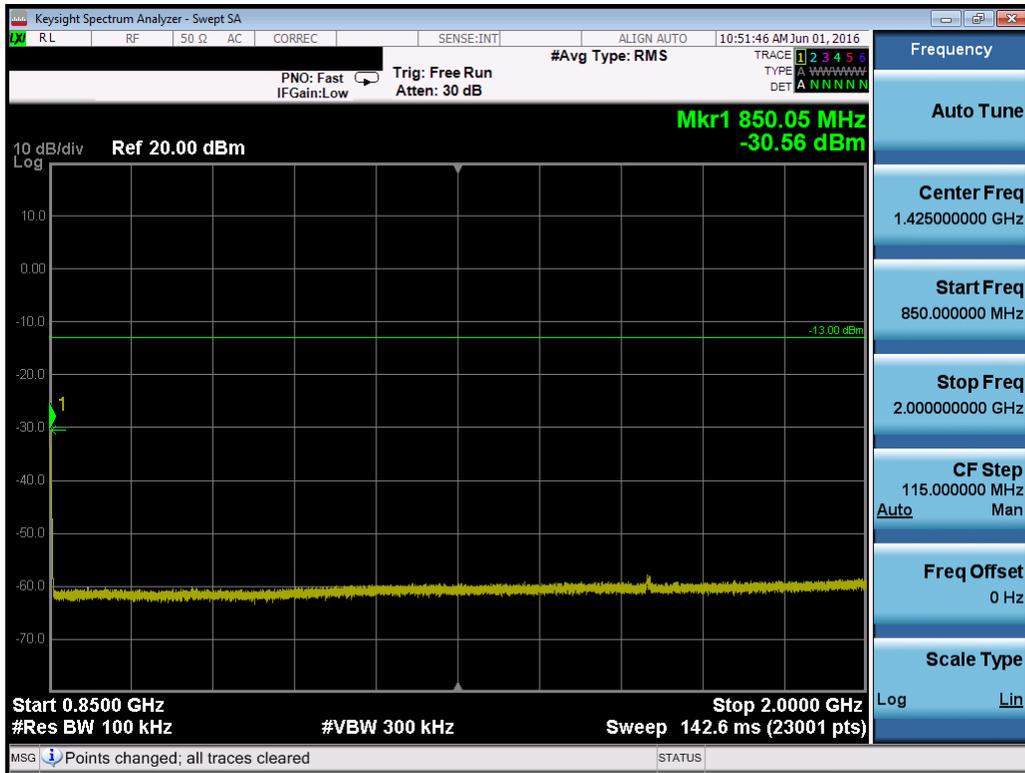


Plot 7-53. Conducted Spurious Plot (Cellular WCDMA Mode – Ch. 4233)

FCC ID: ZNFLS755		FCC Pt. 22, 24, & 27 GSM / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1605310985.ZNF	Test Dates: May 31 - July 07, 2016	EUT Type: Portable Handset		Page 41 of 101

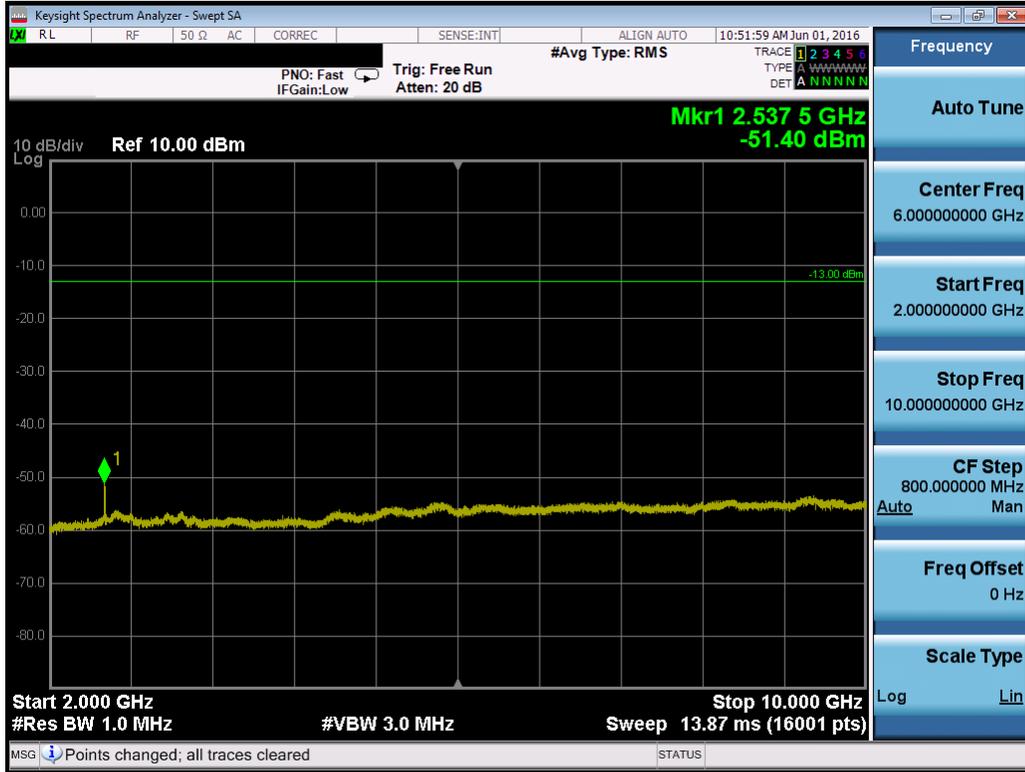


Plot 7-54. Conducted Spurious Plot (Cellular WCDMA Mode – Ch. 4233)

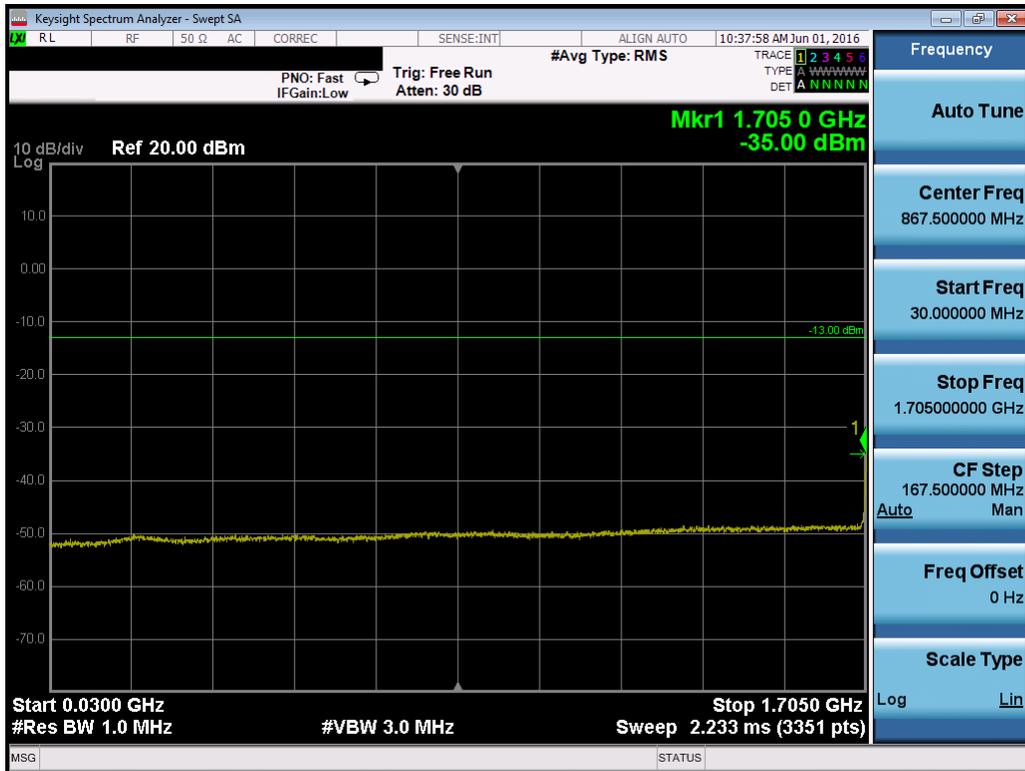


Plot 7-55. Conducted Spurious Plot (AWS WCDMA Mode – Ch. 1312)

FCC ID: ZNFLS755	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 GSM / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1605310985.ZNF	Test Dates: May 31 - July 07, 2016	EUT Type: Portable Handset		Page 42 of 101

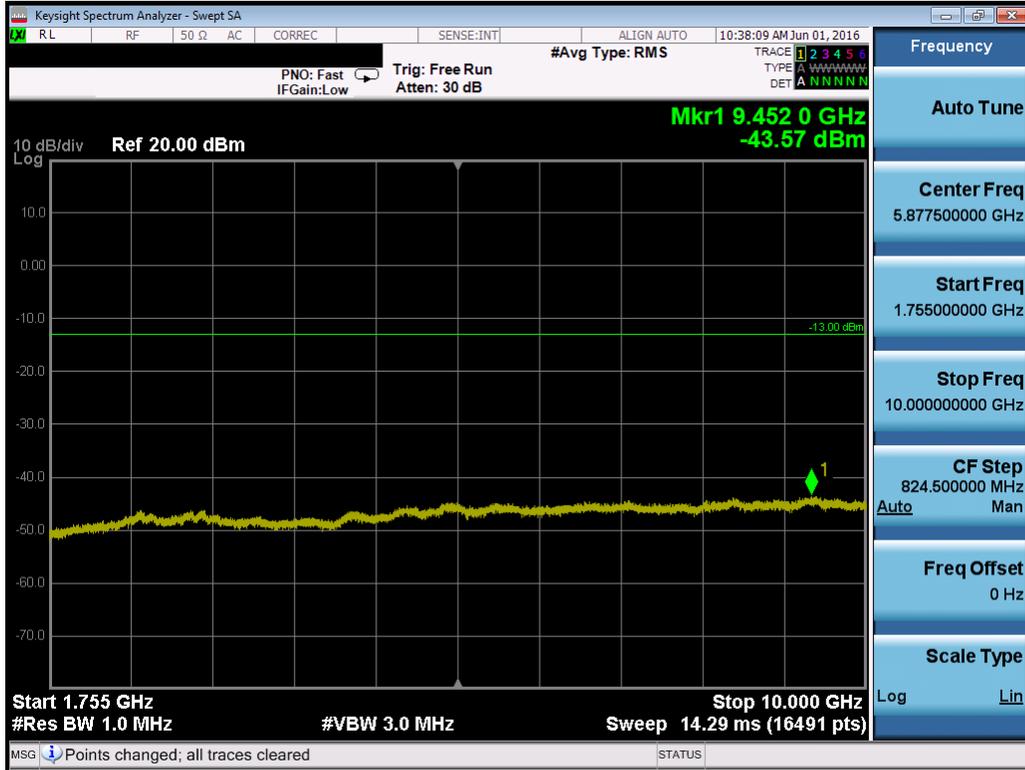


Plot 7-56. Conducted Spurious Plot (AWS WCDMA Mode – Ch. 1312)

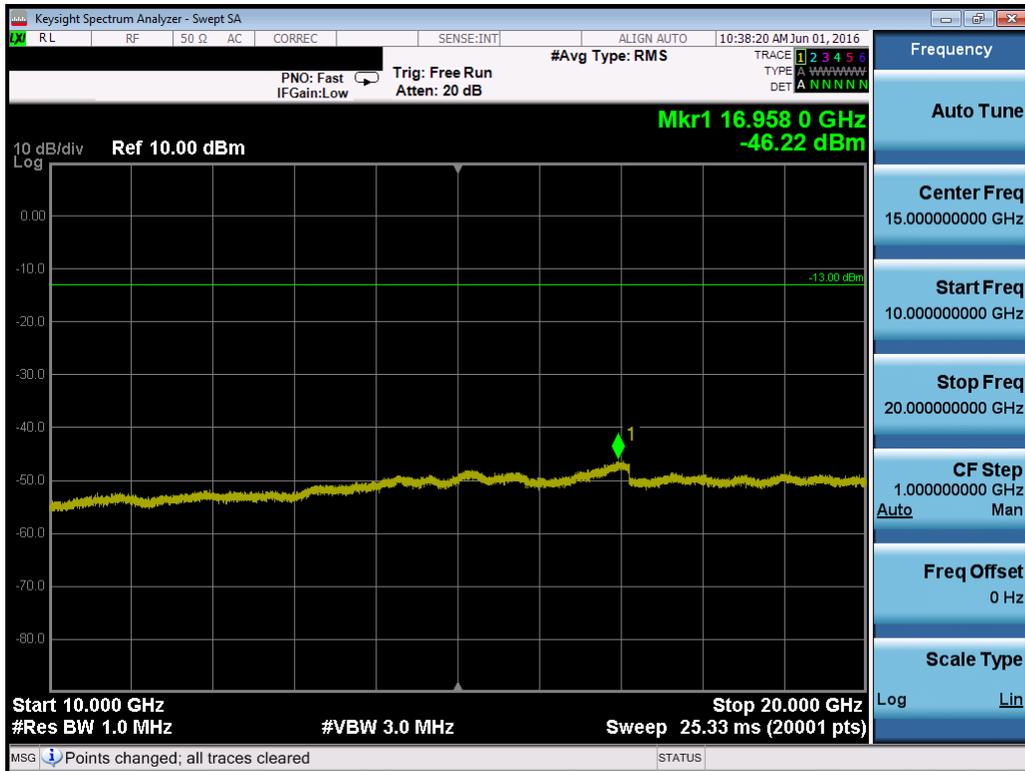


Plot 7-57. Conducted Spurious Plot (AWS WCDMA Mode – Ch. 1312)

FCC ID: ZNFLS755	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 GSM / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1605310985.ZNF	Test Dates: May 31 - July 07, 2016	EUT Type: Portable Handset		Page 43 of 101

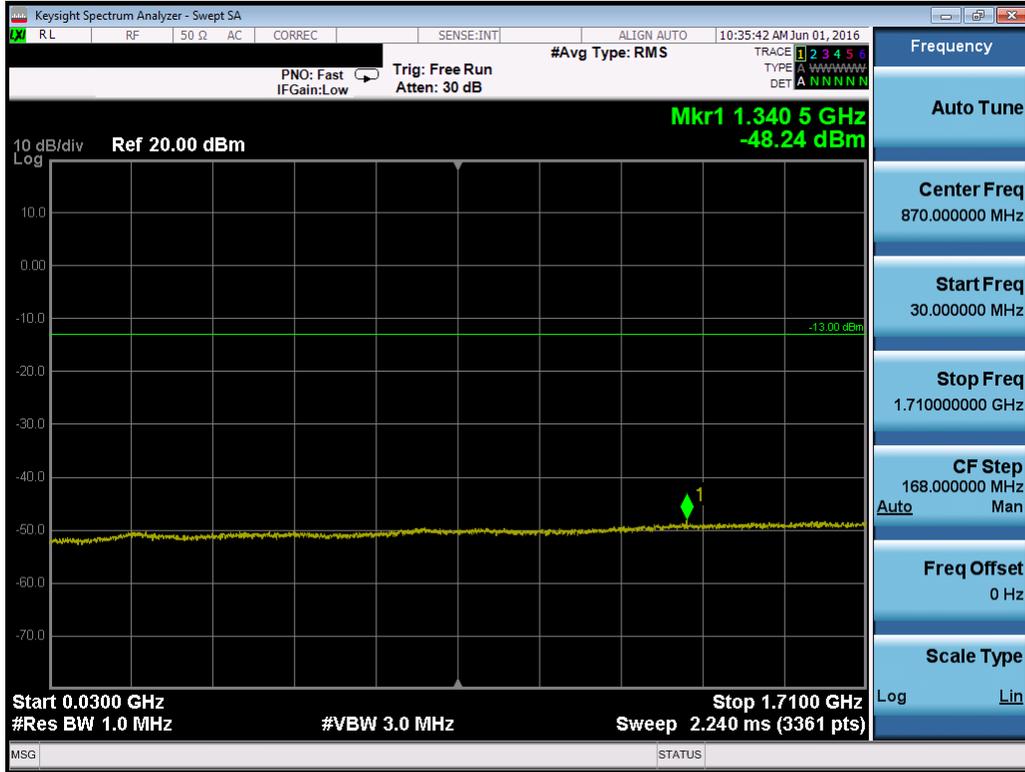


Plot 7-58. Conducted Spurious Plot (AWS WCDMA Mode – Ch. 1412)

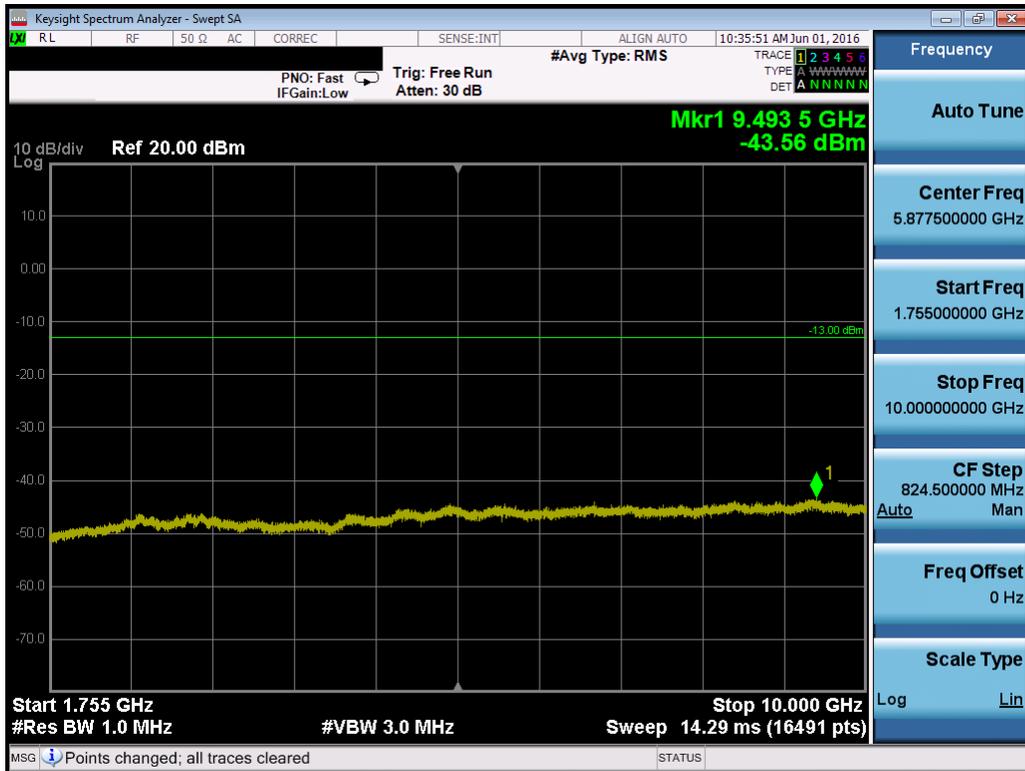


Plot 7-59. Conducted Spurious Plot (AWS WCDMA Mode – Ch. 1412)

FCC ID: ZNFLS755		FCC Pt. 22, 24, & 27 GSM / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: OY1605310985.ZNF	Test Dates: May 31 - July 07, 2016	EUT Type: Portable Handset		Page 44 of 101



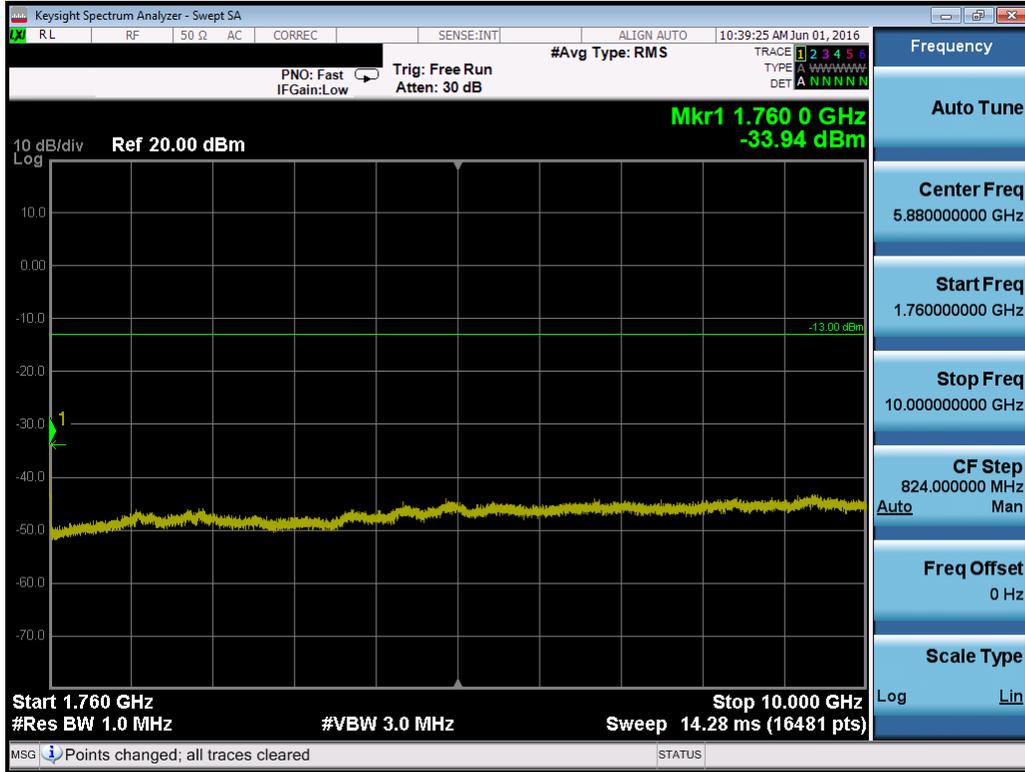


**Plot 7-62. Conducted Spurious Plot (AWS WCDMA Mode – Ch. 1862)**

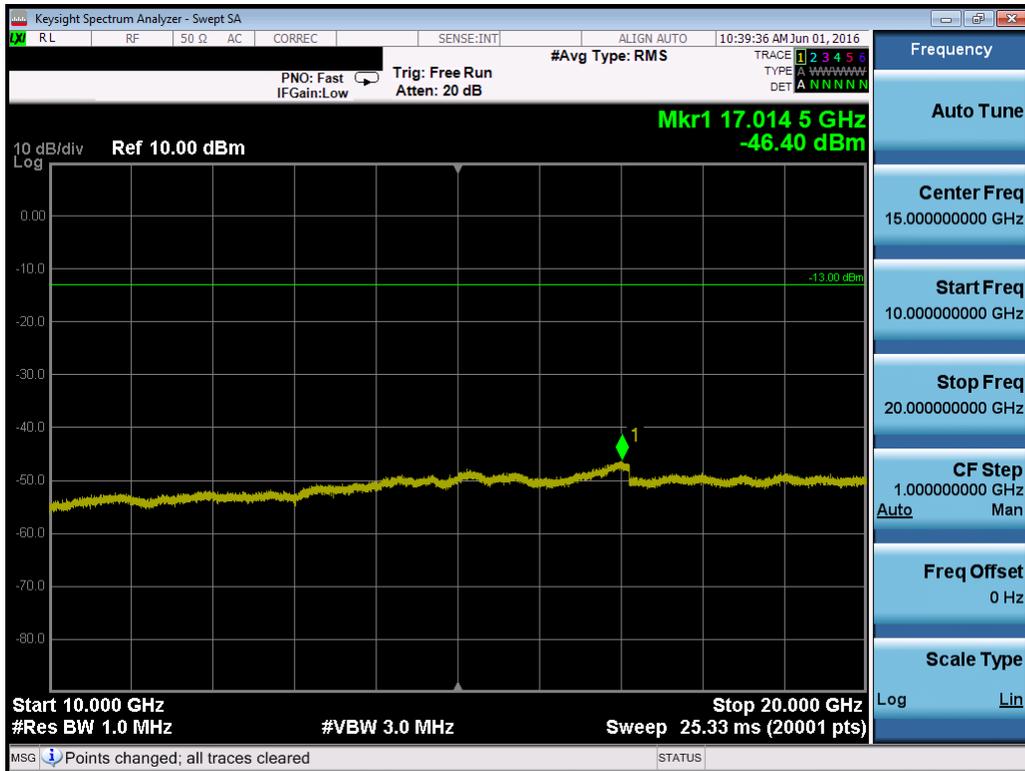


**Plot 7-63. Conducted Spurious Plot (AWS WCDMA Mode – Ch. 1862)**

FCC ID: ZNFLS755	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 GSM / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: OY1605310985.ZNF	Test Dates: May 31 - July 07, 2016	EUT Type: Portable Handset	Page 46 of 101	

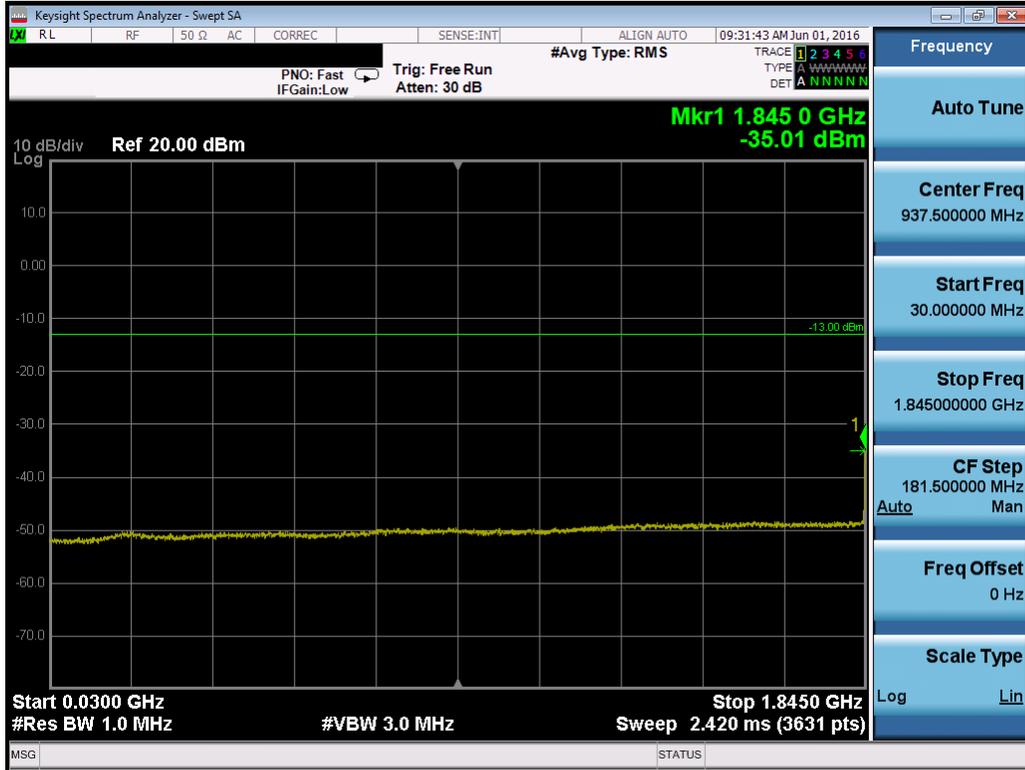


**Plot 7-64. Conducted Spurious Plot (PCS WCDMA Mode – Ch. 9262)**

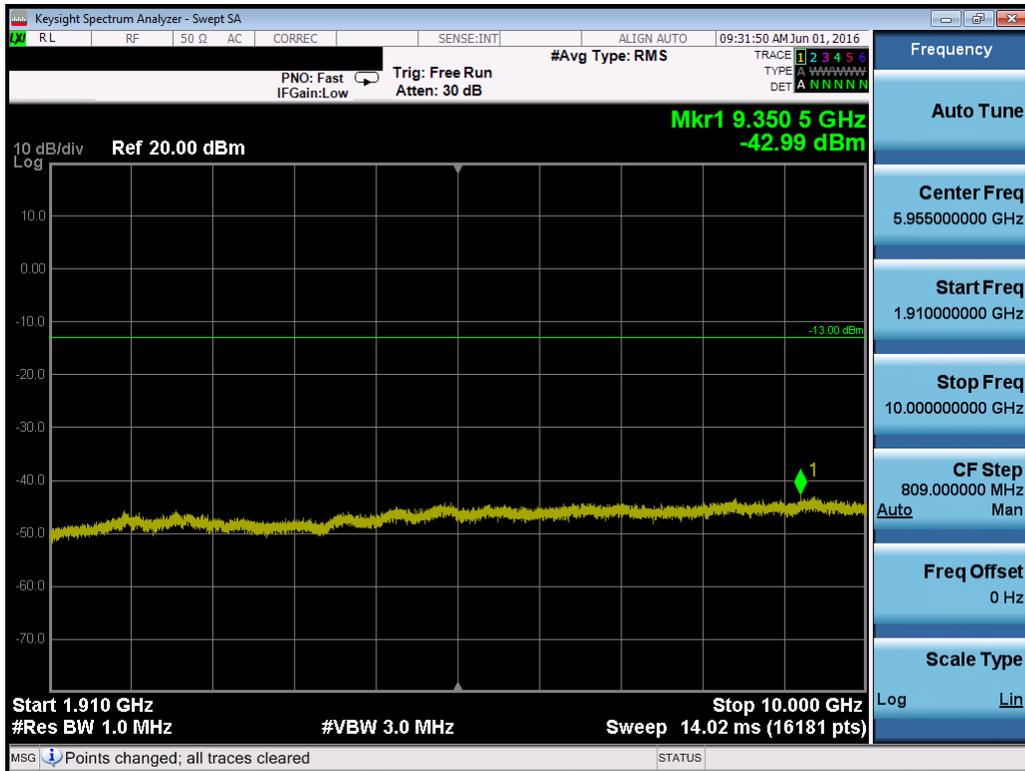


**Plot 7-65. Conducted Spurious Plot (PCS WCDMA Mode – Ch. 9262)**

FCC ID: ZNFLS755	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 GSM / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1605310985.ZNF	Test Dates: May 31 - July 07, 2016	EUT Type: Portable Handset		Page 47 of 101



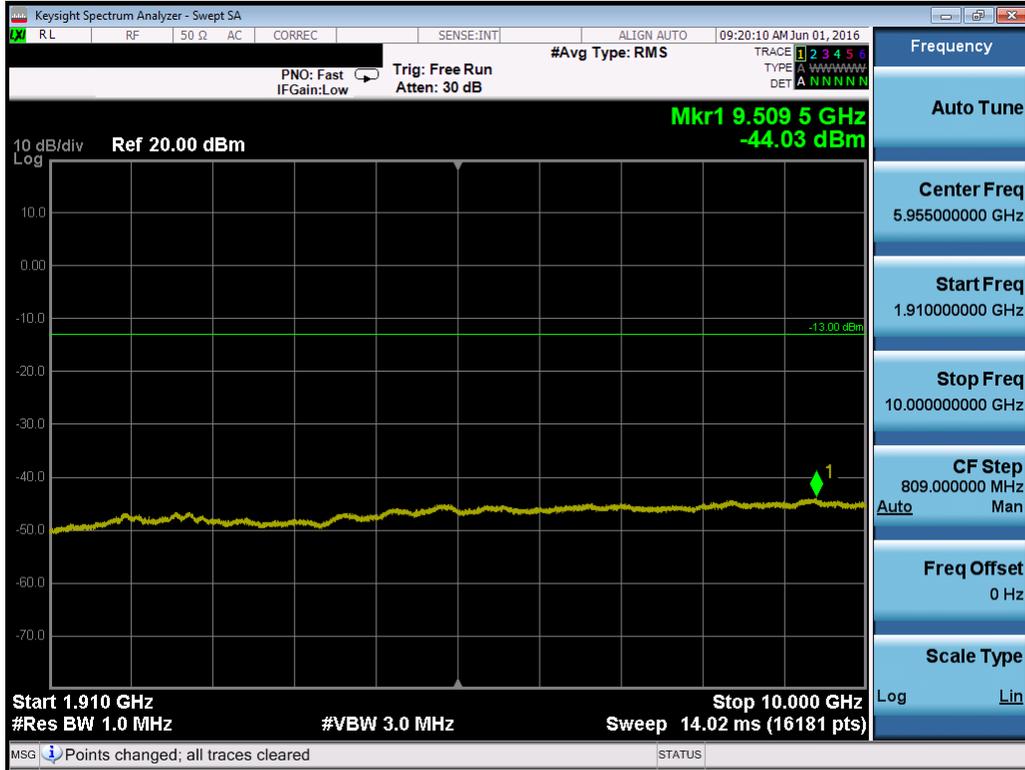


Plot 7-68. Conducted Spurious Plot (PCS WCDMA Mode – Ch. 9400)

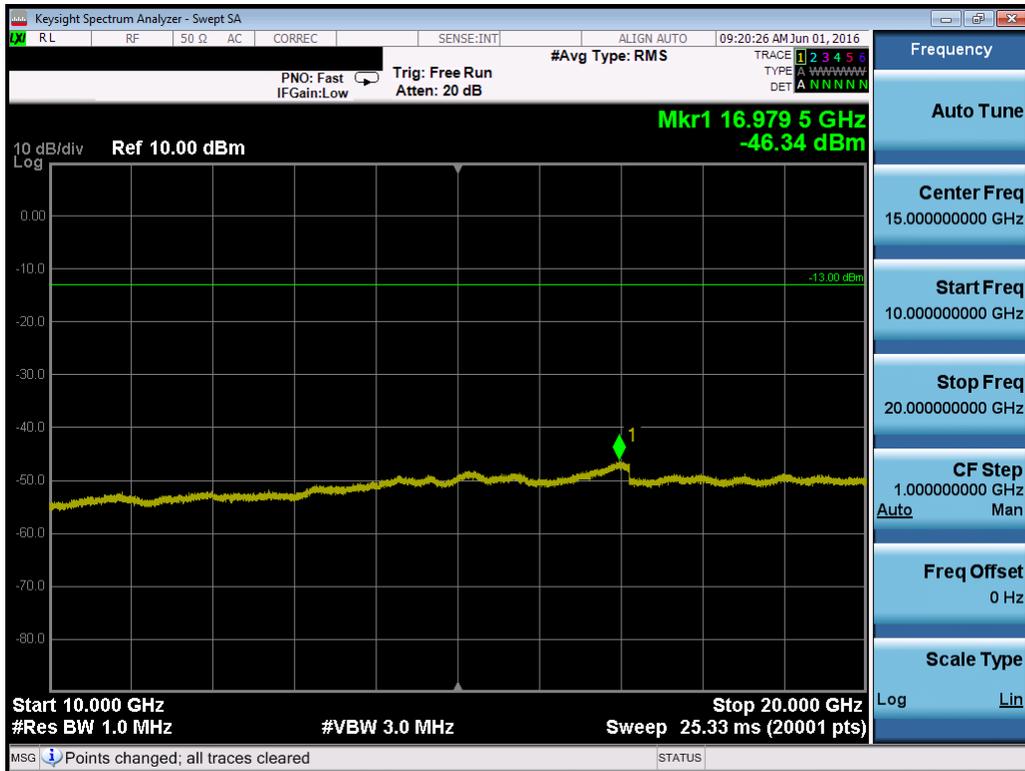


Plot 7-69. Conducted Spurious Plot (PCS WCDMA Mode – Ch. 9400)

FCC ID: ZNFLS755	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 GSM / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: OY1605310985.ZNF	Test Dates: May 31 - July 07, 2016	EUT Type: Portable Handset		Page 49 of 101

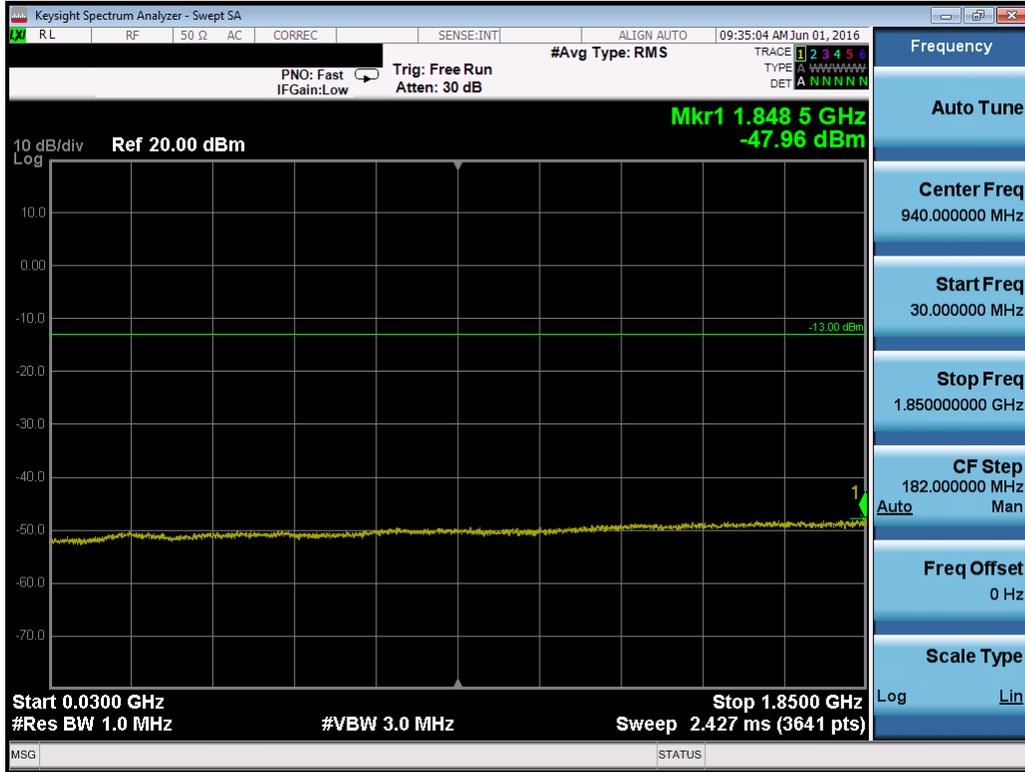


**Plot 7-70. Conducted Spurious Plot (PCS WCDMA Mode – Ch. 9538)**

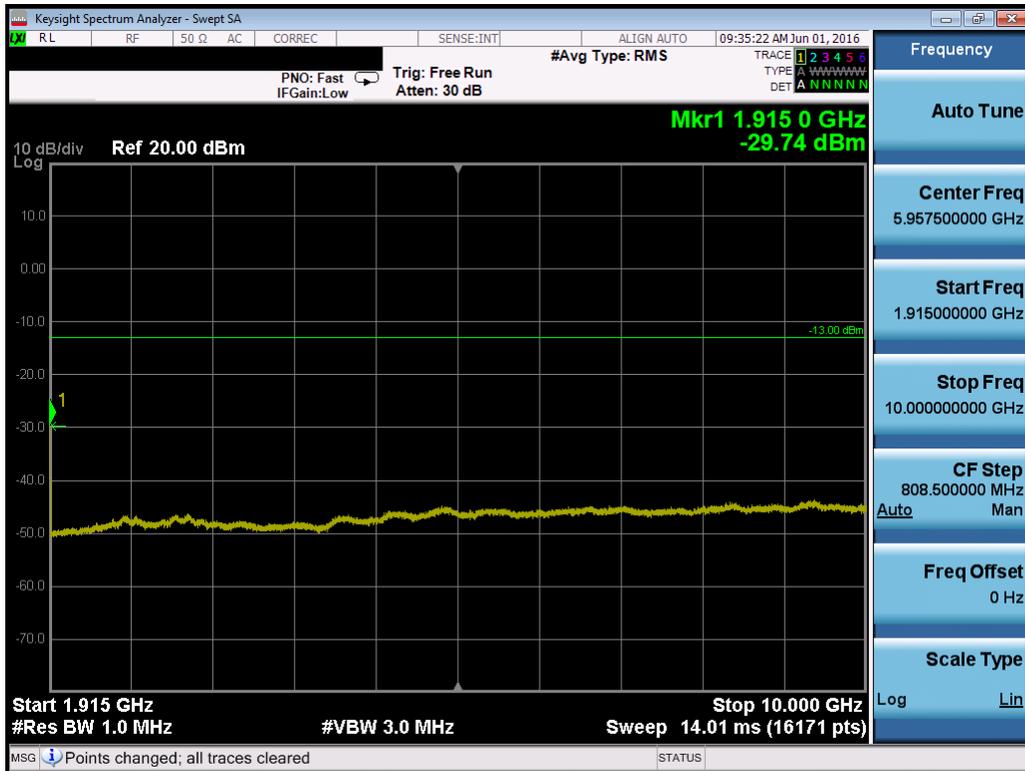

**Plot 7-71. Conducted Spurious Plot (PCS WCDMA Mode – Ch. 9538)**

FCC ID: ZNFLS755	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 GSM / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: OY1605310985.ZNF	Test Dates: May 31 - July 07, 2016	EUT Type: Portable Handset		Page 50 of 101

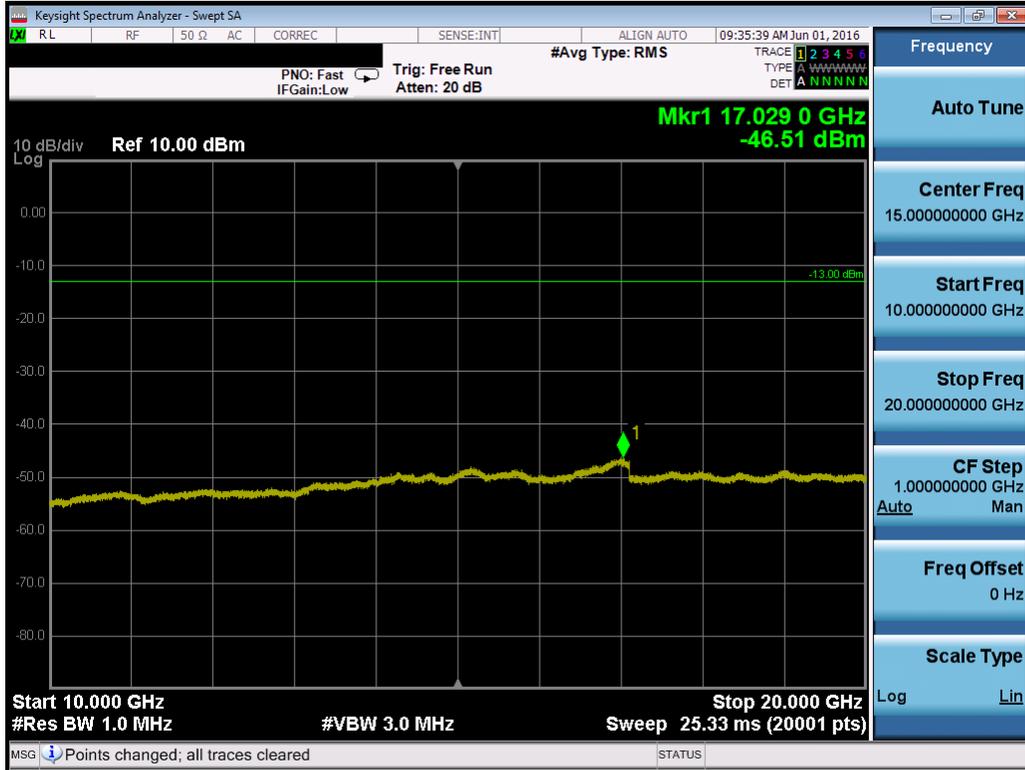

**Plot 7-72. Conducted Spurious Plot (PCS WCDMA Mode – Ch. 9538)**

FCC ID: ZNFLS755	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 GSM / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1605310985.ZNF	Test Dates: May 31 - July 07, 2016	EUT Type: Portable Handset		Page 51 of 101

## 7.4 Band Edge Emissions at Antenna Terminal

§2.1051 §22.917(a) §24.238(a) §27.53(h)

### Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

***The minimum permissible attenuation level of any spurious emission is  $43 + \log_{10}(P_{[Watts]})$ , where P is the transmitter power in Watts.***

### Test Procedure Used


KDB 971168 v02r02 – Section 6.0

### Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW  $\geq$  1% of the emission bandwidth
4. VBW  $\geq$  3 x RBW
5. Detector = RMS
6. Number of sweep points  $\geq$  2 x Span/RBW
7. Trace mode = trace average for continuous emissions, max hold for pulse emissions
8. Sweep time = auto couple
9. The trace was allowed to stabilize

### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

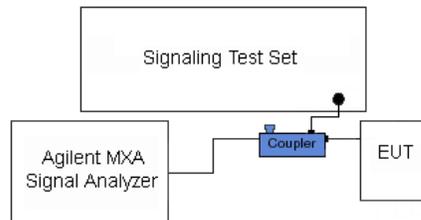


**Figure 7-3. Test Instrument & Measurement Setup**


### Test Notes

Per 22.917(b), 24.238(b), 27.53(h)(3), in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed to demonstrate compliance with the out-of-band emissions limit. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.

FCC ID: ZNFLS755	 PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 GSM / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)	 LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1605310985.ZNF	Test Dates: May 31 - July 07, 2016	EUT Type: Portable Handset		Page 52 of 101

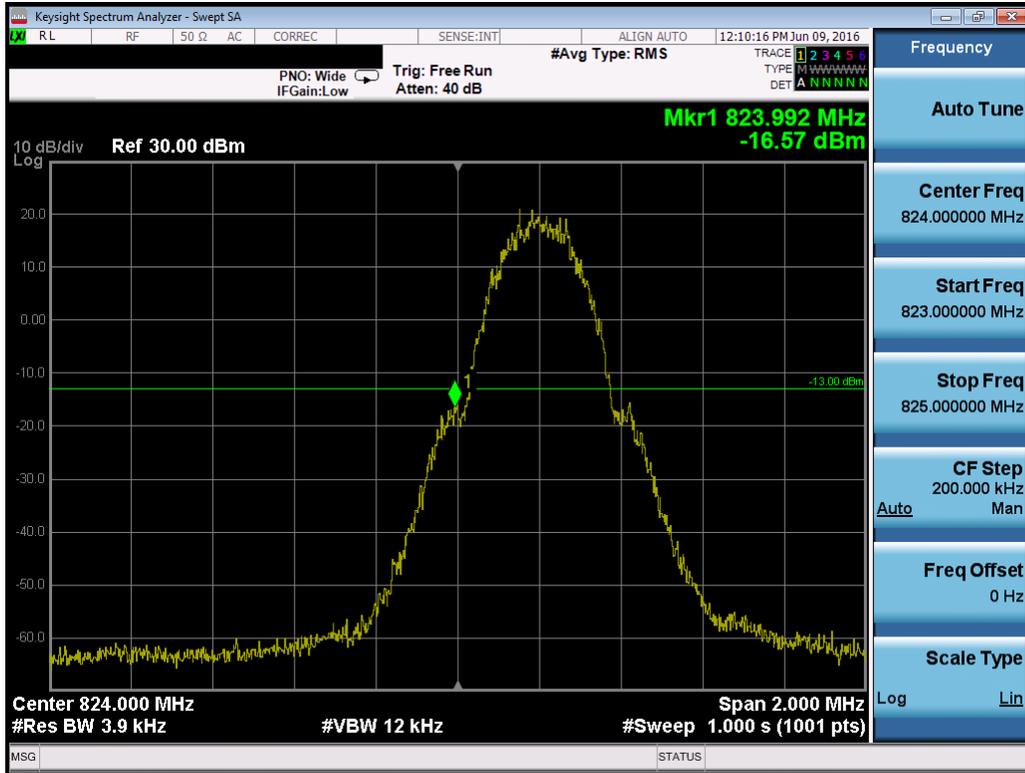


Plot 7-73. Band Edge Plot (Cellular GSM Mode – Ch. 128)

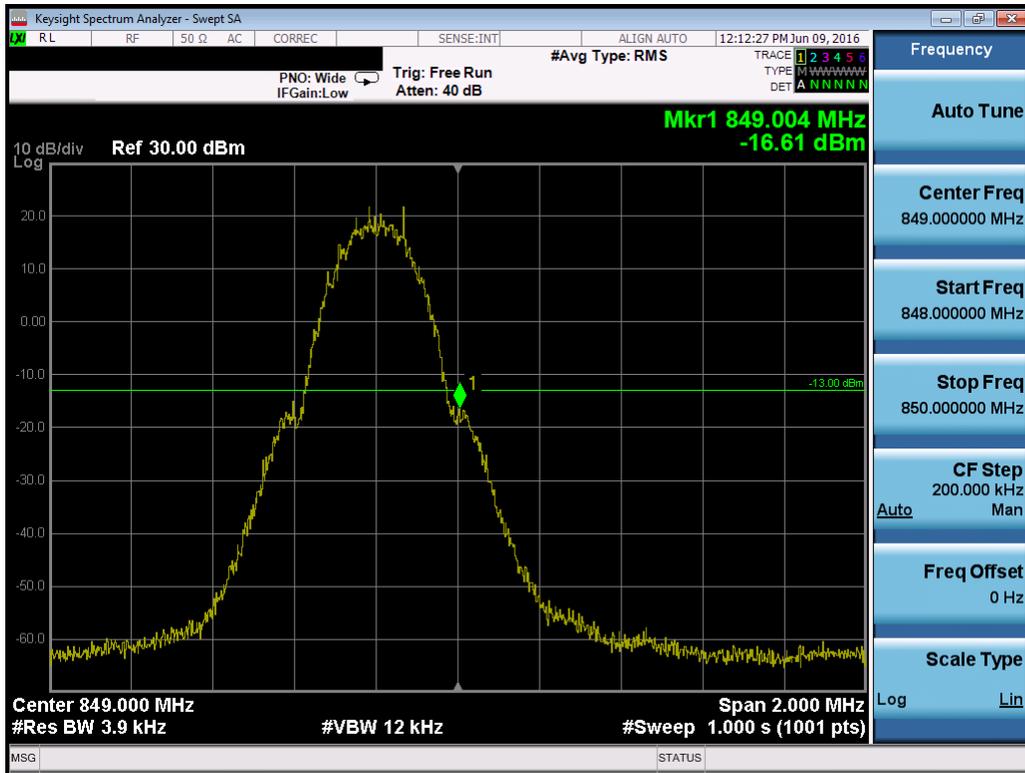


Plot 7-74. Band Edge Plot (Cellular GSM Mode – Ch. 251)

FCC ID: ZNFLS755	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 GSM / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1605310985.ZNF	Test Dates: May 31 - July 07, 2016	EUT Type: Portable Handset		Page 53 of 101

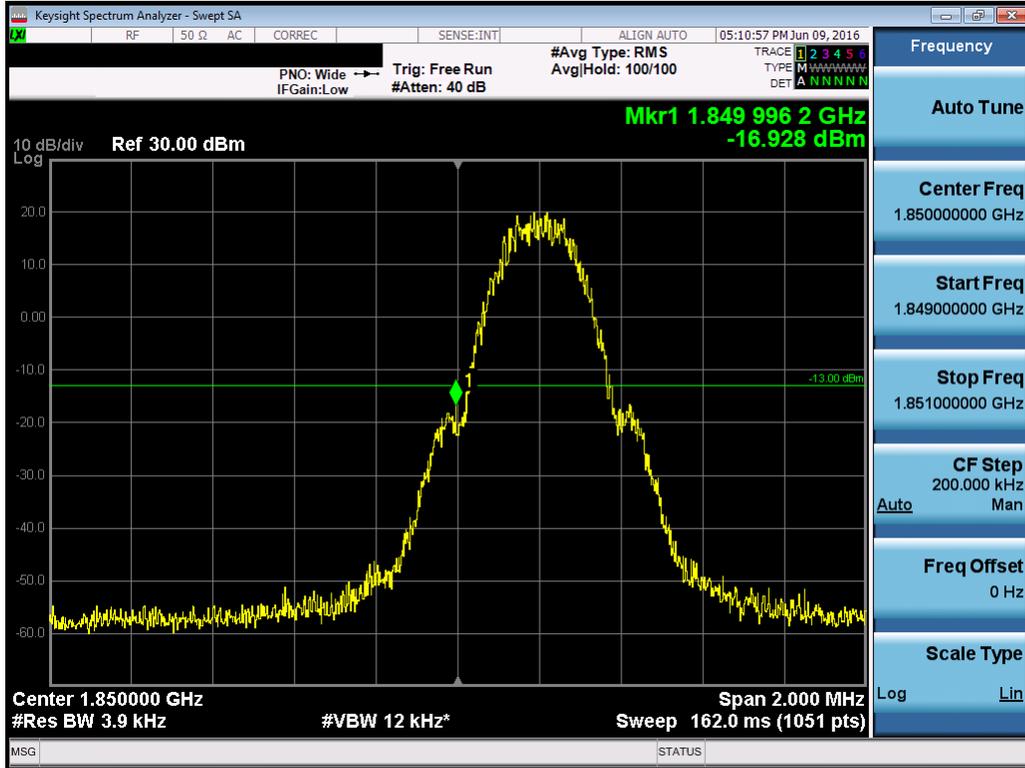


Plot 7-75. Band Edge Plot (PCS GSM Mode – Ch. 512)

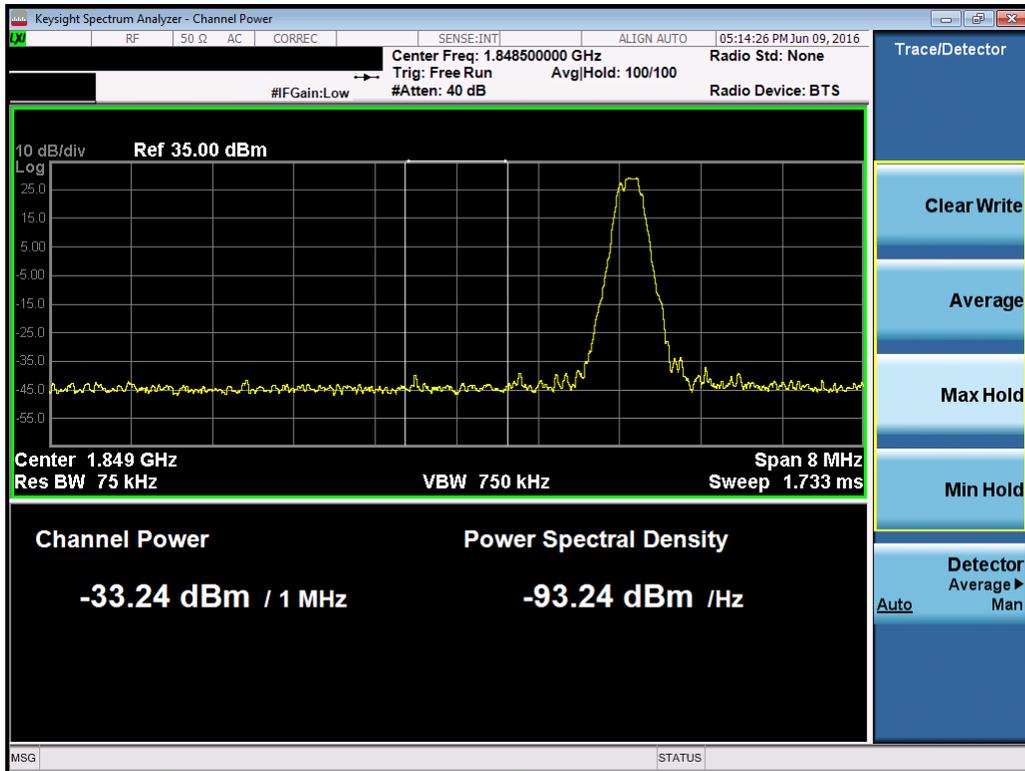


Plot 7-76. 4MHz Span Plot (PCS GSM Mode – Ch. 512)

FCC ID: ZNFLS755	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 GSM / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1605310985.ZNF	Test Dates: May 31 - July 07, 2016	EUT Type: Portable Handset		Page 54 of 101

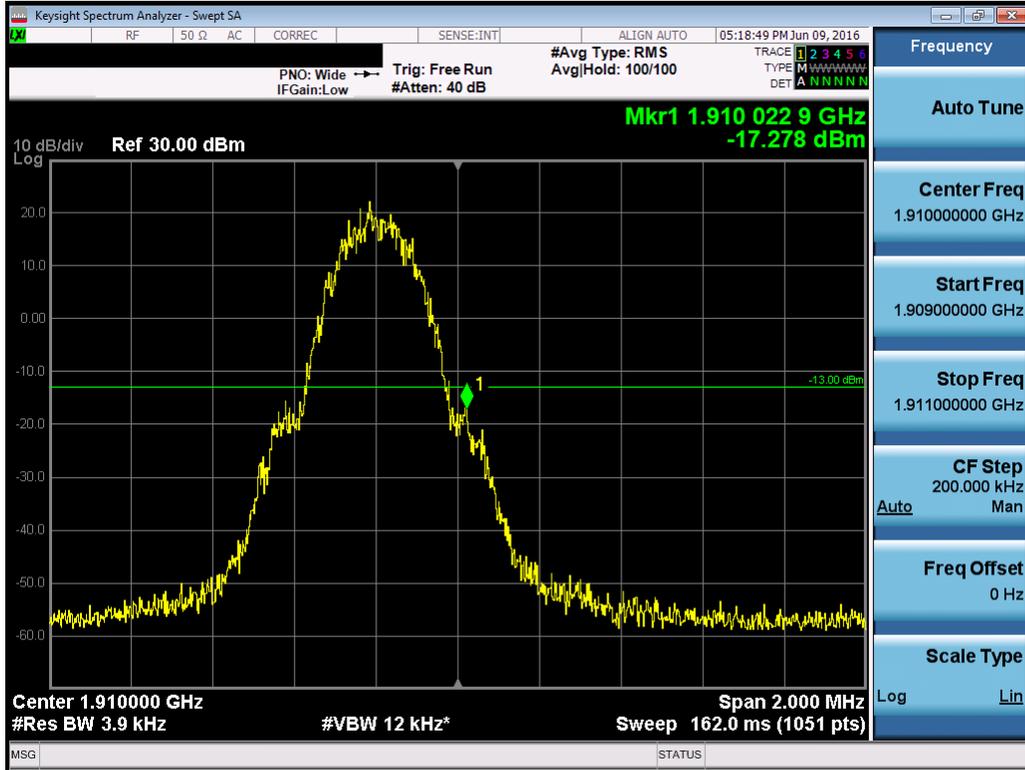

Plot 7-77. Band Edge Plot (PCS GSM Mode – Ch. 810)

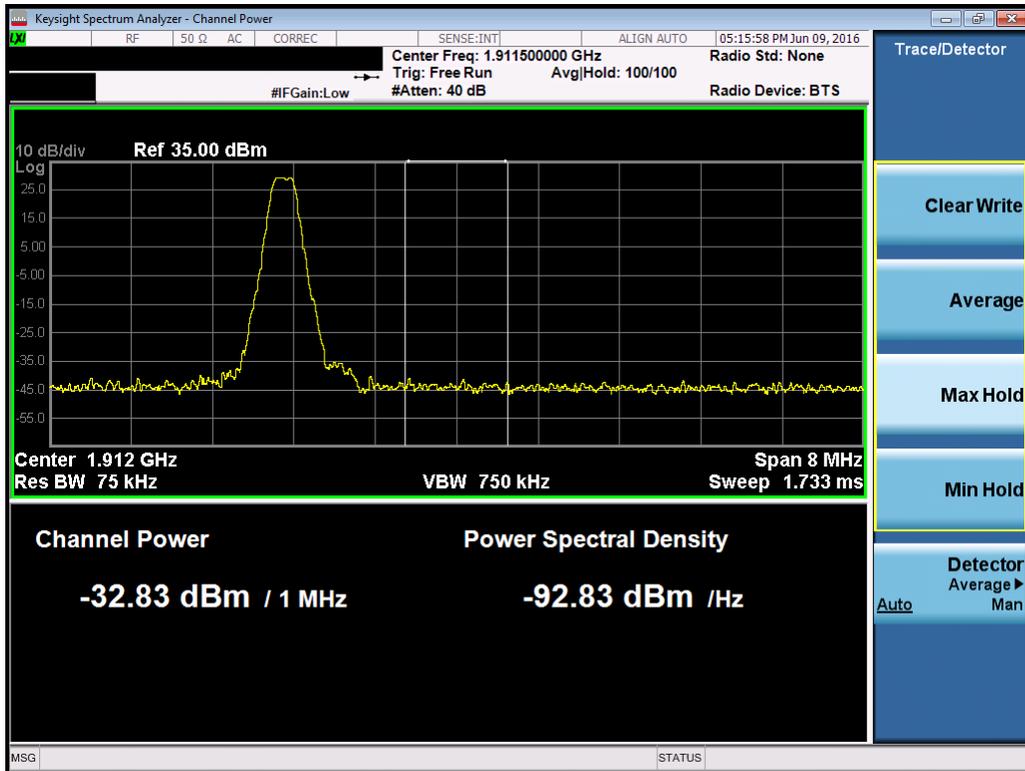

Plot 7-78. 4MHz Span Plot (PCS GSM Mode – Ch. 810)

FCC ID: ZNFLS755	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 GSM / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1605310985.ZNF	Test Dates: May 31 - July 07, 2016	EUT Type: Portable Handset		Page 55 of 101




Plot 7-79. Band Edge Plot (Cellular CDMA Mode – Ch. 1013)



Plot 7-80. 4MHz Span Plot (Cellular CDMA Mode – Ch. 1013)

FCC ID: ZNFLS755	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 GSM / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: OY1605310985.ZNF	Test Dates: May 31 - July 07, 2016	EUT Type: Portable Handset		Page 56 of 101

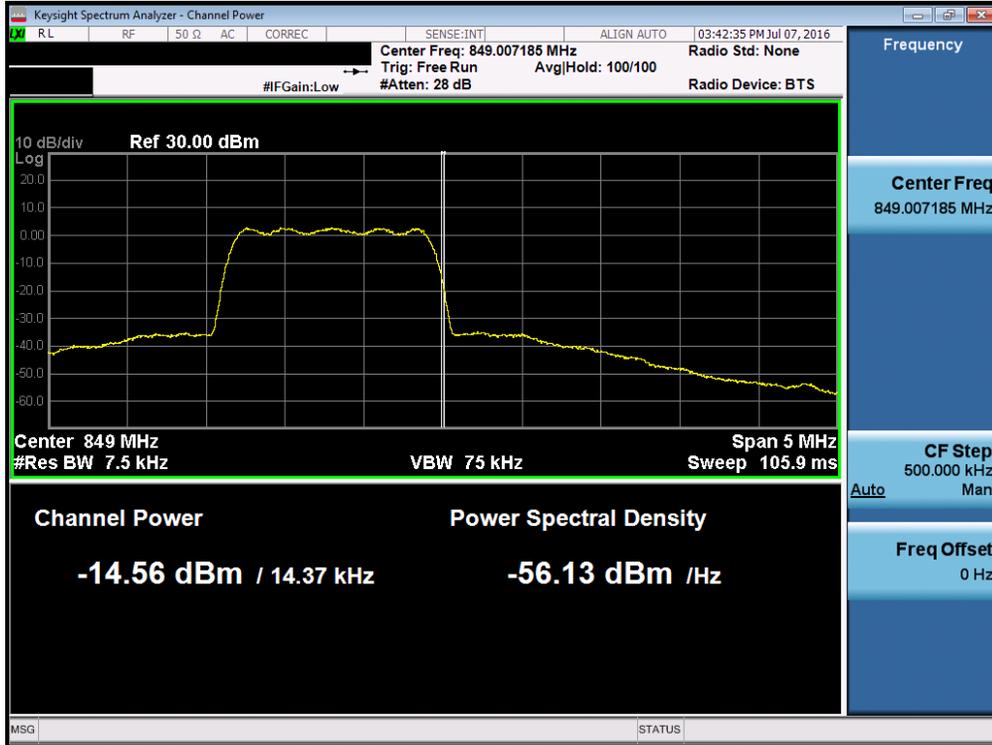


Plot 7-81. Band Edge Plot (Cellular CDMA Mode – Ch. 777)




Plot 7-82. 4MHz Span Plot (Cellular CDMA Mode – Ch. 777)

FCC ID: ZNFLS755		FCC Pt. 22, 24, & 27 GSM / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1605310985.ZNF	Test Dates: May 31 - July 07, 2016	EUT Type: Portable Handset		Page 57 of 101

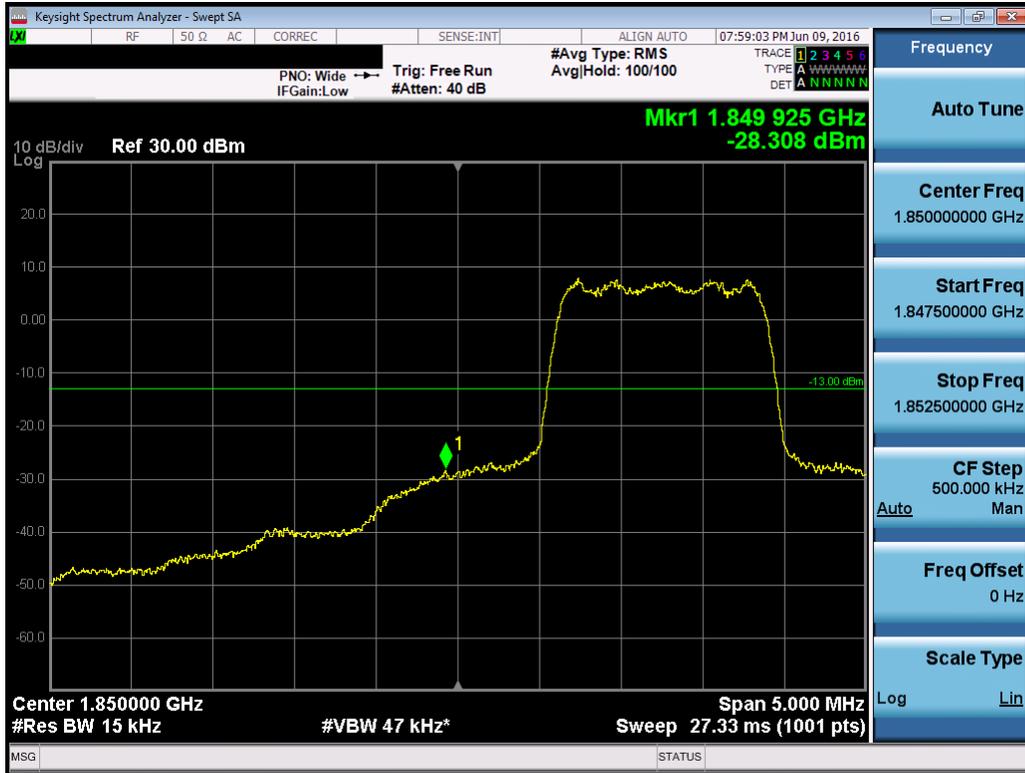


Plot 7-83. Band Edge Plot (PCS CDMA Mode – Ch. 25)

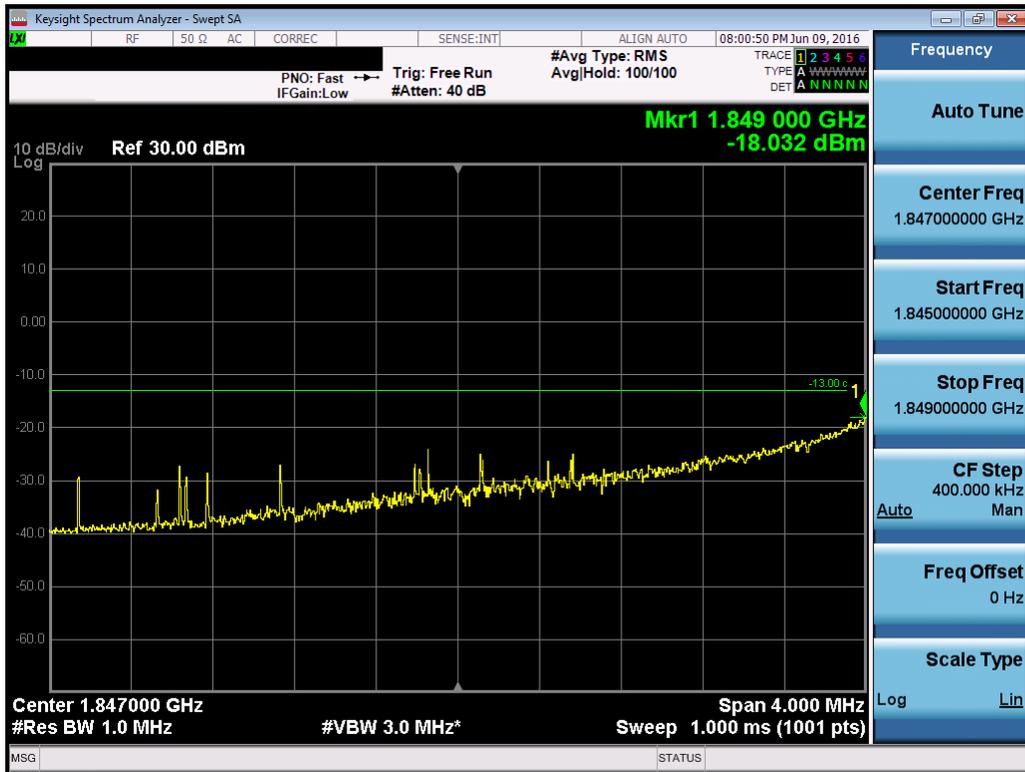


Plot 7-84. 4MHz Span Plot (PCS CDMA Mode – Ch. 25)

FCC ID: ZNFLS755	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 GSM / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1605310985.ZNF	Test Dates: May 31 - July 07, 2016	EUT Type: Portable Handset		Page 58 of 101

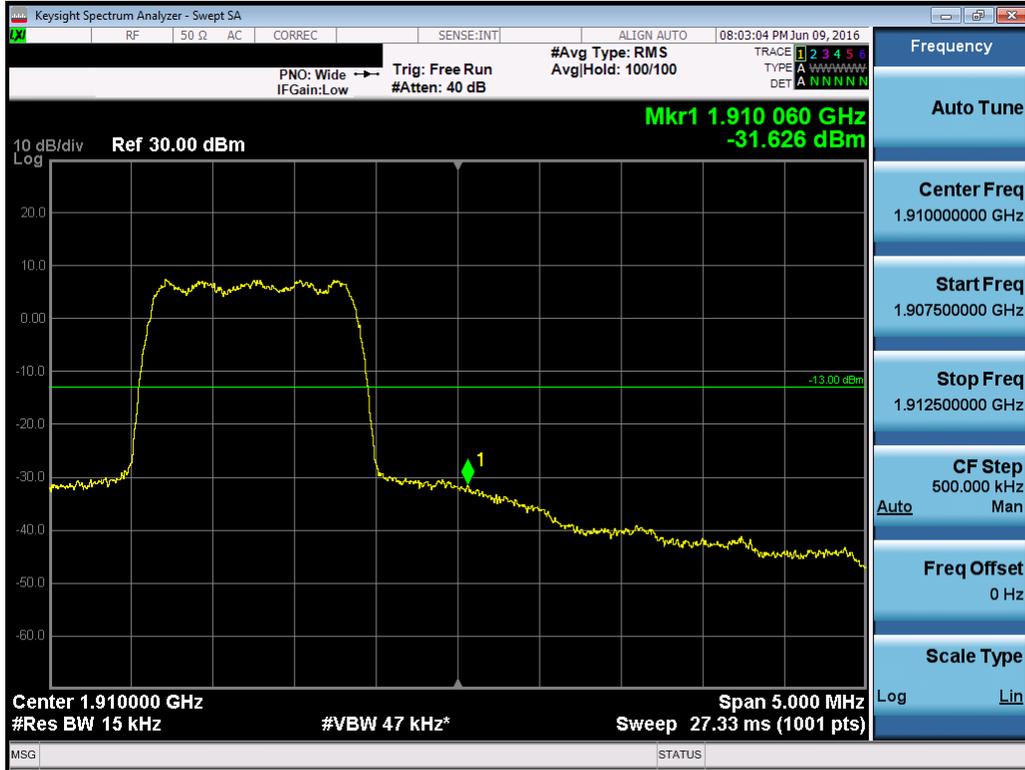


Plot 7-85. Band Edge Plot (PCS CDMA Mode – Ch. 1175)

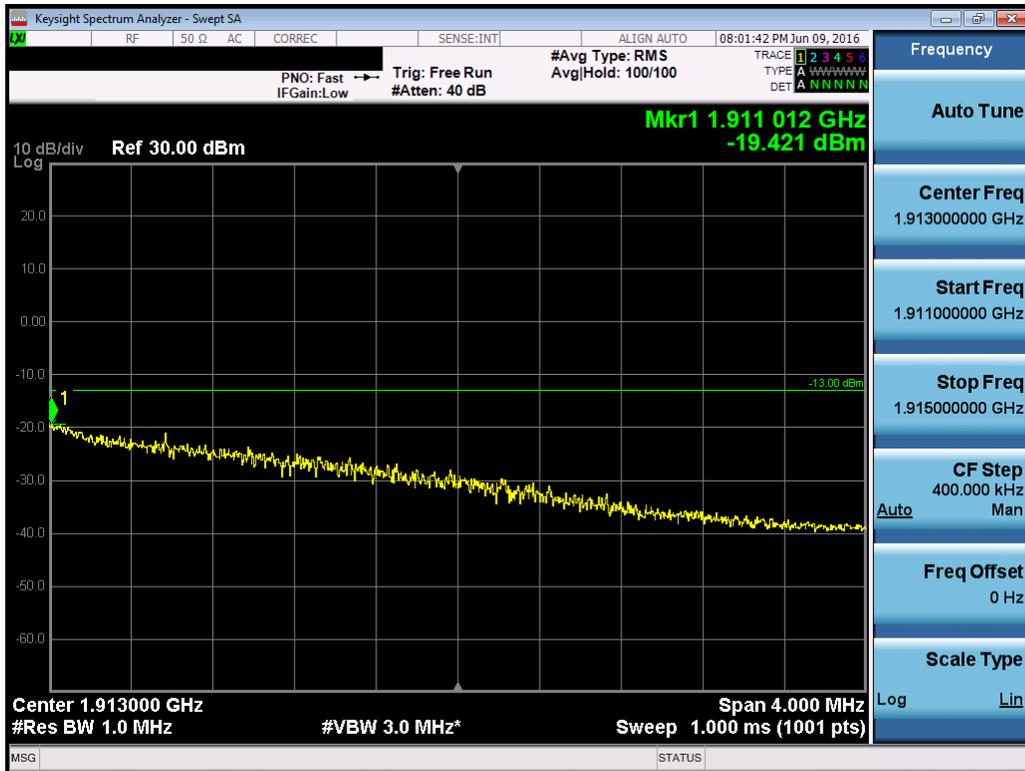

Plot 7-86. 4MHz Span Plot (PCS CDMA Mode – Ch. 1175)

FCC ID: ZNFLS755		FCC Pt. 22, 24, & 27 GSM / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1605310985.ZNF	Test Dates: May 31 - July 07, 2016	EUT Type: Portable Handset		Page 59 of 101

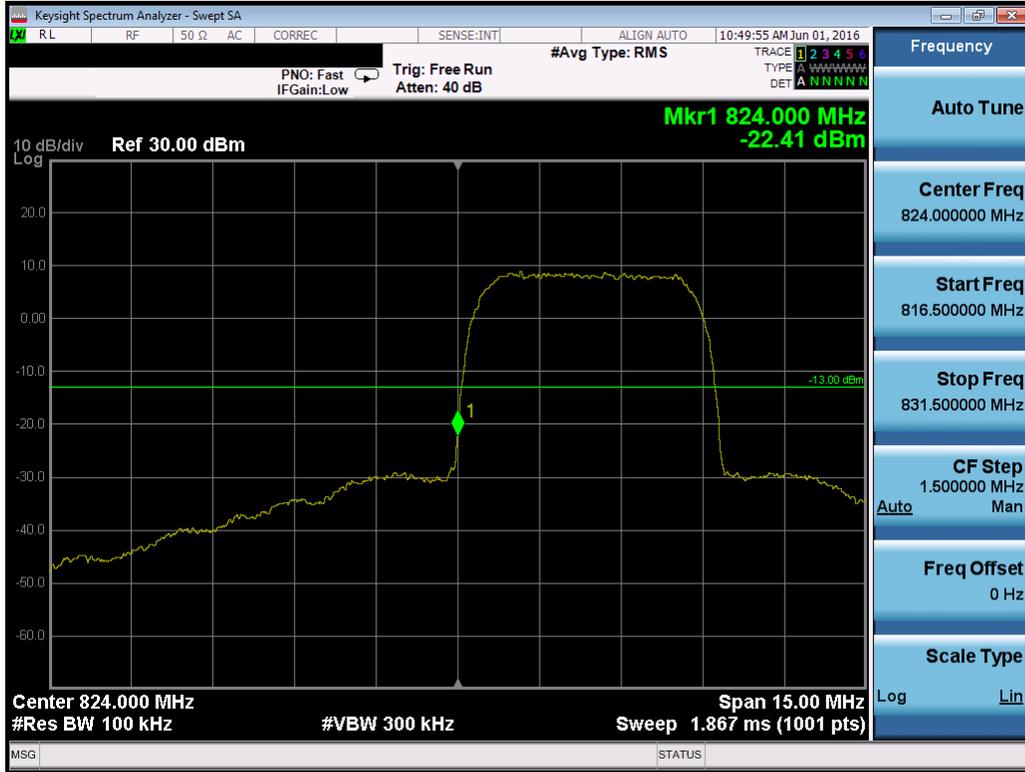

Plot 7-87. Band Edge Plot (Cellular WCDMA Mode – Ch. 4132)




Plot 7-88. Band Edge Plot (Cellular WCDMA Mode – Ch. 4233)

FCC ID: ZNFLS755		FCC Pt. 22, 24, & 27 GSM / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1605310985.ZNF	Test Dates: May 31 - July 07, 2016	EUT Type: Portable Handset		Page 60 of 101



Plot 7-89. Band Edge Plot (AWS WCDMA Mode – Ch. 1312)

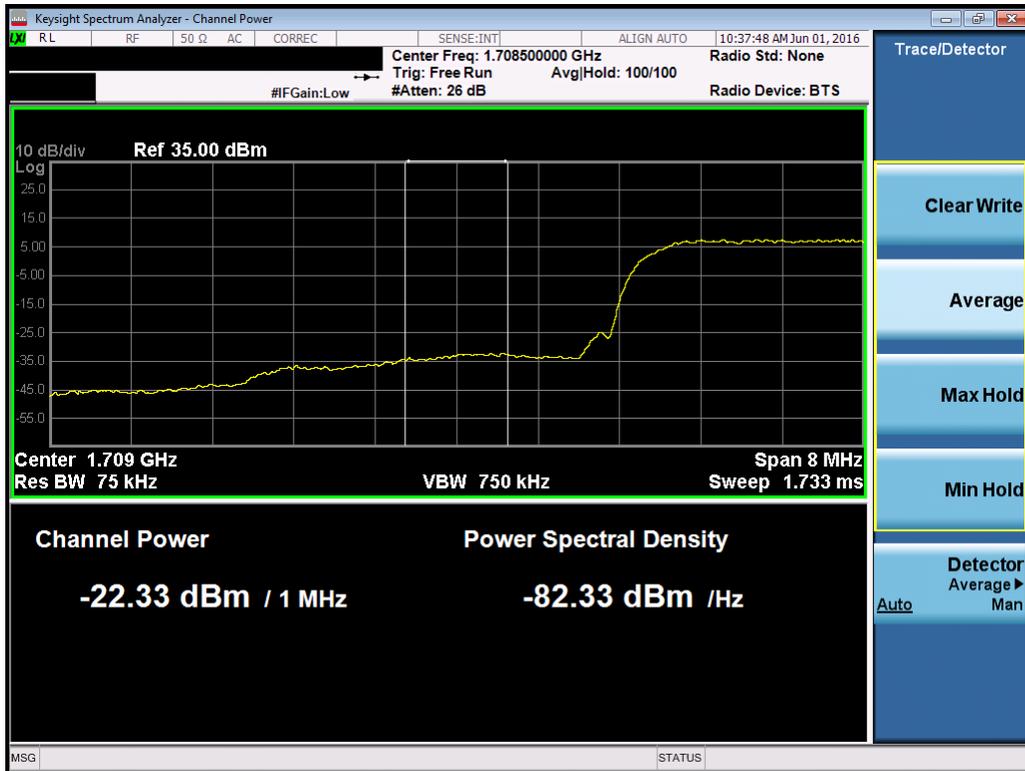


Plot 7-90. 4MHz Span Plot (AWS WCDMA Mode – Ch. 1312)

FCC ID: ZNFLS755		FCC Pt. 22, 24, & 27 GSM / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1605310985.ZNF	Test Dates: May 31 - July 07, 2016	EUT Type: Portable Handset		Page 61 of 101




Plot 7-91. Band Edge Plot (AWS WCDMA Mode – Ch. 1862)

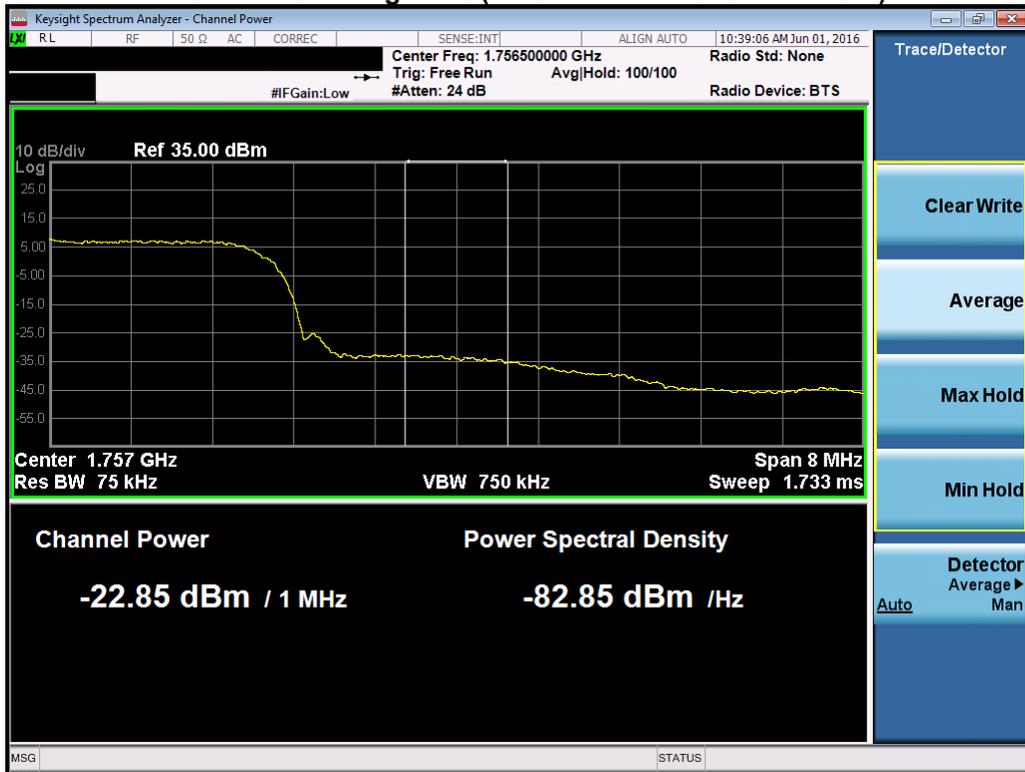


Plot 7-92. 4MHz Span Plot (AWS WCDMA Mode – Ch. 1862)

FCC ID: ZNFLS755	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 GSM / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1605310985.ZNF	Test Dates: May 31 - July 07, 2016	EUT Type: Portable Handset		Page 62 of 101

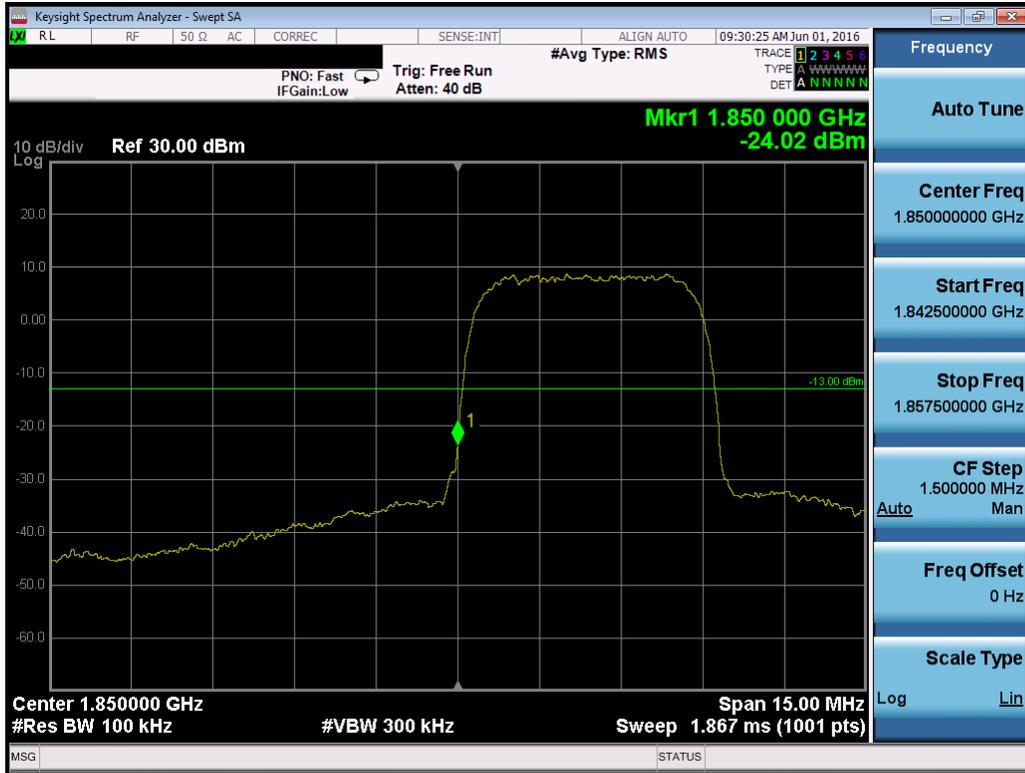

Plot 7-93. Band Edge Plot (PCS WCDMA Mode – Ch. 9262)

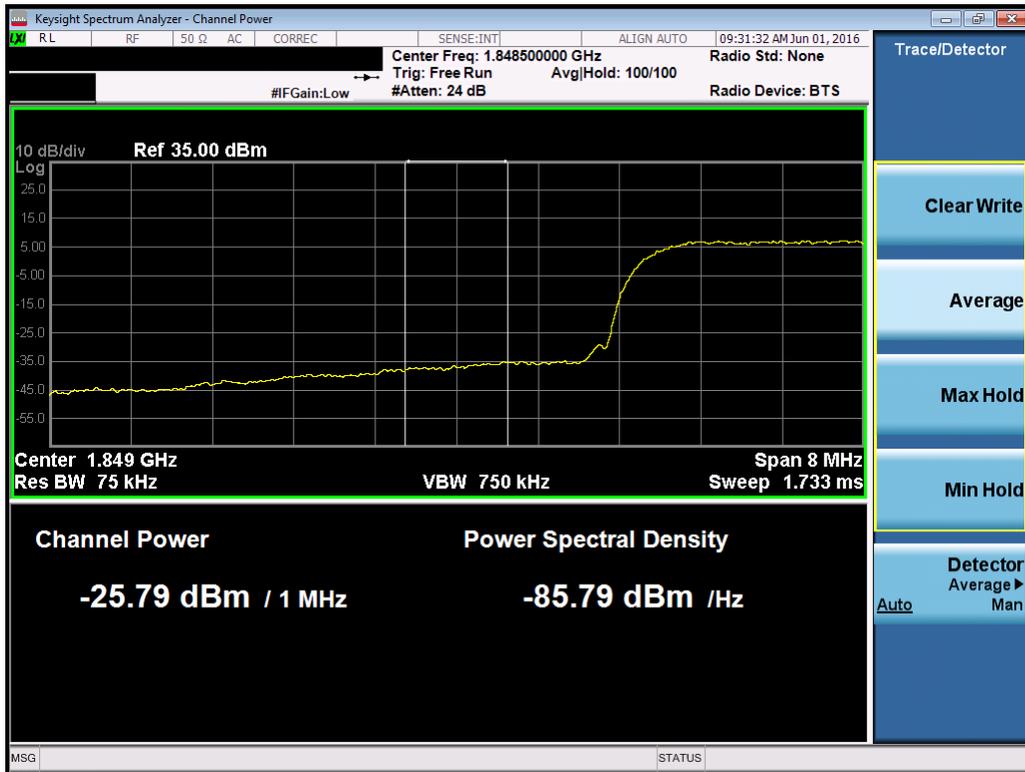


Plot 7-94. 4MHz Span Plot (PCS WCDMA Mode – Ch. 9262)

FCC ID: ZNFLS755	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 GSM / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1605310985.ZNF	Test Dates: May 31 - July 07, 2016	EUT Type: Portable Handset		Page 63 of 101



Plot 7-95. Band Edge Plot (PCS WCDMA Mode – Ch. 9538)

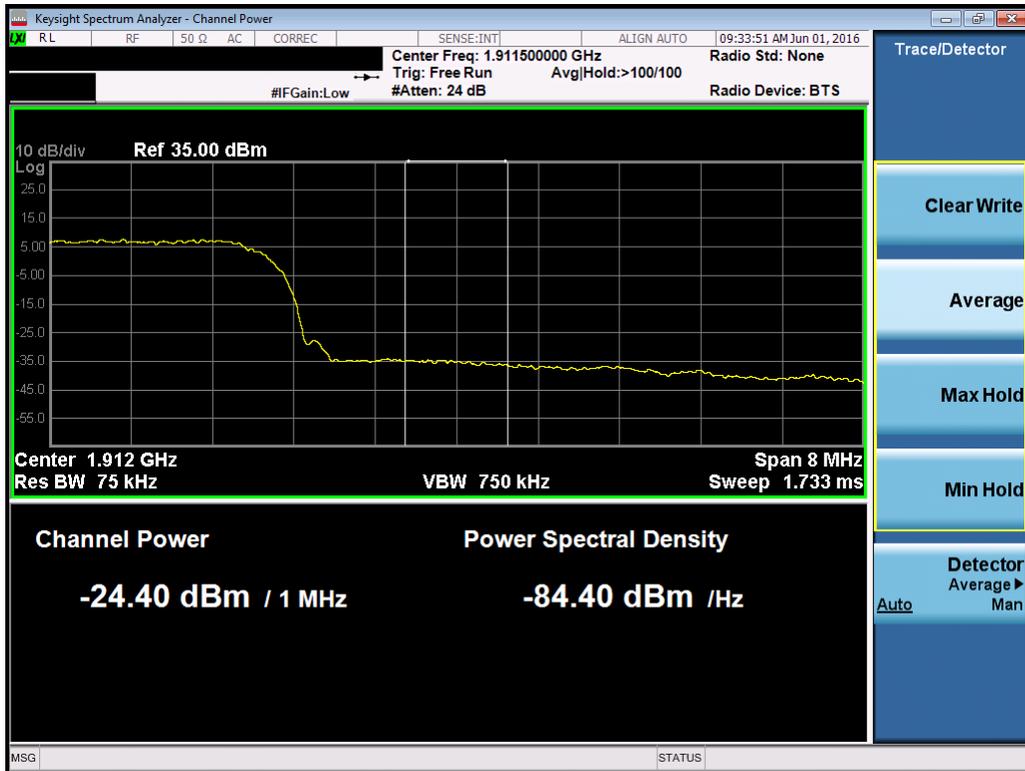

Plot 7-96. 4MHz Span Plot (PCS WCDMA Mode – Ch. 9538)

FCC ID: ZNFLS755	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 GSM / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1605310985.ZNF	Test Dates: May 31 - July 07, 2016	EUT Type: Portable Handset		Page 64 of 101

## 7.5 Peak-Average Ratio

### §24.232(d)

#### Test Overview

A peak to average ratio measurement is performed at the conducted port of the EUT. The spectrum analyzers Complementary Cumulative Distribution Function (CCDF) measurement profile is used to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth. The CCDF curve shows how much time the peak waveform spends at or above a given average power level. The percent of time the signal spends at or above the level defines the probability for that particular power level.

#### Test Procedure Used


KDB 971168 v02r02 – Section 5.7.1

#### Test Settings

1. The signal analyzer’s CCDF measurement profile is enabled
2. Frequency = carrier center frequency
3. Measurement BW > Emission bandwidth of signal
4. The signal analyzer was set to collect one million samples to generate the CCDF curve
5. The measurement interval was set depending on the type of signal analyzed. For continuous signals (>98% duty cycle), the measurement interval was set to 1ms. For burst transmissions, the spectrum analyzer is set to use an internal “RF Burst” trigger that is synced with an incoming pulse and the measurement interval is set to less than the duration of the “on time” of one burst to ensure that energy is only captured during a time in which the transmitter is operating at maximum power

#### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

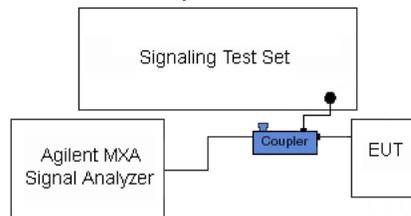


**Figure 7-4. Test Instrument & Measurement Setup**


#### Test Notes

None

FCC ID: ZNFLS755	 PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 GSM / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)	 LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1605310985.ZNF	Test Dates: May 31 - July 07, 2016	EUT Type: Portable Handset	Page 65 of 101	

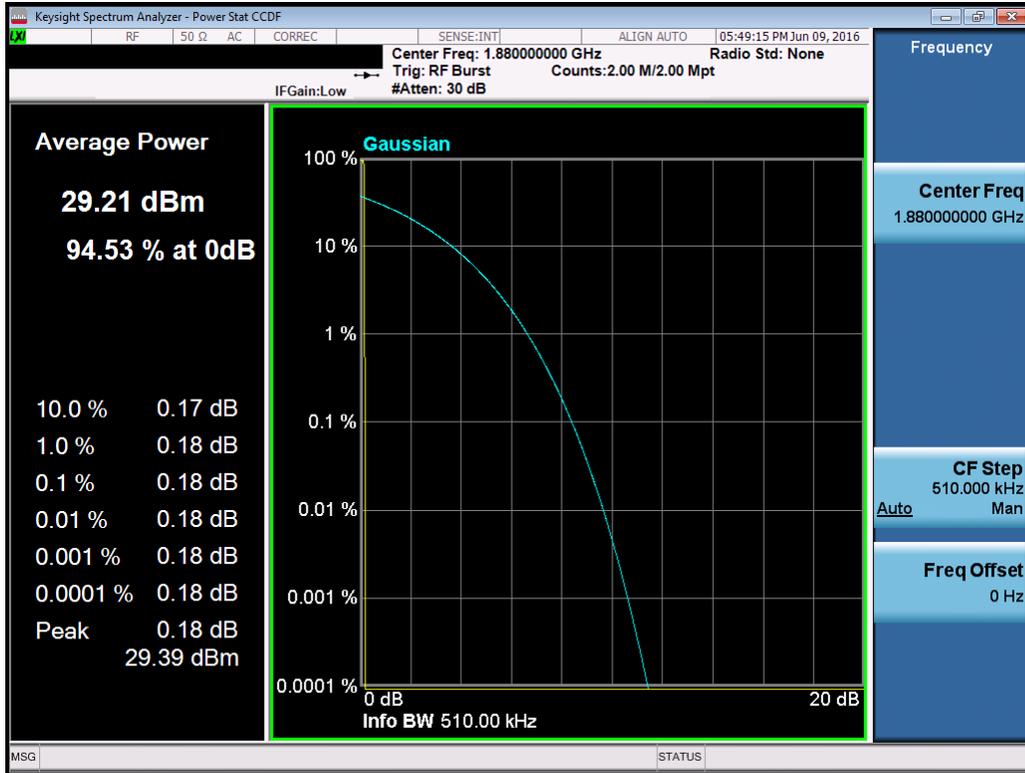


Plot 7-97. Peak-Average Ratio Plot (PCS GSM Mode – Ch. 661)

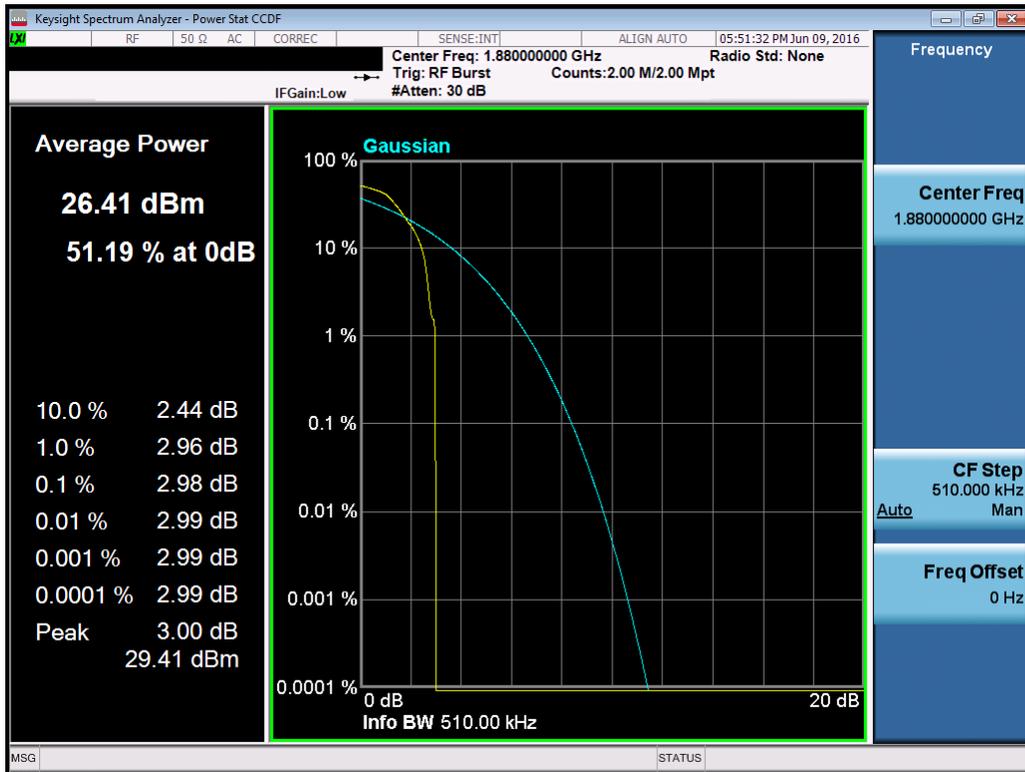


Plot 7-98. Peak-Average Ratio Plot (EDGE1900 Mode – Ch. 661)

FCC ID: ZNFLS755	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 GSM / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1605310985.ZNF	Test Dates: May 31 - July 07, 2016	EUT Type: Portable Handset		Page 66 of 101

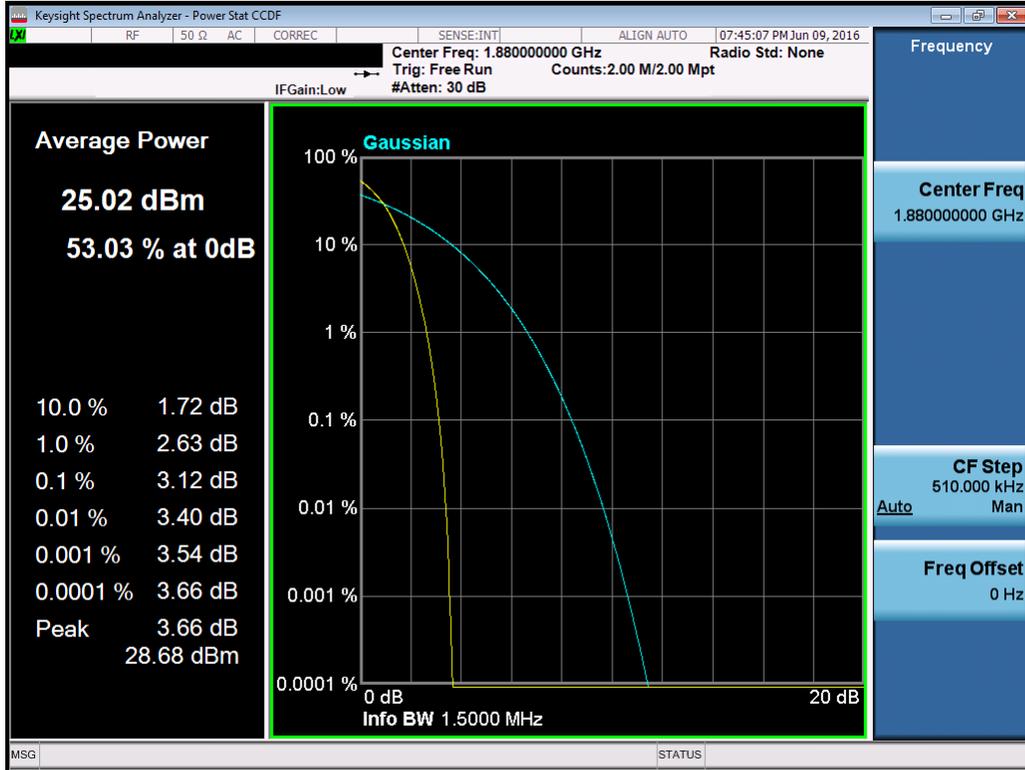

Plot 7-99. Peak-Average Ratio Plot (PCS CDMA Mode – Ch. 600)

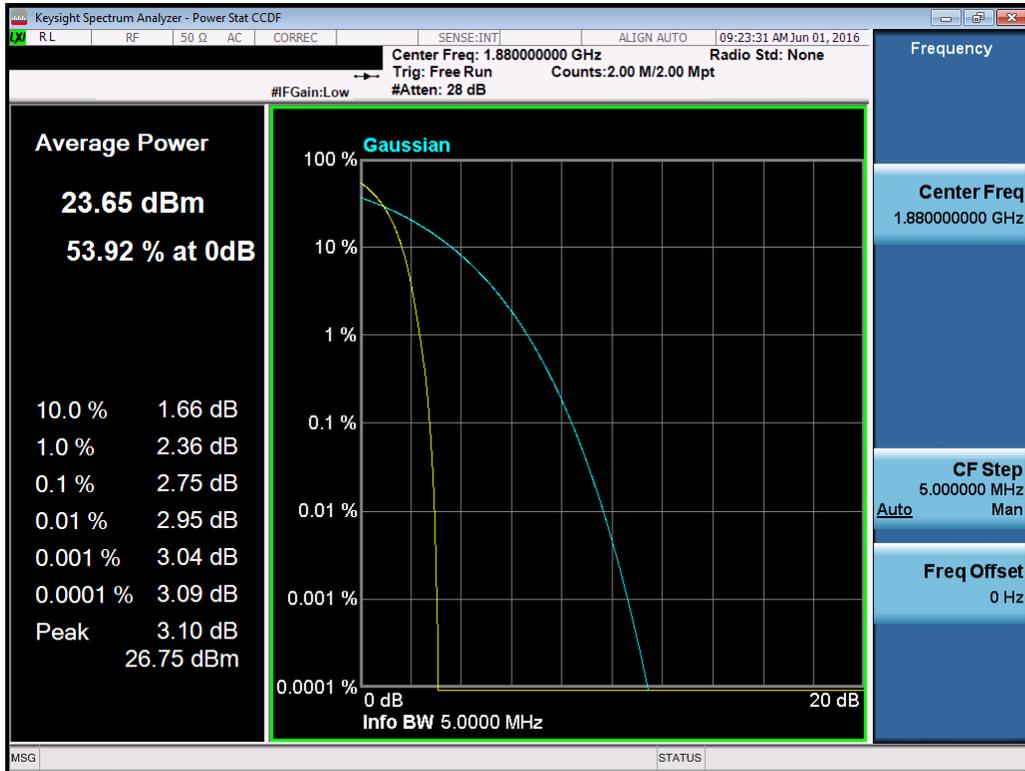

Plot 7-100. Peak-Average Ratio Plot (PCS WCDMA Mode – Ch. 9400)

FCC ID: ZNFLS755	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 GSM / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1605310985.ZNF	Test Dates: May 31 - July 07, 2016	EUT Type: Portable Handset		Page 67 of 101

## 7.6 Radiated Power (ERP/EIRP)

§22.913(a)(2) 24.232(c) 27.50(d.4)

### Test Overview

Effective Radiated Power (ERP) and Equivalent Isotropic Radiated Power (EIRP) measurements are performed using the substitution method described in ANSI/TIA-603-D-2010 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using vertically and horizontally polarized tuned dipole antennas. Measurements on signals operating above 1GHz are performed using vertically and horizontally polarized broadband horn antennas. All measurements are performed as RMS average measurements while the EUT is operating at maximum power, and at the appropriate frequencies.

### Test Procedures Used

KDB 971168 v02r02 – Section 5.2.1

ANSI/TIA-603-D-2010 – Section 2.2.17


### Test Settings

1. Radiated power measurements are performed using the signal analyzer's "channel power" measurement capability for signals with continuous operation. For signals with burst transmission, the signal analyzer's "time domain power" measurement capability is used
2. RBW = 1 – 5% of the expected OBW, not to exceed 1MHz
3. VBW  $\geq$  3 x RBW
4. Span = 1.5 times the OBW
5. No. of sweep points  $\geq$  2 x span / RBW
6. Detector = RMS
7. Trigger is set to "free run" for signals with continuous operation with the sweep times set to "auto". Trigger is set to enable triggering only on full power bursts with the sweep time set less than or equal to the transmission burst duration
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation. For signals with burst transmission, the "gating" function was enabled to ensure that measurements are performed during times in which the transmitter is operating at its maximum power
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize


FCC ID: ZNFLS755		FCC Pt. 22, 24, & 27 GSM / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1605310985.ZNF	Test Dates: May 31 - July 07, 2016	EUT Type: Portable Handset	Page 68 of 101	

### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

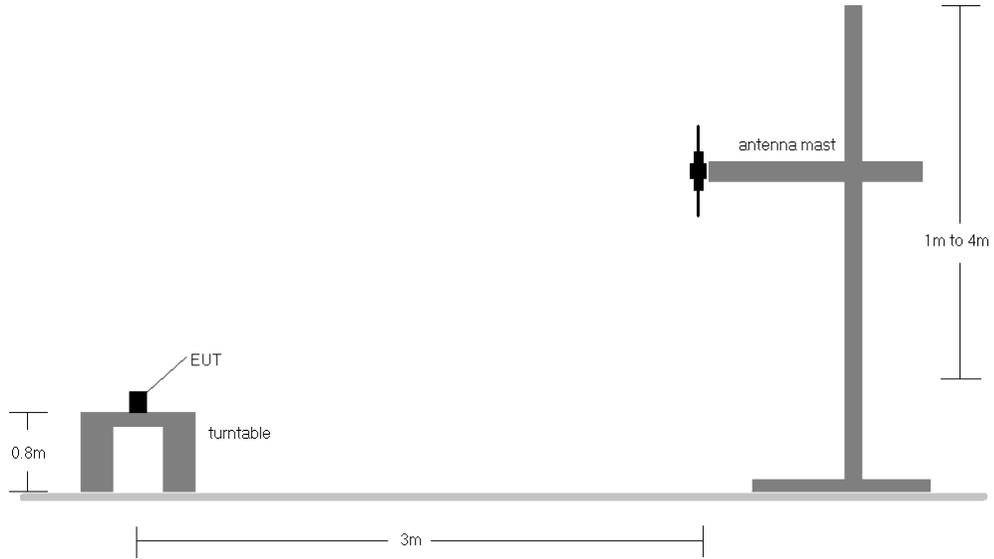

**Figure 7-5. Radiated Test Setup <1GHz**

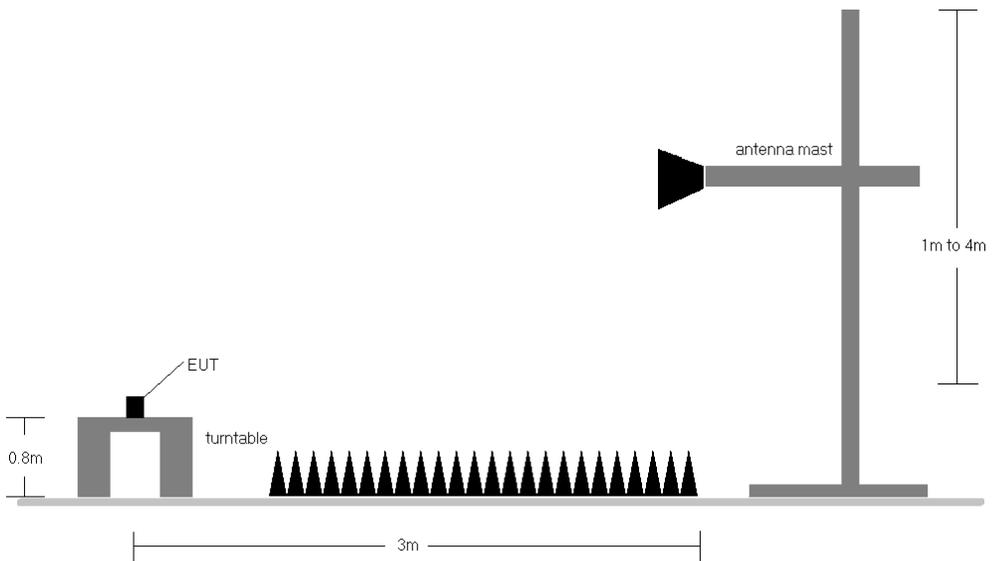

**Figure 7-6. Radiated Test Setup >1GHz**

FCC ID: ZNFLS755		FCC Pt. 22, 24, & 27 GSM / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1605310985.ZNF	Test Dates: May 31 - July 07, 2016	EUT Type: Portable Handset		Page 69 of 101

**Test Notes**

- 1) This device employs GSM, GPRS, and EDGE capabilities. The EUT was tested under all configurations and the highest power is reported in GSM mode using a Power Control Level of "0" in the PCS Band and "5" in the Cellular Band.
- 2) This device employs UMTS technology with WCDMA (AMR/RMC) and HSDPA capabilities. The EUT was tested under all configurations and the highest power is reported in WCDMA mode with HSDPA Inactive at 12.2 kbps RMC and TPC bits all set to "1."
- 3) This device was tested under all RC and SO combinations and the worst case is reported with RC3/SO55 with "All Up" power control bits.
- 4) This unit was tested with its standard battery.
- 5) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case setup is reported in the tables below.

FCC ID: ZNFLS755		FCC Pt. 22, 24, & 27 GSM / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1605310985.ZNF	Test Dates: May 31 - July 07, 2016	EUT Type: Portable Handset		Page 70 of 101

Frequency [MHz]	Mode	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Substitute Level [dBm]	Ant. Gain [dBd]	ERP [dBm]	ERP [Watts]	ERP Limit [dBm]	Margin [dB]
824.20	GSM850	H	162	13	27.77	-0.75	27.03	0.504	38.45	-11.42
836.60	GSM850	H	100	33	29.12	-0.84	28.28	0.672	38.45	-10.17
848.80	GSM850	H	120	38	28.56	-0.94	27.62	0.578	38.45	-10.83
836.60	EDGE850	H	100	32	22.36	-0.84	21.52	0.142	38.45	-16.93
836.60	GSM850	V	120	5	25.14	-0.84	24.30	0.269	38.45	-14.15

**Table 7-2. ERP (Cellular GSM)**

Frequency [MHz]	Mode	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Substitute Level [dBm]	Ant. Gain [dBd]	ERP [dBm]	ERP [Watts]	ERP Limit [dBm]	Margin [dB]
824.70	CDMA850	H	101	42	19.54	-0.75	18.79	0.076	38.45	-19.66
836.52	CDMA850	H	100	40	20.29	-0.84	19.45	0.088	38.45	-19.00
848.31	CDMA850	H	100	40	20.69	-0.94	19.75	0.094	38.45	-18.70
848.31	CDMA850	V	100	40	17.25	-0.94	16.31	0.043	38.45	-22.14

**Table 7-3. ERP (Cellular CDMA)**

Frequency [MHz]	Mode	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Substitute Level [dBm]	Ant. Gain [dBi]	ERP [dBm]	ERP [Watts]	ERP Limit [dBm]	Margin [dB]
826.40	WCDMA850	H	217	286	14.80	7.18	19.83	0.096	38.45	-18.62
836.60	WCDMA850	H	205	285	15.16	7.31	20.32	0.108	38.45	-18.13
846.60	WCDMA850	H	204	288	14.04	7.43	19.32	0.086	38.45	-19.13
836.60	WCDMA850	V	138	340	14.70	7.31	19.86	0.097	38.45	-18.59

**Table 7-4. ERP (Cellular WCDMA)**

Frequency [MHz]	Mode	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Substitute Level [dBm]	Ant. Gain [dBi]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
1712.40	WCDMA1700	H	146	298	16.71	8.23	24.94	0.312	30.00	-5.06
1732.60	WCDMA1700	H	106	106	16.79	8.18	24.97	0.314	30.00	-5.03
1752.60	WCDMA1700	H	175	110	16.15	8.13	24.28	0.268	30.00	-5.72
1752.60	WCDMA1700	V	175	110	14.38	8.13	22.51	0.178	30.00	-7.49

**Table 7-5. EIRP (AWS WCDMA)**

FCC ID: ZNFLS755		FCC Pt. 22, 24, & 27 GSM / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1605310985.ZNF	Test Dates: May 31 - July 07, 2016	EUT Type: Portable Handset	Page 71 of 101	

Frequency [MHz]	Mode	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Substitute Level [dBm]	Ant. Gain [dBi]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
1850.20	GSM1900	V	188	45	21.39	7.99	29.37	0.866	33.01	-3.64
1880.00	GSM1900	V	167	244	21.85	7.98	29.82	0.960	33.01	-3.19
1909.80	GSM1900	V	175	355	19.88	8.04	27.92	0.619	33.01	-5.09
1880.00	EDGE1900	V	108	185	16.66	7.98	24.63	0.291	33.01	-8.38
1880.00	GSM1900	H	151	210	21.47	7.98	29.44	0.879	33.01	-3.57

**Table 7-6. EIRP (PCS GSM)**

Frequency [MHz]	Mode	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Substitute Level [dBm]	Ant. Gain [dBi]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
1851.25	CDMA1900	H	132	287	18.43	7.99	26.42	0.438	33.01	-6.59
1880.00	CDMA1900	H	168	291	17.50	7.98	25.48	0.353	33.01	-7.54
1908.75	CDMA1900	H	168	291	17.88	8.03	25.91	0.390	33.01	-7.10
1851.25	CDMA1900	V	190	100	16.21	7.99	24.32	0.270	33.01	-8.69

**Table 7-7. EIRP (PCS CDMA)**

Frequency [MHz]	Mode	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Substitute Level [dBm]	Ant. Gain [dBi]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
1852.40	WCDMA1900	H	167	281	17.50	7.99	25.49	0.354	33.01	-7.52
1880.00	WCDMA1900	H	166	297	16.78	7.98	24.76	0.299	33.01	-8.26
1907.60	WCDMA1900	H	166	297	16.80	8.02	24.82	0.304	33.01	-8.19
1852.40	WCDMA1900	V	166	297	15.00	7.99	22.99	0.199	33.01	-10.02

**Table 7-8. EIRP (PCS WCDMA)**

<b>FCC ID:</b> ZNFLS755		FCC Pt. 22, 24, & 27 GSM / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)		<b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1605310985.ZNF	<b>Test Dates:</b> May 31 - July 07, 2016	<b>EUT Type:</b> Portable Handset		Page 72 of 101

## 7.7 Radiated Spurious Emissions Measurements

§2.1053 §22.917(a) 24.238(a) 27.53(h)

### Test Overview

Radiated spurious emissions measurements are performed using the substitution method described in ANSI/TIA-603-D-2010 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using horizontally and vertically polarized tuned dipole antennas. Measurements on signals operating above 1GHz are performed using vertically and horizontally polarized broadband horn antennas. All measurements are performed as peak measurements while the EUT is operating at maximum power, and at the appropriate frequencies.

### Test Procedures Used

KDB 971168 v02r02 – Section 5.8

ANSI/TIA-603-D-2010 – Section 2.2.12


### Test Settings

1. RBW = 100kHz for emissions below 1GHz and 1MHz for emissions above 1GHz
2. VBW  $\geq$  3 x RBW
3. Span = 1.5 times the OBW
4. No. of sweep points  $\geq$  2 x span / RBW
5. Detector = Peak
6. Trace mode = max hold
7. The trace was allowed to stabilize

FCC ID: ZNFLS755		FCC Pt. 22, 24, & 27 GSM / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1605310985.ZNF	Test Dates: May 31 - July 07, 2016	EUT Type: Portable Handset		Page 73 of 101

## Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

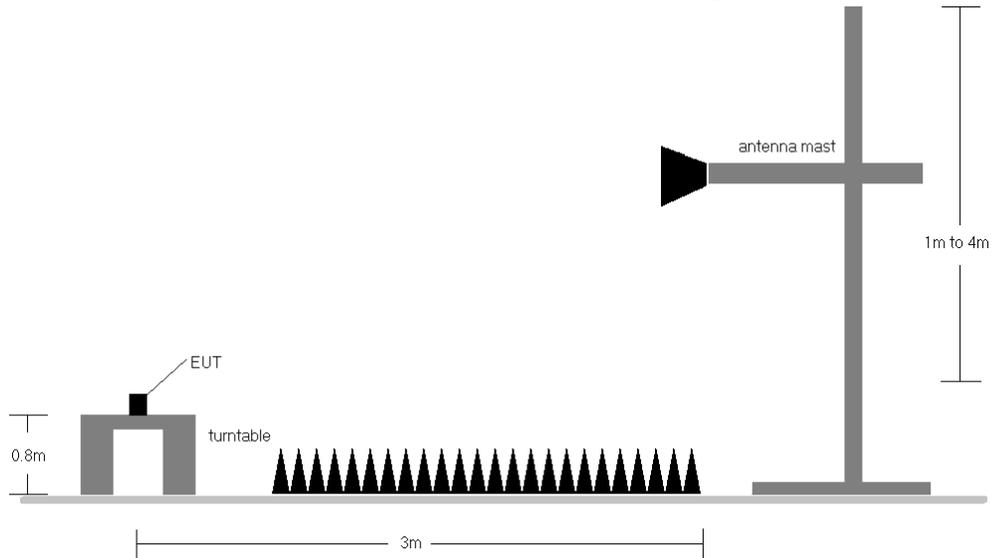

**Figure 7-7. Test Instrument & Measurement Setup**

## Test Notes

- 1) This device employs GSM, GPRS, and EDGE capabilities. The EUT was tested under all configurations and the highest power is reported in GSM mode using a Power Control Level of "0" in the PCS Band and "5" in the Cellular Band.
- 2) This device employs UMTS technology with WCDMA (AMR/RMC) and HSDPA capabilities. The EUT was tested under all configurations and the highest power is reported in WCDMA mode with HSDPA Inactive at 12.2 kbps RMC and TPC bits all set to "1."
- 3) This device was tested under all RC and SO combinations and the worst case is reported with RC3/SO55 with "All Up" power control bits.
- 4) This unit was tested with its standard battery.
- 5) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case setup is reported in the tables below.
- 6) The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter. The worst-case emissions are reported.
- 7) Emissions below 18GHz were measured at a 3 meter test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.
- 8) Data with "-" indicate that only noise floor was measured.

FCC ID: ZNFLS755	 PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 GSM / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)	 LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1605310985.ZNF	Test Dates: May 31 - July 07, 2016	EUT Type: Portable Handset		Page 74 of 101

OPERATING FREQUENCY: 824.20 MHz  
 CHANNEL: 128  
 MEASURED OUTPUT POWER: 27.03 dBm = 0.504 W  
 MODULATION SIGNAL: GSM (GMSK)  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10} (W) =$  40.03 dBc

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBd]	Spurious Emission Level [dBm]	[dBc]
1648.40	H	104	215	-52.82	6.24	-46.57	73.6
2472.60	H	117	3	-43.66	6.59	-37.07	64.1
3296.80	H	-	-	-58.60	6.91	-51.69	78.7

**Table 7-9. Radiated Spurious Data (Cellular GSM Mode – Ch. 128)**

OPERATING FREQUENCY: 836.60 MHz  
 CHANNEL: 190  
 MEASURED OUTPUT POWER: 28.28 dBm = 0.672 W  
 MODULATION SIGNAL: GSM (GMSK)  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10} (W) =$  41.28 dBc

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBd]	Spurious Emission Level [dBm]	[dBc]
1673.20	H	101	215	-48.06	6.12	-41.94	70.2
2509.80	H	100	100	-51.28	6.63	-44.66	72.9
3346.40	H	-	-	-58.89	7.09	-51.80	80.1

**Table 7-10. Radiated Spurious Data (Cellular GSM Mode – Ch. 190)**

FCC ID: ZNFLS755		FCC Pt. 22, 24, & 27 GSM / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1605310985.ZNF	Test Dates: May 31 - July 07, 2016	EUT Type: Portable Handset		Page 75 of 101

OPERATING FREQUENCY: 848.80 MHz  
 CHANNEL: 251  
 MEASURED OUTPUT POWER: 27.62 dBm = 0.578 W  
 MODULATION SIGNAL: GSM (GMSK)  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10} (W) =$  40.62 dBc

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBd]	Spurious Emission Level [dBm]	[dBc]
1697.60	H	163	207	-41.71	6.00	-35.71	63.3
2546.40	H	100	100	-44.09	6.74	-37.35	65.0
3395.20	H	-	-	-59.07	7.27	-51.80	79.4

**Table 7-11. Radiated Spurious Data (Cellular GSM Mode – Ch. 251)**

OPERATING FREQUENCY: 824.70 MHz  
 CHANNEL: 1013  
 MEASURED OUTPUT POWER: 18.79 dBm = 0.076 W  
 MODULATION SIGNAL: CDMA  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10} (W) =$  31.79 dBc

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBd]	Spurious Emission Level [dBm]	[dBc]
1649.40	H	117	297	-58.98	6.24	-52.74	71.5
2474.10	H	117	291	-45.95	6.59	-39.36	58.1
3298.80	H	-	-	-58.65	6.91	-51.75	70.5

**Table 7-12. Radiated Spurious Data (Cellular CDMA Mode – Ch. 1013)**

FCC ID: ZNFLS755		FCC Pt. 22, 24, & 27 GSM / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1605310985.ZNF	Test Dates: May 31 - July 07, 2016	EUT Type: Portable Handset	Page 76 of 101	

OPERATING FREQUENCY: 836.52 MHz  
 CHANNEL: 384  
 MEASURED OUTPUT POWER: 19.45 dBm = 0.088 W  
 MODULATION SIGNAL: CDMA  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10}(W) =$  32.45 dBc

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBd]	Spurious Emission Level [dBm]	[dBc]
1673.04	H	100	345	-61.03	6.12	-54.91	74.4
2509.56	H	201	101	-42.60	6.62	-35.98	55.4
3346.08	H	-	-	-58.37	7.09	-51.28	70.7

**Table 7-13. Radiated Spurious Data (Cellular CDMA Mode – Ch. 384)**

OPERATING FREQUENCY: 848.31 MHz  
 CHANNEL: 777  
 MEASURED OUTPUT POWER: 19.75 dBm = 0.094 W  
 MODULATION SIGNAL: CDMA  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10}(W) =$  32.75 dBc

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBd]	Spurious Emission Level [dBm]	[dBc]
1696.62	H	170	192	-53.79	6.00	-47.79	67.5
2544.93	H	167	280	-45.76	6.73	-39.03	58.8
3393.24	H	-	-	-59.04	7.27	-51.78	71.5

**Table 7-14. Radiated Spurious Data (Cellular CDMA Mode – Ch. 777)**

FCC ID: ZNFLS755		FCC Pt. 22, 24, & 27 GSM / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1605310985.ZNF	Test Dates: May 31 - July 07, 2016	EUT Type: Portable Handset	Page 77 of 101	

OPERATING FREQUENCY: 826.40 MHz  
 CHANNEL: 4132  
 MEASURED OUTPUT POWER: 19.83 dBm = 0.096 W  
 MODULATION SIGNAL: WCDMA  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10}(W) =$  32.83 dBc

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBd]	Spurious Emission Level [dBm]	[dBc]
1652.80	H	-	-	-58.14	6.22	-51.92	71.8
2479.20	H	-	-	-57.93	6.59	-51.34	71.2

**Table 7-15. Radiated Spurious Data (Cellular WCDMA Mode – Ch. 4132)**

OPERATING FREQUENCY: 836.60 MHz  
 CHANNEL: 4183  
 MEASURED OUTPUT POWER: 20.32 dBm = 0.108 W  
 MODULATION SIGNAL: WCDMA  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10}(W) =$  33.32 dBc

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBd]	Spurious Emission Level [dBm]	[dBc]
1673.20	H	-	-	-63.10	6.12	-56.98	77.3
2509.80	H	-	-	-60.30	6.63	-53.68	74.0

**Table 7-16. Radiated Spurious Data (Cellular WCDMA Mode – Ch. 4183)**

FCC ID: ZNFLS755		FCC Pt. 22, 24, & 27 GSM / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1605310985.ZNF	Test Dates: May 31 - July 07, 2016	EUT Type: Portable Handset	Page 78 of 101	

OPERATING FREQUENCY: 846.60 MHz  
 CHANNEL: 4233  
 MEASURED OUTPUT POWER: 19.32 dBm = 0.086 W  
 MODULATION SIGNAL: WCDMA  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10} (W) =$  32.32 dBc

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBd]	Spurious Emission Level [dBm]	[dBc]
1693.20	H	-	-	-57.96	6.02	-51.94	71.3
2539.80	H	-	-	-57.78	6.72	-51.07	70.4

**Table 7-17. Radiated Spurious Data (Cellular WCDMA Mode – Ch. 4233)**

OPERATING FREQUENCY: 1712.40 MHz  
 CHANNEL: 1312  
 MEASURED OUTPUT POWER: 24.94 dBm = 0.312 W  
 MODULATION SIGNAL: WCDMA  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10} (W) =$  37.94 dBc

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	[dBc]
3424.80	H	-	-	-52.91	9.53	-43.37	68.3
5137.20	H	-	-	-51.53	11.03	-40.50	65.4

**Table 7-18. Radiated Spurious Data (AWS WCDMA Mode – Ch. 1312)**

OPERATING FREQUENCY: 1732.60 MHz  
 CHANNEL: 1413  
 MEASURED OUTPUT POWER: 24.97 dBm = 0.314 W  
 MODULATION SIGNAL: WCDMA  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10} (W) =$  37.97 dBc

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	[dBc]
3465.20	H	-	-	-58.26	9.64	-48.62	73.6
5197.80	H	-	-	-54.14	10.98	-43.16	68.1

Table 7-19. Radiated Spurious Data (AWS WCDMA Mode – Ch. 1413)

OPERATING FREQUENCY: 1752.60 MHz  
 CHANNEL: 1513  
 MEASURED OUTPUT POWER: 24.28 dBm = 0.268 W  
 MODULATION SIGNAL: WCDMA  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10} (W) =$  37.28 dBc

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	[dBc]
3505.20	H	-	-	-53.44	9.75	-43.69	68.6
5257.80	H	-	-	-51.75	11.06	-40.69	65.6

Table 7-20. Radiated Spurious Data (AWS WCDMA Mode – Ch. 1513)

OPERATING FREQUENCY: 1850.20 MHz  
 CHANNEL: 512  
 MEASURED OUTPUT POWER: 29.37 dBm = 0.866 W  
 MODULATION SIGNAL: GSM (GMSK)  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10} (W) =$  42.37 dBc

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	[dBc]
3700.40	H	147	14	-56.81	9.92	-46.89	76.3
5550.60	H	-	-	-55.17	11.15	-44.02	73.4

**Table 7-21. Radiated Spurious Data (PCS GSM Mode – Ch. 512)**

OPERATING FREQUENCY: 1880.00 MHz  
 CHANNEL: 661  
 MEASURED OUTPUT POWER: 29.82 dBm = 0.960 W  
 MODULATION SIGNAL: GSM (GMSK)  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10} (W) =$  42.82 dBc

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	[dBc]
3760.00	H	161	276	-56.82	9.63	-47.19	76.6
5640.00	H	-	-	-55.20	11.29	-43.91	73.3

**Table 7-22. Radiated Spurious Data (PCS GSM Mode – Ch. 661)**

OPERATING FREQUENCY: 1909.80 MHz  
 CHANNEL: 810  
 MEASURED OUTPUT POWER: 27.92 dBm = 0.619 W  
 MODULATION SIGNAL: GSM (GMSK)  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10} (W) =$  40.92 dBc

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	[dBc]
3819.60	H	147	289	-55.99	9.39	-46.60	76.0
5729.40	H	-	-	-55.32	11.37	-43.96	73.3

**Table 7-23. Radiated Spurious Data (PCS GSM Mode – Ch. 810)**

OPERATING FREQUENCY: 1851.25 MHz  
 CHANNEL: 25  
 MEASURED OUTPUT POWER: 26.42 dBm = 0.438 W  
 MODULATION SIGNAL: CDMA  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10} (W) =$  39.42 dBc

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	[dBc]
3702.50	H	122	9	-53.73	9.91	-43.82	70.2
5553.75	H	-	-	-54.42	11.16	-43.27	69.7

**Table 7-24. Radiated Spurious Data (PCS CDMA Mode – Ch. 25)**

FCC ID: ZNFLS755		FCC Pt. 22, 24, & 27 GSM / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1605310985.ZNF	Test Dates: May 31 - July 07, 2016	EUT Type: Portable Handset	Page 82 of 101	

OPERATING FREQUENCY: 1880.00 MHz  
 CHANNEL: 600  
 MEASURED OUTPUT POWER: 25.48 dBm = 0.353 W  
 MODULATION SIGNAL: CDMA  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10}(W) =$  38.48 dBc

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	[dBc]
3760.00	H	120	26	-54.00	9.63	-44.37	70.8
5640.00	H	105	248	-49.06	11.29	-37.77	64.2
7520.00	H	-	-	-51.22	11.12	-40.09	66.5

**Table 7-25. Radiated Spurious Data (PCS CDMA Mode – Ch. 600)**

OPERATING FREQUENCY: 1908.75 MHz  
 CHANNEL: 1175  
 MEASURED OUTPUT POWER: 25.91 dBm = 0.390 W  
 MODULATION SIGNAL: CDMA  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10}(W) =$  38.91 dBc

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	[dBc]
3817.50	H	119	313	-51.30	9.40	-41.90	68.3
5726.25	H	124	273	-49.94	11.37	-38.57	65.0
7635.00	H	-	-	-51.63	11.34	-40.29	66.7

**Table 7-26. Radiated Spurious Data (PCS CDMA Mode – Ch. 1175)**

FCC ID: ZNFLS755		FCC Pt. 22, 24, & 27 GSM / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1605310985.ZNF	Test Dates: May 31 - July 07, 2016	EUT Type: Portable Handset	Page 83 of 101	

OPERATING FREQUENCY: 1852.40 MHz  
 CHANNEL: 9262  
 MEASURED OUTPUT POWER: 25.49 dBm = 0.354 W  
 MODULATION SIGNAL: WCDMA  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10}(W) =$  38.49 dBc

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	[dBc]
3704.80	H	134	325	-57.06	9.89	-47.17	72.7
5557.20	H	-	-	-55.78	11.16	-44.61	70.1

**Table 7-27. Radiated Spurious Data (PCS WCDMA Mode – Ch. 9262)**

OPERATING FREQUENCY: 1880.00 MHz  
 CHANNEL: 9400  
 MEASURED OUTPUT POWER: 24.76 dBm = 0.299 W  
 MODULATION SIGNAL: WCDMA  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10}(W) =$  37.76 dBc

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	[dBc]
3760.00	H	126	285	-56.95	9.63	-47.32	72.8
5640.00	H	-	-	-55.99	11.29	-44.70	70.2

**Table 7-28. Radiated Spurious Data (PCS WCDMA Mode – Ch. 9400)**

OPERATING FREQUENCY: 1907.60 MHz  
 CHANNEL: 9538  
 MEASURED OUTPUT POWER: 24.82 dBm = 0.304 W  
 MODULATION SIGNAL: WCDMA  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10}(W) =$  37.82 dBc

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	[dBc]
3815.20	H	130	286	-56.10	9.40	-46.70	72.2
5722.80	H	-	-	-56.10	11.37	-44.73	70.2

**Table 7-29. Radiated Spurious Data (PCS WCDMA Mode – Ch. 9538)**

FCC ID: ZNFLS755		FCC Pt. 22, 24, & 27 GSM / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1605310985.ZNF	Test Dates: May 31 - July 07, 2016	EUT Type: Portable Handset	Page 85 of 101	

## 7.8 Frequency Stability / Temperature Variation

\$2.1055 \$22.355 \$24.235 \$27.54

### Test Overview and Limit

Frequency stability testing is performed in accordance with the guidelines of ANSI/TIA-603-D-2010. The frequency stability of the transmitter is measured by:

- a.) **Temperature:** The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
- b.) **Primary Supply Voltage:** The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

***For Part 22, the frequency stability of the transmitter shall be maintained within  $\pm 0.00025\%$  ( $\pm 2.5$  ppm) of the center frequency. For Part 24 and Part 27, the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.***

### Test Procedure Used

ANSI/TIA-603-D-2010

### Test Settings

1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
2. The equipment is turned on in a "standby" condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

### Test Setup

The EUT was connected via an RF cable to a spectrum analyzer with the EUT placed inside an environmental chamber.

### Test Notes

None

FCC ID: ZNFLS755		FCC Pt. 22, 24, & 27 GSM / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1605310985.ZNF	Test Dates: May 31 - July 07, 2016	EUT Type: Portable Handset	Page 86 of 101	

## Frequency Stability / Temperature Variation

§2.1055 §22.355


OPERATING FREQUENCY: 836,600,000 Hz  
 CHANNEL: 190  
 REFERENCE VOLTAGE: 3.85 VDC  
 DEVIATION LIMIT: ± 0.00025 % or 2.5 ppm

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.85	+ 20 (Ref)	836,600,201	201	0.0000240
100 %		- 30	836,600,162	162	0.0000194
100 %		- 20	836,600,177	177	0.0000212
100 %		- 10	836,599,888	-112	-0.0000134
100 %		0	836,600,124	124	0.0000148
100 %		+ 10	836,600,163	163	0.0000195
100 %		+ 20	836,600,201	201	0.0000240
100 %		+ 30	836,600,231	231	0.0000276
100 %		+ 40	836,600,110	110	0.0000131
100 %		+ 50	836,600,216	216	0.0000258
115 %	4.43	+ 20	836,600,204	204	0.0000244
BATT. ENDPOINT	3.45	+ 20	836,600,235	235	0.0000281

**Table 7-30. Frequency Stability Data (Cellular GSM Mode – Ch. 190)**

FCC ID: ZNFLS755		FCC Pt. 22, 24, & 27 GSM / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1605310985.ZNF	Test Dates: May 31 - July 07, 2016	EUT Type: Portable Handset	Page 87 of 101	

**Frequency Stability / Temperature Variation**  
**§2.1055 §22.355**

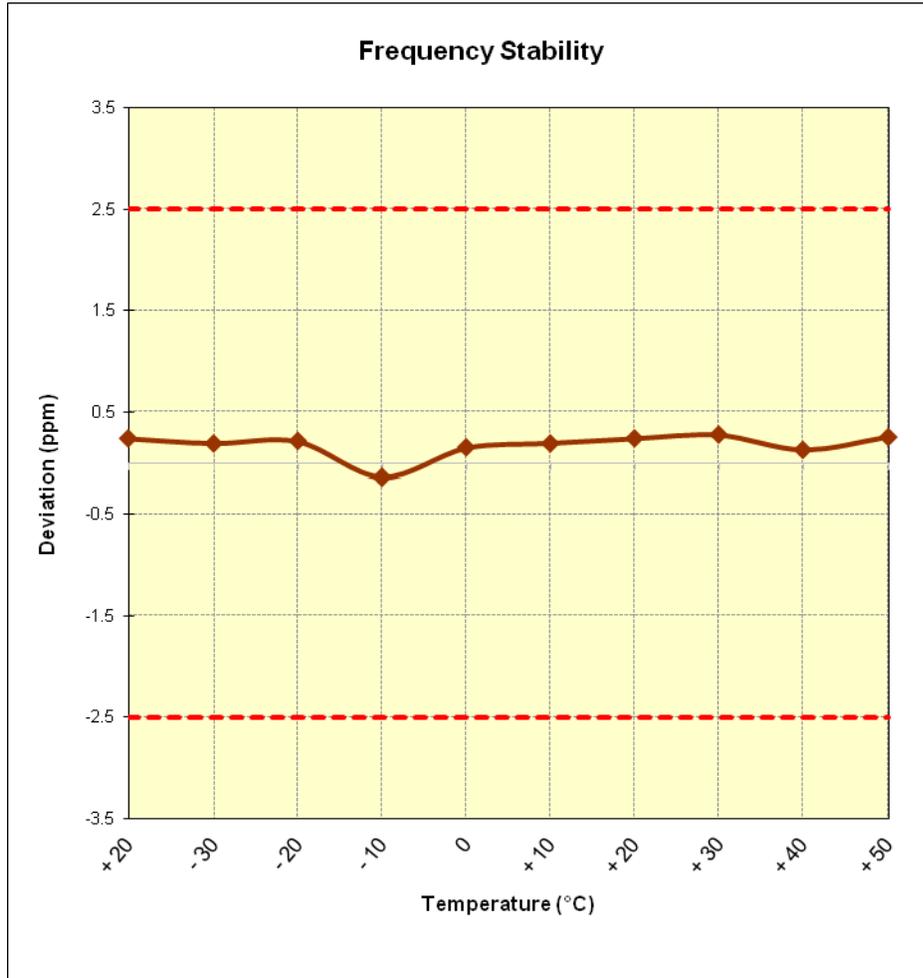

**Figure 7-8. Frequency Stability Graph (Cellular GSM Mode – Ch. 190)**

<b>FCC ID:</b> ZNFLS755		FCC Pt. 22, 24, & 27 GSM / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)		<b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1605310985.ZNF	<b>Test Dates:</b> May 31 - July 07, 2016	<b>EUT Type:</b> Portable Handset	Page 88 of 101	

## Frequency Stability / Temperature Variation

§2.1055 §22.355


OPERATING FREQUENCY: 836,520,000 Hz  
 CHANNEL: 384  
 REFERENCE VOLTAGE: 3.85 VDC  
 DEVIATION LIMIT: ± 0.00025 % or 2.5 ppm

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.85	+ 20 (Ref)	836,520,204	204	0.0000244
100 %		- 30	836,520,161	161	0.0000192
100 %		- 20	836,520,216	216	0.0000258
100 %		- 10	836,520,210	210	0.0000251
100 %		0	836,520,184	184	0.0000220
100 %		+ 10	836,520,147	147	0.0000176
100 %		+ 20	836,520,204	204	0.0000244
100 %		+ 30	836,520,176	176	0.0000210
100 %		+ 40	836,520,207	207	0.0000247
100 %		+ 50	836,520,193	193	0.0000231
115 %	4.43	+ 20	836,520,218	218	0.0000261
BATT. ENDPOINT	3.45	+ 20	836,520,229	229	0.0000274

Table 7-31. Frequency Stability Data (Cellular CDMA Mode – Ch. 384)

FCC ID: ZNFLS755		FCC Pt. 22, 24, & 27 GSM / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1605310985.ZNF	Test Dates: May 31 - July 07, 2016	EUT Type: Portable Handset	Page 89 of 101	

**Frequency Stability / Temperature Variation**  
**§2.1055 §22.355**

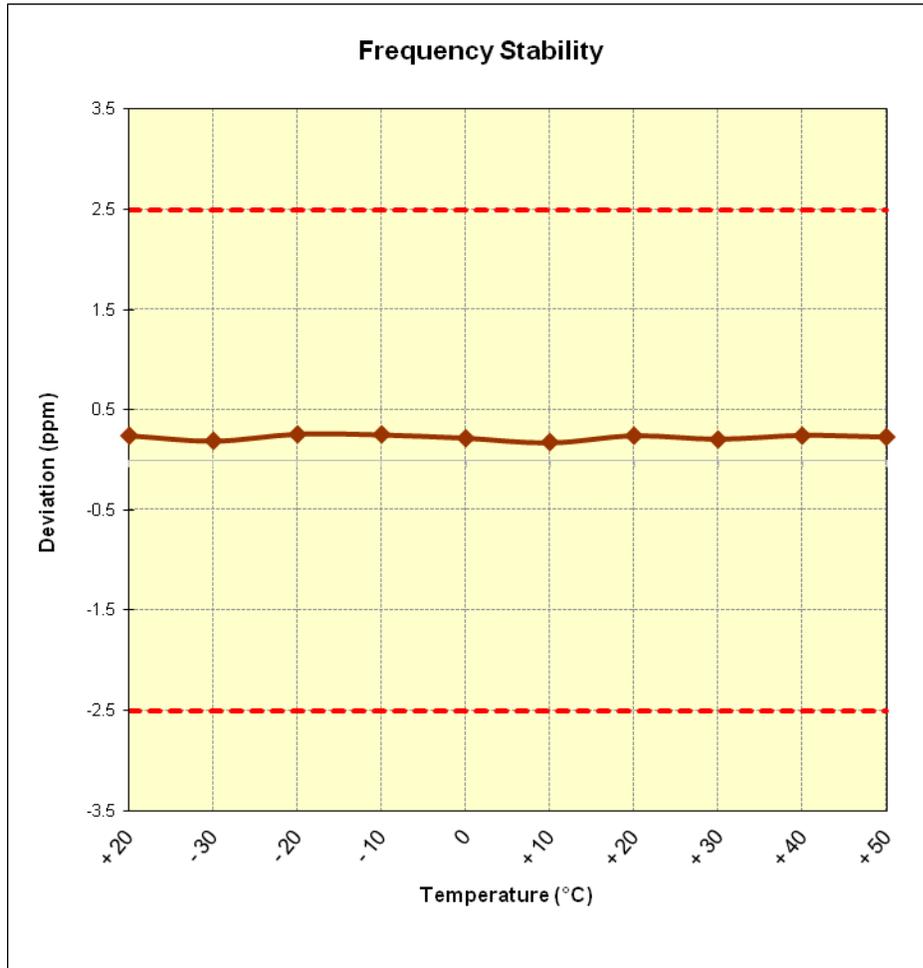

**Figure 7-9. Frequency Stability Graph (Cellular CDMA Mode – Ch. 384)**

<b>FCC ID:</b> ZNFLS755	 <b>FCC Pt. 22, 24, &amp; 27 GSM / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1605310985.ZNF	<b>Test Dates:</b> May 31 - July 07, 2016	<b>EUT Type:</b> Portable Handset	Page 90 of 101

## Frequency Stability / Temperature Variation

§2.1055 §22.355


OPERATING FREQUENCY: 836,600,000 Hz  
 CHANNEL: 4183  
 REFERENCE VOLTAGE: 3.85 VDC  
 DEVIATION LIMIT: ± 0.00025 % or 2.5 ppm

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.85	+ 20 (Ref)	836,600,168	168	0.0000201
100 %		- 30	836,600,213	213	0.0000255
100 %		- 20	836,600,189	189	0.0000226
100 %		- 10	836,600,197	197	0.0000235
100 %		0	836,600,188	188	0.0000225
100 %		+ 10	836,600,206	206	0.0000246
100 %		+ 20	836,600,168	168	0.0000201
100 %		+ 30	836,600,224	224	0.0000268
100 %		+ 40	836,600,182	182	0.0000218
100 %		+ 50	836,600,207	207	0.0000247
115 %		4.43	+ 20	836,600,232	232
BATT. ENDPOINT	3.45	+ 20	836,600,246	246	0.0000294

Table 7-32. Frequency Stability Data (Cellular WCDMA Mode – Ch. 4183)

FCC ID: ZNFLS755		FCC Pt. 22, 24, & 27 GSM / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1605310985.ZNF	Test Dates: May 31 - July 07, 2016	EUT Type: Portable Handset	Page 91 of 101	

**Frequency Stability / Temperature Variation**  
**§2.1055 §22.355**

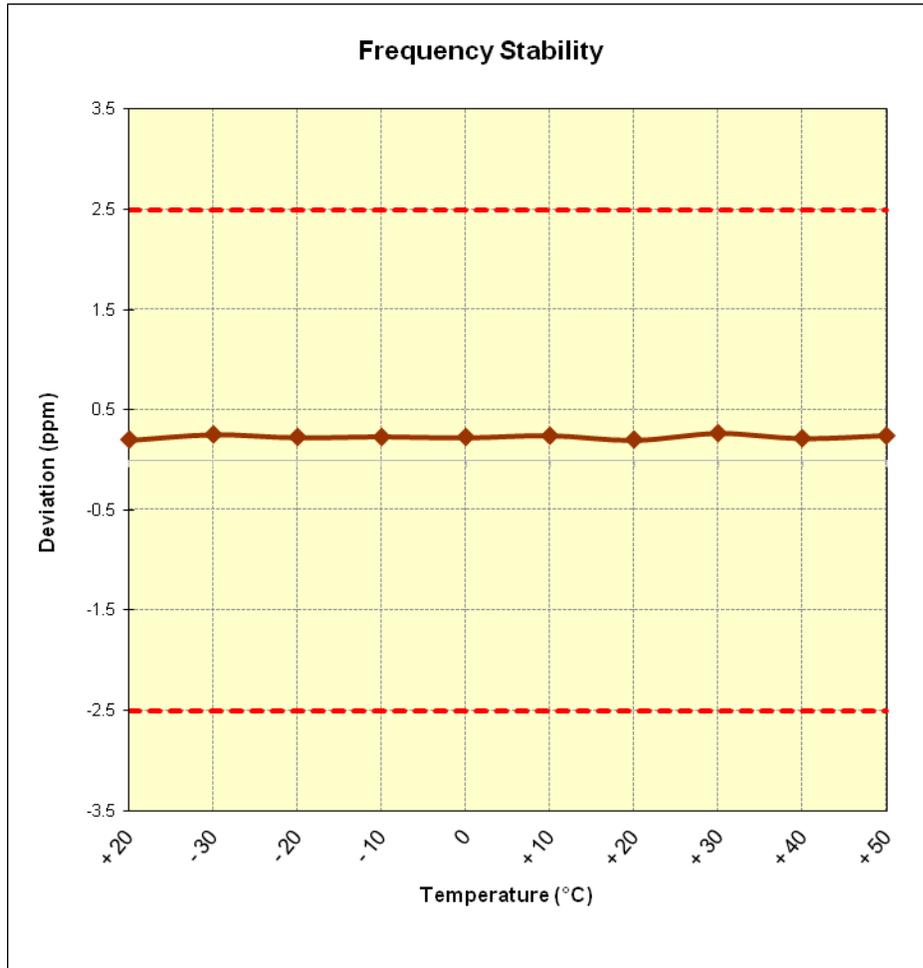

**Figure 7-10. Frequency Stability Graph (Cellular WCDMA Mode – Ch. 4183)**

<b>FCC ID:</b> ZNFLS755		FCC Pt. 22, 24, & 27 GSM / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)		<b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1605310985.ZNF	<b>Test Dates:</b> May 31 - July 07, 2016	<b>EUT Type:</b> Portable Handset		Page 92 of 101

## Frequency Stability / Temperature Variation

§2.1055 §27.54

OPERATING FREQUENCY:	1,732,600,000	Hz
CHANNEL:	1413	
REFERENCE VOLTAGE:	3.85	VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.85	+ 20 (Ref)	1,732,600,194	194	0.0000112
100 %		- 30	1,732,599,880	-120	-0.0000069
100 %		- 20	1,732,600,214	214	0.0000124
100 %		- 10	1,732,600,182	182	0.0000105
100 %		0	1,732,600,167	167	0.0000096
100 %		+ 10	1,732,600,189	189	0.0000109
100 %		+ 20	1,732,600,194	194	0.0000112
100 %		+ 30	1,732,600,231	231	0.0000133
100 %		+ 40	1,732,600,158	158	0.0000091
100 %		+ 50	1,732,600,207	207	0.0000119
115 %	4.43	+ 20	1,732,600,223	223	0.0000129
BATT. ENDPOINT	3.45	+ 20	1,732,600,237	237	0.0000137


**Table 7-33. Frequency Stability Data (AWS WCDMA Mode – Ch. 1413)**

**Note:**

Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

FCC ID: ZNFLS755		FCC Pt. 22, 24, & 27 GSM / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1605310985.ZNF	Test Dates: May 31 - July 07, 2016	EUT Type: Portable Handset	Page 93 of 101	

**Frequency Stability / Temperature Variation**  
**§2.1055 §27.54**

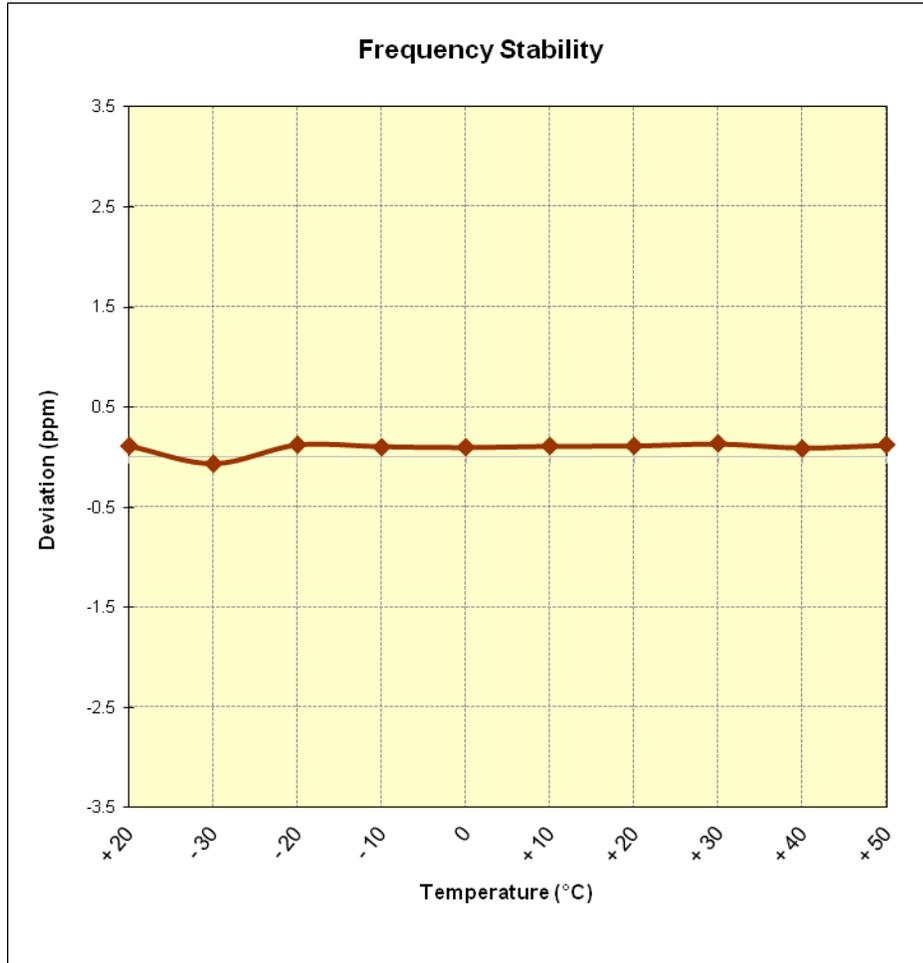

**Figure 7-11. Frequency Stability Graph (AWS WCDMA Mode – Ch. 1413)**

<b>FCC ID:</b> ZNFLS755		FCC Pt. 22, 24, & 27 GSM / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)		<b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1605310985.ZNF	<b>Test Dates:</b> May 31 - July 07, 2016	<b>EUT Type:</b> Portable Handset		Page 94 of 101

## Frequency Stability / Temperature Variation

§2.1055 §24.235

OPERATING FREQUENCY:	1,880,000,000	Hz
CHANNEL:	661	
REFERENCE VOLTAGE:	3.85	VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.85	+ 20 (Ref)	1,880,000,184	184	0.0000098
100 %		- 30	1,880,000,219	219	0.0000116
100 %		- 20	1,880,000,202	202	0.0000107
100 %		- 10	1,880,000,152	152	0.0000081
100 %		0	1,880,000,173	173	0.0000092
100 %		+ 10	1,880,000,206	206	0.0000110
100 %		+ 20	1,880,000,184	184	0.0000098
100 %		+ 30	1,880,000,208	208	0.0000111
100 %		+ 40	1,880,000,165	165	0.0000088
100 %		+ 50	1,880,000,129	129	0.0000069
115 %	4.43	+ 20	1,880,000,201	201	0.0000107
BATT. ENDPOINT	3.45	+ 20	1,880,000,226	226	0.0000120


**Table 7-34. Frequency Stability Data (PCS GSM Mode – Ch. 661)**

**Note:**

Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

FCC ID: ZNFLS755		FCC Pt. 22, 24, & 27 GSM / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1605310985.ZNF	Test Dates: May 31 - July 07, 2016	EUT Type: Portable Handset	Page 95 of 101	

**Frequency Stability / Temperature Variation**  
**§2.1055 §24.235**

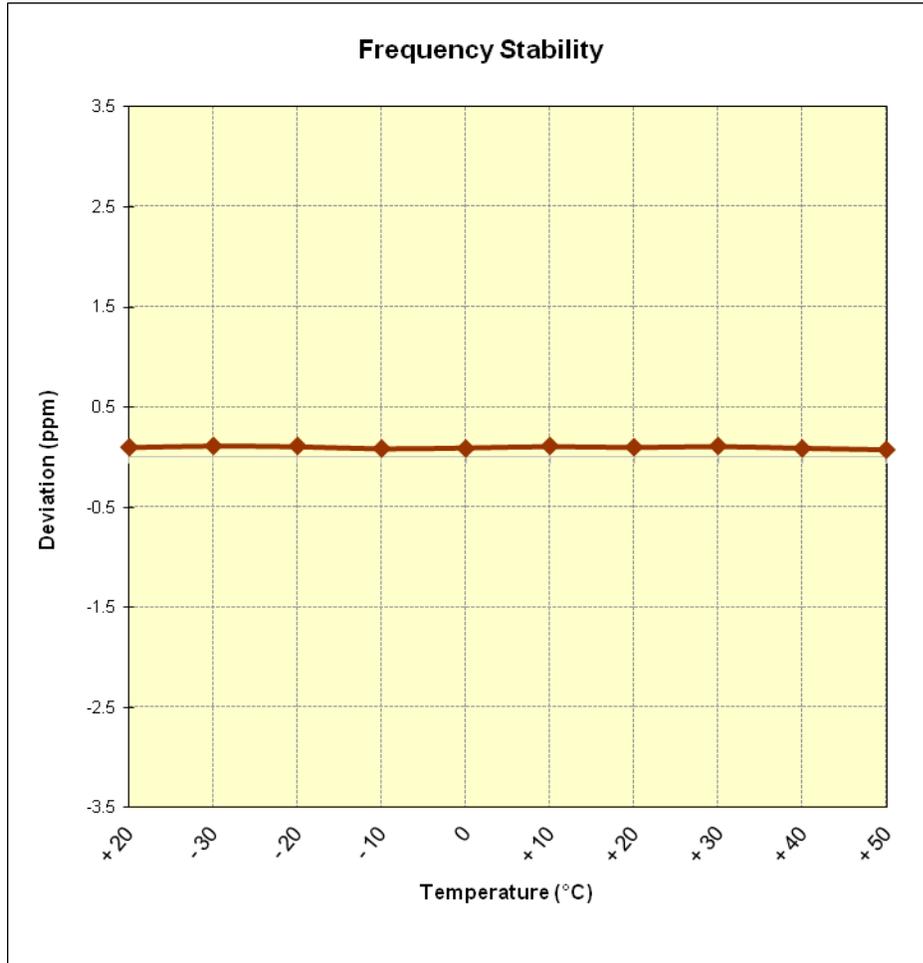

**Figure 7-12. Frequency Stability Graph (PCS GSM Mode – Ch. 661)**

<b>FCC ID:</b> ZNFLS755		FCC Pt. 22, 24, & 27 GSM / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)		<b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1605310985.ZNF	<b>Test Dates:</b> May 31 - July 07, 2016	<b>EUT Type:</b> Portable Handset		Page 96 of 101

## Frequency Stability / Temperature Variation

§2.1055 §24.235

OPERATING FREQUENCY:	1,880,000,000	Hz
CHANNEL:	600	
REFERENCE VOLTAGE:	3.85	VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.85	+ 20 (Ref)	1,880,000,190	190	0.0000101
100 %		- 30	1,880,000,112	112	0.0000060
100 %		- 20	1,880,000,206	206	0.0000110
100 %		- 10	1,880,000,167	167	0.0000089
100 %		0	1,880,000,182	182	0.0000097
100 %		+ 10	1,880,000,191	191	0.0000102
100 %		+ 20	1,880,000,190	190	0.0000101
100 %		+ 30	1,880,000,158	158	0.0000084
100 %		+ 40	1,880,000,201	201	0.0000107
100 %		+ 50	1,880,000,177	177	0.0000094
115 %	4.43	+ 20	1,880,000,214	214	0.0000114
BATT. ENDPOINT	3.45	+ 20	1,880,000,232	232	0.0000123


**Table 7-35. Frequency Stability Data (PCS CDMA Mode – Ch. 600)**

**Note:**

Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

FCC ID: ZNFLS755		FCC Pt. 22, 24, & 27 GSM / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1605310985.ZNF	Test Dates: May 31 - July 07, 2016	EUT Type: Portable Handset	Page 97 of 101	

**Frequency Stability / Temperature Variation**  
**§2.1055 §24.235**

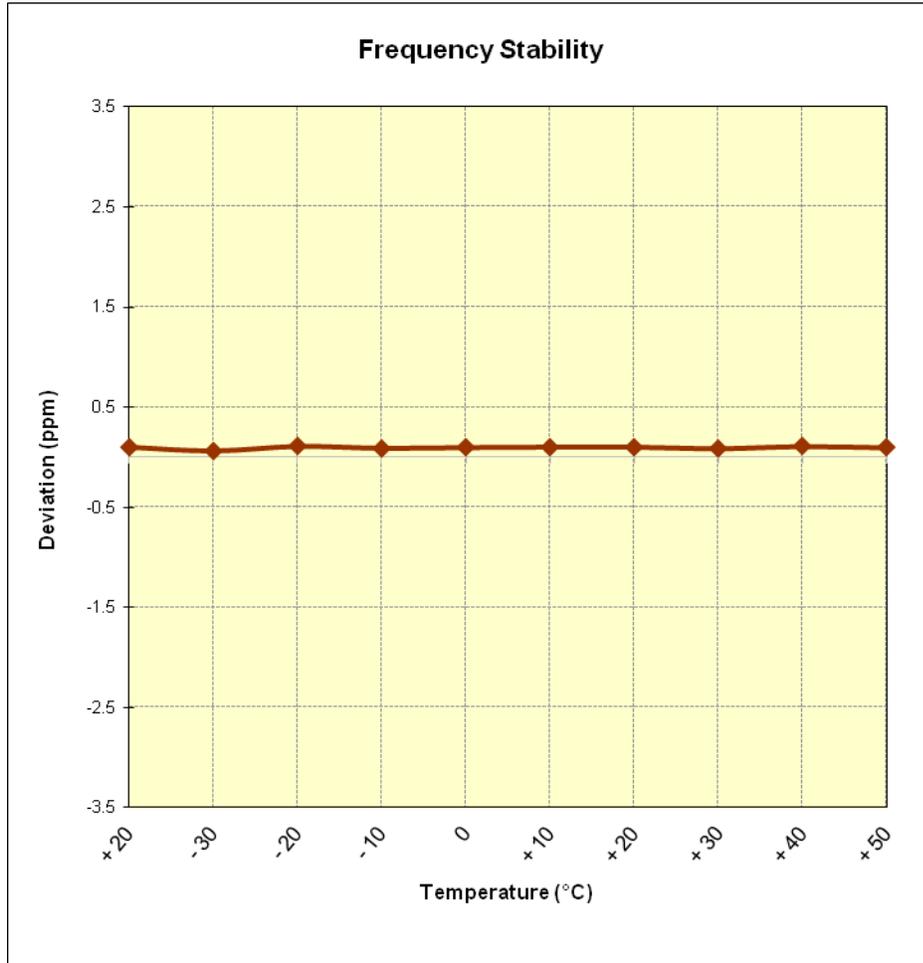

**Figure 7-13. Frequency Stability Graph (PCS CDMA Mode – Ch. 600)**

<b>FCC ID:</b> ZNFLS755	 <b>FCC Pt. 22, 24, &amp; 27 GSM / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1605310985.ZNF	<b>Test Dates:</b> May 31 - July 07, 2016	<b>EUT Type:</b> Portable Handset	Page 98 of 101

## Frequency Stability / Temperature Variation

§2.1055 §24.235

OPERATING FREQUENCY:	1,880,000,000	Hz
CHANNEL:	9400	
REFERENCE VOLTAGE:	3.85	VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.85	+ 20 (Ref)	1,880,000,178	178	0.0000095
100 %		- 30	1,880,000,203	203	0.0000108
100 %		- 20	1,880,000,164	164	0.0000087
100 %		- 10	1,880,000,188	188	0.0000100
100 %		0	1,880,000,210	210	0.0000112
100 %		+ 10	1,880,000,188	188	0.0000100
100 %		+ 20	1,880,000,178	178	0.0000095
100 %		+ 30	1,880,000,208	208	0.0000111
100 %		+ 40	1,880,000,197	197	0.0000105
100 %		+ 50	1,880,000,202	202	0.0000107
115 %	4.43	+ 20	1,880,000,216	216	0.0000115
BATT. ENDPOINT	3.45	+ 20	1,880,000,228	228	0.0000121


**Table 7-36. Frequency Stability Data (PCS WCDMA Mode – Ch. 9400)**

**Note:**

Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

FCC ID: ZNFLS755		FCC Pt. 22, 24, & 27 GSM / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1605310985.ZNF	Test Dates: May 31 - July 07, 2016	EUT Type: Portable Handset	Page 99 of 101	

**Frequency Stability / Temperature Variation**  
**§2.1055 §24.235**

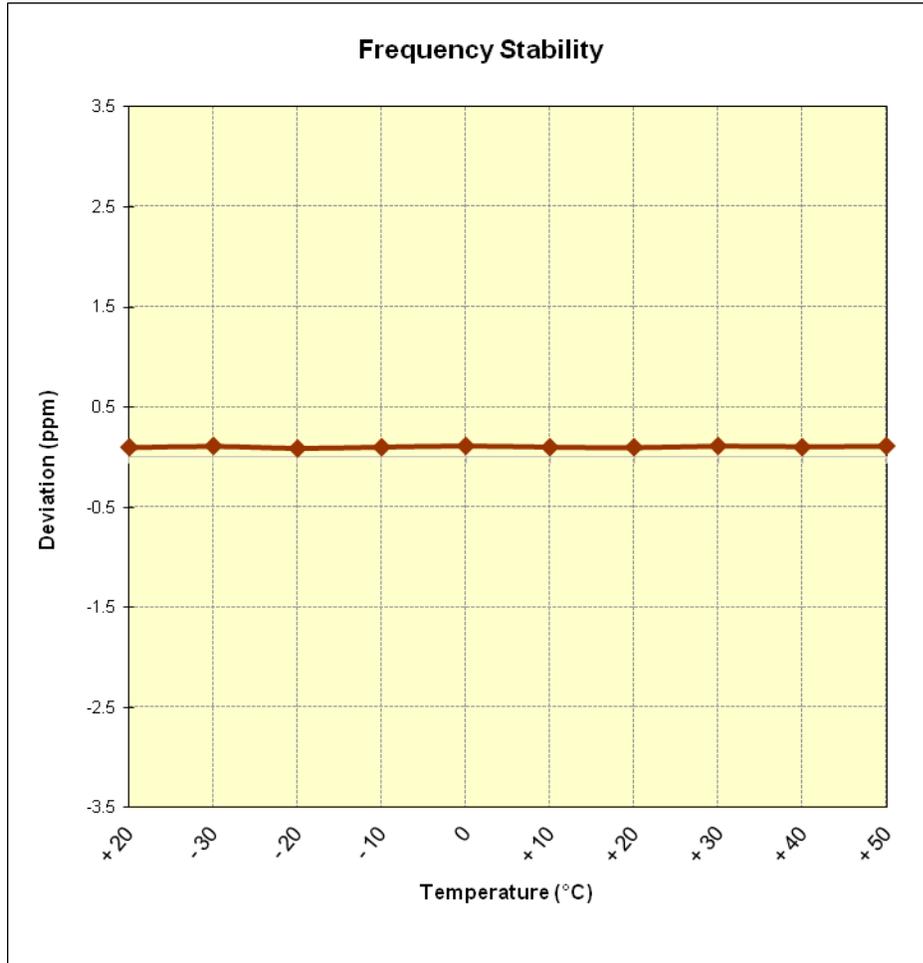

**Figure 7-14. Frequency Stability Graph (PCS WCDMA Mode – Ch. 9400)**

<b>FCC ID:</b> ZNFLS755	 <b>FCC Pt. 22, 24, &amp; 27 GSM / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1605310985.ZNF	<b>Test Dates:</b> May 31 - July 07, 2016	<b>EUT Type:</b> Portable Handset	Page 100 of 101

## 8.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the **LG Portable Handset FCC ID: ZNFLS755** complies with all the requirements of Parts 22, 24, & 27 of the FCC rules.

FCC ID: ZNFLS755		FCC Pt. 22, 24, & 27 GSM / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1605310985.ZNF	Test Dates: May 31 - July 07, 2016	EUT Type: Portable Handset		Page 101 of 101