

Test Laboratory: UL CCS SAR Lab B

CDMA BC1_Head_1xRTT RC3 SO55

Communication System: CDMA2000; Frequency: 1851.25 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1851.25$ MHz; $\sigma = 1.356$ mho/m; $\epsilon_r = 40.847$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3773; ConvF(7.3, 7.3, 7.3); Calibrated: 5/3/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1258; Calibrated: 5/2/2011
- Phantom: SAM with CRP v5.0; Type: QD000P40CD; Serial: TP1632
- Measurement SW: DASY52, Version 52.6 (2);SEMCAD X Version 14.4.5 (3634)

LHS/Touch_L ch/Area Scan (81x111x1): Measurement grid: dx=15mm, dy=15mm[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 1.000 mW/g


LHS/Touch_L ch/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 25.061 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 1.210 W/kg

SAR(1 g) = 0.797 mW/g; SAR(10 g) = 0.500 mW/g[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.974 mW/g

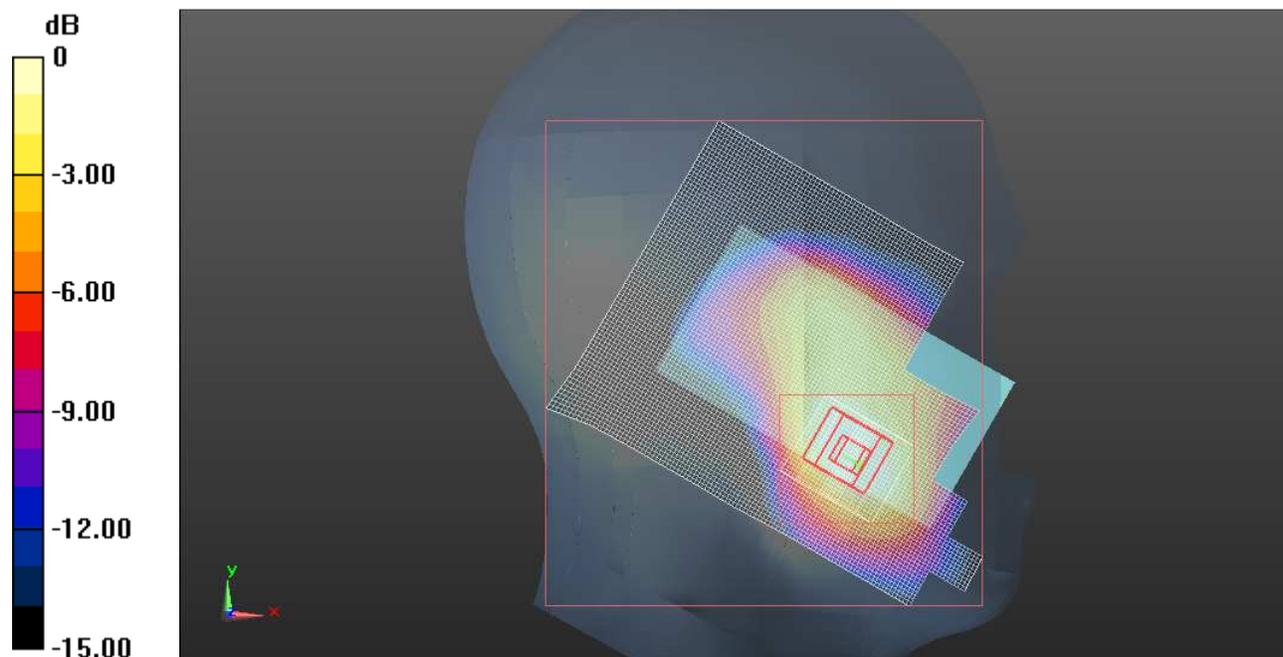

0 dB = 0.970mW/g

Test Laboratory: UL CCS SAR Lab B

CDMA BC1_Head_1xRTT RC3 SO55

Communication System: CDMA2000; Frequency: 1880 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.388$ mho/m; $\epsilon_r = 40.717$; $\rho = 1000$ kg/m³
 Phantom section: Left Section



Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3773; ConvF(7.3, 7.3, 7.3); Calibrated: 5/3/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1258; Calibrated: 5/2/2011
- Phantom: SAM with CRP v5.0; Type: QD000P40CD; Serial: TP1632
- Measurement SW: DASY52, Version 52.6 (2);SEMCAD X Version 14.4.5 (3634)

LHS/Touch_M ch/Area Scan (81x111x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (interpolated) = 1.164 mW/g

LHS/Touch_M ch/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 26.825 V/m; Power Drift = 0.07 dB
 Peak SAR (extrapolated) = 1.471 W/kg
SAR(1 g) = 0.957 mW/g; SAR(10 g) = 0.591 mW/g
 Maximum value of SAR (measured) = 1.179 mW/g

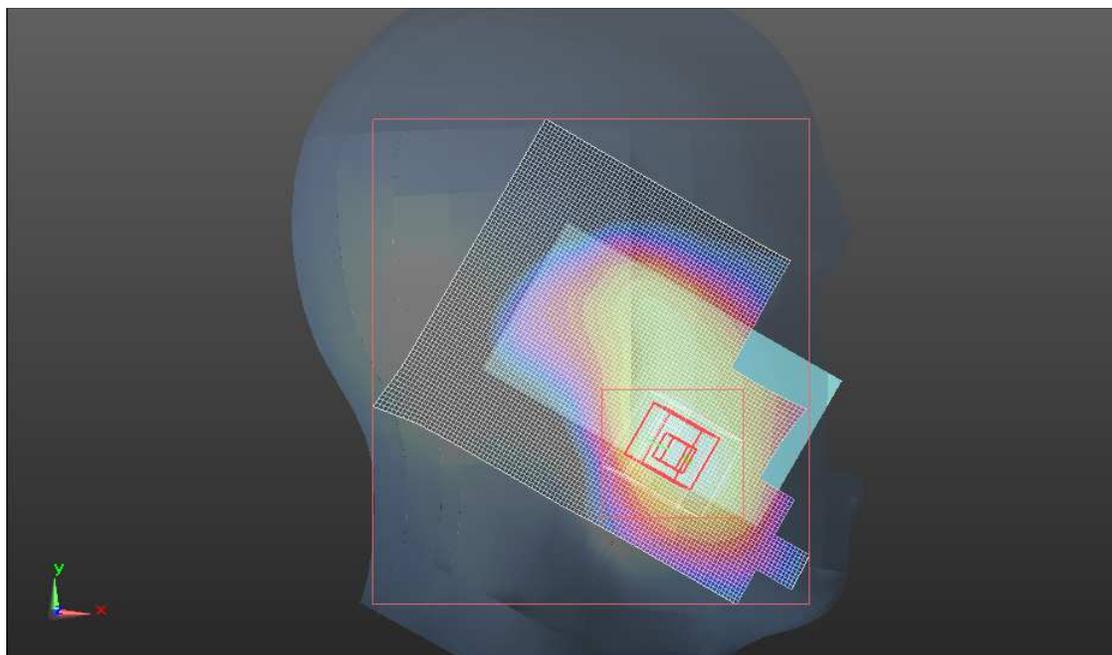

0 dB = 1.180mW/g

Test Laboratory: UL CCS SAR Lab B

CDMA BC1_Head_1xRTT RC3 SO55

Communication System: CDMA2000; Frequency: 1908.75 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1908.75$ MHz; $\sigma = 1.423$ mho/m; $\epsilon_r = 40.36$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3773; ConvF(7.3, 7.3, 7.3); Calibrated: 5/3/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1258; Calibrated: 5/2/2011
- Phantom: SAM with CRP v5.0; Type: QD000P40CD; Serial: TP1632
- Measurement SW: DASY52, Version 52.6 (2);SEMCAD X Version 14.4.5 (3634)

LHS/Touch_H ch /Area Scan (81x111x1): Measurement grid: dx=15mm, dy=15mm[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 1.253 mW/g


LHS/Touch_H ch /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 27.816 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 1.676 W/kg

SAR(1 g) = 1.05 mW/g; SAR(10 g) = 0.619 mW/g[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.305 mW/g

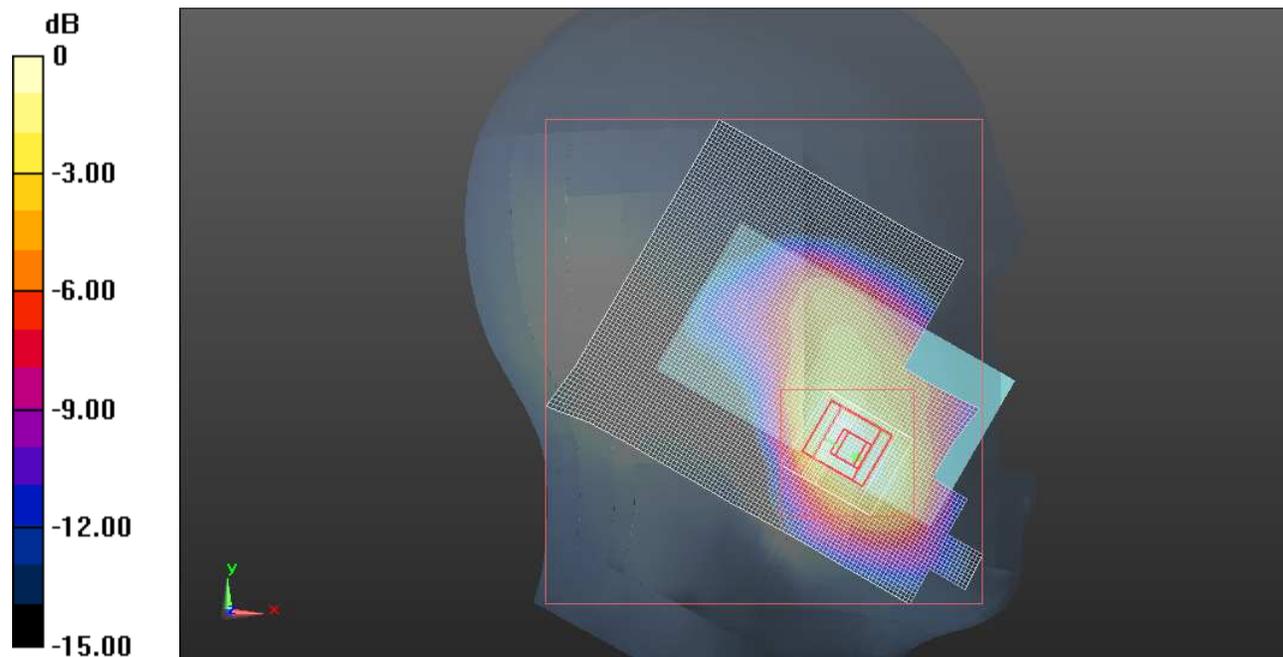

0 dB = 1.310mW/g

Test Laboratory: UL CCS SAR Lab B


CDMA BC1_Head_1xRTT RC3 SO55

Communication System: CDMA2000; Frequency: 1908.75 MHz; Duty Cycle: 1:1

LHS/Touch_H ch /Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm

Info: [Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.145 mW/g

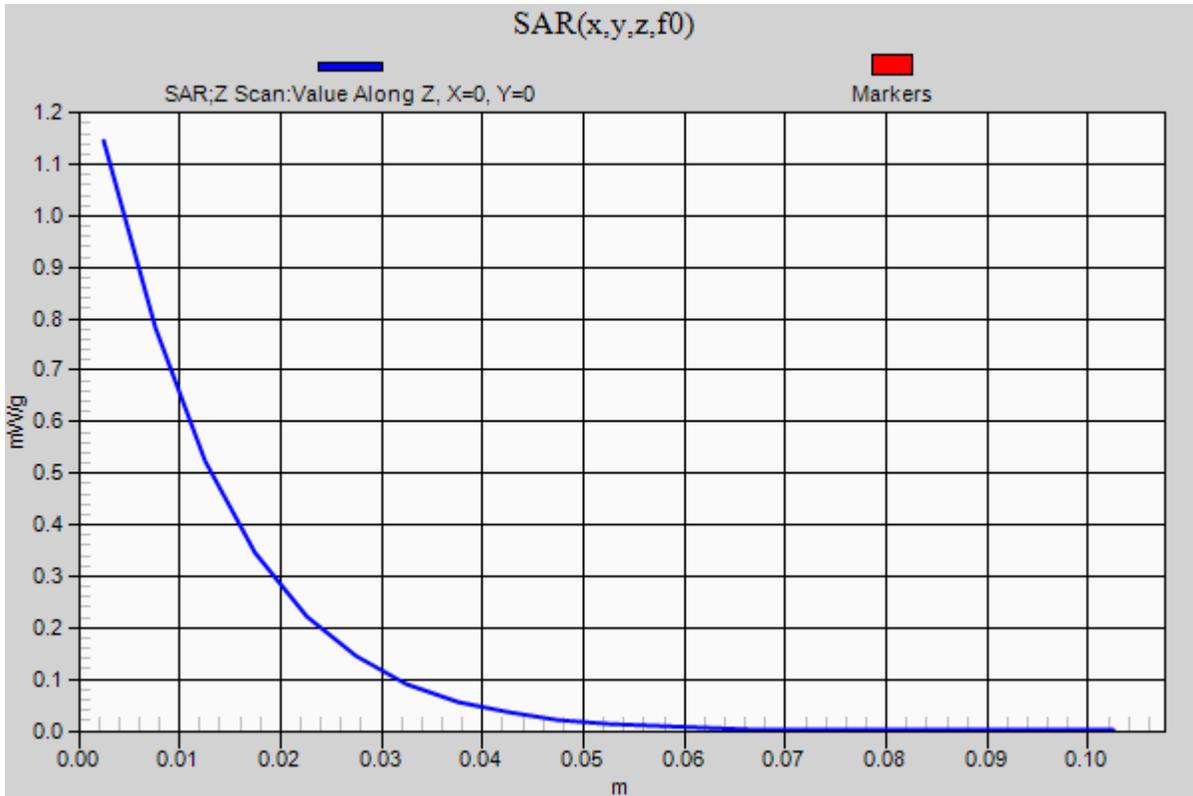

Test Laboratory: UL CCS SAR Lab B

CDMA BC1_Head_1xRTT RC3 SO55

Communication System: CDMA2000; Frequency: 1880 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.388$ mho/m; $\epsilon_r = 40.717$; $\rho = 1000$ kg/m³
 Phantom section: Left Section


Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3773; ConvF(7.3, 7.3, 7.3); Calibrated: 5/3/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1258; Calibrated: 5/2/2011
- Phantom: SAM with CRP v5.0; Type: QD000P40CD; Serial: TP1632
- Measurement SW: DASY52, Version 52.6 (2);SEMCAD X Version 14.4.5 (3634)

LHS/Tilt_M ch/Area Scan (81x111x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (interpolated) = 0.412 mW/g

LHS/Tilt_M ch/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 16.608 V/m; Power Drift = -0.14 dB
 Peak SAR (extrapolated) = 0.488 W/kg
SAR(1 g) = 0.327 mW/g; SAR(10 g) = 0.211 mW/g
 Maximum value of SAR (measured) = 0.383 mW/g

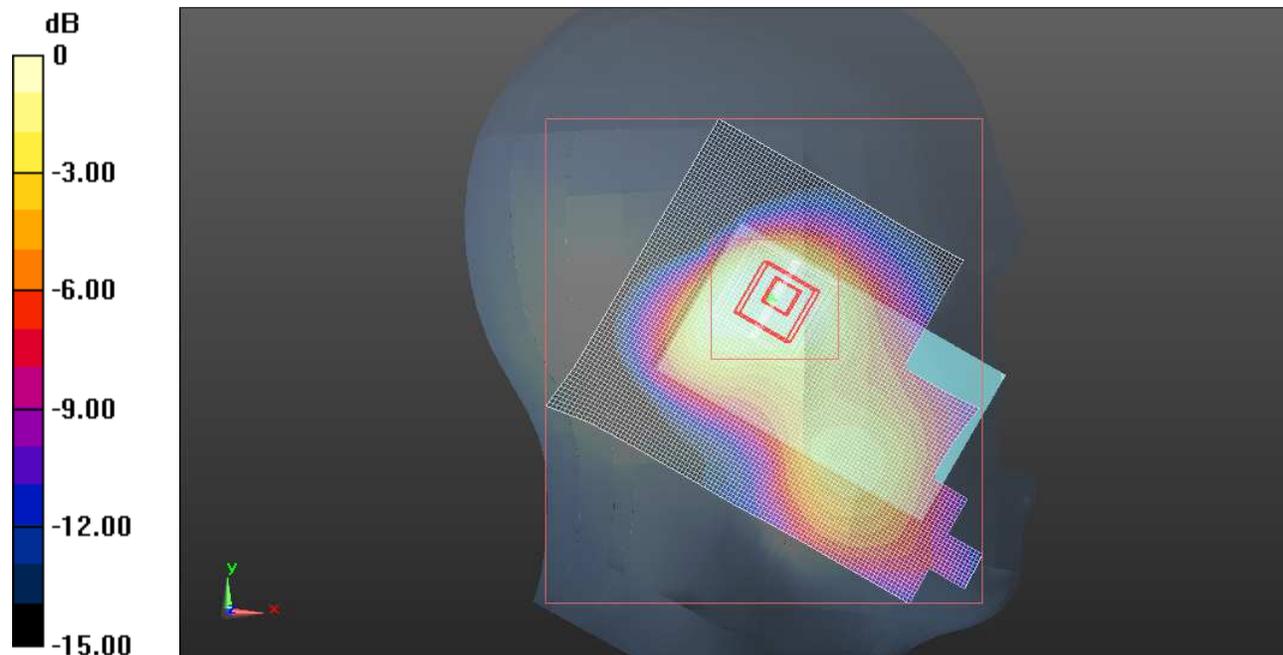

0 dB = 0.380mW/g

Test Laboratory: UL CCS SAR Lab B

CDMA BC1_Head_1xRTT RC3 SO55

Communication System: CDMA2000; Frequency: 1880 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.393$ mho/m; $\epsilon_r = 40.435$; $\rho = 1000$ kg/m³
 Phantom section: Right Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3773; ConvF(7.3, 7.3, 7.3); Calibrated: 5/3/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1258; Calibrated: 5/2/2011
- Phantom: SAM with CRP v5.0; Type: QD000P40CD; Serial: TP1632
- Measurement SW: DASY52, Version 52.6 (2);SEMCAD X Version 14.4.5 (3634)

RHS/Touch_M ch_Vol. Scan/Area Scan (81x111x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (interpolated) = 0.833 mW/g


RHS/Touch_M ch_Vol. Scan/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 23.214 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 1.067 W/kg

SAR(1 g) = 0.686 mW/g; SAR(10 g) = 0.420 mW/g

Maximum value of SAR (measured) = 0.834 mW/g

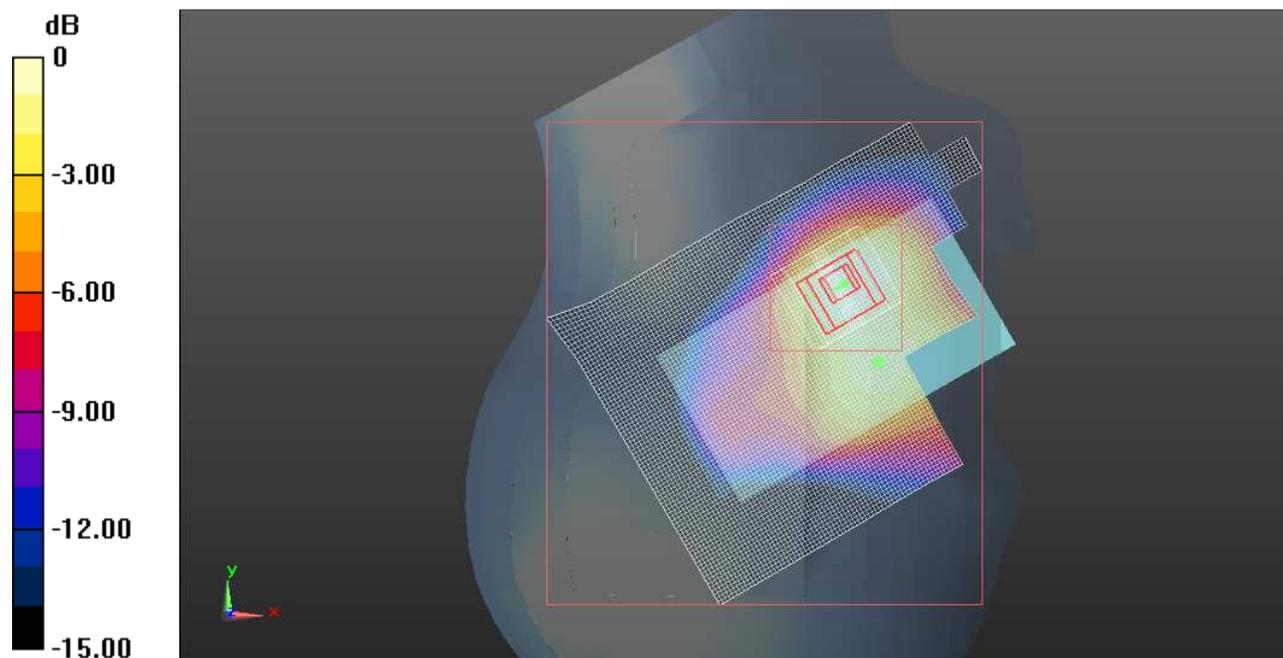

0 dB = 0.830mW/g

Test Laboratory: UL CCS SAR Lab B

CDMA BC1_Head_1xRTT RC3 SO55

Communication System: CDMA2000; Frequency: 1880 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.388$ mho/m; $\epsilon_r = 40.717$; $\rho = 1000$ kg/m³
 Phantom section: Right Section



Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3773; ConvF(7.3, 7.3, 7.3); Calibrated: 5/3/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1258; Calibrated: 5/2/2011
- Phantom: SAM with CRP v5.0; Type: QD000P40CD; Serial: TP1632
- Measurement SW: DASY52, Version 52.6 (2);SEMCAD X Version 14.4.5 (3634)

RHS/Tilt_M ch/Area Scan (81x111x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (interpolated) = 0.355 mW/g

RHS/Tilt_M ch/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 15.604 V/m; Power Drift = -0.08 dB
 Peak SAR (extrapolated) = 0.412 W/kg
SAR(1 g) = 0.260 mW/g; SAR(10 g) = 0.155 mW/g
 Maximum value of SAR (measured) = 0.324 mW/g

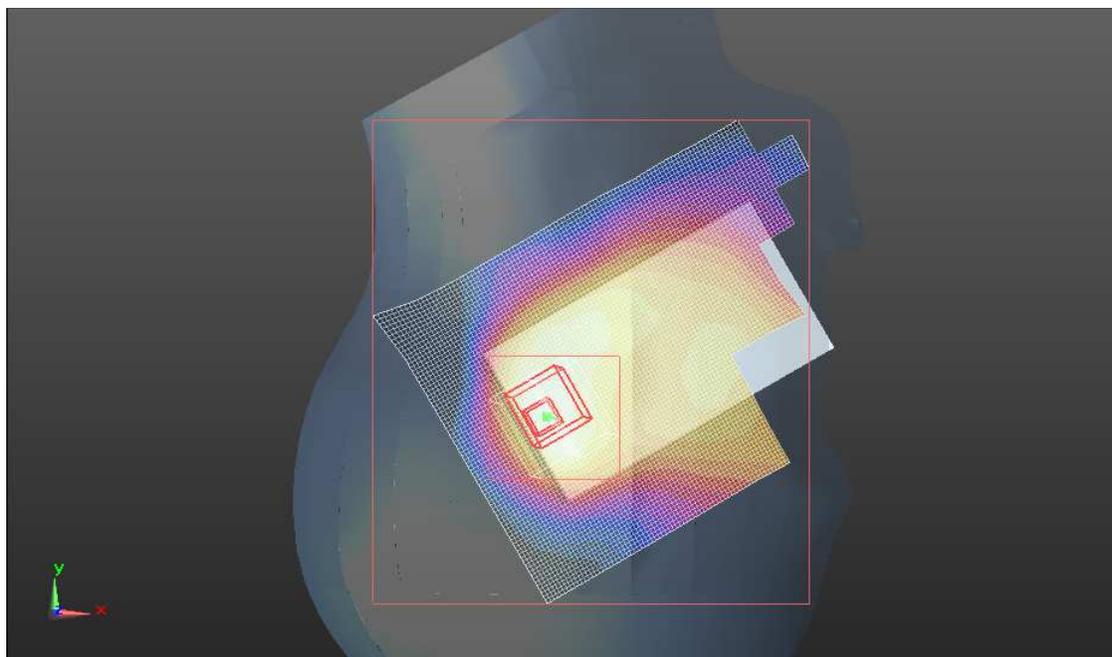

0 dB = 0.320mW/g

Test Laboratory: UL CCS SAR Lab B

CDMA BC1_Head_1xEvDO

Communication System: CDMA2000; Frequency: 1880 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.388$ mho/m; $\epsilon_r = 40.717$; $\rho = 1000$ kg/m³
 Phantom section: Left Section


Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3773; ConvF(7.3, 7.3, 7.3); Calibrated: 5/3/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1258; Calibrated: 5/2/2011
- Phantom: SAM with CRP v5.0; Type: QD000P40CD; Serial: TP1632
- Measurement SW: DASY52, Version 52.6 (2);SEMCAD X Version 14.4.5 (3634)

LHS/Touch_M ch/Area Scan (81x111x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (interpolated) = 0.802 mW/g

LHS/Touch_M ch/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 21.346 V/m; Power Drift = 0.11 dB
 Peak SAR (extrapolated) = 1.032 W/kg
SAR(1 g) = 0.640 mW/g; SAR(10 g) = 0.390 mW/g
 Maximum value of SAR (measured) = 0.802 mW/g

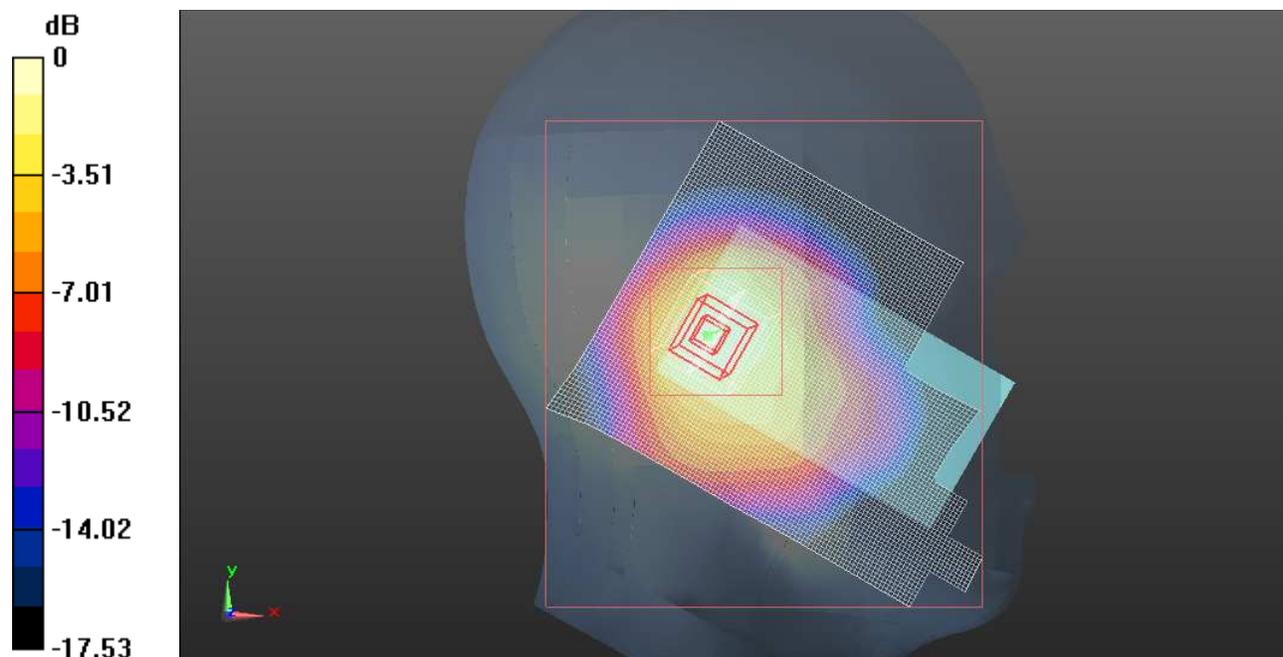

0 dB = 0.800mW/g

Test Laboratory: UL CCS SAR Lab B

CDMA BC1_Head_1xEvDO

Communication System: CDMA2000; Frequency: 1880 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.388$ mho/m; $\epsilon_r = 40.717$; $\rho = 1000$ kg/m³
 Phantom section: Left Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3773; ConvF(7.3, 7.3, 7.3); Calibrated: 5/3/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1258; Calibrated: 5/2/2011
- Phantom: SAM with CRP v5.0; Type: QD000P40CD; Serial: TP1632
- Measurement SW: DASY52, Version 52.6 (2);SEMCAD X Version 14.4.5 (3634)

LHS/Tilt_M ch/Area Scan (81x111x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (interpolated) = 1.046 mW/g


LHS/Tilt_M ch/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 25.275 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 1.262 W/kg

SAR(1 g) = 0.761 mW/g; SAR(10 g) = 0.449 mW/g

Maximum value of SAR (measured) = 0.968 mW/g

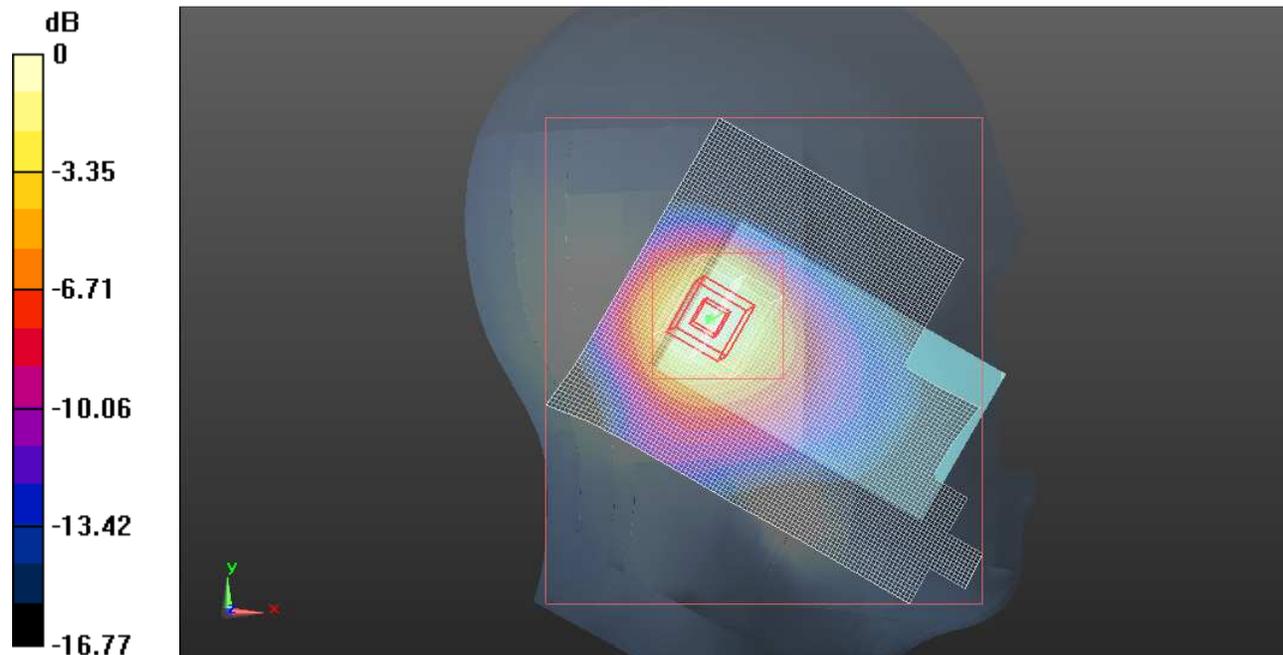

0 dB = 0.970mW/g

Test Laboratory: UL CCS SAR Lab B

CDMA BC1_Head_1xEvDO

Communication System: CDMA2000; Frequency: 1851.25 MHz; Duty Cycle: 1:1
 Medium parameters used (interpolated): $f = 1851.25$ MHz; $\sigma = 1.356$ mho/m; $\epsilon_r = 40.847$; $\rho = 1000$ kg/m³
 Phantom section: Right Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3773; ConvF(7.3, 7.3, 7.3); Calibrated: 5/3/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1258; Calibrated: 5/2/2011
- Phantom: SAM with CRP v5.0; Type: QD000P40CD; Serial: TP1632
- Measurement SW: DASY52, Version 52.6 (2);SEMCAD X Version 14.4.5 (3634)

RHS/Touch_L ch/Area Scan (81x111x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 1.045 mW/g

RHS/Touch_L ch/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 25.491 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 1.441 W/kg

SAR(1 g) = 0.782 mW/g; SAR(10 g) = 0.468 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.015 mW/g

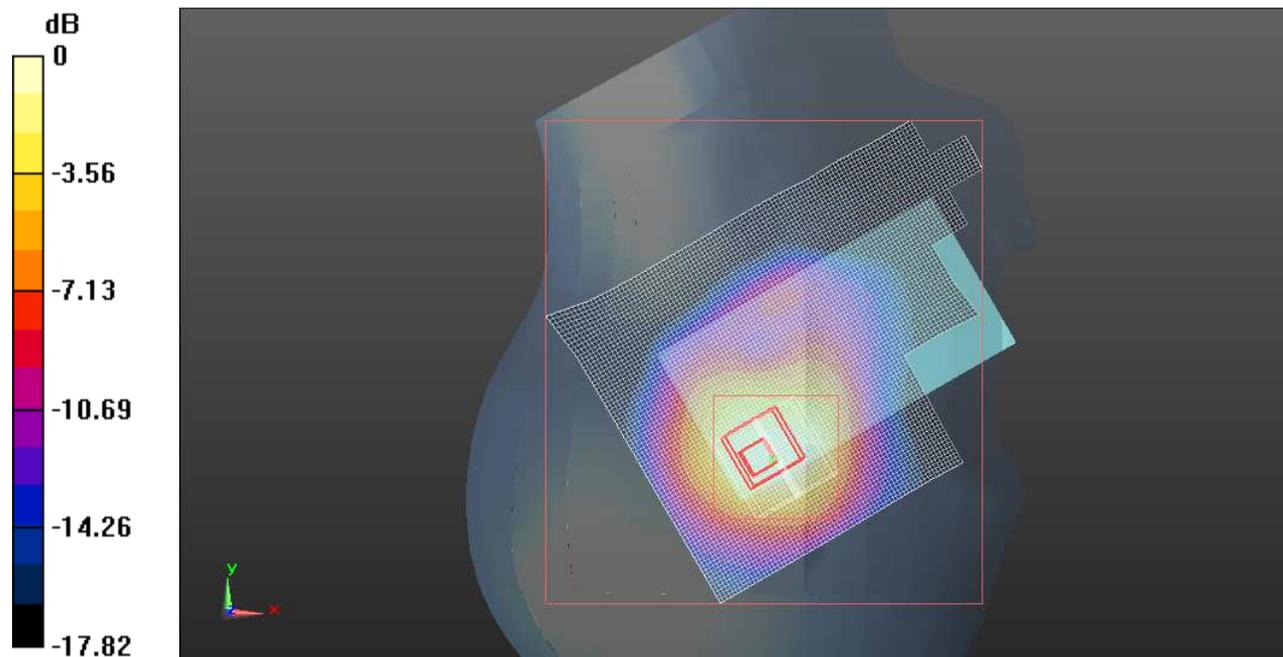

0 dB = 1.010mW/g

Test Laboratory: UL CCS SAR Lab B

CDMA BC1_Head_1xEvDO

Communication System: CDMA2000; Frequency: 1880 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.388$ mho/m; $\epsilon_r = 40.717$; $\rho = 1000$ kg/m³
 Phantom section: Right Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3773; ConvF(7.3, 7.3, 7.3); Calibrated: 5/3/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1258; Calibrated: 5/2/2011
- Phantom: SAM with CRP v5.0; Type: QD000P40CD; Serial: TP1632
- Measurement SW: DASY52, Version 52.6 (2);SEMCAD X Version 14.4.5 (3634)

RHS/Touch_M ch/Area Scan (81x111x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (interpolated) = 1.128 mW/g


RHS/Touch_M ch/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 26.390 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 1.562 W/kg

SAR(1 g) = 0.822 mW/g; SAR(10 g) = 0.494 mW/g

Maximum value of SAR (measured) = 1.093 mW/g

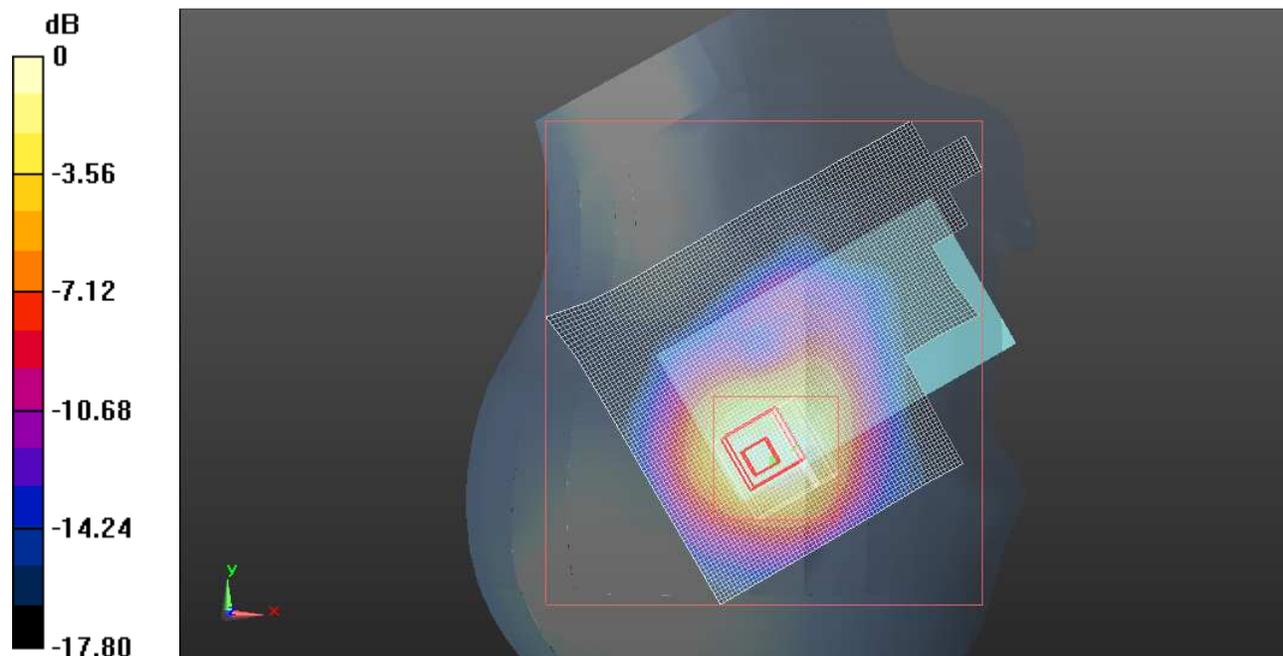

0 dB = 1.090mW/g

Test Laboratory: UL CCS SAR Lab B

CDMA BC1_Head_1xEvDO

Communication System: CDMA2000; Frequency: 1908.75 MHz; Duty Cycle: 1:1
 Medium parameters used (interpolated): $f = 1908.75$ MHz; $\sigma = 1.419$ mho/m; $\epsilon_r = 40.588$; $\rho = 1000$ kg/m³
 Phantom section: Right Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3773; ConvF(7.3, 7.3, 7.3); Calibrated: 5/3/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1258; Calibrated: 5/2/2011
- Phantom: SAM with CRP v5.0; Type: QD000P40CD; Serial: TP1632
- Measurement SW: DASY52, Version 52.6 (2);SEMCAD X Version 14.4.5 (3634)

RHS/Touch_H ch/Area Scan (81x111x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 1.261 mW/g

RHS/Touch_H ch/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 27.683 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 1.724 W/kg

SAR(1 g) = 0.887 mW/g; SAR(10 g) = 0.524 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.215 mW/g

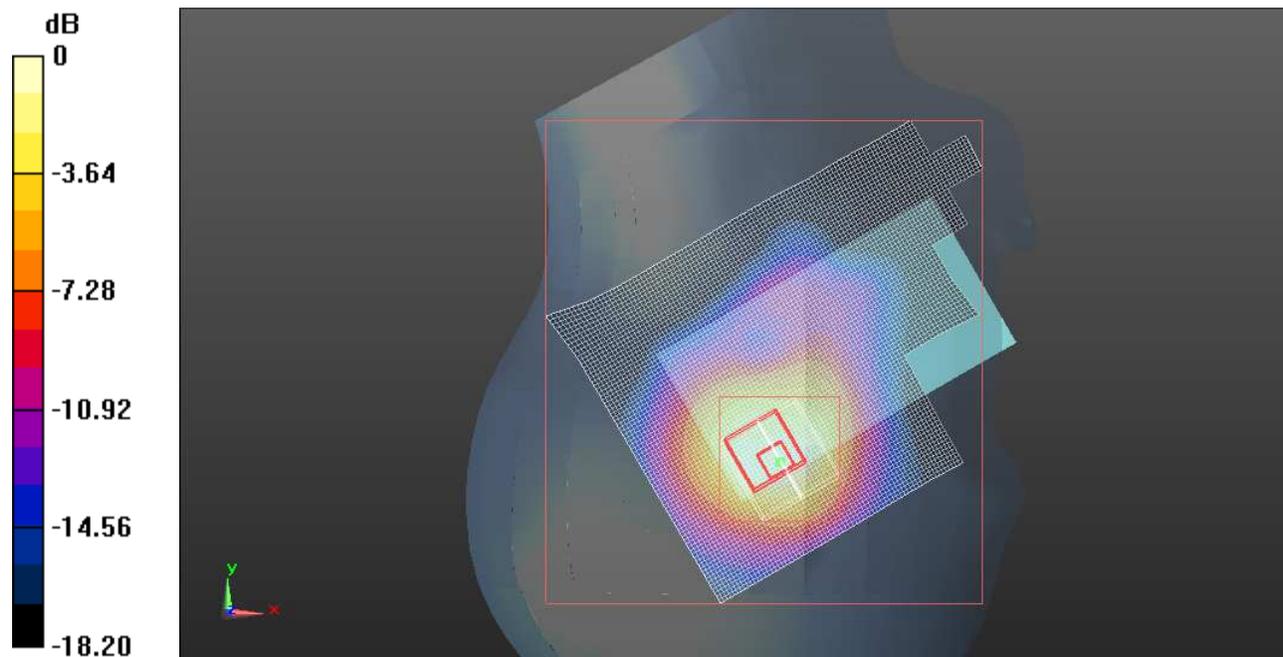

0 dB = 1.220mW/g

Test Laboratory: UL CCS SAR Lab B

CDMA BC1_Head_1xEvDO

Communication System: CDMA2000; Frequency: 1851.25 MHz; Duty Cycle: 1:1
 Medium parameters used (interpolated): $f = 1851.25$ MHz; $\sigma = 1.356$ mho/m; $\epsilon_r = 40.847$; $\rho = 1000$ kg/m³
 Phantom section: Right Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3773; ConvF(7.3, 7.3, 7.3); Calibrated: 5/3/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1258; Calibrated: 5/2/2011
- Phantom: SAM with CRP v5.0; Type: QD000P40CD; Serial: TP1632
- Measurement SW: DASY52, Version 52.6 (2);SEMCAD X Version 14.4.5 (3634)

RHS/Tilt_L ch/Area Scan (81x111x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.886 mW/g

RHS/Tilt_L ch/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 24.265 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 1.086 W/kg

SAR(1 g) = 0.647 mW/g; SAR(10 g) = 0.381 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.807 mW/g

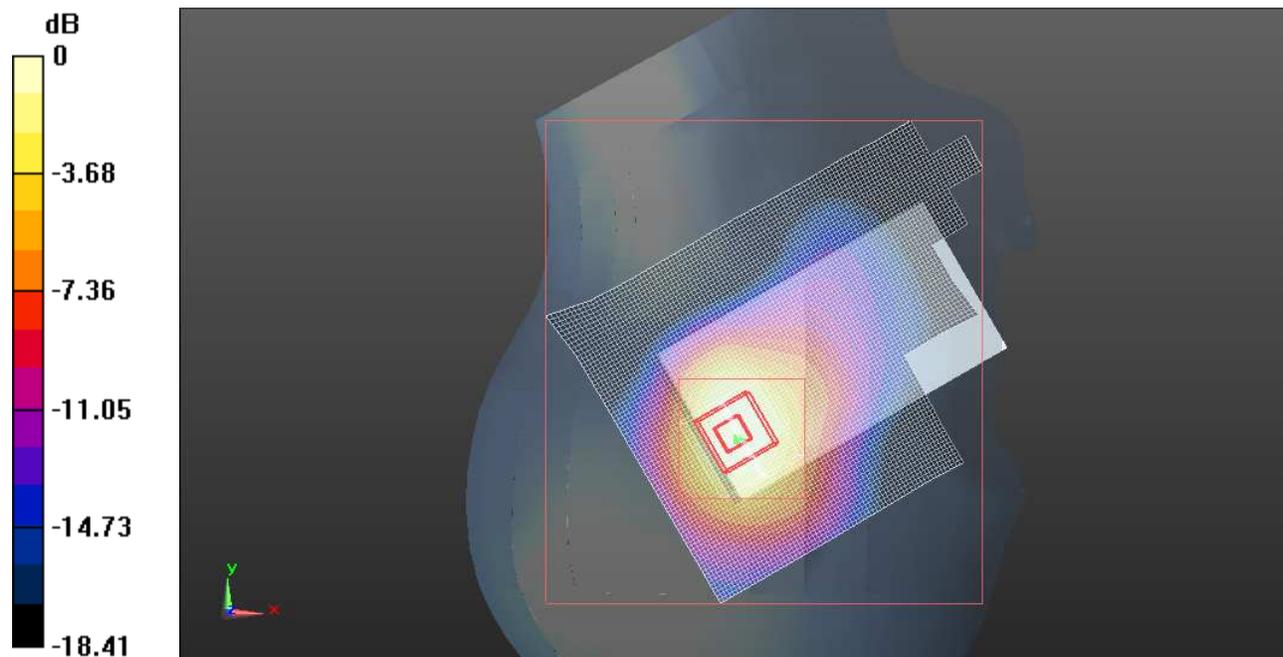

0 dB = 0.810mW/g

Test Laboratory: UL CCS SAR Lab B

CDMA BC1_Head_1xEvDO

Communication System: CDMA2000; Frequency: 1880 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.388$ mho/m; $\epsilon_r = 40.717$; $\rho = 1000$ kg/m³
 Phantom section: Right Section



Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3773; ConvF(7.3, 7.3, 7.3); Calibrated: 5/3/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1258; Calibrated: 5/2/2011
- Phantom: SAM with CRP v5.0; Type: QD000P40CD; Serial: TP1632
- Measurement SW: DASY52, Version 52.6 (2);SEMCAD X Version 14.4.5 (3634)

RHS/Tilt_M ch/Area Scan (81x111x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (interpolated) = 0.872 mW/g

RHS/Tilt_M ch/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 23.476 V/m; Power Drift = -0.14 dB
 Peak SAR (extrapolated) = 1.579 W/kg
SAR(1 g) = 0.945 mW/g; SAR(10 g) = 0.527 mW/g
 Maximum value of SAR (measured) = 1.153 mW/g

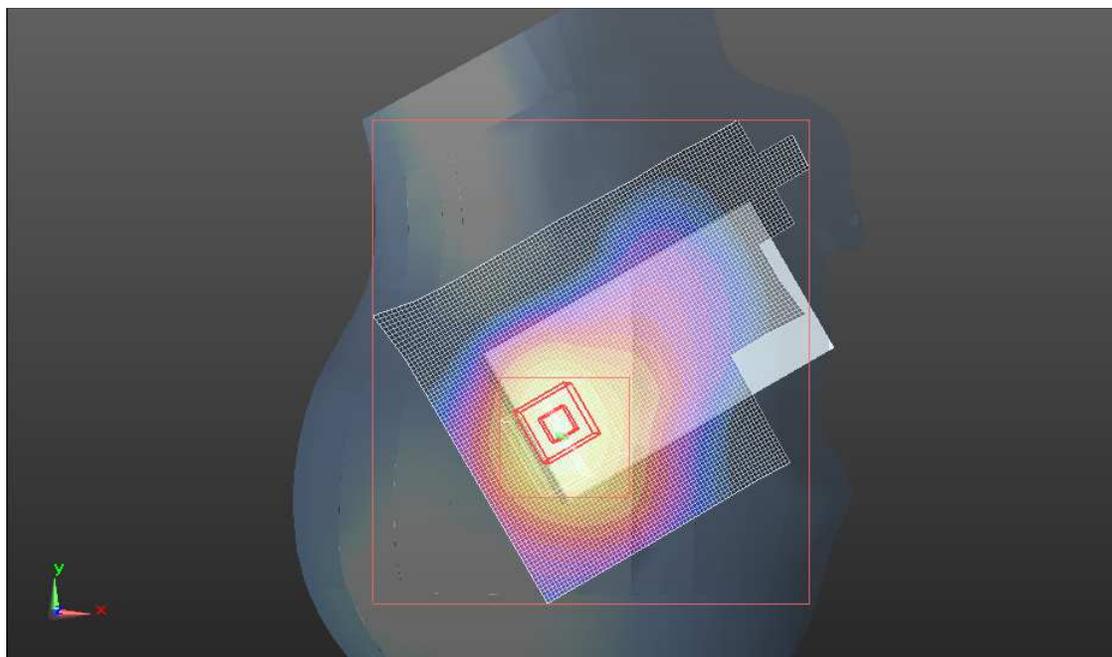

0 dB = 1.150mW/g

Test Laboratory: UL CCS SAR Lab B

CDMA BC1_Head_1xEvDO

Communication System: CDMA2000; Frequency: 1908.75 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1908.75$ MHz; $\sigma = 1.419$ mho/m; $\epsilon_r = 40.588$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3773; ConvF(7.3, 7.3, 7.3); Calibrated: 5/3/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1258; Calibrated: 5/2/2011
- Phantom: SAM with CRP v5.0; Type: QD000P40CD; Serial: TP1632
- Measurement SW: DASY52, Version 52.6 (2);SEMCAD X Version 14.4.5 (3634)

RHS/Tilt_H ch/Area Scan (81x111x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 1.004 mW/g

RHS/Tilt_H ch/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 23.849 V/m; Power Drift = 0.0065 dB

Peak SAR (extrapolated) = 1.214 W/kg

SAR(1 g) = 0.732 mW/g; SAR(10 g) = 0.436 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.911 mW/g

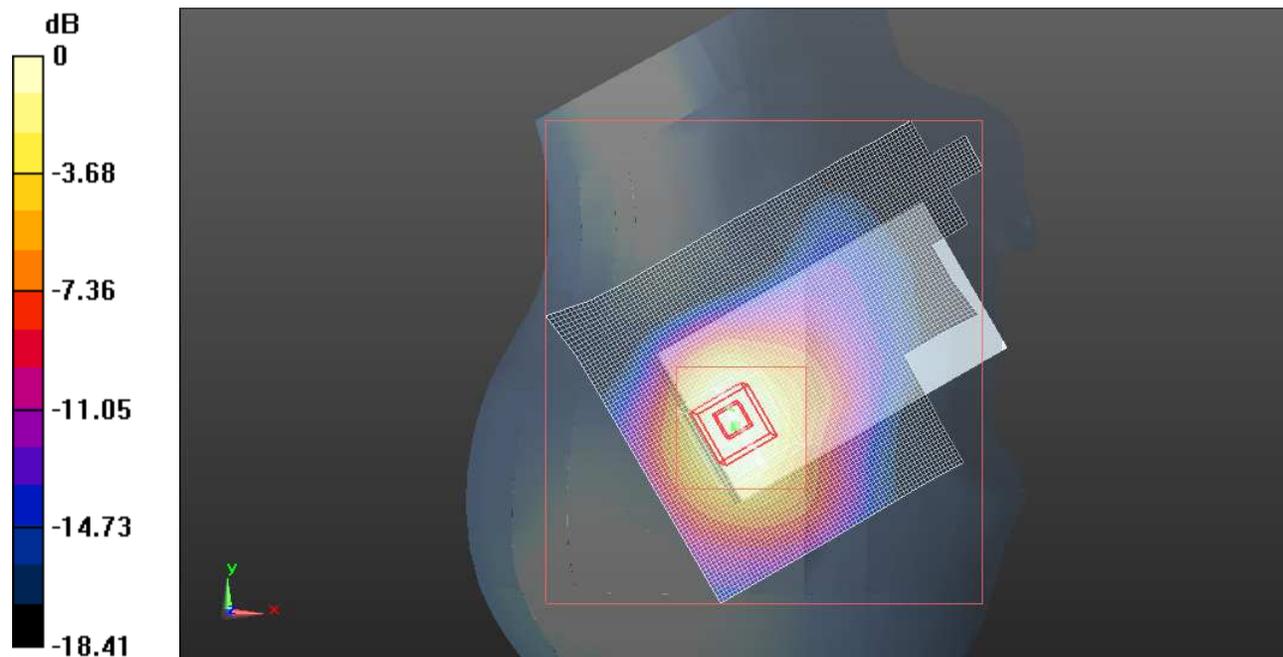

0 dB = 0.910mW/g

Test Laboratory: UL CCS SAR Lab A

CDMA BC1_Body

Communication System: CDMA2000; Frequency: 1851.25 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1851.25$ MHz; $\sigma = 1.447$ mho/m; $\epsilon_r = 51.297$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3772; ConvF(6.76, 6.76, 6.76); Calibrated: 5/3/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1239; Calibrated: 10/18/2011
- Phantom: ELI v4.0 (A); Type: QDOVA001BB; Serial: 1117
- Measurement SW: DASY52, Version 52.6 (2);SEMCAD X Version 14.4.5 (3634)

Rear/1xRTT_L-Ch/Area Scan (81x111x1): Measurement grid: dx=15mm, dy=15mm[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 1.647 mW/g


Rear/1xRTT_L-Ch/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 30.445 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 1.731 W/kg

SAR(1 g) = 0.998 mW/g; SAR(10 g) = 0.551 mW/g[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.248 mW/g

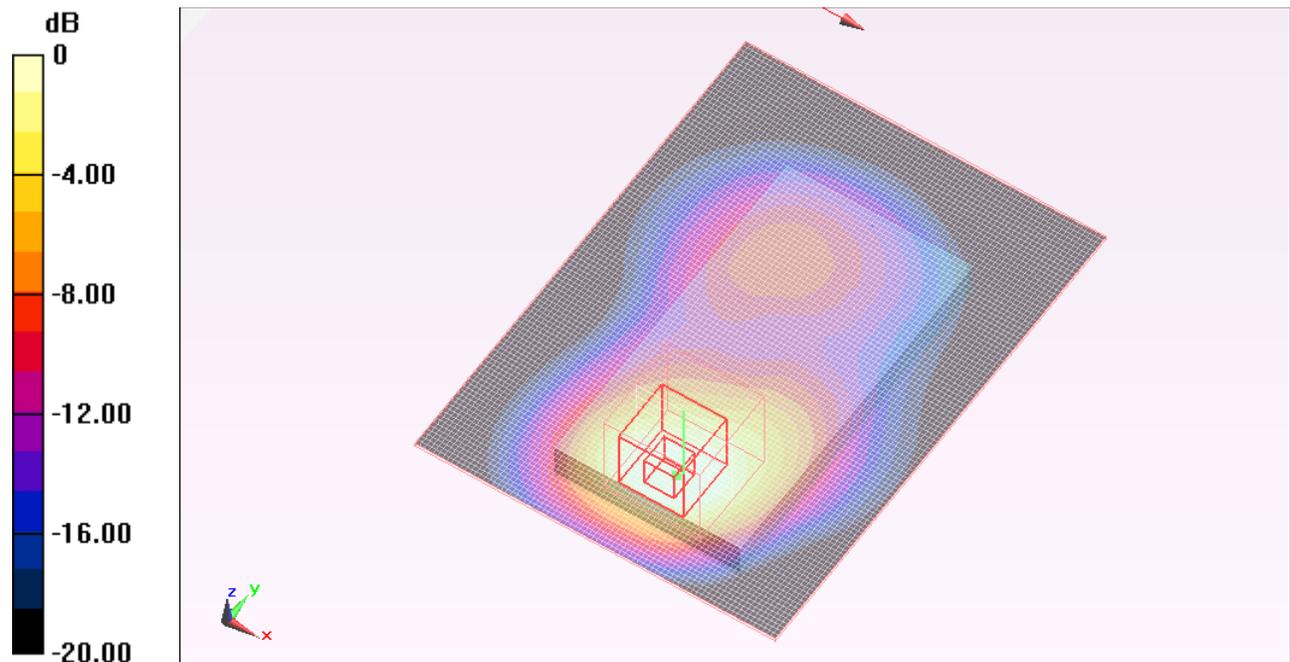

0 dB = 1.250mW/g

Test Laboratory: UL CCS SAR Lab A

CDMA BC1_Body

Communication System: CDMA2000; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.479$ mho/m; $\epsilon_r = 51.221$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3772; ConvF(6.76, 6.76, 6.76); Calibrated: 5/3/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1239; Calibrated: 10/18/2011
- Phantom: ELI v4.0 (A); Type: QDOVA001BB; Serial: 1117
- Measurement SW: DASY52, Version 52.6 (2);SEMCAD X Version 14.4.5 (3634)

Rear/1xRTT_M-Ch/Area Scan (81x111x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 1.451 mW/g


Rear/1xRTT_M-Ch/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 29.114 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 2.063 W/kg

SAR(1 g) = 1.16 mW/g; SAR(10 g) = 0.648 mW/g

Maximum value of SAR (measured) = 1.507 mW/g

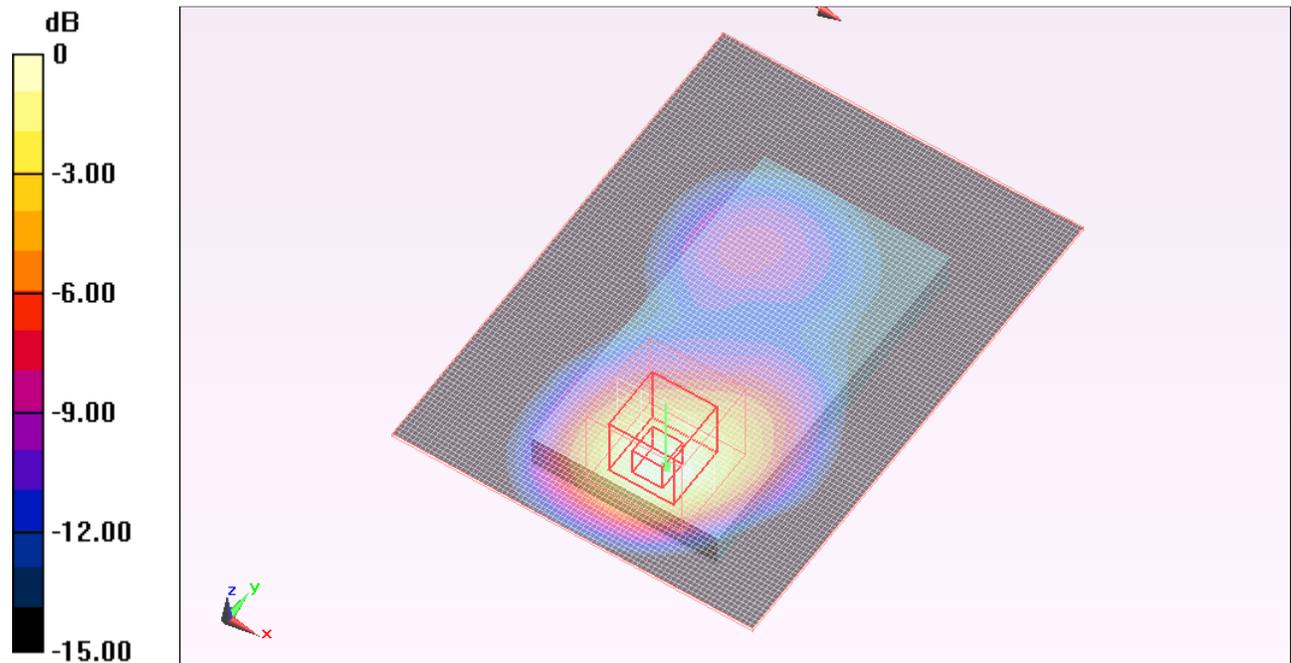


0 dB = 1.510mW/g

Test Laboratory: UL CCS SAR Lab A

CDMA BC1_Body

Communication System: CDMA2000; Frequency: 1880 MHz; Duty Cycle: 1:1

Rear/1xRTT_M-Ch/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm
Maximum value of SAR (measured) = 1.425 mW/g

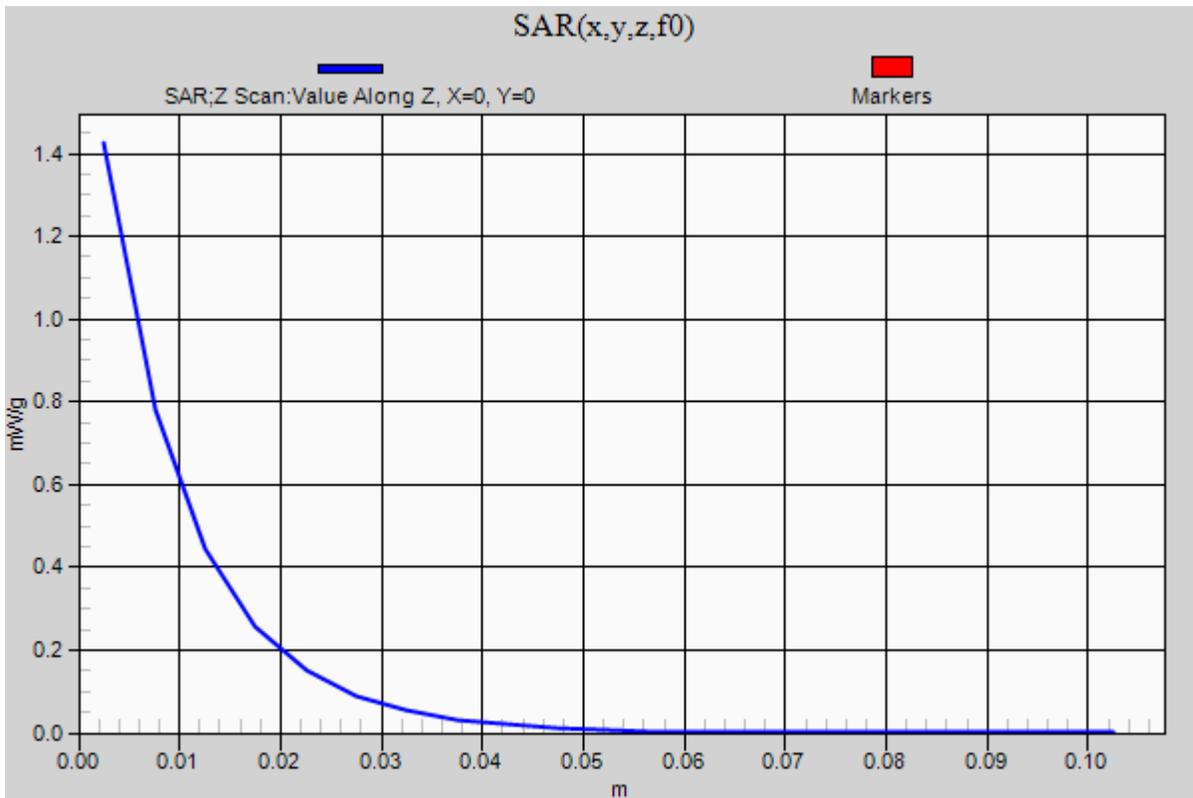

Test Laboratory: UL CCS SAR Lab A

CDMA BC1_Body

Communication System: CDMA2000; Frequency: 1908.75 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1908.75$ MHz; $\sigma = 1.51$ mho/m; $\epsilon_r = 51.173$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3772; ConvF(6.76, 6.76, 6.76); Calibrated: 5/3/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1239; Calibrated: 10/18/2011
- Phantom: ELI v4.0 (A); Type: QDOVA001BB; Serial: 1117
- Measurement SW: DASY52, Version 52.6 (2);SEMCAD X Version 14.4.5 (3634)

Rear/1xRTT_H-Ch/Area Scan (81x111x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 1.451 mW/g

Rear/1xRTT_H-Ch/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 28.121 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 1.883 W/kg

SAR(1 g) = 1.06 mW/g; SAR(10 g) = 0.609 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.348 mW/g

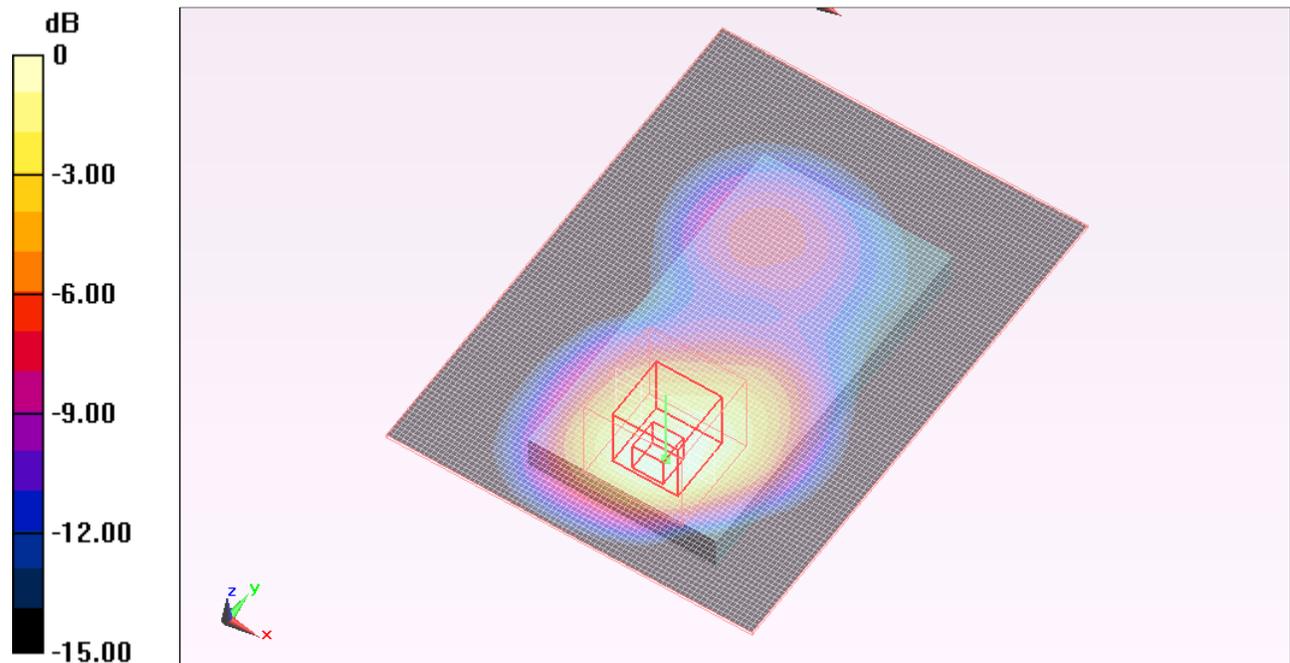

0 dB = 1.350mW/g

Test Laboratory: UL CCS SAR Lab A

CDMA BC1_Body

Communication System: CDMA2000; Frequency: 1880 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.479$ mho/m; $\epsilon_r = 51.221$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3772; ConvF(6.76, 6.76, 6.76); Calibrated: 5/3/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1239; Calibrated: 10/18/2011
- Phantom: ELI v4.0 (A); Type: QDOVA001BB; Serial: 1117
- Measurement SW: DASY52, Version 52.6 (2);SEMCAD X Version 14.4.5 (3634)

Rear/1xRTT_M-Ch w/headset/Area Scan (81x111x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (interpolated) = 1.290 mW/g


Rear/1xRTT_M-Ch w/headset/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 28.395 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 1.615 W/kg

SAR(1 g) = 0.920 mW/g; SAR(10 g) = 0.517 mW/g

Maximum value of SAR (measured) = 1.183 mW/g

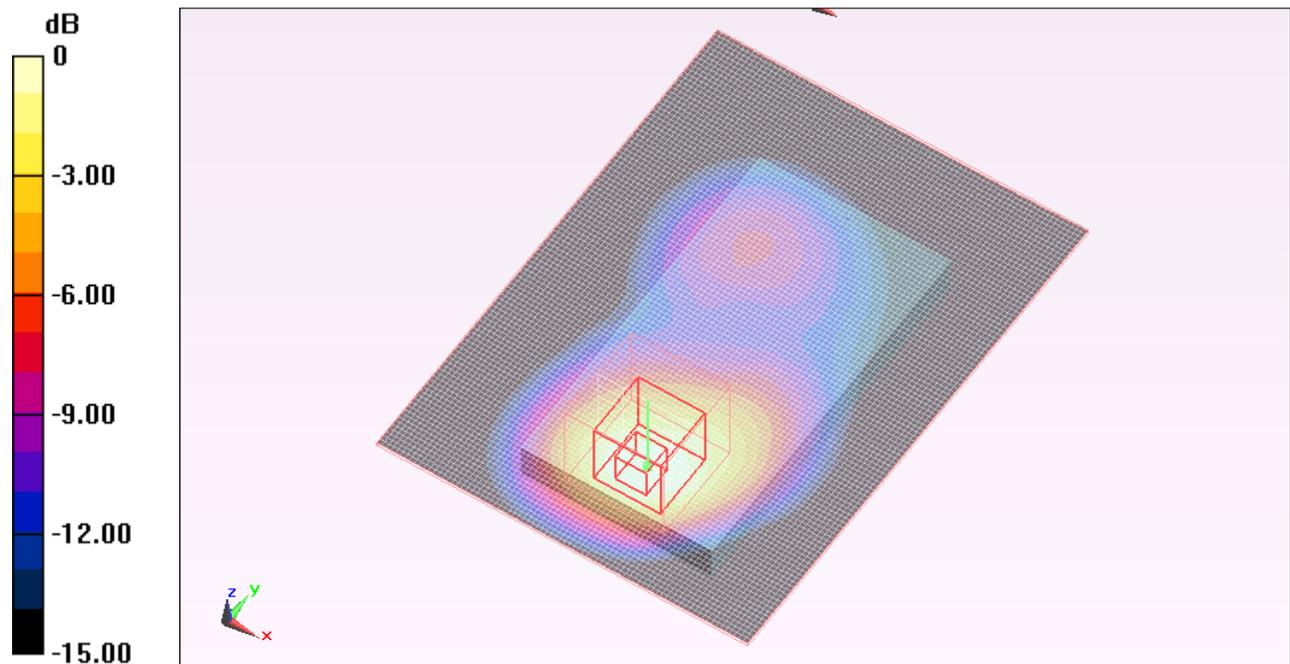

0 dB = 1.180mW/g

Test Laboratory: UL CCS SAR Lab B

CDMA BC1_Body

Communication System: CDMA2000; Frequency: 1851.25 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1851.25$ MHz; $\sigma = 1.495$ mho/m; $\epsilon_r = 52.329$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3773; ConvF(7.37, 7.37, 7.37); Calibrated: 5/3/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1258; Calibrated: 5/2/2011
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1118
- Measurement SW: DASY52, Version 52.6 (2);SEMCAD X Version 14.4.5 (3634)

Front/1xRTT_L-Ch/Area Scan (81x111x1): Measurement grid: dx=15mm, dy=15mm[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 1.211 mW/g


Front/1xRTT_L-Ch/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 26.531 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 1.444 W/kg

SAR(1 g) = 0.911 mW/g; SAR(10 g) = 0.550 mW/g[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.134 mW/g

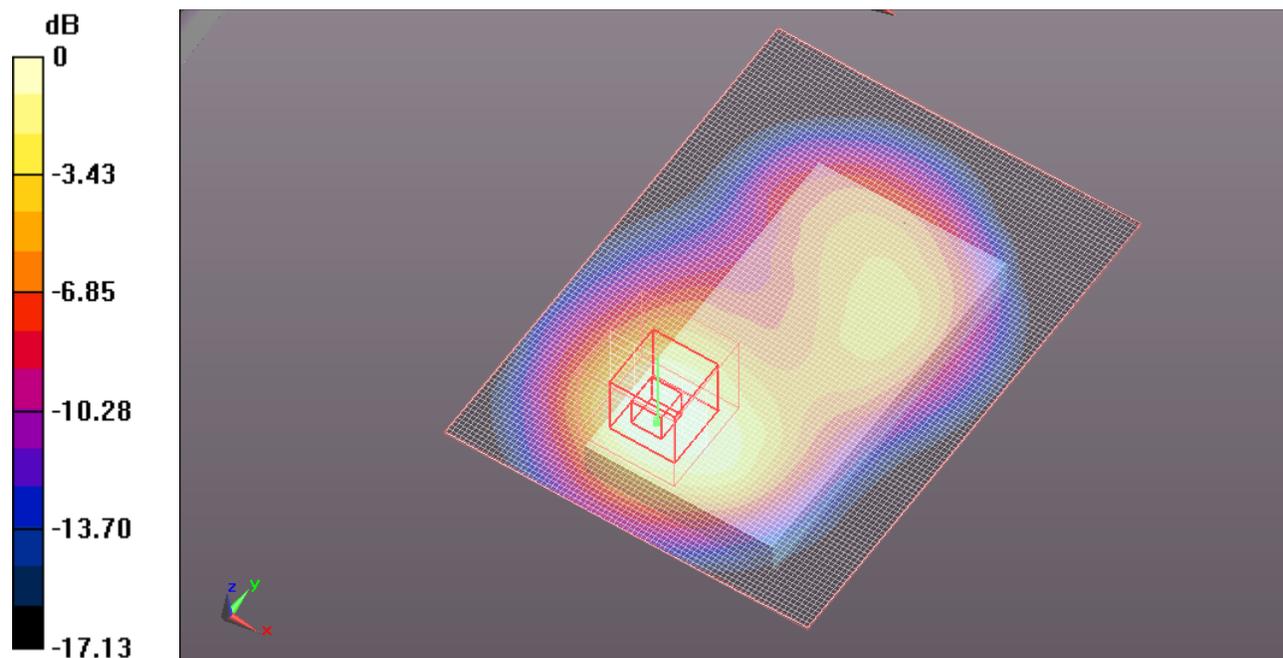

0 dB = 1.130mW/g

Test Laboratory: UL CCS SAR Lab B

CDMA BC1_Body

Communication System: CDMA2000; Frequency: 1880 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.53$ mho/m; $\epsilon_r = 52.224$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section


Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3773; ConvF(7.37, 7.37, 7.37); Calibrated: 5/3/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1258; Calibrated: 5/2/2011
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1118
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.5 (3634)

Front/1xRTT_M-Ch/Area Scan (81x111x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (interpolated) = 1.470 mW/g

Front/1xRTT_M-Ch/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 29.330 V/m; Power Drift = 0.07 dB
 Peak SAR (extrapolated) = 1.838 W/kg
SAR(1 g) = 1.16 mW/g; SAR(10 g) = 0.704 mW/g
 Maximum value of SAR (measured) = 1.430 mW/g

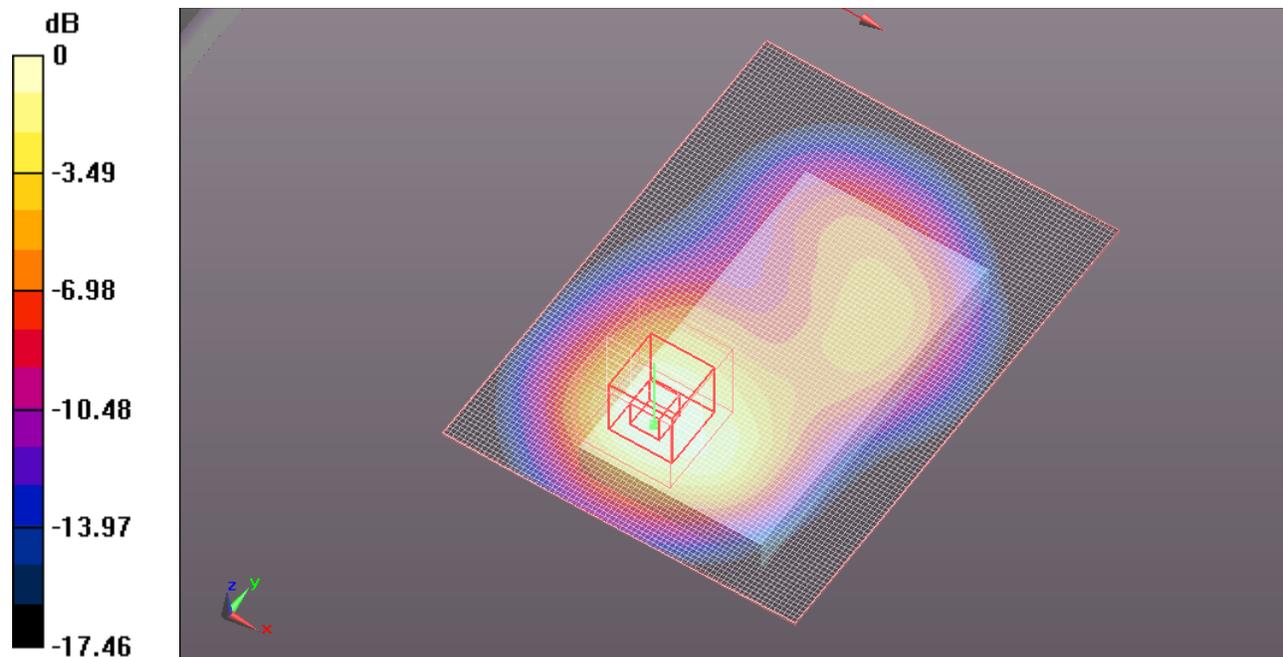

0 dB = 1.430mW/g

Test Laboratory: UL CCS SAR Lab B

CDMA BC1_Body

Communication System: CDMA2000; Frequency: 1908.75 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1908.75$ MHz; $\sigma = 1.566$ mho/m; $\epsilon_r = 52.114$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3773; ConvF(7.37, 7.37, 7.37); Calibrated: 5/3/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1258; Calibrated: 5/2/2011
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1118
- Measurement SW: DASY52, Version 52.6 (2);SEMCAD X Version 14.4.5 (3634)

Front/1xRTT_H-Ch/Area Scan (81x11x1): Measurement grid: dx=15mm, dy=15mm[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 1.474 mW/g


Front/1xRTT_H-Ch/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 29.628 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 1.800 W/kg

SAR(1 g) = 1.14 mW/g; SAR(10 g) = 0.696 mW/g[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.409 mW/g

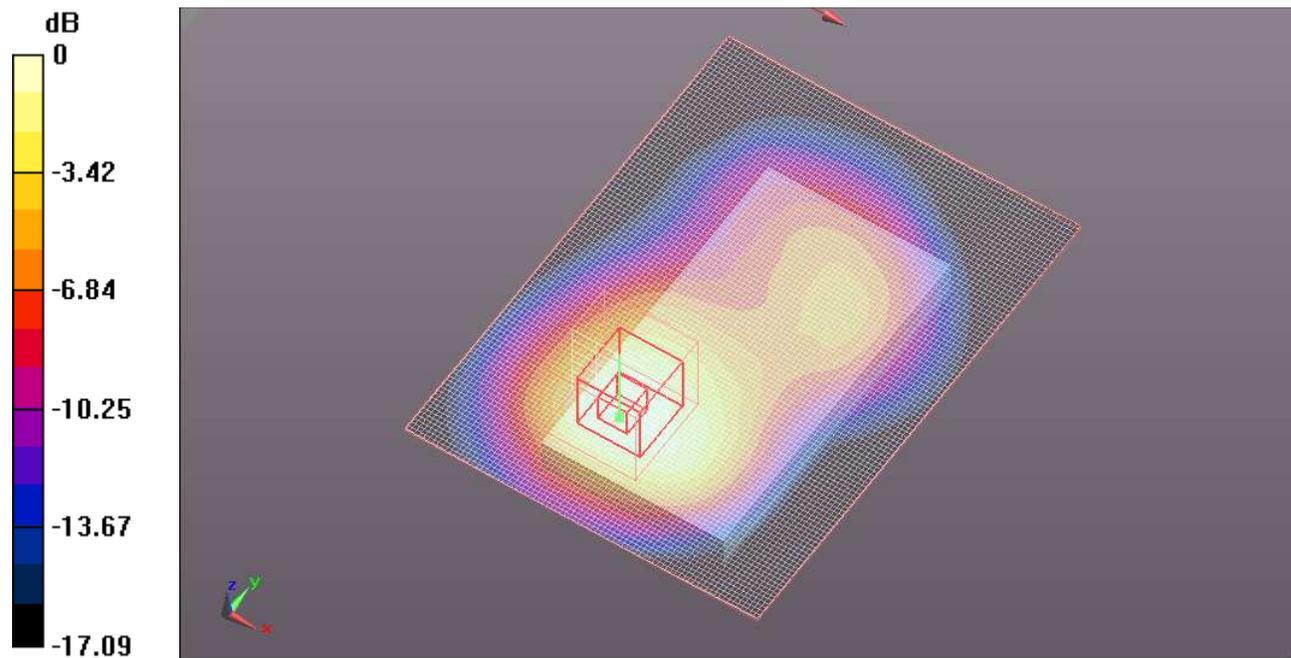

0 dB = 1.410mW/g

Test Laboratory: UL CCS SAR Lab B

CDMA BC1_Hotspot

Communication System: CDMA2000; Frequency: 1880 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.53$ mho/m; $\epsilon_r = 52.224$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3773; ConvF(7.37, 7.37, 7.37); Calibrated: 5/3/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1258; Calibrated: 5/2/2011
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1118
- Measurement SW: DASY52, Version 52.6 (2);SEMCAD X Version 14.4.5 (3634)

Rear/1xEvDo_M-Ch/Area Scan (81x111x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.819 mW/g


Rear/1xEvDo_M-Ch/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 21.889 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 1.246 W/kg

SAR(1 g) = 0.718 mW/g; SAR(10 g) = 0.427 mW/g

Maximum value of SAR (measured) = 0.905 mW/g

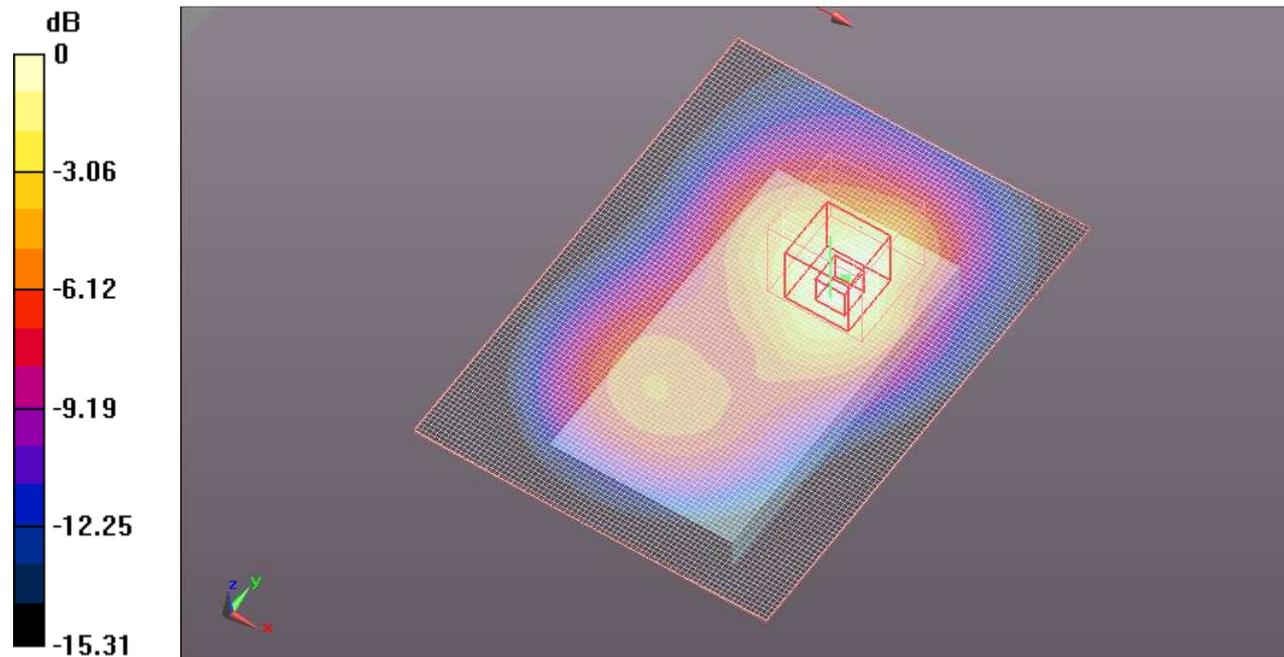


0 dB = 0.900mW/g

Test Laboratory: UL CCS SAR Lab B

CDMA BC1_Hotspot

Communication System: CDMA2000; Frequency: 1880 MHz; Duty Cycle: 1:1

Rear/1xEvDo_M-Ch/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm
Maximum value of SAR (measured) = 0.903 mW/g

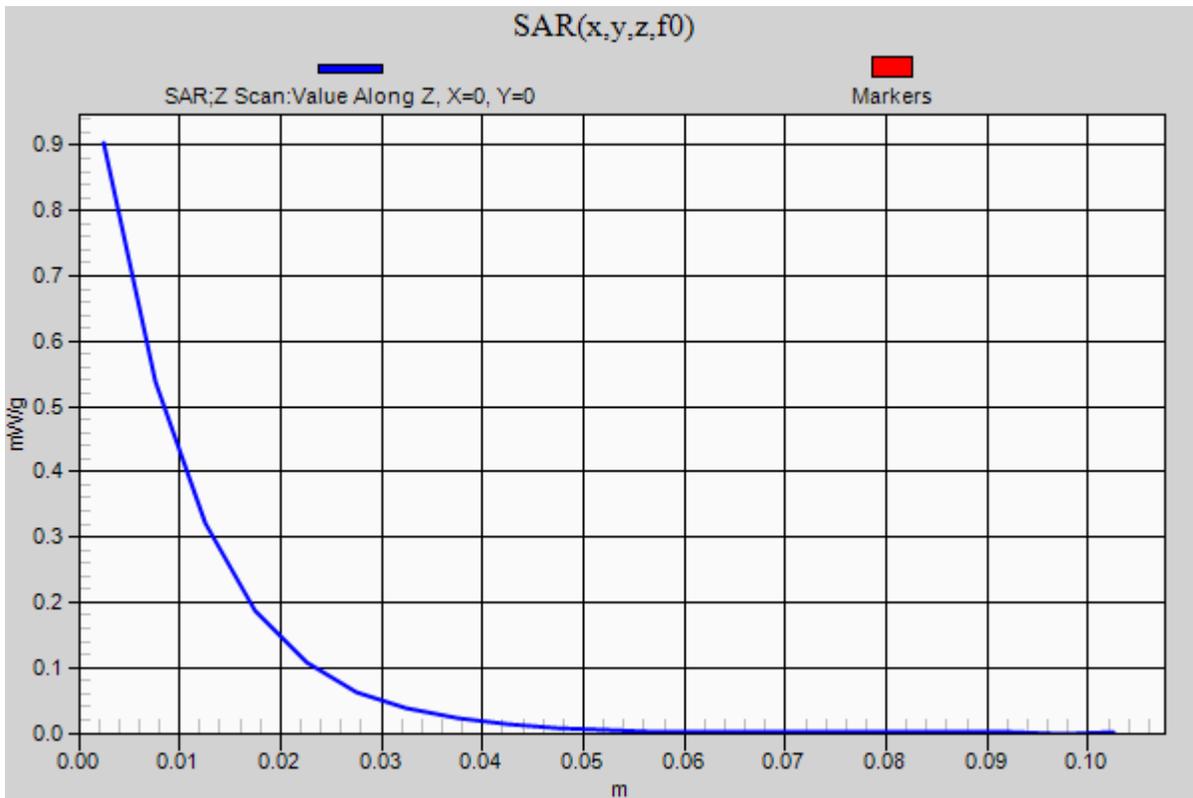

Test Laboratory: UL CCS SAR Lab B

CDMA BC1_Hotspot

Communication System: CDMA2000; Frequency: 1880 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.53$ mho/m; $\epsilon_r = 52.224$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section


Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3773; ConvF(7.37, 7.37, 7.37); Calibrated: 5/3/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1258; Calibrated: 5/2/2011
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1118
- Measurement SW: DASY52, Version 52.6 (2);SEMCAD X Version 14.4.5 (3634)

Rear/1xEvDo_M-Ch with Headset/Area Scan (81x111x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of \bar{SAR} (interpolated) = 0.939 mW/g

Rear/1xEvDo_M-Ch with Headset/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 24.125 V/m; Power Drift = 0.08 dB
 Peak SAR (extrapolated) = 1.165 W/kg
SAR(1 g) = 0.693 mW/g; SAR(10 g) = 0.405 mW/g
 Maximum value of SAR (measured) = 0.867 mW/g

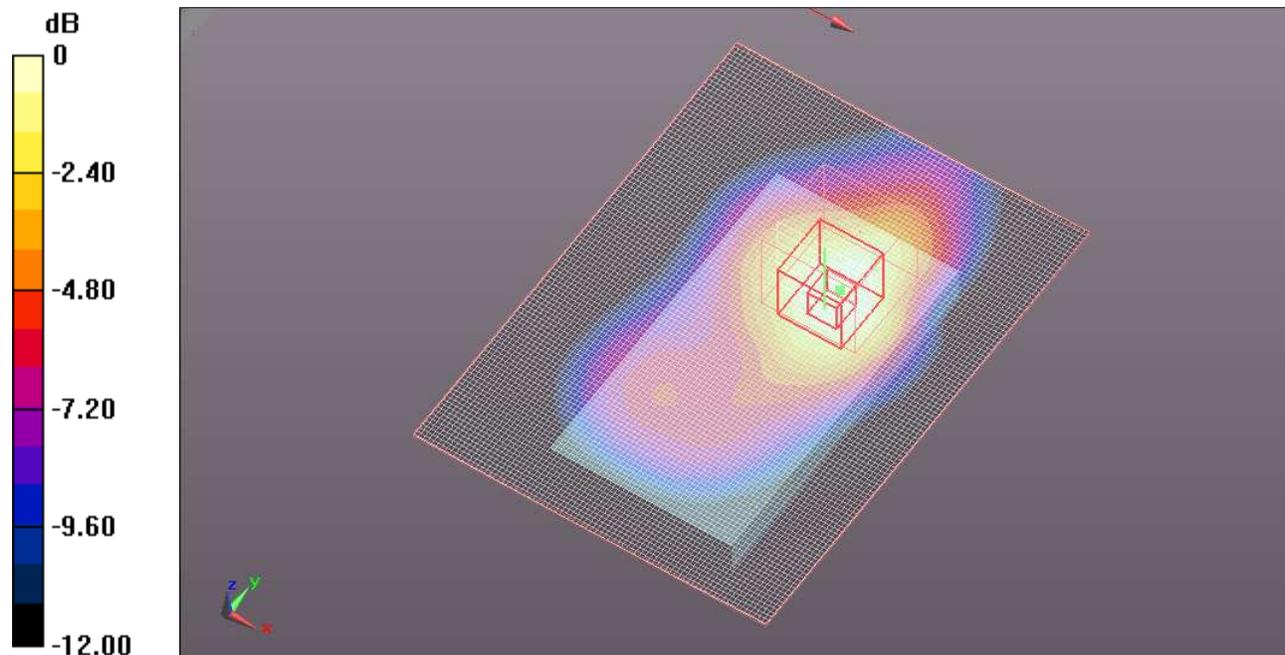

0 dB = 0.870mW/g

Test Laboratory: UL CCS SAR Lab B

CDMA BC1_Hotspot

Communication System: CDMA2000; Frequency: 1880 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.487$ mho/m; $\epsilon_r = 51.643$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C


DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3773; ConvF(7.37, 7.37, 7.37); Calibrated: 5/3/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1258; Calibrated: 5/2/2011
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1118
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.5 (3634)

Front/1xEvDO_M-Ch/Area Scan (81x111x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (interpolated) = 0.395 mW/g

Front/1xEvDO_M-Ch/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 15.668 V/m; Power Drift = -0.03 dB
 Peak SAR (extrapolated) = 0.477 W/kg
SAR(1 g) = 0.311 mW/g; SAR(10 g) = 0.194 mW/g
 Maximum value of SAR (measured) = 0.382 mW/g

Front/1xEvDO_M-Ch/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 15.668 V/m; Power Drift = -0.03 dB
 Peak SAR (extrapolated) = 0.214 W/kg
SAR(1 g) = 0.144 mW/g; SAR(10 g) = 0.095 mW/g
 Maximum value of SAR (measured) = 0.171 mW/g

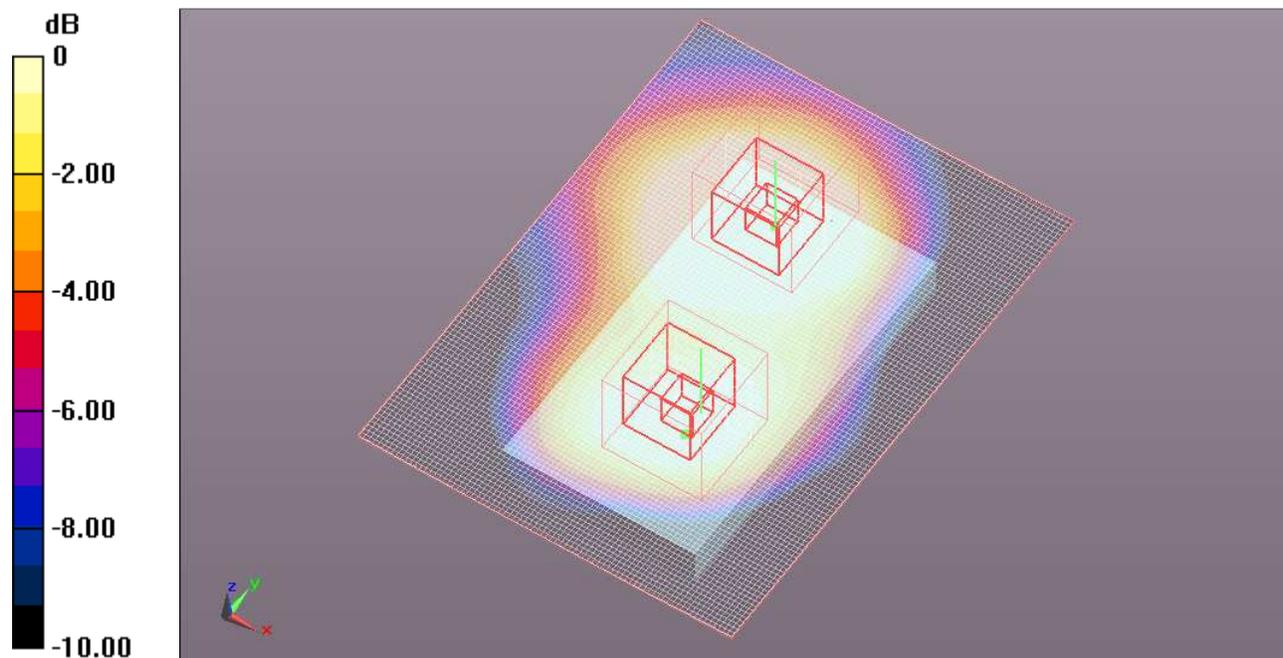

0 dB = 0.170mW/g

Test Laboratory: UL CCS SAR Lab B

CDMA BC1_Hotspot

Communication System: CDMA2000; Frequency: 1880 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.487$ mho/m; $\epsilon_r = 51.643$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3773; ConvF(7.37, 7.37, 7.37); Calibrated: 5/3/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1258; Calibrated: 5/2/2011
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1118
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.5 (3634)

Left/1xEvDO_M-Ch/Area Scan (71x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.403 mW/g

Left/1xEvDO_M-Ch/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.485 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.523 W/kg

SAR(1 g) = 0.316 mW/g; SAR(10 g) = 0.186 mW/g

Maximum value of SAR (measured) = 0.400 mW/g


Left/1xEvDO_M-Ch/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.485 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.447 W/kg

SAR(1 g) = 0.278 mW/g; SAR(10 g) = 0.163 mW/g

Maximum value of SAR (measured) = 0.350 mW/g

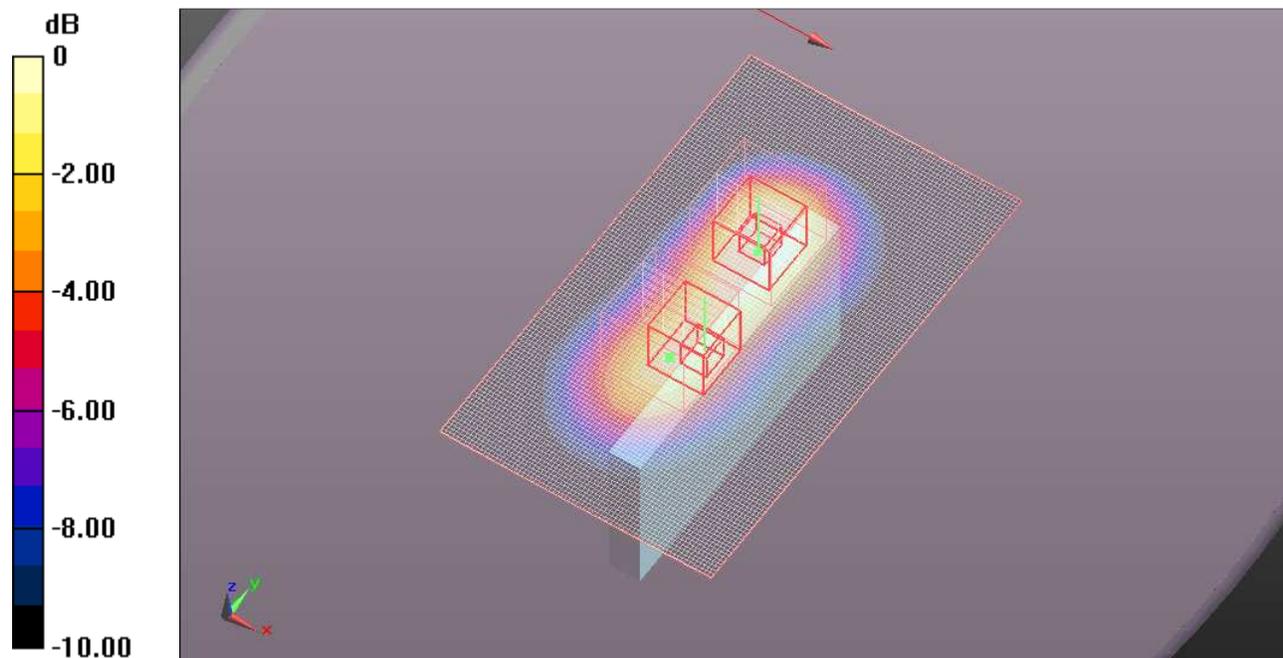

0 dB = 0.350mW/g

Test Laboratory: UL CCS SAR Lab B

CDMA BC1_Hotspot

Communication System: CDMA2000; Frequency: 1880 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.487$ mho/m; $\epsilon_r = 51.643$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3773; ConvF(7.37, 7.37, 7.37); Calibrated: 5/3/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1258; Calibrated: 5/2/2011
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1118
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.5 (3634)

Top/1xEvDO_M-Ch/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.282 mW/g


Top/1xEvDO_M-Ch/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.660 V/m; Power Drift = -0.0031 dB

Peak SAR (extrapolated) = 0.314 W/kg

SAR(1 g) = 0.202 mW/g; SAR(10 g) = 0.125 mW/g

Maximum value of SAR (measured) = 0.250 mW/g

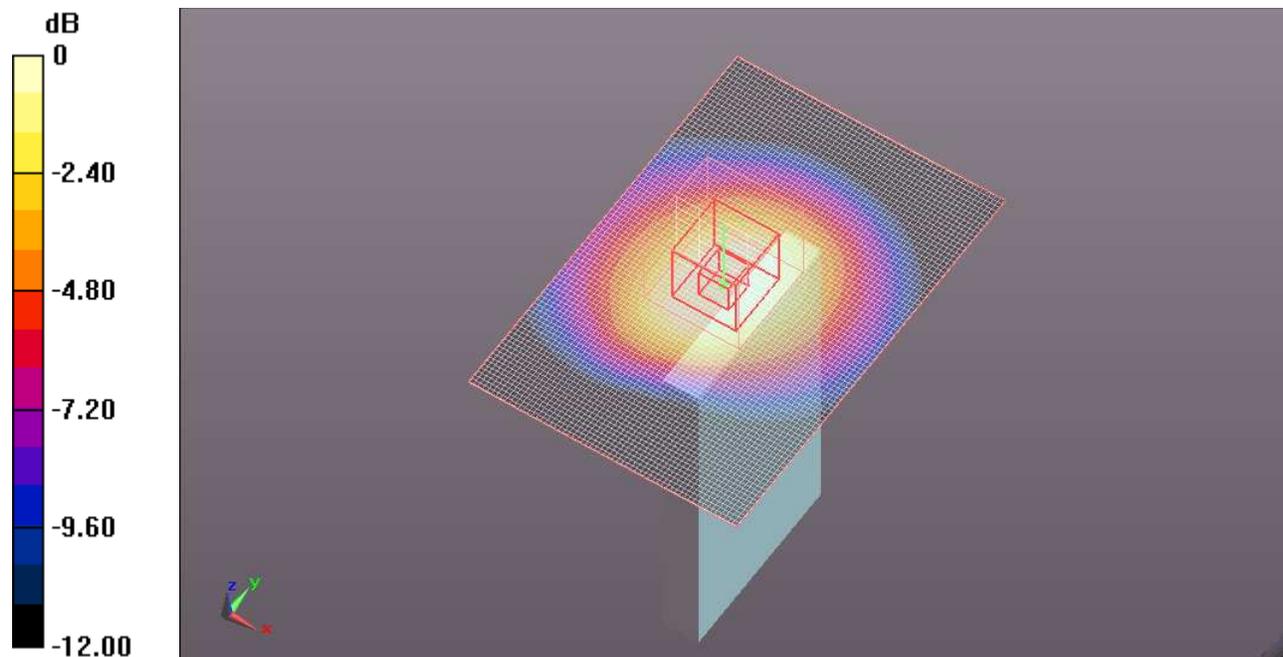

0 dB = 0.250mW/g