

Test Laboratory: UL CCS SAR Lab B

20111101 SystemPerformanceCheck-D1900V2 SN 5d140

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.555$ mho/m; $\epsilon_r = 52.145$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3773; ConvF(7.37, 7.37, 7.37); Calibrated: 5/3/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1258; Calibrated: 5/2/2011
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1118
- Measurement SW: DASY52, Version 52.6 (2);SEMCAD X Version 14.4.5 (3634)

Body/Pin=100 mW/Area Scan (61x61x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 5.456 mW/g


Body/Pin=100 mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 59.804 V/m; Power Drift = -0.0017 dB

Peak SAR (extrapolated) = 7.525 W/kg

SAR(1 g) = 4.05 mW/g; SAR(10 g) = 2.1 mW/g

Maximum value of SAR (measured) = 5.510 mW/g

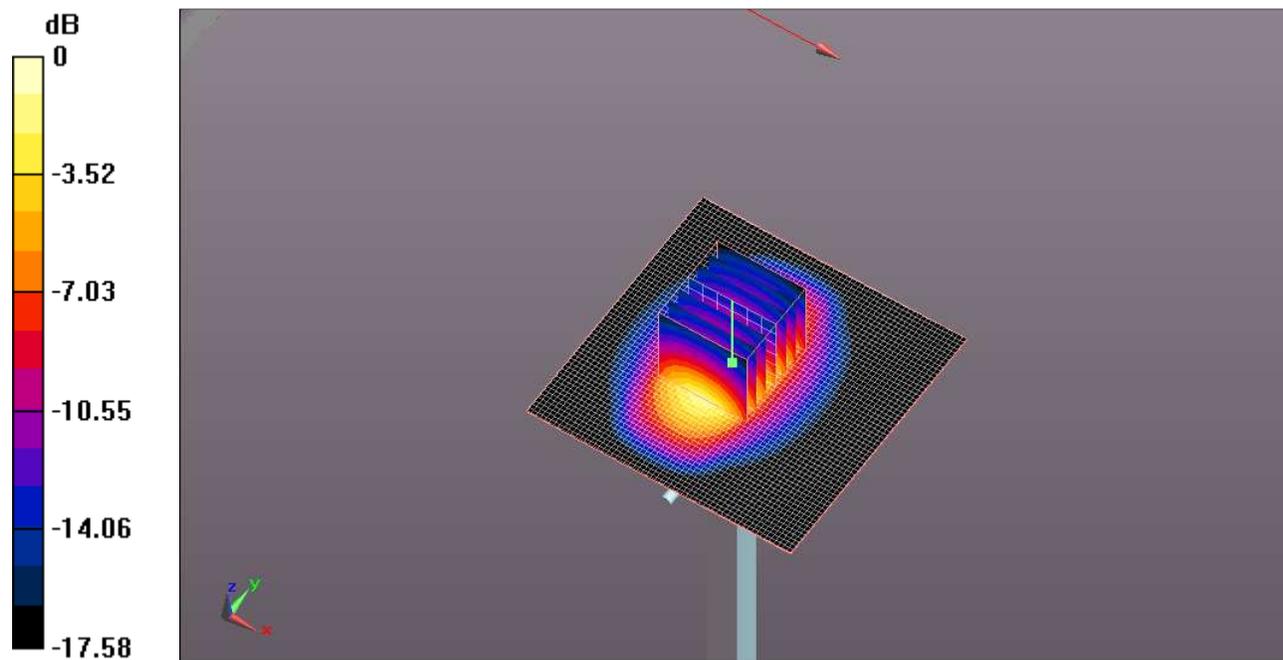


0 dB = 5.510mW/g

Test Laboratory: UL CCS SAR Lab B

20111101 SystemPerformanceCheck-D1900V2 SN 5d140

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Body/Pin=100 mW/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm
Maximum value of SAR (measured) = 3.129 mW/g

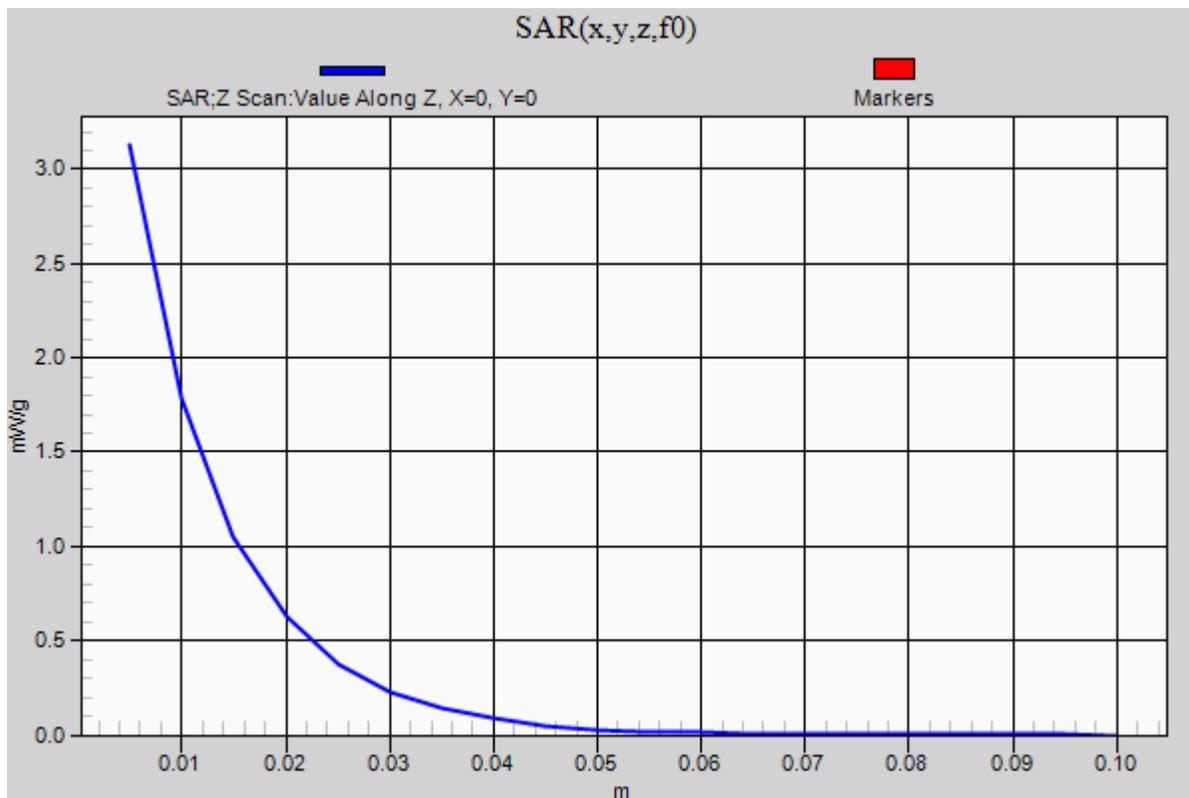

Test Laboratory: UL CCS SAR Lab C

20111102_SystemPerformanceCheck-D835V2 SN 4d117

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 835$ MHz; $\sigma = 0.983$ mho/m; $\epsilon_r = 55.238$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3772; ConvF(8.57, 8.57, 8.57); Calibrated: 5/3/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1239; Calibrated: 10/18/2011
- Phantom: ELI v4.0 (B); Type: QDOVA001BB; Serial: 1121
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.5 (3634)

Body/Pin=100 mW/Area Scan (61x61x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.213 mW/g


Body/Pin=100 mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 35.367 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.493 W/kg

SAR(1 g) = 0.998 mW/g; SAR(10 g) = 0.657 mW/g

Maximum value of SAR (measured) = 1.212 mW/g

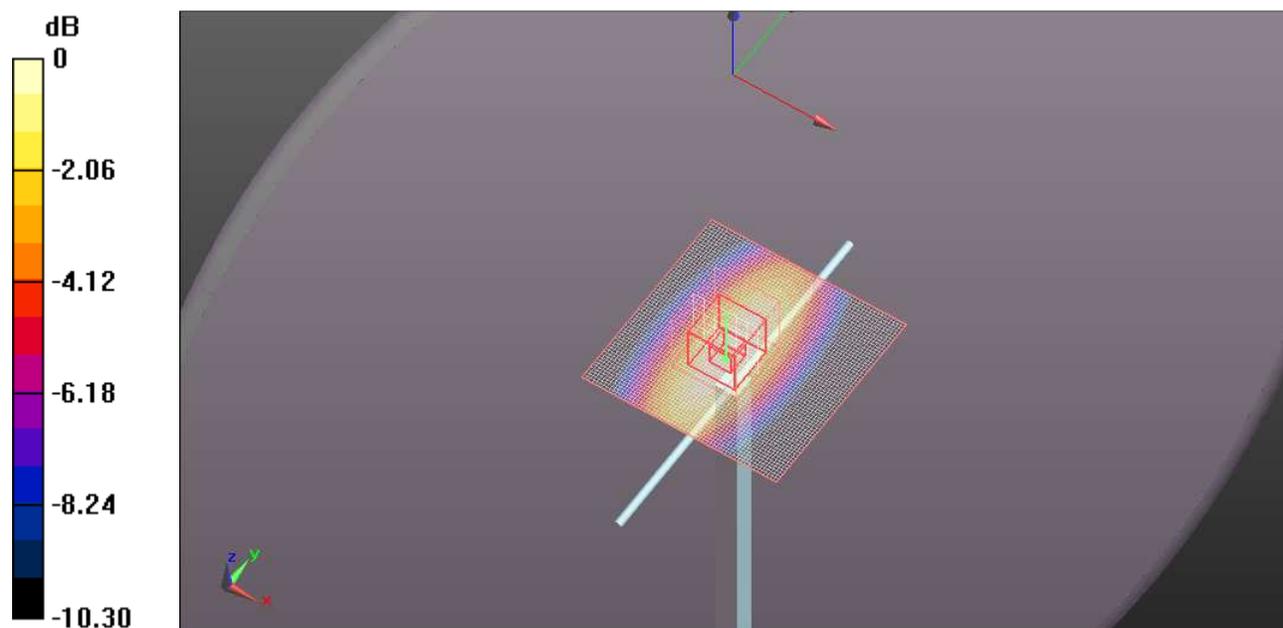


0 dB = 1.210mW/g

Test Laboratory: UL CCS SAR Lab C

20111102_SystemPerformanceCheck-D835V2 SN 4d117

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Body/Pin=100 mW/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm
Maximum value of SAR (measured) = 1.210 mW/g

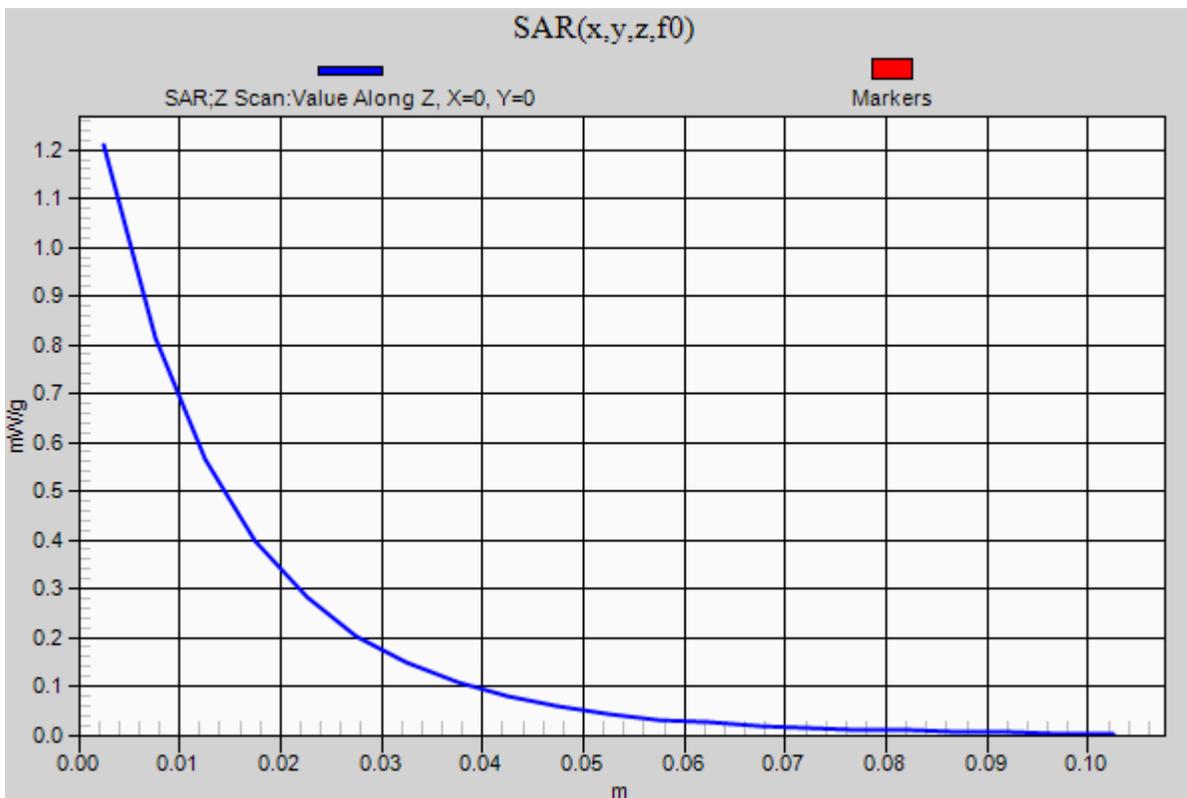

Test Laboratory: UL CCS SAR Lab B

20111102 SystemPerformanceCheck-D1900V2 SN 5d140

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1900$ MHz; $\sigma = 1.41$ mho/m; $\epsilon_r = 40.624$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3773; ConvF(7.3, 7.3, 7.3); Calibrated: 5/3/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1258; Calibrated: 5/2/2011
- Phantom: SAM with CRP v5.0; Type: QD000P40CD; Serial: TP1632
- Measurement SW: DASY52, Version 52.6 (2);SEMCAD X Version 14.4.5 (3634)

Head/Pin=100 mW/Area Scan (61x61x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 5.880 mW/g


Head/Pin=100 mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 62.764 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 8.265 W/kg

SAR(1 g) = 4.4 mW/g; SAR(10 g) = 2.28 mW/g

Maximum value of SAR (measured) = 5.984 mW/g

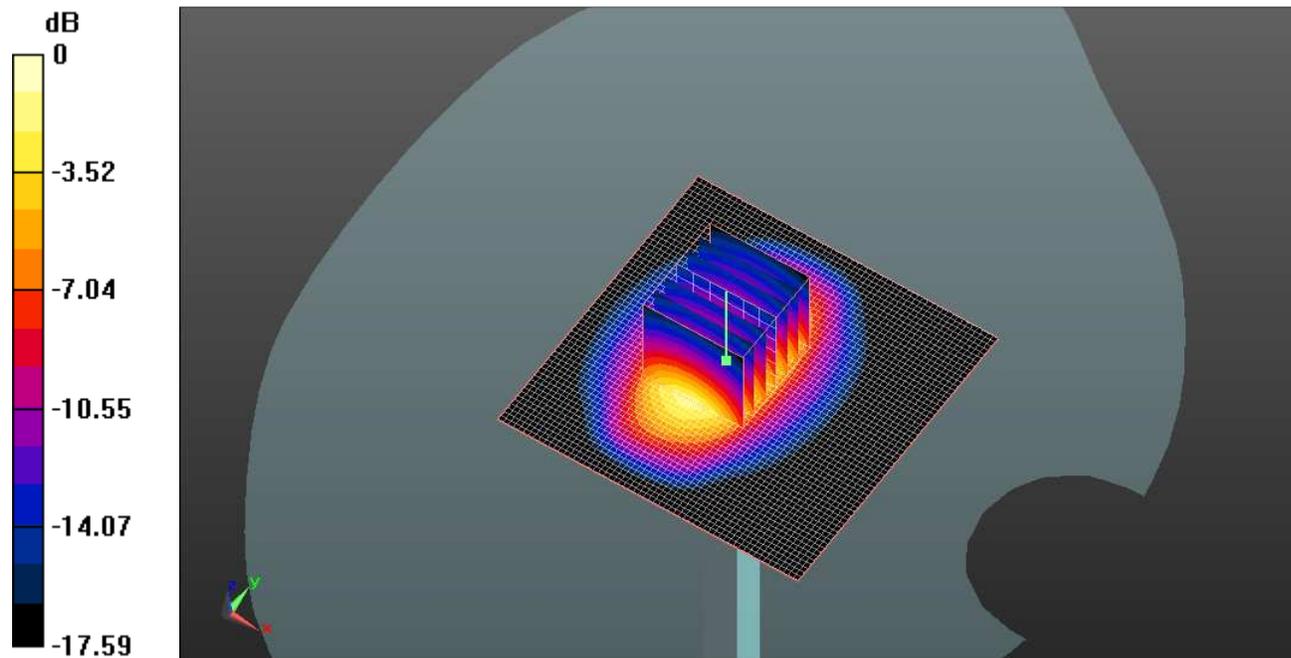


0 dB = 5.980mW/g

Test Laboratory: UL CCS SAR Lab B

20111102 SystemPerformanceCheck-D1900V2 SN 5d140

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Head/Pin=100 mW/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm
Maximum value of SAR (measured) = 3.584 mW/g

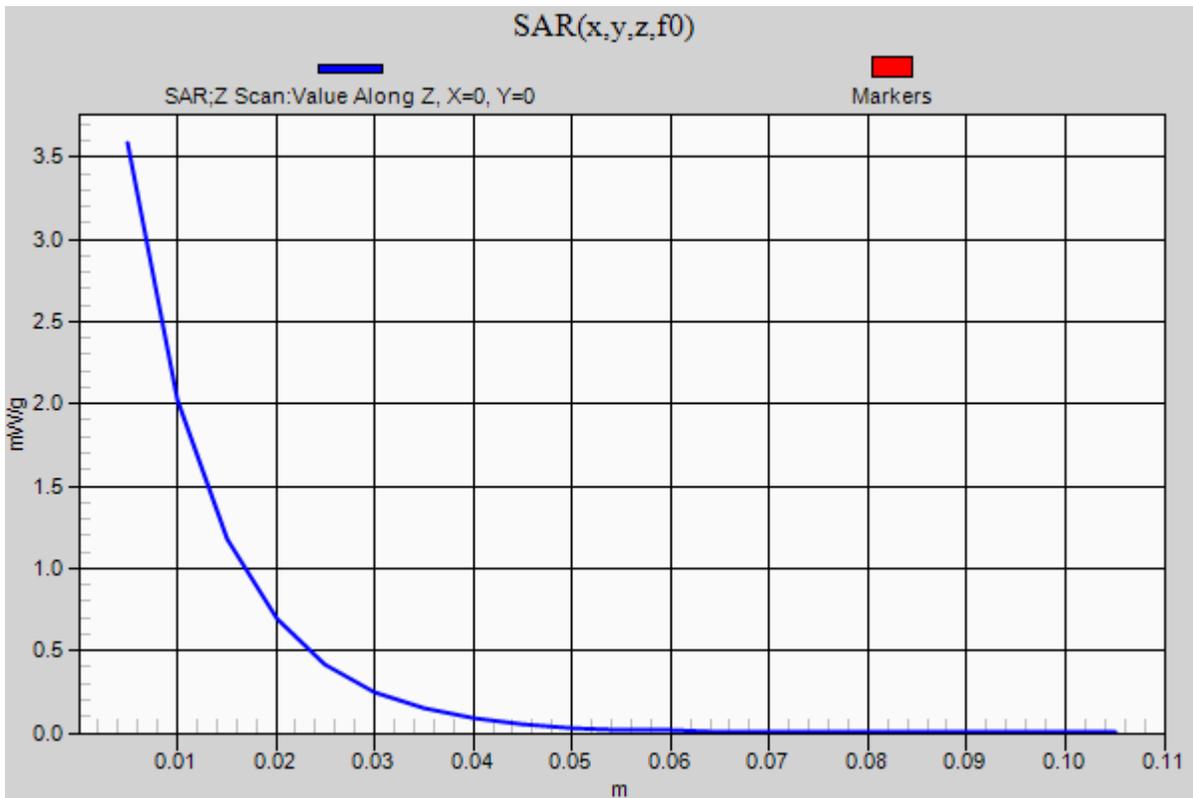

Test Laboratory: UL CCS SAR Lab C

20111103_SystemPerformanceCheck-D835V2 SN 4d117

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 835$ MHz; $\sigma = 0.892$ mho/m; $\epsilon_r = 42.67$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3772; ConvF(8.52, 8.52, 8.52); Calibrated: 5/3/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1239; Calibrated: 10/18/2011
- Phantom: SAM with CRP v5.0; Type: QD000P40CD; Serial: TP1632
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.5 (3634)

Head/Pin=100 mW/Area Scan (61x61x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.167 mW/g


Head/Pin=100 mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 37.263 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.455 W/kg

SAR(1 g) = 0.961 mW/g; SAR(10 g) = 0.630 mW/g

Maximum value of SAR (measured) = 1.173 mW/g

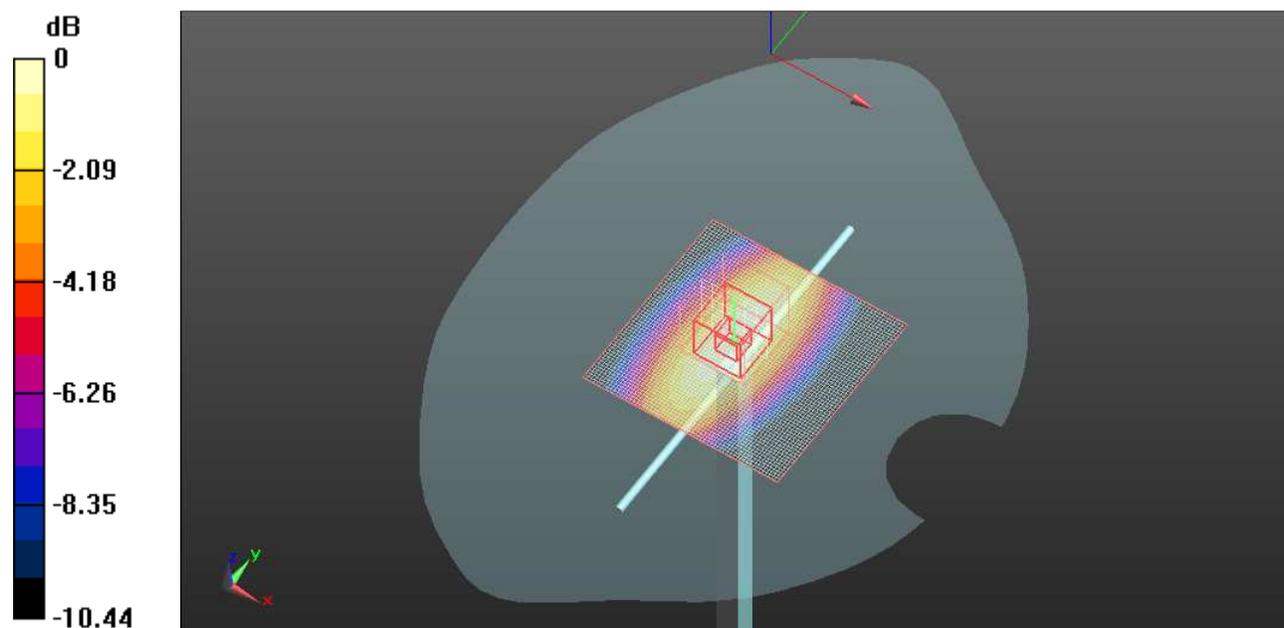


0 dB = 1.170mW/g

Test Laboratory: UL CCS SAR Lab C

20111103_SystemPerformanceCheck-D835V2 SN 4d117

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Head/Pin=100 mW/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm
Maximum value of SAR (measured) = 1.226 mW/g

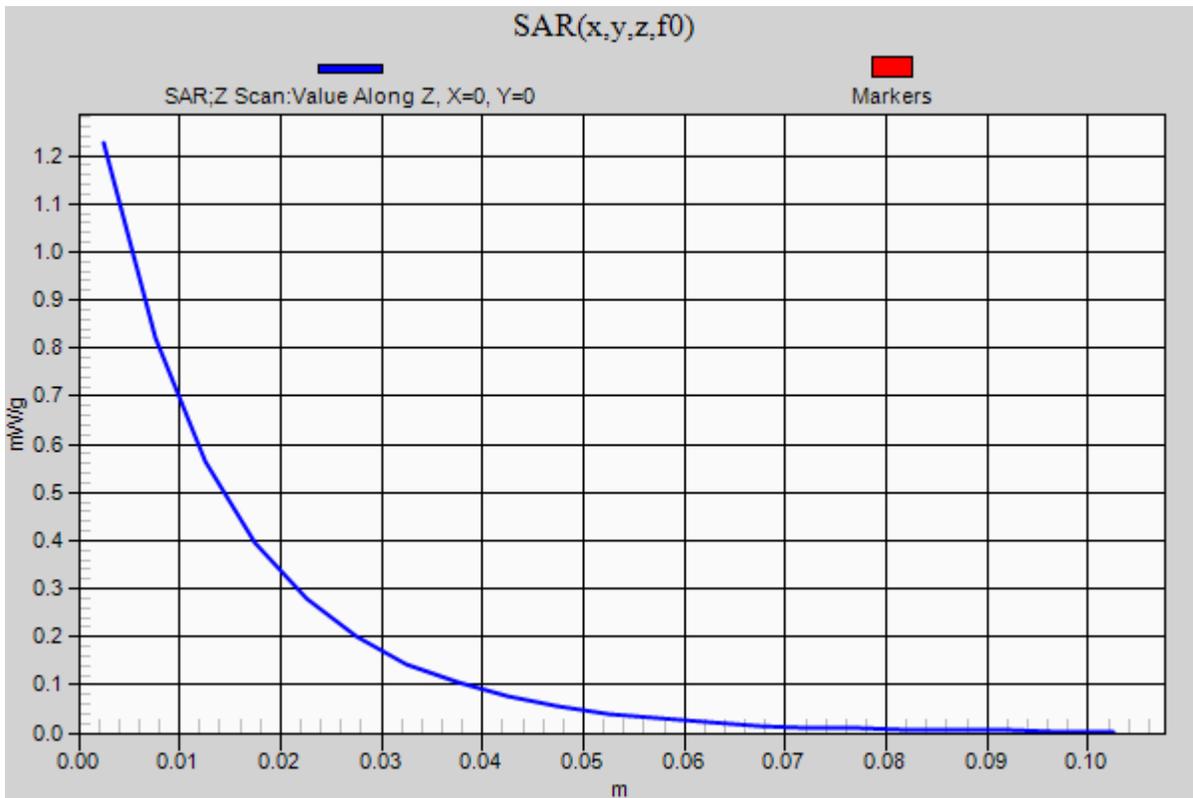

Test Laboratory: UL CCS SAR Lab C

20111103_SystemPerformanceCheck-D835V2 SN 4d117

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 835$ MHz; $\sigma = 0.983$ mho/m; $\epsilon_r = 55.188$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3772; ConvF(8.57, 8.57, 8.57); Calibrated: 5/3/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1239; Calibrated: 10/18/2011
- Phantom: ELI v4.0 (B); Type: QDOVA001BB; Serial: 1121
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.5 (3634)

Body/Pin=100 mW/Area Scan (61x61x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.220 mW/g


Body/Pin=100 mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 35.540 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 1.520 W/kg

SAR(1 g) = 1.01 mW/g; SAR(10 g) = 0.664 mW/g

Maximum value of SAR (measured) = 1.232 mW/g

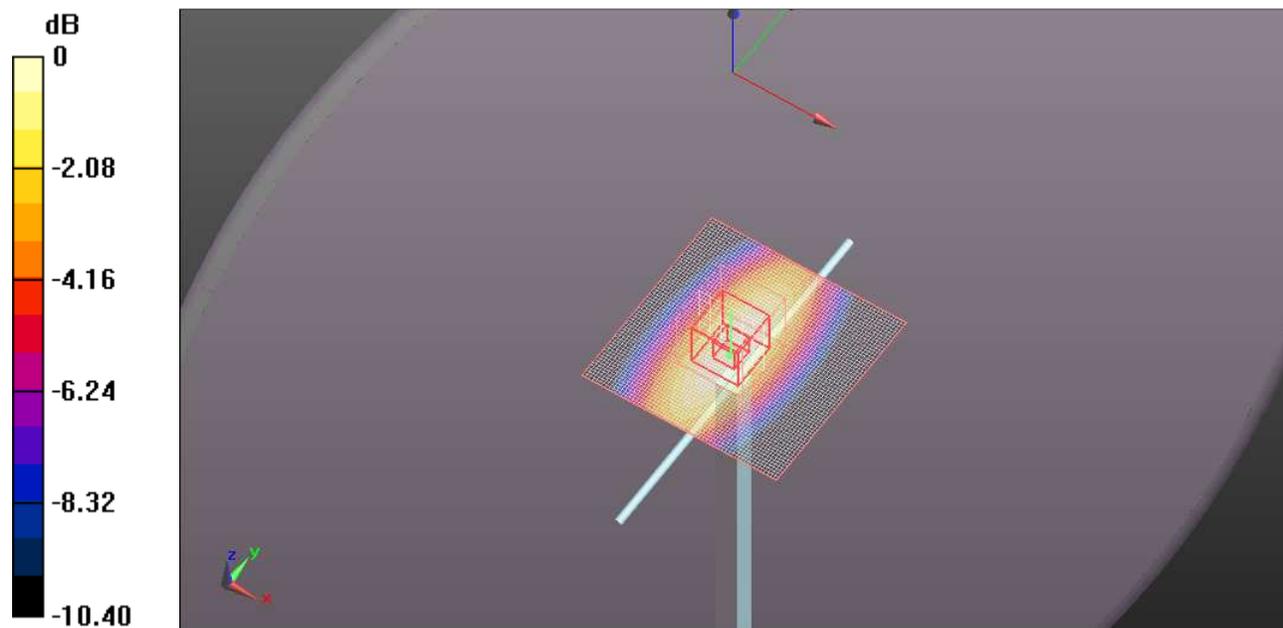


0 dB = 1.230mW/g

Test Laboratory: UL CCS SAR Lab C

20111103_SystemPerformanceCheck-D835V2 SN 4d117

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Body/Pin=100 mW/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm
Maximum value of SAR (measured) = 1.225 mW/g

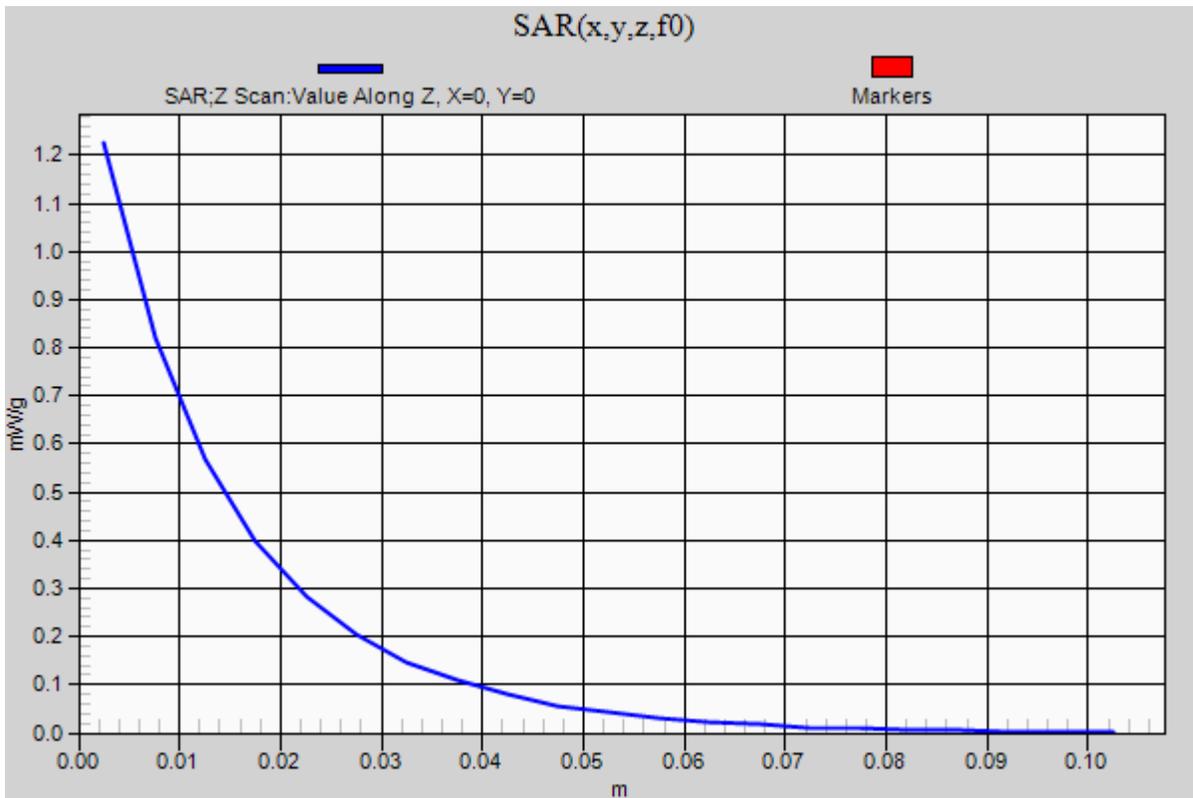

Test Laboratory: UL CCS SAR Lab B

20111103 SystemPerformanceCheck-D1900V2 SN 5d140

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1900$ MHz; $\sigma = 1.415$ mho/m; $\epsilon_r = 40.394$; $\rho = 1000$ kg/m³
Phantom section: Flat Section


Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3773; ConvF(7.3, 7.3, 7.3); Calibrated: 5/3/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1258; Calibrated: 5/2/2011
- Phantom: SAM with CRP v5.0; Type: QD000P40CD; Serial: TP1632
- Measurement SW: DASY52, Version 52.6 (2);SEMCAD X Version 14.4.5 (3634)

Head/Pin=100 mW/Area Scan (61x61x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 5.449 mW/g

Head/Pin=100 mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 62.065 V/m; Power Drift = -0.03 dB
Peak SAR (extrapolated) = 7.610 W/kg
SAR(1 g) = 4.02 mW/g; SAR(10 g) = 2.08 mW/g
Maximum value of SAR (measured) = 5.491 mW/g

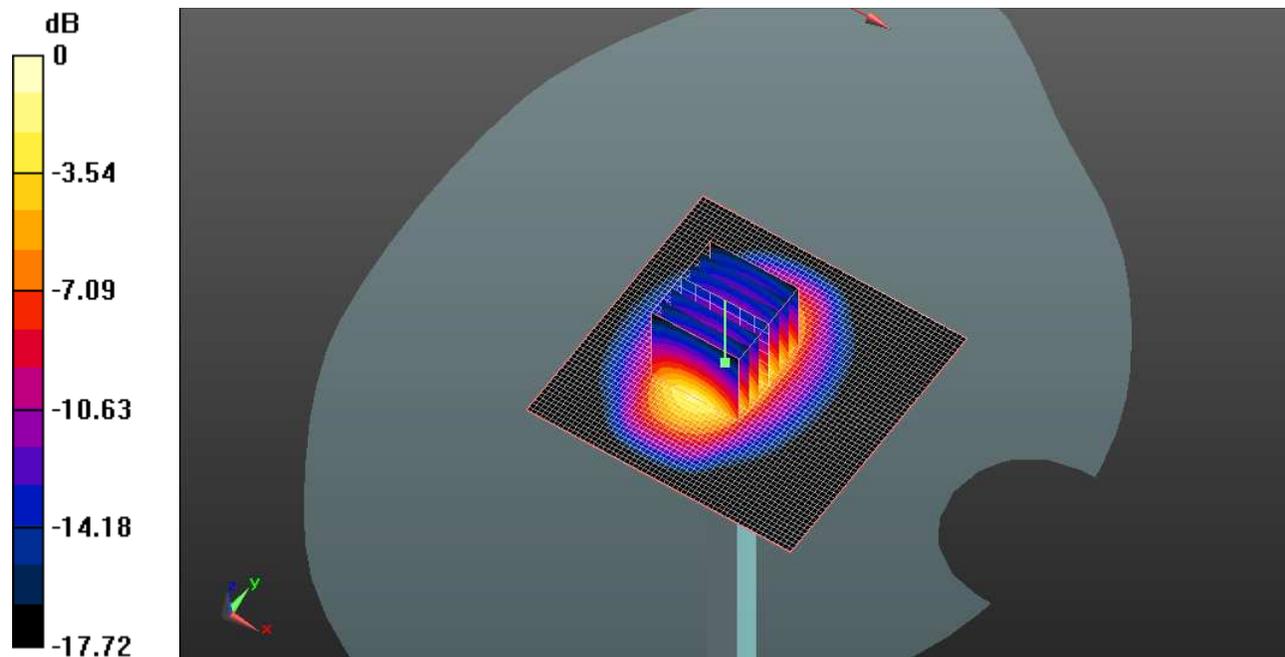


0 dB = 5.490mW/g

Test Laboratory: UL CCS SAR Lab B

20111103 SystemPerformanceCheck-D1900V2 SN 5d140

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Head/Pin=100 mW/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm
Maximum value of SAR (measured) = 3.297 mW/g

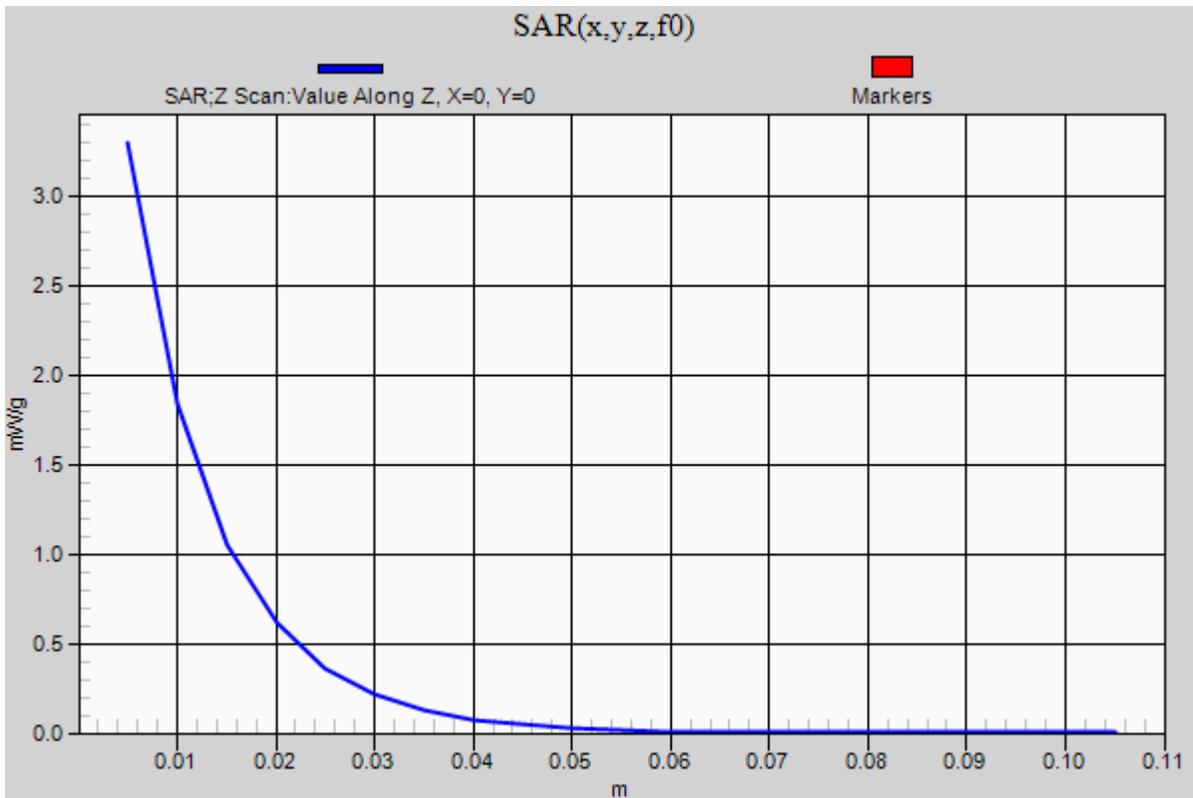

Test Laboratory: UL CCS SAR Lab B

20111104 SystemPerformanceCheck-D1900V2 SN 5d140

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.429$ mho/m; $\epsilon_r = 41.126$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3773; ConvF(7.3, 7.3, 7.3); Calibrated: 5/3/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1258; Calibrated: 5/2/2011
- Phantom: SAM with CRP v5.0; Type: QD000P40CD; Serial: TP1632
- Measurement SW: DASY52, Version 52.6 (2);SEMCAD X Version 14.4.5 (3634)

Head/Pin=100 mW/Area Scan (61x61x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 5.369 mW/g


Head/Pin=100 mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 61.178 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 7.569 W/kg

SAR(1 g) = 3.98 mW/g; SAR(10 g) = 2.04 mW/g

Maximum value of SAR (measured) = 5.441 mW/g

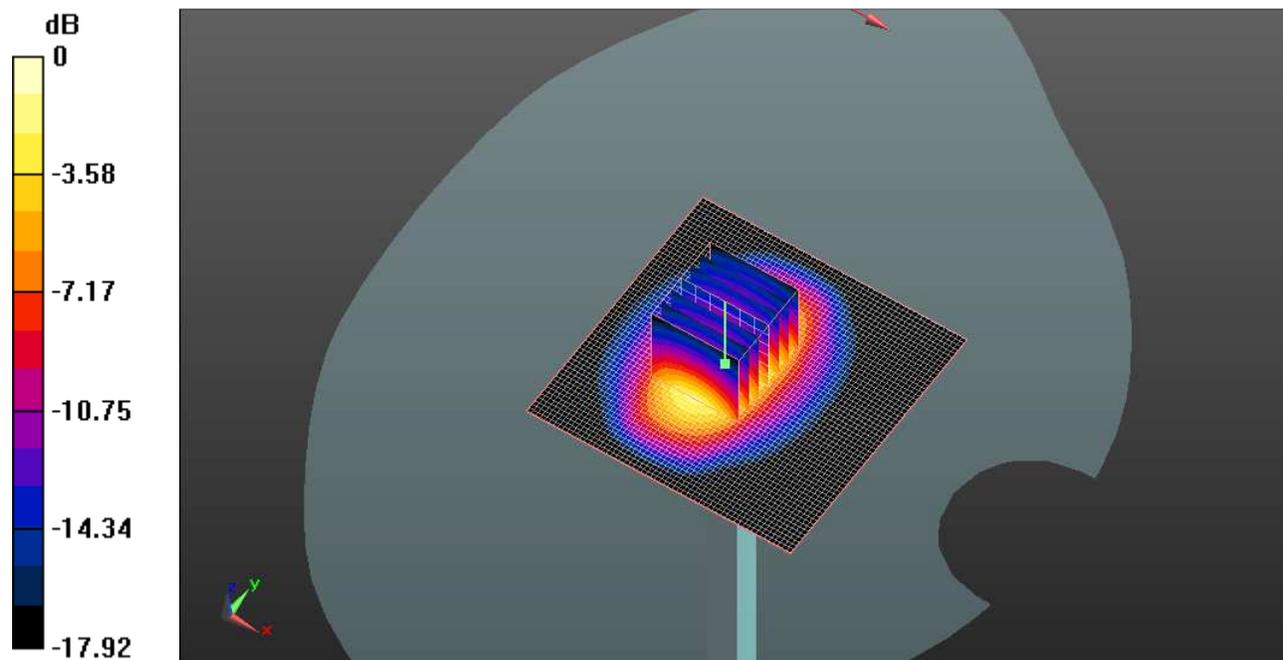


0 dB = 5.440mW/g

Test Laboratory: UL CCS SAR Lab B

20111104 SystemPerformanceCheck-D1900V2 SN 5d140

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Head/Pin=100 mW/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm
Maximum value of SAR (measured) = 3.208 mW/g

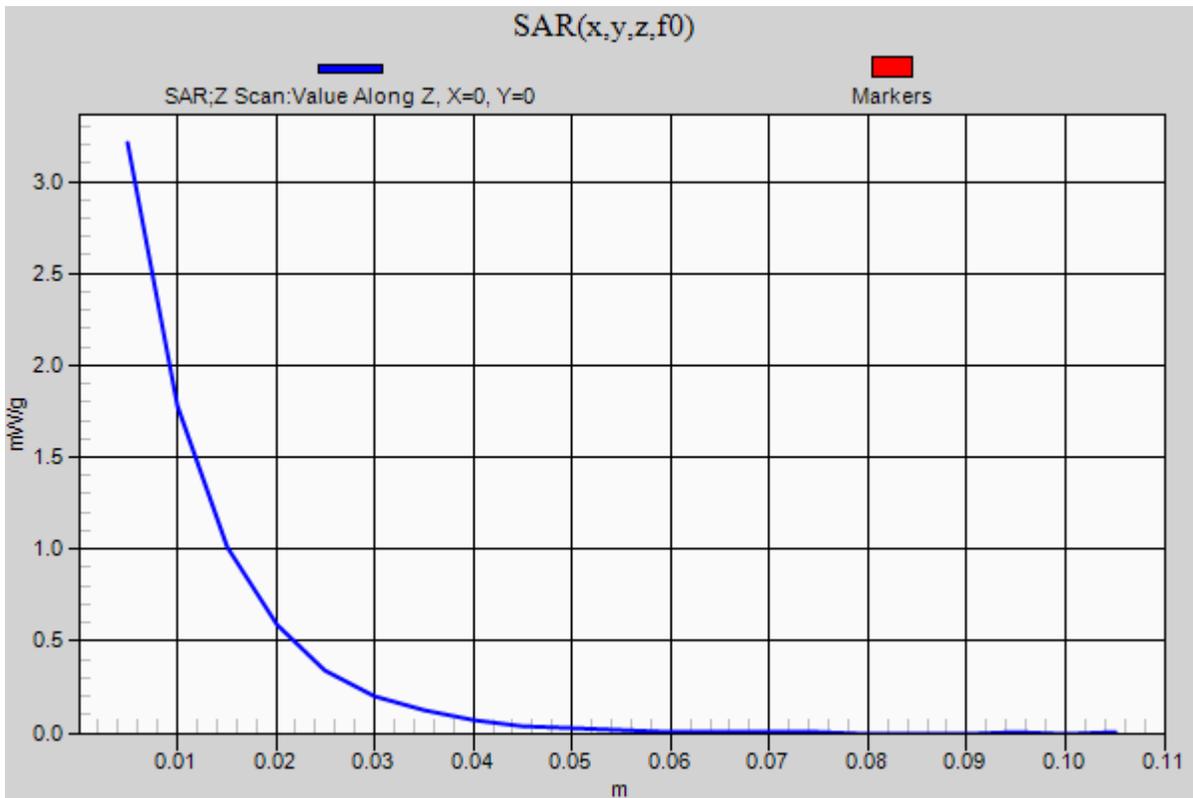

Test Laboratory: UL CCS SAR Lab C

20111105_SystemPerformanceCheck-D835V2 SN 4d117

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 835$ MHz; $\sigma = 0.98$ mho/m; $\epsilon_r = 53.855$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section


Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3772; ConvF(8.57, 8.57, 8.57); Calibrated: 5/3/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1239; Calibrated: 10/18/2011
- Phantom: ELI v4.0 (B); Type: QDOVA001BB; Serial: 1121
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.5 (3634)

Body/Pin=100 mW/Area Scan (61x61x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (interpolated) = 1.257 mW/g

Body/Pin=100 mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 36.130 V/m; Power Drift = 0.02 dB
 Peak SAR (extrapolated) = 1.541 W/kg
SAR(1 g) = 1.03 mW/g; SAR(10 g) = 0.678 mW/g
 Maximum value of SAR (measured) = 1.253 mW/g

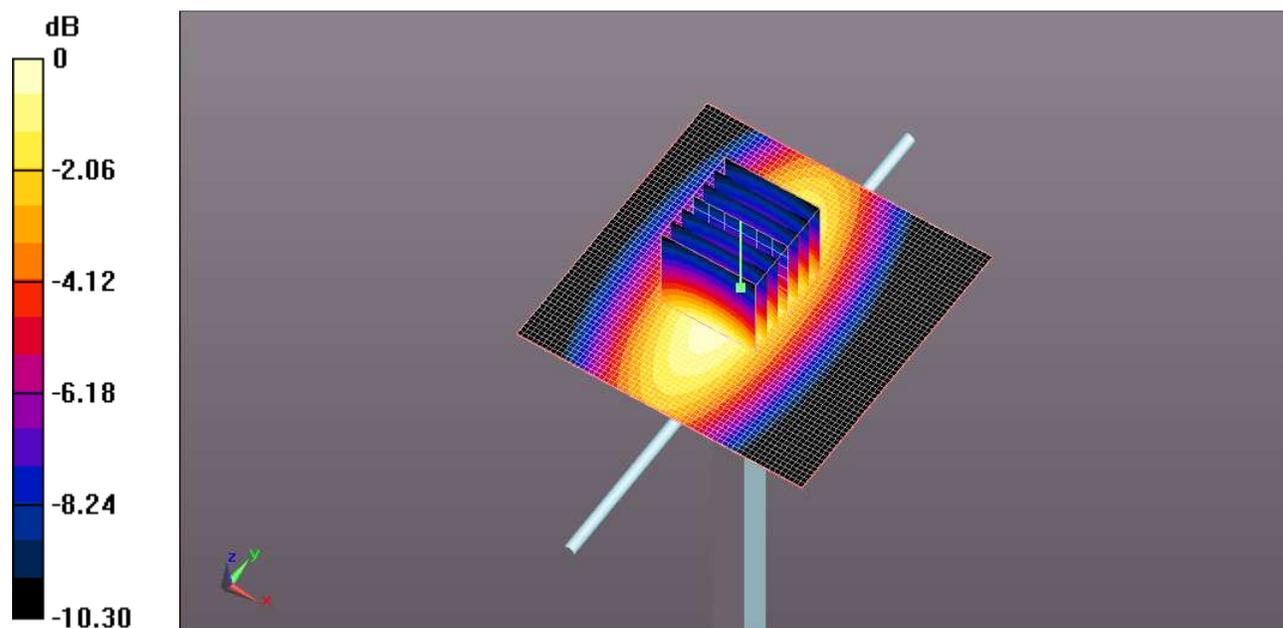


0 dB = 1.250mW/g

Test Laboratory: UL CCS SAR Lab C

20111105_SystemPerformanceCheck-D835V2 SN 4d117

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Body/Pin=100 mW/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm
Maximum value of SAR (measured) = 1.263 mW/g

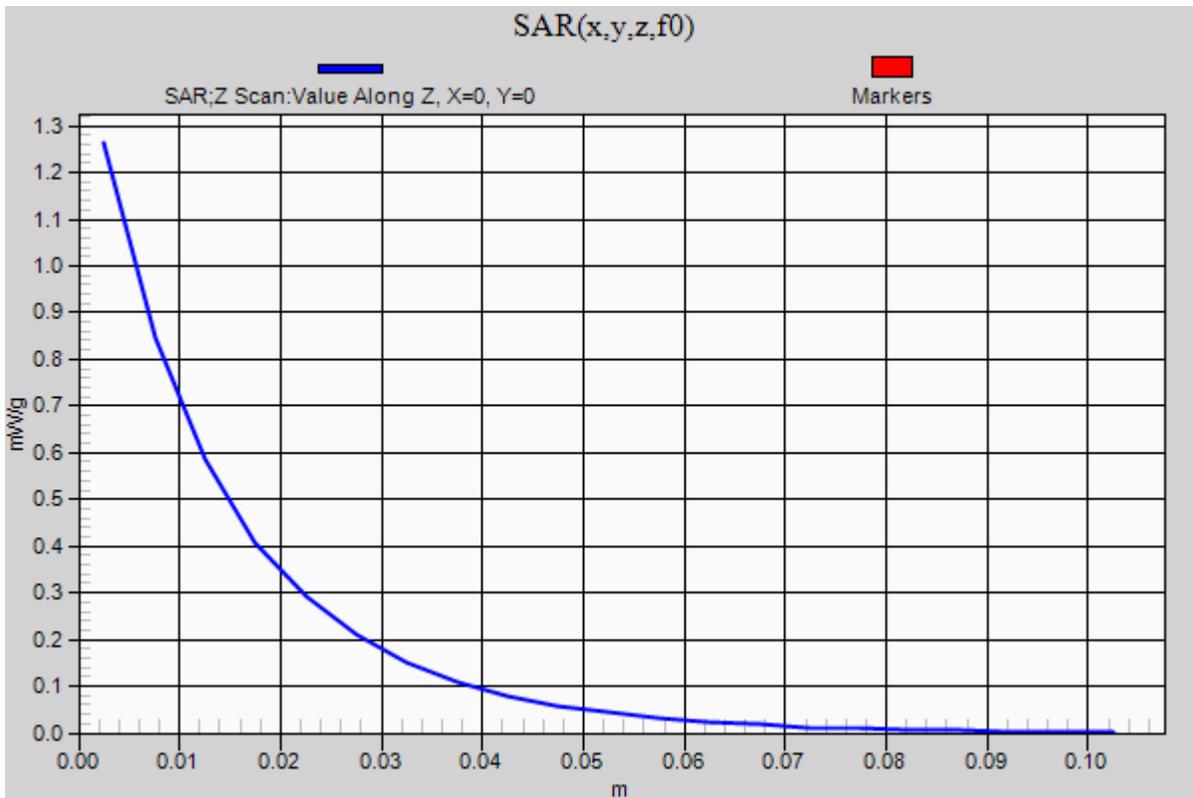

Test Laboratory: UL CCS SAR Lab B

20111107 SystemPerformanceCheck-D1900V2 SN 5d140

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1900$ MHz; $\sigma = 1.485$ mho/m; $\epsilon_r = 52.31$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section


Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3773; ConvF(7.37, 7.37, 7.37); Calibrated: 5/3/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1258; Calibrated: 5/2/2011
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1118
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.5 (3634)

Body/Pin=100 mW/Area Scan (61x61x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (interpolated) = 5.371 mW/g

Body/Pin=100 mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 60.739 V/m; Power Drift = -0.002 dB
 Peak SAR (extrapolated) = 7.486 W/kg
SAR(1 g) = 3.97 mW/g; SAR(10 g) = 2.03 mW/g
 Maximum value of SAR (measured) = 5.425 mW/g

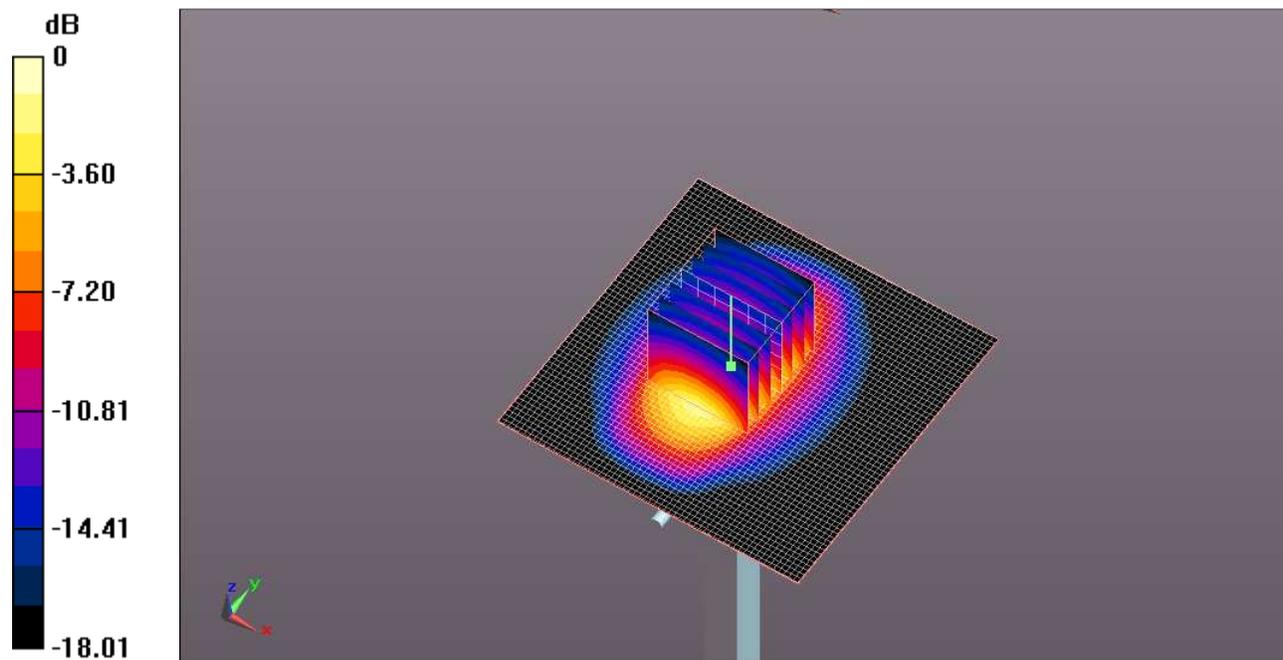


0 dB = 5.430mW/g

Test Laboratory: UL CCS SAR Lab B

20111107 SystemPerformanceCheck-D1900V2 SN 5d140

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Body/Pin=100 mW/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm
Maximum value of SAR (measured) = 3.082 mW/g

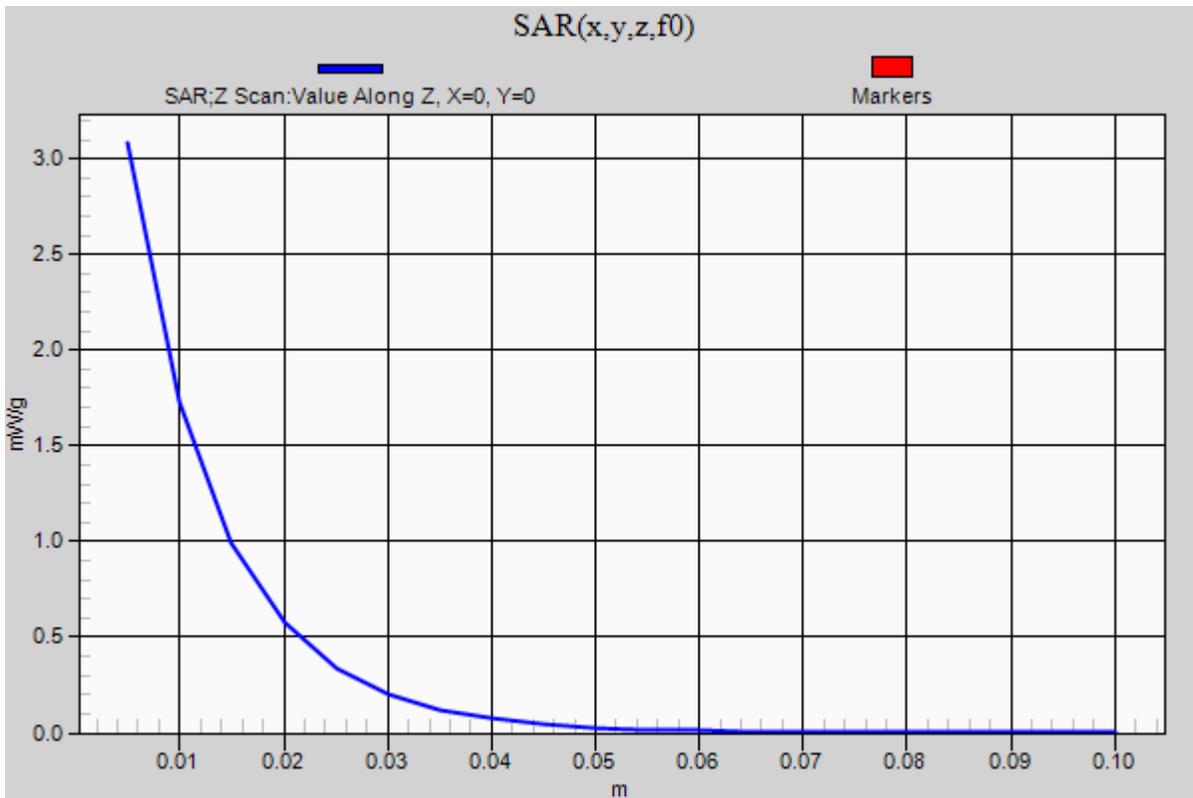

Test Laboratory: UL CCS SAR Lab B

20111108 SystemPerformanceCheck-D1900V2 SN 5d140

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.407$ mho/m; $\epsilon_r = 39.176$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3773; ConvF(7.3, 7.3, 7.3); Calibrated: 5/3/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1258; Calibrated: 5/2/2011
- Phantom: SAM with CRP v5.0; Type: QD000P40CD; Serial: TP1632
- Measurement SW: DASY52, Version 52.6 (2);SEMCAD X Version 14.4.5 (3634)

Head/Pin=100 mW/Area Scan (61x61x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 5.570 mW/g


Head/Pin=100 mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 62.846 V/m; Power Drift = -0.0088 dB

Peak SAR (extrapolated) = 7.747 W/kg

SAR(1 g) = 4.12 mW/g; SAR(10 g) = 2.14 mW/g

Maximum value of SAR (measured) = 5.616 mW/g

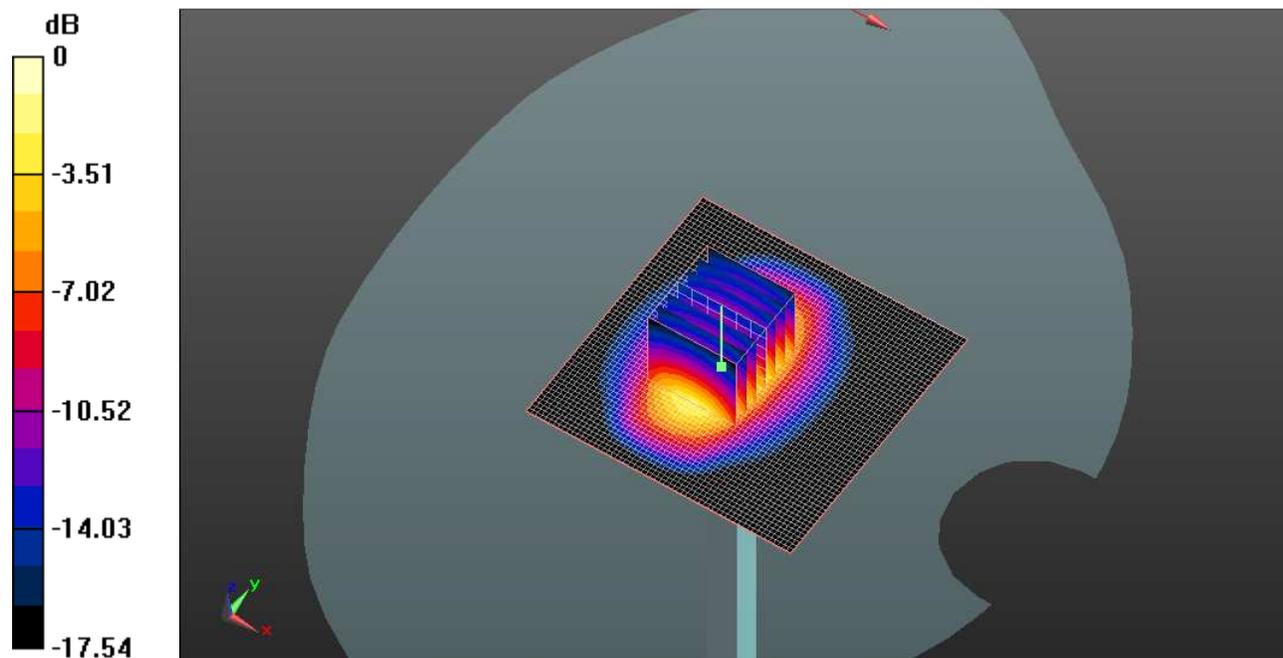


0 dB = 5.620mW/g

Test Laboratory: UL CCS SAR Lab B

20111108 SystemPerformanceCheck-D1900V2 SN 5d140

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Head/Pin=100 mW/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm
Maximum value of SAR (measured) = 3.285 mW/g

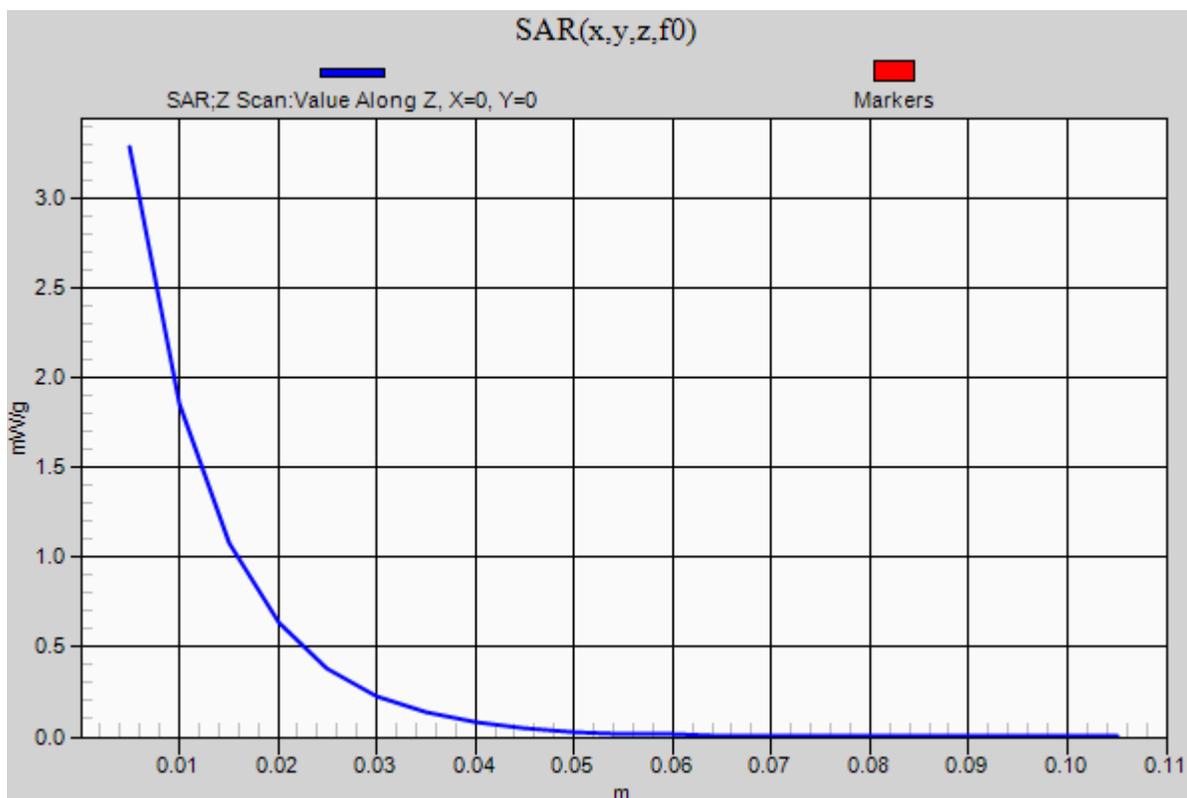

Test Laboratory: UL CCS SAR Lab B

20111108 SystemPerformanceCheck-D1900V2 SN 5d140

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.49$ mho/m; $\epsilon_r = 52.762$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3773; ConvF(7.37, 7.37, 7.37); Calibrated: 5/3/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1258; Calibrated: 5/2/2011
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1118
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.5 (3634)

Body/Pin=100 mW/Area Scan (61x61x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 5.449 mW/g


Body/Pin=100 mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 61.349 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 7.548 W/kg

SAR(1 g) = 4.12 mW/g; SAR(10 g) = 2.16 mW/g

Maximum value of SAR (measured) = 5.583 mW/g

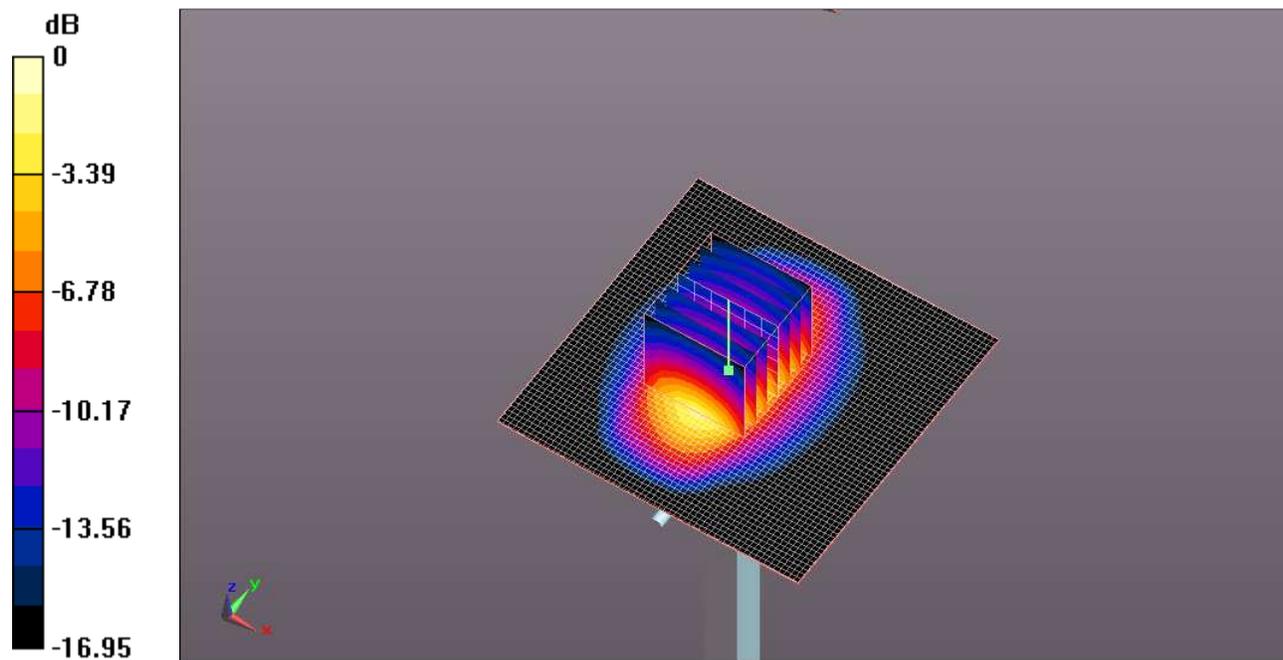


0 dB = 5.580mW/g

Test Laboratory: UL CCS SAR Lab B

20111108 SystemPerformanceCheck-D1900V2 SN 5d140 Body

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Body/Pin=100 mW/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm
Maximum value of SAR (measured) = 3.187 mW/g

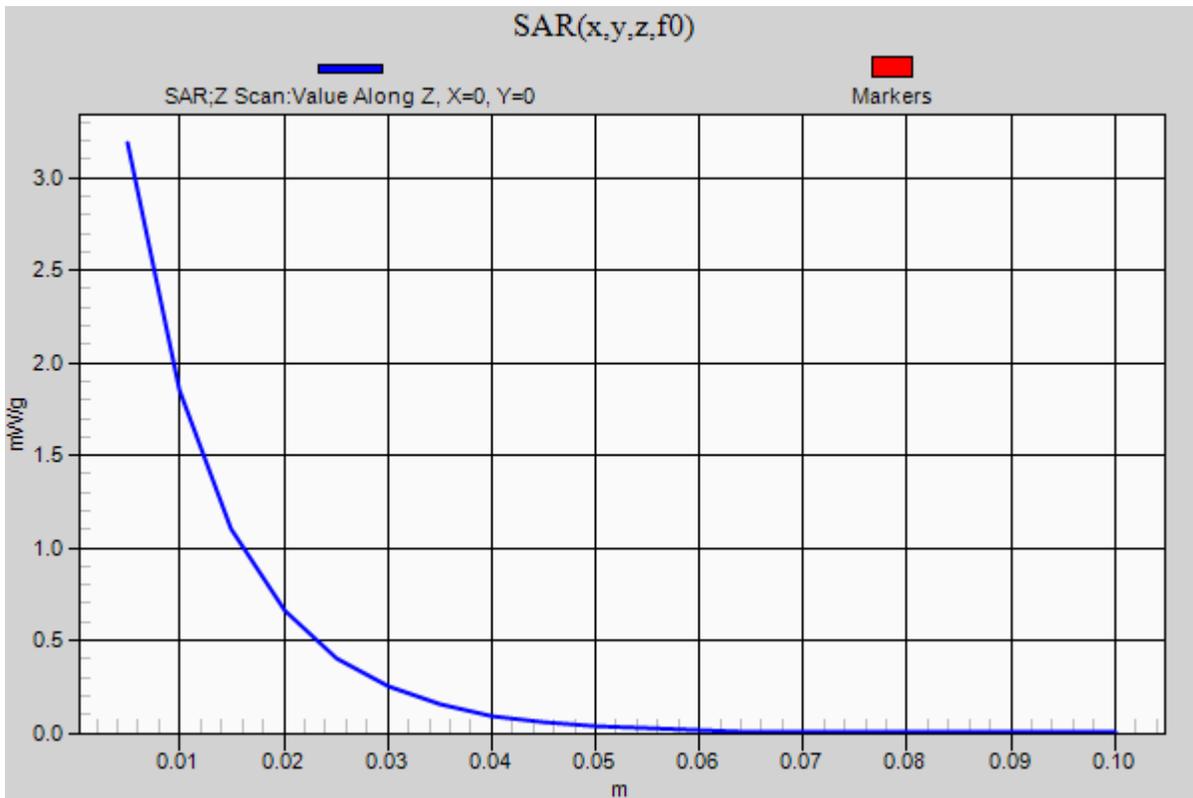

Test Laboratory: UL CCS SAR Lab B

20111109 SystemPerformanceCheck-D1900V2 SN 5d140

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1900$ MHz; $\sigma = 1.385$ mho/m; $\epsilon_r = 40.848$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3773; ConvF(7.3, 7.3, 7.3); Calibrated: 5/3/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1258; Calibrated: 5/2/2011
- Phantom: SAM with CRP v5.0; Type: QD000P40CD; Serial: TP1632
- Measurement SW: DASY52, Version 52.6 (2);SEMCAD X Version 14.4.5 (3634)

Head/Pin=100 mW/Area Scan (61x61x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 5.548 mW/g


Head/Pin=100 mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 61.119 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 7.710 W/kg

SAR(1 g) = 4.12 mW/g; SAR(10 g) = 2.14 mW/g

Maximum value of SAR (measured) = 5.578 mW/g

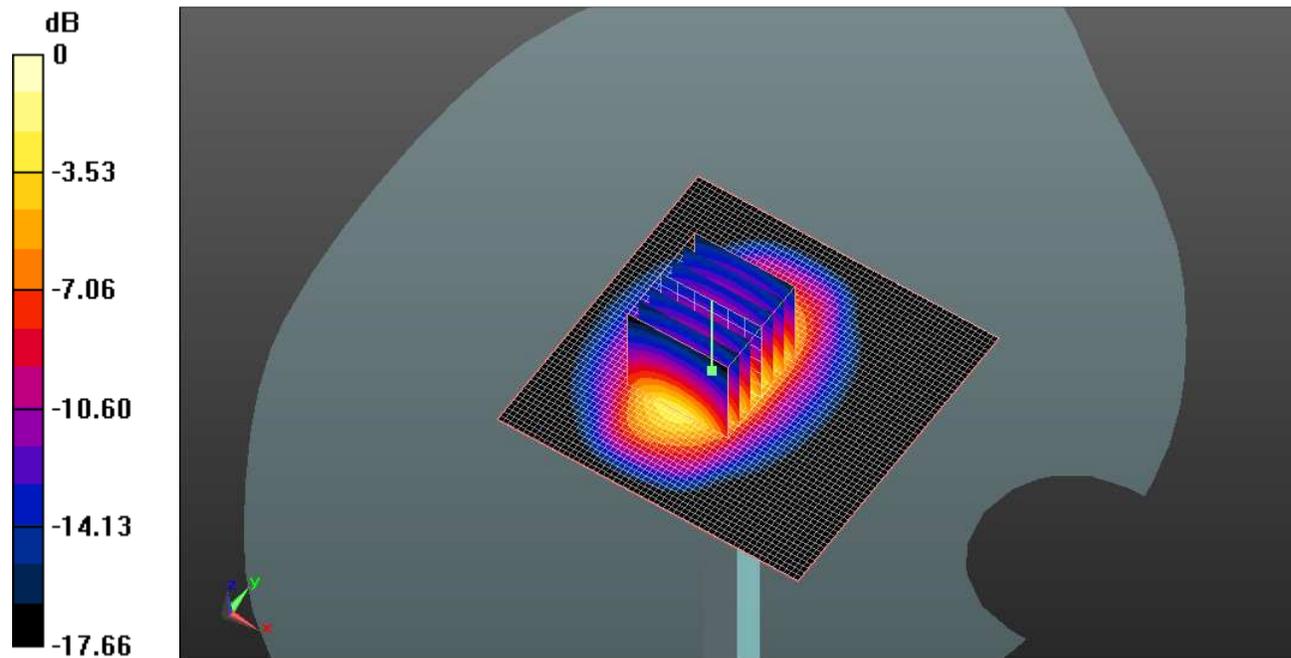


0 dB = 5.580mW/g

Test Laboratory: UL CCS SAR Lab B

20111109 SystemPerformanceCheck-D1900V2 SN 5d140

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Head/Pin=100 mW/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm
Maximum value of SAR (measured) = 3.089 mW/g

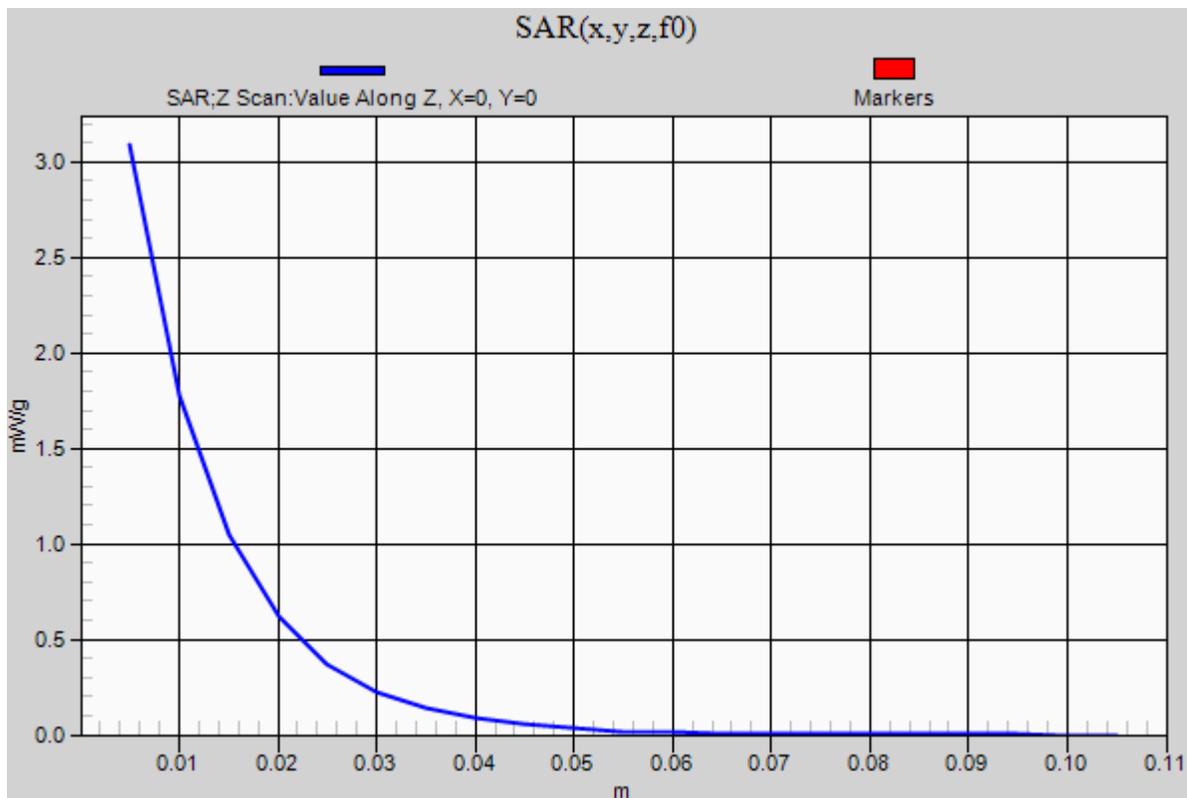

Test Laboratory: UL CCS SAR Lab B

20111110 SystemPerformanceCheck-D1900V2 SN 5d140

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1900$ MHz; $\sigma = 1.412$ mho/m; $\epsilon_r = 39.436$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3773; ConvF(7.3, 7.3, 7.3); Calibrated: 5/3/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1258; Calibrated: 5/2/2011
- Phantom: SAM with CRP v5.0; Type: QD000P40CD; Serial: TP1632
- Measurement SW: DASY52, Version 52.6 (2);SEMCAD X Version 14.4.5 (3634)

Head/Pin=100 mW/Area Scan (61x61x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 5.570 mW/g


Head/Pin=100 mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 55.484 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 7.793 W/kg

SAR(1 g) = 4.14 mW/g; SAR(10 g) = 2.16 mW/g

Maximum value of SAR (measured) = 5.606 mW/g

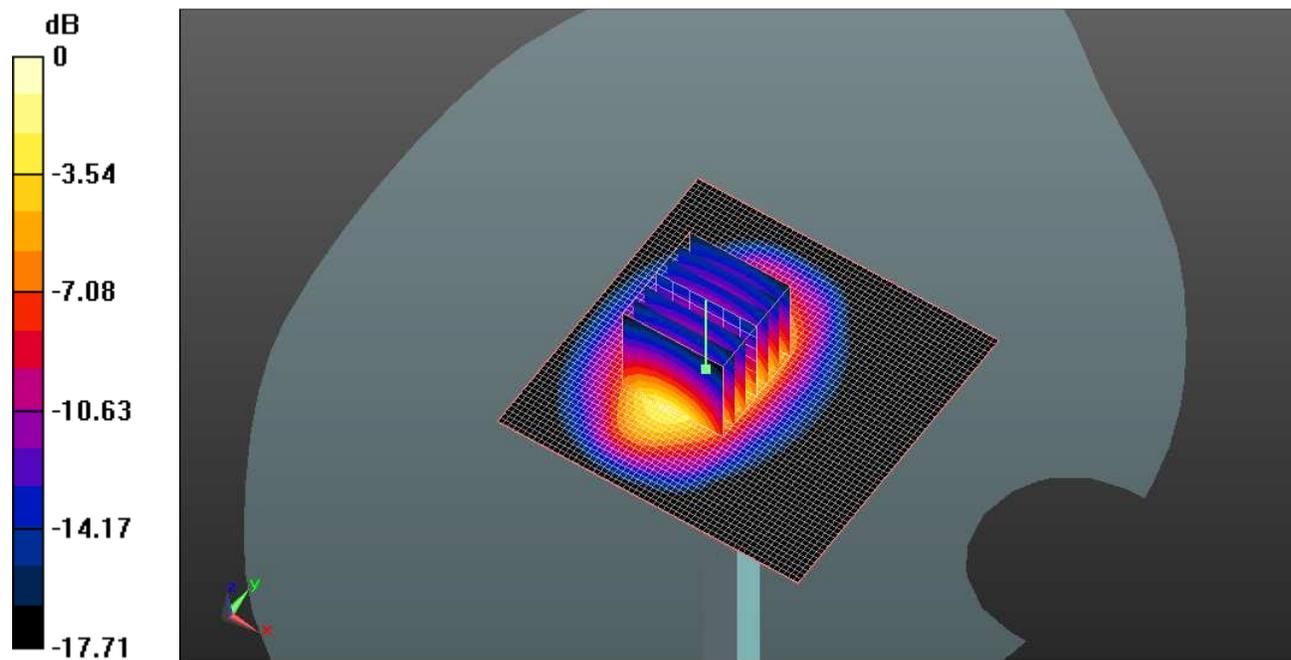


0 dB = 5.610mW/g

Test Laboratory: UL CCS SAR Lab B

20111110 SystemPerformanceCheck-D1900V2 SN 5d140

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Head/Pin=100 mW/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm
Maximum value of SAR (measured) = 2.846 mW/g

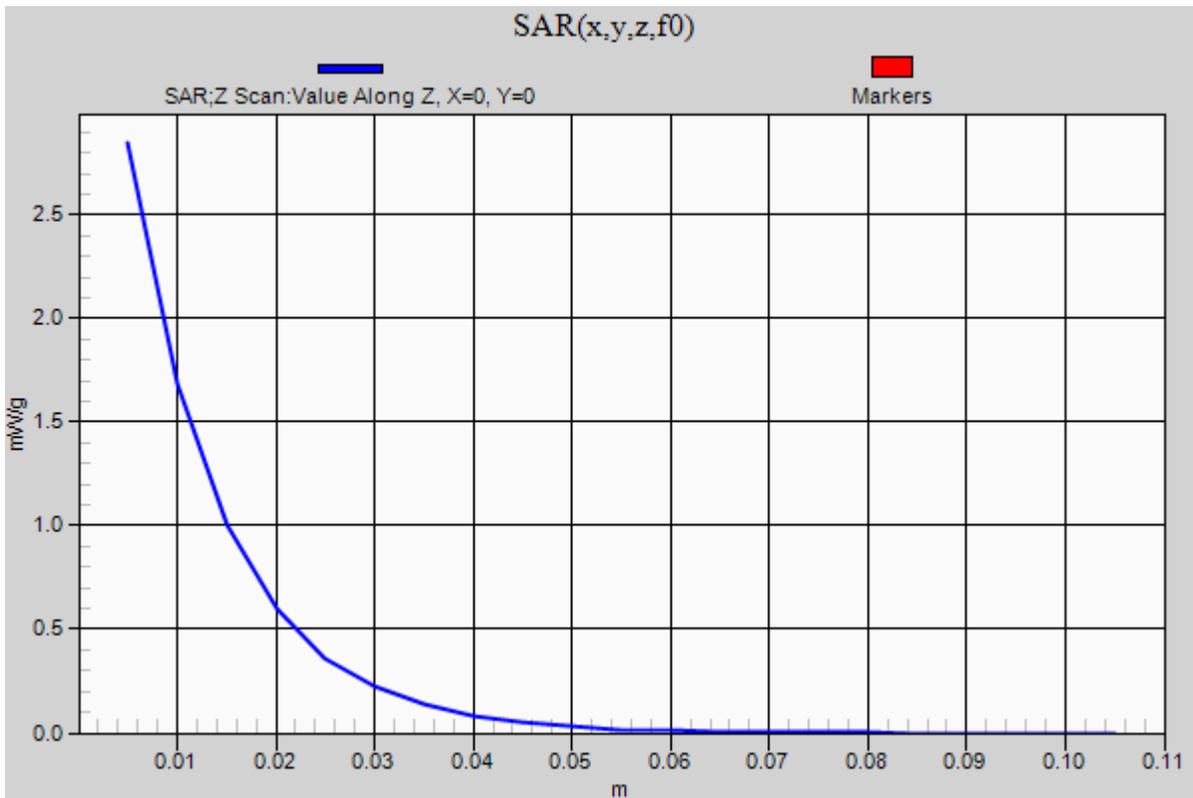

Test Laboratory: UL CCS SAR Lab B

20111111 SystemPerformanceCheck-D1900V2 SN 5d140

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.391$ mho/m; $\epsilon_r = 39.779$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3773; ConvF(7.3, 7.3, 7.3); Calibrated: 5/3/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1258; Calibrated: 5/2/2011
- Phantom: SAM with CRP v5.0; Type: QD000P40CD; Serial: TP1632
- Measurement SW: DASY52, Version 52.6 (2);SEMCAD X Version 14.4.5 (3634)

Head/Pin=100 mW/Area Scan (61x61x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 5.451 mW/g


Head/Pin=100 mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 59.908 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 7.626 W/kg

SAR(1 g) = 4.06 mW/g; SAR(10 g) = 2.11 mW/g

Maximum value of SAR (measured) = 5.518 mW/g

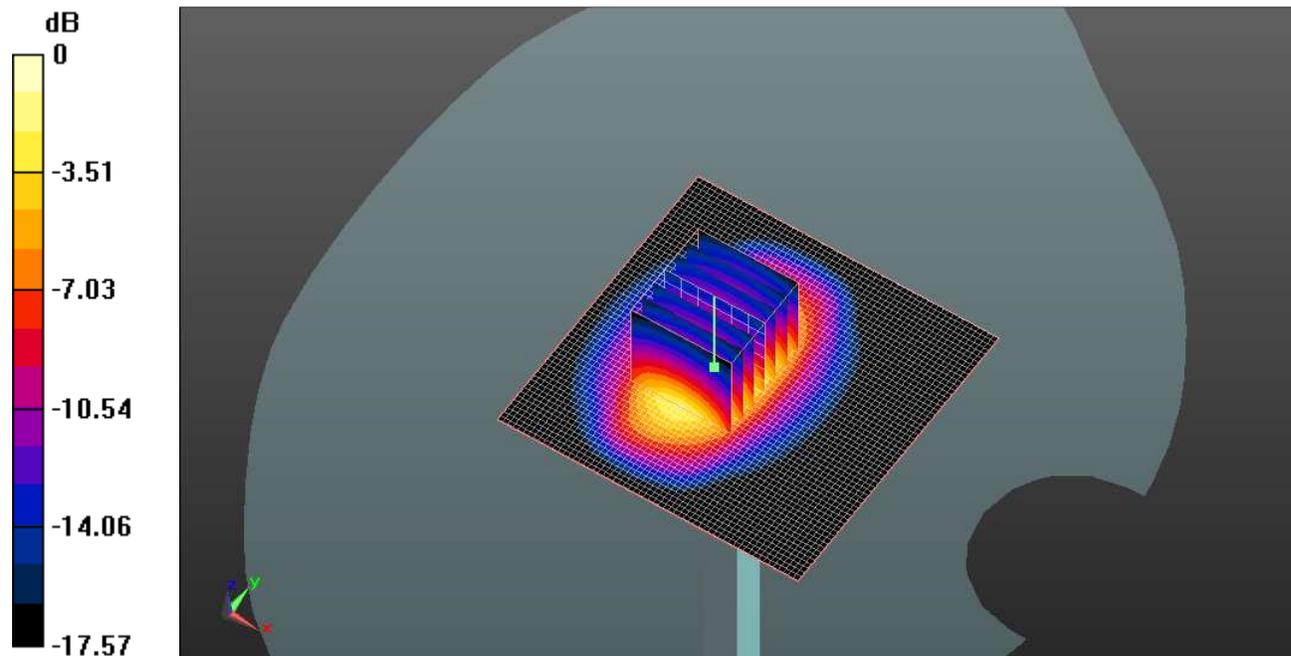


0 dB = 5.520mW/g

Test Laboratory: UL CCS SAR Lab B

20111111 SystemPerformanceCheck-D1900V2 SN 5d140

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Head/Pin=100 mW/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm
Maximum value of SAR (measured) = 3.033 mW/g

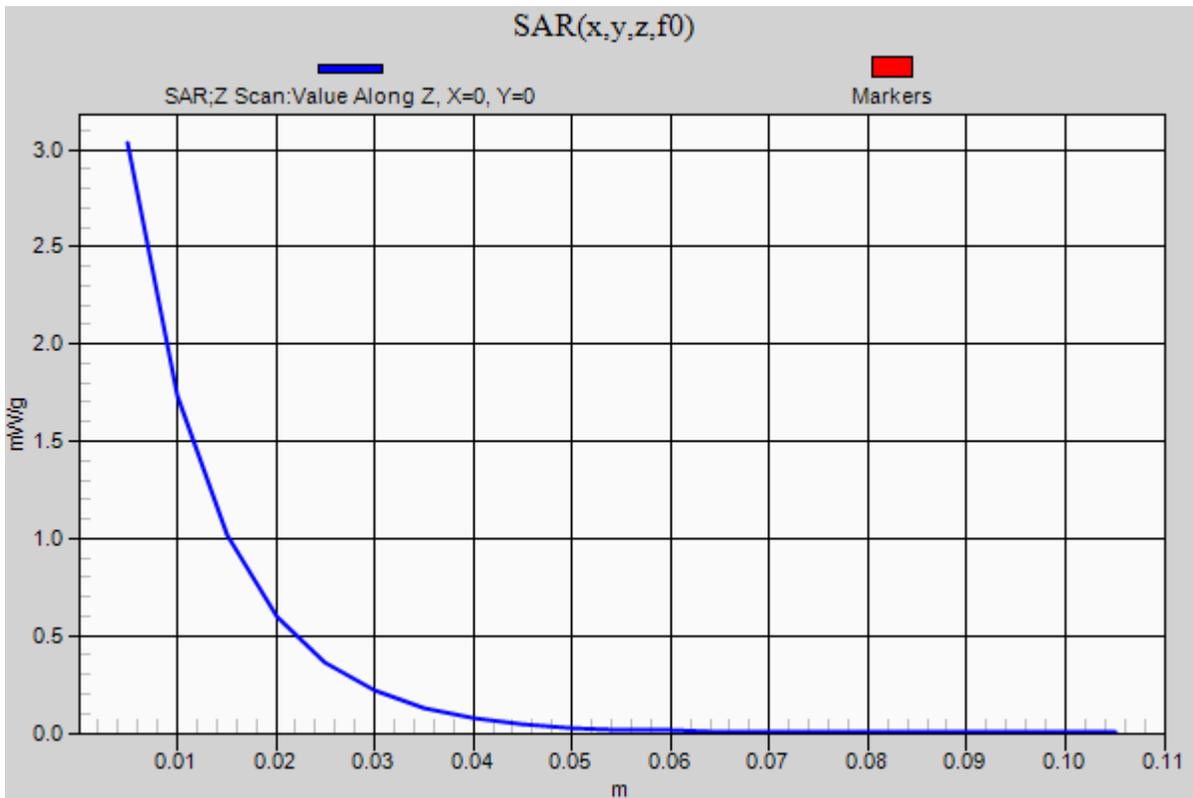

Test Laboratory: UL CCS SAR Lab A

20111111 SystemPerformanceCheck-D1900V2 SN 5d140

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1900$ MHz; $\sigma = 1.489$ mho/m; $\epsilon_r = 52.762$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3773; ConvF(7.37, 7.37, 7.37); Calibrated: 5/3/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1258; Calibrated: 5/2/2011
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1118
- Measurement SW: DASY52, Version 52.6 (2);SEMCAD X Version 14.4.5 (3634)

Body/Pin=100 mW/Area Scan (61x61x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 5.503 mW/g


Body/Pin=100 mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 61.085 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 7.611 W/kg

SAR(1 g) = 4.13 mW/g; SAR(10 g) = 2.15 mW/g

Maximum value of SAR (measured) = 5.588 mW/g

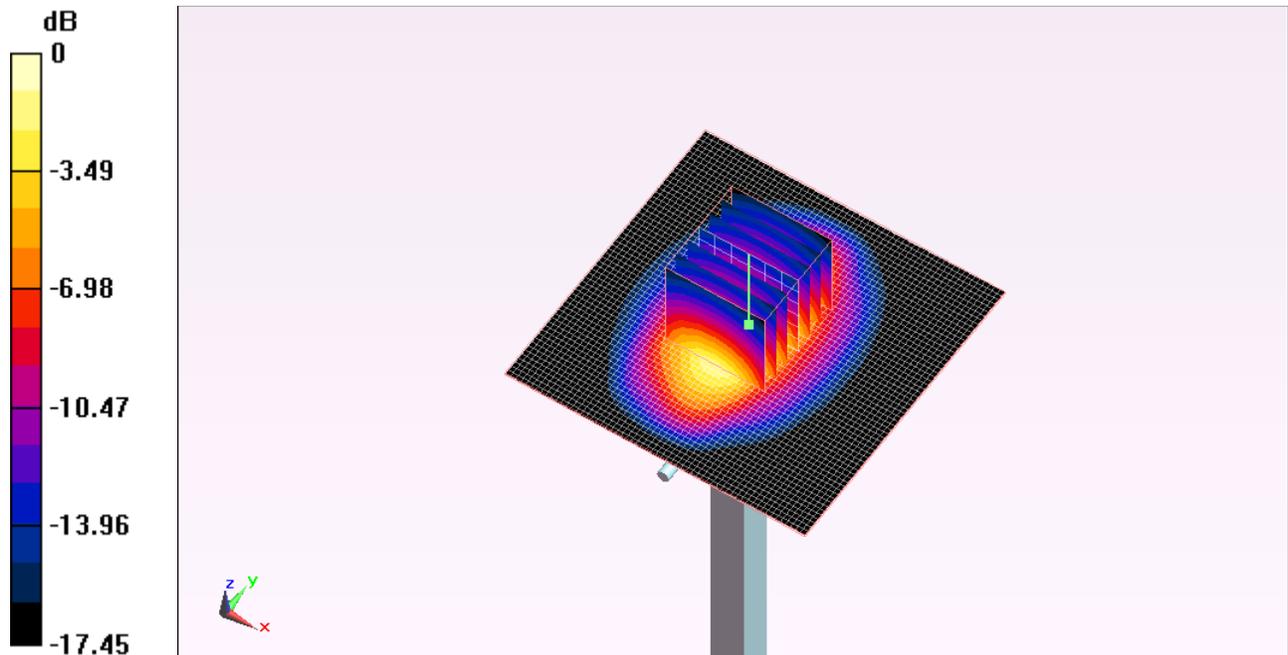


0 dB = 5.590mW/g

Test Laboratory: UL CCS SAR Lab A

20111111 SystemPerformanceCheck-D1900V2 SN 5d140

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Body/Pin=100 mW/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm
Maximum value of SAR (measured) = 3.190 mW/g

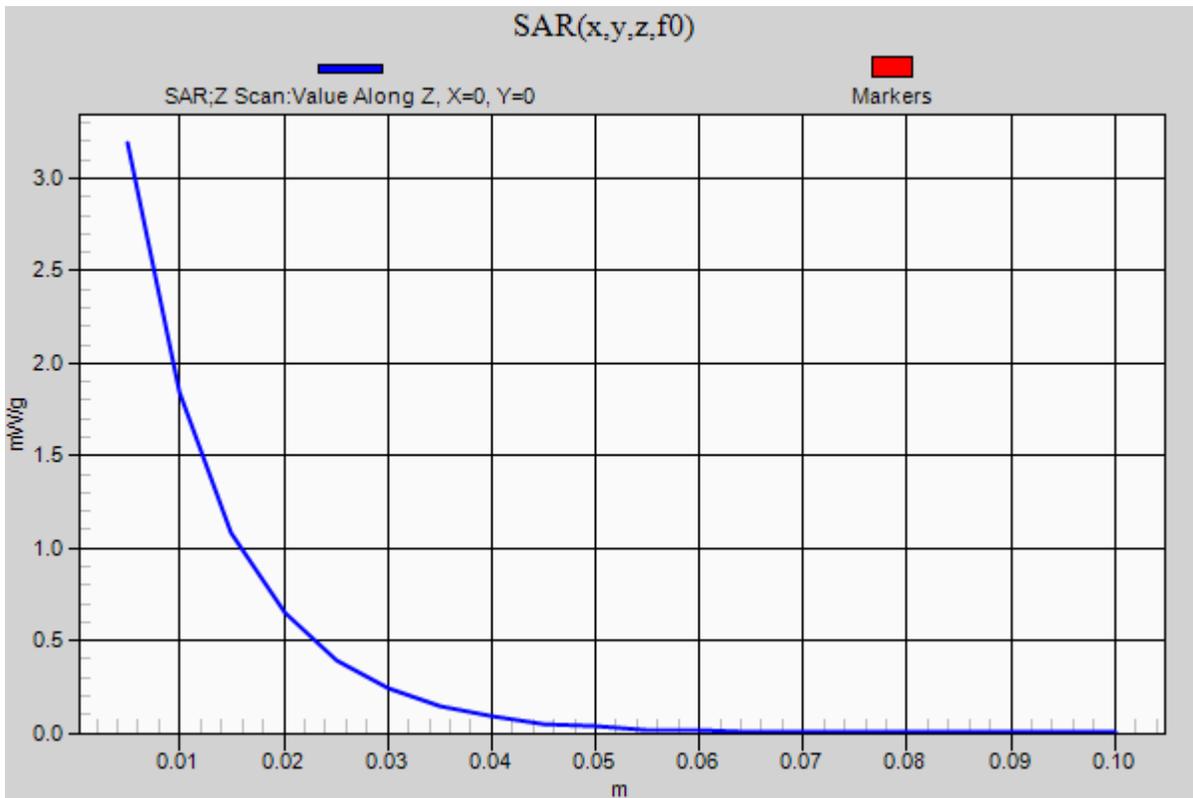

Test Laboratory: UL CCS SAR Lab B

20111112 SystemPerformanceCheck-D1900V2 SN 5d140

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.484$ mho/m; $\epsilon_r = 51.878$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3773; ConvF(7.37, 7.37, 7.37); Calibrated: 5/3/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1258; Calibrated: 5/2/2011
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1118
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.5 (3634)

Body/Pin=100 mW/Area Scan (61x61x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 5.340 mW/g


Body/Pin=100 mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 60.313 V/m; Power Drift = -0.0015 dB

Peak SAR (extrapolated) = 7.364 W/kg

SAR(1 g) = 3.99 mW/g; SAR(10 g) = 2.07 mW/g

Maximum value of SAR (measured) = 5.390 mW/g

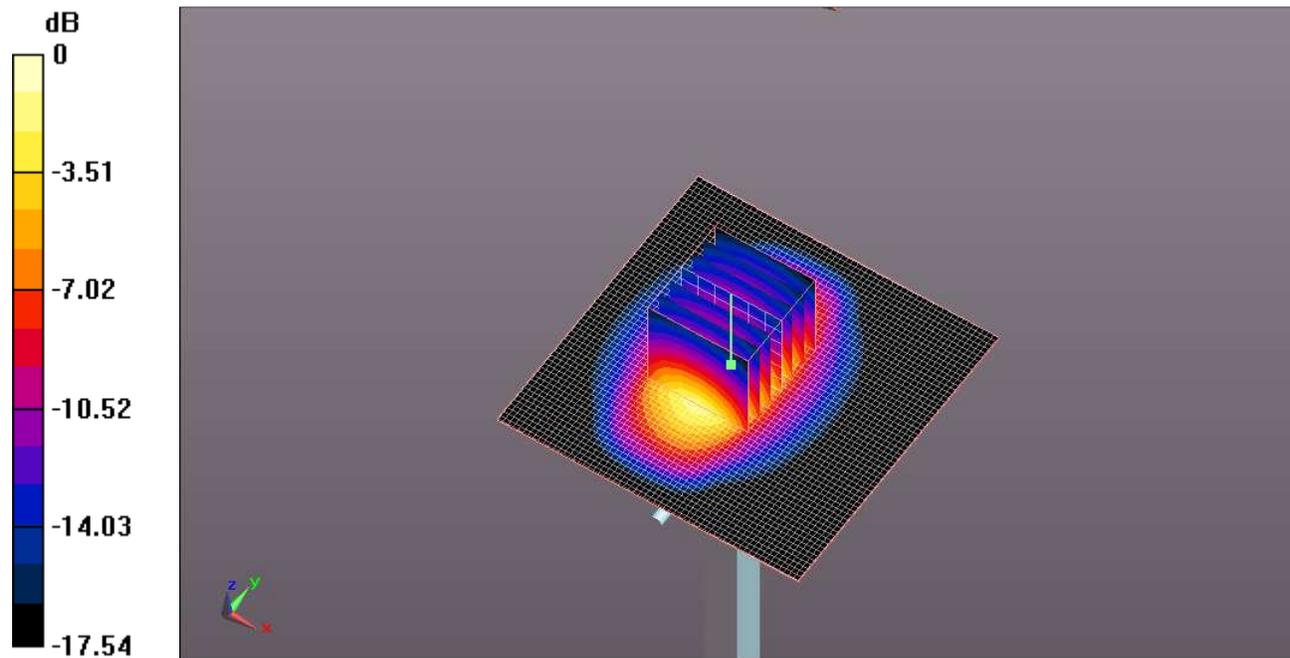


0 dB = 5.390mW/g

Test Laboratory: UL CCS SAR Lab B

20111112 SystemPerformanceCheck-D1900V2 SN 5d140

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Body/Pin=100 mW/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm
Maximum value of SAR (measured) = 3.111 mW/g

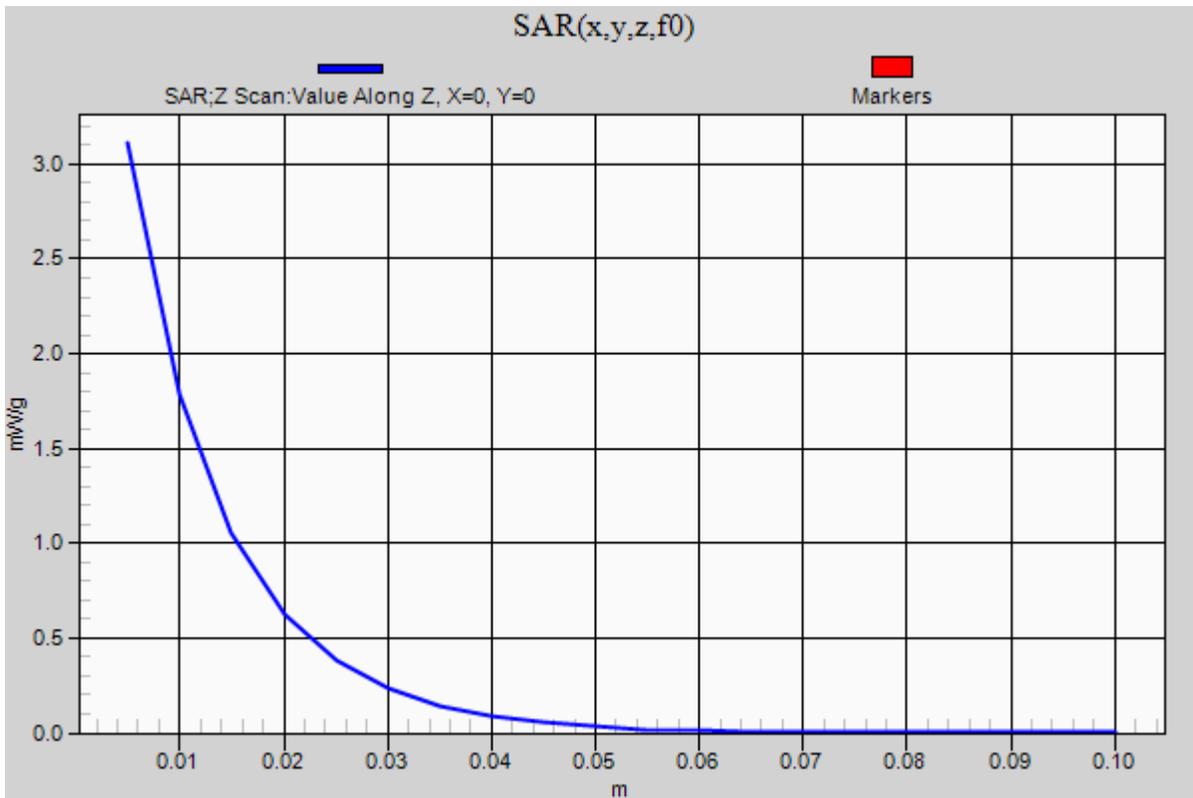

Test Laboratory: UL CCS SAR Lab B

2011-11-13_SystemPerformanceCheck-D2450V2 SN 706

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 2450$ MHz; $\sigma = 1.846$ mho/m; $\epsilon_r = 38.494$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section


Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3773; ConvF(6.56, 6.56, 6.56); Calibrated: 5/3/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1258; Calibrated: 5/2/2011
- Phantom: SAM with CRP v5.0; Type: QD000P40CD; Serial: TP1632
- Measurement SW: DASY52, Version 52.6 (2);SEMCAD X Version 14.4.5 (3634)

Head/Pin=100 mW/Area Scan (61x61x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (interpolated) = 7.702 mW/g

Head/Pin=100 mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 59.398 V/m; Power Drift = -0.03 dB
 Peak SAR (extrapolated) = 11.785 W/kg
SAR(1 g) = 5.47 mW/g; SAR(10 g) = 2.51 mW/g
 Maximum value of SAR (measured) = 7.854 mW/g

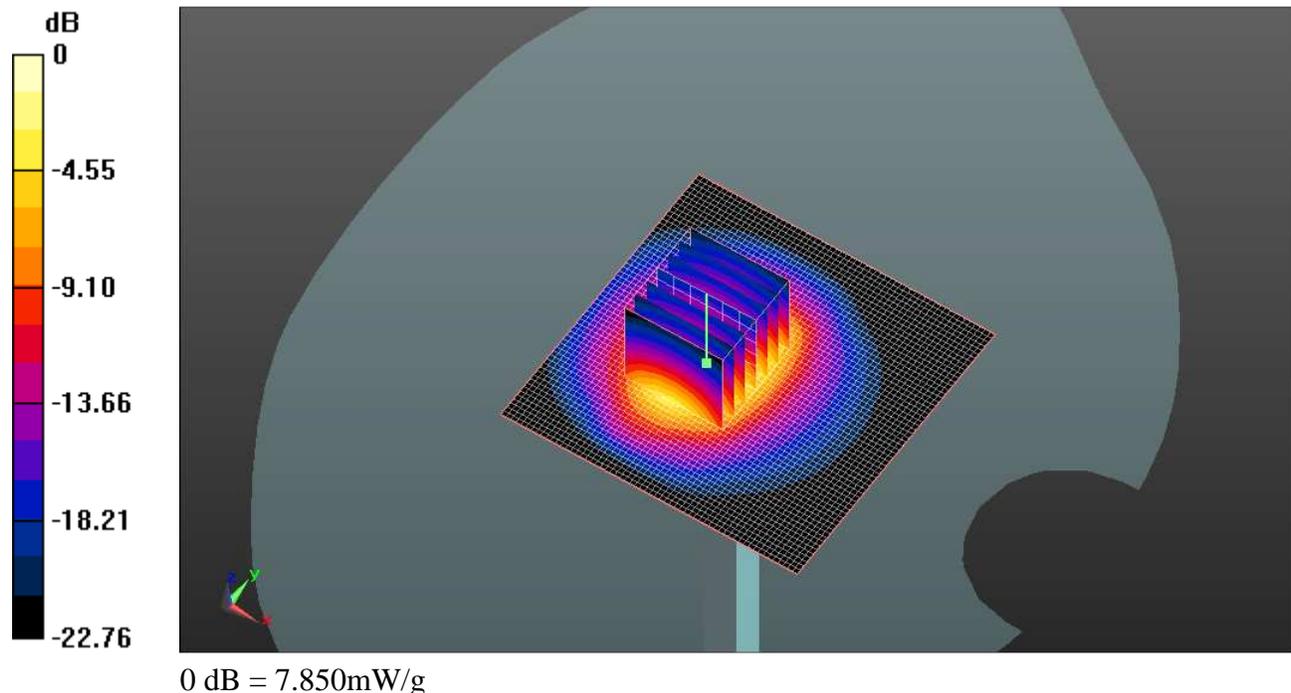


Test Laboratory: UL CCS SAR Lab B

2011-11-13_SystemPerformanceCheck-D2450V2 SN 706

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Head/Pin=100 mW/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm
Maximum value of SAR (measured) = 3.856 mW/g

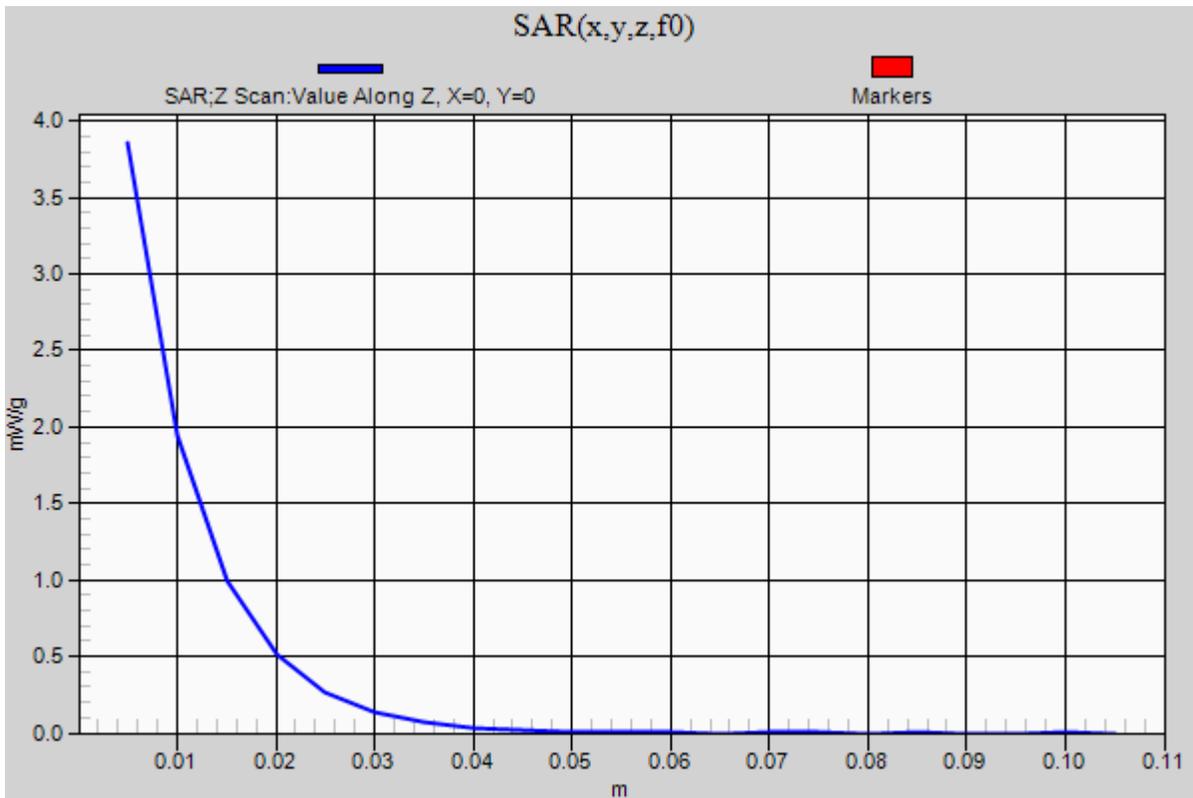

Test Laboratory: UL CCS SAR Lab B

2011-11-13_SystemPerformanceCheck-D2450V2 SN 706

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 2450$ MHz; $\sigma = 1.954$ mho/m; $\epsilon_r = 51.561$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section


Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3773; ConvF(6.87, 6.87, 6.87); Calibrated: 5/3/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1258; Calibrated: 5/2/2011
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1118
- Measurement SW: DASY52, Version 52.6 (2);SEMCAD X Version 14.4.5 (3634)

Body/Pin=100 mW/Area Scan (61x61x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (interpolated) = 7.220 mW/g

Body/Pin=100 mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 61.619 V/m; Power Drift = 0.04 dB
 Peak SAR (extrapolated) = 10.938 W/kg
SAR(1 g) = 5.32 mW/g; SAR(10 g) = 2.48 mW/g
 Maximum value of SAR (measured) = 7.528 mW/g

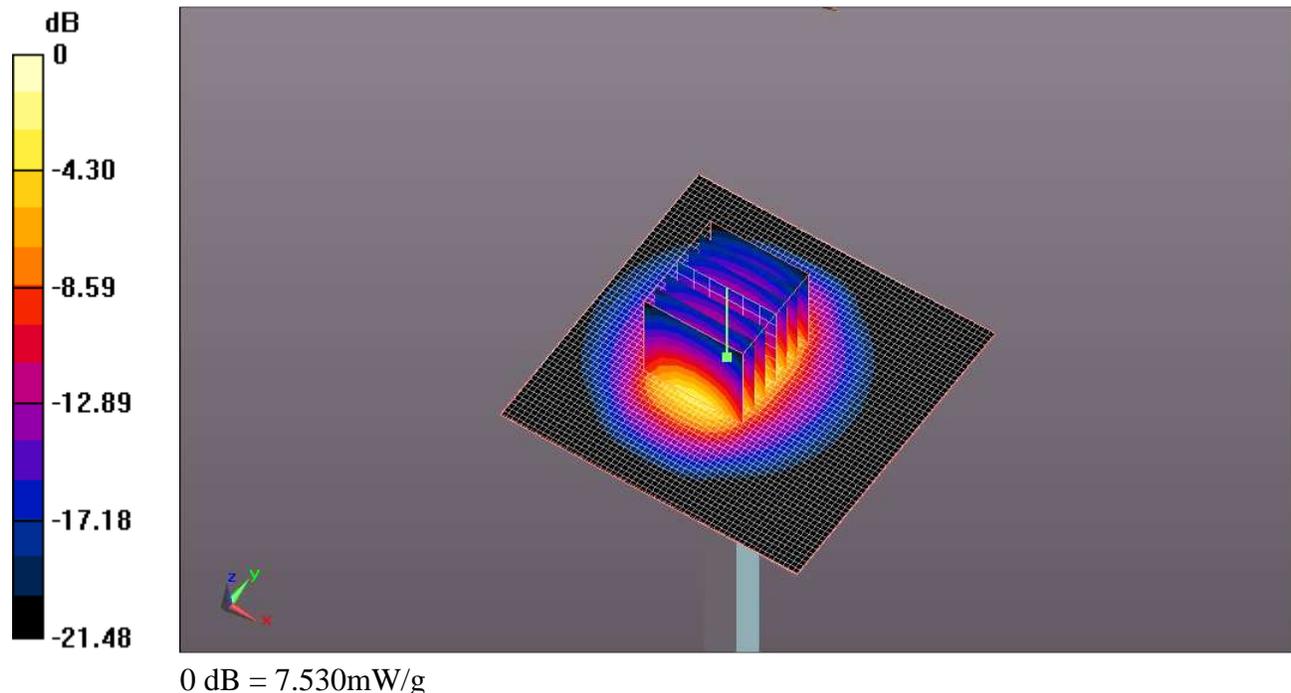


Test Laboratory: UL CCS SAR Lab B

2011-11-13_SystemPerformanceCheck-D2450V2 SN 706

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Body/Pin=100 mW/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm
Maximum value of SAR (measured) = 4.213 mW/g

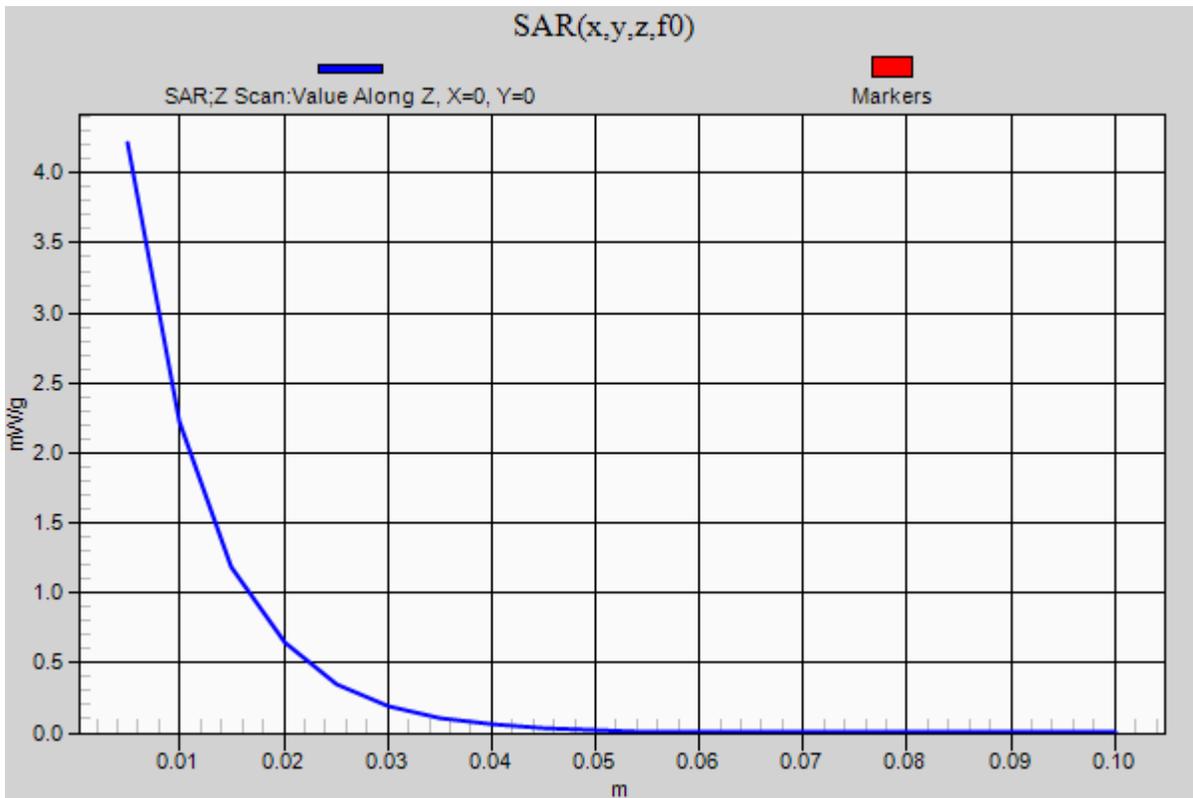

Test Laboratory: UL CCS SAR Lab C

20111114_SystemPerformanceCheck-D1900V2 SN 5d140

Communication System: CW; Frequency: 1800 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1800$ MHz; $\sigma = 1.393$ mho/m; $\epsilon_r = 51.524$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section


Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3772; ConvF(7.15, 7.15, 7.15); Calibrated: 5/3/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1239; Calibrated: 10/18/2011
- Phantom: ELI v4.0 (A); Type: QDOVA001BB; Serial: 1117
- Measurement SW: DASY52, Version 52.6 (2);SEMCAD X Version 14.4.5 (3634)

Body/Pin=100 mW/Area Scan (61x61x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (interpolated) = 5.326 mW/g

Body/Pin=100 mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 61.997 V/m; Power Drift = -0.0041 dB
 Peak SAR (extrapolated) = 7.223 W/kg
SAR(1 g) = 3.95 mW/g; SAR(10 g) = 2.06 mW/g
 Maximum value of SAR (measured) = 5.313 mW/g

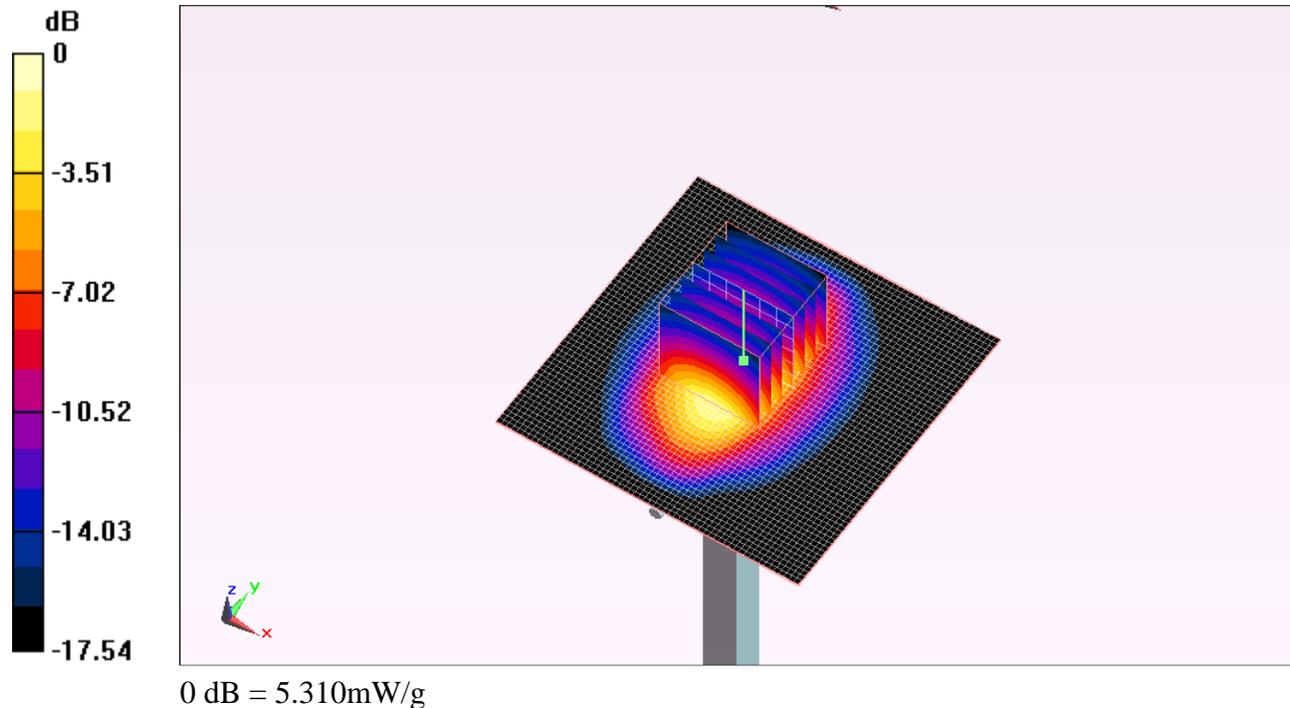

Test Laboratory: UL CCS SAR Lab C

20111114_SystemPerformanceCheck-D1900V2 SN 5d140

Communication System: CW; Frequency: 1800 MHz; Duty Cycle: 1:1

Body/Pin=100 mW/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm
Maximum value of SAR (measured) = 3.550 mW/g

