



HCT CO., LTD.

CERTIFICATION DIVISION
105-1, JANGAM-RI, MAJANG-MYEON, ICHEON-SI, KYOUNGKI-DO, REPUBLIC OF KOREA
TEL: +82 31 645 6300 FAX: +82 31 645 6401

EMI CERTIFICATION REPORT

Applicant:

LG Electronics MobileComm U.S.A., Inc.
1000 Sylvan Avenue, Englewood Cliffs NJ 07632

Date of Issue: July 25, 2012

Test Report No.: HCTE1206FE27-1

Test Site: HCT CO., LTD.

HCT FRN: 0005-8664-21

FCC ID:

ZNFLS970

Rule Part(s) / Standard(s) : FCC PART 15 Subpart B Class B
Equipment Type : Cellular/PCS CDMA/EVDO and PCS LTE Phone with Bluetooth, RFID and WLAN
Model Name : LS970
Additional Model Name : LG-LS970, LGLS970
Port / Connector(s) : USB Port / Headset Port

The device bearing the trade name and model specified above, has been shown to comply with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.4-2003. (See Test Report if any modifications were made for compliance)

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

HCT certifies that no party to application has been subject to a denial of Federal benefits that includes FCC benefits pursuant to Section 5301 of the Anti-Drug Abuse Act of 1988, 21 U.S.C 862

Report prepared by
: Jeong-Hyeon Choi
Test Engineer of EMC Team

Approved by
: Sang-Jun Lee
Manager of EMC Team

DOCUMENT HISTORY

Report NO.	Date	Description
HCTE1206FE27	June 21, 2012	First approval report
HCTE1206FE27-1	July 25, 2012	<ol style="list-style-type: none">1. Added that test was measured by 12 GHz at section 4.2.2. Added the measured table over 1 GHz.3. Added calibration cycle at section 6.

TABLE OF CONTENTS

	PAGE
1. GENERAL INFORMATION	4
1.1 Product Description	4
1.2 Related Submittal(s) / Grant(s).....	4
1.3 Tested System Details.....	5
1.4 Cable Description	6
1.5 Noise Suppression Parts on Cable. (I/O cable)	6
1.6 Test Methodology	7
1.7 Test Facility	7
1.8 Frequency Range of Radiated Measurements	7
2. SYSTEM TEST CONFIGURATION.....	8
2.1 Configuration of Test System	8
3. PRELIMINARY TEST	9
3.1 Conducted Emission Test	9
3.2 Radiated Emission Test	9
4. CONDUCTED AND RADIATED EMISSION TEST SUMMARY	10
4.1 Conducted Emission Test	10
4.2 Radiated Emission Test	15
5. FIELD STRENGTH CALCULATION	17
6. TEST EQUIPMENT.....	18
7. CONCLUSION	19

ATTACHMENT: TEST SETUP PHOTOGRAPHS

1. GENERAL INFORMATION

1.1 Product Description

Equipment Under Test is **Cellular/PCS CDMA/EVDO and PCS LTE Phone with Bluetooth, RFID and WLAN, Model: LS970** manufactured by **LG Electronics MobileComm U.S.A., Inc.** Its basic purpose is used for communications.

Model	LS970
Additional Model Name	LG-LS970, LGLS970
FCC ID	ZNFLS970
E.U.T Type	Cellular/PCS CDMA/EVDO and PCS LTE Phone with Bluetooth, RFID and WLAN
TX Frequency	824.70 MHz to 848.31 MHz (CDMA 835) 1 851.25 MHz to 1 908.75 MHz (CDMA 1 900) 1 850 MHz to 1 915 MHz (LTE B25)
RX Frequency	869.70 MHz to 893.31 MHz (CDMA 835) 1 931.25 MHz to 1 988.75 MHz (CDMA 1 900) 1 930 MHz to 1 955 MHz (LTE B25)

1.2 Related Submittal(s) / Grant(s)

Original submittal only.

1.3 Tested System Details

All equipment descriptions used in the tested system (including inserted cards) are:

Device Type	Manufacturer	Model Name	FCC ID / DoC	Connected To
E.U.T	LG	LS970	ZNFLS970	Notebook PC
Notebook PC	LG	X140-02	DoC	E.U.T Notebook PC adaptor
Notebook PC adaptor	DELTA (JIANG SU)	ADP-40PH AD	-	Notebook PC
Mouse	PRIMAX ELECTRONICS	MOARUO	DoC	Notebook PC
USB cable	-	-	-	E.U.T Notebook PC
SD card	SanDisk	8GB	-	E.U.T
Headset	I-SOUND	EAB62209201	-	E.U.T
Micro SD card	SanDisk	2 GB	-	E.U.T
Net HDD	LG	N1A1DD1	Doc	Notebook PC Net HDD adaptor
Net HDD adaptor	Yang Ming Industrial	DA-60M12	-	Net HDD
RJ45 cable	-	-	-	Net HDD Notebook PC

1.4 Cable Description

Product Name	Port	Power Cord Shielded (Y/N)	I/O Cable Shielded (Y/N)	Length (m)
E.U.T	Micro USB	Y	Y	(P,D)1.2
	Headset jack	-	N	(D)1.2
Notebook PC	RJ45	-	N	(D)1.5
	USB (Mouse)	-	Y	(D)1.8

* The marked "(D)" means the data cable and "(P)" means the power cable.

1.5 Noise Suppression Parts on Cable. (I/O cable)

Product Name	Port	Ferrite Bead (Y/N)	Location	Metal Hood (Y/N)	Location
E.U.T	Micro USB	N	N/A	Y	Both End
	Headset jack	N	N/A	Y	E.U.T End
Notebook PC	RJ45	N	N/A	N	Both End
	USB (Mouse)	-	-	Y	Notebook PC End

1.6 Test Methodology

Both Conducted and Radiated testing was performed according to the procedures in ANSI C63.4/2003. Radiated testing was performed at an antenna to E.U.T distance of 3 m

1.7 Test Facility

The 3 m semi anechoic chamber used to collect the test data is located at the 105-1, Jangam-Ri, Majang-Myeon, Icheon-Si, Kyoungki-Do, Republic of Korea. Those measurement facilities are constructed in conformance with the requirements of ANSI C63.4.

Detailed description of test facilities was submitted to the Commission and accepted dated Mar 02, 2011 (Registration Number: 90661)

1.8 Frequency Range of Radiated Measurements

An unintentional radiator, including a digital device, the spectrum shall be investigated from the lowest radio frequency signal generated or used in the device, without going below the lowest frequency for which a Radiated Emission limit is specified, up to the frequency shown in the following table

Highest frequency generated or used in the device or on which the device operates or tunes (MHz)	Upper frequency of measurement range (MHz)
Below 1.705	30
1.705 to 108	1 000
108 to 500	2 000
500 to 1 000	5 000
Above 1 000	5 th harmonic of the highest frequency or 40 GHz, whichever is lower


2. SYSTEM TEST CONFIGURATION

2.1 Configuration of Test System

Power Line Conducted test : E.U.T was connected to LISN via Notebook PC adaptor and Base Station. Preliminary Power Line Conducted Emission tests were performed by using the procedure in ANSI C63.4/2003 7.2.3 to determine the worst operating conditions.

Radiated Emission test : Preliminary Radiated Emission tests were performed by using the procedure in ANSI C63.4/2003 8.3.1.1 to determine the worst operating condition. Final Radiated Emission tests were performed at 3 m semi-anechoic chamber.

[Configuration of Tested System]

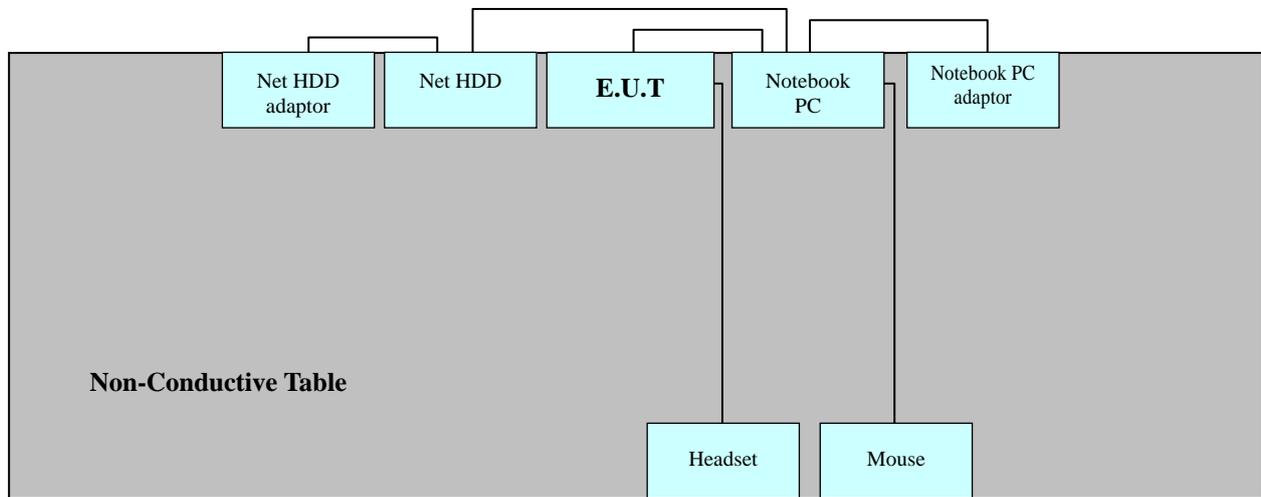

Power Line: 110 VAC

3. PRELIMINARY TEST

3.1 Conducted Emission Test

- It was tested Data Communication mode, after connecting all peripheral devices.

Operation Mode: Data communication mode

3. 2 Radiated Emission Test

- It was tested Data Communication mode, after connecting all peripheral devices.

Operation Mode: Data communication mode

4. CONDUCTED AND RADIATED EMISSION TEST SUMMARY

4.1 Conducted Emission Test

The following table shows the highest levels of conducted emissions on both polarization of hot and neutral line.

Limit Apply to	: FCC PART 15 Subpart B Class B
Detector	: Quasi-Peak, Average (6 dB Bandwidth: 9 kHz)
Operation Mode	: Data communication mode
Temperature	: 24.1 °C
Humidity Level	: 47.8 %
Test Date	: June 09, 2012

Frequency (MHz)	Transd (dB)	Conductor	Quasi-Peak			Average		
			Limit	Measurement Level	Result Level	Limit	Measurement Level	Result Level
			(dBuV)	(dBuV)	(dBuV)	(dBuV)	(dBuV)	(dBuV)
0.150	10.0	H	66	40.1	50.1	56	-	-
0.158	10.0	N	66	39.1	49.1	56	-	-
19.296	11.4	N	60	33.0	44.4	50	-	-
20.820	11.5	N	60	34.4	45.9	50	-	-
20.680	11.6	H	60	33.5	45.1	50	-	-
21.028	11.6	H	60	33.0	44.6	50	-	-

※ **NOTE:** Refer to page 11 to page 14 for details.

1. Transd = Cable Loss Factor + LISN Factor
2. Line H = Hot, Line N = Neutral


HCT

EMC

EUT: LS970
 Manufacturer: LG
 Operating Condition: DATA MODE
 Test Site: SHIELD ROOM
 Operator: JH CHOI
 Test Specification: FCC PART15 CLASS B
 Comment: H

SCAN TABLE: "FCC PART 15 B(H)"

Start Frequency	Stop Frequency	Step Width	FCC PART 15 CLASS B Detector	Meas. Time	IF Bandw.	Transducer
150.0 kHz	500.0 kHz	1.0 kHz	MaxPeak	10.0 ms	9 kHz	None
500.0 kHz	5.0 MHz	4.0 kHz	Average	10.0 ms	9 kHz	None
5.0 MHz	30.0 MHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None
			Average			

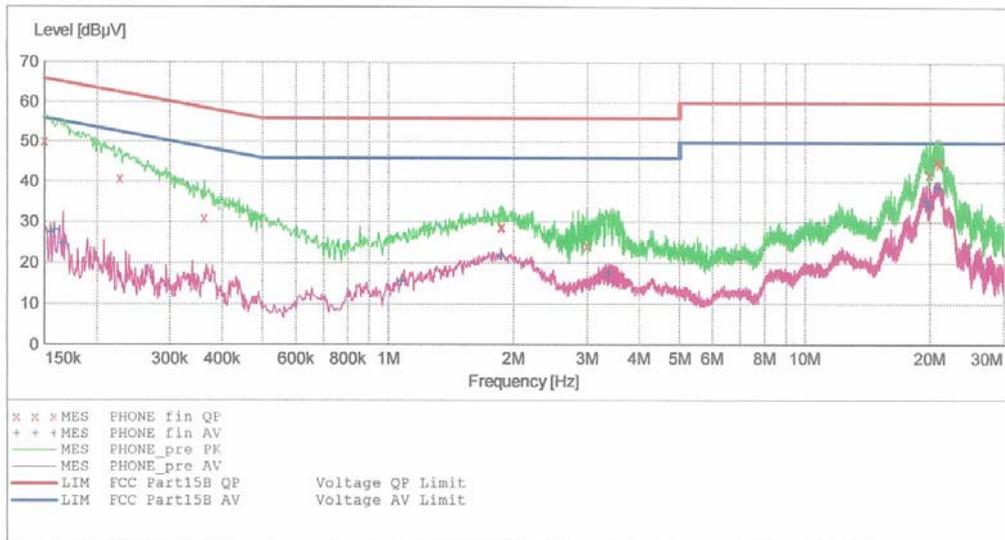

MEASUREMENT RESULT: "PHONE_fin QP"

6/9/2012 10:21PM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Line	PE
0.150010	50.10	10.0	66	15.9	---	---
0.227010	40.90	10.1	63	21.7	---	---
0.362010	31.10	10.1	59	27.6	---	---
1.860000	28.80	10.2	56	27.2	---	---
1.872000	28.90	10.2	56	27.1	---	---
3.004000	24.30	10.3	56	31.7	---	---
19.884000	42.10	11.5	60	17.9	---	---
20.680000	45.10	11.6	60	14.9	---	---
21.028000	44.60	11.6	60	15.4	---	---

MEASUREMENT RESULT: "PHONE_fin AV"

6/9/2012 10:21PM

Frequency MHz	Level dB μ V	Transd dB	Limit dB μ V	Margin dB	Line	PE
0.155010	27.40	10.0	56	28.3	---	---
0.158010	28.00	10.0	56	27.6	---	---
0.166010	24.60	10.1	55	30.5	---	---
1.076000	15.50	10.2	46	30.5	---	---
1.868000	21.60	10.2	46	24.4	---	---
3.380000	17.60	10.3	46	28.4	---	---
19.588000	35.30	11.5	50	14.7	---	---
19.860000	33.90	11.5	50	16.1	---	---
20.860000	38.60	11.6	50	11.4	---	---


HCT

EMC

EUT: LS970
 Manufacturer: LG
 Operating Condition: DATA MODE
 Test Site: SHIELD ROOM
 Operator: JH CHOI
 Test Specification: FCC PART15 CLASS B
 Comment: N

SCAN TABLE: "FCC PART 15 B(N)"

Start Frequency	Stop Frequency	Step Width	Detector	Meas. Time	IF Bandw.	Transducer
150.0 kHz	500.0 kHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None
500.0 kHz	5.0 MHz	4.0 kHz	Average	10.0 ms	9 kHz	None
5.0 MHz	30.0 MHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None
			Average			

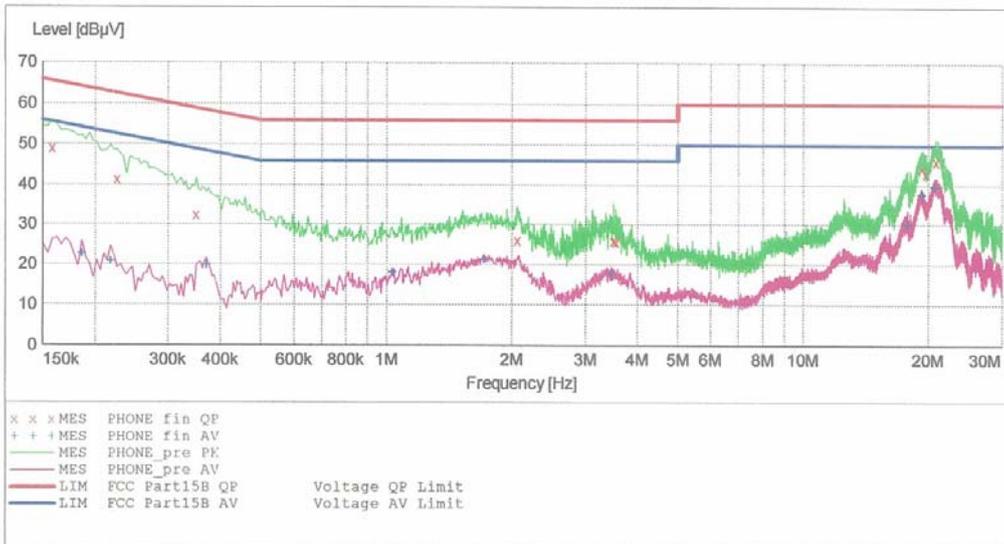

MEASUREMENT RESULT: "PHONE_fin QP"

6/9/2012 10:17PM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Line	PE
0.158010	49.10	10.0	66	16.5	---	---
0.226010	41.30	10.1	63	21.3	---	---
0.350010	32.50	10.1	59	26.5	---	---
2.060000	26.10	10.2	56	29.9	---	---
3.508000	25.90	10.3	56	30.1	---	---
3.552000	25.70	10.3	56	30.3	---	---
19.296000	44.40	11.4	60	15.6	---	---
19.712000	42.90	11.4	60	17.1	---	---
20.820000	45.90	11.5	60	14.1	---	---

MEASUREMENT RESULT: "PHONE_fin AV"

6/9/2012 10:17PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Line	PE
0.186010	22.60	10.1	54	31.6	---	---
0.218010	20.70	10.1	53	32.2	---	---
0.370010	19.90	10.1	49	28.6	---	---
1.032000	18.10	10.1	46	27.9	---	---
1.716000	21.30	10.2	46	24.7	---	---
3.464000	17.90	10.3	46	28.1	---	---
17.812000	29.90	11.3	50	20.1	---	---
19.232000	37.50	11.4	50	12.5	---	---
20.720000	39.60	11.4	50	10.4	---	---

4.2 Radiated Emission Test

The following table shows the highest levels of Radiated Emissions on both polarization of horizontal and vertical.

-For measurement below 1 GHz

Limit Apply to : FCC PART 15 Subpart B Class B

Detector : Quasi-Peak (6 dB Bandwidth: 120 kHz)

Operation Mode : Data communication mode

Test Date : June 09, 2012

Temperature : 25.1 °C

Humidity Level : 48.6 %

Frequency (MHz)	Reading (dBUV)	Polarity (H/V)	Antenna Height (m)	Correction Factor		Limit (dBUV/m)	Level (dBUV/m)	Margin (dB)
				Antenna (dB/m)	Cable (dB)			
37.700	15.82	V	1.0	11.93	3.45	40.0	31.2	8.8
54.800	16.24	V	1.0	12.16	3.60	40.0	32.0	8.0
80.600	12.37	H	2.7	7.93	3.80	40.0	24.1	15.9
376.000	14.71	H	1.0	15.08	4.90	46.0	34.7	11.3
500.400	11.50	H	1.2	17.70	5.30	46.0	34.5	11.5
756.500	9.48	H	1.0	21.82	5.70	46.0	37.0	9.0

-For measurement above 1 GHz

Limit Apply to : FCC PART 15 Subpart B Class B

Detector : Peak mode: Peak (RBW: 1 MHz)
 : Average mode: Peak (RBW: 1 MHz)

Frequency Range : 1 GHz to 12 GHz

Operation Mode : Data communication mode

Test Date : June 09, 2012

Temperature : 25.1 °C

Humidity Level : 48.6 %

Frequency (GHz)	Peak			ANT. POL	Average		
	Total	Limit	Margin		Total	Limit	Margin
	(dB $\mu\text{V}/\text{m}$)	(dB $\mu\text{V}/\text{m}$)	(dB)		(dB $\mu\text{V}/\text{m}$)	(dB $\mu\text{V}/\text{m}$)	(dB)
1.6710	48.00	74	26.0	V	33.90	54	20.1
1.9910	47.50	74	26.5	V	29.70	54	24.3
3.9150	49.10	74	24.9	H	33.10	54	20.9

※ **NOTE:** Measurement above 1 GHz was performed from 1 GHz to the 5th harmonic of highest fundamental frequency.

5. FIELD STRENGTH CALCULATION

The field strength is calculated by adding the antenna factor and cable factor.
The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CF$$

Where FS = Field Strength

RA = Receiver Amplitude

AF = Antenna Factor

CF = Cable Attenuation Factor

Assume a receiver reading of 21.5 dB μ V is obtained. The antenna factor of 7.4 dB/m and a cable factor of 1.1 dB are added. The 30 dB μ V/m value is mathematically converted to its corresponding level in μ V/m.

$$FS = 21.5 + 7.4 + 1.1 = 30 \text{ dB}\mu\text{V/m}$$

[Radiated Emission Limits]

Frequency of Emission (MHz)	Field Strength	
	μ V/m	dB μ V/m
30 to 88	100	40.0
88 to 216	150	43.5
216 to 960	200	46.0
Above 960	500	54.0

6. TEST EQUIPMENT

<u>Type</u>	<u>Manufacturer</u>	<u>Model Name</u>	<u>Serial Number</u>	<u>Calibration Cycle</u>	<u>Next CAL Date</u>
<u>Conducted Emission</u>					
<input checked="" type="checkbox"/> EMI Test Receiver	Rohde & Schwarz	ESCI	100584	1 year	2013.05.02
<input checked="" type="checkbox"/> LISN	Rohde & Schwarz	ESH3-Z5	100282	1 year	2013.02.03
<input checked="" type="checkbox"/> LISN	EMCO	3816/2SH	9706-1070	1 year	2013.05.02
<input type="checkbox"/> LISN	Rohde & Schwarz	ENV216	100073	1 year	2013.02.09
<input checked="" type="checkbox"/> Attenuator	Rohde & Schwarz	ESH3-Z2	357.8810.352	1 year	2012.08.01
<u>Radiated Emission</u>					
<input checked="" type="checkbox"/> EMI Test Receiver	Rohde & Schwarz	ESI40	831564103	1 year	2013.05.03
<input type="checkbox"/> EMI Test Receiver	Rohde & Schwarz	ESU26	100241	1 year	2012.08.02
<input type="checkbox"/> Trilog Antenna	Schwarzbeck	VULB9160	3125	2 year	2013.05.03
<input checked="" type="checkbox"/> Trilog Antenna	Schwarzbeck	VULB9160	3301	2 year	2012.09.13
<input type="checkbox"/> Antenna master	INNCO Systems	MA4000-EP	MA4000/283	N/A	-
<input type="checkbox"/> Turn Table	INNCO Systems	DT3000-3T	DT3000/69	N/A	-
<input checked="" type="checkbox"/> Antenna master	HD GmbH	MA240	240/520	N/A	-
<input checked="" type="checkbox"/> Turn Table	HD GmbH	2090	9702/1224	N/A	-
<input checked="" type="checkbox"/> Power Amplifier	Rohde & Schwarz	SCU-18	10094	1 year	2012.09.19
<input checked="" type="checkbox"/> Horn Antenna	Schwarzbeck	BBHA 9120D	937	2 year	2013.10.17

7. CONCLUSION

The data collected shows that the **Cellular/PCS CDMA/EVDO and PCS LTE Phone with Bluetooth, RFID and WLAN, Model: LS970** complies with §15.107 and §15.109 of the FCC rules.