



HCT CO., LTD.

CERTIFICATION DIVISION
105-1, JANGAM-RI, MAJANG-MYEON, ICHEON-SI, KYOUNGKI-DO, REPUBLIC OF KOREA
TEL: +82 31 645 6300 FAX: +82 31 645 6401

EMI CERTIFICATION REPORT

Applicant:

LG Electronics MobileComm U.S.A., Inc.
1000 Sylvan Avenue, Englewood Cliffs NJ 07632

Date of Issue: August 24, 2012

Test Report No.: HCTE1208FE26

Test Site: HCT CO., LTD.

HCT FRN: 0005-8664-21

FCC ID:

ZNFLS970

Rule Part(s) / Standard(s) : FCC PART 15 Subpart B Class B
Equipment Type : Cellular/PCS CDMA/EVDO and PCS LTE Phone with Bluetooth,
RFID and WLAN
Additional Model Name : LG-LS970, LGLS970
Port / Connector(s) : USB Port / Headset Port

The device bearing the trade name and model specified above, has been shown to comply with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.4-2003. (See Test Report if any modifications were made for compliance)

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

HCT certifies that no party to application has been subject to a denial of Federal benefits that includes FCC benefits pursuant to Section 5301 of the Anti-Drug Abuse Act of 1988, 21 U.S.C 862

Report prepared by
: Jeong Hyeon Choi
Test Engineer of EMC Team

Approved by
: Sang Jun Lee
Manager of EMC Team

This report only responds to the tested sample and may not be reproduced, except in full, without written approval of the HCT Co., Ltd.

DOCUMENT HISTORY

The revision history for this document is shown in table.

Version	Date	Description
HCTE1208FE26	August 24, 2012	Initial Release

TABLE OF CONTENTS

	PAGE
1. GENERAL INFORMATION	4
1.1 Product Description.....	4
1.2 Related Submittal(s) / Grant(s).....	4
1.3 Tested System Details.....	5
1.4 Cable Description.....	6
1.5 Noise Suppression Parts on Cable. (I/O cable)	6
1.6 Test Methodology	7
1.7 Test Facility	7
1.8 Frequency Range of Radiated Measurements	7
2. SYSTEM TEST CONFIGURATION.....	8
2.1 Configuration of Test System	8
3. PRELIMINARY TEST	9
3.1 Conducted Emission Test	9
3. 2 Radiated Emission Test	9
4. CONDUCTED AND RADIATED EMISSION TEST SUMMARY	10
4.1 Conducted Emission Test	10
4.2 Radiated Emission Test	11
5. FIELD STRENGTH CALCULATION	17
6. TEST EQUIPMENT	18
7. CONCLUSION	19

ATTACHMENT: TEST SETUP PHOTOGRAPHS

1. GENERAL INFORMATION

1.1 Product Description

Equipment Under Test is **Cellular/PCS CDMA/EVDO and PCS LTE Phone with Bluetooth, RFID and WLAN, Model: LS970** manufactured by **LG Electronics MobileComm U.S.A., Inc.** Its basic purpose is used for communications.

Model	LS970
FCC ID	ZNFLS970
Additional Model Name	LG-LS970, LGLS970
E.U.T Type	Cellular/PCS CDMA/EVDO and PCS LTE Phone with Bluetooth, RFID and WLAN
TX Frequency	824.70 MHz to 848.31 MHz (CDMA 835) 1 851.25 MHz to 1 908.75 MHz (CDMA 1 900) 1 850 MHz to 1 915 MHz (LTE B25)
RX Frequency	869.70 MHz to 893.31 MHz (CDMA 835) 1 931.25 MHz to 1 988.75 MHz (CDMA 1 900) 1 930 MHz to 1 955 MHz (LTE B25)

1.2 Related Submittal(s) / Grant(s)

Original submittal only.

1.3 Tested System Details

All equipment descriptions used in the tested system (including inserted cards) are:

Device Type	Manufacturer	Model Name	FCC ID / DoC	Connected To
E.U.T	LG	LS970	ZNFLS970	Notebook PC
Notebook PC	H.P	ProBook 6560b	DoC	E.U.T Notebook PC adaptor
Notebook PC adaptor	CHICONY POWER TECHNOLOGY	Series PPP012H-S	-	Notebook PC
USB cable	BD	EAD61965801	-	E.U.T Notebook PC
Headset	CRESYN	EAB62652801	-	E.U.T
Mouse	Radio shack	Series 2-button mouse	Doc	Notebook PC
Net hard	LG	N1A1DD1	Doc	Notebook PC Net hard adaptor
Net hard adaptor	Yang Ming Industrial	DA-60M12	-	Net hard
RJ45 cable	-	-	-	Net hard Notebook PC

1.4 Cable Description

Product Name	Port	Power Cord Shielded (Y/N)	I/O Cable Shielded (Y/N)	Length (m)
E.U.T	Micro USB	-	Y	(D)1.2
	Headset jack	-	N	(D)1.2
Notebook PC	Serial (Mouse)	-	-	(D)1.8
	RJ 45	-	N	(D)1.5

* The marked "(D)" means the data cable and "(P)" means the power cable.

1.5 Noise Suppression Parts on Cable. (I/O cable)

Product Name	Port	Ferrite Bead (Y/N)	Location	Metal Hood (Y/N)	Location
E.U.T	Micro USB	N	N/A	Y	Both End
	Headset jack	N	N/A	Y	E.U.T End
Notebook PC	Serial (Mouse)	N	N/A	Y	Notebook PC End
	RJ 45	N	N/A	N	Both End

1.6 Test Methodology

Both Conducted and Radiated testing was performed according to the procedures in ANSI C63.4/2003. Radiated testing was performed at an antenna to E.U.T distance of 3 m

1.7 Test Facility

The 3 m semi anechoic chamber used to collect the test data is located at the 105-1, Jangam-Ri, Majang-Myeon, Icheon-Si, Kyungki-Do, Republic of Korea. Those measurement facilities are constructed in conformance with the requirements of ANSI C63.4.

Detailed description of test facilities was submitted to the Commission and accepted dated Mar 02, 2011 (Registration Number: 90661)

1.8 Frequency Range of Radiated Measurements

An unintentional radiator, including a digital device, the spectrum shall be investigated from the lowest radio frequency signal generated or used in the device, without going below the lowest frequency for which a Radiated Emission limit is specified, up to the frequency shown in the following table

Highest frequency generated or used in the device or on which the device operates or tunes (MHz)	Upper frequency of measurement range (MHz)
Below 1.705	30
1.705 to 108	1 000
108 to 500	2 000
500 to 1 000	5 000
Above 1 000	5 th harmonic of the highest frequency or 40 GHz, whichever is lower


2. SYSTEM TEST CONFIGURATION

2.1 Configuration of Test System

Power Line Conducted test : E.U.T was connected to LISN via Notebook PC adaptor and Base Station. Preliminary Power Line Conducted Emission tests were performed by using the procedure in ANSI C63.4/2003 7.2.3 to determine the worst operating conditions.

Radiated Emission test : Preliminary Radiated Emission tests were performed by using the procedure in ANSI C63.4/2003 8.3.1.1 to determine the worst operating condition. Final Radiated Emission tests were performed at 3 m semi-anechoic chamber.

[Configuration of Tested System]

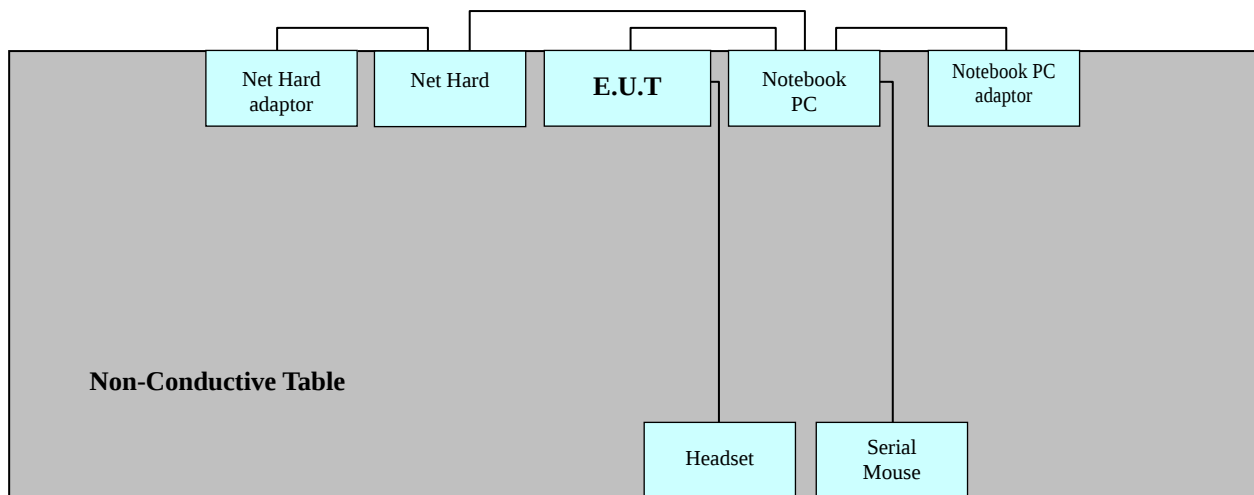

Power Line: 120 VAC

3. PRELIMINARY TEST

3.1 Conducted Emission Test

- It was tested Data Communication mode, after connecting all peripheral devices.

Operation Mode: ☒ Data communication mode

3. 2 Radiated Emission Test

- It was tested Data Communication mode, after connecting all peripheral devices.

Operation Mode: ☒ Data communication mode

4. CONDUCTED AND RADIATED EMISSION TEST SUMMARY

4.1 Conducted Emission Test

The following table shows the highest levels of conducted emissions on both polarization of hot and neutral line.

Limit Apply to	: FCC PART 15 Subpart B Class B
Detector	: Quasi-Peak, Average (6 dB Bandwidth: 9 kHz)
Operation Mode	: Data communication mode
Temperature	: 26.5 °C
Humidity Level	: 53.4 %
Test Date	: August 23, 2012

Frequency (MHz)	Transd (dB)	Conductor	Quasi-Peak			Average		
			Limit	Measurement Level	Result Level	Limit	Measurement Level	Result Level
			(dBuV)	(dBuV)	(dBuV)	(dBuV)	(dBuV)	(dBuV)
0.660	9.8	H	56	-	-	46	13.90	23.70
1.868	10.1	N	56	21.7	31.8	46	-	-
1.876	10.1	N	56	-	-	46	16.60	26.70
1.808	9.9	H	56	23.9	33.8	46	18.60	28.50
2.336	10.0	H	56	-	-	46	15.80	25.80
2.636	10.2	N	56	-	-	46	14.00	24.20

※ **NOTE:** Refer to page 11 to page 14 for details.

1. Line H = Hot, Line N = Neutral
2. Transd = LISN factor + Cable Loss factor


HCT

EMC

EUT: LS970
Manufacturer: LG
Operating Condition: DATA MODE
Test Site: SHIELD ROOM
Operator: JH CHOI
Test Specification: FCC PART 15 CLASS B
Comment: N

SCAN TABLE: "FCC PART 15 B(N)"

Short Description:			FCC PART 15 CLASS B			
Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
Frequency	Frequency	Width				
150.0 kHz	500.0 kHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None
			Average			
500.0 kHz	5.0 MHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None
			Average			
5.0 MHz	30.0 MHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None
			Average			

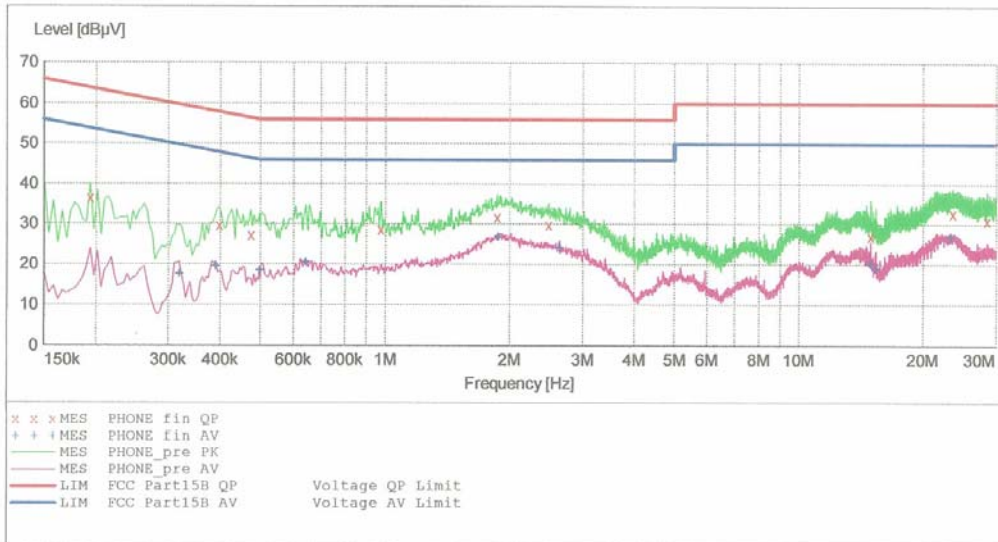

MEASUREMENT RESULT: "PHONE_fin QP"

8/23/2012 11:52AM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Line	PE
0.194010	36.50	9.9	64	27.4	---	---
0.398010	29.70	10.0	58	28.2	---	---
0.474010	27.30	10.0	56	29.1	---	---
0.980000	28.70	10.0	56	27.3	---	---
1.868000	31.80	10.1	56	24.2	---	---
2.484000	29.80	10.2	56	26.2	---	---
14.948000	27.00	11.2	60	33.0	---	---
23.552000	32.80	12.3	60	27.2	---	---
28.580000	30.90	12.6	60	29.1	---	---

MEASUREMENT RESULT: "PHONE_fin AV"

8/23/2012 11:52AM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Line	PE
0.318010	17.50	9.9	50	32.3	---	---
0.390010	19.50	10.0	48	28.6	---	---
0.498010	18.40	10.0	46	27.7	---	---
0.644000	20.40	10.0	46	25.6	---	---
1.876000	26.70	10.1	46	19.3	---	---
2.636000	24.20	10.2	46	21.8	---	---
14.948000	20.20	11.2	50	29.8	---	---
15.344000	18.90	11.3	50	31.1	---	---
23.320000	26.70	12.3	50	23.3	---	---


HCT

EMC

EUT: LS970
Manufacturer: LG
Operating Condition: DATA MODE
Test Site: SHIELD ROOM
Operator: JH CHOI
Test Specification: FCC PART 15 B
Comment: H

SCAN TABLE: "FCC PART 15 B(H)"

Short Description:				FCC PART 15 CLASS B			Transducer
Start	Stop	Step	Detector	Meas. Time	IF Bandw.		
Frequency	Frequency	Width					
150.0 kHz	500.0 kHz	1.0 kHz	MaxPeak	10.0 ms	9 kHz	None	
			Average				
500.0 kHz	5.0 MHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None	
			Average				
5.0 MHz	30.0 MHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None	
			Average				

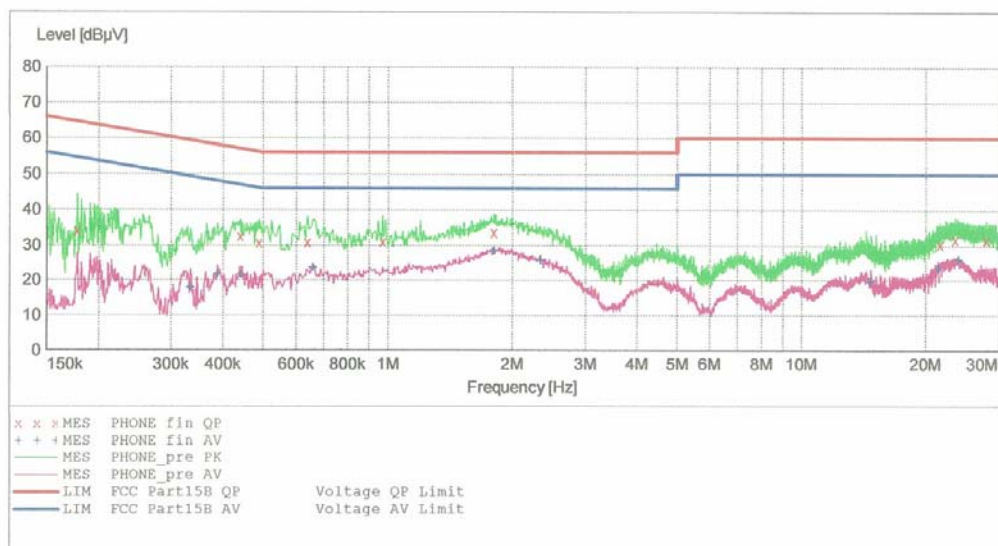

MEASUREMENT RESULT: "PHONE_fin QP"

8/23/2012 11:28AM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Line	PE
0.178010	34.20	9.7	65	30.4	---	---
0.440010	32.80	9.8	57	24.3	---	---
0.489010	30.90	9.8	56	25.3	---	---
0.640000	31.00	9.8	56	25.0	---	---
0.972000	31.20	9.8	56	24.8	---	---
1.808000	33.80	9.9	56	22.2	---	---
21.648000	30.40	11.8	60	29.6	---	---
23.516000	31.90	11.9	60	28.1	---	---
27.948000	31.70	12.1	60	28.3	---	---

MEASUREMENT RESULT: "PHONE_fin AV"

8/23/2012 11:28AM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Line	PE
0.334010	17.80	-9.7	49	31.5	---	---
0.388010	21.80	9.8	48	26.3	---	---
0.442010	21.70	9.8	47	25.3	---	---
0.660000	23.70	9.8	46	22.3	---	---
1.808000	28.50	9.9	46	17.5	---	---
2.336000	25.80	10.0	46	20.2	---	---
14.732000	19.80	10.9	50	30.2	---	---
21.376000	23.60	11.8	50	26.4	---	---
23.940000	26.10	11.9	50	23.9	---	---

4.2 Radiated Emission Test

The following table shows the highest levels of Radiated Emissions on both polarization of horizontal and vertical.

-For measurement below 1 GHz

Limit Apply to : FCC PART 15 Subpart B Class B

Detector : Quasi-Peak (6 dB Bandwidth: 120 kHz)

Operation Mode : Data communication mode

Temperature : 24.9 °C

Humidity Level : 55.4 %

Test Date : August 23, 2012

Frequency (MHz)	Reading (dBuV)	Polarity (H/V)	Antenna Height (m)	Correction Factor		Limit (dBuV/m)	Level (dBuV/m)	Margin (dB)
				Antenna (dB/m)	Cable (dB)			
49.400	13.72	V	1.2	12.40	3.59	40.0	29.7	10.3
69.000	13.61	V	1.0	10.60	3.69	40.0	27.9	12.1
80.900	14.38	H	4.0	7.92	3.80	40.0	26.1	13.9
119.400	16.62	H	1.5	11.78	3.99	43.5	32.4	11.1
133.000	17.23	V	1.0	12.47	4.00	43.5	33.7	9.8
249.300	14.36	H	1.2	11.74	4.50	46.0	30.6	15.4

-For measurement above 1 GHz

Limit Apply to : FCC PART 15 Subpart B Class B

Detector : Peak mode: Peak (RBW: 1 MHz)
: Average mode: Peak (RBW: 1 MHz)

Temperature : 25.6 °C

Humidity Level : 45.2 %

Test Date : August 22, 2012

Frequency (GHz)	Peak			POL	Average		
	Total (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)		Total (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
1.9900	50.80	74	23.2	V	27.80	54	26.2
2.4500	51.00	74	23.0	V	28.10	54	25.9
2.3900	50.20	74	23.8	H	28.40	54	25.6
3.0000	51.30	74	22.7	H	29.10	54	24.9

※ NOTE:

1. Measurement above 1 GHz was performed from 1 GHz to the 5th harmonic of highest fundamental frequency. Test was measured by 12 GHz.

5. FIELD STRENGTH CALCULATION

The field strength is calculated by adding the antenna factor and cable factor.
The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CF$$

Where FS = Field Strength

RA = Receiver Amplitude

AF = Antenna Factor

CF = Cable Attenuation Factor

Assume a receiver reading of 21.5 dB μ V is obtained. The antenna factor of 7.4 dB/m and a cable factor of 1.1 dB are added. The 30 dB μ V/m value is mathematically converted to its corresponding level in μ V/m.

$$FS = 21.5 + 7.4 + 1.1 = 30 \text{ dB}\mu\text{V/m}$$

[Radiated Emission Limits]

Frequency of Emission (MHz)	Field Strength	
	μ V/m	dB μ V/m
30 to 88	100	40.0
88 to 216	150	43.5
216 to 960	200	46.0
Above 960	500	54.0

6. TEST EQUIPMENT

<u>Type</u>	<u>Manufacturer</u>	<u>Model Name</u>	<u>Serial Number</u>	<u>Calibration Cycle</u>	<u>Next CAL Date</u>
<u>Conducted Emission</u>					
☒ EMI Test Receiver	Rohde & Schwarz	ESCI	100584	1 year	2013.05.02
☐ LISN	Rohde & Schwarz	ESH3-Z5	100282	1 year	2013.07.04
☒ LISN	Rohde & Schwarz	ENV216	100073	1 year	2013.02.09
☒ LISN	EMCO	3816/2SH	9706-1070	1 year	2013.05.02
☐ Attenuator	Rohde & Schwarz	ESH3-Z2	357.8810.352	1 year	2013.07.31
<u>Radiated Emission</u>					
☒ EMI Test Receiver	Rohde & Schwarz	ESI40	831564103	1 year	2013.05.03
☐ EMI Test Receiver	Rohde & Schwarz	ESU26	100241	1 year	2013.07.30
☒ Trilog Antenna	Schwarzbeck	VULB9160	3301	2 year	2012.09.13
☐ Antenna master	INNCO Systems	MA4000-EP	MA4000/283	N/A	-
☒ Antenna master	HD GmbH	MA240	240/520	N/A	-
☒ Turn Table	HD GmbH	2090	9702/1224	N/A	-
☒ Power Amplifier	Rohde & Schwarz	SCU-18	10094	1 year	2012.09.19
☐ Horn Antenna	Schwarzbeck	BBHA 9120D	937	2 year	2013.10.17
☒ Horn Antenna	Schwarzbeck	BBHA 9120D	296	2 year	2014.02.20

7. CONCLUSION

The data collected shows that the **E.U.T Type: Cellular/PCS CDMA/EVDO and PCS LTE Phone with Bluetooth, RFID and WLAN, Model: LS970, FCC ID: ZNFLS970** complies with §15.107 and §15.109 of the FCC rules.