



FCC CFR47 PART 15 SUBPART C

CERTIFICATION TEST REPORT

FOR

GSM/CDMA/WCDMA/LTE PHONE + BLUETOOTH, with DTS/UNII a/b/g/n/ac & NFC

MODEL NUMBER: LG-LS991, LS991, LGLS991

FCC ID: ZNFLS991

REPORT NUMBER: 15I20286-E6

ISSUE DATE: APRIL 20, 2015

Prepared for

**LG ELECTRONICS MOBILECOMM U.S.A., INC
1000 SYLVAN AVENUE
ENGLEWOOD CLIFFS,
NEW JERSEY, 07632, U.S.A**

Prepared by

**UL VERIFICATION SERVICES INC.
47173 BENICIA STREET
FREMONT, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888**



NVLAP LAB CODE 200065-0

Revision History

<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
--	04/20/15	Initial Issue	D. Corona

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	4
2. TEST METHODOLOGY	5
3. FACILITIES AND ACCREDITATION	5
4. CALIBRATION AND UNCERTAINTY	5
4.1. <i>MEASURING INSTRUMENT CALIBRATION</i>	<i>5</i>
4.2. <i>SAMPLE CALCULATION</i>	<i>5</i>
5. EQUIPMENT UNDER TEST	6
5.1. <i>DESCRIPTION OF EUT</i>	<i>6</i>
5.2. <i>MAXIMUM OUTPUT POWER.....</i>	<i>6</i>
5.3. <i>WORST-CASE CONFIGURATION AND MODE.....</i>	<i>6</i>
5.4. <i>MODIFICATIONS</i>	<i>6</i>
5.5. <i>DESCRIPTION OF TEST SETUP.....</i>	<i>7</i>
6. TEST AND MEASUREMENT EQUIPMENT	10
7. OCCUPIED BANDWIDTH	11
8. RADIATED EMISSION TEST RESULTS.....	12
8.1. <i>LIMITS AND PROCEDURE</i>	<i>12</i>
8.1.1. <i>FUNDAMENTAL AND SPURIOUS EMISSIONS (0.15 – 30 MHz)</i>	<i>14</i>
8.1.2. <i>TX SPURIOUS EMISSION 30 TO 1000 MHz (Normal Battery Cover)</i>	<i>15</i>
8.1.3. <i>FUNDAMENTAL AND SPURIOUS EMISSIONS (0.15 – 30 MHz) (Smart Cover) ..</i>	<i>17</i>
8.1.4. <i>TX SPURIOUS EMISSION 30 TO 1000 MHz (Smart Cover)</i>	<i>18</i>
9. AC MAINS LINE CONDUCTED EMISSIONS.....	20
10. FREQUENCY STABILITY.....	23
11. SETUP PHOTOS	24

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: LG ELECTRONICS MOBILECOMM U.S.A., INC
EUT DESCRIPTION: CDMA/WCDMA/LTE PHONE + BLUETOOTH, with DTS/UNII a/b/g/n/ac & NFC
MODEL: LG-LS991, LS991, LGLS991
SERIAL NUMBER: 1TLT7 (Radiated)
DATE TESTED: APRIL 7-8, 2015

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C	Pass

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For
UL Verification Services Inc. By:



DAN CORONIA
CONSUMER TECHNOLOGY DIVISION
WISE PROJECT LEAD
UL VERIFICATION SERVICES INC

Tested By:



GLENN ESCANO
CONSUMER TECHNOLOGY DIVISION
WISE LAB EMC TECHNICIAN
UL VERIFICATION SERVICES INC

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with FCC CFR 47 Part 2, FCC CFR 47 Part 15, and ANSI C63.4-2009

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 and 47266 Benicia Street, Fremont, California, USA. Line conducted emissions are measured only at the 47173 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

47173 Benicia Street	47266 Benicia Street
<input type="checkbox"/> Chamber A(IC: 2324B-1)	<input type="checkbox"/> Chamber D(IC: 2324B-4)
<input checked="" type="checkbox"/> Chamber B(IC: 2324B-2)	<input type="checkbox"/> Chamber E(IC: 2324B-5)
<input checked="" type="checkbox"/> Chamber C(IC: 2324B-3)	<input type="checkbox"/> Chamber F(IC: 2324B-6)
	<input type="checkbox"/> Chamber G(IC: 2324B-7)
	<input type="checkbox"/> Chamber H(IC: 2324B-8)

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://ts.nist.gov/standards/scopes/2000650.htm>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamp Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is a CDMA/WCDMA/LTE PHONE + BLUETOOTH, with DTS/UNII a/b/g/n/ac & NFC.

5.2. MAXIMUM OUTPUT POWER

The testing was performed at 3 meters. The transmitter maximum E-field at 30m distance is 9.97 dBuV/m which convert from the 3 meters data.

5.3. WORST-CASE CONFIGURATION AND MODE

The NFC function was tested at its' fundamental and only operational frequency of 13.56 MHz. The fundamental of the EUT was investigated in three orthogonal orientations X, Y and Z. It was determined that the Z-orientation was the worst-case orientation; therefore all final radiated testing was performed with the EUT in the Z-orientation while generating continuous emissions.

5.4. MODIFICATIONS

No modifications were made during testing.

5.5. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Radiated Emissions Above 30 MHz, AC Line Conducted Emissions and Frequency Stability:

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
AC Adapter	LG	MCS-04WD2	EAY62991904	N/A
Smart Case Cover	LG	LG-P1	DK0227	N/A
Wireless Charger	LG	WCD-110	LF1212625283010049	N/A
Earphone	LG	N/A	N/A	N/A

I/O CABLES

Radiated Emissions above 30 MHz, AC Line Conducted Emissions:

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	DC Power	1	Micro-USB	Shielded	1 m	None
2	Audio	1	Mini-Jack	Un-Shielded	1 m	None


TEST SETUP

The EUT is a stand-alone device configured and tested in a worst-case setup.


Note: worst case is using worst case orientation with AC charger and headset attached to the EUT with NFC signal continuously transmitting.

SETUP DIAGRAM FOR TESTS

Radiated Emissions Below 30 MHz:

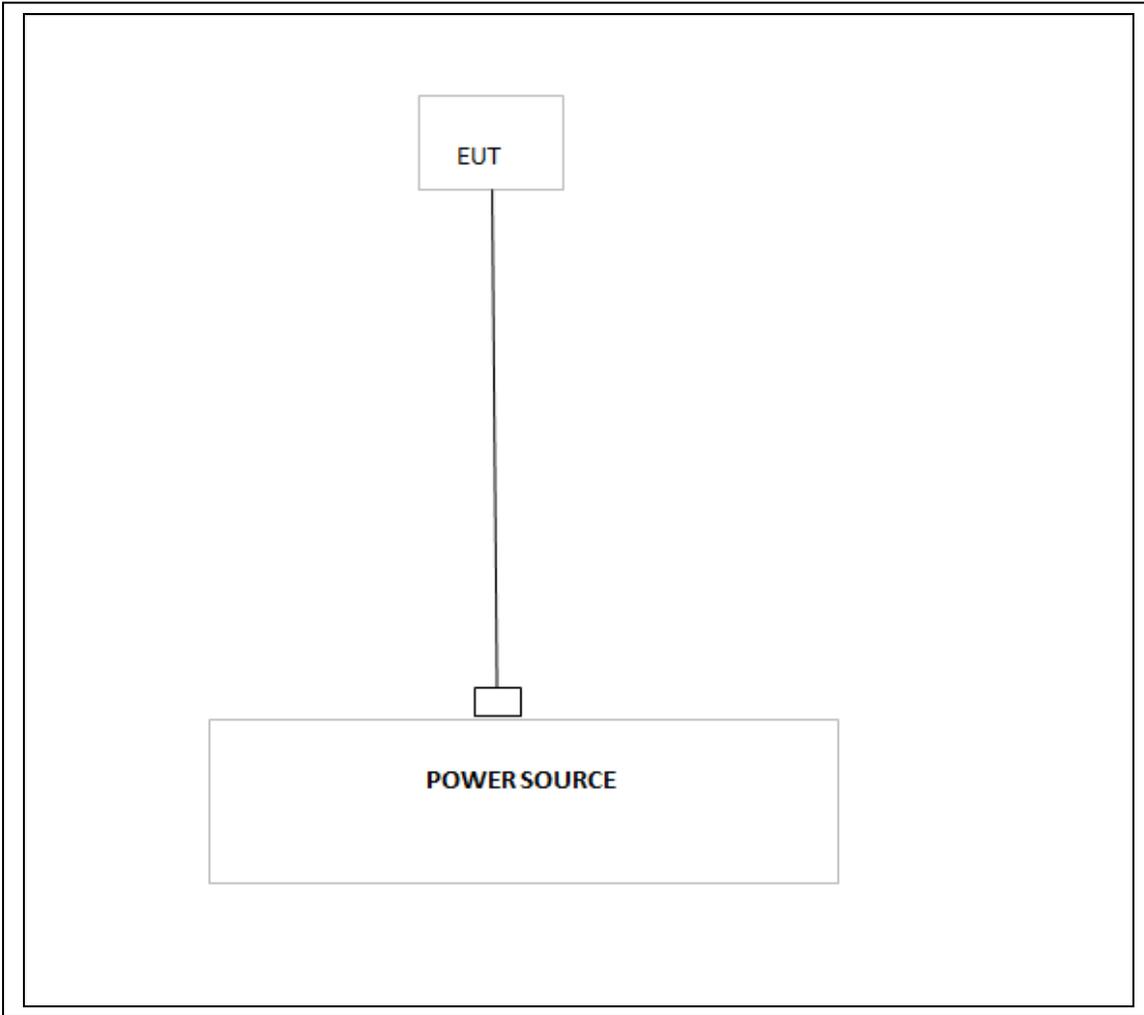

Radiated Emissions above 30 MHz, AC Line Conducted Emissions:

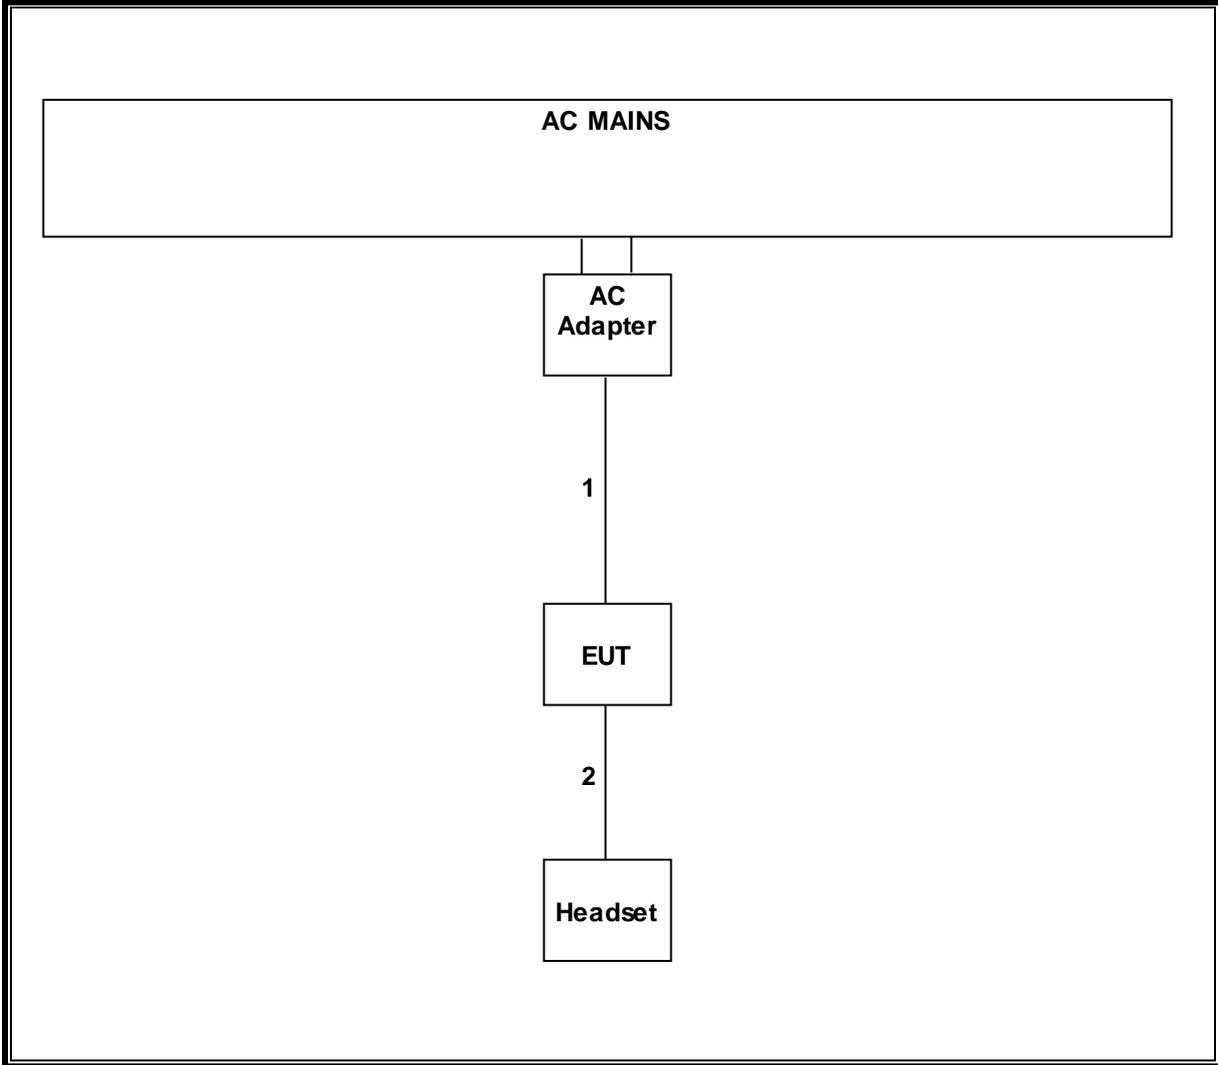

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Test Equipment List				
Description	Manufacturer	Model	Asset	Cal Due
ESA-E Spectrum Analyzer, 9kHz-26.5 GHz	Agilent / HP	E4407B	C01098	04/04/15
Antenna, Loop, 30 MHz	EMCO	6502	C00593	02/20/16
Antenna, Biconolog, 30MHz-1 GHz	Sunol Sciences	JB1	T243	12/08/15
Preamplifier, 1300 MHz	Agilent / HP	8447D	C00580	01/21/16
EMI Test Receiver, 30 MHz	R & S	ESHS 20	N02396	08/08/15
LISN, 30 MHz	FCC	50/250-25-2	C00626	01/14/16
DMM	Fluke	77-11	N02303	10/31/15
Digital Thermometer	Tektronix	DTM920	None	10/21/15
Temperature Chamber	CSZ	2PHS-8-3	T267	03/04/16

7. OCCUPIED BANDWIDTH


RULE PART(S)

LIMITS

For reporting purposes only

RESULTS

Channel	Frequency (KHz)	99% Bandwidth (KHz)
Low	13.56	445.476

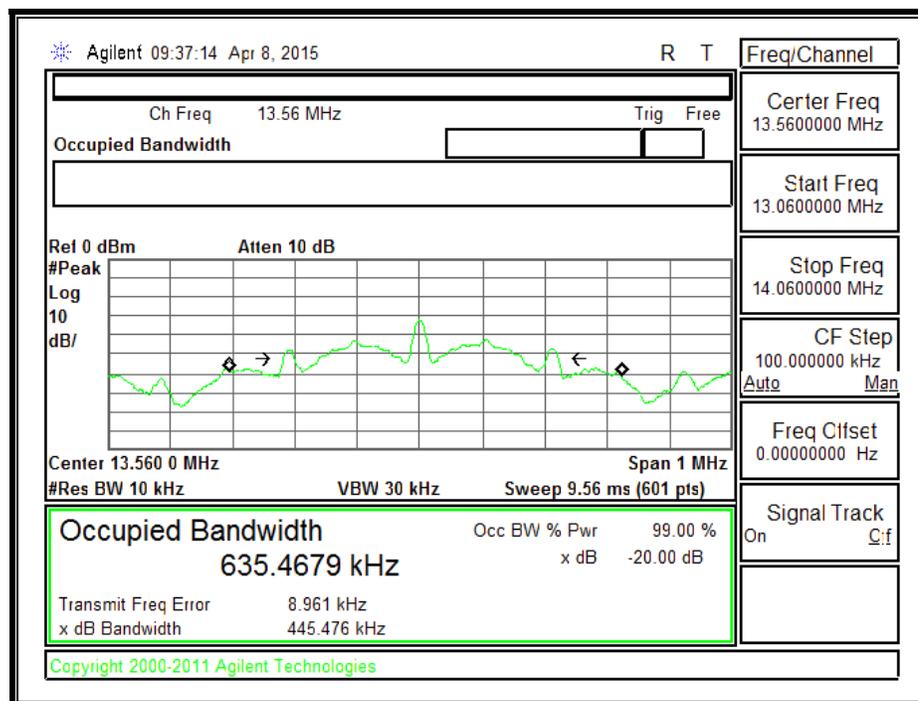

8. RADIATED EMISSION TEST RESULTS

8.1. LIMITS AND PROCEDURE

LIMIT

§15.225

(a) The field strength of any emissions within the band 13.553–13.567 MHz shall not exceed 15,848 microvolts/ meter at 30 meters.

(b) Within the bands 13.410–13.553 MHz and 13.567–13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter at 30 meters.

(c) Within the bands 13.110–13.410 MHz and 13.710–14.010 MHz the field strength of any emissions shall not exceed 106 microvolts/meter at 30 meters.

(d) The field strength of any emissions appearing outside of the 13.110– 14.010 MHz and shall not exceed the general radiated emission limits in § 15.209 as follows:

§15.209 (a) Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Limits for radiated disturbance of an intentional radiator		
Frequency range (MHz)	Limits (µV/m)	Measurement Distance (m)
0.009 – 0.490	2400 / F (kHz)	300
0.490 – 1.705	24000 / F (kHz)	30
1.705 – 30.0	30	30
30 – 88	100**	3
88 - 216	150**	3
216 – 960	200**	3
Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g. §§ 15.231 and 15.241.

§15.209 (b) In the emission table above, the tighter limit applies at the band edges.

Formula for converting the filed strength from uV/m to dBuV/m is:

Limit (dBuV/m) = 20 log limit (uV/m)

In addition:

§15.209 (d) The emission limits shown the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emissions limits in these three bands are based on measurements employing an average detector.

§15.209 (d) The provisions in §§ 15.225, measuring emissions at distances other than the distances specified in the above table, determining the frequency range over which radiated emissions are to be measured, and limiting peak emissions apply to all devices operated under this part.

TEST PROCEDURE

ANSI C63.4-2009

The EUT is an intentional radiator that incorporates a digital device. The highest fundamental frequency generated or used in the device is 13.56 MHz. The frequency range was investigated from 0.15 MHz to the 10th harmonic of the highest fundamental frequency, or 1000 MHz, whichever is greater (1000MHz)


RESULTS

No non-compliance noted:

**8.1.1. FUNDAMENTAL AND SPURIOUS EMISSIONS (0.15 – 30 MHz)
 (Normal Battery Cover)**


FCC Part 15, Subpart B & C														1 Meter Distance Measurement At Emissions Chamber
Company: LG														
Project #: 15I20286														
Model #: LG-LS991														
Tester: G. Escano														
Date: 4/7/2015														
Frequency (MHz)	PK (dBuV)	QP (dBuV)	AV (dBuV)	AF (dB/m)	Distance (m)	Distance Correction (dB)	PK Corrected Reading (dBuV/m)	AV Corrected Reading (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	PK Margin (dB)	AV Margin (dB)	Notes	
Loop Antenna Face On: Z Position														
Fundamental Field Strength & Within Bands:														
13.56	58.494		--	10.56	1	-59.08	9.97	--	84.00	--	-74.0	--	Fundamental @ 30m Dist	
13.454	47.765		--	10.55	1	-59.08	-0.77	--	50.48	--	-51.3	--	13.41-13.553MHz Spurious @ 30m	
13.553	52.536		--	10.56	1	-59.08	4.01	--	50.48	--	-46.5	--	13.41-13.553MHz Spurious @ 30m	
13.567	53.230		--	10.56	1	-59.08	4.70	--	50.48	--	-45.8	--	13.567-13.710MHz Spurious @ 30m	
13.666	48.125		--	10.57	1	-59.08	-0.39	--	40.51	--	-40.9	--	13.567-13.710MHz Spurious @ 30m	
13.137	27.814		--	10.51	1	-59.08	-20.76	--	40.51	--	-61.3	--	13.110-13.410MHz Spurious @ 30m	
13.348	43.002		--	10.53	1	-59.08	-5.55	--	40.51	--	-46.1	--	13.110-13.410MHz Spurious @ 30m	
13.772	43.096		--	10.58	1	-59.08	-5.41	--	40.51	--	-45.9	--	13.710-14.010MHz Spurious @ 30m	
13.984	32.072		--	10.6	1	-59.08	-16.41	--	29.54	--	-46.0	--	13.710-14.010MHz Spurious @ 30m	
Loop Antenna Face Off: Z Position														
Fundamental Field Strength & Within Bands:														
13.56	57.191		--	10.56	1	-59.08	8.66	--	84.00	--	-75.3	--	Fundamental @ 30m Dist	
13.454	44.144		--	10.55	1	-59.08	-4.40	--	50.48	--	-54.9	--	13.41-13.553MHz Spurious @ 30m	
13.553	48.724		--	10.56	1	-59.08	0.19	--	50.48	--	-50.3	--	13.41-13.553MHz Spurious @ 30m	
13.567	49.751		--	10.56	1	-59.08	1.22	--	50.48	--	-49.3	--	13.567-13.710MHz Spurious @ 30m	
13.665	44.045		--	10.57	1	-59.08	-4.47	--	40.51	--	-45.0	--	13.567-13.710MHz Spurious @ 30m	
13.138	25.588		--	10.51	1	-59.08	-22.98	--	40.51	--	-63.5	--	13.110-13.410MHz Spurious @ 30m	
13.348	39.080		--	10.53	1	-59.08	-9.47	--	40.51	--	-50.0	--	13.110-13.410MHz Spurious @ 30m	
13.772	39.432		--	10.58	1	-59.08	-9.08	--	40.51	--	-49.6	--	13.710-14.010MHz Spurious @ 30m	
13.983	28.995		--	10.6	1	-59.08	-19.49	--	29.54	--	-49.0	--	13.710-14.010MHz Spurious @ 30m	
* No more emissions were found up to 30MHz														
Note: The emission limits are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9–90 kHz, 110–490 kHz and above 10000Mhz. Radiated emission limits in these three bands are based on measurements employing an average detector.														
P.K. = Peak														
Q.P. = Quasi Peak Readings														
A.F. = Antenna factor														
Rev. 11.21.14														

8.1.2. TX SPURIOUS EMISSION 30 TO 1000 MHz (Normal Battery Cover)

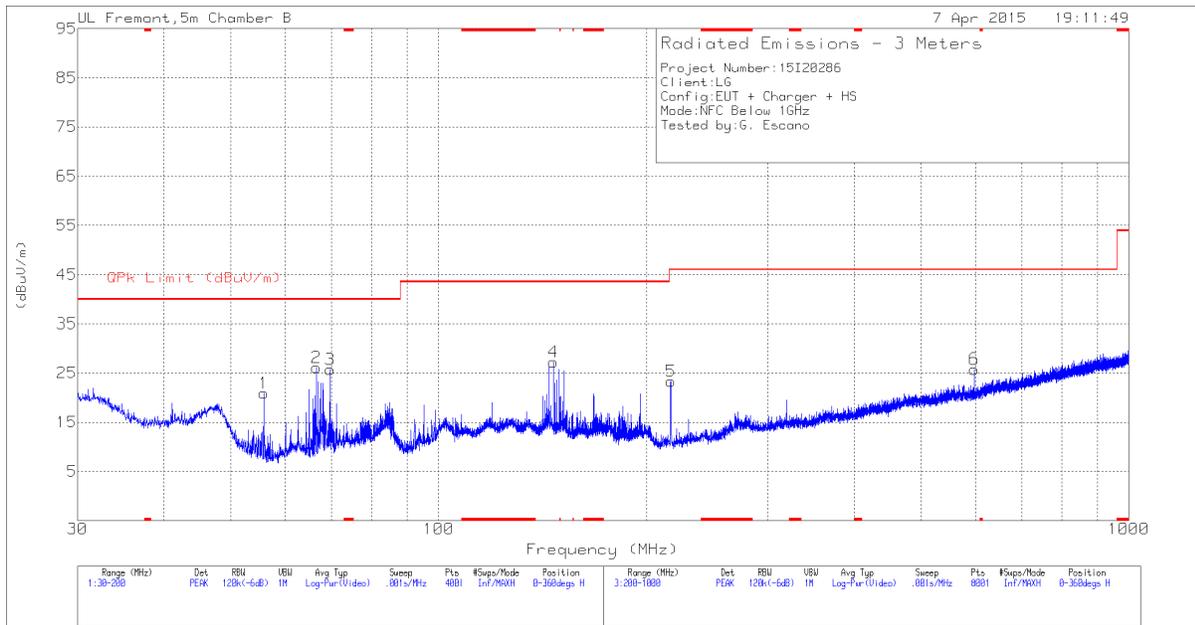

FCC Part 15 Subpart C 30-1000MHz, TST 30915 15 Jul 2014

Rev 9.5 22 Jul 2014

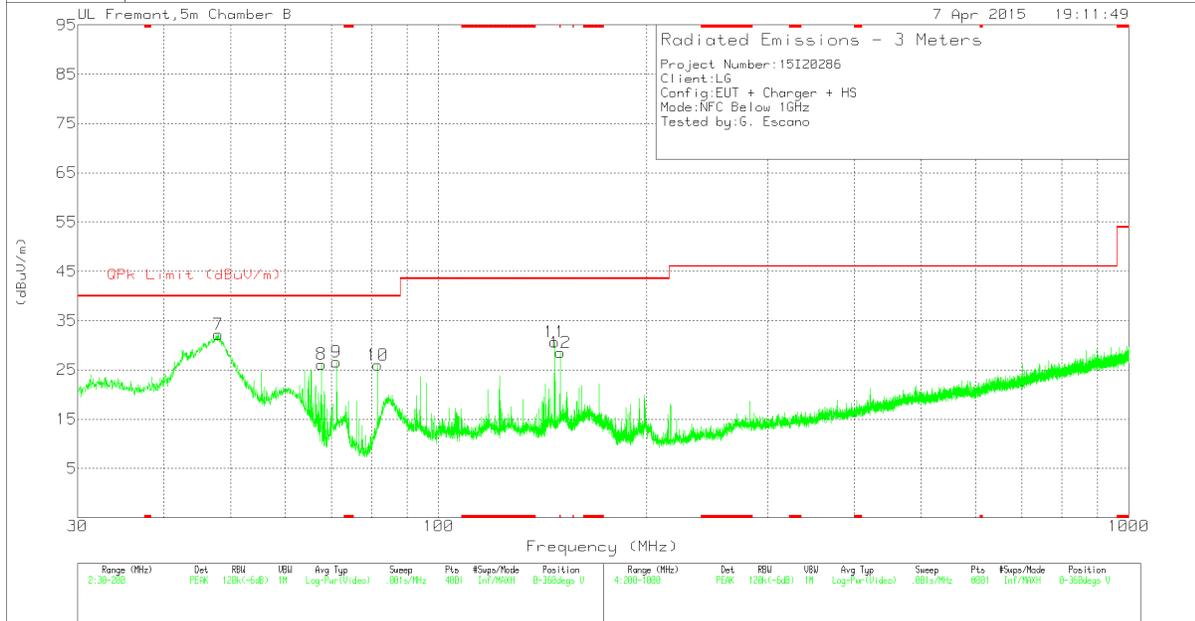

FCC Part 15 Subpart C 30-1000MHz, TST 30915 15 Jul 2014

Rev 9.5 22 Jul 2014

Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF T243 (dB/m)	Amp/Cbl (dB)	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
12	* 150.02	43.51	PK	12.5	-27.5	28.51	43.52	-15.01	0-360	101	V
7	47.935	51.76	PK	9	-28.6	32.16	40	-7.84	0-360	101	V
1	55.7975	42.15	PK	7.3	-28.6	20.85	40	-19.15	0-360	400	H
2	66.55	46.66	PK	7.9	-28.4	26.16	40	-13.84	0-360	101	H
8	67.6975	46.57	PK	8	-28.4	26.17	40	-13.83	0-360	101	V
3	69.61	46.07	PK	8.1	-28.4	25.77	40	-14.23	0-360	400	H
9	71.14	46.91	PK	8.1	-28.4	26.61	40	-13.39	0-360	101	V
10	81.6375	46.79	PK	7.5	-28.3	25.99	40	-14.01	0-360	101	V
4	146.62	42.15	PK	12.6	-27.5	27.25	43.52	-16.27	0-360	300	H
11	147.4275	45.56	PK	12.6	-27.5	30.66	43.52	-12.86	0-360	101	V
5	217	39.56	PK	10.6	-26.8	23.36	46.02	-22.66	0-360	101	H
6	597.1	32.69	PK	18.5	-25.4	25.79	46.02	-20.23	0-360	101	H

* - indicates frequency in CFR 47, Part 15 and Industry Canada RSS-Restricted Band.
 PK - Peak detector

Radiated Emissions


Frequency (MHz)	Meter Reading (dBuV)	Det	AF T243 (dB/m)	Amp/Cbl (dB)	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
47.615	47.4	QP	9.2	-28.7	27.9	40	-12.1	206	111	V

* - indicates frequency in CFR 47, Part 15 and Industry Canada RSS-Restricted Band.
 QP - Quasi-Peak detector

8.1.3. FUNDAMENTAL AND SPURIOUS EMISSIONS (0.15 – 30 MHz) (Smart Cover)


FCC Part 15, Subpart B & C													1 Meter Distance Measurement At Emissions Chamber	
Company: LG														
Project #: 15I20286														
Model #: LG-LS991														
Tester: G. Escano														
Date: 4/17/2015														
Frequency (MHz)	PK (dBuV)	QP (dBuV)	AV (dBuV)	AF (dB/m)	Distance (m)	Distance Correction (dB)	PK Corrected Reading (dBuV/m)	AV Corrected Reading (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	PK Margin (dB)	AV Margin (dB)	Notes	
Loop Antenna Face On: Z Position														
Fundamental Field Strength & Within Bands:														
13.56	55.35		--	10.56	1	-59.08	6.82	--	84.00	--	-77.2	--	Fundamental @ 30m Dist	
13.454	45.03		--	10.55	1	-59.08	-3.51	--	50.48	--	-54.0	--	13.41-13.553MHz Spurious @ 30m	
13.553	49.01		--	10.56	1	-59.08	0.48	--	50.48	--	-50.0	--	13.41-13.553MHz Spurious @ 30m	
13.567	51.02		--	10.56	1	-59.08	2.49	--	50.48	--	-48.0	--	13.567-13.710MHz Spurious @ 30m	
13.665	44.03		--	10.57	1	-59.08	-4.49	--	40.51	--	-45.0	--	13.567-13.710MHz Spurious @ 30m	
13.349	40.83		--	10.53	1	-59.08	-7.72	--	40.51	--	-48.2	--	13.110-13.410MHz Spurious @ 30m	
13.772	39.12		--	10.58	1	-59.08	-9.39	--	40.51	--	-49.9	--	13.710-14.010MHz Spurious @ 30m	
Loop Antenna Face Off: Z Position														
Fundamental Field Strength & Within Bands:														
13.56	61.16		--	10.56	1	-59.08	12.63	--	84.00	--	-71.4	--	Fundamental @ 30m Dist	
13.455	33.94		--	10.55	1	-59.08	-14.60	--	50.48	--	-65.1	--	13.41-13.553MHz Spurious @ 30m	
13.553	38.77		--	10.56	1	-59.08	-9.76	--	50.48	--	-60.2	--	13.41-13.553MHz Spurious @ 30m	
13.567	39.73		--	10.56	1	-59.08	-8.80	--	50.48	--	-59.3	--	13.567-13.710MHz Spurious @ 30m	
13.666	32.79		--	10.57	1	-59.08	-15.73	--	40.51	--	-56.2	--	13.567-13.710MHz Spurious @ 30m	
13.347	30.5		--	10.53	1	-59.08	-18.05	--	40.51	--	-58.6	--	13.110-13.410MHz Spurious @ 30m	
13.772	27.68		--	10.58	1	-59.08	-20.83	--	29.54	--	-50.4	--	13.710-14.010MHz Spurious @ 30m	
* No more emissions were found up to 30MHz														
Note: The emission limits are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9–90 kHz, 110–490 kHz and above 10000MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.														
P.K. = Peak														
Q.P. = Quasi Peak Readings														
A.F. = Antenna factor														
Rev. 11.21.14														

8.1.4. TX SPURIOUS EMISSION 30 TO 1000 MHz (Smart Cover)

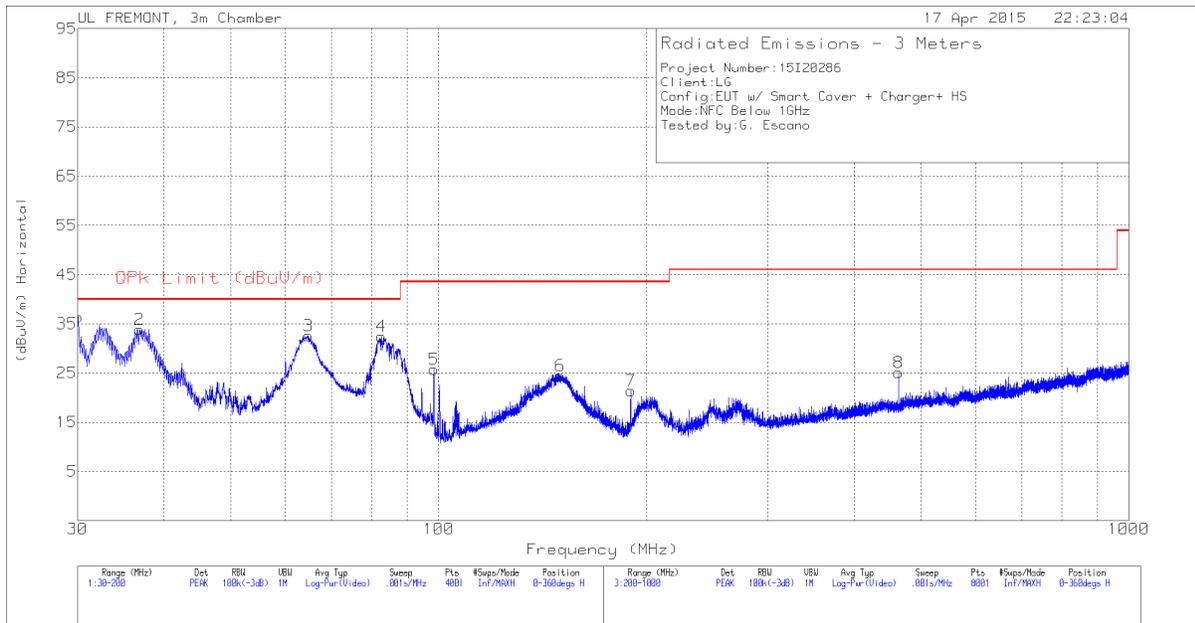

FCC Part 15 Subpart C 30-1000MHz, TST 39763 12 Jun 2014

Rev 9.5 22 Jul 2014

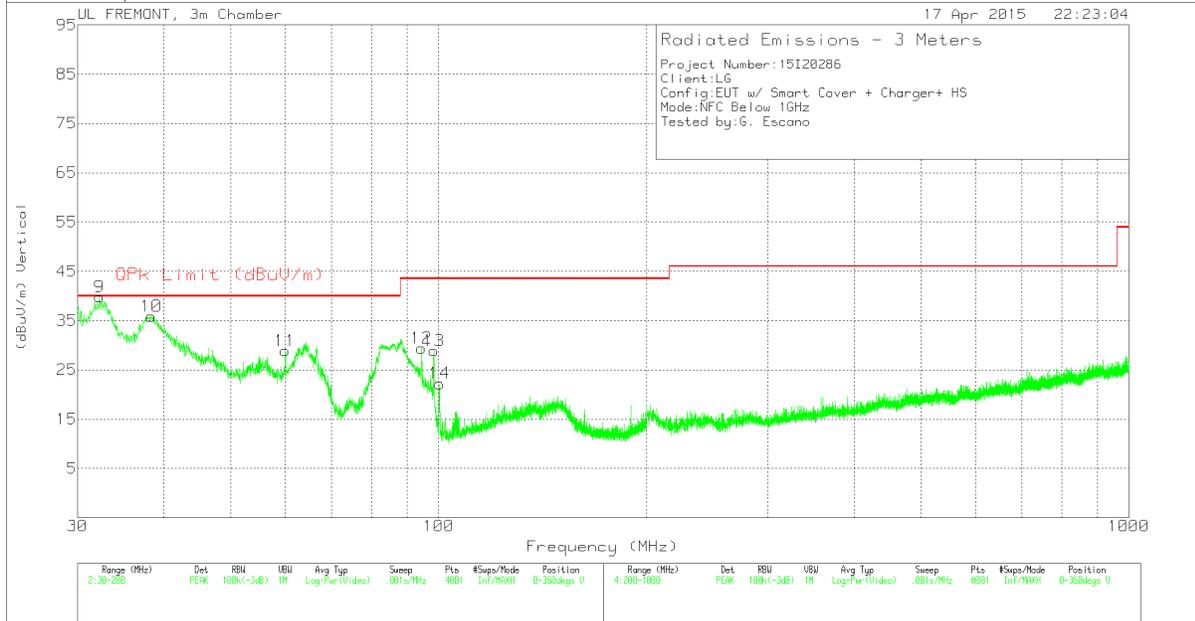

FCC Part 15 Subpart C 30-1000MHz, TST 39763 12 Jun 2014

Rev 9.5 22 Jul 2014

Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF T185 (dB/m)	Amp/Cbl (dB/m)	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	30.0425	42.13	PK	21.8	-27.5	36.43	40	-3.57	0-360	100	H
9	32.2525	47.1	PK	20.2	-27.5	39.8	40	-.2	0-360	100	V
2	36.885	44.65	PK	16.6	-27.4	33.85	40	-6.15	0-360	400	H
10	38.33	47.84	PK	15.5	-27.4	35.94	40	-4.06	0-360	100	V
11	60.005	48.74	PK	7.3	-27.1	28.94	40	-11.06	0-360	100	V
3	64.7225	51.84	PK	7.9	-27.2	32.54	40	-7.46	0-360	400	H
4	82.615	51.7	PK	7.7	-26.9	32.5	40	-7.5	0-360	400	H
12	94.515	47.83	PK	8.5	-26.9	29.43	43.52	-14.09	0-360	100	V
13	98.425	46.31	PK	9.4	-26.8	28.91	43.52	-14.61	0-360	100	V
5	98.4675	43.14	PK	9.4	-26.8	25.74	43.52	-17.78	0-360	300	H
14	100.295	39.24	PK	9.8	-26.8	22.24	43.52	-21.28	0-360	100	V
6	150.02	38.71	PK	12.1	-26.3	24.51	43.52	-19.01	0-360	200	H
7	189.8213	36.24	PK	11.1	-25.9	21.44	43.52	-22.08	0-360	100	H
8	463.8	34.28	PK	16.6	-25.8	25.08	46.02	-20.94	0-360	200	H

PK - Peak detector

Radiated Emissions

Frequency (MHz)	Meter Reading (dBuV)	Det	AF T243 (dB/m)	Amp/Cbl (dB)	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
30	39.44	QP	21.8	-27.5	33.74	40	-6.26	346	337	H
32.0568	41.62	QP	20.3	-27.5	34.42	40	-5.58	127	400	V
37.0822	43.41	QP	16.4	-27.4	32.41	40	-7.59	49	399	H
38.1406	40.11	QP	15.7	-27.4	28.41	40	-11.59	50	394	V

QP - Quasi-Peak detector

9. AC MAINS LINE CONDUCTED EMISSIONS

LIMITS

§15.207

(a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the band edges.

Frequency range (MHz)	Limits (dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

Notes:
1. The lower limit shall apply at the transition frequencies
2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.


TEST PROCEDURE

ANSI C63.4-2009

RESULTS

No non-compliance noted:

LINE 1 RESULTS

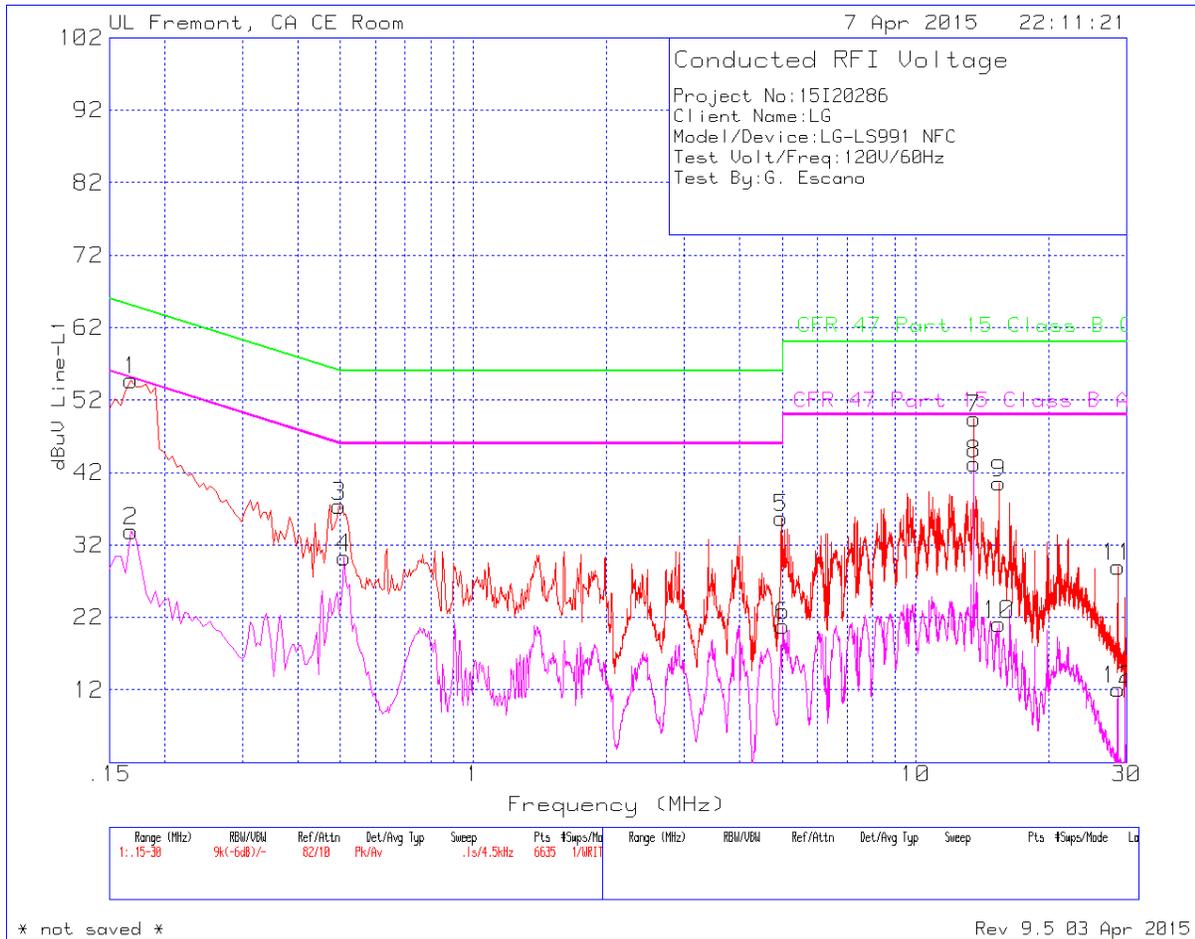


Range 1: Line-L1 .15 - 30MHz

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	T24 IL L1	LC Cables 1&3	Corrected Reading dBuV	CFR 47 Part 15 Class B QP	Margin (dB)	CFR 47 Part 15 Class B Avg	Margin (dB)
1	.168	53.55	Pk	1.2	0	54.75	65.06	-10.31	-	-
2	.168	32.7	Av	1.2	0	33.9	-	-	55.06	-21.16
3	.4965	37.07	Pk	.3	0	37.37	56.06	-18.69	-	-
4	.51	29.96	Av	.3	0	30.26	-	-	46	-15.74
5	4.965	35.42	Pk	.2	.1	35.72	56	-20.28	-	-
6	5.01	20.57	Av	.2	.1	20.87	-	-	50	-29.13
7	13.56	49.04	Pk	.2	.2	49.44	60	-10.56	-	-
8	13.56	42.78	Av	.2	.2	43.18	-	-	50	-6.82
9	15.4635	40.06	Pk	.3	.2	40.56	60	-19.44	-	-
10	15.45	20.55	Av	.3	.2	21.05	-	-	50	-28.95
11	28.671	28.41	Pk	.3	.3	29.01	60	-30.99	-	-
12	28.6755	11.48	Av	.3	.3	12.08	-	-	50	-37.92

Pk - Peak detector
 Av - Average detection

LINE 2 RESULTS

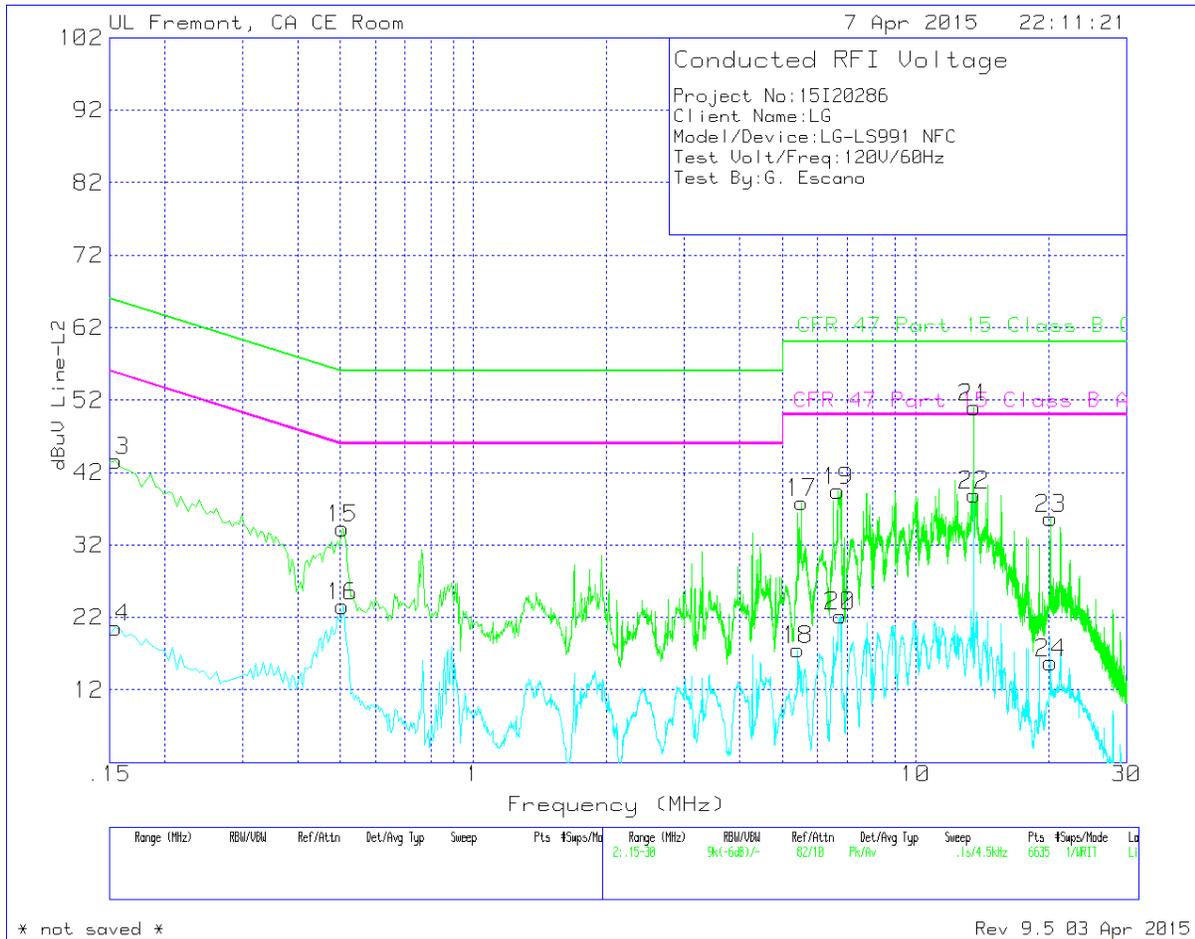

Range 2: Line-L2 .15 - 30MHz

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	T24 IL L2	LC Cables 2&3	Corrected Reading dBuV	CFR 47 Part 15 Class B QP	Margin (dB)	CFR 47 Part 15 Class B Avg	Margin (dB)
13	.1545	42.23	Pk	1.4	0	43.63	65.75	-22.12	-	-
14	.1545	19.2	Av	1.4	0	20.6	-	-	55.75	-35.15
15	.5055	33.9	Pk	.4	0	34.3	56	-21.7	-	-
16	.5055	23.14	Av	.4	0	23.54	-	-	46	-22.46
17	5.523	37.56	Pk	.2	.1	37.86	60	-22.14	-	-
18	5.415	17.24	Av	.2	.1	17.54	-	-	50	-32.46
19	6.675	39.2	Pk	.2	.1	39.5	60	-20.5	-	-
20	6.756	21.9	Av	.2	.1	22.2	-	-	50	-27.8
21	13.56	50.61	Pk	.2	.2	51.01	60	-8.99	-	-
22	13.56	38.5	Av	.2	.2	38.9	-	-	50	-11.1
23	20.2245	35.17	Pk	.3	.2	35.67	60	-24.33	-	-
24	20.2245	15.25	Av	.3	.2	15.75	-	-	50	-34.25

Pk - Peak detector
 Av - Average detection

10. FREQUENCY STABILITY

LIMIT

§15.225 (e) The frequency tolerance of the carrier signal shall be maintained within $\pm 0.01\%$ of the operating frequency, over a temperature variation of -20 degrees to +50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.

TEST PROCEDURE

ANSI C63.4 Section 13

RESULTS

No non-compliance noted.

Reference Frequency: EUT Channel 13.560000 MHz @ 20°C				
Limit: ± 100 ppm = 1.356 kHz				
Power Supply (Vdc)	Environment Temperature (°C)	Frequency Deviation Measured with Time Elapse		
		(MHz)	Delta (ppm)	Limit (ppm)
3.80	50	13.5601000	-7.375	± 100
3.80	40	13.5601000	-7.375	± 100
3.80	30	13.5601200	-8.850	± 100
3.80	20	13.5600000	0.000	± 100
3.80	10	13.5601000	-7.375	± 100
3.80	0	13.5601000	-7.375	± 100
3.80	-10	13.5602000	-14.749	± 100
3.80	-20	13.5605000	-36.873	± 100
3.80	-30	13.5602000	-14.749	± 100
End of volt 3.23	20	13.5598000	14.749	± 100
4.37	20	13.5599000	7.375	± 100