

EMI CERTIFICATION REPORT

Applicant:

LG Electronics MobileComm U.S.A., Inc.
1000 Sylvan Avenue, Englewood Cliffs NJ 07632

Date of Receipt: March 03, 2015**Date of Issue: April 20, 2015****Test Report No. HCT-E-1503-F011-1****HCT FRN: 0005866421****FCC ID:****ZNFLS991**

Rule Part(s) / Standard(s): FCC CFR 47 PART 15 Subpart B Class B
FCC Classification: JBP (Part 15 B – Class B Computing Device Peripheral)
EUT Type: Cellular/PCS CDMA/EVDO and LTE Phone with Bluetooth, WLAN and NFC
Model Name: LGLS991
Additional Model Name: LS991, LG-LS991
Test Port: USB / Earphone Port
Date of Test: March 03, 2015 - March 10, 2015
April 20, 2015

The device bearing the trade name and model specified above, has been shown to comply with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.4-2003. (See Test Report if any modifications were made for compliance)

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

HCT certifies that no party to application has been denied the FCC benefits pursuant to Section 5301 of the Anti-Drug Abuse Act of 1988, 21 U.S.C 862

Tested By

Gu-Cheol Yoon
Test Engineer
EMC Team
Certification Division

Reviewed By

Jin-Pyo Hong
Technical Manager
EMC Team
Certification Division

This report only responds to the tested sample and may not be reproduced, except in full, without written approval of the HCT Co., Ltd.



DOCUMENT HISTORY

The revision history for this document is shown in table.

Version	Date	Description
HCT-E-1503-F011	March 11, 2015	Initial Release
HCT-E-1503-F011-1	April 20, 2015	Additional testing of Quick Cover



TABLE OF CONTENTS

	PAGE
1. GENERAL INFORMATION	4
1.1 Description of EUT	4
1.2 Related Submittal(s) / Grant(s).....	5
1.3 Test Facility	5
1.4 Tested System Details.....	6
1.5 Cable Description	7
1.6 Noise Suppression Parts on Cable. (I/O Cable)	7
2. DESCRIPTION OF TEST	8
3. PRELIMINARY TEST	11
3.1 Conducted Emission Test	11
3. 2 Radiated Emission Test	11
4. CONDUCTED AND RADIATED EMISSION TEST SUMMARY	12
4.1 Conducted Emission Test	12
4.2 Radiated Emission Test	26
5. LIST OF TEST EQUIPMENT	30
6. CONCLUSION	31

ATTACHMENT: TEST SETUP PHOTOGRAPHS



1. GENERAL INFORMATION

1.1 Description of EUT

Equipment Under Test is manufactured by **LG Electronics MobileComm U.S.A., Inc.**
Its basic purpose is used for communications.

Model	LGLS991
FCC ID	ZNFLS991
Additional Model	LS991, LG-LS991
EUT Type	Cellular/PCS CDMA/EVDO and LTE Phone with Bluetooth, WLAN and NFC
TX Frequency	824.70 MHz to 848.31 MHz (CDMA BC0) 1 851.25 MHz to 1 908.75 MHz (CDMA BC1) 817.90 MHz to 823.10 MHz (CDMA BC10) 824.20 MHz to 848.80 MHz (GSM 850) 1 850.20 MHz to 1 909.80 MHz (GSM 1 900) 826.40 MHz to 846.60 MHz (WCDMA 850) 1 852.4 MHz to 1 907.6 MHz (WCDMA 1 900) 1 850.7 MHz to 1 909.3 MHz (LTE B2) 1 710 MHz to 1 755 MHz (LTE B4) 824 MHz to 849 MHz (LTE B5) 699 MHz to 716 MHz (LTE B12) 1 850 MHz to 1 915 MHz (LTE B25) 814 MHz to 849 MHz (LTE B26) 2 496 MHz to 2 690 MHz (LTE B41)
RX Frequency	869.70 MHz to 893.31 MHz (CDMA BC0) 1 931.25 MHz to 1 988.75 MHz (CDMA BC1) 862.00 MHz to 894.00 MHz (CDMA BC10) 869.20 MHz to 893.80 MHz (GSM 850) 1 930.20 MHz to 1 989.80 MHz (GSM 1 900) 871.40 MHz to 891.60 MHz (WCDMA 850) 1 932.4 MHz to 1 987.6 MHz (WCDMA 1 900) 1 930.00 MHz to 1 990.00 MHz (LTE B2) 2 110 MHz to 2 155 MHz (LTE B4) 869 MHz to 894 MHz (LTE B5) 729 MHz to 746 MHz (LTE B12) 1 925 MHz to 1 990 MHz (LTE B25) 859 MHz to 894 MHz (LTE B26) 2 496 MHz to 2 690 MHz (LTE B41)



1.2 Related Submittal(s) / Grant(s)

Original submittal only.

1.3 Test Facility

Test site is located at 74, SEOICHEON-RO, 578BEON-GIL, MAJANG-MYEON, ICHEON-SI, GYEONGGI-DO, SOUTH KOREA. Those measurement facilities are constructed in conformance with the requirements of ANSI C63.4-2003.

Measurement Facilities	Reg. No.
Radiated Field strength measurement facility (3 m)	90661 (February 28, 2014)
Radiated Field strength measurement facility (10 m)	90661 (February 28, 2014)



1.4 Tested System Details

All equipment descriptions used in the tested system (including inserted cards) are:

Device Type	Model Name	Manufacturer	FCC ID / DoC	Connected To
EUT	LGLS991	LG	ZNFLS991	Notebook PC, Earphone
USB cable	LG0121	Ningbo Broad	-	EUT, Notebook PC
USB cable	DLC-LGE51DC MUW-1	CRESYN	-	EUT, Notebook PC
USB cable	KCA-ET-3-0255	KSD	-	EUT, Notebook PC
Earphone	EAB62910501	I-SOUND	-	EUT
Standard cover	-	-	-	EUT
Quick cover	ACQ88174001	DKUIL	-	EUT
Notebook PC	ProBook6560b	HP	DoC	EUT, Notebook PC adaptor
Notebook PC adaptor	PPP009D	DELTA Electronics (Jiangsu) LTD	-	Notebook PC
Gateway	MV440	Axesstel	PH7MV440	Notebook PC, Adaptor
Serial mouse	Serial 2 button mouse	Radio shack	FSUGMZE3	Notebook PC
Adaptor	DA-60M12	Yang Ming Industrial	-	Gateway
RJ45 cable	-	-	-	Notebook PC, Gateway
Micro SD card	16 GB	Samsung	-	EUT



1.5 Cable Description

Product Name	Port	Power Cord Shielded (Y/N)	I/O Cable Shielded (Y/N)	Length (m)
EUT	Micro USB	Y	Y	(P,D)1.2
	Earphone	N/A	Y	(D)1.2
Notebook PC	RJ 45	N/A	N	(D)1.5
	Serial (Mouse)	N/A	Y	(D)1.8
	DC in	N	N/A	(P)1.8
Gateway	DC in	N	N/A	(P)1.8

* The marked "(D)" means the data cable and "(P)" means the power cable.

1.6 Noise Suppression Parts on Cable. (I/O Cable)

Product Name	Port	Ferrite Bead (Y/N)	Location	Metal Hood (Y/N)	Location
EUT	Micro USB	N	N/A	Y	Both End
	Earphone	N	N/A	Y	EUT End
Notebook PC	RJ 45	N	N/A	N	N/A
	Serial (Mouse)	N	N/A	Y	Notebook PC End



2. DESCRIPTION OF TEST

2.1 Measurement of Conducted Emission

The test procedure was in accordance with ANSI C63.4-2003, Clause 7

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN).
If the EUT is connected to the PC through USB, the AC power-line adapter of the PC is directly connected to a line impedance stabilization network (LISN).
Other support units were connected to the power mains through another LISN. The two LISNs provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both conducted lines are measured in Quasi-Peak and Average mode, including the worst-case data points for each tested configuration.
- c. The frequency range from 150 kHz to 30 MHz was searched.

[Conducted Emission Limits]

Frequency (MHz)	Resolution Bandwidth (kHz)	Quasi-Peak (dB(μV))	Average (dB(μV))
0.15 to 0.5	9	66 to 56*	56 to 46*
0.5 to 5	9	56	46
5 to 30	9	60	50

**Decreases with the logarithm of the frequency.*



2.2 Measurement of Radiated Emission

The test procedure was in accordance with ANSI C63.4-2003, Clause 8

- a. The EUT was placed on the top of a turn table 0.8 meters above the ground at a 3 m shield room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 m away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from 1 m to 4 m above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 m to 4 m and the turn table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to Peak and Average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz.
- g. The antenna height scans apply for both horizontal and vertical polarizations, except that for vertical polarization, the minimum height of the center of the antenna shall be increased so that the lowest point of the bottom of the lowest antenna element clears the site reference ground plane by at least 25 cm. (below 1 GHz)

[Radiated Emission Limits]

Frequency (MHz)	Antenna Distance (m)	Field Strength ($\mu\text{V}/\text{m}$)	Quasi-Peak ($\text{dB}(\mu\text{V})/\text{m}$)
30 to 88	3	100	40.0
88 to 216	3	150	43.5
216 to 960	3	200	46.0
Above 960	3	500	54.0
Frequency (MHz)	Antenna Distance (m)	Peak ($\text{dB}(\mu\text{V})/\text{m}$)	Average ($\text{dB}(\mu\text{V})/\text{m}$)
Above 1 000	3	74	54

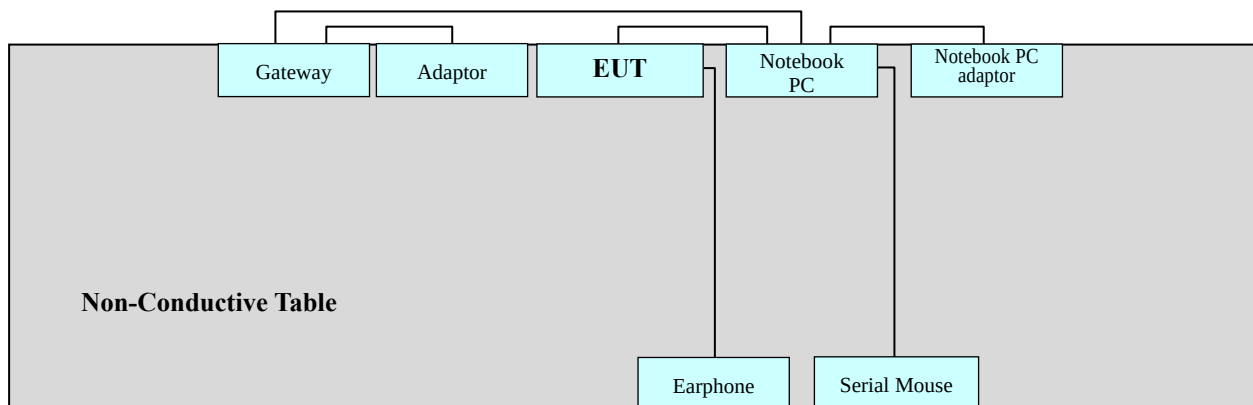


2.2.1 Frequency Range of Radiated Measurements

An unintentional radiator, including a digital device, the spectrum shall be investigated from the lowest radio frequency signal generated or used in the device, without going below the lowest frequency for which a Radiated Emission limit is specified, up to the frequency shown in the following table

Highest frequency generated or used in the device or on which the device operates or tunes (MHz)	Upper frequency of measurement range (MHz)
Below 1.705	30
1.705 to 108	1 000
108 to 500	2 000
500 to 1 000	5 000
Above 1 000	5 th harmonic of the highest frequency or 40 GHz, whichever is lower

2.3 Configuration of Tested System



Power Line: 120 VAC, 60 Hz



3. PRELIMINARY TEST

3.1 Conducted Emission Test

It was tested Data Communication mode, after connecting all peripheral devices.

Operation Mode: ☒ Data Communication mode

3. 2 Radiated Emission Test

It was tested Data Communication mode, after connecting all peripheral devices.

Operation Mode: ☒ Data Communication mode



4. CONDUCTED AND RADIATED EMISSION TEST SUMMARY

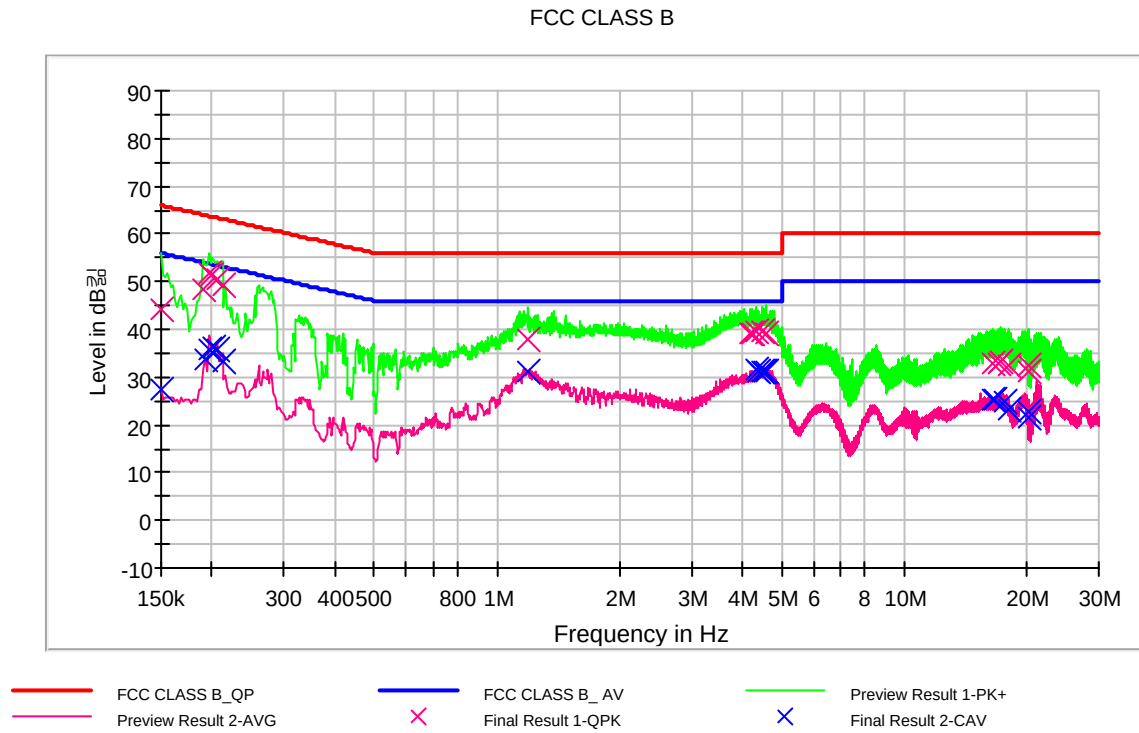
4.1 Conducted Emission Test

The test results of conducted emission at mains ports provide the following information:

Rule Part / Standard	FCC PART 15 Subpart B Class B
Detector	Quasi-Peak, CISPR-Average
Bandwidth	9 kHz (6 dB)
Operation Mode	Data Communication mode
EUT Cover Type	Standard cover
USB Type	CRESYN(DLC-LGE51DCMUW-1) ※NOTE: The worst-case emissions are reported.
Kind of Test Site	Shielded Room
Temperature	21.6 °C
Relative Humidity	24.8 %
Test Date	March 10, 2015

- Calculation Formula:

1. Conductor L1 = Hot, Conductor N = Neutral
2. Corr. = LISN Factor + Cable Loss
3. QuasiPeak or CAverage= Receiver Reading + Corr.
4. Margin = Limit – QuasiPeak or CAverage

**Figure 1: Spectral Diagrams, Conducted Emission, AC Main Port, Line (L1)**



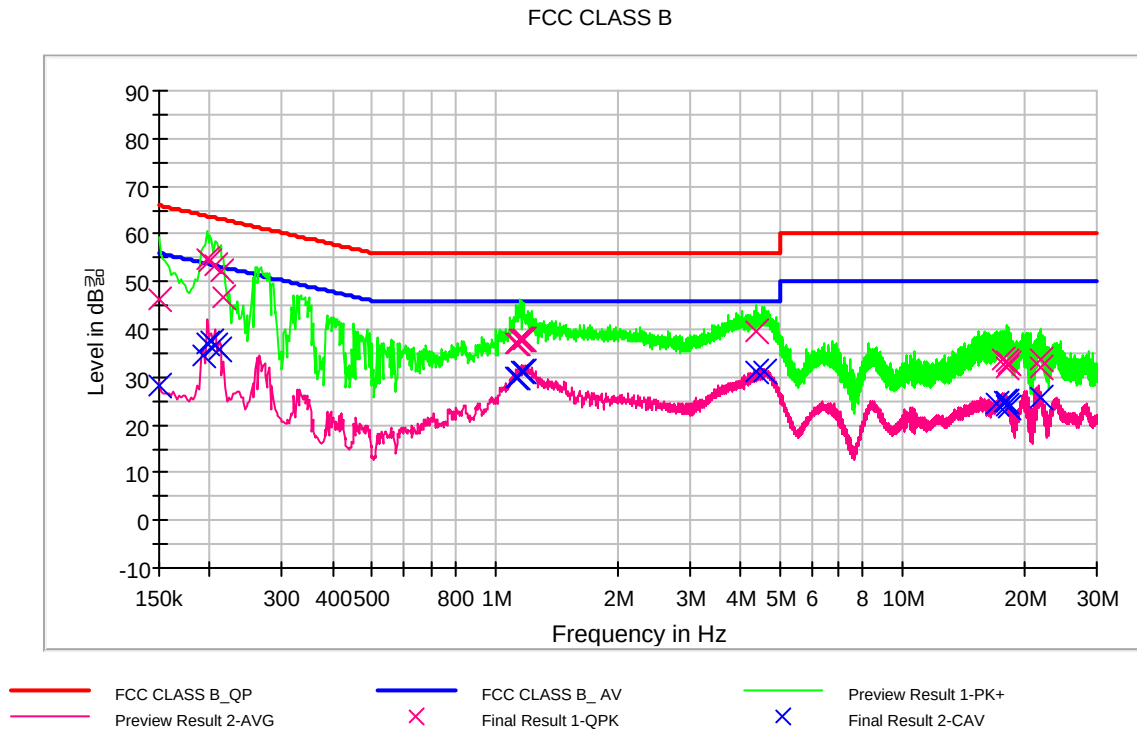
QuasiPeak Final Result, Line (L1)

Frequency (MHz)	QuasiPeak (dBuV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.150000	44.3	9.000	L1	9.6	21.7	66.0
0.190000	48.5	9.000	L1	9.6	15.5	64.0
0.196000	51.8	9.000	L1	9.6	12.0	63.8
0.200000	51.4	9.000	L1	9.7	12.2	63.6
0.206000	50.6	9.000	L1	9.7	12.8	63.4
0.212000	49.4	9.000	L1	9.7	13.7	63.1
1.196000	37.8	9.000	L1	9.7	18.2	56.0
4.178000	39.3	9.000	L1	9.9	16.7	56.0
4.248000	39.3	9.000	L1	9.9	16.7	56.0
4.318000	39.5	9.000	L1	9.9	16.5	56.0
4.460000	39.7	9.000	L1	9.9	16.3	56.0
4.602000	39.2	9.000	L1	9.9	16.8	56.0
16.494000	32.7	9.000	L1	10.2	27.3	60.0
16.990000	32.7	9.000	L1	10.2	27.3	60.0
17.198000	33.3	9.000	L1	10.2	26.7	60.0
18.118000	32.6	9.000	L1	10.3	27.4	60.0
20.170000	32.5	9.000	L1	10.3	27.5	60.0
20.184000	31.3	9.000	L1	10.3	28.7	60.0



CAverage Final Result, Line (L1)

Frequency (MHz)	CAverage (dBuV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.150000	27.5	9.000	L1	9.6	28.5	56.0
0.192000	33.6	9.000	L1	9.6	20.3	53.9
0.196000	35.9	9.000	L1	9.6	17.9	53.8
0.202000	36.2	9.000	L1	9.7	17.3	53.5
0.206000	35.7	9.000	L1	9.7	17.7	53.4
0.212000	33.4	9.000	L1	9.7	19.7	53.1
1.196000	31.0	9.000	L1	9.7	15.0	46.0
4.318000	31.4	9.000	L1	9.9	14.6	46.0
4.388000	31.4	9.000	L1	9.9	14.6	46.0
4.462000	31.2	9.000	L1	9.9	14.8	46.0
4.532000	31.1	9.000	L1	9.9	14.9	46.0
4.602000	31.3	9.000	L1	9.9	14.7	46.0
16.494000	25.1	9.000	L1	10.2	24.9	50.0
16.634000	25.2	9.000	L1	10.2	24.8	50.0
17.696000	25.1	9.000	L1	10.3	24.9	50.0
18.118000	23.2	9.000	L1	10.3	26.8	50.0
20.170000	21.7	9.000	L1	10.3	28.3	50.0
20.184000	22.7	9.000	L1	10.3	27.3	50.0

**Figure 2: Spectral Diagrams, Conducted Emission, AC Main Port, Line (N)**



QuasiPeak Final Result, Line (N)

Frequency (MHz)	QuasiPeak (dBuV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.150000	46.5	9.000	N	9.6	19.5	66.0
0.196000	54.7	9.000	N	9.6	9.1	63.8
0.200000	54.4	9.000	N	9.6	9.2	63.6
0.206000	53.5	9.000	N	9.6	9.9	63.4
0.212000	52.1	9.000	N	9.6	11.0	63.1
0.216000	46.6	9.000	N	9.6	16.4	63.0
1.126000	37.2	9.000	N	9.7	18.8	56.0
1.132000	37.2	9.000	N	9.7	18.8	56.0
1.156000	37.9	9.000	N	9.7	18.1	56.0
1.162000	37.8	9.000	N	9.7	18.2	56.0
1.178000	37.7	9.000	N	9.7	18.3	56.0
4.390000	39.5	9.000	N	9.9	16.5	56.0
17.632000	33.7	9.000	N	10.2	26.3	60.0
17.988000	33.3	9.000	N	10.3	26.7	60.0
18.034000	32.1	9.000	N	10.3	27.9	60.0
18.198000	32.9	9.000	N	10.3	27.1	60.0
21.728000	33.7	9.000	N	10.3	26.3	60.0
21.882000	32.2	9.000	N	10.3	27.8	60.0



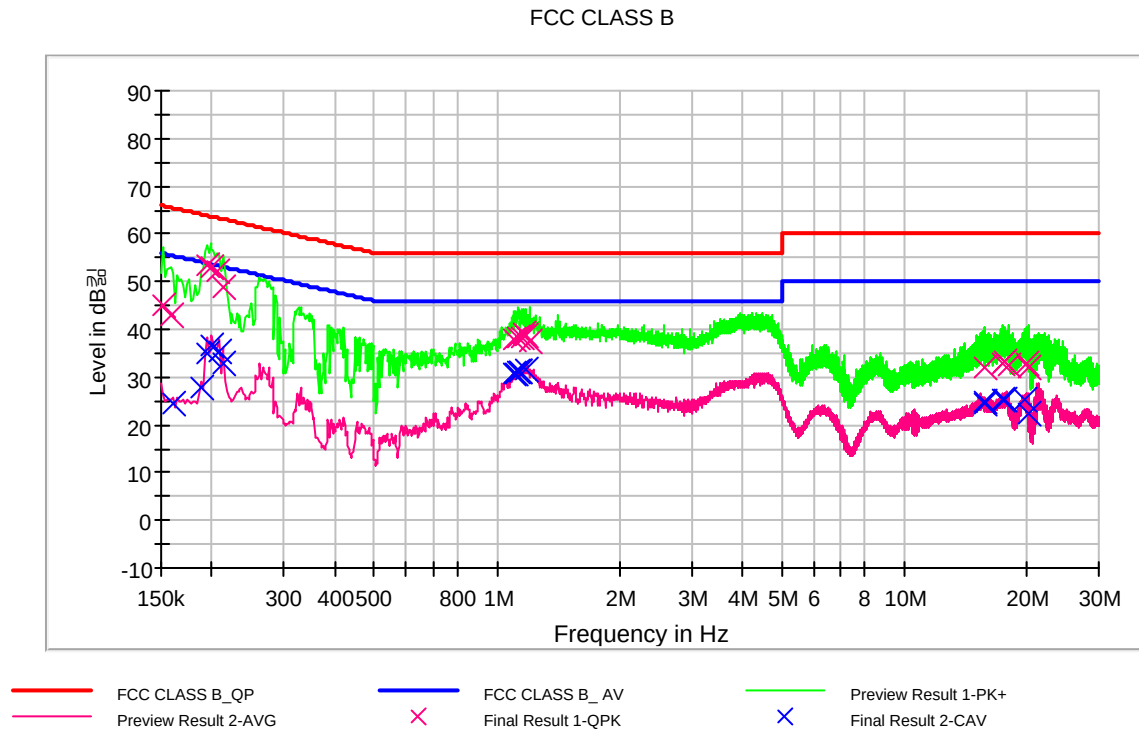
CAverage Final Result, Line (N)

Frequency (MHz)	CAverage (dBuV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.150000	28.2	9.000	N	9.6	27.8	56.0
0.192000	34.4	9.000	N	9.6	19.5	53.9
0.196000	37.2	9.000	N	9.6	16.6	53.8
0.202000	37.4	9.000	N	9.6	16.1	53.5
0.206000	36.7	9.000	N	9.6	16.7	53.4
0.210000	35.7	9.000	N	9.6	17.6	53.2
1.126000	29.9	9.000	N	9.7	16.1	46.0
1.142000	29.8	9.000	N	9.7	16.2	46.0
1.162000	31.1	9.000	N	9.7	14.9	46.0
1.178000	31.0	9.000	N	9.7	15.0	46.0
4.390000	31.1	9.000	N	9.9	14.9	46.0
4.604000	31.2	9.000	N	9.9	14.8	46.0
17.064000	24.5	9.000	N	10.2	25.5	50.0
17.730000	24.9	9.000	N	10.3	25.1	50.0
17.988000	24.7	9.000	N	10.3	25.3	50.0
18.034000	23.9	9.000	N	10.3	26.1	50.0
18.198000	23.6	9.000	N	10.3	26.4	50.0
21.728000	25.9	9.000	N	10.3	24.1	50.0



The test results of conducted emission at mains ports provide the following information:

Rule Part / Standard	FCC PART 15 Subpart B Class B
Detector	Quasi-Peak, CISPR-Average
Bandwidth	9 kHz (6 dB)
Operation Mode	Data Communication mode
EUT Cover Type	Quick cover
USB Type	CRESYN(DLC-LGE51DCMUW-1) ※NOTE: The worst-case emissions are reported.
Kind of Test Site	Shielded Room
Temperature	21.9 °C
Relative Humidity	37.9 %
Test Date	April 20, 2015

**Figure 3: Spectral Diagrams, Conducted Emission, AC Main Port, Line (L1)**



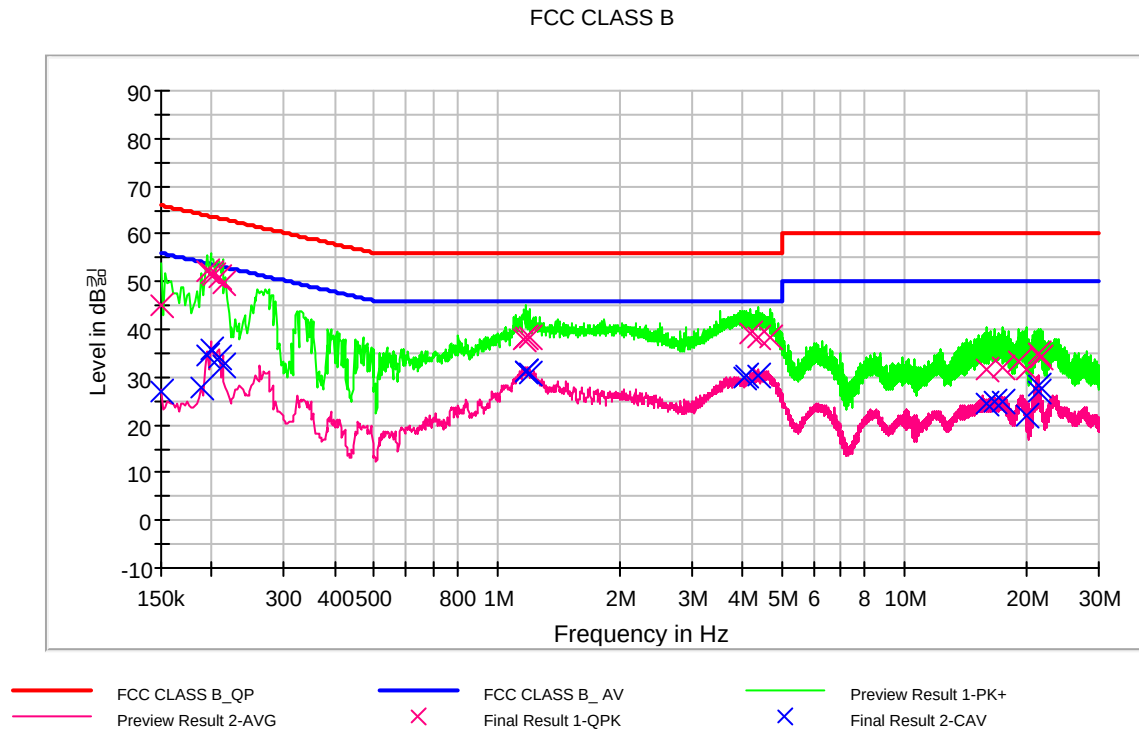
QuasiPeak Final Result, Line (L1)

Frequency (MHz)	QuasiPeak (dBuV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.152000	45.0	9.000	L1	9.6	20.9	65.9
0.158000	43.0	9.000	L1	9.6	22.6	65.6
0.194000	53.3	9.000	L1	9.6	10.6	63.9
0.198000	53.0	9.000	L1	9.6	10.7	63.7
0.206000	52.0	9.000	L1	9.7	11.4	63.4
0.214000	49.0	9.000	L1	9.7	14.0	63.0
1.106000	37.8	9.000	L1	9.7	18.2	56.0
1.130000	38.5	9.000	L1	9.7	17.5	56.0
1.148000	38.3	9.000	L1	9.7	17.7	56.0
1.166000	39.1	9.000	L1	9.7	16.9	56.0
1.176000	38.7	9.000	L1	9.7	17.3	56.0
1.206000	37.3	9.000	L1	9.7	18.7	56.0
15.650000	31.9	9.000	L1	10.2	28.1	60.0
17.420000	32.9	9.000	L1	10.3	27.1	60.0
17.706000	33.1	9.000	L1	10.3	26.9	60.0
18.054000	32.6	9.000	L1	10.3	27.4	60.0
19.964000	32.8	9.000	L1	10.3	27.2	60.0
20.178000	32.1	9.000	L1	10.3	27.9	60.0



CAverage Final Result, Line (L1)

Frequency (MHz)	CAverage (dBuV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.160000	24.3	9.000	L1	9.6	31.2	55.5
0.188000	27.6	9.000	L1	9.6	26.5	54.1
0.194000	35.0	9.000	L1	9.6	18.9	53.9
0.200000	36.8	9.000	L1	9.7	16.8	53.6
0.208000	35.4	9.000	L1	9.7	17.9	53.3
0.212000	32.7	9.000	L1	9.7	20.4	53.1
1.106000	30.6	9.000	L1	9.7	15.4	46.0
1.114000	30.8	9.000	L1	9.7	15.2	46.0
1.128000	31.2	9.000	L1	9.7	14.8	46.0
1.132000	31.1	9.000	L1	9.7	14.9	46.0
1.142000	31.3	9.000	L1	9.7	14.7	46.0
1.174000	31.8	9.000	L1	9.7	14.2	46.0
15.650000	24.6	9.000	L1	10.2	25.4	50.0
15.788000	24.8	9.000	L1	10.2	25.2	50.0
17.420000	25.2	9.000	L1	10.3	24.8	50.0
17.706000	25.4	9.000	L1	10.3	24.6	50.0
19.780000	25.1	9.000	L1	10.3	24.9	50.0
20.176000	22.6	9.000	L1	10.3	27.4	50.0

**Figure 4: Spectral Diagrams, Conducted Emission, AC Main Port, Line (N)**



QuasiPeak Final Result, Line (N)

Frequency (MHz)	QuasiPeak (dBuV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.150000	45.1	9.000	N	9.6	20.9	66.0
0.194000	52.2	9.000	N	9.6	11.7	63.9
0.198000	51.9	9.000	N	9.6	11.8	63.7
0.202000	51.5	9.000	N	9.6	12.0	63.5
0.208000	50.8	9.000	N	9.6	12.5	63.3
0.212000	49.8	9.000	N	9.6	13.3	63.1
1.170000	37.9	9.000	N	9.7	18.1	56.0
1.176000	38.2	9.000	N	9.7	17.8	56.0
1.202000	38.4	9.000	N	9.7	17.6	56.0
4.176000	39.0	9.000	N	9.8	17.0	56.0
4.392000	38.2	9.000	N	9.9	17.8	56.0
4.672000	38.2	9.000	N	9.9	17.8	56.0
15.926000	31.4	9.000	N	10.2	28.6	60.0
17.410000	32.1	9.000	N	10.2	27.9	60.0
19.178000	33.4	9.000	N	10.3	26.6	60.0
19.888000	31.6	9.000	N	10.3	28.4	60.0
21.302000	35.0	9.000	N	10.3	25.0	60.0
21.494000	34.0	9.000	N	10.3	26.0	60.0



CAverage Final Result, Line (N)

Frequency (MHz)	CAverage (dBuV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.150000	26.9	9.000	N	9.6	29.1	56.0
0.188000	27.7	9.000	N	9.6	26.4	54.1
0.194000	34.5	9.000	N	9.6	19.4	53.9
0.198000	35.6	9.000	N	9.6	18.1	53.7
0.208000	34.3	9.000	N	9.6	19.0	53.3
0.212000	32.4	9.000	N	9.6	20.7	53.1
1.176000	31.2	9.000	N	9.7	14.8	46.0
1.180000	31.2	9.000	N	9.7	14.8	46.0
1.202000	31.0	9.000	N	9.7	15.0	46.0
4.044000	29.8	9.000	N	9.8	16.2	46.0
4.104000	30.4	9.000	N	9.8	15.6	46.0
4.392000	30.3	9.000	N	9.9	15.7	46.0
15.926000	24.4	9.000	N	10.2	25.6	50.0
16.736000	24.8	9.000	N	10.2	25.2	50.0
17.410000	24.7	9.000	N	10.2	25.3	50.0
19.888000	22.0	9.000	N	10.3	28.0	50.0
21.302000	28.4	9.000	N	10.3	21.6	50.0
21.376000	26.9	9.000	N	10.3	23.1	50.0



4.2 Radiated Emission Test

The test results of radiated emission provide the following information:

-For Measurement Below 1 GHz

Rule Part / Standard	FCC PART 15 Subpart B Class B
Detector	Quasi-Peak
Bandwidth	120 kHz (6 dB)
Operation Mode	Data Communication mode
EUT Cover Type	Standard cover
USB Type	CRESYN(DLC-LGE51DCMUW-1) ※NOTE: The worst-case emissions are reported.
Kind of Test Site	3 m semi anechoic chamber
Temperature	24.1 °C
Relative Humidity	26.7 %
Test Date	March 03, 2015

Frequency (MHz)	Quasi Peak (dBuV/m)	Antenna Height (cm)	POL. (H/V)	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBuV/m)
34.687776	27.6	100.0	V	1.0	15.0	12.4	40.0
81.181082	32.7	400.0	H	251.0	11.8	7.3	40.0

- Calculation Formula:

1. POL. H = Horizontal, POL. V = Vertical
2. QuasiPeak = Reading (Receiver Reading) + Corr.
3. Corr. (Correction Factor) = Antenna Factor + Cable Loss
4. Margin = Limit - QuasiPeak



Rule Part / Standard	FCC PART 15 Subpart B Class B
Detector	Quasi-Peak
Bandwidth	120 kHz (6 dB)
Operation Mode	Data Communication mode
EUT Cover Type	Quick cover
USB Type	CRESYN(DLC-LGE51DCMUW-1) ※NOTE: The worst-case emissions are reported.
Kind of Test Site	3 m semi anechoic chamber
Temperature	23.4 °C
Relative Humidity	40.4 %
Test Date	April 20, 2015

Frequency (MHz)	Quasi Peak (dBuV/m)	Antenna Height (cm)	POL. (H/V)	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBuV/m)
33.207776	20.4	100.0	V	218.0	14.9	19.6	40.0
78.877194	28.7	350.0	H	253.0	12.1	11.3	40.0
133.306052	32.1	100.0	V	136.0	16.4	11.4	43.5
266.554309	34.4	116.0	H	305.0	16.9	11.6	46.0
750.222365	28.3	193.0	V	164.0	27.5	17.7	46.0



-For Measurement Above 1 GHz

Rule Part / Standard	FCC PART 15 Subpart B Class B
Detector	Peak mode: Peak (RBW: 1 MHz, VBW: 3 MHz) CISPR-Average mode: Peak (RBW: 1 MHz, VBW: 10 Hz)
Highest Operating Frequency	1.8 GHz
Testing Frequency Range	1 GHz to 9 GHz
Operation Mode	Data Communication mode
EUT Cover Type	Standard cover
USB Type	Ningbo Broad (LG0121) ※NOTE: The worst-case emissions are reported.
Kind of Test Site	3 m semi anechoic chamber
Temperature	22.3 °C
Relative Humidity	26.5 %
Test Date	March 04, 2015

Frequency (MHz)	Peak (dBuV/m)	Antenna Height (cm)	POL. (H/V)	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBuV/m)
1249.649299	49.4	100.0	V	-1.0	-9.4	24.6	74.0
1994.438878	56.1	100.0	V	28.0	-7.8	17.9	74.0
2658.767535	49.1	100.0	V	37.0	-4.8	24.9	74.0

Frequency (MHz)	CAverage (dBuV/m)	Antenna Height (cm)	POL. (H/V)	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBuV/m)
1249.649299	42.0	100.0	V	-1.0	-9.4	12.0	54.0
1994.438878	38.1	100.0	V	28.0	-7.8	15.9	54.0
2658.767535	33.3	100.0	V	37.0	-4.8	20.7	54.0

- Calculation Formula:

1. POL. H = Horizontal, POL. V = Vertical
2. Peak or CAverage = Reading (Receiver Reading) + Corr.
3. Corr. (Correction Factor) = Antenna Factor+ Cable Loss –Amplifier Gain
4. Margin = Limit - Peak or CAverage



Rule Part / Standard	FCC PART 15 Subpart B Class B
Detector	Peak mode: Peak (RBW: 1 MHz, VBW: 3 MHz) CISPR-Average mode: Peak (RBW: 1 MHz, VBW: 10 Hz)
Highest Operating Frequency	1.8 GHz
Testing Frequency Range	1 GHz to 9 GHz
Operation Mode	Data Communication mode
EUT Cover Type	Quick cover
USB Type	CRESYN(DLC-LGE51DCMUW-1) ※NOTE: The worst-case emissions are reported.
Kind of Test Site	3 m semi anechoic chamber
Temperature	23.4 °C
Relative Humidity	40.4 %
Test Date	April 20, 2015

Frequency (MHz)	Peak (dBμV/m)	Antenna Height (cm)	POL. (H/V)	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBμV/m)
1250.150301	50.0	100.0	V	353.0	-9.4	24.0	74.0
1329.509018	52.6	100.0	V	29.0	-9.3	21.4	74.0
1996.643287	54.2	100.0	V	28.0	-7.8	19.8	74.0
2055.561123	50.5	100.0	V	30.0	-7.5	23.5	74.0

Frequency (MHz)	CAverage (dBμV/m)	Antenna Height (cm)	POL. (H/V)	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBμV/m)
1250.150301	46.2	100.0	V	353.0	-9.4	7.8	54.0
1329.509018	28.4	100.0	V	29.0	-9.3	25.6	54.0
1996.643287	31.0	100.0	V	28.0	-7.8	23.0	54.0
2055.561123	30.1	100.0	V	30.0	-7.5	23.9	54.0



5. LIST OF TEST EQUIPMENT

<u>Type</u>	<u>Manufacturer</u>	<u>Model Name</u>	<u>Serial Number</u>	<u>Calibration Cycle</u>	<u>CAL Date</u>
<u>Conducted Emission</u>					
☒ EMI Test Receiver	Rohde & Schwarz	ESCI	100584	1 year	01.13.2015
☒ LISN	Rohde & Schwarz	ESH3-Z5	100282	1 year	06.10.2014
☒ LISN	Rohde & Schwarz	ENV216	100073	1 year	01.13.2015
☒ Software	Rohde & Schwarz	EMC32	-	-	-
<u>Radiated Emission</u>					
-For measurement below 1 GHz					
☒ EMI Test Receiver	Rohde & Schwarz	ESI40	831564103	1 year	04.01.2015
☒ Trilog Antenna	Schwarzbeck	VULB9160	3301	2 year	11.17.2014
☒ Antenna master	HD GmbH	MA240	240/520	N/A	-
☒ Antenna master controller	HD GmbH	HD 100	100/637	N/A	-
☒ Turn Table	EMCO	1060-2M	-	N/A	-
☒ Turn Table controller	EMCO	2090	9702-1224	N/A	-
☐ EMI Test Receiver	Rohde & Schwarz	ESU 26	100241	1 year	06.18.2014
☐ Antenna master	INNCO Systems	MA4000-EP	MA4000/283	N/A	-
☐ Turn Table	INNCO Systems	DT3000-3T	DT3000/69	N/A	-
☒ Software	Rohde & Schwarz	EMC32	-	-	-
-For measurement above 1 GHz					
☒ EMI Test Receiver	Rohde & Schwarz	ESI40	831564103	1 year	04.01.2015
☒ Antenna master	HD GmbH	MA240	240/520	N/A	-
☒ Antenna master controller	HD GmbH	HD 100	100/637	N/A	-
☒ Turn Table	EMCO	1060-2M	-	N/A	-
☒ Turn Table controller	EMCO	2090	9702-1224	N/A	-
☐ Power Amplifier	CERNEX	CBLU1183540	21691	1 year	07.11.2014
☒ Power Amplifier	CERNEX	CBLU5183530	24348	1 year	06.11.2014
☒ Horn Antenna	Schwarzbeck	BBHA 9120D	296	2 year	10.07.2014
☐ Horn Antenna	Schwarzbeck	BBHA 9120D	1151	2 year	07.05.2013
☐ EMI Test Receiver	Rohde & Schwarz	ESU 26	100241	1 year	06.18.2014
☐ Turn Table	INNCO Systems	DT3000-3T	DT3000/69	N/A	-
☐ Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170124	2 year	10.30.2013
☒ Software	Rohde & Schwarz	EMC32	-	-	-



6. CONCLUSION

The data collected shows that the **EUT Type: Cellular/PCS CDMA/EVDO and LTE Phone with Bluetooth, WLAN and NFC, FCC ID: ZNFLS991, Model: LGLS991** complies with §15.107 and §15.109 of the FCC rules.