

7.4 Band Edge Emissions at Antenna Terminal

§2.1051 §22.917(a) §24.238(a) §27.53(g) §27.53(h) §27.53(m)

Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

The minimum permissible attenuation level for Band 7 and 41 is as noted in the Test Notes on the following page.

The minimum permissible attenuation level of any spurious emission is $43 + \log_{10}(P_{[Watts]})$, where P is the transmitter power in Watts.

Test Procedure Used

KDB 971168 D01 v02r02 – Section 6.0

Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW \geq 1% of the emission bandwidth
4. VBW \geq 3 x RBW
5. Detector = RMS
6. Number of sweep points \geq 2 x Span/RBW
7. Trace mode = trace average for continuous emissions, max hold for pulse emissions
8. Sweep time = auto couple
9. The trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

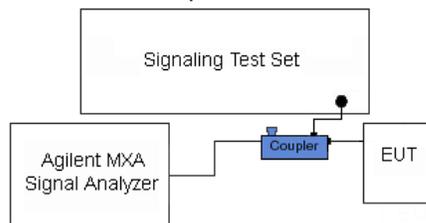


Figure 7-3. Test Instrument & Measurement Setup

FCC ID: ZNFLS992		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1601280183-R1.ZNF	Test Dates: 12/31/2015-02/24/2016	EUT Type: Portable Handset		Page 77 of 167

Test Notes

Per 22.917(b) 24.238(a) 27.53(h) in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed to demonstrate compliance with the out-of-band emissions limit. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.

Per 27.53(g) for operations in the 698-746 MHz band, in the 100 kHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least 30 kHz may be employed to demonstrate compliance with the out-of-band emissions limit.

Per 27.53(m) for operations in the BRS/EBS bands, the attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth. In addition, the attenuation factor shall not be less that $43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log (P)$ dB at or below 2490.5 MHz.

FCC ID: ZNFLS992		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1601280183-R1.ZNF	Test Dates: 12/31/2015-02/24/2016	EUT Type: Portable Handset		Page 78 of 167



Plot 7-122. Lower Band Edge Plot (Band 12 – 1.4MHz QPSK – RB Size 6)



Plot 7-123. Upper Band Edge Plot (Band 12 – 1.4MHz QPSK – RB Size 6)

FCC ID: ZNFLS992		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1601280183-R1.ZNF	Test Dates: 12/31/2015-02/24/2016	EUT Type: Portable Handset		Page 79 of 167




Plot 7-124. Lower Band Edge Plot (Band 12 – 3.0MHz QPSK – RB Size 15)




Plot 7-125. Upper Band Edge Plot (Band 12 – 3.0MHz QPSK – RB Size 15)

FCC ID: ZNFLS992		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1601280183-R1.ZNF	Test Dates: 12/31/2015-02/24/2016	EUT Type: Portable Handset		Page 80 of 167

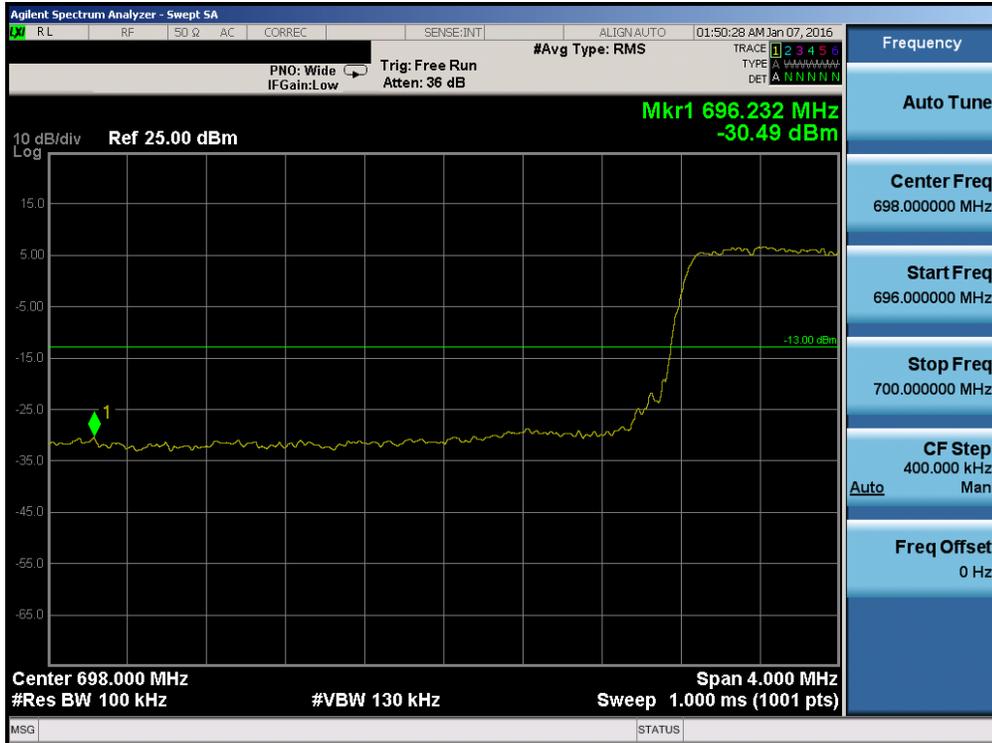


Plot 7-126. Lower Band Edge Plot (Band 12 – 5.0MHz QPSK – RB Size 25)

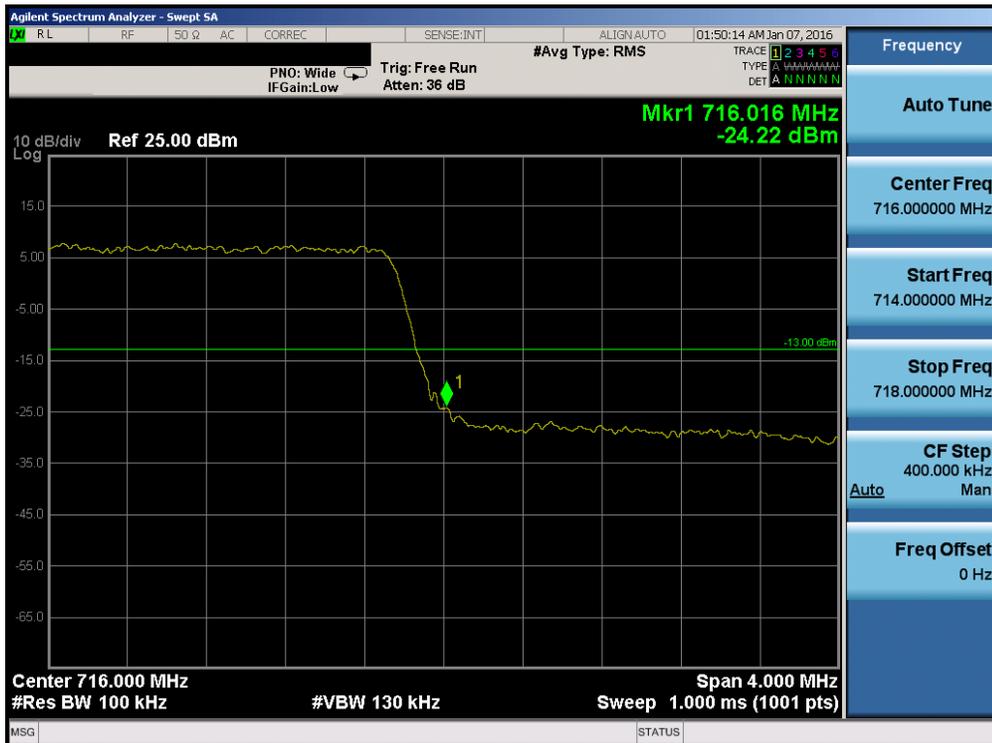


Plot 7-127. Upper Band Edge Plot (Band 12 – 5.0MHz QPSK – RB Size 25)

FCC ID: ZNFLS992		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1601280183-R1.ZNF	Test Dates: 12/31/2015-02/24/2016	EUT Type: Portable Handset		Page 81 of 167

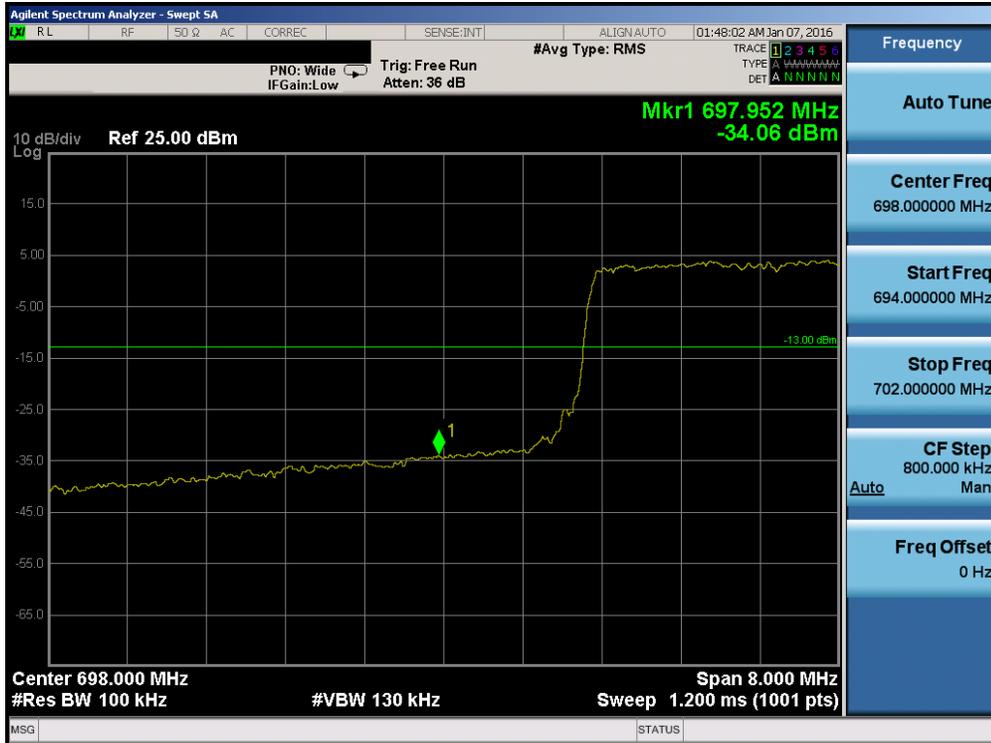


Plot 7-128. Lower Band Edge Plot (Band 12 – 10.0MHz QPSK – RB Size 50)

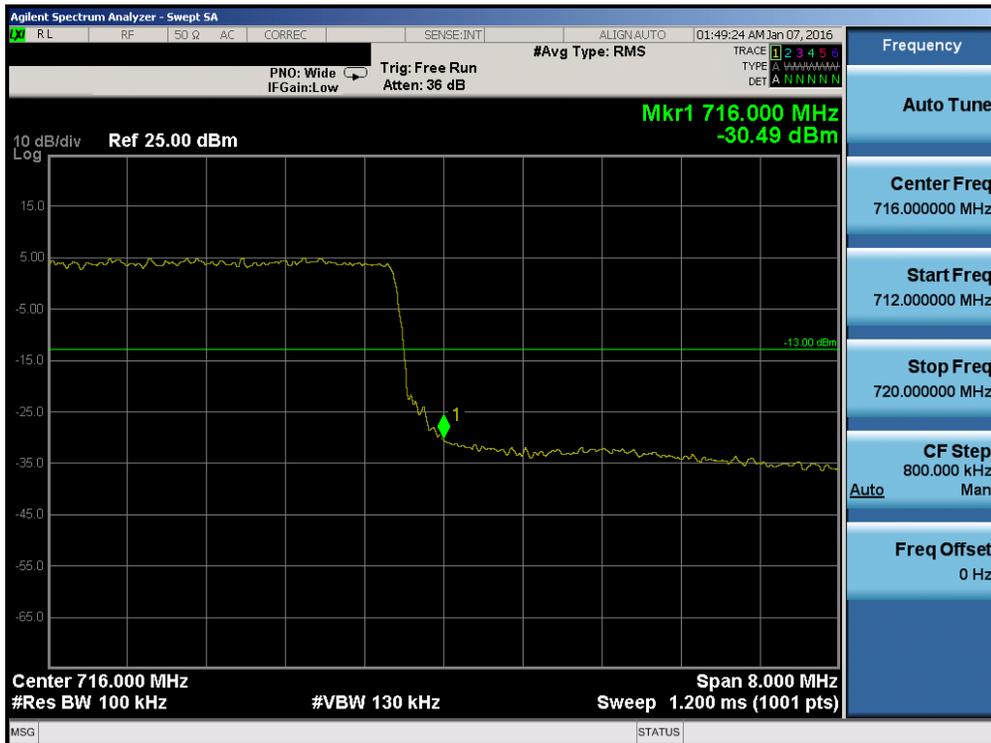

Plot 7-129. Upper Band Edge Plot (Band 12 – 10.0MHz QPSK – RB Size 50)

FCC ID: ZNFLS992		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1601280183-R1.ZNF	Test Dates: 12/31/2015-02/24/2016	EUT Type: Portable Handset		Page 82 of 167

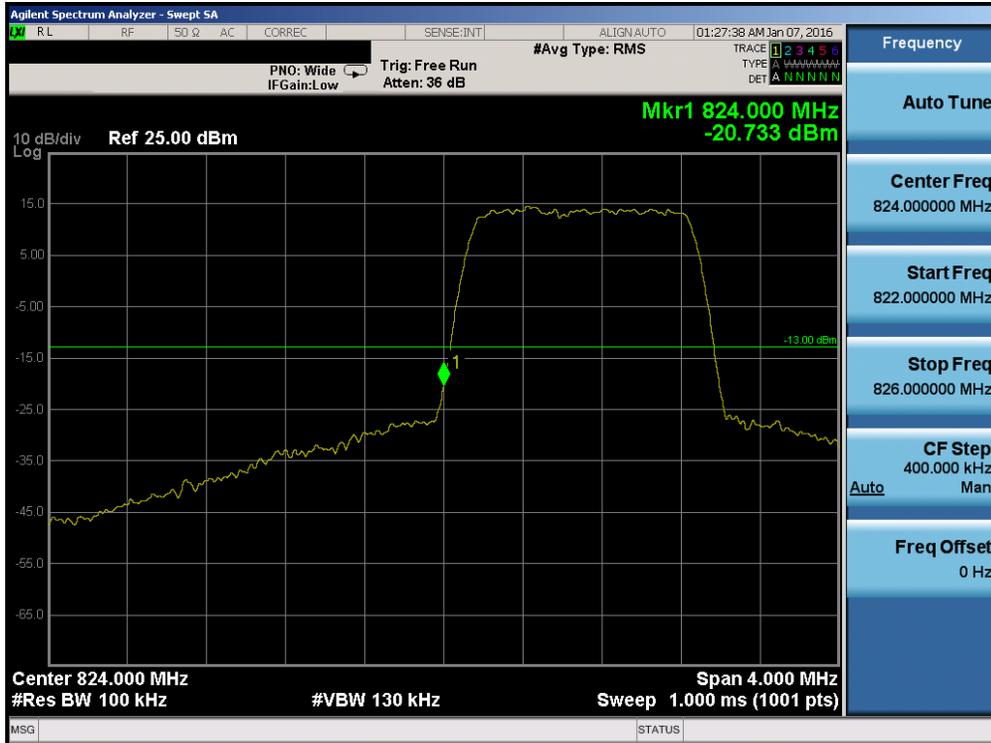

Plot 7-130. Lower Band Edge Plot (Band 26/5 – 1.4MHz QPSK – RB Size 6)



Plot 7-131. Upper Band Edge Plot (Band 26/5 – 1.4MHz QPSK – RB Size 6)

FCC ID: ZNFLS992		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1601280183-R1.ZNF	Test Dates: 12/31/2015-02/24/2016	EUT Type: Portable Handset		Page 83 of 167




Plot 7-132. Lower Band Edge Plot (Band 26/5 – 3.0MHz QPSK – RB Size 15)



Plot 7-133. Upper Band Edge Plot (Band 26/5 – 3.0MHz QPSK – RB Size 15)

FCC ID: ZNFLS992		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1601280183-R1.ZNF	Test Dates: 12/31/2015-02/24/2016	EUT Type: Portable Handset		Page 84 of 167

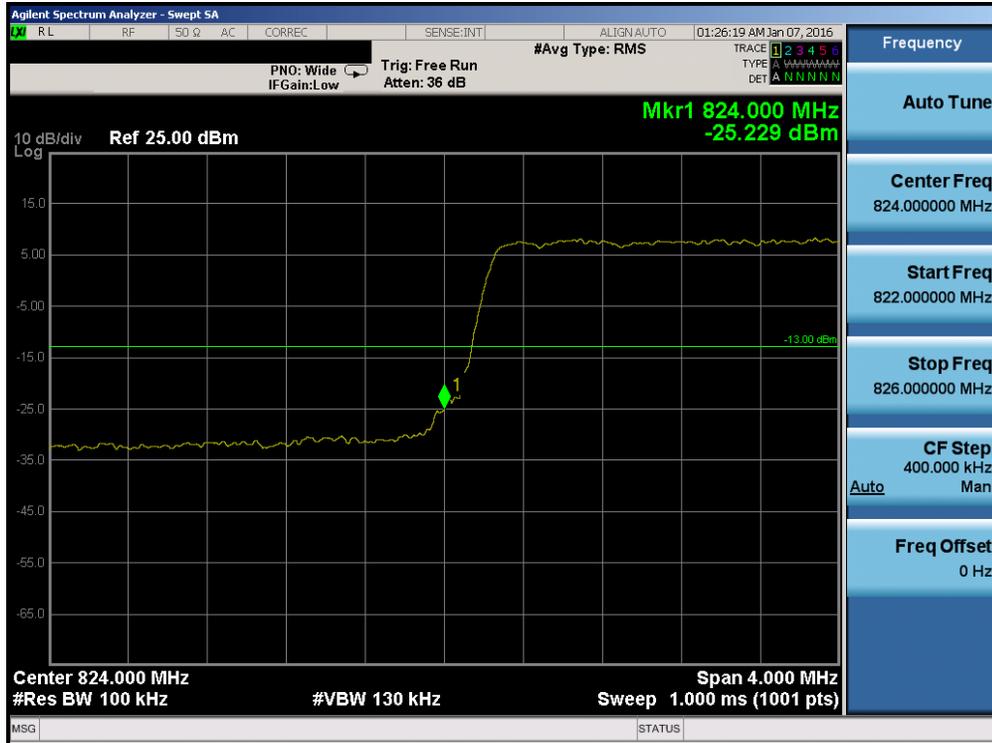


Plot 7-134. Lower Band Edge Plot (Band 26/5 – 5.0MHz QPSK – RB Size 25)



Plot 7-135. Upper Band Edge Plot (Band 26/5 – 5.0MHz QPSK – RB Size 25)

FCC ID: ZNFLS992		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1601280183-R1.ZNF	Test Dates: 12/31/2015-02/24/2016	EUT Type: Portable Handset		Page 85 of 167

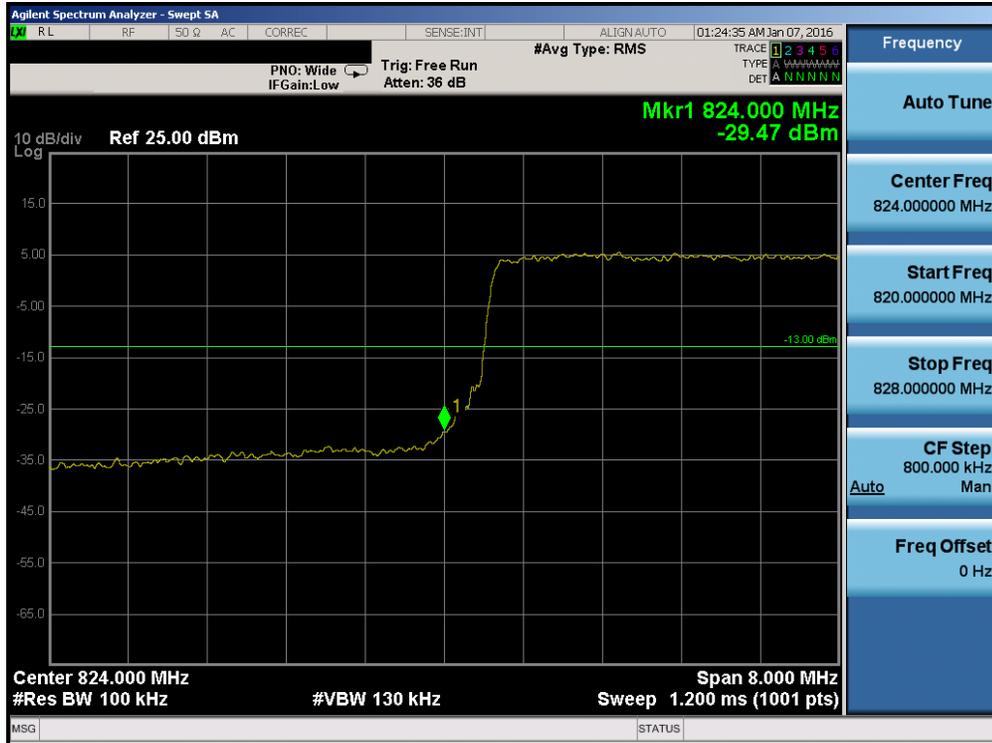


Plot 7-136. Lower Band Edge Plot (Band 26/5 – 10.0MHz QPSK – RB Size 50)




Plot 7-137. Upper Band Edge Plot (Band 26/5 – 10.0MHz QPSK – RB Size 50)

FCC ID: ZNFLS992		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1601280183-R1.ZNF	Test Dates: 12/31/2015-02/24/2016	EUT Type: Portable Handset		Page 86 of 167

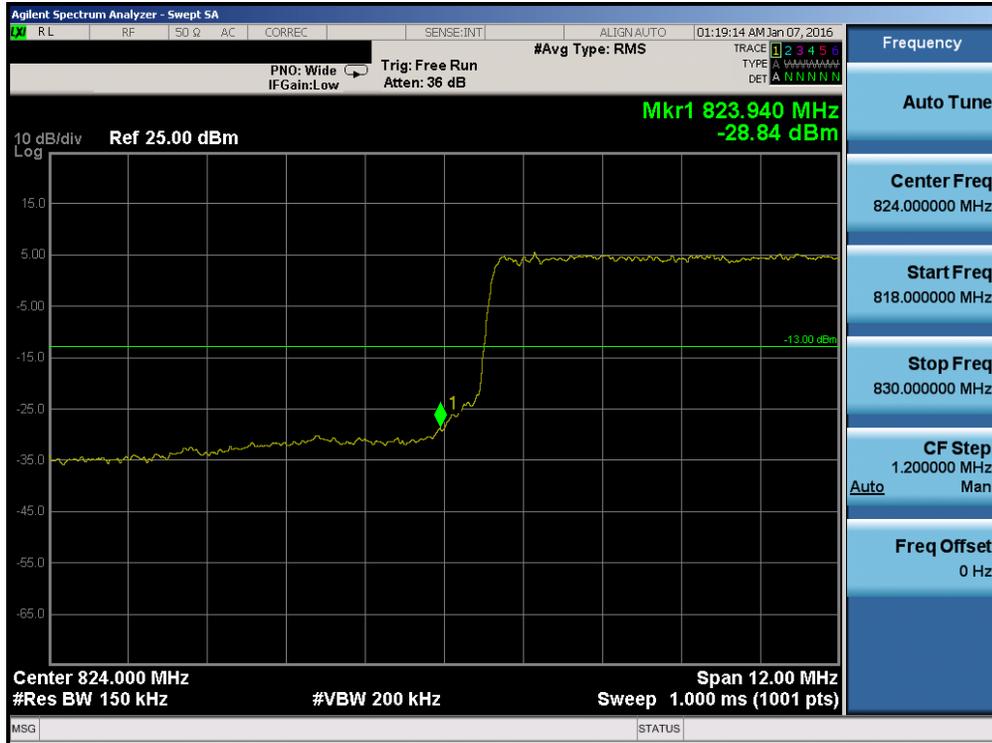


Plot 7-138. Lower Band Edge Plot (Band 26 – 15.0MHz QPSK – RB Size 75)

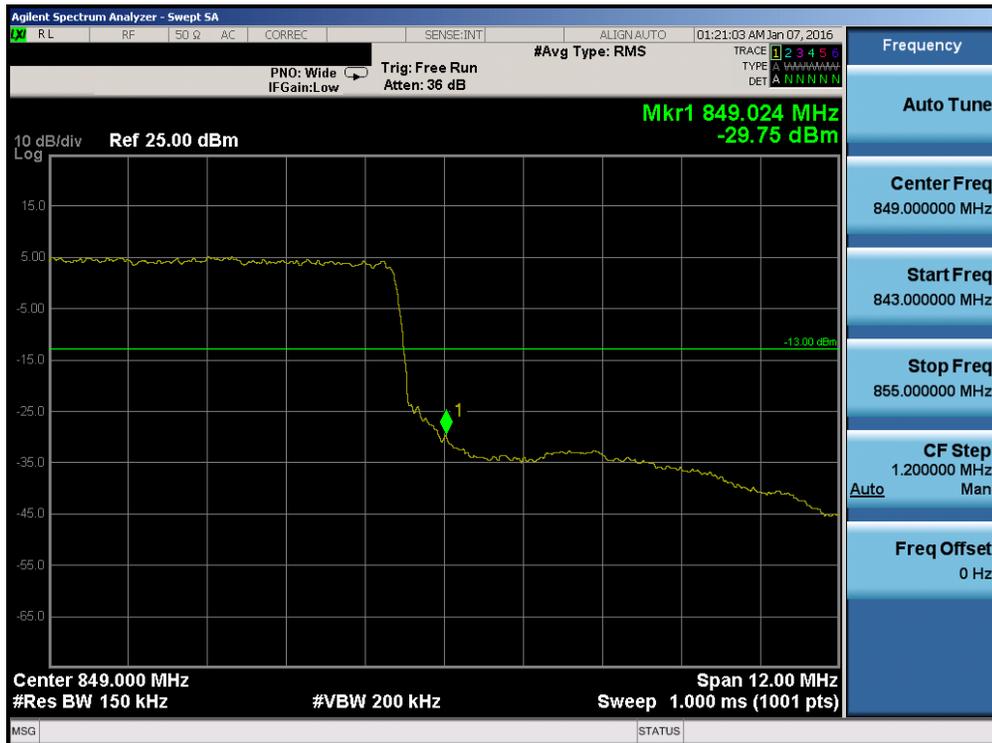


Plot 7-139. Upper Band Edge Plot (Band 26 – 15.0MHz QPSK – RB Size 75)

FCC ID: ZNFLS992		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1601280183-R1.ZNF	Test Dates: 12/31/2015-02/24/2016	EUT Type: Portable Handset		Page 87 of 167

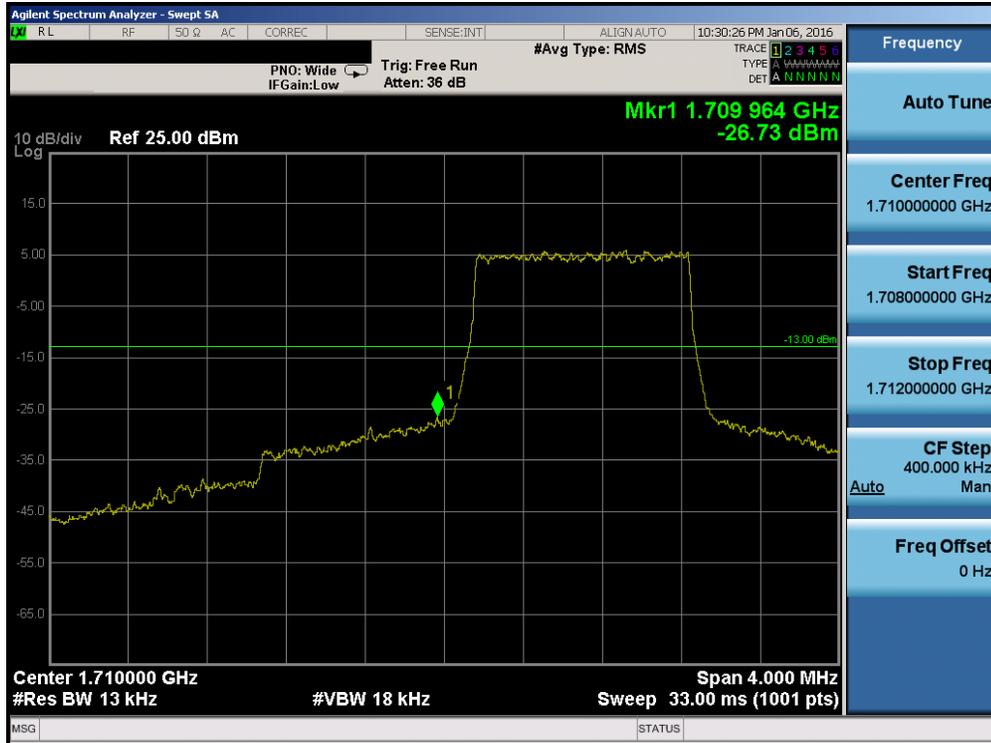

Plot 7-140. Lower Band Edge Plot (Band 4 – 1.4MHz QPSK – RB Size 6)

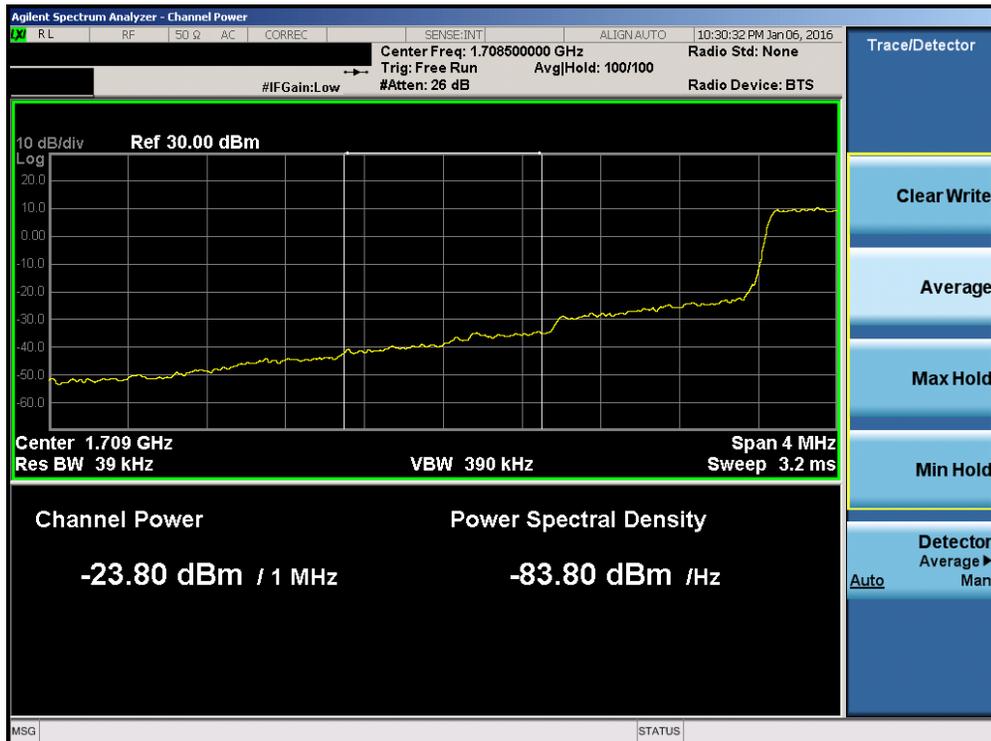


Plot 7-141. Lower Extended Band Edge Plot (Band 4 – 1.4MHz QPSK – RB Size 6)

FCC ID: ZNFLS992	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1601280183-R1.ZNF	Test Dates: 12/31/2015-02/24/2016	EUT Type: Portable Handset		Page 88 of 167




Plot 7-142. Upper Band Edge Plot (Band 4 – 1.4MHz QPSK – RB Size 6)

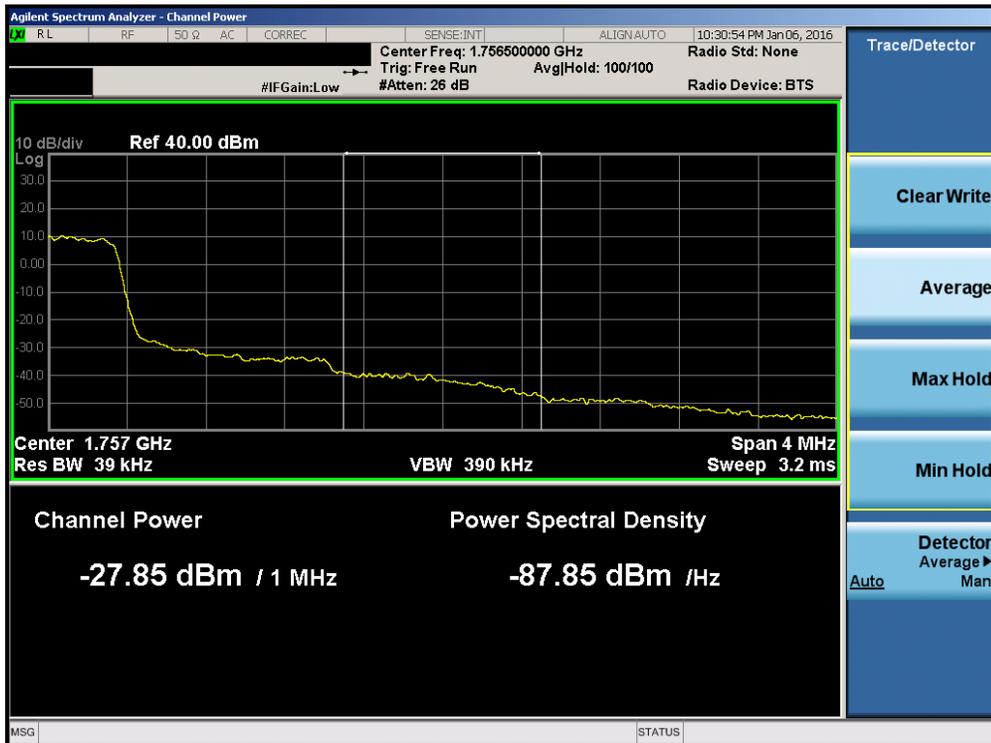


Plot 7-143. Upper Extended Band Edge Plot (Band 4 – 1.4MHz QPSK – RB Size 6)

FCC ID: ZNFLS992		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1601280183-R1.ZNF	Test Dates: 12/31/2015-02/24/2016	EUT Type: Portable Handset		Page 89 of 167

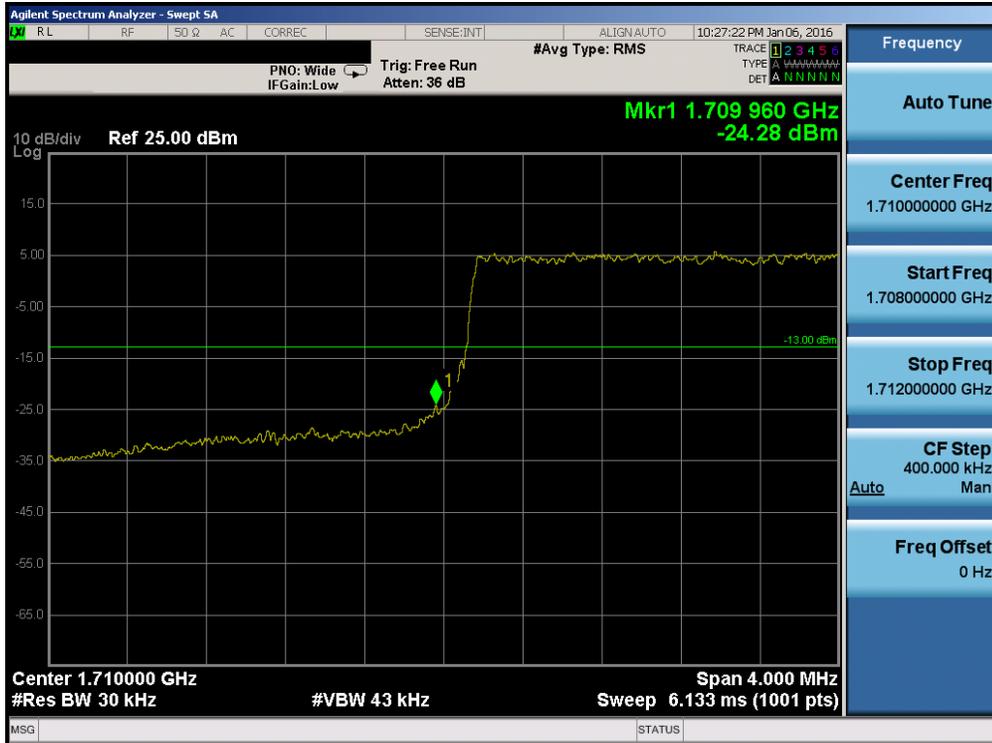

Plot 7-144. Lower Band Edge Plot (Band 4 – 3.0MHz QPSK – RB Size 15)

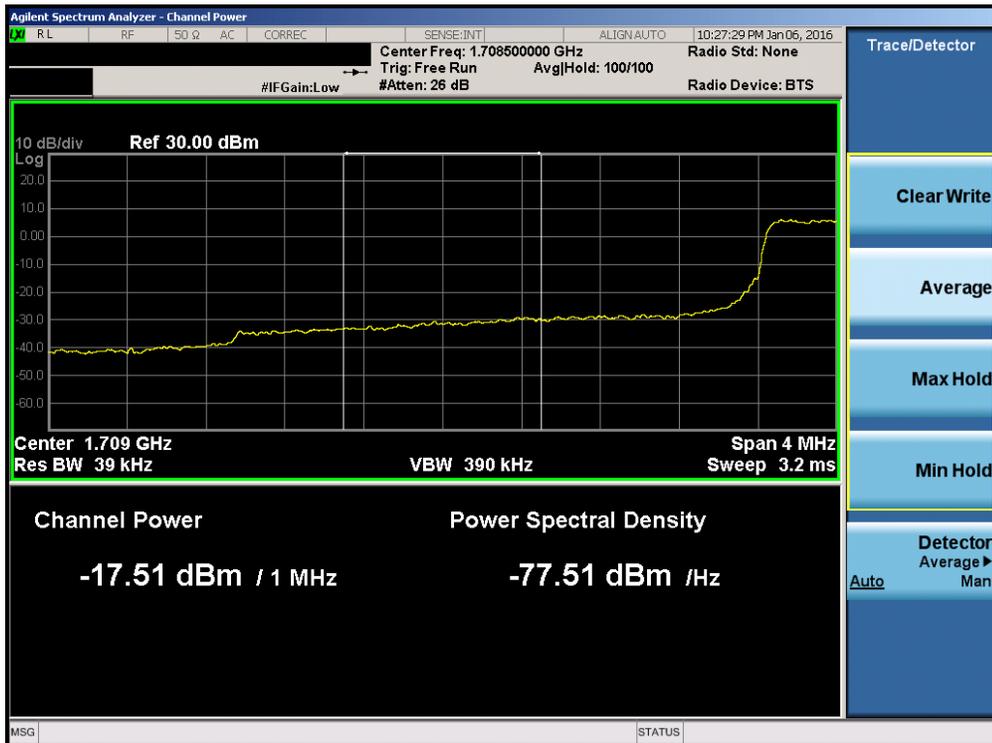


Plot 7-145. Lower Extended Band Edge Plot (Band 4 – 3.0MHz QPSK – RB Size 15)

FCC ID: ZNFLS992	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1601280183-R1.ZNF	Test Dates: 12/31/2015-02/24/2016	EUT Type: Portable Handset		Page 90 of 167




Plot 7-146. Upper Band Edge Plot (Band 4 – 3.0MHz QPSK – RB Size 15)

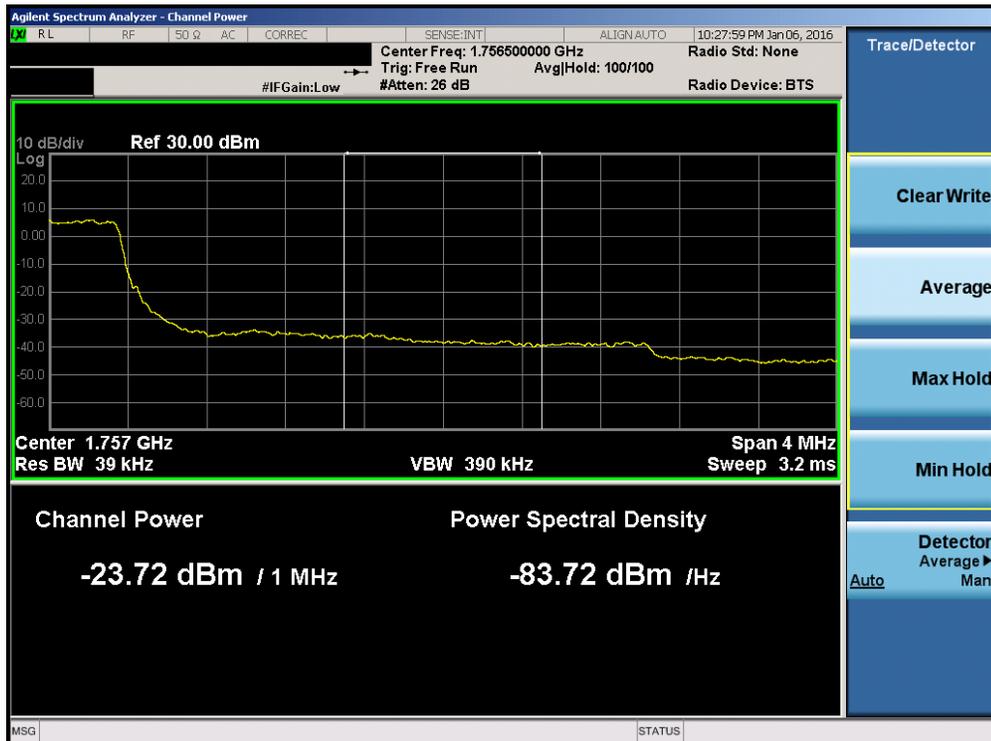


Plot 7-147. Upper Extended Band Edge Plot (Band 4 – 3.0MHz QPSK – RB Size 15)

FCC ID: ZNFLS992	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1601280183-R1.ZNF	Test Dates: 12/31/2015-02/24/2016	EUT Type: Portable Handset		Page 91 of 167

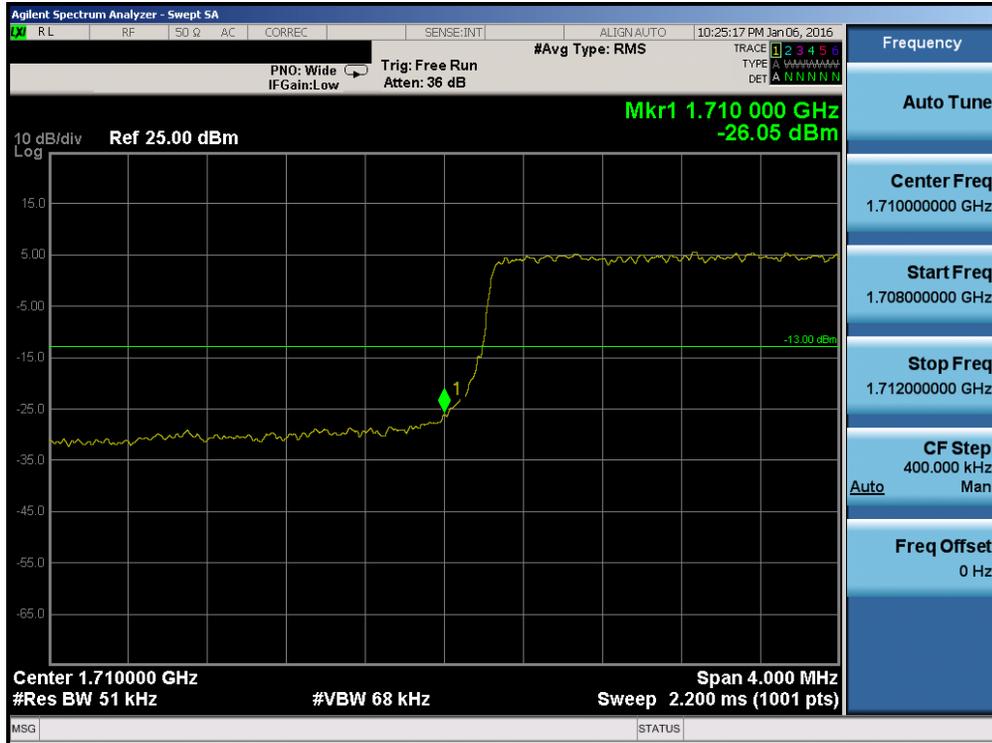

Plot 7-148. Lower Band Edge Plot (Band 4 – 5.0MHz QPSK – RB Size 25)

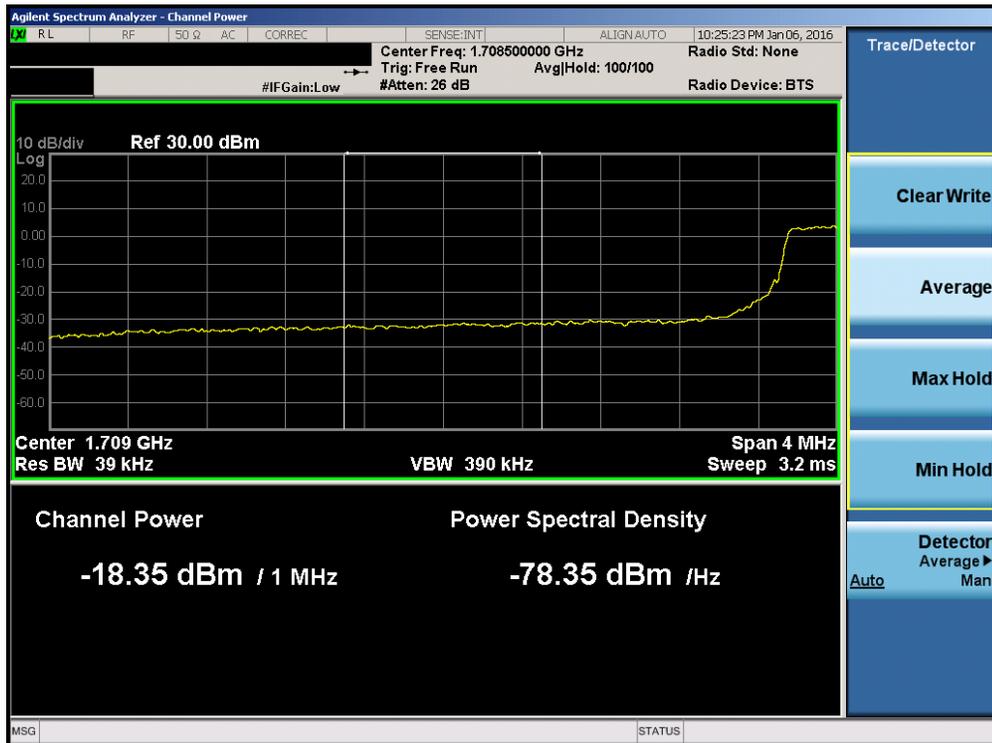


Plot 7-149. Lower Extended Band Edge Plot (Band 4 – 5.0MHz QPSK – RB Size 25)

FCC ID: ZNFLS992		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1601280183-R1.ZNF	Test Dates: 12/31/2015-02/24/2016	EUT Type: Portable Handset		Page 92 of 167




Plot 7-150. Upper Band Edge Plot (Band 4 – 5.0MHz QPSK – RB Size 25)

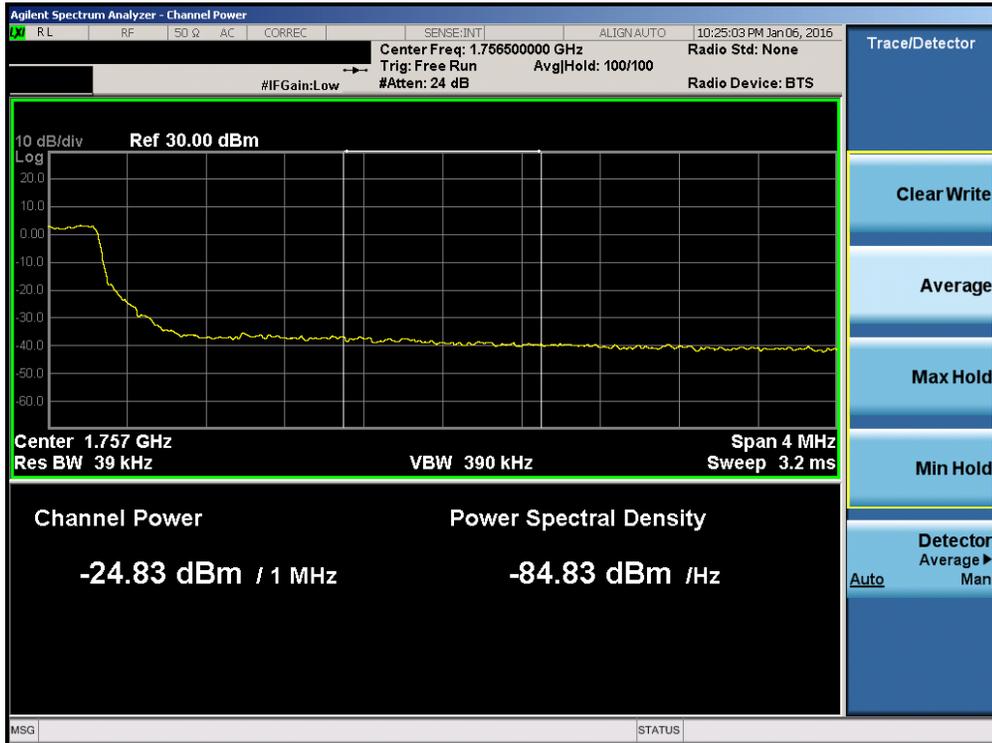


Plot 7-151. Upper Extended Band Edge Plot (Band 4 – 5.0MHz QPSK – RB Size 25)

FCC ID: ZNFLS992		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1601280183-R1.ZNF	Test Dates: 12/31/2015-02/24/2016	EUT Type: Portable Handset		Page 93 of 167

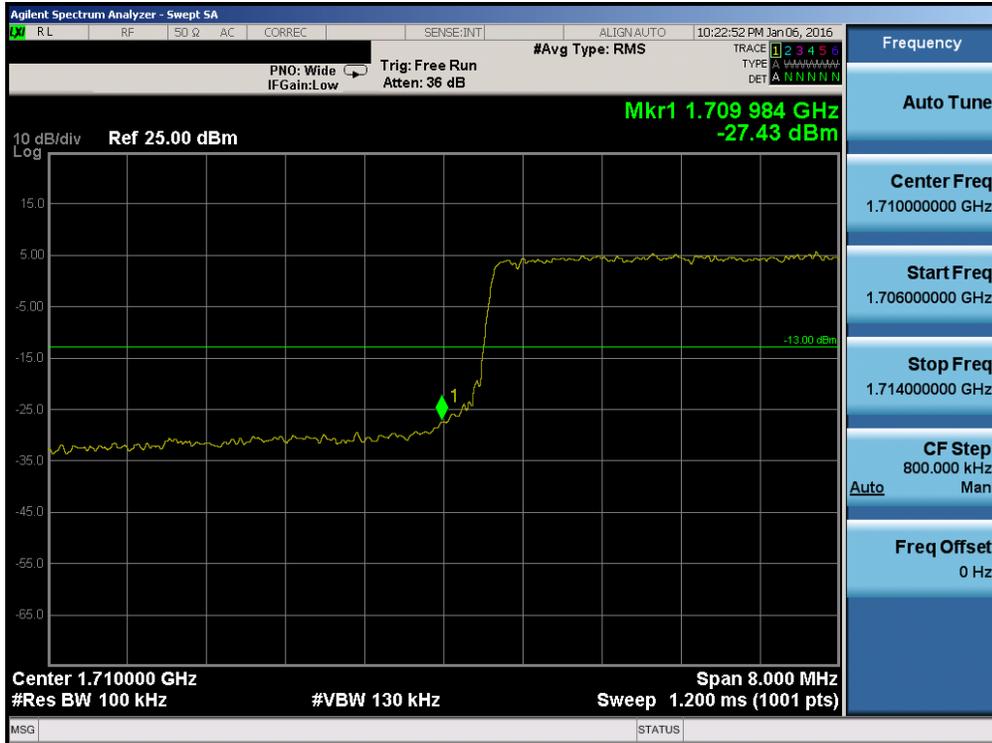

Plot 7-152. Lower Band Edge Plot (Band 4 – 10.0MHz QPSK – RB Size 50)

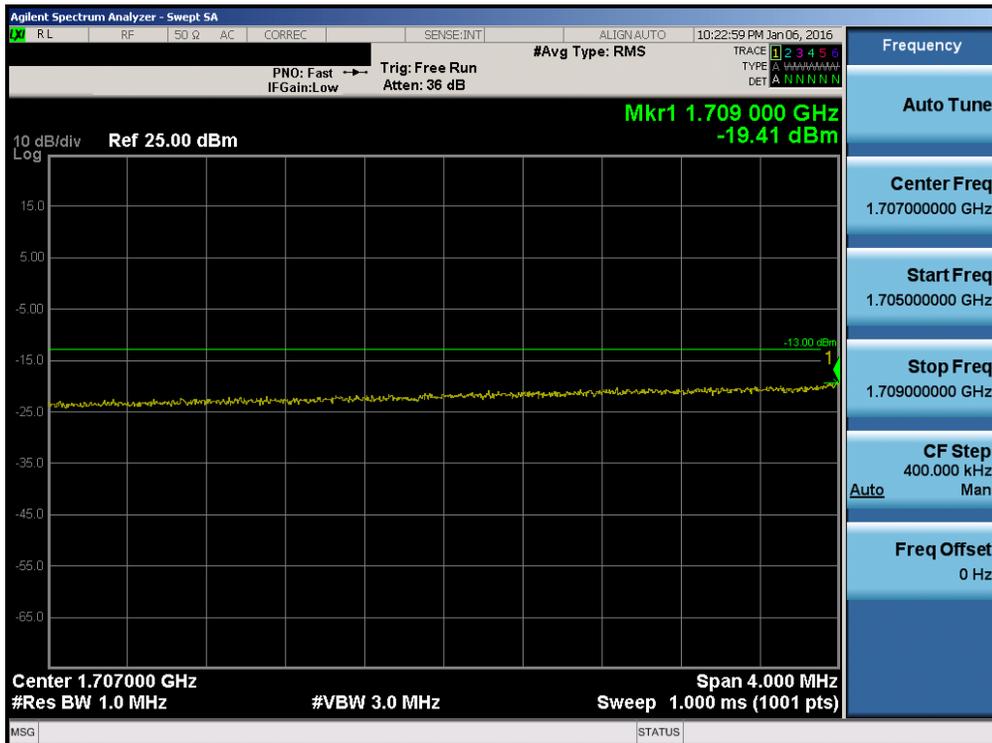

Plot 7-153. Lower Extended Band Edge Plot (Band 4 – 10.0MHz QPSK – RB Size 50)

FCC ID: ZNFLS992		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1601280183-R1.ZNF	Test Dates: 12/31/2015-02/24/2016	EUT Type: Portable Handset		Page 94 of 167




Plot 7-154. Upper Band Edge Plot (Band 4 – 10.0MHz QPSK – RB Size 50)




Plot 7-155. Upper Extended Band Edge Plot (Band 4 – 10.0MHz QPSK – RB Size 50)

FCC ID: ZNFLS992	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1601280183-R1.ZNF	Test Dates: 12/31/2015-02/24/2016	EUT Type: Portable Handset		Page 95 of 167

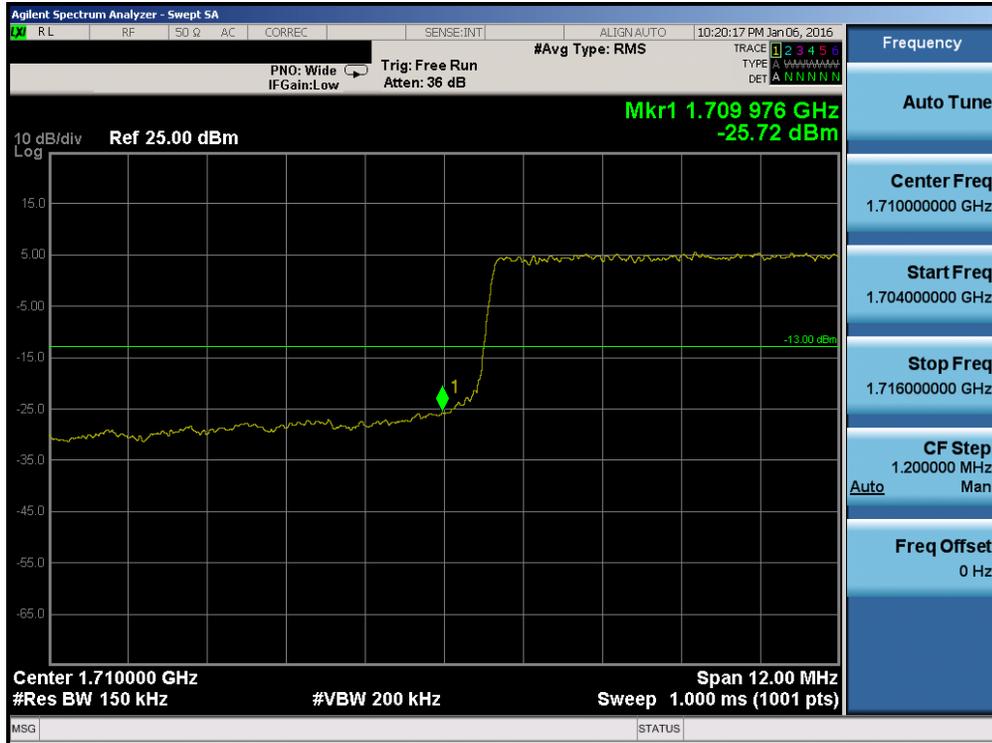

Plot 7-156. Lower Band Edge Plot (Band 4 – 15.0MHz QPSK – RB Size 75)

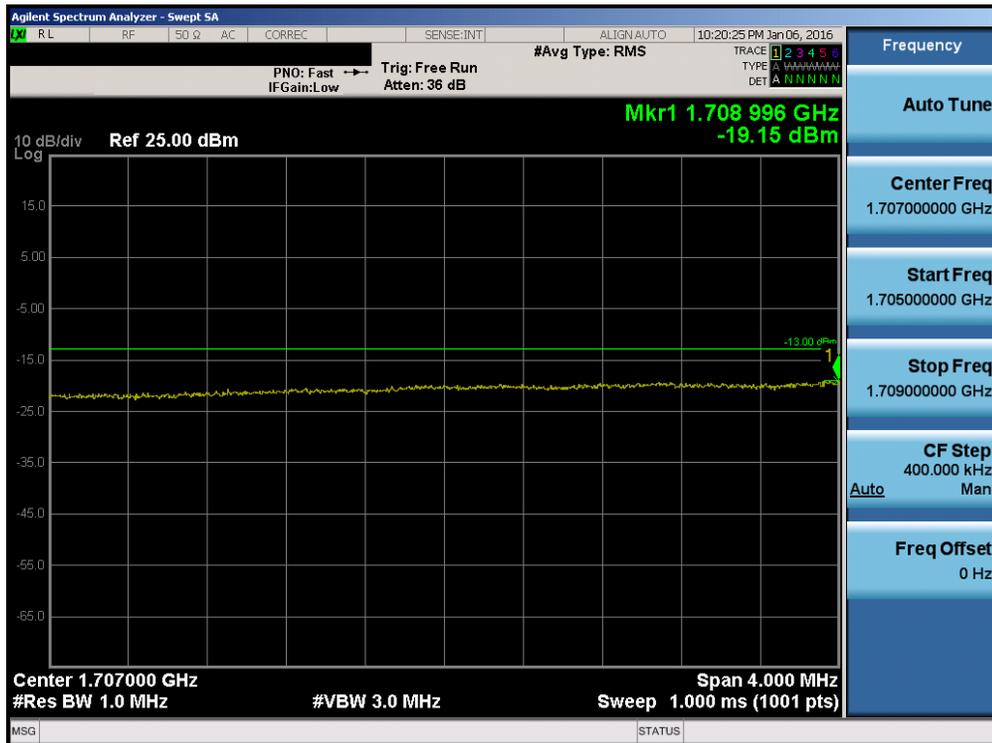

Plot 7-157. Lower Extended Band Edge Plot (Band 4 – 15.0MHz QPSK – RB Size 75)

FCC ID: ZNFLS992	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1601280183-R1.ZNF	Test Dates: 12/31/2015-02/24/2016	EUT Type: Portable Handset		Page 96 of 167




Plot 7-158. Upper Band Edge Plot (Band 4 – 15.0MHz QPSK – RB Size 75)




Plot 7-159. Upper Extended Band Edge Plot (Band 4 – 15.0MHz QPSK – RB Size 75)

FCC ID: ZNFLS992	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1601280183-R1.ZNF	Test Dates: 12/31/2015-02/24/2016	EUT Type: Portable Handset		Page 97 of 167

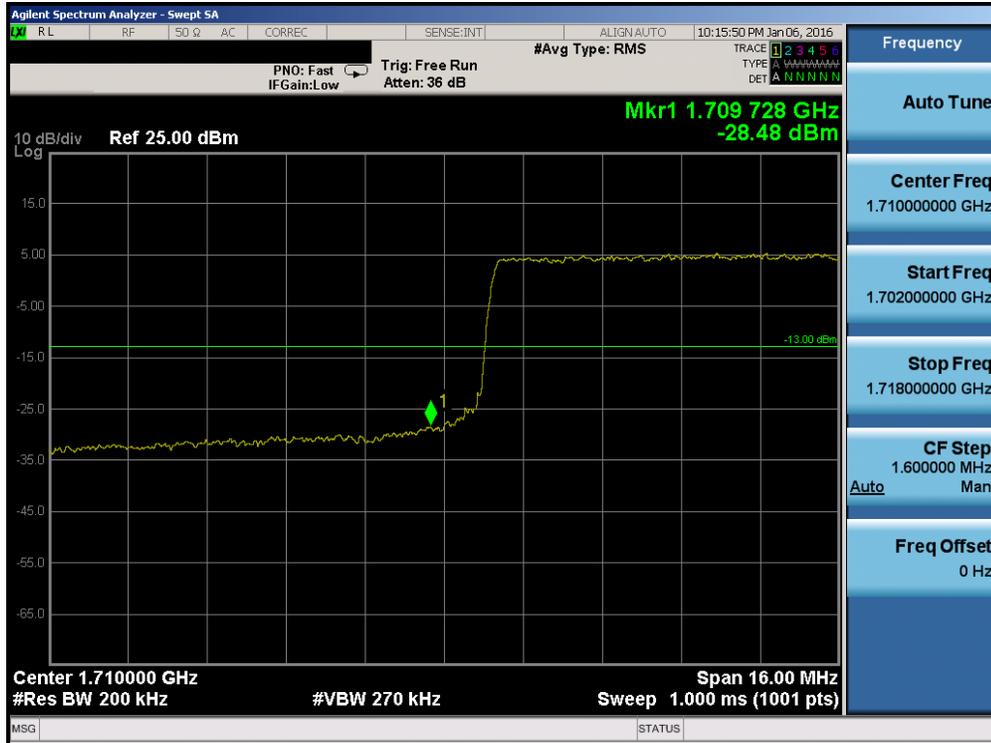


Plot 7-160. Lower Band Edge Plot (Band 4 – 20.0MHz QPSK – RB Size 100)

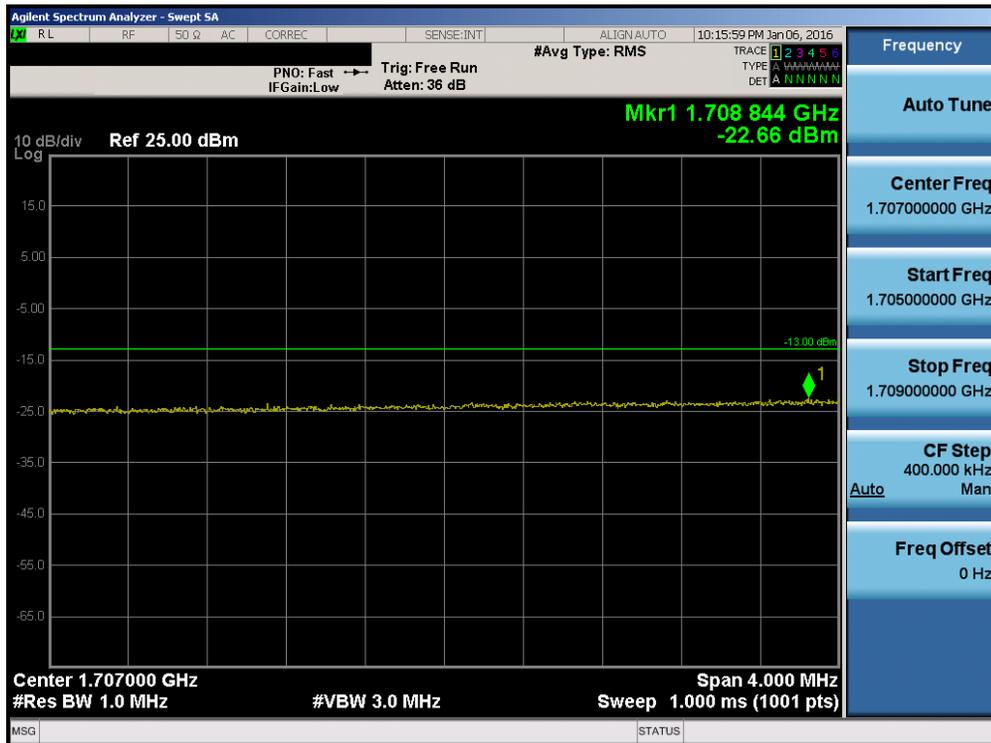

Plot 7-161. Lower Extended Band Edge Plot (Band 4 – 20.0MHz QPSK – RB Size 100)

FCC ID: ZNFLS992		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1601280183-R1.ZNF	Test Dates: 12/31/2015-02/24/2016	EUT Type: Portable Handset		Page 98 of 167

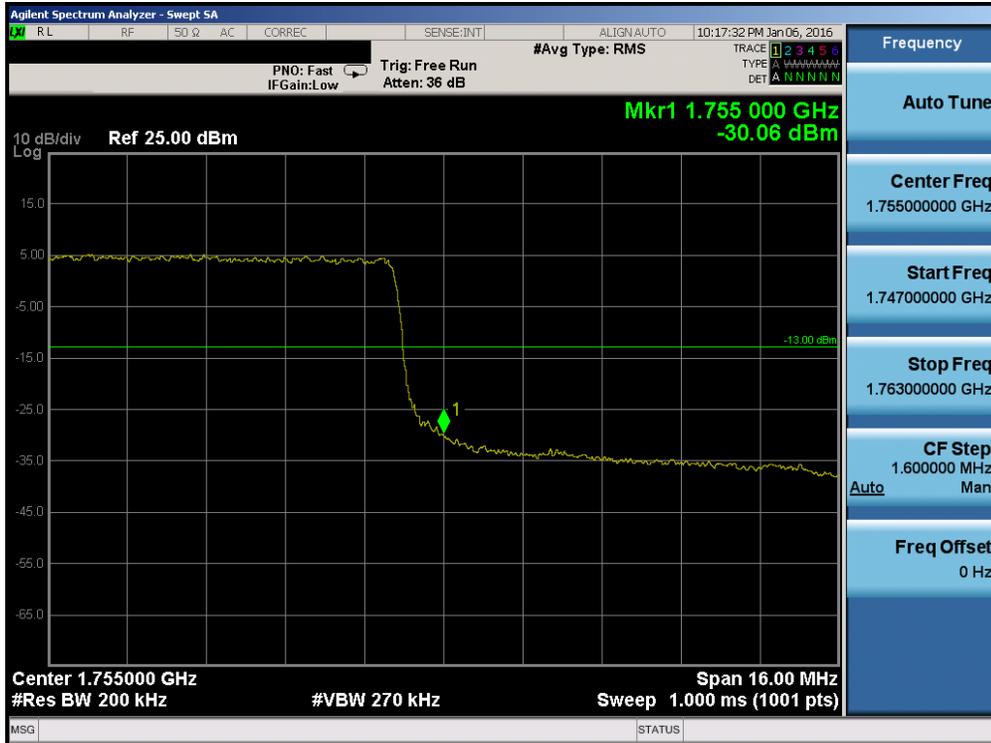


Plot 7-162. Upper Band Edge Plot (Band 4 – 20.0MHz QPSK – RB Size 100)




Plot 7-163. Upper Extended Band Edge Plot (Band 4 – 20.0MHz QPSK – RB Size 100)

FCC ID: ZNFLS992		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1601280183-R1.ZNF	Test Dates: 12/31/2015-02/24/2016	EUT Type: Portable Handset		Page 99 of 167

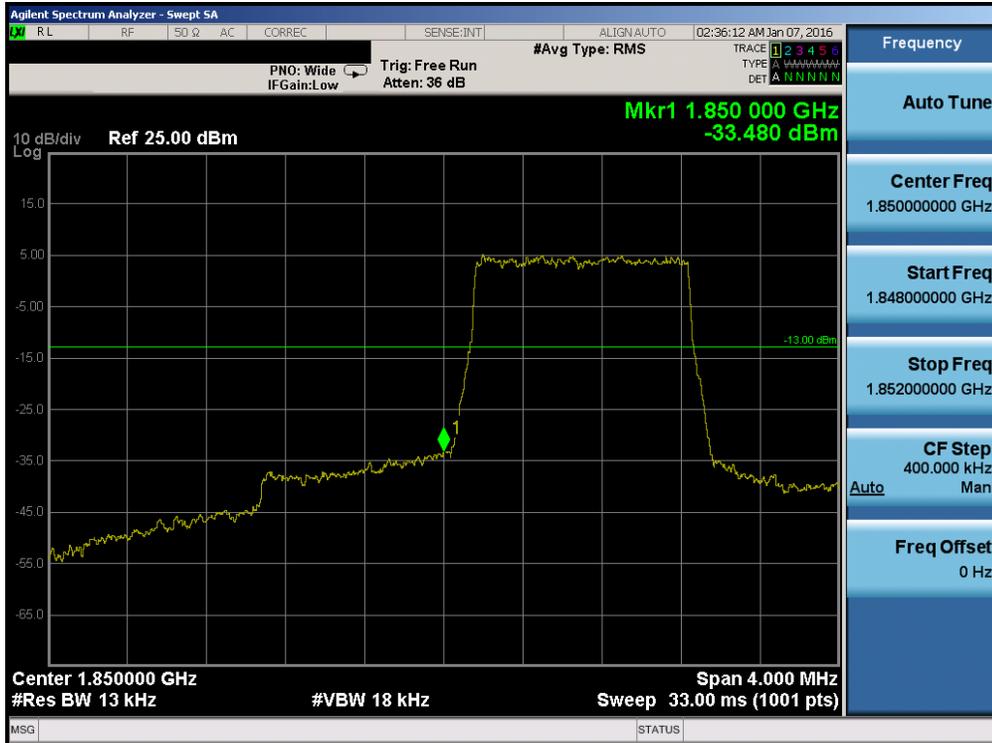


Plot 7-164. Lower Band Edge Plot (Band 25/2 – 1.4MHz QPSK – RB Size 6)

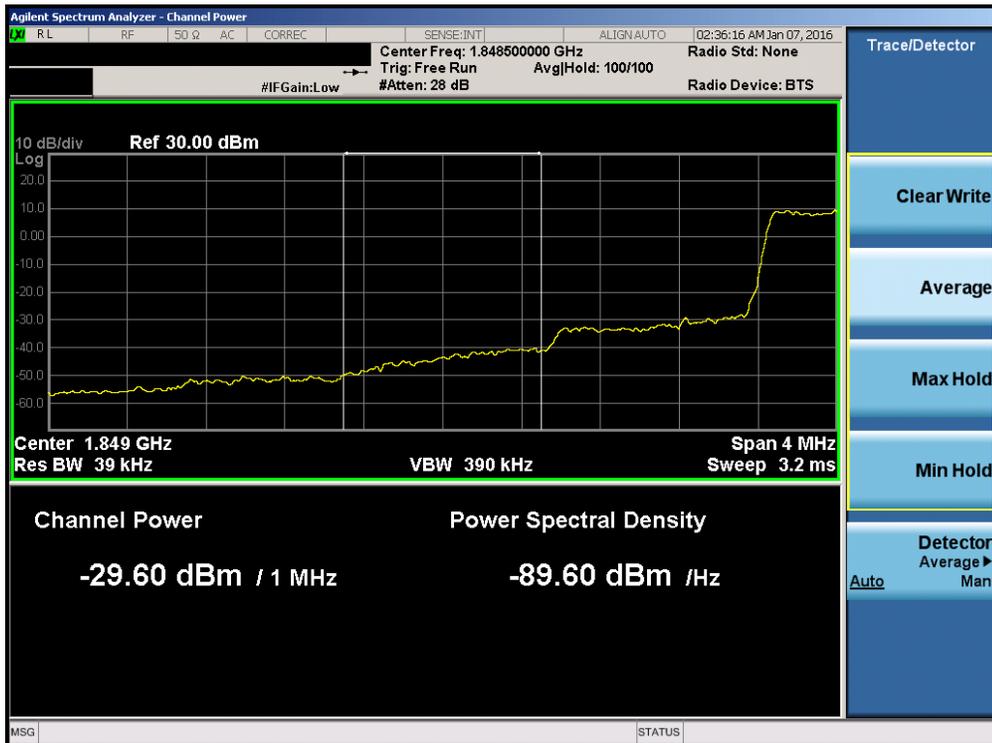


Plot 7-165. Lower Extended Band Edge Plot (Band 25/2 – 1.4MHz QPSK – RB Size 6)

FCC ID: ZNFLS992		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1601280183-R1.ZNF	Test Dates: 12/31/2015-02/24/2016	EUT Type: Portable Handset		Page 100 of 167

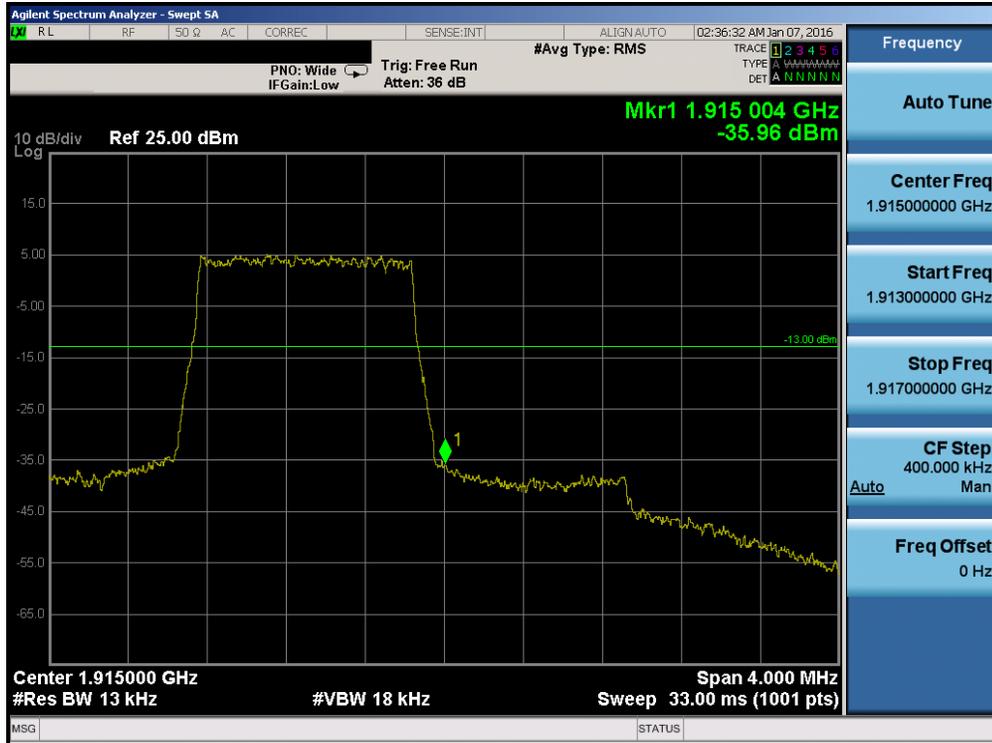


Plot 7-166. Upper Band Edge Plot (Band 25/2 – 1.4MHz QPSK – RB Size 6)

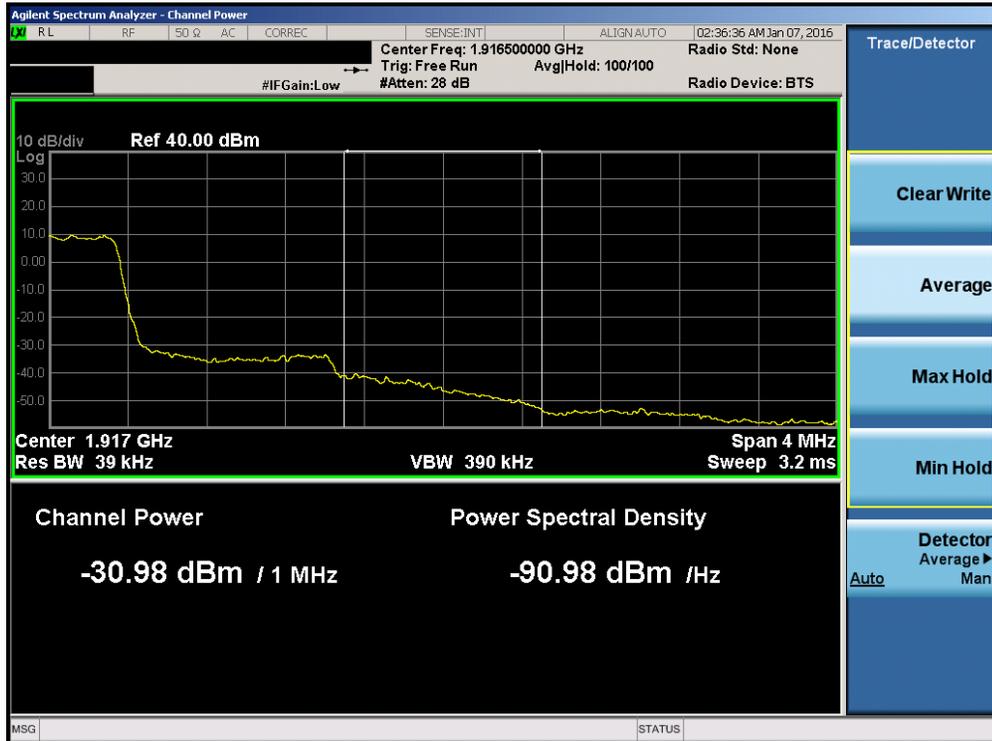


Plot 7-167. Upper Extended Band Edge Plot (Band 25/2 – 1.4MHz QPSK – RB Size 6)

FCC ID: ZNFLS992	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1601280183-R1.ZNF	Test Dates: 12/31/2015-02/24/2016	EUT Type: Portable Handset	Page 101 of 167	

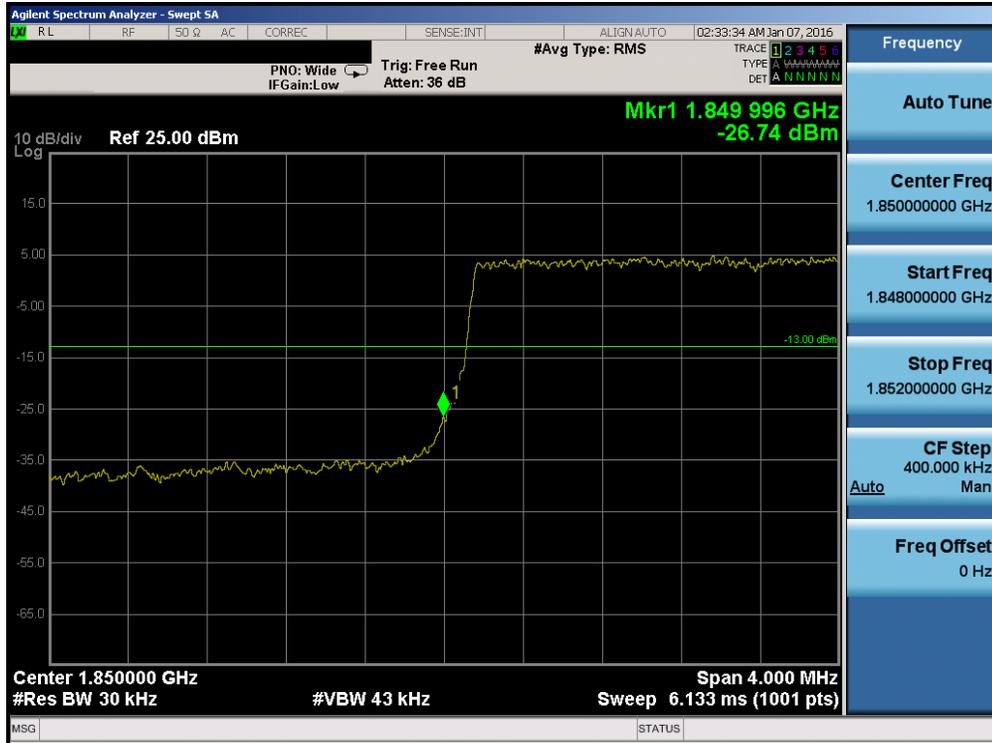


Plot 7-168. Lower Band Edge Plot (Band 25/2 – 3.0MHz QPSK – RB Size 15)

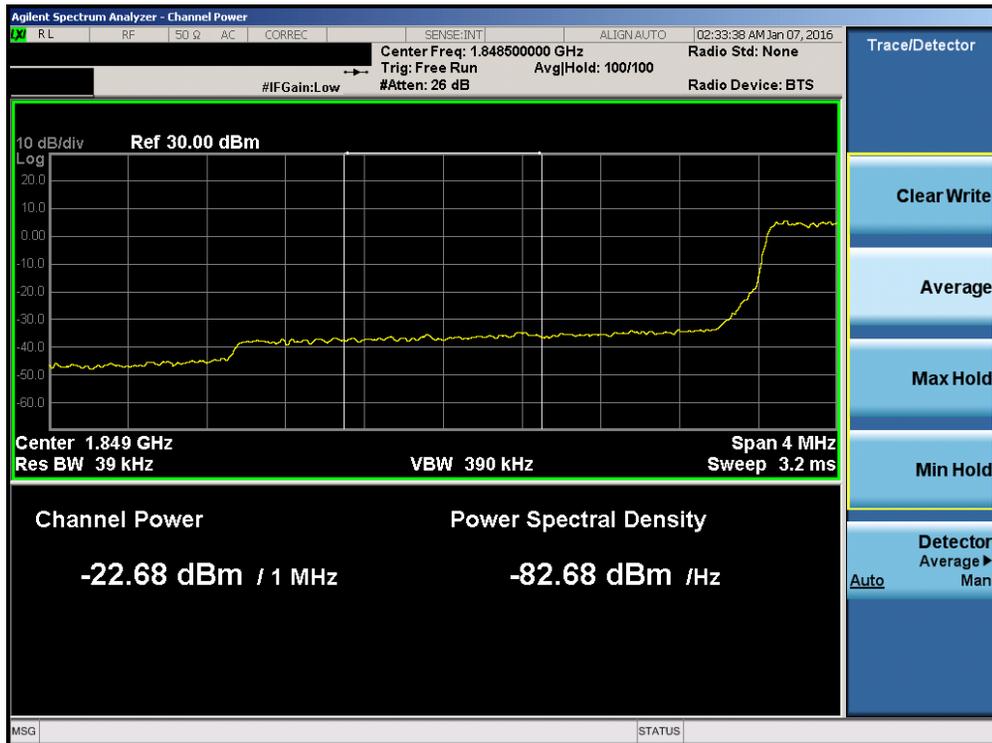


Plot 7-169. Lower Extended Band Edge Plot (Band 25/2 – 3.0MHz QPSK – RB Size 15)

FCC ID: ZNFLS992	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1601280183-R1.ZNF	Test Dates: 12/31/2015-02/24/2016	EUT Type: Portable Handset		Page 102 of 167

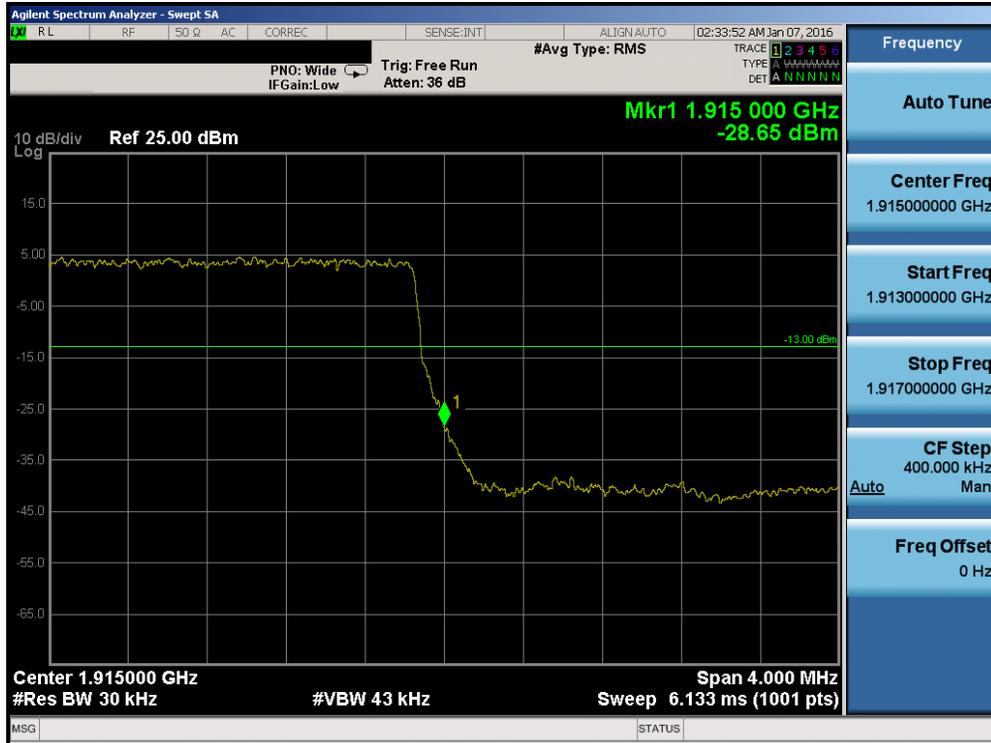


Plot 7-170. Upper Band Edge Plot (Band 25/2 – 3.0MHz QPSK – RB Size 15)

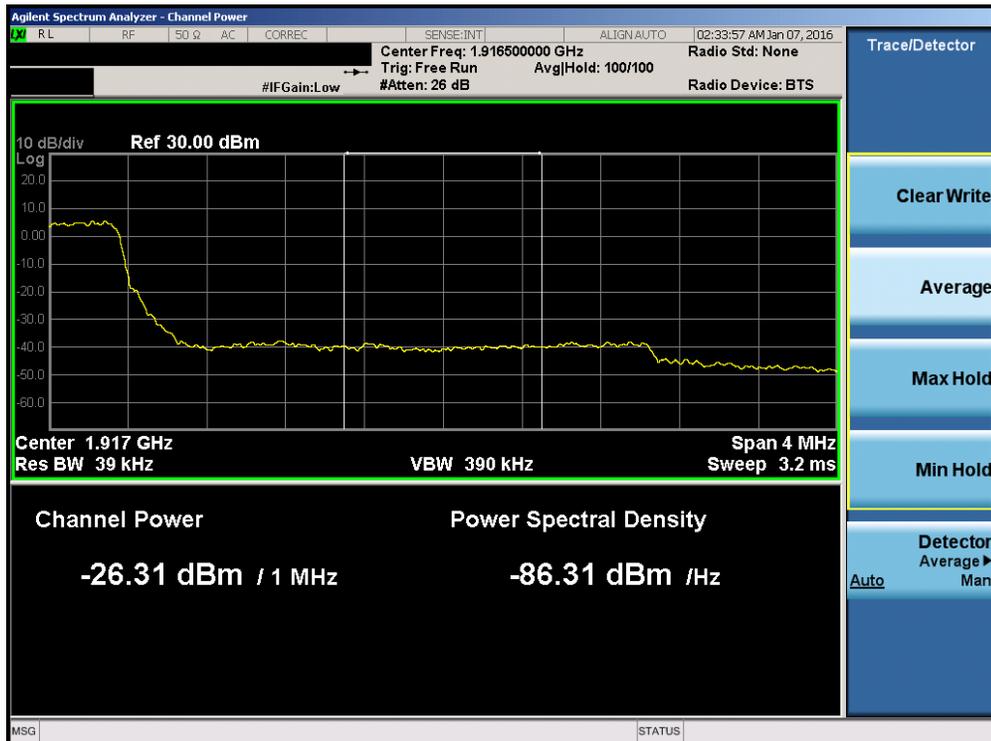


Plot 7-171. Upper Extended Band Edge Plot (Band 25/2 – 3.0MHz QPSK – RB Size 15)

FCC ID: ZNFLS992	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1601280183-R1.ZNF	Test Dates: 12/31/2015-02/24/2016	EUT Type: Portable Handset		Page 103 of 167

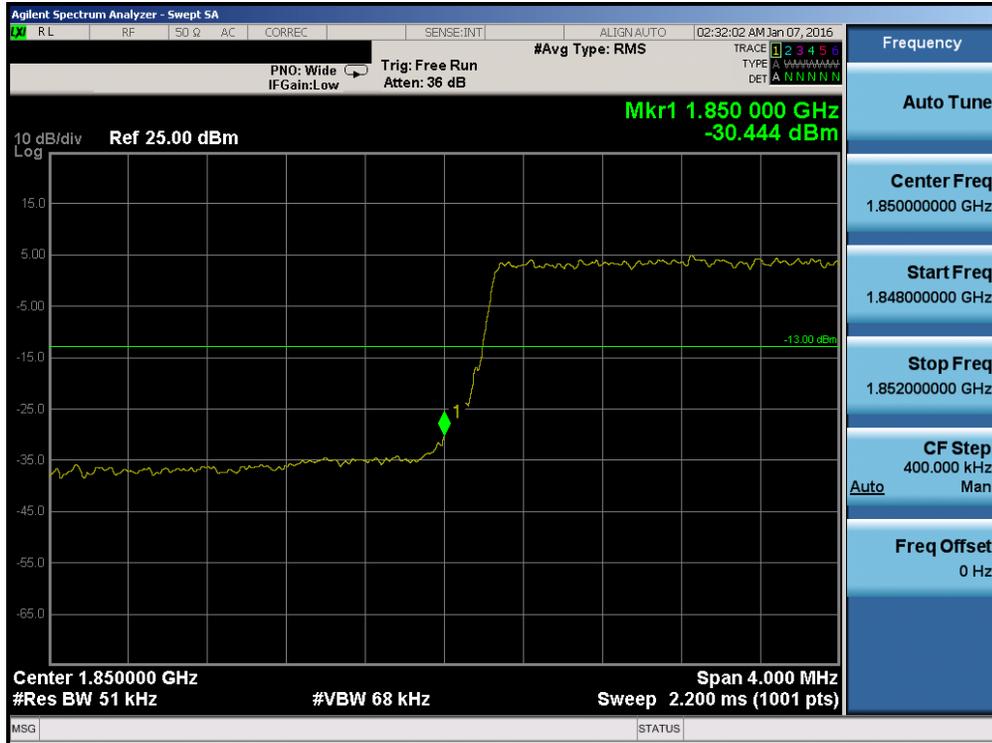


Plot 7-172. Lower Band Edge Plot (Band 25/2 – 5.0MHz QPSK – RB Size 25)

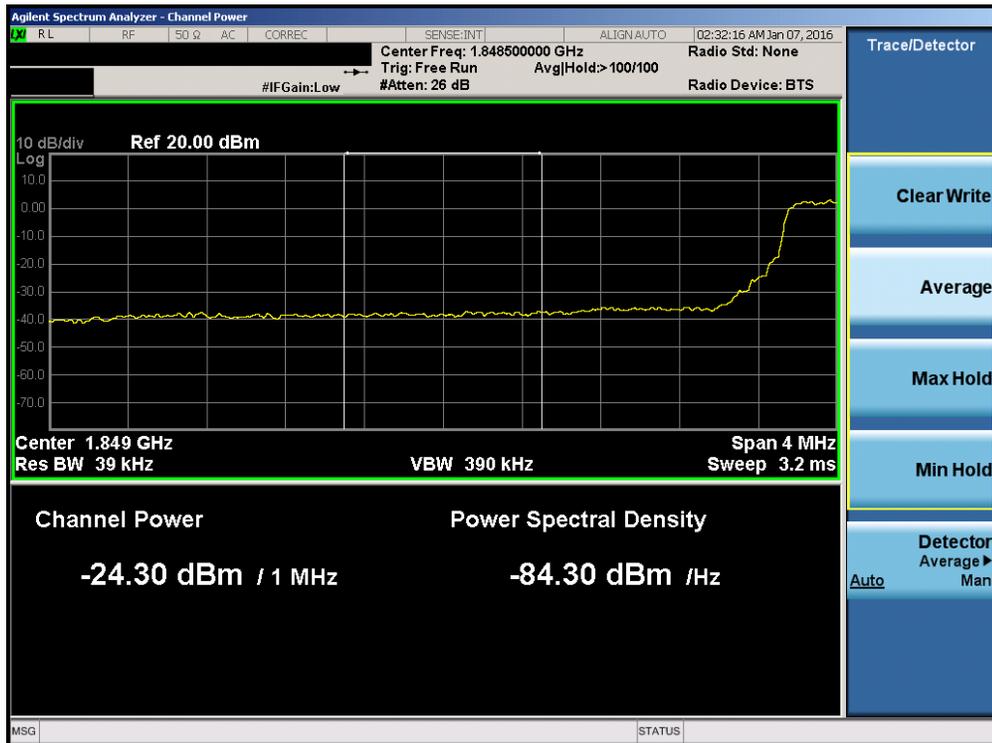


Plot 7-173. Lower Extended Band Edge Plot (Band 25/2 – 5.0MHz QPSK – RB Size 25)

FCC ID: ZNFLS992	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1601280183-R1.ZNF	Test Dates: 12/31/2015-02/24/2016	EUT Type: Portable Handset		Page 104 of 167

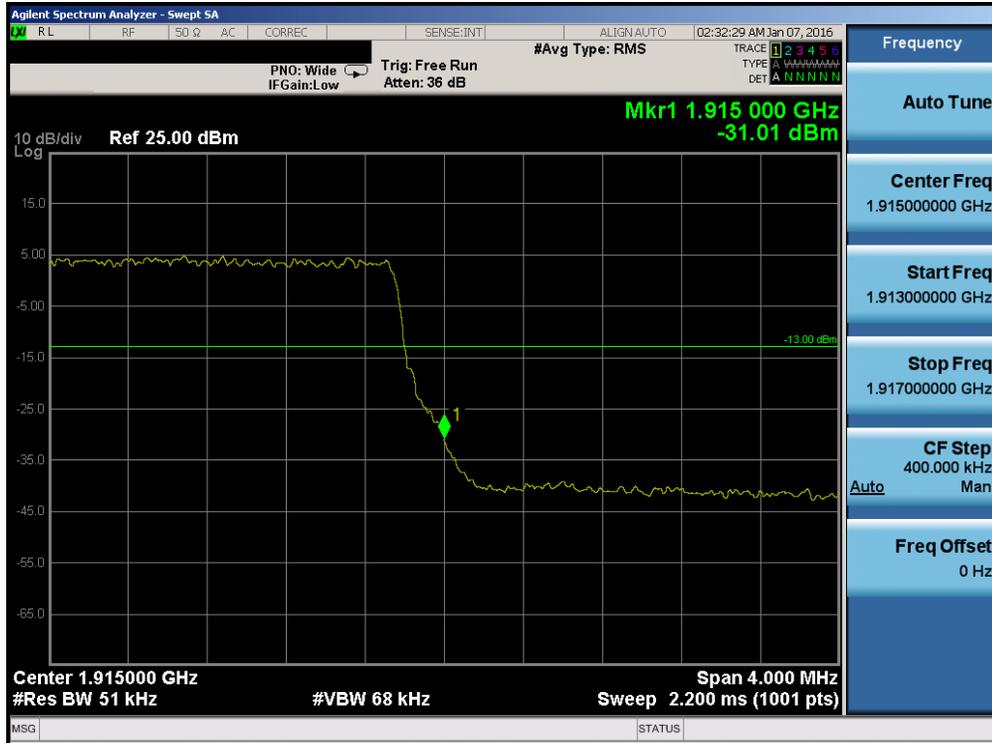


Plot 7-174. Upper Band Edge Plot (Band 25/2 – 5.0MHz QPSK – RB Size 25)

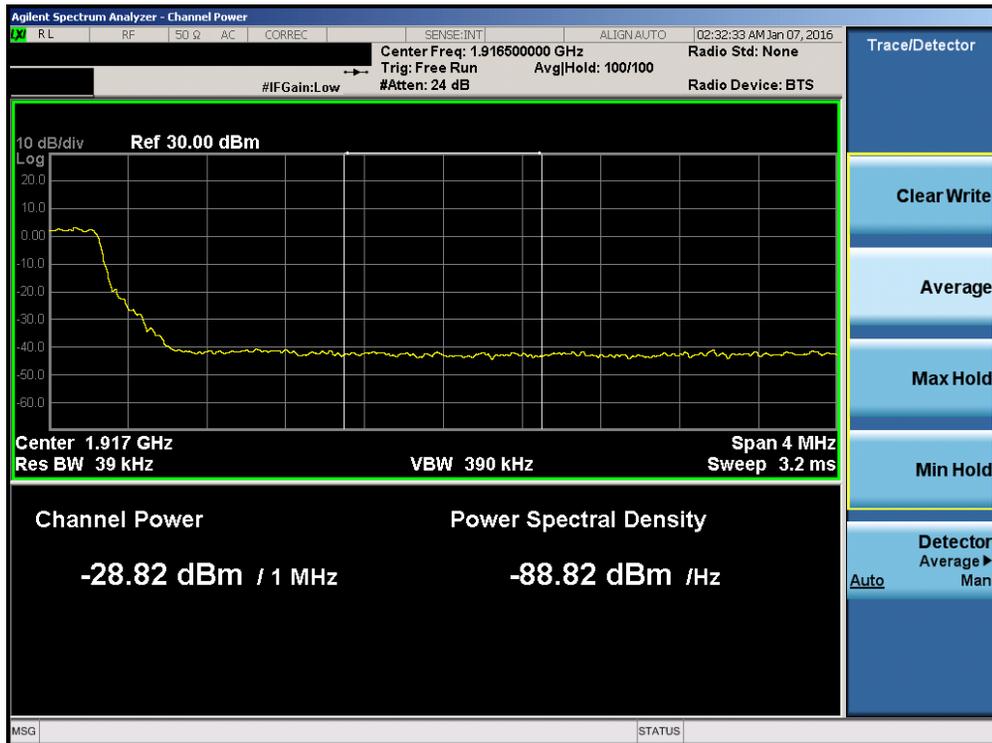


Plot 7-175. Upper Extended Band Edge Plot (Band 25/2 – 5.0MHz QPSK – RB Size 25)

FCC ID: ZNFLS992		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1601280183-R1.ZNF	Test Dates: 12/31/2015-02/24/2016	EUT Type: Portable Handset		Page 105 of 167

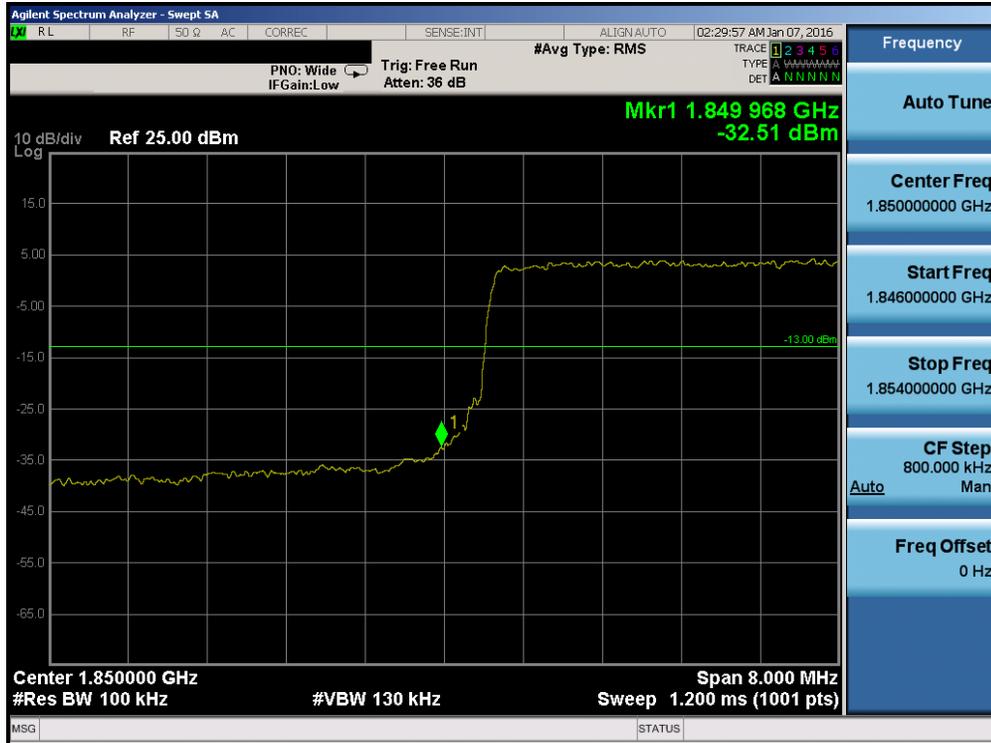

Plot 7-176. Lower Band Edge Plot (Band 25/2 – 10.0MHz QPSK – RB Size 50)

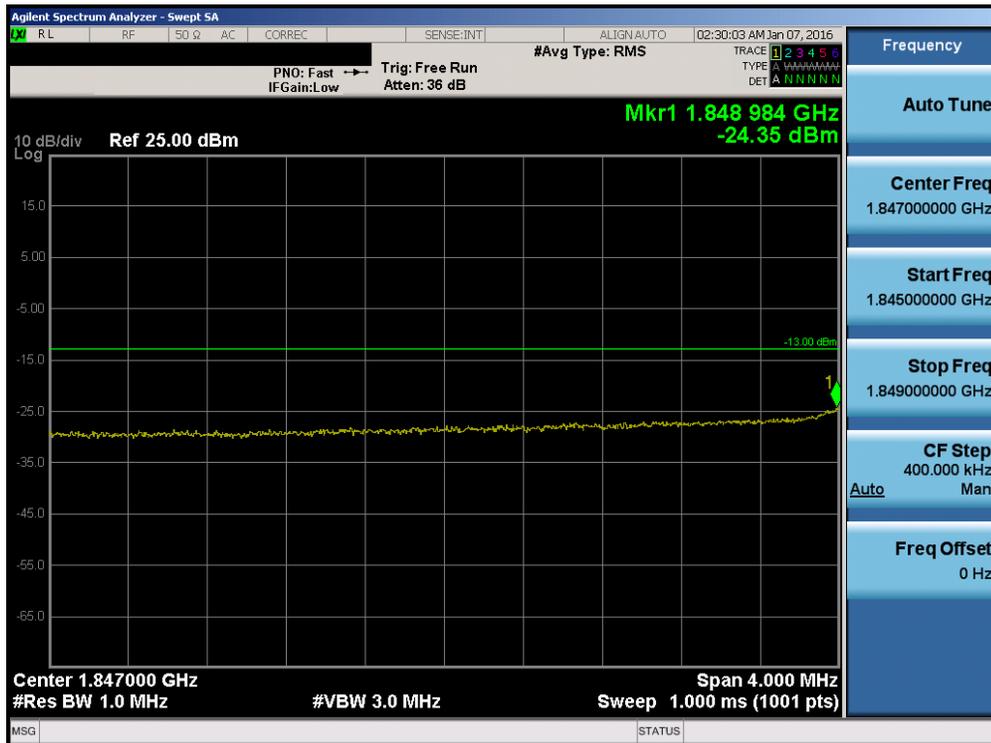


Plot 7-177. Lower Extended Band Edge Plot (Band 25/2 – 10.0MHz QPSK – RB Size 50)

FCC ID: ZNFLS992		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1601280183-R1.ZNF	Test Dates: 12/31/2015-02/24/2016	EUT Type: Portable Handset		Page 106 of 167




Plot 7-178. Upper Band Edge Plot (Band 25/2 – 10.0MHz QPSK – RB Size 50)

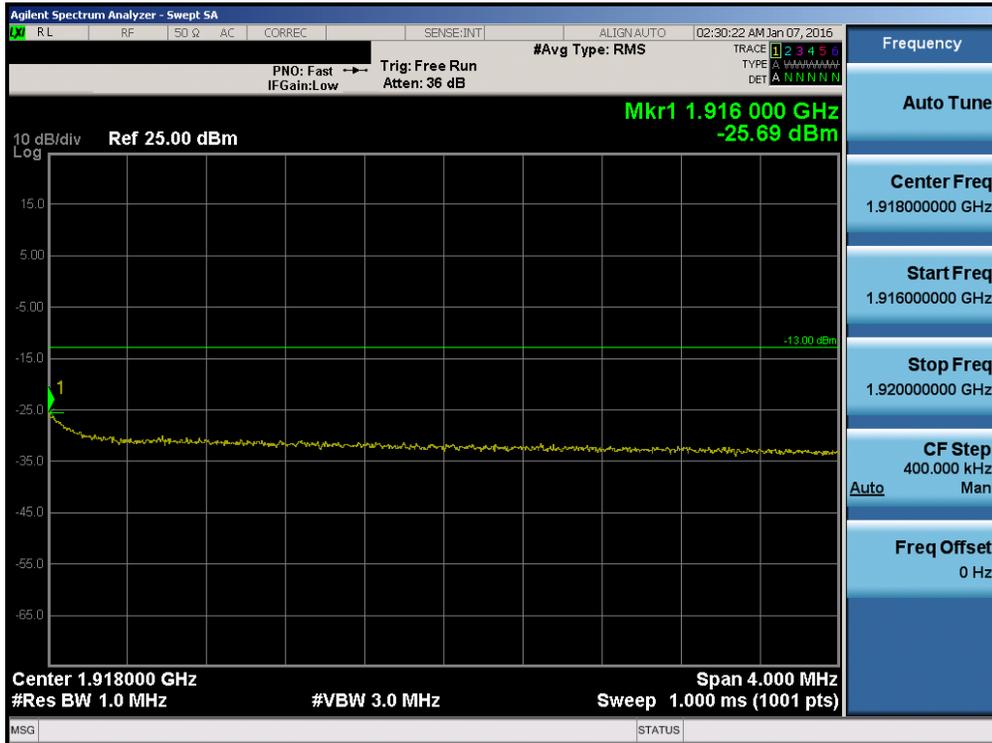


Plot 7-179. Upper Extended Band Edge Plot (Band 25/2 – 10.0MHz QPSK – RB Size 50)

FCC ID: ZNFLS992	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1601280183-R1.ZNF	Test Dates: 12/31/2015-02/24/2016	EUT Type: Portable Handset		Page 107 of 167

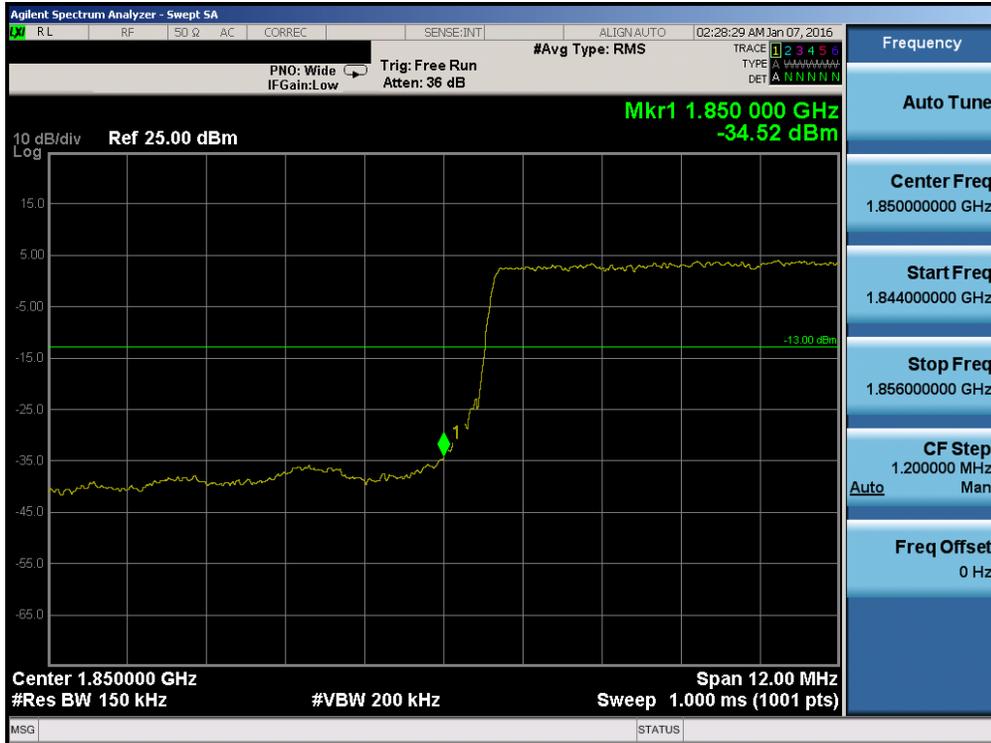

Plot 7-180. Lower Band Edge Plot (Band 25/2 – 15.0MHz QPSK – RB Size 75)

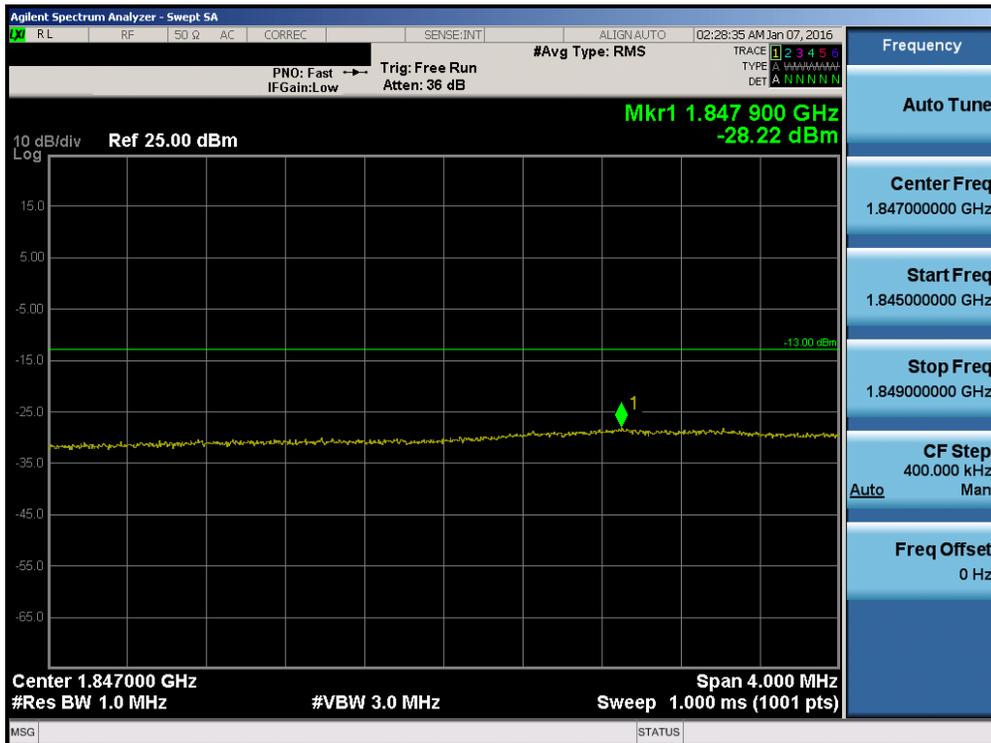

Plot 7-181. Lower Extended Band Edge Plot (Band 25/2 – 15.0MHz QPSK – RB Size 75)

FCC ID: ZNFLS992		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1601280183-R1.ZNF	Test Dates: 12/31/2015-02/24/2016	EUT Type: Portable Handset		Page 108 of 167




Plot 7-182. Upper Band Edge Plot (Band 25/2 – 15.0MHz QPSK – RB Size 75)




Plot 7-183. Upper Extended Band Edge Plot (Band 25/2 – 15.0MHz QPSK – RB Size 75)

FCC ID: ZNFLS992		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1601280183-R1.ZNF	Test Dates: 12/31/2015-02/24/2016	EUT Type: Portable Handset		Page 109 of 167

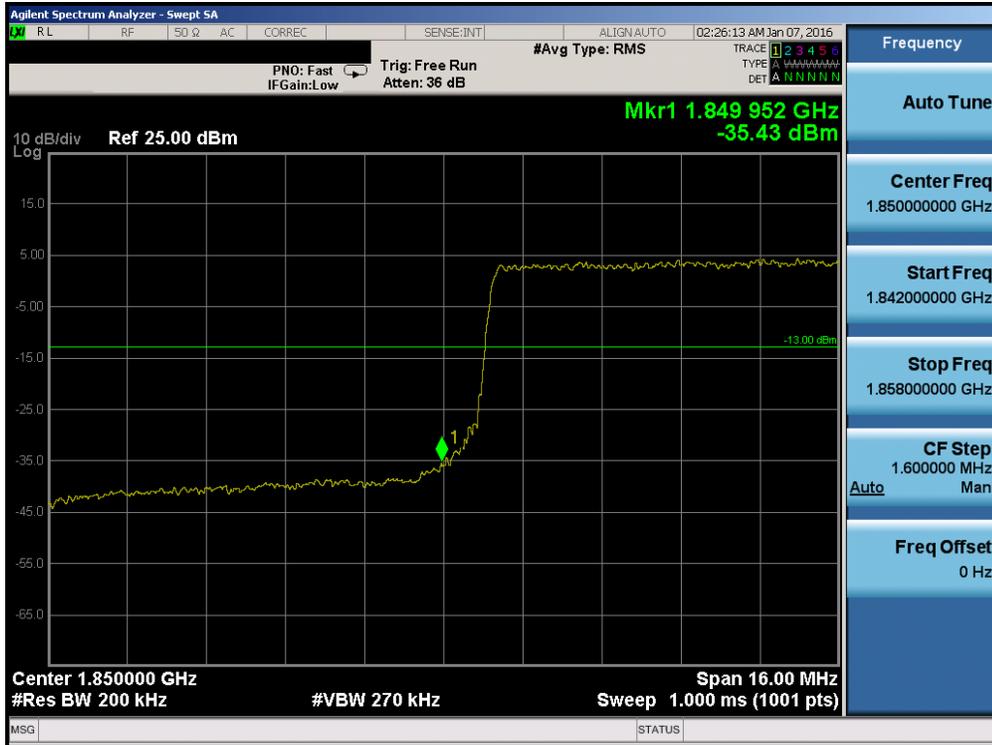

Plot 7-184. Lower Band Edge Plot (Band 25/2 – 20.0MHz QPSK – RB Size 100)

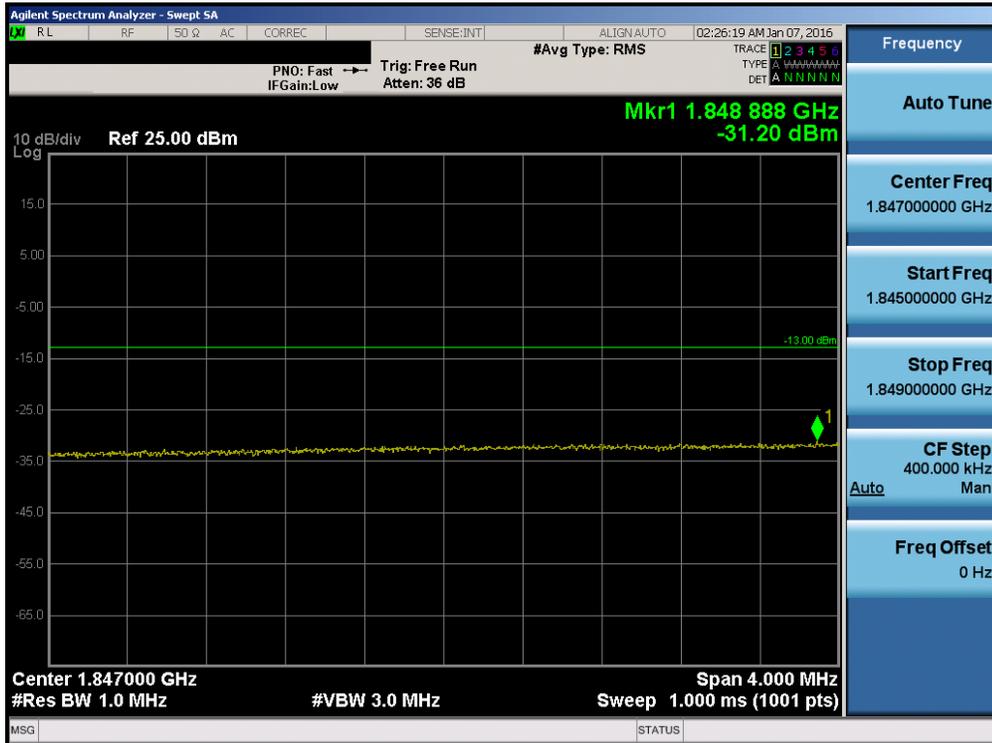


Plot 7-185. Lower Extended Band Edge Plot (Band 25/2 – 20.0MHz QPSK – RB Size 100)

FCC ID: ZNFLS992	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1601280183-R1.ZNF	Test Dates: 12/31/2015-02/24/2016	EUT Type: Portable Handset		Page 110 of 167



Plot 7-186. Upper Band Edge Plot (Band 25/2 – 20.0MHz QPSK – RB Size 100)

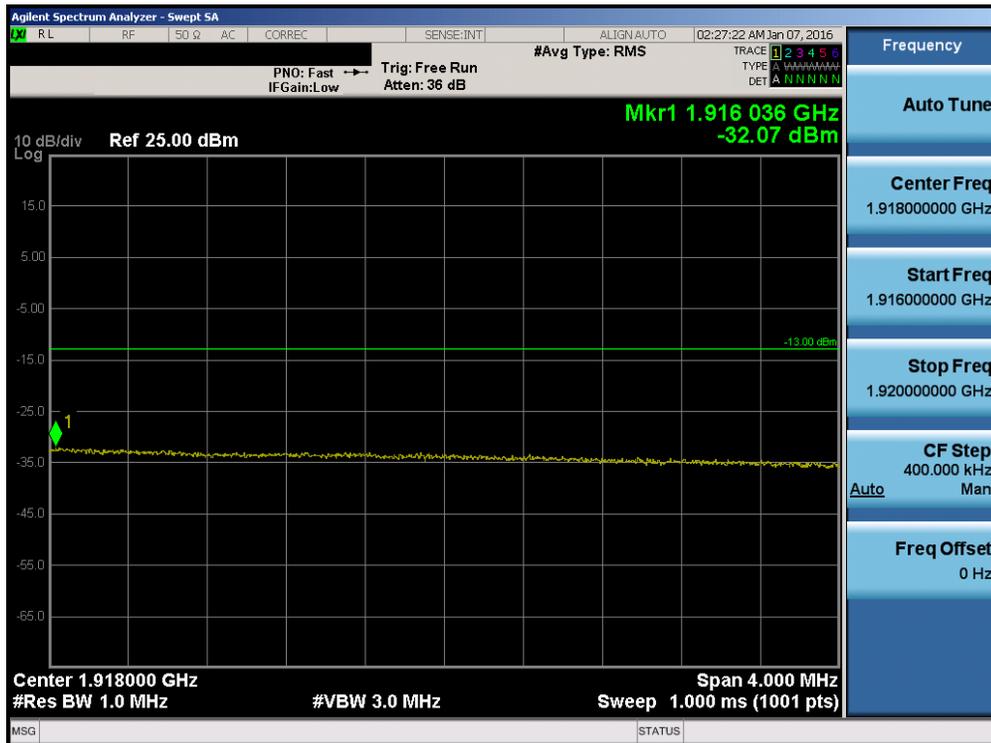

Plot 7-187. Upper Extended Band Edge Plot (Band 25/2 – 20.0MHz QPSK – RB Size 100)

FCC ID: ZNFLS992	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1601280183-R1.ZNF	Test Dates: 12/31/2015-02/24/2016	EUT Type: Portable Handset		Page 111 of 167




Plot 7-188. Lower ACP Plot (Band 7 – 5.0MHz QPSK – RB Size 25)



Plot 7-189. Upper ACP Plot (Band 7 – 5.0MHz QPSK – RB Size 25)

FCC ID: ZNFLS992		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1601280183-R1.ZNF	Test Dates: 12/31/2015-02/24/2016	EUT Type: Portable Handset		Page 112 of 167

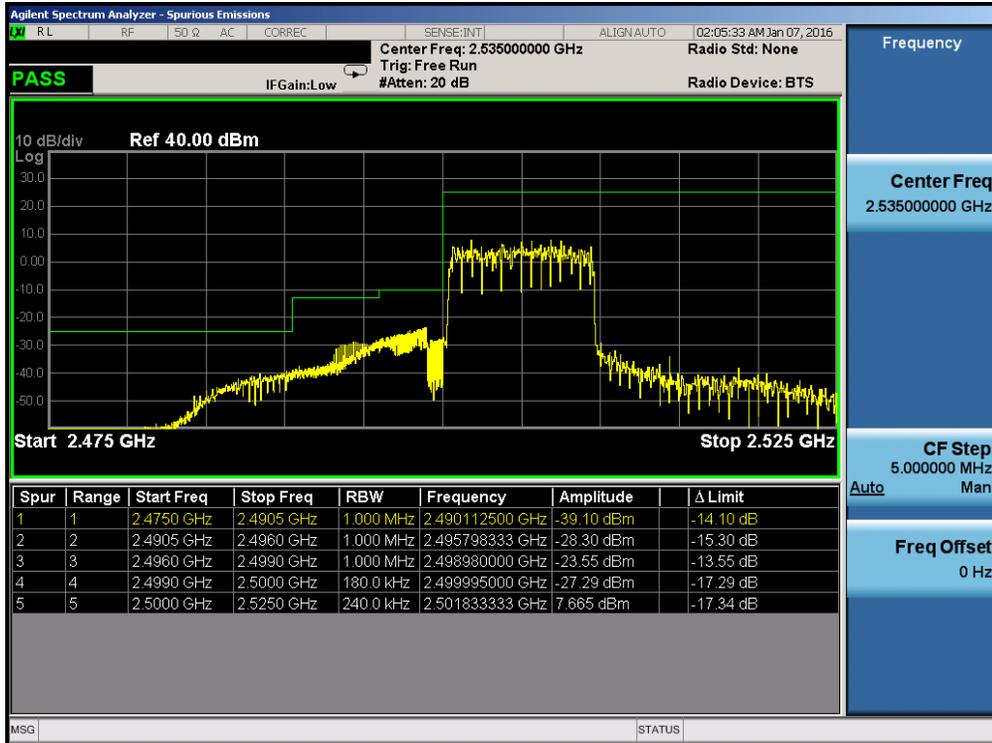


Plot 7-190. Lower ACP Plot (Band 7 – 10.0MHz QPSK – RB Size 50)



Plot 7-191. Upper ACP Plot (Band 7 – 10.0MHz QPSK – RB Size 50)

FCC ID: ZNFLS992		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1601280183-R1.ZNF	Test Dates: 12/31/2015-02/24/2016	EUT Type: Portable Handset		Page 113 of 167

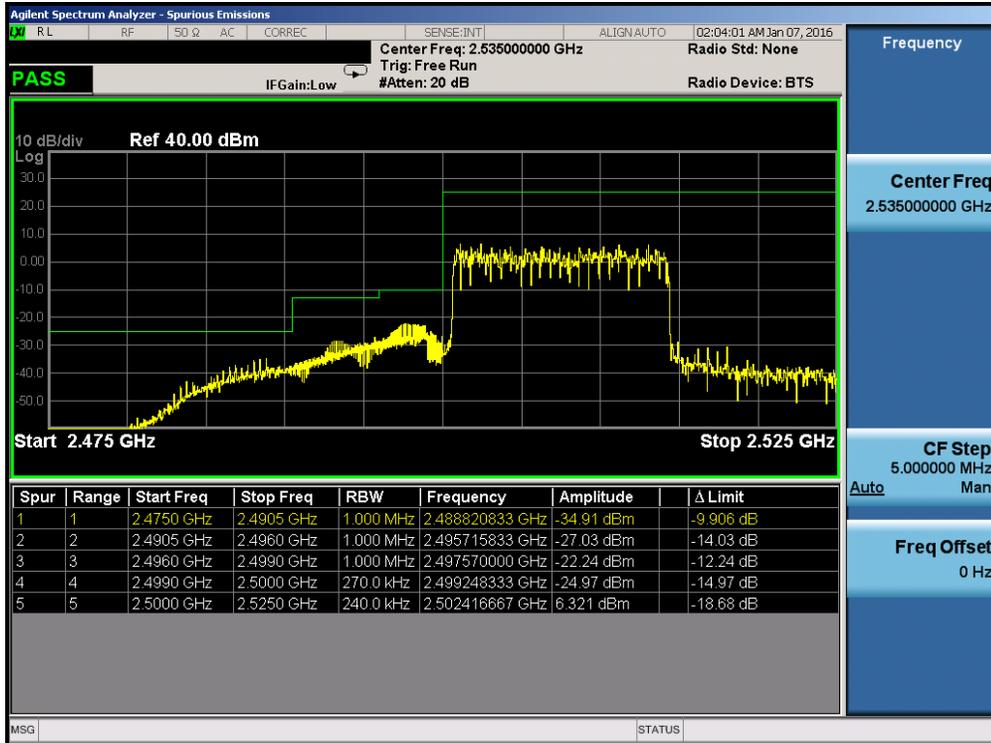

Plot 7-192. Lower ACP Plot (Band 7 – 15.0MHz QPSK – RB Size 75)




Plot 7-193. Upper ACP Plot (Band 7 – 15.0MHz QPSK – RB Size 75)

FCC ID: ZNFLS992		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1601280183-R1.ZNF	Test Dates: 12/31/2015-02/24/2016	EUT Type: Portable Handset		Page 114 of 167




Plot 7-194. Lower ACP Plot (Band 7 – 20.0MHz QPSK – RB Size 100)

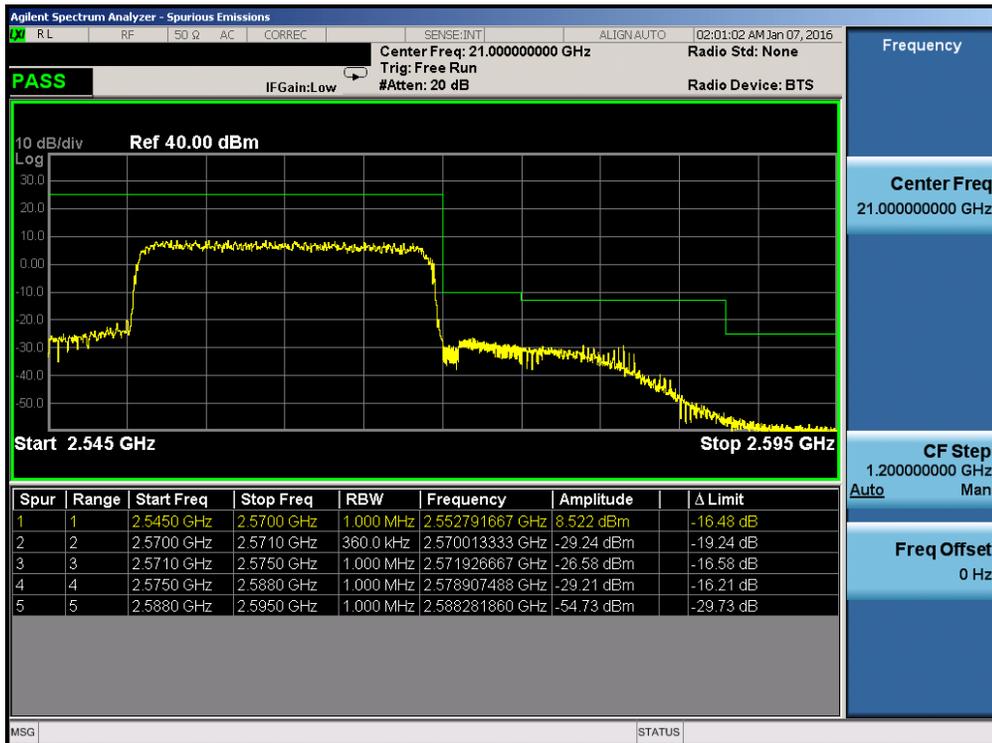

Plot 7-195. Upper ACP Plot (Band 7 – 20.0MHz QPSK – RB Size 100)

FCC ID: ZNFLS992		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1601280183-R1.ZNF	Test Dates: 12/31/2015-02/24/2016	EUT Type: Portable Handset		Page 115 of 167

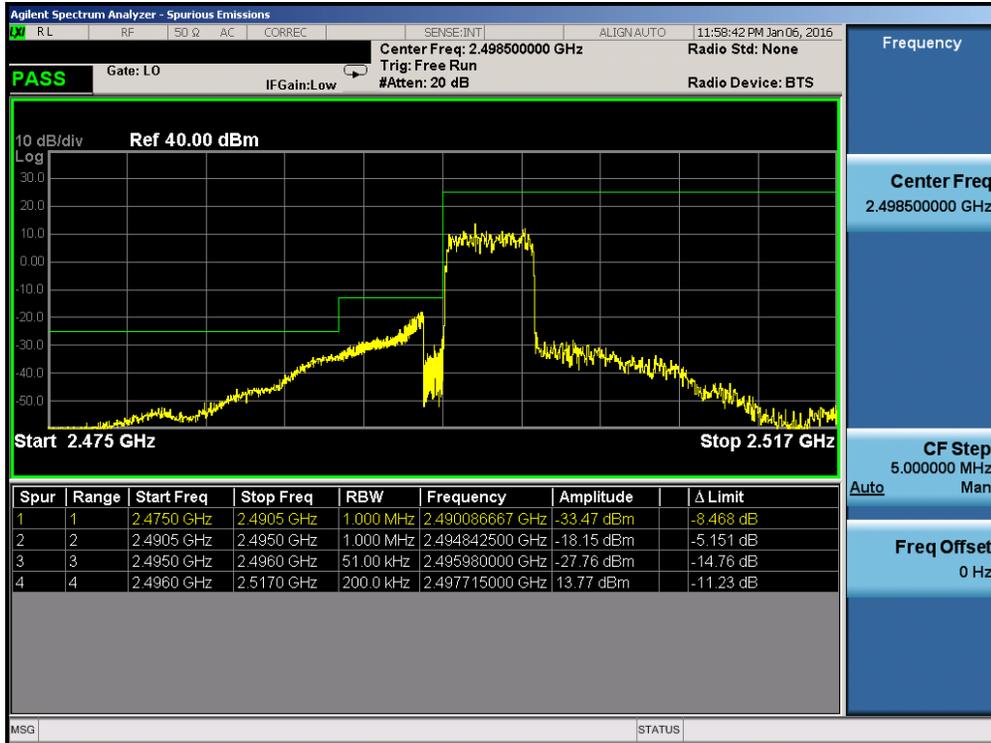


Plot 7-196. Lower ACP Plot (Band 41 – 5.0MHz QPSK – RB Size 25)



Plot 7-197. Upper ACP Plot (Band 41 – 5.0MHz QPSK – RB Size 25)

FCC ID: ZNFLS992		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1601280183-R1.ZNF	Test Dates: 12/31/2015-02/24/2016	EUT Type: Portable Handset		Page 116 of 167

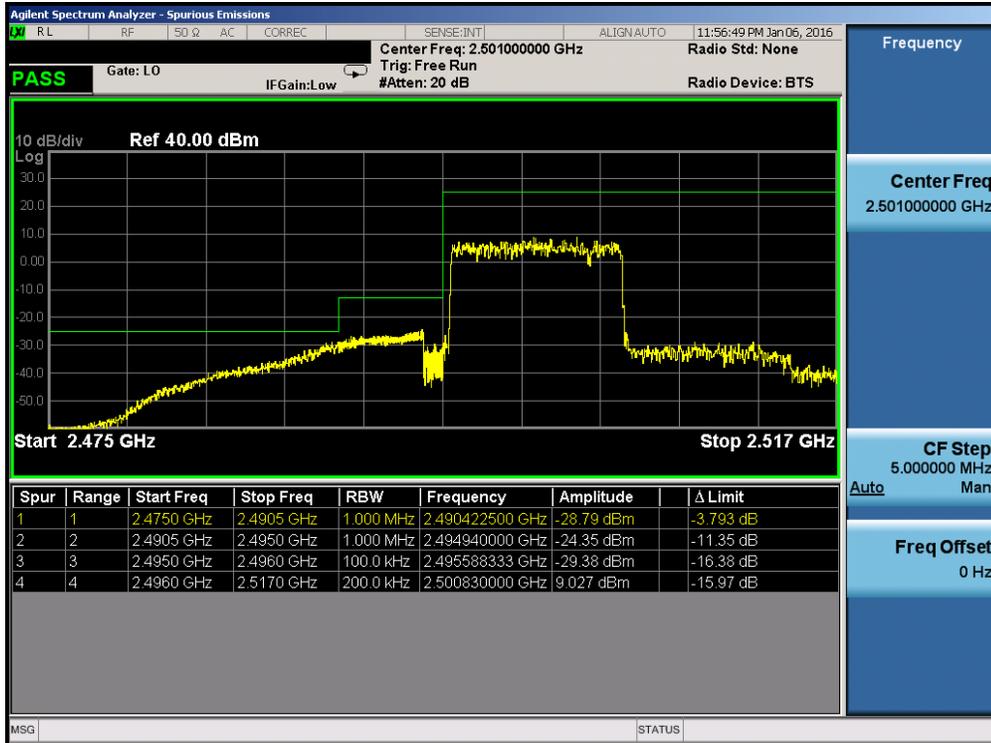


Plot 7-198. Lower ACP Plot (Band 41 – 10.0MHz QPSK – RB Size 50)



Plot 7-199. Upper ACP Plot (Band 41 – 10.0MHz QPSK – RB Size 50)

FCC ID: ZNFLS992		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1601280183-R1.ZNF	Test Dates: 12/31/2015-02/24/2016	EUT Type: Portable Handset		Page 117 of 167

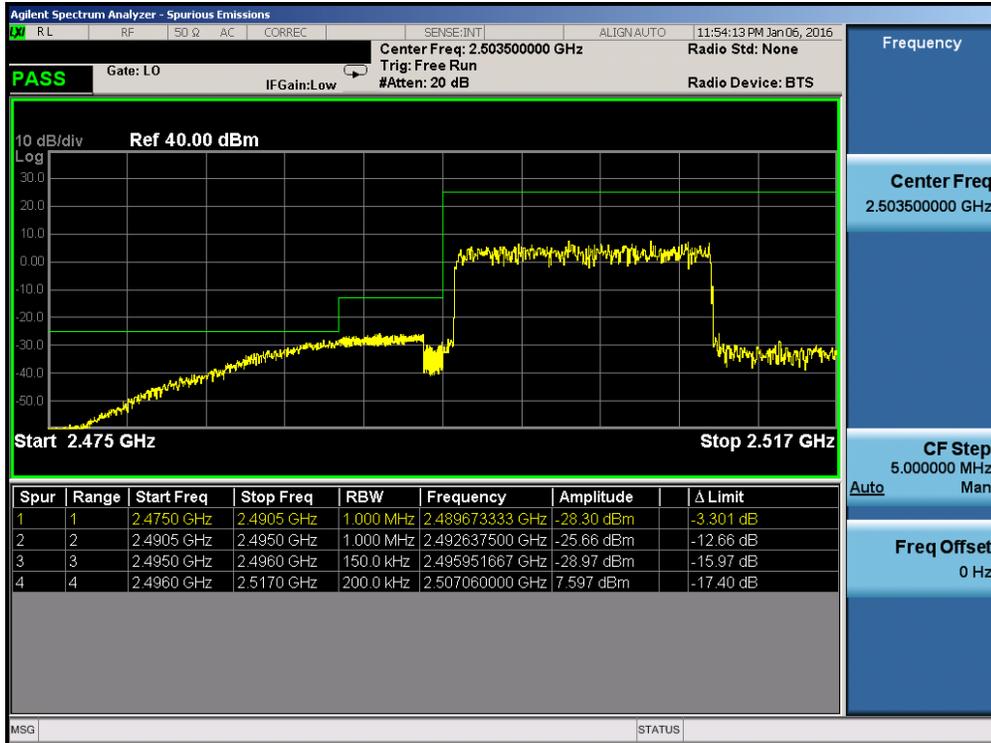


Plot 7-200. Lower ACP Plot (Band 41 – 15.0MHz QPSK – RB Size 75)




Plot 7-201. Upper ACP Plot (Band 41 – 15.0MHz QPSK – RB Size 75)

FCC ID: ZNFLS992		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1601280183-R1.ZNF	Test Dates: 12/31/2015-02/24/2016	EUT Type: Portable Handset		Page 118 of 167

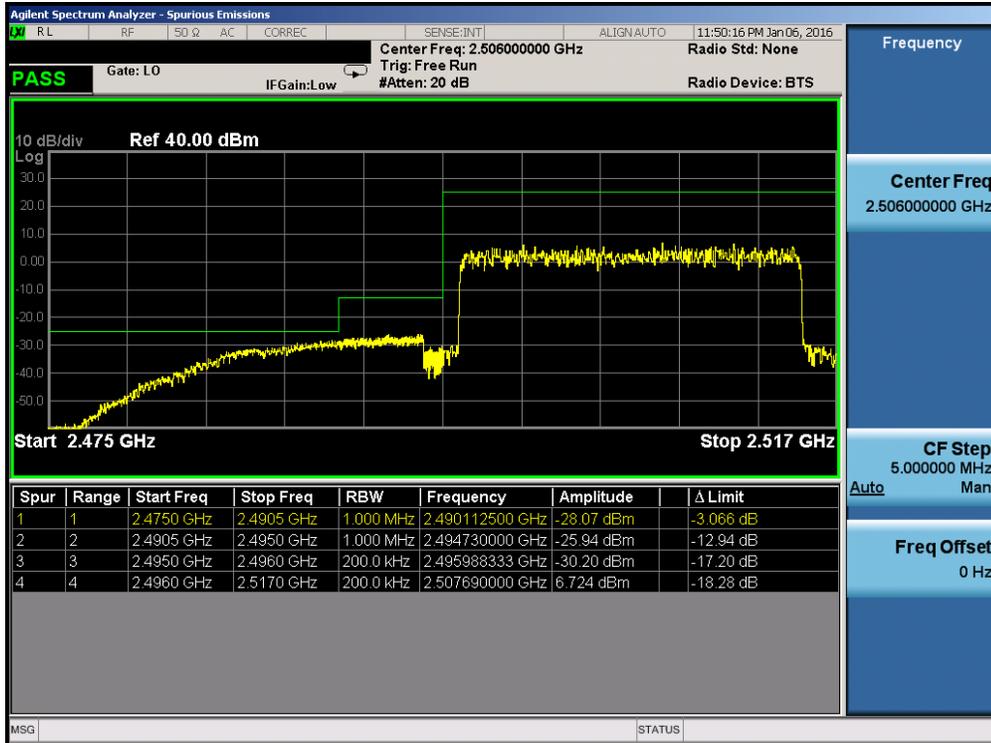

Plot 7-202. Lower ACP Plot (Band 41 – 20.0MHz QPSK – RB Size 100)

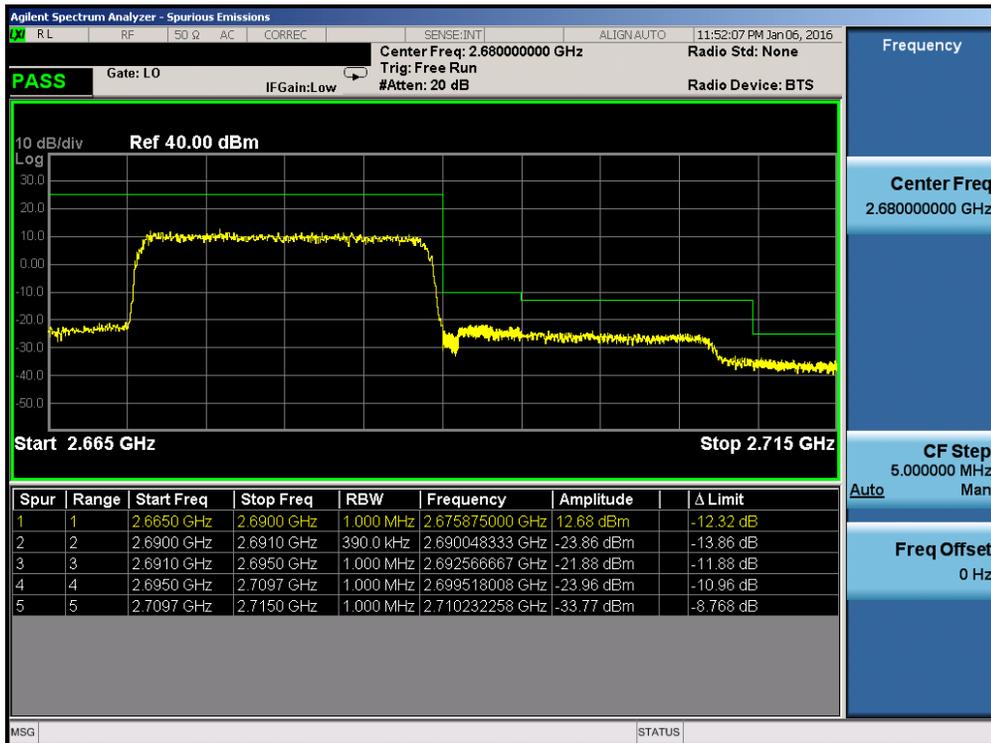

Plot 7-203. Upper ACP Plot (Band 41 – 20.0MHz QPSK – RB Size 100)

FCC ID: ZNFLS992		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1601280183-R1.ZNF	Test Dates: 12/31/2015-02/24/2016	EUT Type: Portable Handset		Page 119 of 167

7.5 Peak-Average Ratio

§24.232(d)

Test Overview

A peak to average ratio measurement is performed at the conducted port of the EUT. The spectrum analyzers Complementary Cumulative Distribution Function (CCDF) measurement profile is used to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth. The CCDF curve shows how much time the peak waveform spends at or above a given average power level. The percent of time the signal spends at or above the level defines the probability for that particular power level.

Test Procedure Used

KDB 971168 D01 v02r02 – Section 5.7.1

Test Settings

1. The signal analyzer's CCDF measurement profile is enabled
2. Frequency = carrier center frequency
3. Measurement BW > Emission bandwidth of signal
4. The signal analyzer was set to collect one million samples to generate the CCDF curve
5. The measurement interval was set depending on the type of signal analyzed. For continuous signals (>98% duty cycle), the measurement interval was set to 1ms. For burst transmissions, the spectrum analyzer is set to use an internal "RF Burst" trigger that is synced with an incoming pulse and the measurement interval is set to less than the duration of the "on time" of one burst to ensure that energy is only captured during a time in which the transmitter is operating at maximum power

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.


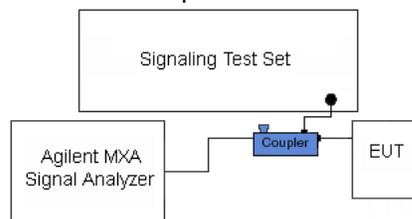


Figure 7-4. Test Instrument & Measurement Setup


Test Notes

None.

FCC ID: ZNFLS992		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1601280183-R1.ZNF	Test Dates: 12/31/2015-02/24/2016	EUT Type: Portable Handset	Page 120 of 167	

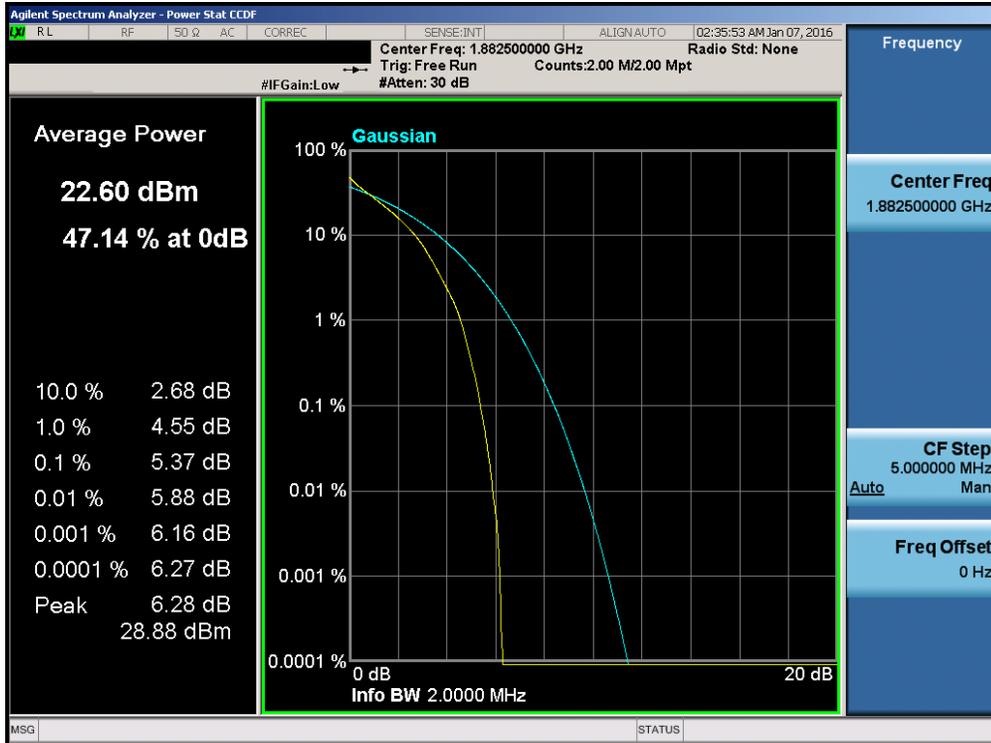


Plot 7-204. PAR Plot (Band 25/2 – 1.4MHz QPSK – RB Size 6)

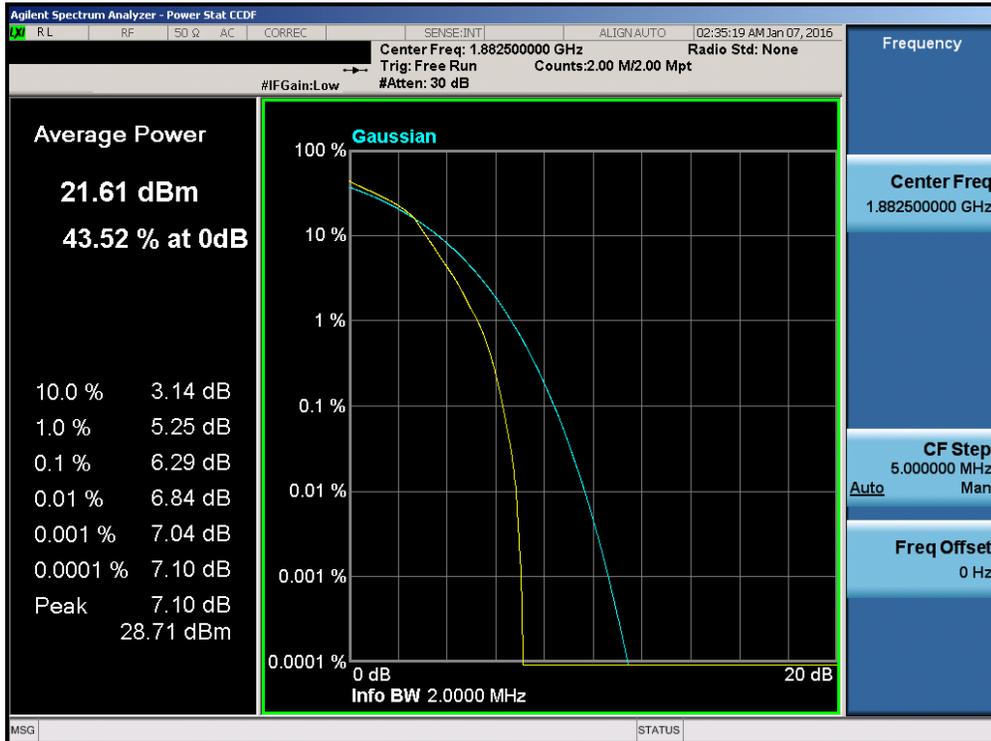


Plot 7-205. PAR Plot (Band 25/2 – 1.4MHz 16-QAM – RB Size 6)

FCC ID: ZNFLS992		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1601280183-R1.ZNF	Test Dates: 12/31/2015-02/24/2016	EUT Type: Portable Handset		Page 121 of 167

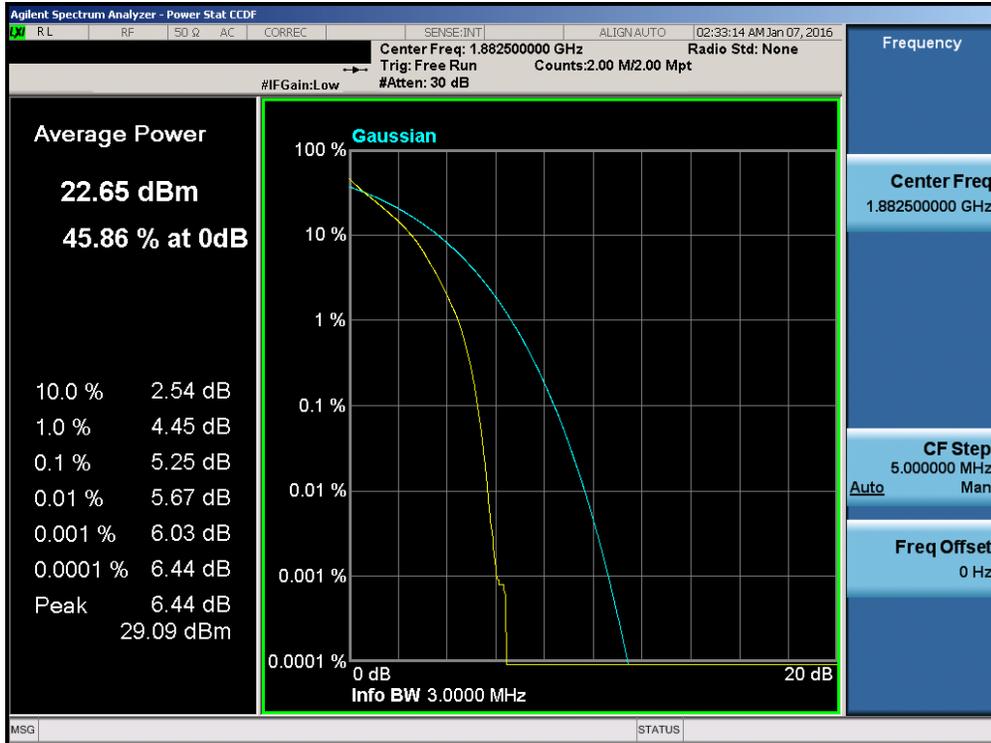


Plot 7-206. PAR Plot (Band 25/2 – 3.0MHz QPSK – RB Size 15)

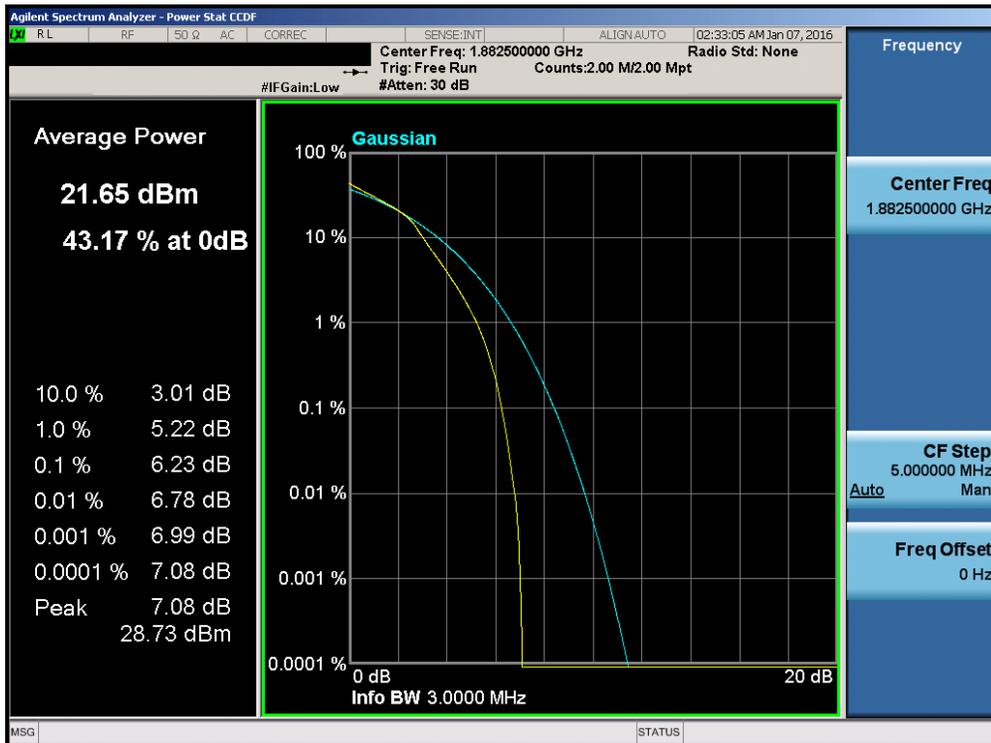


Plot 7-207. PAR Plot (Band 25/2 – 3.0MHz 16-QAM – RB Size 15)

FCC ID: ZNFLS992		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1601280183-R1.ZNF	Test Dates: 12/31/2015-02/24/2016	EUT Type: Portable Handset		Page 122 of 167

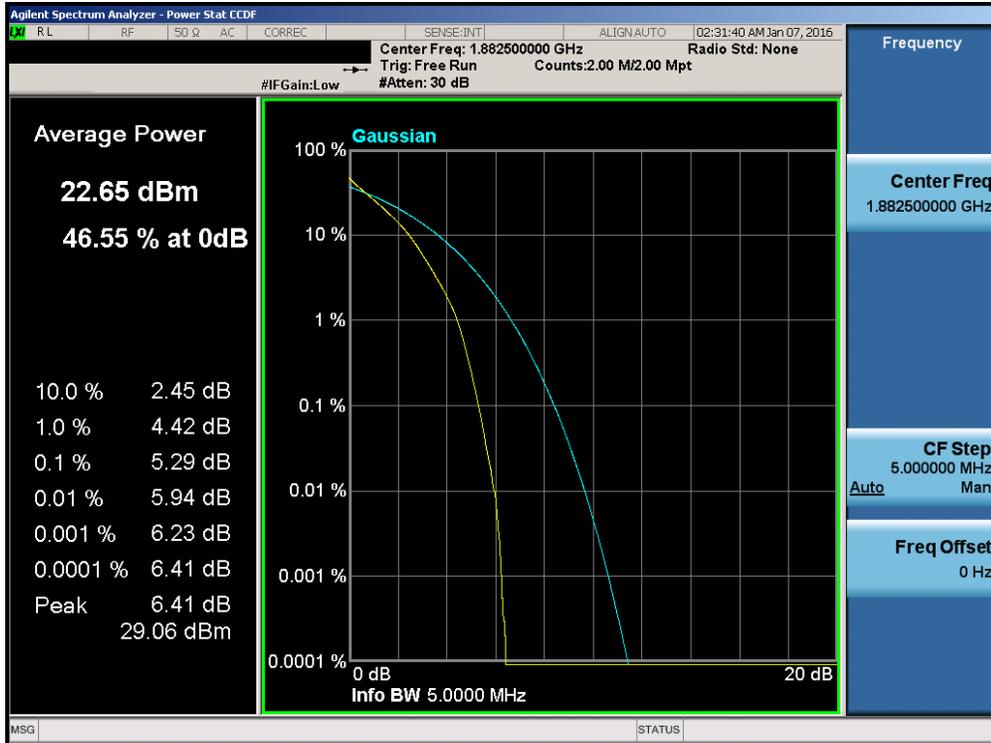


Plot 7-208. PAR Plot (Band 25/2 – 5.0MHz QPSK – RB Size 25)

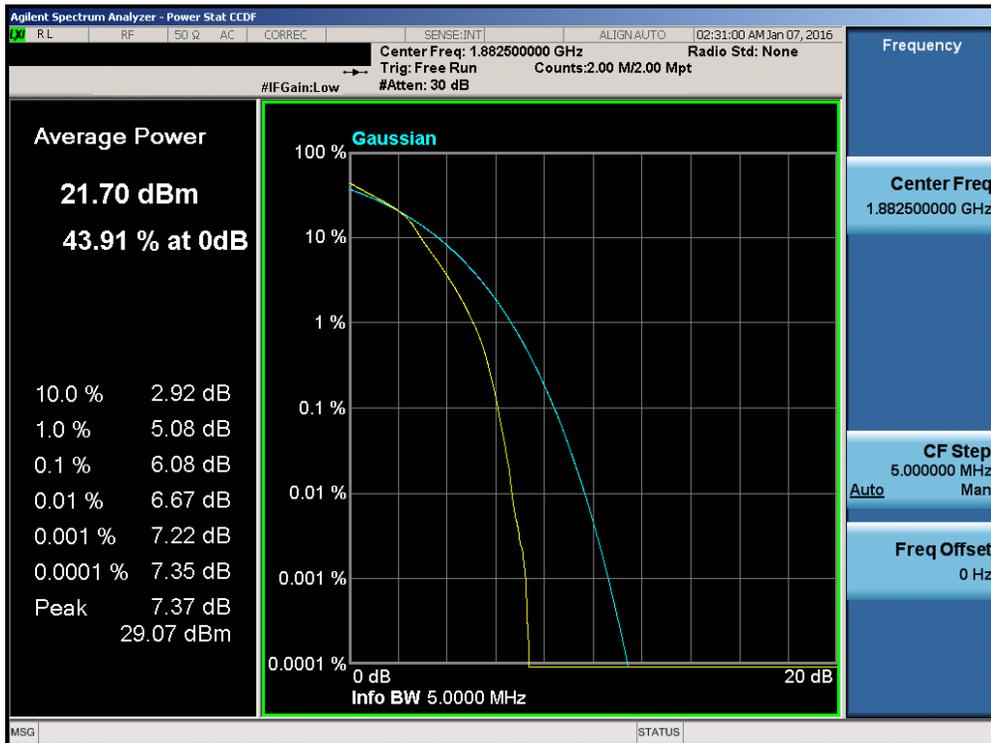


Plot 7-209. PAR Plot (Band 25/2 – 5.0MHz 16-QAM – RB Size 25)

FCC ID: ZNFLS992		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1601280183-R1.ZNF	Test Dates: 12/31/2015-02/24/2016	EUT Type: Portable Handset		Page 123 of 167

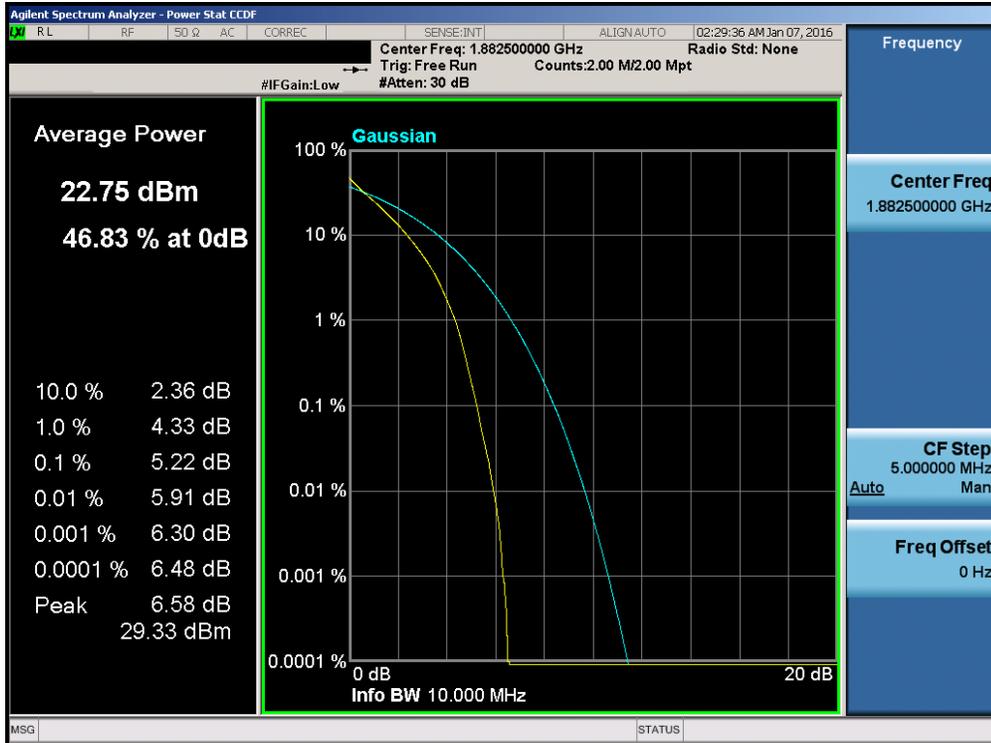


Plot 7-210. PAR Plot (Band 25/2 – 10.0MHz QPSK – RB Size 50)

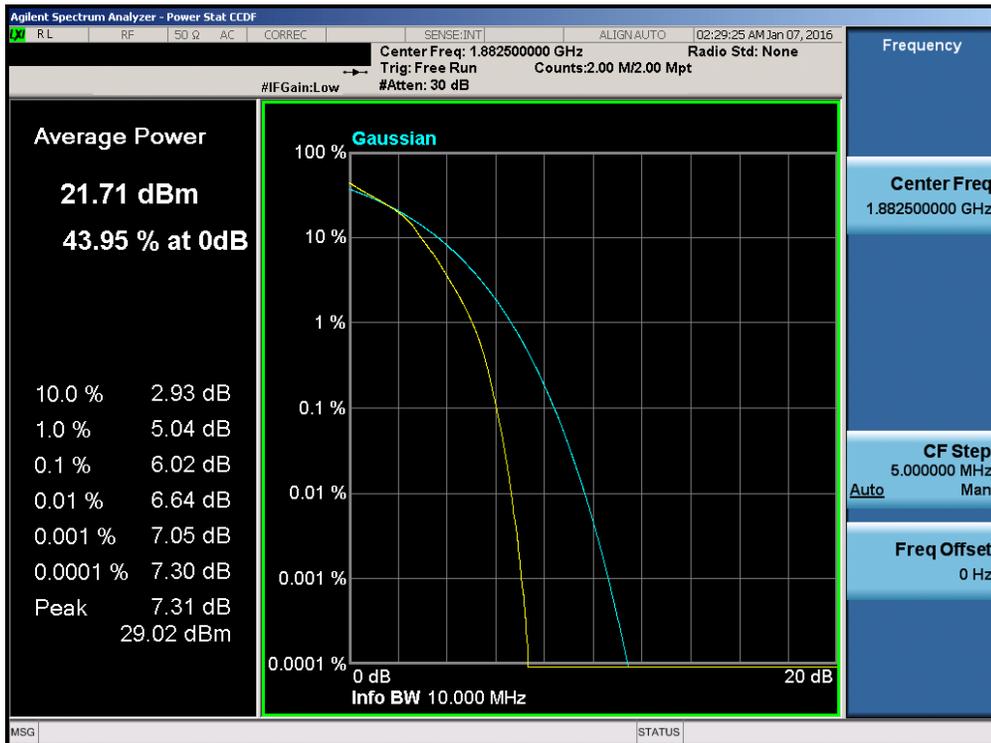


Plot 7-211. PAR Plot (Band 25/2 – 10.0MHz 16-QAM – RB Size 50)

FCC ID: ZNFLS992		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1601280183-R1.ZNF	Test Dates: 12/31/2015-02/24/2016	EUT Type: Portable Handset		Page 124 of 167

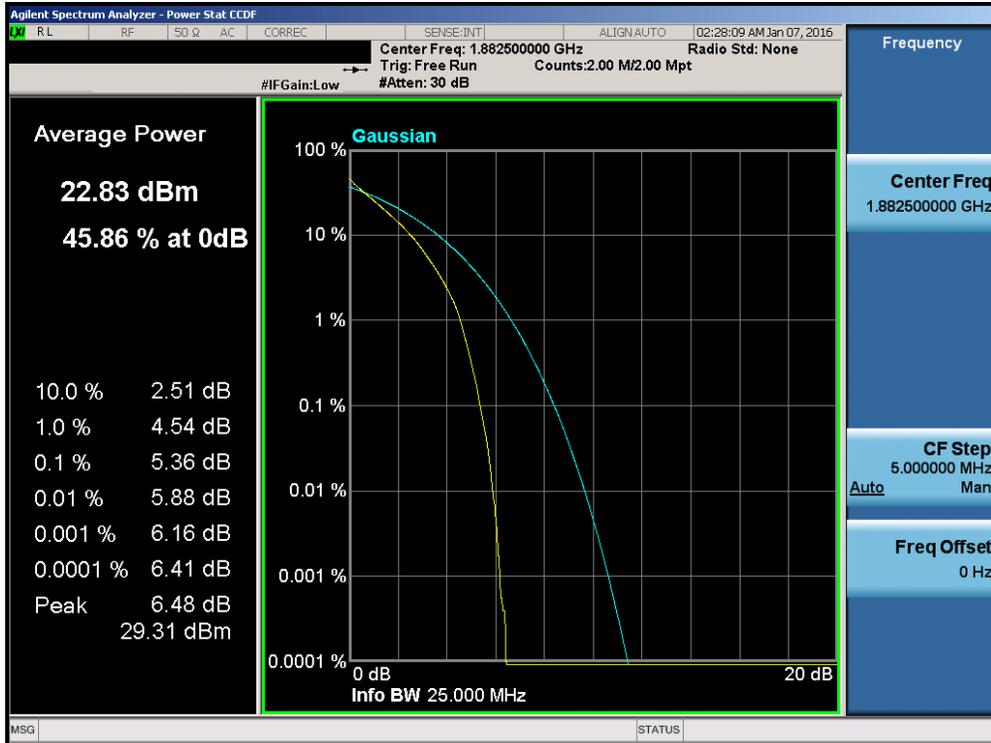


Plot 7-212. PAR Plot (Band 25/2 – 15.0MHz QPSK – RB Size 75)

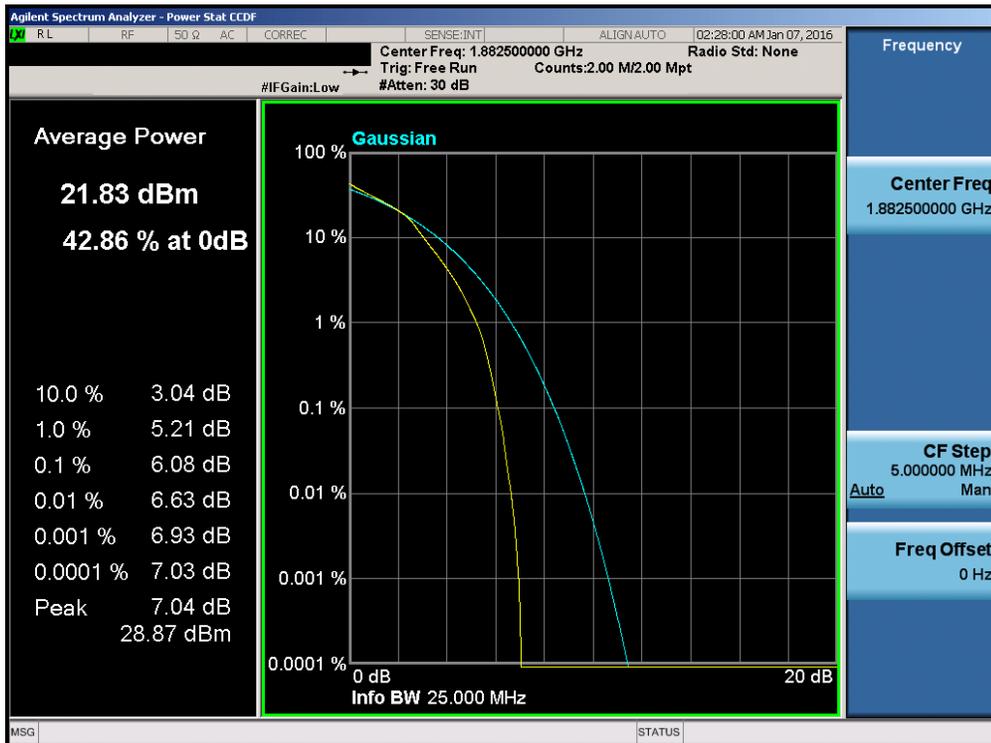


Plot 7-213. PAR Plot (Band 25/2 – 15.0MHz 16-QAM – RB Size 75)

FCC ID: ZNFLS992		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1601280183-R1.ZNF	Test Dates: 12/31/2015-02/24/2016	EUT Type: Portable Handset		Page 125 of 167

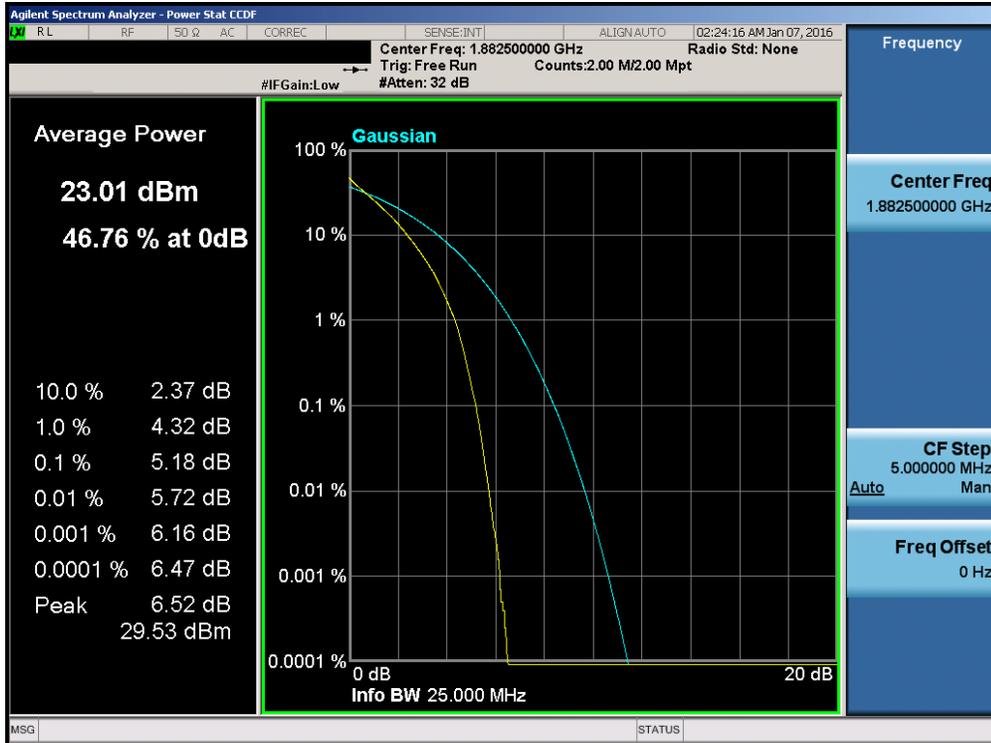

Plot 7-214. PAR Plot (Band 25/2 – 20.0MHz QPSK – RB Size 100)

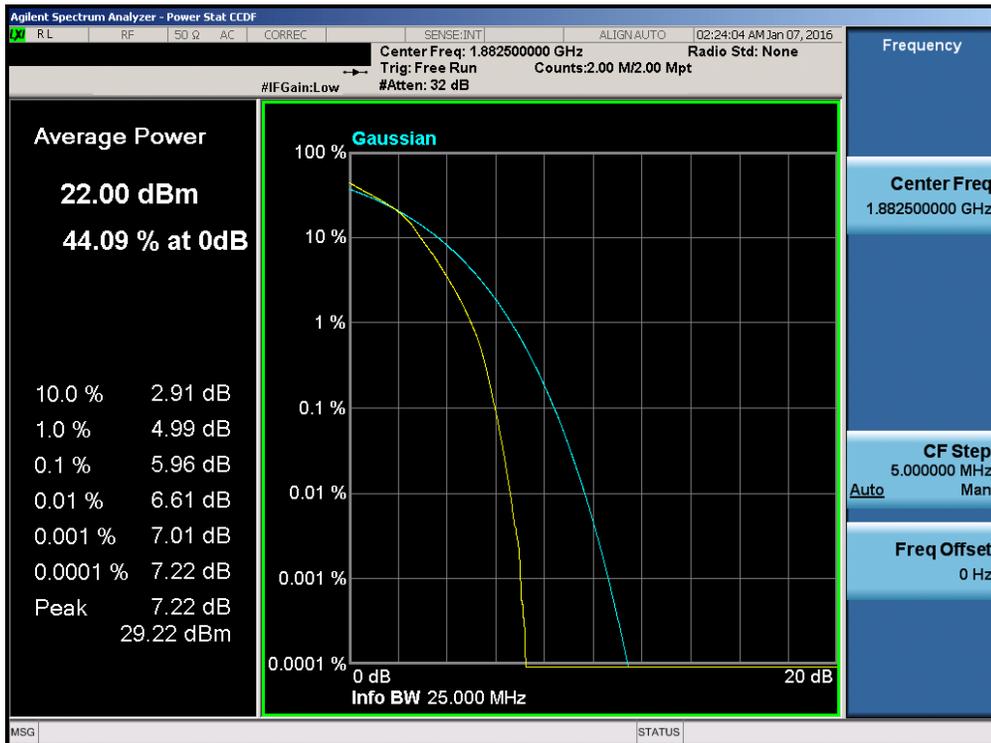

Plot 7-215. PAR Plot (Band 25/2 – 20.0MHz 16-QAM – RB Size 100)

FCC ID: ZNFLS992		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1601280183-R1.ZNF	Test Dates: 12/31/2015-02/24/2016	EUT Type: Portable Handset		Page 126 of 167

7.6 Radiated Power (ERP/EIRP)
§22.913(a.2) §24.232(c.2) §27.50(h.2) §27.50(c.10) §27.50(d.4)

Test Overview

Effective Radiated Power (ERP) and Equivalent Isotropic Radiated Power (EIRP) measurements are performed using the substitution method described in ANSI/TIA-603-C-2004 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using vertically polarized tuned dipole antennas. Measurements on signals operating above 1GHz are performed using vertically polarized broadband horn antennas. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

Test Procedures Used

KDB 971168 D01 v02r02 – Section 5.2.1

ANSI/TIA-603-C-2004 – Section 2.2.17

Test Settings

1. Radiated power measurements are performed using the signal analyzer’s “channel power” measurement capability for signals with continuous operation. For signals with burst transmission, the signal analyzer’s “time domain power” measurement capability is used
2. RBW = 1 – 5% of the expected OBW, not to exceed 1MHz
3. VBW ≥ 3 x RBW
4. Span = 1.5 times the OBW
5. No. of sweep points ≥ 2 x span / RBW
6. Detector = RMS
7. Trigger is set to “free run” for signals with continuous operation with the sweep times set to “auto”.
Trigger is set to enable triggering only on full power bursts with the sweep time set less than or equal to the transmission burst duration
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation. For signals with burst transmission, the “gating” function was enabled to ensure that measurements are performed during times in which the transmitter is operating at its maximum power
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize

FCC ID: ZNFLS992		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1601280183-R1.ZNF	Test Dates: 12/31/2015-02/24/2016	EUT Type: Portable Handset	Page 127 of 167	

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

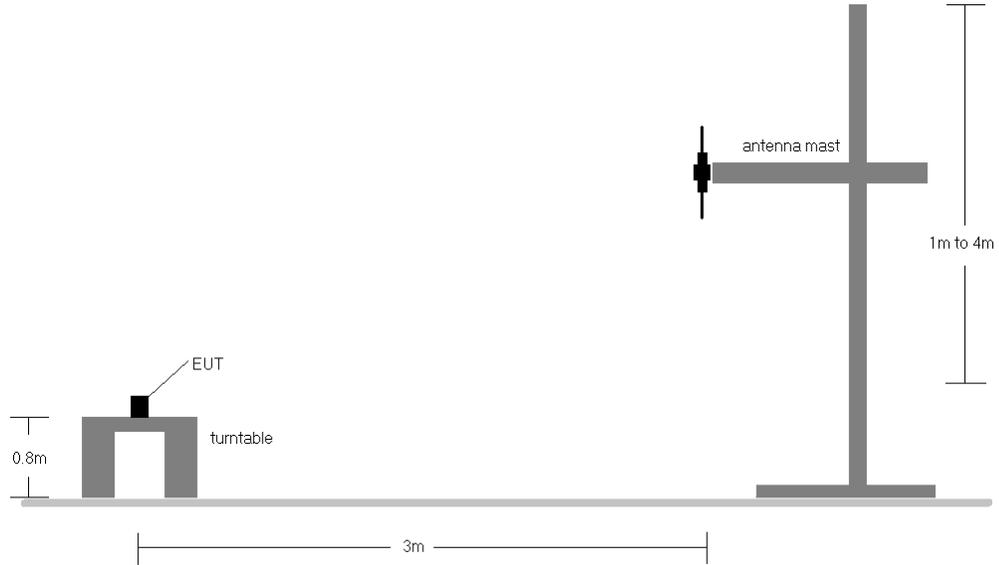


Figure 7-5. Radiated Test Setup <1GHz

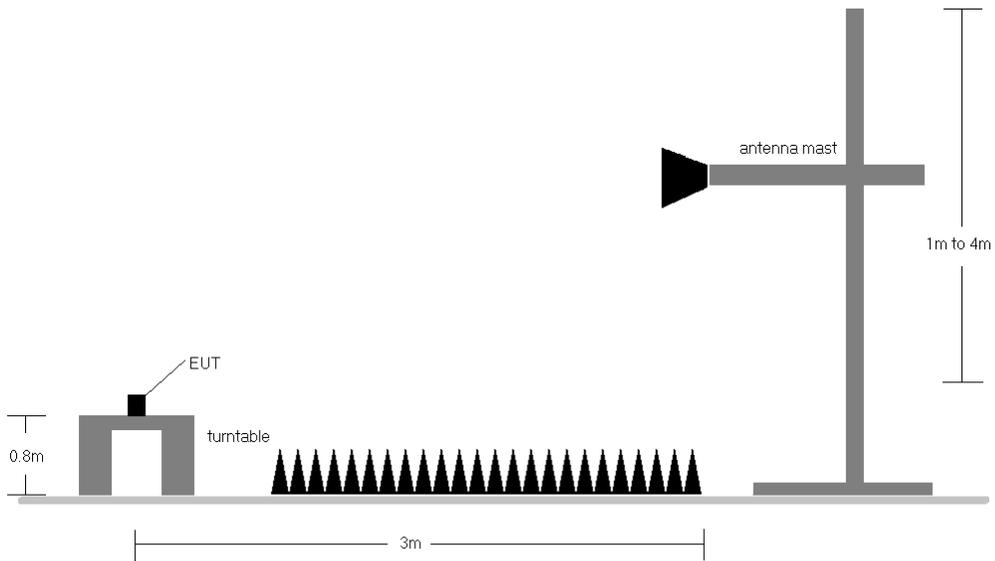


Figure 7-6. Radiated Test Setup >1GHz

Test Notes

- 1) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the tables below.
- 2) This unit was tested with its standard battery.

FCC ID: ZNFLS992	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1601280183-R1.ZNF	Test Dates: 12/31/2015-02/24/2016	EUT Type: Portable Handset		Page 128 of 167

Frequency [MHz]	Antenna	Channel Bandwidth [MHz]	Mod.	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	RB Size/Offset	Substitute Level [dBm]	Ant. Gain [dBd]	ERP [dBm]	ERP Limit [dBm]	Margin [dB]
699.70	Main	1.4	QPSK	V	149	313	1 / 0	15.65	2.72	18.37	34.77	-16.40
707.50	Main	1.4	QPSK	V	149	345	1 / 5	16.91	2.88	19.79	34.77	-14.98
715.30	Main	1.4	QPSK	V	149	358	1 / 0	16.30	3.06	19.36	34.77	-15.41
699.70	Main	1.4	16-QAM	V	149	313	1 / 0	14.41	2.72	17.13	34.77	-17.64
707.50	Main	1.4	16-QAM	V	149	345	1 / 5	16.17	2.88	19.05	34.77	-15.72
715.30	Main	1.4	16-QAM	V	149	358	1 / 0	15.59	3.06	18.65	34.77	-16.12
700.50	Main	3	QPSK	V	149	316	1 / 0	15.75	2.72	18.47	34.77	-16.30
707.50	Main	3	QPSK	V	149	340	1 / 14	17.04	2.88	19.92	34.77	-14.85
714.50	Main	3	QPSK	V	149	360	1 / 0	16.49	3.04	19.53	34.77	-15.24
700.50	Main	3	16-QAM	V	149	316	1 / 0	14.66	2.72	17.38	34.77	-17.39
707.50	Main	3	16-QAM	V	149	340	1 / 14	16.41	2.88	19.29	34.77	-15.48
714.50	Main	3	16-QAM	V	149	360	1 / 0	15.76	3.04	18.80	34.77	-15.97
701.50	Main	5	QPSK	V	149	311	1 / 0	16.33	2.75	19.08	34.77	-15.69
707.50	Main	5	QPSK	V	149	339	1 / 24	16.94	2.88	19.82	34.77	-14.95
713.50	Main	5	QPSK	V	149	363	1 / 24	17.38	3.02	20.40	34.77	-14.37
701.50	Main	5	16-QAM	V	149	311	1 / 0	15.21	2.75	17.96	34.77	-16.81
707.50	Main	5	16-QAM	V	149	339	1 / 24	16.01	2.88	18.89	34.77	-15.88
713.50	Main	5	16-QAM	V	149	363	1 / 24	16.49	3.02	19.51	34.77	-15.26
704.00	Main	10	QPSK	V	149	314	1 / 49	16.18	2.80	18.98	34.77	-15.79
707.50	Main	10	QPSK	V	149	336	1 / 49	15.61	2.88	18.49	34.77	-16.28
711.00	Main	10	QPSK	V	149	363	1 / 49	16.60	2.96	19.56	34.77	-15.21
704.00	Main	10	16-QAM	V	149	314	1 / 49	15.17	2.80	17.97	34.77	-16.80
707.50	Main	10	16-QAM	V	149	336	1 / 49	14.47	2.88	17.35	34.77	-17.42
711.00	Main	10	16-QAM	V	149	363	1 / 49	15.74	2.96	18.70	34.77	-16.07
701.50	CM	5	QPSK	V	156	341	1 / 0	18.84	2.75	21.59	34.77	-13.18
707.50	CM	5	QPSK	V	156	351	1 / 74	19.39	2.88	22.27	34.77	-12.50
713.50	CM	5	QPSK	V	156	356	1 / 74	19.50	3.02	22.52	34.77	-12.25
701.50	CM	5	16-QAM	V	156	341	1 / 0	17.78	2.75	20.53	34.77	-14.24
707.50	CM	5	16-QAM	V	156	351	1 / 74	18.30	2.88	21.18	34.77	-13.59
713.50	CM	5	16-QAM	V	156	356	1 / 74	18.55	3.02	21.57	34.77	-13.20

Table 7-2. ERP Data (Band 12)

FCC ID: ZNFLS992		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1601280183-R1.ZNF	Test Dates: 12/31/2015-02/24/2016	EUT Type: Portable Handset	Page 129 of 167	

Frequency [MHz]	Antenna	Channel Bandwidth [MHz]	Mod.	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	RB Size/Offset	Substitute Level [dBm]	Ant. Gain [dBd]	ERP [dBm]	ERP Limit [dBm]	Margin [dB]
824.70	Main	1.4	QPSK	V	134	309	1 / 0	14.68	4.95	19.63	38.45	-18.83
836.50	Main	1.4	QPSK	V	134	304	1 / 5	15.25	5.00	20.25	38.45	-18.20
848.30	Main	1.4	QPSK	V	134	267	1 / 0	15.43	5.05	20.48	38.45	-17.97
824.70	Main	1.4	16-QAM	V	134	309	1 / 0	14.10	4.95	19.05	38.45	-19.41
836.50	Main	1.4	16-QAM	V	134	304	1 / 5	14.58	5.00	19.58	38.45	-18.87
848.30	Main	1.4	16-QAM	V	134	267	1 / 0	14.77	5.05	19.82	38.45	-18.63
825.50	Main	3	QPSK	V	134	308	1 / 0	14.98	4.95	19.93	38.45	-18.52
836.50	Main	3	QPSK	V	134	298	1 / 14	15.43	5.00	20.43	38.45	-18.02
847.50	Main	3	QPSK	V	134	261	1 / 0	15.69	5.05	20.74	38.45	-17.71
825.50	Main	3	16-QAM	V	134	308	1 / 0	14.23	4.95	19.18	38.45	-19.27
836.50	Main	3	16-QAM	V	134	298	1 / 14	14.72	5.00	19.72	38.45	-18.73
847.50	Main	3	16-QAM	V	134	261	1 / 0	14.97	5.05	20.02	38.45	-18.43
826.50	Main	5	QPSK	V	134	303	1 / 24	15.01	4.95	19.96	38.45	-18.49
836.50	Main	5	QPSK	V	134	295	1 / 24	15.70	5.00	20.70	38.45	-17.75
846.50	Main	5	QPSK	V	134	266	1 / 0	16.11	5.04	21.15	38.45	-17.30
826.50	Main	5	16-QAM	V	134	303	1 / 24	14.08	4.95	19.03	38.45	-19.42
836.50	Main	5	16-QAM	V	134	295	1 / 24	15.05	5.00	20.05	38.45	-18.40
846.50	Main	5	16-QAM	V	134	266	1 / 0	15.55	5.04	20.59	38.45	-17.86
829.00	Main	10	QPSK	V	134	306	1 / 49	14.81	4.96	19.77	38.45	-18.68
836.50	Main	10	QPSK	V	134	296	1 / 49	15.61	5.00	20.61	38.45	-17.84
844.00	Main	10	QPSK	V	134	271	1 / 0	15.90	5.03	20.93	38.45	-17.52
829.00	Main	10	16-QAM	V	134	306	1 / 49	14.20	4.96	19.16	38.45	-19.29
836.50	Main	10	16-QAM	V	134	296	1 / 49	14.85	5.00	19.85	38.45	-18.60
844.00	Main	10	16-QAM	V	134	271	1 / 0	14.83	5.03	19.86	38.45	-18.59
826.50	CM	5	QPSK	V	138	231	1 / 99	11.12	4.95	16.07	38.45	-22.38
836.50	CM	5	QPSK	V	137	341	1 / 99	11.99	5.00	16.99	38.45	-21.46
846.50	CM	5	QPSK	V	138	338	1 / 0	12.60	5.04	17.64	38.45	-20.81
826.50	CM	5	16-QAM	V	138	231	1 / 99	10.19	4.95	15.14	38.45	-23.31
836.50	CM	5	16-QAM	V	137	341	1 / 99	11.42	5.00	16.42	38.45	-22.03
846.50	CM	5	16-QAM	V	138	338	1 / 0	12.08	5.04	17.12	38.45	-21.33

Table 7-3. ERP Data (Band 26/5)

FCC ID: ZNFLS992		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1601280183-R1.ZNF	Test Dates: 12/31/2015-02/24/2016	EUT Type: Portable Handset	Page 130 of 167	

Frequency [MHz]	Antenna	Channel Bandwidth [MHz]	Mod.	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	RB Size/Offset	Substitute Level [dBm]	Ant. Gain [dBd]	ERP [dBm]	ERP Limit [dBm]	Margin [dB]
831.50	Main	15	QPSK	V	134	307	1 / 74	12.40	4.98	17.38	38.45	-21.08
836.50	Main	15	QPSK	V	134	298	1 / 74	12.91	5.00	17.91	38.45	-20.54
841.50	Main	15	QPSK	V	134	273	1 / 74	12.57	5.02	17.59	38.45	-20.86
831.50	Main	15	16-QAM	V	134	307	1 / 74	11.57	4.98	16.55	38.45	-21.91
836.50	Main	15	16-QAM	V	134	298	1 / 74	11.66	5.00	16.66	38.45	-21.79
841.50	Main	15	16-QAM	V	134	273	1 / 74	11.78	5.02	16.80	38.45	-21.65

Table 7-4. ERP Data (Band 26)

FCC ID: ZNFLS992		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1601280183-R1.ZNF	Test Dates: 12/31/2015-02/24/2016	EUT Type: Portable Handset	Page 131 of 167	

Frequency [MHz]	Antenna	Channel Bandwidth [MHz]	Mod.	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	RB Size/Offset	Substitute Level [dBm]	Ant. Gain [dBi]	EIRP [dBm]	EIRP Limit [dBm]	Margin [dB]
1710.70	Main	1.4	QPSK	V	206	289	1 / 0	8.93	9.67	18.60	30.00	-11.40
1732.50	Main	1.4	QPSK	V	132	268	1 / 5	9.93	9.53	19.46	30.00	-10.54
1754.30	Main	1.4	QPSK	V	227	277	1 / 5	9.61	9.39	19.00	30.00	-11.00
1710.70	Main	1.4	16-QAM	V	206	289	1 / 0	8.43	9.67	18.10	30.00	-11.90
1732.50	Main	1.4	16-QAM	V	132	268	1 / 5	8.93	9.53	18.46	30.00	-11.54
1754.30	Main	1.4	16-QAM	V	227	277	1 / 5	8.93	9.39	18.32	30.00	-11.68
1711.50	Main	3	QPSK	V	196	285	1 / 0	9.41	9.67	19.08	30.00	-10.92
1732.50	Main	3	QPSK	V	134	269	1 / 0	10.40	9.53	19.93	30.00	-10.07
1753.50	Main	3	QPSK	V	224	273	1 / 0	10.01	9.40	19.41	30.00	-10.59
1711.50	Main	3	16-QAM	V	196	285	1 / 0	8.46	9.67	18.13	30.00	-11.87
1732.50	Main	3	16-QAM	V	134	269	1 / 0	9.66	9.53	19.19	30.00	-10.81
1753.50	Main	3	16-QAM	V	224	273	1 / 0	9.14	9.40	18.54	30.00	-11.46
1712.50	Main	5	QPSK	V	202	290	1 / 0	8.24	9.66	17.90	30.00	-12.10
1732.50	Main	5	QPSK	V	214	266	1 / 24	10.37	9.53	19.90	30.00	-10.10
1752.50	Main	5	QPSK	V	216	280	1 / 24	9.85	9.40	19.25	30.00	-10.75
1712.50	Main	5	16-QAM	V	202	290	1 / 0	7.63	9.66	17.29	30.00	-12.71
1732.50	Main	5	16-QAM	V	214	266	1 / 24	9.79	9.53	19.32	30.00	-10.68
1752.50	Main	5	16-QAM	V	216	280	1 / 24	9.02	9.40	18.42	30.00	-11.58
1715.00	Main	10	QPSK	V	205	293	1 / 0	7.94	9.64	17.58	30.00	-12.42
1732.50	Main	10	QPSK	V	209	269	1 / 49	9.93	9.53	19.46	30.00	-10.54
1750.00	Main	10	QPSK	V	210	273	1 / 49	9.71	9.42	19.13	30.00	-10.87
1715.00	Main	10	16-QAM	V	205	293	1 / 0	7.13	9.64	16.77	30.00	-13.23
1732.50	Main	10	16-QAM	V	209	269	1 / 49	9.02	9.53	18.55	30.00	-11.45
1750.00	Main	10	16-QAM	V	210	273	1 / 49	9.05	9.42	18.47	30.00	-11.53
1717.50	Main	15	QPSK	V	212	284	1 / 74	8.26	9.63	17.89	30.00	-12.11
1732.50	Main	15	QPSK	V	203	278	1 / 74	9.34	9.53	18.87	30.00	-11.13
1747.50	Main	15	QPSK	V	220	272	1 / 0	9.48	9.43	18.91	30.00	-11.09
1717.50	Main	15	16-QAM	V	212	284	1 / 74	7.60	9.63	17.23	30.00	-12.77
1732.50	Main	15	16-QAM	V	203	278	1 / 74	8.66	9.53	18.19	30.00	-11.81
1747.50	Main	15	16-QAM	V	220	272	1 / 0	8.67	9.43	18.10	30.00	-11.90
1720.00	Main	20	QPSK	V	207	287	1 / 99	9.31	9.61	18.92	30.00	-11.08
1732.50	Main	20	QPSK	V	202	281	1 / 99	9.28	9.53	18.81	30.00	-11.19
1745.00	Main	20	QPSK	V	221	278	1 / 0	9.66	9.45	19.11	30.00	-10.89
1720.00	Main	20	16-QAM	V	207	287	1 / 99	8.71	9.61	18.32	30.00	-11.68
1732.50	Main	20	16-QAM	V	202	281	1 / 99	8.65	9.53	18.18	30.00	-11.82
1745.00	Main	20	16-QAM	V	221	278	1 / 0	9.03	9.45	18.48	30.00	-11.52
1711.50	CM	3	QPSK	V	201	277	1 / 0	8.93	9.67	18.60	30.00	-11.40
1732.50	CM	3	QPSK	V	208	273	1 / 0	9.93	9.53	19.46	30.00	-10.54
1753.50	CM	3	QPSK	V	202	291	1 / 0	9.56	9.40	18.96	30.00	-11.04
1711.50	CM	3	16-QAM	V	201	277	1 / 0	7.97	9.67	17.64	30.00	-12.36
1732.50	CM	3	16-QAM	V	208	273	1 / 0	9.15	9.53	18.68	30.00	-11.32
1753.50	CM	3	16-QAM	V	202	291	1 / 0	8.69	9.40	18.09	30.00	-11.91

Table 7-5. EIRP Data (Band 4)

FCC ID: ZNFLS992		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1601280183-R1.ZNF	Test Dates: 12/31/2015-02/24/2016	EUT Type: Portable Handset	Page 132 of 167	

Frequency [MHz]	Antenna	Channel Bandwidth [MHz]	Mod.	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	RB Size/Offset	Substitute Level [dBm]	Ant. Gain [dBi]	EIRP [dBm]	EIRP Limit [dBm]	Margin [dB]
1850.70	Main	1.4	QPSK	V	148	272	1 / 0	12.38	9.21	21.59	33.01	-11.42
1882.50	Main	1.4	QPSK	V	143	274	1 / 0	13.67	9.28	22.95	33.01	-10.06
1914.30	Main	1.4	QPSK	V	185	261	1 / 0	12.76	9.39	22.15	33.01	-10.86
1850.70	Main	1.4	16-QAM	V	148	272	1 / 0	11.77	9.21	20.98	33.01	-12.03
1882.50	Main	1.4	16-QAM	V	143	274	1 / 0	13.13	9.28	22.41	33.01	-10.60
1914.30	Main	1.4	16-QAM	V	185	261	1 / 0	11.90	9.39	21.29	33.01	-11.72
1851.50	Main	3	QPSK	V	158	276	1 / 0	13.00	9.21	22.21	33.01	-10.80
1882.50	Main	3	QPSK	V	134	269	1 / 0	14.34	9.28	23.62	33.01	-9.39
1913.50	Main	3	QPSK	V	179	268	1 / 0	13.44	9.39	22.83	33.01	-10.18
1851.50	Main	3	16-QAM	V	158	276	1 / 0	12.23	9.21	21.44	33.01	-11.57
1882.50	Main	3	16-QAM	V	134	269	1 / 0	13.82	9.28	23.10	33.01	-9.91
1913.50	Main	3	16-QAM	V	179	268	1 / 0	12.53	9.39	21.92	33.01	-11.09
1852.50	Main	5	QPSK	V	152	277	1 / 0	13.19	9.22	22.41	33.01	-10.60
1882.50	Main	5	QPSK	V	131	266	1 / 0	14.35	9.28	23.63	33.01	-9.38
1912.50	Main	5	QPSK	V	171	269	1 / 24	13.30	9.38	22.68	33.01	-10.33
1852.50	Main	5	16-QAM	V	152	277	1 / 0	12.55	9.22	21.77	33.01	-11.24
1882.50	Main	5	16-QAM	V	131	266	1 / 0	13.86	9.28	23.14	33.01	-9.87
1912.50	Main	5	16-QAM	V	171	269	1 / 24	12.55	9.38	21.93	33.01	-11.08
1855.00	Main	10	QPSK	V	158	270	1 / 0	12.82	9.22	22.04	33.01	-10.97
1882.50	Main	10	QPSK	V	134	269	1 / 0	13.90	9.28	23.18	33.01	-9.83
1910.00	Main	10	QPSK	V	164	267	1 / 49	13.33	9.37	22.70	33.01	-10.31
1855.00	Main	10	16-QAM	V	158	270	1 / 0	12.05	9.22	21.27	33.01	-11.74
1882.50	Main	10	16-QAM	V	134	269	1 / 0	13.24	9.28	22.52	33.01	-10.49
1910.00	Main	10	16-QAM	V	164	267	1 / 49	12.34	9.37	21.71	33.01	-11.30
1857.50	Main	15	QPSK	V	153	265	1 / 74	12.79	9.23	22.02	33.01	-10.99
1882.50	Main	15	QPSK	V	149	264	1 / 0	13.76	9.28	23.04	33.01	-9.97
1907.50	Main	15	QPSK	V	156	269	1 / 74	13.02	9.35	22.37	33.01	-10.64
1857.50	Main	15	16-QAM	V	153	265	1 / 74	12.04	9.23	21.27	33.01	-11.74
1882.50	Main	15	16-QAM	V	149	264	1 / 0	13.02	9.28	22.30	33.01	-10.71
1907.50	Main	15	16-QAM	V	156	269	1 / 74	12.09	9.35	21.44	33.01	-11.57
1860.00	Main	20	QPSK	V	145	273	1 / 0	12.78	9.23	22.01	33.01	-11.00
1882.50	Main	20	QPSK	V	147	266	1 / 0	13.84	9.28	23.12	33.01	-9.89
1905.00	Main	20	QPSK	V	148	265	1 / 99	13.02	9.34	22.36	33.01	-10.65
1860.00	Main	20	16-QAM	V	145	273	1 / 0	12.21	9.23	21.44	33.01	-11.57
1882.50	Main	20	16-QAM	V	147	266	1 / 0	13.11	9.28	22.39	33.01	-10.62
1905.00	Main	20	16-QAM	V	148	265	1 / 99	12.46	9.34	21.80	33.01	-11.21
1852.50	CM	5	QPSK	V	122	276	1 / 0	12.80	9.22	22.02	33.01	-10.99
1882.50	CM	5	QPSK	V	127	286	1 / 0	13.91	9.28	23.19	33.01	-9.82
1912.50	CM	5	QPSK	V	135	281	1 / 99	12.90	9.38	22.28	33.01	-10.73
1852.50	CM	5	16-QAM	V	122	276	1 / 0	12.26	9.22	21.48	33.01	-11.53
1882.50	CM	5	16-QAM	V	127	286	1 / 0	13.16	9.28	22.44	33.01	-10.57
1912.50	CM	5	16-QAM	V	135	281	1 / 99	12.05	9.38	21.43	33.01	-11.58

Table 7-6. EIRP Data (Band 25/2)

FCC ID: ZNFLS992		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1601280183-R1.ZNF	Test Dates: 12/31/2015-02/24/2016	EUT Type: Portable Handset	Page 133 of 167	

Frequency [MHz]	Antenna	Channel Bandwidth [MHz]	Mod.	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	RB Size/Offset	Substitute Level [dBm]	Ant. Gain [dBi]	EIRP [dBm]	EIRP Limit [dBm]	Margin [dB]
2502.50	Main	5	QPSK	V	264	242	1 / 24	11.59	8.51	20.10	33.01	-12.91
2535.00	Main	5	QPSK	V	235	288	1 / 0	12.50	8.60	21.10	33.01	-11.91
2567.50	Main	5	QPSK	V	235	219	1 / 24	13.11	8.70	21.81	33.01	-11.20
2502.50	Main	5	16-QAM	V	264	242	1 / 24	11.11	8.51	19.62	33.01	-13.39
2535.00	Main	5	16-QAM	V	235	288	1 / 0	11.58	8.60	20.18	33.01	-12.83
2567.50	Main	5	16-QAM	V	235	219	1 / 24	12.39	8.70	21.09	33.01	-11.92
2505.00	Main	10	QPSK	V	289	273	1 / 49	11.73	8.51	20.24	33.01	-12.77
2535.00	Main	10	QPSK	V	236	250	1 / 0	12.25	8.60	20.85	33.01	-12.16
2565.00	Main	10	QPSK	V	211	233	1 / 49	12.92	8.69	21.61	33.01	-11.40
2505.00	Main	10	16-QAM	V	289	273	1 / 49	10.77	8.51	19.28	33.01	-13.73
2535.00	Main	10	16-QAM	V	236	250	1 / 0	11.43	8.60	20.03	33.01	-12.98
2565.00	Main	10	16-QAM	V	211	233	1 / 49	12.06	8.69	20.75	33.01	-12.26
2507.50	Main	15	QPSK	V	283	254	1 / 74	10.06	8.52	18.58	33.01	-14.43
2535.00	Main	15	QPSK	V	259	271	1 / 0	11.82	8.60	20.42	33.01	-12.59
2562.50	Main	15	QPSK	V	241	255	1 / 74	12.67	8.69	21.36	33.01	-11.65
2507.50	Main	15	16-QAM	V	283	254	1 / 74	9.06	8.52	17.58	33.01	-15.43
2535.00	Main	15	16-QAM	V	259	271	1 / 0	10.92	8.60	19.52	33.01	-13.49
2562.50	Main	15	16-QAM	V	241	255	1 / 74	11.58	8.69	20.27	33.01	-12.74
2510.00	Main	20	QPSK	V	250	282	1 / 99	11.48	8.53	20.01	33.01	-13.00
2535.00	Main	20	QPSK	V	204	288	1 / 99	11.38	8.60	19.98	33.01	-13.03
2560.00	Main	20	QPSK	V	210	291	1 / 99	12.62	8.68	21.30	33.01	-11.71
2510.00	Main	20	16-QAM	V	250	282	1 / 99	10.88	8.53	19.41	33.01	-13.60
2535.00	Main	20	16-QAM	V	204	288	1 / 99	10.75	8.60	19.35	33.01	-13.66
2560.00	Main	20	16-QAM	V	210	291	1 / 99	10.97	8.68	19.65	33.01	-13.36
2502.50	CM	5	QPSK	V	195	277	1 / 99	6.26	8.51	14.77	33.01	-18.24
2535.00	CM	5	QPSK	V	181	256	1 / 0	8.03	8.60	16.63	33.01	-16.38
2567.50	CM	5	QPSK	V	185	286	1 / 99	7.72	8.70	16.42	33.01	-16.59

Table 7-7. EIRP Data (Band 7)

FCC ID: ZNFLS992		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1601280183-R1.ZNF	Test Dates: 12/31/2015-02/24/2016	EUT Type: Portable Handset	Page 134 of 167	

Frequency [MHz]	Antenna	Channel Bandwidth [MHz]	Mod.	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	RB Size/Offset	Substitute Level [dBm]	Ant. Gain [dBi]	EIRP [dBm]	EIRP Limit [dBm]	Margin [dB]
2498.50	Main	5	QPSK	V	202	292	1 / 0	8.86	8.51	17.37	33.01	-15.64
2593.00	Main	5	QPSK	V	195	285	1 / 0	12.16	8.78	20.94	33.01	-12.07
2687.50	Main	5	QPSK	V	226	215	1 / 0	10.93	8.93	19.86	33.01	-13.15
2498.50	Main	5	16-QAM	V	202	292	1 / 0	8.25	8.51	16.76	33.01	-16.25
2593.00	Main	5	16-QAM	V	195	285	1 / 0	11.72	8.78	20.50	33.01	-12.51
2687.50	Main	5	16-QAM	V	226	215	1 / 0	9.82	8.93	18.75	33.01	-14.26
2501.00	Main	10	QPSK	V	201	280	1 / 0	9.06	8.50	17.56	33.01	-15.45
2593.00	Main	10	QPSK	V	175	281	1 / 0	12.23	8.78	21.01	33.01	-12.00
2685.00	Main	10	QPSK	V	237	225	1 / 0	11.05	8.93	19.98	33.01	-13.03
2501.00	Main	10	16-QAM	V	201	280	1 / 0	8.39	8.50	16.89	33.01	-16.12
2593.00	Main	10	16-QAM	V	175	281	1 / 0	11.68	8.78	20.46	33.01	-12.55
2685.00	Main	10	16-QAM	V	237	225	1 / 0	9.85	8.93	18.78	33.01	-14.23
2503.50	Main	15	QPSK	V	199	283	1 / 0	9.17	8.51	17.68	33.01	-15.33
2593.00	Main	15	QPSK	V	181	291	1 / 0	12.36	8.78	21.14	33.01	-11.87
2682.50	Main	15	QPSK	V	237	218	1 / 0	11.05	8.92	19.97	33.01	-13.04
2503.50	Main	15	16-QAM	V	199	283	1 / 0	8.50	8.51	17.01	33.01	-16.00
2593.00	Main	15	16-QAM	V	181	291	1 / 0	10.44	8.78	19.22	33.01	-13.79
2682.50	Main	15	16-QAM	V	237	218	1 / 0	10.02	8.92	18.94	33.01	-14.07
2506.00	Main	20	QPSK	V	208	266	1 / 0	9.24	8.52	17.76	33.01	-15.25
2593.00	Main	20	QPSK	V	201	277	1 / 0	12.49	8.78	21.27	33.01	-11.74
2680.00	Main	20	QPSK	V	257	232	1 / 0	11.17	8.92	20.09	33.01	-12.92
2506.00	Main	20	16-QAM	V	208	266	1 / 0	8.66	8.52	17.18	33.01	-15.83
2593.00	Main	20	16-QAM	V	201	277	1 / 0	11.50	8.78	20.28	33.01	-12.73
2680.00	Main	20	16-QAM	V	257	232	1 / 0	10.20	8.92	19.12	33.01	-13.89
2506.00	CM	20	QPSK	V	176	288	1 / 0	3.30	8.52	11.82	33.01	-21.19
2593.00	CM	20	QPSK	V	188	264	1 / 0	6.16	8.78	14.94	33.01	-18.07
2680.00	CM	20	QPSK	V	199	254	1 / 0	5.10	8.92	14.02	33.01	-18.99

Table 7-8. EIRP Data (Band 41)

FCC ID: ZNFLS992		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1601280183-R1.ZNF	Test Dates: 12/31/2015-02/24/2016	EUT Type: Portable Handset	Page 135 of 167	

7.7 Radiated Spurious Emissions Measurements

§2.1053 §22.917(a) §24.238(a) §27.53(g) §27.53(h) §27.53(m)

Test Overview

Radiated spurious emissions measurements are performed using the substitution method described in ANSI/TIA-603-C-2004 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using vertically and horizontally polarized tuned dipole antennas. Measurements on signals operating above 1GHz are performed using vertically and horizontally polarized broadband horn antennas. All measurements are performed as peak measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

Test Procedures Used

KDB 971168 D01 v02r02 – Section 5.8

ANSI/TIA-603-C-2004 – Section 2.2.12

Test Settings

1. RBW = 100kHz for emissions below 1GHz and 1MHz for emissions above 1GHz
2. VBW $\geq 3 \times$ RBW
3. Span = 1.5 times the OBW
4. No. of sweep points $\geq 2 \times$ span / RBW
5. Detector = Peak
6. Trace mode = max hold
7. The trace was allowed to stabilize

FCC ID: ZNFLS992		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1601280183-R1.ZNF	Test Dates: 12/31/2015-02/24/2016	EUT Type: Portable Handset	Page 136 of 167	

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

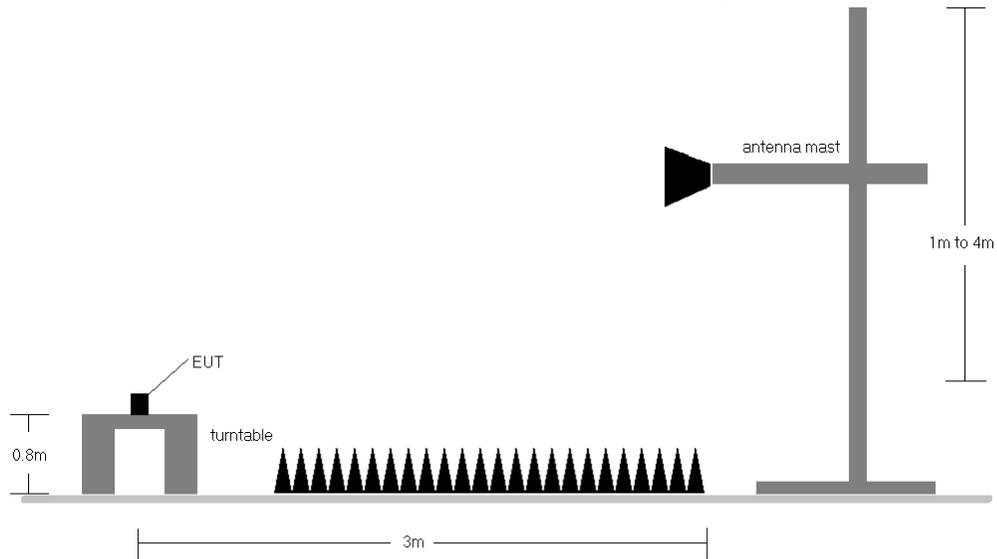


Figure 7-7. Test Instrument & Measurement Setup

Test Notes

- 1) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the tables below.
- 2) This unit was tested with its standard battery.
- 3) The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter. The worst-case emissions are reported.
- 4) Emissions below 18GHz were measured at a 3 meter test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.

FCC ID: ZNFLS992		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1601280183-R1.ZNF	Test Dates: 12/31/2015-02/24/2016	EUT Type: Portable Handset	Page 137 of 167	

OPERATING FREQUENCY: 701.50 MHz
 CHANNEL: 23035
 MEASURED OUTPUT POWER: 19.08 dBm = 0.081 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 5.0 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10}(W) =$ 32.08 dBc

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBd]	Spurious Emission Level [dBm]	[dBc]
1403.00	H	107	178	-55.99	2.45	-53.53	72.6
2104.50	H	176	156	-52.10	2.96	-49.14	68.2
2806.00	H	-	-	-57.30	4.75	-52.55	71.6

Table 7-9. Radiated Spurious Data (Band 12 – Low Channel)

OPERATING FREQUENCY: 707.50 MHz
 CHANNEL: 23095
 MEASURED OUTPUT POWER: 19.82 dBm = 0.096 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 5.0 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10}(W) =$ 32.82 dBc

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBd]	Spurious Emission Level [dBm]	[dBc]
1415.00	H	167	190	-57.78	2.59	-55.20	75.0
2122.50	H	220	227	-49.20	3.02	-46.19	66.0
2830.00	H	223	260	-57.48	4.74	-52.74	72.6

Table 7-10. Radiated Spurious Data (Band 12 – Mid Channel)

FCC ID: ZNFLS992		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1601280183-R1.ZNF	Test Dates: 12/31/2015-02/24/2016	EUT Type: Portable Handset	Page 138 of 167	

OPERATING FREQUENCY: 713.50 MHz
 CHANNEL: 23155
 MEASURED OUTPUT POWER: 20.40 dBm = 0.110 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 5.0 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10}(W) =$ 33.40 dBc

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBd]	Spurious Emission Level [dBm]	[dBc]
1427.00	H	164	166	-57.54	2.72	-54.82	75.2
2140.50	H	343	224	-55.90	3.07	-52.83	73.2
2854.00	H	-	-	-57.80	4.73	-53.08	73.5

Table 7-11. Radiated Spurious Data (Band 12 – High Channel)

OPERATING FREQUENCY: 713.50 MHz
 CHANNEL: 23155
 MEASURED OUTPUT POWER: 22.52 dBm = 0.178 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 5.0 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10}(W) =$ 35.52 dBc

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBd]	Spurious Emission Level [dBm]	[dBc]
1427.00	H	101	148	-57.91	2.72	-55.19	77.7
2140.50	H	116	142	-47.68	3.07	-44.61	67.1
2854.00	H	-	-	-59.10	4.73	-54.38	76.9

Table 7-12. Radiated Spurious Data with CM Accessory (Band 12 – High Channel)

FCC ID: ZNFLS992		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1601280183-R1.ZNF	Test Dates: 12/31/2015-02/24/2016	EUT Type: Portable Handset	Page 139 of 167	

OPERATING FREQUENCY: 826.50 MHz
 CHANNEL: 26815
 MEASURED OUTPUT POWER: 19.96 dBm = 0.099 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 5.0 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10}(W) =$ 32.96 dBc

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	[dBc]
1653.00	H	132	143	-59.81	3.60	-56.21	76.2
2479.50	H	-	-	-58.25	3.57	-54.68	74.6
3306.00	H	-	-	-59.54	5.68	-53.85	73.8

Table 7-13. Radiated Spurious Data (Band 26/5 – Low Channel)

OPERATING FREQUENCY: 836.50 MHz
 CHANNEL: 26915
 MEASURED OUTPUT POWER: 20.70 dBm = 0.117 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 5.0 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10}(W) =$ 33.70 dBc

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBd]	Spurious Emission Level [dBm]	[dBc]
1673.00	H	169	151	-60.34	3.53	-56.82	77.5
2509.50	H	-	-	-58.30	3.57	-54.73	75.4
3346.00	H	-	-	-59.87	5.78	-54.08	74.8

Table 7-14. Radiated Spurious Data (Band 26/5 – Mid Channel)

FCC ID: ZNFLS992		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1601280183-R1.ZNF	Test Dates: 12/31/2015-02/24/2016	EUT Type: Portable Handset	Page 140 of 167	

OPERATING FREQUENCY: 846.50 MHz
 CHANNEL: 27015
 MEASURED OUTPUT POWER: 21.15 dBm = 0.130 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 5.0 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10}(W) =$ 34.15 dBc

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBd]	Spurious Emission Level [dBm]	[dBc]
1693.00	H	124	156	-58.10	3.46	-54.64	75.8
2539.50	H	-	-	-57.98	3.63	-54.35	75.5
3386.00	H	-	-	-60.37	5.89	-54.48	75.6

Table 7-15. Radiated Spurious Data (Band 26/5 – High Channel)

OPERATING FREQUENCY: 846.50 MHz
 CHANNEL: 27015
 MEASURED OUTPUT POWER: 17.64 dBm = 0.058 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 5.0 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10}(W) =$ 30.64 dBc

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBd]	Spurious Emission Level [dBm]	[dBc]
1693.00	H	101	225	-61.71	3.46	-58.25	75.9
2539.50	H	101	40	-42.35	3.63	-38.72	56.4
3386.00	H	-	-	-59.22	5.89	-53.33	71.0

Table 7-16. Radiated Spurious Data with CM Accessory (Band 26/5 – High Channel)

FCC ID: ZNFLS992		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1601280183-R1.ZNF	Test Dates: 12/31/2015-02/24/2016	EUT Type: Portable Handset	Page 141 of 167	

OPERATING FREQUENCY: 1711.50 MHz
 CHANNEL: 19965
 MEASURED OUTPUT POWER: 19.08 dBm = 0.081 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 3.0 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10}(W) =$ 32.08 dBc

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	[dBc]
3423.00	H	183	141	-50.82	8.15	-42.67	61.7
5134.50	H	115	325	-54.21	10.26	-43.95	63.0
6846.00	H	115	130	-54.01	11.38	-42.62	61.7
8557.50	H	-	-	-53.23	13.02	-40.21	59.3

Table 7-17. Radiated Spurious Data (Band 4 – Low Channel)

OPERATING FREQUENCY: 1732.50 MHz
 CHANNEL: 20175
 MEASURED OUTPUT POWER: 19.93 dBm = 0.098 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 3.0 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10}(W) =$ 32.93 dBc

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	[dBc]
3465.00	H	129	150	-47.36	8.29	-39.08	59.0
5197.50	H	-	-	-54.40	10.35	-44.05	64.0
6930.00	H	179	10	-53.37	11.49	-41.89	61.8
8662.50	H	-	-	-53.99	13.02	-40.97	60.9

Table 7-18. Radiated Spurious Data (Band 4 – Mid Channel)

FCC ID: ZNFLS992		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1601280183-R1.ZNF	Test Dates: 12/31/2015-02/24/2016	EUT Type: Portable Handset	Page 142 of 167	

OPERATING FREQUENCY: 1753.50 MHz
 CHANNEL: 20385
 MEASURED OUTPUT POWER: 19.41 dBm = 0.087 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 3.0 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10}(W) =$ 32.41 dBc

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	[dBc]
3507.00	H	171	133	-42.77	8.41	-34.37	53.8
5260.50	H	-	-	-54.73	10.36	-44.37	63.8
7014.00	H	139	98	-50.60	11.57	-39.03	58.4
8767.50	H	-	-	-54.25	13.02	-41.23	60.6

Table 7-19. Radiated Spurious Data (Band 4 – High Channel)

OPERATING FREQUENCY: 1732.50 MHz
 CHANNEL: 20175
 MEASURED OUTPUT POWER: 19.46 dBm = 0.088 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 3.0 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10}(W) =$ 32.46 dBc

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	[dBc]
3465.00	H	120	149	-53.11	8.29	-44.83	64.3
5197.50	H	121	323	-55.58	10.35	-45.23	64.7
6930.00	H	-	-	-55.21	11.49	-43.73	63.2
8662.50	H	-	-	-55.25	13.02	-42.23	61.7

Table 7-20. Radiated Spurious Data with CM Accessory (Band 4 – Mid Channel)

FCC ID: ZNFLS992		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1601280183-R1.ZNF	Test Dates: 12/31/2015-02/24/2016	EUT Type: Portable Handset	Page 143 of 167	

OPERATING FREQUENCY: 1852.50 MHz
 CHANNEL: 26065
 MEASURED OUTPUT POWER: 22.41 dBm = 0.174 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 5.0 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10}(W) =$ 35.41 dBc

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	[dBc]
3705.00	H	124	137	-46.86	8.40	-38.47	60.9
5557.50	H	164	355	-58.03	10.57	-47.46	69.9
7410.00	H	-	-	-57.37	12.06	-45.31	67.7
9262.50	H	-	-	-56.03	13.22	-42.82	65.2

Table 7-21. Radiated Spurious Data (Band 25/2 – Low Channel)

OPERATING FREQUENCY: 1882.50 MHz
 CHANNEL: 26365
 MEASURED OUTPUT POWER: 23.63 dBm = 0.231 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 5.0 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10}(W) =$ 36.63 dBc

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	[dBc]
3765.00	H	119	138	-48.07	8.38	-39.69	63.3
5647.50	H	127	222	-56.14	10.70	-45.44	69.1
7530.00	H	-	-	-56.51	12.11	-44.39	68.0
9412.50	H	-	-	-55.94	13.19	-42.75	66.4

Table 7-22. Radiated Spurious Data (Band 25/2 – Mid Channel)

FCC ID: ZNFLS992		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1601280183-R1.ZNF	Test Dates: 12/31/2015-02/24/2016	EUT Type: Portable Handset	Page 144 of 167	

OPERATING FREQUENCY: 1912.50 MHz
 CHANNEL: 26665
 MEASURED OUTPUT POWER: 22.68 dBm = 0.185 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 5.0 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10}(W) =$ 35.68 dBc

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	[dBc]
3825.00	H	179	145	-47.24	8.41	-38.83	61.5
5737.50	H	101	154	-53.95	10.76	-43.19	65.9
7650.00	H	-	-	-54.50	12.23	-42.27	65.0
9562.50	H	-	-	-53.18	13.18	-40.00	62.7

Table 7-23. Radiated Spurious Data (Band 25/2 – High Channel)

OPERATING FREQUENCY: 1882.50 MHz
 CHANNEL: 26365
 MEASURED OUTPUT POWER: 23.19 dBm = 0.208 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 5.0 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10}(W) =$ 36.19 dBc

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	[dBc]
3765.00	H	101	215	-38.19	8.38	-29.81	53.0
5647.50	H	137	64	-54.05	10.70	-43.35	66.5
7530.00	H	-	-	-55.96	12.11	-43.84	67.0
9412.50	H	-	-	-54.26	13.19	-41.07	64.3

Table 7-24. Radiated Spurious Data with CM Accessory (Band 25/2 – Mid Channel)

FCC ID: ZNFLS992		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1601280183-R1.ZNF	Test Dates: 12/31/2015-02/24/2016	EUT Type: Portable Handset	Page 145 of 167	

OPERATING FREQUENCY: 2502.50 MHz
 CHANNEL: 20775
 MEASURED OUTPUT POWER: 20.10 dBm = 0.102 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 5.0 MHz
 DISTANCE: 3 meters
 LIMIT: $55 + 10 \log_{10}(W)$ 45.10 dBc

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	[dBc]
5005.00	H	122	204	-40.97	10.15	-30.82	50.9
7507.50	H	-	-	-57.09	12.09	-44.99	65.1
10010.00	H	105	282	-53.59	13.26	-40.34	60.4
12512.50	H	-	-	-50.97	13.19	-37.79	57.9

Table 7-25. Radiated Spurious Data (Band 7 – Low Channel)

OPERATING FREQUENCY: 2535.00 MHz
 CHANNEL: 21100
 MEASURED OUTPUT POWER: 21.10 dBm = 0.129 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 5.0 MHz
 DISTANCE: 3 meters
 LIMIT: $55 + 10 \log_{10}(W)$ 46.10 dBc

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	[dBc]
5070.00	H	122	198	-51.59	10.19	-41.40	62.5
7605.00	H	-	-	-57.20	12.18	-45.01	66.1
10140.00	H	-	-	-55.08	13.29	-41.79	62.9
12675.00	H	-	-	-50.63	13.19	-37.44	58.5

Table 7-26. Radiated Spurious Data (Band 7 – Mid Channel)

FCC ID: ZNFLS992		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1601280183-R1.ZNF	Test Dates: 12/31/2015-02/24/2016	EUT Type: Portable Handset	Page 146 of 167	

OPERATING FREQUENCY: 2567.50 MHz
 CHANNEL: 21425
 MEASURED OUTPUT POWER: 21.81 dBm = 0.152 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 5.0 MHz
 DISTANCE: 3 meters
 LIMIT: $55 + 10 \log_{10}(W)$ 46.81 dBc

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	[dBc]
5135.00	H	174	179	-49.63	10.26	-39.37	61.2
7702.50	H	-	-	-57.18	12.29	-44.89	66.7
10270.00	H	-	-	-53.76	13.27	-40.49	62.3
12837.50	H	-	-	-50.69	13.29	-37.40	59.2

Table 7-27. Radiated Spurious Data (Band 7 – High Channel)

OPERATING FREQUENCY: 2567.50 MHz
 CHANNEL: 21425
 MEASURED OUTPUT POWER: 16.42 dBm = 0.044 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 5.0 MHz
 DISTANCE: 3 meters
 LIMIT: $55 + 10 \log_{10}(W)$ 41.42 dBc

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	[dBc]
5135.00	H	128	88	-39.81	10.26	-29.55	46.0
7702.50	H	130	192	-54.68	12.29	-42.39	58.8
10270.00	H	114	159	-51.63	13.27	-38.36	54.8
12837.50	H	-	-	-50.41	13.29	-37.12	53.5

Table 7-28. Radiated Spurious Data with CM Accessory (Band 7 – High Channel)

FCC ID: ZNFLS992		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1601280183-R1.ZNF	Test Dates: 12/31/2015-02/24/2016	EUT Type: Portable Handset	Page 147 of 167	

OPERATING FREQUENCY: 2506.00 MHz
 CHANNEL: 39750
 MEASURED OUTPUT POWER: 17.76 dBm = 0.060 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 20.0 MHz
 DISTANCE: 3 meters
 LIMIT: $55 + 10 \log_{10}(W)$ 42.76 dBc

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	[dBc]
5012.00	H	124	226	-54.56	10.15	-44.41	62.2
7518.00	H	112	216	-52.06	12.10	-39.95	57.7
10024.00	H	-	-	-52.38	13.26	-39.12	56.9

Table 7-29. Radiated Spurious Data (Band 41 – Low Channel)

OPERATING FREQUENCY: 2593.00 MHz
 CHANNEL: 40620
 MEASURED OUTPUT POWER: 21.27 dBm = 0.134 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 20.0 MHz
 DISTANCE: 3 meters
 LIMIT: $55 + 10 \log_{10}(W)$ 46.27 dBc

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	[dBc]
5186.00	H	186	4	-52.38	10.33	-42.05	63.3
7779.00	H	196	276	-50.10	12.32	-37.78	59.0
10372.00	H	-	-	-53.25	13.18	-40.07	61.3

Table 7-30. Radiated Spurious Data (Band 41 – Mid Channel)

FCC ID: ZNFLS992		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1601280183-R1.ZNF	Test Dates: 12/31/2015-02/24/2016	EUT Type: Portable Handset	Page 148 of 167	

OPERATING FREQUENCY: 2680.00 MHz
 CHANNEL: 41490
 MEASURED OUTPUT POWER: 20.09 dBm = 0.102 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 20.0 MHz
 DISTANCE: 3 meters
 LIMIT: $55 + 10 \log_{10}(W)$ 45.09 dBc

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	[dBc]
5360.00	H	171	232	-51.48	10.37	-41.12	61.2
8040.00	H	169	298	-48.88	12.58	-36.30	56.4
10720.00	H	-	-	-51.05	12.92	-38.13	58.2

Table 7-31. Radiated Spurious Data (Band 41 – High Channel)

OPERATING FREQUENCY: 2593.00 MHz
 CHANNEL: 40620
 MEASURED OUTPUT POWER: 14.94 dBm = 0.031 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 20.0 MHz
 DISTANCE: 3 meters
 LIMIT: $55 + 10 \log_{10}(W)$ 39.94 dBc

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	[dBc]
5186.00	H	119	352	-48.38	10.33	-38.05	53.0
7779.00	H	120	243	-54.21	12.32	-41.89	56.8
10372.00	H	101	167	-50.99	13.18	-37.81	52.7

Table 7-32. Radiated Spurious Data with CM Accessory (Band 41 – Mid Channel)

FCC ID: ZNFLS992		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1601280183-R1.ZNF	Test Dates: 12/31/2015-02/24/2016	EUT Type: Portable Handset	Page 149 of 167	

7.8 Frequency Stability / Temperature Variation

§2.1055 §22.355 §24.235 §27.54

Test Overview and Limit

Frequency stability testing is performed in accordance with the guidelines of ANSI/TIA-603-C-2004. The frequency stability of the transmitter is measured by:

- a.) **Temperature:** The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
- b.) **Primary Supply Voltage:** The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

For Part 22, the frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ (± 2.5 ppm) of the center frequency. For Part 24 and Part 27, the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

Test Procedure Used

ANSI/TIA-603-C-2004

Test Settings

1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
2. The equipment is turned on in a “standby” condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

Test Setup

The EUT was connected via an RF cable to a spectrum analyzer with the EUT placed inside an environmental chamber.

Test Notes

None

FCC ID: ZNFLS992		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1601280183-R1.ZNF	Test Dates: 12/31/2015-02/24/2016	EUT Type: Portable Handset	Page 150 of 167	

Band 12 Frequency Stability Measurements

§2.1055 §27.54

OPERATING FREQUENCY: 707,500,000 Hz
 CHANNEL: 23790
 REFERENCE VOLTAGE: 3.85 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.85	+ 20 (Ref)	707,500,144	144	0.0000204
100 %		- 30	707,499,969	-31	-0.0000044
100 %		- 20	707,499,913	-87	-0.0000123
100 %		- 10	707,499,914	-86	-0.0000122
100 %		0	707,499,988	-12	-0.0000017
100 %		+ 10	707,500,372	372	0.0000526
100 %		+ 20	707,499,915	-85	-0.0000120
100 %		+ 30	707,499,938	-62	-0.0000088
100 %		+ 40	707,499,775	-225	-0.0000318
100 %		+ 50	707,499,989	-11	-0.0000016
BATT. ENDPOINT	3.45	+ 20	707,500,088	88	0.0000124

Table 7-33. Frequency Stability Data (Band 12)

Note:

Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

FCC ID: ZNFLS992		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1601280183-R1.ZNF	Test Dates: 12/31/2015-02/24/2016	EUT Type: Portable Handset	Page 151 of 167	

Band 12 Frequency Stability Measurements
§2.1055 §27.54

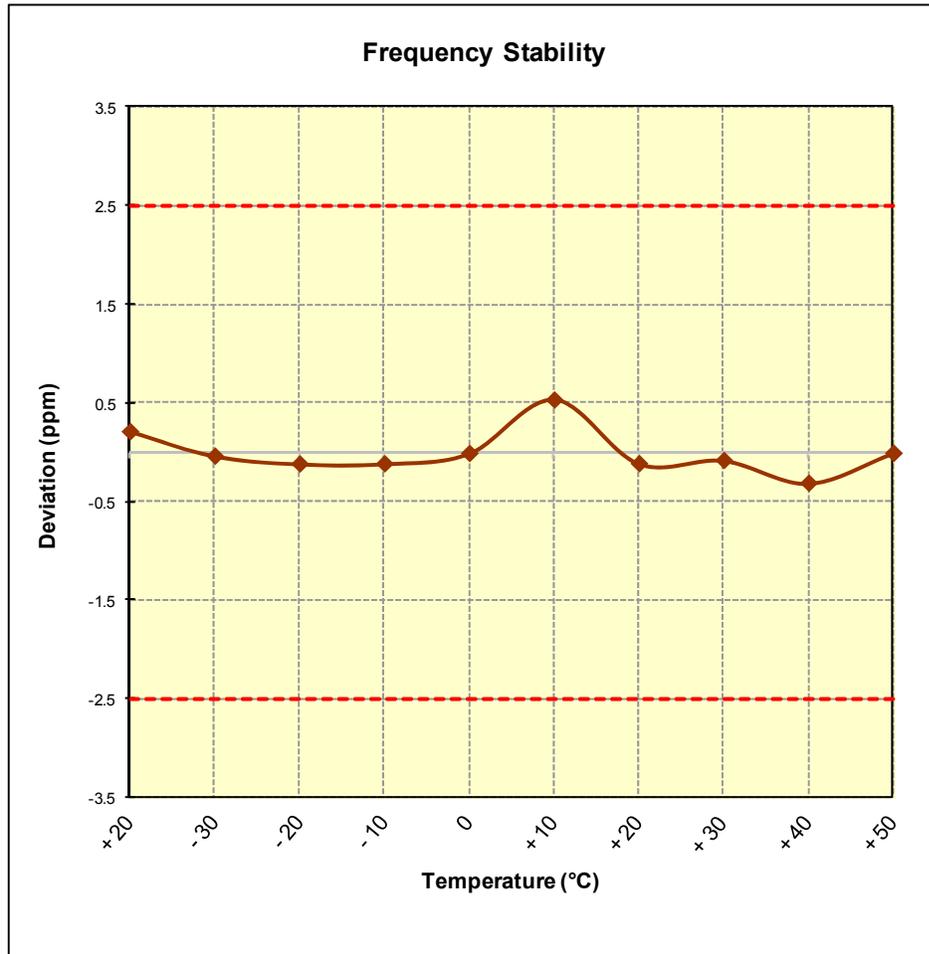


Figure 7-8. Frequency Stability Graph (Band 12)

FCC ID: ZNFLS992		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1601280183-R1.ZNF	Test Dates: 12/31/2015-02/24/2016	EUT Type: Portable Handset	Page 152 of 167	

Band 5 Frequency Stability Measurements

§2.1055 §22.355

OPERATING FREQUENCY: 836,500,000 Hz
 CHANNEL: 20525
 REFERENCE VOLTAGE: 3.85 VDC
 DEVIATION LIMIT: ± 0.00025 % or 2.5 ppm

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.85	+ 20 (Ref)	836,499,951	-49	-0.0000059
100 %		- 30	836,500,004	4	0.0000005
100 %		- 20	836,499,996	-4	-0.0000005
100 %		- 10	836,499,854	-146	-0.0000175
100 %		0	836,500,364	364	0.0000435
100 %		+ 10	836,500,034	34	0.0000041
100 %		+ 20	836,499,912	-88	-0.0000105
100 %		+ 30	836,500,058	58	0.0000069
100 %		+ 40	836,500,116	116	0.0000139
100 %		+ 50	836,499,972	-28	-0.0000033
BATT. ENDPOINT	3.45	+ 20	836,499,918	-82	-0.0000098

Table 7-34. Frequency Stability Data (Band 5)

FCC ID: ZNFLS992		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1601280183-R1.ZNF	Test Dates: 12/31/2015-02/24/2016	EUT Type: Portable Handset	Page 153 of 167	

Band 5 Frequency Stability Measurements

§2.1055 §22.355

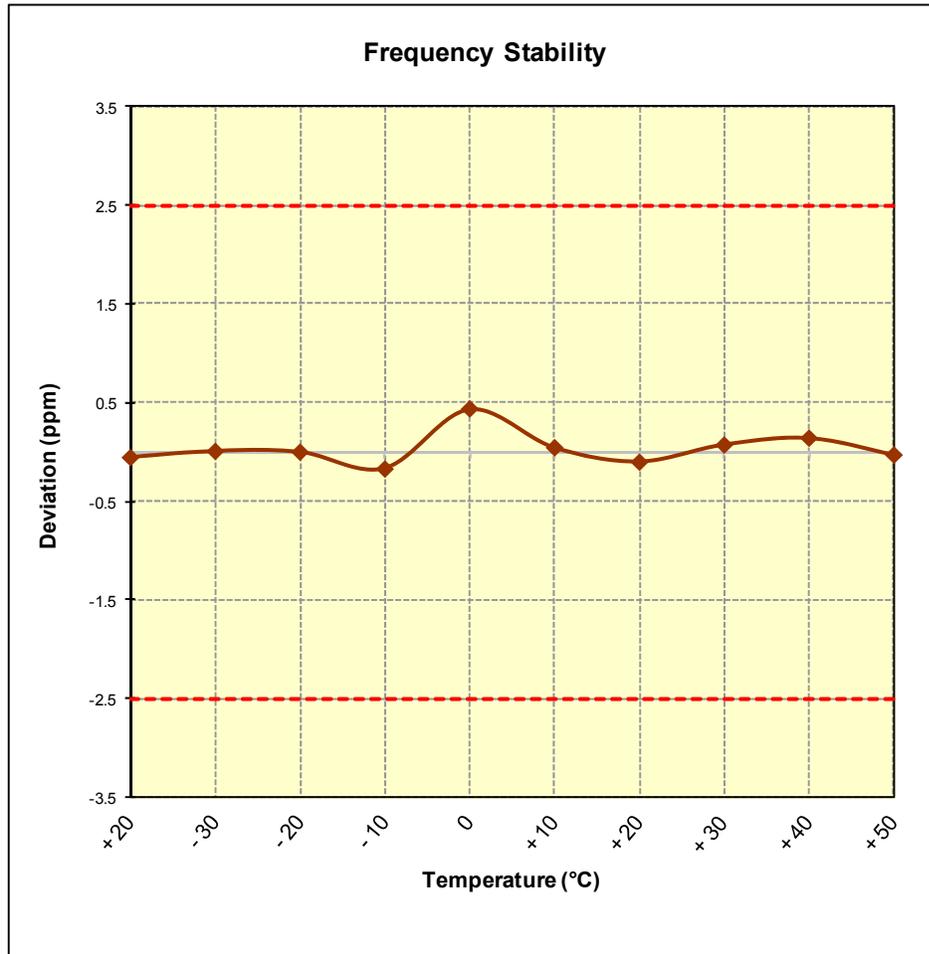


Figure 7-9. Frequency Stability Graph (Band 5)

FCC ID: ZNFLS992	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1601280183-R1.ZNF	Test Dates: 12/31/2015-02/24/2016	EUT Type: Portable Handset	Page 154 of 167	

Band 26 Frequency Stability Measurements

§2.1055 §22.355

OPERATING FREQUENCY: 831,500,000 Hz
 CHANNEL: 26865
 REFERENCE VOLTAGE: 3.85 VDC
 DEVIATION LIMIT: ± 0.00025 % or 2.5 ppm

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.85	+ 20 (Ref)	831,499,999	-1	-0.0000001
100 %		- 30	831,499,789	-211	-0.0000254
100 %		- 20	831,500,052	52	0.0000063
100 %		- 10	831,500,467	467	0.0000562
100 %		0	831,499,917	-83	-0.0000100
100 %		+ 10	831,500,125	125	0.0000150
100 %		+ 20	831,500,211	211	0.0000254
100 %		+ 30	831,500,076	76	0.0000091
100 %		+ 40	831,500,176	176	0.0000212
100 %		+ 50	831,499,950	-50	-0.0000060
BATT. ENDPOINT	3.45	+ 20	831,500,023	23	0.0000028

Table 7-35. Frequency Stability Data (Band 26)

FCC ID: ZNFLS992		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1601280183-R1.ZNF	Test Dates: 12/31/2015-02/24/2016	EUT Type: Portable Handset	Page 155 of 167	

Band 26 Frequency Stability Measurements
§2.1055 §22.355

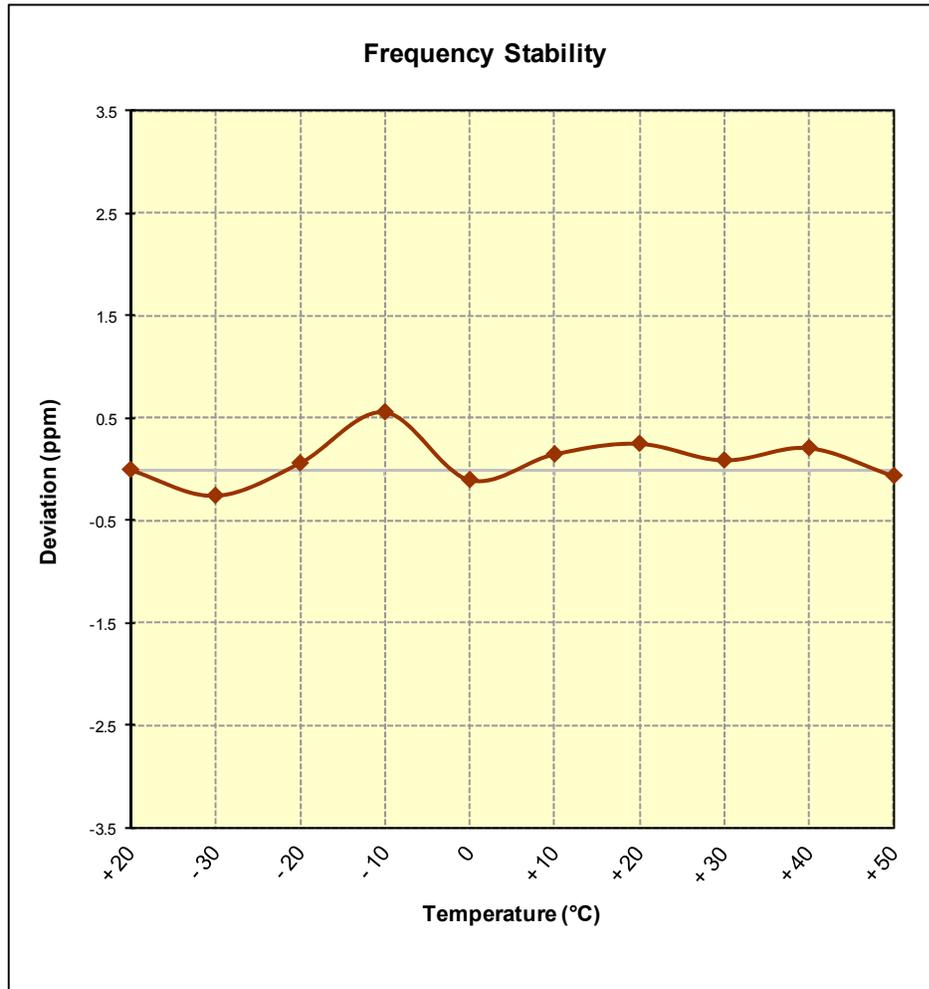


Figure 7-10. Frequency Stability Graph (Band 26)

FCC ID: ZNFLS992		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1601280183-R1.ZNF	Test Dates: 12/31/2015-02/24/2016	EUT Type: Portable Handset	Page 156 of 167	

Band 4 Frequency Stability Measurements

§2.1055 §§27.54

OPERATING FREQUENCY: 1,732,500,000 Hz
 CHANNEL: 20175
 REFERENCE VOLTAGE: 3.85 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.85	+ 20 (Ref)	1,732,500,113	113	0.0000065
100 %		- 30	1,732,500,166	166	0.0000096
100 %		- 20	1,732,499,928	-72	-0.0000042
100 %		- 10	1,732,500,153	153	0.0000088
100 %		0	1,732,500,219	219	0.0000126
100 %		+ 10	1,732,499,962	-38	-0.0000022
100 %		+ 20	1,732,499,733	-267	-0.0000154
100 %		+ 30	1,732,499,852	-148	-0.0000085
100 %		+ 40	1,732,500,156	156	0.0000090
100 %		+ 50	1,732,500,015	15	0.0000009
BATT. ENDPOINT	3.45	+ 20	1,732,500,266	266	0.0000154

Table 7-36. Frequency Stability Data (Band 4)

Note:

Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

FCC ID: ZNFLS992		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1601280183-R1.ZNF	Test Dates: 12/31/2015-02/24/2016	EUT Type: Portable Handset	Page 157 of 167	

Band 4 Frequency Stability Measurements

§2.1055 §§27.54

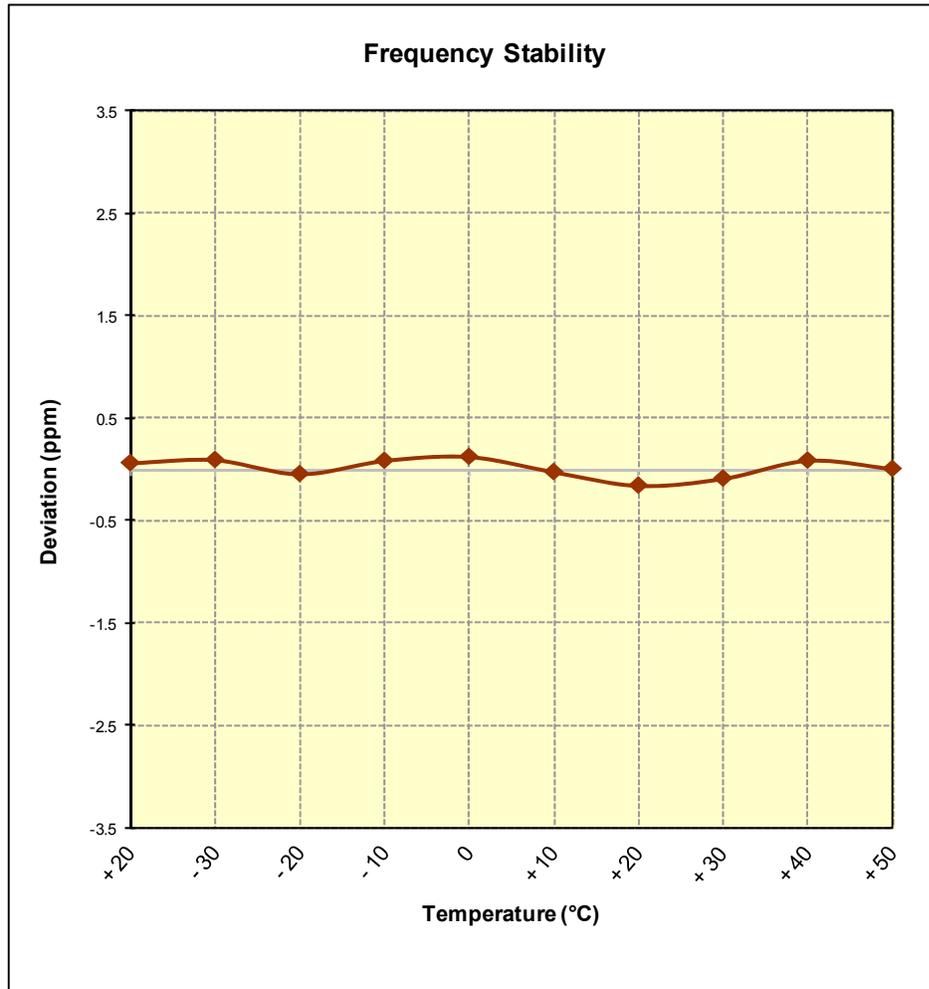


Figure 7-11. Frequency Stability Graph (Band 4)

FCC ID: ZNFLS992		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1601280183-R1.ZNF	Test Dates: 12/31/2015-02/24/2016	EUT Type: Portable Handset	Page 158 of 167	

Band 2 Frequency Stability Measurements

§2.1055 §24.235

OPERATING FREQUENCY: 1,880,000,000 Hz
 CHANNEL: 18900
 REFERENCE VOLTAGE: 3.85 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.85	+ 20 (Ref)	1,879,999,917	-83	-0.0000044
100 %		- 30	1,880,000,026	26	0.0000014
100 %		- 20	1,880,000,118	118	0.0000063
100 %		- 10	1,880,000,115	115	0.0000061
100 %		0	1,880,000,027	27	0.0000014
100 %		+ 10	1,879,999,600	-400	-0.0000213
100 %		+ 20	1,879,999,827	-173	-0.0000092
100 %		+ 30	1,879,999,738	-262	-0.0000139
100 %		+ 40	1,879,999,964	-36	-0.0000019
100 %		+ 50	1,879,999,848	-152	-0.0000081
BATT. ENDPOINT	3.45	+ 20	1,880,000,053	53	0.0000028

Table 7-37. Frequency Stability Data (Band 2)

Note:

Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

FCC ID: ZNFLS992		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1601280183-R1.ZNF	Test Dates: 12/31/2015-02/24/2016	EUT Type: Portable Handset	Page 159 of 167	

Band 2 Frequency Stability Measurements
§2.1055 §24.235

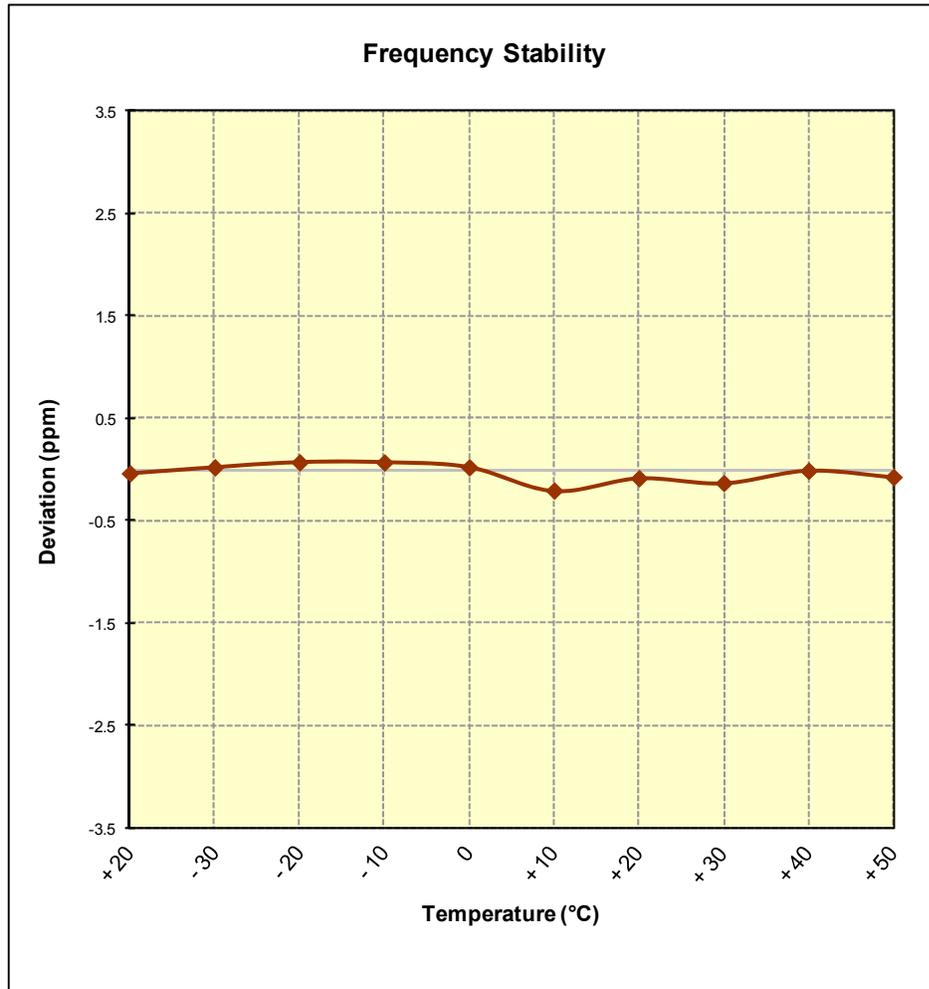


Figure 7-12. Frequency Stability Graph (Band 2)

FCC ID: ZNFLS992		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1601280183-R1.ZNF	Test Dates: 12/31/2015-02/24/2016	EUT Type: Portable Handset	Page 160 of 167	

Band 25 Frequency Stability Measurements

§2.1055 §24.235

OPERATING FREQUENCY: 1,882,500,000 Hz
 CHANNEL: 26365
 REFERENCE VOLTAGE: 3.85 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.85	+ 20 (Ref)	1,882,500,109	109	0.0000058
100 %		- 30	1,882,500,068	68	0.0000036
100 %		- 20	1,882,499,726	-274	-0.0000146
100 %		- 10	1,882,499,595	-405	-0.0000215
100 %		0	1,882,499,699	-301	-0.0000160
100 %		+ 10	1,882,499,834	-166	-0.0000088
100 %		+ 20	1,882,499,960	-40	-0.0000021
100 %		+ 30	1,882,499,526	-474	-0.0000252
100 %		+ 40	1,882,499,958	-42	-0.0000022
100 %		+ 50	1,882,499,982	-18	-0.0000010
BATT. ENDPOINT		3.45	+ 20	1,882,499,776	-224

Table 7-38. Frequency Stability Data (Band 25)

Note:

Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

FCC ID: ZNFLS992		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1601280183-R1.ZNF	Test Dates: 12/31/2015-02/24/2016	EUT Type: Portable Handset	Page 161 of 167	

Band 25 Frequency Stability Measurements
§2.1055 §24.235

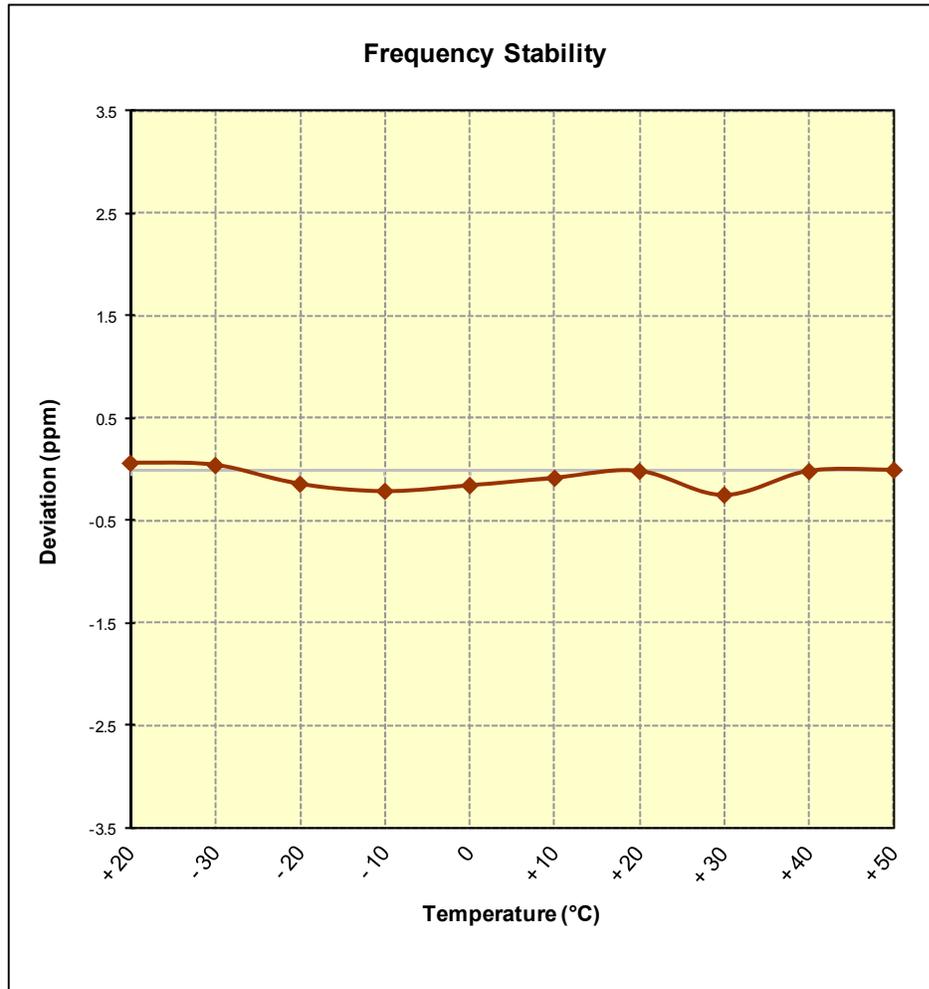


Figure 7-13. Frequency Stability Graph (Band 25)

FCC ID: ZNFLS992		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1601280183-R1.ZNF	Test Dates: 12/31/2015-02/24/2016	EUT Type: Portable Handset	Page 162 of 167	

Band 7 Frequency Stability Measurements

§2.1055 §27.54

OPERATING FREQUENCY: 2,535,000,000 Hz
 CHANNEL: 21100
 REFERENCE VOLTAGE: 3.85 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.85	+ 20 (Ref)	2,535,000,235	235	0.0000093
100 %		- 30	2,534,999,935	-65	-0.0000026
100 %		- 20	2,535,000,020	20	0.0000008
100 %		- 10	2,535,000,083	83	0.0000033
100 %		0	2,535,000,282	282	0.0000111
100 %		+ 10	2,535,000,061	61	0.0000024
100 %		+ 20	2,534,999,947	-53	-0.0000021
100 %		+ 30	2,534,999,960	-40	-0.0000016
100 %		+ 40	2,534,999,989	-11	-0.0000004
100 %		+ 50	2,535,000,197	197	0.0000078
BATT. ENDPOINT	3.45	+ 20	2,534,999,915	-85	-0.0000034

Table 7-39. Frequency Stability Data (Band 7)

Note:

Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

FCC ID: ZNFLS992		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1601280183-R1.ZNF	Test Dates: 12/31/2015-02/24/2016	EUT Type: Portable Handset	Page 163 of 167	

Band 7 Frequency Stability Measurements
§2.1055 §27.54

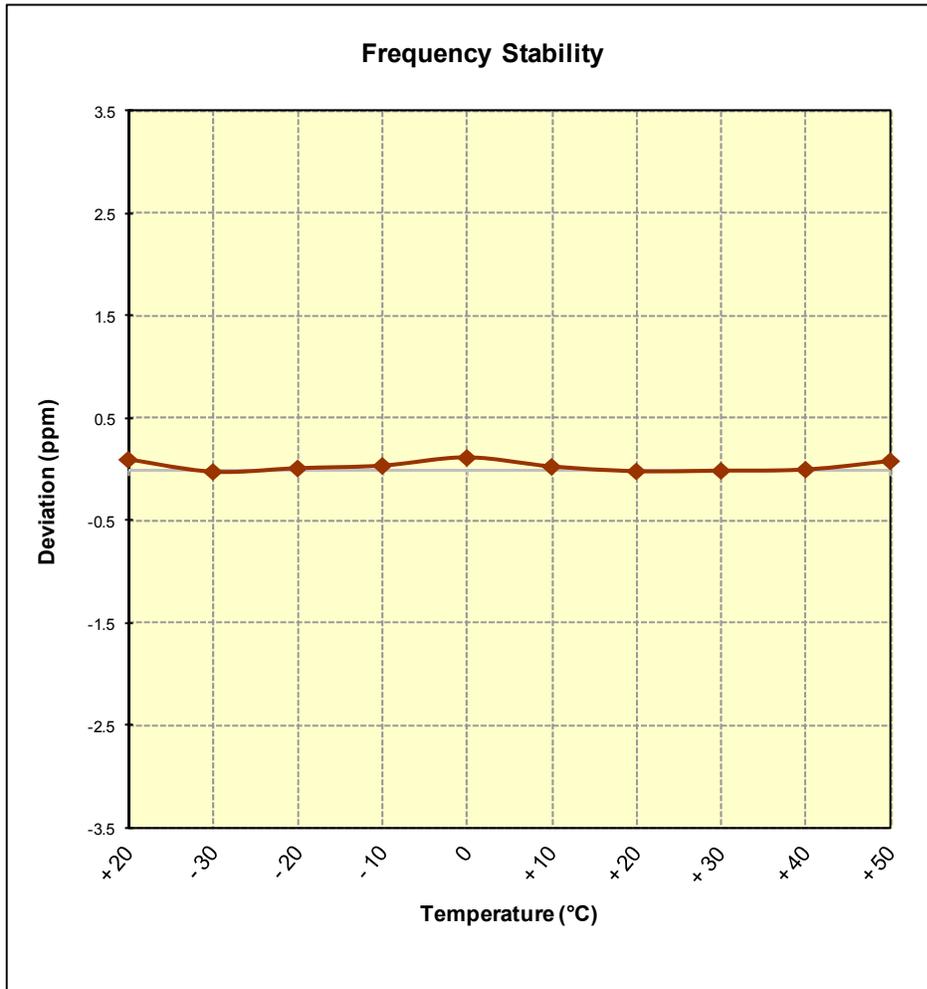


Figure 7-14. Frequency Stability Graph (Band 7)

FCC ID: ZNFLS992		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1601280183-R1.ZNF	Test Dates: 12/31/2015-02/24/2016	EUT Type: Portable Handset	Page 164 of 167	

Band 41 Frequency Stability Measurements

§2.1055 §27.54

OPERATING FREQUENCY: 2,593,000,000 Hz
 CHANNEL: 40620
 REFERENCE VOLTAGE: 3.85 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.85	+ 20 (Ref)	2,592,999,960	-40	-0.0000015
100 %		- 30	2,592,999,876	-124	-0.0000048
100 %		- 20	2,592,999,996	-4	-0.0000002
100 %		- 10	2,592,999,826	-174	-0.0000067
100 %		0	2,592,999,996	-4	-0.0000002
100 %		+ 10	2,593,000,020	20	0.0000008
100 %		+ 20	2,592,999,817	-183	-0.0000071
100 %		+ 30	2,592,999,894	-106	-0.0000041
100 %		+ 40	2,592,999,984	-16	-0.0000006
100 %		+ 50	2,592,999,848	-152	-0.0000059
BATT. ENDPOINT	3.45	+ 20	2,592,999,919	-81	-0.0000031

Table 7-40. Frequency Stability Data (Band 41)

Note:

Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

FCC ID: ZNFLS992		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1601280183-R1.ZNF	Test Dates: 12/31/2015-02/24/2016	EUT Type: Portable Handset	Page 165 of 167	

Band 41 Frequency Stability Measurements
§2.1055 §27.54

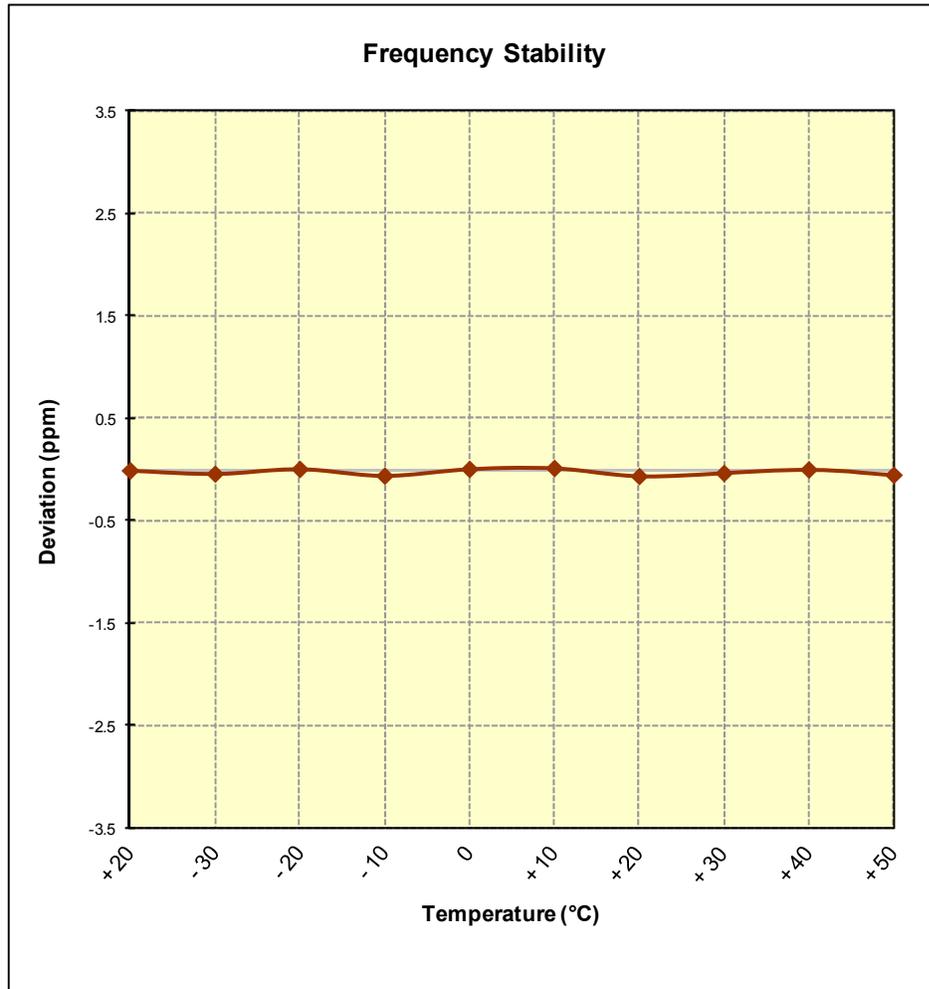


Figure 7-15. Frequency Stability Graph (Band 41)

FCC ID: ZNFLS992		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1601280183-R1.ZNF	Test Dates: 12/31/2015-02/24/2016	EUT Type: Portable Handset	Page 166 of 167	

8.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the **LG Electronics MobileComm U.S.A Portable Handset FCC ID: ZNFLS992** complies with all the requirements of Parts 22, 24, & 27 of the FCC rules for LTE operation only.

FCC ID: ZNFLS992		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1601280183-R1.ZNF	Test Dates: 12/31/2015-02/24/2016	EUT Type: Portable Handset	Page 167 of 167	