



# PCTEST ENGINEERING LABORATORY, INC.

7185 Oakland Mills Road, Columbia, MD 21045 USA

Tel. 410.290.6652 / Fax 410.290.6654

http://www.pctestlab.com



## MEASUREMENT REPORT FCC Part 22 & 90

**Applicant:**  
LG Electronics MobileComm U.S.A  
1000 Sylvan Avenue  
Englewood Cliffs, NJ 07632  
United States

**Date of Testing:**  
12/27/2016-2/20/2017  
**Test Site/Location:**  
PCTEST Lab., Columbia, MD, USA  
**Test Report Serial No.:**  
1M1701180034-04-R1.ZNF

|                   |  |
|-------------------|--|
| <b>FCC ID:</b>    | <b>ZNFLS993</b>                        |
| <b>APPLICANT:</b> | <b>LG ELECTRONICS MOBILECOMM U.S.A</b> |

**Applicant Type:** Certification  
**FCC Classification:** PCS Licensed Transmitter Held to Ear (PCE)  
**FCC Rule Part:** §2.1049 §22(H) §90.691  
**Test Procedure(s):** KDB 971168 D01 v02r02  
**EUT Type:** Portable Handset  
**Model:** LG-LS993  
**Additional Model(s):** LGLS993, LS993, LG-AS993, LGA993, AS993  
**Test Device Serial No.:** [S/N: 01409, 01415, 00336]

| Mode           | Tx Frequency (MHz) | Emission Designator | Measurement | Max. Power (W) | Max. Power (dBm) | Modulation |
|----------------|--------------------|---------------------|-------------|----------------|------------------|------------|
| CDMA800 (BC10) | 817.9 - 823.1      | 1M27F9W             | Conducted   | 0.328          | 25.16            | CDMA       |
| LTE Band 26    | 814.7 - 823.3      | 1M09G7D             | Conducted   | 0.328          | 25.16            | QPSK       |
| LTE Band 26    | 814.7 - 823.3      | 1M08W7D             | Conducted   | 0.277          | 24.42            | 16-QAM     |
| LTE Band 26    | 814.7 - 823.3      | 1M08W7D             | Conducted   | 0.221          | 23.44            | 64-QAM     |
| LTE Band 26    | 815.5 - 822.5      | 2M69G7D             | Conducted   | 0.327          | 25.14            | QPSK       |
| LTE Band 26    | 815.5 - 822.5      | 2M69W7D             | Conducted   | 0.281          | 24.48            | 16-QAM     |
| LTE Band 26    | 815.5 - 822.5      | 2M69W7D             | Conducted   | 0.213          | 23.29            | 64-QAM     |
| LTE Band 26    | 816.5 - 821.5      | 4M50G7D             | Conducted   | 0.330          | 25.18            | QPSK       |
| LTE Band 26    | 816.5 - 821.5      | 4M51W7D             | Conducted   | 0.281          | 24.49            | 16-QAM     |
| LTE Band 26    | 816.5 - 821.5      | 4M52W7D             | Conducted   | 0.220          | 23.42            | 64-QAM     |
| LTE Band 26    | 819                | 8M96G7D             | Conducted   | 0.337          | 25.27            | QPSK       |
| LTE Band 26    | 819                | 8M97W7D             | Conducted   | 0.282          | 24.50            | 16-QAM     |
| LTE Band 26    | 819                | 8M97W7D             | Conducted   | 0.282          | 24.50            | 64-QAM     |
| LTE Band 26    | 821.5              | 13M4G7D             | ERP         | 0.079          | 18.95            | QPSK       |
| LTE Band 26    | 821.5              | 13M4W7D             | ERP         | 0.066          | 18.21            | 16-QAM     |
| LTE Band 26    | 821.5              | 13M4W7D             | ERP         | 0.050          | 16.99            | 64-QAM     |

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in §2.947. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

Randy Ortaez  
President



|   |   |                                      |  |
|---|---|--------------------------------------|--|
| <b>FCC ID:</b> ZNFLS993                           | <b>Part 22(H) &amp; 90 CDMA / EvDO / LTE MEASUREMENT REPORT</b> |                                      | <b>Approved by:</b><br>Quality Manager |
| <b>Test Report S/N:</b><br>1M1701180034-04-R1.ZNF | <b>Test Dates:</b><br>12/27/2016-2/20/2017                      | <b>EUT Type:</b><br>Portable Handset | Page 1 of 47                           |

© 2017 PCTEST Engineering Laboratory, Inc.


V 6.2  
01/09/2016

© 2015 PCTEST Engineering Laboratory, Inc. All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST Engineering Laboratory, Inc. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTESTLAB.COM.

# TABLE OF CONTENTS

|   |  |    |
|---|--|----|
| FCC PART 22(H) & 90 MEASUREMENT REPORT .....                  |  | 3  |
| 1.0 INTRODUCTION .....  |  | 4  |
| 1.1 Scope .....   |  | 4  |
| 1.2 Testing Facility .....                                    |  | 4  |
| 2.0 PRODUCT INFORMATION .....                                 |  | 5  |
| 2.1 Equipment Description .....                               |  | 5  |
| 2.2 Device Capabilities .....                                 |  | 5  |
| 2.3 Test Configuration .....                                  |  | 5  |
| 2.4 EMI Suppression Device(s)/Modifications .....             |  | 5  |
| 3.0 DESCRIPTION OF TESTS .....                                |  | 6  |
| 3.1 Evaluation Procedure .....                                |  | 6  |
| 3.2 Occupied Bandwidth .....                                  |  | 6  |
| 3.3 Spurious and Harmonic Emissions at Antenna Terminal ..... |  | 6  |
| 3.4 Radiated Power and Radiated Spurious Emissions .....      |  | 7  |
| 3.5 Frequency Stability / Temperature Variation .....         |  | 8  |
| 4.0 MEASUREMENT UNCERTAINTY .....                             |  | 9  |
| 5.0 TEST EQUIPMENT CALIBRATION DATA .....                     |  | 10 |
| 6.0 SAMPLE CALCULATIONS .....                                 |  | 11 |
| 7.0 TEST RESULTS .....  |  | 12 |
| 7.1 Summary .....   |  | 12 |
| 7.2 Occupied Bandwidth .....                                  |  | 13 |
| 7.3 Spurious and Harmonic Emissions at Antenna Terminal ..... |  | 23 |
| 7.4 Band Edge Emissions at Antenna Terminal .....             |  | 28 |
| 7.5 Conducted Power Output Data .....                         |  | 34 |
| 7.6 Radiated Spurious Emissions Measurements .....            |  | 37 |
| 7.7 Frequency Stability / Temperature Variation .....         |  | 42 |
| 8.0 CONCLUSION .....  |  | 47 |

|   |  |   |  |
|---|--|---|--|
| <b>FCC ID:</b> ZNFLS993                           | <br><b>Part 22(H) &amp; 90 CDMA / EvDO / LTE MEASUREMENT REPORT</b> |  | <b>Approved by:</b><br>Quality Manager |
| <b>Test Report S/N:</b><br>1M1701180034-04-R1.ZNF | <b>Test Dates:</b><br>12/27/2016-2/20/2017   | <b>EUT Type:</b><br>Portable Handset  |  |
|   |  |   | Page 2 of 47                           |



# MEASUREMENT REPORT

## FCC Part 22(H) & 90





### §2.1033 General Information

**APPLICANT:** LG Electronics MobileComm U.S.A  
**APPLICANT ADDRESS:** 1000 Sylvan Avenue  
 Englewood Cliffs, NJ 07632, United States  
**TEST SITE:** PCTEST ENGINEERING LABORATORY, INC.  
**TEST SITE ADDRESS:** 7185 Oakland Mills Road, Columbia, MD 21045 USA  
**BASE MODEL:** LG-LS993  
**FCC CLASSIFICATION:** PCS Licensed Transmitter Held to Ear (PCE)  
**MODE:** CDMA / EvDO / LTE  
**FREQUENCY TOLERANCE:** ±0.00025 % (2.5 ppm)  
**Test Device Serial No.:** 01409, 01415, 00336     Production     Pre-Production     Engineering  
**DATE(S) OF TEST:** 12/27/2016-2/20/2017  
**TEST REPORT S/N:** 1M1701180034-04-R1.ZNF

### Test Facility / Accreditations

Measurements were performed at **PCTEST Engineering Lab. located in Columbia, MD 21046, U.S.A.**

- PCTEST facility is an FCC registered (PCTEST Reg. No. 159966) test facility with the site description report on file and has met all the requirements specified in Section 2.948 of the FCC Rules.
- PCTEST Lab is accredited to ISO 17025 by U.S. National Institute of Standards and Technology (NIST) under the National Voluntary Laboratory Accreditation Program (NVLAP Lab code: 100431-0) in EMC, FCC and Telecommunications.
- PCTEST Lab is accredited to ISO 17025-2005 by the American Association for Laboratory Accreditation (A2LA) in Specific Absorption Rate (SAR) testing, Hearing Aid Compatibility (HAC) testing, CTIA Test Plans, and wireless testing for FCC.
- PCTEST Lab is a recognized U.S. Conformity Assessment Body (CAB) in EMC and R&TTE (n.b. 0982) under the U.S.-EU Mutual Recognition Agreement (MRA).
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC Guide 65 by the American National Standards Institute (ANSI) in all scopes of FCC Rules.
- PCTEST is a CTIA Authorized Test Laboratory (CATL) for AMPS, CDMA, and EvDO wireless devices and for Over-the-Air (OTA) Antenna Performance testing for AMPS, CDMA, GSM, GPRS, EGPRS, UMTS (W-CDMA), CDMA 1xEVDO, and CDMA 1xRTT.

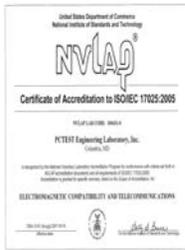

|   |   |   |  |
|---|---|---|--|
| <b>FCC ID:</b> ZNFLS993                           |  <b>Part 22(H) &amp; 90 CDMA / EvDO / LTE MEASUREMENT REPORT</b><br><b>Certification</b> |  | <b>Approved by:</b><br>Quality Manager |
| <b>Test Report S/N:</b><br>1M1701180034-04-R1.ZNF | <b>Test Dates:</b><br>12/27/2016-2/20/2017  | <b>EUT Type:</b><br>Portable Handset  |  |
| © 2017 PCTEST Engineering Laboratory, Inc.        |   |   | Page 3 of 47                           |

# 1.0 INTRODUCTION

## 1.1 Scope

Measurement and determination of electromagnetic emissions (EME) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Industry Canada Certification and Engineering Bureau.

## 1.2 Testing Facility

The map below shows the location of the PCTEST LABORATORY, its proximity to the FCC Laboratory, the Columbia vicinity, the Baltimore-Washington Intern't'l (BWI) airport, the city of Baltimore and the Washington, DC area. (See Figure 1-1).

These measurement tests were conducted at the PCTEST Engineering Laboratory, Inc. facility located at 7185 Oakland Mills Road, Columbia, MD 21046. The site coordinates are 39° 10'23" N latitude and 76° 49'50" W longitude. The facility is 0.4 miles North of the FCC laboratory, and the ambient signal and ambient signal strength are approximately equal to those of the FCC laboratory. The detailed description of the measurement facility was found to be in compliance with the requirements of § 2.948 according to ANSI C63.4-2014 on January 22, 2015.

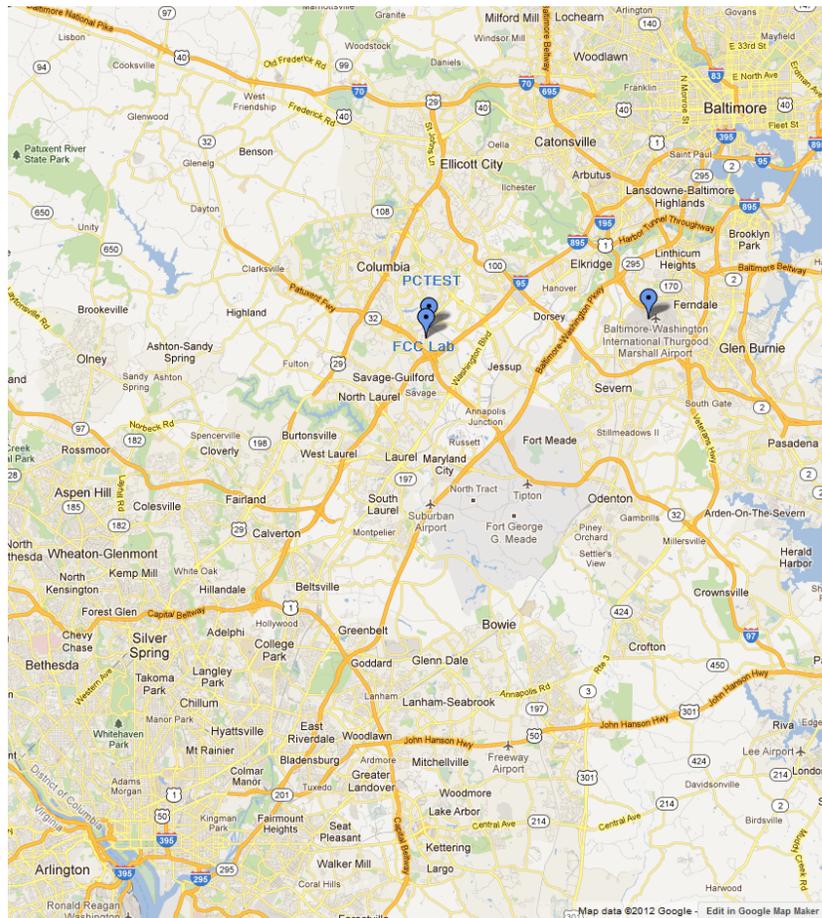


Figure 1-1. Map of the Greater Baltimore and Metropolitan Washington, D.C. area

|  |   |   |   |                                 |
|--|---|---|---|---------------------------------|
| FCC ID: ZNFLS993                           |  | Part 22(H) & 90 CDMA / EvDO / LTE MEASUREMENT REPORT<br>Certification |  | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M1701180034-04-R1.ZNF | Test Dates:<br>12/27/2016-2/20/2017   | EUT Type:<br>Portable Handset   |   | Page 4 of 47                    |

© 2017 PCTEST Engineering Laboratory, Inc.

V 6.2  
01/09/2016

## 2.0 PRODUCT INFORMATION

### 2.1 Equipment Description

The Equipment Under Test (EUT) is the **LG Portable Handset FCC ID: ZNFLS993**. The test data contained in this report pertains only to the emissions due to the EUT's licensed transmitters that operate under the provisions of Part 22(H) and 90.691.

### 2.2 Device Capabilities

This device contains the following capabilities:

850/1900 CDMA/EVDO Rev0/A (BC0, BC1, BC10), 850/1900 GSM/GPRS/EDGE, 850/1700/1900 WCDMA, Multi-band LTE, 802.11b/g/n WLAN, 802.11a/n/ac UNII, Bluetooth (1x, EDR, LE), NFC

### 2.3 Test Configuration

The EUT was tested per the guidance of ANSI/TIA-603-D-2010 and KDB 971168 D01 v02r02. See Section 7.0 of this test report for a description of the radiated and antenna port conducted emissions tests.

This device supports wireless charging capability and, thus, is subject to the test requirements of KDB 648474 D03 v01r04. Additional radiated spurious emission measurements were performed with the EUT lying flat on a certified wireless charging pad (WCP) while operating under normal conditions in a simulated call or data transmission configuration. The worst case radiated emissions data is shown in this report.

### 2.4 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

|  |   |   |                                 |
|--|---|---|---------------------------------|
| FCC ID: ZNFLS993                           |  <b>Part 22(H) &amp; 90 CDMA / EvDO / LTE MEASUREMENT REPORT</b> |  | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M1701180034-04-R1.ZNF | Test Dates:<br>12/27/2016-2/20/2017   | EUT Type:<br>Portable Handset   | Page 5 of 47                    |

## 3.0 DESCRIPTION OF TESTS

### 3.1 Evaluation Procedure

The measurement procedures described in the document titled “Land Mobile FM or PM – Communications Equipment – Measurements and Performance Standards” (ANSI/TIA-603-D-2010) and “Procedures for Compliance Measurement of the Fundamental Emission Power of Licensed Wideband (> 1 MHz) Digital Transmission Systems” (KDB 971168 D01 v02r02) were used in the measurement of the EUT.

### 3.2 Occupied Bandwidth

#### §2.1049

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. The spectrum analyzers’ “occupied bandwidth” measurement function was used to record the occupied bandwidth in accordance with KDB 971168 D01 v02r02.

### 3.3 Spurious and Harmonic Emissions at Antenna Terminal

#### §2.1051, §90.691

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10<sup>th</sup> harmonic.

Out-of-band emission requirement shall apply only to the “outer” channels included in an EA license and to spectrum adjacent to interior channels used by incumbent licensees. The emission limits are as follows:

For any frequency removed from the EA licensee's frequency block by up to and including 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least  $116 \text{ Log}_{10}(f/6.1)$  decibels or  $50 + 10 \text{ Log}_{10}(P)$  decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 12.5 kHz.

For any frequency removed from the EA licensee's frequency block greater than 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least  $43 + 10 \text{ Log}_{10}(P)$  decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 37.5 kHz.

|  |   |   |                                 |
|--|---|---|---------------------------------|
| FCC ID: ZNFLS993                           |  <b>Part 22(H) &amp; 90 CDMA / EvDO / LTE MEASUREMENT REPORT</b> |  | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M1701180034-04-R1.ZNF | Test Dates:<br>12/27/2016-2/20/2017   | EUT Type:<br>Portable Handset   | Page 6 of 47                    |

### 3.4 Radiated Power and Radiated Spurious Emissions

§2.1053, §90.635, §90.691

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. For measurements below 1GHz, the absorbers are removed. A raised turntable is used for radiated measurement. The turn table is a continuously rotatable, remote-controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. A 72.4cm high PVC support structure is placed on top of the turntable. A 3" (~7.6cm) sheet of high density polystyrene is used as the table top and is placed on top of the PVC supports to bring the total height of the table to 80cm.

The equipment under test was transmitting while connected to its integral antenna and is placed on a wooden turntable 80cm above the ground plane and 3 meters from the receive antenna. The receive antenna height is adjusted between 1 and 4 meter height, the turntable is rotated through 360 degrees, and the EUT is manipulated through all orthogonal planes representative of its typical use to achieve the highest reading on the receive spectrum analyzer. Radiated power levels are also investigated with the receive antenna horizontally and vertically polarized. The maximized power level is recorded using the spectrum analyzer "Channel Power" function with the integration band set to the emissions' occupied bandwidth, a RMS detector, RBW = 100kHz, VBW = 300kHz, and a 1 second sweep time over a minimum of 10 sweeps, per the guidelines of KDB 971168 D01 v02r02.

Per the guidance of ANSI/TIA-603-D-2010, a half-wave dipole is then substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator with the level of the signal generator being adjusted to obtain the same receive spectrum analyzer level previously recorded from the spurious emission from the EUT. The power of the emission is calculated using the following formula:

$$P_d \text{ [dBm]} = P_g \text{ [dBm]} - \text{cable loss [dB]} + \text{antenna gain [dBd/dBi]}$$

Where,  $P_d$  is the dipole equivalent power,  $P_g$  is the generator output into the substitution antenna, and the antenna gain is the gain of the substitute antenna used relative to either a half-wave dipole (dBd) or an isotropic source (dBi). The substitute level is equal to  $P_g \text{ [dBm]} - \text{cable loss [dB]}$ .

The calculated  $P_d$  levels are then compared to the absolute spurious emission limit of -13dBm which is equivalent to the required minimum attenuation of  $43 + 10\log_{10}(\text{Power [Watts]})$  specified in 90.691.

For fundamental radiated power measurements, the guidance of KDB 971168 D01 v02r02 is used to record the EUT power level that is subsequently matched via the aforementioned substitution method given in ANSI/TIA-603-D-2010.

|  |   |   |                                 |
|--|---|---|---------------------------------|
| FCC ID: ZNFLS993                           |  <b>Part 22(H) &amp; 90 CDMA / EvDO / LTE MEASUREMENT REPORT</b> |  | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M1701180034-04-R1.ZNF | Test Dates:<br>12/27/2016-2/20/2017   | EUT Type:<br>Portable Handset   | Page 7 of 47                    |

### 3.5 Frequency Stability / Temperature Variation

#### §2.1055, 90.213(a)

Frequency stability testing is performed in accordance with the guidelines of ANSI/TIA-603-D-2010. The frequency stability of the transmitter is measured by:

- a.) **Temperature:** The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
- b.) **Primary Supply Voltage:** The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

*Specification – For Part 90.213, the frequency stability of the transmitter shall be maintained within ±0.00025% (±2.5 ppm) of the center frequency.*

#### Time Period and Procedure:

1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
2. The equipment is turned on in a “standby” condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A sufficient stabilization period at each temperature shall be used prior to each frequency requirement.

|   |   |                                      |  |
|---|---|--------------------------------------|--|
| FCC ID: ZNFLS993                                  |  <b>Part 22(H) &amp; 90 CDMA / EvDO / LTE MEASUREMENT REPORT</b><br><b>Certification</b>  |                                      | <b>Approved by:</b><br>Quality Manager |
| <b>Test Report S/N:</b><br>1M1701180034-04-R1.ZNF | <b>Test Dates:</b><br>12/27/2016-2/20/2017  | <b>EUT Type:</b><br>Portable Handset | Page 8 of 47                           |

## 4.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013. All measurement uncertainty values are shown with a coverage factor of  $k = 2$  to indicate a 95% level of confidence. The measurement data shown herein meets or exceeds the  $U_{\text{CISPR}}$  measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

| Contribution                     | Expanded Uncertainty ( $\pm$ dB) |
|----------------------------------|----------------------------------|
| Conducted Bench Top Measurements | 1.13                             |
| Radiated Disturbance (<1GHz)     | 4.98                             |
| Radiated Disturbance (>1GHz)     | 5.07                             |
| Radiated Disturbance (>18GHz)    | 5.09                             |

|   |   |   |   |  |
|---|---|---|---|--|
| FCC ID: ZNFLS993                                  |  | <b>Part 22(H) &amp; 90 CDMA / EvDO / LTE MEASUREMENT REPORT</b><br><b>Certification</b> |  | <b>Approved by:</b><br>Quality Manager |
| <b>Test Report S/N:</b><br>1M1701180034-04-R1.ZNF | <b>Test Dates:</b><br>12/27/2016-2/20/2017  | <b>EUT Type:</b><br>Portable Handset  | Page 9 of 47  |  |

## 5.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2006.

| Manufacturer    | Model             | Description                            | Cal Date   | Cal Interval | Cal Due    | Serial Number       |
|-----------------|-------------------|--|------------|--------------|------------|---------------------|
| -               | LTX1              | Licensed Transmitter Cable Set         | 4/11/2016  | Annual       | 4/11/2017  | LTX1                |
| -               | RE1               | Radiated Emissions Cable Set (UHF/EHF) | 7/11/2016  | Annual       | 7/11/2017  | RE1                 |
| Agilent         | E5515C            | Wireless Communications Test Set       | 1/29/2016  | Biennial     | 1/29/2018  | GB46310798          |
| Agilent         | N9020A            | MXA Signal Analyzer                    | 10/28/2016 | Annual       | 10/28/2017 | US46470561          |
| Agilent         | N9030A            | PXA Signal Analyzer (44GHz)            | 3/1/2016   | Annual       | 3/1/2017   | MY52350166          |
| Anritsu         | MT8820C           | Radio Communication Analyzer           | 9/15/2016  | Annual       | 9/15/2017  | 6200901190          |
| Com-Power       | AL-130            | 9kHz - 30MHz Loop Antenna              | 7/30/2015  | Biennial     | 7/30/2017  | 121034              |
| Com-Power       | PAM-118A          | Pre-Amplifier                          | 4/10/2016  | Annual       | 4/10/2017  | 551042              |
| Com-Power       | PAM-103           | Pre-Amplifier (1-1000MHz)              | 7/6/2016   | Annual       | 7/6/2017   | 441119              |
| Emco            | 3115              | Horn Antenna (1-18GHz)                 | 3/10/2016  | Biennial     | 3/10/2018  | 9704-5182           |
| EMCO            | 3160-09           | Small Horn (18 - 26.5GHz)              | 8/23/2016  | Biennial     | 8/23/2018  | 135427              |
| Espec           | ESX-2CA           | Environmental Chamber                  | 3/4/2016   | Annual       | 3/4/2017   | 17620               |
| K & L           | 13SH10-1000/U1000 | N Type High Pass Filter                | 7/6/2016   | Annual       | 7/6/2017   | 13SH10-1000/U1000-1 |
| PCTEST          | -                 | EMC Switch System                      | 7/11/2016  | Annual       | 7/11/2017  | NM1                 |
| PCTEST          | -                 | EMC Switch System                      | 7/6/2016   | Annual       | 7/6/2017   | NM2                 |
| Rohde & Schwarz | CMW500            | Radio Communication Tester             | 10/20/2016 | Annual       | 10/20/2017 | 100976              |
| Rohde & Schwarz | TS-PR26           | 18-26.5 GHz Pre-Amplifier              | 3/7/2016   | Annual       | 3/7/2017   | 100040              |
| Rohde & Schwarz | ESU26             | EMI Test Receiver (26.5GHz)            | 5/16/2016  | Annual       | 5/16/2017  | 100342              |
| Rohde & Schwarz | ESU40             | EMI Test Receiver (40GHz)              | 7/15/2016  | Annual       | 7/15/2017  | 100348              |
| Rohde & Schwarz | FSW67             | Signal / Spectrum Analyzer             | 7/27/2016  | Annual       | 7/27/2017  | 103200              |
| Schwarzbeck     | UHA 9105          | Dipole Antenna (400 - 1GHz) Rx         | 3/30/2016  | Biennial     | 3/30/2018  | 9105-2404           |
| Sunol           | DRH-118           | Horn Antenna (1-18GHz)                 | 7/30/2015  | Biennial     | 7/30/2017  | A050307             |
| Sunol           | JB5               | Bi-Log Antenna (30M - 5GHz)            | 3/14/2016  | Biennial     | 3/14/2018  | A051107             |
| Sunol           | DRH-118           | Horn Antenna (1-18 GHz)                | 7/30/2015  | Biennial     | 7/30/2017  | A042511             |

**Table 5-1. Test Equipment**

|   |   |   |   |  |
|---|---|---|---|--|
| FCC ID: ZNFLS993                                  |  | <b>Part 22(H) &amp; 90 CDMA / EvDO / LTE MEASUREMENT REPORT</b> |  | <b>Approved by:</b><br>Quality Manager |
| <b>Test Report S/N:</b><br>1M1701180034-04-R1.ZNF | <b>Test Dates:</b><br>12/27/2016-2/20/2017  | <b>EUT Type:</b><br>Portable Handset                            | Page 10 of 47   |  |

## 6.0 SAMPLE CALCULATIONS

### Emission Designator

**Emission Designator = 1M25F9W**

CDMA BW = 1.25 MHz

F = Frequency Modulation

9 = Composite Digital Info

W = Combination (Audio/Data) (Measured at the 99.75% power bandwidth)

### Spurious Radiated Emission – BC10

**Example: Channel 476 CDMA BC10 Mode 3<sup>rd</sup> Harmonic (2453.70MHz)**

The average spectrum analyzer reading at 3 meters with the EUT on the turntable was –81.0 dBm. The gain of the substituted antenna is 8.1 dBi. The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of –81.0 dBm on the spectrum analyzer. The loss of the cable between the signal generator and the terminals of the substituted antenna is 2.0 dB at 2453.70 MHz. So 6.1 dB is added to the signal generator reading of –30.9 dBm yielding –24.80 dBm. The fundamental EIRP was 25.501 dBm so this harmonic was 25.501 dBm – (–24.80) = 50.3 dBc.

### Emission Designator

#### QPSK Modulation

**Emission Designator = 8M62G7D**

LTE BW = 8.62 MHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Data transmission, telemetry, telecommand

#### 16QAM Modulation

**Emission Designator = 8M45W7D**

LTE BW = 8.45 MHz

W = Amplitude/Angle Modulated

7 = Quantized/Digital Info

D = Data transmission, telemetry, telecommand

### Spurious Radiated Emission – LTE Band

**Example: Middle Channel LTE Mode 2<sup>nd</sup> Harmonic (1564 MHz)**

The average spectrum analyzer reading at 3 meters with the EUT on the turntable was –81.0 dBm. The gain of the substituted antenna is 8.1 dBi. The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of –81.0 dBm on the spectrum analyzer. The loss of the cable between the signal generator and the terminals of the substituted antenna is 2.0 dB at 1564 MHz. So 6.1 dB is added to the signal generator reading of –30.9 dBm yielding –24.80 dBm. The fundamental EIRP was 25.501 dBm so this harmonic was 25.501 dBm – (–24.80).

|  |   |   |                                 |
|--|---|---|---------------------------------|
| FCC ID: ZNFLS993                           |  <b>Part 22(H) &amp; 90 CDMA / EvDO / LTE MEASUREMENT REPORT</b> |  | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M1701180034-04-R1.ZNF | Test Dates:<br>12/27/2016-2/20/2017   | EUT Type:<br>Portable Handset   | Page 11 of 47                   |

## 7.0 TEST RESULTS

### 7.1 Summary

Company Name: LG Electronics MobileComm U.S.A  
 FCC ID: ZNFLS993  
 FCC Classification: PCS Licensed Transmitter Held to Ear (PCE)  
 Mode(s): CDMA / EvDO / LTE  
 Band: Band Class 10 / Band 26

| FCC Part Section(s) | Test Description                         | Test Limit   | Test Condition | Test Result | Reference         |
|---------------------|--|--|----------------|-------------|-------------------|
| 2.1049              | Occupied Bandwidth                       | N/A  | CONDUCTED      | PASS        | Section 7.2       |
| 2.1051<br>90.691    | Conducted Band Edge / Spurious Emissions | > 43 + log <sub>10</sub> (P[Watts]) for all out-of-band emissions except > 50 + 10log <sub>10</sub> (P[Watts]) at Band Edge and for all out-of-band emissions within 37.5kHz of Block Edge |                | PASS        | Sections 7.3, 7.4 |
| 2.1055<br>90.213    | Frequency Stability                      | < 2.5 ppm  |                | PASS        | Section 7.8       |
| 2.1046<br>90.635    | Conducted Power                          | < 100 Watts  |                | PASS        | Section 7.5       |
| 22.913(a.2)         | Effective Radiated Power (Band 26)       | < 7 Watts max. ERP   | RADIATED       | PASS        | Section 7.6       |
| 2.1053<br>90.691    | Radiated Spurious Emissions              | > 43 + log <sub>10</sub> (P[Watts]) for all out-of-band emissions except > 50 + 10log <sub>10</sub> (P[Watts]) at Band Edge and for all out-of-band emissions within 37.5kHz of Block Edge |                | PASS        | Section 7.7       |

**Table 7-1. Summary of Test Results**

#### Notes:

- 1) All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots shown in Section 7.0 were taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables, directional couplers, and attenuators used as part of the system to maintain a link between the call box and the EUT at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables, attenuators, and couplers.
- 4) For conducted spurious emissions, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is PCTEST "2G/3G Automation," Version 3.7.

|  |   |   |                                 |
|--|---|---|---------------------------------|
| FCC ID: ZNFLS993                           |  Part 22(H) & 90 CDMA / EvDO / LTE MEASUREMENT REPORT<br>Certification |  | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M1701180034-04-R1.ZNF | Test Dates:<br>12/27/2016-2/20/2017   | EUT Type:<br>Portable Handset   | Page 12 of 47                   |

## 7.2 Occupied Bandwidth

### §2.1049

#### Test Overview

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. All modes of operation were investigated and the worst case configuration results are reported in this section.

#### Test Procedure Used


KDB 971168 D01 v02r02 – Section 4.2

#### Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5% of the expected OBW
3. VBW  $\geq$  3 x RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5% of the 99% occupied bandwidth observed in Step 7

#### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

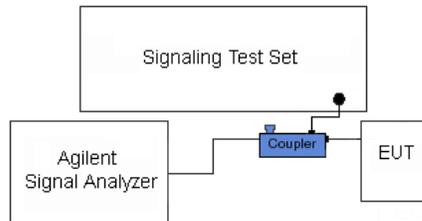


**Figure 7-1. Test Instrument & Measurement Setup**


#### Test Notes

None.

|  |   |   |                                 |
|--|---|---|---------------------------------|
| FCC ID: ZNFLS993                           |  <b>Part 22(H) &amp; 90 CDMA / EvDO / LTE MEASUREMENT REPORT</b> |  | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M1701180034-04-R1.ZNF | Test Dates:<br>12/27/2016-2/20/2017   | EUT Type:<br>Portable Handset   | Page 13 of 47                   |

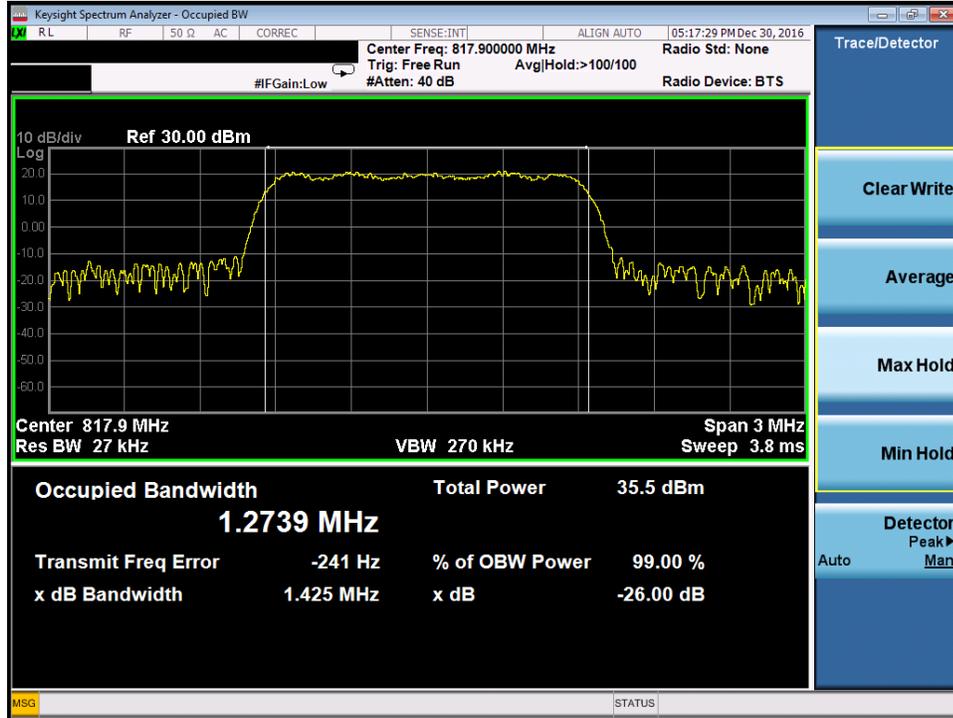


Plot 7-1. Occupied Bandwidth Plot CDMA (Ch. 476)

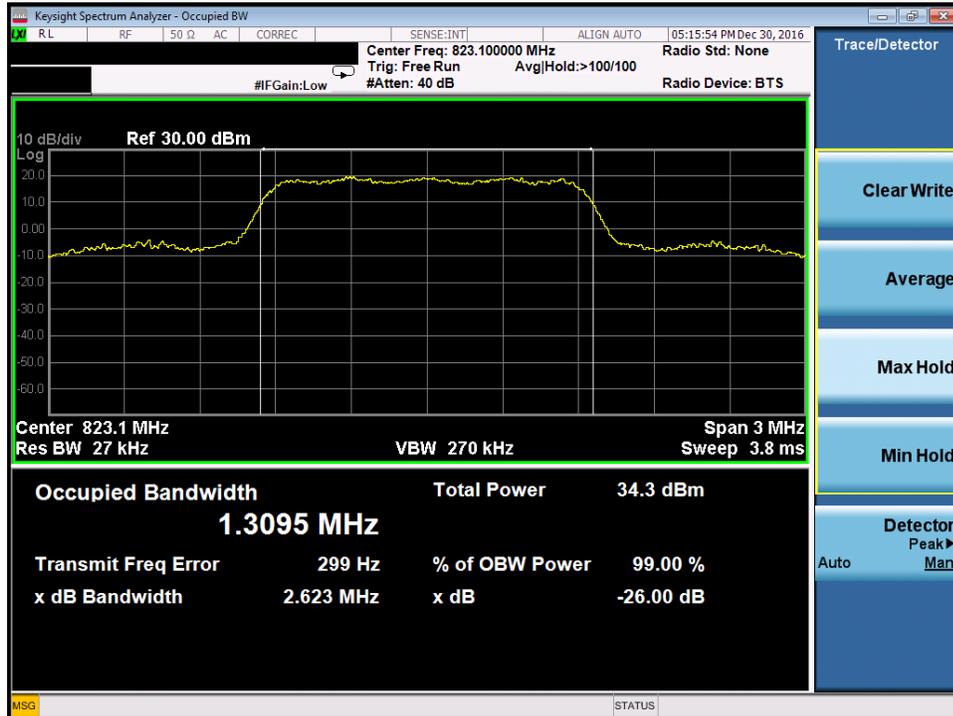


Plot 7-2. Occupied Bandwidth Plot CDMA (Ch. 684)

|  |                                     |  |  |                                 |
|--|-------------------------------------|--|--|---------------------------------|
| FCC ID: ZNFLS993                           | PCTEST ENGINEERING LABORATORY, INC. | Part 22(H) & 90 CDMA / EvDO / LTE MEASUREMENT REPORT Certification |  | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M1701180034-04-R1-ZNF | Test Dates:<br>12/27/2016-2/20/2017 | EUT Type:<br>Portable Handset                                      |  | Page 14 of 47                   |

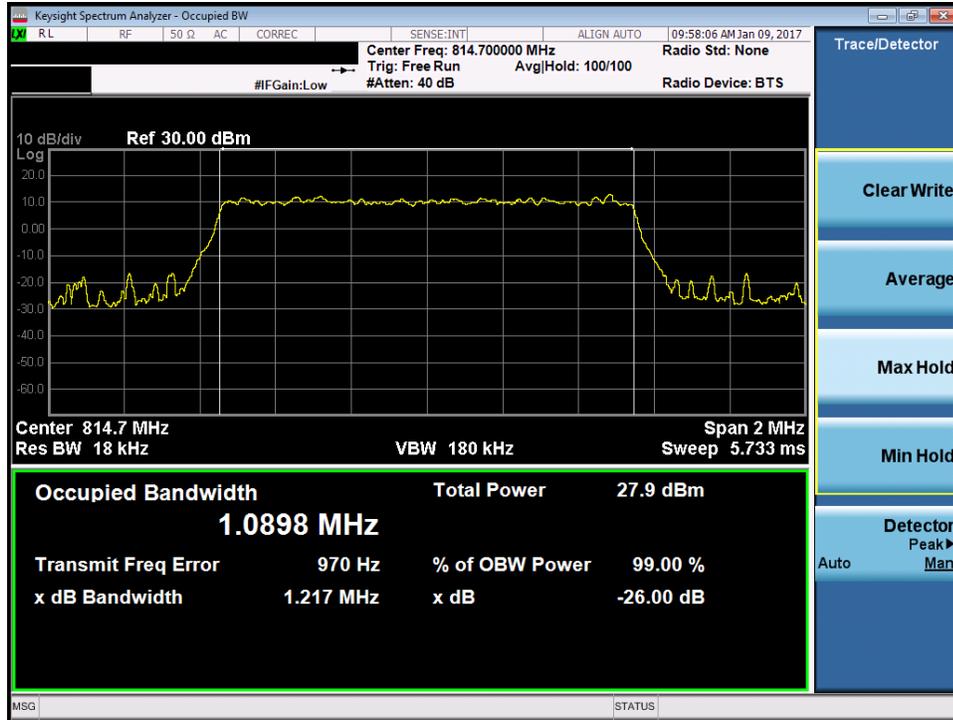


Plot 7-3. Occupied Bandwidth Plot LTE B26 (1.4MHz QPSK – RB Size 6– Low Channel)

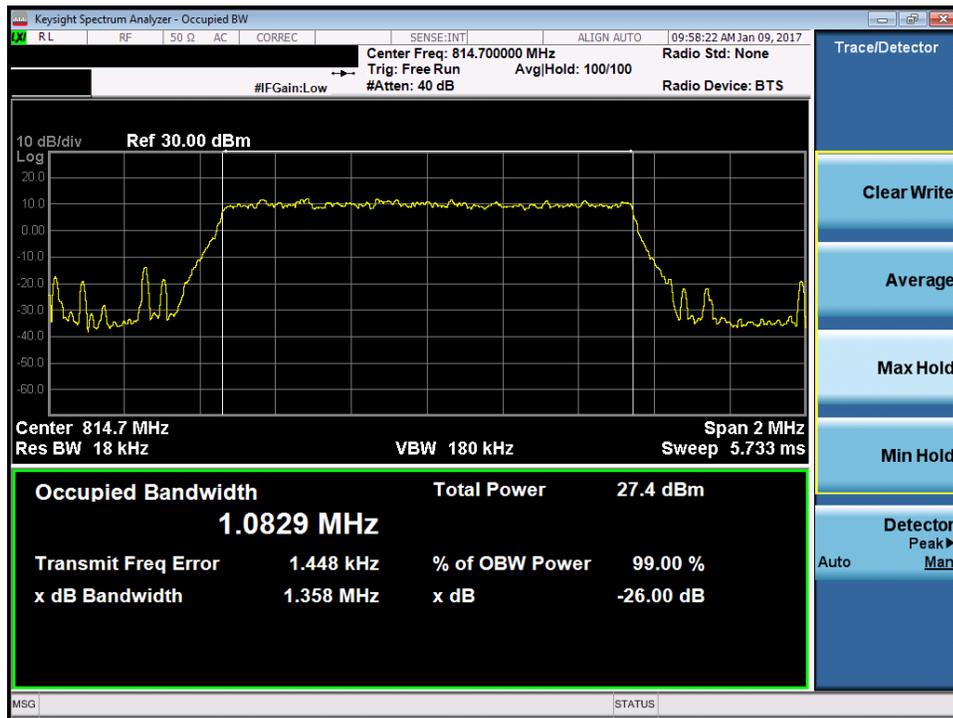


Plot 7-4. Occupied Bandwidth Plot LTE B26 (1.4MHz 16-QAM – RB Size 6– Low Channel)

|  |                                     |  |  |                                 |
|--|-------------------------------------|--|--|---------------------------------|
| FCC ID: ZNFLS993                           | PCTEST ENGINEERING LABORATORY, INC. | Part 22(H) & 90 CDMA / EvDO / LTE MEASUREMENT REPORT Certification |  | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M1701180034-04-R1-ZNF | Test Dates:<br>12/27/2016-2/20/2017 | EUT Type:<br>Portable Handset                                      |  | Page 15 of 47                   |

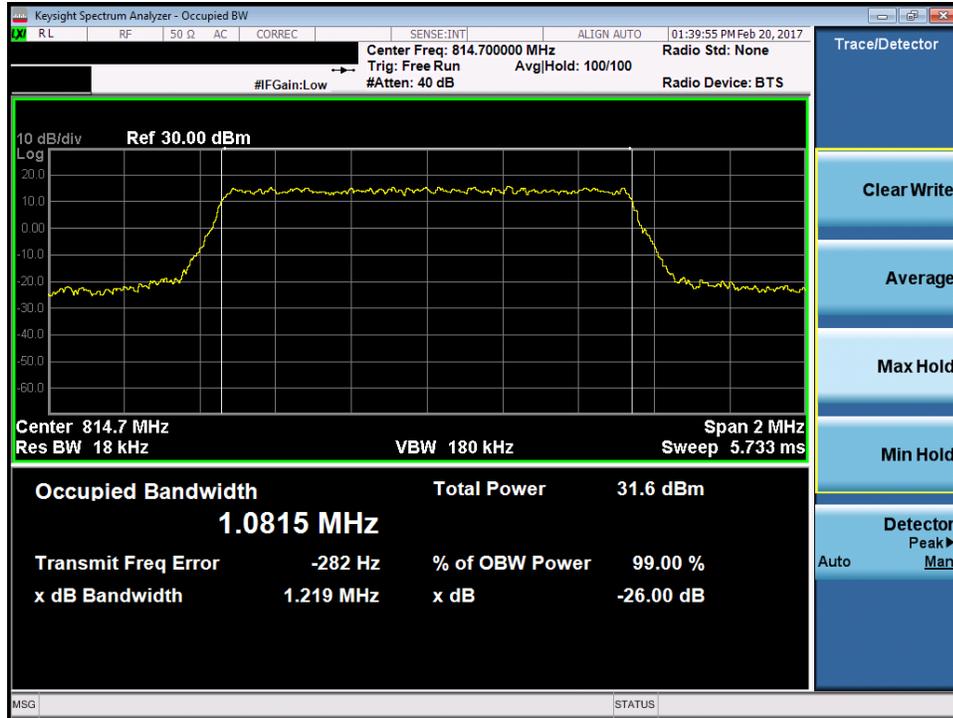


Plot 7-5. Occupied Bandwidth Plot LTE B26 (1.4MHz 64-QAM – RB Size 6– Low Channel)

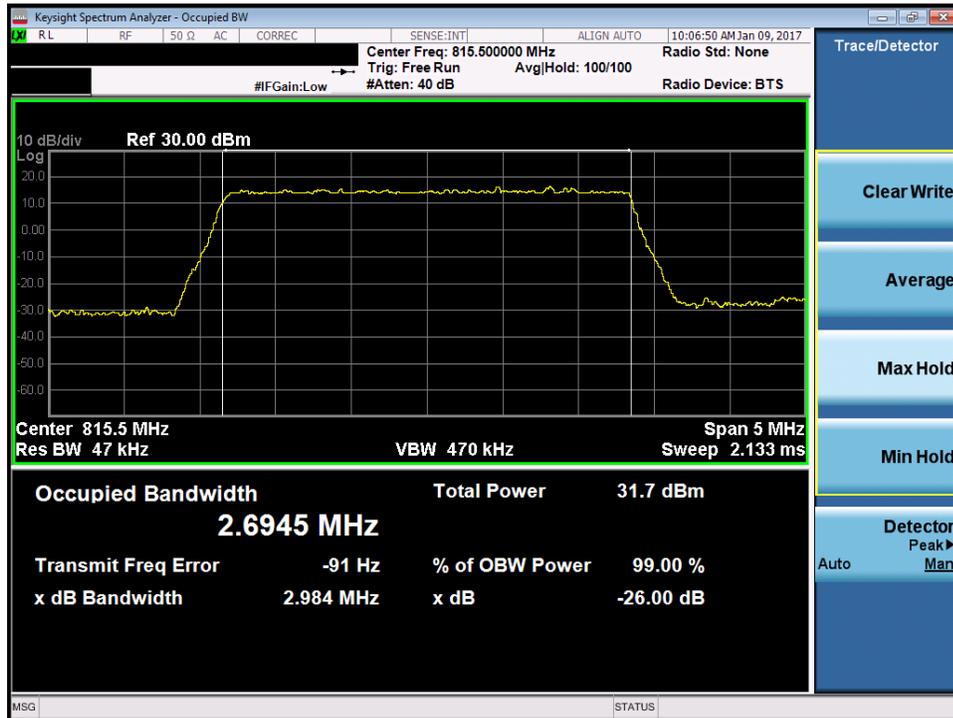


Plot 7-6. Occupied Bandwidth Plot LTE B26 (3MHz QPSK – RB Size 15– Low Channel)

|  |                                     |  |  |                                 |
|--|-------------------------------------|--|--|---------------------------------|
| FCC ID: ZNFLS993                           | PCTEST ENGINEERING LABORATORY, INC. | Part 22(H) & 90 CDMA / EvDO / LTE MEASUREMENT REPORT Certification |  | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M1701180034-04-R1-ZNF | Test Dates:<br>12/27/2016-2/20/2017 | EUT Type:<br>Portable Handset                                      |  | Page 16 of 47                   |

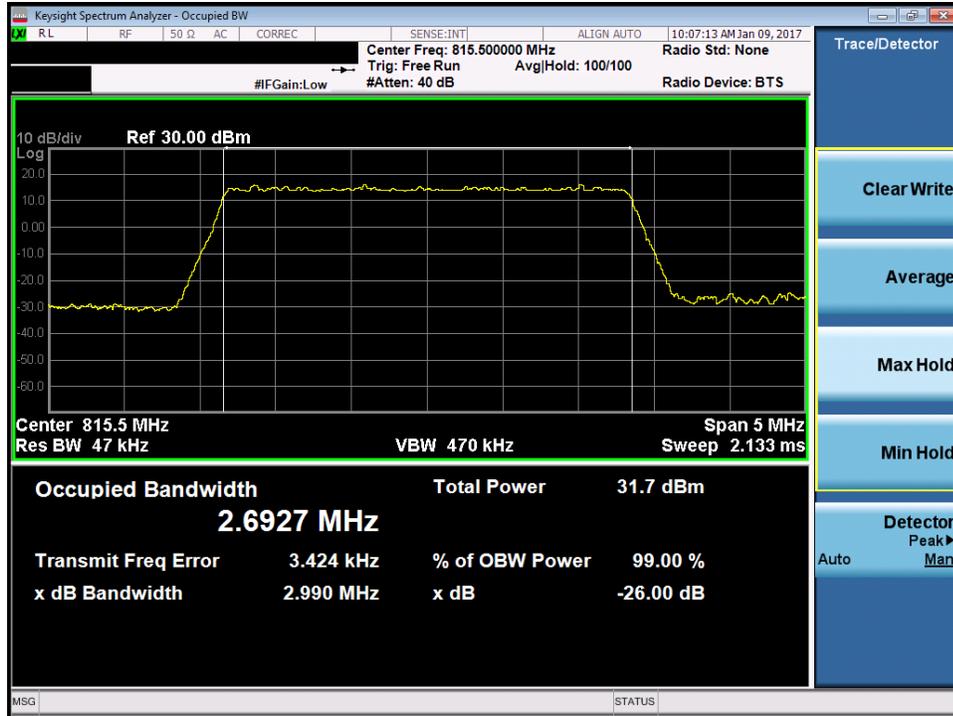


Plot 7-7. Occupied Bandwidth Plot LTE B26 (3MHz 16-QAM – RB Size 15– Low Channel)

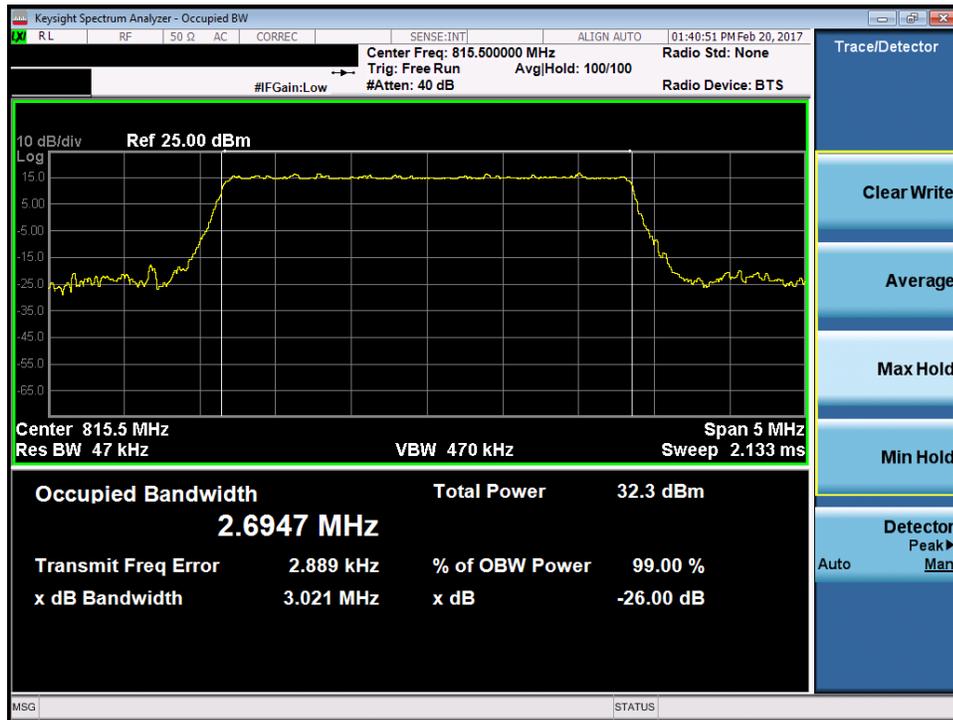


Plot 7-8. Occupied Bandwidth Plot LTE B26 (3MHz 64-QAM – RB Size 15– Low Channel)

|  |                                     |   |  |                                 |
|--|-------------------------------------|---|--|---------------------------------|
| FCC ID: ZNFLS993                           | PCTEST ENGINEERING LABORATORY, INC. | Part 22(H) & 90 CDMA / EvDO / LTE MEASUREMENT REPORT<br>Certification |  | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M1701180034-04-R1-ZNF | Test Dates:<br>12/27/2016-2/20/2017 | EUT Type:<br>Portable Handset   |  | Page 17 of 47                   |

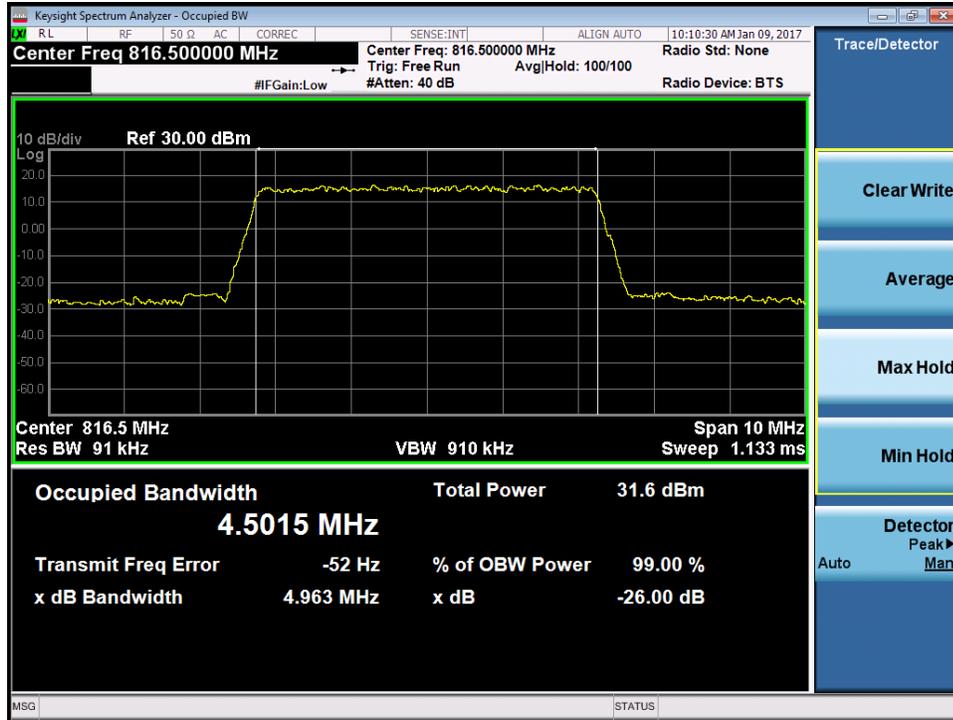


Plot 7-9. Occupied Bandwidth Plot LTE B26 (5MHz QPSK – RB Size 25– Low Channel)

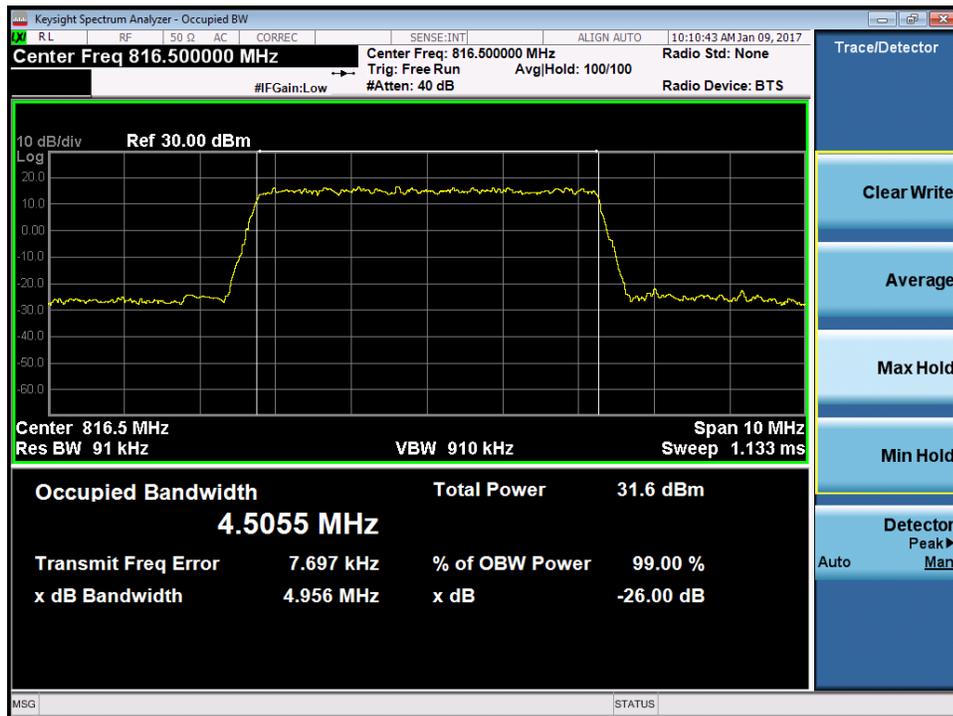


Plot 7-10. Occupied Bandwidth Plot LTE B26 (5MHz 16-QAM – RB Size 25– Low Channel)

|  |                                     |  |  |                                 |
|--|-------------------------------------|--|--|---------------------------------|
| FCC ID: ZNFLS993                           | PCTEST ENGINEERING LABORATORY, INC. | Part 22(H) & 90 CDMA / EvDO / LTE MEASUREMENT REPORT Certification |  | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M1701180034-04-R1-ZNF | Test Dates:<br>12/27/2016-2/20/2017 | EUT Type:<br>Portable Handset                                      |  | Page 18 of 47                   |

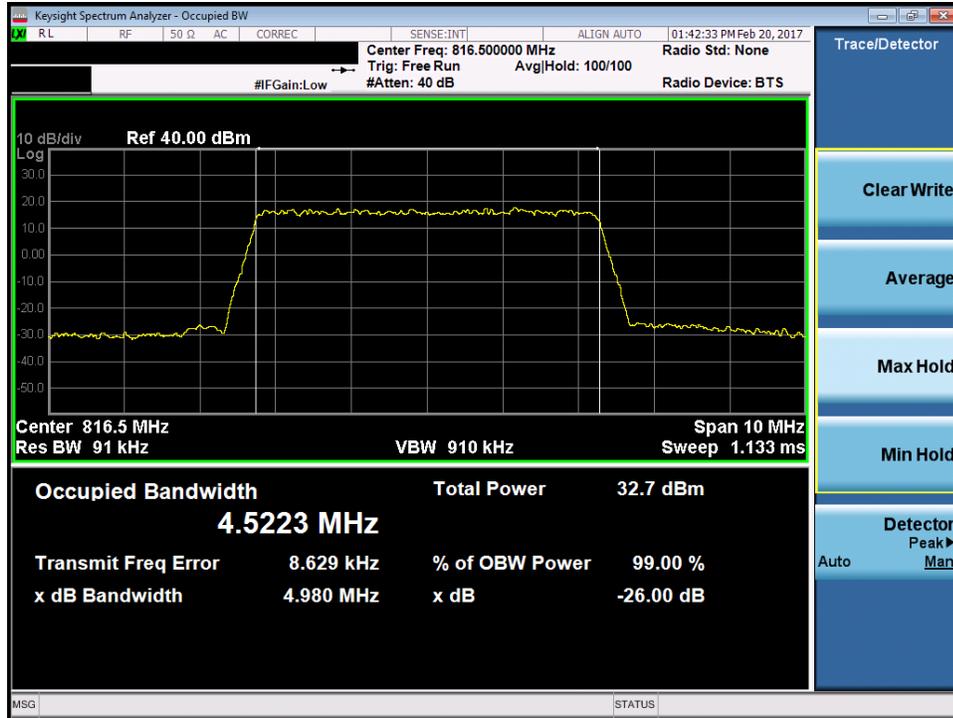


Plot 7-11. Occupied Bandwidth Plot LTE B26 (5MHz 64-QAM – RB Size 25– Low Channel)

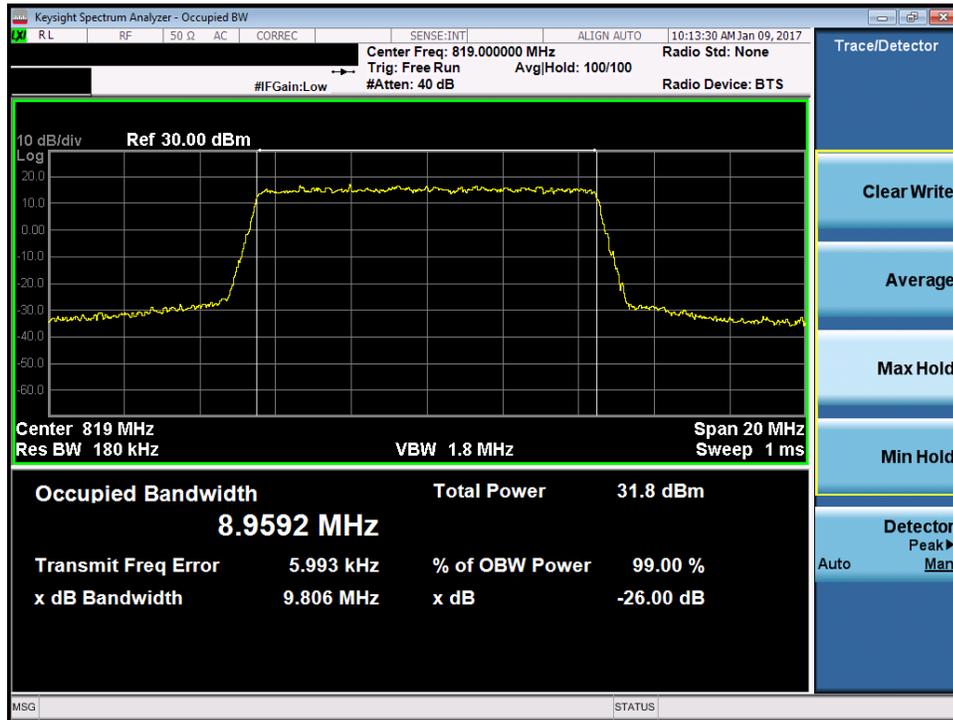


Plot 7-12. Occupied Bandwidth Plot LTE B26 (10MHz QPSK – RB Size 50)

|  |                                     |  |  |                                 |
|--|-------------------------------------|--|--|---------------------------------|
| FCC ID: ZNFLS993                           | PCTEST ENGINEERING LABORATORY, INC. | Part 22(H) & 90 CDMA / EvDO / LTE MEASUREMENT REPORT Certification |  | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M1701180034-04-R1-ZNF | Test Dates:<br>12/27/2016-2/20/2017 | EUT Type:<br>Portable Handset                                      |  | Page 19 of 47                   |

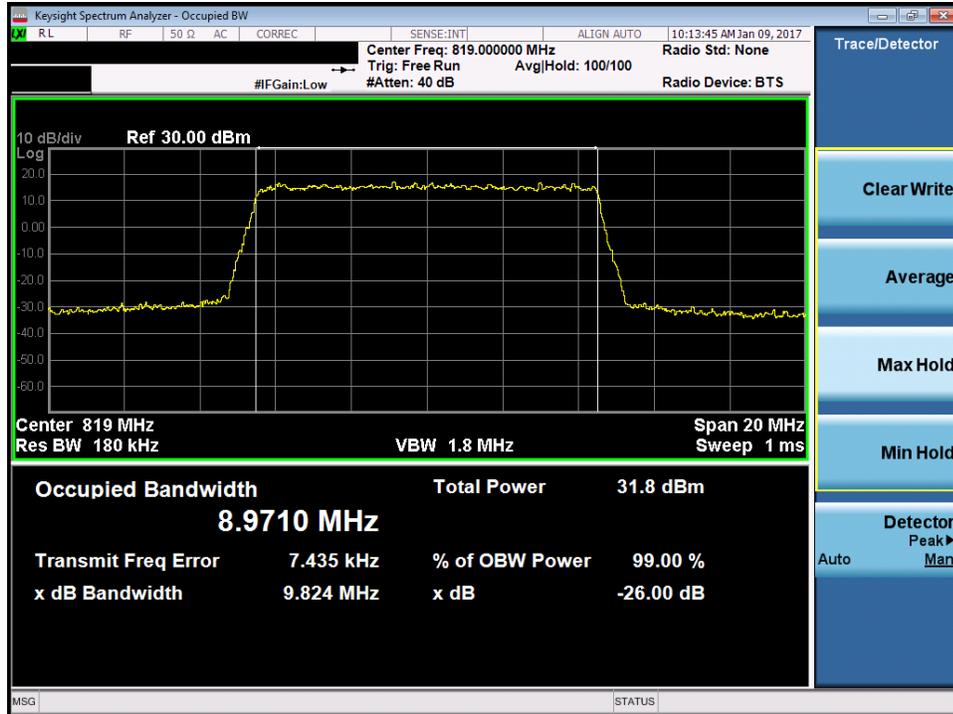


Plot 7-13. Occupied Bandwidth Plot LTE B26 (10MHz 16-QAM – RB Size 50)

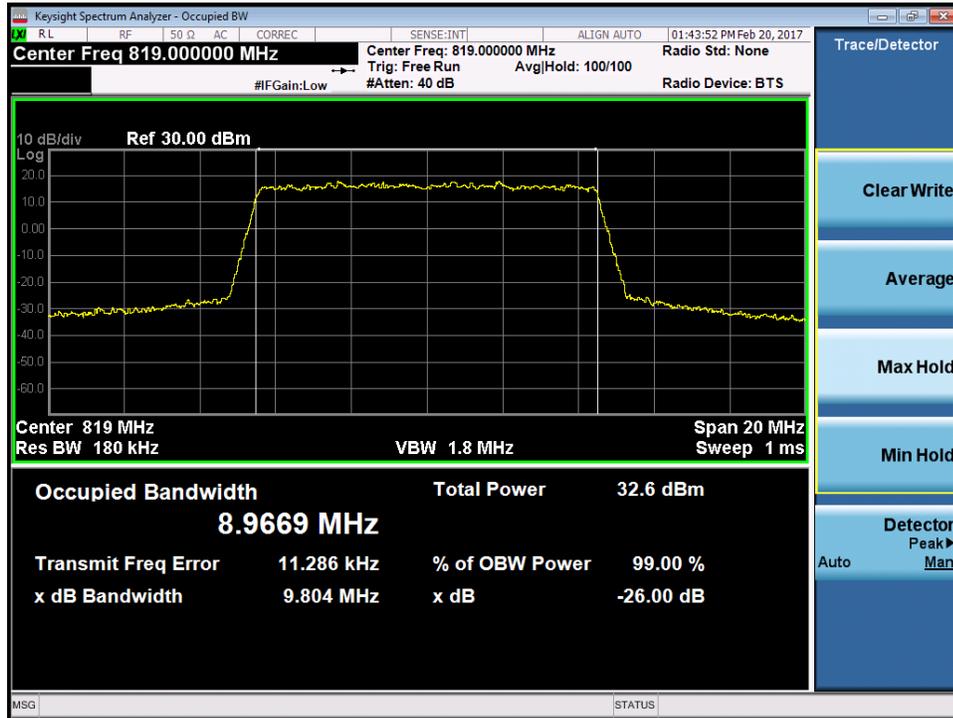


Plot 7-14. Occupied Bandwidth Plot LTE B26 (10MHz 64-QAM – RB Size 50)

|  |                                     |  |  |                                 |
|--|-------------------------------------|--|--|---------------------------------|
| FCC ID: ZNFLS993                           | PCTEST ENGINEERING LABORATORY, INC. | Part 22(H) & 90 CDMA / EvDO / LTE MEASUREMENT REPORT Certification |  | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M1701180034-04-R1-ZNF | Test Dates:<br>12/27/2016-2/20/2017 | EUT Type:<br>Portable Handset                                      |  | Page 20 of 47                   |

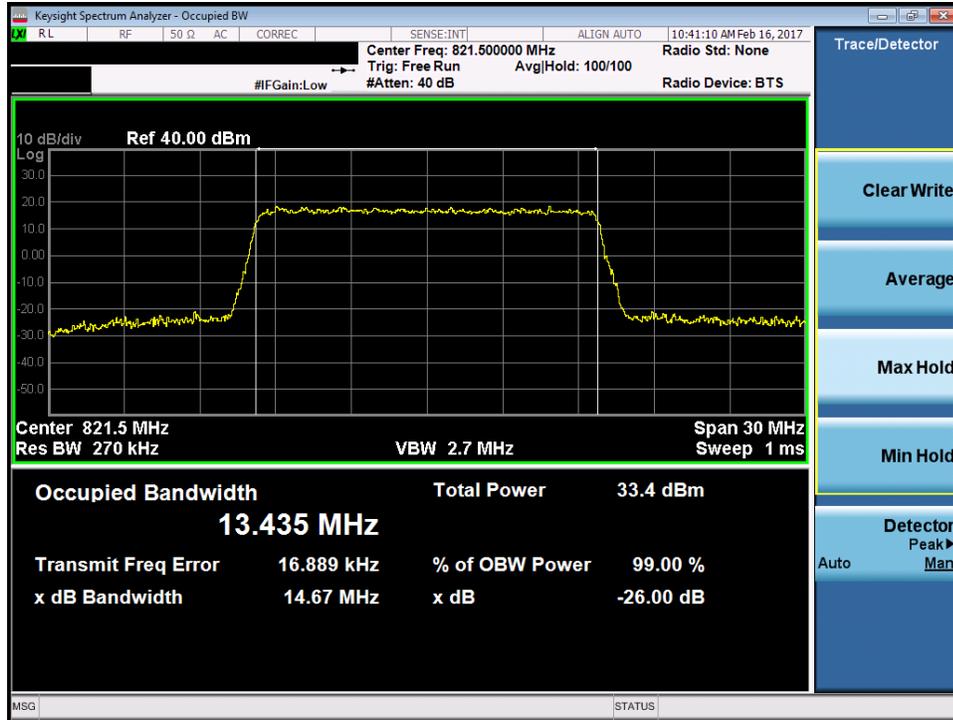

Plot 7-15. Occupied Bandwidth Plot LTE B26 (15MHz QPSK – RB Size 75)

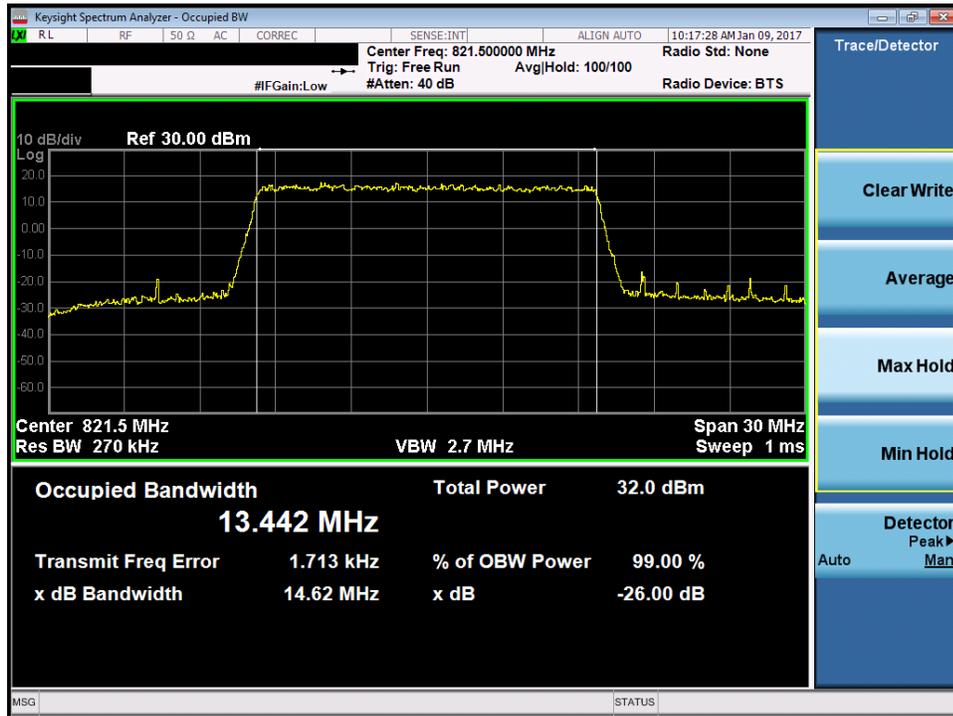

Plot 7-16. Occupied Bandwidth Plot LTE B26 (15MHz 16-QAM – RB Size 75)

|  |                                     |   |  |                                 |
|--|-------------------------------------|---|--|---------------------------------|
| FCC ID: ZNFLS993                           | PCTEST ENGINEERING LABORATORY, INC. | Part 22(H) & 90 CDMA / EvDO / LTE MEASUREMENT REPORT<br>Certification |  | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M1701180034-04-R1-ZNF | Test Dates:<br>12/27/2016-2/20/2017 | EUT Type:<br>Portable Handset   |  | Page 21 of 47                   |



Plot 7-17. Occupied Bandwidth Plot LTE B26 (15MHz 64-QAM – RB Size 75)

|  |   |   |  |                                 |
|--|---|---|--|---------------------------------|
| FCC ID: ZNFLS993                           | <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | Part 22(H) & 90 CDMA / EvDO / LTE MEASUREMENT REPORT<br>Certification |  | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M1701180034-04-R1.ZNF | Test Dates:<br>12/27/2016-2/20/2017           | EUT Type:<br>Portable Handset   |  | Page 22 of 47                   |

### 7.3 Spurious and Harmonic Emissions at Antenna Terminal

§2.1051 §90.691

#### Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10<sup>th</sup> harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

**The minimum permissible attenuation level of any spurious emission is  $43 + \log_{10}(P_{[Watts]})$ , where P is the transmitter power in Watts.**

#### Test Procedure Used

KDB 971168 D01 v02r02 – Section 6.0

#### Test Settings

1. Start frequency was set to 30MHz and stop frequency was set to 10GHz (separated into at least two plots per channel)
2. RBW  $\geq$  1MHz
3. VBW  $\geq$  3 x RBW
4. Detector = RMS
5. Trace mode = max hold
6. Sweep time = auto couple
7. The trace was allowed to stabilize

#### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.


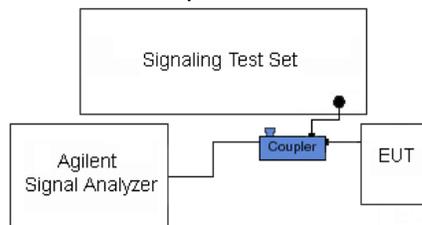


Figure 7-2. Test Instrument & Measurement Setup


#### Test Notes

Compliance with the applicable limits is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater for Part 22. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.

|  |  |   |                                 |
|--|--|---|---------------------------------|
| FCC ID: ZNFLS993                           |  Part 22(H) & 90 CDMA / EvDO / LTE MEASUREMENT REPORT Certification |  | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M1701180034-04-R1.ZNF | Test Dates:<br>12/27/2016-2/20/2017  | EUT Type:<br>Portable Handset   | Page 23 of 47                   |

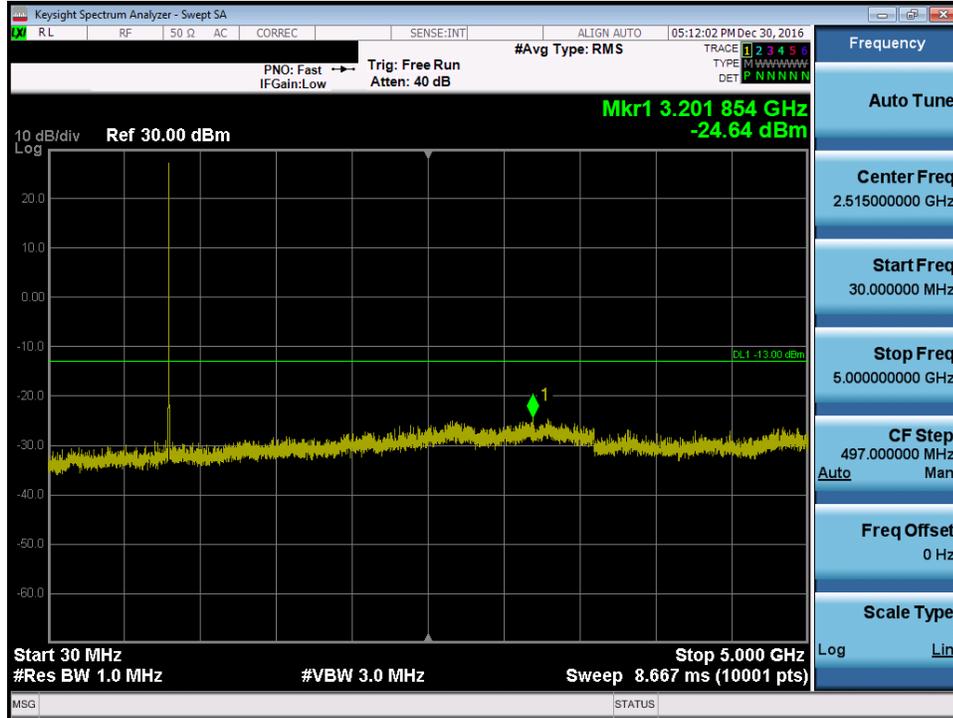


Plot 7-18. Conducted Spurious Plot LTE B26 CDMA (Ch. 476)

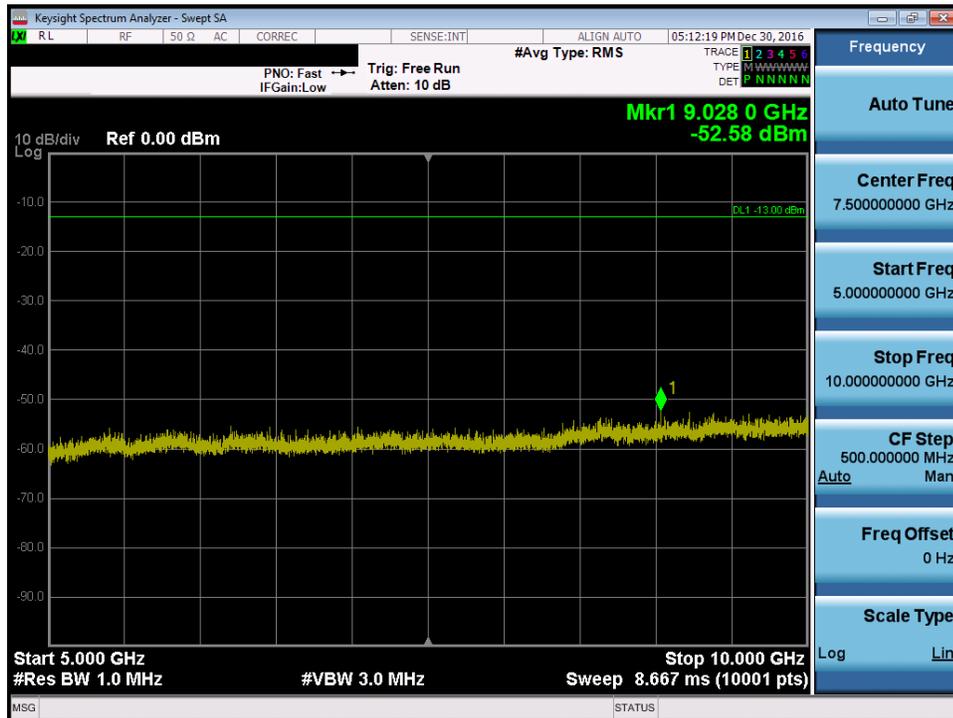


Plot 7-19. Conducted Spurious Plot LTE B26 CDMA (Ch. 476)

|  |                                     |  |  |                                 |
|--|-------------------------------------|--|--|---------------------------------|
| FCC ID: ZNFLS993                           | PCTEST ENGINEERING LABORATORY, INC. | Part 22(H) & 90 CDMA / EvDO / LTE MEASUREMENT REPORT Certification |  | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M1701180034-04-R1-ZNF | Test Dates:<br>12/27/2016-2/20/2017 | EUT Type:<br>Portable Handset                                      |  | Page 24 of 47                   |

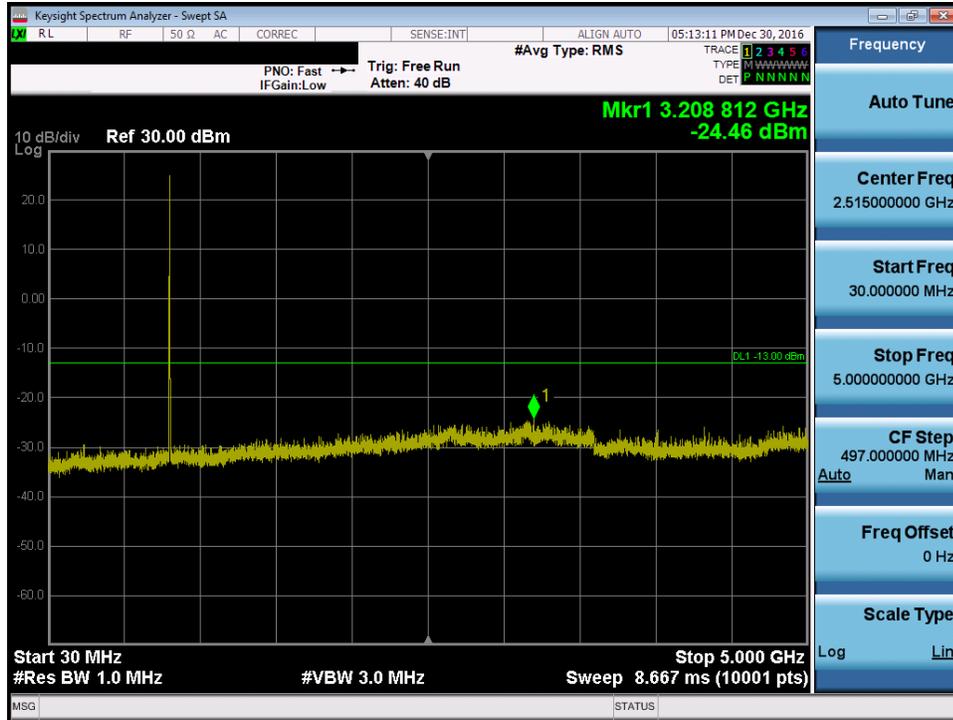


Plot 7-20. Conducted Spurious Plot LTE B26 CDMA (Ch. 684)

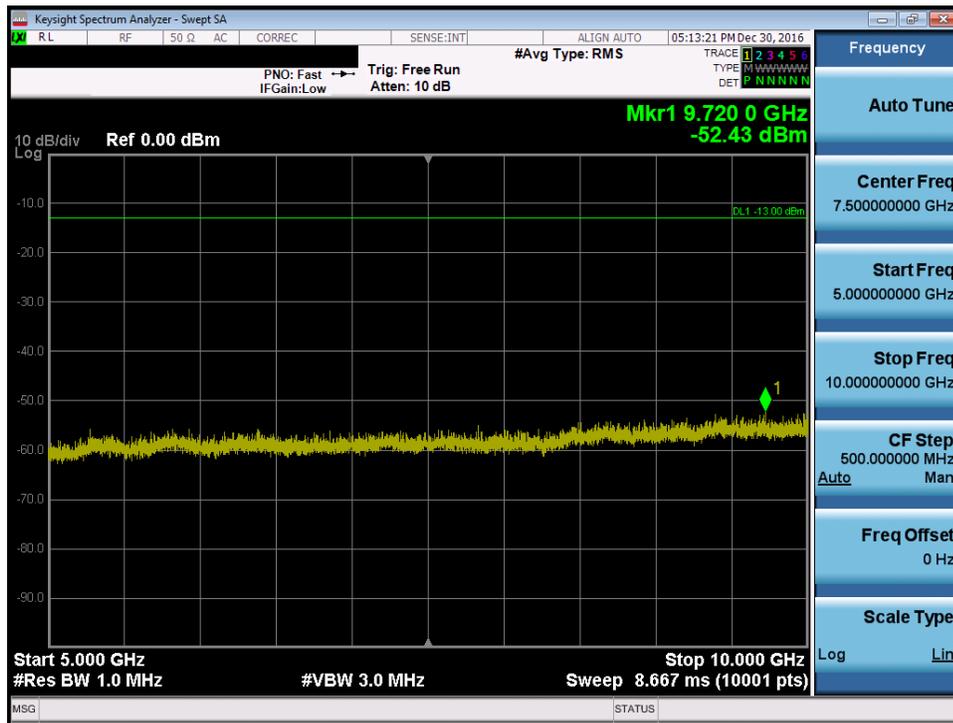


Plot 7-21. Conducted Spurious Plot LTE B26 CDMA (Ch. 684)

|  |                                     |  |  |                                 |
|--|-------------------------------------|--|--|---------------------------------|
| FCC ID: ZNFLS993                           | PCTEST ENGINEERING LABORATORY, INC. | Part 22(H) & 90 CDMA / EvDO / LTE MEASUREMENT REPORT Certification |  | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M1701180034-04-R1-ZNF | Test Dates:<br>12/27/2016-2/20/2017 | EUT Type:<br>Portable Handset                                      |  | Page 25 of 47                   |

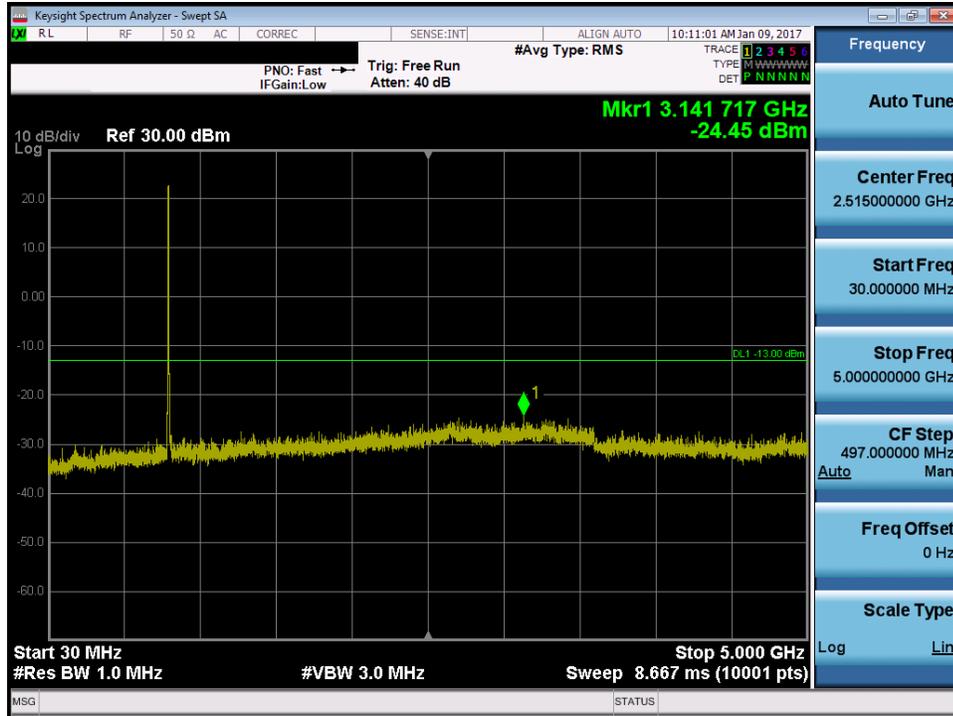


Plot 7-22. Conducted Spurious Plot LTE B26 LTE B26 (5MHz QPSK – RB Size 1, RB Offset 0 – Low Channel)

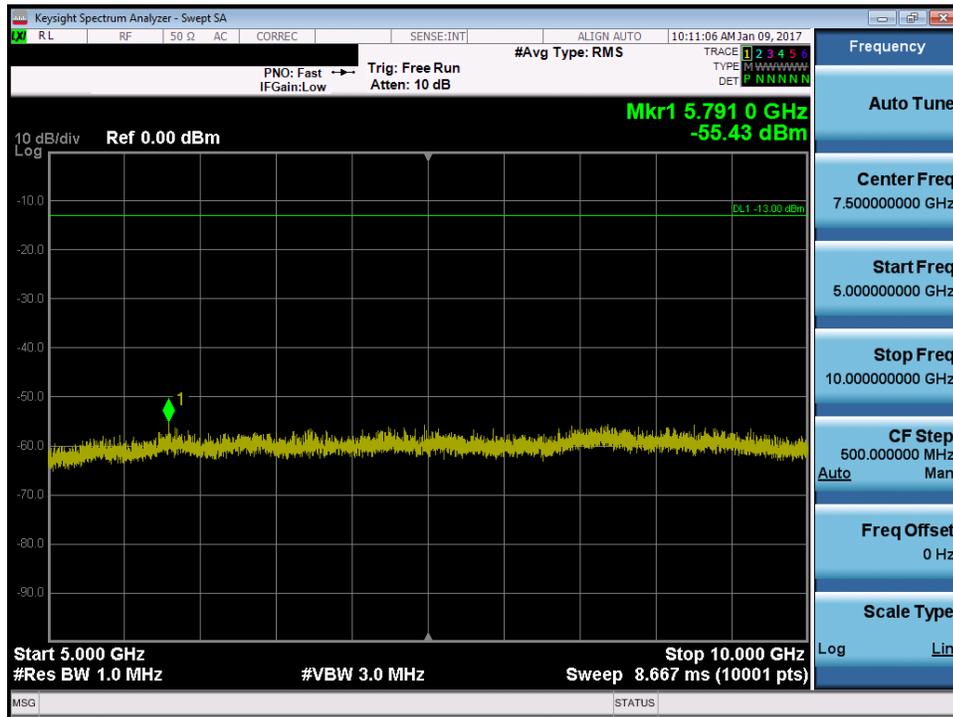


Plot 7-23. Conducted Spurious Plot LTE B26 (5MHz QPSK – RB Size 1, RB Offset 0 – Low Channel)

|  |  |   |  |                                 |
|--|--|---|--|---------------------------------|
| FCC ID: ZNFLS993                           | PCTEST<br>ENGINEERING LABORATORY, INC. | Part 22(H) & 90 CDMA / EvDO / LTE MEASUREMENT REPORT<br>Certification |  | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M1701180034-04-R1-ZNF | Test Dates:<br>12/27/2016-2/20/2017    | EUT Type:<br>Portable Handset   |  | Page 26 of 47                   |

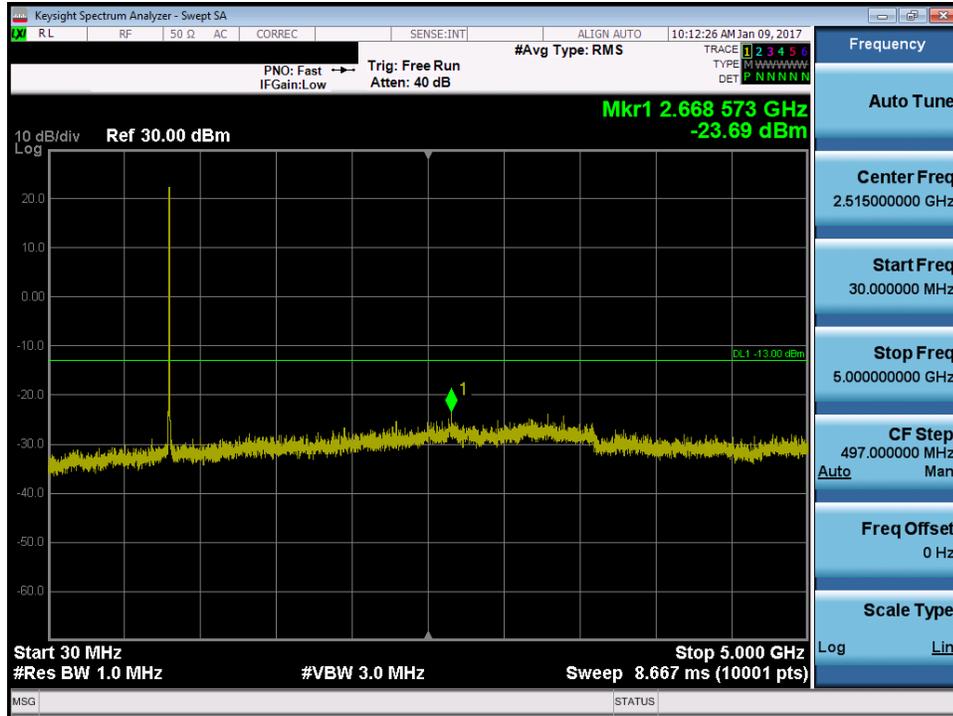

Plot 7-24. Conducted Spurious Plot LTE B26 (5MHz QPSK – RB Size 1, RB Offset 0 – High Channel)

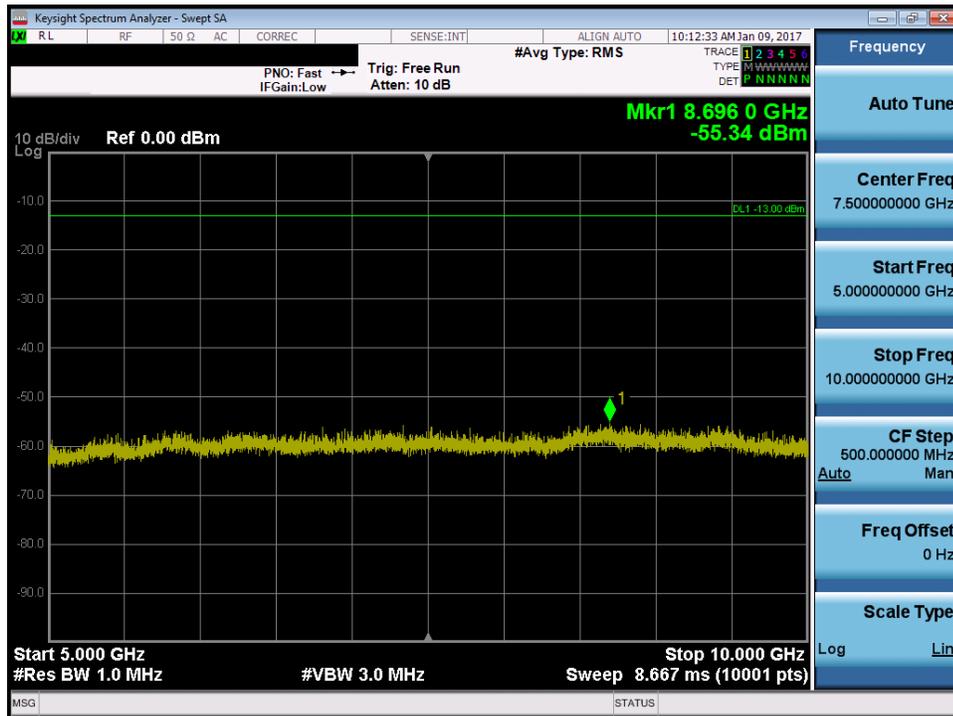

Plot 7-25. Conducted Spurious Plot LTE B26 (5MHz QPSK – RB Size 1, RB Offset 0 – High Channel)

|  |   |   |   |                                 |
|--|---|---|---|---------------------------------|
| FCC ID: ZNFLS993                           |  | Part 22(H) & 90 CDMA / EvDO / LTE MEASUREMENT REPORT<br>Certification |  | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M1701180034-04-R1-ZNF | Test Dates:<br>12/27/2016-2/20/2017   | EUT Type:<br>Portable Handset   |   | Page 27 of 47                   |

## 7.4 Band Edge Emissions at Antenna Terminal

**\$2.1051 \$90.691**

### Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

*The minimum permissible attenuation level of any spurious emission removed from the EA licensee's frequency block by greater than 37.5 kHz is  $43 + \log_{10}(P_{[Watts]})$ , where P is the transmitter power in Watts.*

*The minimum permissible attenuation level of any spurious emission removed from the EA licensee's frequency block by up to and including 37.5 kHz is  $50 + 10 \log_{10}(P_{[Watts]})$ , where P is the transmitter power in Watts.*

### Test Procedure Used


KDB 971168 D01 v02r02 – Section 6.0

### Test Settings

1. Span was set large enough so as to capture all out of band emissions near the band edge
2. RBW = 100 kHz
3. VBW = 300 kHz
4. Detector = RMS
5. Trace mode = trace average
6. Sweep time = auto couple
7. The trace was allowed to stabilize

### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

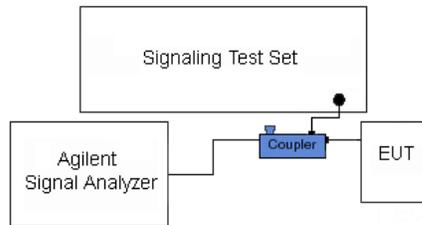


**Figure 7-3. Test Instrument & Measurement Setup**

### Test Notes


For channel edge emission, the signal analyzer's "ACP" measurement capability is used.

Per 22.917(b) in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed to demonstrate compliance with the out-of-band emissions limit. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.

|  |   |   |                                 |
|--|---|---|---------------------------------|
| FCC ID: ZNFLS993                           |  <b>Part 22(H) &amp; 90 CDMA / EvDO / LTE MEASUREMENT REPORT</b> |  | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M1701180034-04-R1.ZNF | Test Dates:<br>12/27/2016-2/20/2017   | EUT Type:<br>Portable Handset   | Page 28 of 47                   |

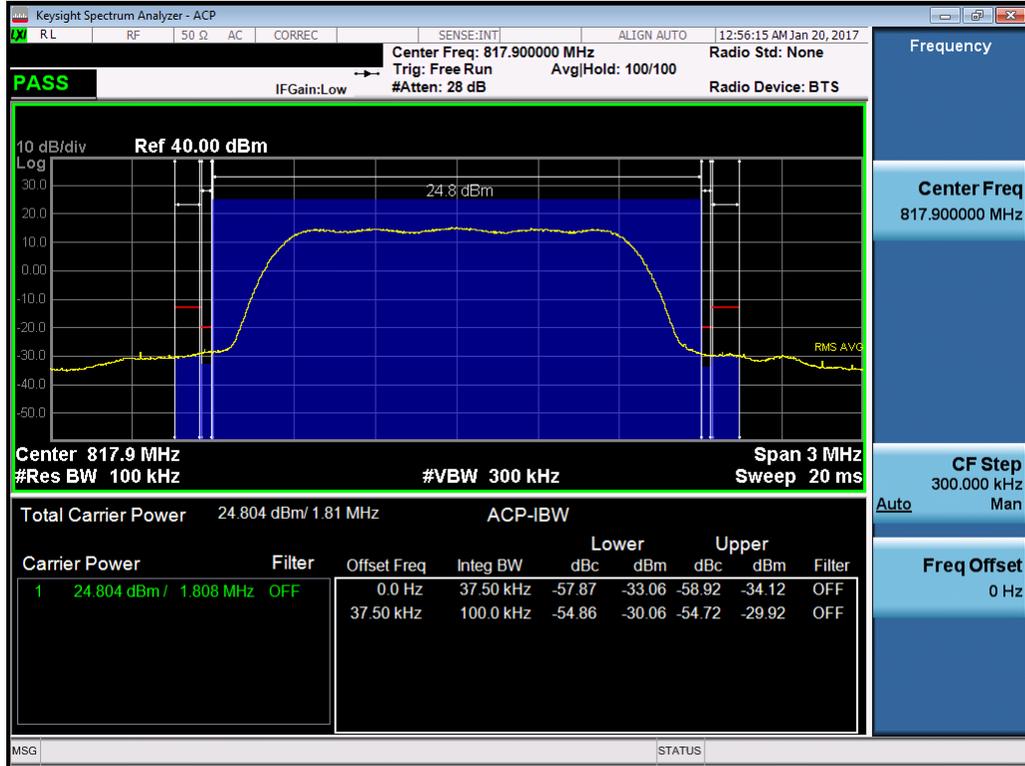


Plot 7-26. Channel Edge Plot CDMA (Ch. 476)

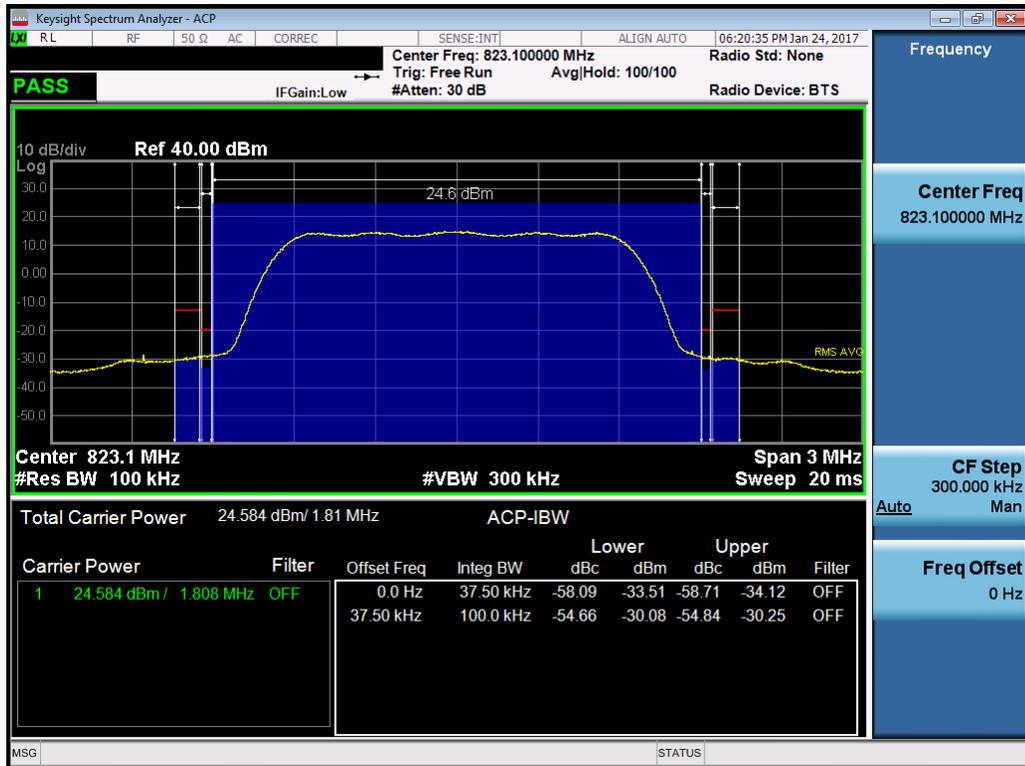


Plot 7-27. Channel Edge Plot CDMA (Ch. 684)

|  |                                     |  |  |                                 |
|--|-------------------------------------|--|--|---------------------------------|
| FCC ID: ZNFLS993                           | PCTEST ENGINEERING LABORATORY, INC. | Part 22(H) & 90 CDMA / EvDO / LTE MEASUREMENT REPORT Certification |  | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M1701180034-04-R1.ZNF | Test Dates:<br>12/27/2016-2/20/2017 | EUT Type:<br>Portable Handset                                      |  | Page 29 of 47                   |

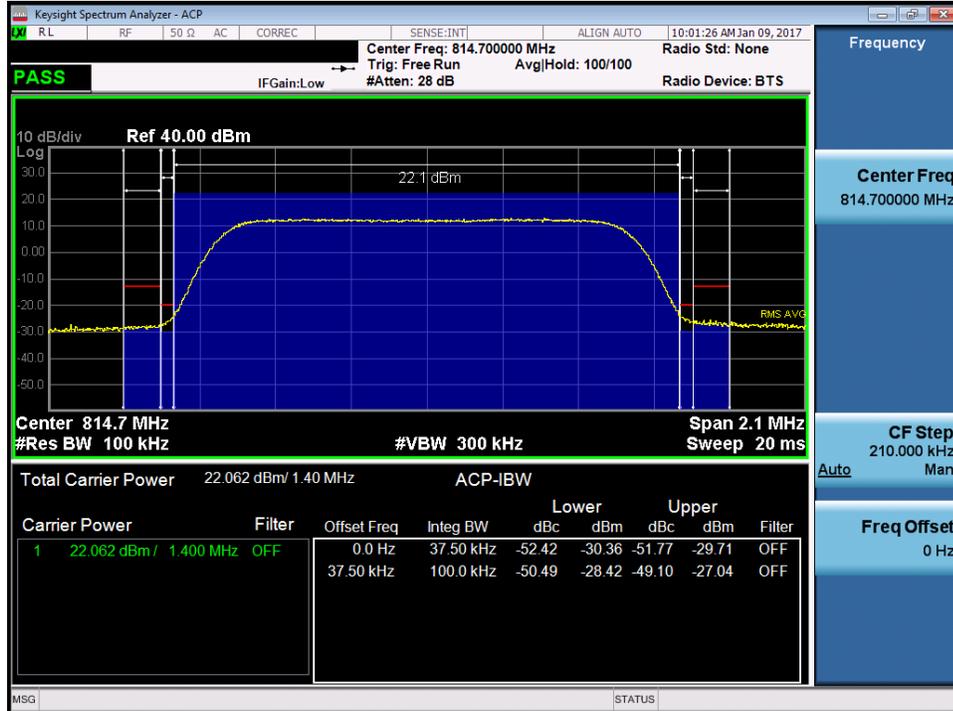


Plot 7-28. Channel Edge Plot LTE B26 (1.4MHz QPSK – RB Size 6– Low Channel)

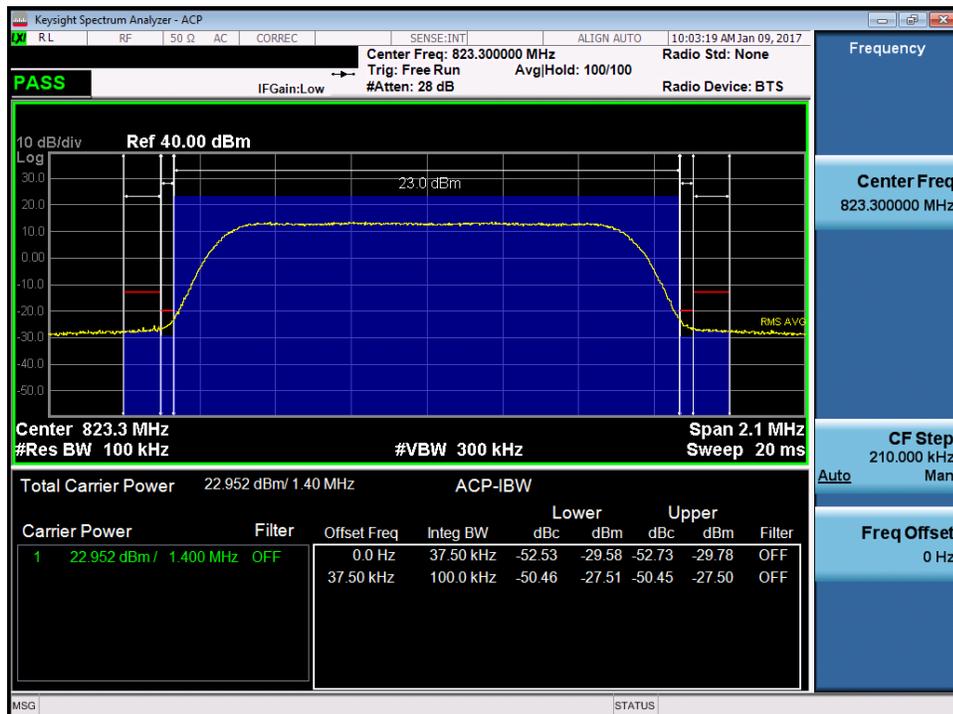


Plot 7-29. Channel Edge Plot LTE B26 (1.4MHz QPSK – RB Size 6 – High Channel)

|  |                                     |  |  |                                 |
|--|-------------------------------------|--|--|---------------------------------|
| FCC ID: ZNFLS993                           | PCTEST ENGINEERING LABORATORY, INC. | Part 22(H) & 90 CDMA / EvDO / LTE MEASUREMENT REPORT Certification |  | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M1701180034-04-R1.ZNF | Test Dates:<br>12/27/2016-2/20/2017 | EUT Type:<br>Portable Handset                                      |  | Page 30 of 47                   |

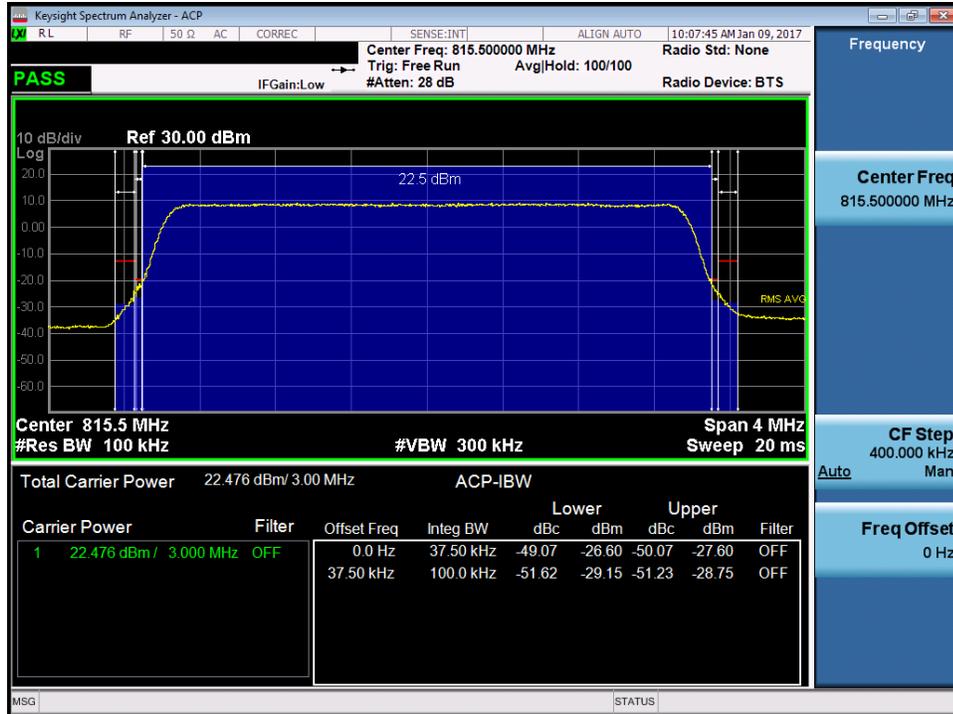


Plot 7-30. Channel Edge Plot LTE B26 (3MHz QPSK – RB Size 15– Low Channel)

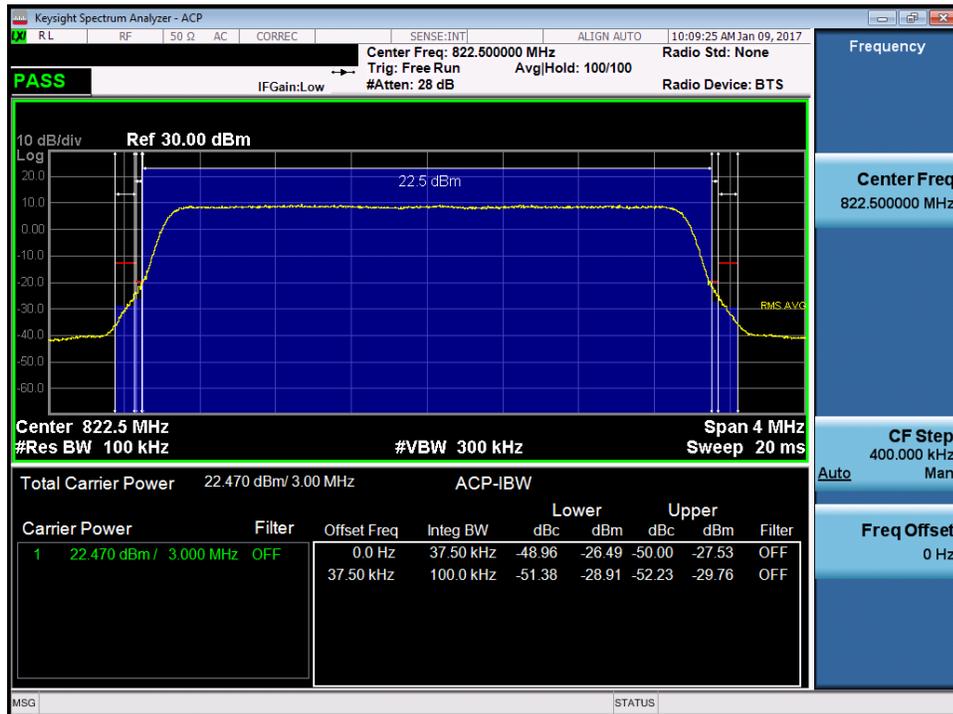


Plot 7-31. Channel Edge Plot LTE B26 (3MHz QPSK – RB Size 15 – High Channel)

|  |                                     |  |  |                                 |
|--|-------------------------------------|--|--|---------------------------------|
| FCC ID: ZNFLS993                           | PCTEST ENGINEERING LABORATORY, INC. | Part 22(H) & 90 CDMA / EvDO / LTE MEASUREMENT REPORT Certification |  | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M1701180034-04-R1.ZNF | Test Dates:<br>12/27/2016-2/20/2017 | EUT Type:<br>Portable Handset                                      |  | Page 31 of 47                   |

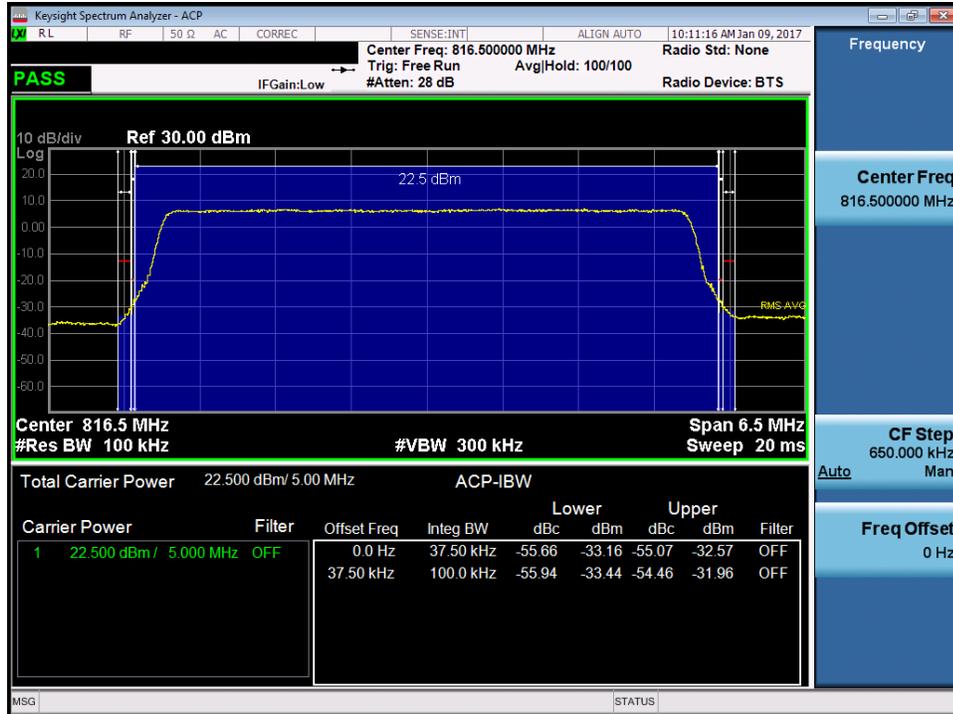


Plot 7-32. Channel Edge Plot LTE B26 (5MHz QPSK – RB Size 25– Low Channel)

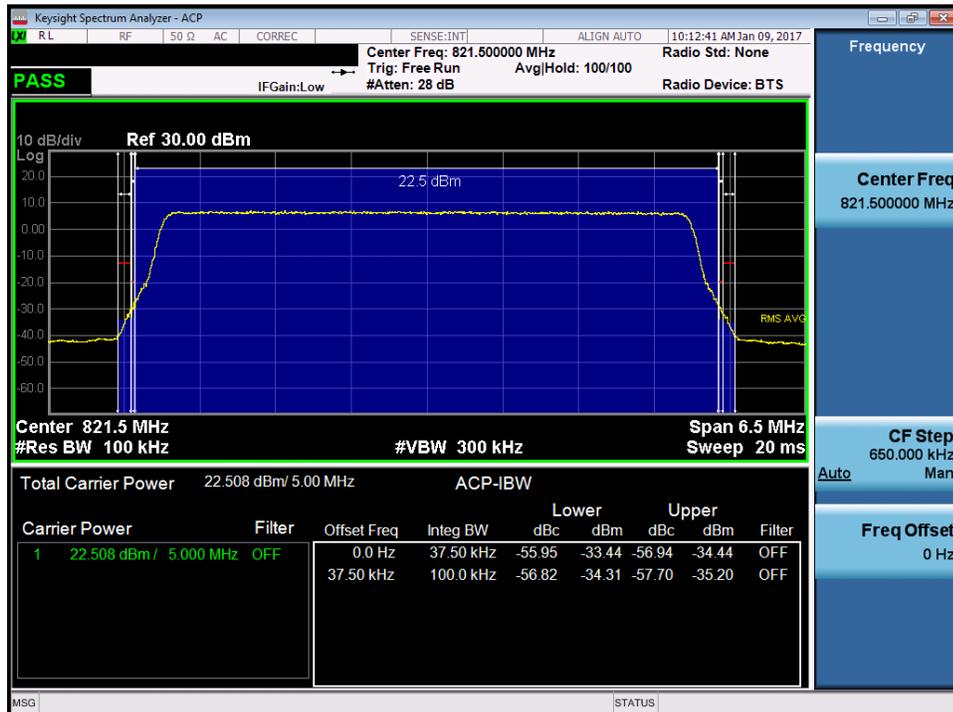


Plot 7-33. Channel Edge Plot LTE B26 (5MHz QPSK – RB Size 25 – High Channel)

|  |                                     |  |  |                                 |
|--|-------------------------------------|--|--|---------------------------------|
| FCC ID: ZNFLS993                           | PCTEST ENGINEERING LABORATORY, INC. | Part 22(H) & 90 CDMA / EvDO / LTE MEASUREMENT REPORT Certification |  | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M1701180034-04-R1.ZNF | Test Dates:<br>12/27/2016-2/20/2017 | EUT Type:<br>Portable Handset                                      |  | Page 32 of 47                   |

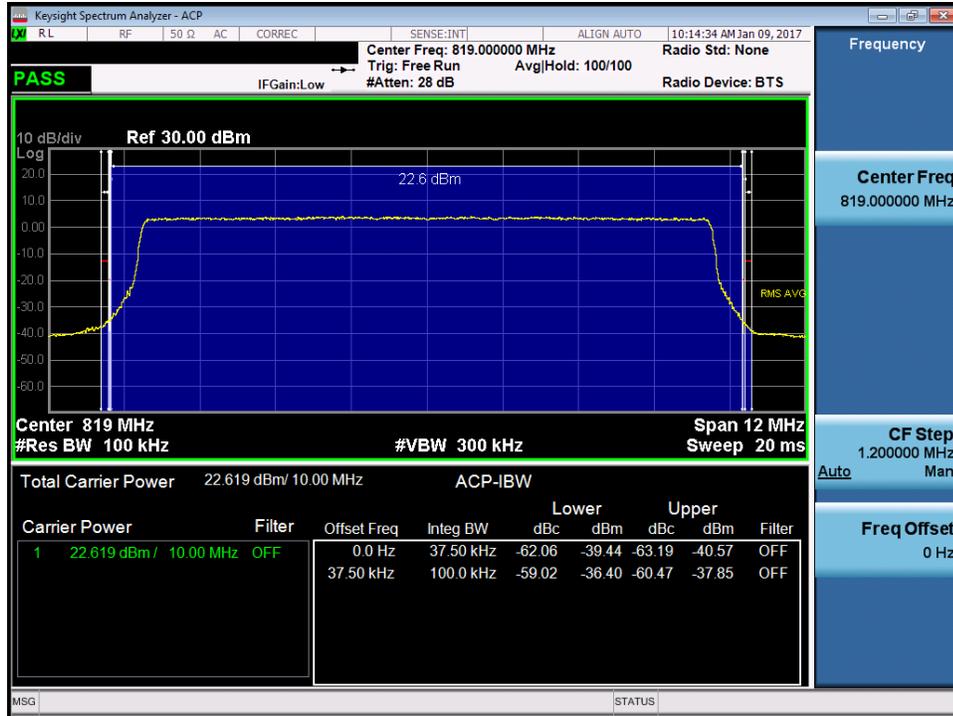

Plot 7-34. Channel Edge Plot LTE B26 (10MHz QPSK – RB Size 50)

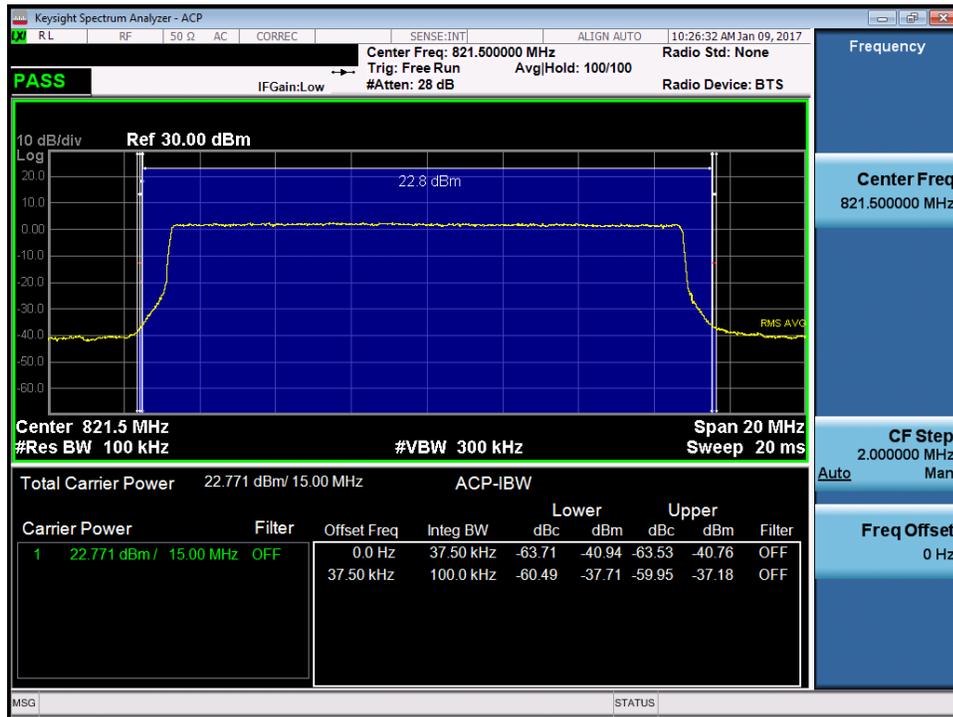

Plot 7-35. Channel Edge Plot LTE B26 (15MHz QPSK – RB Size 75)

|  |                                     |  |  |                                 |
|--|-------------------------------------|--|--|---------------------------------|
| FCC ID: ZNFLS993                           | PCTEST ENGINEERING LABORATORY, INC. | Part 22(H) & 90 CDMA / EvDO / LTE MEASUREMENT REPORT Certification |  | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M1701180034-04-R1.ZNF | Test Dates:<br>12/27/2016-2/20/2017 | EUT Type:<br>Portable Handset                                      |  | Page 33 of 47                   |

## 7.5 Conducted Power Output Data

§90.635

| Frequency [MHz] | BC10 [Channel] | Battery Type | Cond. PWR [dBm] | Cond. PWR [Watts] | Cond. PWR Limit [dBm] | Margin [dB] |
|-----------------|----------------|--------------|-----------------|-------------------|-----------------------|-------------|
| 817.90          | 476            | Standard     | 25.13           | 0.326             | 50.00                 | -24.87      |
| 823.10          | 684            | Standard     | 25.16           | 0.328             | 50.00                 | -24.84      |

**Table 7-2. CDMA BC10 Conducted Power Output Data**

| Frequency [MHz] | Channel Bandwidth [MHz] | Mod.   | Cond. PWR [dBm] | Cond. PWR [Watts] | Cond. PWR Limit [dBm] | Margin [dB] |
|-----------------|-------------------------|--------|-----------------|-------------------|-----------------------|-------------|
| 814.70          | 1.4                     | QPSK   | 25.07           | 0.321             | 50.00                 | -24.93      |
| 823.30          | 1.4                     | QPSK   | 25.16           | 0.328             | 50.00                 | -24.84      |
| 814.70          | 1.4                     | 16-QAM | 24.42           | 0.277             | 50.00                 | -25.58      |
| 823.30          | 1.4                     | 16-QAM | 24.16           | 0.261             | 50.00                 | -25.84      |
| 814.70          | 1.4                     | 64-QAM | 23.44           | 0.221             | 50.00                 | -26.56      |
| 823.30          | 1.4                     | 64-QAM | 23.36           | 0.217             | 50.00                 | -26.64      |
| 815.50          | 3                       | QPSK   | 25.14           | 0.327             | 50.00                 | -24.86      |
| 822.50          | 3                       | QPSK   | 24.99           | 0.316             | 50.00                 | -25.01      |
| 815.50          | 3                       | 16-QAM | 24.48           | 0.281             | 50.00                 | -25.52      |
| 822.50          | 3                       | 16-QAM | 24.06           | 0.255             | 50.00                 | -25.94      |
| 815.50          | 3                       | 64-QAM | 23.29           | 0.213             | 50.00                 | -26.71      |
| 822.50          | 3                       | 64-QAM | 23.29           | 0.213             | 50.00                 | -26.71      |
| 816.50          | 5                       | QPSK   | 25.18           | 0.330             | 50.00                 | -24.82      |
| 821.50          | 5                       | QPSK   | 24.89           | 0.308             | 50.00                 | -25.11      |
| 816.50          | 5                       | 16-QAM | 24.49           | 0.281             | 50.00                 | -25.51      |
| 821.50          | 5                       | 16-QAM | 24.10           | 0.257             | 50.00                 | -25.90      |
| 816.50          | 5                       | 64-QAM | 23.42           | 0.220             | 50.00                 | -26.58      |
| 821.50          | 5                       | 64-QAM | 23.34           | 0.216             | 50.00                 | -26.66      |
| 819.00          | 10                      | QPSK   | 25.27           | 0.337             | 50.00                 | -24.73      |
| 819.00          | 10                      | 16-QAM | 24.50           | 0.282             | 50.00                 | -25.50      |
| 819.00          | 10                      | 64-QAM | 24.50           | 0.282             | 50.00                 | -25.50      |
| 821.50          | 15                      | QPSK   | 25.3            | 0.339             | 50.00                 | -24.70      |
| 821.50          | 15                      | 16-QAM | 24.16           | 0.261             | 50.00                 | -25.84      |
| 821.50          | 15                      | 64-QAM | 23.29           | 0.213             | 50.00                 | -26.71      |

**Table 7-3. LTE Band 26 Conducted Power Output Data**

### NOTES:

1. For CDMA mode, this device was tested under all R.C.s and S.O.s and the worst case is reported with RC3/SO55 with "All Up" power control bits. For LTE mode, the device was tested under all modulations, RB sizes and offsets, and channel bandwidth configurations and the worst case emissions are reported with 1 RB.
2. This unit was tested with its standard battery.

|  |   |   |   |                                 |
|--|---|---|---|---------------------------------|
| FCC ID: ZNFLS993                           |  | Part 22(H) & 90 CDMA / EvDO / LTE MEASUREMENT REPORT<br>Certification |  | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M1701180034-04-R1-ZNF | Test Dates:<br>12/27/2016-2/20/2017   | EUT Type:<br>Portable Handset   | Page 34 of 47   |                                 |

## 7.6 Radiated Power (ERP)

§22.913(a.2)

### Test Overview

Effective Radiated Power (ERP) measurements are performed using the substitution method described in ANSI/TIA-603-D-2010 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using vertically and horizontally polarized tuned dipole antennas. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

### Test Procedures Used

KDB 971168 D01 v02r02 – Section 5.2.1

ANSI/TIA-603-D-2010 – Section 2.2.17


### Test Settings

1. Radiated power measurements are performed using the signal analyzer's "channel power" measurement capability for signals with continuous operation.
2. RBW = 1 – 5% of the expected OBW, not to exceed 1MHz
3. VBW  $\geq 3 \times$  RBW
4. Span = 1.5 times the OBW
5. No. of sweep points  $\geq 2 \times$  span / RBW
6. Detector = RMS
7. Trigger is set to "free run" for signals with continuous operation with the sweep times set to "auto".
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation.
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize

|  |   |   |                                 |
|--|---|---|---------------------------------|
| FCC ID: ZNFLS993                           |  <b>Part 22(H) &amp; 90 CDMA / EvDO / LTE MEASUREMENT REPORT</b> |  | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M1701180034-04-R1.ZNF | Test Dates:<br>12/27/2016-2/20/2017   | EUT Type:<br>Portable Handset   | Page 35 of 47                   |

## Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

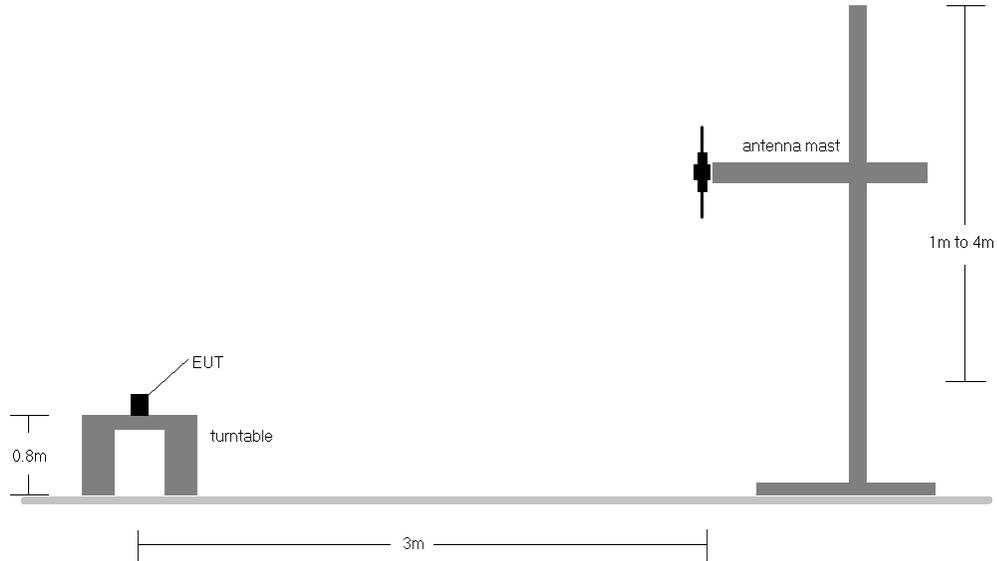

**Figure 7-4. Radiated Test Setup <1GHz**

## Test Notes

- 1) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the tables below.
- 2) This unit was tested with its standard battery.

| Frequency [MHz] | Channel Bandwidth [MHz] | Mod.   | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | RB Size/Offset | Substitute Level [dBm] | Ant. Gain [dBd] | ERP [dBm] | ERP Limit [dBm] | Margin [dB] |
|-----------------|-------------------------|--------|-----------------|---------------------|----------------------------|----------------|------------------------|-----------------|-----------|-----------------|-------------|
| 821.50          | 15                      | QPSK   | V               | 129                 | 68                         | 1 / 74         | 13.61                  | 5.34            | 18.95     | 38.45           | -19.50      |
| 821.50          | 15                      | 16-QAM | V               | 129                 | 68                         | 1 / 74         | 12.87                  | 5.34            | 18.21     | 38.45           | -20.24      |
| 821.50          | 15                      | 64-QAM | V               | 129                 | 68                         | 1 / 74         | 11.65                  | 5.34            | 16.99     | 38.45           | -21.46      |

**Table 7-36. ERP Data (Band 26)**

|  |  |   |                                 |
|--|--|---|---------------------------------|
| FCC ID: ZNFLS993                           |  Part 22(H) & 90 CDMA / EvDO / LTE MEASUREMENT REPORT Certification |  | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M1701180034-04-R1.ZNF | Test Dates:<br>12/27/2016-2/20/2017  | EUT Type:<br>Portable Handset   | Page 36 of 47                   |

## 7.7 Radiated Spurious Emissions Measurements

**\$2.1053 \$90.691**

### Test Overview

Radiated spurious emissions measurements are performed using the substitution method described in ANSI/TIA-603-D-2010 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using horizontally and vertically polarized tuned dipole antennas. Measurements on signals operating above 1GHz are performed using vertically and horizontally polarized broadband horn antennas. All measurements are performed as peak measurements while the EUT is operating at maximum power, and at the appropriate frequencies.

### Test Procedures Used

KDB 971168 D01 v02r02 – Section 5.8

ANSI/TIA-603-D-2010 – Section 2.2.12


### Test Settings

1. RBW = 100kHz for emissions below 1GHz and 1MHz for emissions above 1GHz
2. VBW  $\geq 3 \times$  RBW
3. Span = 1.5 times the OBW
4. No. of sweep points  $\geq 2 \times$  span / RBW
5. Detector = RMS
6. Trace mode = Average (Max Hold for pulsed emissions)
7. The trace was allowed to stabilize

|  |   |   |                                 |
|--|---|---|---------------------------------|
| FCC ID: ZNFLS993                           |  <b>Part 22(H) &amp; 90 CDMA / EvDO / LTE MEASUREMENT REPORT</b> |  | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M1701180034-04-R1.ZNF | Test Dates:<br>12/27/2016-2/20/2017   | EUT Type:<br>Portable Handset   | Page 37 of 47                   |

**Test Setup**

The EUT and measurement equipment were set up as shown in the diagram below.

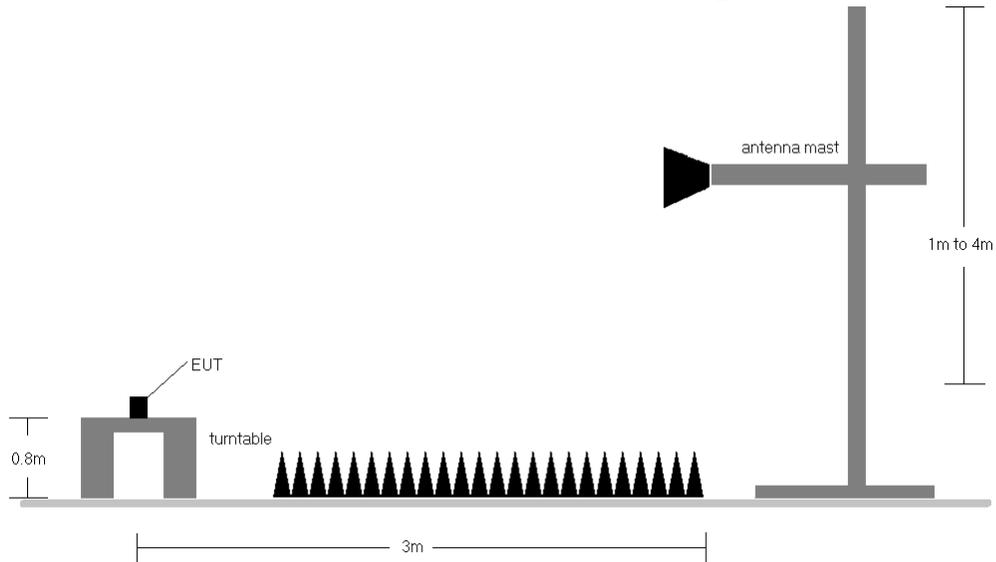

**Figure 7-5. Test Instrument & Measurement Setup**

**Test Notes**

1. For CDMA mode, this device was tested under all R.C.s and S.O.s and the worst case is reported with RC3/SO55 with "All Up" power control bits.
2. For LTE mode, the device was tested under all modulations, RB sizes and offsets, and channel bandwidth configurations and the worst case emissions are reported with 1 RB.
3. This unit was tested with its standard battery.
4. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case setup is reported in the tables below.
5. The "-" shown in the following RSE tables are used to denote a noise floor measurement.

|  |   |   |                                 |
|--|---|---|---------------------------------|
| FCC ID: ZNFLS993                           |  <b>Part 22(H) &amp; 90 CDMA / EvDO / LTE MEASUREMENT REPORT</b> |  | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M1701180034-04-R1.ZNF | Test Dates:<br>12/27/2016-2/20/2017   | EUT Type:<br>Portable Handset   | Page 38 of 47                   |

OPERATING FREQUENCY: 817.90 MHz  
 CHANNEL: 476  
 MODULATION SIGNAL: CDMA  
 DISTANCE: 3 meters  
 LIMIT: -13.00 dBm

| Frequency [MHz] | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Level at Antenna Terminals [dBm] | Substitute Antenna Gain [dBd] | Spurious Emission Level [dBm] | Margin [dB] |
|-----------------|-----------------|---------------------|----------------------------|----------------------------------|-------------------------------|-------------------------------|-------------|
| 1635.80         | H               | 110                 | 131                        | -56.05                           | 6.69                          | -49.35                        | -36.4       |
| 2453.70         | H               | 110                 | 328                        | -58.09                           | 7.42                          | -50.67                        | -37.7       |
| 3271.60         | H               | 110                 | 6                          | -63.65                           | 7.34                          | -56.31                        | -43.3       |
| 4089.50         | H               | -                   | -                          | -60.77                           | 7.97                          | -52.80                        | -39.8       |

**Table 7-4. CDMA BC10 Radiated Spurious Data with WCP (Ch. 476)**

OPERATING FREQUENCY: 823.10 MHz  
 CHANNEL: 684  
 MODULATION SIGNAL: CDMA  
 DISTANCE: 3 meters  
 LIMIT: -13.00 dBm

| Frequency [MHz] | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Level at Antenna Terminals [dBm] | Substitute Antenna Gain [dBd] | Spurious Emission Level [dBm] | Margin [dB] |
|-----------------|-----------------|---------------------|----------------------------|----------------------------------|-------------------------------|-------------------------------|-------------|
| 1646.20         | H               | 110                 | 132                        | -56.96                           | 6.69                          | -50.27                        | -37.3       |
| 2469.30         | H               | 110                 | 326                        | -57.97                           | 7.49                          | -50.48                        | -37.5       |
| 3292.40         | H               | 110                 | 6                          | -63.18                           | 7.36                          | -55.82                        | -42.8       |
| 4115.50         | H               | -                   | -                          | -61.89                           | 8.06                          | -53.83                        | -40.8       |

**Table 7-5. CDMA BC10 Radiated Spurious Data (Ch. 684)**

|  |  |   |                                 |
|--|--|---|---------------------------------|
| FCC ID: ZNFLS993                           |  Part 22(H) & 90 CDMA / EvDO / LTE MEASUREMENT REPORT Certification |  | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M1701180034-04-R1.ZNF | Test Dates:<br>12/27/2016-2/20/2017  | EUT Type:<br>Portable Handset   | Page 39 of 47                   |

OPERATING FREQUENCY: 823.10 MHz  
 CHANNEL: 684  
 MODULATION SIGNAL: CDMA  
 DISTANCE: 3 meters  
 LIMIT: -13.00 dBm

| Frequency [MHz] | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Level at Antenna Terminals [dBm] | Substitute Antenna Gain [dBd] | Spurious Emission Level [dBm] | Margin [dB] |
|-----------------|-----------------|---------------------|----------------------------|----------------------------------|-------------------------------|-------------------------------|-------------|
| 1646.20         | H               | 110                 | 267                        | -55.75                           | 6.69                          | -49.06                        | -36.1       |
| 2469.30         | H               | 110                 | 149                        | -56.17                           | 7.49                          | -48.68                        | -35.7       |
| 3292.40         | H               | 110                 | 328                        | -63.68                           | 7.36                          | -56.32                        | -43.3       |
| 4115.50         | H               | -                   | -                          | -62.25                           | 8.06                          | -54.19                        | -41.2       |

**Table 7-6. CDMA BC10 Radiated Spurious Data with WCP (Ch. 684)**

OPERATING FREQUENCY: 819.00 MHz  
 CHANNEL: 26740  
 MODULATION SIGNAL: QPSK  
 BANDWIDTH: 10.0 MHz  
 DISTANCE: 3 meters  
 LIMIT: -13.00 dBm

| Frequency [MHz] | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Level at Antenna Terminals [dBm] | Substitute Antenna Gain [dBd] | Spurious Emission Level [dBm] | Margin [dB] |
|-----------------|-----------------|---------------------|----------------------------|----------------------------------|-------------------------------|-------------------------------|-------------|
| 1638.00         | V               | 100                 | 302                        | -49.25                           | 6.72                          | -42.53                        | -29.5       |
| 2457.00         | V               | 125                 | 3                          | -45.40                           | 7.41                          | -37.99                        | -25.0       |
| 3276.00         | V               | -                   | -                          | -64.49                           | 7.42                          | -57.07                        | -44.1       |

**Table 7-7. Radiated Spurious Data (Ch. 26740)**

|  |  |   |                                 |
|--|--|---|---------------------------------|
| FCC ID: ZNFLS993                           |  Part 22(H) & 90 CDMA / EvDO / LTE MEASUREMENT REPORT Certification |  | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M1701180034-04-R1.ZNF | Test Dates:<br>12/27/2016-2/20/2017  | EUT Type:<br>Portable Handset   | Page 40 of 47                   |

OPERATING FREQUENCY: 819.00 MHz  
 CHANNEL: 26740  
 MODULATION SIGNAL: QPSK  
 BANDWIDTH: 10.0 MHz  
 DISTANCE: 3 meters  
 LIMIT: -13.00 dBm

| Frequency [MHz] | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Level at Antenna Terminals [dBm] | Substitute Antenna Gain [dBd] | Spurious Emission Level [dBm] | Margin [dB] |
|-----------------|-----------------|---------------------|----------------------------|----------------------------------|-------------------------------|-------------------------------|-------------|
| 1646.60         | H               | 112                 | 200                        | -47.47                           | 6.72                          | -40.75                        | -27.7       |
| 2469.90         | H               | 122                 | 160                        | -42.51                           | 7.41                          | -35.10                        | -22.1       |
| 3293.20         | H               | -                   | -                          | -64.83                           | 7.42                          | -57.41                        | -44.4       |

**Table 7-8. Radiated Spurious Data with WCP (Ch. 26740)**

|  |   |   |                                 |
|--|---|---|---------------------------------|
| FCC ID: ZNFLS993                           |  <b>Part 22(H) &amp; 90 CDMA / EvDO / LTE MEASUREMENT REPORT</b> |  | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M1701180034-04-R1.ZNF | Test Dates:<br>12/27/2016-2/20/2017   | EUT Type:<br>Portable Handset   | Page 41 of 47                   |

## 7.8 Frequency Stability / Temperature Variation

§2.1055 §90.213

### Test Overview and Limit

Frequency stability testing is performed in accordance with the guidelines of ANSI/TIA-603-D-2010. The frequency stability of the transmitter is measured by:

- a.) **Temperature:** The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
- b.) **Primary Supply Voltage:** The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

***The frequency stability of the transmitter shall be maintained within  $\pm 0.00025\%$  ( $\pm 2.5$  ppm) of the center frequency.***

### Test Procedure Used

ANSI/TIA-603-D-2010

### Test Settings

1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
2. The equipment is turned on in a “standby” condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

### Test Setup

The EUT was connected via an RF cable to a spectrum analyzer with the EUT placed inside an environmental chamber.

### Test Notes

None

|  |   |   |                                 |
|--|---|---|---------------------------------|
| FCC ID: ZNFLS993                           |  <b>Part 22(H) &amp; 90 CDMA / EvDO / LTE MEASUREMENT REPORT</b> |  | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M1701180034-04-R1.ZNF | Test Dates:<br>12/27/2016-2/20/2017   | EUT Type:<br>Portable Handset   | Page 42 of 47                   |

## Frequency Stability / Temperature Variation

\$2.1055, \$90.213

OPERATING FREQUENCY: 817,900,000 Hz  
 CHANNEL: 476  
 REFERENCE VOLTAGE: 3.80 VDC  
 DEVIATION LIMIT: ± 0.00025 % or 2.5 ppm


| VOLTAGE (%)    | POWER (VDC) | TEMP (°C)  | FREQUENCY (Hz) | Freq. Dev. (Hz) | Deviation (%) |
|----------------|-------------|------------|----------------|-----------------|---------------|
| 100 %          | 3.80        | + 20 (Ref) | 817,899,984    | -16             | -0.0000020    |
| 100 %          |             | - 30       | 817,899,990    | -10             | -0.0000012    |
| 100 %          |             | - 20       | 817,900,094    | 94              | 0.0000115     |
| 100 %          |             | - 10       | 817,899,921    | -79             | -0.0000097    |
| 100 %          |             | 0          | 817,900,076    | 76              | 0.0000093     |
| 100 %          |             | + 10       | 817,899,947    | -53             | -0.0000065    |
| 100 %          |             | + 20       | 817,899,976    | -24             | -0.0000029    |
| 100 %          |             | + 30       | 817,899,956    | -44             | -0.0000054    |
| 100 %          |             | + 40       | 817,899,851    | -149            | -0.0000182    |
| 100 %          |             | + 50       | 817,900,098    | 98              | 0.0000120     |
| BATT. ENDPOINT |             | 3.40       | + 20           | 817,900,058     | 58            |

**Table 7-9. CDMA BC10 Frequency Stability Data (Ch. 476)**

|  |  |   |                                 |
|--|--|---|---------------------------------|
| FCC ID: ZNFLS993                           |  Part 22(H) & 90 CDMA / EvDO / LTE MEASUREMENT REPORT Certification |  | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M1701180034-04-R1.ZNF | Test Dates:<br>12/27/2016-2/20/2017  | EUT Type:<br>Portable Handset   | Page 43 of 47                   |

**Frequency Stability / Temperature Variation**

**§2.1055, §90.213**

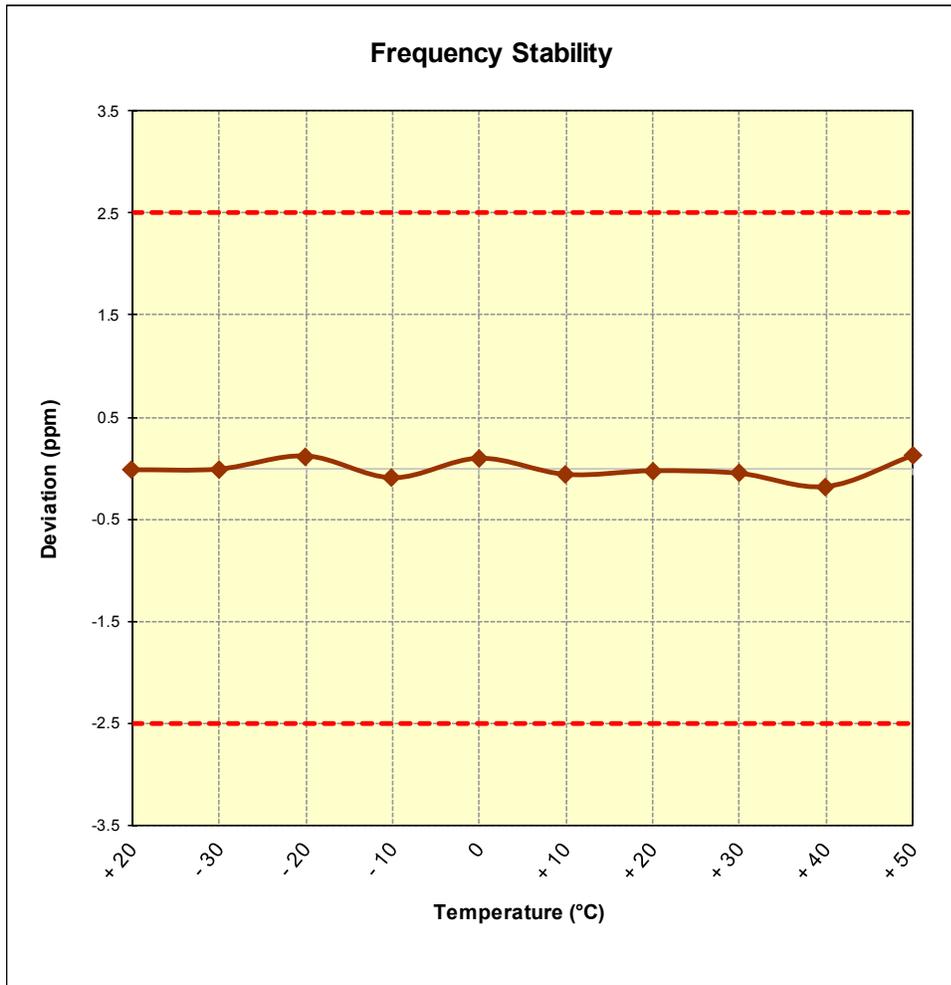

**Figure 7-6. CDMA BC10 Frequency Stability Graph (Ch. 476)**

|  |   |                               |                                 |
|--|---|-------------------------------|---------------------------------|
| FCC ID: ZNFLS993                           | <b>Part 22(H) &amp; 90 CDMA / EvDO / LTE MEASUREMENT REPORT</b> |                               | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M1701180034-04-R1.ZNF | Test Dates:<br>12/27/2016-2/20/2017                             | EUT Type:<br>Portable Handset | Page 44 of 47                   |

## Frequency Stability / Temperature Variation

\$2.1055, \$90.213

OPERATING FREQUENCY: 819,000,000 Hz  
 CHANNEL: 26740  
 REFERENCE VOLTAGE: 3.80 VDC  
 DEVIATION LIMIT: ± 0.00025 % or 2.5 ppm


| VOLTAGE (%)    | POWER (VDC) | TEMP (°C)  | FREQUENCY (Hz) | Freq. Dev. (Hz) | Deviation (%) |
|----------------|-------------|------------|----------------|-----------------|---------------|
| 100 %          | 3.80        | + 20 (Ref) | 817,900,000    | 119             | 0.0000145     |
| 100 %          |             | - 30       | 817,900,000    | -74             | -0.0000090    |
| 100 %          |             | - 20       | 817,900,000    | -110            | -0.0000134    |
| 100 %          |             | - 10       | 817,900,000    | 93              | 0.0000114     |
| 100 %          |             | 0          | 817,900,000    | 131             | 0.0000160     |
| 100 %          |             | + 10       | 817,900,000    | 75              | 0.0000092     |
| 100 %          |             | + 20       | 817,900,000    | 104             | 0.0000127     |
| 100 %          |             | + 30       | 817,900,000    | -16             | -0.0000020    |
| 100 %          |             | + 40       | 817,900,000    | -149            | -0.0000182    |
| 100 %          |             | + 50       | 817,900,000    | 113             | 0.0000138     |
| BATT. ENDPOINT |             | 3.40       | + 20           | 817,900,000     | -65           |

**Table 7-10. LTE Band 26 Frequency Stability Data (Ch. 26740)**

|  |  |   |                                 |
|--|--|---|---------------------------------|
| FCC ID: ZNFLS993                           |  Part 22(H) & 90 CDMA / EvDO / LTE MEASUREMENT REPORT Certification |  | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M1701180034-04-R1.ZNF | Test Dates:<br>12/27/2016-2/20/2017  | EUT Type:<br>Portable Handset   | Page 45 of 47                   |

**Frequency Stability / Temperature Variation**

**§2.1055, §90.213**

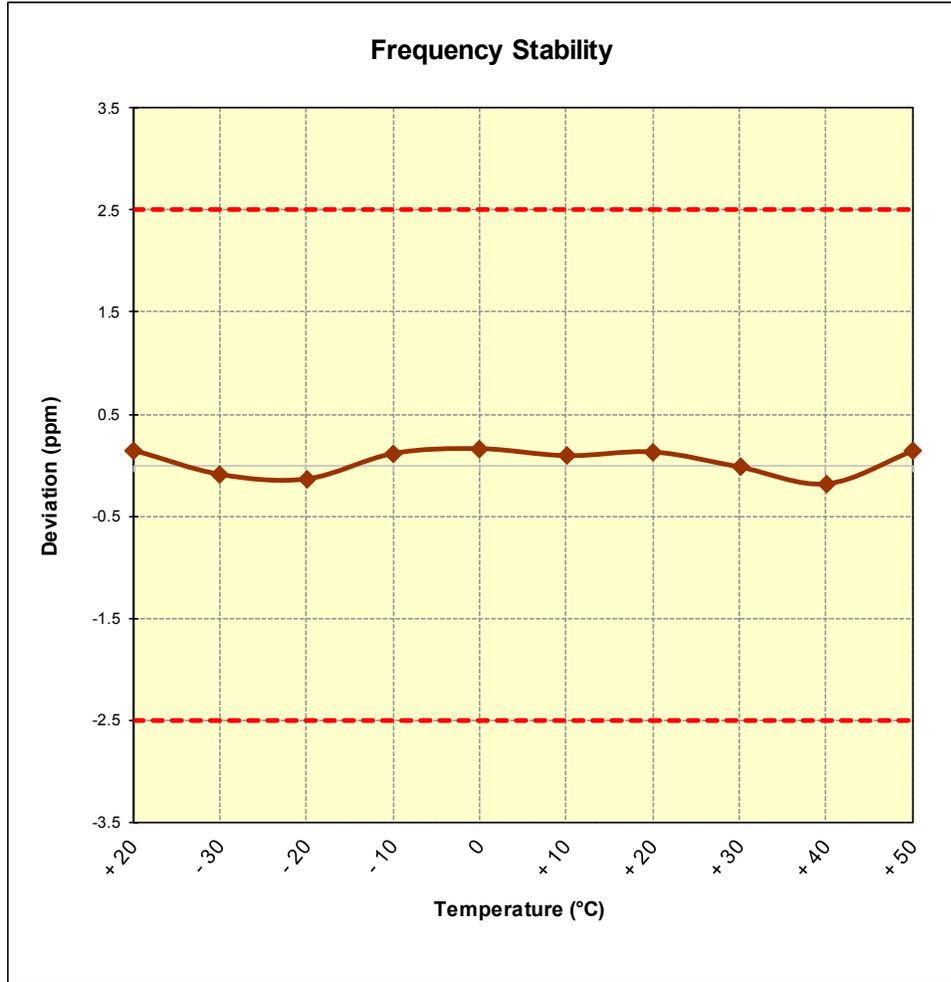

**Table 7-11. LTE Band 26 Frequency Stability Data (Ch. 26740)**

|  |   |                               |                                 |
|--|---|-------------------------------|---------------------------------|
| FCC ID: ZNFLS993                           | <b>Part 22(H) &amp; 90 CDMA / EvDO / LTE MEASUREMENT REPORT</b> |                               | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M1701180034-04-R1.ZNF | Test Dates:<br>12/27/2016-2/20/2017                             | EUT Type:<br>Portable Handset | Page 46 of 47                   |

## 8.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the **LG Portable Handset FCC ID: ZNFLS993** complies with all the requirements of Parts 22(H) and 90 of the FCC rules.

|   |   |   |   |  |
|---|---|---|---|--|
| FCC ID: ZNFLS993                                  |  | <b>Part 22(H) &amp; 90 CDMA / EvDO / LTE MEASUREMENT REPORT</b><br><b>Certification</b> |  | <b>Approved by:</b><br>Quality Manager |
| <b>Test Report S/N:</b><br>1M1701180034-04-R1.ZNF | <b>Test Dates:</b><br>12/27/2016-2/20/2017  | <b>EUT Type:</b><br>Portable Handset  |   | Page 47 of 47                          |