



PCTEST ENGINEERING LABORATORY, INC.

7185 Oakland Mills Road, Columbia, MD 21045 USA

Tel. 410.290.6652 / Fax 410.290.6654

<http://www.pctestlab.com>



MEASUREMENT REPORT FCC Part 22 & 90

Applicant:

LG Electronics MobileComm U.S.A
1000 Sylvan Avenue
Englewood Cliffs, NJ 07632
United States

Date of Testing:

7/24-8/15/2017

Test Site/Location:

PCTEST Lab., Columbia, MD, USA

Test Report Serial No.:

1M1707180223-04-R1.ZNF

FCC ID:

ZNFLS998

APPLICANT:

LG ELECTRONICS MOBILECOMM U.S.A

Applicant Type:

Class II Permissive Change

Model:

LGLS998

Additional Model(s):

LG-LS998, LS998, LG-AS998, LGA998, AS998

EUT Type:

Portable Handset

FCC Classification:

PCS Licensed Transmitter Held to Ear (PCE)

FCC Rule Part:

§2.1049, §22(H), §90.691

Test Procedure(s):

ANSI/TIA-603-D-2010, KDB 971168 D01 v02r02, KDB 648474 D03 v01r04

Test Device Serial No.:

identical prototype [S/N: 01570, 01569]

Class II Permissive Change:

See FCC change document

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in §2.947. Test results reported herein relate only to the item(s) tested.

This revised Test Report (S/N: 1M1707180223-04-R1.ZNF) supersedes and replaces the previously issued test report (S/N: 1M1707180223-04.ZNF) on the same subject device for the same type of testing as indicated. Please discard or destroy the previously issued test report(s) and dispose of it accordingly.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.


Randy Ortanez
President



FCC ID: ZNFLS998		Part 22(H) & 90 CDMA / EvDO / LTE MEASUREMENT REPORT (Class II Permissive Change)		Approved by: Quality Manager
Test Report S/N: 1M1707180223-04-R1.ZNF	Test Dates: 7/24-8/15/2017	EUT Type: Portable Handset		Page 1 of 19

© 2017 PCTEST Engineering Laboratory, Inc.


V 6.8
07/14/2017

© 2017 PCTEST Engineering Laboratory, Inc. All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST Engineering Laboratory, Inc. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTESTLAB.COM.

TABLE OF CONTENTS


FCC PART 22(H) & 90 MEASUREMENT REPORT	3
1.0 INTRODUCTION	5
1.1 Scope.....	5
1.2 Testing Facility	5
2.0 PRODUCT INFORMATION.....	6
2.1 Equipment Description	6
2.2 Device Capabilities	6
2.3 Test Configuration.....	6
2.4 EMI Suppression Device(s)/Modifications.....	6
3.0 DESCRIPTION OF TESTS	7
3.1 Evaluation Procedure.....	7
3.2 Radiated Power and Radiated Spurious Emissions.....	7
4.0 MEASUREMENT UNCERTAINTY	8
5.0 TEST EQUIPMENT CALIBRATION DATA	9
6.0 SAMPLE CALCULATIONS	10
7.0 TEST RESULTS.....	11
7.1 Summary.....	11
7.2 Radiated Power (ERP).....	12
7.3 Radiated Spurious Emissions Measurements.....	14
8.0 CONCLUSION.....	19

FCC ID: ZNFLS998	 Part 22(H) & 90 CDMA / EvDO / LTE MEASUREMENT REPORT (Class II Permissive Change)		Approved by: Quality Manager
Test Report S/N: 1M1707180223-04-R1.ZNF	Test Dates: 7/24-8/15/2017	EUT Type: Portable Handset	Page 2 of 19



MEASUREMENT REPORT

FCC Part 22(H) & 90




§2.1033 General Information

APPLICANT: LG Electronics MobileComm U.S.A
APPLICANT ADDRESS: 1000 Sylvan Avenue
 Englewood Cliffs, NJ 07632, United States
TEST SITE: PCTEST ENGINEERING LABORATORY, INC.
TEST SITE ADDRESS: 7185 Oakland Mills Road, Columbia, MD 21045 USA
BASE MODEL: LGLS998
FCC CLASSIFICATION: PCS Licensed Transmitter Held to Ear (PCE)
MODE: CDMA / EvDO / LTE
FREQUENCY TOLERANCE: $\pm 0.00025\%$ (2.5 ppm)
Test Device Serial No.: 01570, 01569 ☐ Production ☒ Pre-Production ☐ Engineering
DATE(S) OF TEST: 7/24-8/15/2017
TEST REPORT S/N: 1M1707180223-04-R1.ZNF

Test Facility / Accreditations

Measurements were performed at PCTEST Engineering Lab. located in Columbia, MD 21046, U.S.A.




- PCTEST facility is an FCC registered (PCTEST Reg. No. 159966) test facility with the site description report on file and has met all the requirements specified in Section 2.948 of the FCC Rules.
- PCTEST Lab is accredited to ISO 17025 by U.S. National Institute of Standards and Technology (NIST) under the National Voluntary Laboratory Accreditation Program (NVLAP Lab code: 100431-0) in EMC, FCC and Telecommunications.
- PCTEST Lab is accredited to ISO 17025-2005 by the American Association for Laboratory Accreditation (A2LA) in Specific Absorption Rate (SAR) testing, Hearing Aid Compatibility (HAC) testing, CTIA Test Plans, and wireless testing for FCC.
- PCTEST Lab is a recognized U.S. Conformity Assessment Body (CAB) in EMC and R&TTE (n.b. 0982) under the U.S.-EU Mutual Recognition Agreement (MRA).
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC Guide 65 by the American National Standards Institute (ANSI) in all scopes of FCC Rules.
- PCTEST is a CTIA Authorized Test Laboratory (CATL) for AMPS, CDMA, and EvDO wireless devices and for Over-the-Air (OTA) Antenna Performance testing for AMPS, CDMA, GSM, GPRS, EGPRS, UMTS (W-CDMA), CDMA 1xEVDO, and CDMA 1xRTT.

FCC ID: ZNLS998	 Part 22(H) & 90 CDMA / EvDO / LTE MEASUREMENT REPORT (Class II Permissive Change)		Approved by: Quality Manager
Test Report S/N: 1M1707180223-04-R1.ZNF	Test Dates: 7/24-8/15/2017	EUT Type: Portable Handset	Page 3 of 19



MEASUREMENT REPORT

FCC Part 22(H) & 90



Mode	Tx Frequency (MHz)	Measurement	Max. Power (W)	Max. Power (dBm)	Modulation
LTE Band 26	821.5	ERP	0.055	17.44	QPSK
LTE Band 26	821.5	ERP	0.048	16.79	16-QAM
LTE Band 26	821.5	ERP	0.037	15.65	64-QAM

EUT Overview

FCC ID: ZNFLS998		Part 22(H) & 90 CDMA / EvDO / LTE MEASUREMENT REPORT (Class II Permissive Change)		Approved by: Quality Manager
Test Report S/N: 1M1707180223-04-R1.ZNF	Test Dates: 7/24-8/15/2017	EUT Type: Portable Handset	Page 4 of 19	

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EME) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Industry Canada Certification and Engineering Bureau.

1.2 Testing Facility

The map below shows the location of the PCTEST LABORATORY, its proximity to the FCC Laboratory, the Columbia vicinity, the Baltimore-Washington Intern't'l (BWI) airport, the city of Baltimore and the Washington, DC area. (See Figure 1-1).

These measurement tests were conducted at the PCTEST Engineering Laboratory, Inc. facility located at 7185 Oakland Mills Road, Columbia, MD 21046. The site coordinates are 39° 10'23" N latitude and 76° 49'50" W longitude. The facility is 0.4 miles North of the FCC laboratory, and the ambient signal and ambient signal strength are approximately equal to those of the FCC laboratory. The detailed description of the measurement facility was found to be in compliance with the requirements of § 2.948 according to ANSI C63.4-2014 on January 22, 2015.

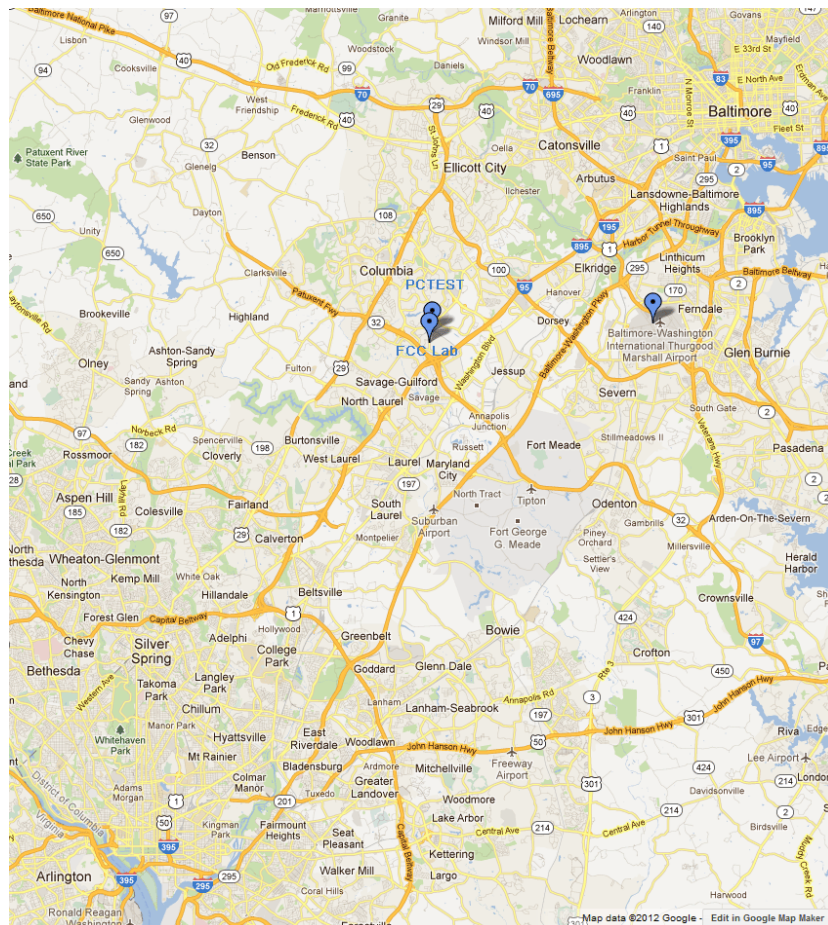


Figure 1-1. Map of the Greater Baltimore and Metropolitan Washington, D.C. area

FCC ID: ZNFS998	PCTEST ENGINEERING LABORATORY, INC.	Part 22(H) & 90 CDMA / EvDO / LTE MEASUREMENT REPORT (Class II Permissive Change)	LG	Approved by: Quality Manager
Test Report S/N: 1M1707180223-04-R1.ZNF	Test Dates: 7/24-8/15/2017	EUT Type: Portable Handset		Page 5 of 19

© 2017 PCTEST Engineering Laboratory, Inc.

V 6.8
07/14/2017

© 2017 PCTEST Engineering Laboratory, Inc. All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST Engineering Laboratory, Inc. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTESTLAB.COM.

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **LG Portable Handset FCC ID: ZNFLS998**. The test data contained in this report pertains only to the emissions due to the EUT's licensed transmitters that operate under the provisions of Part 22(H) and 90.691.

2.2 Device Capabilities

This device contains the following capabilities:

850/1900 CDMA/EvDO Rev0/A, 1x Advanced (BC0, BC1, BC10), 850/1900 GPRS/EDGE, 850/1700/1900 WCDMA/HSPA, Multi-band LTE, 802.11b/g/n WLAN, 802.11a/n/ac UNII, Bluetooth (1x, EDR, LE), NFC

2.3 Test Configuration

The EUT was tested per the guidance of ANSI/TIA-603-D-2010 and KDB 971168 D01 v02r02. See Section 7.0 of this test report for a description of the radiated tests.

This device supports wireless charging capability and, thus, is subject to the test requirements of KDB 648474 D03 v01r04. Additional radiated spurious emission measurements were performed with the EUT lying flat on a certified wireless charging pad (WCP) while operating under normal conditions in a simulated call or data transmission configuration. The worst case radiated emissions data is shown in this report.

2.4 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

FCC ID: ZNFLS998		Part 22(H) & 90 CDMA / EvDO / LTE MEASUREMENT REPORT (Class II Permissive Change)		Approved by: Quality Manager
Test Report S/N: 1M1707180223-04-R1.ZNF	Test Dates: 7/24-8/15/2017	EUT Type: Portable Handset		Page 6 of 19

3.0 DESCRIPTION OF TESTS

3.1 Evaluation Procedure

The measurement procedures described in the document titled “Land Mobile FM or PM – Communications Equipment – Measurements and Performance Standards” (ANSI/TIA-603-D-2010) and “Procedures for Compliance Measurement of the Fundamental Emission Power of Licensed Wideband (> 1 MHz) Digital Transmission Systems” (KDB 971168 D01 v02r02) were used in the measurement of the EUT.

3.2 Radiated Power and Radiated Spurious Emissions

\$2.1053, \$90.635, \$90.691

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. For measurements below 1GHz, the absorbers are removed. A raised turntable is used for radiated measurement. The turn table is a continuously rotatable, remote-controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. A 72.4cm high PVC support structure is placed on top of the turntable. A 3” (~7.6cm) sheet of high density polystyrene is used as the table top and is placed on top of the PVC supports to bring the total height of the table to 80cm.

The equipment under test was transmitting while connected to its integral antenna and is placed on a wooden turntable 80cm above the ground plane and 3 meters from the receive antenna. The receive antenna height is adjusted between 1 and 4 meter height, the turntable is rotated through 360 degrees, and the EUT is manipulated through all orthogonal planes representative of its typical use to achieve the highest reading on the receive spectrum analyzer. Radiated power levels are also investigated with the receive antenna horizontally and vertically polarized. The maximized power level is recorded using the spectrum analyzer “Channel Power” function with the integration band set to the emissions’ occupied bandwidth, a RMS detector, RBW = 100kHz, VBW = 300kHz, and a 1 second sweep time over a minimum of 10 sweeps, per the guidelines of KDB 971168 D01 v02r02.

Per the guidance of ANSI/TIA-603-D-2010, a half-wave dipole is then substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator with the level of the signal generator being adjusted to obtain the same receive spectrum analyzer level previously recorded from the spurious emission from the EUT. The power of the emission is calculated using the following formula:

$$P_d \text{ [dBm]} = P_g \text{ [dBm]} - \text{cable loss [dB]} + \text{antenna gain [dBd/dBi]}$$

Where, P_d is the dipole equivalent power, P_g is the generator output into the substitution antenna, and the antenna gain is the gain of the substitute antenna used relative to either a half-wave dipole (dBd) or an isotropic source (dBi). The substitute level is equal to $P_g \text{ [dBm]} - \text{cable loss [dB]}$.

The calculated P_d levels are then compared to the absolute spurious emission limit of -13dBm which is equivalent to the required minimum attenuation of $43 + 10\log_{10}(\text{Power [Watts]})$ specified in 90.691.

For fundamental radiated power measurements, the guidance of KDB 971168 D01 v02r02 is used to record the EUT power level that is subsequently matched via the aforementioned substitution method given in ANSI/TIA-603-D-2010.

FCC ID: ZNFLS998		Part 22(H) & 90 CDMA / EvDO / LTE MEASUREMENT REPORT (Class II Permissive Change)		Approved by: Quality Manager
Test Report S/N: 1M1707180223-04-R1.ZNF	Test Dates: 7/24-8/15/2017	EUT Type: Portable Handset		Page 7 of 19

4.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4-2014. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty ($\pm$ dB)
Radiated Disturbance (<1GHz)	4.98
Radiated Disturbance (>1GHz)	5.07
Radiated Disturbance (>18GHz)	5.09

FCC ID: ZNFLS998	 Part 22(H) & 90 CDMA / EvDO / LTE MEASUREMENT REPORT (Class II Permissive Change)		Approved by: Quality Manager
Test Report S/N: 1M1707180223-04-R1.ZNF	Test Dates: 7/24-8/15/2017	EUT Type: Portable Handset	Page 8 of 19

5.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2006.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
-	RE1	Radiated Emissions Cable Set (UHF/EHF)	6/21/2017	Annual	6/21/2018	RE1
Agilent	E5515C	Wireless Communications Test Set	1/29/2016	Biennial	1/29/2018	GB46310798
COM-Power	AL-130R	Active Loop Antenna	6/5/2017	Annual	6/5/2018	121085
Com-Power	PAM-103	Pre-Amplifier (1-1000MHz)	6/21/2017	Annual	6/21/2018	441119
Emco	3115	Horn Antenna (1-18GHz)	3/10/2016	Biennial	3/10/2018	9704-5182
EMCO	3160-09	Small Horn (18 - 26.5GHz)	8/23/2016	Biennial	8/23/2018	135427
ETS Lindgren	3117	1-18 GHz DRG Horn (Medium)	12/1/2016	Biennial	12/1/2018	125518
ETS Lindgren	3164-08	Quad Ridge Horn Antenna	4/26/2016	Biennial	4/26/2018	128337
ETS Lindgren	3164-08	Quad Ridge Horn Antenna	12/5/2016	Biennial	12/5/2018	128338
Mini Circuits	PWR-SEN-4GHS	USB Power Sensor	3/24/2017	Annual	3/24/2018	11401010036
Mini Circuits	TVA-11-422	RF Power Amp	N/A			QA1317001
Mini-Circuits	PWR-SEN-4RMS	USB Power Sensor	3/24/2017	Annual	3/24/2018	11210140001
Mini-Circuits	SSG-4000HP	Synthesized Signal Generator	N/A			11208010032
PCTEST	-	EMC Switch System	6/21/2017	Annual	6/21/2018	NM1
PCTEST	-	EMC Switch System	6/21/2017	Annual	6/21/2018	NM2
Rohde & Schwarz	CMW500	Radio Communication Tester	10/20/2016	Annual	10/20/2017	100976
Rohde & Schwarz	ESU26	EMI Test Receiver (26.5GHz)	4/19/2017	Annual	4/19/2018	100342
Rohde & Schwarz	ESU40	EMI Test Receiver (40GHz)	7/31/2017	Annual	7/31/2018	100348
Rohde & Schwarz	TS-PR26	18-26.5 GHz Pre-Amplifier	5/11/2017	Annual	5/11/2018	100040
Schwarzbeck	UHA 9105	Dipole Antenna (400 - 1GHz) Rx	3/30/2016	Biennial	3/30/2018	9105-2404
Schwarzbeck	UHA 9105	Dipole Antenna (400 - 1GHz) Tx	3/30/2016	Biennial	3/30/2018	9105-2403
Seekonk	NC-100	Torque Wrench 5/16", 8" lbs	3/2/2016	Biennial	3/2/2018	N/A
Sunol	JB5	Bi-Log Antenna (30M - 5GHz)	3/14/2016	Biennial	3/14/2018	A051107

Table 5-1. Test Equipment

Notes:

- Equipment with a calibration date of "N/A" shown in this list was not used to make direct calibrated measurements.
- For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.

FCC ID: ZNFS998		Part 22(H) & 90 CDMA / EvDO / LTE MEASUREMENT REPORT (Class II Permissive Change)		Approved by: Quality Manager
Test Report S/N: 1M1707180223-04-R1.ZNF	Test Dates: 7/24-8/15/2017	EUT Type: Portable Handset	Page 9 of 19	

6.0 SAMPLE CALCULATIONS

Spurious Radiated Emission – BC10

Example: Channel 476 CDMA BC10 Mode 3rd Harmonic (2453.70MHz)

The average spectrum analyzer reading at 3 meters with the EUT on the turntable was –81.0 dBm. The gain of the substituted antenna is 8.1 dBi. The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of –81.0 dBm on the spectrum analyzer. The loss of the cable between the signal generator and the terminals of the substituted antenna is 2.0 dB at 2453.70 MHz. So 6.1 dB is added to the signal generator reading of –30.9 dBm yielding –24.80 dBm. The fundamental EIRP was 25.501 dBm so this harmonic was 25.501 dBm – (–24.80) = 50.3 dBc.

Spurious Radiated Emission – LTE Band

Example: Middle Channel LTE Mode 2nd Harmonic (1564 MHz)

The average spectrum analyzer reading at 3 meters with the EUT on the turntable was –81.0 dBm. The gain of the substituted antenna is 8.1 dBi. The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of –81.0 dBm on the spectrum analyzer. The loss of the cable between the signal generator and the terminals of the substituted antenna is 2.0 dB at 1564 MHz. So 6.1 dB is added to the signal generator reading of –30.9 dBm yielding –24.80 dBm. The fundamental EIRP was 25.501 dBm so this harmonic was 25.501 dBm – (–24.80).

FCC ID: ZNFLS998		Part 22(H) & 90 CDMA / EvDO / LTE MEASUREMENT REPORT (Class II Permissive Change)		Approved by: Quality Manager
Test Report S/N: 1M1707180223-04-R1.ZNF	Test Dates: 7/24-8/15/2017	EUT Type: Portable Handset		Page 10 of 19

7.0 TEST RESULTS

7.1 Summary

Company Name: LG Electronics MobileComm U.S.A
 FCC ID: ZNFLS998
 FCC Classification: PCS Licensed Transmitter Held to Ear (PCE)
 Mode(s): CDMA / EvDO / LTE
 Band: Band Class 10 / Band 26

FCC Part Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
22.913(a.2)	Effective Radiated Power (Band 26)	< 7 Watts max. ERP	RADIATED	PASS	Section 7.2
2.1053 90.691	Radiated Spurious Emissions	> 43 + log ₁₀ (P[Watts]) for all out-of-band emissions except > 50 + 10log ₁₀ (P[Watts]) at Band Edge and for all out-of-band emissions within 37.5kHz of Block Edge		PASS	Section 7.3

Table 7-1. Summary of Test Results

Note:

All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.

FCC ID: ZNFLS998		Part 22(H) & 90 CDMA / EvDO / LTE MEASUREMENT REPORT (Class II Permissive Change)		Approved by: Quality Manager
Test Report S/N: 1M1707180223-04-R1.ZNF	Test Dates: 7/24-8/15/2017	EUT Type: Portable Handset	Page 11 of 19	

7.2 Radiated Power (ERP)

§22.913(a.2)

Test Overview

Effective Radiated Power (ERP) measurements are performed using the substitution method described in ANSI/TIA-603-D-2010 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using vertically and horizontally polarized tuned dipole antennas. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

Test Procedures Used

KDB 971168 D01 v02r02 – Section 5.2.1

ANSI/TIA-603-D-2010 – Section 2.2.17

Test Settings

1. Radiated power measurements are performed using the signal analyzer's "channel power" measurement capability for signals with continuous operation.
2. RBW = 1 – 5% of the expected OBW, not to exceed 1MHz
3. VBW $\geq 3 \times$ RBW
4. Span = 1.5 times the OBW
5. No. of sweep points $\geq 2 \times$ span / RBW
6. Detector = RMS
7. Trigger is set to "free run" for signals with continuous operation with the sweep times set to "auto".
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation.
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize

FCC ID: ZNFLS998		Part 22(H) & 90 CDMA / EvDO / LTE MEASUREMENT REPORT (Class II Permissive Change)		Approved by: Quality Manager
Test Report S/N: 1M1707180223-04-R1.ZNF	Test Dates: 7/24-8/15/2017	EUT Type: Portable Handset		Page 12 of 19

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

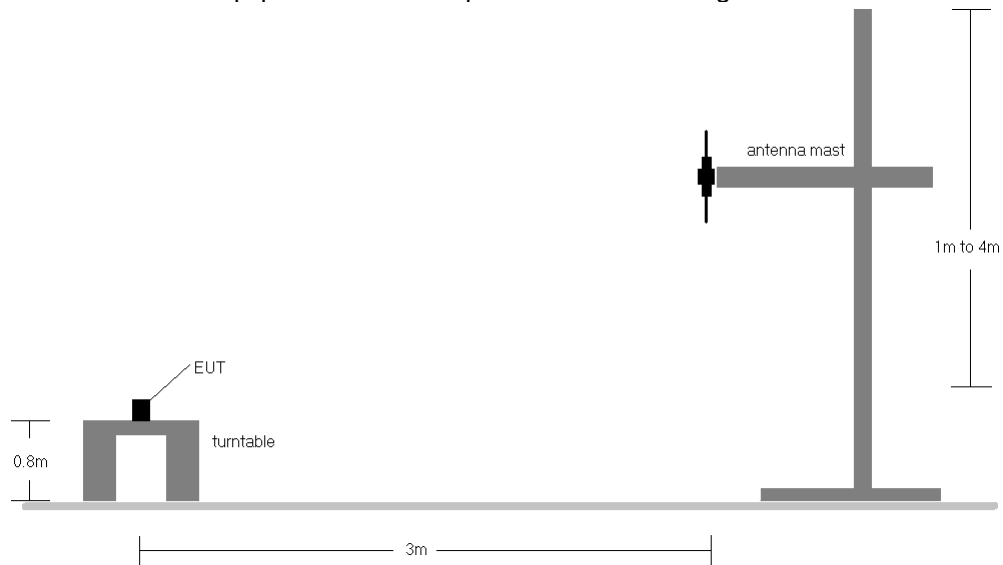


Figure 7-1. Radiated Test Setup <1GHz

Test Notes

- 1) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the tables below.
- 2) This unit was tested with its standard battery.

Frequency [MHz]	Channel Bandwidth [MHz]	Mod.	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	RB Size/Offset	Substitute Level [dBm]	Ant. Gain [dBd]	ERP [dBm]	ERP Limit [dBm]	Margin [dB]
821.50	15	QPSK	H	314	57	1 / 74	18.10	-0.66	17.44	38.45	-21.01
821.50	15	16-QAM	H	314	57	1 / 74	17.45	-0.66	16.79	38.45	-21.66
821.50	15	64-QAM	H	314	57	1 / 74	16.31	-0.66	15.65	38.45	-22.80
821.50	15 (WCP)	QPSK	H	179	352	1 / 74	17.21	-0.66	16.55	38.45	-21.90

Table 7-1. ERP Data (Band 26)

FCC ID: ZNFLS998	PCTEST ENGINEERING LABORATORY, INC.	Part 22(H) & 90 CDMA / EvDO / LTE MEASUREMENT REPORT (Class II Permissive Change)		Approved by: Quality Manager
Test Report S/N: 1M1707180223-04-R1.ZNF	Test Dates: 7/24-8/15/2017	EUT Type: Portable Handset		Page 13 of 19

7.3 Radiated Spurious Emissions Measurements

\$2.1053 \$90.691

Test Overview

Radiated spurious emissions measurements are performed using the substitution method described in ANSI/TIA-603-D-2010 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using horizontally and vertically polarized tuned dipole antennas. Measurements on signals operating above 1GHz are performed using vertically and horizontally polarized broadband horn antennas. All measurements are performed as peak measurements while the EUT is operating at maximum power, and at the appropriate frequencies.

Test Procedures Used

KDB 971168 D01 v02r02 – Section 5.8

ANSI/TIA-603-D-2010 – Section 2.2.12

Test Settings

1. RBW = 100kHz for emissions below 1GHz and 1MHz for emissions above 1GHz
2. VBW $\geq 3 \times$ RBW
3. Span = 1.5 times the OBW
4. No. of sweep points $\geq 2 \times$ span / RBW
5. Detector = RMS
6. Trace mode = Average (Max Hold for pulsed emissions)
7. The trace was allowed to stabilize

FCC ID: ZNFLS998		Part 22(H) & 90 CDMA / EvDO / LTE MEASUREMENT REPORT (Class II Permissive Change)		Approved by: Quality Manager
Test Report S/N: 1M1707180223-04-R1.ZNF	Test Dates: 7/24-8/15/2017	EUT Type: Portable Handset	Page 14 of 19	

© 2017 PCTEST Engineering Laboratory, Inc.

V 6.8
07/14/2017

© 2017 PCTEST Engineering Laboratory, Inc. All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST Engineering Laboratory, Inc. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTESTLAB.COM.

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

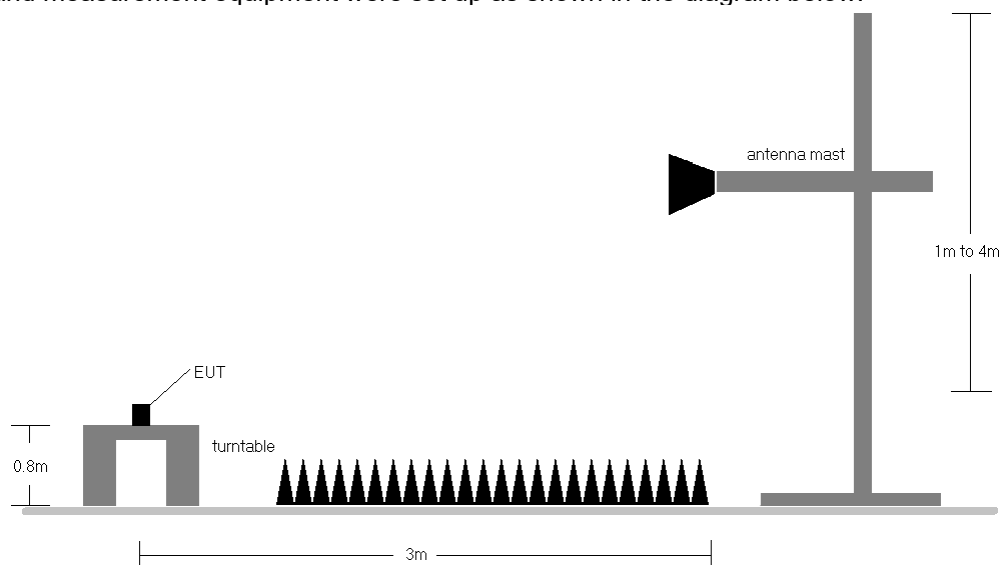


Figure 7-2. Test Instrument & Measurement Setup

Test Notes

1. For CDMA mode, this device was tested under all R.C.s and S.O.s and the worst case is reported with RC3/SO55 with "All Up" power control bits.
2. For LTE mode, the device was tested under all modulations, RB sizes and offsets, and channel bandwidth configurations and the worst case emissions are reported with 1 RB.
3. This unit was tested with its standard battery.
4. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case setup is reported in the tables below.
5. The "-" shown in the following RSE tables are used to denote a noise floor measurement.

FCC ID: ZNFLS998	PCTEST ENGINEERING LABORATORY, INC.	Part 22(H) & 90 CDMA / EvDO / LTE MEASUREMENT REPORT (Class II Permissive Change)			Approved by: Quality Manager
Test Report S/N: 1M1707180223-04-R1.ZNF	Test Dates: 7/24-8/15/2017	EUT Type: Portable Handset			Page 15 of 19

OPERATING FREQUENCY: 817.90 MHz
 CHANNEL: 476
 MODULATION SIGNAL: CDMA
 DISTANCE: 3 meters
 LIMIT: -13.00 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBd]	Spurious Emission Level [dBm]	Margin [dB]
1635.80	H	114	135	-74.40	6.69	-67.70	-54.7
2453.70	H	125	173	-72.33	7.42	-64.91	-51.9
3271.60	H	-	-	-69.63	7.34	-62.29	-49.3
4089.50	H	-	-	-67.21	7.97	-59.24	-46.2

Table 7-2. CDMA BC10 Radiated Spurious Data (Ch. 476)

OPERATING FREQUENCY: 823.10 MHz
 CHANNEL: 684
 MODULATION SIGNAL: CDMA
 DISTANCE: 3 meters
 LIMIT: -13.00 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBd]	Spurious Emission Level [dBm]	Margin [dB]
1646.20	H	161	143	-75.25	6.69	-68.56	-55.6
2469.30	H	120	178	-71.44	7.49	-63.95	-50.9
3292.40	H	-	-	-69.58	7.36	-62.22	-49.2
4115.50	H	-	-	-69.13	8.06	-61.07	-48.1

Table 7-3. CDMA BC10 Radiated Spurious Data (Ch. 684)

FCC ID: ZNFLS998		Part 22(H) & 90 CDMA / EvDO / LTE MEASUREMENT REPORT (Class II Permissive Change)			Approved by: Quality Manager
Test Report S/N: 1M1707180223-04-R1.ZNF	Test Dates: 7/24-8/15/2017	EUT Type: Portable Handset			Page 16 of 19

OPERATING FREQUENCY: 823.10 MHz
CHANNEL: 684
MODULATION SIGNAL: CDMA
DISTANCE: 3 meters
LIMIT: -13.00 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBd]	Spurious Emission Level [dBm]	Margin [dB]
1646.20	H	130	21	-74.44	6.69	-67.75	-54.7
2469.30	H	270	-8	-72.31	7.49	-64.82	-51.8
3292.40	H	-	-	-69.52	7.36	-62.16	-49.2
4115.50	H	-	-	-69.12	8.06	-61.06	-48.1

Table 7-4. CDMA BC10 Radiated Spurious Data with WCP (Ch. 684)

OPERATING FREQUENCY: 814.70 MHz
CHANNEL: 26697
MODULATION SIGNAL: QPSK
BANDWIDTH: 1.4 MHz
DISTANCE: 3 meters
LIMIT: -13.00 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBd]	Spurious Emission Level [dBm]	Margin [dB]
1629.40	H	134	322	-74.11	6.69	-67.42	-54.4
2444.10	H	235	130	-64.28	7.38	-56.90	-43.9
3258.80	H	-	-	-68.96	7.34	-61.63	-48.6

Table 7-5. Radiated Spurious Data (Ch. 26697)

FCC ID: ZNFLS998		Part 22(H) & 90 CDMA / EvDO / LTE MEASUREMENT REPORT (Class II Permissive Change)				Approved by: Quality Manager
Test Report S/N: 1M1707180223-04-R1.ZNF	Test Dates: 7/24-8/15/2017	EUT Type: Portable Handset				Page 17 of 19

OPERATING FREQUENCY: 823.30 MHz
 CHANNEL: 26783
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 1.4 MHz
 DISTANCE: 3 meters
 LIMIT: -13.00 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBd]	Spurious Emission Level [dBm]	Margin [dB]
1646.60	H	-	-	-74.65	6.69	-67.95	-55.0
2469.90	H	110	46	-64.13	7.50	-56.64	-43.6
3293.20	H	-	-	-69.42	7.36	-62.06	-49.1

Table 7-6. Radiated Spurious Data (Ch. 26783)

OPERATING FREQUENCY: 814.70 MHz
 CHANNEL: 26697
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 1.4 MHz
 DISTANCE: 3 meters
 LIMIT: -13.00 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBd]	Spurious Emission Level [dBm]	Margin [dB]
1629.40	H	120	350	-74.43	6.69	-67.73	-54.7
2444.10	H	235	130	-64.89	7.50	-57.40	-44.4
3258.80	H	-	-	-68.69	7.36	-61.33	-48.3

Table 7-7. Radiated Spurious Data with WCP (Ch. 26697)

FCC ID: ZNFS998	 Part 22(H) & 90 CDMA / EvDO / LTE MEASUREMENT REPORT (Class II Permissive Change)		Approved by: Quality Manager
Test Report S/N: 1M1707180223-04-R1.ZNF	Test Dates: 7/24-8/15/2017	EUT Type: Portable Handset	Page 18 of 19

8.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the **LG Portable Handset FCC ID: ZNFLS998** complies with all the requirements of Parts 22(H) and 90 of the FCC rules.

FCC ID: ZNFLS998		Part 22(H) & 90 CDMA / EvDO / LTE MEASUREMENT REPORT (Class II Permissive Change)	 Approved by: Quality Manager
Test Report S/N: 1M1707180223-04-R1.ZNF	Test Dates: 7/24-8/15/2017	EUT Type: Portable Handset	Page 19 of 19

© 2017 PCTEST Engineering Laboratory, Inc.

V 6.8
07/14/2017

© 2017 PCTEST Engineering Laboratory, Inc. All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST Engineering Laboratory, Inc. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTESTLAB.COM.