

# FCC LTE REPORT

## FCC Certification

<b>Applicant Name:</b> LG Electronics MobileComm U.S.A., Inc.	<b>Date of Issue:</b> March 22, 2017
<b>Address:</b> 1000 Sylvan Avenue, Englewood Cliffs NJ 07632	<b>Location:</b> HCT CO., LTD., 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA
	<b>Report No.:</b> HCT-R-1703-F016 <b>HCT FRN:</b> 0005866421

<b>FCC ID:</b>	<b>ZNFM320F</b>
<b>APPLICANT:</b>	<b>LG Electronics MobileComm U.S.A., Inc.</b>

According to the Evaluation report, all of the data contained herein is reused from the reference FCC ID: ZNFM320H report.

**FCC Model(s):** LG-M320F  
**Additional FCC Model(s):** LGM320F, M320F, LG-M320AR, LGM320AR, M320AR  
**EUT Type:** Portable Handset  
**FCC Classification:** Licensed Portable Transmitter Held to Ear (PCE)  
**FCC Rule Part(s):** §22, §24, §2

Mode (MHz)	Tx Frequency (MHz)	Emission Designator	Modulation	EIRP	
				Max. Power (W)	Max. Power (dBm)
LTE – Band2 (1.4)	1850.7 – 1909.3	1M09G7D	QPSK	0.302	24.81
		1M09W7D	16QAM	0.251	24.01
LTE – Band2 (3)	1851.5 – 1908.5	2M69G7D	QPSK	0.314	24.97
		2M69W7D	16QAM	0.258	24.12
LTE – Band2 (5)	1852.5 – 1907.5	4M50G7D	QPSK	0.308	24.89
		4M50W7D	16QAM	0.253	24.03
LTE – Band2 (10)	1855.0 – 1905.0	8M98G7D	QPSK	0.319	25.03
		8M98W7D	16QAM	0.266	24.25
LTE – Band2 (15)	1857.5 – 1902.5	13M5G7D	QPSK	0.318	25.02
		13M5W7D	16QAM	0.267	24.27
LTE – Band2 (20)	1860.0 – 1900.0	18M0G7D	QPSK	0.343	25.35
		18M0W7D	16QAM	0.285	24.55

Mode (MHz)	Tx Frequency (MHz)	Emission Designator	Modulation	ERP	
				Max. Power (W)	Max. Power (dBm)
LTE – Band5 (1.4)	824.7 – 848.3	1M09G7D	QPSK	0.080	19.02
		1M09W7D	16QAM	0.065	18.15
LTE – Band5 (3)	825.5 – 847.5	2M70G7D	QPSK	0.083	19.18
		2M70W7D	16QAM	0.067	18.28
LTE – Band5 (5)	826.5 – 846.5	4M51G7D	QPSK	0.081	19.11
		4M50W7D	16QAM	0.067	18.26
LTE – Band5 (10)	829.0 – 844.0	9M01G7D	QPSK	0.083	19.19
		8M97W7D	16QAM	0.070	18.44

The measurements shown in this report were made in accordance with the procedures specified in CFR47 section §2.947. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998, 21 U.S. C.853(a)



**Report prepared by : Jeong Ho Kim**  
**Engineer of Telecommunication Testing Center**



**Report approved by : Jong Seok Lee**  
**Manager of Telecommunication Testing Center**

This report only responds to the tested sample and may not be reproduced, except in full, without written approval of the HCT Co., Ltd.

## Version

TEST REPORT NO.	DATE	DESCRIPTION
HCT-R-1703-F016	March 22, 2017	- First Approval Report

---

---

# Table of Contents

1. GENERAL INFORMATION .....	6
2. INTRODUCTION .....	8
2.1. EUT DESCRIPTION.....	8
2.2. MEASURING INSTRUMENT CALIBRATION.....	8
2.3. TEST FACILITY .....	8
3. DESCRIPTION OF TESTS .....	9
3.1 ERP/ EIRP RADIATED POWER AND RADIATED SPURIOUS EMISSIONS.....	9
3.2 FREQUENCY RANGE.....	10
3.3 PEAK-AVERAGE RATIO. ....	11
3.4 OCCUPIED BANDWIDTH. ....	13
3.5 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL.....	14
3.6 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE .....	15
4. LIST OF TEST EQUIPMENT .....	16
5. MEASUREMENT UNCERTAINTY.....	17
6. SUMMARY OF TEST RESULTS .....	18
7. SAMPLE CALCULATION.....	19
8. TEST DATA .....	20
8.1 EQUIVALENT ISOTROPIC RADIATED POWER (Band 2) .....	20
8.2 EFFECTIVE RADIATED POWER (Band 5).....	24
8.3 RADIATED SPURIOUS EMISSIONS.....	26
8.3.1 RADIATED SPURIOUS EMISSIONS (1.4 MHz Band 2 LTE).....	26
8.3.2 RADIATED SPURIOUS EMISSIONS (3 MHz Band 2 LTE).....	27
8.3.3 RADIATED SPURIOUS EMISSIONS (5 MHz Band 2 LTE).....	28
8.3.4 RADIATED SPURIOUS EMISSIONS (10 MHz Band 2 LTE).....	29
8.3.5 RADIATED SPURIOUS EMISSIONS (15 MHz Band 2 LTE).....	30
8.3.6 RADIATED SPURIOUS EMISSIONS (20 MHz Band 2 LTE).....	31
8.3.7 RADIATED SPURIOUS EMISSIONS (1.4 MHz Band 5 LTE).....	32
8.3.8 RADIATED SPURIOUS EMISSIONS (3 MHz Band 5 LTE).....	33
8.3.9 RADIATED SPURIOUS EMISSIONS (5 MHz Band 5 LTE).....	34
8.3.10 RADIATED SPURIOUS EMISSIONS (10 MHz Band 5 LTE).....	35
8.4 PEAK-TO-AVERAGE RATIO .....	36
8.5 OCCUPIED BANDWIDTH .....	37
8.6 CONDUCTED SPURIOUS EMISSIONS .....	38
8.6.1 BAND EDGE.....	39
8.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE .....	40

8.7.1 FREQUENCY STABILITY (1.4 MHz Band 2 LTE) .....	40
8.7.2 FREQUENCY STABILITY (3 MHz Band 2 LTE) .....	41
8.7.3 FREQUENCY STABILITY (5 MHz Band 2 LTE) .....	42
8.7.4 FREQUENCY STABILITY (10 MHz Band 2 LTE) .....	43
8.7.5 FREQUENCY STABILITY (15 MHz Band 2 LTE) .....	44
8.7.6 FREQUENCY STABILITY (20 MHz Band 2 LTE) .....	45
8.7.7 FREQUENCY STABILITY (1.4 MHz Band 5 LTE) .....	46
8.7.8 FREQUENCY STABILITY (3 MHz Band 5 LTE) .....	47
8.7.9 FREQUENCY STABILITY (5 MHz Band 5 LTE) .....	48
8.7.10 FREQUENCY STABILITY (10 MHz Band 5 LTE) .....	49
9. TEST PLOTS.....	50

# MEASUREMENT REPORT

## 1. GENERAL INFORMATION

**Applicant Name:** LG Electronics MobileComm U.S.A., Inc.

**Address:** 1000 Sylvan Avenue, Englewood Cliffs NJ 07632

**FCC ID:** ZNFM320F

**Application Type:** Certification

**FCC Classification:** Licensed Portable Transmitter Held to Ear (PCE)

**FCC Rule Part(s):** §22,§24, §2

**EUT Type:** Portable Handset

**FCC Model(s):** LG-M320F

**Additional FCC Model(s):** LGM320F, M320F, LG-M320AR, LGM320AR, M320AR

**Tx Frequency:** 1850.7 MHz – 1909.3 MHz (LTE – Band2 (1.4 MHz))  
1851.5 MHz – 1908.5 MHz (LTE – Band2 (3 MHz))  
1852.5 MHz – 1907.5 MHz (LTE – Band2 (5 MHz))  
1855.0 MHz – 1905.0 MHz (LTE – Band2 (10 MHz))  
1857.5 MHz – 1902.5 MHz (LTE – Band2 (15 MHz))  
1860.0 MHz – 1900.0 MHz (LTE – Band2 (20 MHz))

824.7 MHz – 848.3 MHz (LTE – Band 5 (1.4 MHz))  
825.5 MHz – 847.5 MHz (LTE – Band 5 (3 MHz))  
826.5 MHz – 846.5 MHz (LTE – Band 5 (5 MHz))  
829.0 MHz – 844.0 MHz (LTE – Band 5 (10 MHz))

**Max. RF Output Power:**

Band 2 (1.4 MHz) :	0.302 W (QPSK) (24.81 dBm)
	0.251 W (16-QAM) (24.01 dBm)
Band 2 (3 MHz) :	0.314 W (QPSK) (24.97 dBm)
	0.258 W (16-QAM) (24.12 dBm)
Band 2 (5 MHz) :	0.308 W (QPSK) (24.89 dBm)
	0.253 W (16-QAM) (24.03 dBm)
Band 2 (10 MHz) :	0.319 W (QPSK) (25.03 dBm)
	0.266 W (16-QAM) (24.25 dBm)
Band 2 (15 MHz) :	0.318 W (QPSK) (25.02 dBm)
	0.267 W (16-QAM) (24.27 dBm)
Band 2 (20 MHz) :	0.343 W (QPSK) (25.35 dBm)
	0.285 W (16-QAM) (24.55 dBm)
Band 5 (1.4 MHz) :	0.080 W (QPSK) (19.02 dBm)
	0.065 W (16-QAM) (18.15 dBm)
Band 5 (3 MHz) :	0.083 W (QPSK) (19.18 dBm)
	0.067 W (16-QAM) (18.28 dBm)
Band 5 (5 MHz) :	0.081 W (QPSK) (19.11 dBm)
	0.067 W (16-QAM) (18.26 dBm)
Band 5 (10 MHz) :	0.083 W (QPSK) (19.19 dBm)
	0.070 W (16-QAM) (18.44 dBm)

<b>Emission Designator(s):</b>	Band 2 (1.4 MHz) :	1M09G7D (QPSK) / 1M09W7D (16-QAM)	
	Band 2 (3 MHz)	2M69G7D (QPSK) / 2M69W7D (16-QAM)	
	Band 2 (5 MHz) :	4M50G7D (QPSK) / 4M50W7D (16-QAM)	
	Band 2 (10 MHz)	8M98G7D (QPSK) / 8M98W7D (16-QAM)	
	Band 2 (15 MHz) :	13M5G7D (QPSK) / 13M5W7D (16-QAM)	
	Band 2 (20 MHz)	18M0G7D (QPSK) / 18M0W7D (16-QAM)	
	Band 5 (1.4 MHz) :	1M09G7D (QPSK) / 1M09W7D (16-QAM)	
	Band 5 (3 MHz) :	2M70G7D (QPSK) / 2M70W7D (16-QAM)	
	Band 5 (5 MHz) :	4M51G7D (QPSK) / 4M50W7D (16-QAM)	
	Band 5 (10 MHz) :	9M01G7D (QPSK) / 8M97W7D (16-QAM)	

**Date(s) of Tests:** January 03, 2017 ~ February 23, 2017

**Antenna Specification:**  
Manufacturer: AT&C Co.LTD.  
Antenna type: PIFA Antenna (Planar Inverted F)  
Peak Gain: Band 2 : 1.6 dBi  
Band 5 : -0.7 dBi

## **2. INTRODUCTION**

### **2.1. EUT DESCRIPTION**

The LG Electronics MobileComm U.S.A., Inc. LG-M320F Portable Handset consists of LTE 2 and 5.

### **2.2. MEASURING INSTRUMENT CALIBRATION**

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

### **2.3. TEST FACILITY**

The Fully-anechoic chamber and conducted measurement facility used to collect the radiated data are located at the **74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA.**

## **3. DESCRIPTION OF TESTS**

### **3.1 ERP/ EIRP RADIATED POWER AND RADIATED SPURIOUS EMISSIONS**

Note: ERP(Effective Radiated Power), EIRP(Effective Isotropic Radiated Power)

#### Test Procedure

Radiated emission measurements are performed in the Fully-anechoic chamber. The equipment under test is placed on a non-conductive table 3-meters away from the receive antenna in accordance with ANSI/TIA-603-D-2010 Clause 2.2.17. The turntable is rotated through 360 degrees, and the receiving antenna scans in order to determine the level of the maximized emission. The level and position of the maximized emission is recorded with the spectrum analyzer using a RMS detector.

A half wave dipole is then substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.

The power is calculated by the following formula;

$$P_{d(\text{dBm})} = P_{g(\text{dBm})} - \text{cable loss (dB)} + \text{antenna gain (dB)}$$

Where:  $P_d$  is the dipole equivalent power and  $P_g$  is the generator output power into the substitution antenna.

The maximum EIRP is calculated by adding the forward power to the calibrated source plus its appropriate gain value. These steps are repeated with the receiving antenna in both vertical and horizontal polarization. the difference between the gain of the horn and an isotropic antenna are taken into consideration

#### **Radiated spurious emissions**

: Frequency Range : 9 kHz ~ 10<sup>th</sup> Harmonics of highest channel fundamental frequency.



### 3.3 PEAK-AVERAGE RATIO.

#### Test Procedure

Peak to Average Power Ratio is tested in accordance with KDB971168 D01 Power Meas License Digital Systems v02r02, October 17, 2014, Section 5.7.

#### - Section 5.7.1 CCDF Procedure

- a) Set resolution/measurement bandwidth  $\geq$  signal's occupied bandwidth;
- b) Set the number of counts to a value that stabilizes the measured CCDF curve;
- c) Set the measurement interval as follows:
  - 1) for continuous transmissions, set to 1 ms,
  - 2) for burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize and set the measurement interval to a time that is less than or equal to the burst duration.
- d) Record the maximum PAPR level associated with a probability of 0.1%.

#### - Section 5.7.2 Alternate Procedure

Use one of the procedures presented in 5.1 to measure the total peak power and record as  $P_{Pk}$ . Use one of the applicable procedures presented 5.2 to measure the total average power and record as  $P_{Avg}$ . Determine the P.A.R. from:  $P.A.R_{(dB)} = P_{Pk (dBm)} - P_{Avg (dBm)}$  ( $P_{Avg}$  = Average Power + Duty cycle Factor)

#### 5.1.1 Peak power measurements with a spectrum/signal analyzer or EMI receiver

The following procedure can be used to determine the total peak output power.

- a) Set the RBW  $\geq$  OBW.
- b) Set VBW  $\geq 3 \times$  RBW.
- c) Set span  $\geq 2 \times$  RBW
- d) Sweep time = auto couple.
- e) Detector = peak.
- f) Ensure that the number of measurement points  $\geq$  span/RBW.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the peak amplitude level.

## 5.2.2 Procedures for use with a spectrum/signal analyzer when EUT cannot be configured to transmit continuously and sweep triggering/signal gating cannot be properly implemented

If the EUT cannot be configured to transmit continuously (burst duty cycle < 98%), then one of the following procedures can be used. The selection of the applicable procedure will depend on the characteristics of the measured burst duty cycle.

Measure the burst duty cycle with a spectrum/signal analyzer or EMC receiver can be used in zero-span mode if the response time and spacing between bins on the sweep are sufficient to permit accurate measurement of the burst on/off time of the transmitted signal.

### 5.2.2.2 Constant burst duty cycle


If the measured burst duty cycle is constant (i.e., duty cycle variations are less than  $\pm 2$  percent), then:

- a) Set span to at least 1.5 times the OBW.
- b) Set RBW = 1-5% of the OBW, not to exceed 1 MHz.
- c) Set VBW  $\geq 3 \times$  RBW.
- d) Number of points in sweep  $\geq 2 \times$  span / RBW. (This gives bin-to-bin spacing  $\leq$  RBW/2, so that narrowband signals are not lost between frequency bins.)
- e) Sweep time = auto.
- f) Detector = RMS (power averaging).
- g) Set sweep trigger to "free run".
- h) Trace average at least 100 traces in power averaging (i.e., RMS) mode.
- i) Compute power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function with band limits set equal to the OBW band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.
- j) Add  $10 \log (1/x)$ , where  $x$  is the duty cycle, to the measured power in order to compute the average power during the actual transmission times (because the measurement represents an average over both the on and off times of the transmission).

For example, add  $10 \log (1/0.25) = 6$  dB if the duty cycle is a constant 25%.

### 3.4 OCCUPIED BANDWIDTH.

#### Test set-up

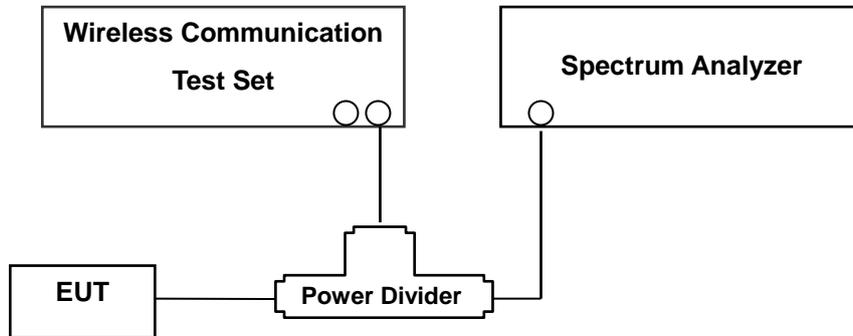

(Configuration of conducted Emission measurement)

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

#### Test Procedure

OBW is tested in accordance with KDB971168 D01 Power Meas License Digital Systems v02r02, October 17, 2014, Section 4.2.

The EUT makes a call to the communication simulator. The power was measured with R&S Spectrum Analyzer. All measurements were done at 3 channels(low, middle and high operational range.)

The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth

### 3.5 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL.

#### Test Procedure

Spurious and harmonic emissions at antenna terminal is tested in accordance with KDB971168 D01 Power Meas License Digital Systems v02r02, October 17, 2014, Section 6.0.

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer.

The EUT was setup to maximum output power at its lowest channel. The Resolution BW of the analyzer is set to 1 % of the emission bandwidth to show compliance with the -13 dBm limit, in the 1 MHz bands immediately outside and adjacent to the edge of the frequency block. The 1 MHz RBW was used to scan from 30 MHz to 10<sup>th</sup> Harmonics. A display line was placed at -13 dBm to show compliance. The high, lowest and a middle channel were tested for out of band measurements.


- Band Edge Requirement : In the 1MHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least 1 percent of the emission bandwidth of the fundamental emission of the transmitter may be employed to measure the out of band Emissions. Limit, -13dBm.

**NOTES:** The analyzer plot offsets were determined by below conditions.

- For LTE Band 2, total offset 26.85 dBm = 20 dBm attenuator + 6 dBm Divider + 0.85 dBm RF cables.
- For LTE Band 5, total offset 26.9 dBm = 20 dBm attenuator + 6 dBm Divider + 0.9 dBm RF cables.

### 3.6 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

#### Test Set-up

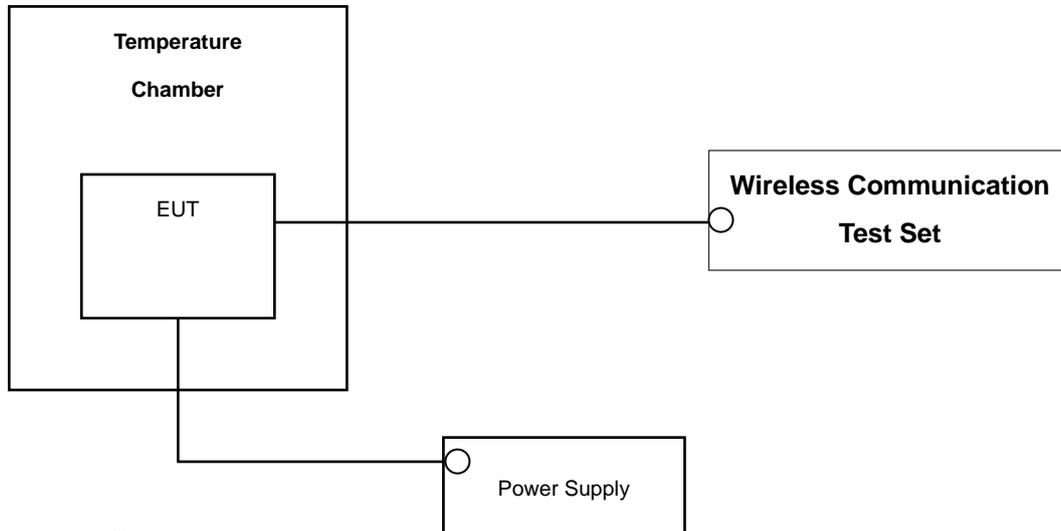

\* Nominal Operating Voltage

#### Test Procedure

Frequency stability is tested in accordance with ANSI/TIA-603-D-2010 section 2.2.2

The frequency stability of the transmitter is measured by:

- a.) **Temperature:** The temperature is varied from - 30 °C to + 50 °C using an environmental chamber.
- b.) **Primary Supply Voltage:** The primary supply voltage is varied from the end point to 100 % of the voltage normally at the input to the device or at the power supply terminals if cables are not normally supplied.

Specification — the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block(LTE Band2).The frequency stability of the transmitter shall be maintained within  $\pm 0.00025\%$ ( $\pm 2.5$  ppm) of the center frequency. (LTE Band5).

#### Time Period and Procedure:

The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).

1. The equipment is turned on in a “standby” condition for one minute before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
2. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

**NOTE: The EUT is tested down to the battery endpoint.**

## 4. LIST OF TEST EQUIPMENT

Manufacture	Model/ Equipment	Serial Number	Calibration Date	Calibration Interval	Calibration Due
REOHDE & SCHWARZ	SCU 18 / AMPLIFIER	10094	09/07/2016	Annual	09/07/2017
Wainwright	WHK1.2/15G-10EF/H.P.F	4	04/11/2016	Annual	04/11/2017
Wainwright	WHK3.3/18G-10EF/H.P.F	2	04/11/2016	Annual	04/11/2017
Hewlett Packard	11667B / Power Splitter	10545	02/15/2017	Annual	02/15/2018
Hewlett Packard	11667B / Power Splitter	11275	04/29/2016	Annual	04/29/2017
Agilent	E3632A/DC Power Supply	KR75303243	07/12/2016	Annual	07/12/2017
Schwarzbeck	UHAP/ Dipole Antenna	557	03/23/2015	Biennial	03/23/2017
Schwarzbeck	UHAP/ Dipole Antenna	558	03/23/2015	Biennial	03/23/2017
EXP	EX-TH400/ Chamber	None	05/31/2016	Annual	05/31/2017
Schwarzbeck	BBHA 9120D/ Horn Antenna	147	09/09/2016	Biennial	09/09/2018
Schwarzbeck	BBHA 9120D/ Horn Antenna	1299	05/15/2015	Biennial	05/15/2017
Schwarzbeck	BBHA 9170/ Horn Antenna(15~40GHz)	BBHA9170342	04/30/2015	Biennial	04/30/2017
Schwarzbeck	BBHA 9170/ Horn Antenna(15~35GHz)	BBHA9170124	04/30/2015	Biennial	04/30/2017
Agilent	N9020A/Signal Analyzer	MY52090906	05/13/2016	Annual	05/13/2017
Hewlett Packard	8493C/ATTENUATOR	17280	06/22/2016	Annual	06/22/2017
REOHDE & SCHWARZ	FSV40/Spectrum Analyzer	1307.9002K40-100931-NK	06/15/2016	Annual	06/15/2017
Agilent	8960 (E5515C)/ Base Station(Now)	MY48360800	10/19/2016	Annual	10/19/2017
Schwarzbeck	FMZB1513/ Loop Antenna(9kHz~30MHz)	1513-175	02/23/2016	Biennial	02/23/2018
Schwarzbeck	VULB9160/ Bilog Antenna	3150	09/30/2016	Biennial	09/30/2018
Schwarzbeck	VULB9160/ Bilog Antenna	3368	10/14/2016	Biennial	10/14/2018
Anritsu Corp.	MT8820C/Wideband Radio Communication Tester	6200576565	07/05/2016	Annual	07/05/2017
Anritsu Corp.	MT8820C/Wideband Radio Communication Tester	6201026545	02/13/2017	Annual	02/13/2018

## 5. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4:2014.

All measurement uncertainty values are shown with a coverage factor of  $k = 2$  to indicate a 95 % level of confidence. The measurement data shown herein meets or exceeds the  $U_{\text{CISPR}}$  measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty ( $\pm$ dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	1.82
Radiated Disturbance (9 kHz ~ 30 MHz)	3.40
Radiated Disturbance (30 MHz ~ 1 GHz)	4.80
Radiated Disturbance (1 GHz ~ 18 GHz)	6.07

## 6. SUMMARY OF TEST RESULTS

FCC Part Section(s)	Test Description	Test Limit	Test Condition	Test Result
2.1049	Occupied Bandwidth	N/A	CONDUCTED	PASS
2.1051, 22.917(a), 24.238(a)	Band Edge / Spurious and Harmonic Emissions at Antenna Terminal.	$< 43 + 10\log_{10}(P[\text{Watts}])$ at Band Edge and for all out-of-band emissions		PASS
2.1046	* Conducted Output Power	N/A		PASS
24.232(d)	Peak- to- Average Ratio	$< 13 \text{ dB}$		PASS
2.1055, 22.355	Frequency stability / variation of ambient temperature	$< 2.5 \text{ ppm}$ (Part22)		PASS
24.235		Emission must remain in band (Part24)		
22.913(a)(2)	Effective Radiated Power (Band 5)	$< 7 \text{ Watts max. ERP}$	RADIATED	PASS
24.232(c)	Equivalent Isotropic Radiated Power (Band 2)	$< 2 \text{ Watts max. EIRP}$		PASS
2.1053, 22.917(a), 24.238(a)	Radiated Spurious and Harmonic Emissions	$< 43 + 10\log_{10}(P[\text{Watts}])$ for all out-of band emissions		PASS

\*: See SAR Report

## 7. SAMPLE CALCULATION

### A. ERP Sample Calculation

Mode	Ch./ Freq.		Measured Level(dBm)	Substitute LEVEL(dBm)	Ant. Gain (dBd)	C.L	Pol.	Limit W	ERP	
	channel	Freq.(MHz)							W	dBm
LTE Band5	20525	836.50	-6.73	40.89	-10.54	0.96	V	< 7.00	0.869	29.39

#### ERP = Substitute LEVEL(dBm) + Ant. Gain – CL(Cable Loss)

- 1) The EUT mounted on a wooden tripod is 2.5 meter above test site ground level.
- 2) During the test , the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of effective radiated power(ERP).

## B. Emission Designator

### QPSK Modulation

#### **5MHz Bandwidth**

**Emission Designator = 4M48G7D**

LTE BW = 4.48 MHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

#### **10MHz Bandwidth**

**Emission Designator = 8M95G7D**

LTE BW = 8.95 MHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

### 16QAM Modulation

#### **5MHz Bandwidth**

**Emission Designator = 4M48W7D**

LTE BW = 4.48 MHz

W = main carrier modulated in a combination of two or more of the following modes;  
amplitude, angle, pulse

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

#### **10MHz Bandwidth**

**Emission Designator = 8M95W7D**

LTE BW = 8.95 MHz

W = main carrier modulated in a combination of two or more of the following modes;  
amplitude, angle, pulse

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

## 8. TEST DATA

### 8.1 EQUIVALENT ISOTROPIC RADIATED POWER (Band 2)

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	Limit	EIRP	
								W	W	dBm
1850.7	1.4 MHz	QPSK	-16.56	17.05	9.82	2.54	V	< 2.00	0.271	24.33
		16-QAM	-17.24	16.37	9.82	2.54	V		0.232	23.65
1880.0		QPSK	-16.41	17.47	9.91	2.57	V		0.302	24.81
		16-QAM	-17.21	16.67	9.91	2.57	V		0.251	24.01
1909.3		QPSK	-17.21	17.03	10.00	2.60	V		0.277	24.43
		16-QAM	-18.08	16.21	10.00	2.60	V		0.230	23.61

#### Equivalent Isotropic Radiated Power Data (1.4 MHz Band 2 LTE)

Note: All of RB size has been tested for emissions and EIRP, with the 1RB configuration observed as the worst case

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	Limit	EIRP	
								W	W	dBm
1851.5	3 MHz	QPSK	-16.45	17.16	9.82	2.54	V	< 2.00	0.278	24.44
		16-QAM	-17.17	16.44	9.82	2.54	V		0.236	23.72
1880.0		QPSK	-16.25	17.63	9.91	2.57	V		0.314	24.97
		16-QAM	-17.10	16.78	9.91	2.57	V		0.258	24.12
1908.5		QPSK	-16.97	17.04	10.00	2.60	V		0.278	24.44
		16-QAM	-17.86	16.15	10.00	2.60	V		0.226	23.55

#### Equivalent Isotropic Radiated Power Data (3 MHz Band 2 LTE)

Note: All of RB size has been tested for emissions and EIRP, with the 1RB configuration observed as the worst case

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	Limit	EIRP	
								W	W	dBm
1852.5	5 MHz	QPSK	-16.49	17.12	9.82	2.54	V	< 2.00	0.275	24.40
		16-QAM	-17.22	16.39	9.82	2.54	V		0.233	23.67
1880.0		QPSK	-16.33	17.55	9.91	2.57	V		0.308	24.89
		16-QAM	-17.19	16.69	9.91	2.57	V		0.253	24.03
1907.5		QPSK	-16.89	17.12	10.00	2.60	V		0.283	24.52
		16-QAM	-17.75	16.26	10.00	2.60	V		0.232	23.66

**Equivalent Isotropic Radiated Power Data (5 MHz Band 2 LTE)**

Note: All of RB size has been tested for emissions and EIRP, with the 1RB configuration observed as the worst case

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	Limit	EIRP	
								W	W	dBm
1855.0	10 MHz	QPSK	-16.38	17.27	9.83	2.54	V	< 2.00	0.286	24.56
		16-QAM	-17.12	16.53	9.83	2.54	V		0.241	23.82
1880.0		QPSK	-16.40	17.48	9.91	2.57	V		0.303	24.82
		16-QAM	-17.26	16.62	9.91	2.57	V		0.249	23.96
1905.0		QPSK	-16.49	17.64	9.98	2.59	V		0.319	25.03
		16-QAM	-17.27	16.86	9.98	2.59	V		0.266	24.25

**Equivalent Isotropic Radiated Power Data (10 MHz Band 2 LTE)**

Note: All of RB size has been tested for emissions and EIRP, with the 1RB configuration observed as the worst case

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	Limit	EIRP	
								W	W	dBm
1857.5	15 MHz	QPSK	-16.35	17.34	9.85	2.55	V	< 2.00	0.291	24.64
		16-QAM	-17.08	16.61	9.85	2.55	V		0.246	23.91
1880.0		QPSK	-16.36	17.52	9.91	2.57	V		0.306	24.86
		16-QAM	-17.24	16.64	9.91	2.57	V		0.250	23.98
1902.5		QPSK	-16.39	17.64	9.97	2.59	V		0.318	25.02
		16-QAM	-17.14	16.89	9.97	2.59	V		0.267	24.27

**Equivalent Isotropic Radiated Power Data (15 MHz Band 2 LTE)**

Note: All of RB size has been tested for emissions and EIRP, with the 1RB configuration observed as the worst case

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	Limit	EIRP	
								W	W	dBm
1860.0	20 MHz	QPSK	-16.28	17.41	9.85	2.55	V	< 2.00	0.296	24.71
		16-QAM	-17.03	16.66	9.85	2.55	V		0.249	23.96
1880.0		QPSK	-16.27	17.61	9.91	2.57	V		0.312	24.95
		16-QAM	-17.16	16.72	9.91	2.57	V		0.254	24.06
1900.0		QPSK	-16.06	17.97	9.97	2.59	V		0.343	25.35
		16-QAM	-16.86	17.17	9.97	2.59	V		0.285	24.55

**Equivalent Isotropic Radiated Power Data ( 20 MHz Band 2 LTE)**

Note: All of RB size has been tested for emissions and EIRP, with the 1RB configuration observed as the worst case

**NOTES:**

Equivalent Isotropic Radiated Power Measurements by Substitution Method  
according to ANSI/TIA/EIA-603-D-2010 June 24, 2010:

The EUT was placed on a non-conductive styrofoam resin table 3-meters from the receive antenna. Turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. For LTE signals, RBW = 1-5% of the OBW, not to exceed 1MHz, VBW  $\geq 3 \times$  RBW, Detector = RMS. A Horn antenna was substituted in place of the EUT. This Horn antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. The conducted power at the terminals of the Horn antenna is measured. The difference between the gain of the horn and an isotropic antenna is taken into consideration and the EIRP is recorded.

Also, we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna. The worst case of the EUT is z plane in LTE mode. Also worst case of detecting Antenna is vertical polarization in LTE mode.

### 8.2 EFFECTIVE RADIATED POWER (Band 5)

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBd)	C.L	Pol	Limit	ERP	
								W	W	dBm
824.7	1.4 MHz	QPSK	-32.10	30.52	-10.59	1.67	V	< 7.00	0.067	18.26
		16-QAM	-32.94	29.68	-10.59	1.67	V		0.055	17.42
836.5		QPSK	-32.32	31.24	-10.54	1.68	V		0.080	19.02
		16-QAM	-33.19	30.37	-10.54	1.68	V		0.065	18.15
848.3		QPSK	-32.32	30.77	-10.49	1.69	V		0.072	18.59
		16-QAM	-33.05	30.04	-10.49	1.69	V		0.061	17.86

**Effective Radiated Power Data (1.4 MHz Band 5 LTE)**

Note: All of RB size has been tested for emissions and ERP, with the 1RB configuration observed as the worst case

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBd)	C.L	Pol	Limit	ERP	
								W	W	dBm
825.5	3 MHz	QPSK	-31.98	30.72	-10.59	1.67	V	< 7.00	0.070	18.46
		16-QAM	-32.86	29.84	-10.59	1.67	V		0.057	17.58
836.5		QPSK	-32.16	31.40	-10.54	1.68	V		0.083	19.18
		16-QAM	-33.06	30.50	-10.54	1.68	V		0.067	18.28
847.5		QPSK	-32.13	30.96	-10.49	1.69	V		0.076	18.78
		16-QAM	-32.86	30.23	-10.49	1.69	V		0.064	18.05

**Effective Radiated Power Data (3 MHz Band 5 LTE)**

Note: All of RB size has been tested for emissions and ERP, with the 1RB configuration observed as the worst case

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBd)	C.L	Pol	Limit	ERP	
								W	W	dBm
826.5	5 MHz	QPSK	-32.06	30.76	-10.58	1.67	V	< 7.00	0.071	18.51
		16-QAM	-32.94	29.88	-10.58	1.67	V		0.058	17.63
836.5		QPSK	-32.23	31.33	-10.54	1.68	V		0.081	19.11
		16-QAM	-33.08	30.48	-10.54	1.68	V		0.067	18.26
846.5		QPSK	-32.20	30.97	-10.50	1.69	V		0.076	18.78
		16-QAM	-32.97	30.20	-10.50	1.69	V		0.063	18.01

**Effective Radiated Power Data (5 MHz Band 5 LTE)**

Note: All of RB size has been tested for emissions and ERP, with the 1RB configuration observed as the worst case

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBd)	C.L	Pol	Limit	ERP	
								W	W	dBm
829.0	10 MHz	QPSK	-32.05	31.05	-10.57	1.67	V	< 7.00	0.076	18.81
		16-QAM	-32.92	30.18	-10.57	1.67	V		0.062	17.94
836.5		QPSK	-32.15	31.41	-10.54	1.68	V		0.083	19.19
		16-QAM	-32.90	30.66	-10.54	1.68	V		0.070	18.44
844.0		QPSK	-32.21	31.15	-10.51	1.69	V		0.079	18.95
		16-QAM	-33.17	30.19	-10.51	1.69	V		0.063	17.99

**Effective Radiated Power Data (10 MHz Band 5 LTE)**

Note: All of RB size has been tested for emissions and ERP, with the 1RB configuration observed as the worst case

**NOTES:**

Effective Radiated Power Output Measurements by Substitution Method

according to ANSI/TIA/EIA-603-D-2010 June 24, 2010:

The EUT was placed on a non-conductive styrofoam resin table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. For LTE signals, RBW = 1-5% of the OBW, not to exceed 1MHz, VBW ≥ 3 x RBW, Detector = RMS.

A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. The conducted power at the terminals of the dipole is measured. The ERP is recorded.

Also, we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna. The worst case of the EUT is y plane in LTE mode. Also worst case of detecting Antenna is vertical polarization in LTE mode.

## 8.3 RADIATED SPURIOUS EMISSIONS

### 8.3.1 RADIATED SPURIOUS EMISSIONS (1.4 MHz Band 2 LTE)

- ▣ OPERATING FREQUENCY: 1880.00 MHz
- ▣ MEASURED OUTPUT POWER: 24.81 dBm = 0.302 W
- ▣ MODULATION SIGNAL: 1.4 MHz QPSK
- ▣ DISTANCE: 3 meters
- ▣ LIMIT:  $43 + 10 \log_{10}(W) =$  37.81 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	EIRP (dBm)	dBc
18607 (1850.7)	3,701.40	-45.62	12.52	-51.67	1.69	V	-40.84	65.65
	5,552.10	-48.17	13.29	-48.74	2.82	V	-38.27	63.08
	7,402.80	-48.34	11.72	-44.00	3.85	H	-36.13	60.94
	9,253.50	-55.95	11.49	-46.94	4.70	V	-40.14	64.95
18900 (1880.0)	3,760.00	-46.92	12.56	-52.75	1.67	V	-41.86	66.67
	5,640.00	-48.24	13.30	-48.38	2.90	H	-37.98	62.79
	7,520.00	-48.86	11.70	-44.58	3.98	H	-36.86	61.67
	9,400.00	-46.79	11.43	-37.58	4.63	H	-30.78	55.59
19193 (1909.3)	3,818.60	-44.76	12.60	-50.26	1.65	V	-39.31	64.12
	5,727.90	-48.53	13.31	-47.62	2.92	V	-37.23	62.04
	7,637.20	-48.83	11.62	-44.76	3.99	H	-37.13	61.94
	9,546.50	-43.99	11.36	-35.44	4.75	H	-28.83	53.64

- NOTES:**
1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA/EIA-603-D-2010 June 24, 2010:
  2. We are performed all frequency to 10<sup>th</sup> harmonics from 9 kHz. Measurements above show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
  3. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
  4. All of RB size has been tested for emissions and EIRP, with the 1RB configuration observed as the worst case
  5. We are performed 16QAM and QPSK modulations. The worst case data are reported in the table above.

### 8.3.2 RADIATED SPURIOUS EMISSIONS (3 MHz Band 2 LTE)

- ▣ OPERATING FREQUENCY: 1880.00 MHz
- ▣ MEASURED OUTPUT POWER: 24.97 dBm = 0.314 W
- ▣ MODULATION SIGNAL: 3 MHz QPSK
- ▣ DISTANCE: 3 meters
- ▣ LIMIT:  $43 + 10 \log_{10}(W) =$  37.97 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	EIRP (dBm)	dBc
18615 (1851.5)	3,703.00	-46.15	12.52	-52.20	1.69	V	-41.37	66.34
	5,554.50	-46.78	13.29	-47.26	2.82	V	-36.78	61.75
	7,406.00	-46.32	11.72	-41.82	3.88	H	-33.97	58.94
	9,257.50	-55.39	11.49	-46.55	4.67	H	-39.73	64.70
18900 (1880.0)	3,760.00	-45.77	12.56	-51.60	1.67	V	-40.71	65.68
	5,640.00	-49.26	13.30	-49.40	2.90	V	-39.00	63.97
	7,520.00	-44.87	11.70	-40.59	3.98	V	-32.87	57.84
	9,400.00	-46.30	11.43	-37.09	4.63	H	-30.29	55.26
19185 (1908.5)	3,817.00	-43.86	12.60	-49.56	1.66	V	-38.61	63.58
	5,725.50	-49.41	13.31	-48.36	2.92	H	-37.96	62.93
	7,634.00	-47.26	11.62	-43.19	3.99	H	-35.56	60.53
	9,542.50	-45.22	11.36	-36.80	4.73	H	-30.17	55.14

- NOTES:**
1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA/EIA-603-D-2010 June 24, 2010:
  2. We are performed all frequency to 10<sup>th</sup> harmonics from 9 kHz. Measurements above show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
  3. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
  4. All of RB size has been tested for emissions and EIRP, with the 1RB configuration observed as the worst case
  5. We are performed 16QAM and QPSK modulations. The worst case data are reported in the table above.

### 8.3.3 RADIATED SPURIOUS EMISSIONS (5 MHz Band 2 LTE)

- ▣ OPERATING FREQUENCY: 1880.00 MHz
- ▣ MEASURED OUTPUT POWER: 24.89 dBm = 0.308 W
- ▣ MODULATION SIGNAL: 5 MHz QPSK
- ▣ DISTANCE: 3 meters
- ▣ LIMIT:  $43 + 10 \log_{10}(W) =$  37.89 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	EIRP (dBm)	dBc
18625 (1852.5)	3,705.00	-46.87	12.52	-52.78	1.68	V	-41.94	66.83
	5,557.50	-48.59	13.29	-49.02	2.83	V	-38.55	63.44
	7,410.00	-51.52	11.72	-46.85	3.90	H	-39.03	63.92
	9,262.50	-55.71	11.49	-46.87	4.67	V	-40.05	64.94
18900 (1880.0)	3,760.00	-46.71	12.56	-52.54	1.67	V	-41.65	66.54
	5,640.00	-48.38	13.30	-48.52	2.90	V	-38.12	63.01
	7,520.00	-45.26	11.70	-40.98	3.98	V	-33.26	58.15
	9,400.00	-48.94	11.43	-39.73	4.63	H	-32.93	57.82
19175 (1907.5)	3,815.00	-45.19	12.60	-50.89	1.66	V	-39.94	64.83
	5,722.50	-50.51	13.31	-49.32	2.91	H	-38.92	63.81
	7,630.00	-46.12	11.62	-42.09	3.98	H	-34.45	59.34
	9,537.50	-44.85	11.36	-36.43	4.73	H	-29.80	54.69

- NOTES:**
1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA/EIA-603-D-2010 June 24, 2010:
  2. We are performed all frequency to 10<sup>th</sup> harmonics from 9 kHz. Measurements above show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
  3. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
  4. All of RB size has been tested for emissions and EIRP, with the 1RB configuration observed as the worst case
  5. We are performed 16QAM and QPSK modulations. The worst case data are reported in the table above.

**8.3.4 RADIATED SPURIOUS EMISSIONS (10 MHz Band 2 LTE)**

- ▣ OPERATING FREQUENCY: 1905.00 MHz
- ▣ MEASURED OUTPUT POWER: 25.03 dBm = 0.319 W
- ▣ MODULATION SIGNAL: 10 MHz QPSK
- ▣ DISTANCE: 3 meters
- ▣ LIMIT:  $43 + 10 \log_{10}(W) =$  38.03 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	EIRP (dBm)	dBc
18650 (1855.0)	3,710.00	-43.86	12.52	-49.63	1.67	V	-38.78	63.81
	5,565.00	-46.67	13.29	-47.17	2.82	V	-36.70	61.73
	7,420.00	-46.06	11.72	-41.37	3.87	H	-33.52	58.55
	9,275.00	-53.84	11.48	-44.96	4.64	H	-38.12	63.15
18900 (1880.0)	3,760.00	-46.12	12.56	-51.95	1.67	V	-41.06	66.09
	5,640.00	-48.78	13.30	-48.92	2.90	V	-38.52	63.55
	7,520.00	-45.42	11.70	-41.14	3.98	H	-33.42	58.45
	9,400.00	-48.97	11.43	-39.76	4.63	H	-32.96	57.99
19150 (1905.0)	3,810.00	-45.45	12.60	-51.35	1.66	V	-40.41	65.44
	5,715.00	-50.43	13.31	-49.43	2.90	V	-39.02	64.05
	7,620.00	-52.31	11.62	-48.35	3.97	H	-40.70	65.73
	9,525.00	-49.93	11.37	-41.33	4.76	H	-34.72	59.75

- NOTES:**
1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA/EIA-603-D-2010 June 24, 2010:
  2. We are performed all frequency to 10<sup>th</sup> harmonics from 9 kHz. Measurements above show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
  3. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
  4. All of RB size has been tested for emissions and EIRP, with the 1RB configuration observed as the worst case
  5. We are performed 16QAM and QPSK modulations. The worst case data are reported in the table above.

**8.3.5 RADIATED SPURIOUS EMISSIONS (15 MHz Band 2 LTE)**

- ▣ OPERATING FREQUENCY: 1902.50 MHz
- ▣ MEASURED OUTPUT POWER: 25.02 dBm = 0.318 W
- ▣ MODULATION SIGNAL: 15 MHz QPSK
- ▣ DISTANCE: 3 meters
- ▣ LIMIT:  $43 + 10 \log_{10}(W) =$  38.02 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	EIRP (dBm)	dBc
18675 (1857.5)	3,715.00	-46.27	12.52	-52.20	1.66	V	-41.34	66.36
	5,572.50	-47.94	13.29	-48.54	2.83	V	-38.08	63.10
	7,430.00	-48.48	11.72	-43.96	3.87	V	-36.11	61.13
18900 (1880.0)	3,760.00	-46.79	12.56	-52.62	1.67	V	-41.73	66.75
	5,640.00	-49.16	13.30	-49.30	2.90	V	-38.90	63.92
	7,520.00	-46.00	11.70	-41.72	3.98	H	-34.00	59.02
	9,400.00	-53.22	11.43	-44.01	4.63	H	-37.21	62.23
19125 (1902.5)	3,805.00	-49.23	12.59	-54.88	1.67	V	-43.96	68.98
	5,707.50	-49.57	13.31	-48.75	2.89	V	-38.33	63.35
	7,610.00	-52.31	11.63	-48.22	3.95	V	-40.54	65.56
	9,512.50	-53.21	11.38	-44.53	4.77	H	-37.92	62.94

- NOTES:**
1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA/EIA-603-D-2010 June 24, 2010:
  2. We are performed all frequency to 10<sup>th</sup> harmonics from 9 kHz. Measurements above show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
  3. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
  4. All of RB size has been tested for emissions and EIRP, with the 1RB configuration observed as the worst case
  5. We are performed 16QAM and QPSK modulations. The worst case data are reported in the table above.

### 8.3.6 RADIATED SPURIOUS EMISSIONS (20 MHz Band 2 LTE)

- ▣ OPERATING FREQUENCY: 1900.00 MHz
- ▣ MEASURED OUTPUT POWER: 25.35 dBm = 0.343 W
- ▣ MODULATION SIGNAL: 20 MHz QPSK
- ▣ DISTANCE: 3 meters
- ▣ LIMIT:  $43 + 10 \log_{10}(W) =$  38.35 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	EIRP (dBm)	dBc
18700 (1860.0)	3,720.00	-45.06	12.53	-51.16	1.64	V	-40.27	65.62
	5,580.00	-48.37	13.29	-48.62	2.82	V	-38.15	63.50
	7,440.00	-50.91	11.72	-46.36	3.87	H	-38.51	63.86
	9,300.00	-52.93	11.47	-43.59	4.69	V	-36.81	62.16
18900 (1880.0)	3,760.00	-46.72	12.56	-52.55	1.67	V	-41.66	67.01
	5,640.00	-49.84	13.30	-49.98	2.90	V	-39.58	64.93
	7,520.00	-45.86	11.70	-41.58	3.98	H	-33.86	59.21
	9,400.00	-46.63	11.43	-37.42	4.63	H	-30.62	55.97
19100 (1900.0)	3,800.00	-48.12	12.59	-53.53	1.68	V	-42.62	67.97
	5,700.00	-49.86	13.31	-49.28	2.87	V	-38.84	64.19
	7,600.00	-47.40	11.64	-43.01	3.94	V	-35.31	60.66
	9,500.00	-51.81	11.38	-43.17	4.91	H	-36.70	62.05

- NOTES:**
1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA/EIA-603-D-2010 June 24, 2010:
  2. We are performed all frequency to 10<sup>th</sup> harmonics from 9 kHz. Measurements above show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
  3. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
  4. All of RB size has been tested for emissions and EIRP, with the 1RB configuration observed as the worst case
  5. We are performed 16QAM and QPSK modulations. The worst case data are reported in the table above.

### 8.3.7 RADIATED SPURIOUS EMISSIONS (1.4 MHz Band 5 LTE)

- ▣ OPERATING FREQUENCY: 836.50 MHz
- ▣ MEASURED OUTPUT POWER: 19.02 dBm = 0.080 W
- ▣ MODULATION SIGNAL: 1.4 MHz QPSK
- ▣ DISTANCE: 3 meters
- ▣ LIMIT:  $43 + 10 \log_{10}(W) =$  32.02 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBd)	Substitute Level (dBm)	C.L	Pol	ERP (dBm)	dBc
20407 (824.7)	1,649.40	-56.70	9.16	-67.41	1.17	V	-59.42	78.44
	2,474.10	-53.40	10.93	-60.83	1.18	V	-51.09	70.11
	3,298.80	-55.91	11.94	-63.43	1.41	H	-52.90	71.92
20525 (836.5)	1,673.00	-54.37	9.23	-65.05	1.17	H	-56.99	76.01
	2,509.50	-53.13	10.96	-60.76	1.24	H	-51.04	70.06
	3,346.00	-55.33	12.04	-63.09	1.46	H	-52.51	71.53
20643 (848.3)	1,696.60	-53.48	9.32	-64.20	1.16	V	-56.04	75.06
	2,544.90	-54.77	10.99	-62.23	1.21	H	-52.46	71.48
	3,393.20	-56.04	12.14	-63.66	1.49	H	-53.01	72.03

- NOTES:**
1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA/EIA-603-D-2010 June 24, 2010:
  2. We are performed all frequency to 10<sup>th</sup> harmonics from 9 kHz. Measurements above show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
  3. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
  4. All of RB size has been tested for emissions and ERP, with the 1RB configuration observed as the worst case
  5. We are performed 16QAM and QPSK modulations. The worst case data are reported in the table above.

### 8.3.8 RADIATED SPURIOUS EMISSIONS (3 MHz Band 5 LTE)

- ▣ OPERATING FREQUENCY: 836.50 MHz
- ▣ MEASURED OUTPUT POWER: 19.18 dBm = 0.083 W
- ▣ MODULATION SIGNAL: 3 MHz QPSK
- ▣ DISTANCE: 3 meters
- ▣ LIMIT:  $43 + 10 \log_{10}(W) =$  32.18 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBd)	Substitute Level (dBm)	C.L	Pol	ERP (dBm)	dBc
20415 (825.5)	1,651.00	-55.56	9.16	-66.27	1.17	H	-58.28	77.46
	2,476.50	-47.82	10.93	-55.25	1.18	H	-45.51	64.69
	3,302.00	-57.28	11.94	-64.80	1.41	H	-54.27	73.45
20525 (836.5)	1,673.00	-53.81	9.23	-64.49	1.17	H	-56.43	75.61
	2,509.50	-54.62	10.96	-62.25	1.24	H	-52.53	71.71
	3,346.00	-57.62	10.03	-63.38	1.46	H	-54.80	73.98
20635 (847.5)	1,695.00	-55.89	9.32	-66.61	1.16	H	-58.45	77.63
	2,542.50	-54.78	10.98	-62.02	1.21	H	-52.25	71.43
	3,390.00	-55.87	12.13	-63.60	1.48	H	-52.95	72.13

- NOTES:**
1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA/EIA-603-D-2010 June 24, 2010:
  2. We are performed all frequency to 10<sup>th</sup> harmonics from 9 kHz. Measurements above show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
  3. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
  4. All of RB size has been tested for emissions and ERP, with the 1RB configuration observed as the worst case
  5. We are performed 16QAM and QPSK modulations. The worst case data are reported in the table above.

**8.3.9 RADIATED SPURIOUS EMISSIONS (5 MHz Band 5 LTE)**

- ▣ OPERATING FREQUENCY: 836.50 MHz
- ▣ MEASURED OUTPUT POWER: 19.11 dBm = 0.081 W
- ▣ MODULATION SIGNAL: 5 MHz QPSK
- ▣ DISTANCE: 3 meters
- ▣ LIMIT:  $43 + 10 \log_{10}(W) =$  32.11 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBd)	Substitute Level (dBm)	C.L	Pol	ERP (dBm)	dBc
20425 (826.5)	1,653.00	-56.34	9.18	-67.11	1.17	H	-59.10	78.21
	2,479.50	-55.71	10.93	-63.33	1.18	H	-53.58	72.69
	3,306.00	-55.50	11.95	-63.02	1.42	H	-52.48	71.59
20525 (836.5)	1,673.00	-53.28	9.23	-63.96	1.17	H	-55.90	75.01
	2,509.50	-54.84	10.96	-62.47	1.24	H	-52.75	71.86
	3,346.00	-56.73	10.03	-62.49	1.46	H	-53.91	73.02
20625 (846.5)	1,693.00	-57.75	9.32	-68.47	1.16	H	-60.31	79.42
	2,539.50	-54.43	10.98	-61.67	1.21	H	-51.90	71.01
	3,386.00	-55.46	12.22	-63.32	1.48	H	-52.57	71.68

- NOTES:**
1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA/EIA-603-D-2010 June 24, 2010:
  2. We are performed all frequency to 10<sup>th</sup> harmonics from 9 kHz. Measurements above show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
  3. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
  4. All of RB size has been tested for emissions and ERP, with the 1RB configuration observed as the worst case
  5. We are performed 16QAM and QPSK modulations. The worst case data are reported in the table above.

**8.3.10 RADIATED SPURIOUS EMISSIONS (10 MHz Band 5 LTE)**

- ▣ OPERATING FREQUENCY: 836.50 MHz
- ▣ MEASURED OUTPUT POWER: 19.19 dBm = 0.083 W
- ▣ MODULATION SIGNAL: 10 MHz QPSK
- ▣ DISTANCE: 3 meters
- ▣ LIMIT:  $43 + 10 \log_{10}(W) =$  32.19 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBd)	Substitute Level (dBm)	C.L	Pol	ERP (dBm)	dBc
20450 (829.0)	1,658.00	-55.03	9.20	-65.86	1.17	H	-57.83	77.02
	2,487.00	-56.81	10.94	-64.14	1.20	H	-54.40	73.59
	3,316.00	-55.63	11.97	-63.24	1.43	H	-52.69	71.88
20525 (836.5)	1,673.00	-54.62	9.23	-65.30	1.17	H	-57.24	76.43
	2,509.50	-54.14	10.96	-61.77	1.24	H	-52.05	71.24
	3,346.00	-55.94	10.03	-61.70	1.46	H	-53.12	72.31
20600 (844.0)	1,688.00	-54.98	9.30	-65.68	1.16	H	-57.54	76.73
	2,532.00	-56.18	10.98	-63.90	1.20	H	-54.12	73.31
	3,376.00	-56.05	12.10	-63.86	1.47	H	-53.23	72.42

- NOTES:**
1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA/EIA-603-D-2010 June 24, 2010:
  2. We are performed all frequency to 10<sup>th</sup> harmonics from 9 kHz. Measurements above show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
  3. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
  4. All of RB size has been tested for emissions and ERP, with the 1RB configuration observed as the worst case
  5. We are performed 16QAM and QPSK modulations. The worst case data are reported in the table above.

### 8.4 PEAK-TO-AVERAGE RATIO

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data ( dB )
2	1.4 MHz	1880.0	QPSK	6	0	5.54
			16-QAM	6	0	6.39
	3 MHz		QPSK	15	0	5.69
			16-QAM	15	0	6.47
	5 MHz		QPSK	25	0	5.63
			16-QAM	25	0	6.32
	10 MHz		QPSK	50	0	5.71
			16-QAM	50	0	6.33
	15 MHz		QPSK	75	0	5.64
			16-QAM	75	0	6.30
	20 MHz		QPSK	100	0	5.61
			16-QAM	100	0	6.32

- Plots of the EUT's Peak- to- Average Ratio are shown Page 61 ~ 66.

### 8.5 OCCUPIED BANDWIDTH

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data ( MHz )
2	1.4 MHz	1880.0	QPSK	6	0	1.0914
			16-QAM	6	0	1.0936
	3 MHz		QPSK	15	0	2.6923
			16-QAM	15	0	2.6946
	5 MHz		QPSK	25	0	4.5021
			16-QAM	25	0	4.4983
	10 MHz		QPSK	50	0	8.9847
			16-QAM	50	0	8.9782
	15 MHz		QPSK	75	0	13.485
			16-QAM	75	0	13.487
	20 MHz		QPSK	100	0	17.964
			16-QAM	100	0	17.974

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data ( MHz )
5	1.4 MHz	836.5	QPSK	6	0	1.0934
			16-QAM	6	0	1.0946
	3 MHz		QPSK	15	0	2.7042
			16-QAM	15	0	2.6985
	5 MHz		QPSK	25	0	4.5095
			16-QAM	25	0	4.5001
	10 MHz		QPSK	50	0	9.0063
			16-QAM	50	0	8.9661

- Plots of the EUT's Occupied Bandwidth are shown Page 51 ~ 60.

### 8.6 CONDUCTED SPURIOUS EMISSIONS

■FACTORS FOR FREQUENCY

Frequency Range (GHz)	Factor [dB]
0.03 – 1	27.145
1 – 5	26.960
5 – 10	27.542
10 – 15	28.439
15 – 20	29.144
Above 20	30.148

**NOTES:**

Factor(dB) = Cable Loss + Attenuator +Power Splitter

Band	Band Width (MHz)	Frequency (MHz)	Frequency of Maximum Harmonic (GHz)	Factor (dB)	Measurement Maximum Data (dBm)	Result (dBm)	Limit (dBm)
2	1.4	1850.7	18.9410	29.144	-62.55	-33.406	-13.00
		1880.0	18.8480	29.144	-62.43	-33.286	
		1909.3	18.9455	29.144	-62.38	-33.236	
	3	1851.5	18.9015	29.144	-62.22	-33.076	
		1880.0	18.9360	29.144	-62.27	-33.126	
		1908.5	19.2535	29.144	-62.35	-33.206	
	5	1852.5	18.9210	29.144	-62.17	-33.026	
		1880.0	19.2505	29.144	-62.69	-33.546	
		1907.5	18.9125	29.144	-62.57	-33.426	
	10	1855.0	18.9665	29.144	-62.26	-33.116	
		1880.0	18.9660	29.144	-62.47	-33.326	
		1905.0	18.5995	29.144	-62.56	-33.416	
	15	1857.5	6.2722	27.542	-67.33	-39.788	
		1880.0	18.8760	29.144	-62.57	-33.426	
		1902.5	18.9195	29.144	-62.40	-33.256	
	20	1860.0	18.9190	29.144	-62.46	-33.316	
		1880.0	19.2605	29.144	-62.45	-33.306	
		1900.0	18.8430	29.144	-62.70	-33.556	

Band	Band Width (MHz)	Frequency (MHz)	Frequency of Maximum Harmonic (GHz)	Factor (dB)	Measurement Maximum Data (dBm)	Result (dBm)	Limit (dBm)
5	1.4	824.7	3.68842	26.96	-67.24	-40.28	-13.00
		836.5	2.70411	26.96	-67.20	-40.24	
		848.3	3.67699	26.96	-67.06	-40.10	
	3	825.5	3.71128	26.96	-66.57	-39.61	
		836.5	3.69861	26.96	-67.21	-40.25	
		847.5	3.69214	26.96	-67.23	-40.27	
	5	826.5	3.70059	26.96	-67.00	-40.04	
		836.5	3.67997	26.96	-66.90	-39.94	
		846.5	3.68991	26.96	-67.21	-40.25	
	10	829.0	3.69488	26.96	-67.05	-40.09	
		836.5	3.71128	26.96	-66.76	-39.80	
		844.0	3.72520	26.96	-67.09	-40.13	

**NOTES:**

1. Conducted Spurious Emissions was Tested QPSK Modulation, Resource Block Size 1 and Resource Block Offset 0
2. Result (dBm) = Measurement Maximum Data (dBm) + Factor (dB)

- Plots of the EUT's Conducted Spurious Emissions are shown Page 97 ~ 126.

**8.6.1 BAND EDGE**


- Plots of the EUT's Band Edge are shown Page 67 ~ 96.

## 8.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

### 8.7.1 FREQUENCY STABILITY (1.4 MHz Band 2 LTE)

- ▣ OPERATING FREQUENCY: 1880,000,000 Hz
- ▣ CHANNEL: 18900 (1.4 MHz)
- ▣ REFERENCE VOLTAGE: 3.85 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band


Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.85	+20(Ref)	1879 999 991	0.0	0.000 000	0.000
100%		-30	1879 999 981	-9.7	-0.000 001	-0.005
100%		-20	1879 999 977	-13.7	-0.000 001	-0.007
100%		-10	1879 999 985	-6.0	0.000 000	-0.003
100%		0	1879 999 980	-10.7	-0.000 001	-0.006
100%		+10	1879 999 981	-10.1	-0.000 001	-0.005
100%		+30	1879 999 982	-9.4	-0.000 001	-0.005
100%		+40	1879 999 984	-6.8	0.000 000	-0.004
100%		+50	1879 999 981	-9.7	-0.000 001	-0.005
Batt. Endpoint		3.60	+20	1879 999 984	-7.1	0.000 000

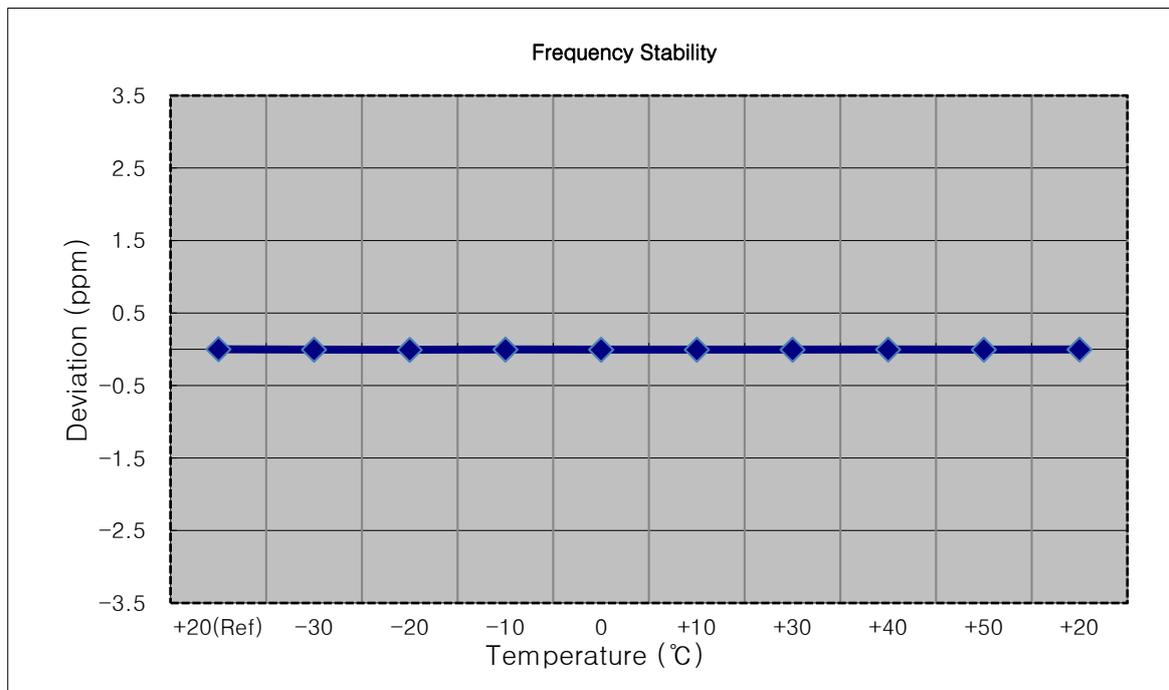

**8.7.2 FREQUENCY STABILITY (3 MHz Band 2 LTE)**

- ▣ OPERATING FREQUENCY: 1880,000,000 Hz
- ▣ CHANNEL: 18900 (3 MHz)
- ▣ REFERENCE VOLTAGE: 3.85 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band


Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.85	+20(Ref)	1879 999 992	0.0	0.000 000	0.000
100%		-30	1879 999 981	-11.3	-0.000 001	-0.006
100%		-20	1879 999 986	-5.8	0.000 000	-0.003
100%		-10	1879 999 988	-4.4	0.000 000	-0.002
100%		0	1879 999 981	-10.9	-0.000 001	-0.006
100%		+10	1879 999 985	-7.0	0.000 000	-0.004
100%		+30	1879 999 982	-9.8	-0.000 001	-0.005
100%		+40	1879 999 988	-3.9	0.000 000	-0.002
100%		+50	1879 999 985	-7.4	0.000 000	-0.004
Batt. Endpoint		3.60	+20	1879 999 984	-8.5	0.000 000

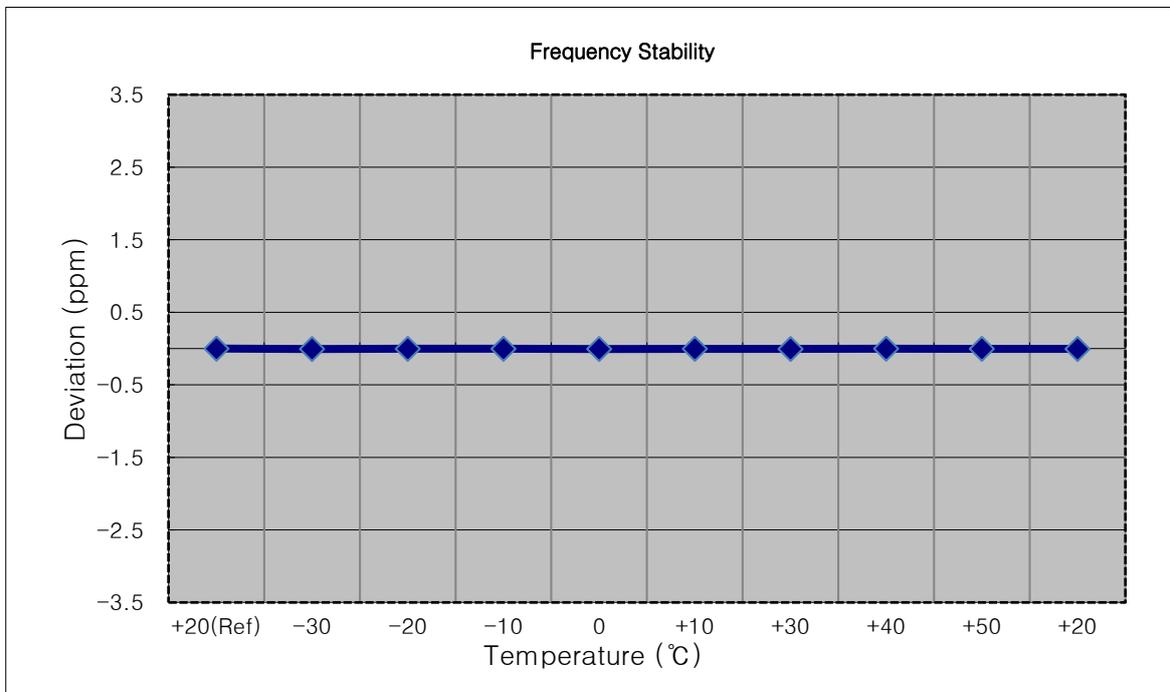

**8.7.3 FREQUENCY STABILITY (5 MHz Band 2 LTE)**

- ▣ OPERATING FREQUENCY: 1880,000,000 Hz
- ▣ CHANNEL: 18900 (5 MHz)
- ▣ REFERENCE VOLTAGE: 3.85 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band


Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.85	+20(Ref)	1879 999 989	0.0	0.000 000	0.000
100%		-30	1879 999 982	-7.0	0.000 000	-0.004
100%		-20	1879 999 977	-11.7	-0.000 001	-0.006
100%		-10	1879 999 984	-5.3	0.000 000	-0.003
100%		0	1879 999 981	-8.4	0.000 000	-0.004
100%		+10	1879 999 981	-8.2	0.000 000	-0.004
100%		+30	1879 999 982	-7.5	0.000 000	-0.004
100%		+40	1879 999 983	-6.2	0.000 000	-0.003
100%		+50	1879 999 983	-6.2	0.000 000	-0.003
Batt. Endpoint		3.60	+20	1879 999 984	-4.7	0.000 000

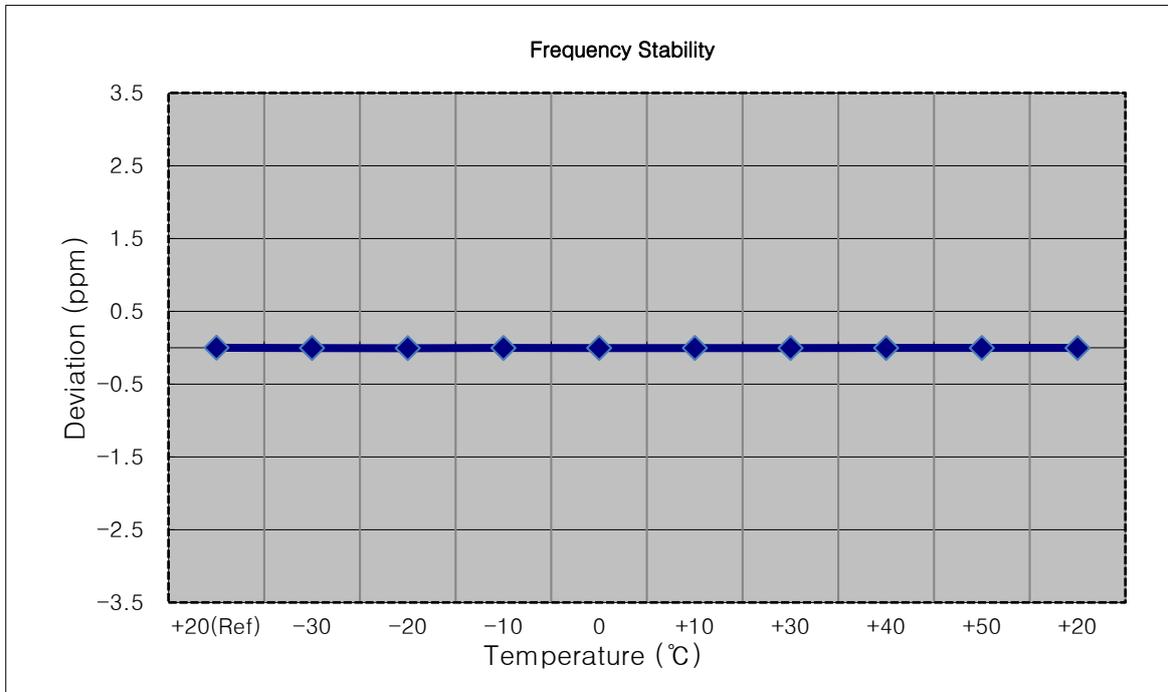

**8.7.4 FREQUENCY STABILITY (10 MHz Band 2 LTE)**

- ▣ OPERATING FREQUENCY: 1880,000,000 Hz
- ▣ CHANNEL: 18900 (10 MHz)
- ▣ REFERENCE VOLTAGE: 3.85 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band


Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.85	+20(Ref)	1879 999 995	0.0	0.000 000	0.000
100%		-30	1879 999 984	-10.7	-0.000 001	-0.006
100%		-20	1879 999 988	-6.9	0.000 000	-0.004
100%		-10	1879 999 988	-7.3	0.000 000	-0.004
100%		0	1879 999 989	-5.9	0.000 000	-0.003
100%		+10	1879 999 986	-9.4	-0.000 001	-0.005
100%		+30	1879 999 987	-7.7	0.000 000	-0.004
100%		+40	1879 999 989	-5.8	0.000 000	-0.003
100%		+50	1879 999 986	-9.5	-0.000 001	-0.005
Batt. Endpoint		3.60	+20	1879 999 988	-7.5	0.000 000

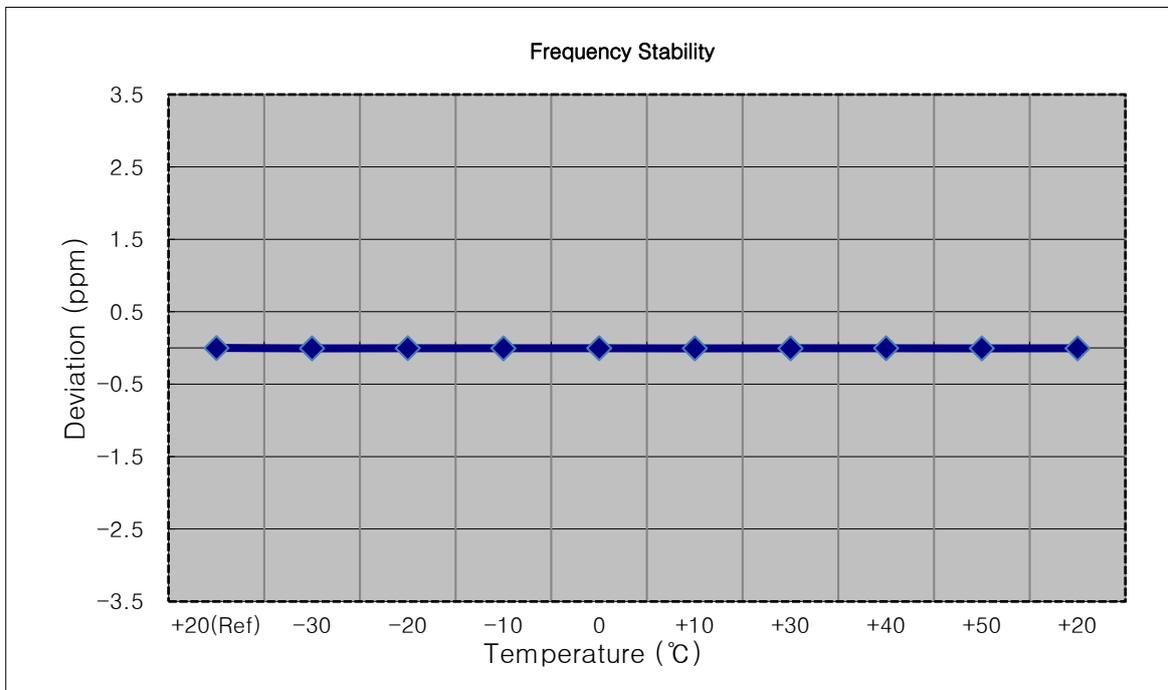

**8.7.5 FREQUENCY STABILITY (15 MHz Band 2 LTE)**

- ▣ OPERATING FREQUENCY: 1880,000,000 Hz
- ▣ CHANNEL: 18900 (15 MHz)
- ▣ REFERENCE VOLTAGE: 3.85 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band


Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.85	+20(Ref)	1879 999 997	0.0	0.000 000	0.000
100%		-30	1879 999 993	-3.7	0.000 000	-0.002
100%		-20	1879 999 991	-5.8	0.000 000	-0.003
100%		-10	1879 999 988	-8.7	0.000 000	-0.005
100%		0	1879 999 987	-9.7	-0.000 001	-0.005
100%		+10	1879 999 991	-6.4	0.000 000	-0.003
100%		+30	1879 999 993	-4.2	0.000 000	-0.002
100%		+40	1879 999 992	-5.4	0.000 000	-0.003
100%		+50	1879 999 992	-5.3	0.000 000	-0.003
Batt. Endpoint		3.60	+20	1879 999 989	-8.5	0.000 000

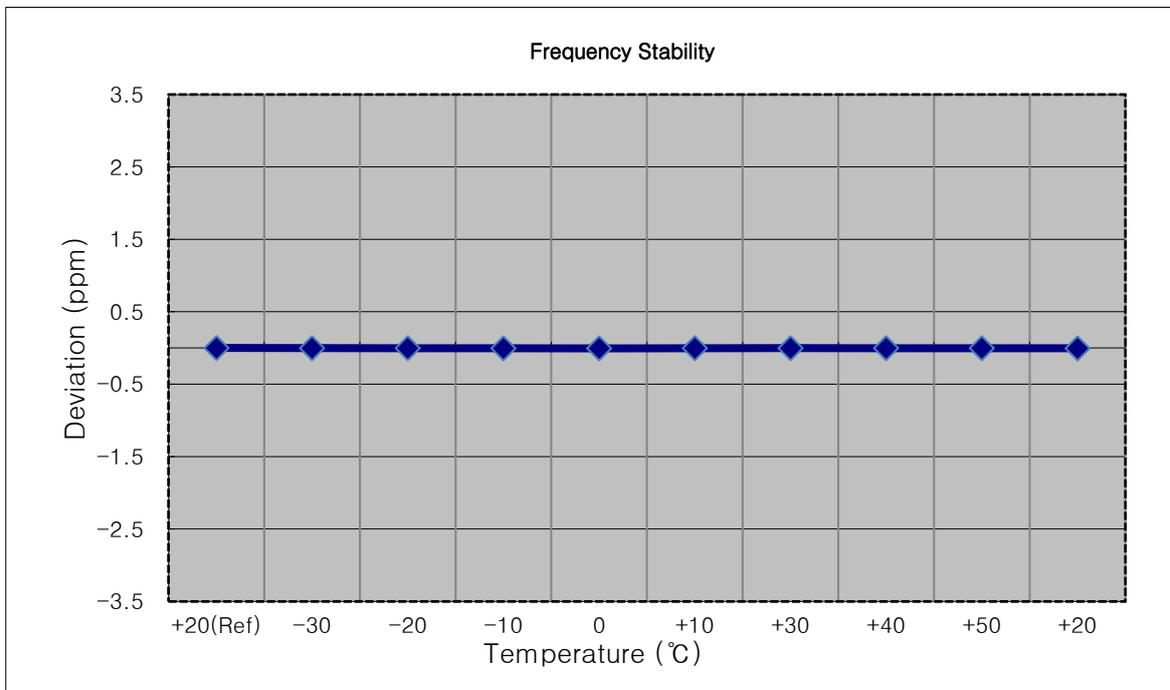

**8.7.6 FREQUENCY STABILITY (20 MHz Band 2 LTE)**

- ▣ OPERATING FREQUENCY: 1880,000,000 Hz
- ▣ CHANNEL: 18900 (20 MHz)
- ▣ REFERENCE VOLTAGE: 3.85 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band


Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.85	+20(Ref)	1879 999 994	0.0	0.000 000	0.000
100%		-30	1879 999 990	-3.6	0.000 000	-0.002
100%		-20	1879 999 989	-5.4	0.000 000	-0.003
100%		-10	1879 999 988	-6.3	0.000 000	-0.003
100%		0	1879 999 988	-6.0	0.000 000	-0.003
100%		+10	1879 999 989	-4.6	0.000 000	-0.002
100%		+30	1879 999 998	3.6	0.000 000	0.002
100%		+40	1879 999 986	-8.5	0.000 000	-0.005
100%		+50	1879 999 985	-9.0	0.000 000	-0.005
Batt. Endpoint		3.60	+20	1879 999 989	-5.3	0.000 000

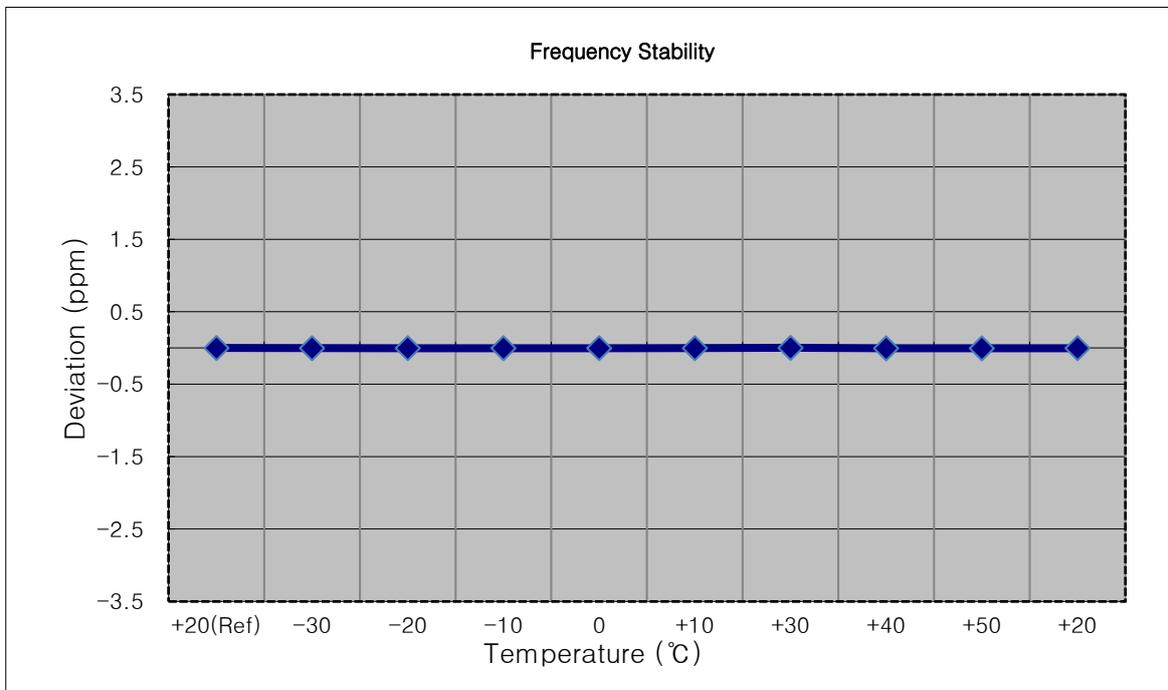

**8.7.7 FREQUENCY STABILITY (1.4 MHz Band 5 LTE)**

- ▣ OPERATING FREQUENCY: 836,500,000 Hz
- ▣ CHANNEL: 20525 (1.4 MHz)
- ▣ REFERENCE VOLTAGE: 3.85 VDC
- ▣ DEVIATION LIMIT: ± 0.000 25 % or 2.5 ppm


Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.85	+20(Ref)	836 500 009	0.0	0.000 000	0.000
100%		-30	836 500 019	9.6	0.000 001	0.011
100%		-20	836 500 018	8.9	0.000 001	0.011
100%		-10	836 500 016	7.3	0.000 001	0.009
100%		0	836 500 020	11.3	0.000 001	0.014
100%		+10	836 500 016	6.5	0.000 001	0.008
100%		+30	836 500 016	6.7	0.000 001	0.008
100%		+40	836 500 016	7.3	0.000 001	0.009
100%		+50	836 500 017	8.4	0.000 001	0.010
Batt. Endpoint		3.60	+20	836 500 018	8.5	0.000 001

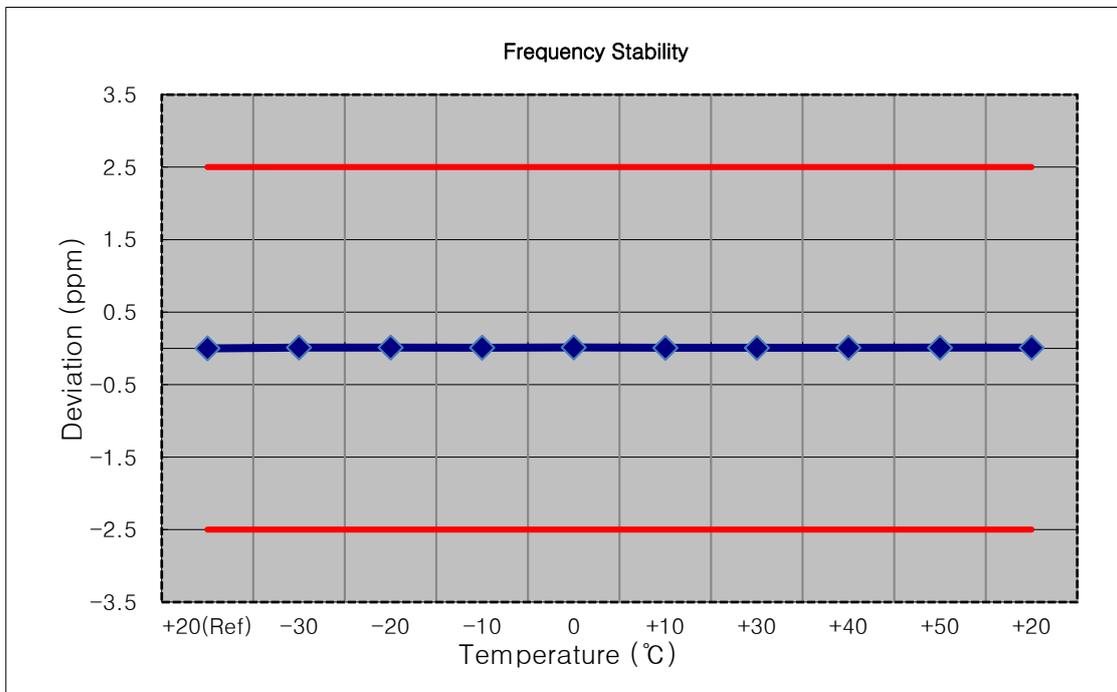

**8.7.8 FREQUENCY STABILITY (3 MHz Band 5 LTE)**

- ▣ OPERATING FREQUENCY: 836,500,000 Hz
- ▣ CHANNEL: 20525 (3 MHz)
- ▣ REFERENCE VOLTAGE: 3.85 VDC
- ▣ DEVIATION LIMIT: ± 0.000 25 % or 2.5 ppm


Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.85	+20(Ref)	836 500 010	0.0	0.000 000	0.000
100%		-30	836 500 014	3.9	0.000 000	0.005
100%		-20	836 500 016	6.3	0.000 001	0.008
100%		-10	836 500 015	5.2	0.000 001	0.006
100%		0	836 500 016	5.7	0.000 001	0.007
100%		+10	836 500 016	6.4	0.000 001	0.008
100%		+30	836 500 017	7.2	0.000 001	0.009
100%		+40	836 500 014	4.0	0.000 000	0.005
100%		+50	836 500 014	3.5	0.000 000	0.004
Batt. Endpoint		3.60	+20	836 500 015	4.7	0.000 001

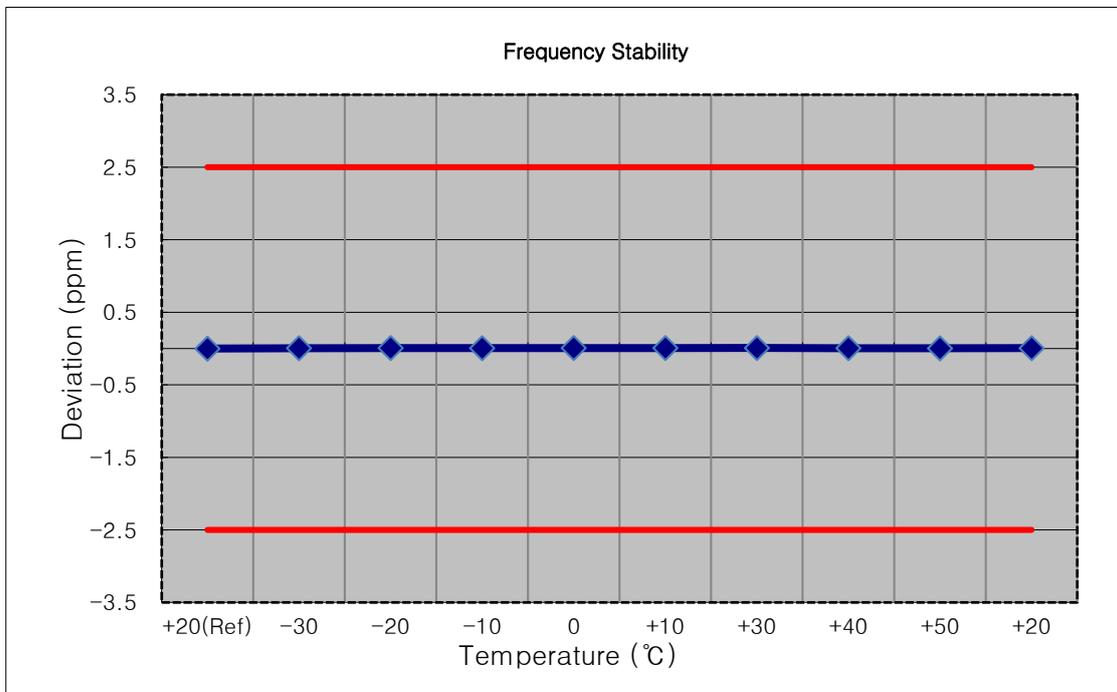

**8.7.9 FREQUENCY STABILITY (5 MHz Band 5 LTE)**

- ▣ OPERATING FREQUENCY: 836,500,000 Hz
- ▣ CHANNEL: 20525 (5 MHz)
- ▣ REFERENCE VOLTAGE: 3.85 VDC
- ▣ DEVIATION LIMIT: ± 0.000 25 % or 2.5 ppm


Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.85	+20(Ref)	836 500 004	0.0	0.000 000	0.000
100%		-30	836 500 008	4.3	0.000 001	0.005
100%		-20	836 500 010	6.3	0.000 001	0.008
100%		-10	836 500 009	5.1	0.000 001	0.006
100%		0	836 500 010	5.8	0.000 001	0.007
100%		+10	836 500 008	4.1	0.000 000	0.005
100%		+30	836 500 011	6.9	0.000 001	0.008
100%		+40	836 500 007	3.1	0.000 000	0.004
100%		+50	836 500 008	4.2	0.000 001	0.005
Batt. Endpoint		3.60	+20	836 500 010	6.0	0.000 001

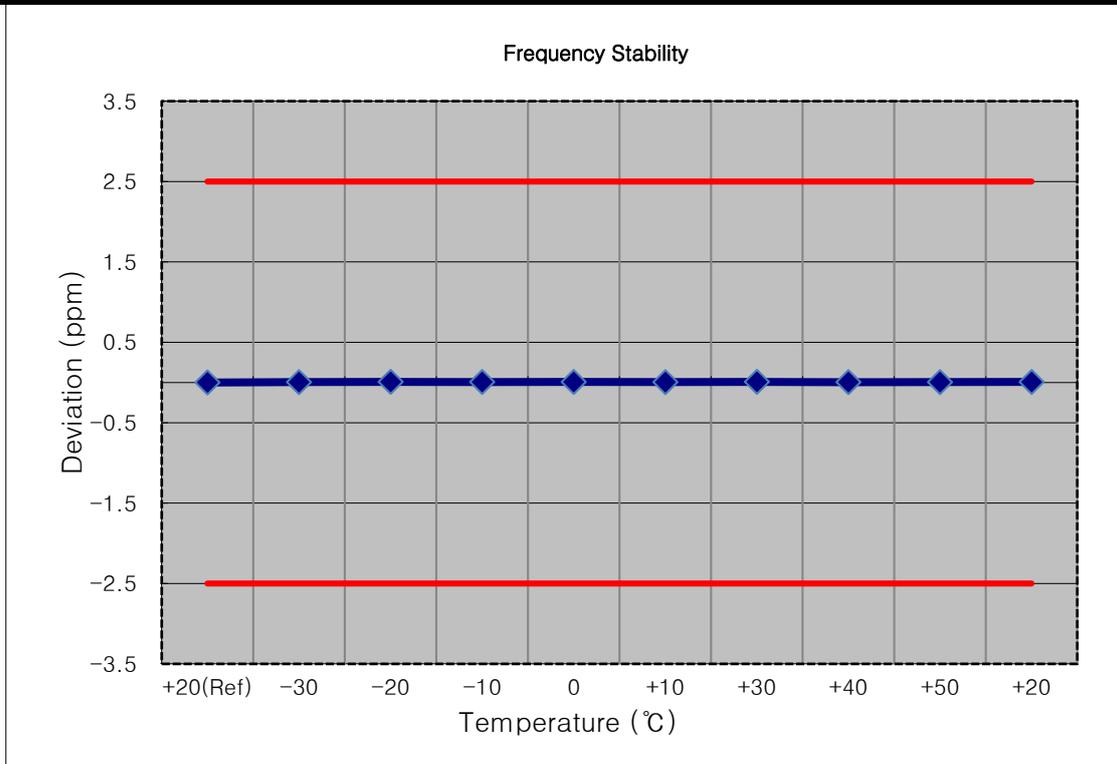

**8.7.10 FREQUENCY STABILITY (10 MHz Band 5 LTE)**


- ▣ OPERATING FREQUENCY: 836,500,000 Hz
- ▣ CHANNEL: 20525 (10 MHz)
- ▣ REFERENCE VOLTAGE: 3.85 VDC
- ▣ DEVIATION LIMIT: ± 0.000 25 % or 2.5 ppm

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.85	+20(Ref)	836 500 005	0.0	0.000 000	0.000
100%		-30	836 500 009	4.1	0.000 000	0.005
100%		-20	836 500 013	7.8	0.000 001	0.009
100%		-10	836 500 010	4.9	0.000 001	0.006
100%		0	836 500 011	6.2	0.000 001	0.007
100%		+10	836 500 013	7.5	0.000 001	0.009
100%		+30	836 500 013	7.5	0.000 001	0.009
100%		+40	836 500 013	7.5	0.000 001	0.009
100%		+50	836 500 013	7.5	0.000 001	0.009
Batt. Endpoint		3.60	+20	836 500 012	6.5	0.000 001

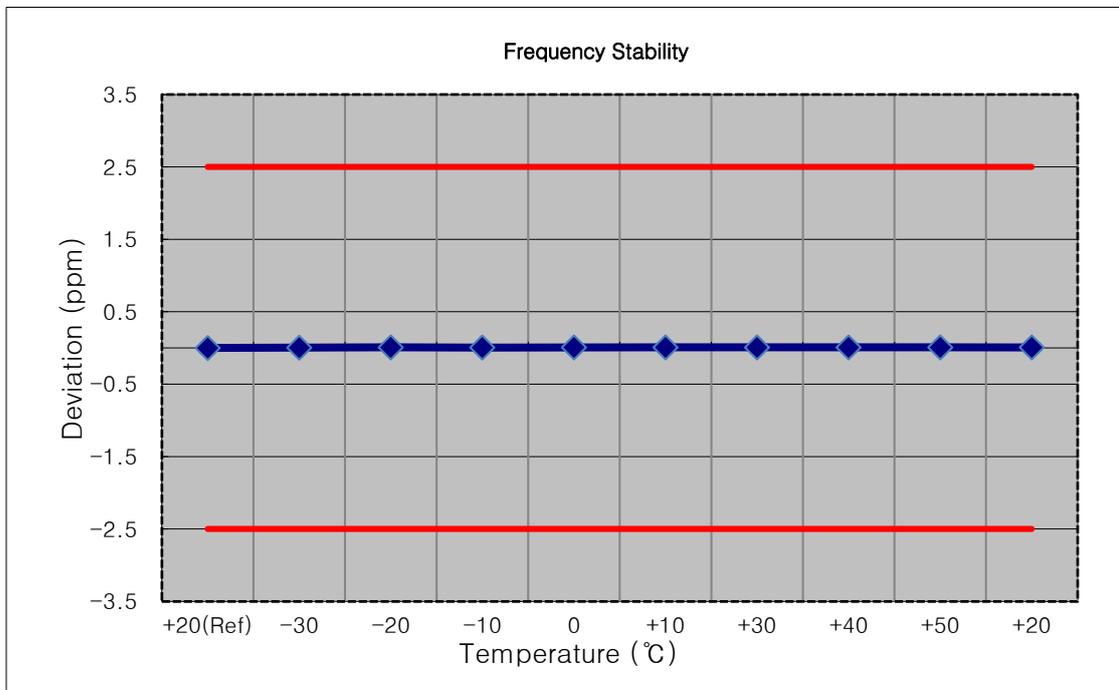


## **9. TEST PLOTS**


BAND 2. Occupied Bandwidth Plot (1.4M BW Ch.18900 QPSK RB 6\_0)

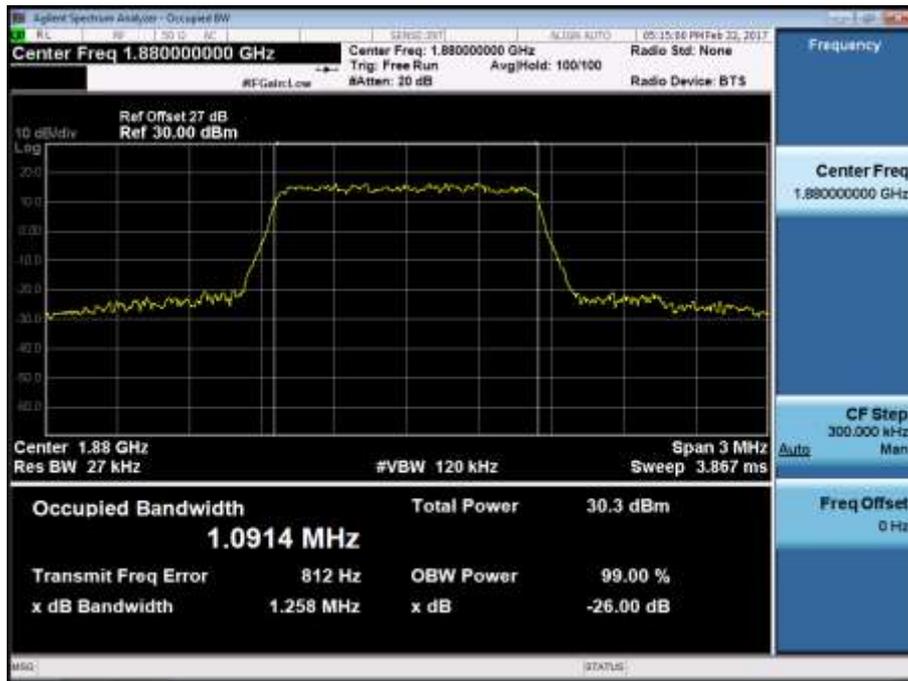


BAND 2. Occupied Bandwidth Plot (1.4M BW Ch.18900 16QAM RB 6\_0)

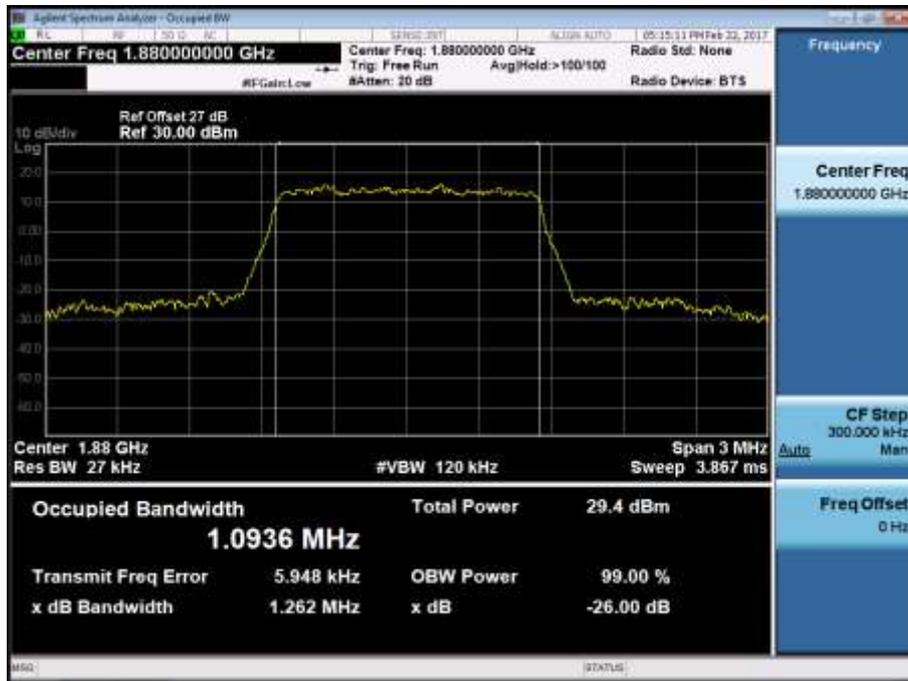


BAND 2. Occupied Bandwidth Plot (3M BW Ch.18900 QPSK RB 15\_0)

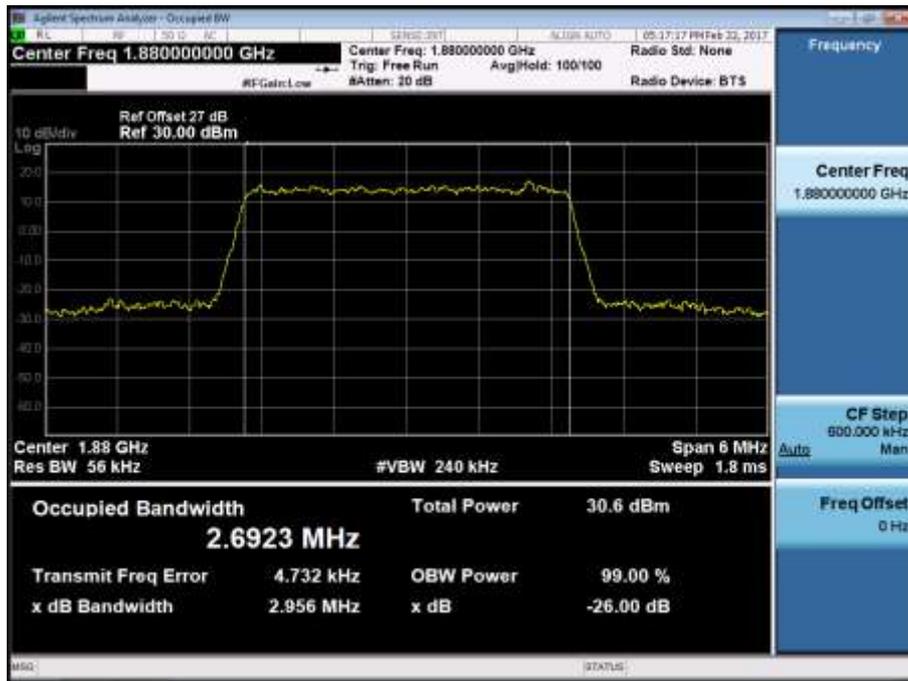


BAND 2. Occupied Bandwidth Plot (3M BW Ch.18900 16QAM RB 15\_0)

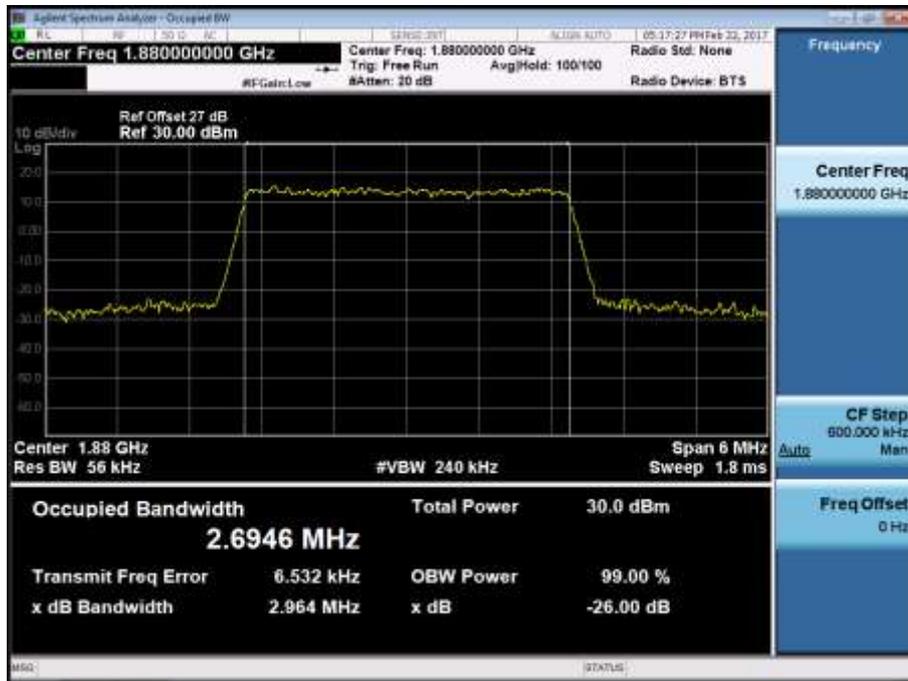


BAND 2. Occupied Bandwidth Plot (5M BW Ch.18900 QPSK RB 25\_0)

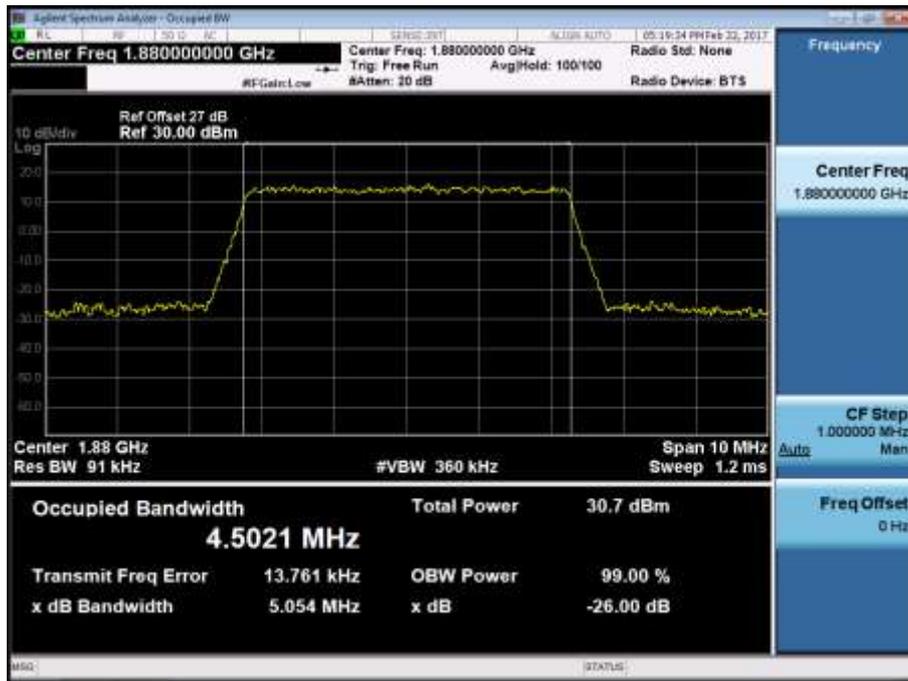


BAND 2. Occupied Bandwidth Plot (5M BW Ch.18900 16QAM RB 25\_0)

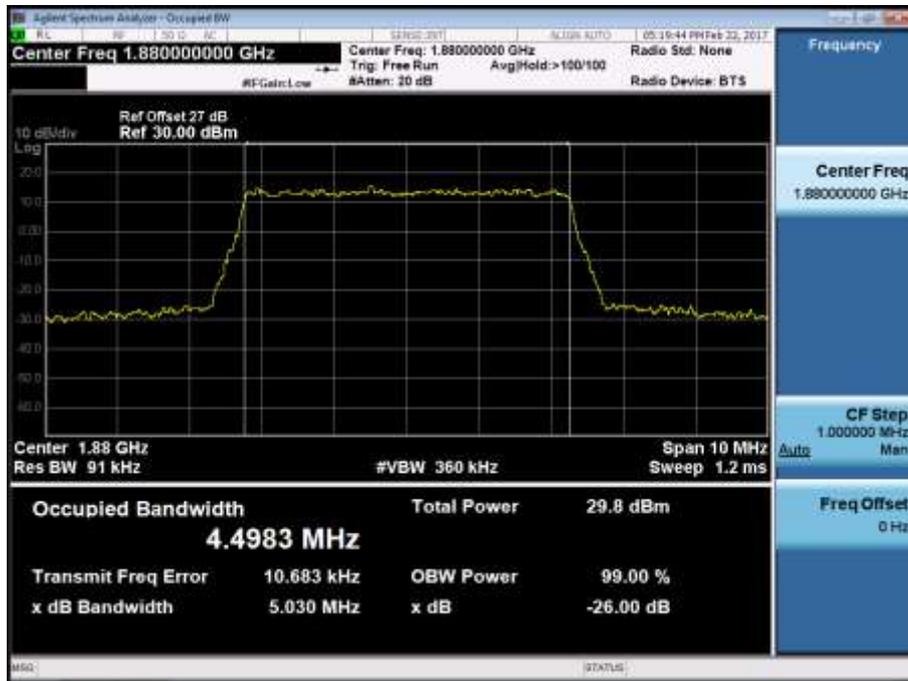


BAND 2. Occupied Bandwidth Plot (10M BW Ch.18900 QPSK RB 50\_0)

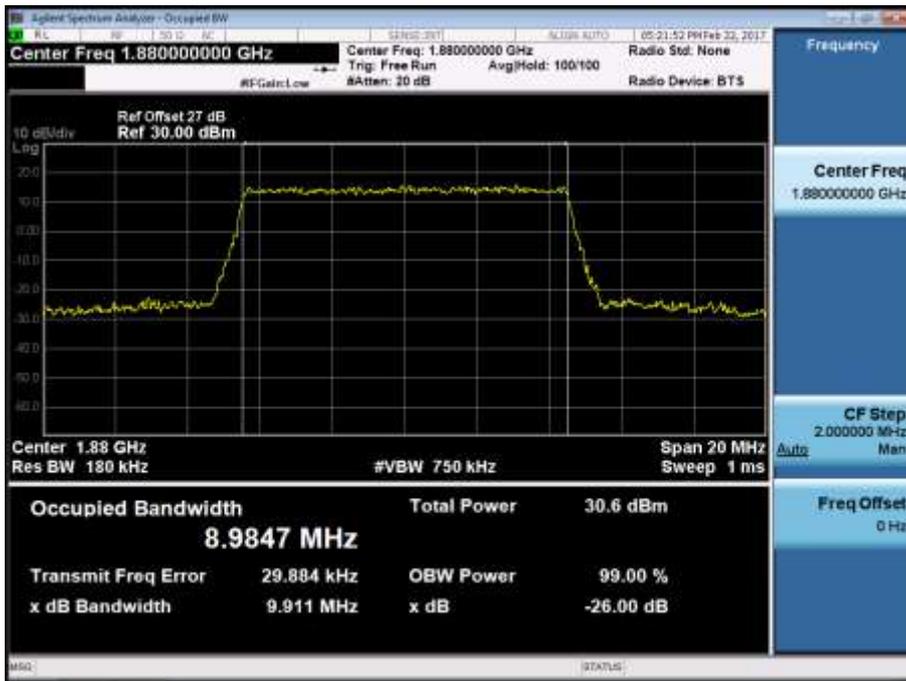


BAND 2. Occupied Bandwidth Plot (10M BW Ch.18900 16QAM RB 50\_0)

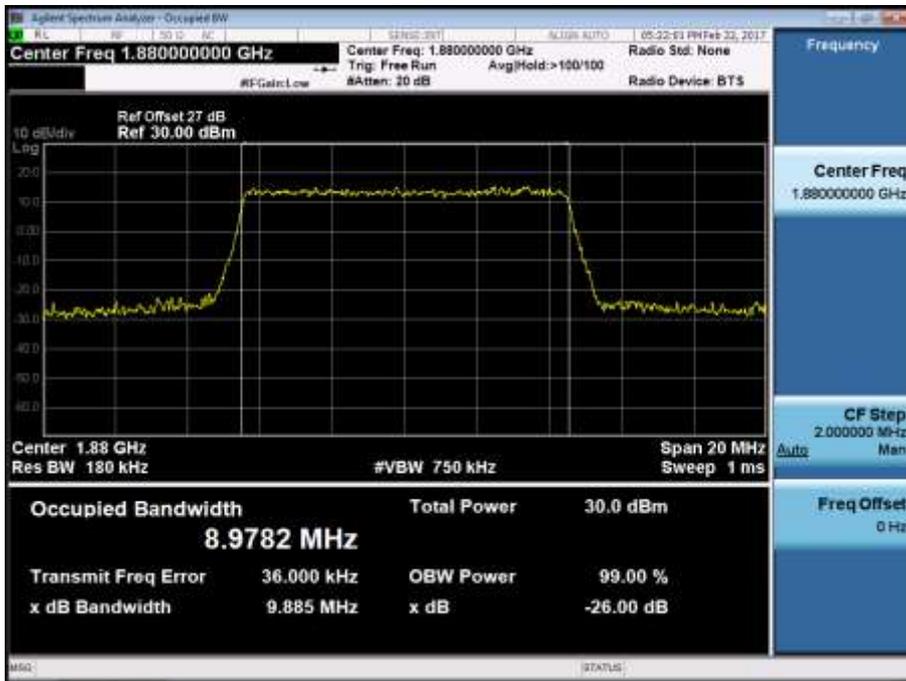


BAND 2. Occupied Bandwidth Plot (15M BW Ch.18900 QPSK RB 75\_0)

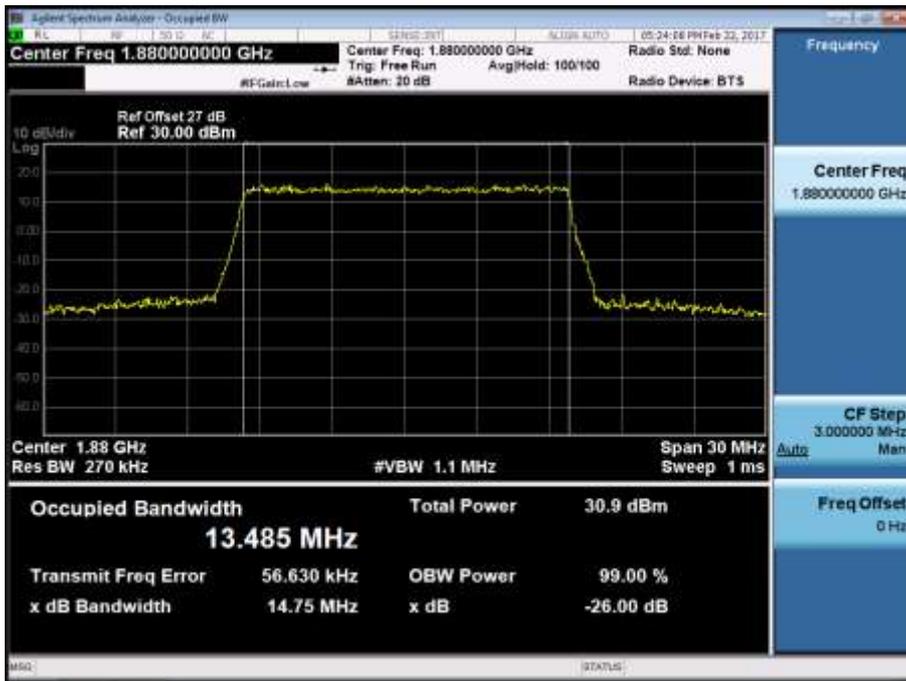


BAND 2. Occupied Bandwidth Plot (15M BW Ch.18900 16QAM RB 75\_0)

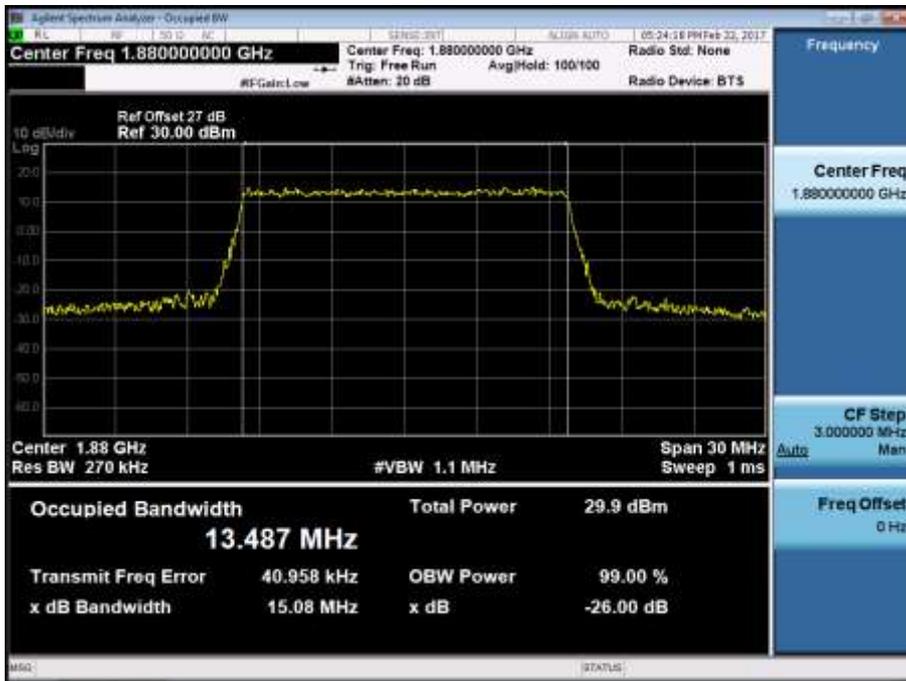

BAND 2. Occupied Bandwidth Plot (20M BW Ch.18900 QPSK RB 100\_0)

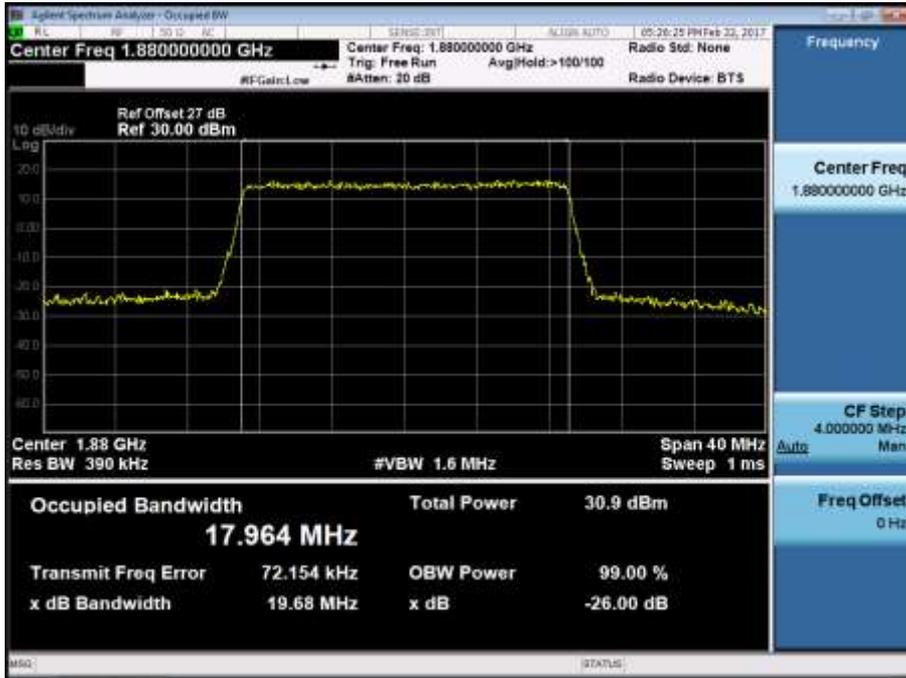


BAND 2. Occupied Bandwidth Plot (20M BW Ch.18900 16QAM RB 100\_0)

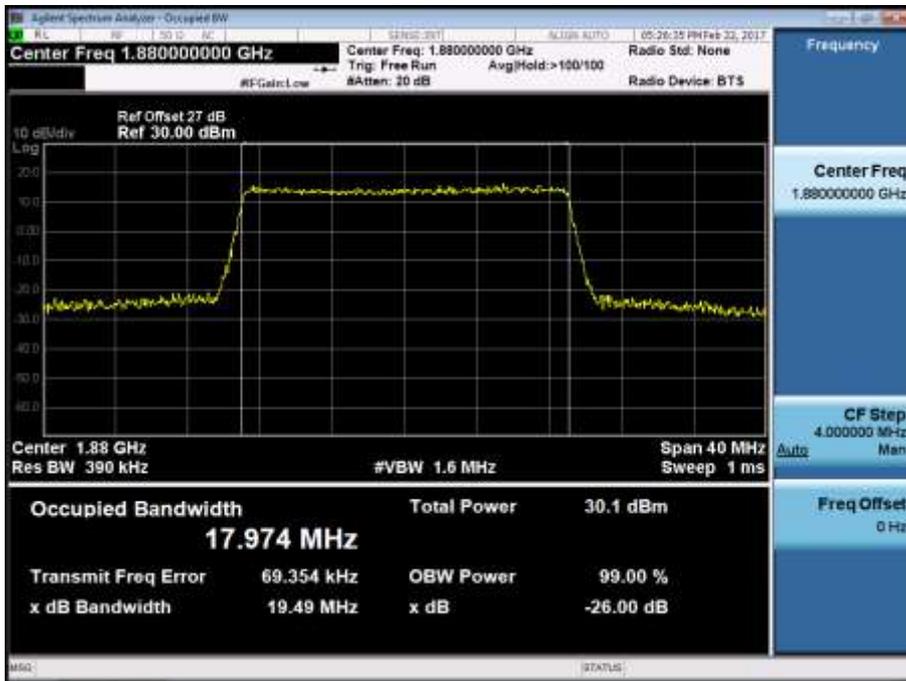

BAND 5. Occupied Bandwidth Plot (1.4M BW Ch.20525 QPSK\_RB6\_0)




BAND 5. Occupied Bandwidth Plot (1.4M BW Ch.20525 16QAM\_RB6\_0)

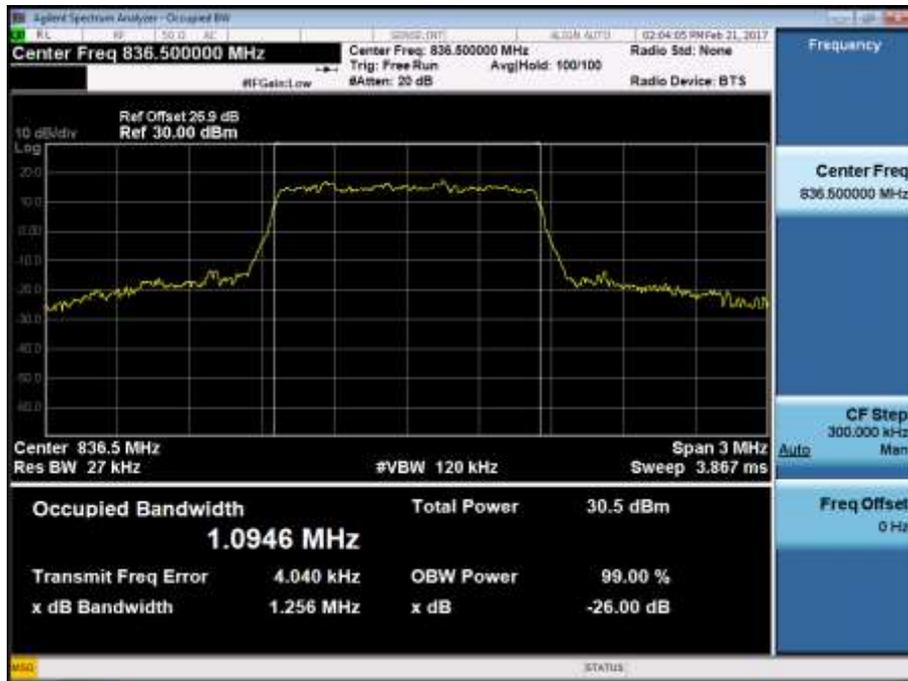

BAND 5. Occupied Bandwidth Plot (3M BW Ch.20525 QPSK\_RB15\_0)



BAND 5. Occupied Bandwidth Plot (3M BW Ch.20525 16QAM\_RB15\_0)

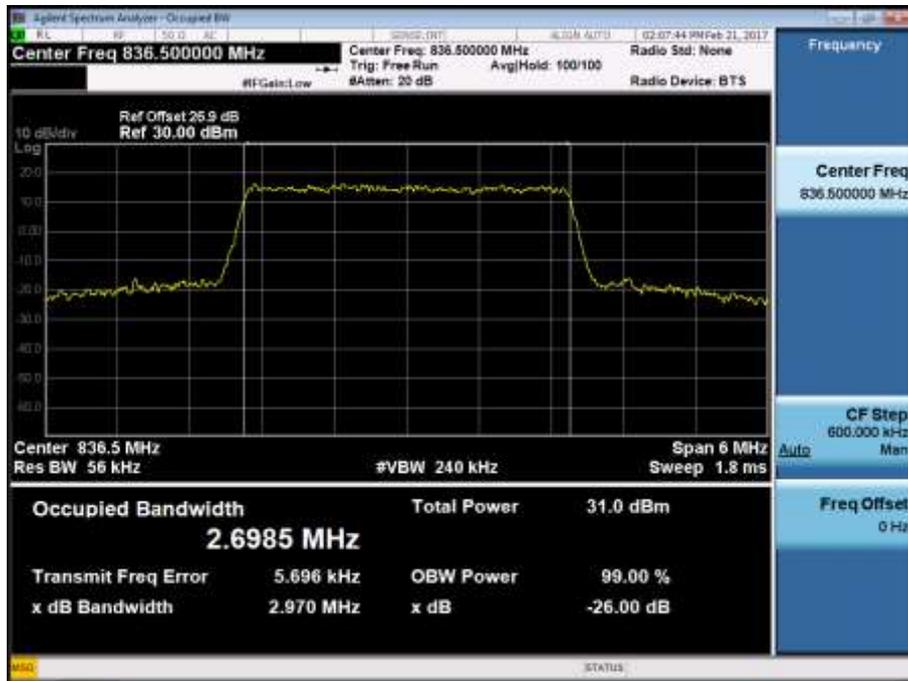


BAND 5. Occupied Bandwidth Plot (5M BW Ch.20525 QPSK\_RB25\_0)




BAND 5. Occupied Bandwidth Plot (5M BW Ch.20525 16QAM\_RB25\_0)



BAND 5. Occupied Bandwidth Plot (10M BW Ch.20525 QPSK\_RB50\_0)

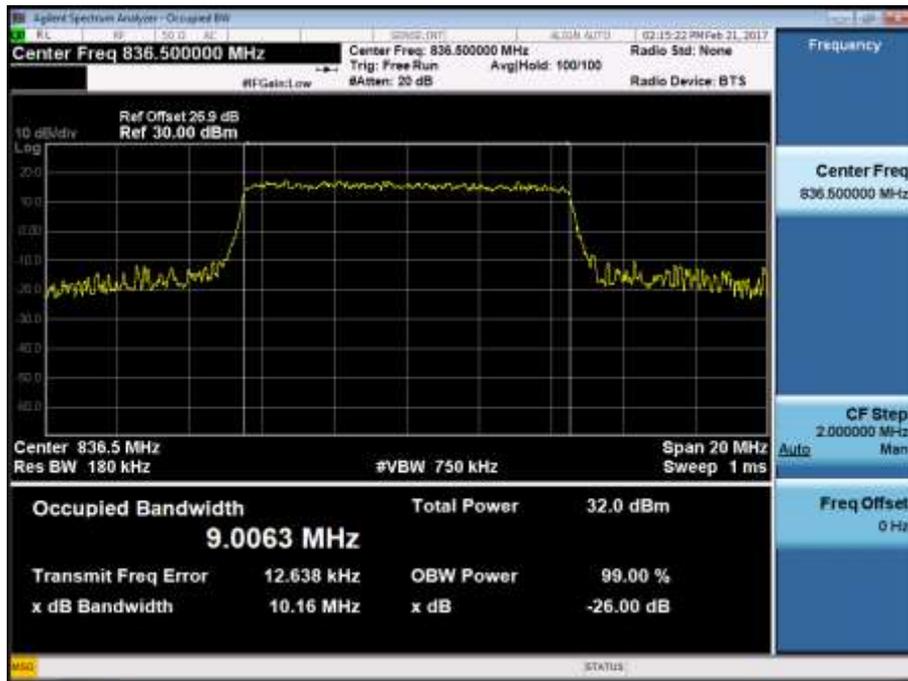

BAND 5. Occupied Bandwidth Plot (10M BW Ch.20525 16QAM\_RB50\_0)

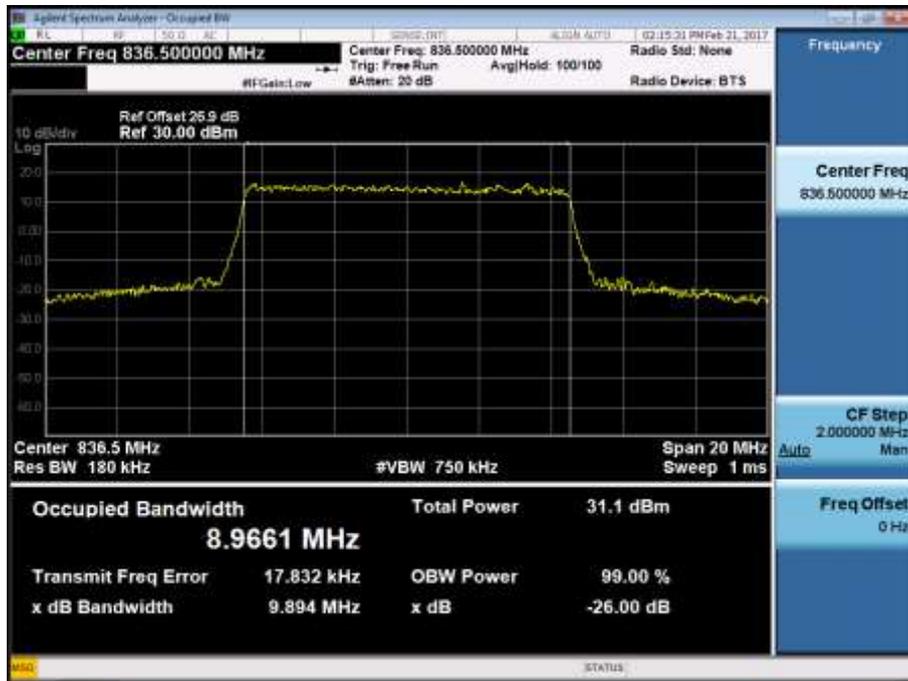


BAND 2. PAR Plot (1.4M BW Ch.18900 QPSK RB 6\_0)



BAND 2. PAR Plot (1.4M BW Ch.18900 16QAM RB 6\_0)



BAND 2. PAR Plot (3M BW Ch.18900 QPSK RB 15\_0)

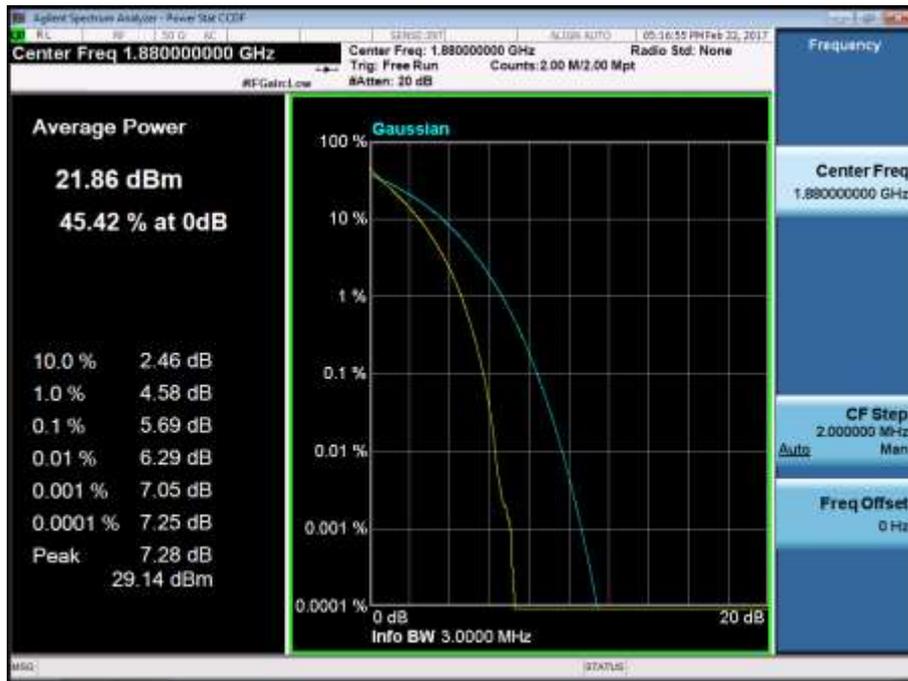

BAND 2. PAR Plot (3M BW Ch.18900 16QAM RB 15\_0)



BAND 2. PAR Plot (5M BW Ch.18900 QPSK RB 25\_0)




BAND 2. PAR Plot (5M BW Ch.18900 16QAM RB 25\_0)



BAND 2. PAR Plot (10M BW Ch.18900 QPSK RB 50\_0)



BAND 2. PAR Plot (10M BW Ch.18900 16QAM RB 50\_0)

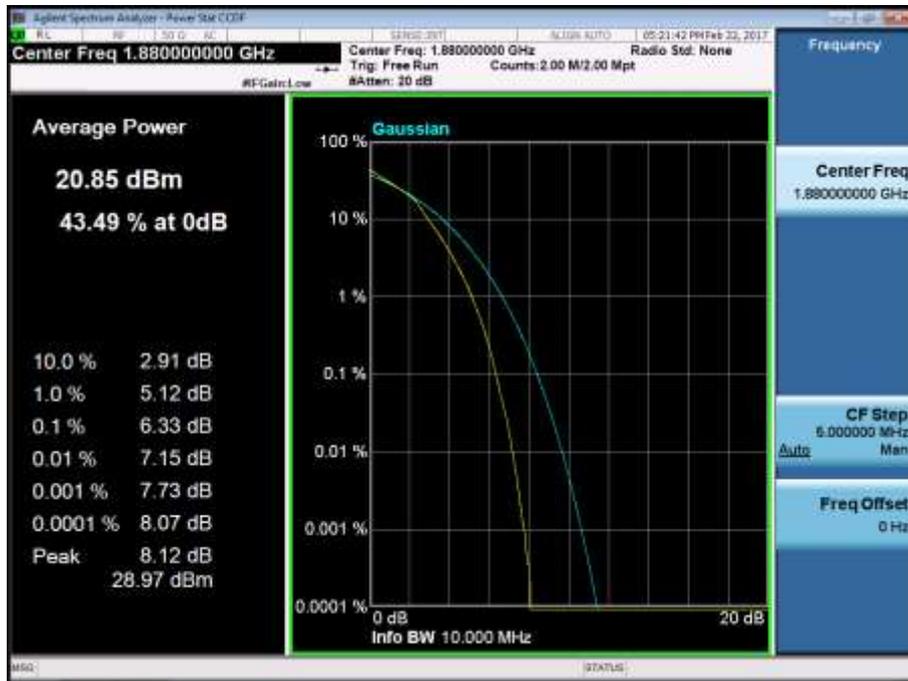

BAND 2. PAR Plot (15M BW Ch.18900 QPSK RB 75\_0)




BAND 2. PAR Plot (15M BW Ch.18900 16QAM RB 75\_0)



BAND 2. PAR Plot (20M BW Ch.18900 QPSK RB 100\_0)




BAND 2. PAR Plot (20M BW Ch.18900 16QAM RB 100\_0)

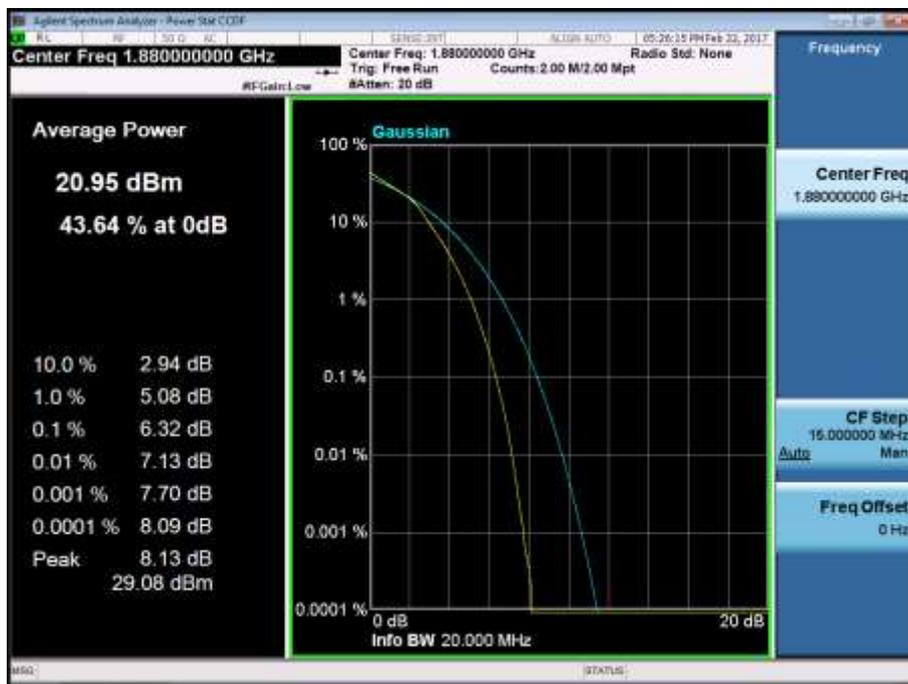

BAND 2. Lower Band Edge Plot (1.4M BW Ch.18607 QPSK\_RB1\_Offset 0) -1




BAND 2. Lower Band Edge Plot (1.4M BW Ch.18607 QPSK\_RB6\_Offset 0) -2

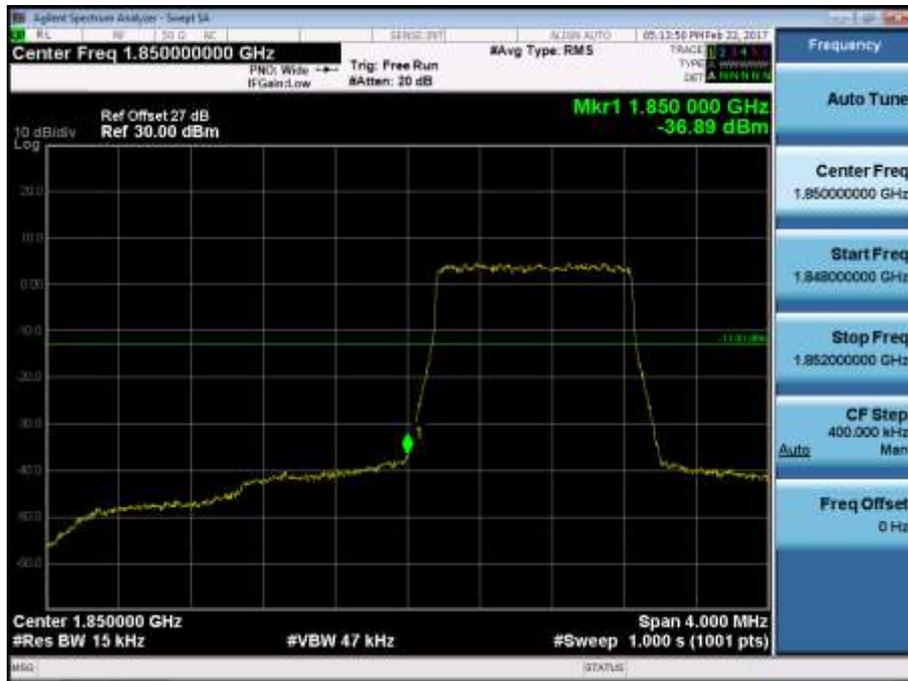


BAND 2. Lower Extended Band Edge Plot (1.4M BW Ch.18607 QPSK\_RB6\_0) -3




BAND 2. Lower Band Edge Plot (3M BW Ch.18615 QPSK\_RB1\_Offset 0) -1

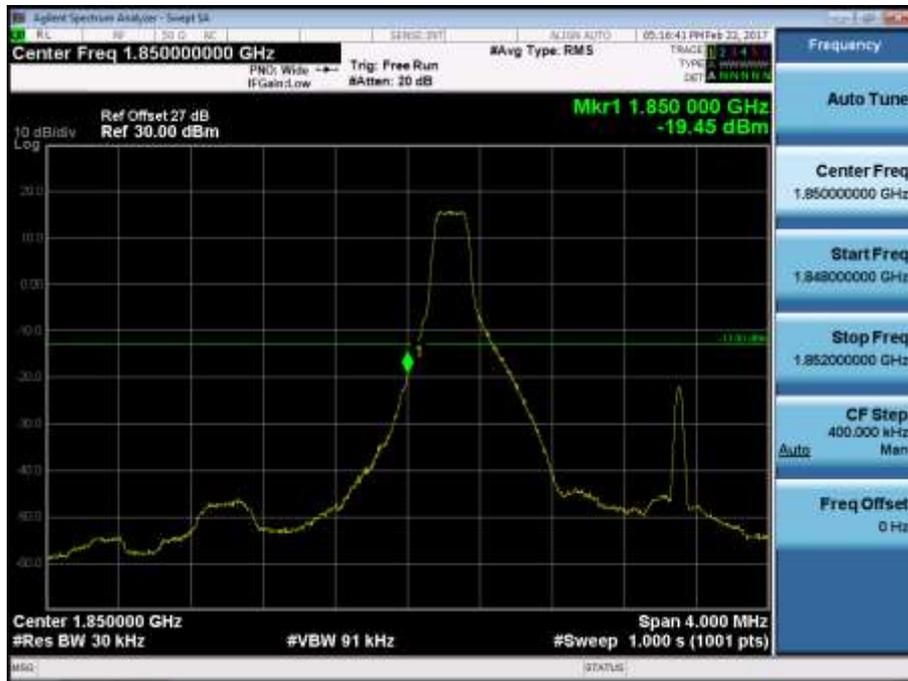


BAND 2. Lower Band Edge Plot (3M BW Ch.18615 QPSK\_RB15\_Offset 0) -2

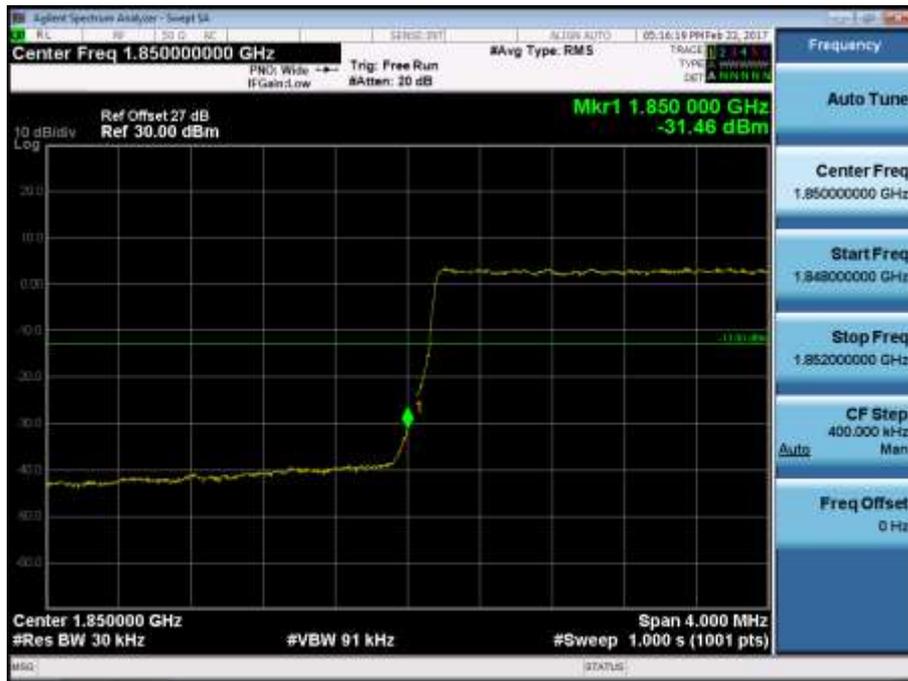

BAND 2. Lower Extended Band Edge Plot (3M BW Ch.18615 QPSK\_RB15\_0) -3

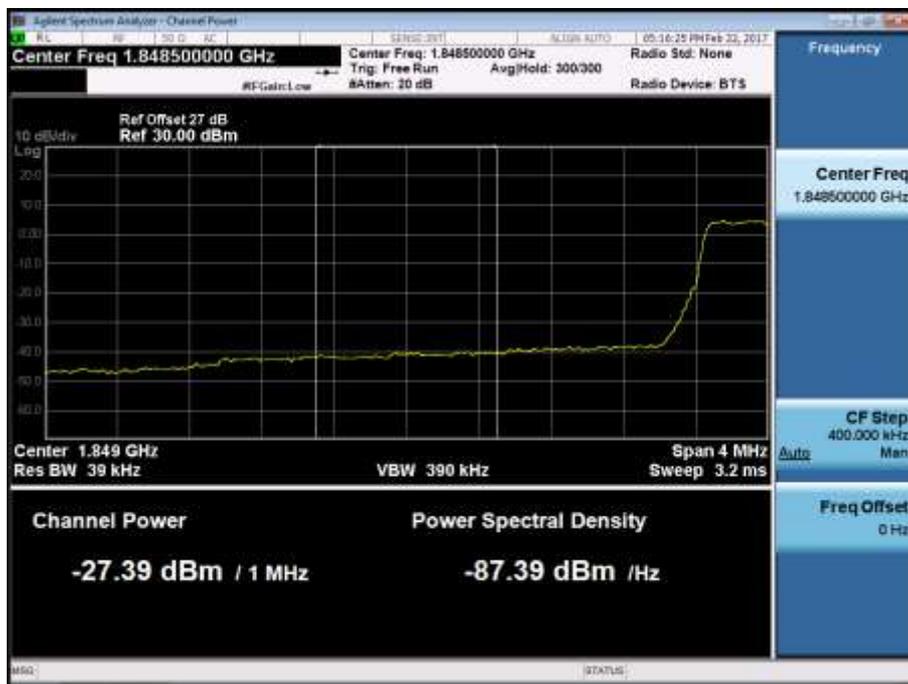

BAND 2. Lower Band Edge Plot (5M BW Ch.18625 QPSK\_RB1\_Offset 0) -1

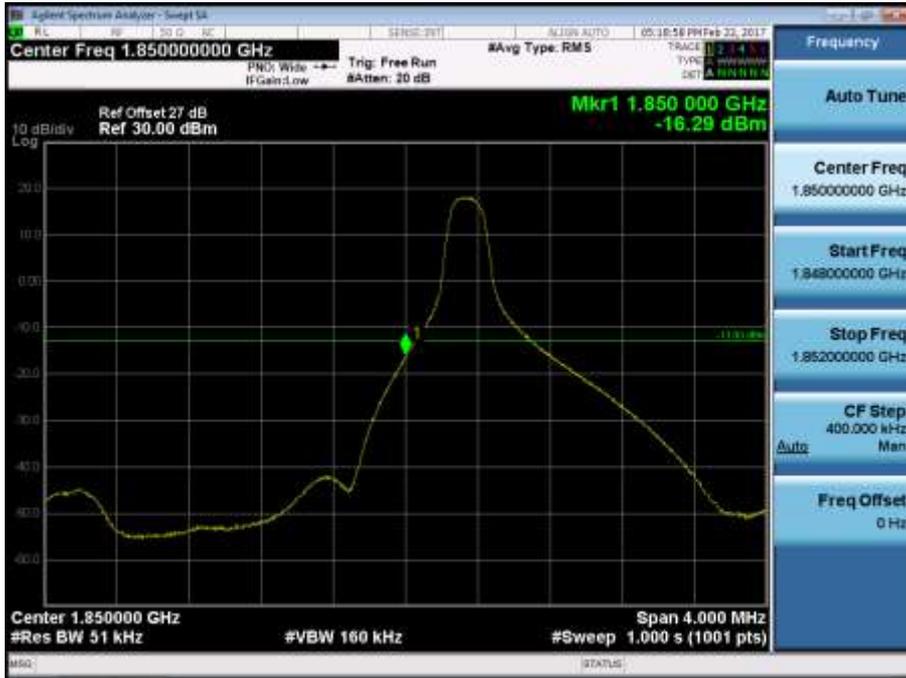


BAND 2. Lower Band Edge Plot (5M BW Ch.18625 QPSK\_RB25\_Offset 0) -2




BAND 2. Lower Extended Band Edge Plot (5M BW Ch.18625 QPSK\_RB25\_0) -3



BAND 2. Lower Band Edge Plot (10M BW Ch.18650 QPSK\_RB1\_Offset 0) -1

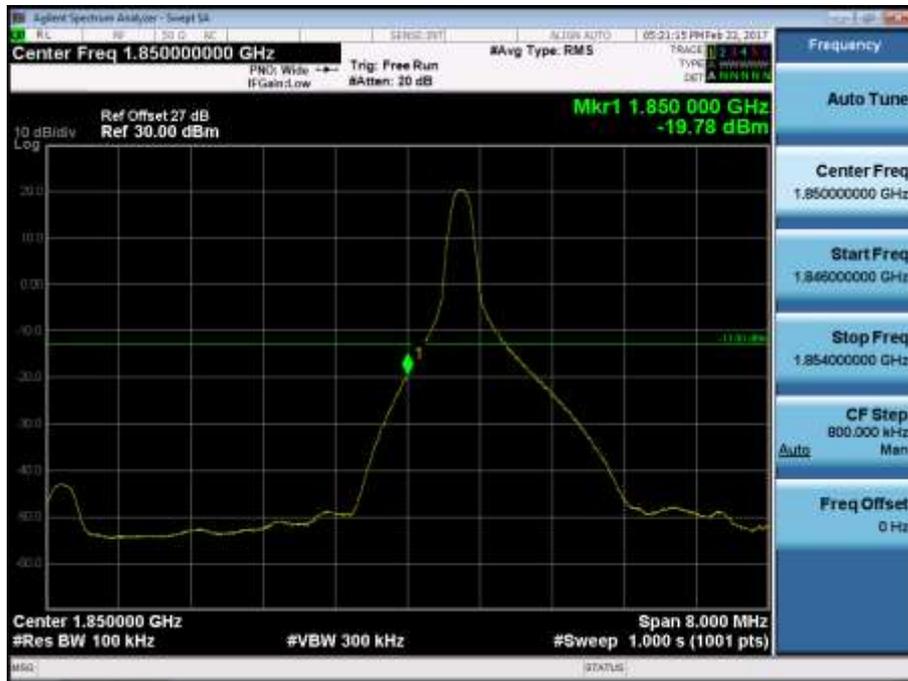


BAND 2. Lower Band Edge Plot (10M BW Ch.18650 QPSK\_RB50\_Offset 0) -2

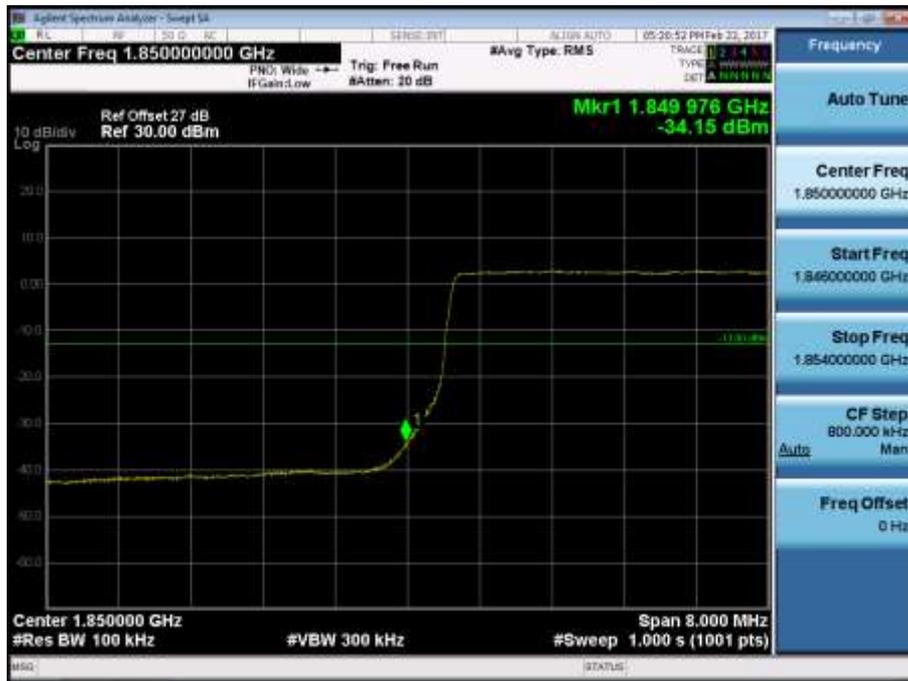

BAND 2. Lower Extended Band Edge Plot (10M BW Ch.18650 QPSK\_RB50\_0) -3



BAND 2. Lower Band Edge Plot (15M BW Ch.18675 QPSK\_RB75\_Offset 0) -1

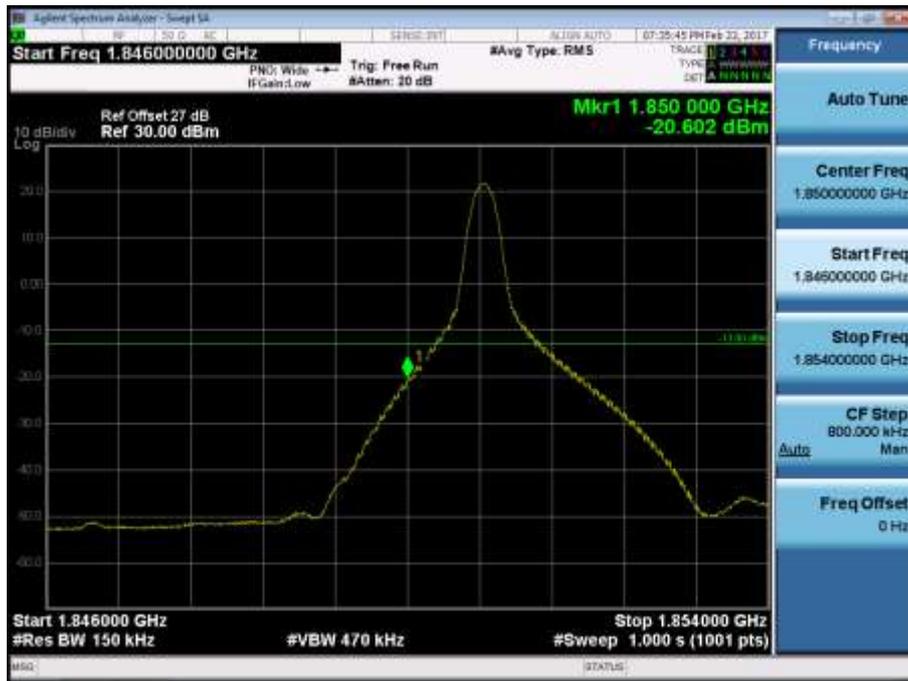


BAND 2. Lower Band Edge Plot (15M BW Ch.18675 QPSK\_RB75\_Offset 0) -2



BAND 2. Lower Extended Band Edge Plot (15M BW Ch.18675 QPSK\_RB75\_0) -3



BAND 2. Lower Band Edge Plot (20M BW Ch.18700 QPSK\_RB1\_Offset 0) -1

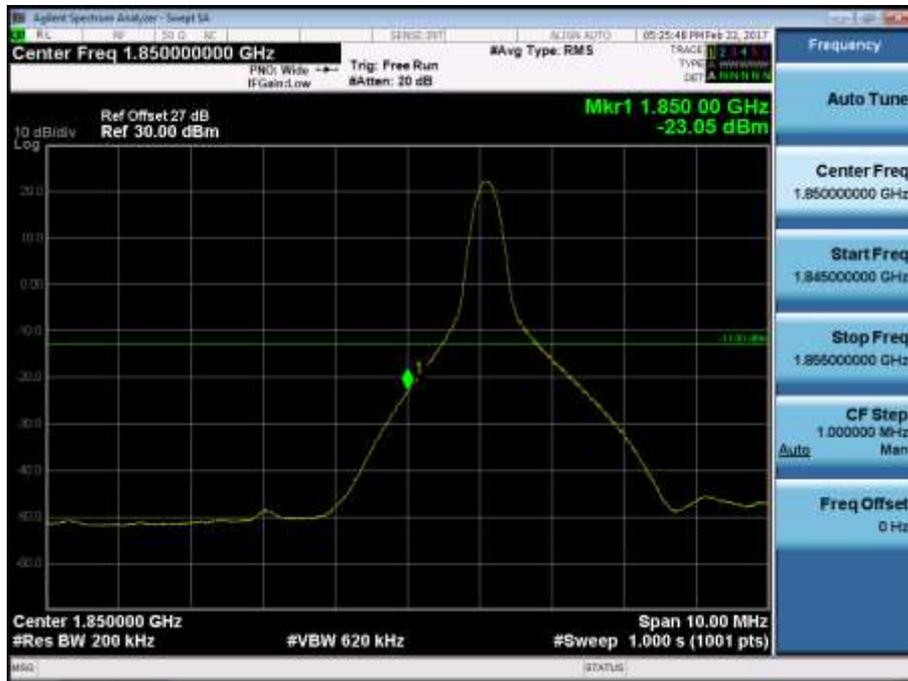

BAND 2. Lower Band Edge Plot (20M BW Ch.18700 QPSK\_RB100\_Offset 0) -2



BAND 2. Lower Extended Band Edge Plot (20M BW Ch.18700 QPSK\_RB100\_0) -3




BAND 2. Upper Band Edge Plot (1.4M BW Ch.19193 QPSK\_RB1\_Offset 5) -1




BAND 2. Upper Band Edge Plot (1.4M BW Ch.19193 QPSK\_RB6\_Offset 0) -2



BAND 2. Upper Extended Band Edge Plot (1.4M BW Ch.19193 QPSK\_RB6\_0) -3

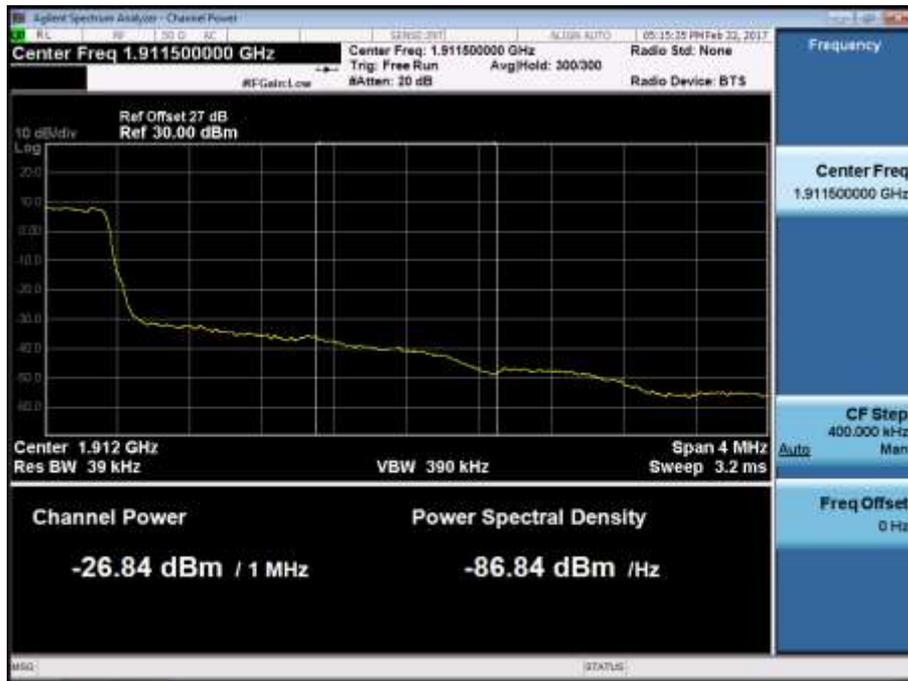


BAND 2. Upper Band Edge Plot (3M BW Ch.19185 QPSK\_RB1\_Offset 14) -1

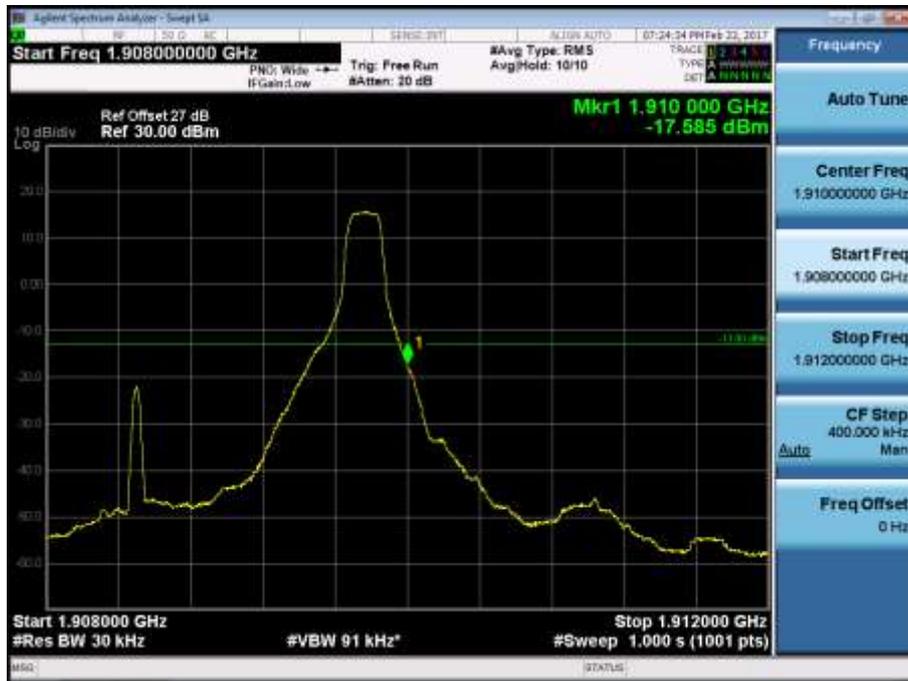

BAND 2. Upper Band Edge Plot (3M BW Ch.19185 QPSK\_RB15\_Offset 0) -2



BAND 2. Upper Extended Band Edge Plot (3M BW Ch.19185 QPSK\_RB15 0) -3

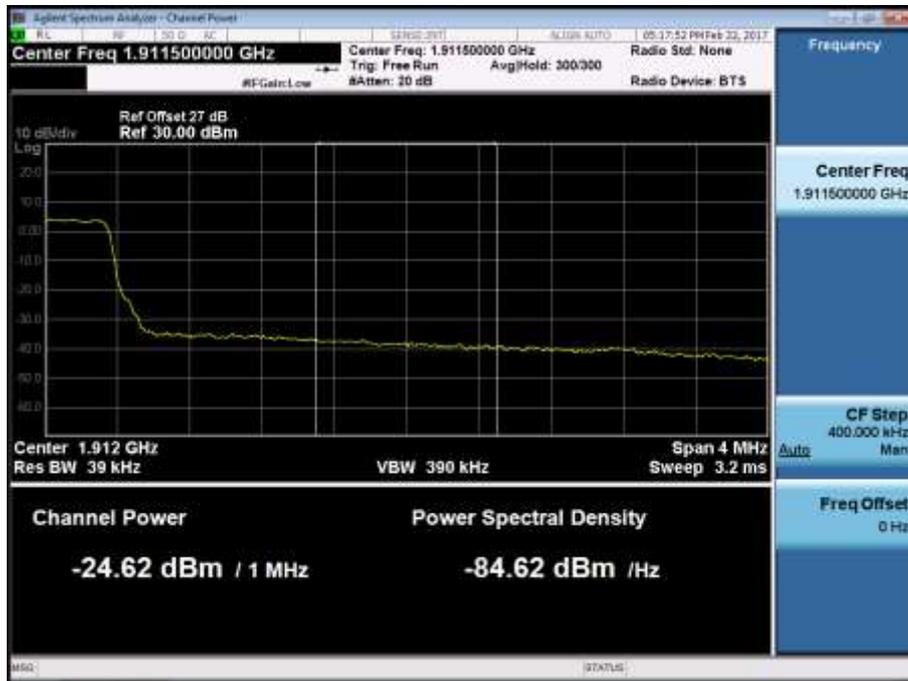

BAND 2. Upper Band Edge Plot (5M BW Ch.19175 QPSK\_RB1\_Offset 24) -1




BAND 2. Upper Band Edge Plot (5M BW Ch.19175 QPSK\_RB25\_Offset 0) -2



BAND 2. Upper Extended Band Edge Plot (5M BW Ch.19175 QPSK\_RB25\_0) -3



BAND 2. Upper Band Edge Plot (10M BW Ch.19150 QPSK\_RB1\_Offset 49) -1

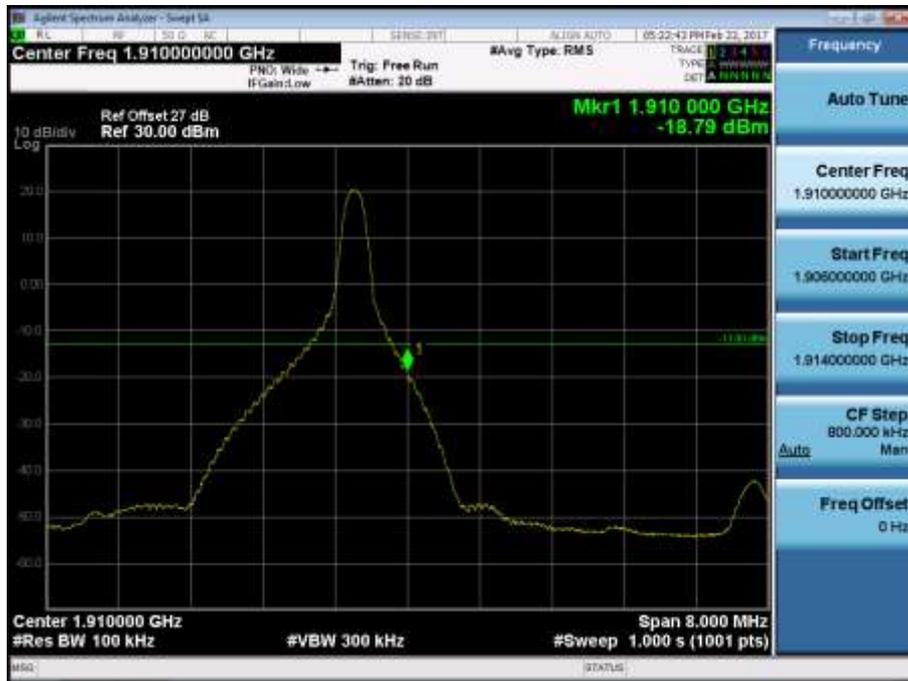


BAND 2. Upper Band Edge Plot (10M BW Ch.19150 QPSK\_RB50\_Offset 0) -2



BAND 2. Upper Extended Band Edge Plot (10M BW Ch.19150 QPSK\_RB50\_0) -3



BAND 2. Upper Band Edge Plot (15M BW Ch.19125 QPSK\_RB1\_Offset 74) -1

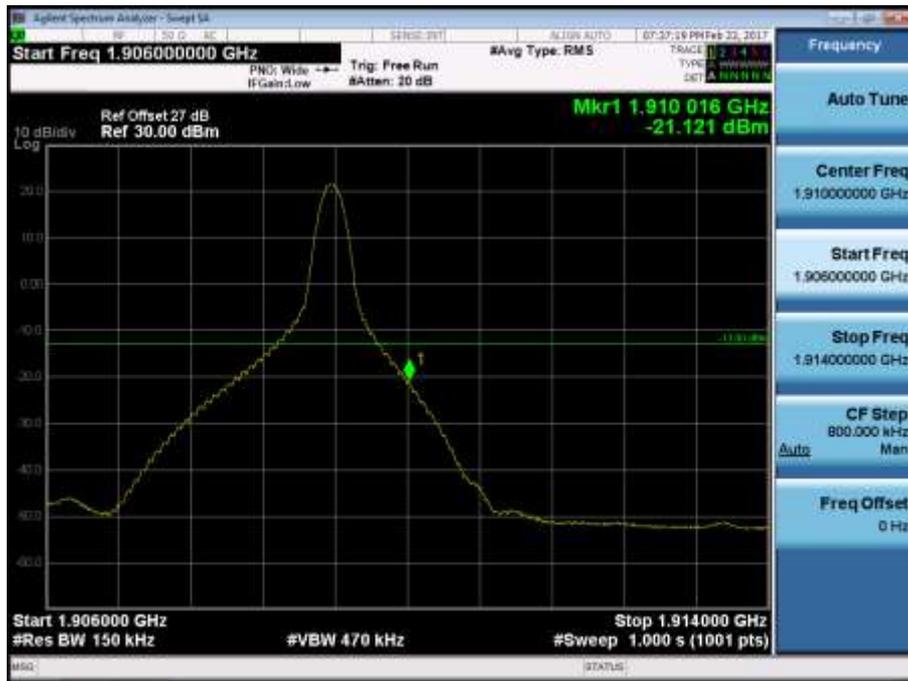


BAND 2. Upper Band Edge Plot (15M BW Ch.19125 QPSK\_RB75\_Offset 0) -2



BAND 2. Upper Extended Band Edge Plot (15M BW Ch.19125 QPSK\_RB75\_0) -3




BAND 2. Upper Band Edge Plot (20M BW Ch.19100 QPSK\_RB1\_Offset 99) -1

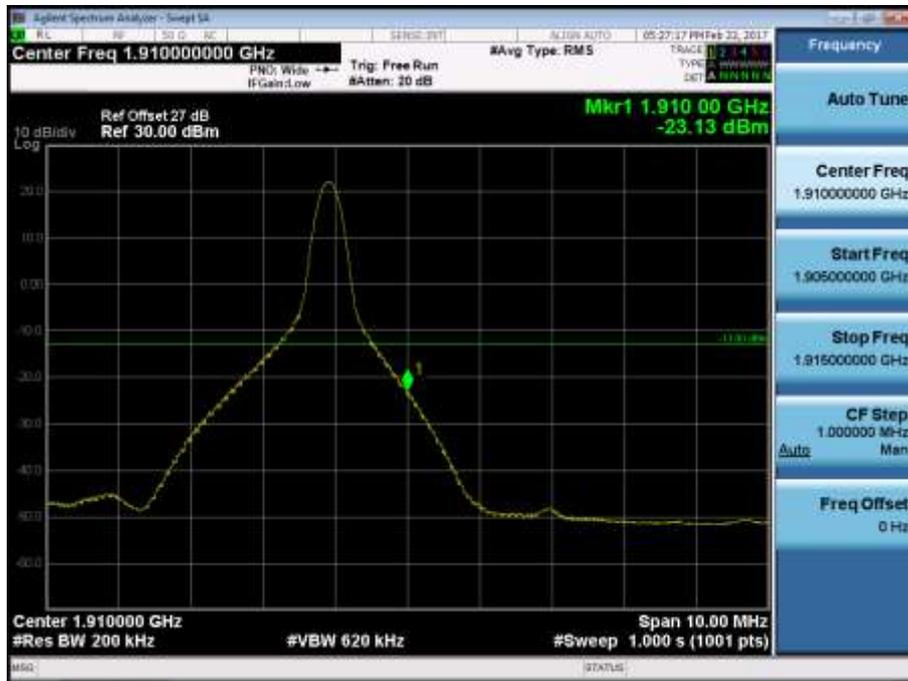


BAND 2. Upper Band Edge Plot (20M BW Ch.19100 QPSK\_RB100\_Offset 0) -2




BAND 2. Upper Extended Band Edge Plot (20M BW Ch.19100 QPSK\_RB100\_0) -3

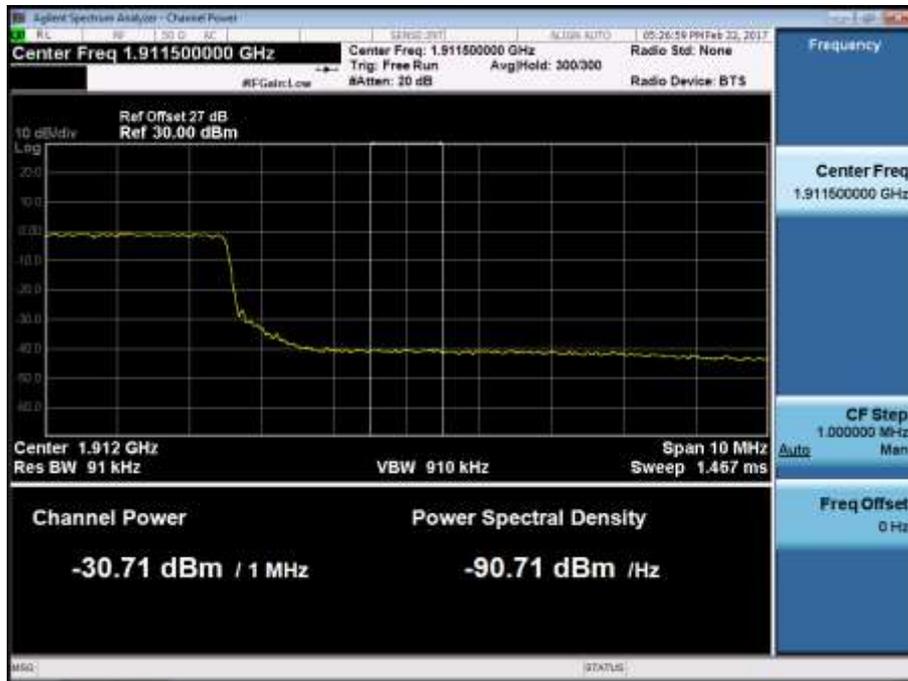

BAND 5. Lower Band Edge Plot (1.4M BW Ch.20407 QPSK\_RB1\_Offset 0)

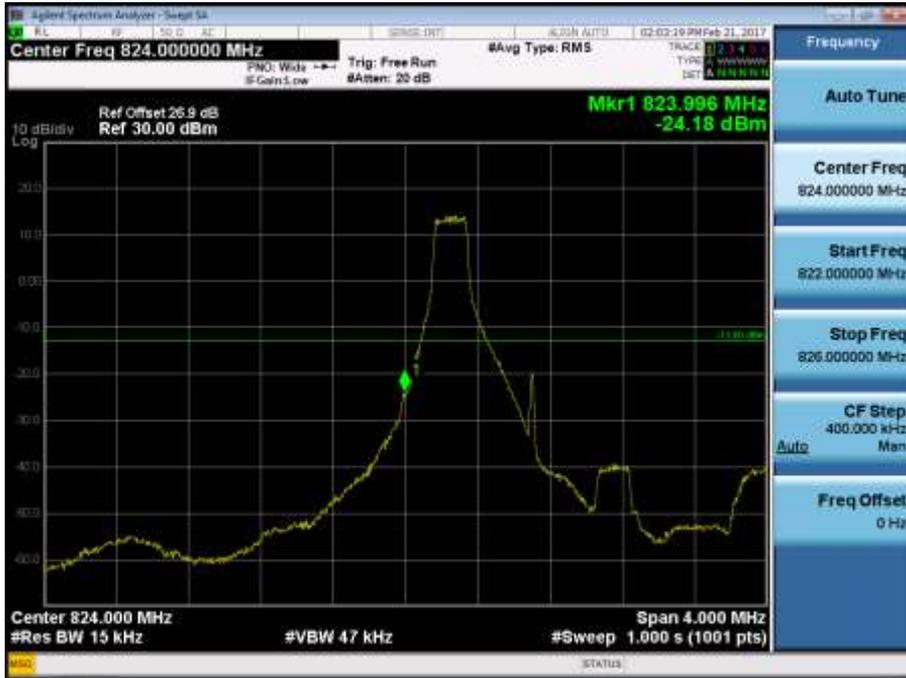


BAND 5. Lower Band Edge Plot (1.4M BW Ch.20407 QPSK\_RB6\_Offset 0)

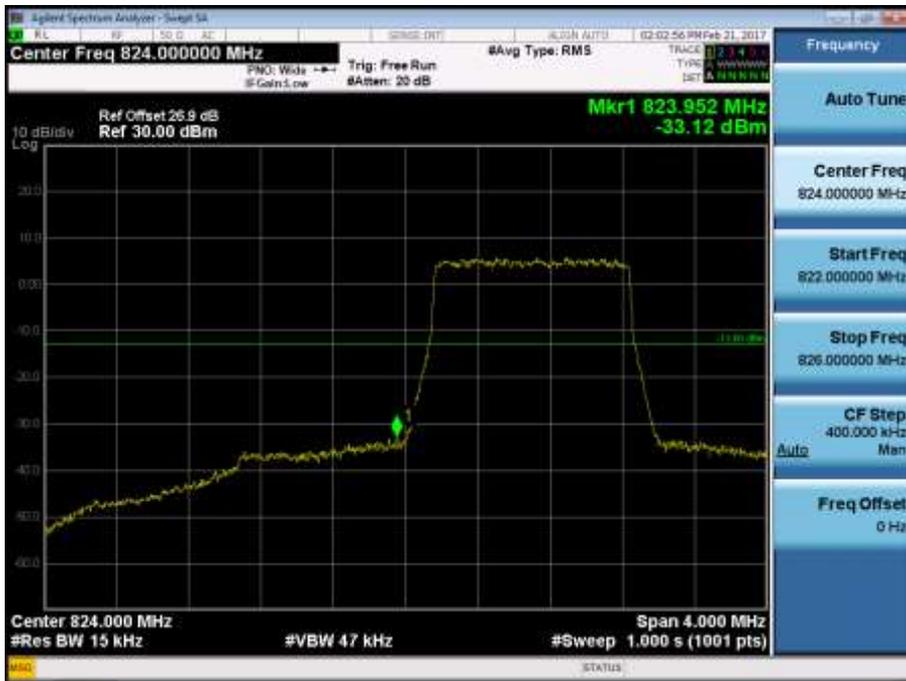

BAND 5. Lower Extended Band Edge Plot (1.4M BW Ch.20407 QPSK\_RB6\_0)



BAND 5. Lower Band Edge Plot (3M BW Ch.20415 QPSK\_RB1\_Offset 0)

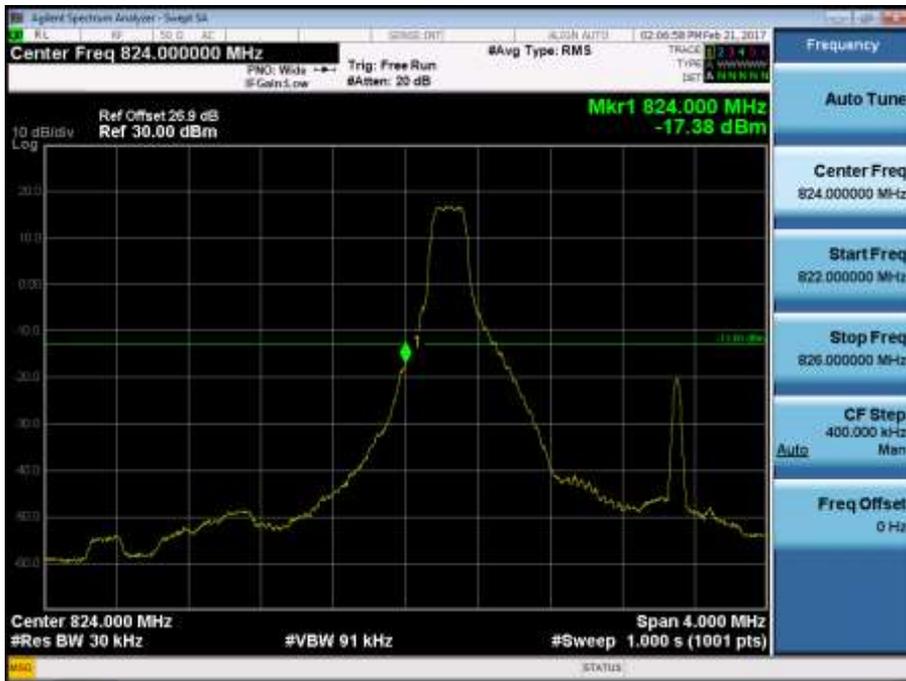


BAND 5. Lower Band Edge Plot (3M BW Ch.20415 QPSK\_RB15\_Offset 0)



BAND 5. Lower Extended Band Edge Plot (3M BW Ch.20415 QPSK\_RB15\_0)



BAND 5. Lower Band Edge Plot (5M BW Ch.20425 QPSK\_RB1\_Offset 0)

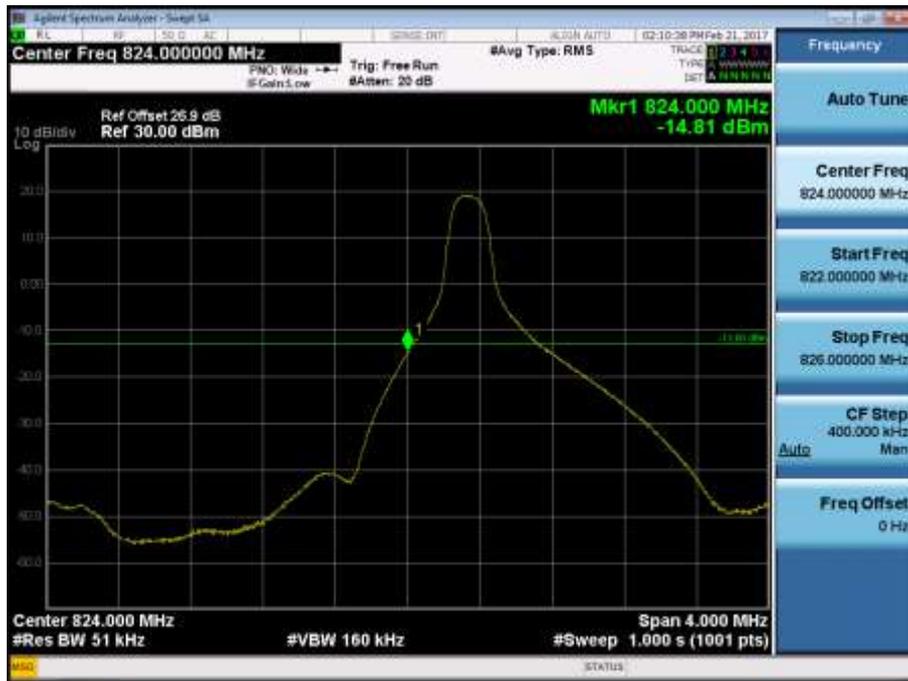


BAND 5. Lower Band Edge Plot (5M BW Ch.20425 QPSK\_RB25\_Offset 0)



BAND 5. Lower Extended Band Edge Plot (5M BW Ch.20425 QPSK\_RB25\_0)



BAND 5. Lower Band Edge Plot (10M BW Ch.20450 QPSK\_RB1\_Offset 0)

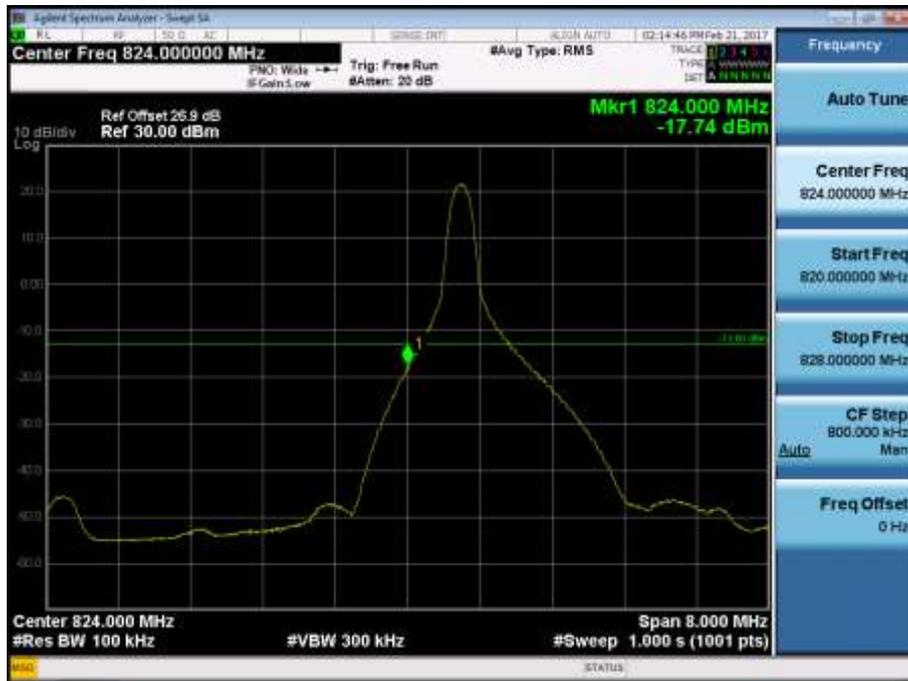

BAND 5. Lower Band Edge Plot (10M BW Ch.20450 QPSK\_RB50\_Offset 0)



BAND 5. Lower Extended Band Edge Plot (10M BW Ch.20450 QPSK\_RB50\_0)

