

# FCC LTE REPORT

## FCC Certification

<b>Applicant Name:</b> LG Electronics MobileComm U.S.A., Inc.	<b>Date of Issue:</b> February 24, 2017
<b>Address:</b> 1000 Sylvan Avenue, Englewood Cliffs NJ 07632	<b>Location:</b> HCT CO., LTD., 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA
	<b>Report No.:</b> HCT-R-1702-F025 <b>HCT FRN:</b> 0005866421

**FCC ID:** ZNFM320H

**APPLICANT:** LG Electronics MobileComm U.S.A., Inc.

**FCC Model(s):** LG-M320H  
**EUT Type:** Portable Handset  
**FCC Classification:** Licensed Portable Transmitter Held to Ear (PCE)  
**FCC Rule Part(s):** §27, §2

Mode (MHz)	Tx Frequency (MHz)	Emission Designator	Modulation	EIRP	
				Max. Power (W)	Max. Power (dBm)
LTE – Band4 (1.4)	1710.7 – 1754.3	1M09G7D	QPSK	0.134	21.28
		1M09W7D	16QAM	0.112	20.48
LTE – Band4 (3)	1711.5 – 1753.5	2M69G7D	QPSK	0.136	21.34
		2M69W7D	16QAM	0.113	20.54
LTE – Band4 (5)	1712.5 – 1752.5	4M49G7D	QPSK	0.133	21.23
		4M50W7D	16QAM	0.111	20.46
LTE – Band4 (10)	1715.0 – 1750.0	8M99G7D	QPSK	0.127	21.05
		8M95W7D	16QAM	0.108	20.35
LTE – Band4 (15)	1717.5 – 1747.5	13M5G7D	QPSK	0.123	20.91
		13M5W7D	16QAM	0.104	20.18
LTE – Band4 (20)	1720.0 – 1745.0	17M9G7D	QPSK	0.114	20.58
		17M9W7D	16QAM	0.095	19.79

Mode (MHz)	Tx Frequency (MHz)	Emission Designator	Modulation	ERP	
				Max. Power (W)	Max. Power (dBm)
LTE – Band13 (5)	779.5 – 784.5	4M50G7D	QPSK	0.099	19.97
		4M51W7D	16QAM	0.080	19.02
LTE – Band13 (10)	782.0	8M98G7D	QPSK	0.099	19.96
		8M96W7D	16QAM	0.078	18.93


Mode (MHz)	Tx Frequency (MHz)	Emission Designator	Modulation	ERP	
				Max. Power (W)	Max. Power (dBm)
LTE – Band17 (5)	706.5 – 713.5	4M51G7D	QPSK	0.079	18.95
		4M49W7D	16QAM	0.065	18.12
LTE – Band17 (10)	709.0 – 711.0	8M93G7D	QPSK	0.075	18.76
		8M94W7D	16QAM	0.062	17.91

The measurements shown in this report were made in accordance with the procedures specified in CFR47 section §2.947. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998, 21 U.S.C. 853(a)



**Report prepared by : Jeong Ho Kim**  
**Engineer of Telecommunication Testing Center**



**Report approved by : Jong Seok Lee**  
**Manager of Telecommunication Testing Center**

This report only responds to the tested sample and may not be reproduced, except in full, without written approval of the HCT Co., Ltd.

## Version

TEST REPORT NO.	DATE	DESCRIPTION
HCT-R-1702-F025	February 24, 2017	- First Approval Report

---

---

# Table of Contents

1. GENERAL INFORMATION .....	6
2. INTRODUCTION .....	8
2.1. EUT DESCRIPTION.....	8
2.2. MEASURING INSTRUMENT CALIBRATION.....	8
2.3. TEST FACILITY .....	8
3. DESCRIPTION OF TESTS .....	9
3.1 ERP/EIRP RADIATED POWER AND RADIATED SPURIOUS EMISSIONS.....	9
3.2 AWS – MOBILE FREQUENCY BLOCKS (1710 – 1755 MHz).....	10
3.3 BLOCK B FREQUENCY RANGE (775 – 788 MHz) .....	10
3.4 BLOCK B FREQUENCY RANGE (704 – 710 and 734 – 740 MHz, 777 – 792 MHz) .....	11
3.5 PEAK-AVERAGE RATIO. ....	12
3.6 OCCUPIED BANDWIDTH. ....	14
3.7 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL.....	15
3.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE .....	16
4. LIST OF TEST EQUIPMENT .....	17
5. MEASUREMENT UNCERTAINTY .....	18
6. SUMMARY OF TEST RESULTS .....	19
7. SAMPLE CALCULATION.....	20
8. TEST DATA .....	21
8.1 EQUIVALENT ISOTROPIC RADIATED POWER (Band 4) .....	21
8.2 EFFECTIVE RADIATED POWER (Band 13).....	25
8.3 EFFECTIVE RADIATED POWER (Band 17).....	26
8.4 RADIATED SPURIOUS EMISSIONS.....	28
8.4.1 RADIATED SPURIOUS EMISSIONS (1.4 MHz Band 4 LTE) .....	28
8.4.2 RADIATED SPURIOUS EMISSIONS (3 MHz Band 4 LTE) .....	29
8.4.3 RADIATED SPURIOUS EMISSIONS (5 MHz Band 4 LTE) .....	30
8.4.4 RADIATED SPURIOUS EMISSIONS (10 MHz Band 4 LTE) .....	31
8.4.5 RADIATED SPURIOUS EMISSIONS (15 MHz Band 4 LTE) .....	32
8.4.6 RADIATED SPURIOUS EMISSIONS (20 MHz Band 4 LTE) .....	33
8.4.7 RADIATED SPURIOUS EMISSIONS (5 MHz Band 13 LTE).....	34
8.4.8 RADIATED SPURIOUS EMISSIONS (10 MHz Band 13 LTE).....	35
8.4.8.1 RADIATED SPURIOUS EMISSIONS (1559 ~ 1610 MHz Band) .....	36
8.4.8.2 RADIATED SPURIOUS EMISSIONS (1559 ~ 1610 MHz Band) .....	36
8.4.9 RADIATED SPURIOUS EMISSIONS (5 MHz Band 17 LTE).....	37
8.4.10 RADIATED SPURIOUS EMISSIONS (10 MHz Band 17 LTE).....	38

<b>8.5 PEAK-TO-AVERAGE RATIO .....</b>	<b>39</b>
<b>8.6 OCCUPIED BANDWIDTH .....</b>	<b>40</b>
<b>8.7 CONDUCTED SPURIOUS EMISSIONS .....</b>	<b>42</b>
<b>8.7.1 BAND EDGE.....</b>	<b>43</b>
<b>8.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE .....</b>	<b>44</b>
<b>8.8.1 FREQUENCY STABILITY (1.4 MHz Band 4 LTE) .....</b>	<b>44</b>
<b>8.8.2 FREQUENCY STABILITY (3 MHz Band 4 LTE) .....</b>	<b>45</b>
<b>8.8.3 FREQUENCY STABILITY (5 MHz Band 4 LTE) .....</b>	<b>46</b>
<b>8.8.4 FREQUENCY STABILITY (10 MHz Band 4 LTE) .....</b>	<b>47</b>
<b>8.8.5 FREQUENCY STABILITY (15 MHz Band 4 LTE) .....</b>	<b>48</b>
<b>8.8.6 FREQUENCY STABILITY (20 MHz Band 4 LTE) .....</b>	<b>49</b>
<b>8.8.7 FREQUENCY STABILITY (5 MHz Band 13 LTE) .....</b>	<b>50</b>
<b>8.8.8 FREQUENCY STABILITY (10 MHz Band 13 LTE) .....</b>	<b>51</b>
<b>8.8.9 FREQUENCY STABILITY (5 MHz Band 17 LTE) .....</b>	<b>52</b>
<b>8.8.10 FREQUENCY STABILITY (10 MHz Band 17 LTE) .....</b>	<b>53</b>
<b>9. TEST PLOTS.....</b>	<b>54</b>

# MEASUREMENT REPORT

## 1. GENERAL INFORMATION

**Applicant Name:** LG Electronics MobileComm U.S.A., Inc.

**Address:** 1000 Sylvan Avenue, Englewood Cliffs NJ 07632

**FCC ID:** ZNFM320H

**Application Type:** Certification

**FCC Classification:** Licensed Portable Transmitter Held to Ear (PCE)

**FCC Rule Part(s):** §27, §2

**EUT Type:** Portable Handset

**FCC Model(s):** LG-M320H

**Tx Frequency:** 1710.7 MHz – 1754.3 MHz (LTE – Band 4 (1.4 MHz))  
1711.5 MHz – 1753.5 MHz (LTE – Band 4 (3 MHz))  
1712.5 MHz – 1752.5 MHz (LTE – Band 4 (5 MHz))  
1715.0 MHz – 1750.0 MHz (LTE – Band 4 (10 MHz))  
1717.5 MHz – 1747.5 MHz (LTE – Band 4 (15 MHz))  
1720.0 MHz – 1745.0 MHz (LTE – Band 4 (20 MHz))

779.5 MHz – 784.5 MHz (LTE – Band 13 (5MHz))  
782 MHz (LTE – Band 13 (10 MHz))

706.5 MHz – 713.5 MHz (LTE – Band 17 (5 MHz))  
709.0 MHz – 711.0 MHz (LTE – Band 17 (10 MHz))

**Max. RF Output Power:**

Band 4 (1.4 MHz):	0.134 W (QPSK) (21.28 dBm)
	0.112 W (16-QAM) (20.48 dBm)
Band 4 (3 MHz):	0.136 W (QPSK) (21.34 dBm)
	0.113 W (16-QAM) (20.54 dBm)
Band 4 (5 MHz):	0.133 W (QPSK) (21.23 dBm)
	0.111 W (16-QAM) (20.46 dBm)
Band 4 (10 MHz):	0.127 W (QPSK) (21.05 dBm)
	0.108 W (16-QAM) (20.35 dBm)
Band 4 (15 MHz):	0.123 W (QPSK) (20.91 dBm)
	0.104 W (16-QAM) (20.18 dBm)
Band 4 (20 MHz):	0.114 W (QPSK) (20.58 dBm)
	0.095 W (16-QAM) (19.79 dBm)
Band 13 (5 MHz) :	0.099 W (QPSK) (19.97 dBm)
	0.080 W (16-QAM) (19.02 dBm)
Band 13 (10 MHz) :	0.099 W (QPSK) (19.96 dBm)
	0.078 W (16-QAM) (18.93 dBm)

Band 17 ( 5 MHz) : 0.079 W (QPSK) (18.95 dBm)  
0.065 W (16-QAM) (18.12 dBm)  
Band 17 (10 MHz) : 0.075 W (QPSK) (18.76 dBm)  
0.062 W (16-QAM) (17.91 dBm)

**Emission Designator(s):** Band 4 (1.4 MHz): 1M09G7D (QPSK) / 1M09W7D (16-QAM)  
Band 4 (3 MHz): 2M69G7D (QPSK) / 2M69W7D (16-QAM)  
Band 4 (5 MHz): 4M49G7D (QPSK) / 4M50W7D (16-QAM)  
Band 4 (10 MHz): 8M99G7D (QPSK) / 8M95W7D (16-QAM)  
Band 4 (15 MHz): 13M5G7D (QPSK) / 13M5W7D (16-QAM)  
Band 4 (20 MHz): 17M9G7D (QPSK) / 17M9W7D (16-QAM)

Band 13 (5 MHz) : 4M50G7D (QPSK) / 4M51W7D (16-QAM)  
Band 13 (10 MHz) : 8M98G7D (QPSK) / 8M96W7D (16-QAM)

Band 17 ( 5 MHz) : 4M51G7D (QPSK) / 4M49W7D (16-QAM)  
Band 17 (10 MHz) : 8M93G7D (QPSK) / 8M94W7D (16-QAM)

**Date(s) of Tests:** January 03, 2017 ~ February 23, 2017

**Antenna Specification:** Manufacturer: AT&C Co.LTD.  
Antenna type: PIFA Antenna (Planar Inverted F)  
Peak Gain: Band 4: 0.5 dBi  
Band 13: -2.7 dBi  
Band 17: -2.7 dBi

## **2. INTRODUCTION**

### **2.1. EUT DESCRIPTION**

The LG Electronics MobileComm U.S.A., Inc. LG-M320H Portable Handset consists of LTE 4, LTE 13 and 17.

### **2.2. MEASURING INSTRUMENT CALIBRATION**

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

### **2.3. TEST FACILITY**

The Fully-anechoic chamber and conducted measurement facility used to collect the radiated data are located at the **74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA.**

## **3. DESCRIPTION OF TESTS**

### **3.1 ERP/EIRP RADIATED POWER AND RADIATED SPURIOUS EMISSIONS**

Note: ERP(Effective Radiated Power), EIRP(Effective Isotropic Radiated Power)

#### Test Procedure

Radiated emission measurements are performed in the Fully-anechoic chamber. The equipment under test is placed on a non-conductive table 3-meters away from the receive antenna in accordance with ANSI/TIA-603-D-2010 Clause 2.2.17. The turntable is rotated through 360 degrees, and the receiving antenna scans in order to determine the level of the maximized emission. The level and position of the maximized emission is recorded with the spectrum analyzer using a RMS detector.

A half wave dipole is then substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.

The power is calculated by the following formula;

$$P_{d(\text{dBm})} = P_{g(\text{dBm})} - \text{cable loss (dB)} + \text{antenna gain (dB)}$$

Where:  $P_d$  is the dipole equivalent power and  $P_g$  is the generator output power into the substitution antenna.


The maximum EIRP is calculated by adding the forward power to the calibrated source plus its appropriate gain value. These steps are repeated with the receiving antenna in both vertical and horizontal polarization. the difference between the gain of the horn and an isotropic antenna are taken into consideration

#### **Radiated spurious emissions**

: Frequency Range : 9 kHz ~ 10<sup>th</sup> Harmonics of highest channel fundamental frequency.

### 3.2 AWS – MOBILE FREQUENCY BLOCKS (1710 – 1755 MHz)

§27.5(h)

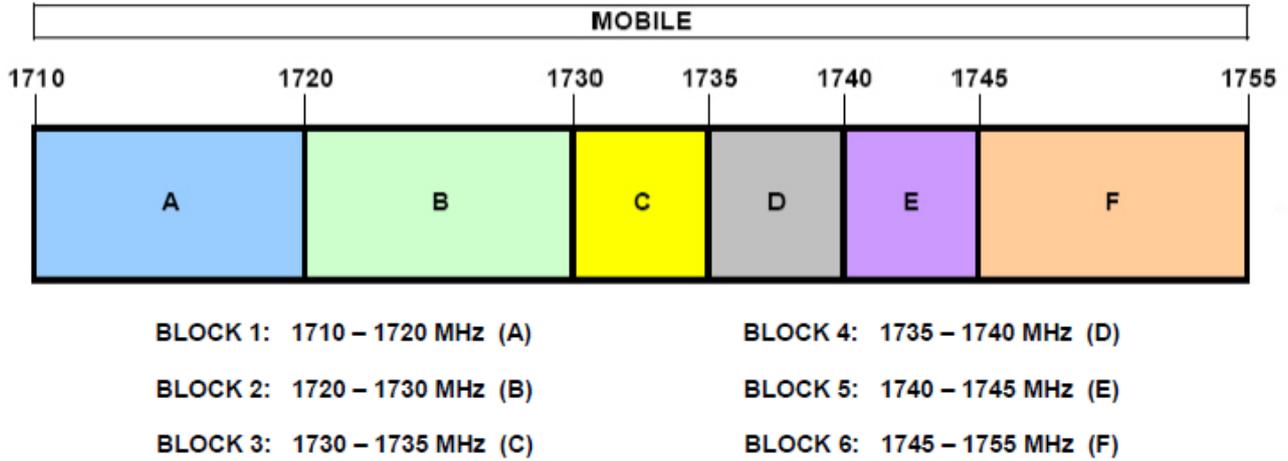

### 3.3 BLOCK B FREQUENCY RANGE (775 – 788 MHz)

§27.5(b)

746-758 MHz, 775-788 MHz, and 805-806 MHz bands. The following frequencies are available for licensing pursuant to this part in the 746-758 MHz, 775-788 MHz, and 805-806 MHz bands:

(1) Two paired channels of 1 megahertz each are available for assignment in Block A in the 757-758 MHz and 787-788 MHz bands.

(2) Two paired channels of 1 megahertz each are available for assignment in Block B in the 775-776 MHz and 805-806 MHz bands.

(3) Two paired channels of 11 megahertz each are available for assignment in Block C in the 746-757 MHz and 776-787 MHz bands. In the event that no licenses for two channels in this Block C are assigned based on the results of the first auction in which such licenses were offered because the auction results do not satisfy the applicable reserve price, the spectrum in the 746-757 MHz and 776-787 MHz bands will instead be made available for assignment at a subsequent auction as follows:

(i) Two paired channels of 6 megahertz each available for assignment in Block C1 in the 746-752 MHz and 776-782 MHz bands.

(ii) Two paired channels of 5 megahertz each available for assignment in Block C2 in the 752-757 MHz and 782-787 MHz band.

### **3.4 BLOCK B FREQUENCY RANGE (704 – 710 and 734 – 740 MHz, 777 – 792 MHz)**

§27.5(c)

698-746 MHz Band. The following frequencies are available for licensing pursuant to this part in the 698–746 MHz band: (1) Three paired channel blocks of 12 MHz each are available for assignment as follows :

Block A : 698 – 704 MHz and 728 – 734 MHz ;

Block B : 704 – 710 MHz and 734 – 740 MHz ; and

Block C : 710 – 716 MHz and 740 – 746 MHz.

The EUT is only being authorized for operation in Blocks B and C.

### 3.5 PEAK-AVERAGE RATIO.

#### Test Procedure

Peak to Average Power Ratio is tested in accordance with KDB971168 D01 Power Meas License Digital Systems v02r02, October 17, 2014, Section 5.7.

#### - Section 5.7.1 CCDF Procedure

- a) Set resolution/measurement bandwidth  $\geq$  signal's occupied bandwidth;
- b) Set the number of counts to a value that stabilizes the measured CCDF curve;
- c) Set the measurement interval as follows:
  - 1) for continuous transmissions, set to 1 ms,
  - 2) for burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize and set the measurement interval to a time that is less than or equal to the burst duration.
- d) Record the maximum PAPR level associated with a probability of 0.1%.

#### - Section 5.7.2 Alternate Procedure

Use one of the procedures presented in 5.1 to measure the total peak power and record as  $P_{Pk}$ . Use one of the applicable procedures presented 5.2 to measure the total average power and record as  $P_{Avg}$ . Determine the P.A.R. from:  $P.A.R_{(dB)} = P_{Pk (dBm)} - P_{Avg (dBm)}$  ( $P_{Avg}$  = Average Power + Duty cycle Factor)

#### 5.1.1 Peak power measurements with a spectrum/signal analyzer or EMI receiver

The following procedure can be used to determine the total peak output power.

- a) Set the RBW  $\geq$  OBW.
- b) Set VBW  $\geq 3 \times$  RBW.
- c) Set span  $\geq 2 \times$  RBW
- d) Sweep time = auto couple.
- e) Detector = peak.
- f) Ensure that the number of measurement points  $\geq$  span/RBW.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the peak amplitude level.

### **5.2.2 Procedures for use with a spectrum/signal analyzer when EUT cannot be configured to transmit continuously and sweep triggering/signal gating cannot be properly implemented**

If the EUT cannot be configured to transmit continuously (burst duty cycle < 98%), then one of the following procedures can be used. The selection of the applicable procedure will depend on the characteristics of the measured burst duty cycle.

Measure the burst duty cycle with a spectrum/signal analyzer or EMC receiver can be used in zero-span mode if the response time and spacing between bins on the sweep are sufficient to permit accurate measurement of the burst on/off time of the transmitted signal.

#### **5.2.2.2 Constant burst duty cycle**


If the measured burst duty cycle is constant (i.e., duty cycle variations are less than  $\pm 2$  percent), then:

- a) Set span to at least 1.5 times the OBW.
- b) Set RBW = 1-5% of the OBW, not to exceed 1 MHz.
- c) Set VBW  $\geq 3 \times$  RBW.
- d) Number of points in sweep  $\geq 2 \times$  span / RBW. (This gives bin-to-bin spacing  $\leq$  RBW/2, so that narrowband signals are not lost between frequency bins.)
- e) Sweep time = auto.
- f) Detector = RMS (power averaging).
- g) Set sweep trigger to "free run".
- h) Trace average at least 100 traces in power averaging (i.e., RMS) mode.
- i) Compute power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function with band limits set equal to the OBW band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.
- j) Add  $10 \log (1/x)$ , where  $x$  is the duty cycle, to the measured power in order to compute the average power during the actual transmission times (because the measurement represents an average over both the on and off times of the transmission).

For example, add  $10 \log (1/0.25) = 6$  dB if the duty cycle is a constant 25%.

### 3.6 OCCUPIED BANDWIDTH.

Test set-up

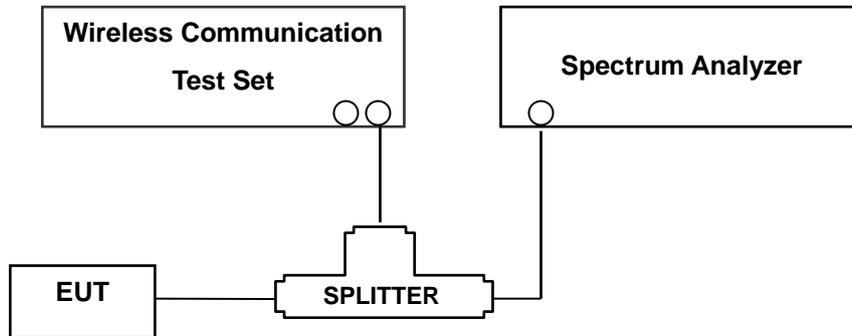

(Configuration of conducted Emission measurement)

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

#### Test Procedure

OBW is tested in accordance with KDB971168 D01 Power Meas License Digital Systems v02r02, October 17, 2014, Section 4.2.

The EUT makes a call to the communication simulator. The power was measured with R&S Spectrum Analyzer. All measurements were done at 3 channels(low, middle and high operational range.)

The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth

### 3.7 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL.

#### Test Procedure

Spurious and harmonic emissions at antenna terminal is tested in accordance with KDB971168 D01 Power Meas License Digital Systems v02r02, October 17, 2014, Section 6.0.

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer.

The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. On any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least  $43 + 10 \log(P)$  dB. Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 100 kHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least 30 kHz bandwidth may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency

Additionally, for operations in the 776-788MHz band, the power of any emission outside the licensee's frequency band of operation shall be attenuated below the transmitted power (P) within the licensed band(s) of operation, measured in watts, in accordance with the following:

- (1) On any frequency outside the 776-788MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least  $43+10\log(P)$ dB.
- (2) On all frequencies between 763-775 and 793-805MHz, by a factor not less than  $65+10\log(P)$ dB in a 6.25kHz band segment.

For operations in the 788–793 MHz band, the power of any emission outside the licensee's frequency bands of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, in accordance with the following:


- (1) On all frequencies between 769–775 MHz and 799–805 MHz, by a factor not less than  $65 + 10 \log (P)$  dB in a 6.25 kHz band segment, for mobile and portable stations;
- (2) On any frequency between 775–788 MHz, above 805 MHz, and below 758 MHz, by at least  $43 + 10 \log (P)$  dB

**NOTES:** The analyzer plot offsets were determined by below conditions.

- For LTE Band 4, total offset 26.90 dB = 20 dB attenuator + 6 dB Divider + 0.90 dB RF cables.
- For LTE Band 13 total offset 26.95 dB = 20 dB attenuator + 6 dB Divider + 0.95 dB RF cables.
- For LTE Band 17 total offset 26.85 dB = 20 dB attenuator + 6 dB Divider + 0.85 dB RF cables.

### 3.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

#### Test Set-up

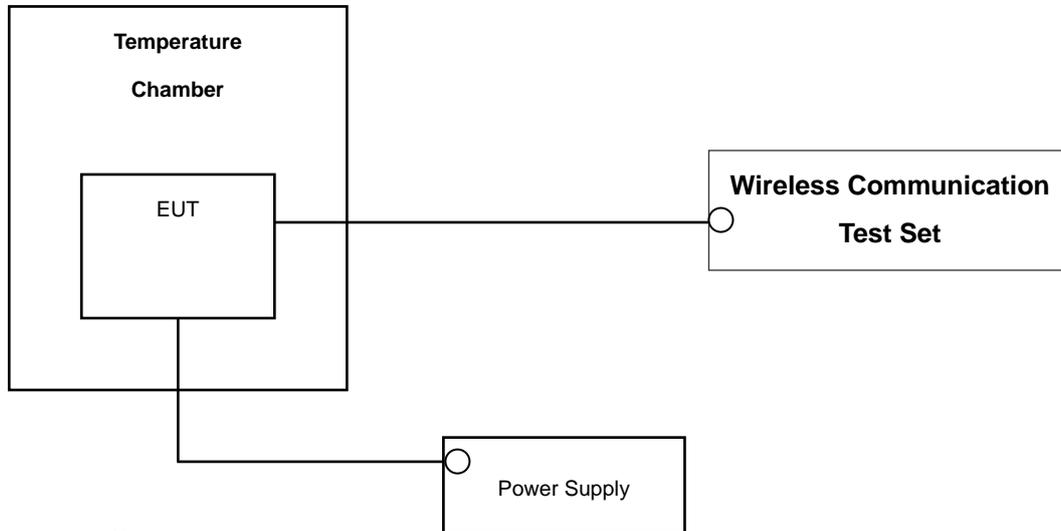

\* Nominal Operating Voltage

#### Test Procedure

Frequency stability is tested in accordance with ANSI/TIA-603-D-2010 section 2.2.2

The frequency stability of the transmitter is measured by:

- a.) **Temperature:** The temperature is varied from - 30 °C to + 50 °C using an environmental chamber.
- b.) **Primary Supply Voltage:** The primary supply voltage is varied from the end point to 100 % of the voltage normally at the input to the device or at the power supply terminals if cables are not normally supplied.

Specification — the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block

#### Time Period and Procedure:

The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).

1. The equipment is turned on in a "standby" condition for one minute before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
2. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

**NOTE: The EUT is tested down to the battery endpoint.**

## 4. LIST OF TEST EQUIPMENT

Manufacture	Model/ Equipment	Serial Number	Calibration Date	Calibration Interval	Calibration Due
REOHDE & SCHWARZ	SCU 18 / AMPLIFIER	10094	09/07/2016	Annual	09/07/2017
Wainwright	WHK1.2/15G-10EF/H.P.F	4	04/11/2016	Annual	04/11/2017
Wainwright	WHK3.3/18G-10EF/H.P.F	2	04/11/2016	Annual	04/11/2017
Hewlett Packard	11667B / Power Splitter	10545	02/15/2017	Annual	02/15/2018
Hewlett Packard	11667B / Power Splitter	11275	04/29/2016	Annual	04/29/2017
Agilent	E3632A/DC Power Supply	KR75303243	07/12/2016	Annual	07/12/2017
Schwarzbeck	UHAP/ Dipole Antenna	557	03/23/2015	Biennial	03/23/2017
Schwarzbeck	UHAP/ Dipole Antenna	558	03/23/2015	Biennial	03/23/2017
EXP	EX-TH400/ Chamber	None	05/31/2016	Annual	05/31/2017
Schwarzbeck	BBHA 9120D/ Horn Antenna	147	09/09/2016	Biennial	09/09/2018
Schwarzbeck	BBHA 9120D/ Horn Antenna	1299	05/15/2015	Biennial	05/15/2017
Schwarzbeck	BBHA 9170/ Horn Antenna(15~40GHz)	BBHA9170342	04/30/2015	Biennial	04/30/2017
Schwarzbeck	BBHA 9170/ Horn Antenna(15~35GHz)	BBHA9170124	04/30/2015	Biennial	04/30/2017
Agilent	N9020A/Signal Analyzer	MY52090906	05/13/2016	Annual	05/13/2017
Hewlett Packard	8493C/ATTENUATOR	17280	06/22/2016	Annual	06/22/2017
REOHDE & SCHWARZ	FSV40/Spectrum Analyzer	1307.9002K40-100931-NK	06/15/2016	Annual	06/15/2017
Agilent	8960 (E5515C)/ Base Station(Now)	MY48360800	10/19/2016	Annual	10/19/2017
Schwarzbeck	FMZB1513/ Loop Antenna(9kHz~30MHz)	1513-175	02/23/2016	Biennial	02/23/2018
Schwarzbeck	VULB9160/ Bilog Antenna	3150	09/30/2016	Biennial	09/30/2018
Schwarzbeck	VULB9160/ Bilog Antenna	3368	10/14/2016	Biennial	10/14/2018
Anritsu Corp.	MT8820C/Wideband Radio Communication Tester	6200576565	07/05/2016	Annual	07/05/2017
Anritsu Corp.	MT8820C/Wideband Radio Communication Tester	6201026545	02/13/2017	Annual	02/13/2018

## 5. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4:2014.

All measurement uncertainty values are shown with a coverage factor of  $k = 2$  to indicate a 95 % level of confidence.

Parameter	Expanded Uncertainty ( $\pm$ dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	1.82
Radiated Disturbance (9 kHz ~ 30 MHz)	3.40
Radiated Disturbance (30 MHz ~ 1 GHz)	4.80
Radiated Disturbance (1 GHz ~ 18 GHz)	6.07

## 6. SUMMARY OF TEST RESULTS

FCC Part Section(s)	Test Description	Test Limit	Test Condition	Test Result
2.1049	Occupied Bandwidth	N/A	CONDUCTED	PASS
2.1051, 27.53(g), 27.53(h), 27.53(c)	Band Edge / Spurious and Harmonic Emissions at Antenna Terminal.	< 43 +10 log <sub>10</sub> (P[Watts]) at Band Edge and for all-of-band emissions <65 + 10 log (P[Watts]) in a 6.25kHz bandwidth for emissions in the 777-787 MHz bands		PASS
27.50(d)(5)	Peak-Average Ratio	< 13 dB		PASS
2.1046	* Conducted Output Power	N/A		PASS
2.1055, 27.54	Frequency stability / variation of ambient temperature	Emission must remain in band		PASS
27.50(c)(10), 27.50(b)(10)	Effective Radiated Power (Band 17, Band 13)	< 3 Watts max. ERP	RADIATED	PASS
27.50(d)(4)	Equivalent Isotropic Radiated Power (Band 4)	< 1 Watts max. EIRP		PASS
2.1053, 27.53(g), 27.53(h)	Undesirable Out-of-Band Emissions	< 43 +10 log <sub>10</sub> (P[Watts]) for all out-of-band emissions		PASS
2.1053, 27.53(f)	Undesirable Emissions in the 1559 – 1610 MHz band	< -70dBW/MHz EIRP (wideband) < -80dBW EIRP (narrowband)		PASS

**Note regarding all Emission Mask test plots:**

The FCC limit is  $65 + 10\log_{10}(P_{\text{Watts}}) = -35 \text{ dBm}$  in a 6.25 kHz bandwidth. Since it was not possible to set the resolution bandwidth to 6.25 kHz with the available equipment, a bandwidth of 10 kHz was used instead to show compliance. By using a 10 kHz bandwidth, the limit was adjusted by  $10\log_{10}(10 \text{ kHz}/6.25 \text{ kHz}) = 2.04 \text{ dB}$ . Thus, the limit shown in all emission mask plots for all available modulation types was  $-35 \text{ dBm} + 2.04 \text{ dB} = -32.96 \text{ dBm}$ .

\*: See SAR Report

## 7. SAMPLE CALCULATION

### A. EIRP Sample Calculation

Mode	Ch./ Freq.		Measured Level(dBm)	Substitute LEVEL(dBm)	Ant. Gain (dBi)	C.L	Pol.	Limit W	EIRP	
	channel	Freq.(MHz)							W	dBm
LTE Band4	20175	1,732.50	-15.75	18.45	9.90	1.76	H	< 1.00	0.456	26.59

**EIRP = Substitute LEVEL(dBm) + Ant. Gain – CL(Cable Loss)**

- 1) The EUT mounted on a wooden tripod is 2.5 meter above test site ground level.
- 2) During the test , the turn table is rotated and the antenna height is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of equivalent isotropic radiated power (EIRP).

## B. Emission Designator

### QPSK Modulation

**Emission Designator = 4M48G7D**

LTE BW = 4.48 MHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

### 16QAM Modulation

**Emission Designator = 4M48W7D**

LTE BW = 4.48 MHz

W = main carrier modulated in a combination of two

or more of the following modes;

amplitude, angle, pulse

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

## 8. TEST DATA

### 8.1 EQUIVALENT ISOTROPIC RADIATED POWER (Band 4)

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	Limit	EIRP	
								W	W	dBm
1710.7	1.4 MHz	QPSK	-22.29	11.05	9.37	2.45	V	< 1.00	0.063	17.97
		16-QAM	-22.95	10.39	9.37	2.45	V		0.054	17.31
1732.5		QPSK	-20.46	12.86	9.44	2.47	V		0.096	19.83
		16-QAM	-21.26	12.06	9.44	2.47	V		0.080	19.03
1754.3		QPSK	-19.10	14.22	9.53	2.47	V		0.134	21.28
		16-QAM	-19.90	13.42	9.53	2.47	V		0.112	20.48

#### Equivalent Isotropic Radiated Power Data (1.4 MHz Band4 LTE)

Note: All of RB size has been tested for emissions and EIRP, with the 1RB configuration observed as the worst case

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	Limit	EIRP	
								W	W	dBm
1711.5	3 MHz	QPSK	-22.13	11.21	9.37	2.45	V	< 1.00	0.065	18.13
		16-QAM	-22.83	10.51	9.37	2.45	V		0.055	17.43
1732.5		QPSK	-20.27	13.05	9.44	2.47	V		0.100	20.02
		16-QAM	-21.17	12.15	9.44	2.47	V		0.082	19.12
1753.5		QPSK	-19.04	14.28	9.53	2.47	V		0.136	21.34
		16-QAM	-19.84	13.48	9.53	2.47	V		0.113	20.54

#### Equivalent Isotropic Radiated Power Data (3 MHz Band4 LTE)

Note: All of RB size has been tested for emissions and EIRP, with the 1RB configuration observed as the worst case

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	Limit	EIRP	
								W	W	dBm
1712.5	5 MHz	QPSK	-22.14	11.20	9.37	2.45	V	< 1.00	0.065	18.12
		16-QAM	-22.87	10.47	9.37	2.45	V		0.055	17.39
1732.5		QPSK	-20.46	12.86	9.44	2.47	V		0.096	19.83
		16-QAM	-21.32	12.00	9.44	2.47	V		0.079	18.97
1752.5		QPSK	-19.13	14.19	9.51	2.47	V		0.133	21.23
		16-QAM	-19.90	13.42	9.51	2.47	V		0.111	20.46

**Equivalent Isotropic Radiated Power Data (5 MHz Band4 LTE)**

Note: All of RB size has been tested for emissions and EIRP, with the 1RB configuration observed as the worst case

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	Limit	EIRP	
								W	W	dBm
1715.0	10 MHz	QPSK	-22.09	11.25	9.39	2.46	V	< 1.00	0.066	18.18
		16-QAM	-22.81	10.53	9.39	2.46	V		0.056	17.46
1732.5		QPSK	-20.65	12.67	9.44	2.47	V		0.092	19.64
		16-QAM	-21.52	11.80	9.44	2.47	V		0.075	18.77
1750.0		QPSK	-19.31	14.01	9.51	2.47	V		0.127	21.05
		16-QAM	-20.01	13.31	9.51	2.47	V		0.108	20.35

**Equivalent Isotropic Radiated Power Data (10 MHz Band4 LTE)**

Note: All of RB size has been tested for emissions and EIRP, with the 1RB configuration observed as the worst case

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	Limit	EIRP	
								W	W	dBm
1717.5	15 MHz	QPSK	-22.01	11.33	9.40	2.47	V	< 1.00	0.067	18.26
		16-QAM	-22.73	10.61	9.40	2.47	V		0.057	17.54
1732.5		QPSK	-20.83	12.49	9.44	2.47	V		0.088	19.46
		16-QAM	-21.70	11.62	9.44	2.47	V		0.072	18.59
1747.5		QPSK	-19.45	13.87	9.51	2.47	V		0.123	20.91
		16-QAM	-20.18	13.14	9.51	2.47	V		0.104	20.18

**Equivalent Isotropic Radiated Power Data (15 MHz Band4 LTE)**

Note: All of RB size has been tested for emissions and EIRP, with the 1RB configuration observed as the worst case

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	Limit	EIRP	
								W	W	dBm
1720.0	20 MHz	QPSK	-21.93	11.41	9.40	2.47	V	< 1.00	0.068	18.34
		16-QAM	-22.65	10.69	9.40	2.47	V		0.058	17.62
1732.5		QPSK	-20.98	12.34	9.44	2.47	V		0.085	19.31
		16-QAM	-21.83	11.49	9.44	2.47	V		0.070	18.46
1745.0		QPSK	-19.80	13.56	9.49	2.47	V		0.114	20.58
		16-QAM	-20.59	12.77	9.49	2.47	V		0.095	19.79

**Equivalent Isotropic Radiated Power Data (20 MHz Band4 LTE)**

Note: All of RB size has been tested for emissions and EIRP, with the 1RB configuration observed as the worst case

**NOTES:**

Equivalent Isotropic Radiated Power Measurements by Substitution Method

according to ANSI/TIA/EIA-603-D-2010 June 24, 2010:

The EUT was placed on a non-conductive styrofoam resin table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. For LTE signals, RBW = 1-5% of the OBW, not to exceed 1MHz, VBW  $\geq 3 \times$  RBW, Detector = RMS. A Horn antenna was substituted in place of the EUT. This Horn antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. The conducted power at the terminals of the Horn antenna is measured. The difference between the gain of the horn and an isotropic antenna is taken into consideration and the EIRP is recorded.

Also, we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna. The worst case of the EUT is z plane in LTE mode. Also worst case of detecting Antenna is vertical polarization in LTE mode.

## 8.2 EFFECTIVE RADIATED POWER (Band 13)

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBd)	C.L	Pol	Limit	ERP	
								W	W	dBm
779.5	5 MHz	QPSK	-29.32	32.05	-10.58	1.63	H	< 3.00	0.096	19.84
		16-QAM	-30.37	31.00	-10.58	1.63	H		0.076	18.79
782.0		QPSK	-29.39	32.15	-10.60	1.64	H		0.098	19.91
		16-QAM	-30.28	31.26	-10.60	1.64	H		0.080	19.02
784.5		QPSK	-29.53	32.22	-10.61	1.64	H		0.099	19.97
		16-QAM	-30.53	31.22	-10.61	1.64	H		0.079	18.97

### Effective Radiated Power Data (5 MHz Band 13 LTE)

Note: All of RB size has been tested for emissions and ERP, with the 1RB configuration observed as the worst case

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBd)	C.L	Pol	Limit	ERP	
								W	W	dBm
782.0	10 MHz	QPSK	-29.34	32.20	-10.60	1.64	H	< 3.00	0.099	19.96
		16-QAM	-30.37	31.17	-10.60	1.64	H		0.078	18.93

### Effective Radiated Power Data (5 MHz Band 13 LTE)

Note: All of RB size has been tested for emissions and ERP, with the 1RB configuration observed as the worst case

#### NOTES:

Effective Radiated Power Output Measurements by Substitution Method

according to ANSI/TIA/EIA-603-D-2010 June 24, 2010:

The EUT was placed on a non-conductive styrofoam resin table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. For LTE signals, RBW = 1-5% of the OBW, not to exceed 1MHz, VBW ≥ 3 x RBW, Detector = RMS. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. The conducted power at the terminals of the dipole is measured. The ERP is recorded.

Also, we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna. The worst case of the EUT is x plane in LTE mode. Also worst case of detecting Antenna is horizontal polarization in LTE mode.

### 8.3 EFFECTIVE RADIATED POWER (Band 17)

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBd)	C.L	Pol	Limit	ERP	
								W	W	dBm
706.5	5 MHz	QPSK	-31.18	30.64	-10.20	1.54	V	< 3.00	0.078	18.90
		16-QAM	-32.06	29.76	-10.20	1.54	V		0.063	18.02
710.0		QPSK	-30.93	30.67	-10.22	1.55	V		0.078	18.90
		16-QAM	-31.76	29.84	-10.22	1.55	V		0.064	18.07
713.5		QPSK	-30.70	30.74	-10.24	1.55	V		0.079	18.95
		16-QAM	-31.53	29.91	-10.24	1.55	V		0.065	18.12

**Effective Radiated Power Data (5 MHz Band 17 LTE)**

Note: All of RB size has been tested for emissions and ERP, with the 1RB configuration observed as the worst case

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBd)	C.L	Pol	Limit	ERP	
								W	W	dBm
709.0	10 MHz	QPSK	-31.16	30.52	-10.22	1.54	V	< 3.00	0.075	18.76
		16-QAM	-32.03	29.65	-10.22	1.54	V		0.062	17.89
710.0		QPSK	-31.10	30.50	-10.22	1.55	V		0.075	18.73
		16-QAM	-31.95	29.65	-10.22	1.55	V		0.061	17.88
711.0		QPSK	-30.98	30.51	-10.23	1.55	V		0.075	18.73
		16-QAM	-31.80	29.69	-10.23	1.55	V		0.062	17.91

**Effective Radiated Power Data (10 MHz Band 17 LTE)**

Note: All of RB size has been tested for emissions and ERP, with the 1RB configuration observed as the worst case

**NOTES:**

Effective Radiated Power Output Measurements by Substitution Method

according to ANSI/TIA/EIA-603-D-2010 June 24, 2010:

The EUT was placed on a non-conductive styrofoam resin table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. For LTE signals, RBW = 1-5% of the OBW, not to exceed 1MHz, VBW  $\geq 3 \times$  RBW, Detector = RMS. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. The conducted power at the terminals of the dipole is measured. The ERP is recorded.

Also, we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna. The worst case of the EUT is y plane in LTE mode. Also worst case of detecting Antenna is vertical polarization in LTE mode.

## 8.4 RADIATED SPURIOUS EMISSIONS

### 8.4.1 RADIATED SPURIOUS EMISSIONS (1.4 MHz Band 4 LTE)

- ▣ OPERATING FREQUENCY: 1754.30 MHz
- ▣ MEASURED OUTPUT POWER: 21.28 dBm = 0.134 W
- ▣ MODULATION SIGNAL: 1.4 MHz QPSK
- ▣ DISTANCE: 3 meters
- ▣ LIMIT:  $43 + 10 \log_{10}(W) =$  34.28 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	EIRP (dBm)	dBc
19957 (1710.7)	3,421.40	-44.68	12.19	-51.85	1.49	V	-41.15	62.43
	5,132.10	-46.16	12.76	-47.04	2.49	H	-36.77	58.05
	6,842.80	-52.18	12.06	-48.47	3.49	V	-39.90	61.18
20175 (1732.5)	3,465.00	-41.86	12.28	-48.75	1.49	H	-37.96	59.24
	5,197.50	-48.81	12.86	-49.92	2.57	H	-39.63	60.91
	6,930.00	-54.02	11.87	-49.42	3.53	H	-41.08	62.36
20393 (1754.3)	3,508.60	-39.78	12.36	-46.23	1.53	H	-35.40	56.68
	5,262.90	-47.27	12.95	-49.06	2.63	V	-38.74	60.02
	7,017.20	-46.84	11.73	-43.81	3.64	V	-35.72	57.00

- NOTES:**
1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA/EIA-603-D-2010 June 24, 2010:
  2. We are performed all frequency to 10<sup>th</sup> harmonics from 9 kHz. Measurements above show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
  3. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
  4. All of RB size has been tested for emissions and EIRP, with the 1RB configuration observed as the worst case
  5. We are performed 16QAM and QPSK modulations. The worst case data are reported in the table above.

### 8.4.2 RADIATED SPURIOUS EMISSIONS (3 MHz Band 4 LTE)

- ▣ OPERATING FREQUENCY: 1753.50 MHz
- ▣ MEASURED OUTPUT POWER: 21.34 dBm = 0.136 W
- ▣ MODULATION SIGNAL: 3 MHz QPSK
- ▣ DISTANCE: 3 meters
- ▣ LIMIT:  $43 + 10 \log_{10}(W) =$  34.34 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	EIRP (dBm)	dBc
19965 (1711.5)	3,423.00	-44.65	12.20	-51.94	1.50	H	-41.23	62.57
	5,134.50	-48.68	12.76	-49.56	2.49	V	-39.29	60.63
	6,846.00	-51.32	12.05	-47.45	3.49	V	-38.89	60.23
20175 (1732.5)	3,465.00	-40.25	12.28	-47.14	1.49	V	-36.35	57.69
	5,197.50	-48.67	12.86	-49.78	2.57	H	-39.49	60.83
	6,930.00	-49.65	11.87	-45.05	3.53	V	-36.71	58.05
20385 (1753.5)	3,507.00	-39.99	12.36	-46.44	1.53	H	-35.61	56.95
	5,260.50	-47.18	12.95	-48.97	2.63	V	-38.65	59.99
	7,014.00	-50.70	11.73	-47.92	3.64	H	-39.83	61.17

- NOTES:**
1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA/EIA-603-D-2010 June 24, 2010:
  2. We are performed all frequency to 10<sup>th</sup> harmonics from 9 kHz. Measurements above show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
  3. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
  4. All of RB size has been tested for emissions and EIRP, with the 1RB configuration observed as the worst case
  5. We are performed 16QAM and QPSK modulations. The worst case data are reported in the table above.

### 8.4.3 RADIATED SPURIOUS EMISSIONS (5 MHz Band 4 LTE)

- ▣ OPERATING FREQUENCY: 1752.50 MHz
- ▣ MEASURED OUTPUT POWER: 21.23 dBm = 0.133 W
- ▣ MODULATION SIGNAL: 5 MHz QPSK
- ▣ DISTANCE: 3 meters
- ▣ LIMIT:  $43 + 10 \log_{10}(W) =$  34.23 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	EIRP (dBm)	dBc
19975 (1712.5)	3,425.00	-44.22	12.20	-51.51	1.50	H	-40.80	62.03
	5,137.50	-47.22	12.77	-48.05	2.50	V	-37.78	59.01
	6,850.00	-53.30	12.04	-49.27	3.49	H	-40.72	61.95
20175 (1732.5)	3,465.00	-42.00	12.28	-48.89	1.49	H	-38.10	59.33
	5,197.50	-47.53	12.86	-48.64	2.57	V	-38.35	59.58
	6,930.00	-52.01	11.87	-47.41	3.53	V	-39.07	60.30
20375 (1752.5)	3,505.00	-43.71	12.36	-50.26	1.54	H	-39.44	60.67
	5,257.50	-47.19	12.95	-48.98	2.63	V	-38.66	59.89
	7,010.00	-48.76	11.73	-45.98	3.64	V	-37.89	59.12

- NOTES:**
1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA/EIA-603-D-2010 June 24, 2010:
  2. We are performed all frequency to 10<sup>th</sup> harmonics from 9 kHz. Measurements above show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
  3. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
  4. All of RB size has been tested for emissions and EIRP, with the 1RB configuration observed as the worst case
  5. We are performed 16QAM and QPSK modulations. The worst case data are reported in the table above.

### 8.4.4 RADIATED SPURIOUS EMISSIONS (10 MHz Band 4 LTE)

- ▣ OPERATING FREQUENCY: 1750.00 MHz
- ▣ MEASURED OUTPUT POWER: 21.05 dBm = 0.127 W
- ▣ MODULATION SIGNAL: 10 MHz QPSK
- ▣ DISTANCE: 3 meters
- ▣ LIMIT:  $43 + 10 \log_{10}(W) =$  34.05 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	EIRP (dBm)	dBc
20000 (1715.0)	3,430.00	-45.10	12.21	-52.50	1.50	H	-41.79	62.84
	5,145.00	-47.13	12.78	-47.89	2.51	H	-37.62	58.67
	6,860.00	-52.36	12.01	-48.28	3.49	V	-39.76	60.81
20175 (1732.5)	3,465.00	-40.57	12.28	-47.46	1.49	V	-36.67	57.72
	5,197.50	-48.96	12.86	-50.07	2.57	V	-39.78	60.83
	6,930.00	-54.64	11.87	-50.04	3.53	H	-41.70	62.75
20350 (1750.0)	3,500.00	-43.58	12.35	-50.23	1.55	H	-39.43	60.48
	5,250.00	-46.49	12.93	-48.30	2.63	H	-38.00	59.05
	7,000.00	-50.20	11.73	-48.07	3.63	H	-39.97	61.02

- NOTES:**
1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA/EIA-603-D-2010 June 24, 2010:
  2. We are performed all frequency to 10<sup>th</sup> harmonics from 9 kHz. Measurements above show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
  3. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
  4. All of RB size has been tested for emissions and EIRP, with the 1RB configuration observed as the worst case
  5. We are performed 16QAM and QPSK modulations. The worst case data are reported in the table above.

### 8.4.5 RADIATED SPURIOUS EMISSIONS (15 MHz Band 4 LTE)

- ▣ OPERATING FREQUENCY: 1747.50 MHz
- ▣ MEASURED OUTPUT POWER: 20.91 dBm = 0.123 W
- ▣ MODULATION SIGNAL: 15 MHz QPSK
- ▣ DISTANCE: 3 meters
- ▣ LIMIT:  $43 + 10 \log_{10}(W) =$  33.91 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	EIRP (dBm)	dBc
20025 (1717.5)	3,435.00	-44.33	12.22	-51.58	1.51	H	-40.87	61.78
	5,152.50	-47.36	12.79	-48.05	2.52	H	-37.78	58.69
	6,870.00	-52.92	11.99	-49.16	3.44	H	-40.61	61.52
20175 (1732.5)	3,465.00	-41.09	12.28	-47.98	1.49	H	-37.19	58.10
	5,197.50	-49.49	12.86	-50.60	2.57	V	-40.31	61.22
	6,930.00	-53.34	11.87	-48.74	3.53	V	-40.40	61.31
20325 (1747.5)	3,495.00	-46.23	12.34	-52.84	1.54	V	-42.04	62.95
	5,242.50	-45.71	12.92	-47.17	2.60	H	-36.85	57.76
	6,990.00	-53.07	11.75	-48.13	3.52	H	-39.90	60.81

- NOTES:**
1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA/EIA-603-D-2010 June 24, 2010:
  2. We are performed all frequency to 10<sup>th</sup> harmonics from 9 kHz. Measurements above show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
  3. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
  4. All of RB size has been tested for emissions and EIRP, with the 1RB configuration observed as the worst case
  5. We are performed 16QAM and QPSK modulations. The worst case data are reported in the table above.

### 8.4.6 RADIATED SPURIOUS EMISSIONS (20 MHz Band 4 LTE)

- ▣ OPERATING FREQUENCY: 1745.00 MHz
- ▣ MEASURED OUTPUT POWER: 20.58 dBm = 0.114 W
- ▣ MODULATION SIGNAL: 20 MHz QPSK
- ▣ DISTANCE: 3 meters
- ▣ LIMIT:  $43 + 10 \log_{10}(W) =$  33.58 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	EIRP (dBm)	dBc
20050 (1720.0)	3,440.00	-44.36	12.23	-51.47	1.52	H	-40.76	61.34
	5,160.00	-48.25	12.80	-49.28	2.53	V	-39.01	59.59
	6,880.00	-52.28	11.97	-48.35	3.46	V	-39.84	60.42
20175 (1732.5)	3,465.00	-41.21	12.28	-48.10	1.49	H	-37.31	57.89
	5,197.50	-50.86	12.86	-51.97	2.57	V	-41.68	62.26
	6,930.00	-55.76	11.87	-51.16	3.53	V	-42.82	63.40
20300 (1745.0)	3,490.00	-41.27	12.33	-47.84	1.53	V	-37.04	57.62
	5,235.00	-45.97	12.91	-47.50	2.59	V	-37.18	57.76
	6,980.00	-50.67	11.77	-45.60	3.50	V	-37.33	57.91

- NOTES:**
1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA/EIA-603-D-2010 June 24, 2010:
  2. We are performed all frequency to 10<sup>th</sup> harmonics from 9 kHz. Measurements above show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
  3. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
  4. All of RB size has been tested for emissions and EIRP, with the 1RB configuration observed as the worst case
  5. We are performed 16QAM and QPSK modulations. The worst case data are reported in the table above.

### 8.4.7 RADIATED SPURIOUS EMISSIONS (5 MHz Band 13 LTE)

- ▣ OPERATING FREQUENCY: 784.50 MHz
- ▣ MEASURED OUTPUT POWER: 19.97 dBm = 0.099 W
- ▣ MODULATION SIGNAL: 5 MHz QPSK
- ▣ DISTANCE: 3 meters
- ▣ LIMIT:  $43 + 10 \log_{10}(W) =$  32.97 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBd)	Substitute Level (dBm)	C.L	Pol	ERP (dBm)	dBc
23205 (779.5)	1,559.00	-54.93	8.82	-59.88	1.18	H	-52.24	72.21
	2,338.50	-55.01	10.77	-60.51	1.17	H	-50.91	70.88
	3,118.00	-56.82	11.54	-61.65	1.36	H	-51.47	71.44
23230 (782.0)	1,564.00	-57.28	8.84	-62.28	1.18	H	-54.62	74.59
	2,346.00	-54.98	10.78	-60.51	1.17	V	-50.90	70.87
	3,128.00	-56.85	11.56	-61.60	1.38	H	-51.42	71.39
23255 (784.5)	1,569.00	-55.24	8.86	-60.30	1.18	H	-52.62	72.59
	2,353.50	-56.30	10.78	-61.80	1.17	V	-52.19	72.16
	3,138.00	-56.52	11.59	-61.34	1.39	H	-51.14	71.11

- NOTES:**
1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA/EIA-603-D-2010 June 24, 2010:
  2. We are performed all frequency to 10<sup>th</sup> harmonics from 9 kHz. Measurements above show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
  3. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
  4. All of RB size has been tested for emissions and ERP, with the 1RB configuration observed as the worst case
  5. We are performed 16QAM and QPSK modulations. The worst case data are reported in the table above.

### 8.4.8 RADIATED SPURIOUS EMISSIONS (10 MHz Band 13 LTE)

- ▣ OPERATING FREQUENCY: 782.00 MHz
- ▣ MEASURED OUTPUT POWER: 19.96 dBm = 0.099 W
- ▣ MODULATION SIGNAL: 10 MHz QPSK
- ▣ DISTANCE: 3 meters
- ▣ LIMIT:  $43 + 10 \log_{10}(W) =$  32.96 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBd)	Substitute Level (dBm)	C.L	Pol	ERP (dBm)	dBc
23230 (782.00)	1,564.00	-55.25	8.84	-65.34	1.18	H	-57.68	77.64
	2,346.00	-56.12	10.78	-63.07	1.17	V	-53.46	73.42
	3,128.00	-56.59	11.56	-62.69	1.38	H	-52.51	72.47
	3,910.00	-56.97	12.67	-62.49	1.72	H	-51.54	71.50

- NOTES:**
1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA/EIA-603-D-2010 June 24, 2010:
  2. We are performed all frequency to 10<sup>th</sup> harmonics from 9 kHz. Measurements above show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
  3. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
  4. All of RB size has been tested for emissions and ERP, with the 1RB configuration observed as the worst case
  5. We are performed 16QAM and QPSK modulations. The worst case data are reported in the table above.

**8.4.8.1 RADIATED SPURIOUS EMISSIONS (1559 ~ 1610 MHz Band)**

- ▣ OPERATING FREQUENCY: 779.5 MHz, 782.0 MHz, 784.5 MHz
- ▣ MEASURED OUTPUT POWER: 5 MHz QPSK
- ▣ DISTANCE: 3 meters
- ▣ WIDEBAND EMISSION LIMIT: -70 dBW/ MHz (= -40 dBm/ MHz)

Operating Frequency (MHz)	Measured Frequency (MHz)	EMISSION TYPE	Measured Level (dBm)	Ant. Gain (dBd)	Substitute Level (dBm)	C.L	Pol	ERP (dBm)	MARGIN (dB)
779.5	1601.0	WIDEBAND	-54.53	8.98	-64.84	1.18	V	-57.04	17.04
782.0	1559.5		-53.71	8.82	-63.80	1.18	H	-56.16	16.16
784.5	1564.6		-52.87	8.84	-62.96	1.18	V	-55.30	15.30

**8.4.8.2 RADIATED SPURIOUS EMISSIONS (1559 ~ 1610 MHz Band)**

- ▣ OPERATING FREQUENCY: 782.00 MHz
- ▣ MEASURED OUTPUT POWER: 10 MHz QPSK
- ▣ DISTANCE: 3 meters
- ▣ WIDEBAND EMISSION LIMIT: -70 dBW/ MHz (= -40 dBm/ MHz)

Operating Frequency (MHz)	Measured Frequency (MHz)	EMISSION TYPE	Measured Level (dBm)	Ant. Gain (dBd)	Substitute Level (dBm)	C.L	Pol	ERP (dBm)	MARGIN (dB)
782.0	1609.3	WIDEBAND	-54.23	9.00	-64.91	1.18	V	-57.09	17.09

### 8.4.9 RADIATED SPURIOUS EMISSIONS (5 MHz Band 17 LTE)

- ▣ OPERATING FREQUENCY: 713.50 MHz
- ▣ MEASURED OUTPUT POWER: 18.95 dBm = 0.079 W
- ▣ MODULATION SIGNAL: 5 MHz QPSK
- ▣ DISTANCE: 3 meters
- ▣ LIMIT:  $43 + 10 \log_{10}(W) =$  31.95 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBd)	Substitute Level (dBm)	C.L	Pol	ERP (dBm)	dBc
23755 (706.50)	1,413.00	-52.23	8.05	-60.30	1.19	H	-53.44	72.39
	2,119.50	-53.05	10.46	-60.62	1.18	H	-51.34	70.29
	2,826.00	-57.32	11.18	-63.57	1.23	H	-53.62	72.57
23790 (710.00)	1,420.00	-50.50	8.09	-58.84	1.18	H	-51.93	70.88
	2,130.00	-53.06	10.47	-60.31	1.17	H	-51.01	69.96
	2,840.00	-57.36	11.19	-63.50	1.26	V	-53.57	72.52
23825 (713.50)	1,427.00	-51.36	8.11	-59.89	1.18	H	-52.96	71.91
	2,140.50	-52.30	10.49	-59.20	1.17	H	-49.88	68.83
	2,854.00	-55.44	11.20	-61.63	1.27	H	-51.70	70.65

- NOTES:**
1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA/EIA-603-D-2010 June 24, 2010:
  2. We are performed all frequency to 10<sup>th</sup> harmonics from 9 kHz. Measurements above show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
  3. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
  4. All of RB size has been tested for emissions and ERP, with the 1RB configuration observed as the worst case
  5. We are performed 16QAM and QPSK modulations. The worst case data are reported in the table above.

### 8.4.10 RADIATED SPURIOUS EMISSIONS (10 MHz Band 17 LTE)

- ▣ OPERATING FREQUENCY: 709.00 MHz
- ▣ MEASURED OUTPUT POWER: 18.76 dBm = 0.075 W
- ▣ MODULATION SIGNAL: 10 MHz QPSK
- ▣ DISTANCE: 3 meters
- ▣ LIMIT:  $43 + 10 \log_{10}(W) =$  31.76 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBd)	Substitute Level (dBm)	C.L	Pol	ERP (dBm)	dBc
23780 (709.00)	1,418.00	-52.48	8.08	-60.75	1.18	H	-53.85	72.61
	2,127.00	-56.60	10.47	-63.95	1.17	V	-54.65	73.41
	2,836.00	-57.18	11.19	-63.34	1.25	V	-53.40	72.16
23790 (710.00)	1,420.00	-52.51	8.09	-60.85	1.18	H	-53.94	72.70
	2,130.00	-54.29	10.47	-61.54	1.17	H	-52.24	71.00
	2,840.00	-56.42	11.19	-62.56	1.26	H	-52.63	71.39
23800 (711.00)	1,422.00	-52.65	8.10	-61.05	1.18	H	-54.13	72.89
	2,133.00	-56.61	10.47	-63.75	1.17	H	-54.45	73.21
	2,844.00	-56.64	11.19	-62.83	1.26	V	-52.90	71.66

- NOTES:**
1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA/EIA-603-D-2010 June 24, 2010:
  2. We are performed all frequency to 10<sup>th</sup> harmonics from 9 kHz. Measurements above show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
  3. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
  4. All of RB size has been tested for emissions and ERP, with the 1RB configuration observed as the worst case
  5. We are performed 16QAM and QPSK modulations. The worst case data are reported in the table above.

**8.5 PEAK-TO-AVERAGE RATIO**

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (dB )
4	1.4 MHz	1732.5	QPSK	6	0	5.34
			16-QAM	6		6.18
	3 MHz		QPSK	15		5.53
			16-QAM	15		6.33
	5 MHz		QPSK	25		5.49
			16-QAM	25		6.18
	10 MHz		QPSK	50		5.59
			16-QAM	50		6.20
	15 MHz		QPSK	75		5.54
			16-QAM	75		6.19
	20 MHz		QPSK	100		5.52
			16-QAM	100		6.25

- Plots of the EUT's Peak- to- Average Ratio are shown Page 65~ 70.

## 8.6 OCCUPIED BANDWIDTH

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data ( MHz )
4	1.4 MHz	1732.5	QPSK	6	0	1.0917
			16-QAM	6	0	1.0948
	3 MHz		QPSK	15	0	2.6947
			16-QAM	15	0	2.6937
	5 MHz		QPSK	25	0	4.4944
			16-QAM	25	0	4.4982
	10 MHz		QPSK	50	0	8.9912
			16-QAM	50	0	8.9492
	15 MHz		QPSK	75	0	13.491
			16-QAM	75	0	13.465
	20 MHz		QPSK	100	0	17.933
			16-QAM	100	0	17.924

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data ( MHz )
13	5 MHz	782.0	QPSK	25	0	4.5025
			16-QAM	25	0	4.5067
	10 MHz		QPSK	50	0	8.9780
			16-QAM	50	0	8.9606

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data ( MHz )
17	5 MHz	710.0	QPSK	25	0	4.5094
			16-QAM	25	0	4.4914
	10 MHz		QPSK	50	0	8.9326
			16-QAM	50	0	8.9365

- Plots of the EUT's Occupied Bandwidth are shown Page 55 ~ 64.

## 8.7 CONDUCTED SPURIOUS EMISSIONS

■FACTORS FOR FREQUENCY

Frequency Range (GHz)	Factor [dB]
0.03 – 1	27.145
1 – 5	26.960
5 – 10	27.542
10 – 15	28.439
15 – 20	29.144
Above 20	30.148

**NOTES:**

Factor(dB) = Cable Loss + Attenuator +Power Splitter

Band	Band Width (MHz)	Frequency (MHz)	Frequency of Maximum Harmonic (GHz)	Factor (dB)	Measurement Maximum Data (dBm)	Result (dBm)	Limit (dBm)
4	1.4	1710.7	3.4213	26.960	-65.14	-38.180	-13.00
		1732.5	3.4647	26.960	-67.15	-40.190	
		1754.3	16.5250	29.144	-62.67	-33.526	
	3	1711.5	3.4213	26.960	-65.24	-38.280	
		1732.5	18.9510	29.144	-62.48	-33.336	
		1753.5	19.5545	29.144	-62.74	-33.596	
	5	1712.5	3.4213	26.960	-65.15	-38.190	
		1732.5	18.9170	29.144	-62.05	-32.906	
		1752.5	18.8955	29.144	-62.44	-33.296	
	10	1715.0	3.4218	26.960	-64.78	-37.820	
		1732.5	18.9395	29.144	-62.49	-33.346	
		1750.0	18.9245	29.144	-62.76	-33.616	
	15	1717.5	3.4223	26.960	-64.77	-37.810	
		1732.5	3.4223	26.960	-65.551	-38.591	
		1747.5	18.9260	29.144	-62.45	-33.306	
	20	1720.0	3.4228	26.960	-64.77	-37.810	
		1732.5	3.4477	26.960	-66.53	-39.570	
		1745.0	18.9370	29.144	-62.64	-33.496	

Band	Band Width (MHz)	Frequency (MHz)	Frequency of Maximum Harmonic (GHz)	Factor (dB)	Measurement Maximum Data (dBm)	Result (dBm)	Limit (dBm)
13	5	779.5	3.71128	26.96	-67.11	-40.15	-13.00
		782.0	3.69214	26.96	-66.77	-39.81	
		784.5	3.72221	26.96	-67.31	-40.35	
	10	782.0	3.71451	26.96	-67.22	-40.26	

Band	Band Width (MHz)	Frequency (MHz)	Frequency of Maximum Harmonic (GHz)	Factor (dB)	Measurement Maximum Data (dBm)	Result (dBm)	Limit (dBm)
17	5	706.5	3.68146	26.960	-66.860	-39.900	-13.00
		710.0	3.67723	26.960	-66.860	-39.900	
		713.5	6.25275	27.542	-67.270	-39.728	
	10	709.0	3.70929	26.960	-66.370	-39.410	
		710.0	3.70805	26.960	-66.210	-39.250	
		711.0	3.70035	26.960	-67.399	-40.439	

**NOTES:**

1. Conducted Spurious Emissions was Tested QPSK Modulation, Resource Block Size 1 and Resource Block Offset 0
2. Result (dBm) = Measurement Maximum Data (dBm) + Factor (dB)

- Plots of the EUT's Conducted Spurious Emissions are shown Page 99 ~ 127.

**8.7.1 BAND EDGE**


- Plots of the EUT's Band Edge are shown Page 71 ~ 99.

## 8.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

### 8.8.1 FREQUENCY STABILITY (1.4 MHz Band 4 LTE)

- ▣ OPERATING FREQUENCY: 1732,500,000 Hz
- ▣ CHANNEL: 20175 (1.4 MHz)
- ▣ REFERENCE VOLTAGE: 3.85 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band


Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.85	+20(Ref)	1732 500 006	0.0	0.000 000	0.000
100%		-30	1732 500 002	-3.9	0.000 000	-0.002
100%		-20	1732 500 009	2.8	0.000 000	0.002
100%		-10	1732 500 015	9.2	0.000 001	0.005
100%		0	1732 500 010	4.4	0.000 000	0.003
100%		+10	1732 500 010	3.6	0.000 000	0.002
100%		+30	1732 499 999	-6.7	0.000 000	-0.004
100%		+40	1732 500 002	-4.2	0.000 000	-0.002
100%		+50	1732 500 011	4.5	0.000 000	0.003
Batt. Endpoint		3.60	+20	1732 500 010	4.4	0.000 000

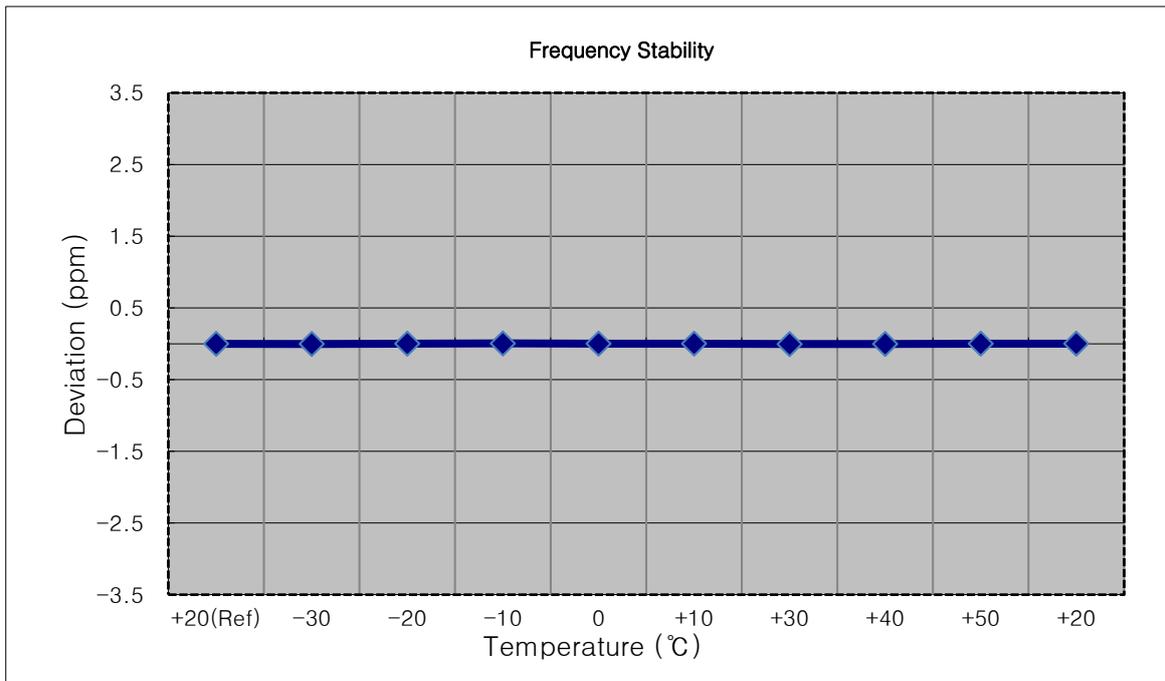

**8.8.2 FREQUENCY STABILITY (3 MHz Band 4 LTE)**

- OPERATING FREQUENCY: 1732,500,000 Hz
- CHANNEL: 20175 (3 MHz)
- REFERENCE VOLTAGE: 3.85 VDC
- DEVIATION LIMIT: Emission must remain in band


Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.85	+20(Ref)	1732 500 005	0.0	0.000 000	0.000
100%		-30	1732 500 009	4.3	0.000 000	0.002
100%		-20	1732 500 013	8.3	0.000 000	0.005
100%		-10	1732 500 010	4.5	0.000 000	0.003
100%		0	1732 500 009	4.3	0.000 000	0.002
100%		+10	1732 500 011	6.0	0.000 000	0.003
100%		+30	1732 500 014	8.5	0.000 000	0.005
100%		+40	1732 500 010	5.1	0.000 000	0.003
100%		+50	1732 500 010	4.7	0.000 000	0.003
Batt. Endpoint		3.60	+20	1732 500 010	4.8	0.000 000

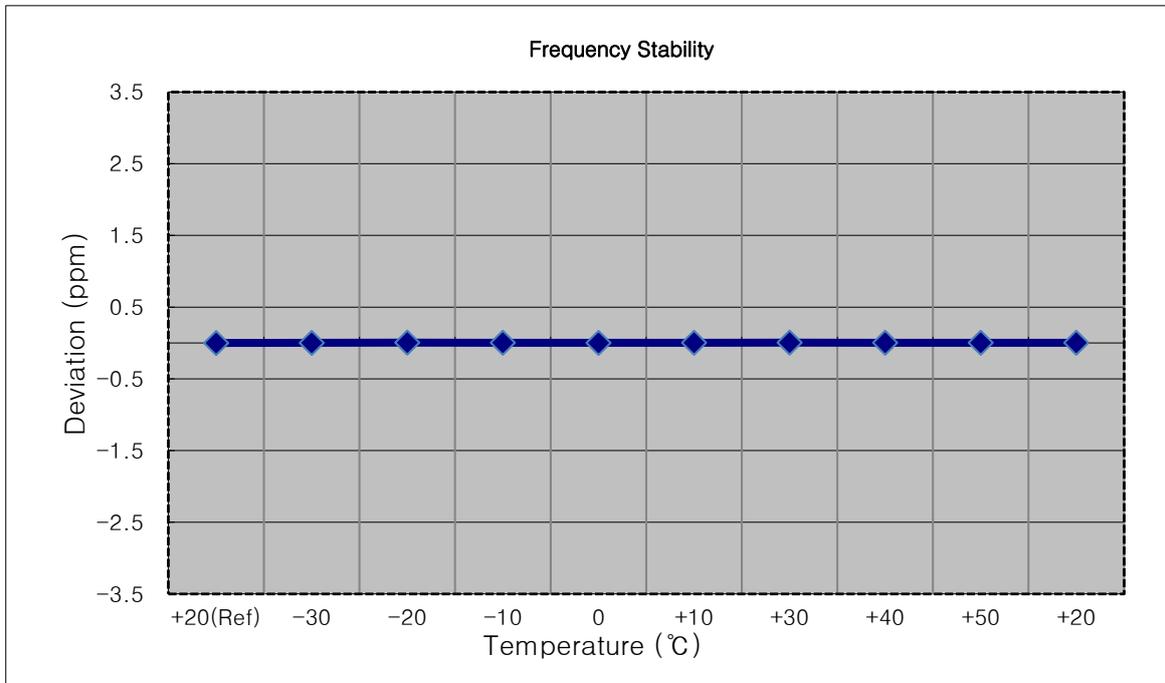

**8.8.3 FREQUENCY STABILITY (5 MHz Band 4 LTE)**

- OPERATING FREQUENCY: 1732,500,000 Hz
- CHANNEL: 20175 (5 MHz)
- REFERENCE VOLTAGE: 3.85 VDC
- DEVIATION LIMIT: Emission must remain in band


Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.85	+20(Ref)	1732 500 007	0.0	0.000 000	0.000
100%		-30	1732 500 012	5.4	0.000 000	0.003
100%		-20	1732 500 011	3.6	0.000 000	0.002
100%		-10	1732 500 012	4.8	0.000 000	0.003
100%		0	1732 500 012	4.7	0.000 000	0.003
100%		+10	1732 500 011	4.2	0.000 000	0.002
100%		+30	1732 500 016	8.7	0.000 001	0.005
100%		+40	1732 500 015	7.5	0.000 000	0.004
100%		+50	1732 500 012	4.9	0.000 000	0.003
Batt. Endpoint		3.60	+20	1732 500 012	5.1	0.000 000

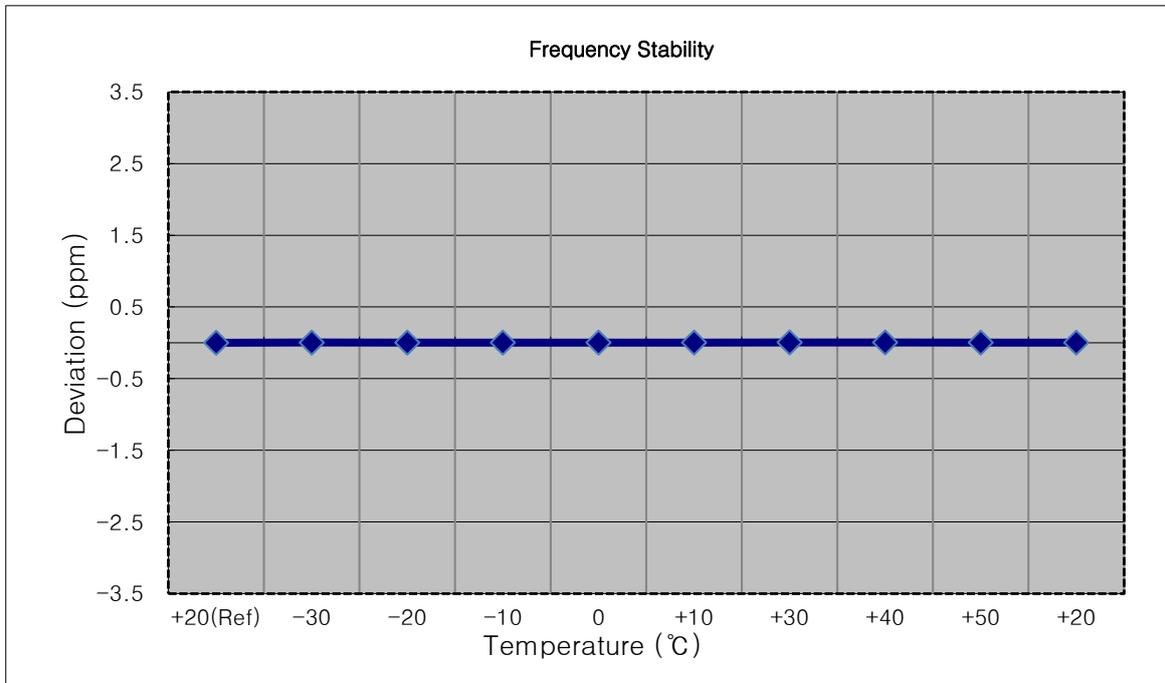

**8.8.4 FREQUENCY STABILITY (10 MHz Band 4 LTE)**

- OPERATING FREQUENCY: 1732,500,000 Hz
- CHANNEL: 20175 (10 MHz)
- REFERENCE VOLTAGE: 3.85 VDC
- DEVIATION LIMIT: Emission must remain in band


Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.85	+20(Ref)	1732 500 003	0.0	0.000 000	0.000
100%		-30	1732 500 008	5.1	0.000 000	0.003
100%		-20	1732 500 001	-2.1	0.000 000	-0.001
100%		-10	1732 500 009	5.5	0.000 000	0.003
100%		0	1732 500 007	4.2	0.000 000	0.002
100%		+10	1732 500 006	3.3	0.000 000	0.002
100%		+30	1732 500 008	5.3	0.000 000	0.003
100%		+40	1732 500 000	-3.4	0.000 000	-0.002
100%		+50	1732 500 008	4.7	0.000 000	0.003
Batt. Endpoint		3.60	+20	1732 500 008	4.7	0.000 000

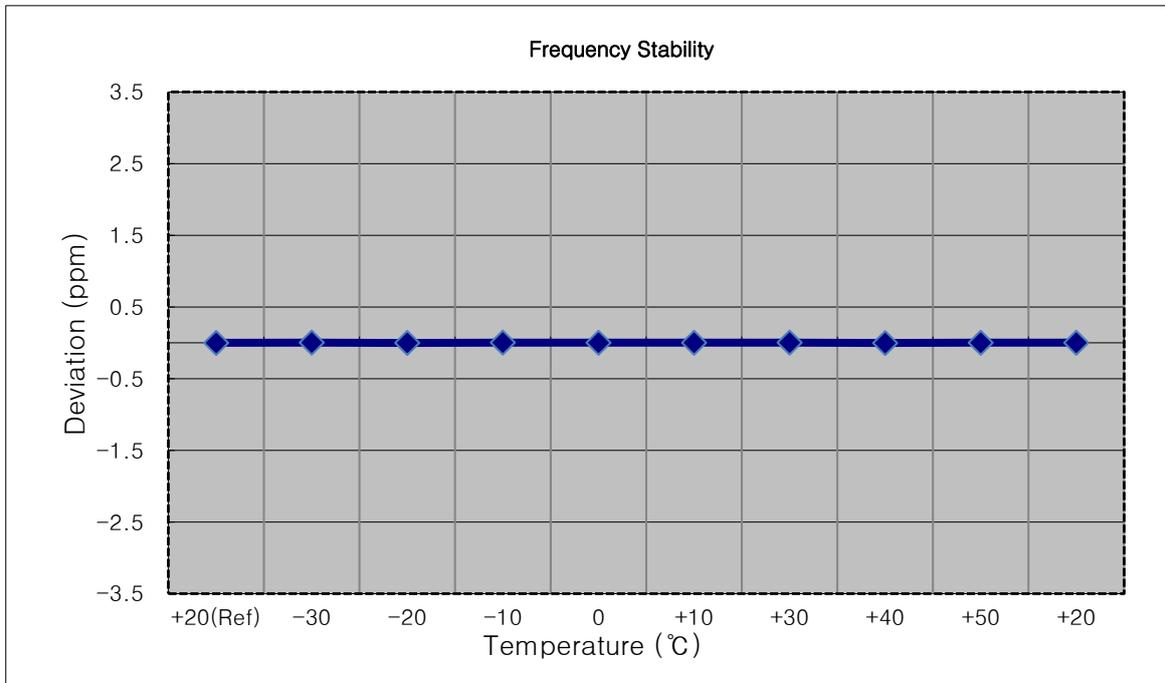

**8.8.5 FREQUENCY STABILITY (15 MHz Band 4 LTE)**

- OPERATING FREQUENCY: 1732,500,000 Hz
- CHANNEL: 20175 (15 MHz)
- REFERENCE VOLTAGE: 3.85 VDC
- DEVIATION LIMIT: Emission must remain in band


Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.85	+20(Ref)	1732 500 005	0.0	0.000 000	0.000
100%		-30	1732 500 010	5.4	0.000 000	0.003
100%		-20	1732 500 002	-3.5	0.000 000	-0.002
100%		-10	1732 500 011	5.6	0.000 000	0.003
100%		0	1732 500 001	-4.1	0.000 000	-0.002
100%		+10	1732 500 001	-4.5	0.000 000	-0.003
100%		+30	1732 500 008	2.7	0.000 000	0.002
100%		+40	1732 500 011	6.0	0.000 000	0.003
100%		+50	1732 500 010	5.2	0.000 000	0.003
Batt. Endpoint	3.60	+20	1732 500 009	3.9	0.000 000	0.002

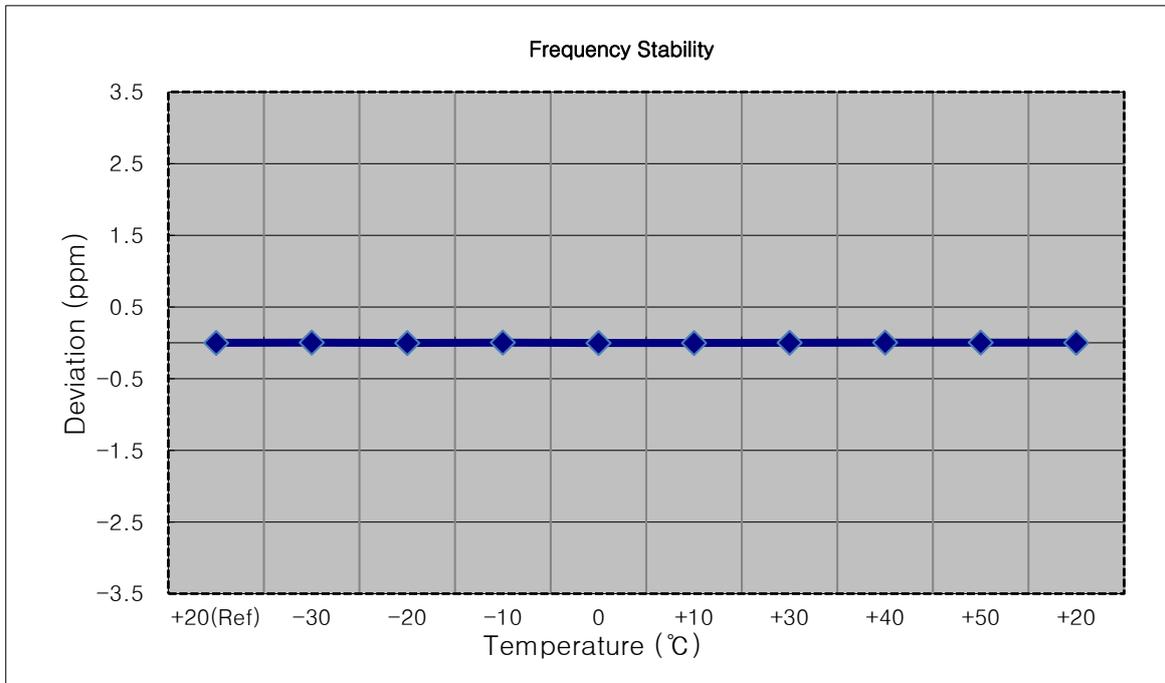

**8.8.6 FREQUENCY STABILITY (20 MHz Band 4 LTE)**

- OPERATING FREQUENCY: 1732,500,000 Hz
- CHANNEL: 20175 (20 MHz)
- REFERENCE VOLTAGE: 3.85 VDC
- DEVIATION LIMIT: Emission must remain in band


Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.85	+20(Ref)	1732 500 005	0.0	0.000 000	0.000
100%		-30	1732 500 009	4.4	0.000 000	0.003
100%		-20	1732 500 013	7.8	0.000 000	0.005
100%		-10	1732 500 012	7.0	0.000 000	0.004
100%		0	1732 500 009	3.6	0.000 000	0.002
100%		+10	1732 500 002	-2.6	0.000 000	-0.002
100%		+30	1732 500 014	9.1	0.000 001	0.005
100%		+40	1732 500 011	5.8	0.000 000	0.003
100%		+50	1732 500 010	5.4	0.000 000	0.003
Batt. Endpoint		3.60	+20	1732 499 999	-6.3	0.000 000

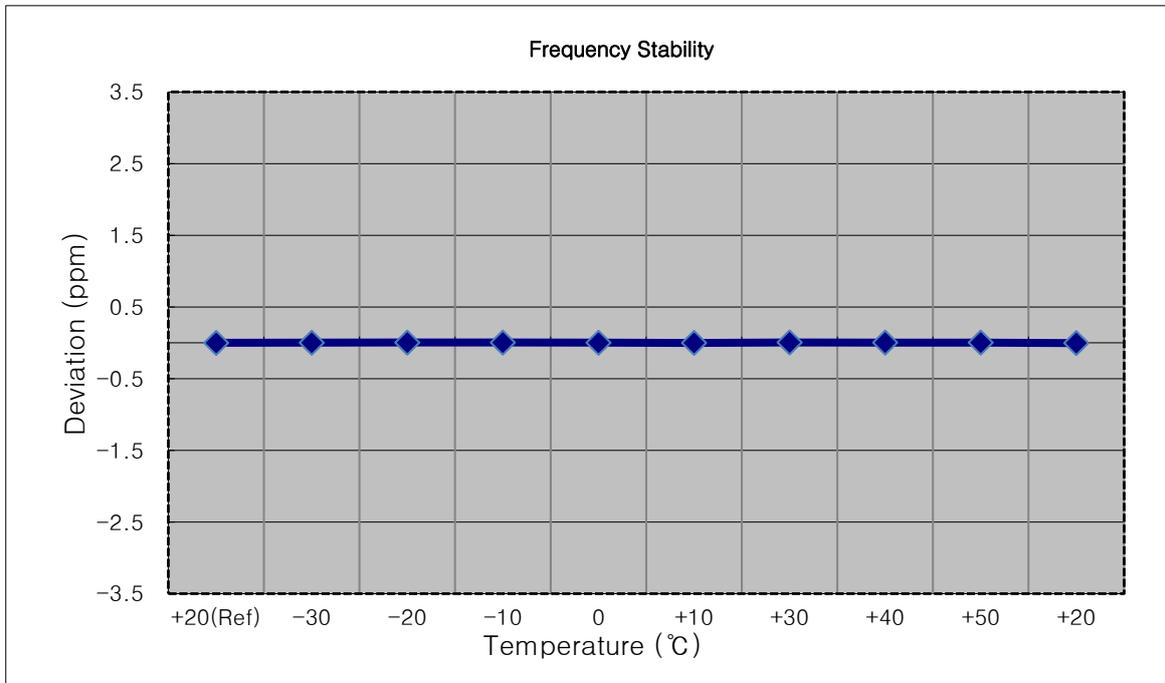

**8.8.7 FREQUENCY STABILITY (5 MHz Band 13 LTE)**

- ▣ OPERATING FREQUENCY: 782,000,000 Hz
- ▣ CHANNEL: 23230 (5 MHz)
- ▣ REFERENCE VOLTAGE: 3.85 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band


Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.85	+20(Ref)	781 999 995	0.0	0.000 000	0.0000
100%		-30	781 999 993	-2.0	0.000 000	-0.0026
100%		-20	781 999 999	3.7	0.000 000	0.0047
100%		-10	781 999 993	-1.9	0.000 000	-0.0024
100%		0	781 999 992	-2.8	0.000 000	-0.0036
100%		+10	781 999 992	-3.5	0.000 000	-0.0045
100%		+30	781 999 991	-3.7	0.000 000	-0.0047
100%		+40	781 999 989	-5.8	-0.000 001	-0.0074
100%		+50	781 999 992	-2.6	0.000 000	-0.0033
Batt. Endpoint	3.60	+20	781 999 989	-5.6	-0.000 001	-0.0072

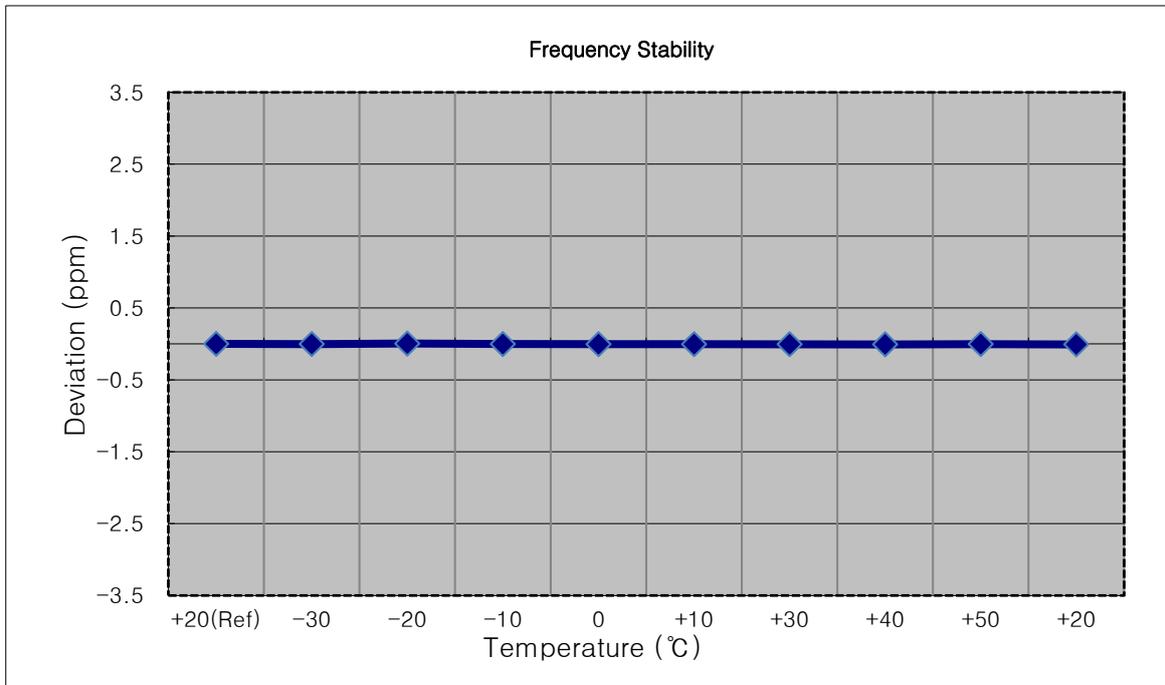

**8.8.8 FREQUENCY STABILITY (10 MHz Band 13 LTE)**

- ▣ OPERATING FREQUENCY: 782,000,000 Hz
- ▣ CHANNEL: 23230 (10 MHz)
- ▣ REFERENCE VOLTAGE: 3.85 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band


Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.85	+20(Ref)	781 999 994	0.0	0.000 000	0.0000
100%		-30	781 999 991	-2.9	0.000 000	-0.0037
100%		-20	781 999 990	-3.9	0.000 000	-0.0050
100%		-10	781 999 991	-3.1	0.000 000	-0.0040
100%		0	781 999 999	4.7	0.000 001	0.0060
100%		+10	781 999 990	-4.4	-0.000 001	-0.0056
100%		+30	781 999 987	-7.3	-0.000 001	-0.0093
100%		+40	781 999 992	-2.0	0.000 000	-0.0026
100%		+50	781 999 992	-2.4	0.000 000	-0.0031
Batt. Endpoint	3.60	+20	781 999 990	-4.2	-0.000 001	-0.0054

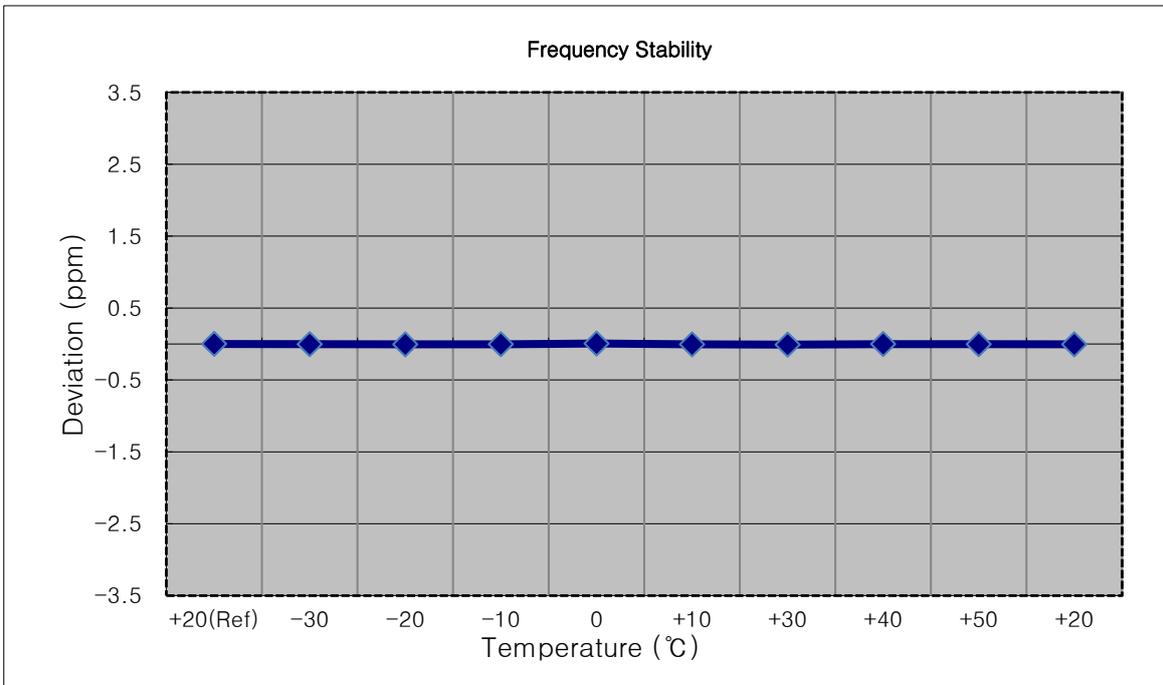

**8.8.9 FREQUENCY STABILITY (5 MHz Band 17 LTE)**

- OPERATING FREQUENCY: 710,000,000 Hz
- CHANNEL: 23790 (5 MHz)
- REFERENCE VOLTAGE: 3.85 VDC
- DEVIATION LIMIT: Emission must remain in band


Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.85	+20(Ref)	709 999 997	0.0	0.000 000	0.0000
100%		-30	709 999 994	-2.7	0.000 000	-0.0038
100%		-20	709 999 994	-3.0	0.000 000	-0.0042
100%		-10	709 999 995	-2.4	0.000 000	-0.0034
100%		0	709 999 999	1.6	0.000 000	0.0023
100%		+10	710 000 000	3.0	0.000 000	0.0042
100%		+30	710 000 000	2.8	0.000 000	0.0039
100%		+40	710 000 000	2.8	0.000 000	0.0039
100%		+50	710 000 000	3.2	0.000 000	0.0045
Batt. Endpoint	3.60	+20	709 999 993	-4.1	-0.000 001	-0.0058

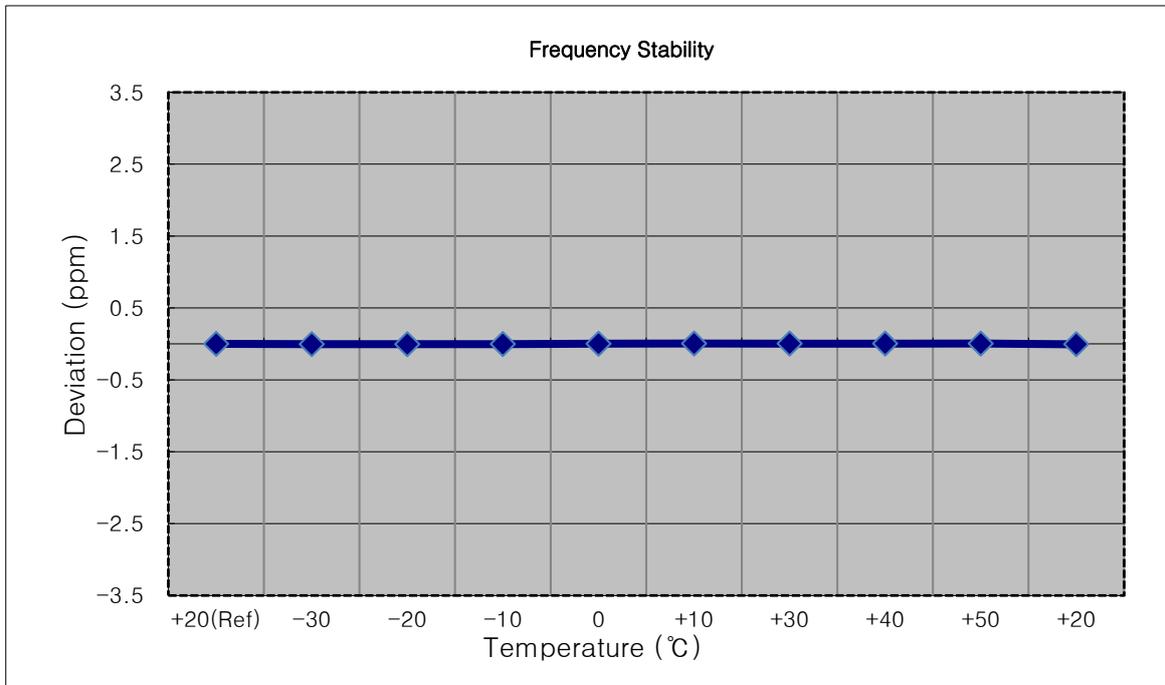

**8.8.10 FREQUENCY STABILITY (10 MHz Band 17 LTE)**


- OPERATING FREQUENCY: 710,000,000 Hz
- CHANNEL: 23790 (10 MHz)
- REFERENCE VOLTAGE: 3.85 VDC
- DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.85	+20(Ref)	709 999 997	0.0	0.000 000	0.0000
100%		-30	709 999 994	-3.4	0.000 000	-0.0048
100%		-20	709 999 999	2.2	0.000 000	0.0031
100%		-10	709 999 992	-5.1	-0.000 001	-0.0072
100%		0	710 000 000	3.0	0.000 000	0.0042
100%		+10	709 999 994	-3.1	0.000 000	-0.0044
100%		+30	710 000 000	3.3	0.000 000	0.0046
100%		+40	709 999 999	2.2	0.000 000	0.0031
100%		+50	709 999 994	-2.6	0.000 000	-0.0037
Batt. Endpoint	3.60	+20	709 999 994	-2.7	0.000 000	-0.0038

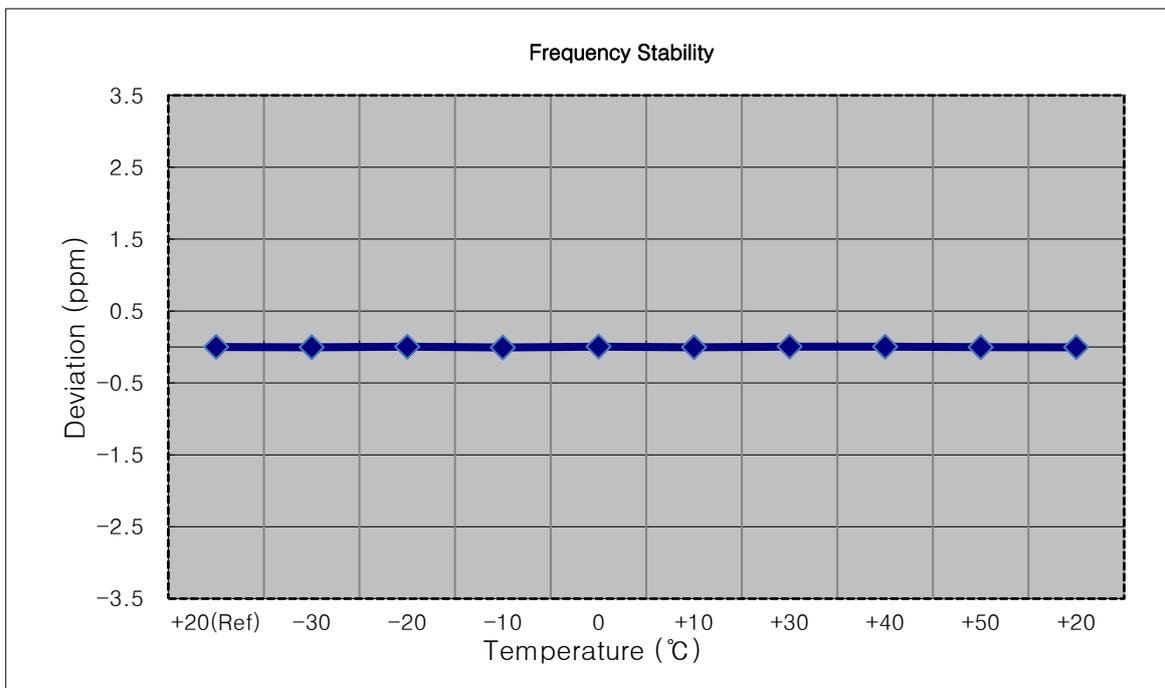


## 9. TEST PLOTS


BAND 4. Occupied Bandwidth Plot (1.4M BW Ch.20175 QPSK RB 6)

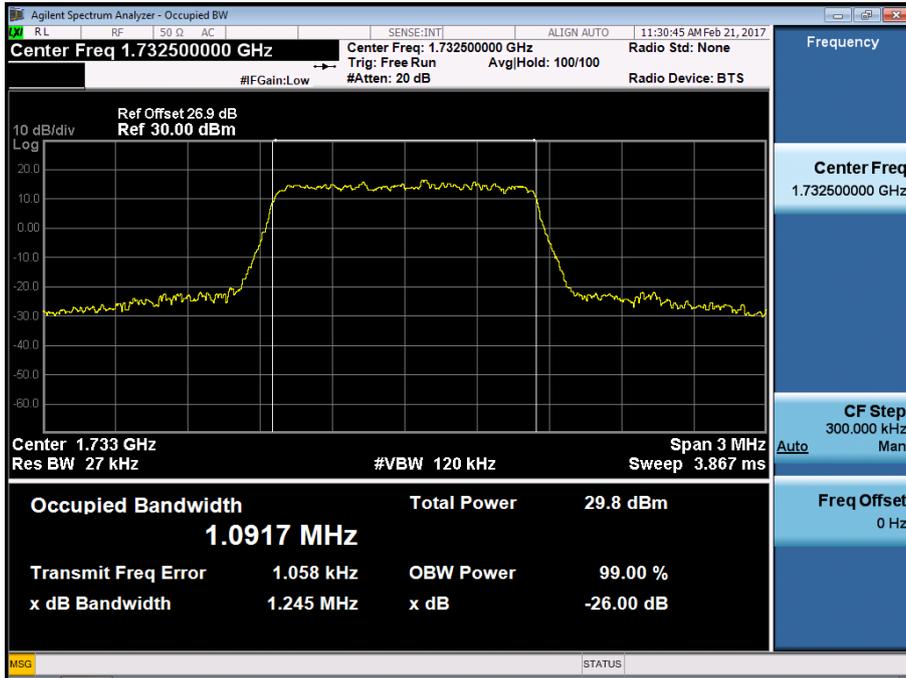


BAND 4. Occupied Bandwidth Plot (1.4M BW Ch.20175 16QAM RB 6)

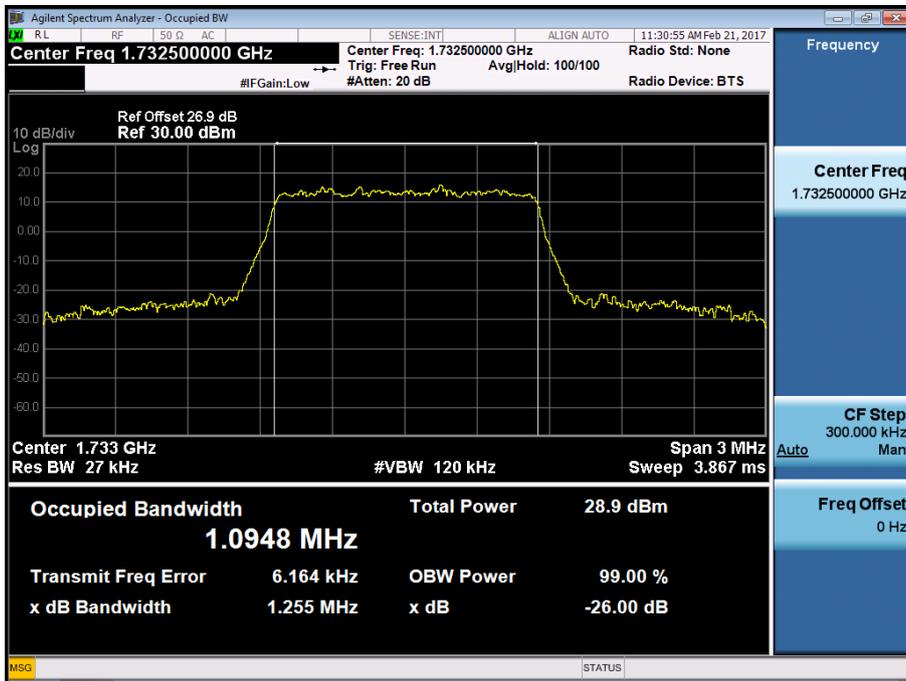


BAND 4. Occupied Bandwidth Plot (3M BW Ch.20175 QPSK RB 15)

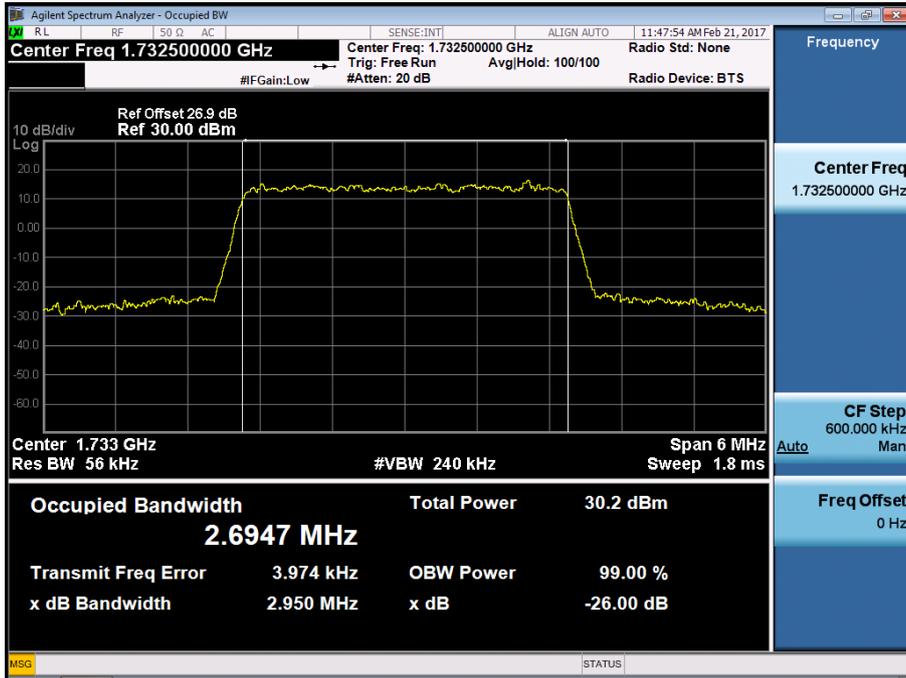


BAND 4. Occupied Bandwidth Plot (3M BW Ch.20175 16QAM RB 15)

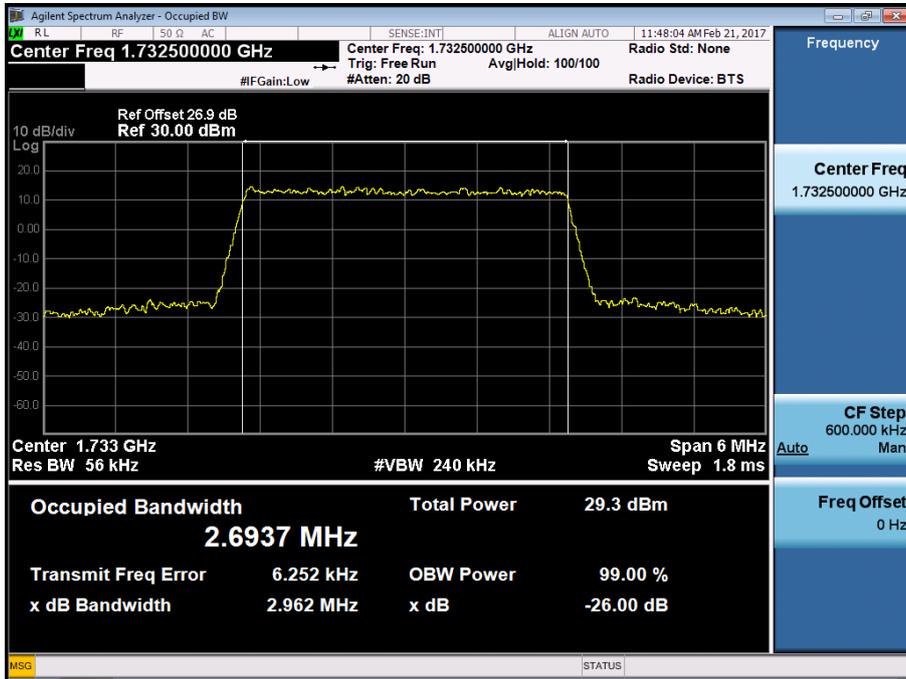


BAND 4. Occupied Bandwidth Plot (5M BW Ch.20175 QPSK RB 25)

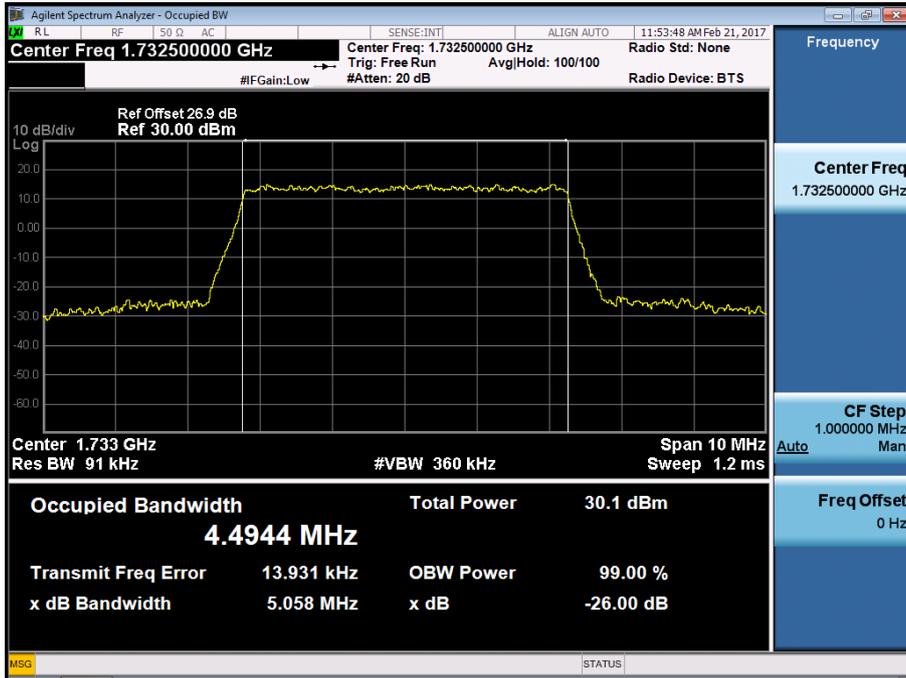


BAND 4. Occupied Bandwidth Plot (5M BW Ch.20175 16QAM RB 25)

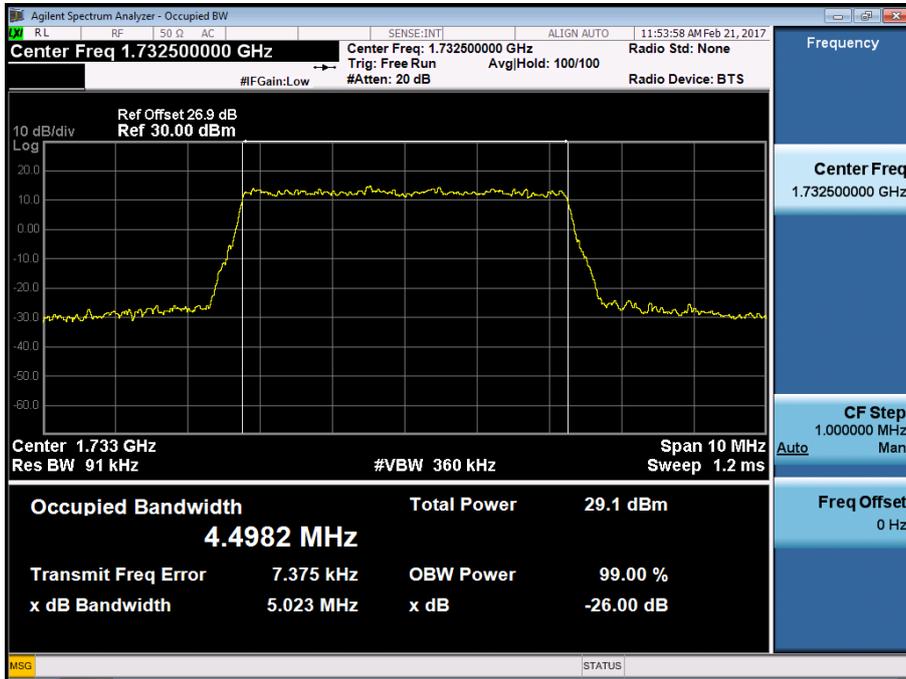


BAND 4. Occupied Bandwidth Plot (10M BW Ch.20175 QPSK RB 50)

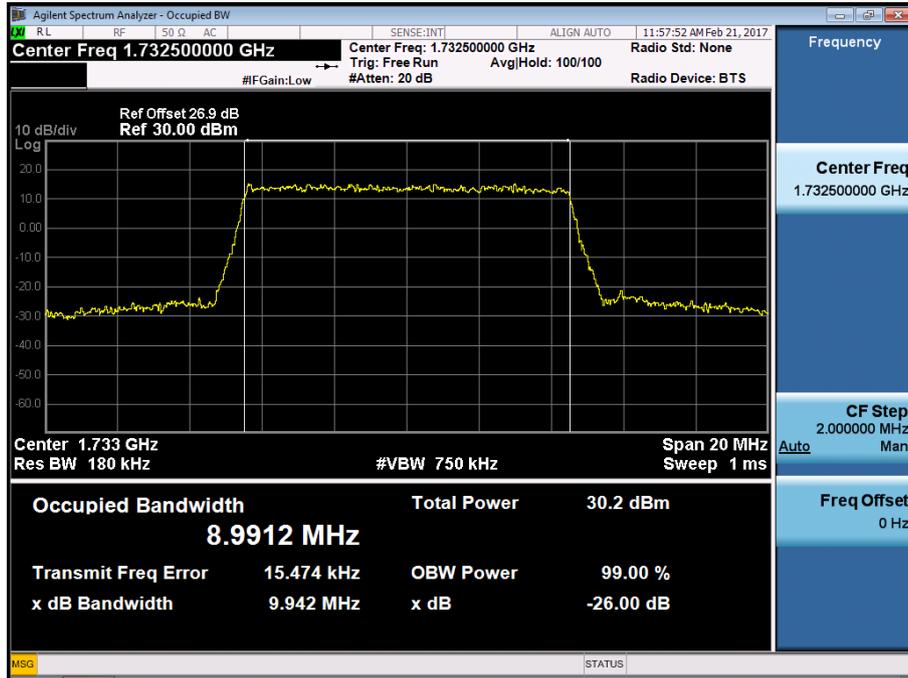


BAND 4. Occupied Bandwidth Plot (10M BW Ch.20175 16QAM RB 50)

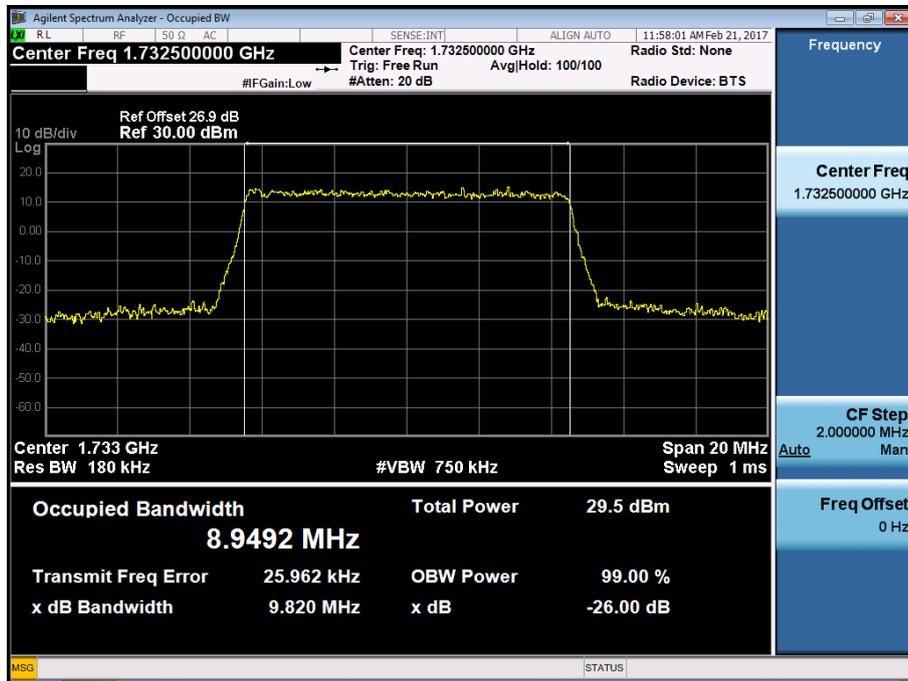


BAND 4. Occupied Bandwidth Plot (15M BW Ch.20175 QPSK RB 75)

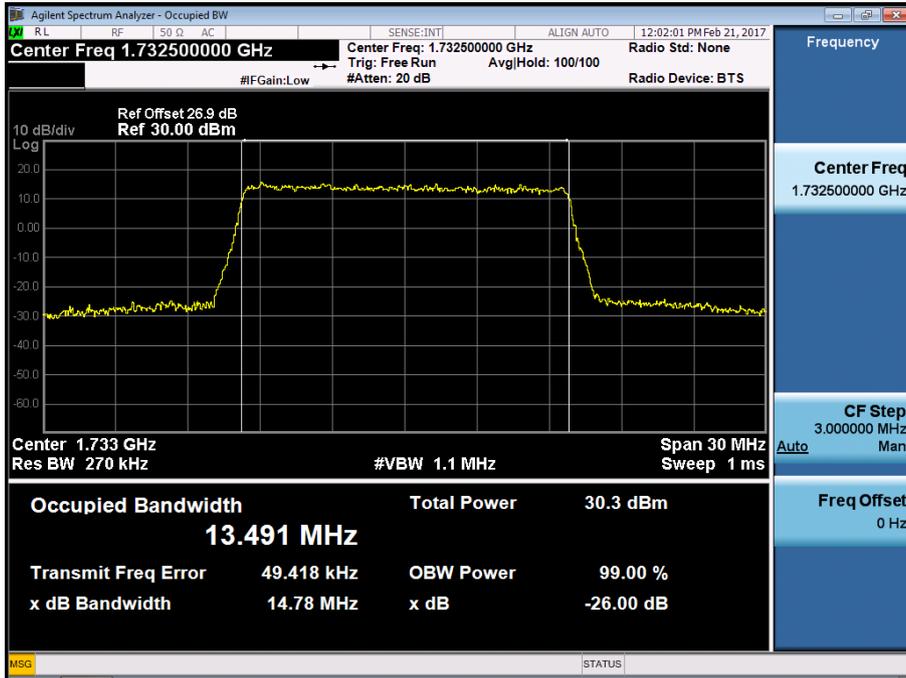


BAND 4. Occupied Bandwidth Plot (15M BW Ch.20175 16QAM RB 75)

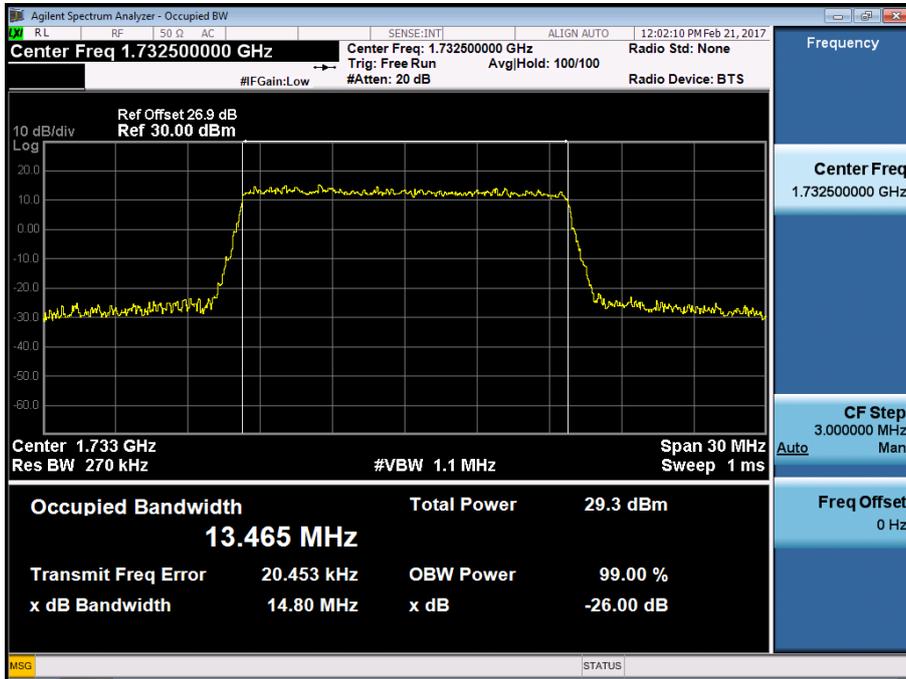


BAND 4. Occupied Bandwidth Plot (20M BW Ch.20175 QPSK RB 100)

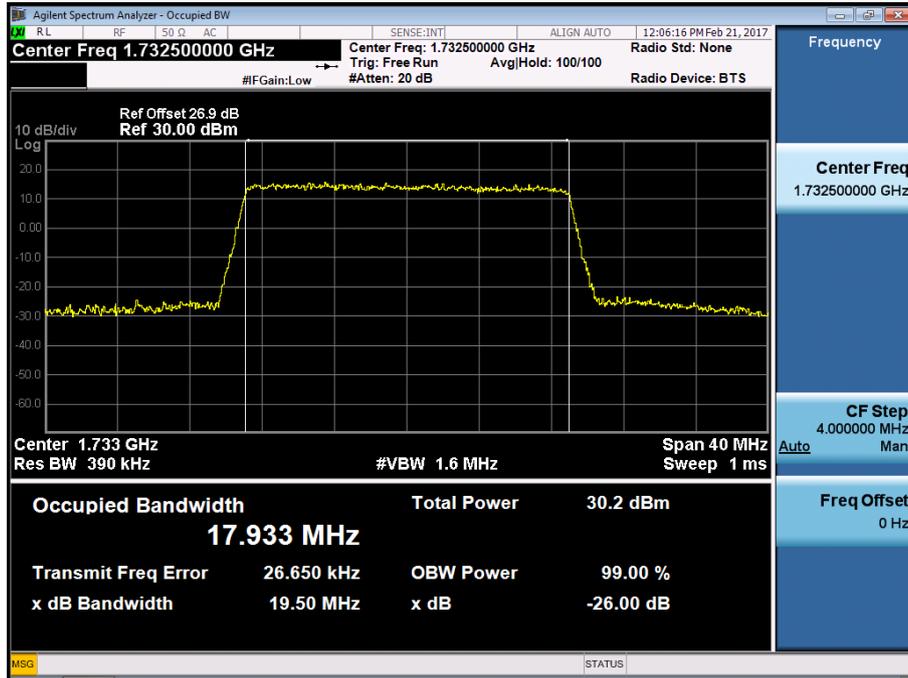


BAND 4. Occupied Bandwidth Plot (20M BW Ch.20175 16QAM RB 100)

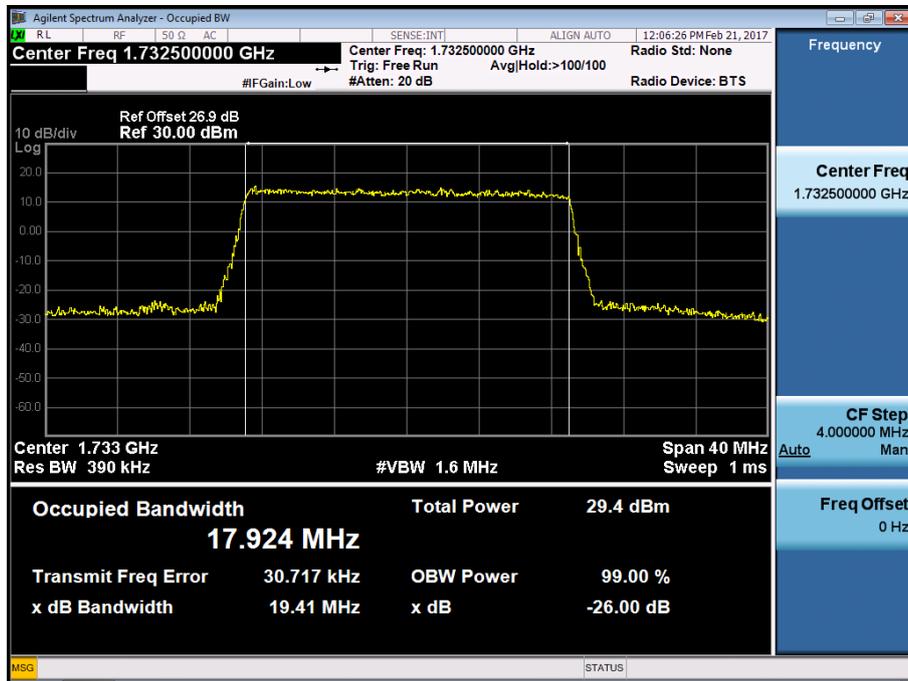


BAND 13. Occupied Bandwidth Plot (Ch.23230 QPSK RB 25) 5 MHz

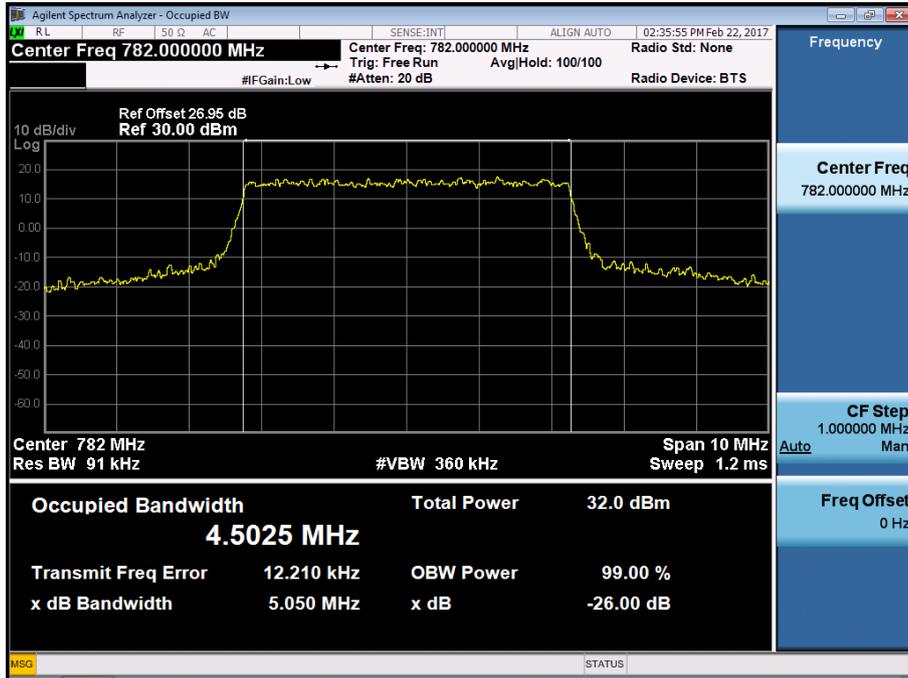


BAND 13. Occupied Bandwidth Plot (Ch.23230 16-QAM RB 25) 5 MHz

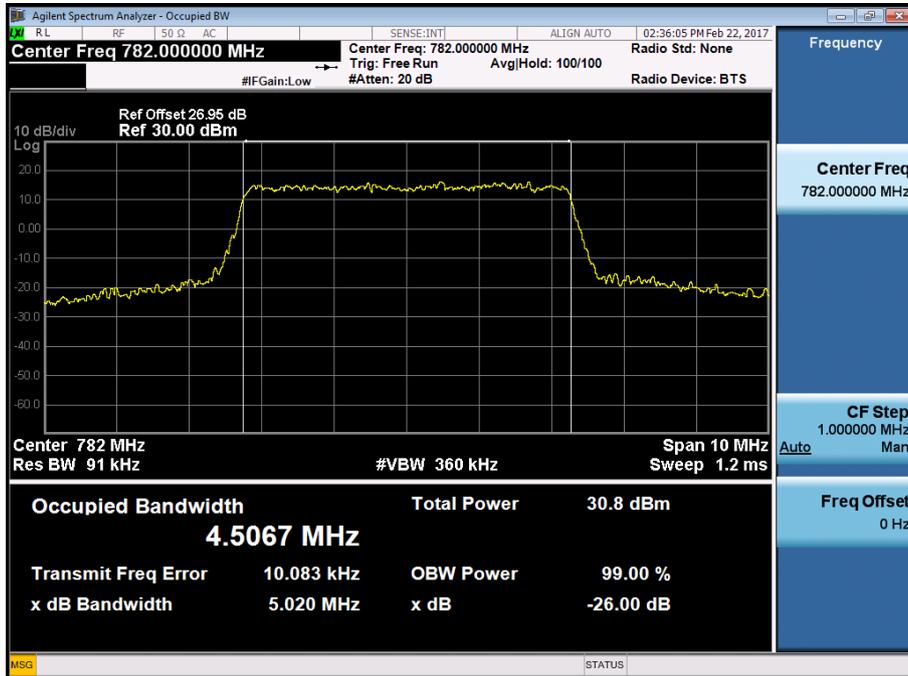


BAND 13. Occupied Bandwidth Plot (Ch.23230 QPSK RB 50) 10 MHz

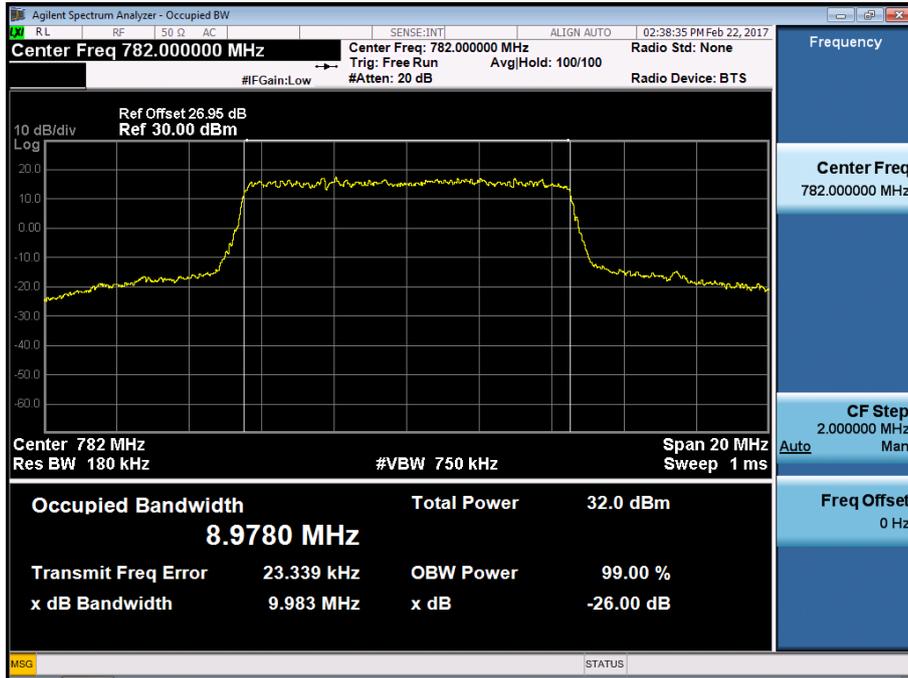


BAND 13. Occupied Bandwidth Plot (Ch.23230 16-QAM RB 50) 10 MHz

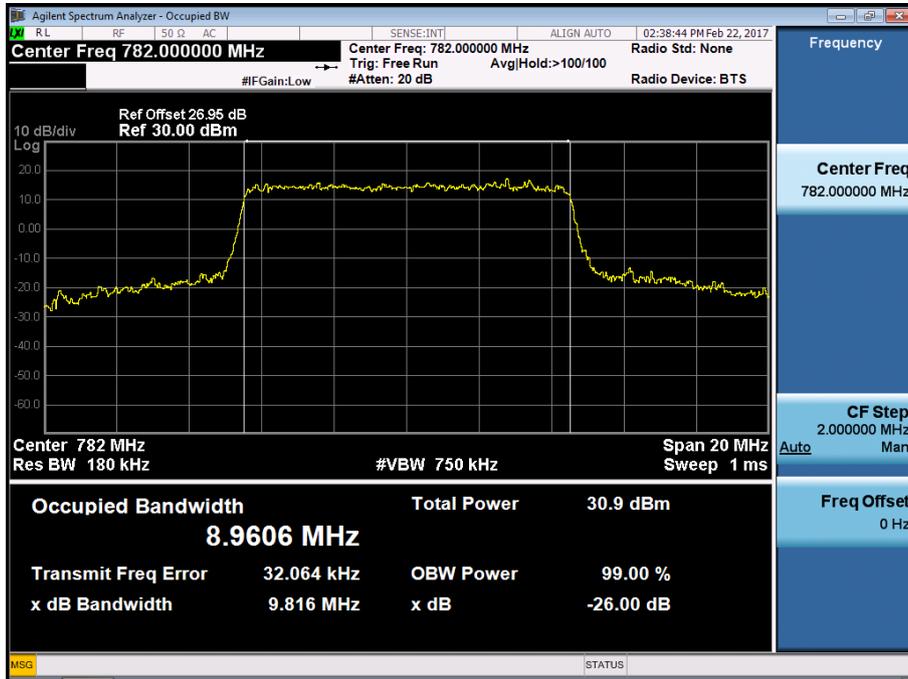


BAND 17. Occupied Bandwidth Plot (5M BW Ch.23790 QPSK RB 25)

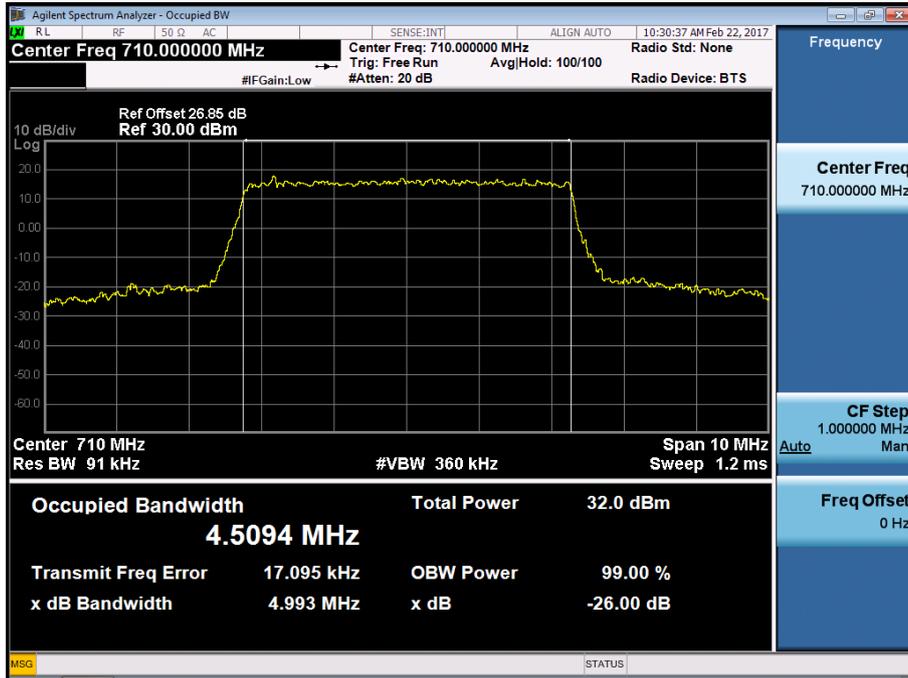


BAND 17. Occupied Bandwidth Plot (5M BW Ch.23790 16QAM RB 25)

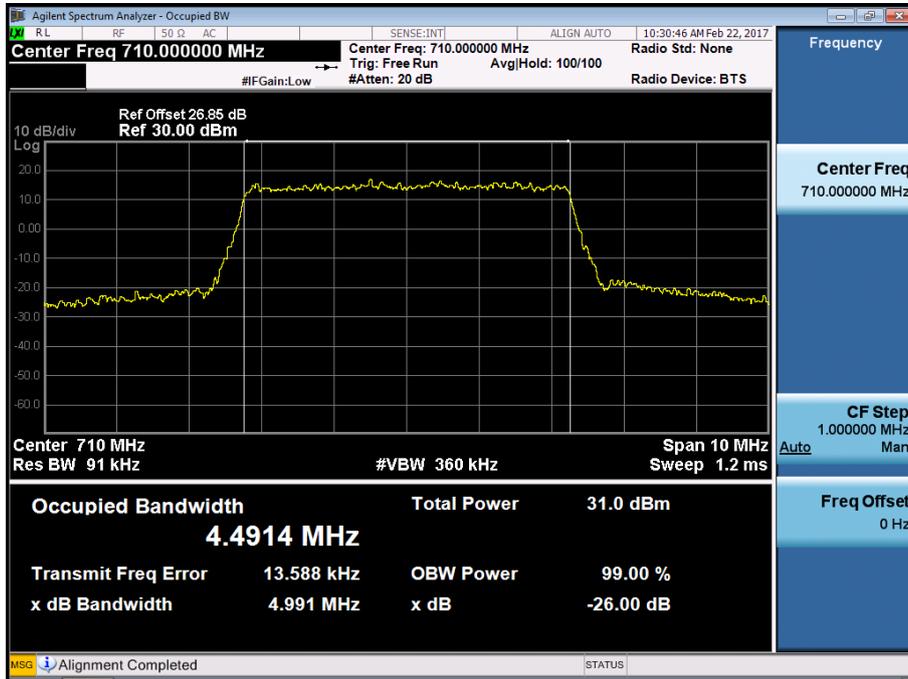


BAND 17. Occupied Bandwidth Plot (10M BW Ch.23790 QPSK RB 50)

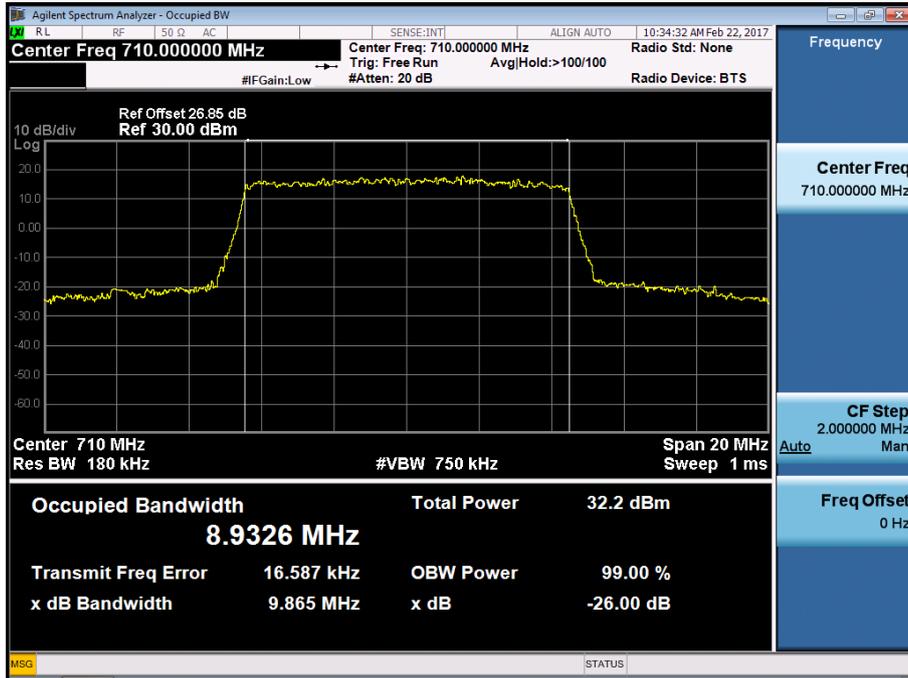


BAND 17. Occupied Bandwidth Plot (10M BW Ch.23790 16QAMRB 50)

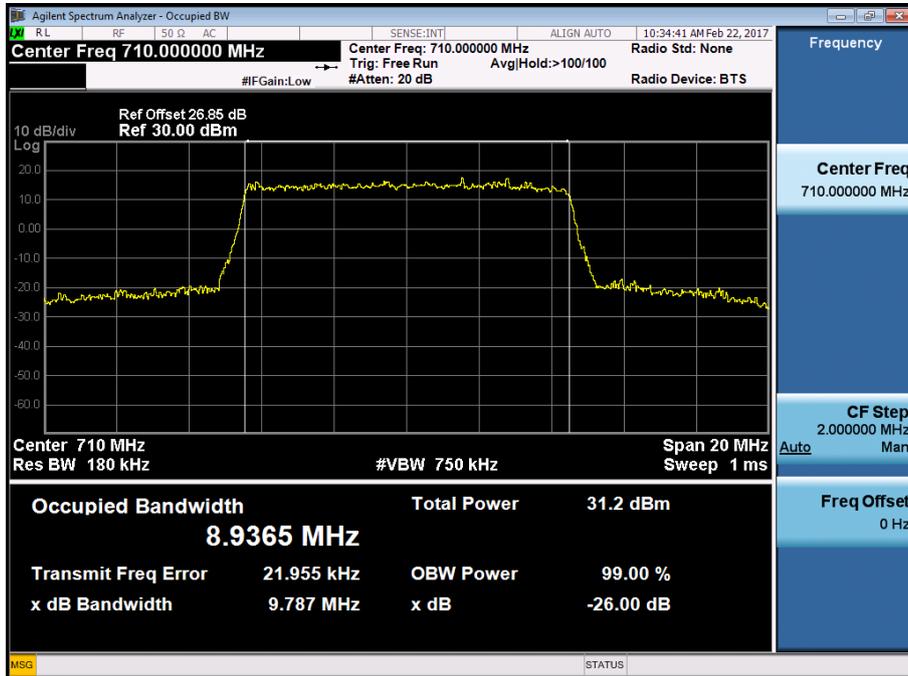


BAND 4. PAR Plot (1.4M BW\_Ch.20175\_QPSK\_RB6\_0)

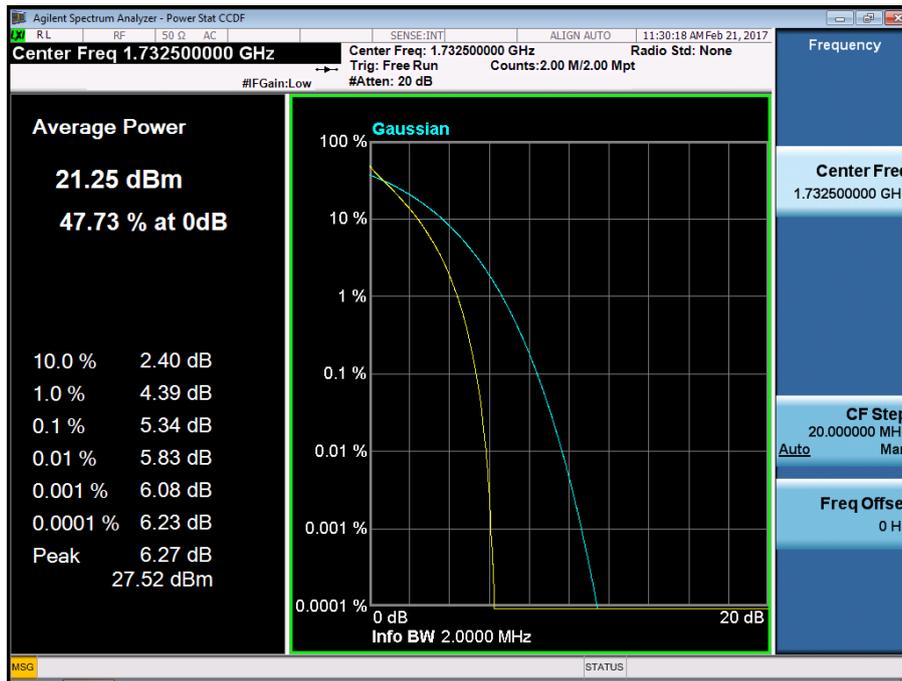


BAND 4. PAR Plot (1.4M BW\_Ch.20175\_16QAM\_RB6\_0)

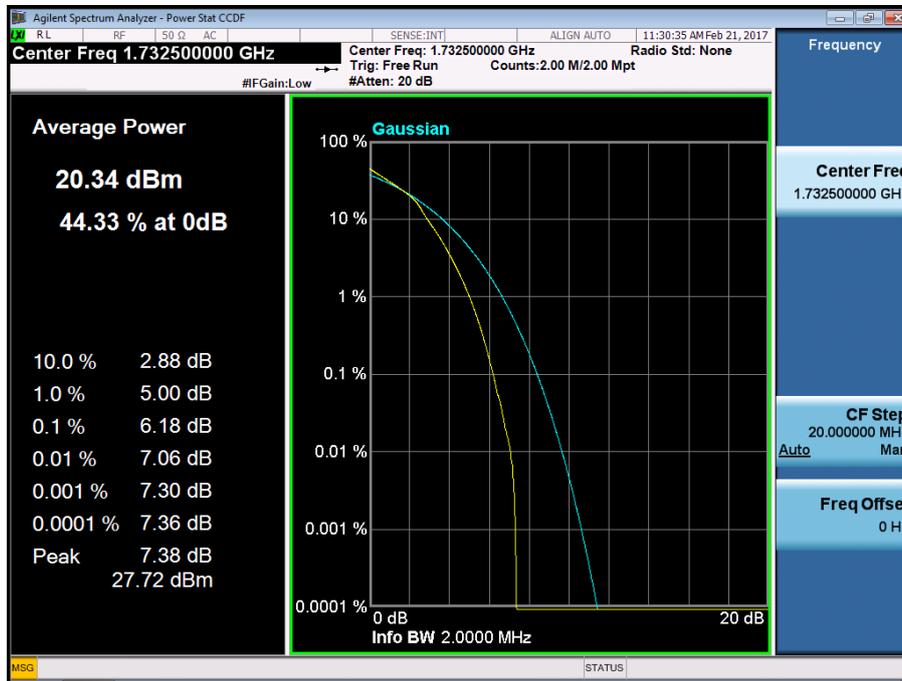


BAND 4. PAR Plot (3M BW\_Ch.20175\_QPSK\_RB15\_0)

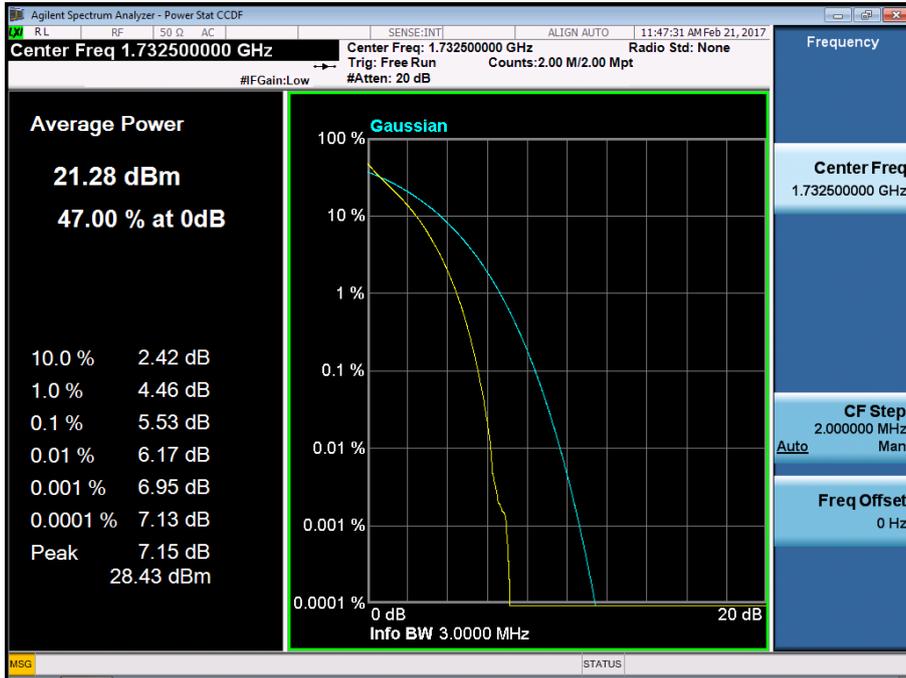


BAND 4. PAR Plot (3M BW\_Ch.20175\_16QAM\_RB15\_0)

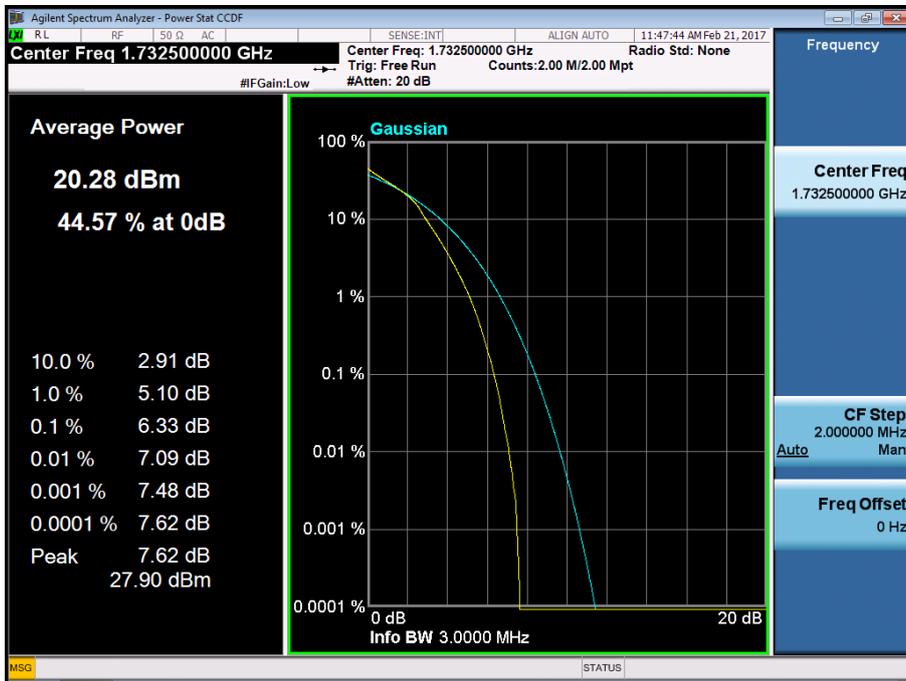


BAND 4. PAR Plot (5M BW\_Ch.20175\_QPSK\_RB25\_0)

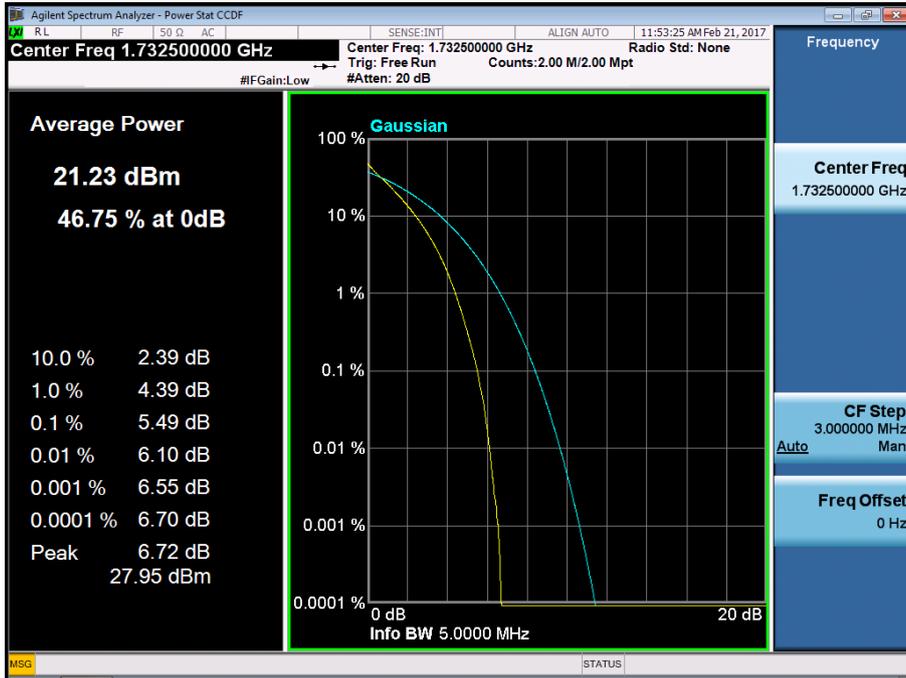


BAND 4. PAR Plot (5M BW\_Ch.20175\_16QAM\_RB25\_0)

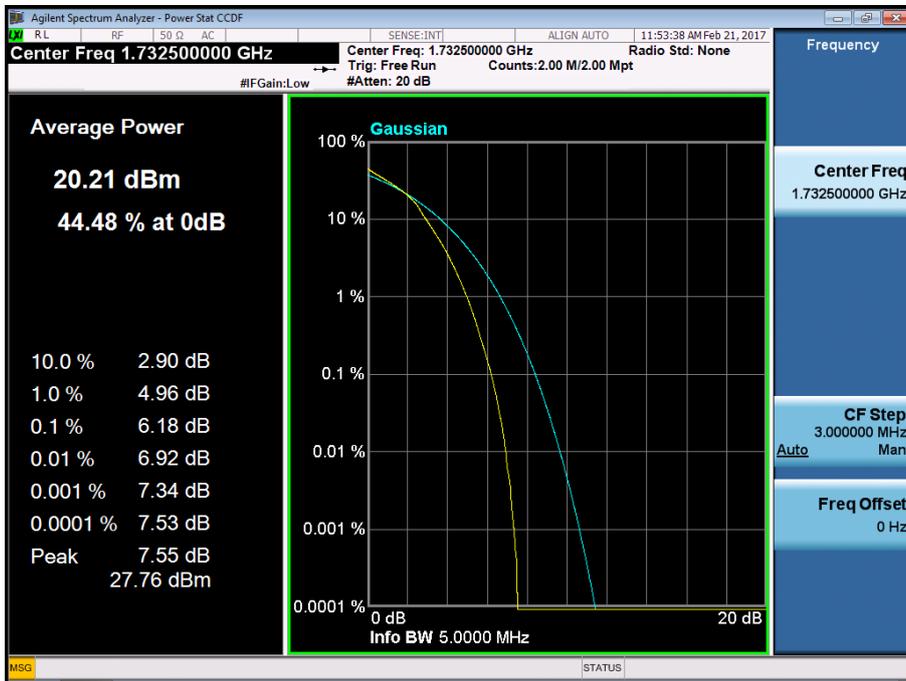


BAND 4. PAR Plot (10M BW\_Ch.20175\_QPSK\_RB50\_0)

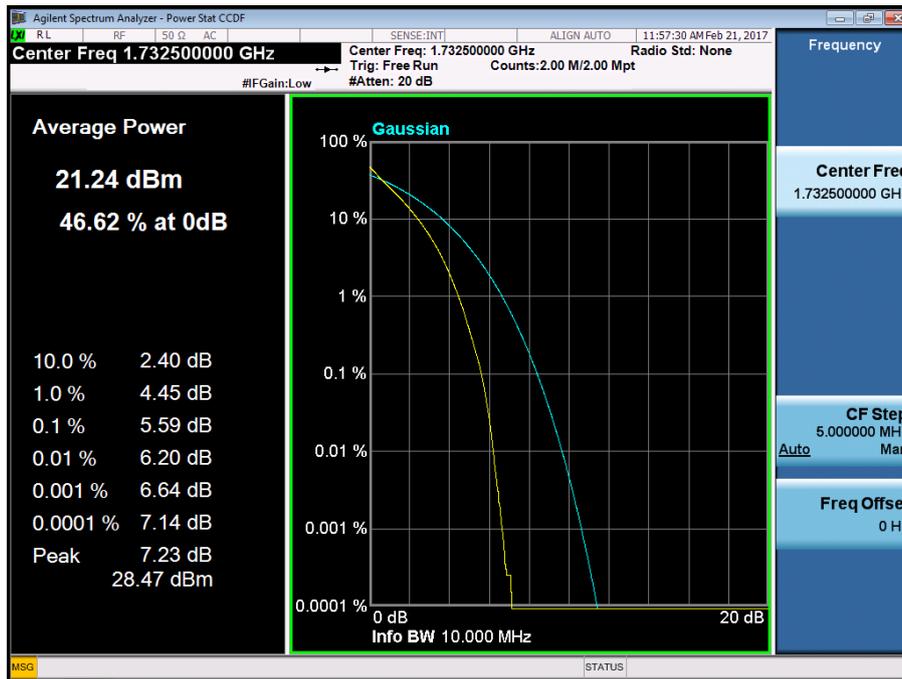


BAND 4. PAR Plot (10M BW\_Ch.20175\_16QAM\_RB50\_0)

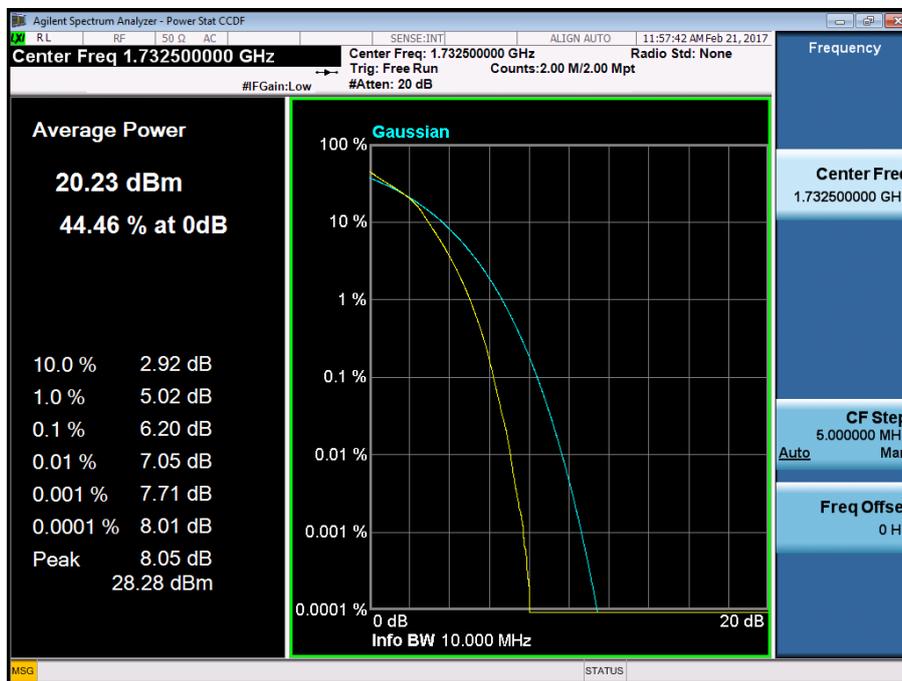


BAND 4. PAR Plot (15M BW\_Ch.20175\_QPSK\_RB75\_0)

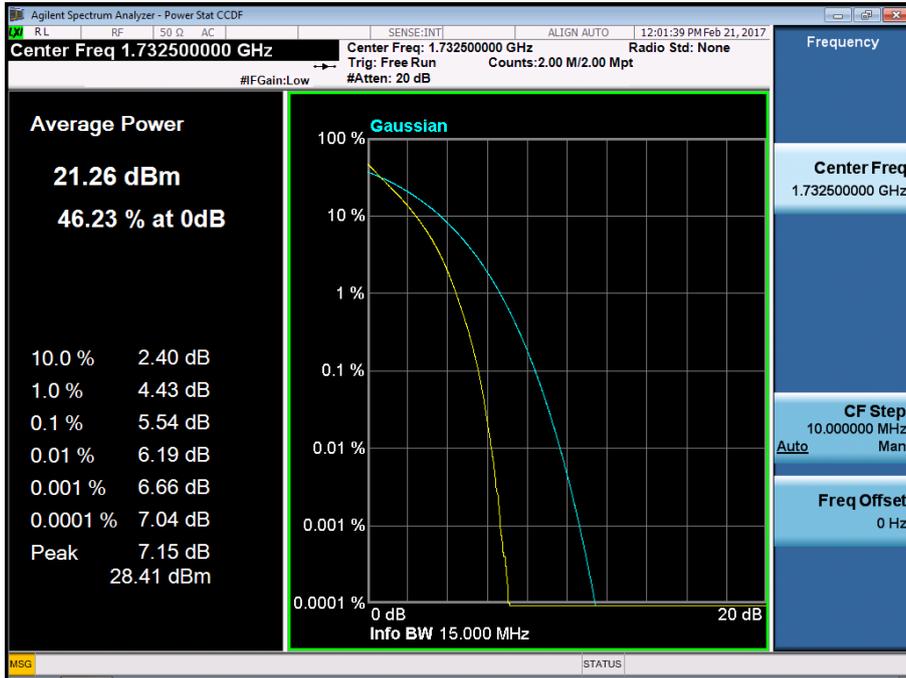


BAND 4. PAR Plot (15M BW\_Ch.20175\_16QAM\_RB75\_0)

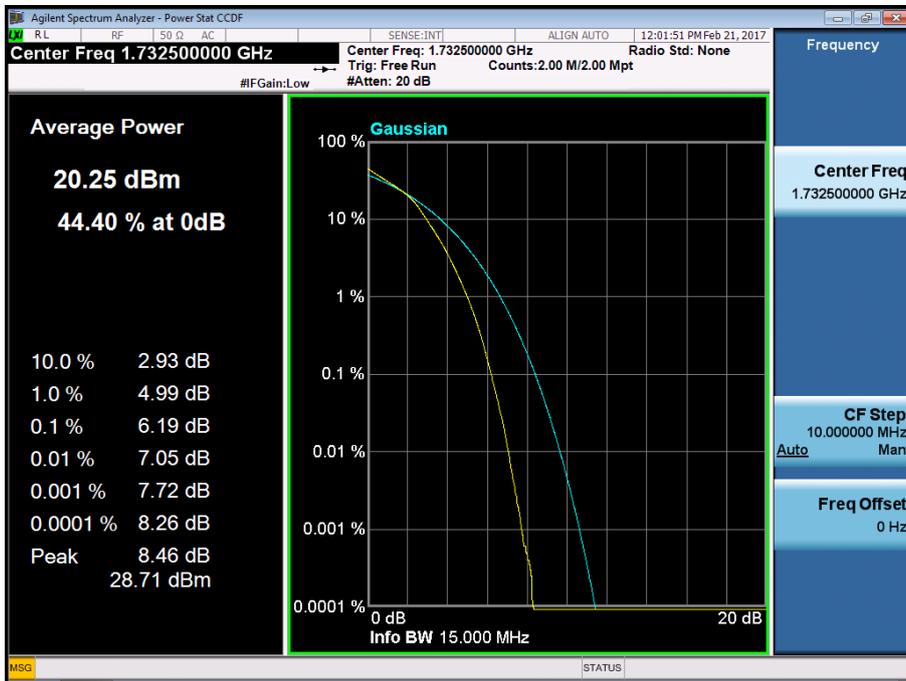

BAND 4. PAR Plot (20M BW\_Ch.20175\_QPSK\_RB100\_0)

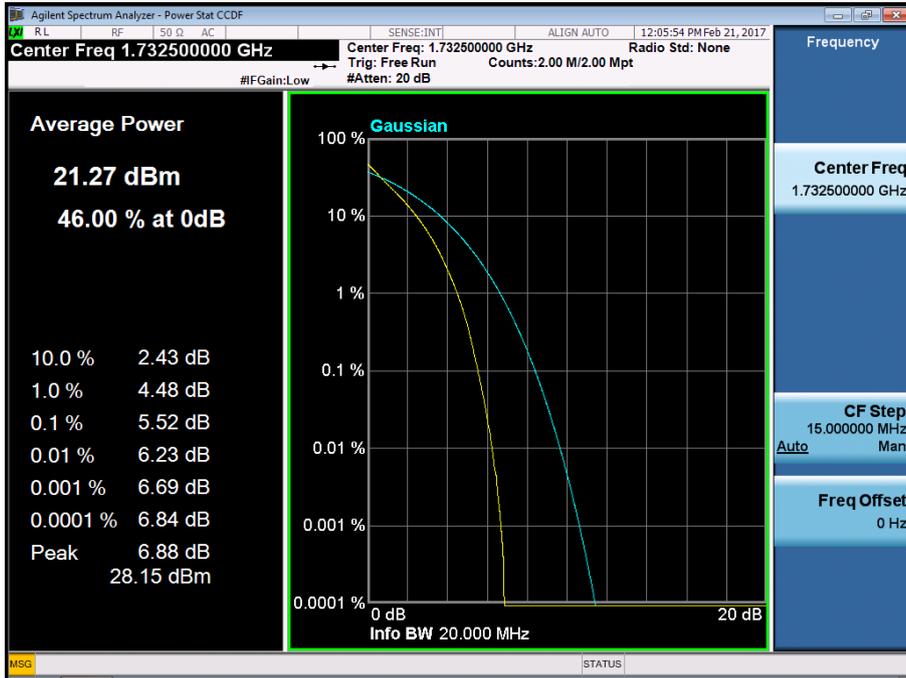

BAND 4. PAR Plot (20M BW\_Ch.20175\_16QAM\_RB100\_0)

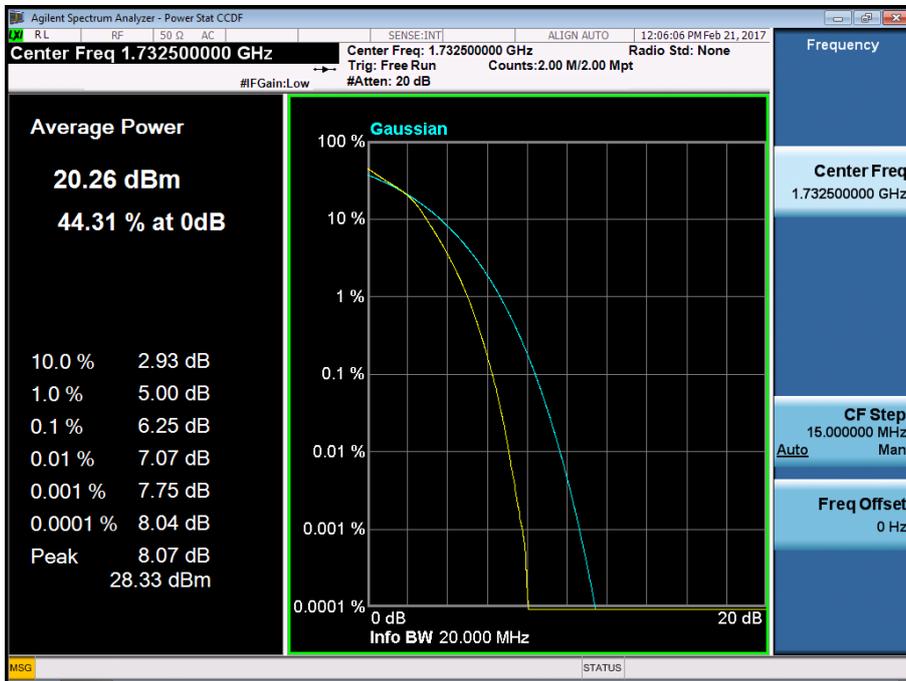


BAND 4. Lower Band Edge Plot (1.4M BW Ch.19957 QPSK RB 1, Offset 0) -1




BAND 4. Lower Band Edge Plot (1.4M BW Ch.19957 QPSK RB 6) -2




BAND 4. Lower Extended Band Edge Plot (1.4M BW Ch.19957 QPSK\_RB6\_0) -3

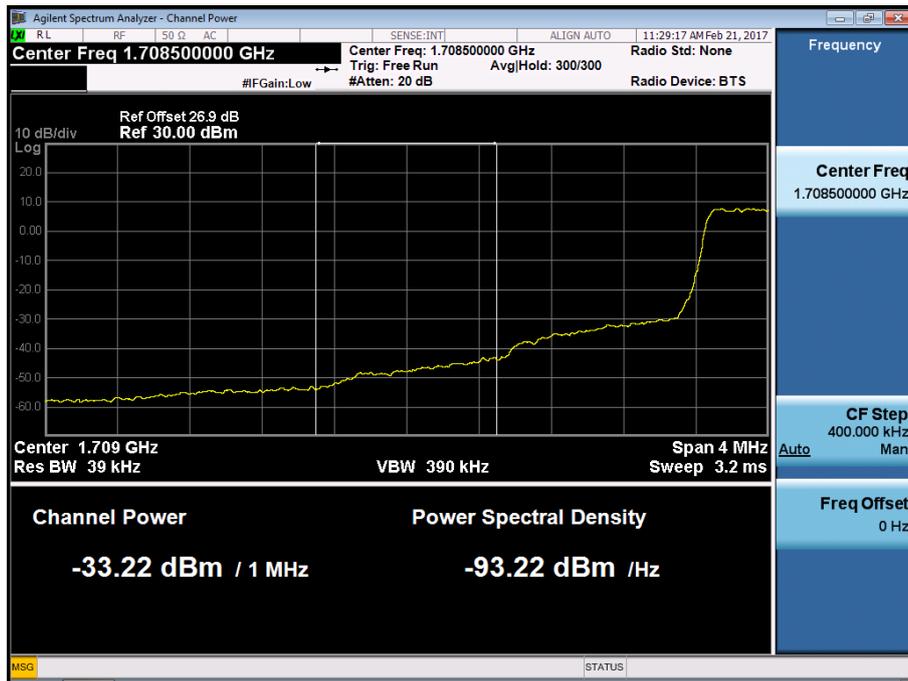

BAND 4. Lower Band Edge Plot (3M BW Ch.19965 QPSK RB 1, Offset 0) -1

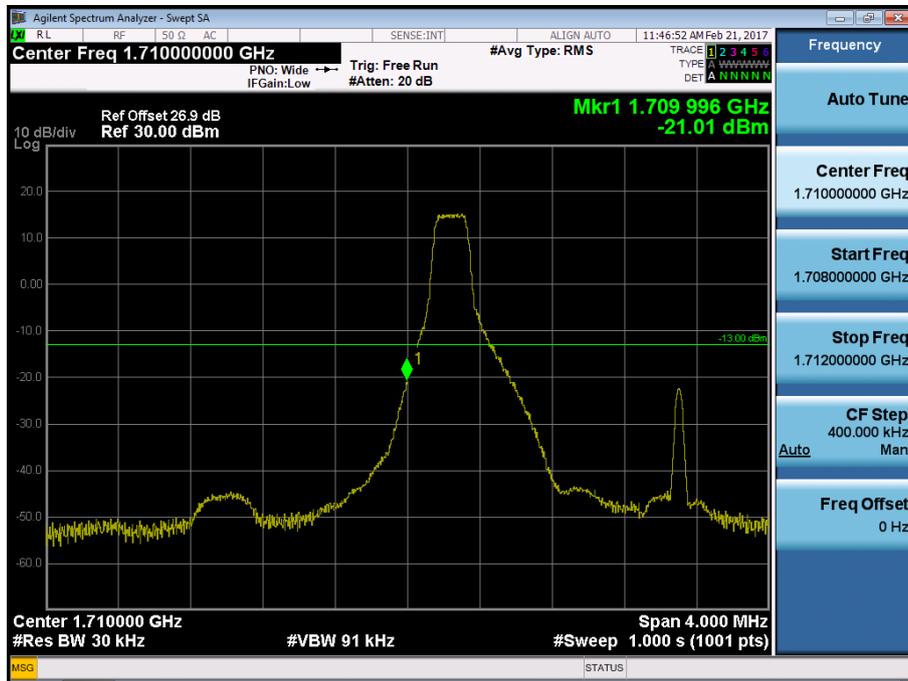


BAND 4. Lower Band Edge Plot (3M BW Ch.19965 QPSK RB 15) -2

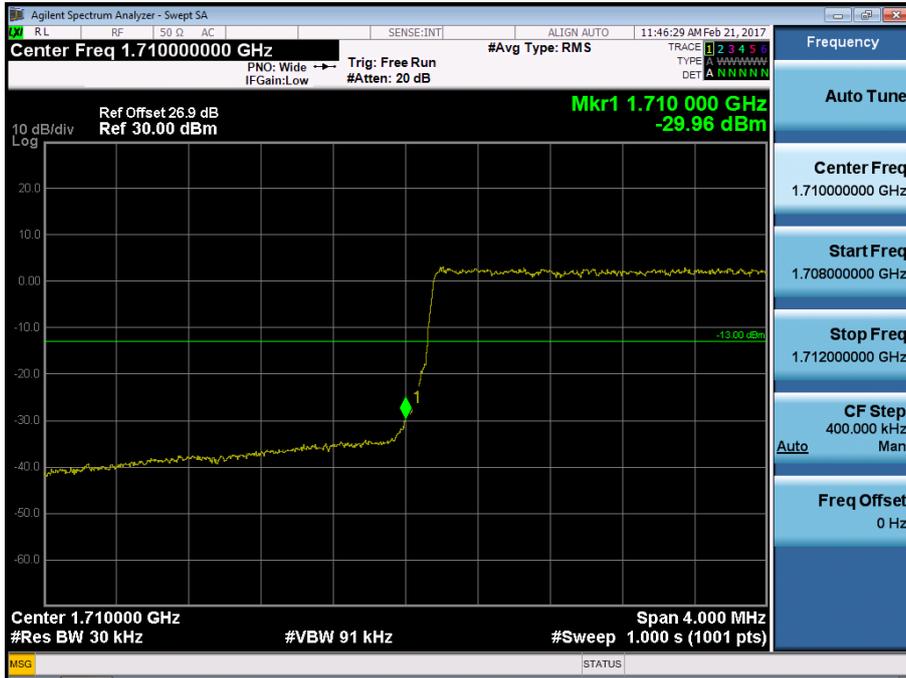

BAND 4. Lower Extended Band Edge Plot (3M BW Ch.19965 QPSK\_RB15\_0) -3



BAND 4. Lower Band Edge Plot (5M BW Ch.19975 QPSK RB 1, Offset 0) -1

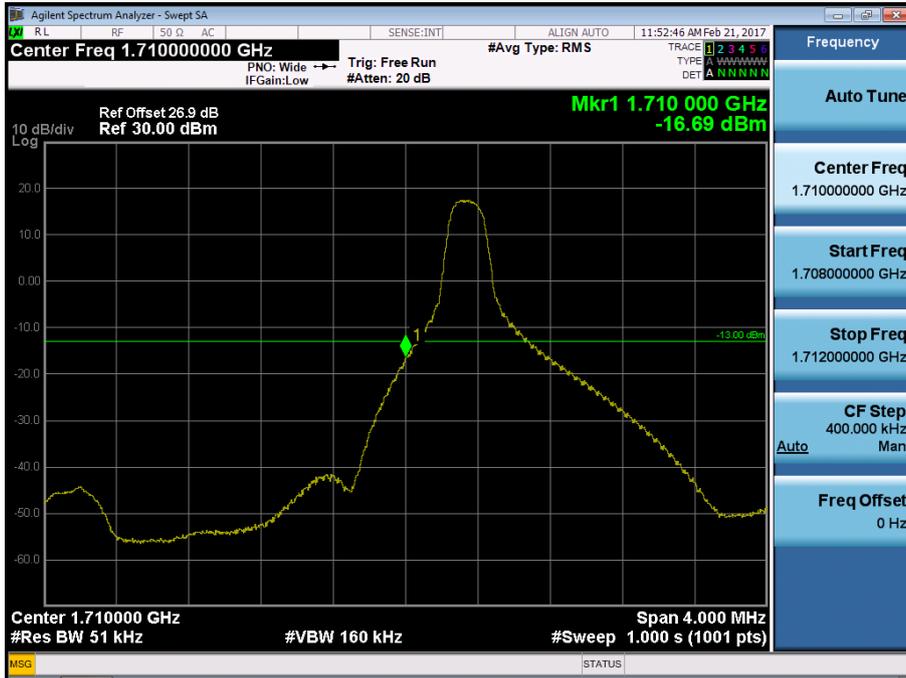


BAND 4. Lower Band Edge Plot (5M BW Ch.19975 QPSK RB 25) -2



BAND 4. Lower Extended Band Edge Plot (5M BW Ch.19975 QPSK\_RB25\_0) -3




BAND 4. Lower Band Edge Plot (10M BW Ch.20000 QPSK RB 1, Offset 0) -1

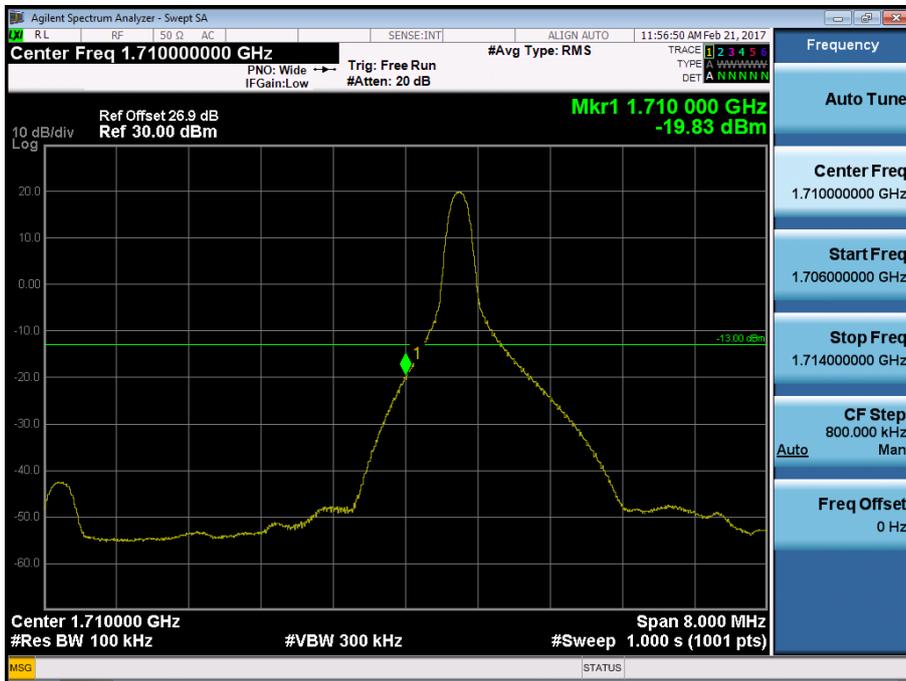


BAND 4. Lower Band Edge Plot (10M BW Ch.20000 QPSK RB 50) -2




BAND 4. Lower Extended Band Edge Plot (10M BW Ch.20000 QPSK\_RB50\_0) -3

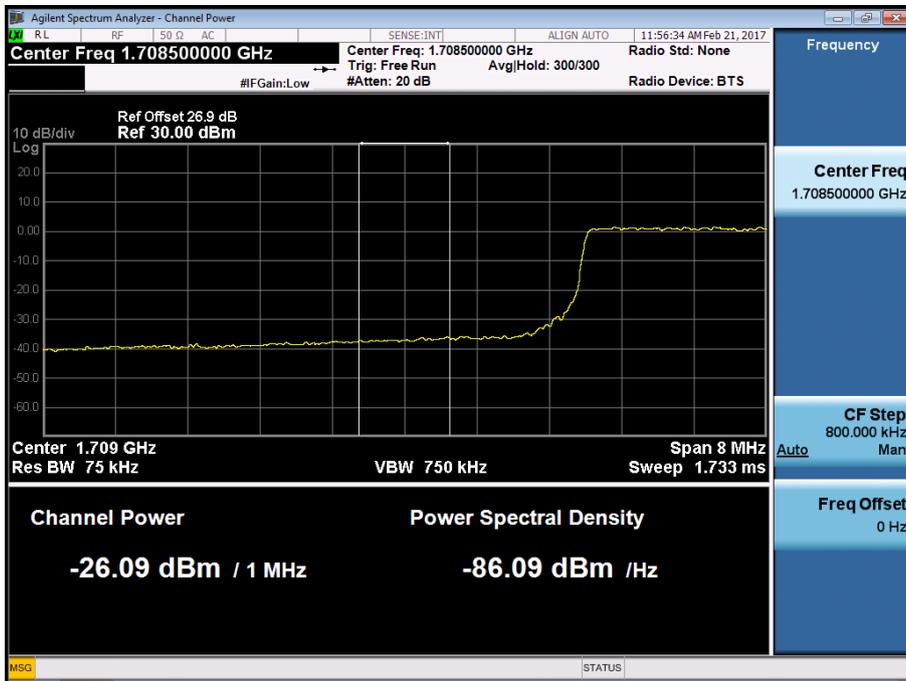


BAND 4. Lower Band Edge Plot (15M BW Ch.20025 QPSK RB 1, Offset 0) -1

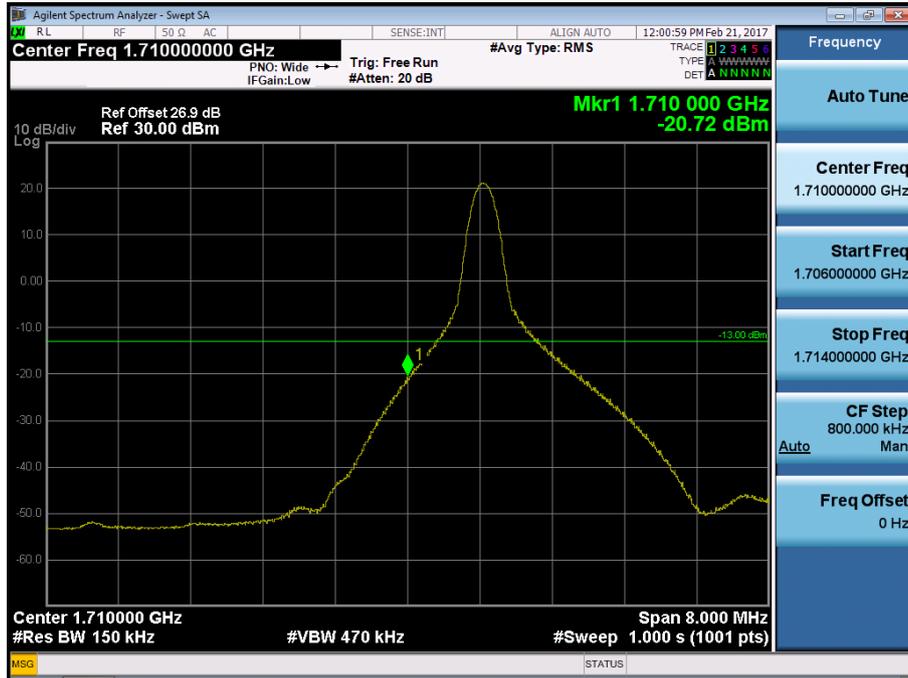


BAND 4. Lower Band Edge Plot (15M BW Ch.20025 QPSK RB 75) -2

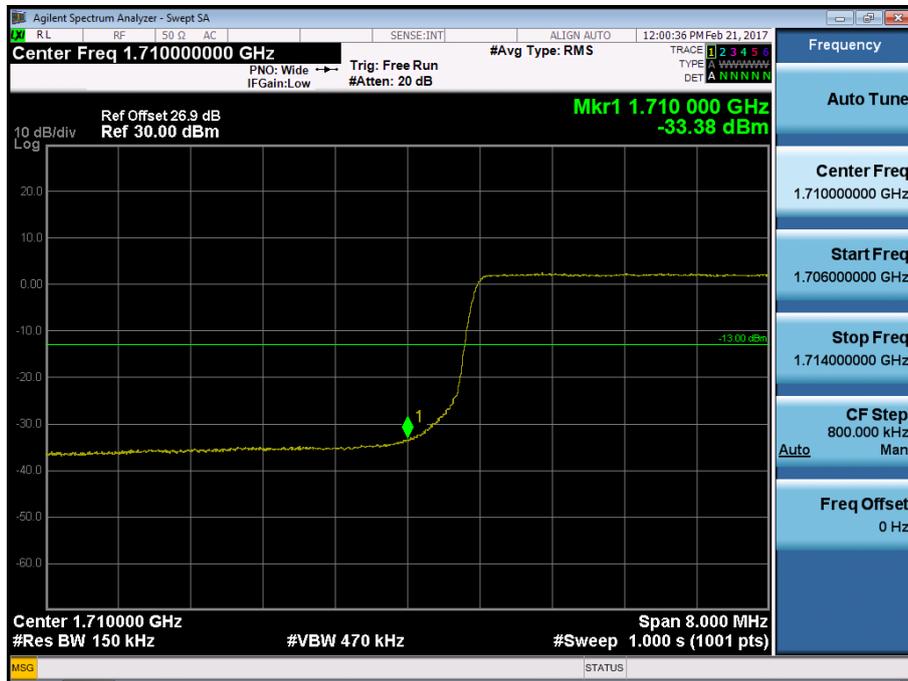


BAND 4. Lower Extended Band Edge Plot (15M BW Ch.20025 QPSK\_RB75\_0) -3

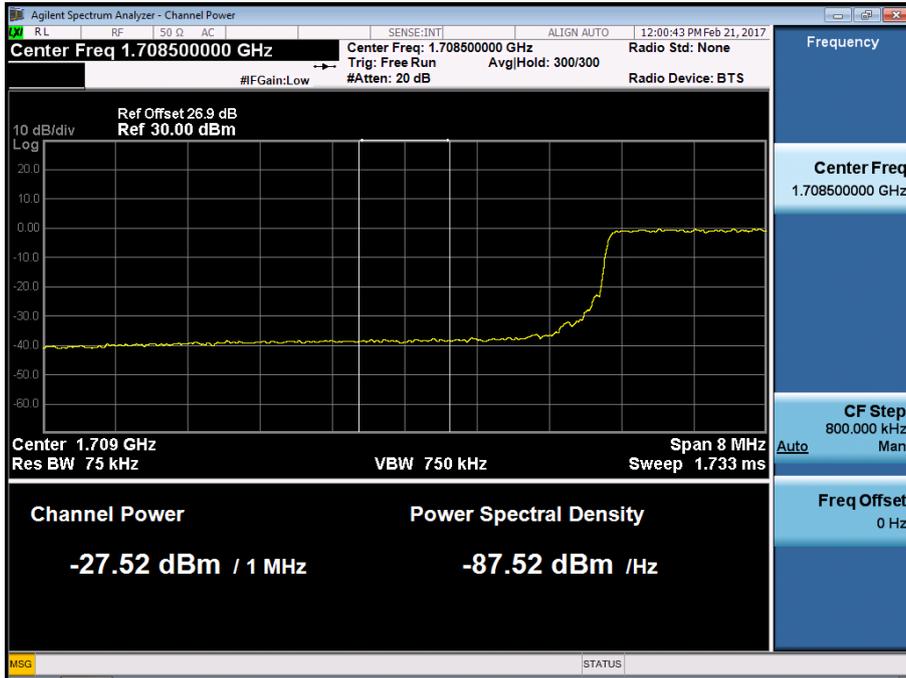


BAND 4. Lower Band Edge Plot (20M BW Ch.20050 QPSK RB 1, Offset 0) -1

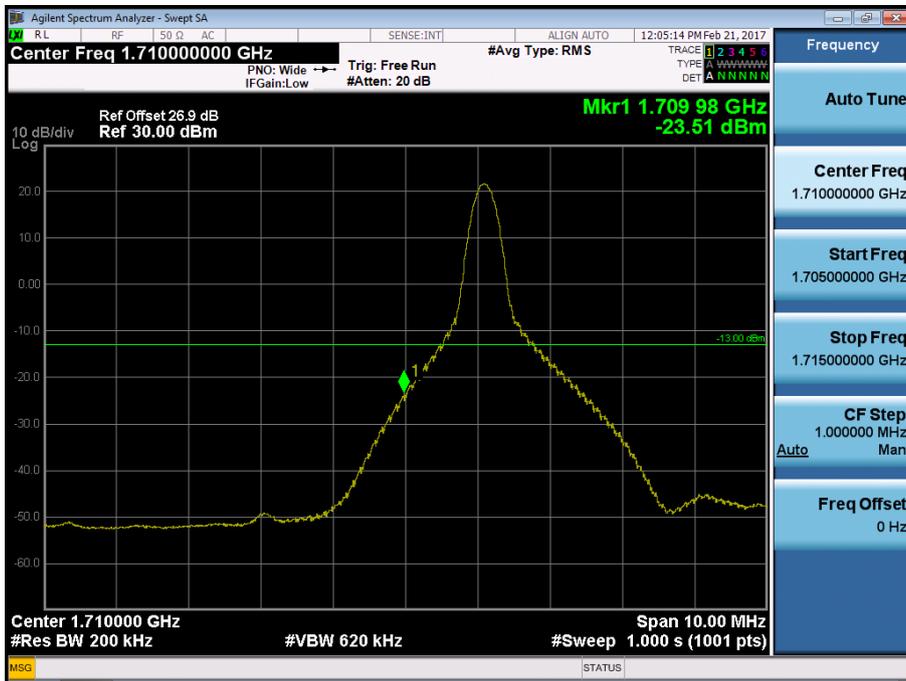


BAND 4. Lower Band Edge Plot (20M BW Ch.20050 QPSK RB 100) -2

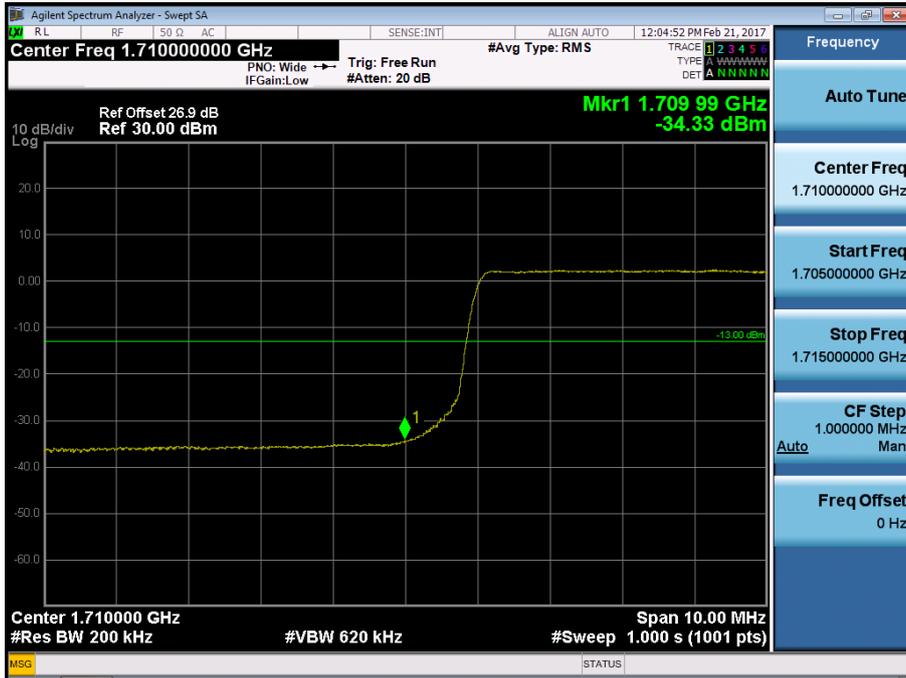

BAND 4. Lower Extended Band Edge Plot (20M BW Ch.20050 QPSK\_RB100\_0) -3

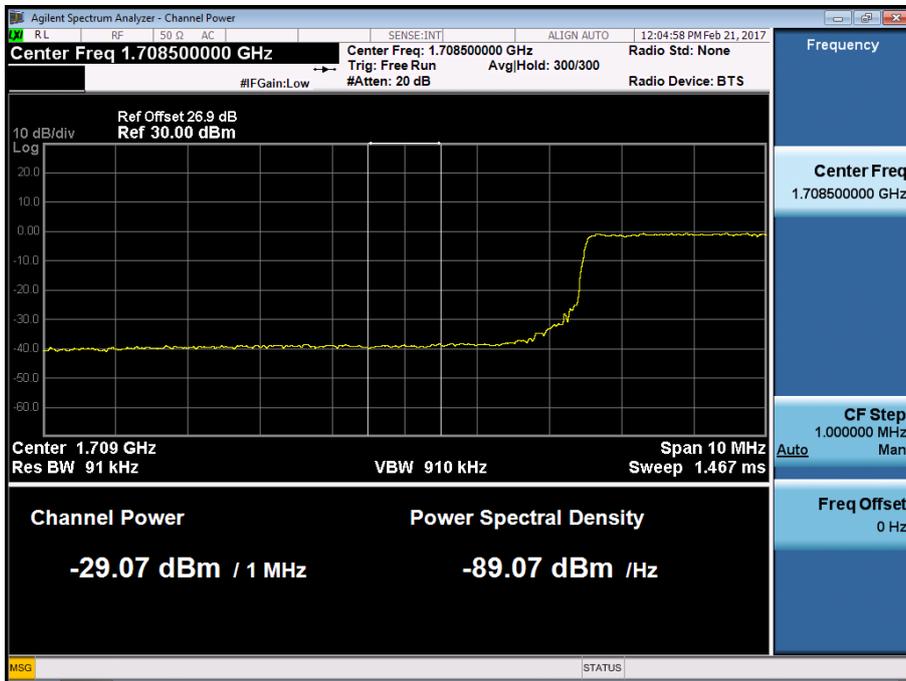

BAND 4. Upper Band Edge Plot (1.4M BW Ch.20393 QPSK\_RB1\_Offset 5) -1

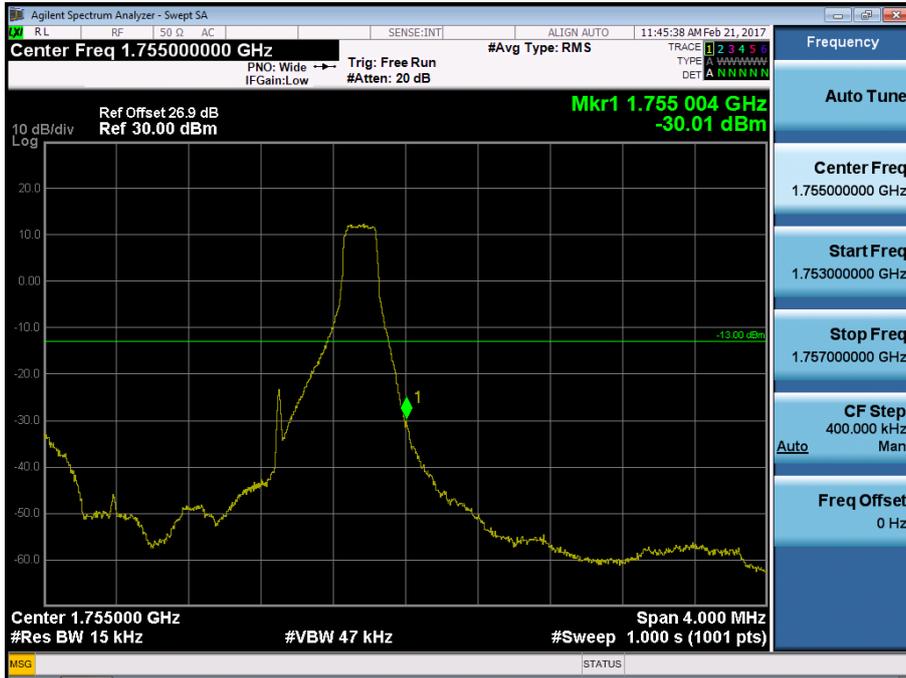


BAND 4. Upper Band Edge Plot (1.4M BW Ch.20393 QPSK\_RB6) -2



BAND 4. Upper Extended Band Edge Plot (1.4M BW Ch. 20393 QPSK\_RB6\_0) -3




BAND 4. Upper Band Edge Plot (3M BW Ch.20385 QPSK\_RB1\_Offset 14) -1

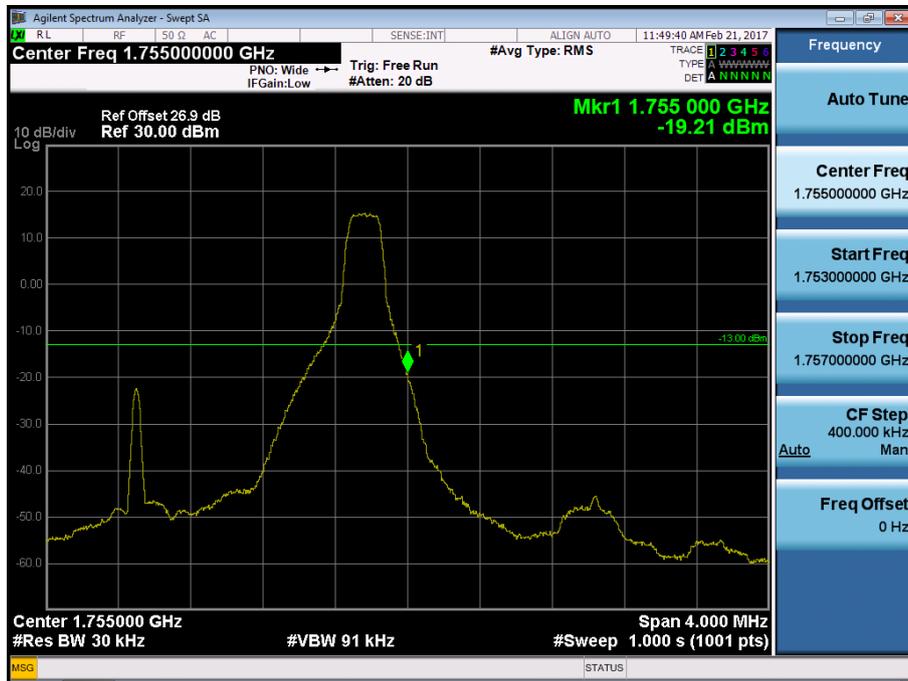


BAND 4. Upper Band Edge Plot (3M BW Ch.20385 QPSK\_RB15) -2



BAND 4. Upper Extended Band Edge Plot (3M BW Ch.20385 QPSK\_RB15\_0) -3

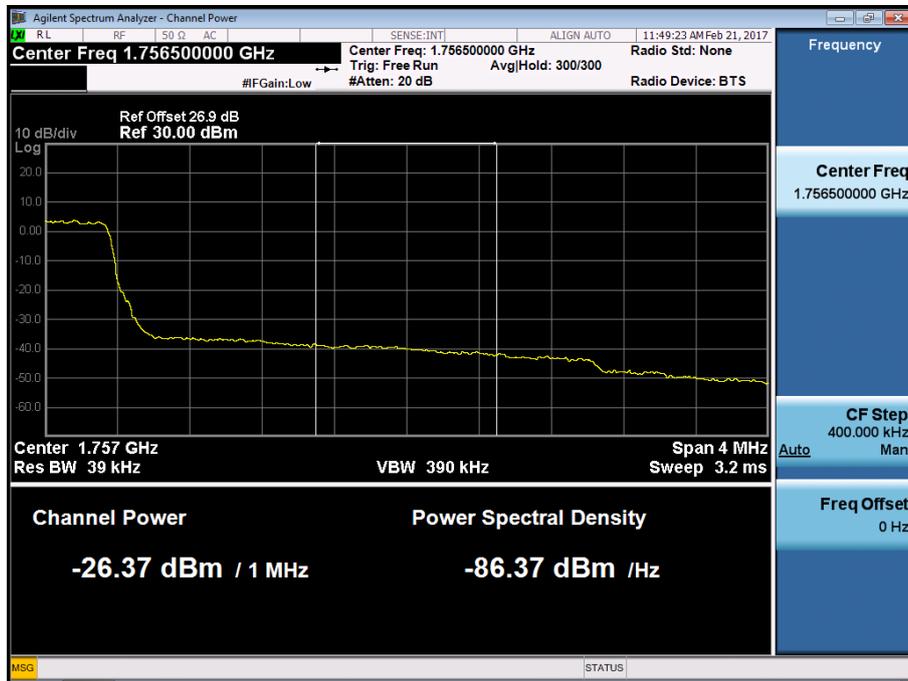


BAND 4. Upper Band Edge Plot (5M BW Ch.20375 QPSK\_RB1\_Offset 24) -1

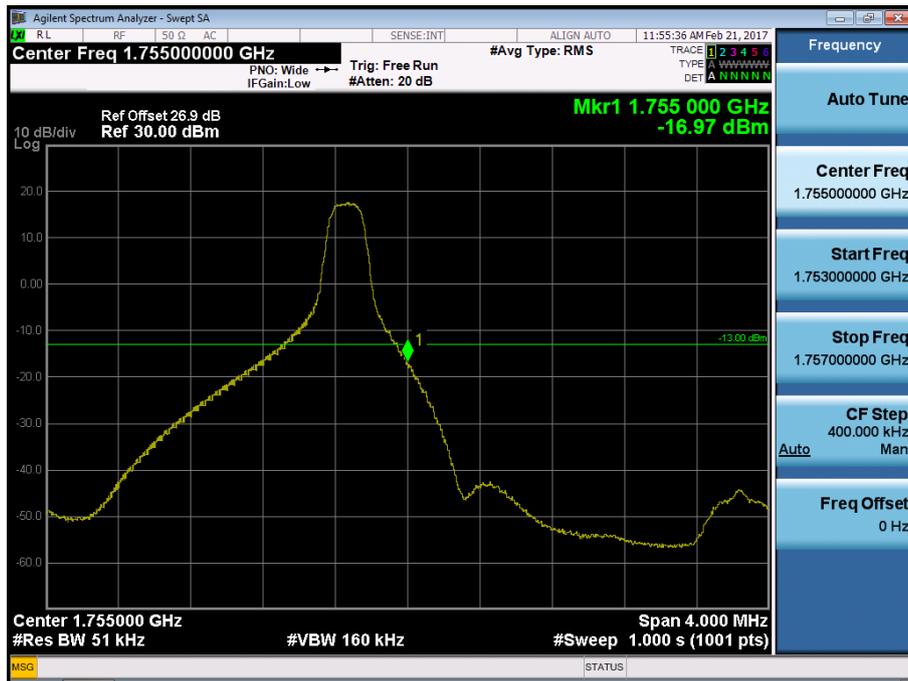


BAND 4. Upper Band Edge Plot (5M BW Ch.20375 QPSK\_RB25) -2



BAND 4. Upper Extended Band Edge Plot (5M BW Ch.20375 QPSK\_RB25) -3

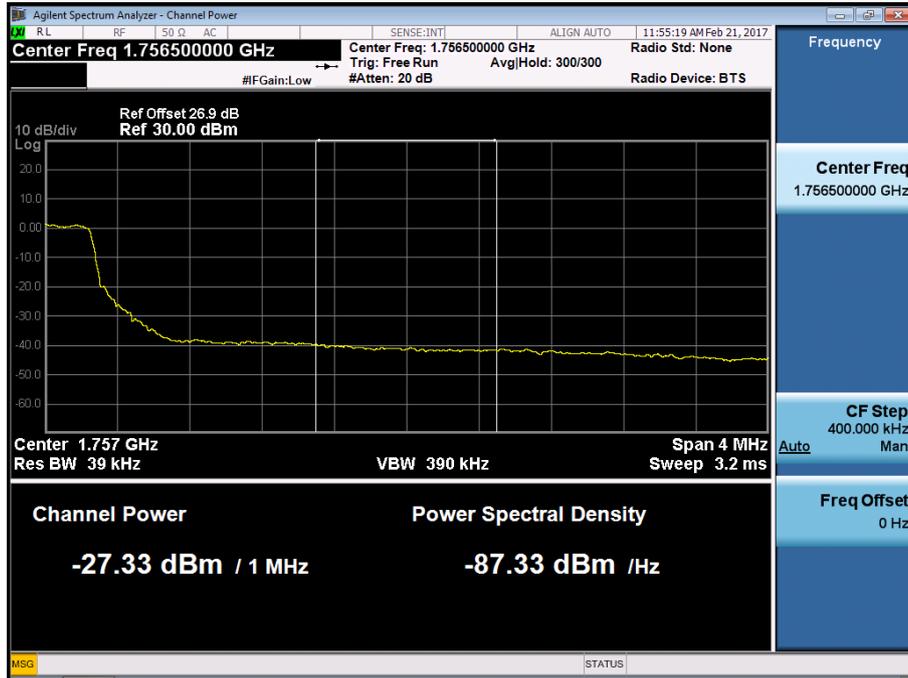


BAND 4. Upper Band Edge Plot (10M BW Ch.20350 QPSK\_RB1\_Offset 49) -1

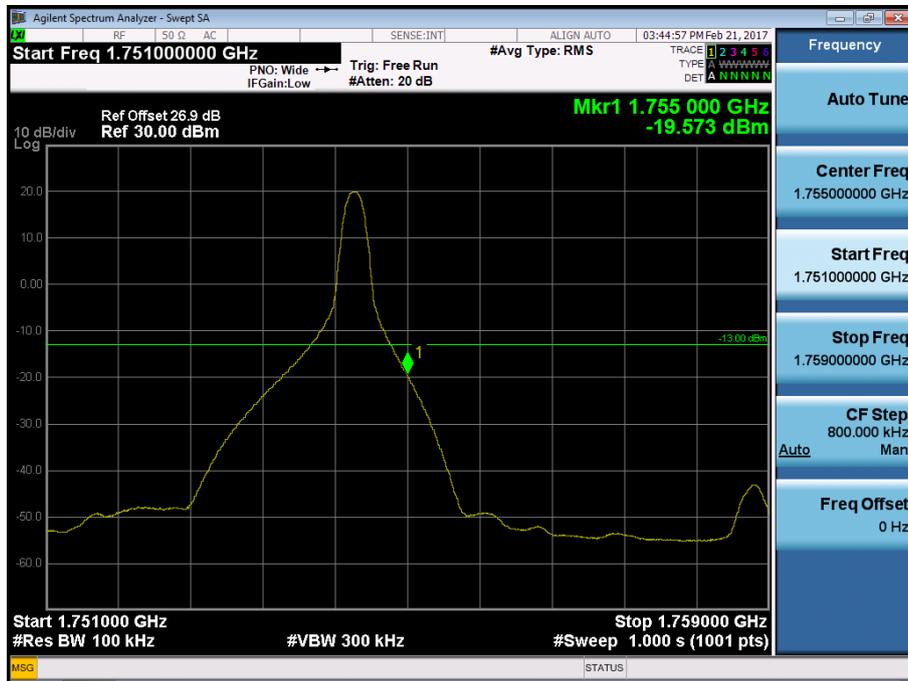


BAND 4. Upper Band Edge Plot (10M BW Ch.20350 QPSK\_RB50) -2



BAND 4. Upper Extended Band Edge Plot (10M BW Ch.20350 QPSK\_RB50) -3

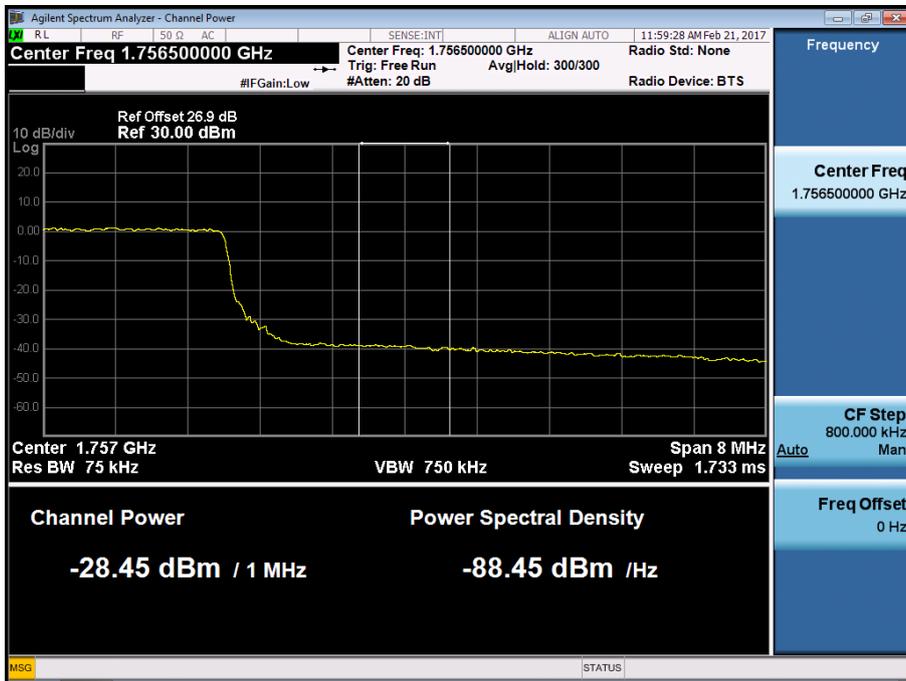


BAND 4. Upper Band Edge Plot (15M BW Ch.20325 QPSK\_RB1\_Offset 74) -1

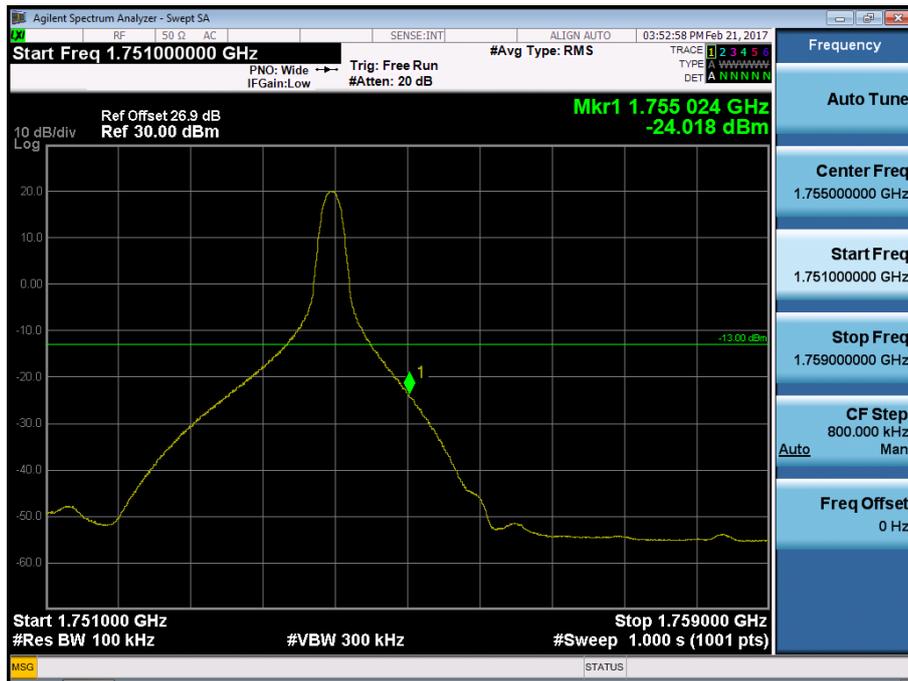


BAND 4. Upper Band Edge Plot (15M BW Ch.20325 QPSK\_RB75) -2




BAND 4. Upper Extended Band Edge Plot (15M BW Ch.20325 QPSK\_RB75) -3

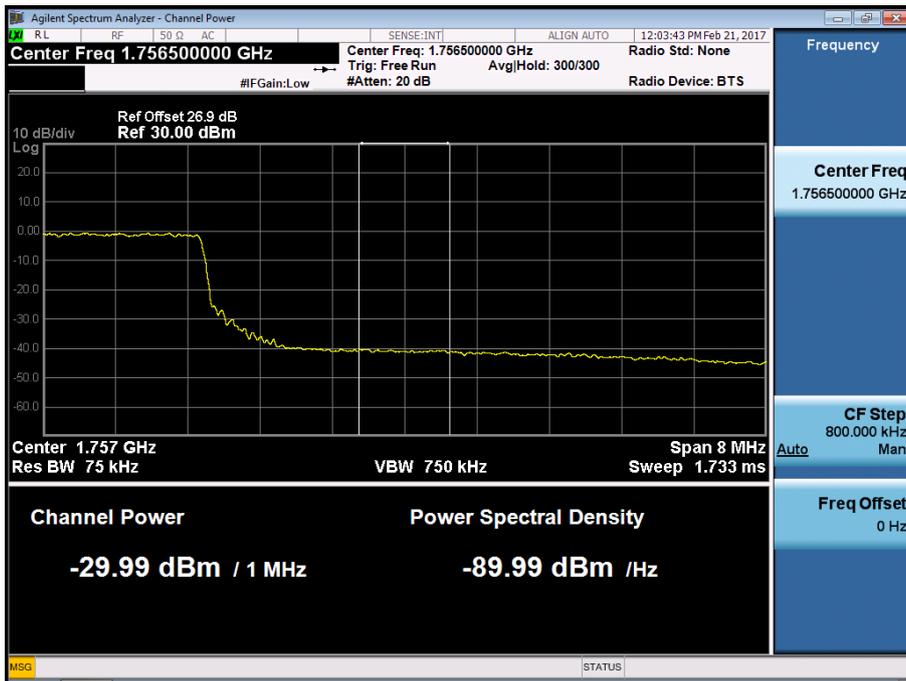


BAND 4. Upper Band Edge Plot (20M BW Ch.20300 QPSK\_RB1\_Offset 99) -1

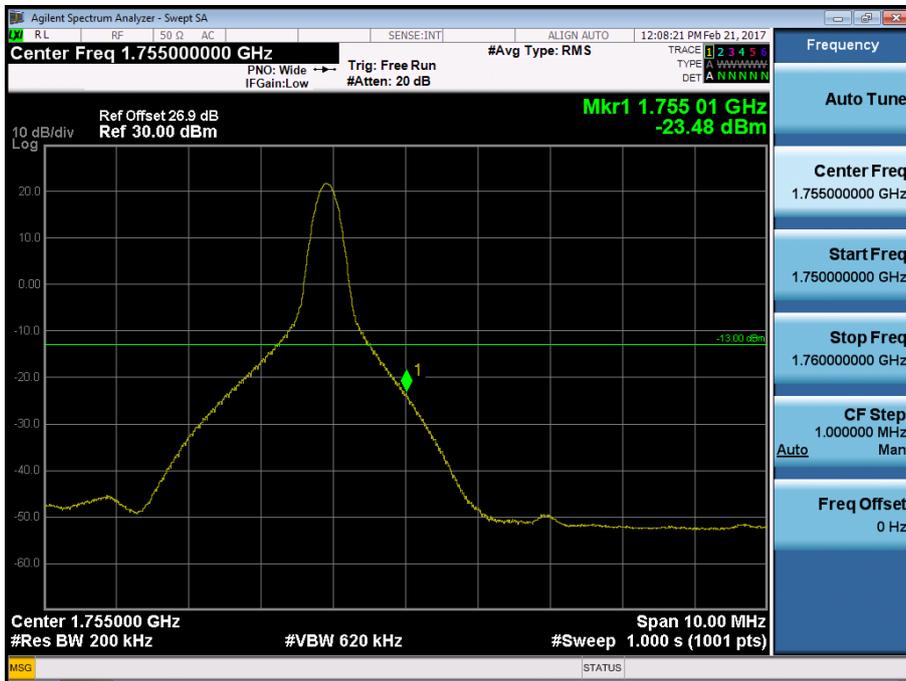


BAND 4. Upper Band Edge Plot (20M BW Ch.20300 QPSK\_RB100) -2

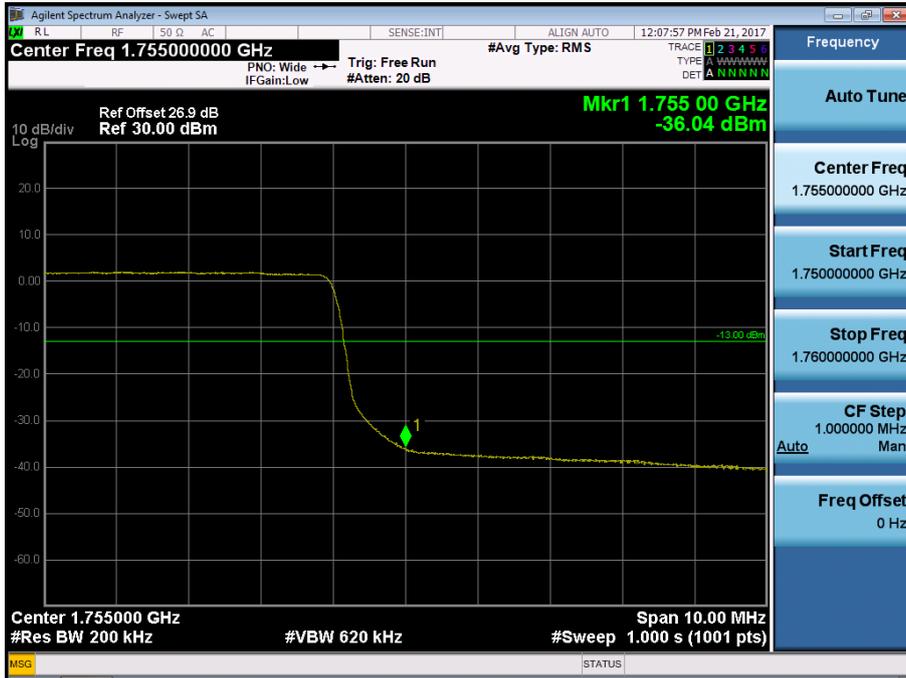

BAND 4. Upper Extended Band Edge Plot (20M BW Ch.20300 QPSK\_RB100) -3

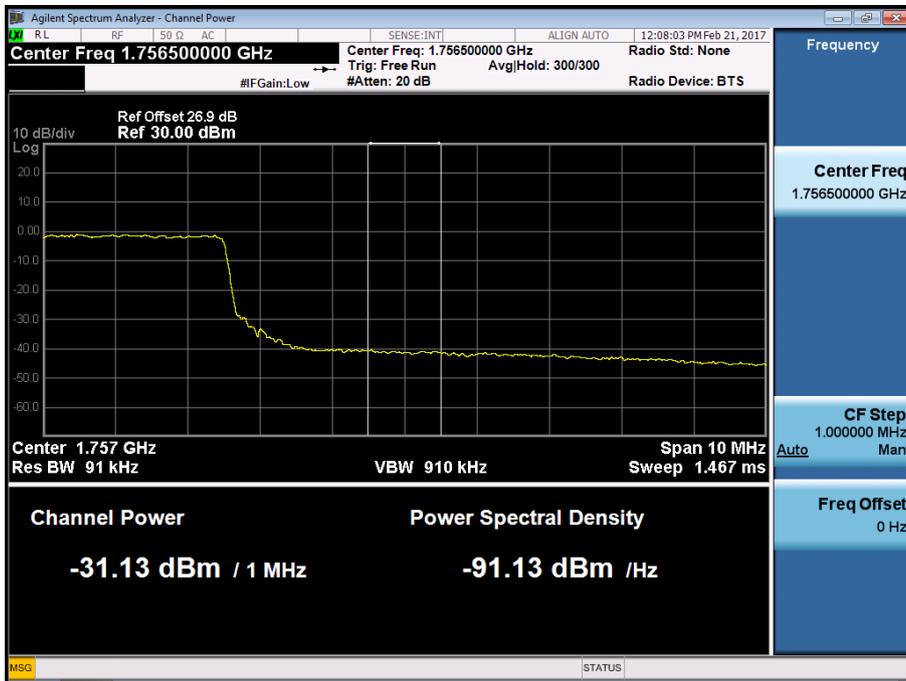


Band 13 Lower Band Edge Plot (5M BW Ch.23205 QPSK\_RB1 OFFSET0)

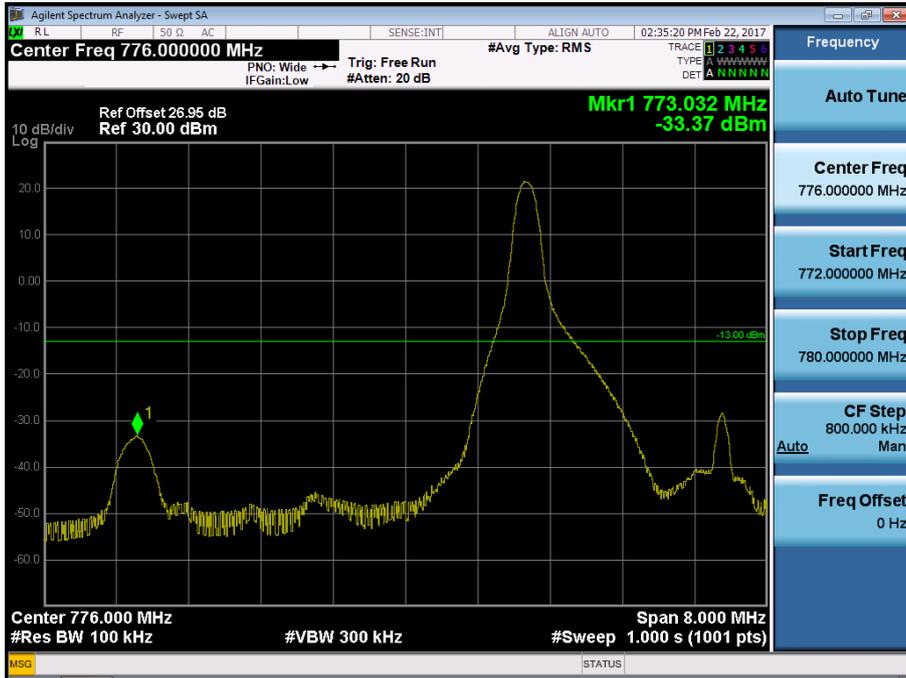

Band 13 Lower Band Edge Plot (5M BW Ch.23205 QPSK\_RB25)



Band 13 Lower Emission Mask (763 MHz ~ 775 MHz) Plot (5M BW Ch.23205 QPSK\_RB25\_0)

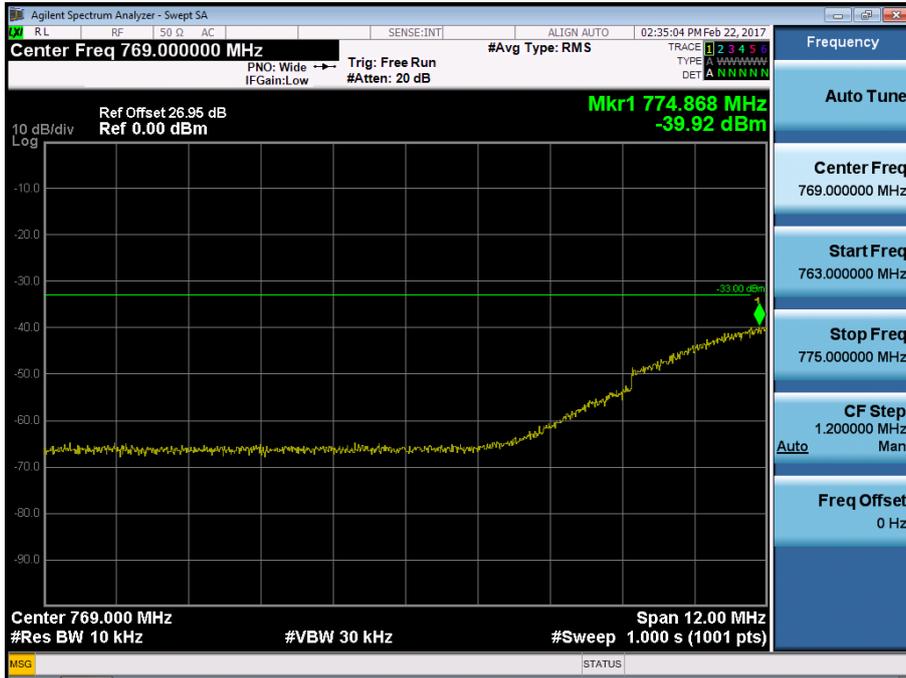

Band 13 Lower Band Edge Plot (10M BW Ch.23230 QPSK\_RB1 OFFSET0)

