

Attachment 1. – Dipole Validation Plots

DIGITAL EMC CO., LTD

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN:464

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.961 \text{ mho/m}$; $\epsilon_r = 53.8$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(8.97, 8.97, 8.97); Calibrated: 2011-01-24; Electronics: DAE3 Sn519

Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Date: 2011-11-29; Ambient Temp: 22.2; Tissue Temp: 22.4

Dipole Validation


Area Scan (61x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Power Drift = -0.004 dB

Peak SAR (extrapolated) = 3.51 W/kg

SAR(1 g) = 2.31 mW/g; SAR(10 g) = 1.51 mW/g

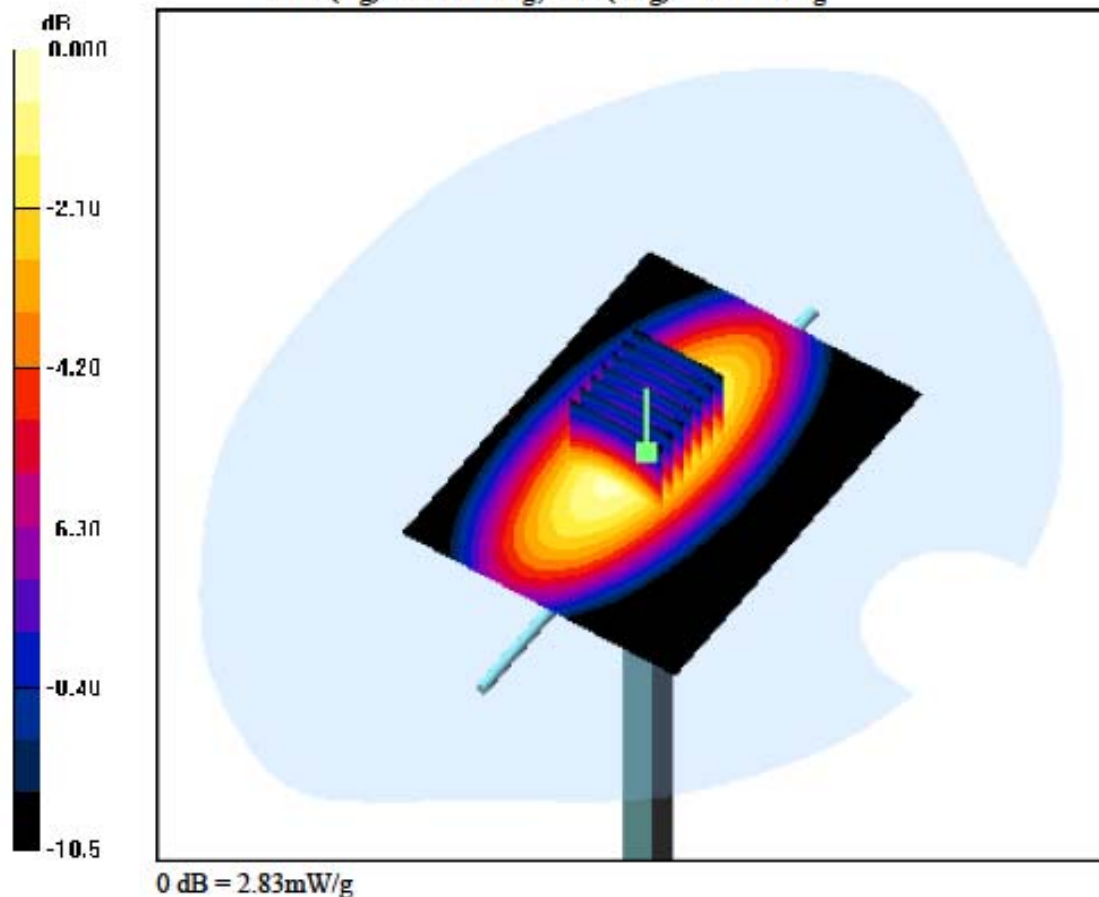

DIGITAL EMC CO., LTD

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN:464

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.972 \text{ mho/m}$; $\epsilon_r = 53.3$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(8.97, 8.97, 8.97); Calibrated: 2011-01-24; Electronics: DAE3 Sn519

Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Date: 2011-12-01; Ambient Temp: 22.1; Tissue Temp: 22.3

Dipole Validation


Area Scan (61x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Power Drift = -0.064 dB

Peak SAR (extrapolated) = 3.85 W/kg

SAR(1 g) = 2.57 W/kg; SAR(10 g) = 1.69 W/kg

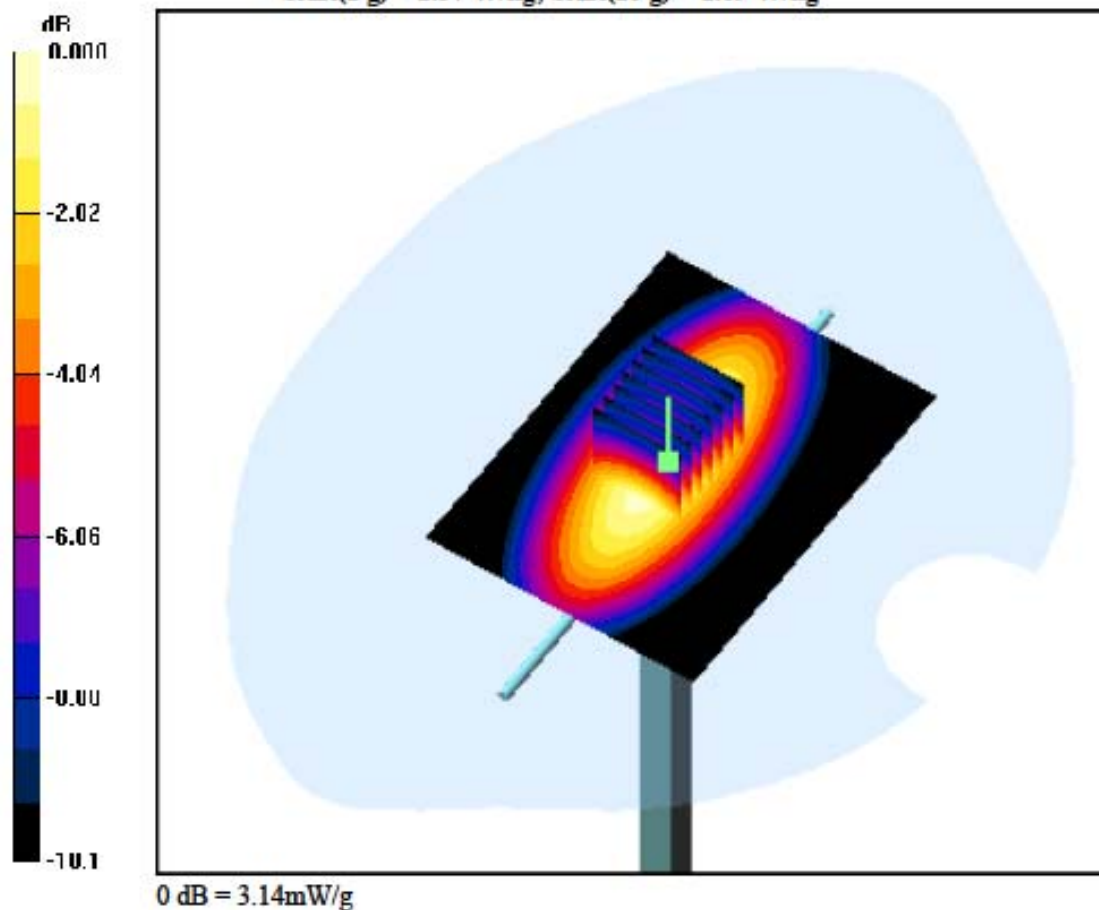

DIGITAL EMC CO., LTD**DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d029**

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1900 \text{ MHz}$; $\sigma = 1.55 \text{ mho/m}$; $\epsilon_r = 52.8$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(7.19, 7.19, 7.19); Calibrated: 2011-01-24; Electronics: DAE3 Sn519

Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186


Date: 2011-11-30; Ambient Temp: 22.2; Tissue Temp: 22.4

Dipole Validation**Area Scan (61x91x1):** Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$ **Zoom Scan (7x7x7)/Cube 0:** Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Power Drift = 0.056 dB

Peak SAR (extrapolated) = 20.7 W/kg

SAR(1 g) = 10.9 W/kg; SAR(10 g) = 5.53 W/kg

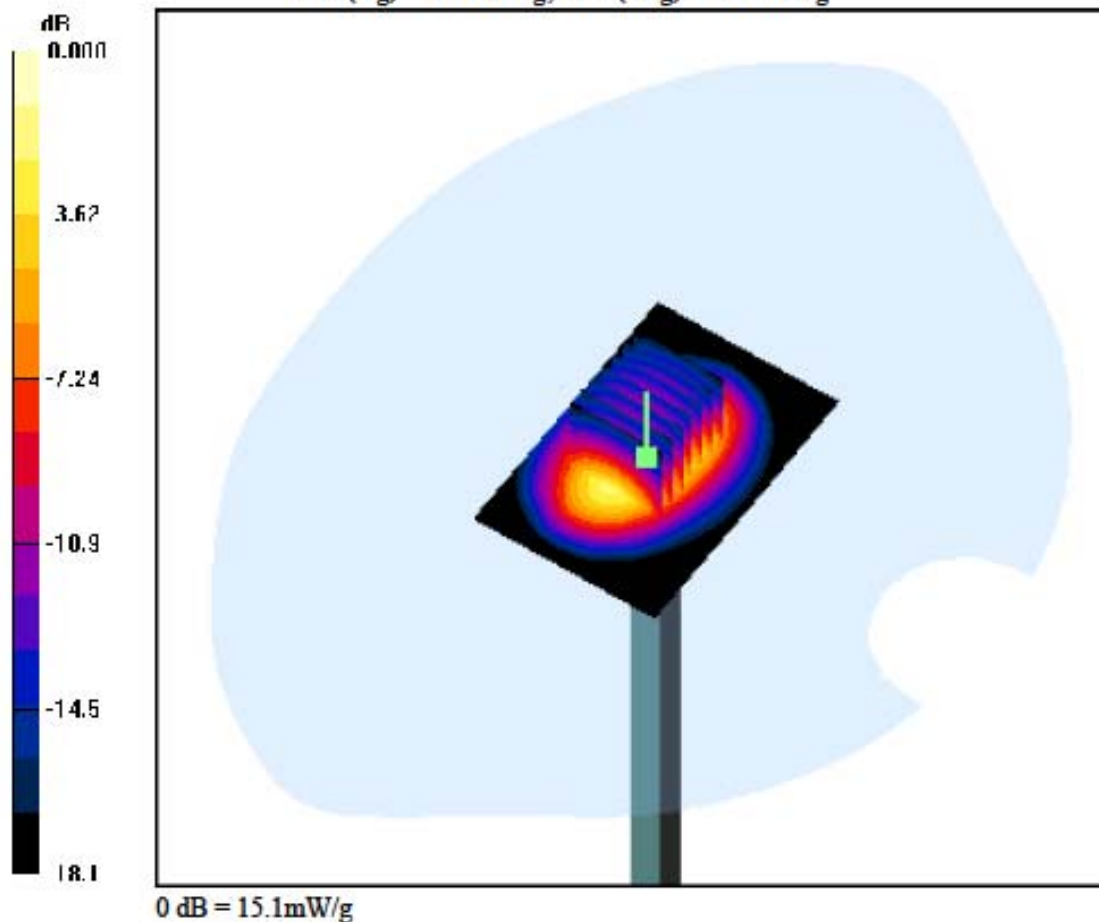

Attachment 2. – SAR Test Plots

DIGITAL EMC CO., LTD**DUT: OD811; Type: USB Modem**

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3
Medium parameters used: $f = 836.6 \text{ MHz}$; $\sigma = 0.977 \text{ mho/m}$; $\epsilon_r = 53.4$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(8.97, 8.97, 8.97); Calibrated: 2011-01-24; Electronics: DAE3 Sn519
Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2011-12-01; Ambient Temp: 22.1; Tissue Temp: 22.3

5 mm space from Body, GSM850 Ch. 190, Ant Internal, Horizontal up


Area Scan (61x101x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Power Drift = 0.141 dB

Peak SAR (extrapolated) = 1.00 W/kg

SAR(1 g) = 0.675 W/kg; SAR(10 g) = 0.459 W/kg

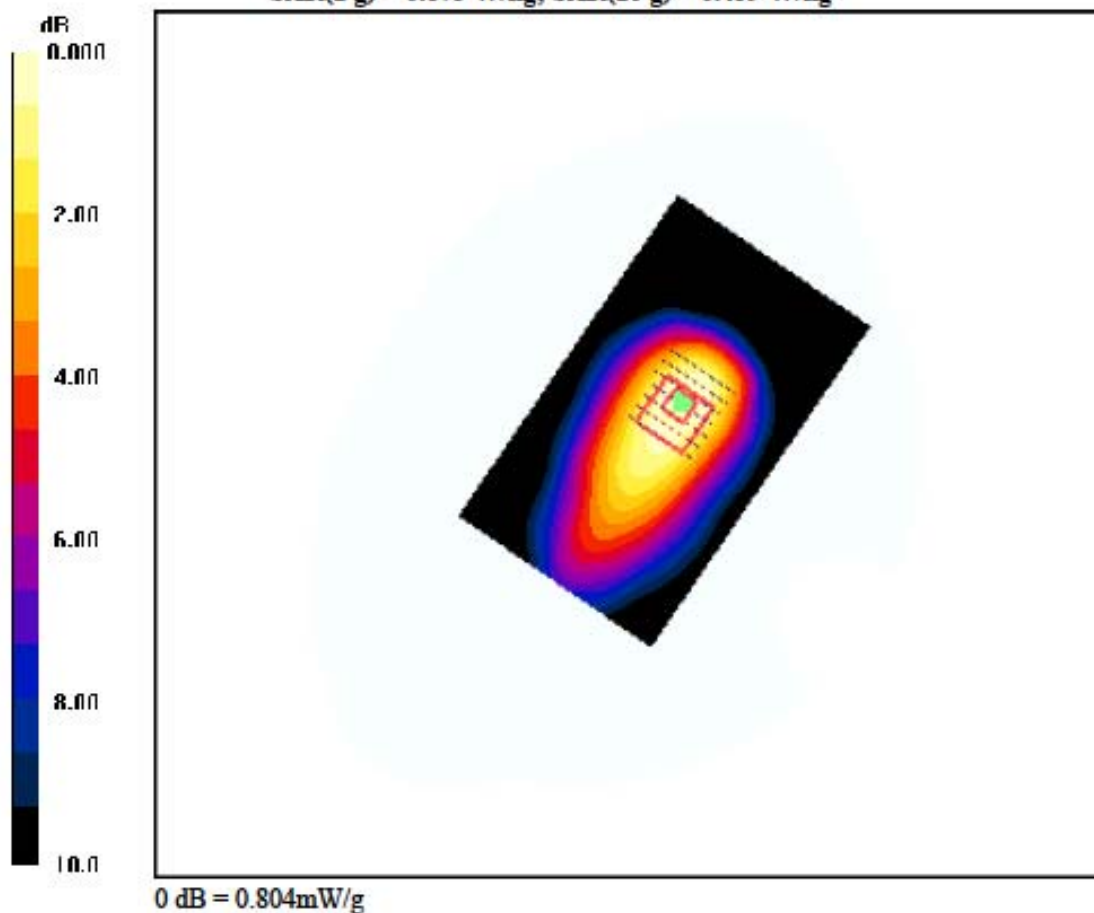

DIGITAL EMC CO., LTD**DUT: OD811; Type: USB Modem**

Communication System: GSM 850; Frequency: 824.2 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 824.2$ MHz; $\sigma = 0.954$ mho/m; $\epsilon_r = 53.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(8.97, 8.97, 8.97); Calibrated: 2011-01-24; Electronics: DAE3 Sn519

Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2011-12-01; Ambient Temp: 22.1; Tissue Temp: 22.3

5 mm space from Body, GSM850 GPRS Class 8 Ch. 128

Ant Internal, Horizontal up


Area Scan (61x101x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Power Drift = -0.019 dB

Peak SAR (extrapolated) = 1.43 W/kg

SAR(1 g) = 0.934 W/kg; SAR(10 g) = 0.616 W/kg

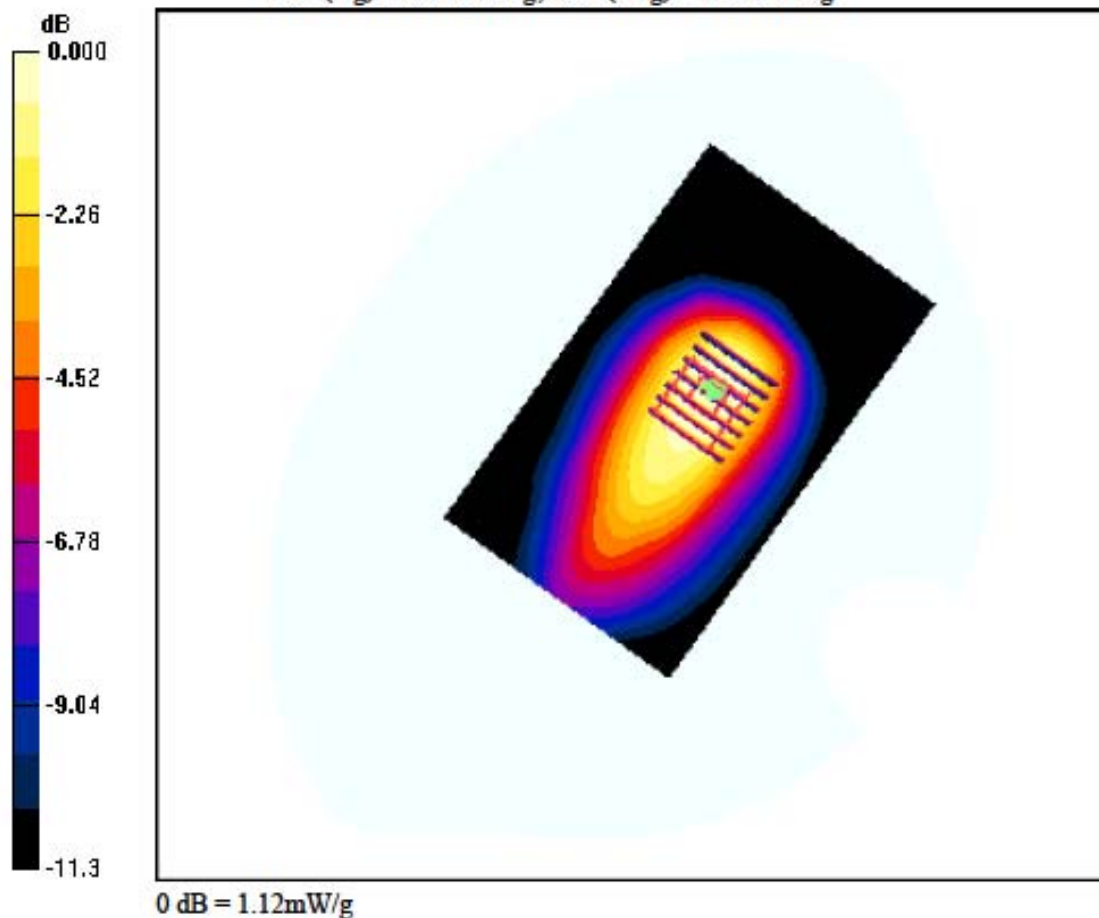

DIGITAL EMC CO., LTD**DUT: OD811; Type: USB Modem**

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 836.6 \text{ MHz}$; $\sigma = 0.977 \text{ mho/m}$; $\epsilon_r = 53.4$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(8.97, 8.97, 8.97); Calibrated: 2011-01-24; Electronics: DAE3 Sn519

Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186


Test Date: 2011-12-01; Ambient Temp: 22.1; Tissue Temp: 22.3

5 mm space from Body, GSM850 GPRS Class 8 Ch. 190**Ant Internal, Horizontal up****Area Scan (61x101x1):** Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ **Zoom Scan (7x7x7)/Cube 0:** Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Power Drift = -0.083 dB

Peak SAR (extrapolated) = 1.44 W/kg

SAR(1 g) = 0.917 W/kg; SAR(10 g) = 0.587 W/kg

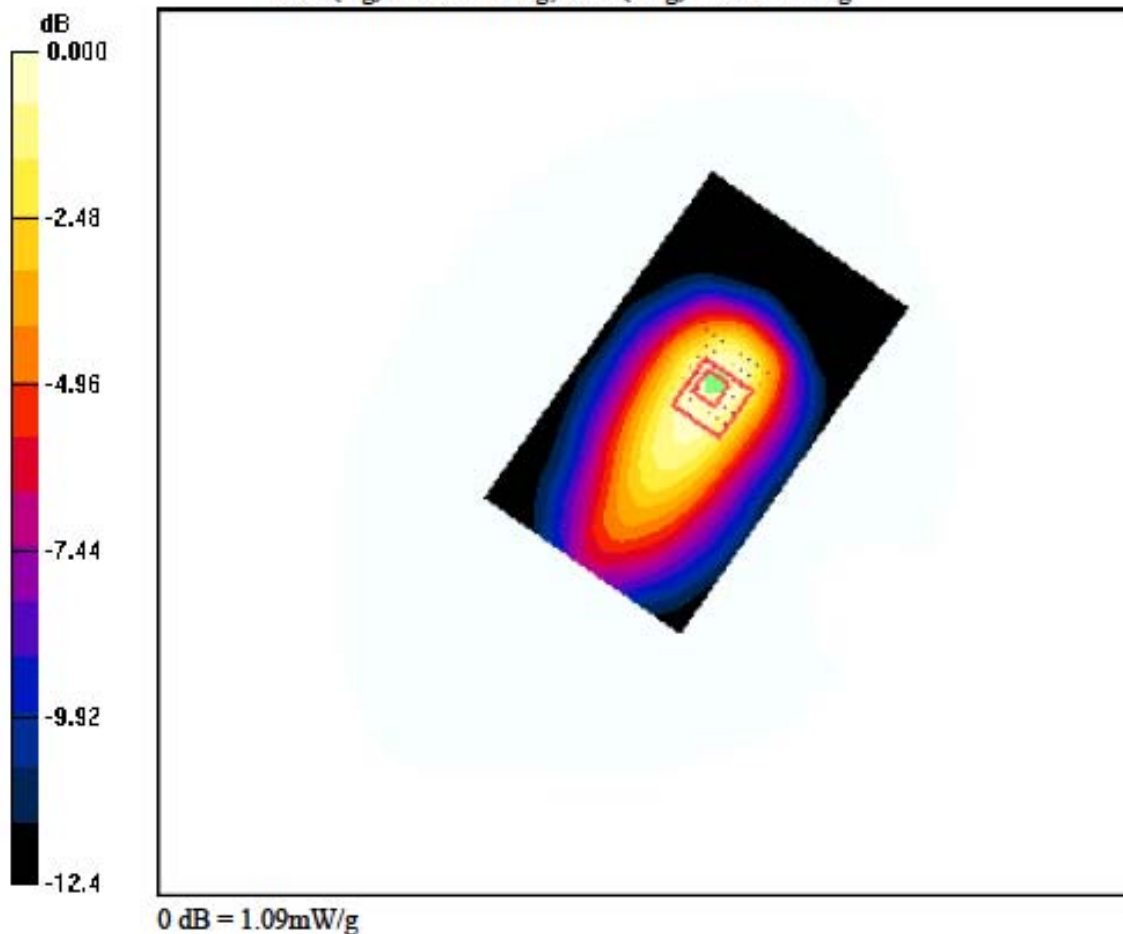

DIGITAL EMC CO., LTD**DUT: OD811; Type: USB Modem**

Communication System: GSM 850; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 848.8 \text{ MHz}$; $\sigma = 0.981 \text{ mho/m}$; $\epsilon_r = 53.5$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(8.97, 8.97, 8.97); Calibrated: 2011-01-24; Electronics: DAE3 Sn519

Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186


Test Date: 2011-12-01; Ambient Temp: 22.1; Tissue Temp: 22.3

5 mm space from Body, GSM850 GPRS Class 8 Ch. 251**Ant Internal, Horizontal up****Area Scan (61x101x1):** Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ **Zoom Scan (7x7x7)/Cube 0:** Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Power Drift = -0.019 dB

Peak SAR (extrapolated) = 1.51 W/kg

SAR(1 g) = 0.937 W/kg; SAR(10 g) = 0.604 W/kg

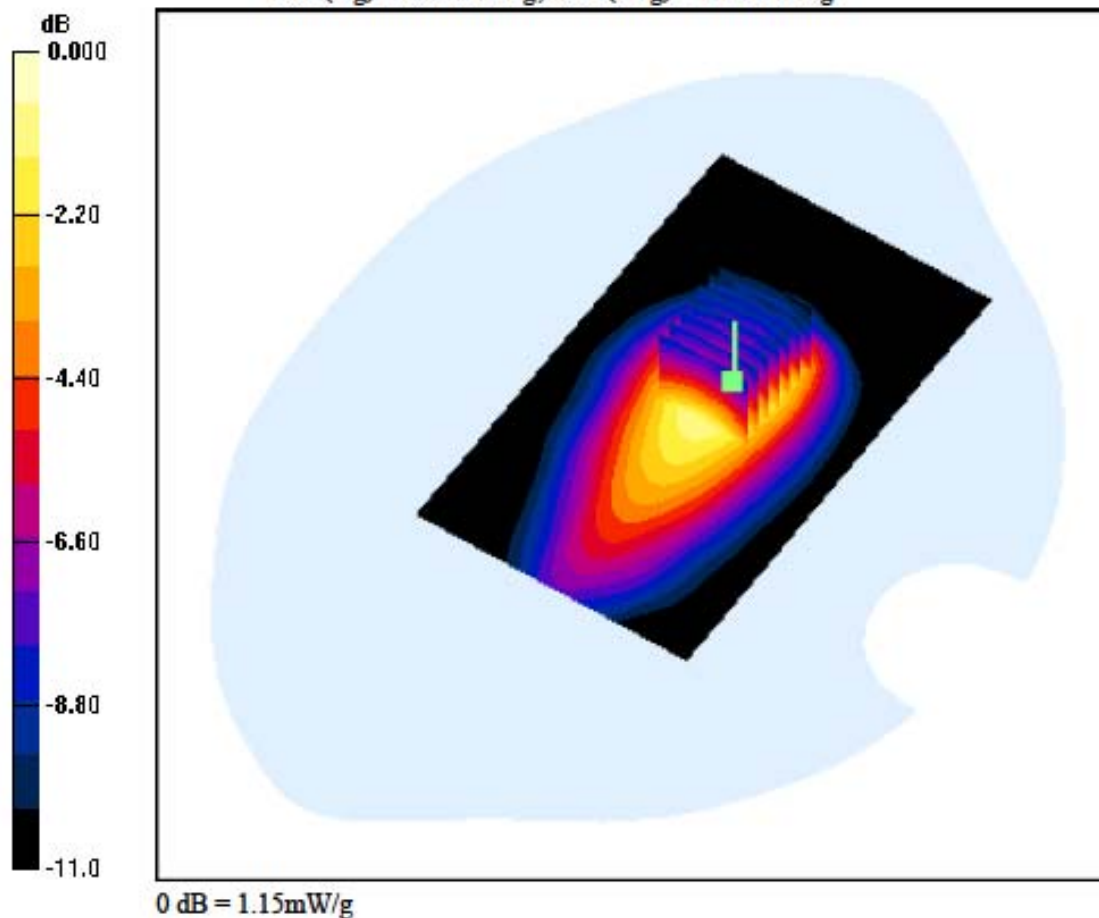

DIGITAL EMC CO., LTD**DUT: OD811; Type: USB Modem**

Communication System: GSM 850; Frequency: 824.2 MHz; Duty Cycle: 1:4.15
Medium parameters used: $f = 824.2 \text{ MHz}$; $\sigma = 0.954 \text{ mho/m}$; $\epsilon_r = 53.2$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(8.97, 8.97, 8.97); Calibrated: 2011-01-24; Electronics: DAE3 Sn519
Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2011-12-01; Ambient Temp: 22.1; Tissue Temp: 22.3

5 mm space from Body, GSM850 GPRS Class 10 Ch. 128

Ant Internal, Horizontal up


Area Scan (61x101x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Power Drift = -0.038 dB

Peak SAR (extrapolated) = 1.32 W/kg

SAR(1 g) = 0.885 W/kg; SAR(10 g) = 0.592 W/kg

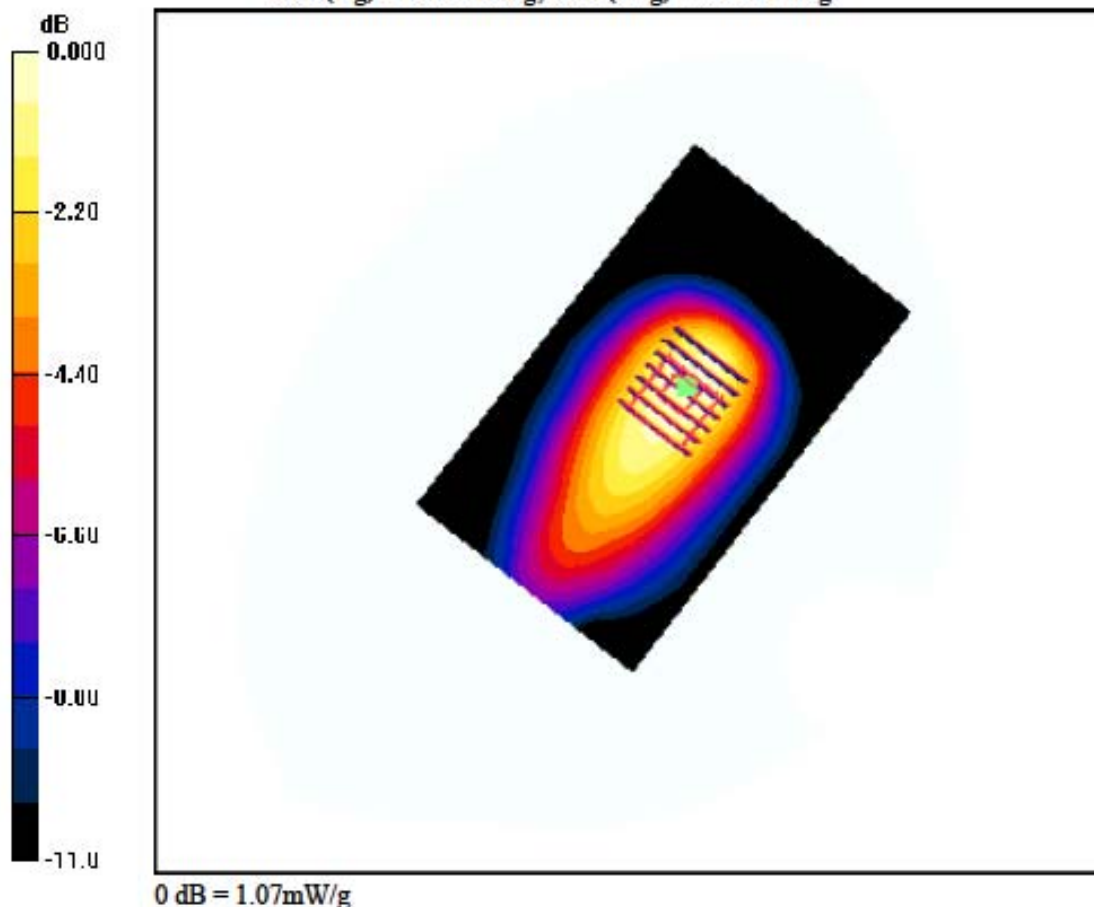

DIGITAL EMC CO., LTD**DUT: OD811; Type: USB Modem**

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:4.15
Medium parameters used: $f = 836.6 \text{ MHz}$; $\sigma = 0.977 \text{ mho/m}$; $\epsilon_r = 53.4$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(8.97, 8.97, 8.97); Calibrated: 2011-01-24; Electronics: DAE3 Sn519
Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2011-12-01; Ambient Temp: 22.1; Tissue Temp: 22.3

5 mm space from Body, GSM850 GPRS Class 10 Ch. 190

Ant Internal, Horizontal up


Area Scan (61x101x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Power Drift = 0.042 dB

Peak SAR (extrapolated) = 1.45 W/kg

SAR(1 g) = 0.951 W/kg; SAR(10 g) = 0.631 W/kg

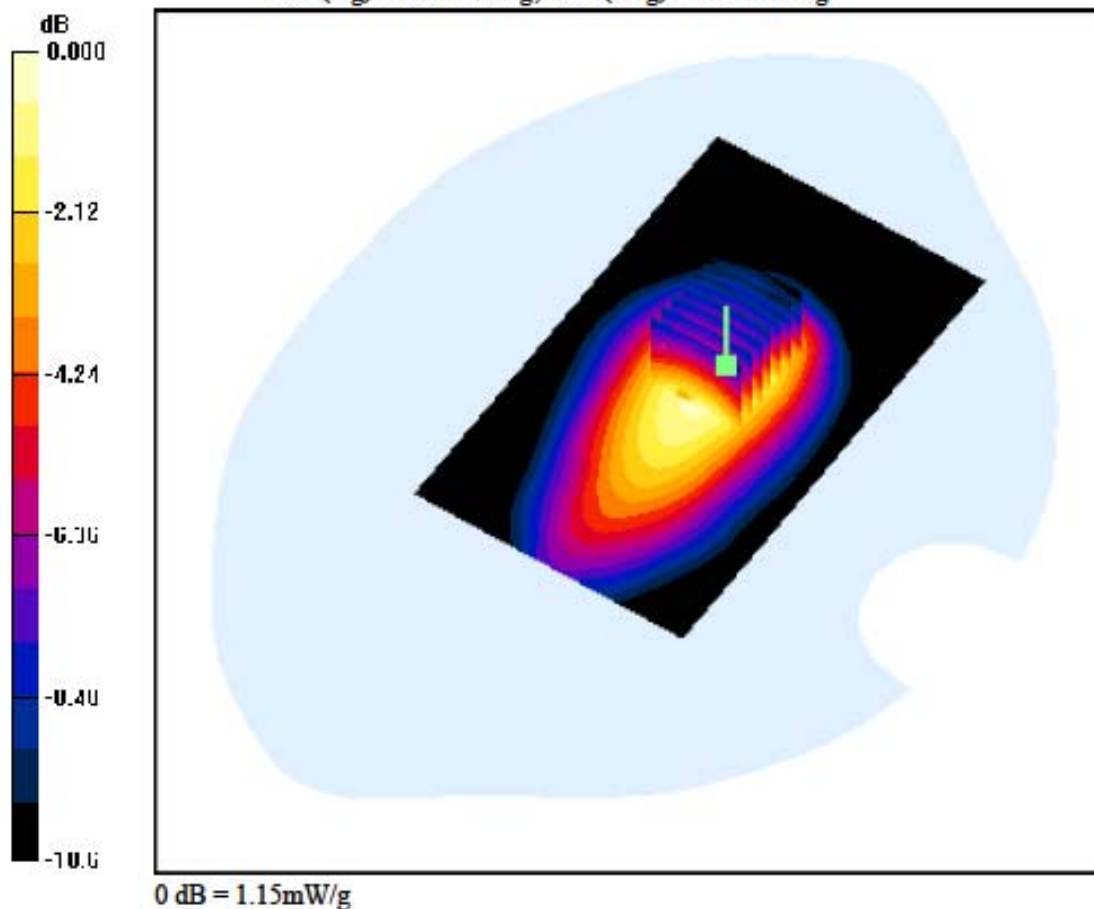

DIGITAL EMC CO., LTD**DUT: OD811; Type: USB Modem**

Communication System: GSM 850; Frequency: 848.8 MHz; Duty Cycle: 1:4.15
Medium parameters used: $f = 848.8 \text{ MHz}$; $\sigma = 0.976 \text{ mho/m}$; $\epsilon_r = 53.9$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY4 Configuration:


Probe: EX3DV4 - SN3643; ConvF(8.97, 8.97, 8.97); Calibrated: 2011-01-24; Electronics: DAE3 Sn519
Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2011-11-29; Ambient Temp: 22.2; Tissue Temp: 22.4

5 mm space from Body, GSM850 GPRS Class 10 Ch. 251

Ant Internal, Horizontal up

Area Scan (61x101x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
Power Drift = 0.042 dB
Peak SAR (extrapolated) = 1.76 W/kg
SAR(1 g) = 1.14 mW/g; SAR(10 g) = 0.730 mW/g

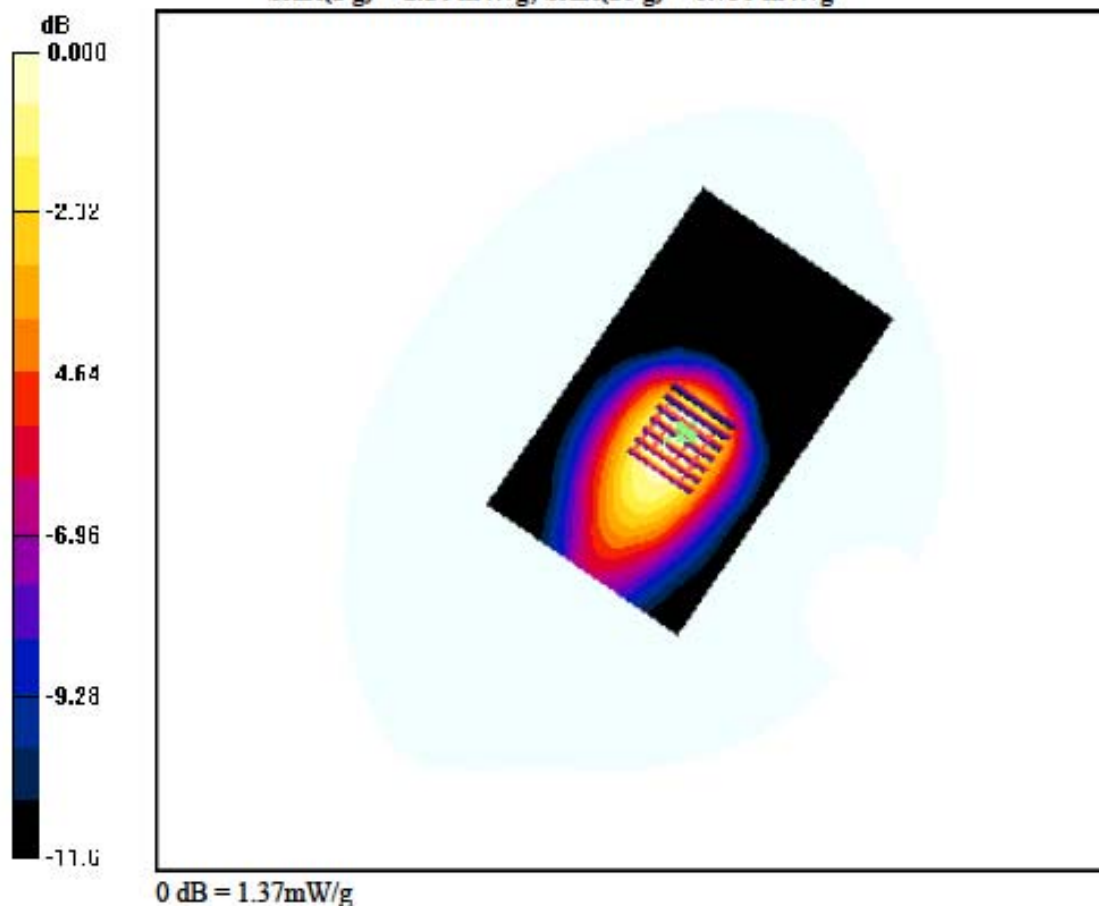

DIGITAL EMC CO., LTD**DUT: OD811; Type: USB Modem**

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:2.77
Medium parameters used: $f = 836.6 \text{ MHz}$; $\sigma = 0.977 \text{ mho/m}$; $\epsilon_r = 53.4$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY4 Configuration:


Probe: EX3DV4 - SN3643; ConvF(8.97, 8.97, 8.97); Calibrated: 2011-01-24; Electronics: DAE3 Sn519
Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2011-12-01; Ambient Temp: 22.1; Tissue Temp: 22.3

5 mm space from Body, GSM850 GPRS Class 11 Ch. 190

Ant Internal, Horizontal up

Area Scan (61x101x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
Power Drift = -0.057 dB
Peak SAR (extrapolated) = 0.804 W/kg
SAR(1 g) = 0.589 W/kg; SAR(10 g) = 0.416 W/kg

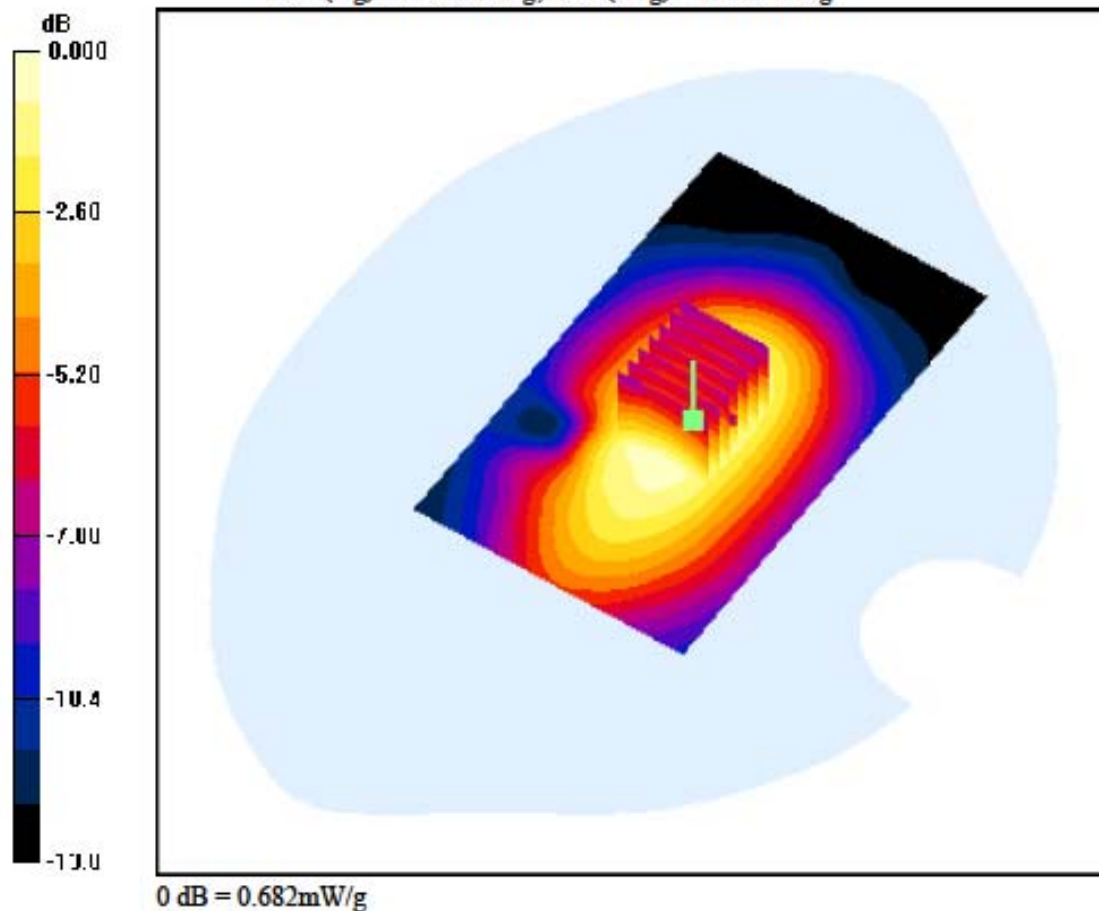

DIGITAL EMC CO., LTD**DUT: OD811; Type: USB Modem**

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:2.075

Medium parameters used: $f = 836.6 \text{ MHz}$; $\sigma = 0.977 \text{ mho/m}$; $\epsilon_r = 53.4$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(8.97, 8.97, 8.97); Calibrated: 2011-01-24; Electronics: DAE3 Sn519

Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186


Test Date: 2011-12-01; Ambient Temp: 22.1; Tissue Temp: 22.3

5 mm space from Body, GSM850 GPRS Class 12 Ch. 190**Ant Internal, Horizontal up****Area Scan (61x101x1):** Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ **Zoom Scan (7x7x7)/Cube 0:** Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Power Drift = -0.008 dB

Peak SAR (extrapolated) = 0.745 W/kg

SAR(1 g) = 0.544 W/kg; SAR(10 g) = 0.382 W/kg

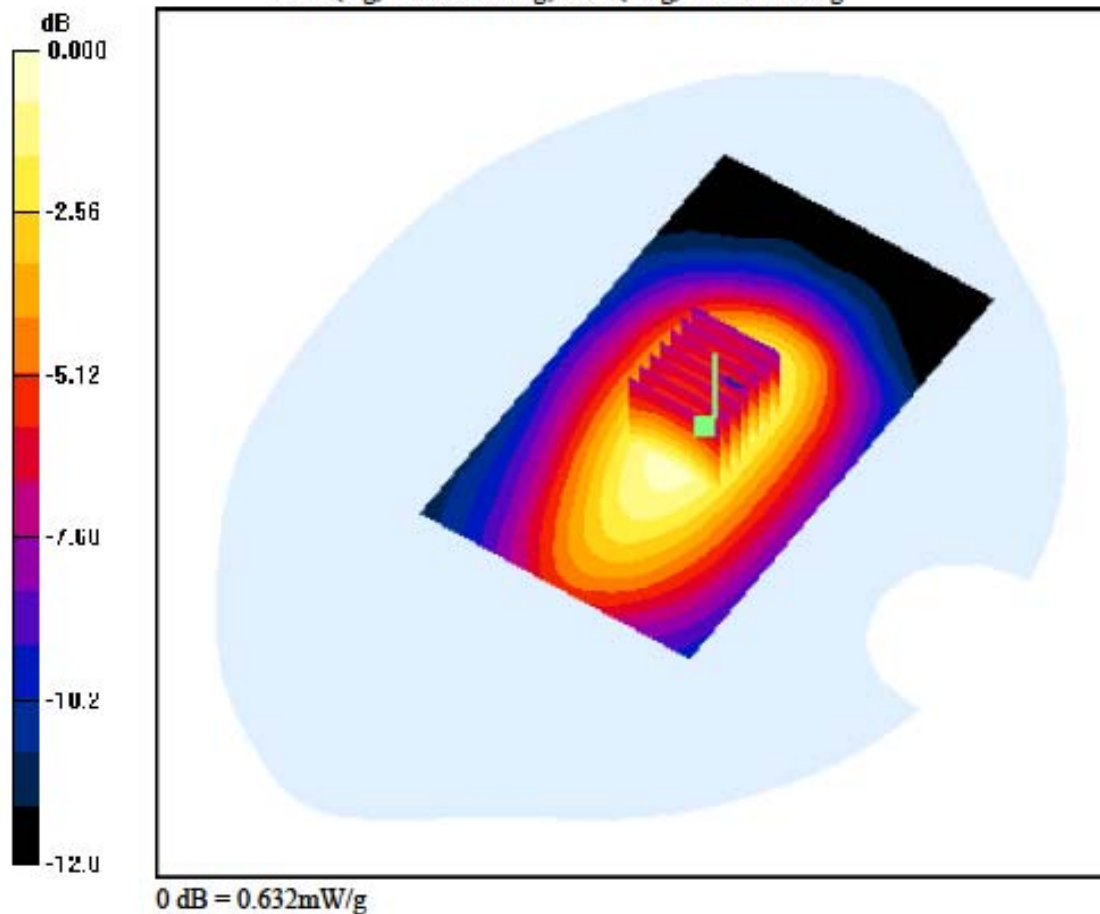

DIGITAL EMC CO., LTD**DUT: OD811; Type: USB Modem**

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:4.15
Medium parameters used: $f = 836.6 \text{ MHz}$; $\sigma = 0.977 \text{ mho/m}$; $\epsilon_r = 53.4$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY4 Configuration:


Probe: EX3DV4 - SN3643; ConvF(8.97, 8.97, 8.97); Calibrated: 2011-01-24; Electronics: DAE3 Sn519
Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2011-12-01; Ambient Temp: 22.1; Tissue Temp: 22.3

5 mm space from Body, GSM850 GPRS Class 10 Ch. 190

Ant Internal, Horizontal Down

Area Scan (61x101x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
Power Drift = -0.370 dB
Peak SAR (extrapolated) = 1.40 W/kg
SAR(1 g) = 0.779 W/kg; SAR(10 g) = 0.490 W/kg

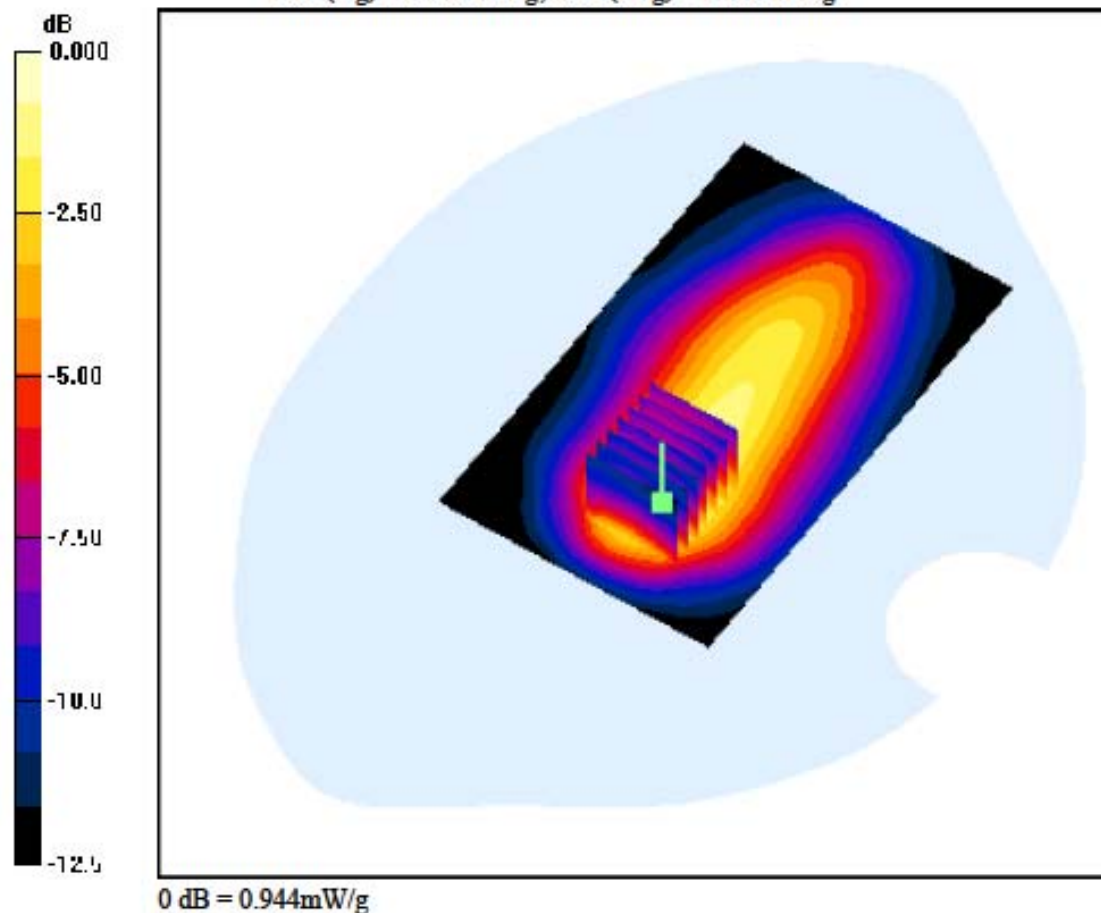

DIGITAL EMC CO., LTD**DUT: OD811; Type: USB Modem**

Communication System: GSM 850; Frequency: 824.2 MHz; Duty Cycle: 1:4.15
Medium parameters used: $f = 824.2 \text{ MHz}$; $\sigma = 0.954 \text{ mho/m}$; $\epsilon_r = 53.2$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY4 Configuration:


Probe: EX3DV4 - SN3643; ConvF(8.97, 8.97, 8.97); Calibrated: 2011-01-24; Electronics: DAE3 Sn519
Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2011-12-01; Ambient Temp: 22.1; Tissue Temp: 22.3

5 mm space from Body, GSM850 GPRS Class 10 Ch. 128

Ant Internal, Vertical Front

Area Scan (61x101x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
Power Drift = 0.075 dB
Peak SAR (extrapolated) = 1.52 W/kg
SAR(1 g) = 0.937 W/kg; SAR(10 g) = 0.558 W/kg

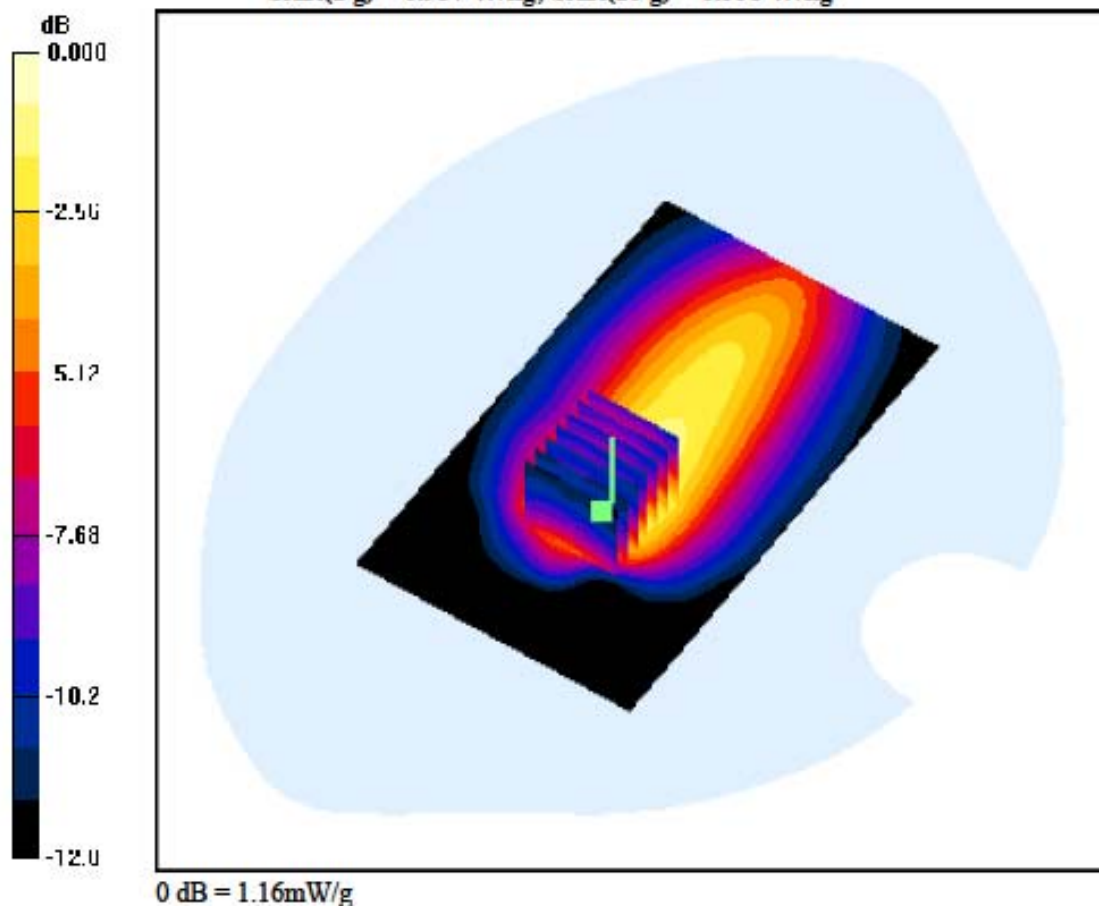

DIGITAL EMC CO., LTD**DUT: OD811; Type: USB Modem**

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:4.15
Medium parameters used: $f = 836.6 \text{ MHz}$; $\sigma = 0.977 \text{ mho/m}$; $\epsilon_r = 53.4$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(8.97, 8.97, 8.97); Calibrated: 2011-01-24; Electronics: DAE3 Sn519
Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2011-12-01; Ambient Temp: 22.1; Tissue Temp: 22.3

5 mm space from Body, GSM850 GPRS Class 10 Ch. 190

Ant Internal, Vertical Front


Area Scan (61x101x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Power Drift = 0.042 dB

Peak SAR (extrapolated) = 1.46 W/kg

SAR(1 g) = 0.914 W/kg; SAR(10 g) = 0.552 W/kg

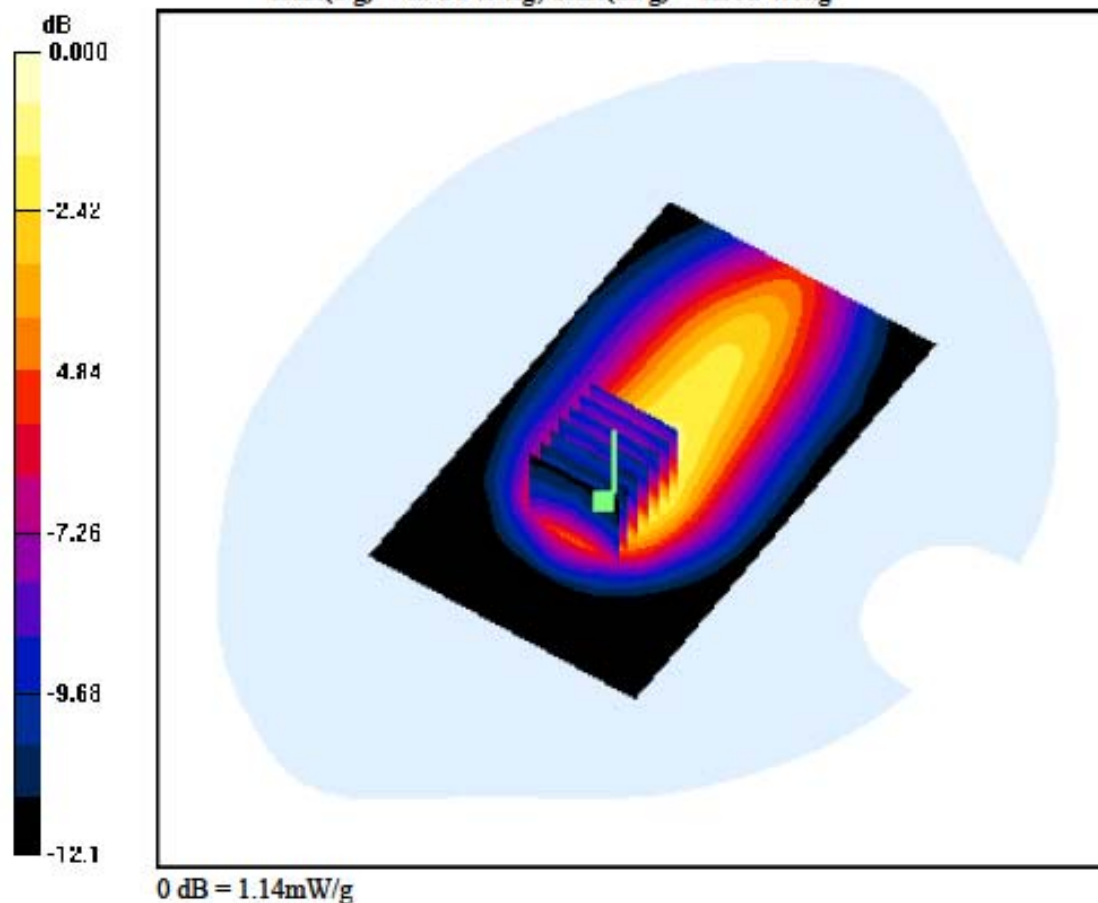

DIGITAL EMC CO., LTD**DUT: OD811; Type: USB Modem**

Communication System: GSM 850; Frequency: 848.8 MHz; Duty Cycle: 1:4.15
Medium parameters used: $f = 848.8 \text{ MHz}$; $\sigma = 0.981 \text{ mho/m}$; $\epsilon_r = 53.5$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY4 Configuration:


Probe: EX3DV4 - SN3643; ConvF(8.97, 8.97, 8.97); Calibrated: 2011-01-24; Electronics: DAE3 Sn519
Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2011-12-01; Ambient Temp: 22.1; Tissue Temp: 22.3

5 mm space from Body, GSM850 GPRS Class 10 Ch. 251

Ant Internal, Vertical Front

Area Scan (61x101x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
Power Drift = 0.184 dB
Peak SAR (extrapolated) = 1.28 W/kg
SAR(1 g) = 0.761 W/kg; SAR(10 g) = 0.479 W/kg

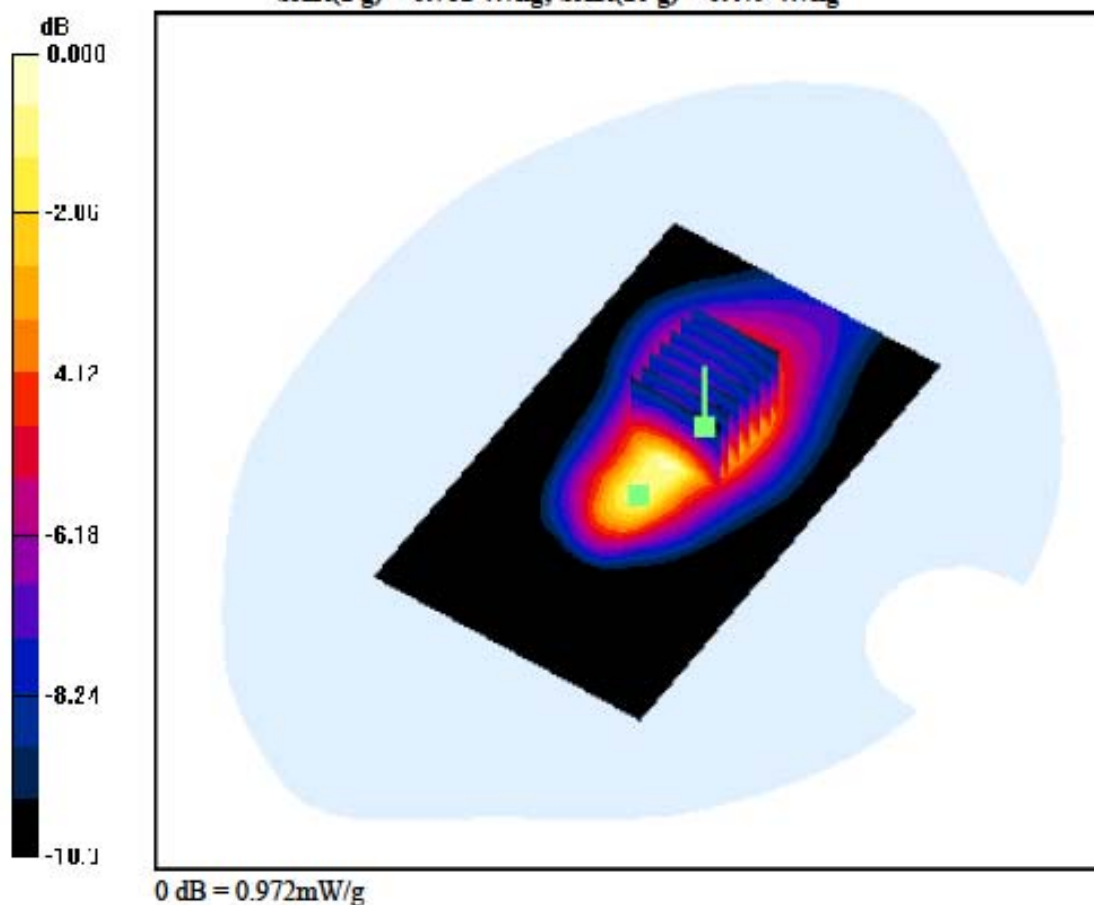

DIGITAL EMC CO., LTD**DUT: OD811; Type: USB Modem**

Communication System: GSM 850; Frequency: 848.8 MHz; Duty Cycle: 1:4.15
Medium parameters used: $f = 848.8 \text{ MHz}$; $\sigma = 0.981 \text{ mho/m}$; $\epsilon_r = 53.5$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY4 Configuration:


Probe: EX3DV4 - SN3643; ConvF(8.97, 8.97, 8.97); Calibrated: 2011-01-24; Electronics: DAE3 Sn519
Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2011-12-01; Ambient Temp: 22.1; Tissue Temp: 22.3

5 mm space from Body, GSM850 GPRS Class 10 Ch. 251

Ant Internal, Vertical Front

Area Scan (61x101x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Zoom Scan (7x7x7)/Cube 1: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
Power Drift = 0.184 dB
Peak SAR (extrapolated) = 1.15 W/kg
SAR(1 g) = 0.614 W/kg; SAR(10 g) = 0.355 W/kg

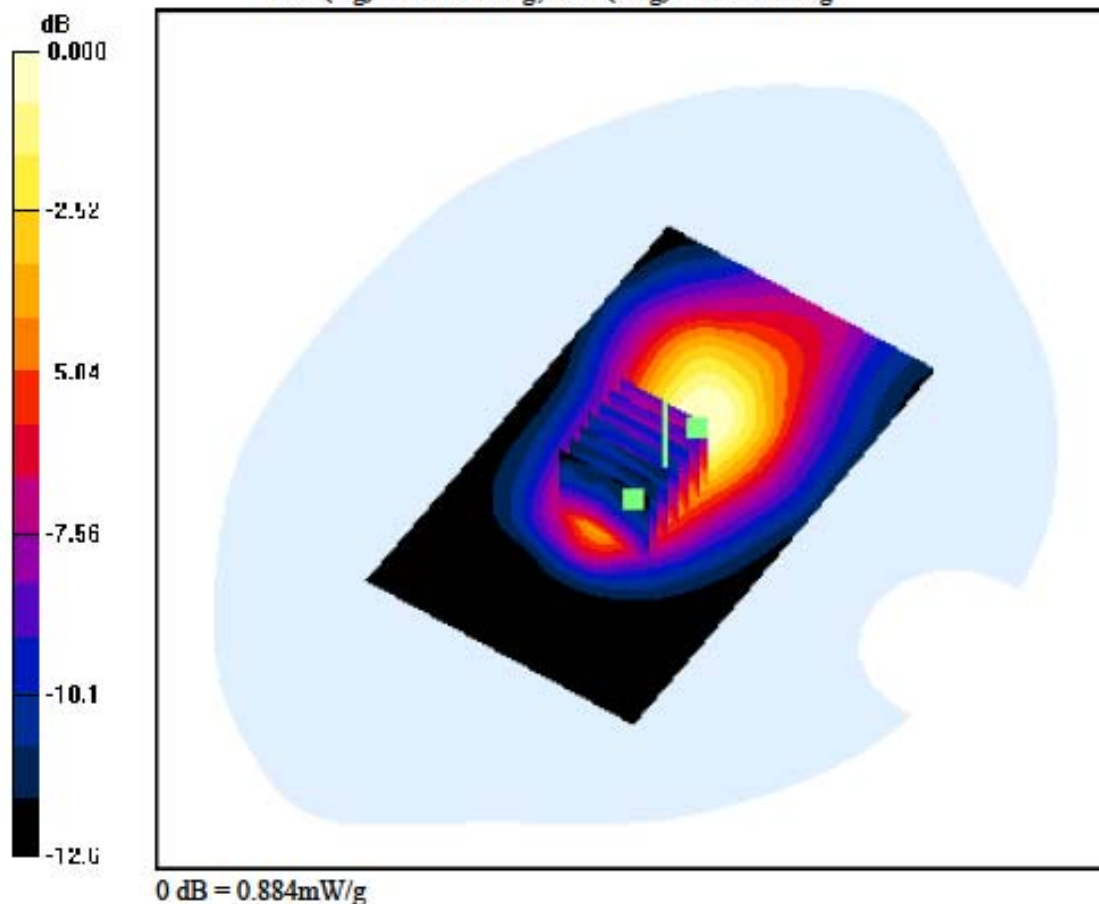

DIGITAL EMC CO., LTD**DUT: OD811; Type: USB Modem**

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:4.15
Medium parameters used: $f = 836.6 \text{ MHz}$; $\sigma = 0.977 \text{ mho/m}$; $\epsilon_r = 53.4$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY4 Configuration:


Probe: EX3DV4 - SN3643; ConvF(8.97, 8.97, 8.97); Calibrated: 2011-01-24; Electronics: DAE3 Sn519
Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2011-12-01; Ambient Temp: 22.1; Tissue Temp: 22.3

5 mm space from Body, GSM850 GPRS Class 10 Ch. 190

Ant Internal, Vertical Back

Area Scan (61x101x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
Power Drift = -0.045 dB
Peak SAR (extrapolated) = 1.61 W/kg
SAR(1 g) = 0.761 W/kg; SAR(10 g) = 0.415 W/kg

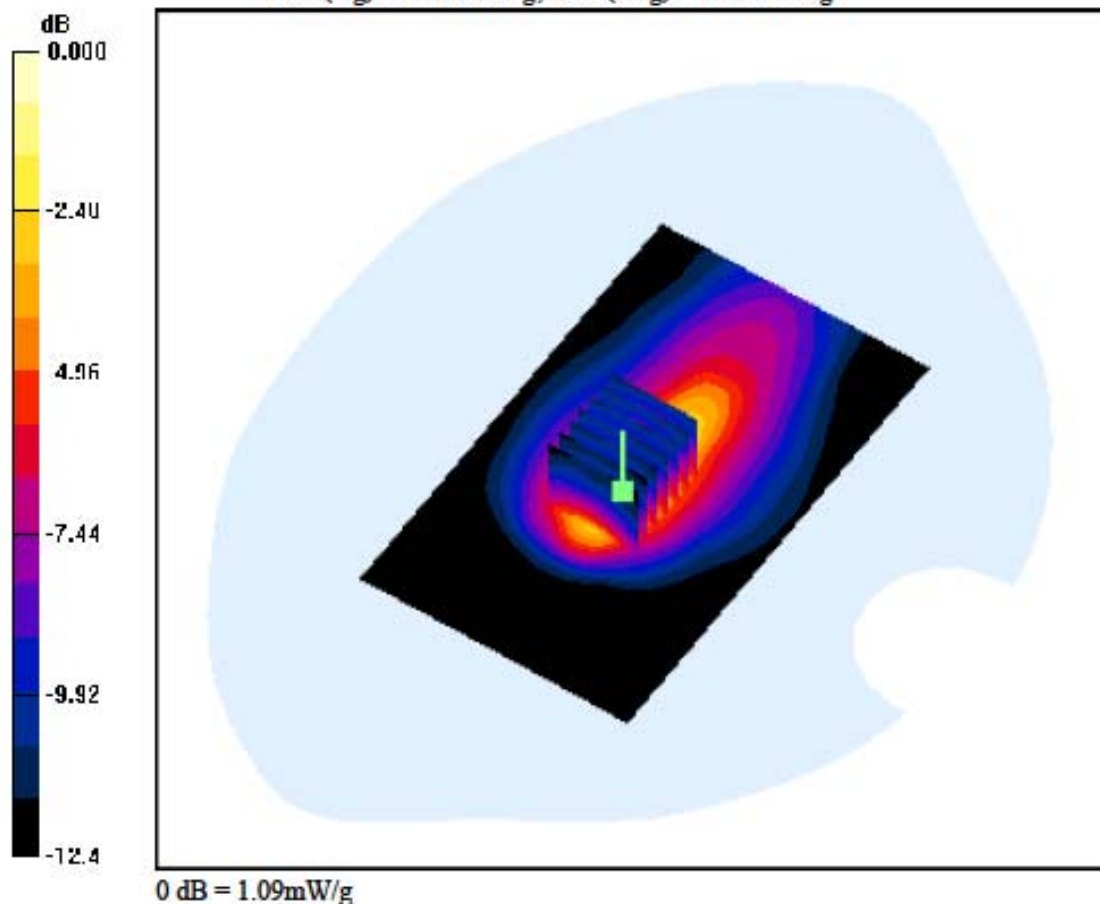

DIGITAL EMC CO., LTD**DUT: OD811; Type: USB Modem**

Communication System: PCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.51$ mho/m; $\epsilon_r = 52.7$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(7.19, 7.19, 7.19); Calibrated: 2011-01-24; Electronics: DAE3 Sn519
Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2011-11-30; Ambient Temp: 22.2; Tissue Temp: 22.4

5 mm space from Body, PCS1900 Ch. 661, Ant Internal, Horizontal up


Area Scan (61x101x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Power Drift = 0.069 dB

Peak SAR (extrapolated) = 0.291 W/kg

SAR(1 g) = 0.194 W/kg; SAR(10 g) = 0.138 W/kg

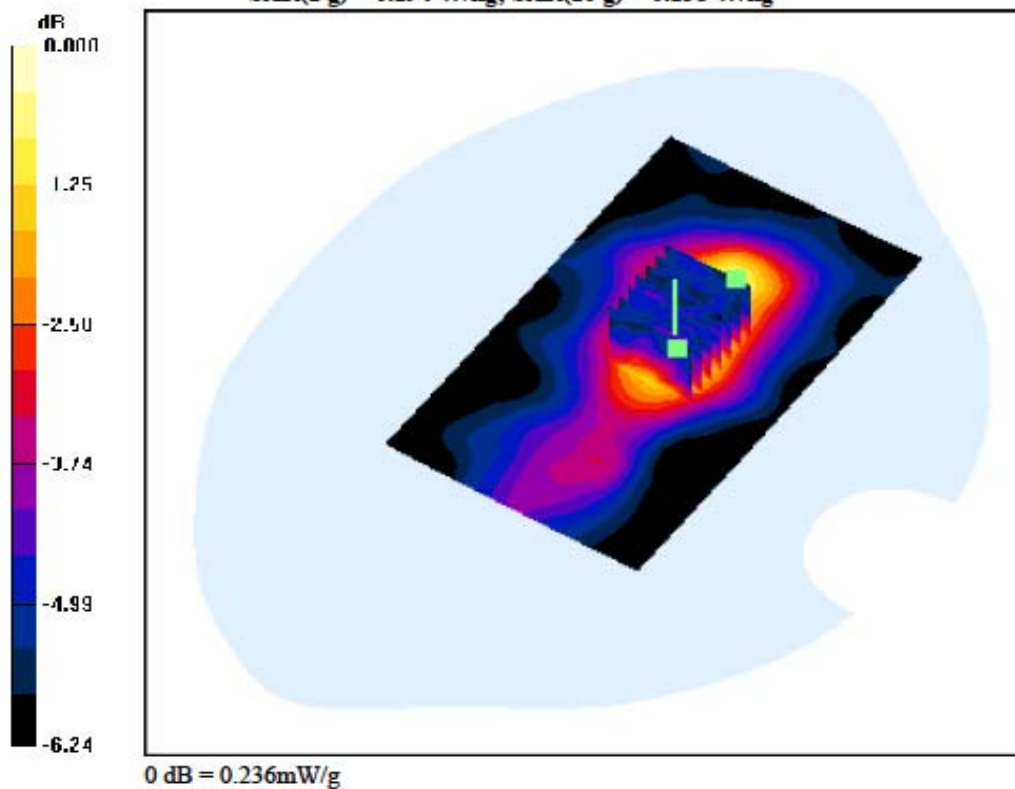

DIGITAL EMC CO., LTD**DUT: OD811; Type: USB Modem**

Communication System: PCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.51$ mho/m; $\epsilon_r = 52.7$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(7.19, 7.19, 7.19); Calibrated: 2011-01-24; Electronics: DAE3 Sn519

Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2011-11-30; Ambient Temp: 22.2; Tissue Temp: 22.4

5 mm space from Body, PCS1900 Ch. 661, Ant Internal, Horizontal up


Area Scan (61x101x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Power Drift = 0.069 dB

Peak SAR (extrapolated) = 0.262 W/kg

SAR(1 g) = 0.167 W/kg; SAR(10 g) = 0.121 W/kg

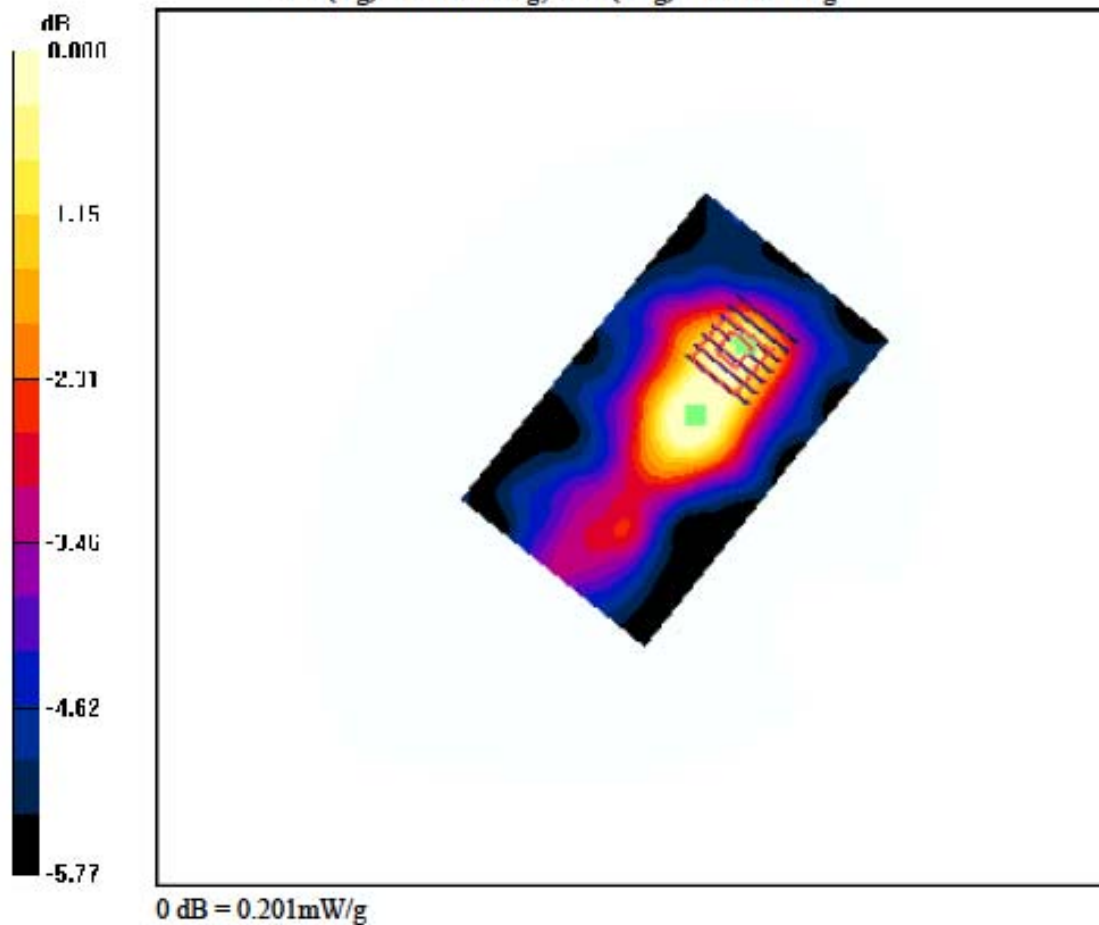

DIGITAL EMC CO., LTD**DUT: OD811; Type: USB Modem**

Communication System: PCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.51 \text{ mho/m}$; $\epsilon_r = 52.7$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(7.19, 7.19, 7.19); Calibrated: 2011-01-24; Electronics: DAE3 Sn519

Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2011-11-30; Ambient Temp: 22.2; Tissue Temp: 22.4

5 mm space from Body, PCS1900 GPRS Class 8 Ch. 661

Ant Internal, Horizontal up


Area Scan (61x101x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Power Drift = -0.249 dB

Peak SAR (extrapolated) = 0.262 W/kg

SAR(1 g) = 0.182 W/kg; SAR(10 g) = 0.132 W/kg

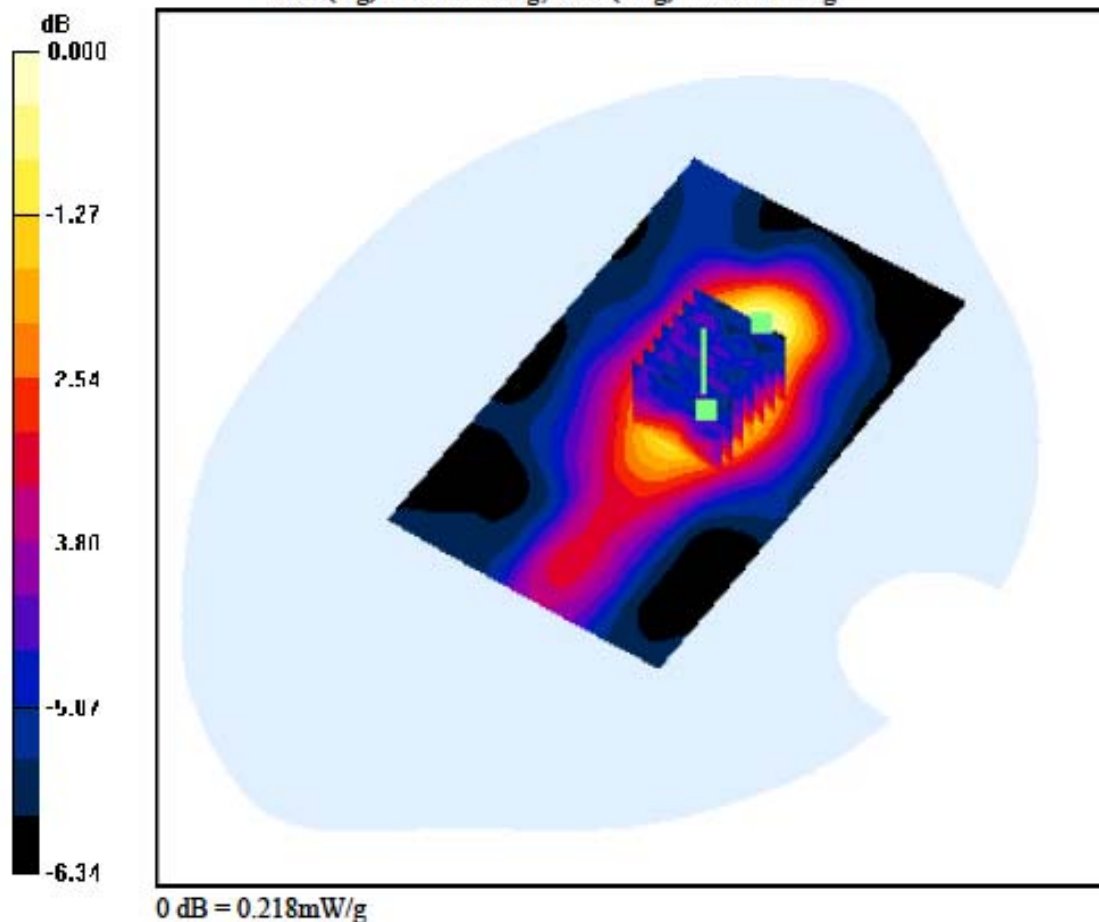

DIGITAL EMC CO., LTD**DUT: OD811; Type: USB Modem**

Communication System: PCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.51$ mho/m; $\epsilon_r = 52.7$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(7.19, 7.19, 7.19); Calibrated: 2011-01-24; Electronics: DAE3 Sn519

Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2011-11-30; Ambient Temp: 22.2; Tissue Temp: 22.4

5 mm space from Body, PCS1900 GPRS Class 8 Ch. 661

Ant Internal, Horizontal up


Area Scan (61x101x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Zoom Scan (7x7x7)/Cube 1: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Power Drift = -0.249 dB

Peak SAR (extrapolated) = 0.233 W/kg

SAR(1 g) = 0.159 W/kg; SAR(10 g) = 0.117 W/kg

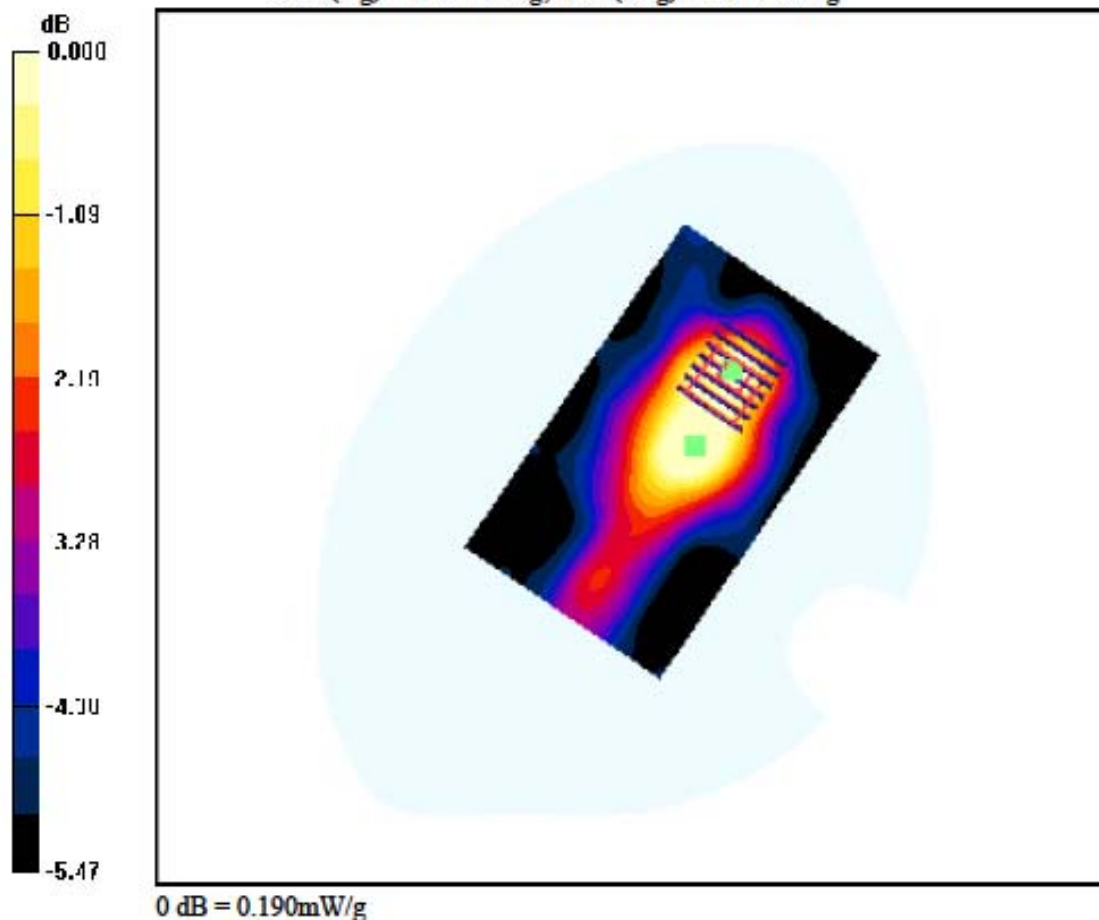

DIGITAL EMC CO., LTD**DUT: OD811; Type: USB Modem**

Communication System: PCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:4.15

Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.51 \text{ mho/m}$; $\epsilon_r = 52.7$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(7.19, 7.19, 7.19); Calibrated: 2011-01-24; Electronics: DAE3 Sn519

Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186


Test Date: 2011-11-30; Ambient Temp: 22.2; Tissue Temp: 22.4

5 mm space from Body, PCS1900 GPRS Class 10 Ch. 661**Ant Internal, Horizontal up****Area Scan (61x101x1):** Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ **Zoom Scan (7x7x7)/Cube 0:** Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Power Drift = 0.159 dB

Peak SAR (extrapolated) = 0.465 W/kg

SAR(1 g) = 0.192 W/kg; SAR(10 g) = 0.139 W/kg

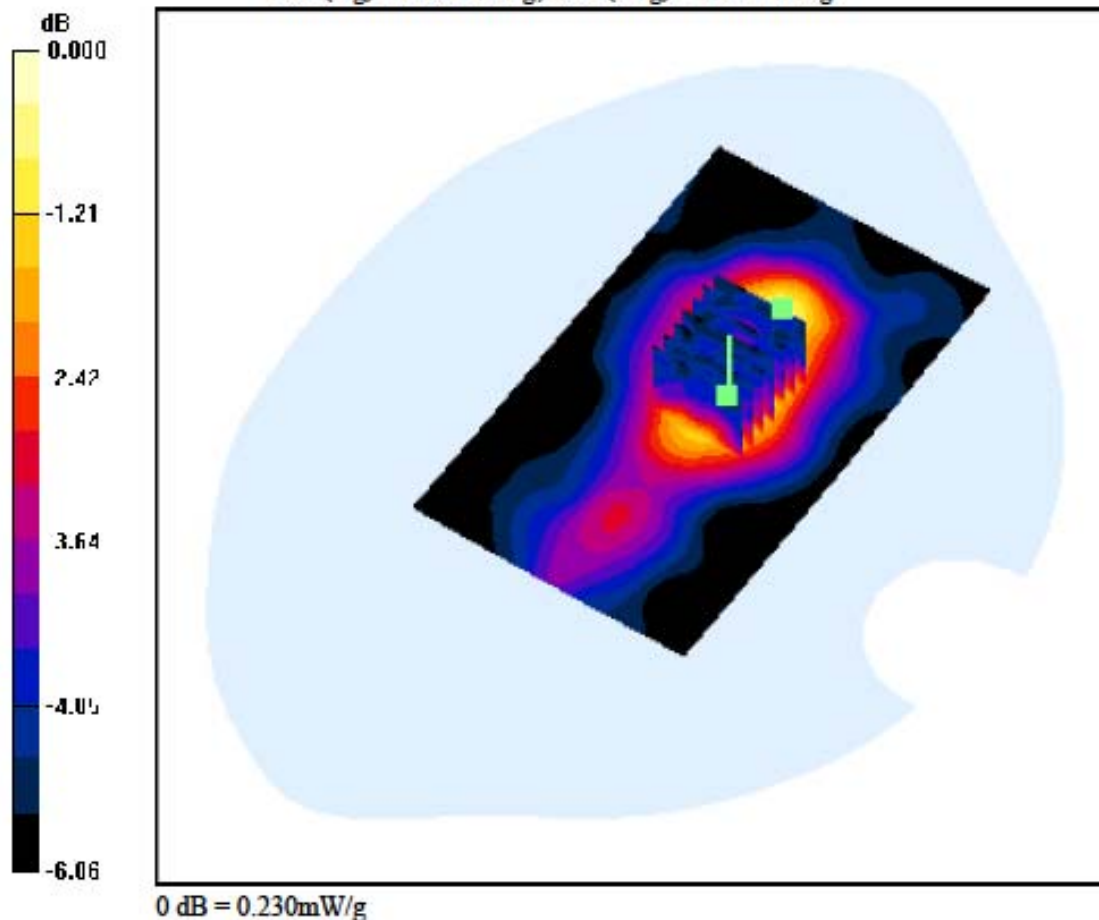

DIGITAL EMC CO., LTD**DUT: OD811; Type: USB Modem**

Communication System: PCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:4.15

Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.51 \text{ mho/m}$; $\epsilon_r = 52.7$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(7.19, 7.19, 7.19); Calibrated: 2011-01-24; Electronics: DAE3 Sn519

Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186


Test Date: 2011-11-30; Ambient Temp: 22.2; Tissue Temp: 22.4

5 mm space from Body, PCS1900 GPRS Class 10 Ch. 661**Ant Internal, Horizontal up****Area Scan (61x101x1):** Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ **Zoom Scan (7x7x7)/Cube 1:** Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Power Drift = 0.159 dB

Peak SAR (extrapolated) = 0.240 W/kg

SAR(1 g) = 0.162 W/kg; SAR(10 g) = 0.120 W/kg

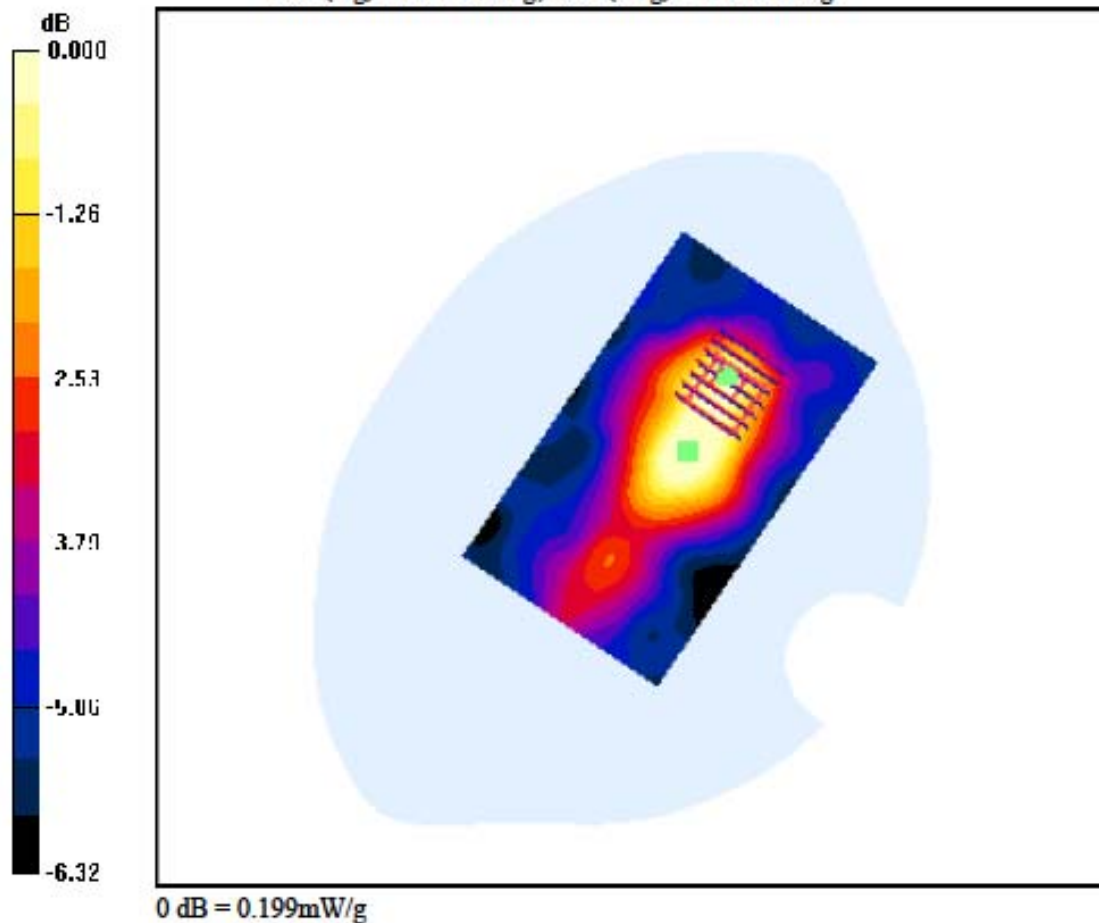

DIGITAL EMC CO., LTD**DUT: OD811; Type: USB Modem**

Communication System: PCS 1900; Frequency: 1850.2 MHz; Duty Cycle: 1:2.77
Medium parameters used: $f = 1850.2$ MHz; $\sigma = 1.47$ mho/m; $\epsilon_r = 52.5$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY4 Configuration:


Probe: EX3DV4 - SN3643; ConvF(7.19, 7.19, 7.19); Calibrated: 2011-01-24; Electronics: DAE3 Sn519
Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2011-11-30; Ambient Temp: 22.2; Tissue Temp: 22.4

5 mm space from Body, PCS1900 GPRS Class 11 Ch. 512

Ant Internal, Horizontal up

Area Scan (61x101x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Power Drift = 0.077 dB
Peak SAR (extrapolated) = 0.307 W/kg
SAR(1 g) = 0.203 W/kg; SAR(10 g) = 0.143 W/kg

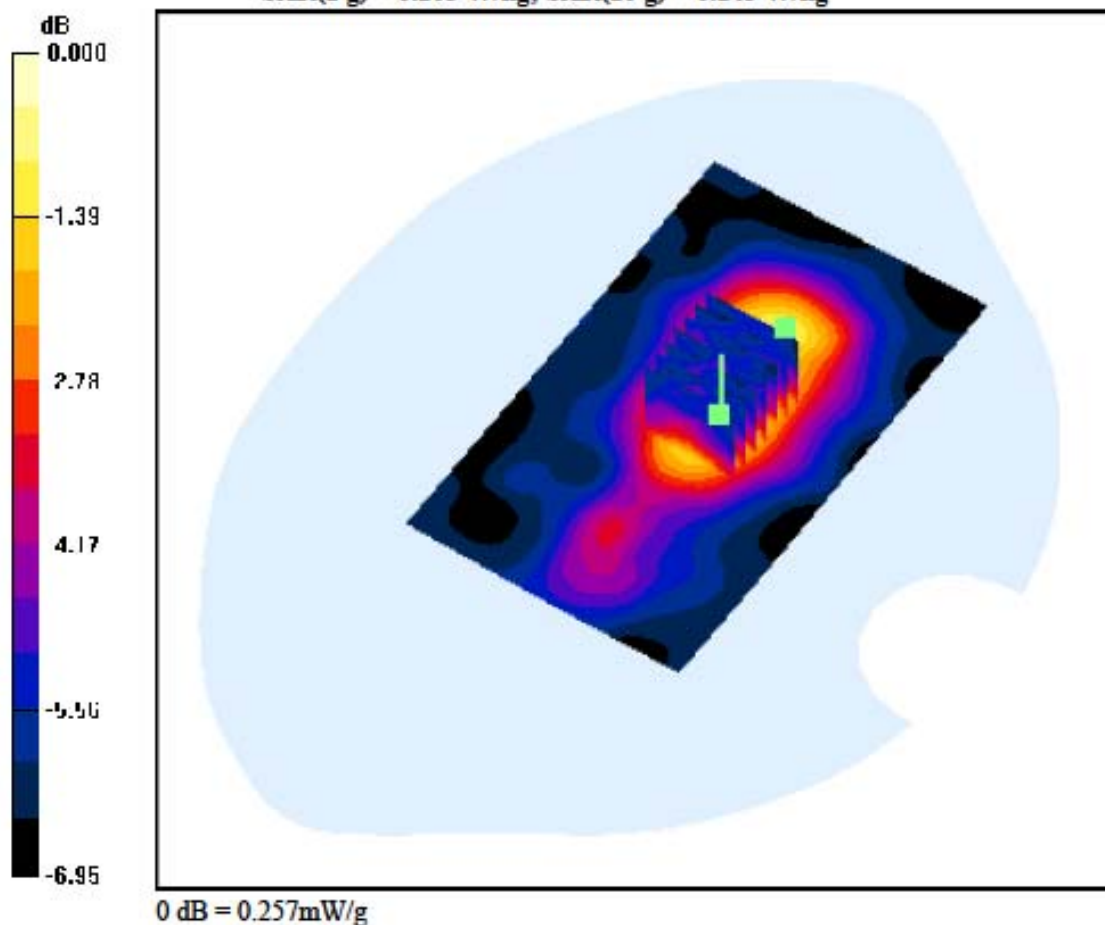

DIGITAL EMC CO., LTD**DUT: OD811; Type: USB Modem**

Communication System: PCS 1900; Frequency: 1850.2 MHz; Duty Cycle: 1:2.77
Medium parameters used: $f = 1850.2$ MHz; $\sigma = 1.47$ mho/m; $\epsilon_r = 52.5$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY4 Configuration:


Probe: EX3DV4 - SN3643; ConvF(7.19, 7.19, 7.19); Calibrated: 2011-01-24; Electronics: DAE3 Sn519
Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2011-11-30; Ambient Temp: 22.2; Tissue Temp: 22.4

5 mm space from Body, PCS1900 GPRS Class 11 Ch. 512

Ant Internal, Horizontal up

Area Scan (61x101x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Power Drift = 0.077 dB
Peak SAR (extrapolated) = 0.369 W/kg
SAR(1 g) = 0.172 W/kg; SAR(10 g) = 0.123 W/kg

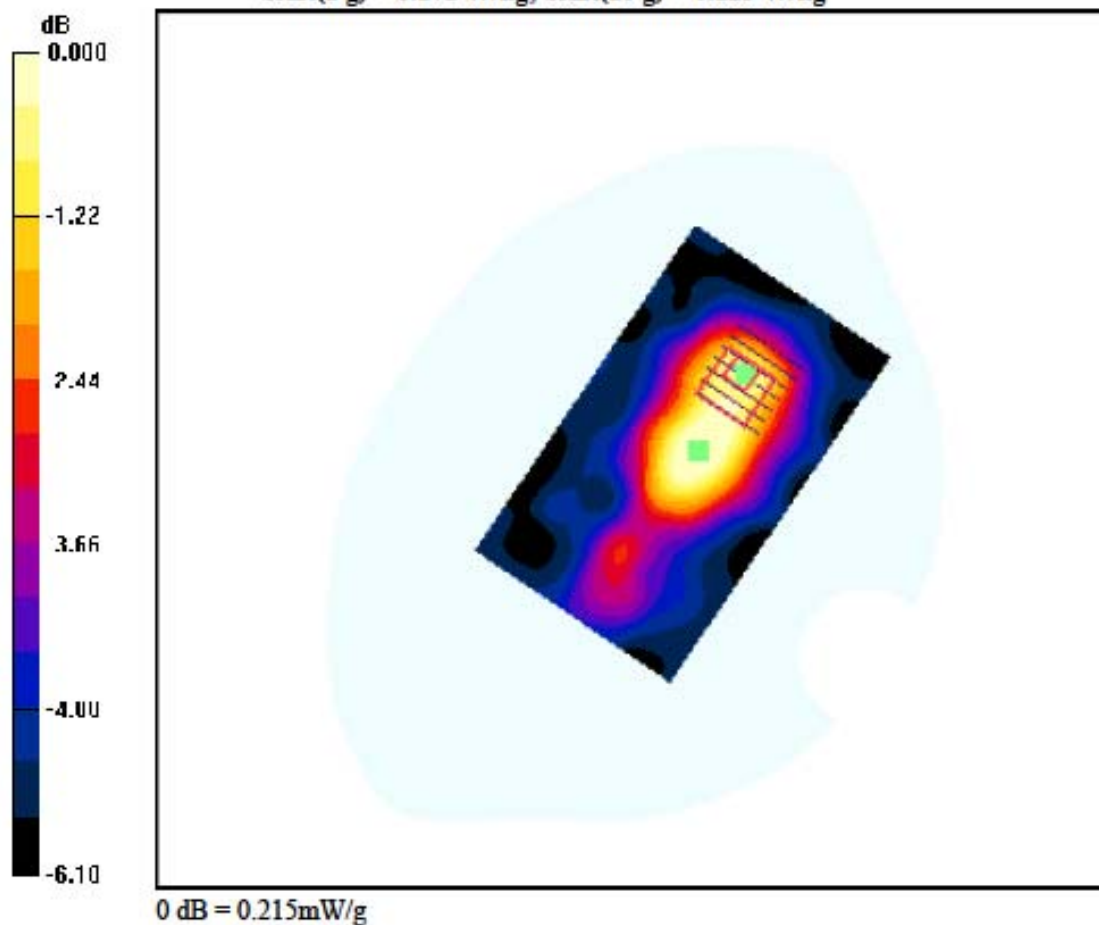

DIGITAL EMC CO., LTD**DUT: OD811; Type: USB Modem**

Communication System: PCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:2.77

Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.51 \text{ mho/m}$; $\epsilon_r = 52.7$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(7.19, 7.19, 7.19); Calibrated: 2011-01-24; Electronics: DAE3 Sn519

Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186


Test Date: 2011-11-30; Ambient Temp: 22.2; Tissue Temp: 22.4

5 mm space from Body, PCS1900 GPRS Class 11 Ch. 661**Ant Internal, Horizontal up****Area Scan (61x101x1):** Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ **Zoom Scan (7x7x7)/Cube 0:** Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Power Drift = 0.047 dB

Peak SAR (extrapolated) = 0.540 W/kg

SAR(1 g) = 0.345 W/kg; SAR(10 g) = 0.233 W/kg

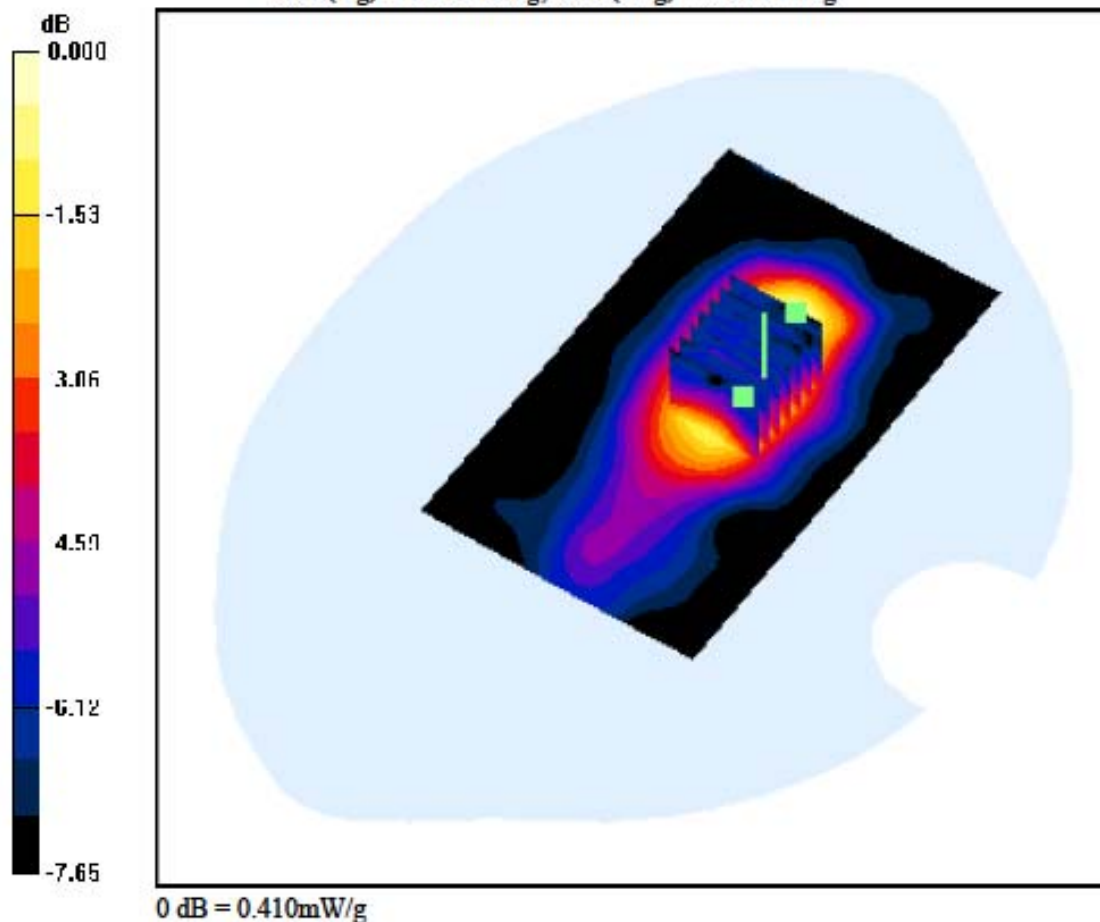

DIGITAL EMC CO., LTD**DUT: OD811; Type: USB Modem**

Communication System: PCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:2.77

Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.51 \text{ mho/m}$; $\epsilon_r = 52.7$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(7.19, 7.19, 7.19); Calibrated: 2011-01-24; Electronics: DAE3 Sn519

Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186


Test Date: 2011-11-30; Ambient Temp: 22.2; Tissue Temp: 22.4

5 mm space from Body, PCS1900 GPRS Class 11 Ch. 661**Ant Internal, Horizontal up****Area Scan (61x101x1):** Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ **Zoom Scan (7x7x7)/Cube 1:** Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Power Drift = 0.047 dB

Peak SAR (extrapolated) = 0.737 W/kg

SAR(1 g) = 0.317 W/kg; SAR(10 g) = 0.202 W/kg

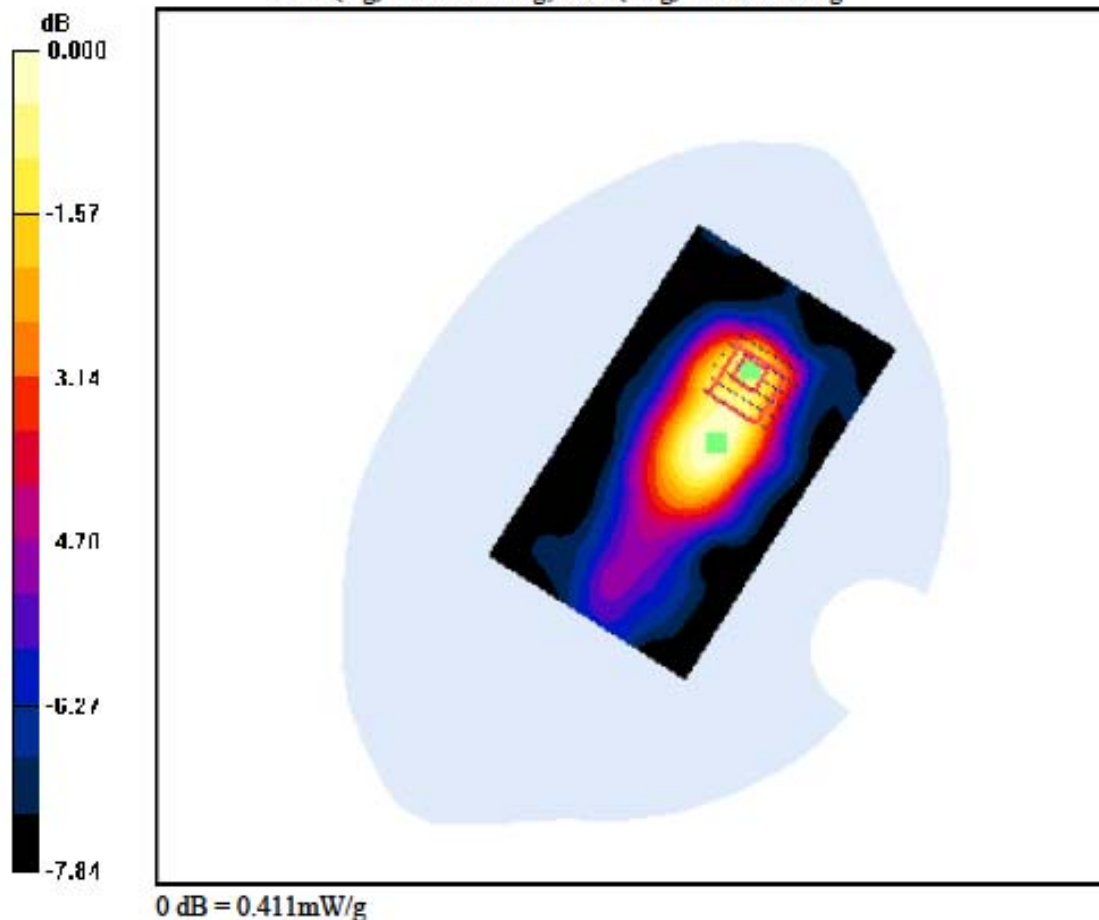

DIGITAL EMC CO., LTD**DUT: OD811; Type: USB Modem**

Communication System: PCS 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:2.77
Medium parameters used: $f = 1909.8 \text{ MHz}$; $\sigma = 1.56 \text{ mho/m}$; $\epsilon_r = 52.9$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY4 Configuration:


Probe: EX3DV4 - SN3643; ConvF(7.19, 7.19, 7.19); Calibrated: 2011-01-24; Electronics: DAE3 Sn519
Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2011-11-30; Ambient Temp: 22.2; Tissue Temp: 22.4

5 mm space from Body, PCS1900 GPRS Class 11 Ch. 810

Ant Internal, Horizontal up

Area Scan (61x101x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
Power Drift = -0.017 dB
Peak SAR (extrapolated) = 1.16 W/kg
SAR(1 g) = 0.565 W/kg; SAR(10 g) = 0.337 W/kg

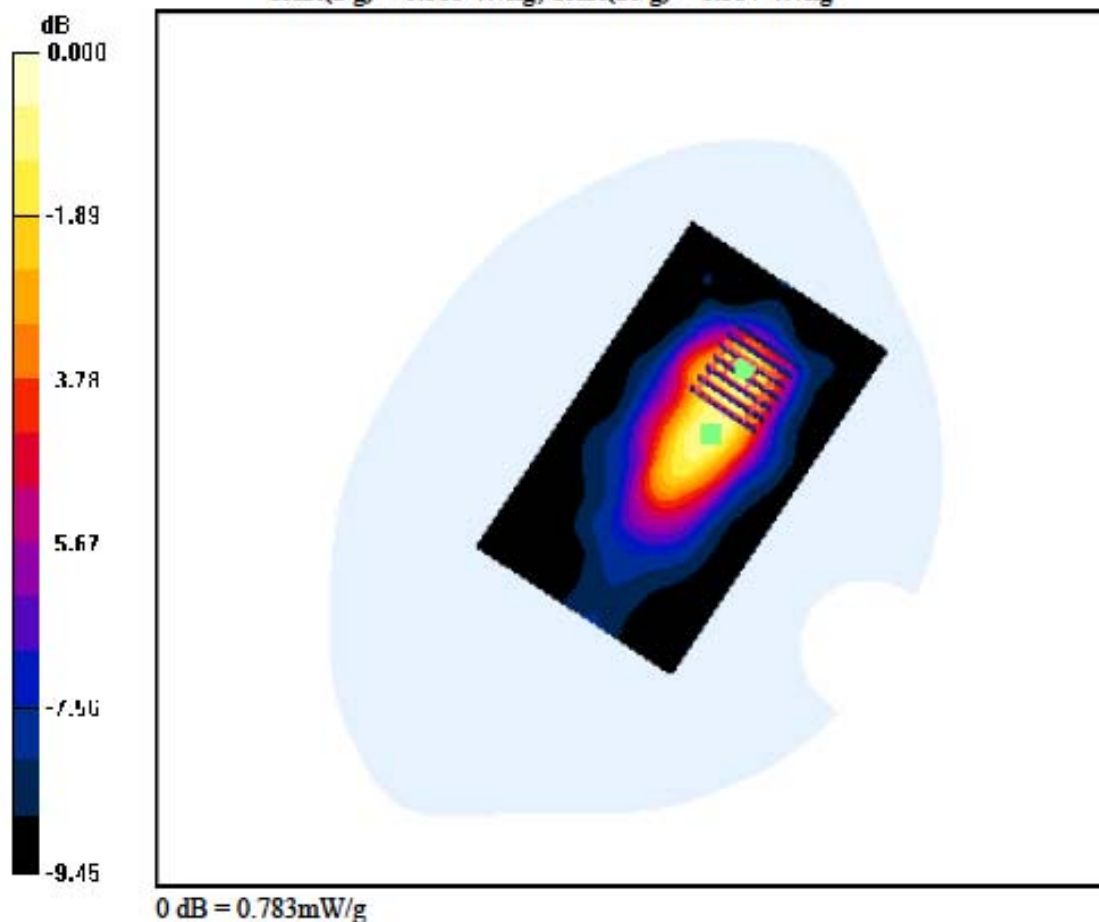

DIGITAL EMC CO., LTD**DUT: OD811; Type: USB Modem**

Communication System: PCS 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:2.77
Medium parameters used: $f = 1909.8$ MHz; $\sigma = 1.56$ mho/m; $\epsilon_r = 52.9$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY4 Configuration:


Probe: EX3DV4 - SN3643; ConvF(7.19, 7.19, 7.19); Calibrated: 2011-01-24; Electronics: DAE3 Sn519
Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2011-11-30; Ambient Temp: 22.2; Tissue Temp: 22.4

5 mm space from Body, PCS1900 GPRS Class 11 Ch. 810

Ant Internal, Horizontal up

Area Scan (61x101x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Power Drift = -0.017 dB
Peak SAR (extrapolated) = 1.08 W/kg
SAR(1 g) = 0.564 W/kg; SAR(10 g) = 0.337 W/kg

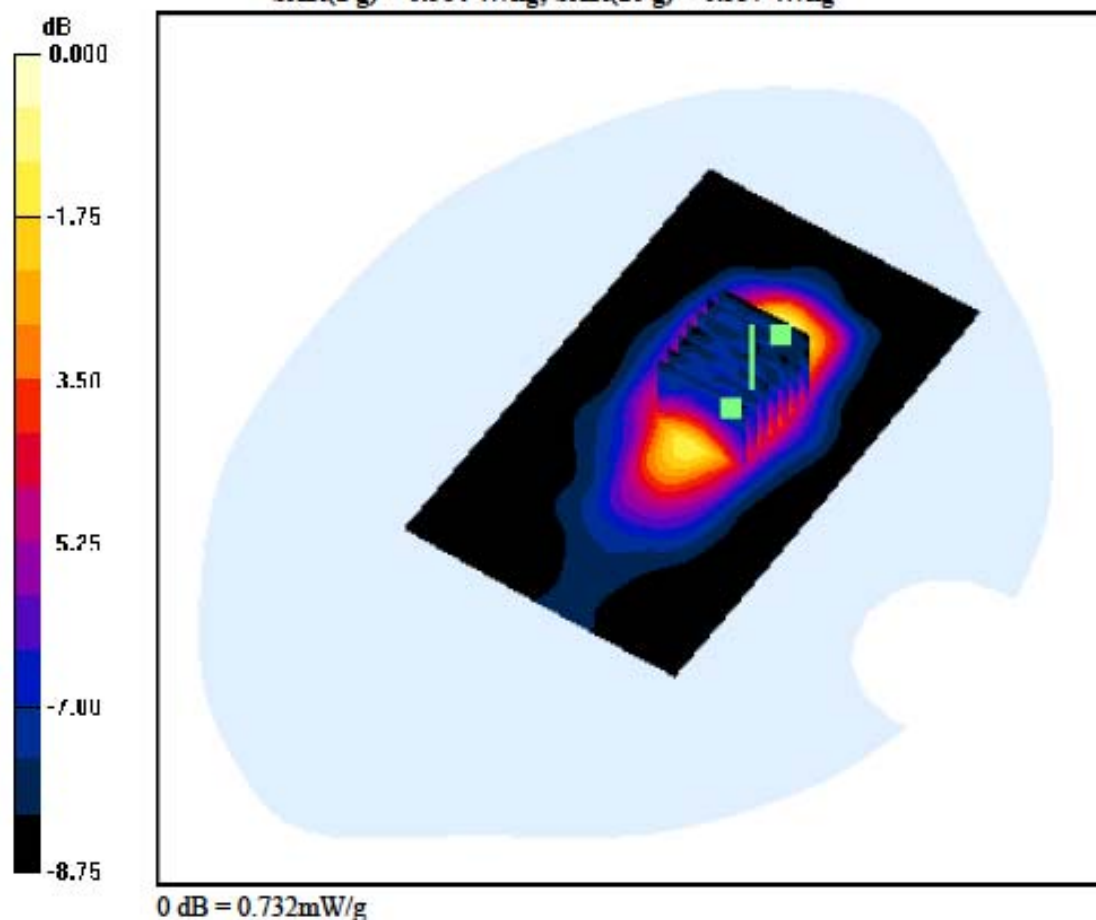

DIGITAL EMC CO., LTD**DUT: OD811; Type: USB Modem**

Communication System: PCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:2.075

Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.51 \text{ mho/m}$; $\epsilon_r = 52.7$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(7.19, 7.19, 7.19); Calibrated: 2011-01-24; Electronics: DAE3 Sn519

Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186


Test Date: 2011-11-30; Ambient Temp: 22.2; Tissue Temp: 22.4

5 mm space from Body, PCS1900 GPRS Class 12 Ch. 661**Ant Internal, Horizontal up****Area Scan (61x101x1):** Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ **Zoom Scan (7x7x7)/Cube 0:** Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Power Drift = 0.292 dB

Peak SAR (extrapolated) = 0.323 W/kg

SAR(1 g) = 0.224 W/kg; SAR(10 g) = 0.160 W/kg

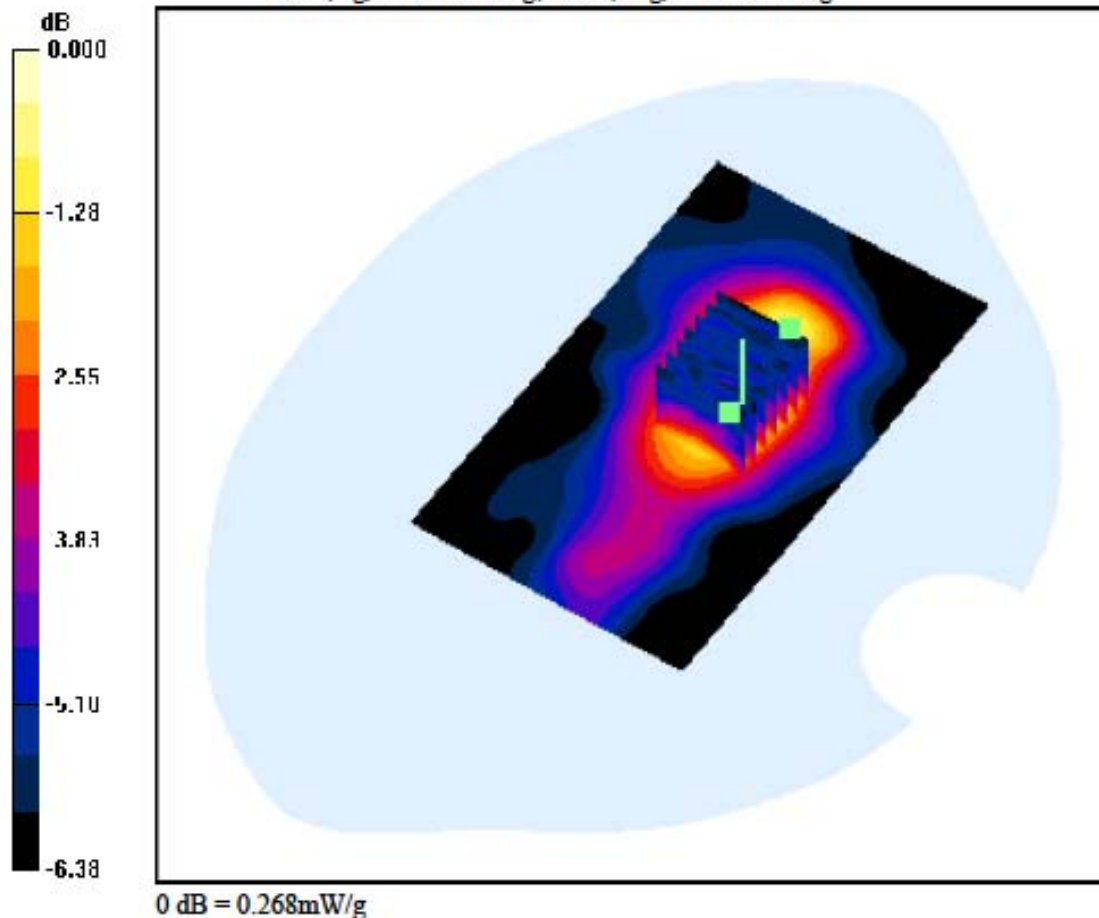

DIGITAL EMC CO., LTD**DUT: OD811; Type: USB Modem**

Communication System: PCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:2.075

Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.51 \text{ mho/m}$; $\epsilon_r = 52.7$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(7.19, 7.19, 7.19); Calibrated: 2011-01-24; Electronics: DAE3 Sn519

Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186


Test Date: 2011-11-30; Ambient Temp: 22.2; Tissue Temp: 22.4

5 mm space from Body, PCS1900 GPRS Class 12 Ch. 661**Ant Internal, Horizontal up****Area Scan (61x101x1):** Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ **Zoom Scan (7x7x7)/Cube 1:** Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Power Drift = 0.292 dB

Peak SAR (extrapolated) = 0.317 W/kg

SAR(1 g) = 0.189 W/kg; SAR(10 g) = 0.135 W/kg

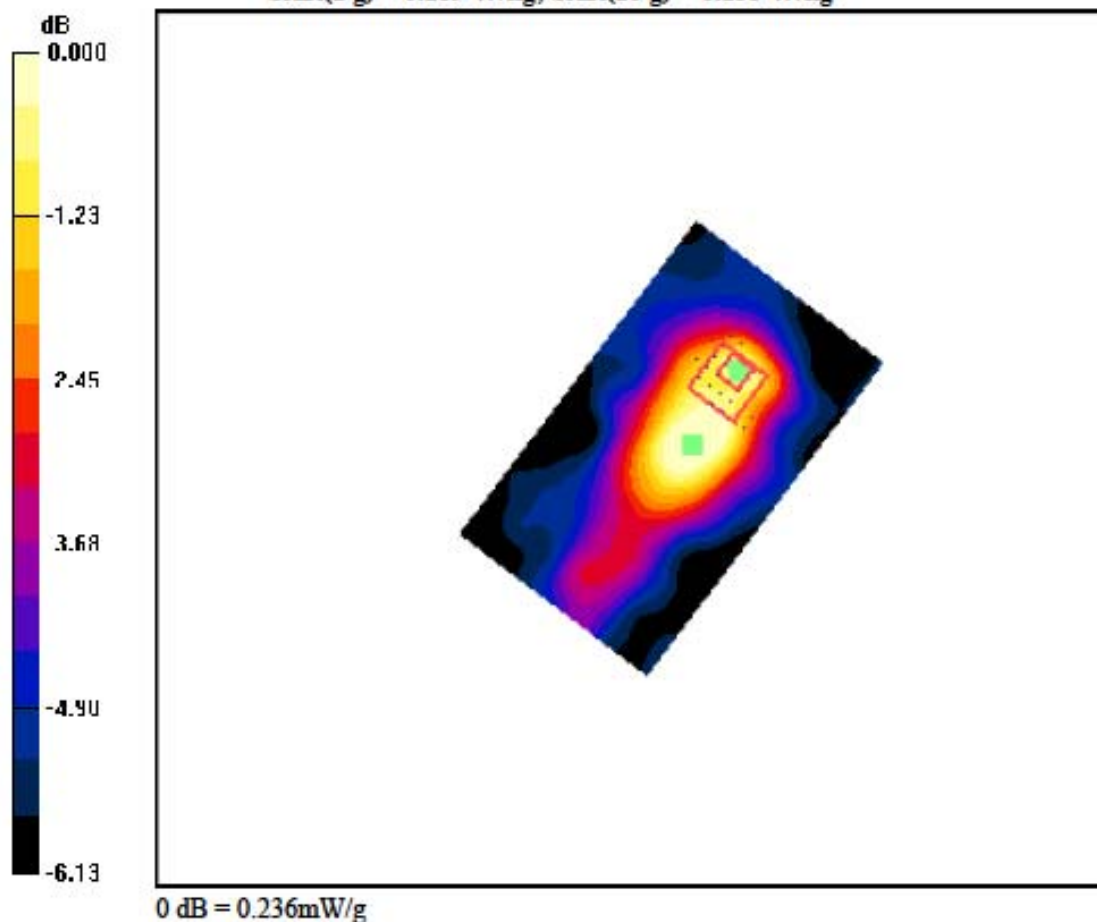

DIGITAL EMC CO., LTD**DUT: OD811; Type: USB Modem**

Communication System: PCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:2.77

Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.51 \text{ mho/m}$; $\epsilon_r = 52.7$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(7.19, 7.19, 7.19); Calibrated: 2011-01-24; Electronics: DAE3 Sn519

Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186


Test Date: 2011-11-30; Ambient Temp: 22.2; Tissue Temp: 22.4

5 mm space from Body, PCS1900 GPRS Class 11 Ch. 661**Ant Internal, Horizontal Down****Area Scan (61x101x1):** Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ **Zoom Scan (7x7x7)/Cube 0:** Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Power Drift = 0.078 dB

Peak SAR (extrapolated) = 0.413 W/kg

SAR(1 g) = 0.253 W/kg; SAR(10 g) = 0.165 W/kg

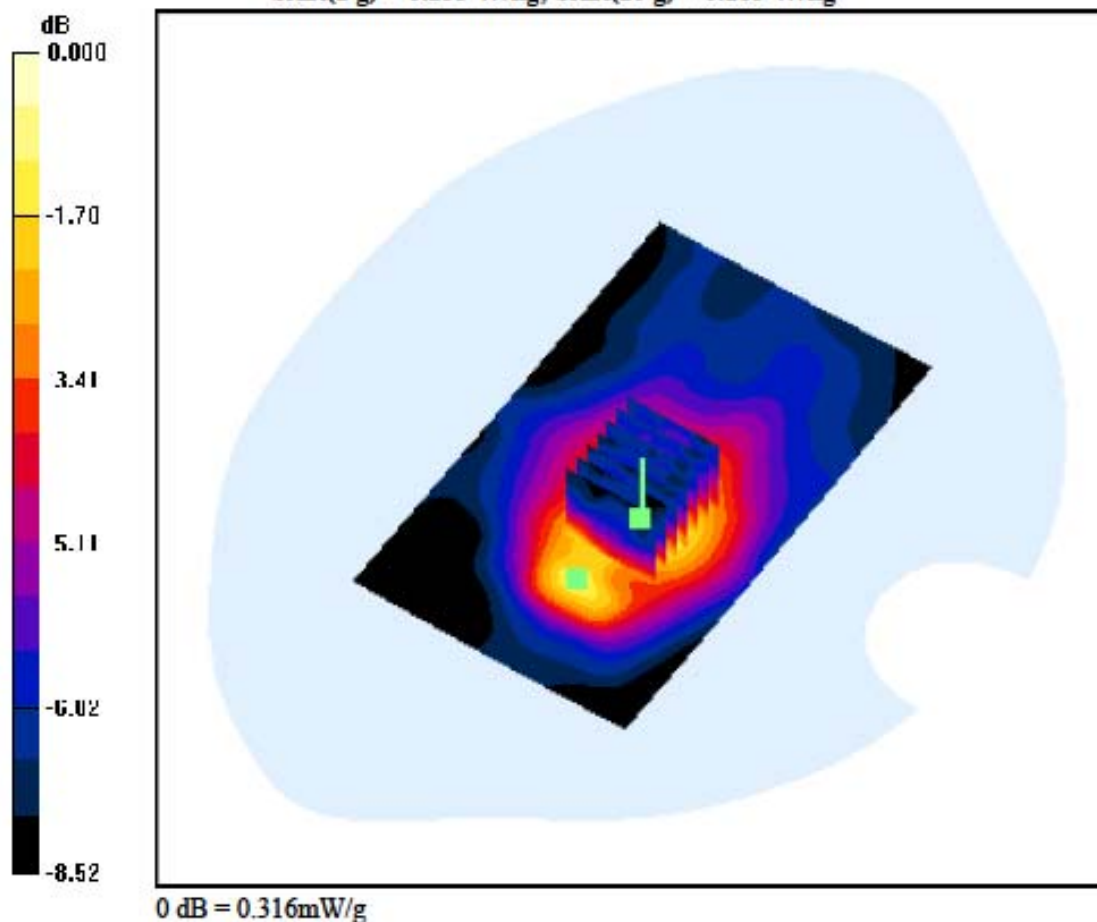

DIGITAL EMC CO., LTD**DUT: OD811; Type: USB Modem**

Communication System: PCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:2.77

Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.51 \text{ mho/m}$; $\epsilon_r = 52.7$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(7.19, 7.19, 7.19); Calibrated: 2011-01-24; Electronics: DAE3 Sn519

Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186


Test Date: 2011-11-30; Ambient Temp: 22.2; Tissue Temp: 22.4

5 mm space from Body, PCS1900 GPRS Class 11 Ch. 661**Ant Internal, Horizontal Down****Area Scan (61x101x1):** Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ **Zoom Scan (7x7x7)/Cube 1:** Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Power Drift = 0.078 dB

Peak SAR (extrapolated) = 0.437 W/kg

SAR(1 g) = 0.203 W/kg; SAR(10 g) = 0.127 W/kg

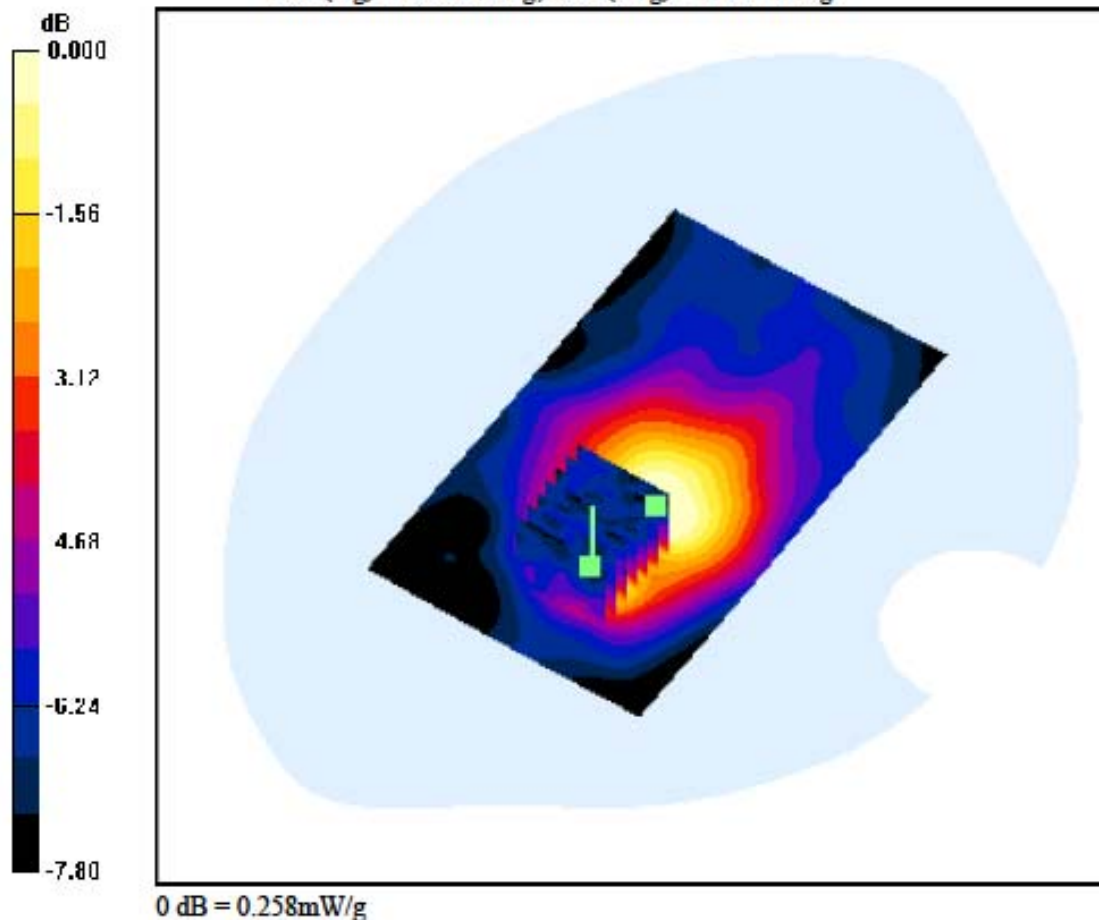

DIGITAL EMC CO., LTD**DUT: OD811; Type: USB Modem**

Communication System: PCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:2.77

Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.51 \text{ mho/m}$; $\epsilon_r = 52.7$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(7.19, 7.19, 7.19); Calibrated: 2011-01-24; Electronics: DAE3 Sn519

Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186


Test Date: 2011-11-30; Ambient Temp: 22.2; Tissue Temp: 22.4

5 mm space from Body, PCS1900 GPRS Class 11 Ch. 661**Ant Internal, Vertical Front****Area Scan (61x101x1):** Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ **Zoom Scan (7x7x7)/Cube 0:** Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Power Drift = 0.052 dB

Peak SAR (extrapolated) = 0.197 W/kg

SAR(1 g) = 0.131 W/kg; SAR(10 g) = 0.098 W/kg

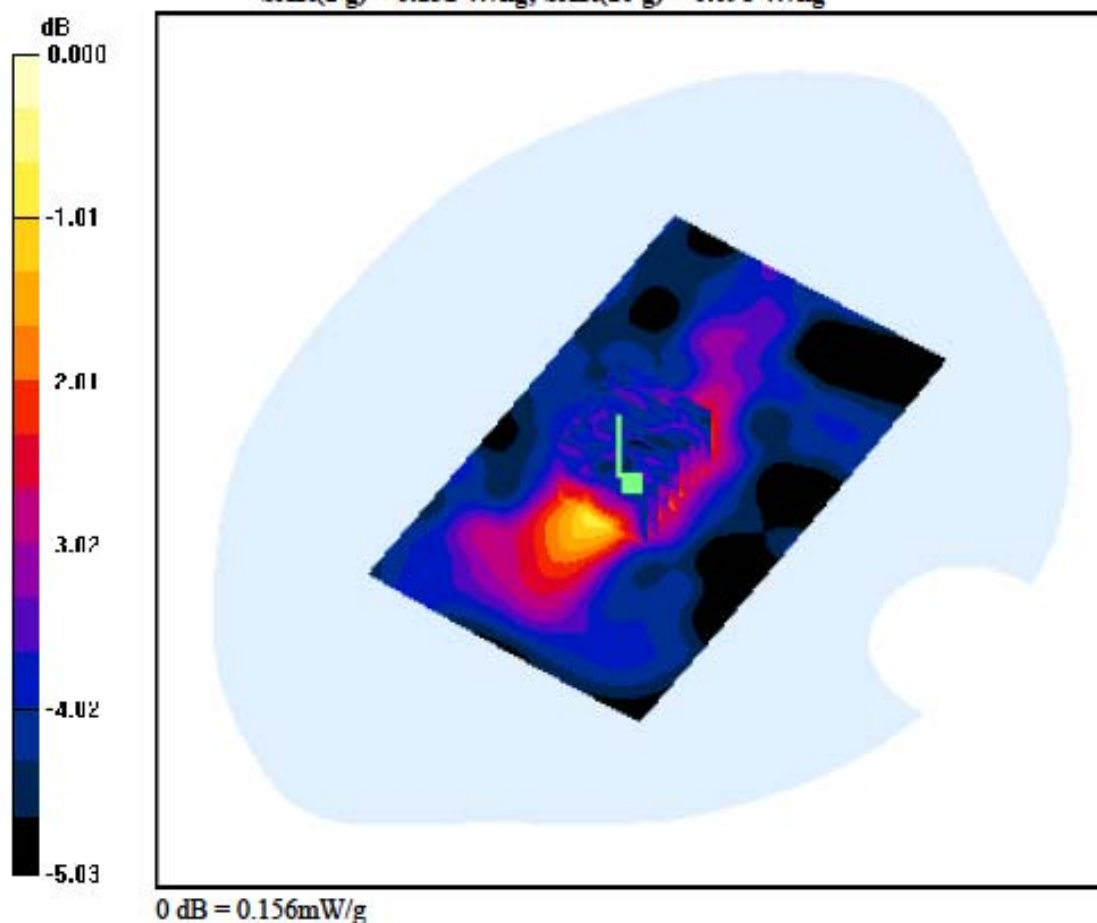

DIGITAL EMC CO., LTD**DUT: OD811; Type: USB Modem**

Communication System: PCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:2.77

Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.51 \text{ mho/m}$; $\epsilon_r = 52.7$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(7.19, 7.19, 7.19); Calibrated: 2011-01-24; Electronics: DAE3 Sn519

Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186


Test Date: 2011-11-30; Ambient Temp: 22.2; Tissue Temp: 22.4

5 mm space from Body, PCS1900 GPRS Class 11 Ch. 661**Ant Internal, Vertical Back****Area Scan (61x101x1):** Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ **Zoom Scan (7x7x7)/Cube 0:** Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Power Drift = 0.151 dB

Peak SAR (extrapolated) = 0.391 W/kg

SAR(1 g) = 0.262 W/kg; SAR(10 g) = 0.174 W/kg

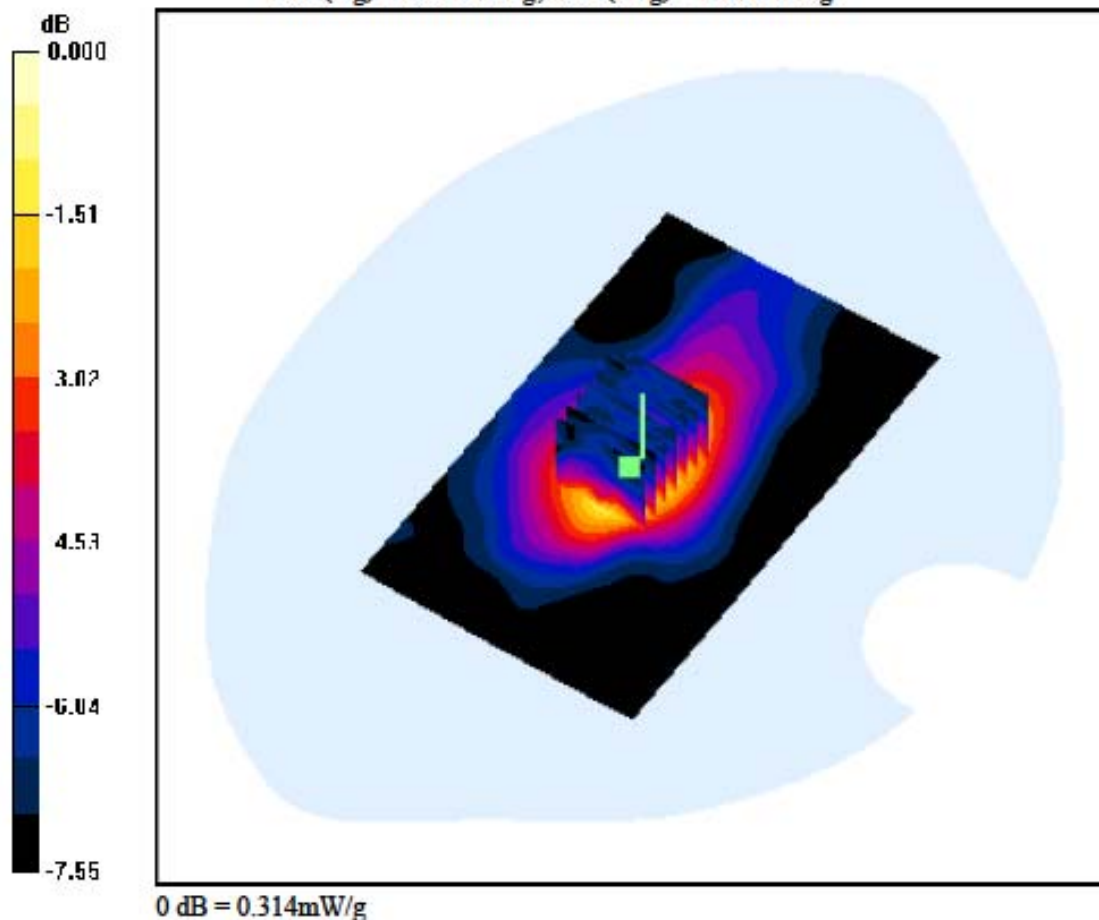

DIGITAL EMC CO., LTD**DUT: OD811; Type: USB Modem**

Communication System: PCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:2.77
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.51$ mho/m; $\epsilon_r = 52.7$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(7.19, 7.19, 7.19); Calibrated: 2011-01-24; Electronics: DAE3 Sn519
Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2011-11-30; Ambient Temp: 22.2; Tissue Temp: 22.4

5 mm space from Body, PCS1900 EDGE Class II Ch. 661

Ant Internal, Horizontal up


Area Scan (61x101x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Power Drift = 0.384 dB

Peak SAR (extrapolated) = 0.519 W/kg

SAR(1 g) = 0.317 W/kg; SAR(10 g) = 0.192 W/kg

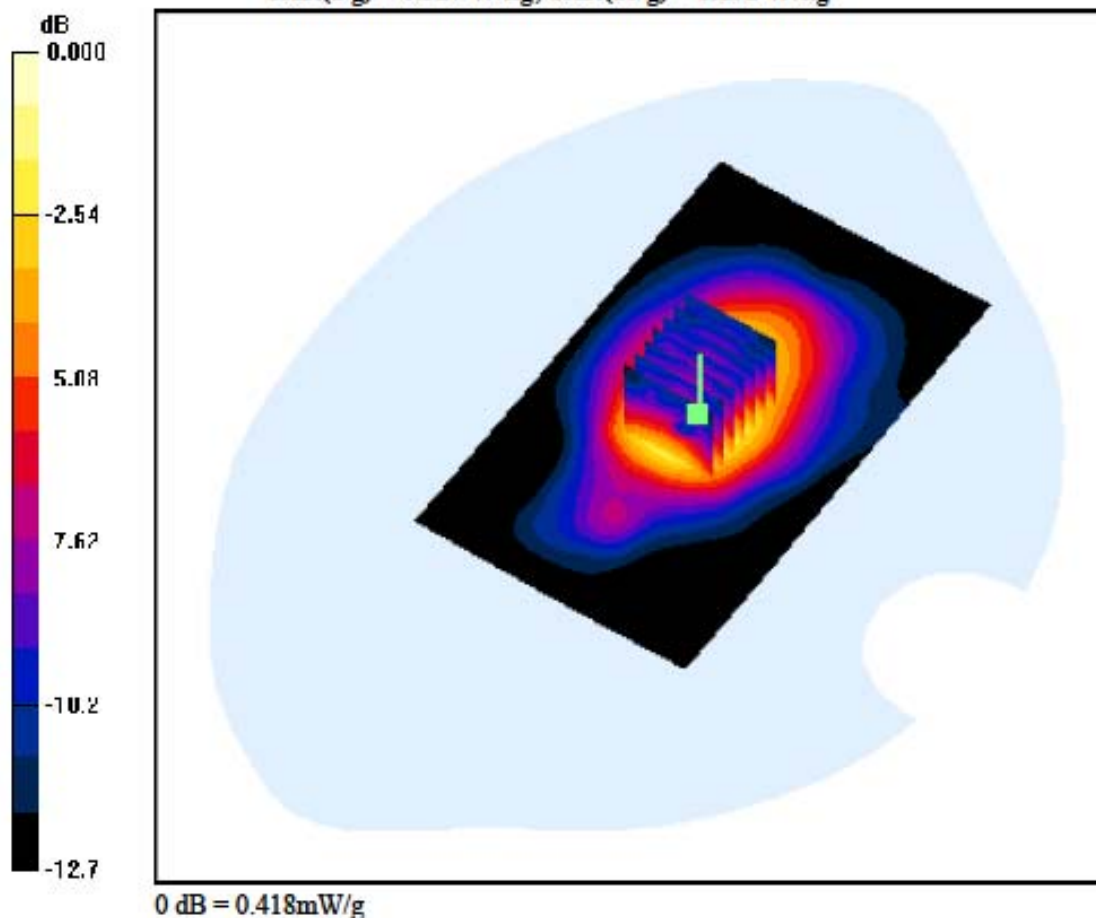

DIGITAL EMC CO., LTD**DUT: OD811; Type: USB Modem**

Communication System: PCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:2.075

Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.51 \text{ mho/m}$; $\epsilon_r = 52.7$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(7.19, 7.19, 7.19); Calibrated: 2011-01-24; Electronics: DAE3 Sn519

Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186


Test Date: 2011-11-30; Ambient Temp: 22.2; Tissue Temp: 22.4

5 mm space from Body, PCS1900 EDGE Class 12 Ch. 661**Ant Internal, Horizontal up****Area Scan (61x101x1):** Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ **Zoom Scan (7x7x7)/Cube 0:** Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Power Drift = 0.341 dB

Peak SAR (extrapolated) = 0.327 W/kg

SAR(1 g) = 0.222 W/kg; SAR(10 g) = 0.158 W/kg

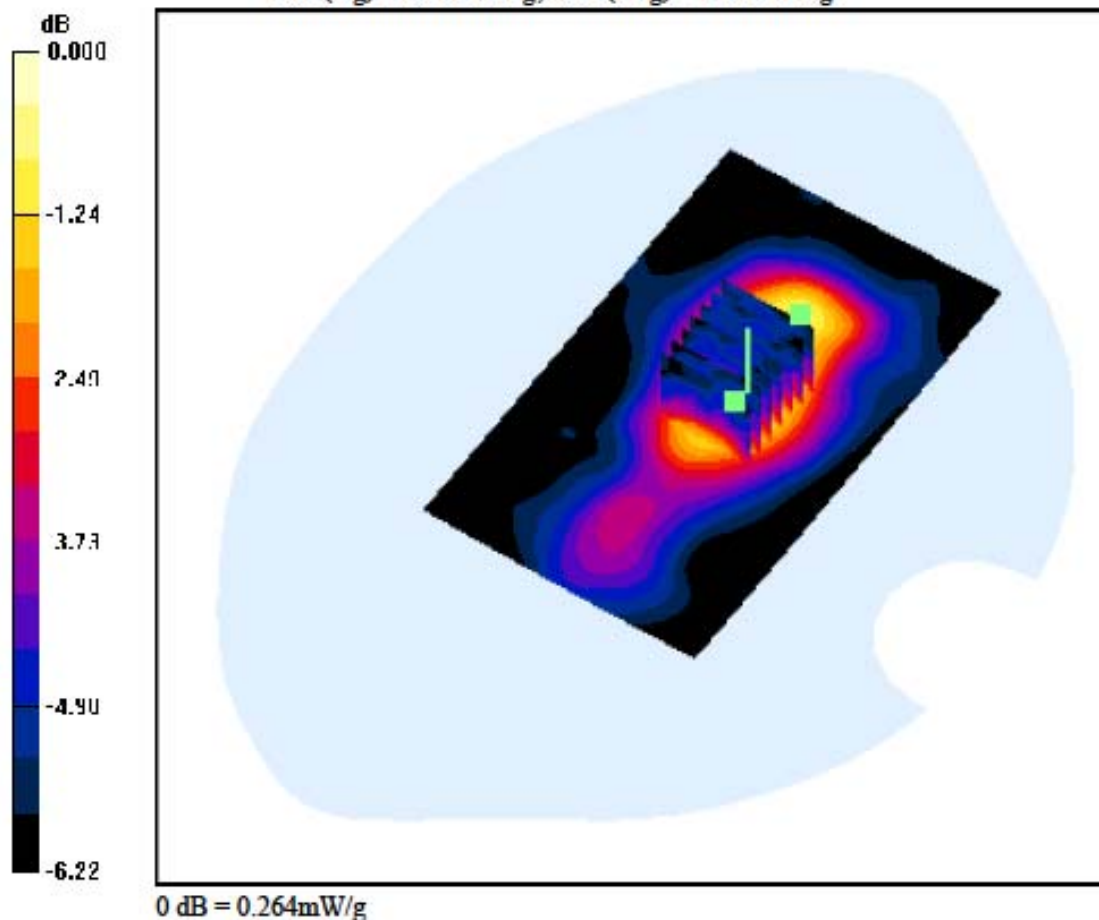

DIGITAL EMC CO., LTD**DUT: OD811; Type: USB Modem**

Communication System: PCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:2.075
Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.51 \text{ mho/m}$; $\epsilon_r = 52.7$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY4 Configuration:


Probe: EX3DV4 - SN3643; ConvF(7.19, 7.19, 7.19); Calibrated: 2011-01-24; Electronics: DAE3 Sn519
Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2011-11-30; Ambient Temp: 22.2; Tissue Temp: 22.4

5 mm space from Body, PCS1900 EDGE Class 12 Ch. 661

Ant Internal, Horizontal up

Area Scan (61x101x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Zoom Scan (7x7x7)/Cube 1: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
Power Drift = 0.341 dB
Peak SAR (extrapolated) = 0.291 W/kg
SAR(1 g) = 0.190 W/kg; SAR(10 g) = 0.137 W/kg

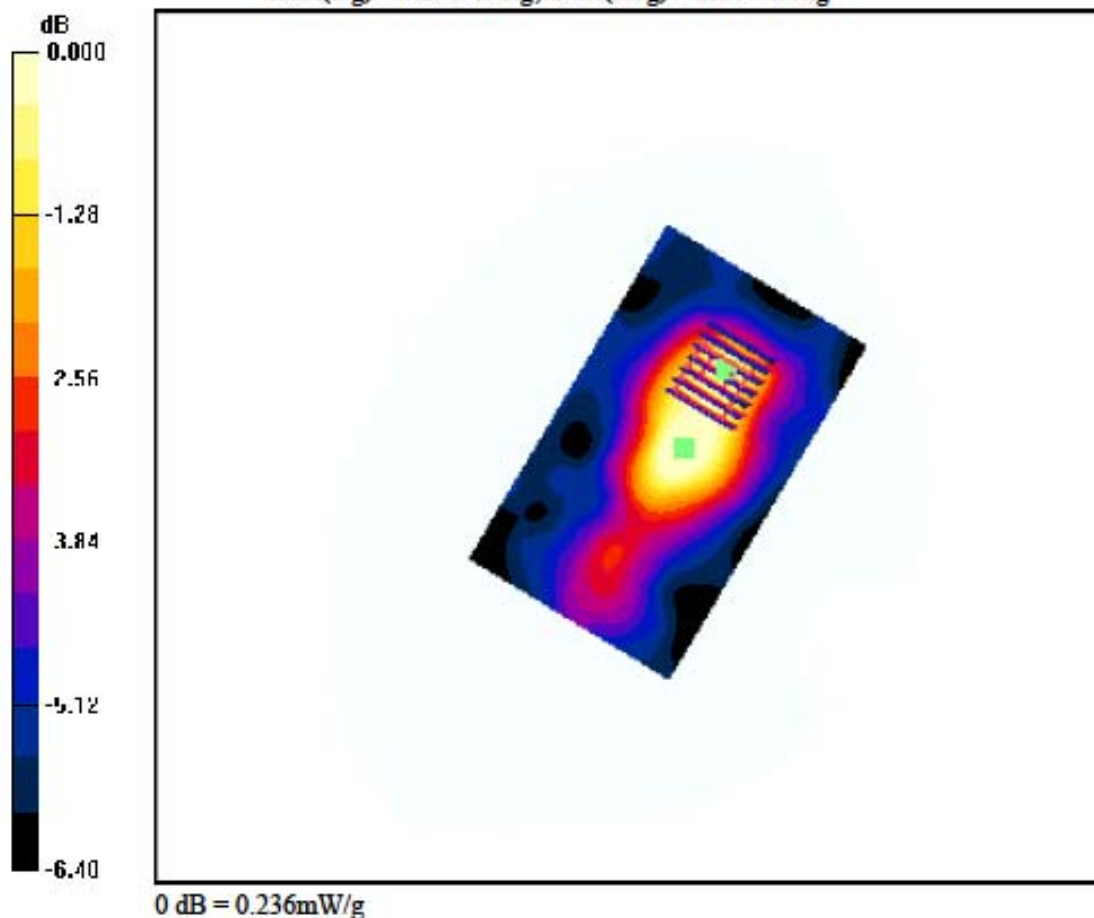

DIGITAL EMC CO., LTD**DUT: OD811; Type: USB Modem**

Communication System: GSM 850; Frequency: 848.8 MHz; Duty Cycle: 1:4.15

Medium parameters used: $f = 848.8 \text{ MHz}$; $\sigma = 0.976 \text{ mho/m}$; $\epsilon_r = 53.9$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(8.97, 8.97, 8.97); Calibrated: 2011-01-24; Electronics: DAE3 Sn519

Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186


Test Date: 2011-11-29; Ambient Temp: 22.2; Tissue Temp: 22.4

5 mm space from Body, GSM850 GPRS Class 10 Ch. 251**Ant Internal, Horizontal up****Area Scan (61x101x1):** Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ **Zoom Scan (7x7x7)/Cube 0:** Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Power Drift = 0.042 dB

Peak SAR (extrapolated) = 1.76 W/kg

SAR(1 g) = 1.14 W/kg; SAR(10 g) = 0.730 W/kg

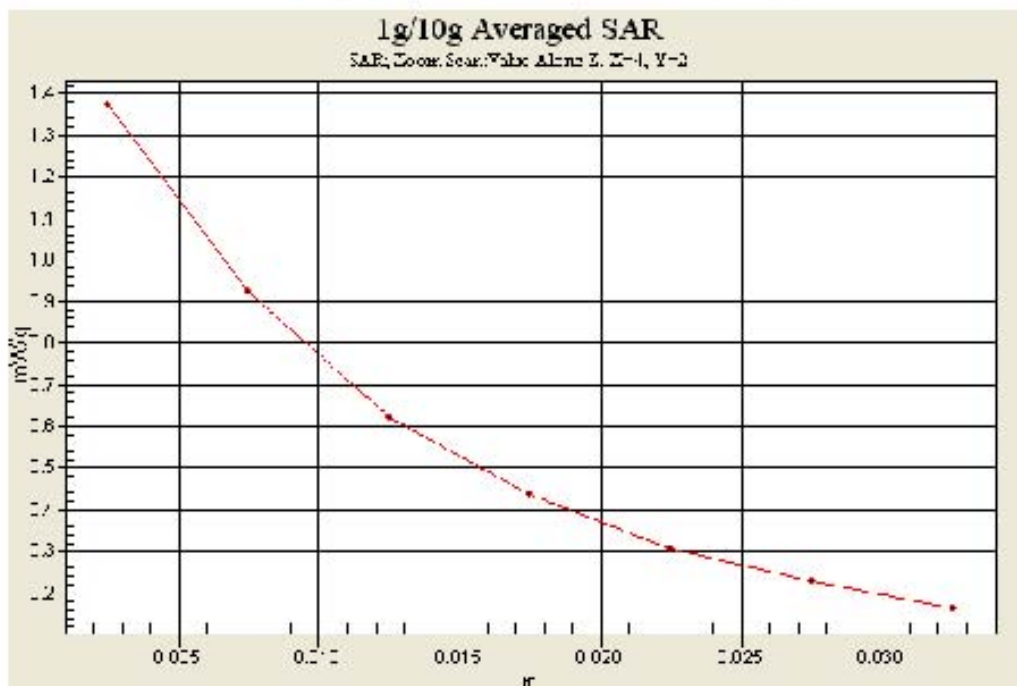

DIGITAL EMC CO., LTD

DUT: OD811; Type: USB Modem

Communication System: PCS 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:2.77
 Medium parameters used: $f = 1909.8 \text{ MHz}$; $\sigma = 1.56 \text{ mho/m}$; $\epsilon_r = 52.9$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(7.19, 7.19, 7.19); Calibrated: 2011-01-24; Electronics: DAE3 Sn519
 Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224
 Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Date: 2011-11-30; Ambient Temp: 22.2; Tissue Temp: 22.4

Dipole Validation

Area Scan (61x101x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
 Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
 Power Drift = -0.017 dB
 Peak SAR (extrapolated) = 1.16 W/kg
 SAR(1 g) = 0.565 W/kg; SAR(10 g) = 0.337 W/kg

