

HCT CO., LTD.

CERTIFICATE OF COMPLIANCE

FCC Certification

Applicant Name:
LG Electronics MobileComm U.S.A., Inc.

Address:
10101 Old Grove Road, San Diego, CA 92131

Date of Issue:

March 12, 2012

Test Site/Location:

HCT CO., LTD., 105-1, Jangam-ri, Majang-Myeon, Icheon-si,
Kyunggi-Do, Korea

Test Report No.: HCTR1203FR07-1

HCT FRN: 0005866421

FCC ID : ZNFP700

APPLICANT : LG Electronics MobileComm U.S.A., Inc.

FCC Model(s): LG-P700

Additional FCC Model(s): P700, LGP700

EUT Type: Cellular/PCS GSM/GPRS/EDGE Rx only Phone with Bluetooth, WLAN and NFC

RF Output Field Strength 10.98 dBuV/m

Frequency of Operation: 13.5605 MHz

Modulation type ASK

FCC Classification: Low Power Communication Device – Transmitter

FCC Rule Part(s): FCC Part 15.225 Subpart C

Engineering Statement:

The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.


HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998, 21 U.S.C. 853(a)



Report prepared by

: Jong Seok Lee

Test engineer of RF Team



Approved by

: Sang Jun Lee

Manager of RF Team

This report only responds to the tested sample and may not be reproduced, except in full, without written approval of the HCT Co., Ltd.

FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1203FR07-1	Date of Issue: March 12, 2012	EUT Type: Cellular/PCS GSM/GPRS/EDGE Rx only Phone with Bluetooth, WLAN and NFC	FCC ID: ZNFP700

Version

TEST REPORT NO.	DATE	DESCRIPTION
HCTR1203FR07	March 06, 2012	- First Approval Report
HCTR1203FR07-1	March 12, 2012	- Change of the EUT Type

Table of Contents

1. GENERAL INFORMATION	4
2. EUT DESCRIPTION	4
3. TEST METHODOLOGY	5
3.1 EUT CONFIGURATION	5
3.2 EUT EXERCISE	5
3.3 GENERAL TEST PROCEDURES	5
3.4 DESCRIPTION OF TEST MODES	5
3.5 STANDARDS	6
4. INSTRUMENT CALIBRATION.....	7
5. FACILITIES AND ACCREDITATIONS	7
5.1 FACILITIES	7
5.2 EQUIPMENT	7
6. ANTENNA REQUIREMENTS	7
7. TEST SUMMARY	8
8. RADIATED EMISSION MEASUREMENT	9
8.1. RADIATED EMISSION 9 kHz – 30 MHz	1 0
8.2. RADIATED EMISSION 30 MHz – 1000 MHz	1 3
9. EMISSION BANDWIDTH PLOT.....	1 4
10. FREQUENCY TOLERANCE	1 5
11. POWERLINE CONDUCTE EMISSIONS.....	1 6
12. LIST OF TEST EQUIPMENT	2 5

FCC PT.15.225 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1203FR07-1	Date of Issue: March 12, 2012	EUT Type: Cellular/PCS GSM/GPRS/EDGE Rx only Phone with Bluetooth, WLAN and NFC	FCC ID: ZNFP700



1. GENERAL INFORMATION

Applicant: LG Electronics MobileComm U.S.A., Inc.

Address: 10101 Old Grove Road, San Diego, CA 92131

FCC ID: ZNFP700

EUT: Cellular/PCS GSM/GPRS/EDGE Rx only Phone with Bluetooth, WLAN and NFC

Model name(s): LG-P700

Additional Model name(s): P700, LGP700

Date of Test: January 10, 2012

Contact person: Name: Tae Sung Lee
Tel/ Fax: Phone #: +82-2-2033-1166

2. EUT DESCRIPTION

Product	Cellular/PCS GSM/GPRS/EDGE Rx only Phone with Bluetooth, WLAN and NFC
FCC Model Name	LG-P700
Additional FCC Model Name	P700, LGP700
Power Supply	DC 3.7 V
Battery Type	Li-ion Battery(Standard)
Frequency of Operation	10.98 dBuV/m
Transmit Power	13.5605 MHz
Modulation Type	ASK
Antenna Specification	Manufacturer: KOMATECH Co., Ltd. Antenna type: Loop Antenna

FCC PT.15.225 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1203FR07-1	Date of Issue: March 12, 2012	EUT Type: Cellular/PCS GSM/GPRS/EDGE Rx only Phone with Bluetooth, WLAN and NFC	FCC ID: ZNFP700

3. TEST METHODOLOGY

The measurement procedure described in the American National Standard for Methods of Measurement of Radio-Noise Emission from Low-Voltage Electrical and Electronic Equipment in the Range of 9kHz to 40GHz(ANSI C63.4-2003)

3.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

3.2 EUT EXERCISE

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.225 under the FCC Rules Part 15 Subpart C.

3.3 GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4. (Version :2003) Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 13.1.4.1 of ANSI C63.4. (Version: 2003)

3.4 DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

FCC PT.15.225 TEST REPORT		FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1203FR07-1	Date of Issue: March 12, 2012	EUT Type: Cellular/PCS GSM/GPRS/EDGE Rx only Phone with Bluetooth, WLAN and NFC	FCC ID: ZNFP700	

3.5 STANDARDS

The following tests were conducted on a sample of the equipment for the purpose of demonstrating compliance With

FCC Part 15.Subpart C

Regulation	Measurement standard	Range
Title 47 of the CFR:2005, Part 15 Subpart (c), Clause 15.225(a)	ANSI C63.4:2003	13.553MHz to 13.567MHz
Title 47 of the CFR:2005, Part 15 Subpart (c), Clause 15.225(d)	ANSI C63.4:2003	outside of the 13.110-14.010 MHz band
Title 47 of the CFR:2005, Part 15 Subpart (c), Clause 15.209	ANSI C63.4:2003	9kHz to 30MHz
Title 47 of the CFR:2005, Part 15 Subpart (c), Clause 15.209	ANSI C63.4:2003	30MHz to 1GHz
Title 47 of the CFR:2005, Part 15 Subpart (c), Clause 15.207	ANSI C63.4:2003	150kHz to 30MHz
Title 47 of the CFR:2005, Part 15 Subpart (c), Clause 15.225(e)	ANSI C63.4:2003	0.01% of nominal
Title 47 of the CFR:2005, Part 15 Subpart (c), Clause 15.215(c)	ANSI C63.4:2003	-

4. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipments, which is traceable to recognized national standards.

5. FACILITIES AND ACCREDITATIONS

5.1 FACILITIES

The 10 m semi anechoic chamber used to collect the Conducted and Radiated data is located at the 105-1, Jangam-Ri, Majang-Myeon, Icheon-Si, Kyongki-Do, Korea. Those measurement facilities are constructed in conformance with the requirements of ANSI C63.4. Detailed description of test facilities was submitted to the Commission and accepted dated Sep. 03, 2010 (Registration Number: 90661)

5.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of Linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements. Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers. Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

6. ANTENNA REQUIREMENTS

According to FCC 47 CFR §15.203:

"An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section."

* The antennas of this E.U.T are permanently attached.

*The E.U.T Complies with the requirement of §15.203

FCC PT.15.225 TEST REPORT		FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1203FR07-1	Date of Issue: March 12, 2012	EUT Type: Cellular/PCS GSM/GPRS/EDGE Rx only Phone with Bluetooth, WLAN and NFC		FCC ID: ZNFP700

7. TEST SUMMARY

The results in this report apply only to sample tested

Regulation	Test Type	Range	Result
Title 47 of the CFR:2009, Part 15 Subpart (c), Clause 15.225(a)	Radiated Electric Field Emissions	13.553MHz to 13.567MHz	Pass
Title 47 of the CFR:2009, Part 15 Subpart (c), Clause 15.225(b)	Radiated Electric Field Emissions	13.410MHz to 13.553MHz and 13.567MHz to 13.710MHz	Pass
Title 47 of the CFR:2009, Part 15 Subpart (c), Clause 15.225(c)	Radiated Electric Field Emissions	13.110 MHz to 13.410 MHz and 13.710 MHz to 14.010 MHz	Pass
Title 47 of the CFR:2009, Part 15 Subpart (c), Clause 15.209 (d)	Radiated Electric Field Emissions	9kHz to 30MHz	Pass
Title 47 of the CFR:2009, Part 15 Subpart (c), Clause 15.209	Radiated Electric Field Emissions	30MHz to 1GHz	Pass
Title 47 of the CFR:2009, Part 15 Subpart (c), Clause 15.207	AC power conducted emissions	150kHz to 30MHz	N/A
Title 47 of the CFR:2009, Part 15 Subpart (c), Clause 15.225(e)	Frequency Stability	0.01% of nominal	Pass
Title 47 of the CFR:2009, Part 15 Subpart (c), Clause 15.215(c)	20 dB Bandwidth	-	Pass

8. RADIATED EMISSION MEASUREMENT

Requirement(s): 15.209, 15.225

Except as provided elsewhere in this paragraph the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Minimum Standard: FCC Part 15.225 / 15.209

Rule Part	Frequency (MHz)	Limit
Part 15.209	0.009 ~ 0.490	2400/F(kHz)uV/m@300
	0.490 ~1.705	24000/F(kHz)uV/m@30
	1.705 ~ 30	30 uV/m@30
	30 ~ 88	100 ** uV/m@3m
	88 ~ 216	150 ** uV/m@3m
	216 ~ 960	200 ** uV/m@3m
	Above 960	500 uV/m@3m

** Except as provided in 15.209(g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88MHz, 174-216MHz or 470-806MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g. 15.231 and 15.241.

15.225 Operation within the band 13.110 – 14.010 MHz.

(a) The field strength of any emissions within the band 13.553-13.567 MHz shall not exceed 15,848 microvolts/meter (= 84 dBuV/m) at 30 meters.

(b) Within the bands 13.410-13.553 MHz and 13.567-13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter (=50.5dBuV/m) at 30 meters.

(c) Within the bands 13.110-13.410 MHz and 13.710-14.010 MHz the field strength of any emissions shall not exceed 106 microvolts/meter (=40.5 dBuV/m) at 30 meters.

(d) The field strength of any emissions appearing outside of the 13.110-14.010 MHz band shall not exceed the general radiated emission limits in § 15.209.


(e) The frequency tolerance of the carrier signal shall be maintained within +/- 0.01% of the operating frequency over a temperature variation of -20 degrees to +50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.

(f) In the case of radio frequency powered tags designed to operate with a device authorized under this section, the tag may be approved with the device or be considered as a separate device subject to its own authorization. Powered tags approved with a device under a single application shall be labeled with the same identification number as the device.

FCC PT.15.225 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1203FR07-1	Date of Issue: March 12, 2012	EUT Type: Cellular/PCS GSM/GPRS/EDGE Rx only Phone with Bluetooth, WLAN and NFC	FCC ID: ZNF700

8.1. RADIATED EMISSION 9 kHz – 30 MHz

Test Set-up

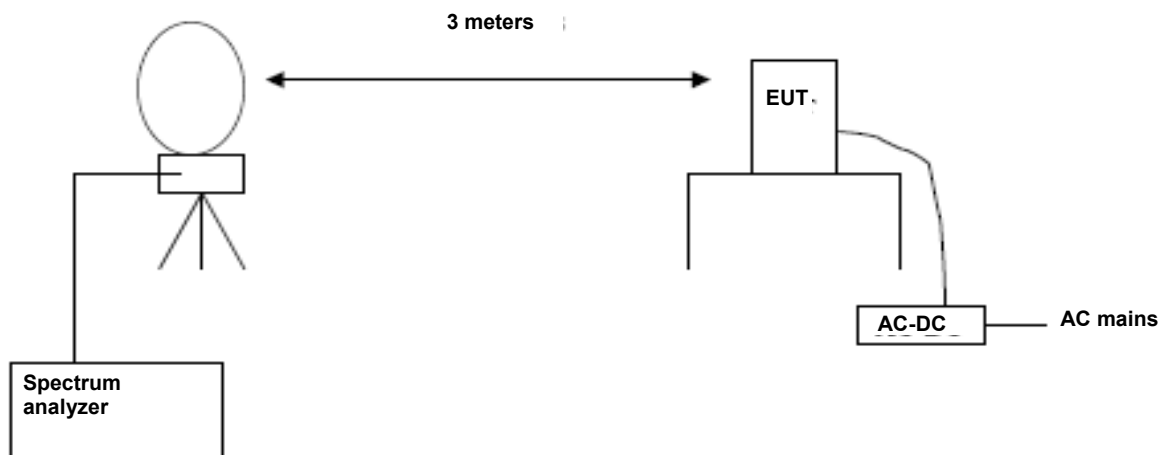

Test Procedure

The EUT was placed on a non-conductive table located on a large open test site. The loop antenna was placed at a location 3m from the EUT. Radiated emissions were measured with the loop antenna both parallel and perpendicular to the plane of the EUT loop antenna.

The limit is converted from microvolts/meter to decibel microvolts/meter. Sample Calculation:

Corrected Amplitude = Raw Amplitude(dBμV/m) + ACF(dB) + Cable Loss(dB) – Distance Correction Factor

The spectrum analyzer is set to:

Frequency Range = 9 kHz ~ 1GHz

RBW = 9 kHz (9 kHz ~ 30MHz)
= 120 kHz (30 MHz ~ 1 GHz)

Trace Mode = max hold

Detector Mode = peak / Quasi-peak

Sweep time = auto

FCC PT.15.225 TEST REPORT		FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1203FR07-1	Date of Issue: March 12, 2012	EUT Type: Cellular/PCS GSM/GPRS/EDGE Rx only Phone with Bluetooth, WLAN and NFC	FCC ID: ZNFP700	

Test Results

13.553 MHz-13.567 MHz						
Frequency (MHz)	Read Level (dBuV)@3m	Ant.Factor+Cable Loss (dB/m)	Distance Correction (dB)	Result Level (dBuV/m)@30m	Limit (dBuV/m)@30m	Margin (dB)
13.5605	33.42(H)*	17.56	-40	10.98	84	73.02
13.5605	26.16(V)*	17.56	-40	3.72	84	80.28

13.410 MHz-13.553 MHz and 13.567 MHz-13.710 MHz						
Frequency (MHz)	Read Level (dBuV)@3m	Ant.Factor+Cable Loss (dB/m)	Distance Correction (dB)	Result Level (dBuV/m)@30m	Limit (dBuV/m)@30m	Margin (dB)
13.5530	25.90	17.56	-40	3.46	50.47	47.01
13.5670	26.10	17.56	-40	3.66	50.47	46.81

13.110 MHz – 13.410 MHz and 13.710 MHz-14.010 MHz						
Frequency (MHz)	Read Level (dBuV)@3m	Ant.Factor+Cable Loss (dB/m)	Distance Correction (dB)	Result Level (dBuV/m)@30m	Limit (dBuV/m)@30m	Margin (dB)
13.3499	16.98	17.56	-40	-5.46	40.51	45.97
13.7701	18.83	17.56	-40	-3.61	40.51	44.12

9 kHz -30 MHz						
Frequency (MHz)	Read Level (dBuV)@3m	Ant.Factor+Cable Loss (dB/m)	Distance Correction (dB)	Result Level (dBuV/m)@30m	Limit (dBuV/m)@30m	Margin (dB)
12.684	22.03	17.56	-40	-0.41	29.54	29.95
14.785	17.34	17.46	-40	-5.10	29.54	34.64


Note :

1. Distance Correction Below 30MHz = $40\log(3m/30m) = -40 \text{ dB}$
Measurement Distance : 3 m (Below 30MHz)
2. Factor = Antenna Factor + Cable Loss
3. Result Level = Read Level + Factor + Distance Correction
4. Margin = Limit – Result Level
5. (H)* and (V)* mean antenna polarization.

FCC PT.15.225 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1203FR07-1	Date of Issue: March 12, 2012	EUT Type: Cellular/PCS GSM/GPRS/EDGE Rx only Phone with Bluetooth, WLAN and NFC	FCC ID: ZNFP700

8.2. RADIATED EMISSION 30 MHz – 1000 MHz

Test Set-up

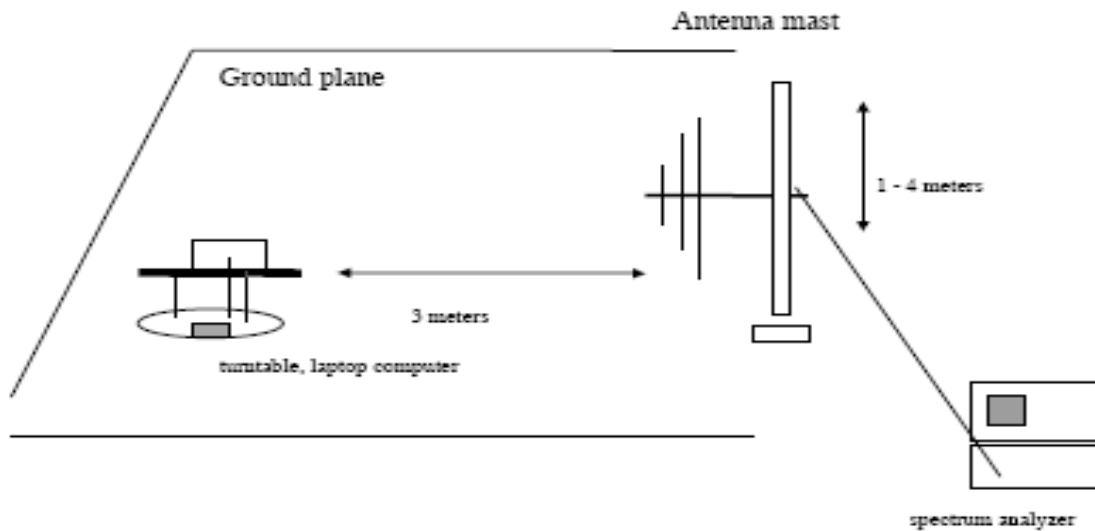

Test Procedures: Radiated emissions were measured according to ANSI C63.4.

The EUT was set to transmit at the highest output power.

The EUT was set 3 meter away from the measuring antenna.

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dB μ V	dB /m	dB	(H/V)	dB μ V/m	dB μ V/m	dB
No Critical peaks found							

Remark


1. Result Level = Read Level + (ANT+ CL Factor)
2. Margin = Limit – Result Level

9. EMISSION BANDWIDTH PLOT.

Requirement(s):

Test Set-up: The EUT was connected to a spectrum analyzer.

Test Procedure: The 20 dB bandwidth was measured by using a spectrum analyzer.

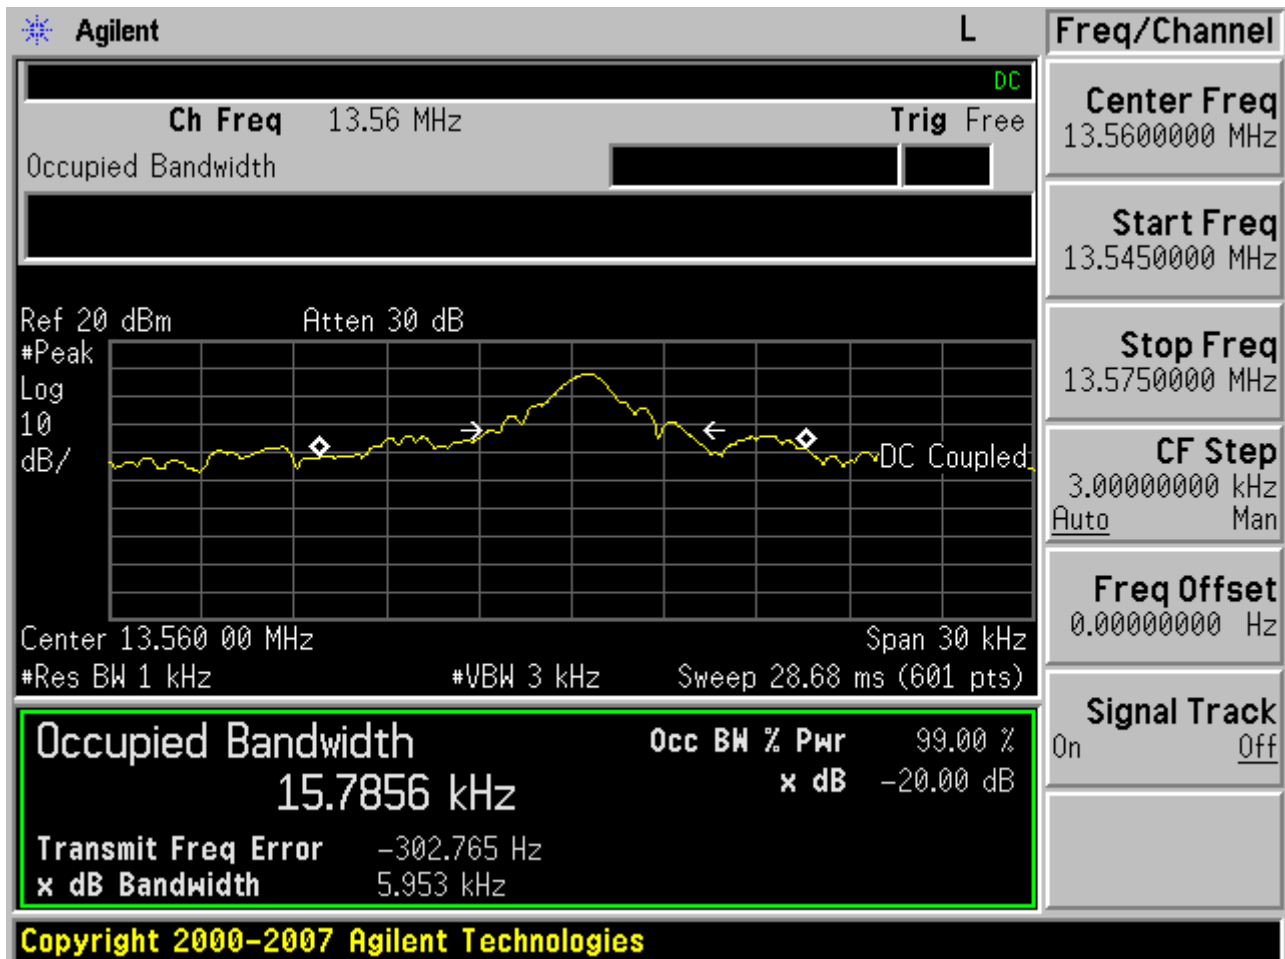

10. FREQUENCY TOLERANCE

Procedure: Part 15.225, ANSI 63.4

If required, the operating or transmitting frequency of an intentional radiator should be measured in accordance with the following procedure to ensure that the device operates outside certain precluded frequency bands and within the frequency range. No modulation needs to be supplied to the intentional radiator during these tests, unless modulation is required to produce an output, e.g., single-sideband suppressed carrier transmitters.

The frequency stability of the transmitter is measured by:

- a) Temperature: The temperature is varied from -20°C to + 50°C using an environmental chamber.
- b) For battery operated equipment, the equipment tests shall be performed using a new battery.

The frequency tolerance of the carrier signal shall be maintained within +/- 0.01% of the operating frequency.

Measurement Result:

VOLTAGE (%)	POWER	Temperature (°C)	Frequency (MHz)	Frequency Error (Hz)
100%	3.7 V	-20	13.560540	40
100%		-10	13.560620	120
100%		0	13.560625	125
100%		10	13.560700	200
100%		20	13.560500	0
100%		30	13.560430	-70
100%		40	13.560320	-180
100%		50	13.560545	45

Notes:

1. The EUT is supplied with the fully re-charged battery.

11. POWERLINE CONDUCTED EMISSIONS

LIMIT

For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolt (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range is listed as follows:

Frequency Range (MHz)	Limits (dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

Test Configuration

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

TEST PROCEDURE

1. The EUT is placed on a wooden table 80 cm above the reference ground plane.
2. The EUT is connected via LISN to a test power supply.
3. The measurement results are obtained as described below:
4. Detectors – Quasi Peak and Average Detector.

Test Plots

Unterminate the Antenna

Conducted Emissions (Line 1)


HCT

EMC

EUT: P700
 Manufacturer: LG
 Operating Condition: NFC MODE
 Test Site: SHIELD ROOM
 Operator: JS LEE
 Test Specification: FCC PART15 CLASS B
 Comment: N(Underminated)

SCAN TABLE: "FCC PART 15 B(N)"

Short Description:				FCC PART 15 CLASS B			Transducer
Start	Stop	Step	Detector	Meas. Time	IF Bandw.		
Frequency	Frequency	Width					
150.0 kHz	500.0 kHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None	
			Average				
500.0 kHz	5.0 MHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None	
			Average				
5.0 MHz	30.0 MHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None	
			Average				

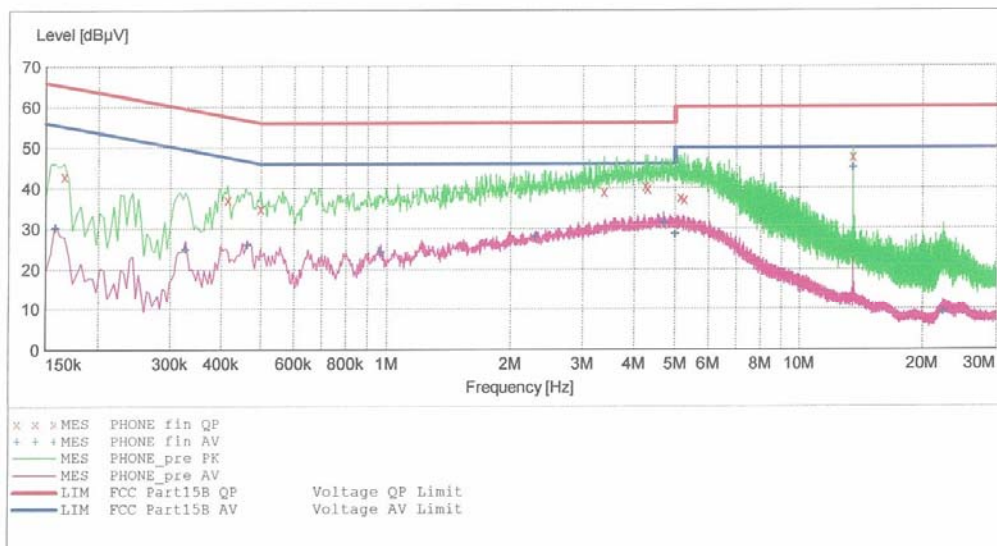

MEASUREMENT RESULT: "PHONE_fin QP"

2/24/2012 10:24PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Line	PE
0.166010	43.10	10.3	65	22.0	---	---
0.414010	37.20	10.3	58	20.3	---	---
0.498010	35.00	10.3	56	21.0	---	---
3.384000	39.10	10.5	56	16.9	---	---
4.252000	40.50	10.6	56	15.5	---	---
4.300000	39.90	10.6	56	16.1	---	---
5.156000	37.70	10.7	60	22.3	---	---
5.256000	37.20	10.7	60	22.8	---	---
13.560000	47.70	11.3	60	12.3	---	---

MEASUREMENT RESULT: "PHONE_fin AV"

2/24/2012 10:24PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Line	PE
0.158010	30.20	10.3	56	25.3	---	---
0.326010	25.00	10.3	50	24.6	---	---
0.462010	26.00	10.3	47	20.7	---	---
0.968000	24.40	10.4	46	21.6	---	---
2.300000	27.80	10.4	46	18.2	---	---
4.704000	31.50	10.7	46	14.5	---	---
5.000000	28.70	10.7	46	17.3	---	---
13.560000	44.90	11.3	50	5.1	---	---
22.332000	9.20	11.8	50	40.8	---	---

FCC PT.15.225 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1203FR07-1	Date of Issue: March 12, 2012	EUT Type: Cellular/PCS GSM/GPRS/EDGE Rx only Phone with Bluetooth, WLAN and NFC	FCC ID: ZNFP700

Conducted Emissions (Line 2)


HCT

EMC

EUT: P700
 Manufacturer: LG
 Operating Condition: NFC MODE
 Test Site: SHIELD ROOM
 Operator: JS LEE
 Test Specification: FCC PART15 CLASS B
 Comment: H(Unterminated)

SCAN TABLE: "FCC PART 15 B(H)"

Short Description:		FCC PART 15 CLASS B					
Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer	
Frequency	Frequency	Width					
150.0 kHz	500.0 kHz	1.0 kHz	MaxPeak	10.0 ms	9 kHz	None	
			Average				
500.0 kHz	5.0 MHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None	
			Average				
5.0 MHz	30.0 MHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None	
			Average				

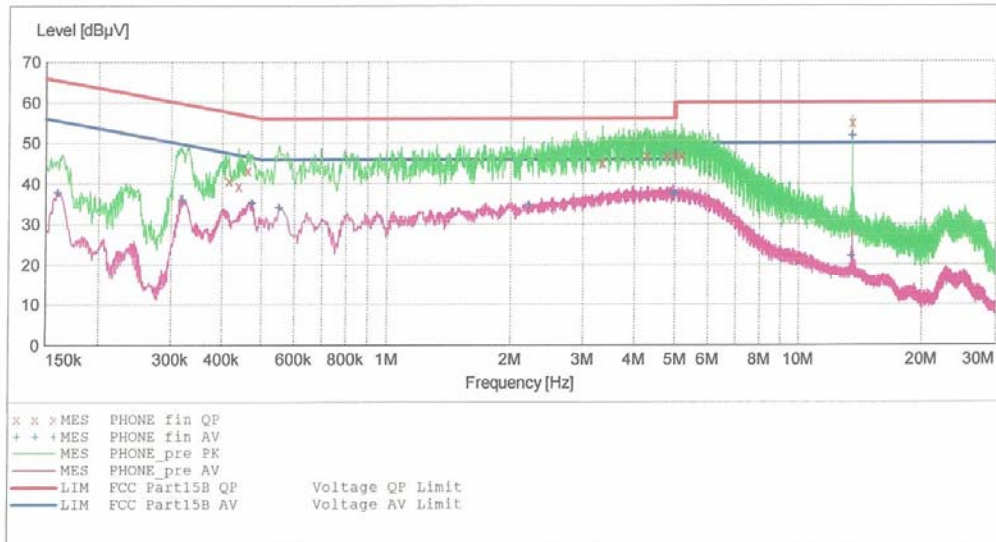

MEASUREMENT RESULT: "PHONE_fin_QP"

2/24/2012 10:20PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Line	PE
0.416010	40.80	10.1	58	16.7	---	---
0.439010	39.50	10.1	57	17.5	---	---
0.462010	43.30	10.1	57	13.3	---	---
3.348000	45.20	10.3	56	10.8	---	---
4.276000	46.80	10.4	56	9.2	---	---
4.780000	46.80	10.5	56	9.2	---	---
5.000000	46.90	10.5	56	9.1	---	---
5.184000	46.80	10.5	60	13.2	---	---
13.560000	55.00	11.3	60	5.0	---	---

MEASUREMENT RESULT: "PHONE_fin AV"

2/24/2012 10:20PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Line	PE
0.160010	37.90	10.1	56	17.6	---	---
0.319010	35.90	10.1	50	13.9	---	---
0.473010	35.10	10.1	47	11.4	---	---
0.552000	34.10	10.1	46	11.9	---	---
2.212000	34.70	10.2	46	11.3	---	---
4.960000	37.70	10.5	46	8.3	---	---
5.000000	37.40	10.5	46	8.6	---	---
13.484000	22.00	11.3	50	28.0	---	---
13.560000	51.70	11.3	50	-1.7	---	---

FCC PT.15.225 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1203FR07-1	Date of Issue: March 12, 2012	EUT Type: Cellular/PCS GSM/GPRS/EDGE Rx only Phone with Bluetooth, WLAN and NFC		FCC ID: ZNFP700

Terminate the Antenna Conducted Emissions (Line 1)


HCT

EMC

EUT: P700
 Manufacturer: LG
 Operating Condition: NFC MODE
 Test Site: SHIELD ROOM
 Operator: JS LEE
 Test Specification: FCC PART15 CLASS B
 Comment: H(terminated)

SCAN TABLE: "FCC PART 15 B(H)"

Short Description:			FCC PART 15 CLASS B			
Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
Frequency	Frequency	Width				
150.0 kHz	500.0 kHz	1.0 kHz	MaxPeak	10.0 ms	9 kHz	None
			Average			
500.0 kHz	5.0 MHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None
			Average			
5.0 MHz	30.0 MHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None
			Average			

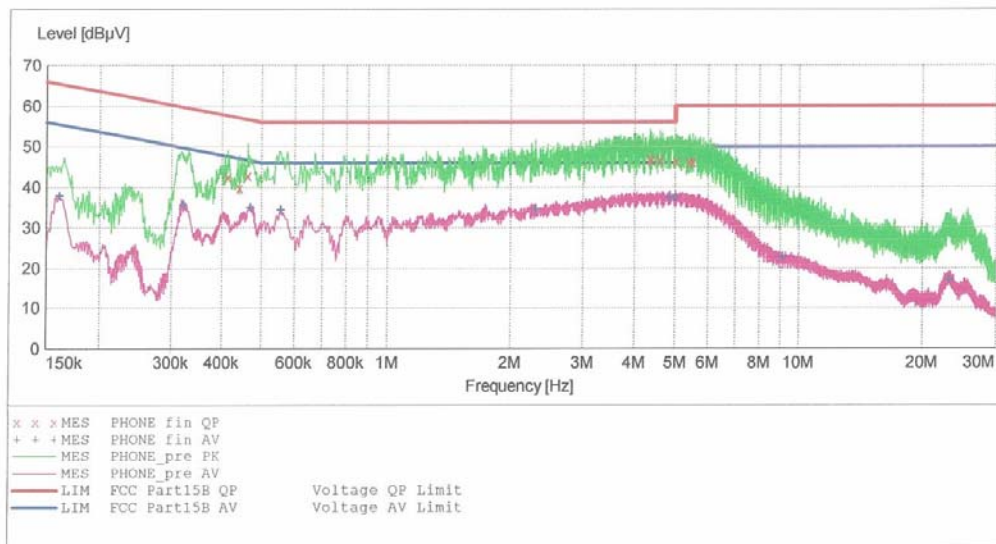

MEASUREMENT RESULT: "PHONE_fin_QP"

2/24/2012 10:11PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Line	PE
0.413010	42.50	10.1	58	15.1	---	---
0.442010	39.90	10.1	57	17.1	---	---
0.462010	42.90	10.1	57	13.8	---	---
4.364000	47.00	10.4	56	9.0	---	---
4.384000	46.50	10.4	56	9.5	---	---
4.608000	46.70	10.5	56	9.3	---	---
5.016000	46.40	10.5	60	13.6	---	---
5.400000	46.20	10.6	60	13.8	---	---
5.512000	46.20	10.6	60	13.8	---	---

MEASUREMENT RESULT: "PHONE_fin AV"

2/24/2012 10:11PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Line	PE
0.161010	37.90	10.1	55	17.5	---	---
0.320010	35.70	10.1	50	14.0	---	---
0.469010	35.00	10.1	47	11.6	---	---
0.556000	34.40	10.1	46	11.6	---	---
2.304000	34.60	10.2	46	11.4	---	---
4.868000	37.30	10.5	46	8.7	---	---
5.000000	37.30	10.5	46	8.7	---	---
9.128000	22.60	10.9	50	27.4	---	---
23.180000	17.10	12.0	50	32.9	---	---

FCC PT.15.225 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1203FR07-1	Date of Issue: March 12, 2012	EUT Type: Cellular/PCS GSM/GPRS/EDGE Rx only Phone with Bluetooth, WLAN and NFC	FCC ID: ZNFP700

Conducted Emissions (Line 2)


HCT

EMC

EUT: P700
 Manufacturer: LG
 Operating Condition: NFC MODE
 Test Site: SHIELD ROOM
 Operator: JS LEE
 Test Specification: FCC PART15 CLASS B
 Comment: N(terminated)

SCAN TABLE: "FCC PART 15 B(N)"

Short Description:		FCC PART 15 CLASS B					
Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer	
Frequency	Frequency	Width					
150.0 kHz	500.0 kHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None	
			Average				
500.0 kHz	5.0 MHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None	
			Average				
5.0 MHz	30.0 MHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None	
			Average				

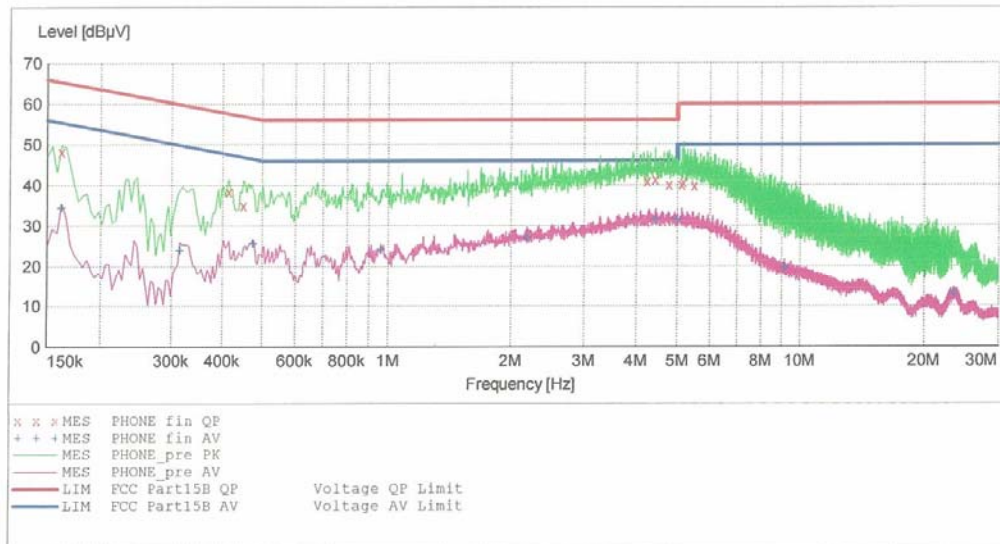

MEASUREMENT RESULT: "PHONE_fin_QP"

2/24/2012 10:06PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Line	PE
0.162010	48.20	10.3	65	17.2	---	---
0.414010	38.40	10.3	58	19.1	---	---
0.450010	35.00	10.3	57	21.9	---	---
4.240000	41.00	10.6	56	15.0	---	---
4.436000	41.40	10.7	56	14.6	---	---
4.780000	40.20	10.7	56	15.8	---	---
5.124000	40.20	10.7	60	19.8	---	---
5.168000	40.70	10.7	60	19.3	---	---
5.500000	39.90	10.8	60	20.1	---	---

MEASUREMENT RESULT: "PHONE_fin AV"

2/24/2012 10:06PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Line	PE
0.162010	34.30	10.3	55	21.1	---	---
0.314010	24.00	10.3	50	25.9	---	---
0.474010	25.60	10.3	46	20.8	---	---
0.964000	24.10	10.4	46	21.9	---	---
2.192000	27.00	10.4	46	19.0	---	---
4.448000	31.50	10.7	46	14.5	---	---
5.000000	31.50	10.7	46	14.5	---	---
9.168000	19.60	11.0	50	30.4	---	---
23.420000	13.00	11.8	50	37.0	---	---

FCC PT.15.225 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1203FR07-1	Date of Issue: March 12, 2012	EUT Type: Cellular/PCS GSM/GPRS/EDGE Rx only Phone with Bluetooth, WLAN and NFC	FCC ID: ZNFP700

12. LIST OF TEST EQUIPMENT

Manufacturer	Model / Equipment	Calibration Interval	Calibration Due	Serial No.
Rohde & Schwarz	ESH2-Z5/ LISN	Annual	02/03/2013	861741/013
Schwarzbeck	VULB 9168/ TRILOG Antenna	Biennial	02/09/2013	200
Rohde & Schwarz	ESI 40 / EMI TEST RECEIVER	Annual	05/26/2012	831564103
Agilent	E4440A/ Spectrum Analyzer	Annual	05/02/2012	US45303008
Agilent	N9020A/ SIGNAL ANALYZER	Annual	09/23/2012	MY51110020
HD	MA240/ Antenna Position Tower	N/A	N/A	556
EMCO	1050/ Turn Table	N/A	N/A	114
HD GmbH	HD 100/ Controller	N/A	N/A	13
HD GmbH	KMS 560/ SlideBar	N/A	N/A	12
Rohde & Schwarz	ESH3-Z2/ PULSE LIMITER	Annual	08/01/2012	375.8810.352
Rohde & Schwarz	SCU-18/ Signal Conditioning Unit	Annual	09/19/2012	10094
MITEQ	AFS44-00102650-42-10P-44-PS/ POWER AMP	Annual	09/23/2012	1532439
Schwarzbeck	BBHA 9120D/ Horn Antenna	Biennial	10/17/2013	937
Schwarzbeck	BBHA9170 / Horn Antenna(15 GHz ~ 40 GHz)	Biennial	10/26/2012	BBHA9170342
Rohde & Schwarz	FSP / Spectrum Analyzer	Annual	02/09/2013	839117/011
Agilent	E4440A / Spectrum Analyzer	Annual	05/02/2012	US45303008
Agilent	E4416A /Power Meter	Annual	11/07/2012	GB41291412
Agilent	E9327A /POWER SENSOR	Annual	05/02/2012	MY4442009
Wainwright Instrument	WHF3.3/18G-10EF / High Pass Filter	Annual	05/02/2012	1
Wainwright Instrument	WRCJ2400/2483.5-2370/2520-60/14SS / Band Reject Filter	Annual	05/02/2012	1
Hewlett Packard	11636B/Power Divider	Annual	11/07/2012	11377
Hewlett Packard	11667B / Power Splitter	Annual	11/04/2012	10126
DIGITAL	EP-3010 /DC POWER SUPPLY	Annual	11/07/2012	3110117
ITECH	IT6720 / DC POWER SUPPLY	Annual	11/07/2012	010002156287001199
TESCOM	TC-3000C / BLUETOOTH TESTER	Annual	11/14/2012	3000C000276
Rohde & Schwarz	CBT / BLUETOOTH TESTER	Annual	05/02/2012	100422
EMCO	6502.LOOP ANTENNA	Biennial	01/11/2014	9009-2536
MITEQ	AMF-6D-001180-35-20P/ POWER AMP	Annual	12/26/2012	990893
ETS-Lindgren	6507, LOOP ANTENNA	Biennial	03/01/2012	00103695