

EMC TEST REPORT

Test item : Cellular/PCS
GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA Phone
with Bluetooth and WLAN

Model No. : LG-P720, P720, LGP720

Order No. : 1112-01758

Date of receipt : 2011-12-14

Test duration : 2011-12-15 ~ 2011-12-19

Use of report : FCC CoC Marking

Date of Issue : 2011-12-21

Applicant : LG Electronics MobileComm U.S.A., Inc.
10101 Old Grove Road., San Diego, CA 92131

Test laboratory : Digital EMC Co., Ltd.
683-3, Yubang-Dong, Cheoin-Gu, Yongin-Si, Gyeonggi-Do, 449-080, Korea

Test specification : ANSI C 63.4:2003
FCC Part 15 Subpart B
(Type of Device : Class B Personal Computers
and Peripherals (JBP))

Test environment : Temperature : (19 ~ 21) °C,
Humidity : 34 % R.H.

Test result : Comply Not Comply

The test results presented in this test report are limited only to the sample supplied by applicant and the use of this test report is inhibited other than its purpose.
This test report shall not be reproduced except in full, without the written approval of DIGITAL EMC CO., LTD.

Tested by:

Reviewed by:



Manager
H.S.KO



General Manager
C.H.LEE

The above test report is the accredited test results by Korea Laboratory Accreditation Scheme, which signed the ILAC-MRA.

PRESIDENT OF DIGITAL EMC CO., LTD.

CONTENTS

1. General Remarks	3
2. Test Laboratory	3
3. General Information of EUT	4
4. Test Summary	5
4.1 Applied standards and test results	5
4.2 Test environment and conditions	5
4.3 Test result Summary	5
5. Test Set-up and operation mode	6
5.1 Principle of Configuration Selection	6
5.2 Test Operation Mode	6
5.3 Support Equipment Used	6
6. Test Results : Emission	7
6.1 Conducted Disturbance	7
6.2 Radiated Disturbance	10
Appendix 1	18
List of Test and Measurement Instruments	18

1. General Remarks

This report contains the result of tests performed by:

DIGITAL EMC CO., LTD.

Address : 683-3, Yubang-Dong, Cheoin-Gu, Yongin-Si, Gyeonggi-Do, 449-080, Korea

<http://www.digitalemco.com>

Tel: +82-31-321-2664 Fax: +82-31-321-1664

2. Test Laboratory

Digital EMC Co., Ltd. has been accredited / filed / authorized by the agencies listed in the following table;

Certificate	Nation	Agency	Code	Mark
Accreditation	Korea	KOLAS	393	ISO/IEC 17025
Site Filing	USA	FCC	101842 678747	Test Facility list & NSA Data
	Canada	IC	5740A-1 5740A-2	Test Facility list & NSA Data
	Japan	VCCI	C-1427 R-1364, R-3385 T-1442, G-338	Test Facility list & NSA Data
Certification	Korea	KC	KR0034	Test Facility list & NSA Data
	Germany	TUV	ROK1028C	ISO/IEC 17025

Quality control in the testing laboratory is implemented as per ISO/IEC 17025 which is the "General requirements for the competent of calibration and testing laboratory".

3. General Information of EUT

Model No.	LG-P720
Add Model No.	P720, LGP720
EUT Type	Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA Phone with Bluetooth and WLAN
Serial No	NONE
FCC ID	ZNFP720
Type of Sample Tested	Pre-Production
High Frequency	1.2 GHz
Supplied Power for Test	AC120 V, 60 Hz
Applicant	LG Electronics MobileComm U.S.A., Inc. 10101 Old Grove Road., San Diego, CA 92131

4. Test Summary

4.1 Applied standards and test results

Test Items	Applied Standards	Results
Conducted Disturbance	ANSI C63.4:2003	C
Radiated Disturbance	ANSI C63.4:2003	C
C=Comply N/C=Not Comply N/T=Not Tested N/A=Not Applicable		

The data in this test report are traceable to the national or international standards.

4.2 Test environment and conditions

Test Items	Test date (MM-DD)	Temp ()	Humidity (% R.H.)	Pressure (hPa)
Conducted Disturbance	12-15	21	34	-
Radiated Disturbance	12-19	19	34	

4.3 Test result Summary

(1) Conducted Emission

Frequency [MHz]	Phase	Result [dB μ V]	Detector	Limit [dB μ V]	Margin [dB]
0.15444	N	55.7	Quasi-Peak	65.8	10.1
0.15604	L1	54.1	Quasi-Peak	65.7	11.6

(2) Radiated Emission

Frequency [MHz]	Pol.	Result [dB(μ V/m)]	Detector	Limit [dB(μ V/m)]	Margin [dB]
140.386	V	31.6	Quasi-Peak	43.5	11.9

5. Test Set-up and operation mode

5.1 Principle of Configuration Selection

Emission : The equipment under test (EUT) was configured to measure its highest possible radiation level. The test modes were adapted accordingly in reference to the instructions for use.


5.2 Test Operation Mode

- PC link mode (The measurement was made of the maximized by: Write/Delete/Read the “H” pattern mode; data exchange speed; moving the cable)

5.3 Support Equipment Used

Unit	Model No.	Serial No.	Manufacturer	CABLE			Backshell	FCC ID
				Connect type	Length (m)	shield		
Note Book	LGX14	F022040	LG	DC Power USB	1.8 1.2	Non- Shield Shield	Plastic	DOC
AC/DC Adaptor	ADP-40PH	6T1094	DELTA ELECTONICS INC	Power	1.6	Non- Shield	Plastic	VER
Mouse	1484	352700021375	Microsoft	USB	1.8	Non- Shield	Plastic	DOC
LCD Monitor	U2312HMT	W-036N7K-74445-199-440L	DELL INC.	POWER DSUB	1.8 1.7	Non- Shield	Plastic	DOC
Headset	EAB62609301	N/A	I-Sound	STEREO	1.1	Non- Shield	Plastic	DOC

(Configuration of Tested System)

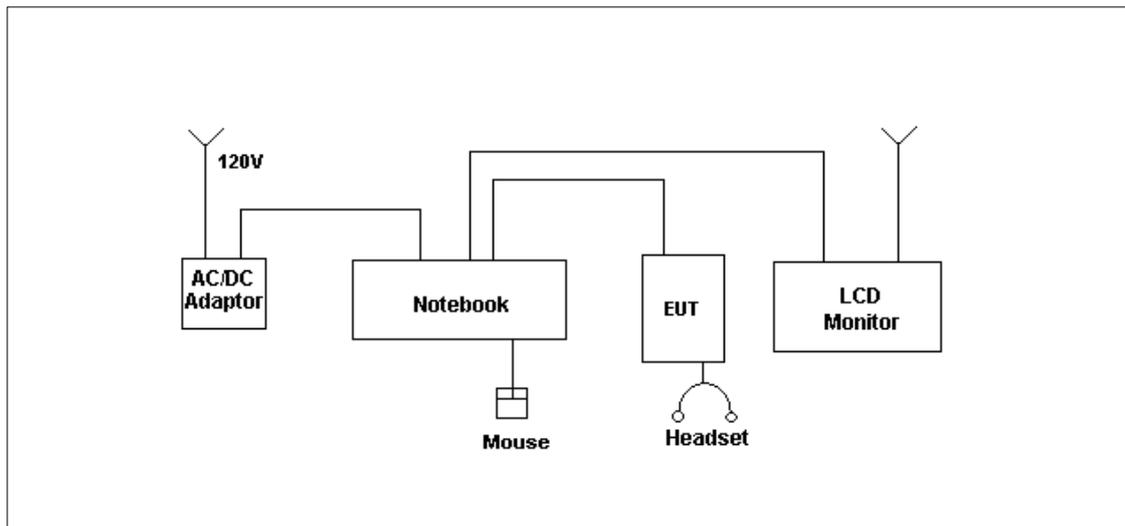

6. Test Results : Emission

6.1 Conducted Disturbance

6.1.1 Measurement Procedure

In the range of 0.15MHz to 30MHz, the conducted disturbance was measured and set-up was made accordance with **ANSI C63.4**.

If the EUT is table top equipment, it was placed on a wooden table with a height of 0.8m above the reference ground plane and 0.4m from the conducting wall of the shielded room.

Also if the EUT is floor-standing equipment, it was placed on a non-conducted support with a height up to 0.15m above the reference ground plane.

Connect the EUT's power source lines to the appropriate power mains / peripherals through the LISN. All the other peripherals are connected to the 2nd LISN, if any.

Unused measuring port of the LISN was resistively terminated by 50 ohm terminator.

The measuring port of the LISN for EUT was connected to spectrum analyzer.

Using conducted emission test software, the emissions were scanned with peak detector mode.

After scanning over the frequency range, suspected emissions were selected to perform final measurement. When performing final measurement, the receiver was used which has Quasi-Peak detector and Average detector.

By varying the configuration of the test sample and the cable routing it was attempted to maximize the emission.

For further description of the configuration refer to the picture of the test set-up.

6.1.2 Limit for Conducted Disturbance

(1) Conducted disturbance at mains ports.

Frequency range (MHz)	Limits dB(μ V)			
	Quasi-peak		Average	
	Class A	Class B	Class A	Class B
0.15 to 0.50	79	66 to 56	66	56 to 46
0.50 to 5	73	56	60	46
5 to 30		60		50

Note 1 The lower limit shall apply at the transition frequencies.
 Note 2 The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

Test Result





Results of Conducted Emission

Digital EMC
Date : 2011-12-15

Model No. : LG-P720
 Type :
 Serial No. :
 Test Condition : PC LINK MODE

Reference No. :
 Power Supply : 120 V 60 Hz
 Temp/Humi. : 21 °C 34 % R.H.
 Operator : H.S KO

Memo :
 LIMIT : CISPR22_B OP
 CISPR22_B AV

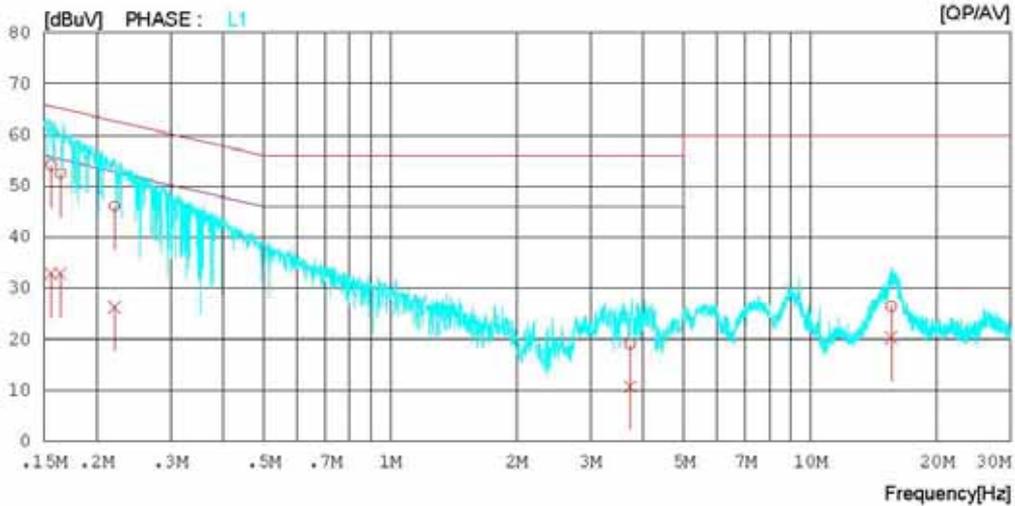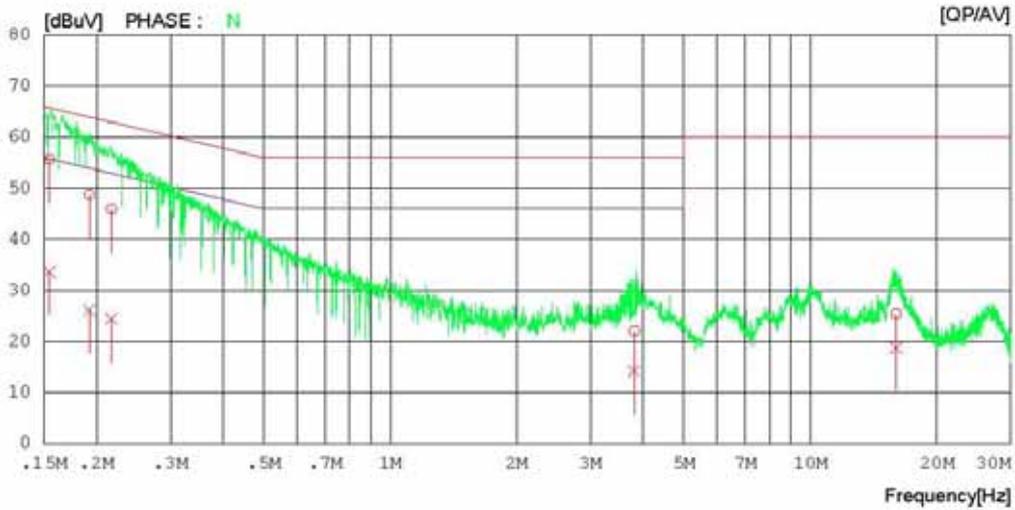

Results of Conducted Emission

Digital EMC
Date : 2011-12-15

Model No. : LG-P720
 Type :
 Serial No. :
 Test Condition : PC LINK MODE

Reference No. :
 Power Supply : 120 V 60 Hz
 Temp/Humi. : 21 °C 34 % R.H.
 Operator : H.S KO

Memo :

LIMIT : CISPR22_B QP
 CISPR22_B AV

NO	FREQ [MHz]	READING		C. FACTOR [dB]	RESULT		LIMIT		MARGIN		PHASE
		QP [dBuV]	AV [dBuV]		QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	
1	0.15444	55.5	33.4	0.2	55.7	33.6	65.8	55.8	10.1	22.2	N
2	0.19244	48.6	26.0	0.1	48.7	26.1	63.9	53.9	15.2	27.8	N
3	0.21724	45.8	24.3	0.1	45.9	24.4	62.9	52.9	17.0	28.5	N
4	3.81500	21.6	13.8	0.4	22.0	14.2	56.0	46.0	34.0	31.8	N
5	16.00450	24.4	17.8	1.0	25.4	18.8	60.0	50.0	34.6	31.2	N
6	0.15604	53.9	32.7	0.2	54.1	32.9	65.7	55.7	11.6	22.8	L1
7	0.16420	52.3	32.7	0.2	52.5	32.9	65.2	55.2	12.7	22.3	L1
8	0.22054	46.0	26.2	0.1	46.1	26.3	62.8	52.8	16.7	26.5	L1
9	3.72750	18.7	10.4	0.4	19.1	10.8	56.0	46.0	36.9	35.2	L1
10	15.58300	25.5	19.4	1.0	26.5	20.4	60.0	50.0	33.5	29.6	L1

6.2 Radiated Disturbance

6.2.1 Measurement Procedure

The radiated disturbance was measured and set-up was made accordance with **ANSI C63.4**.

If the EUT is tabletop equipment, it was placed on a wooden table with a height of 0.8m above the reference ground plane and 3m away from the interference receiving antenna in the **10m semi-anechoic chamber**.

Also if the EUT is floor-standing equipment, it was placed on a non-conducted support with a height up to 0.15m above the reference ground plane.

Rotate the EUT from 0° to 360° and position the receiving antenna at heights from 1 to 4m above the reference ground plane continuously to determine associated with higher emission levels and record them.

The measurement was made in both the vertical and horizontal polarization, and the maximum value is presented in the report.

For below 1GHz frequency range, Quasi-Peak detector with 120kHz RBW was used.

Also Peak and Average detector with 1MHz RBW were used for above 1GHz frequency range.

For further description of the configuration refer to the picture of the test set-up.

6.2.2 Limit for Radiated Disturbance

- The test frequency range of Radiated Disturbance measurements are listed below.

Highest frequency generated or used in the device or on which the device operates or tunes (MHz)	Upper frequency of measurement range (MHz)
Below 108	1000
108 – 500	2000
500 – 1000	5000
Above 1000	5 th harmonic of the highest frequency or 40GHz, whichever is lower

(1) Limit for Radiated Emission below 1000MHz

Frequency range (MHz)	Class A Equipment (10m distance)	Class B Equipment (3m distance)
	Quasi-peak (dB μ V/m)	Quasi-peak (dB μ V/m)
30 to 88	39.1	40
88 to 216	43.5	43.5
216 to 960	46.4	46
960 to 1000	49.5	54

Note 1 The lower limit shall apply at the transition frequency.

Note 2 Additional provisions may be required for cases where interference occurs.

Note 3 According to 15.109(g), as an alternative to the radiated emission limit shown above, digital devices may be shown to comply with the standards(CISPR), Pub. 22 shown as below.

Frequency range (MHz)	Class A Equipment (10m distance)	Class B Equipment (10m distance)
	Quasi-peak (dB μ V/m)	Quasi-peak (dB μ V/m)
30 to 230	40	30
230 to 1000	47	37

(2) Limits for Radiated Emission above 1000MHz at a measuring distance of 3m

Frequency (GHz)	Class A Equipment		Class B Equipment	
	Peak (dB μ V/m)	Average (dB μ V/m)	Peak (dB μ V/m)	Average (dB μ V/m)
1 to 40	80	60	74	54

Test Result

< 30 MHz ~ 1 GHz >

RADIATED EMISSION



Date : 2011-12-19

Model Name : LG-P720
 Model No. :
 Serial No. :
 Test Condition : PC link mode

Reference No. :
 Power Supply : 120 V 60 Hz
 Temp/Humi : 19 °C 34 % R.H.
 Operator : H.S KO

Memo :

LIMIT : FCC Part15 Subpart B Class B (3m)
 MARGIN: 3 dB

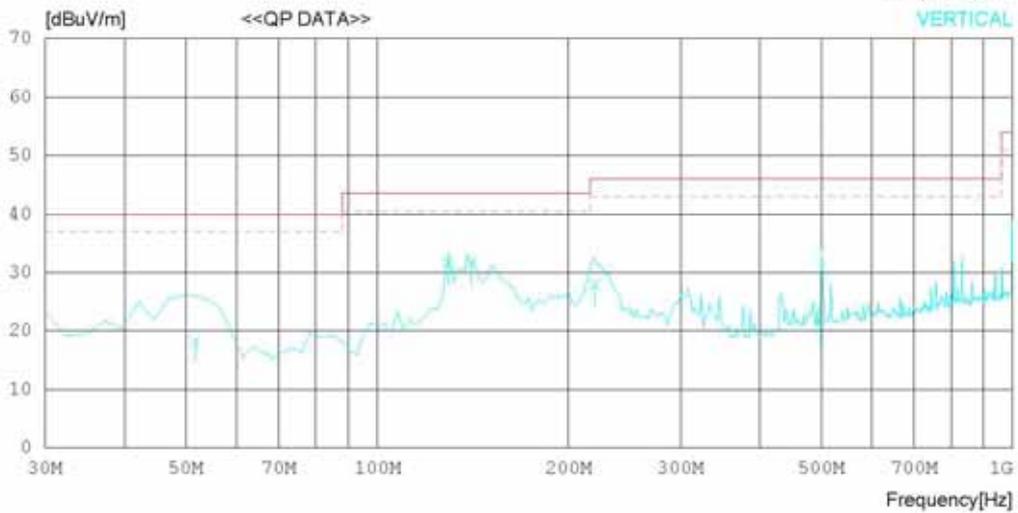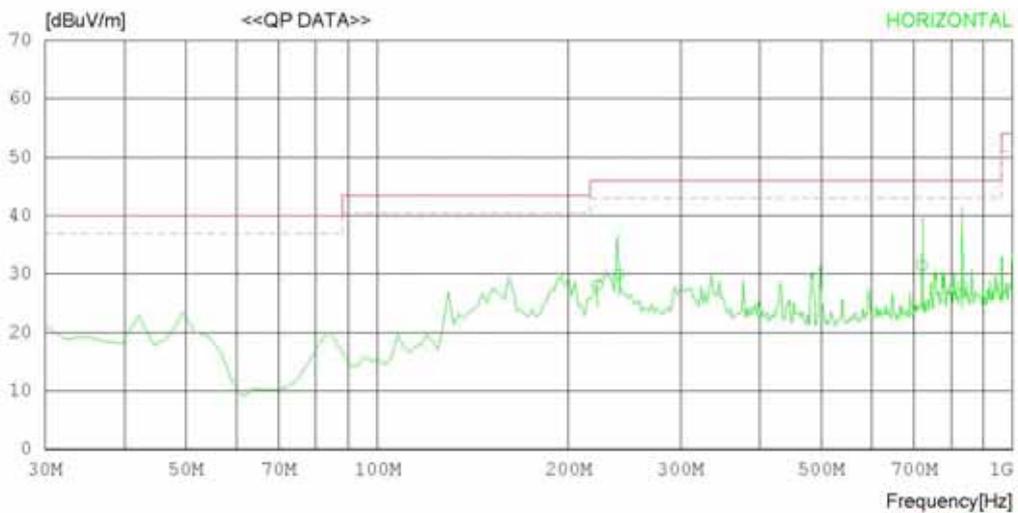

RADIATED EMISSION

Date : 2011-12-19

Model Name : LG-P720	Reference No. :
Model No. :	Power Supply : 120 V 60 Hz
Serial No. :	Temp/Humi : 19 °C 34 % R.H.
Test Condition : PC link mode	Operator : H.S KO

Memo :

LIMIT : FCC Part15 Subpart B Class B (3m)
MARGIN: 3 dB

No.	FREQ [MHz]	READING QP [dBuV]	ANT FACTOR [dB]	LOSS [dB]	GAIN [dB]	RESULT [dBuV/m]	LIMIT [dBuV/m]	MARGIN [dB]	ANTENNA [cm]	TABLE [DEG]
----- Horizontal -----										
1	221.750	38.1	11.1	2.2	23.4	28.0	46.0	18.0	100	358
2	240.050	38.7	12.4	2.3	23.5	29.9	46.0	16.1	100	358
3	720.000	32.0	19.2	4.3	24.0	31.5	46.0	14.5	146	128
4	832.250	26.4	20.5	4.5	23.5	27.9	46.0	18.1	100	358
----- Vertical -----										
5	51.825	31.2	8.7	1.0	22.6	18.3	40.0	21.7	164	279
6	129.250	41.3	11.6	1.6	22.9	31.6	43.5	11.9	100	189
7	219.761	38.2	11.0	2.2	23.4	28.0	46.0	18.0	100	1
8	499.175	24.2	17.7	3.4	24.6	20.7	46.0	25.3	100	129
9	140.386	42.0	11.0	1.6	23.0	31.6	43.5	11.9	100	1

< 1 GHz ~ 6 GHz_Peak >

RADIATED EMISSION



Date : 2011-12-19

Model Name : LG-P720
 Model No. :
 Serial No. :
 Test Condition : PC link mode

Reference No. :
 Power Supply : 120 V 60 Hz
 Temp/Humi : 19 °C 34 % R.H.
 Operator : H.S KO

Memo :

LIMIT : FCC Part15 Subpart B Class B (3m) - 18G(Peak)
 FCC Part15 Subpart B Class B (3m) - 18G(Avg)

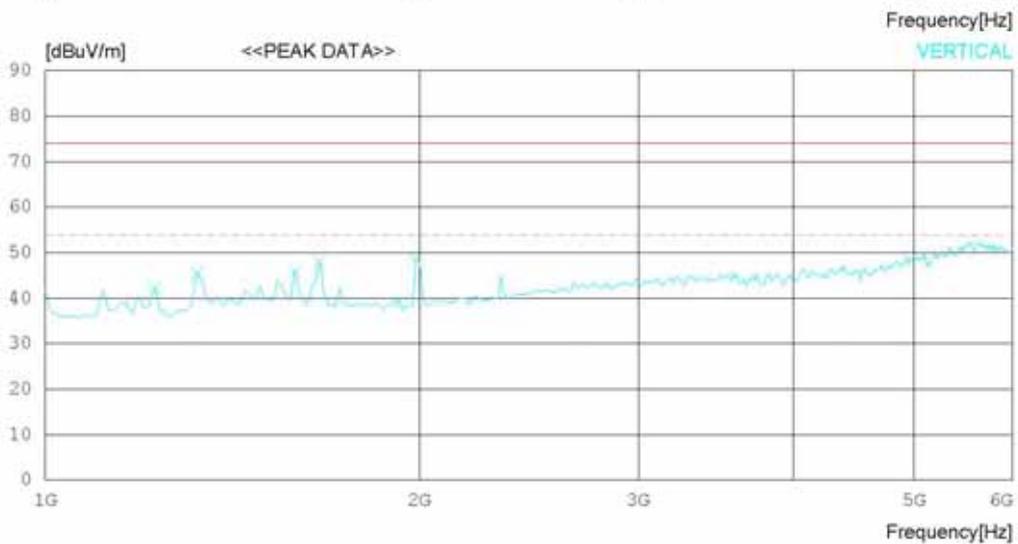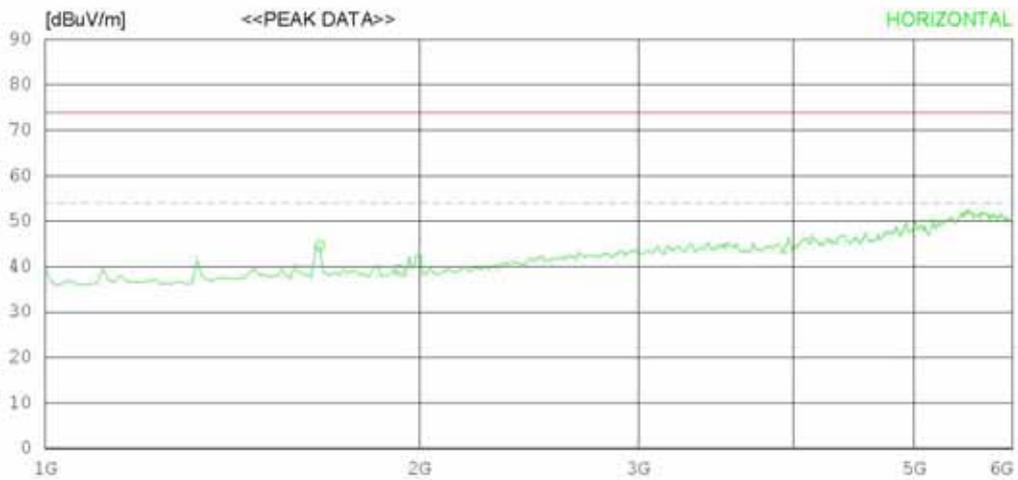

RADIATED EMISSION

Date : 2011-12-19

Model Name : LG-P720	Reference No. :
Model No. :	Power Supply : 120 V 60 Hz
Serial No. :	Temp/Humi : 19 °C 34 % R.H.
Test Condition : PC link mode	Operator : H.S KO

Memo :

LIMIT : FCC Part15 Subpart B Class B (3m) - 18G(Peak)
 FCC Part15 Subpart B Class B (3m) - 18G(Avg)

No.	FREQ [MHz]	READING PEAK [dBuV]	ANT FACTOR [dB]	LOSS [dB]	GAIN [dB]	RESULT [dBuV/m]	LIMIT [dBuV/m]	MARGIN [dB]	ANTENNA [cm]	TABLE [DEG]
----- Horizontal -----										
1	1662.500	55.0	25.2	6.3	41.9	44.6	74.0	29.4	201	101
2	1925.000	49.1	25.2	6.9	42.0	39.2	74.0	34.8	201	1
----- Vertical -----										
3	1225.000	54.4	24.3	5.3	41.8	42.2	74.0	31.8	100	358
4	1325.000	57.1	24.6	5.6	41.9	45.4	74.0	28.6	100	358
5	1587.500	56.5	25.2	6.1	41.9	45.9	74.0	28.1	100	10
6	1662.500	58.3	25.2	6.3	41.9	47.9	74.0	26.1	100	169
7	1925.000	49.2	25.2	6.9	42.0	39.3	74.0	34.7	100	358
8	1987.500	58.4	25.2	7.0	42.0	48.6	74.0	25.4	100	358

< 1 GHz ~ 6 GHz_Average >

RADIATED EMISSION



Date : 2011-12-19

Model Name : LG-P720
 Model No. :
 Serial No. :
 Test Condition : PC link mode

Reference No. :
 Power Supply : 120 V 60 Hz
 Temp/Humi : 19 °C 34 % R.H.
 Operator : H.S KO

Memo :

LIMIT : FCC Part15 Subpart B Class B (3m) - 18G(Avg)
 FCC Part15 Subpart B Class B (3m) - 18G(Peak)

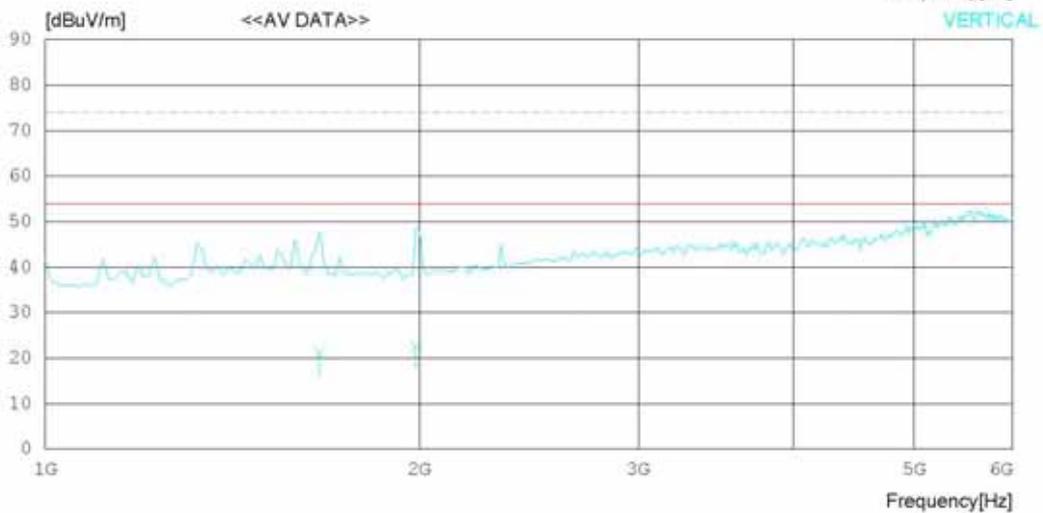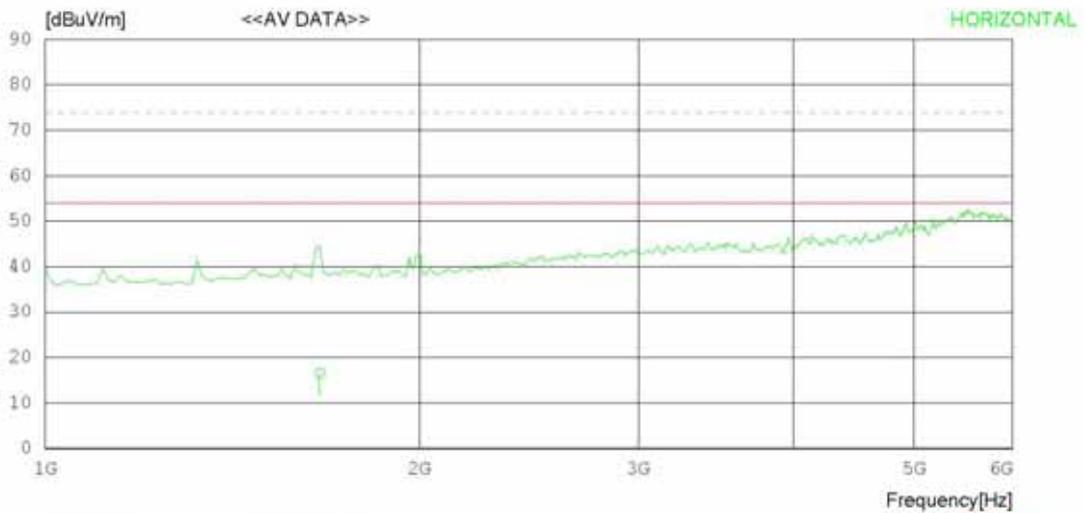

RADIATED EMISSION

Date : 2011-12-19

Model Name : LG-P720	Reference No. :
Model No. :	Power Supply : 120 V 60 Hz
Serial No. :	Temp/Humi : 19 °C 34 % R.H.
Test Condition : PC link mode	Operator : H.S KO

Memo :

LIMIT : FCC Part15 Subpart B Class B (3m) - 18G(Avg)
 FCC Part15 Subpart B Class B (3m) - 18G(Peak)

No.	FREQ [MHz]	READING AV [dBuV]	ANT FACTOR [dB]	LOSS [dB]	GAIN [dB]	RESULT [dBuV/m]	LIMIT [dBuV/m]	MARGIN [dB]	ANTENNA [cm]	TABLE [DEG]
----- Horizontal -----										
1	1662.500	26.9	25.2	6.3	41.9	16.5	54.0	37.5	201	101
----- Vertical -----										
2	1662.500	31.4	25.2	6.3	41.9	21.0	54.0	33.0	100	169
3	1987.500	32.4	25.2	7.0	42.0	22.6	54.0	31.4	100	358

Appendix 1

List of Test and Measurement Instruments

1. Conducted Disturbance

Name of Instrument	Model No.	Manufacturer	Serial No.	Cal. Date	Next Cal. Date
<input type="checkbox"/> SPECTRUM ANALYZER	8591E	H/P	3649A05889	2011.03.07	2012.03.07
<input type="checkbox"/> RFI/FIELD INTENSITY METER	KNM-2402	KYORITSU	4N-170-3	2011.07.02	2012.07.02
<input type="checkbox"/> LISN	KNW-407	KYORITSU	8-317-8	2011.01.11	2012.01.11
<input type="checkbox"/> LISN	KNW-242	KYORITSU	8-654-15	2011.07.01	2012.07.01
<input type="checkbox"/> 50 OHM TERMINATOR	CT-01	TME	N/A	2011.01.11	2012.01.11
<input checked="" type="checkbox"/> EMI TEST RECEIVER	ESCI	ROHDE & SCHWARZ	100364	2011.03.08	2012.03.08
<input checked="" type="checkbox"/> LISN	ESH2-Z5	ROHDE & SCHWARZ	828739/006	2011.09.30	2012.09.30
<input checked="" type="checkbox"/> LISN	LISN1600	TTI	197204	2012.07.02	2012.07.02
<input checked="" type="checkbox"/> 50 OHM TERMINATOR	CT-01	TME	N/A	2011.01.11	2012.01.11

2. Radiated Disturbance

Name of Instrument	Model No.	Manufacturer	Serial No.	Cal. Date	Next Cal. Date
<input checked="" type="checkbox"/> EMI TEST RECEIVER	ESU	ROHDE & SCHWARZ	100014	2011.01.20	2012.01.20
<input checked="" type="checkbox"/> BILOG ANTENNA	CBL6112B	SCHAFFNER	2737	2010.07.14	2012.07.14
<input checked="" type="checkbox"/> HORN ANTENNA	BBHA9120A	SCHWARZBECK	322	2010.04.13	2012.04.13
<input checked="" type="checkbox"/> AMPLIFIER	8447E	H/P	2945A02865	2011.01.11	2012.01.11
<input checked="" type="checkbox"/> AMPLIFIER	MLA-00108-B02-36	TSJ	1518831	2011.01.11	2012.01.11
<input type="checkbox"/> SPECTRUM ANALYZER	E4411B	AGILENT	US41062735	2011.07.01	2012.07.01
<input type="checkbox"/> AMPLIFIER	8447D	AGILENT	2443A03690	2011.07.01	2012.07.01
<input type="checkbox"/> BILOG ANTENNA	VULB9160	SCHAFFNER	3151	2010.08.25	2012.08.25
<input type="checkbox"/> EMI TEST RECEIVER	ESCI	ROHDE & SCHWARZ	100364	2011.03.08	2012.03.08
<input type="checkbox"/> BICONICAL ANT.	VHA 9103	SCHWARZBECK	91032789	2010.11.29	2012.11.29
<input type="checkbox"/> LOG-PERIODIC ANT.	UHALP 9108A	SCHWARZBECK	590	2010.07.07	2012.07.07
<input type="checkbox"/> BICONICAL ANT.	VHA 9103	SCHWARZBECK	91031946	2010.12.21	2012.12.21
<input type="checkbox"/> LOG-PERIODIC ANT.	UHALP 9108-A1	SCHWARZBECK	1098	2010.11.29	2012.11.29
<input type="checkbox"/> AMPLIFIER	MLA-100K01-B01-26	TSJ	1252741	2011.03.07	2012.03.07