

EMC TEST REPORT

Test item : Cellular/PCS GSM/GPRS/EDGE and Cellular
WCDMA/HSPA Phone with Bluetooth and WLAN
Model No. : LG-P768f
Order No. : 1207-01175
Date of receipt : 2012-07-13
Test duration : 2012-07-16 ~ 2012-07-17
Use of report : FCC CoC Marking
Date of Issue : 2012-07-19

Applicant : LG Electronics MobileComm U.S.A., Inc.
1000 Sylvan Avenue, Englewood Cliffs NJ 07632

Test laboratory : Digital EMC Co., Ltd.
683-3, Yubang-Dong, Cheoin-Gu, Yongin-Si, Gyeonggi-Do, 449-080, Korea

Test specification : ANSI C 63.4:2003
FCC Part 15 Subpart B
(Class B personal computers and peripherals)

Test environment : Temperature : 23 °C,
Humidity : (45 ~ 49) % R.H.

Test result : Comply Not Comply

The test results presented in this test report are limited only to the sample supplied by applicant and the use of this test report is inhibited other than its purpose.


This test report shall not be reproduced except in full, without the written approval of DIGITAL EMC CO., LTD.

Tested by:

Reviewed by:



Manager
H.S.KO



General Manager
C.H.LEE

PRESIDENT OF DIGITAL EMC CO., LTD.

CONTENTS

1. General Remarks	3
2. Test Laboratory	3
3. General Information of EUT	4
4. Test Summary	5
4.1 Applied standards and test results	5
4.2 Test environment and conditions	5
4.3 Test result Summary	5
5. Test Set-up and operation mode	6
5.1 Principle of Configuration Selection	6
5.2 Test Operation Mode	6
5.3 Support Equipment Used	6
6. Test Results : Emission	7
6.1 Conducted Disturbance	7
6.2 Radiated Disturbance	10
Appendix 1	18
List of Test and Measurement Instruments	18

1. General Remarks

This report contains the result of tests performed by:

DIGITAL EMC CO., LTD.

Address : 683-3, Yubang-Dong, Cheoin-Gu, Yongin-Si, Gyeonggi-Do, 449-080, Korea

<http://www.digitalemc.com>

Tel: +82-31-321-2664 Fax: +82-31-321-1664

2. Test Laboratory

Digital EMC Co., Ltd. has been accredited / filed / authorized by the agencies listed in the following table;

Certificate	Nation	Agency	Code	Mark
Accreditation	Korea	KOLAS	393	ISO/IEC 17025
Site Filing	USA	FCC	101842 678747	Test Facility list & NSA Data
	Canada	IC	5740A-1 5740A-2	Test Facility list & NSA Data
	Japan	VCCI	C-1427 R-1364, R-3385 T-1442, G-338	Test Facility list & NSA Data
Certification	Korea	KC	KR0034	Test Facility list & NSA Data
	Germany	TUV	ROK1124C	ISO/IEC 17025

Quality control in the testing laboratory is implemented as per ISO/IEC 17025 which is the "General requirements for the competent of calibration and testing laboratory".

3. General Information of EUT

Model No.	LG-P768f
Add Model No.	LG-P768F, LGP768f, LGP768F, P769f, P769F
FCC Band	GSM 850/1900, WCDMA 850
Serial No	NONE
FCC ID	ZNFP768F
Max CPU clock	1.0 GHz
Supplied Power for Test	AC 120 V, 60 Hz
Applicant	LG Electronics MobileComm U.S.A., Inc. 1000 Sylvan Avenue, Englewood Cliffs NJ 07632
Manufacturer	LG Electronics MobileComm U.S.A., Inc. 1000 Sylvan Avenue, Englewood Cliffs NJ 07632

4. Test Summary

4.1 Applied standards and test results

Test Items	Applied Standards	Results
Conducted Disturbance	ANSI C63.4:2003	C
Radiated Disturbance	ANSI C63.4:2003	C
C=Comply N/C=Not Comply N/T=Not Tested N/A=Not Applicable		

The data in this test report are traceable to the national or international standards.

4.2 Test environment and conditions

Test Items	Test date (MM-DD)	Temp (°C)	Humidity (% R.H.)
Conducted Disturbance	07-16	23	45
Radiated Disturbance	07-16	23	49
	07-17	23	49

4.3 Test result Summary

(1) Conducted Emission

Frequency [MHz]	Phase	Result [dB μ V]	Detector	Limit [dB μ V]	Margin [dB]
0.150	L1	56.1	Quasi-Peak	66.0	9.9

(2) Radiated Emission

Frequency [MHz]	Pol.	Result [dB(μ V/m)]	Detector	Limit [dB(μ V/m)]	Margin [dB]
141.325	V	21.8	Quasi-Peak	30.0	8.2

5. Test Set-up and operation mode

5.1 Principle of Configuration Selection

Emission : The equipment under test (EUT) was configured to measure its highest possible radiation level. The test modes were adapted accordingly in reference to the instructions for use.


5.2 Test Operation Mode

- PC link mode (The measurement was made of the maximized by: Write/Delete the “H” pattern mode; data exchange speed; moving the cable)

5.3 Support Equipment Used

Unit	Model No.	Serial No.	Manufacturer	CABLE			Backshell	FCC ID
				Connect type	Length (m)	shield		
Notebook	LGX14	009QTAF022136	LG	RJ45	1.6	Non-Shield	Plastic	DOC
				POWER	1.8	Non-Shield	Plastic	
				USB	1.2	Shield	Metal	
AC/DC Adaptor	ADP-40PH AD	N/A	Delta electronics Ltd.	POWER	1.6	Non-Shield	Plastic	VER
Headset	EAB62808201	N/A	I-Sound	Stereo	1.1	Non-Shield	Metal	VER
Mouse	1484	352700021375	Microsoft corp.	USB	1.5	Shield	Metal	DOC
Broadband Router	IPtime N804	N/A	EFM Networks	POWER	1.8	Non-Shield	Plastic	DOC

(Configuration of Tested System)

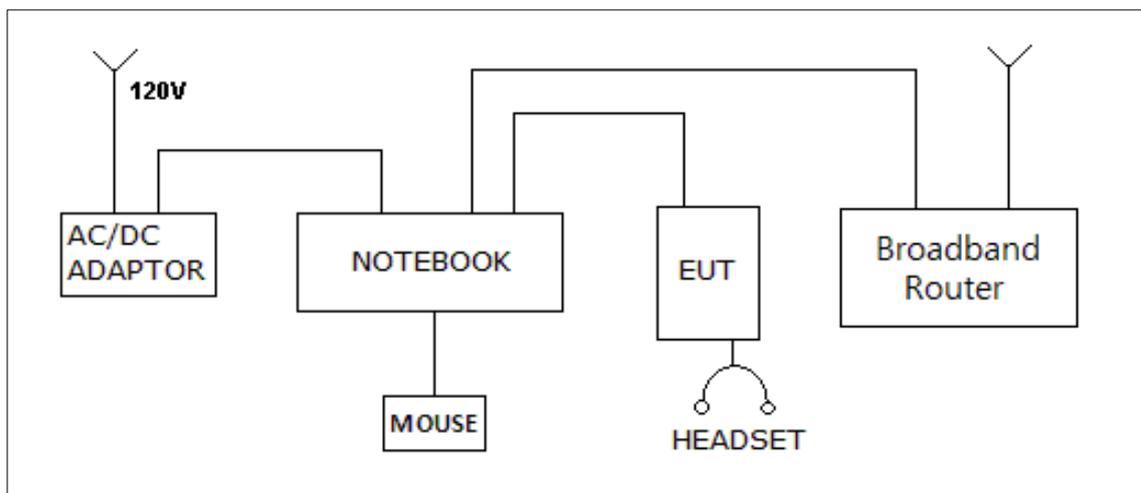

6. Test Results : Emission

6.1 Conducted Disturbance

6.1.1 Measurement Procedure

In the range of 0.15 MHz to 30 MHz, the conducted disturbance was measured and set-up was made accordance with **ANSI C63.4**.

If the EUT is table top equipment, it was placed on a wooden table with a height of 0.8 m above the reference ground plane and 0.4 m from the conducting wall of the shielded room.

Also if the EUT is floor-standing equipment, it was placed on a non-conducted support with a height up to 0.15 m above the reference ground plane.

Connect the EUT's power source lines to the appropriate power mains / peripherals through the LISN. All the other peripherals are connected to the 2nd LISN, if any.

Unused measuring port of the LISN was resistively terminated by 50 ohm terminator.

The measuring port of the LISN for EUT was connected to spectrum analyzer.

Using conducted emission test software, the emissions were scanned with peak detector mode.

After scanning over the frequency range, suspected emissions were selected to perform final measurement. When performing final measurement, the receiver was used which has Quasi-Peak detector and Average detector.

By varying the configuration of the test sample and the cable routing it was attempted to maximize the emission.

For further description of the configuration refer to the picture of the test set-up.

6.1.2 Limit for Conducted Disturbance

(1) Conducted disturbance at mains ports.

Frequency range (MHz)	Limits dB(μV)			
	Quasi-peak		Average	
	Class A	Class B	Class A	Class B
0.15 to 0.50	79	66 to 56	66	56 to 46
0.50 to 5	73	56	60	46
5 to 30		60		50

Note 1 The lower limit shall apply at the transition frequencies.
 Note 2 The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

- Note) 1. Emission Level = Reading Value + Correction Factor.
 2. Correction Factor = Cable Loss + Insertion Loss of LISN
 3. Margin = Limit - Emission level

Test Result



Results of Conducted Emission



Digital EMC
Date : 2012-07-16

Model No. : LG-P768f
Type :
Serial No. :
Test Condition :

Reference No. :
Power Supply : 120 V 60 Hz
Temp/Humi. : 23 °C 45 % R.H.
Operator : H.S KO

Memo :

LIMIT : CISPR22_B QP
CISPR22_B AV

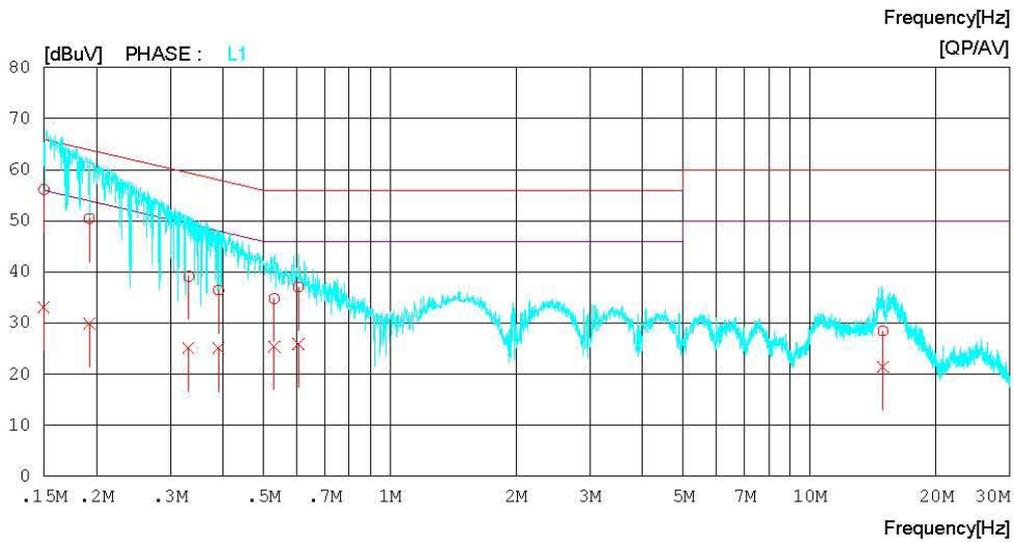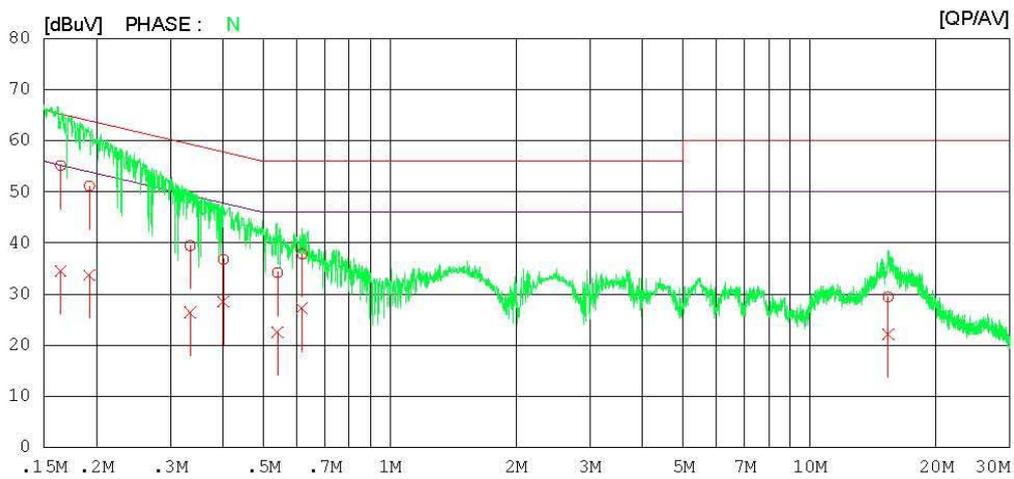

Results of Conducted Emission

Digital EMC
 Date : 2012-07-16

Model No. : LG-P768f	Reference No. :
Type :	Power Supply : 120 V 60 Hz
Serial No. :	Temp/Humi. : 23 °C 45 % R.H.
Test Condition :	Operator : H.S KO

Memo :

LIMIT : CISPR22_B QP
 CISPR22_B AV

NO	FREQ [MHz]	READING		C. FACTOR [dB]	RESULT		LIMIT		MARGIN		PHASE
		QP [dBuV]	AV [dBuV]		QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	
1	0.16426	54.8	34.2	0.3	55.1	34.5	65.2	55.2	10.1	20.7	N
2	0.19263	50.9	33.5	0.2	51.1	33.7	63.9	53.9	12.8	20.2	N
3	0.33441	39.1	26.1	0.3	39.4	26.4	59.3	49.3	19.9	22.9	N
4	0.40110	36.5	28.2	0.3	36.8	28.5	57.8	47.8	21.0	19.3	N
5	0.54004	34.0	22.3	0.2	34.2	22.5	56.0	46.0	21.8	23.5	N
6	0.61809	37.7	27.0	0.2	37.9	27.2	56.0	46.0	18.1	18.8	N
7	15.39150	28.5	21.2	1.0	29.5	22.2	60.0	50.0	30.5	27.8	N
8	0.15000	55.8	32.8	0.3	56.1	33.1	66.0	56.0	9.9	22.9	L1
9	0.19244	50.3	29.7	0.2	50.5	29.9	63.9	53.9	13.4	24.0	L1
10	0.33188	39.0	24.9	0.2	39.2	25.1	59.4	49.4	20.2	24.3	L1
11	0.39096	36.1	24.8	0.3	36.4	25.1	58.0	48.0	21.6	22.9	L1
12	0.53054	34.6	25.2	0.2	34.8	25.4	56.0	46.0	21.2	20.6	L1
13	0.60556	36.9	25.7	0.2	37.1	25.9	56.0	46.0	18.9	20.1	L1
14	14.95550	27.5	20.6	0.9	28.4	21.5	60.0	50.0	31.6	28.5	L1

6.2 Radiated Disturbance

6.2.1 Measurement Procedure

The radiated disturbance was measured and set-up was made accordance with **ANSI C63.4**.

If the EUT is tabletop equipment, it was placed on a wooden table with a height of 0.8 m above the reference ground plane and 3 m or 10m away from the interference receiving antenna in the **10m semi-anechoic chamber**.

Also if the EUT is floor-standing equipment, it was placed on a non-conducted support with a height up to 0.15 m above the reference ground plane.

Rotate the EUT from (0 - 360)° and position the receiving antenna at heights from (1 - 4) m above the reference ground plane continuously to determine associated with higher emission levels and record them.

The measurement was made in both the vertical and horizontal polarization, and the maximum value is presented in the report.

For below 1 GHz frequency range, Quasi-Peak detector with 120 kHz RBW was used.

Also Peak and Average detector with 1 MHz RBW were used for above 1 GHz frequency range.

For further description of the configuration refer to the picture of the test set-up.

6.2.2 Limit for Radiated Disturbance

- The test frequency range of Radiated Disturbance measurements are listed below.

Highest frequency generated or used in the device or on which the device operates or tunes (MHz)	Upper frequency of measurement range (MHz)
Below 108	1 000
108 – 500	2 000
500 – 1 000	5 000
Above 1 000	5 th harmonic of the highest frequency or 40 GHz, whichever is lower

(1) Limit for Radiated Emission below 1 000MHz

Frequency range (MHz)	Class A Equipment (10m distance)	Class B Equipment (3m distance)
	Quasi-peak (dB μ V/m)	Quasi-peak (dB μ V/m)
30 to 88	39.1	40
88 to 216	43.5	43.5
216 to 960	46.4	46
960 to 1 000	49.5	54

Note 1 The lower limit shall apply at the transition frequency.

Note 2 Additional provisions may be required for cases where interference occurs.

Note 3 According to 15.109(g), as an alternative to the radiated emission limit shown above, digital devices may be shown to comply with the standards(CISPR), Pub. 22 shown as below.

Frequency range (MHz)	Class A Equipment (10 m distance)	Class B Equipment (10 m distance)
	Quasi-peak (dB μ V/m)	Quasi-peak (dB μ V/m)
30 to 230	40	30
230 to 1 000	47	37

(2) Limits for Radiated Emission above 1 000MHz at a measuring distance of 3 m

Frequency (GHz)	Class A Equipment		Class B Equipment	
	Peak (dB μ V/m)	Average (dB μ V/m)	Peak (dB μ V/m)	Average (dB μ V/m)
1 to 40	80	60	74	54

Note) 1. Emission Level = Reading Value + Correction Factor.

2. Correction Factor = Cable loss - Amp gain + Antenna Factor

3. Margin = Limit - Emission level

Test Result

< 30 MHz ~ 1 GHz >



RADIATED EMISSION

Date : 2012-07-16

Model Name	: LG-P768f	Reference No.	:
Model No.	:	Power Supply	: 120 V 60 Hz
Serial No.	:	Temp/Humi	: 23 °C 49 % R.H.
Test Condition	:	Operator	: H.S KO

Memo :

LIMIT : CISPR Pub.22 Class B (10m)
MARGIN: 3 dB

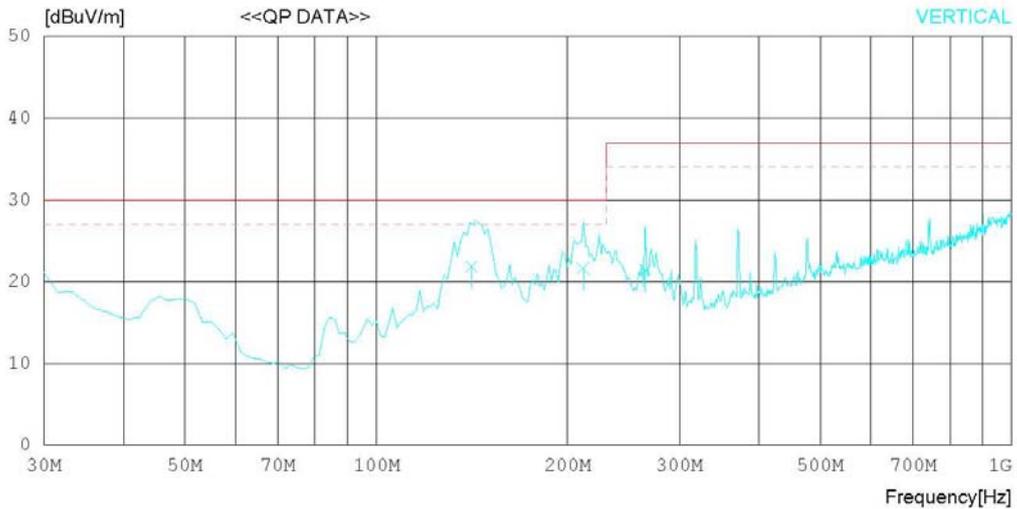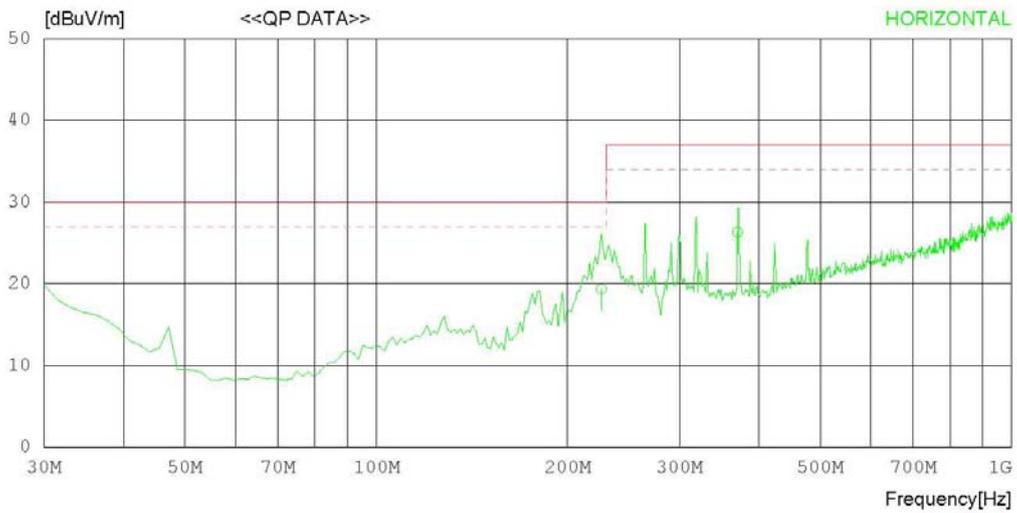

RADIATED EMISSION

Date : 2012-07-16

Model Name : LG-P768f	Reference No. :
Model No. :	Power Supply : 120 V 60 Hz
Serial No. :	Temp/Humi : 23 °C 49 % R.H.
Test Condition :	Operator : H.S KO

Memo :

LIMIT : CISPR Pub.22 Class B (10m)
 MARGIN: 3 dB

No.	FREQ [MHz]	READING QP [dBuV]	ANT FACTOR [dB]	LOSS [dB]	GAIN [dB]	RESULT [dBuV/m]	LIMIT [dBuV/m]	MARGIN [dB]	ANTENNA [cm]	TABLE [DEG]
----- Horizontal -----										
1	226.050	29.3	10.8	2.7	23.5	19.3	30.0	10.7	347	202
2	370.185	32.2	14.9	3.5	24.3	26.3	37.0	10.7	329	82
----- Vertical -----										
3	141.325	31.6	11.2	2.0	23.0	21.8	30.0	8.2	184	32
4	211.764	32.4	9.9	2.7	23.4	21.6	30.0	8.4	135	139
5	265.421	29.7	12.5	2.9	23.7	21.4	37.0	15.6	133	43



< (1 ~ 6) GHz_Peak >

RADIATED EMISSION

Date : 2012-07-17

Model Name	: LG-P768f	Reference No.	:
Model No.	:	Power Supply	: 120 V 60 Hz
Serial No.	:	Temp/Humi	: 23 °C 49 % R.H.
Test Condition	:	Operator	: H.S KO
Memo	:		

LIMIT : FCC Part15 Subpart.B Class B (3m) - 18G(Peak)
FCC Part15 Subpart.B Class B (3m) - 18G(Avg)

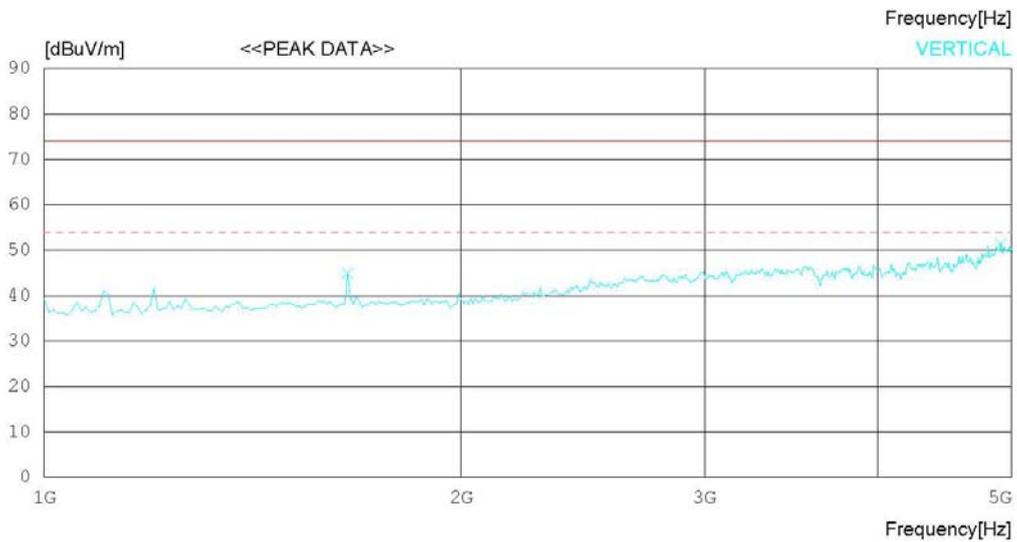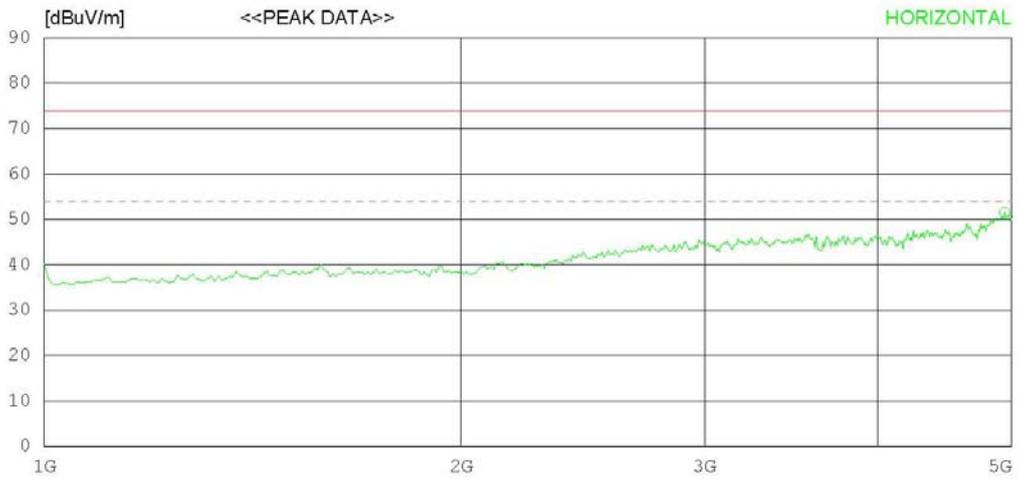

RADIATED EMISSION

Date : 2012-07-17

Model Name : LG-P768f	Reference No. :
Model No. :	Power Supply : 120 V 60 Hz
Serial No. :	Temp/Humi : 23 °C 49 % R.H.
Test Condition :	Operator : H.S KO

Memo :

LIMIT : FCC Part15 Subpart B Class B (3m) - 18G(Peak)
 FCC Part15 Subpart B Class B (3m) - 18G(Avg)

No.	FREQ [MHz]	READING PEAK [dBuV]	ANT FACTOR [dB]	LOSS [dB]	GAIN [dB]	RESULT [dBuV/m]	LIMIT [dBuV/m]	MARGIN [dB]	ANTENNA [cm]	TABLE [DEG]
----- Horizontal -----										
1	4942.325	45.8	32.3	15.2	41.8	51.5	74.0	22.5	100	332
----- Vertical -----										
2	1657.051	54.2	24.6	7.8	41.7	44.9	74.0	29.1	100	228
3	4910.274	45.8	32.2	15.1	41.8	51.3	74.0	22.7	100	1

RADIATED EMISSION

Date : 2012-07-17

Model Name : LG-P768f	Reference No. :
Model No. :	Power Supply : 120 V 60 Hz
Serial No. :	Temp/Humi : 23 °C 49 % R.H.
Test Condition :	Operator : H.S KO

Memo :

LIMIT : FCC Part15 Subpart B Class B (3m) - 18G(Avg)
 FCC Part15 Subpart B Class B (3m) - 18G(Peak)

No.	FREQ [MHz]	READING AV [dBuV]	ANT FACTOR [dB]	LOSS [dB]	GAIN [dB]	RESULT [dBuV/m]	LIMIT [dBuV/m]	MARGIN [dB]	ANTENNA [cm]	TABLE [DEG]
----- Horizontal -----										
1	4942.325	34.8	32.3	15.2	41.8	40.5	54.0	13.5	100	332
----- Vertical -----										
2	1657.051	35.9	24.6	7.8	41.7	26.6	54.0	27.4	100	228
3	4910.274	34.3	32.2	15.1	41.8	39.8	54.0	14.2	100	1

Appendix 1

List of Test and Measurement Instruments

To facilitate inclusion on each page of the test equipment used for related tests, each item of test equipment is identified by the Test Laboratory.

1. Conducted Disturbance

Name of Instrument	Model No.	Manufacturer	Serial No.	Cal. Date	Next Cal. Date
<input type="checkbox"/> SPECTRUM ANALYZER	8591E	H/P	3649A05889	2012.03.05	2013.03.05
<input type="checkbox"/> RFI/FIELD INTENSITY METER	KNM-2402	KYORITSU	4N-170-3	2012.07.02	2013.07.02
<input type="checkbox"/> LISN	KNW-407	KYORITSU	8-317-8	2012.01.09	2013.01.09
<input type="checkbox"/> LISN	PMM L2-16B	NARDA S.T.S. / PMM	000WX20305	2011.09.19	2012.09.19
<input type="checkbox"/> ATTENUATOR	CFA-10BPJ-10	TAMAGAWA ELECTRONICS	1760307E	N/A	N/A
<input type="checkbox"/> 50 OHM TERMINATOR	CT-01	TME	N/A	2012.01.09	2013.01.09
<input checked="" type="checkbox"/> EMI TEST RECEIVER	ESCI	ROHDE & SCHWARZ	100364	2012.03.06	2013.03.06
<input checked="" type="checkbox"/> LISN	ESH2-Z5	ROHDE & SCHWARZ	828739/006	2011.09.30	2012.09.30
<input checked="" type="checkbox"/> LISN	LISN1600	TTI	197204	2012.07.02	2013.07.02
<input checked="" type="checkbox"/> 50 OHM TERMINATOR	CT-01	TME	N/A	2012.01.09	2013.01.09

2. Radiated Disturbance

Name of Instrument	Model No.	Manufacturer	Serial No.	Cal. Date	Next Cal. Date
<input checked="" type="checkbox"/> EMI TEST RECEIVER	ESU	ROHDE & SCHWARZ	100014	2012.01.09	2013.01.09
<input checked="" type="checkbox"/> BILOG ANTENNA	CBL6112D	SCHAFFNER	22609	2010.12.21	2012.12.21
<input checked="" type="checkbox"/> HORN ANTENNA	BBHA9120A	SCHWARZBECK	322	2012.05.15	2014.05.15
<input checked="" type="checkbox"/> AMPLIFIER	8447E	H/P	2945A02865	2012.01.09	2013.01.09
<input checked="" type="checkbox"/> AMPLIFIER	MLA-00108-B02-36	TSJ	1518831	2012.01.09	2013.01.09
<input type="checkbox"/> SPECTRUM ANALYZER	E4411B	AGILENT	US41062735	2012.07.11	2013.07.11
<input type="checkbox"/> AMPLIFIER	8447D	AGILENT	2443A03690	2012.07.01	2013.07.01
<input type="checkbox"/> BILOG ANTENNA	VULB9160	SCHAFFNER	3151	2010.08.25	2012.08.25
<input type="checkbox"/> EMI TEST RECEIVER	ESCI	ROHDE & SCHWARZ	100364	2012.03.06	2013.03.06
<input type="checkbox"/> BICONICAL ANT.	VHA 9103	SCHWARZBECK	91032789	2010.11.29	2012.11.29
<input type="checkbox"/> LOG-PERIODIC ANT.	UHALP 9108A	SCHWARZBECK	590	2012.07.07	2014.07.07
<input type="checkbox"/> BICONICAL ANT.	VHA 9103	SCHWARZBECK	91031946	2010.12.21	2012.12.21
<input type="checkbox"/> LOG-PERIODIC ANT.	UHALP 9108-A1	SCHWARZBECK	1098	2010.11.29	2012.11.29
<input type="checkbox"/> AMPLIFIER	MLA-100K01-B01-26	TSJ	1252741	2012.03.05	2013.03.05