

TEST REPORT

of

FCC Part 22 Subpart H, and Part 24 Subpart E
FCC ID : ZNFP940

Equipment Under Test : Cellular/PCS GSM/GPRS/EDGE and PCS
WCDMA/HSUPA Phone with Bluetooth, WLAN and NFC

Model Name : LG-P940

Serial No. : N/A

Applicant : LG Electronics mobileComm U.S.A.,Inc.

Manufacturer : LG Electronics mobileComm U.S.A.,Inc.

Date of Test(s) : 2011.09.06 ~ 2011.09.21

Date of Issue : 2011.10.12

In the configuration tested, the EUT complied with the standards specified above.

Tested By:



Date

2011.10.12

Wonsuk Kim

Approved By:



Date

2011.10.12

Charles Kim

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

INDEX

TABLE OF CONTENTS Page

1. General Information -----	3
2. RF radiated output power & spurious radiated emission -----	7
3. Conducted Output Power -----	15
4. Occupied Bandwidth 99 % -----	17
5. Spurious Emissions At Antenna Terminal-----	25
6. Band Edge -----	32
7. Peak-Average Ratio -----	39
8. Frequency Stability -----	41

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

1. General information

1.1. Testing laboratory

SGS Korea Co., Ltd.(Gunpo Laboratory)

- 705, Dongchun-Dong Sooji-Gu, Yongin-Shi, Kyungki-Do, South Korea.

- Wireless Div. 2FL, 18-34, Sanbon-dong, Gunpo-si, Gyeonggi-do, Korea 435-040

www.kr.sgs.com/ee

Telephone : +82 +31 428 5700

FAX : +82 +31 427 2371

1.2. Details of applicant

Applicant : LG Electronics mobileComm U.S.A.,Inc.

Address : 10101 Old Grove Road, San Diego, CA 92131

Contact Person : An, Hee-Ju

Phone No. : +82 +10 2846 2750

1.3. Description of EUT

Kind of Product	Cellular/PCS GSM/GPRS/EDGE and PCS WCDMA/HSUPA Phone with Bluetooth, WLAN and NFC
Model Name	LG-P940
Serial Number	N/A
Power Supply	DC 3.7 V (Li-Ion Battery)
Rated Power	GSM850 : 33.2 dBm GSM1900 : 29.5 dBm WCDMA1900 : 22.6 dBm
Frequency Range	GSM850 : 824.2 MHz ~ 848.8 MHz GSM1900 : 1 850.2 MHz ~ 1 909.8 MHz WCDMA1900 : 1 852.4 MHz ~ 1 907.6 MHz Bluetooth : 2 402 ~ 2 480 MHz WLAN : 2 412 ~ 2 462 MHz (11b/g/n) 5 180 MHz ~ 5 240 MHz (11a/n – Non DFS) 5 260 MHz ~ 5 320 MHz (11a/n - DFS) 5 500 MHz ~ 5 700 MHz (11a/n - DFS) NFC : 13.56 MHz
Class of GPRS	Class 12, Class B
Emission Designator	245KGXW (GSM850), 249KG7W (GSM850 EDGE), 250KGXW (GSM1900), 247KG7W (GSM1900 EDGE), 4M07F9W (WCDMA1900)

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

1.4. Description of test mode

Band	Frequency (MHz)	Voice GSM (dBm)	GPRS Data			
			GPRS 1 TX Slot	GPRS 2 TX Slot	GPRS 3 TX Slot	GPRS 4 TX Slot
			(dBm)	(dBm)	(dBm)	(dBm)
GSM 850	824.2	33.20	33.2	31.1	29.3	28.2
	836.6	33.20	33.2	31.2	29.3	28.3
	848.8	33.20	33.2	31.2	29.2	28.3
GSM 1900	1 850.2	29.50	29.5	27.6	25.6	24.6
	1 880.0	29.40	29.4	27.4	25.4	24.4
	1 909.8	29.30	29.4	27.4	25.4	24.4

Band	Frequency (MHz)	EDGE Data			
		EDGE 1 TX Slot	EDGE 2 TX Slot	EDGE 3 TX Slot	EDGE 4 TX Slot
		(dBm)	(dBm)	(dBm)	(dBm)
GSM 850	824.2	26.7 24.6		22.6 21.7	
	836.6	26.7 24.7		22.6 21.8	
	848.8	26.7 24.7		22.7 21.8	
GSM 1900	1 850.2	25.6 23.6		21.7 20.7	
	1 880.0	25.5 23.5		21.5 20.5	
	1 909.8	25.5 23.5		21.5 20.4	

3GPP Release version	Mode	3GPP 34.121	PCS Band[dBm]		
		Subtest	9262	9400	9538
99	WCDMA	12.2kbps RMC	22.64	22.42	22.34
5	HSDPA	Subtest1	22.53	22.34	22.29
5		Subtest2	22.63	22.40	22.35
5		Subtest3	22.58	22.42	22.32
5		Subtest4	22.27	22.08	22.03
5	HSUPA	Subtest1	21.92	21.56	21.60
5		Subtest2	20.93	20.80	20.66
5		Subtest3	22.03	21.64	21.70
5		Subtest4	21.79	21.34	21.58
5		Subtest5	21.59	21.29	21.37

- GSM (850 / 1900) & WCDMA (1900)

We found out the test mode with the highest power level after we analyze all the data rates. So we chose GSM850 / GSM1900 1 TX Slot and WCDMA 1900 12.2 kbps RMC (worst case) as a representative.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

1.5. Test equipment list

Equipment	Manufacturer	Model	S/N	Cal Due.
Signal Generator	Agilent	E4438C MY4208	2477	Mar. 31, 2012
Signal Generator	R & S	SMR40 1002	72	Jul. 15, 2012
Spectrum Analyzer	R & S	FSP40	100007	Jul. 14, 2012
Spectrum Analyzer	Agilent	E4440A	MY43362142	May. 18, 2012
Mobile Test Unit	Agilent	E5515C	GB43345198	Mar. 31, 2012
Directional Coupler	KRYTAR	152613 1226	61	May. 16, 2012
High Pass Filter	Wainwright	WHK3.0/18G-10SS	344	Jul. 07, 2012
Band Reject Filter	Wainwright	WRCG824/849-814/85 960/10SS	7	Apr. 01, 2012
DC power Supply	Agilent	U8002A	MY49030063	Jan. 05, 2012
Preamplifier	H.P.	8447F	2944A03909	Jul. 04, 2012
Preamplifier	R & S	SCU 18	10117	Mar. 23, 2012
Test Receiver	R & S	ESU26	100109	Feb. 21, 2012
Bilog Antenna	SCHWARZBECK MESSELEKTRONIK	VULB9163	396	Apr. 27, 2013
Horn Antenna	R & S	HF 906	100326	Oct. 08, 2011
Horn Antenna	SCHWARZBECK	BBH 9120D	BBHA9170431	Mar. 17, 2012
Dipole Antenna	SCHWARZBECK	VHA 9103/UHA 9105	9103-2817 9105-2514	Jun. 14, 2012
Antenna Master	EMCO	1050	N.C.R.	N.C.R.
Turn Table	Daeil EMC	DI-1500	N.C.R.	N.C.R.
Anechoic Chamber	SY Corporation	L × W × H (9.6 m × 6.4 m × 6.6 m)	N.C.R.	N.C.R.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

1.6. Summary of test results

The EUT has been tested according to the following specifications:

APPLIED STANDARD : FCC Part 22, 24		
Section in FCC part	Test Item	Result
§2.1046 §22.913(a) §24.232(b)	RF Radiated Output Power	Complied
§2.1053 §22.917(a) §24.238(a)	Spurious Radiated Emission	Complied
§2.1046(a)	Conducted Output Power	Complied
§2.1049(h) (i)	Occupied Bandwidth	Complied
§2.1051 §22.917(a) §24.238(a)	Spurious Emission at Antenna Terminal	Complied
§24.232(d) Peak-A	verage Ratio	Complied
§2.1055 §22.355 §24.235	Frequency Stability	Complied
§22.917(a) §24.238(a)	Band Edge	Complied

1.7. Test report revision


Revision	Report number	Description
0 F690	501/RF-RTL004977	Initial
1 F690	501/RF-RTL004977-1	The band(5745-5825) is deleted

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.


2. RF radiated output power & spurious radiated emission

2.1. Test setup

The diagram below shows the test setup that is utilized to make the measurements for emission from 30 MHz to 1 GHz Emissions.

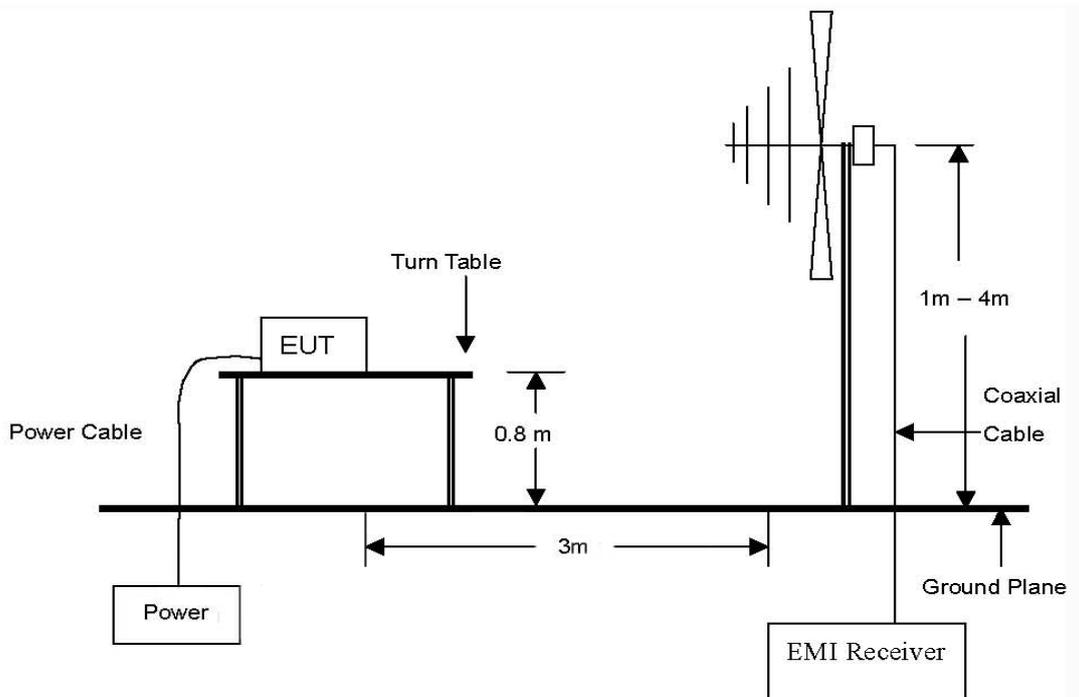


The diagram below shows the test setup that is utilized to make the measurements for emission from 1 GHz to 18 GHz Emissions.

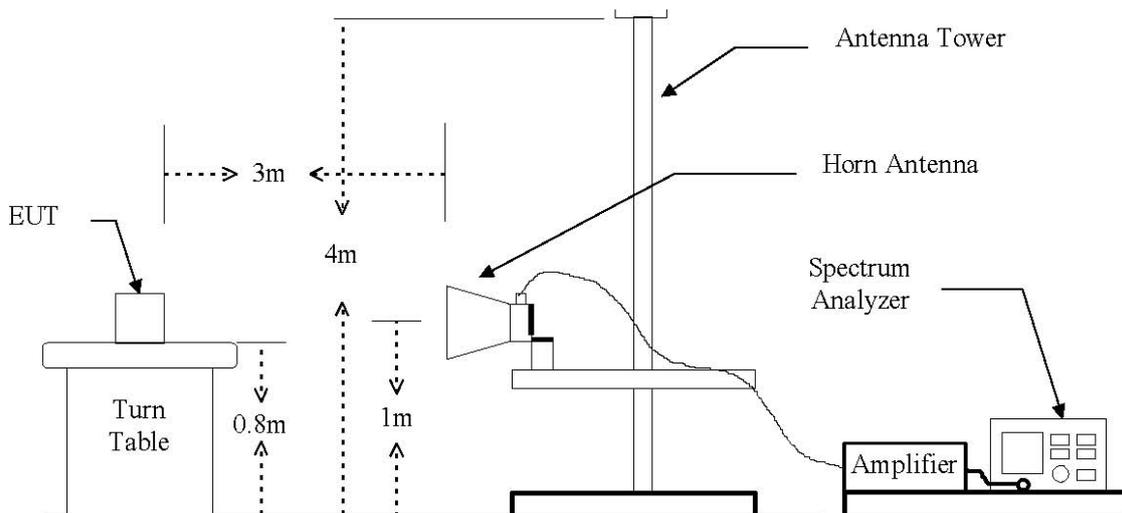

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

The diagram below shows the test setup for substituted method

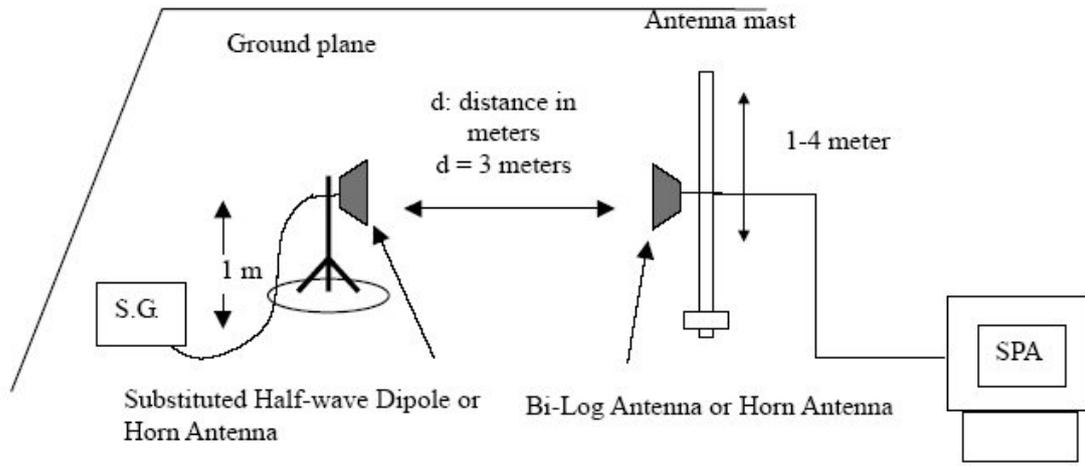

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

2.2. Limit

FCC §22.913(a), the ERP of mobile transmitters must not exceed 7 watts.

FCC §24.232(b) Mobile/portable stations are limited to 2 watts e.i.r.p. peak power and the equipment must employ means to limit the power to the minimum necessary for successful communications.

2.3. Test procedure : Based on ANSI/TIA 603C: 2004

1. On a test site, the EUT shall be placed at 80cm height on a turn table, and in the position close to normal use as declared by the applicant.
2. The test antenna shall be oriented initially for vertical polarization located 3 m from EUT to correspond to the fundamental frequency of the transmitter.
3. The output of the test antenna shall be connected to the measuring receiver and the peak detector is used for the measurement.
4. During the measurement of the EUT, the resolution bandwidth was to 1 MHz and the average bandwidth was set to 1 MHz.
5. The transmitter shall be switched on; the measuring receiver shall be tuned to the frequency of the transmitter under test.
6. The test antenna shall be raised and lowered through the specified range of height until the maximum signal level is detected by the measuring receiver.
7. The transmitter shall be rotated through 360° in the horizontal plane, until the maximum signal level is detected by the measuring receiver.
8. The test antenna shall be raised and lowered again through the specified range of height until the maximum signal level is detected by the measuring receiver.
9. The maximum signal level detected by the measuring receiver shall be noted.
10. The EUT was replaced by half-wave dipole (824 ~ 849 MHz) or horn antenna (1850 ~ 1910 MHz) connected to a signal generator.
11. In necessary, the input attenuator setting on the measuring receiver shall be adjusted in order to increase the sensitivity of the measuring receiver.
12. The test antenna shall be raised and lowered through the specified range of height to ensure that the maximum signal is received.
13. The input signal to the substitution antenna shall be adjusted to the level that produces a level detected by the measuring receiver, which is equal to the level noted while the transmitter radiated power was measured, corrected for the change of input attenuator setting of the measuring receiver.
14. The input level to the substitution antenna shall be recorded as power level in dBm, corrected for any change of input attenuator setting of the measuring receiver.
15. The measurement shall be repeated with the test antenna and the substitution antenna orientated for horizontal polarization.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

2.4. Test result for RF radiated output power

Ambient temperature : (24 ± 2) °C
 Relative humidity : 47 % R.H.

GSM850

Frequency (MHz)	Ant. Pol. (H/V)	S.G level + Amp. (dB m)	Cable loss (dB)	Ant. gain (dB d)	E.R.P.	
					(dB m)	(mW)
824.2	V	31.08	3.42	-4.22	23.44	220.80
824.2	H	41.10	3.42	-4.22	33.46	2218.20
836.6	V	28.63	3.38	-3.99	21.27	133.97
836.6	H	39.71	3.38	-3.99	32.35	1717.91
848.8	V	26.84	3.33	-3.76	19.75	94.41
848.8	H	39.28	3.33	-3.76	32.19	1655.77

GSM850 (EDGE)

Frequency (MHz)	Ant. Pol. (H/V)	S.G level + Amp. (dB m)	Cable loss (dB)	Ant. gain (dB d)	E.R.P.	
					(dB m)	(mW)
824.2	V	26.83	3.42	-4.22	19.19	82.99
824.2	H	37.69	3.42	-4.22	30.05	1011.58

GSM1900

Frequency (MHz)	Ant. Pol. (H/V)	S.G level + Amp. (dB m)	Cable loss (dB)	Ant. gain (dB i)	E.I.R.P.	
					(dB m)	(mW)
1 850.2	V	25.86	4.87	9.12	30.11	1025.65
1 850.2	H	23.60	4.87	9.12	27.85	609.54
1 880.0	V	21.97	4.91	9.20	26.26	422.67
1 880.0	H	20.58	4.91	9.20	24.87	306.90
1 909.8	V	22.31	4.94	9.27	26.64	461.32
1 909.8	H	18.88	4.94	9.27	23.21	209.41

GSM1900 (EDGE)

Frequency (MHz)	Ant. Pol. (H/V)	S.G level + Amp. (dB m)	Cable loss (dB)	Ant. gain (dB i)	E.I.R.P.	
					(dB m)	(mW)
1 850.2	V	24.54	4.87	9.12	28.79	756.83
1 850.2	H	22.39	4.87	9.12	26.64	461.32

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

WCDMA1900

Frequency (MHz)	Ant. Pol. (H/V)	S.G level + Amp. (dB m)	Cable loss (dB)	Ant. gain (dB i)	E.I.R.P.	
					(dB m)	(mW)
1 852.4	V	18.53	4.87	9.12	22.78	189.67
1 852.4	H	15.88	4.87	9.12	20.13	103.04
1 880.0	V	14.89	4.91	9.20	19.18	82.79
1 880.0	H	13.06	4.91	9.20	17.35	54.33
1 907.6	V	15.89	4.94	9.27	20.22	105.20
1 907.6	H	11.47	4.94	9.27	15.80	38.02

Remark:

1. E.R.P. & E.I.R.P. = [S.G level + Amp.](dB m) - Cable loss(dB) + Ant. gain (dB d/dB i)
2. The E.R.P. & E.I.R.P. was measured in three orthogonal EUT position(x-axis, y-axis and z-axis). Worst cases are y-axis.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

2.5. Spurious radiated emission

- Modulation Signal : GSM850
- Measured output Power : 33.46 dB m = 2.22 W
- Distance : 3 meters
- Limit : $-(43 + 10\log_{10}(W)) = -46.46$ dB c

Frequency (MHz)	Ant. Pol. (H/V)	S.G level (dB m)	Cable loss (dB)	Ant. gain (dB d)	E.R.P (dB m)	dB c	Margin (dB)
Low Channel (824.2 MHz)							
1 648.5	V	-55.77	4.54	6.44	-53.87	-87.33	40.87
1 648.5	H	-59.01	4.54	6.44	-57.11	-90.57	44.11
Middle Channel (836.6 MHz)							
1 673.1	V	-53.83	4.58	6.50	-51.90	-85.36	38.90
1 673.1	H	-59.01	4.58	6.50	-57.08	-90.54	44.08
High Channel (848.8 MHz)							
1 697.2	V	-51.69	4.62	6.57	-49.74	-83.20	36.74
1 697.2	H	-58.11	4.62	6.57	-56.16	-89.62	43.16

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

- Modulation Signal : GSM1900
- Measured output Power : 30.11 dB m = 1.03 W
- Distance : 3 meters
- Limit : $-(43 + 10\log_{10}(W)) = -43.13$ dB c

Frequency (MHz)	Ant. Pol. (H/V)	S.G level (dB m)	Cable loss (dB)	Ant. gain (dB i)	E.I.R.P. (dB m)	dB c	Margin (dB)
Low Channel(1 850.2 MHz)							
3 700.3	V	-41.42	7.13	11.85	-36.70	-66.81	23.70
3 700.3	H	-40.21	7.13	11.85	-35.49	-65.60	22.49
Middle Channel(1 880.0 MHz)							
3 760.1	V	-40.97	7.23	11.85	-36.36	-66.47	23.36
3 760.1	H	-41.81	7.23	11.85	-37.20	-67.31	24.20
High Channel(1 909.8 MHz)							
3 819.7	V	-42.74	7.33	11.84	-38.23	-68.34	25.23
3 819.7	H	-43.83	7.33	11.84	-39.32	-69.43	26.32

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

- Modulation Signal : WCDMA1900
- Measured output Power : 22.78 dB m = 0.19 W
- Distance : 3 meters
- Limit : $-(43 + 10\log_{10}(W)) = -35.79$ dB c

Frequency (MHz)	Ant. Pol. (H/V)	S.G level (dB m)	Cable loss (dB)	Ant. gain (dB i)	E.I.R.P. (dB m)	dB c	Margin (dB)
Low Channel(1 852.4 MHz)							
3 702.2	V	-52.50	7.13	11.85	-47.78	-70.56	34.78
3 702.2	H	-48.61	7.13	11.85	-43.89	-66.67	30.89
Middle Channel(1 880.0 MHz)							
3 762.4	V	-49.79	7.24	11.85	-45.18	-67.96	32.18
3 762.4	H	-51.95	7.24	11.85	-47.34	-70.12	34.34
High Channel(1 907.6 MHz)							
3 817.5	V	-50.60	7.33	11.84	-46.09	-68.87	33.09
3 817.5	H	-52.77	7.33	11.84	-48.26	-71.04	35.26

Remark:

1. $E.R.P. \ \& \ E.I.R.P. = S.G \ level \ (dB \ m) - Cable \ loss \ (dB) + Ant. \ gain \ (dB \ d/dB \ i)$
2. No more harmonic above 3rd harmonic for all channel.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.


3. Conducted Output Power

3.1. Limit

Requirements: CFR 47, Section §2.1046

3.2. Test Procedure

1. The RF output of the transmitter was connected to the input of the Mobile Communication Test Unit through sufficient attenuation.
2. The mobile was set up for the max. output power with pseudo random data modulation.
3. The power was measured with

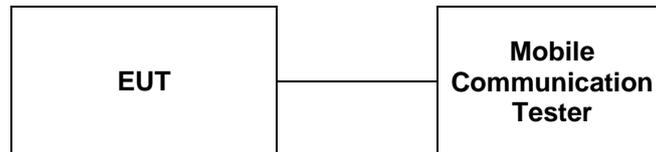

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

SGS Korea Co., Ltd. (Gunpo Laboratory) 18-34, Sanbon-dong, Gunpo-si, Gyeonggi-do, Korea, 435-040

Tel. +82 31 428 5700 / Fax. +82 31 427 2371

www.kr.sgs.com/ee

3.3. Test Result

Ambient temperature : (24 ± 2) °C
 Relative humidity : 47 % R.H.

Band	Frequency (MHz)	Voice GSM (dBm)	GPRS Data			
			GPRS 1 TX Slot (dBm)	GPRS 2 TX Slot (dBm)	GPRS 3 TX Slot (dBm)	GPRS 4 TX Slot (dBm)
			GSM 850	824.2	33.20	33.2
	836.6	33.20	33.2	31.2	29.3	28.3
	848.8	33.20	33.2	31.2	29.2	28.3
GSM 1900	1 850.2	29.50	29.5	27.6	25.6	24.6
	1 880.0	29.40	29.4	27.4	25.4	24.4
	1 909.8	29.30	29.4	27.4	25.4	24.4

Band	Frequency (MHz)	EDGE Data			
		EDGE 1 TX Slot (dBm)	EDGE 2 TX Slot (dBm)	EDGE 3 TX Slot (dBm)	EDGE 4 TX Slot (dBm)
		GSM 850	824.2	26.7	24.6
	836.6	26.7	24.7	22.6	21.8
	848.8	26.7	24.7	22.7	21.8
GSM 1900	1 850.2	25.6	23.6	21.7	20.7
	1 880.0	25.5	23.5	21.5	20.5
	1 909.8	25.5	23.5	21.5	20.4

3GPP Release version	Mode	3GPP 34.121 Subtest	PCS Band[dBm]		
			9262	9400	9538
99	WCDMA	12.2kbps RMC	22.64	22.42	22.34
5	HSDPA	Subtest1	22.53	22.34	22.29
5		Subtest2	22.63	22.40	22.35
5		Subtest3	22.58	22.42	22.32
5		Subtest4	22.27	22.08	22.03
5	HSUPA	Subtest1	21.92	21.56	21.60
5		Subtest2	20.93	20.80	20.66
5		Subtest3	22.03	21.64	21.70
5		Subtest4	21.09	20.92	20.88
5		Subtest5	21.59	21.29	21.37

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.


4. Occupied Bandwidth 99 %

4.1. Limit

Requirements: CFR 47, Section §2.1049.

4.2. Test Procedure

1. The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation.
2. The resolution bandwidth of the spectrum analyzer was set.
Occupied Bandwidth 99 % was tested under

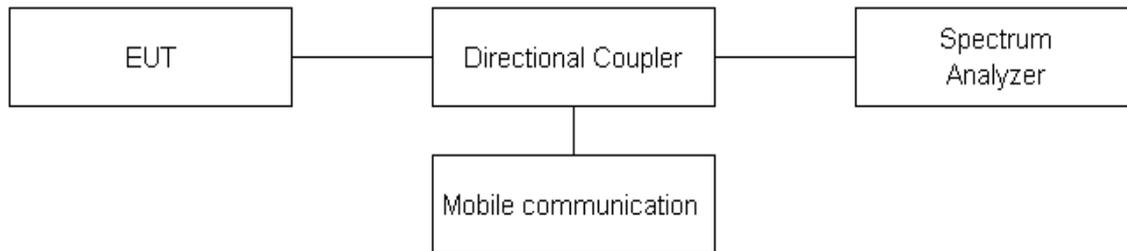

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

4.3 Test Results

Ambient temperature : (24 ± 2) °C
 Relative humidity : 47 % R.H.

Band	Mode	Frequency (MHz)	Occupied Bandwidth (MHz)
GSM850	1 Tx slot	824.2 0.245	
		836.6 0.242	
		848.8 0.244	
	EDGE 824.2		0.249
GSM1900	1 Tx slot	1 850.2	0.250
		1 880.0	0.245
		1 909.8	0.242
	EDGE 1	850.2	0.247
WCDMA1900	12.2kbps RMC	1 852.4	4.056
		1 880.0	4.058
		1 907.6	4.069


Please refer to the following plots.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.


GSM850

99 %

Low Channel

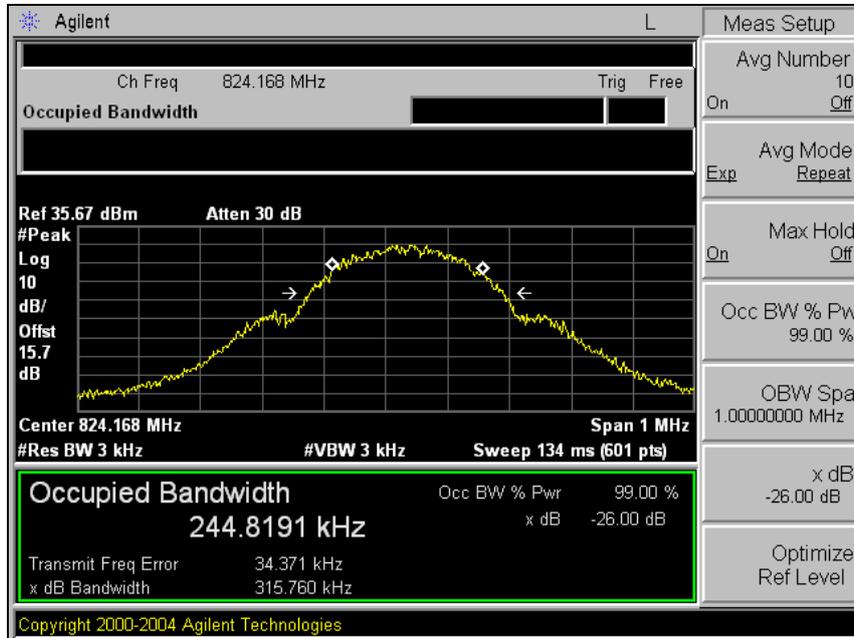


Middle Channel

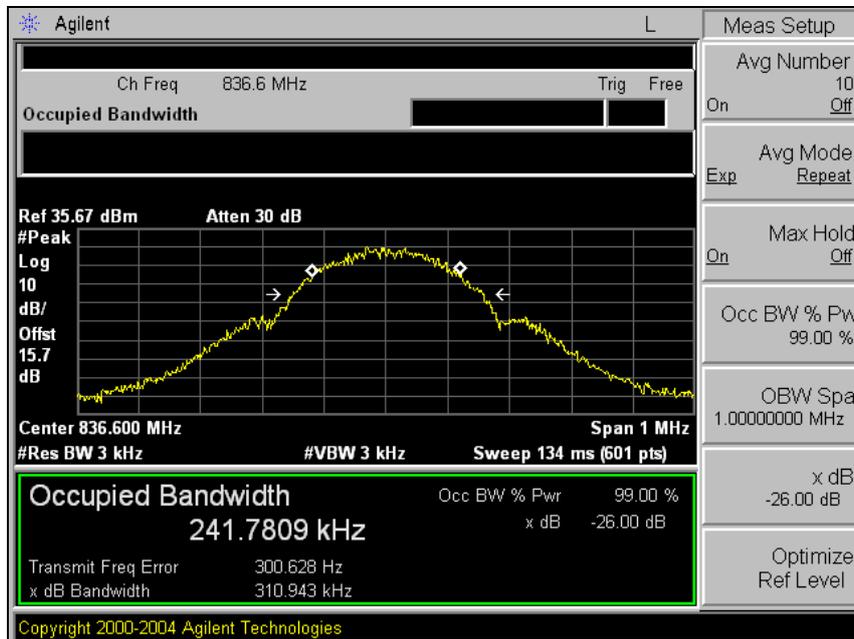


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

High Channel

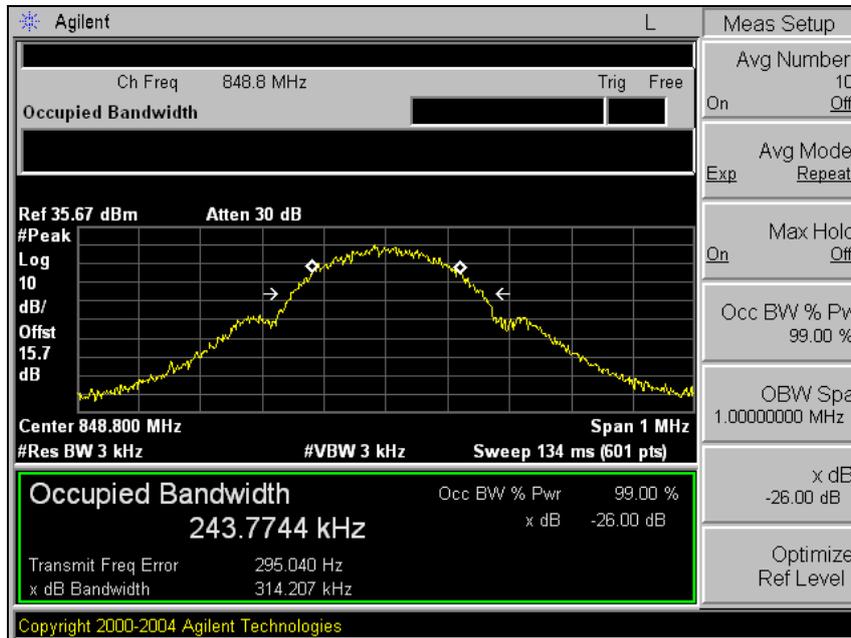

GSM850 EDGE
99 %
Middle Channel

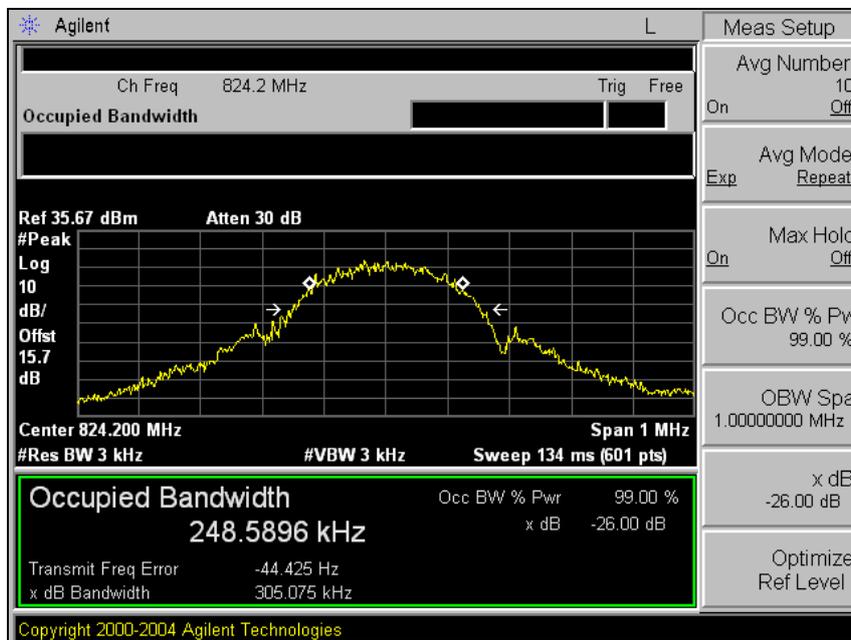


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.


GSM1900

99 %

Low Channel

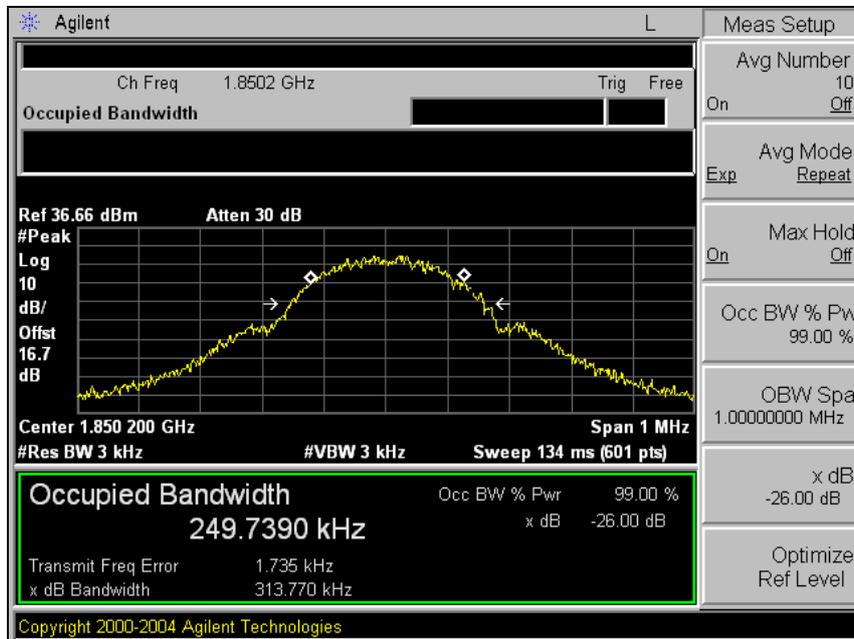


Middle Channel

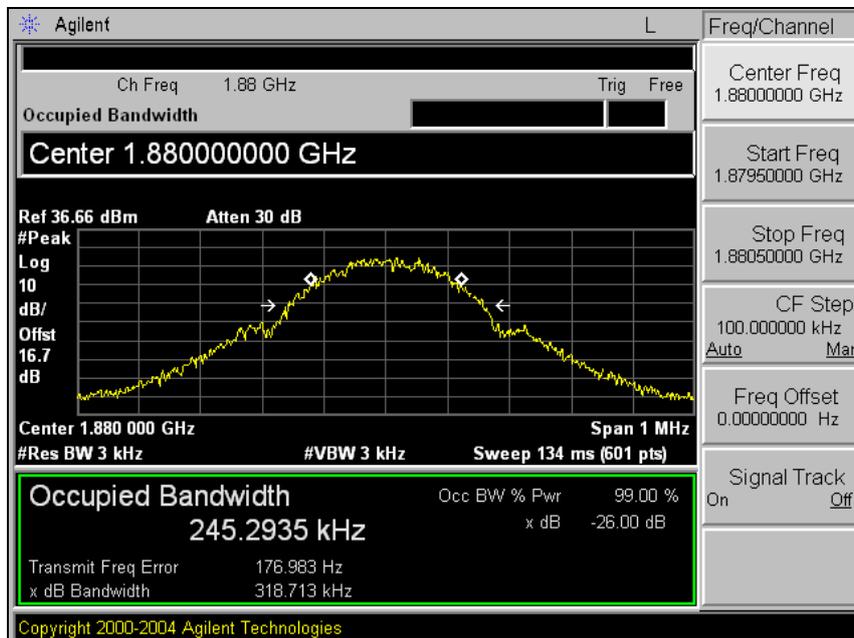


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

High Channel

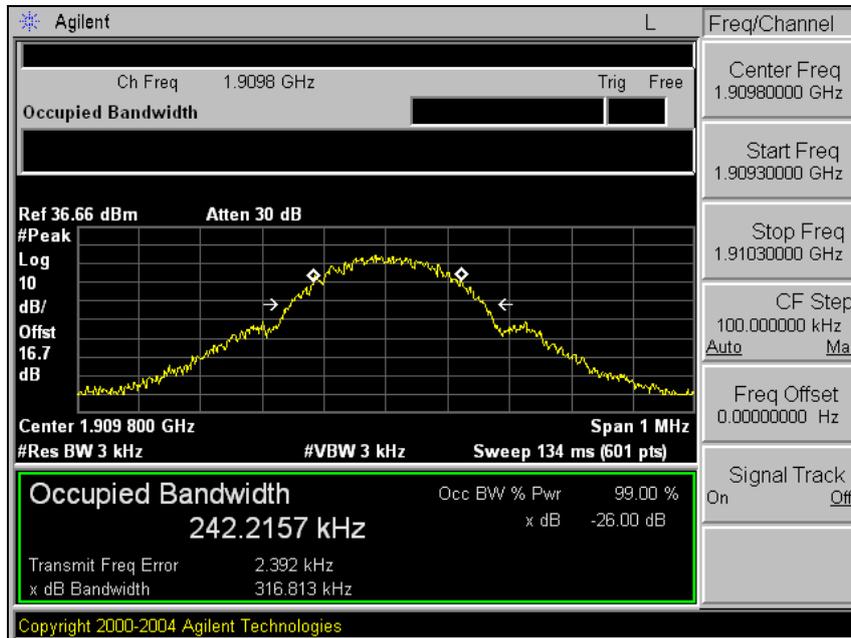

GSM1900 EDGE
99 %
Middle Channel

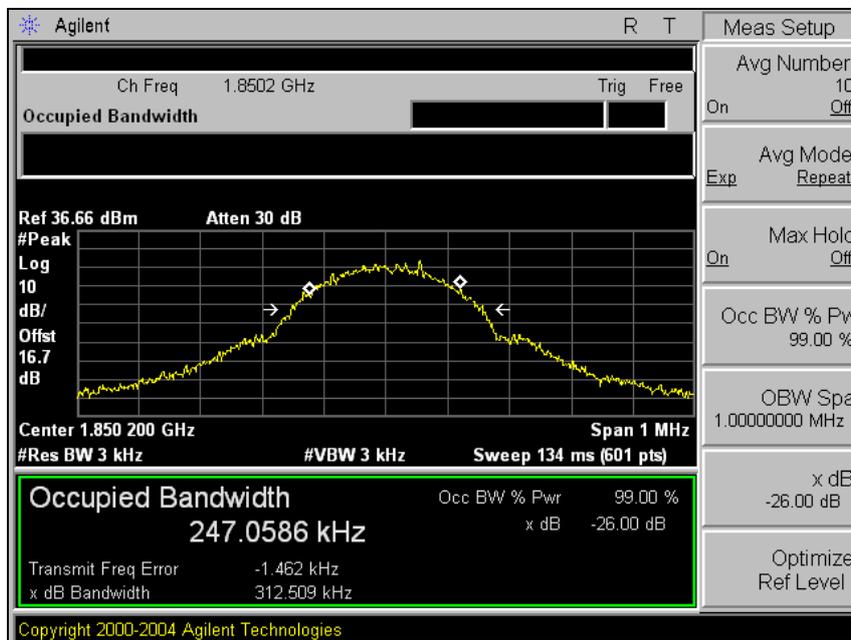


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.


WCDMA1900

99 %

Low Channel

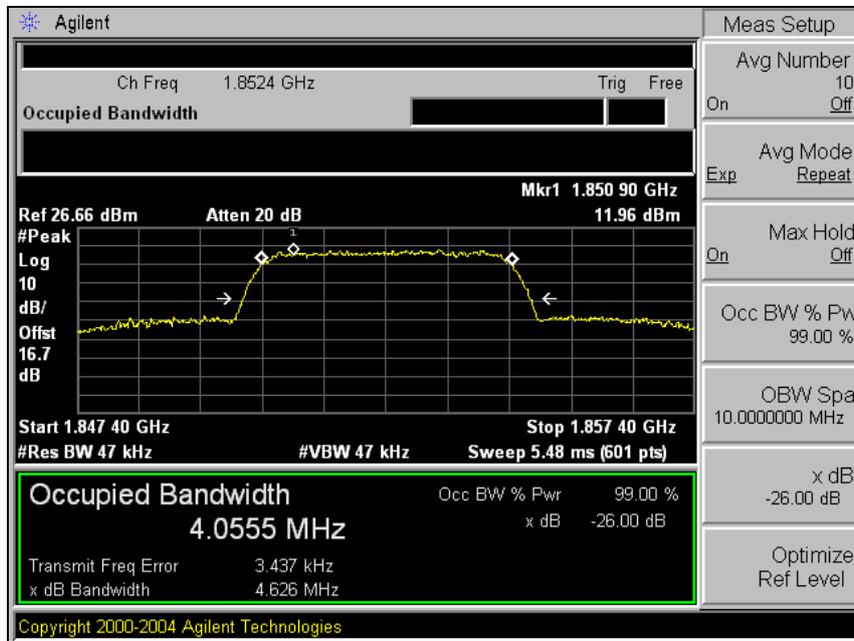


Middle Channel

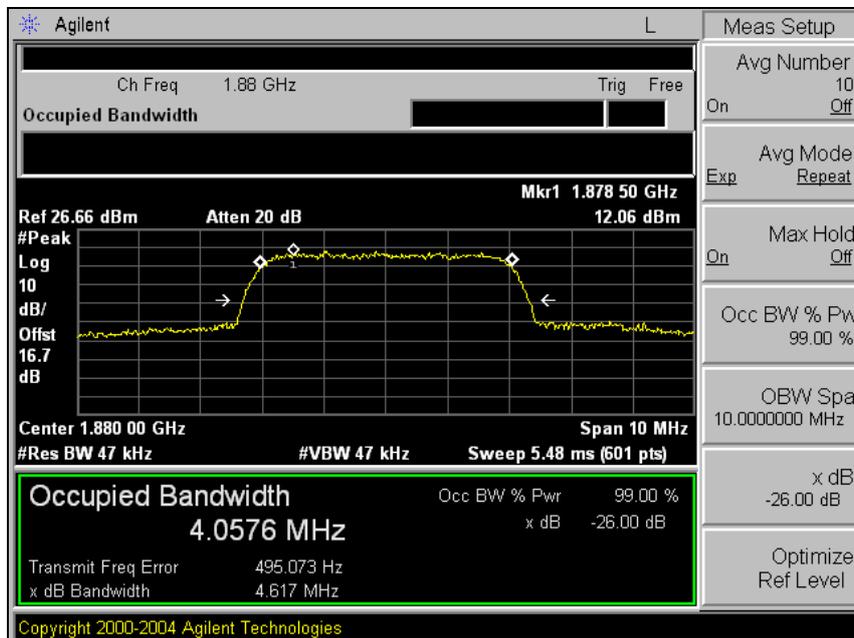

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

High Channel

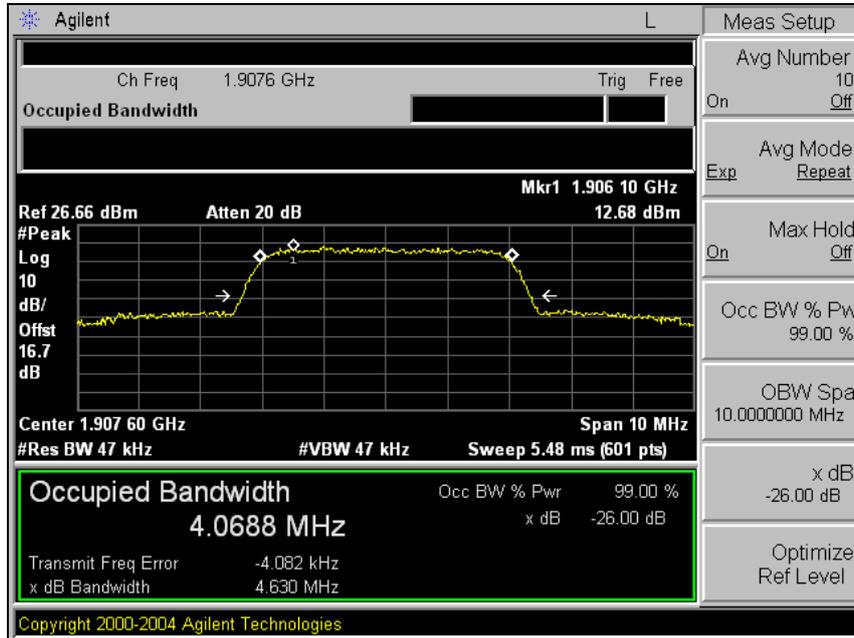

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.


5. Spurious Emissions at Antenna Terminal

5.1. Limit

§ 22.917(a) and §24.2 38 (a) Out of band emissions. The power of any emission outside of the authorized operating frequency must be attenuated below the transmitting (P) by a factor of at least $43 + 10\log(P)$ dB.

5.2. Test Procedure

1. The RF output of the transceiver was connected to a spectrum analyzer through appropriate attenuation.
2. The resolution bandwidth of the spectrum analyzer was set at 1 MHz. Sufficient scans were taken to show any out of band emissions up to 10th harmonic.
3. Spurious Emission was tested under

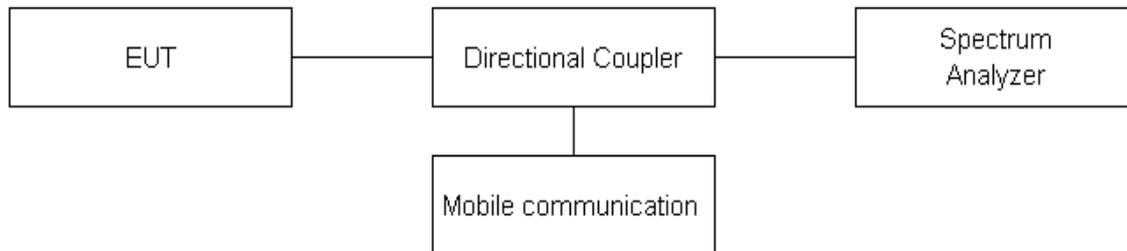


5.3. Test Results

Ambient temperature : (24 ± 2) °C
 Relative humidity : 47 % R.H.


Please refer to the following plots.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

GSM850
Low Channel

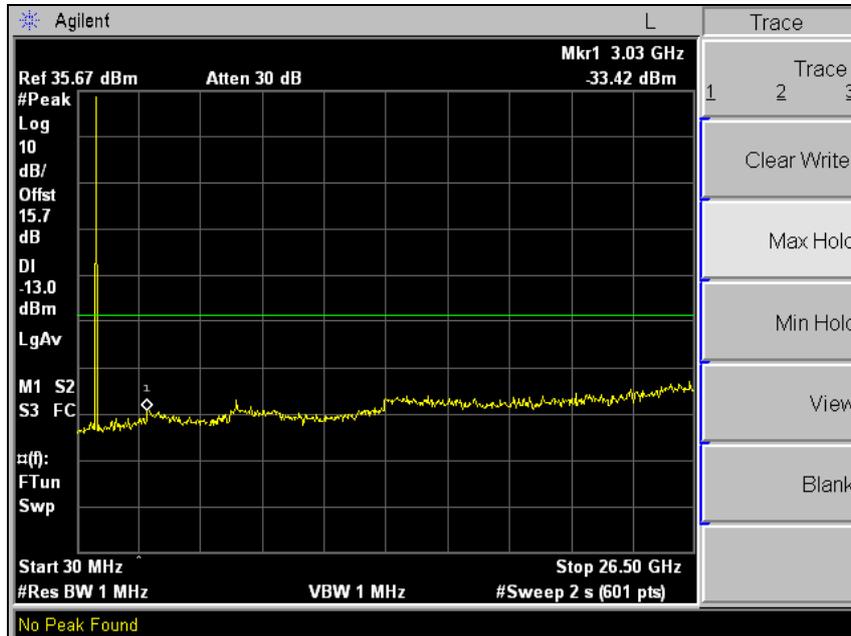


Middle Channel

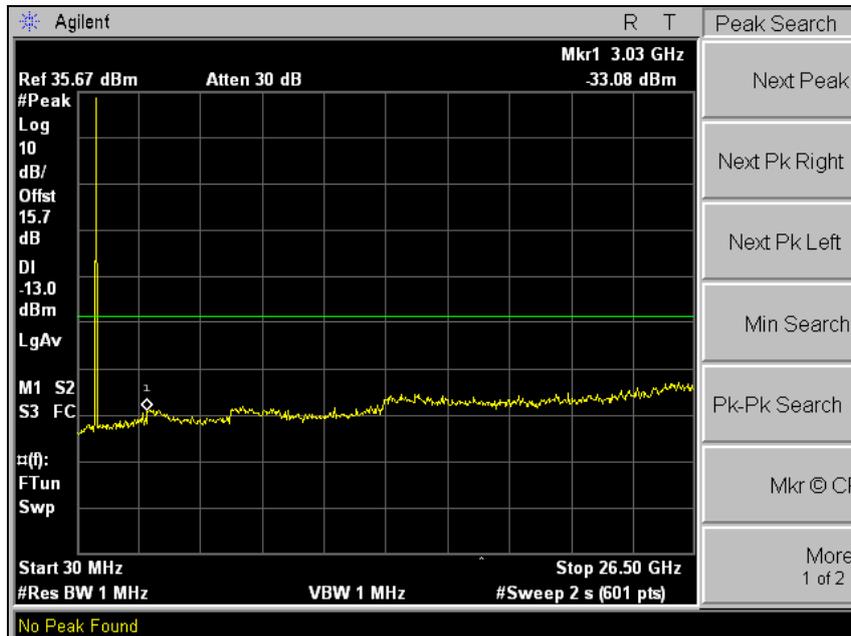


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

High Channel

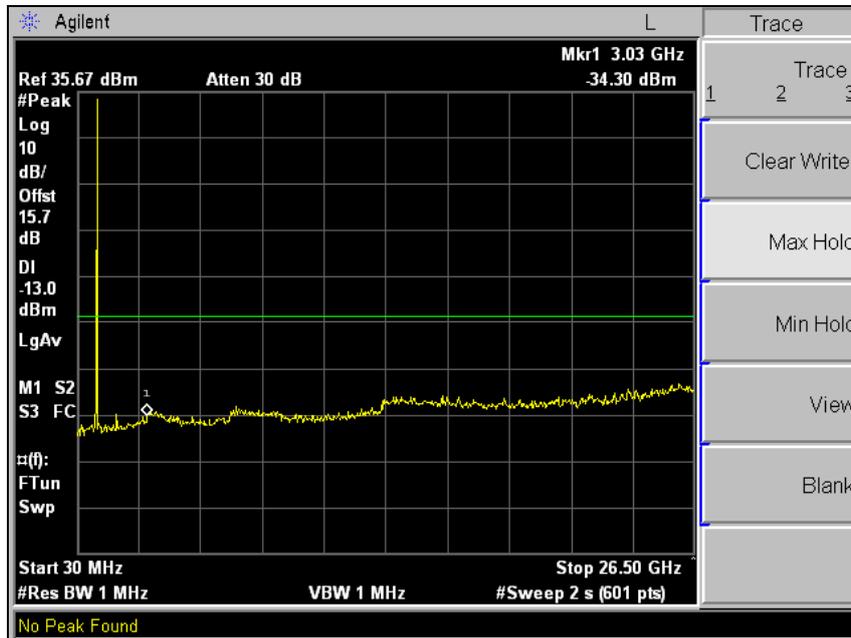


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

GSM1900
Low Channel

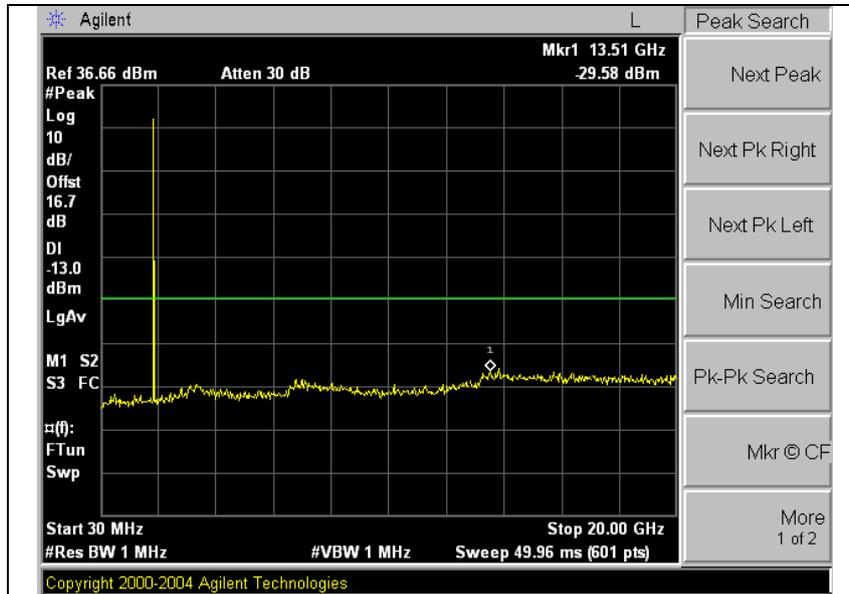


Middle Channel

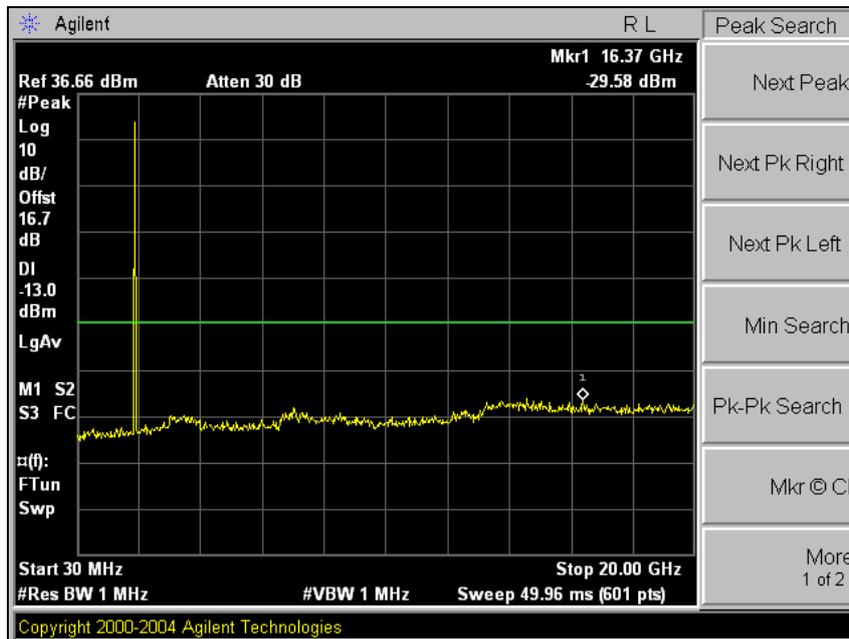


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

High Channel

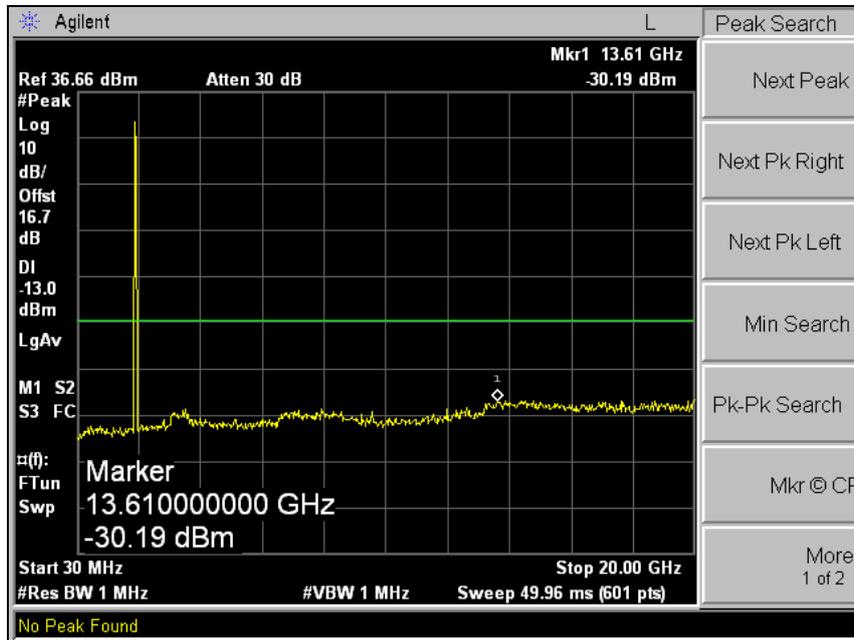


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

WCDMA1900
Low Channel

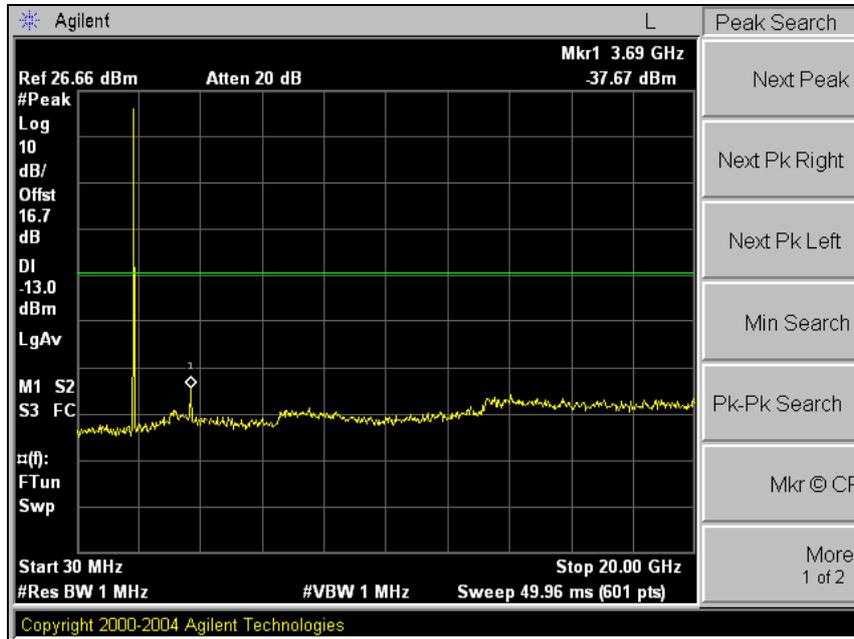


Middle Channel

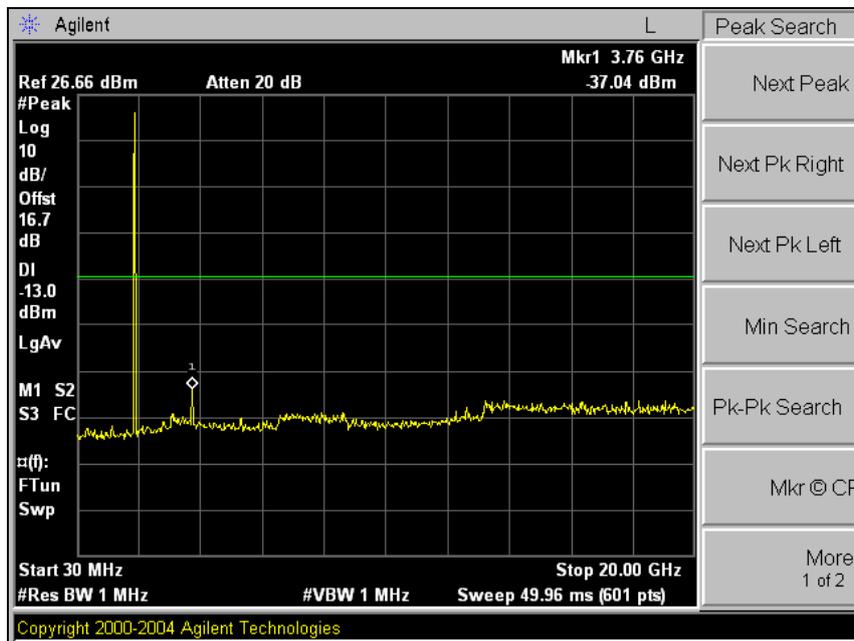

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

High Channel

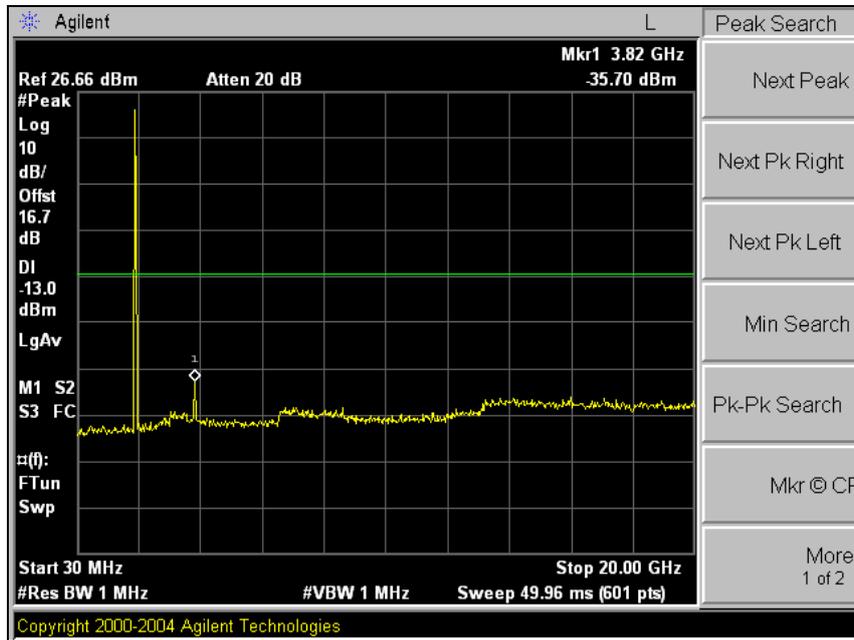

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.


6. Band Edge

6.1. Limit

§ 22.917(a) and §24.2 38 (a) Out of band emission s. The power of any emission outside of the authorized operating frequency must be attenuated below the transmitting (P) by a factor of at least $43+10\log(P)$ dB.

6.2. Test Procedure

1. The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation.
2. The center of the spectrum analyzer was set to block edge frequency.

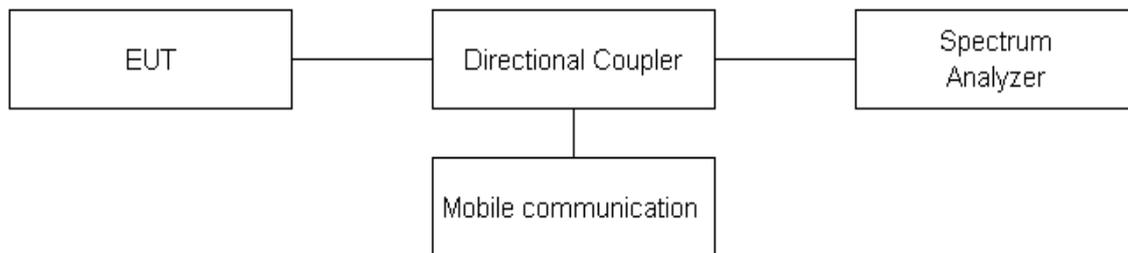


6.3. Test Results

Ambient temperature : (24 ± 2) °C
 Relative humidity : 47 % R.H.


Please refer to the following plots.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

GSM850
Low Channel

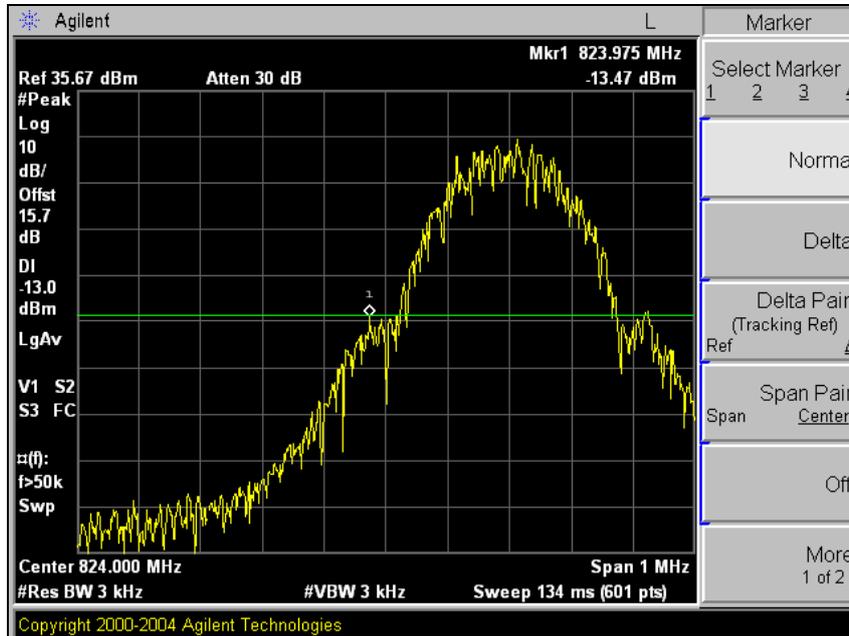


High Channel

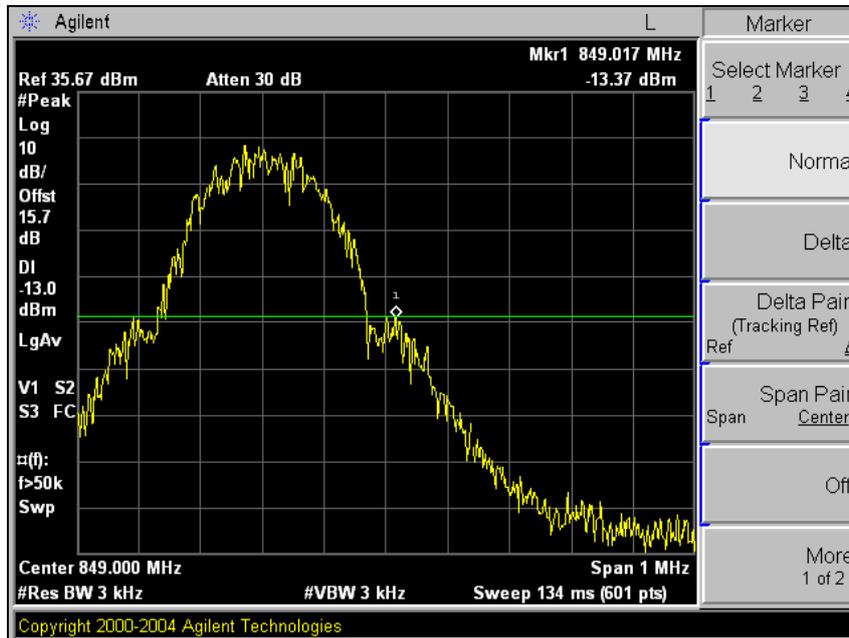


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

GSM850 EDGE
Low Channel

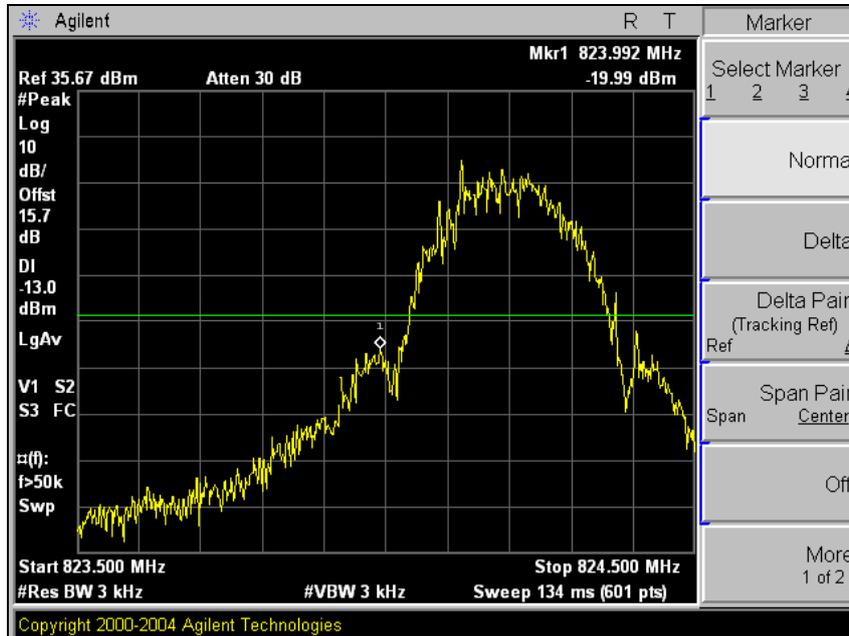


High Channel

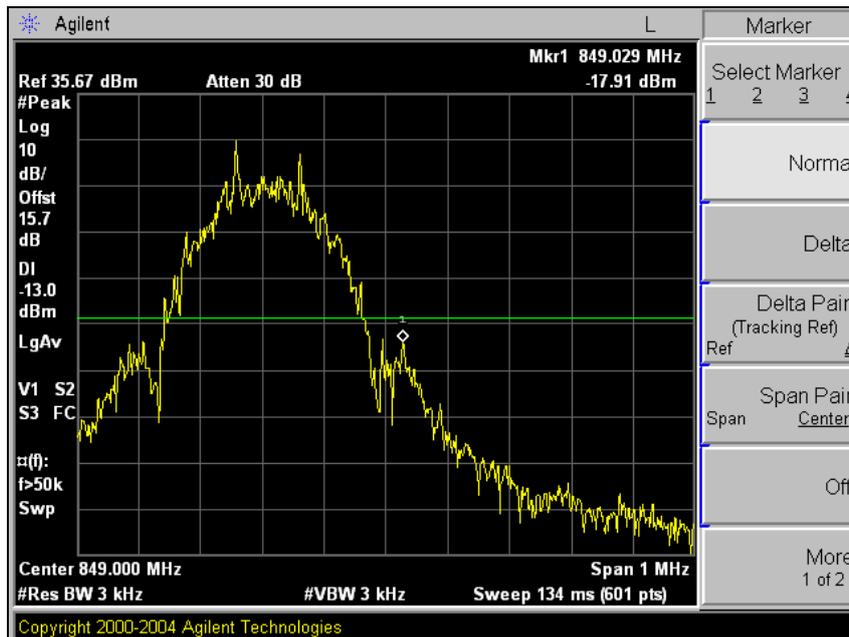


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

GSM1900
Low Channel

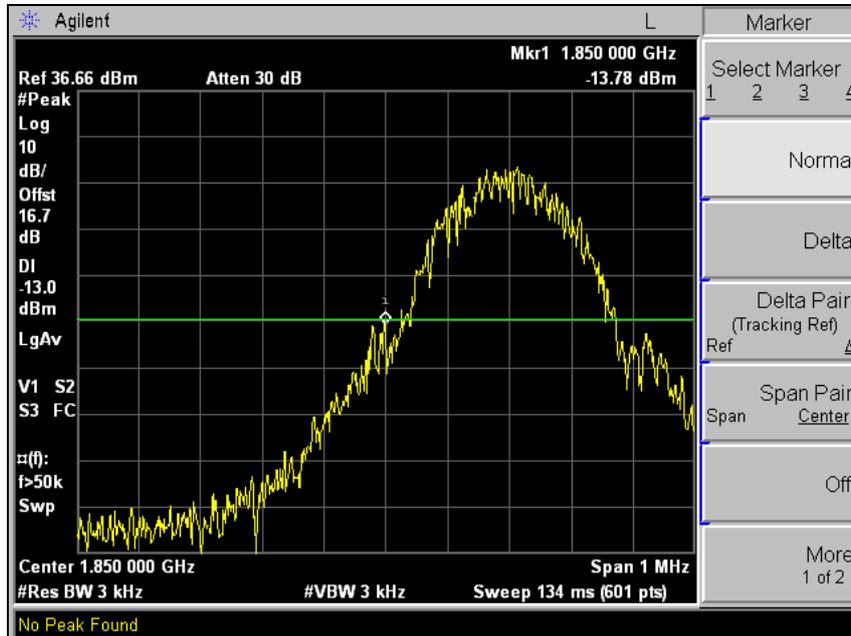


High Channel

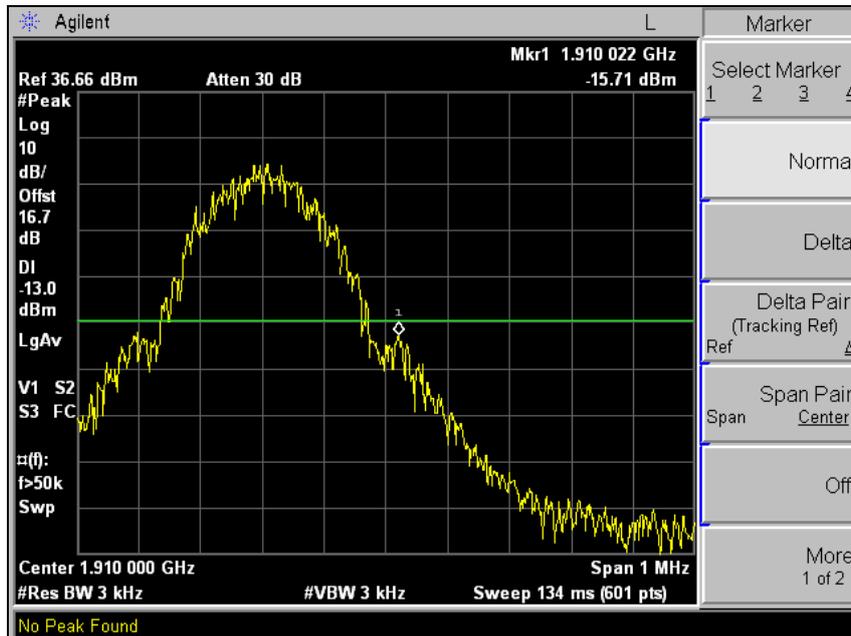


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

GSM1900 EDGE
Low Channel

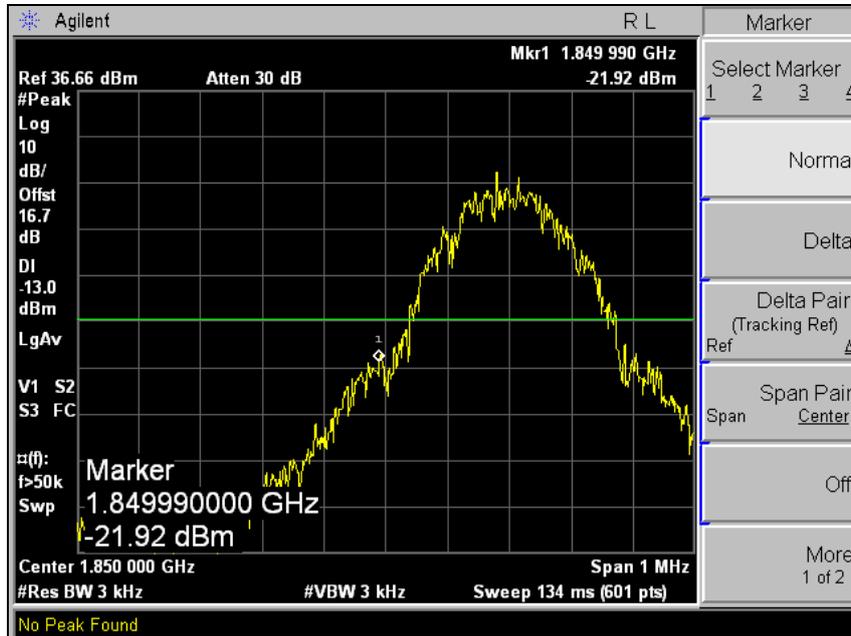


High Channel

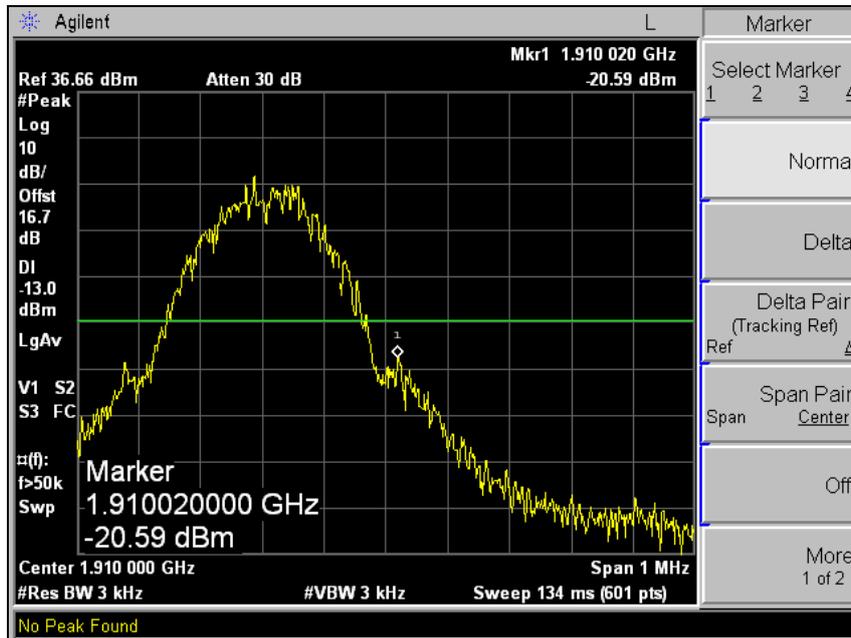


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

WCDMA1900
Low Channel

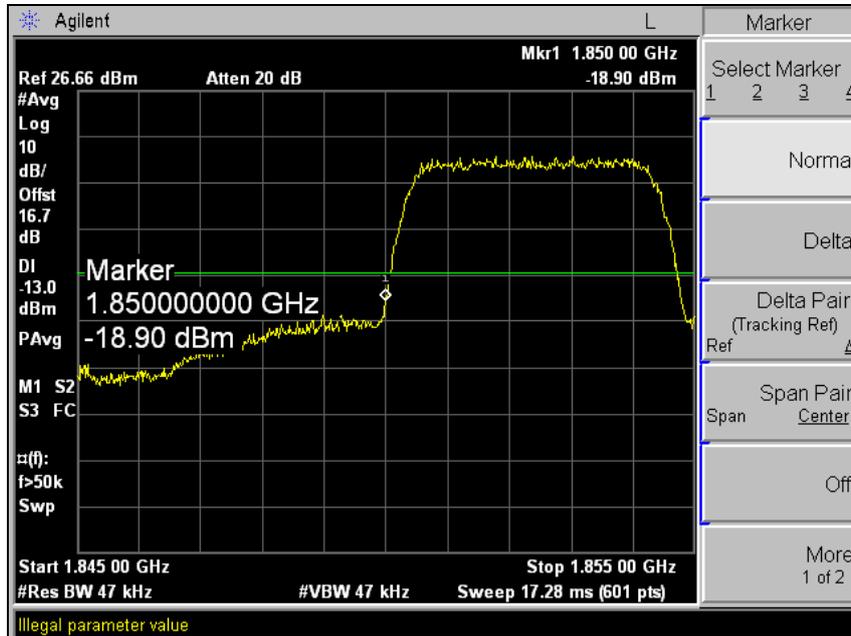


High Channel

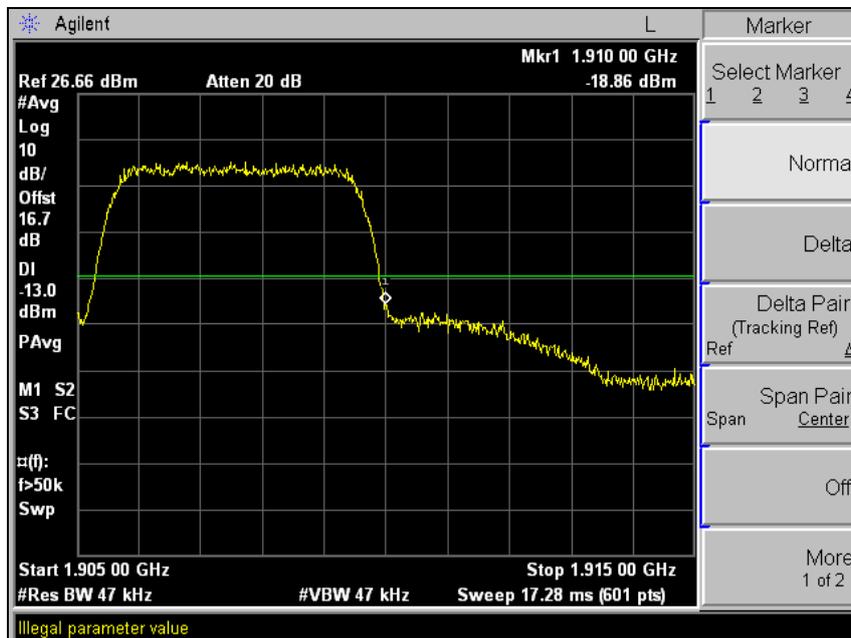

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

4 MHz span plot_WCDMA1900

Low Channel

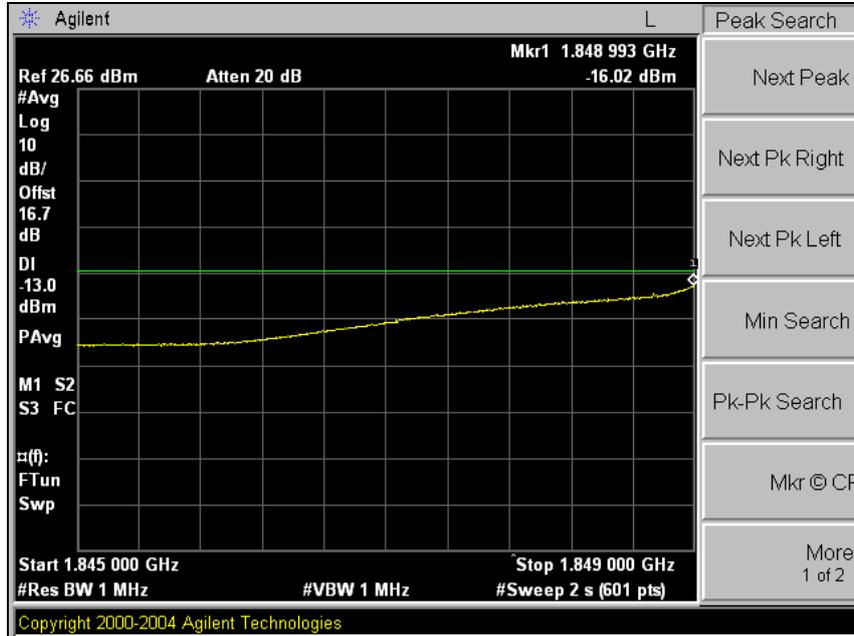

High Channel



The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

7. Peak-Average Ratio


7.1. Limit

Requirements: FCC § 24.232 (d),

(d) Power measurements for transmissions by stations authorized under this section may be made either in accordance with a Commission-approved average power technique or in compliance with paragraph (e) of this section. In both instances, equipment employed must be authorized in accordance with the provisions of §24.51. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

7.2. Test Procedure

1. The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation.
2. The center of the spectrum analyzer was set to center frequency.

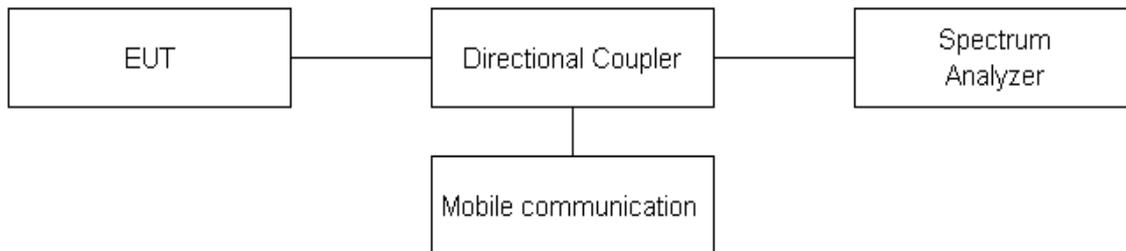

7.3. Test Results

Ambient temperature : (24 ± 2) °C
 Relative humidity : 47 % R.H.

Please refer to the following plots.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

PAR plot_WCDMA1900

Middle Channel



The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

8. Frequency Stability

8.1. Limit

Requirements: FCC § 2.1055 (a), § 2.1055 (d) & following:


According to §22.355, the carrier frequency of each transmitter in the Public Mobile Services must be maintained within the tolerances given in Table of this section.

For Mobile devices operating in the 824 to 849 MHz band at a power level less than or equal to 3 Watts, the limit specified in Table C-1 is +/- 2.5 ppm.

§24.235 The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

8.2. Test Procedure

1. Frequency Stability vs. Temperature: The equipment under test was connected to an external DC power supply and the RF output was connected to a frequency counter via feed-through attenuators.
2. The EUT was placed inside the temperature chamber.
3. After the temperature stabilized for approximately 20 minutes, the frequency output was recorded from the counter.

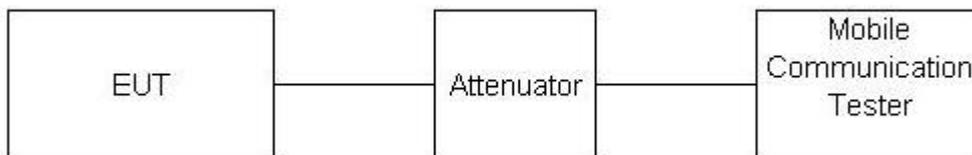

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

8.3. Test Results

Ambient temperature : (24 ± 2) °C
 Relative humidity : 47 % R.H.

GSM850 mode at middle channel

Reference Frequency: 836.6 MHz, Limit: 2.5 ppm			
Frequency Stability versus Temperature			
Environment Temperature (°C)	Power Supplied (Vdc)	Frequency Measure with Time Elapse	
		Frequency Error (Hz)	ppm
50	3.7	-34 -	0.041
40		-26 -	0.031
30		-27 -	0.032
24		-39 -	0.047
10		-41 -	0.049
0		-29 -	0.035
-10		-30 -	0.036
-20		-45 -	0.054
-30		-46 -	0.055
Frequency Stability versus power Supply			
Environment Temperature (°C)	Power Supplied (Vdc)	Frequency Measure with Time Elapse	
		Frequency Error (Hz)	ppm
24	4.255 -38		-0.045
	3.40 (batt. End point)	-47 -	0.056

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

GSM1900 mode at middle channel

Reference Frequency: 1880.0 MHz, Limit: 2.5 ppm			
Frequency Stability versus Temperature			
Environment Temperature (°C)	Power Supplied (Vdc)	Frequency Measure with Time Elapse	
		Frequency Error (Hz)	ppm
50	3.7	-16 -	0.009
40		-31 -	0.016
30		-18 -	0.010
24		-21 -0.0	11
10		-27 -	0.014
0		-19 -	0.010
-10		-18 -	0.010
-20		-34 -	0.018
-30		-37 -	0.020
Frequency Stability versus power Supply			
Environment Temperature (°C)	Power Supplied (Vdc)	Frequency Measure with Time Elapse	
		Frequency Error (Hz)	ppm
24	4.255 -35		-0.019
	3.40 (batt. End point)	-39 -	0.021

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

WCDMA1900 mode at middle channel

Reference Frequency: 1880.0 MHz, Limit: 2.5 ppm			
Frequency Stability versus Temperature			
Environment Temperature (°C)	Power Supplied (Vdc)	Frequency Measure with Time Elapse	
		Frequency Error (Hz)	ppm
50	3.7	-11 -	0.006
40		-8 -0.00	4
30		-14 -	0.007
24		-13 -	0.007
10		-12 -	0.006
0		-7 -0.00	4
-10		-10 -	0.005
-20		-14 -	0.007
-30		-16 -	0.009
Frequency Stability versus power Supply			
Environment Temperature (°C)	Power Supplied (Vdc)	Frequency Measure with Time Elapse	
		Frequency Error (Hz)	ppm
24	4.255 -18		-0.010
	3.40 (batt. End point)	-15 -	0.008

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.