

# FCC LTE REPORT

## Certification

**Applicant Name:**  
 LG Electronics MobileComm U.S.A., Inc.

**Address:**  
 1000 Sylvan Avenue, Englewood Cliffs NJ 07632

**Date of Issue:**  
 March 27, 2018

**Location:**  
 HCT CO., LTD.,  
 74, Seoicheon-ro 578beon-gil, Majang-myeon,  
 Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA  
**Report No.:** HCT-RF-1803-FC031

**FCC ID:** ZNFQ610EA

**APPLICANT:** LG Electronics MobileComm U.S.A., Inc.

**Model(s):** LM-Q610EA  
**Additional Model(s):** LMQ610EA, Q610EA, LM-Q610EM, LMQ610EM, Q610EM, LM-Q610ES, LMQ610ES, Q610ES  
**EUT Type:** GSM/WCDMA/LTE Phone with Bluetooth4.2LE, WIFI802.11 b/g/n, NFC  
**FCC Classification:** Licensed Portable Transmitter Held to Ear (PCE)  
**FCC Rule Part(s):** §27, §2

Mode (MHz)	Tx Frequency (MHz)	Emission Designator	Modulation	EIRP	
				Max. Power (W)	Max. Power (dBm)
LTE – Band4 (1.4)	1710.7 – 1754.3	1M09G7D	QPSK	0.103	20.13
		1M09W7D	16QAM	0.088	19.43
LTE – Band4 (3)	1711.5 – 1753.5	2M70G7D	QPSK	0.106	20.27
		2M70W7D	16QAM	0.090	19.52
LTE – Band4 (5)	1712.5 – 1752.5	4M51G7D	QPSK	0.104	20.19
		4M52W7D	16QAM	0.088	19.45
LTE – Band4 (10)	1715.0 – 1750.0	8M99G7D	QPSK	0.106	20.25
		8M98W7D	16QAM	0.089	19.50
LTE – Band4 (15)	1717.5 – 1747.5	13M5G7D	QPSK	0.106	20.26
		13M5W7D	16QAM	0.090	19.52
LTE – Band4 (20)	1720.0 – 1745.0	18M0G7D	QPSK	0.107	20.30
		17M9W7D	16QAM	0.090	19.56

The measurements shown in this report were made in accordance with the procedures specified in CFR47 section §2.947. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998,21 U.S. C.853(a)



**Report prepared by : Kwon Jeong**  
**Engineer of Telecommunication Testing Center**



**Report approved by : Jong Seok Lee**  
**Manager of Telecommunication Testing Center**

This report only responds to the tested sample and may not be reproduced, except in full, without written approval of the HCT Co., Ltd.

## Version

TEST REPORT NO.	DATE	DESCRIPTION
HCT-RF-1803-FC031	March 27, 2018	- First Approval Report

# Table of Contents

1. GENERAL INFORMATION .....	4
2. INTRODUCTION .....	5
2.1. Description of EUT .....	5
2.2. MEASURING INSTRUMENT CALIBRATION .....	5
2.3. TEST FACILITY .....	5
3. DESCRIPTION OF TESTS .....	6
3.1 TEST PROCEDURE .....	6
3.2 RADIATED POWER .....	7
3.3 RADIATED SPURIOUS EMISSIONS .....	8
3.4 PEAK- TO- AVERAGE RATIO .....	9
3.5 OCCUPIED BANDWIDTH. ....	11
3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL.....	12
3.7 BAND EDGE .....	13
3.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE .....	14
4. LIST OF TEST EQUIPMENT .....	15
5. MEASUREMENT UNCERTAINTY .....	16
6. SUMMARY OF TEST RESULTS .....	17
7. SAMPLE CALCULATION .....	18
8. TEST DATA .....	20
8.1 EQUIVALENT ISOTROPIC RADIATED POWER .....	20
8.2 RADIATED SPURIOUS EMISSIONS .....	23
8.3 PEAK-TO-AVERAGE RATIO .....	29
8.4 OCCUPIED BANDWIDTH .....	30
8.5 CONDUCTED SPURIOUS EMISSIONS .....	31
8.6 BAND EDGE .....	31
8.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE .....	32
9. TEST PLOTS.....	38

# MEASUREMENT REPORT

## 1. GENERAL INFORMATION

<b>Applicant Name:</b>	LG Electronics MobileComm U.S.A., Inc.
<b>Address:</b>	1000 Sylvan Avenue, Englewood Cliffs NJ 07632
<b>FCC ID:</b>	ZNFQ610EA
<b>Application Type:</b>	Certification
<b>FCC Classification:</b>	Licensed Portable Transmitter Held to Ear (PCE)
<b>FCC Rule Part(s):</b>	§27, §2
<b>EUT Type:</b>	GSM/WCDMA/LTE Phone with Bluetooth4.2LE, WIFI802.11 b/g/n, NFC
<b>Model(s):</b>	LM-Q610EA
<b>Additional Model(s):</b>	LMQ610EA, Q610EA, LM-Q610EM, LMQ610EM, Q610EM, LM-Q610ES, LMQ610ES, Q610ES
<b>Tx Frequency:</b>	1710.7 MHz – 1754.3 MHz (LTE – Band 4 (1.4 MHz)) 1711.5 MHz – 1753.5 MHz (LTE – Band 4 (3 MHz)) 1712.5 MHz – 1752.5 MHz (LTE – Band 4 (5 MHz)) 1715.0 MHz – 1750.0 MHz (LTE – Band 4 (10 MHz)) 1717.5 MHz – 1747.5 MHz (LTE – Band 4 (15 MHz)) 1720.0 MHz – 1745.0 MHz (LTE – Band 4 (20 MHz))
<b>Date(s) of Tests:</b>	March 05, 2018 ~ March 27, 2018

## **2. INTRODUCTION**

### **2.1. Description of EUT**

The EUT was a GSM/WCDMA/LTE Phone with Bluetooth4.2LE, WIFI802.11 b/g/n, NFC with GSM/GPRS/EGPRS/UMTS and LTE.

It also supports IEEE 802.11b/g/n, Bluetooth and NFC.

### **2.2. MEASURING INSTRUMENT CALIBRATION**

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

### **2.3. TEST FACILITY**

The Fully-anechoic chamber and conducted measurement facility used to collect the radiated data are located at the 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA.

### 3. DESCRIPTION OF TESTS

#### 3.1 TEST PROCEDURE

Test Description	Test Procedure Used
Occupied Bandwidth	- KDB 971168 D01 v03 – Section 4.2 - ANSI C63.26-2015 – Section 5.4.4
Band Edge	- KDB 971168 D01 v03 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Spurious and Harmonic Emissions at Antenna Terminal	- KDB 971168 D01 v03 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Conducted Output Power	- N/A (See SAR Report)
Peak- to- Average Ratio	- KDB 971168 D01 v03 – Section 5.7 - ANSI C63.26-2015 – Section 5.2.3.4 - ANSI C63.26-2015 – Section 5.2.6(only GSM)
Frequency stability	- ANSI C63.26-2015 – Section 5.6
Effective Radiated Power/ Effective Isotropic Radiated Power	- KDB 971168 D01 v03 – Section 5.2 - ANSI C63.26-2015 – Section 5.2 - ANSI/TIA-603-E-2016 – Section 2.2.17
Radiated Spurious and Harmonic Emissions	- KDB 971168 D01 v03 – Section 5.8 - ANSI/TIA-603-E-2016 – Section 2.2.12

## 3.2 RADIATED POWER

### Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

The equipment under test is placed on a non-conductive table 3-meters away from the receive antenna in accordance with ANSI/TIA-603-E-2016 Clause 2.2.17.

### Test Settings

1. Radiated power measurements are performed using the signal analyzer's "channel power" measurement capability for signals with continuous operation.
2. RBW = 1 – 5% of the expected OBW, not to exceed 1MHz
3. VBW  $\geq$  3 x RBW
4. Span = 1.5 times the OBW
5. No. of sweep points > 2 x span / RBW
6. Detector = RMS
7. Trigger is set to "free run" for signals with continuous operation with the sweep times set to "auto".
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation.
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize

### Test Note

1. The turntable is rotated through 360 degrees, and the receiving antenna scans in order to determine the level of the maximized emission.
2. A half wave dipole is then substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.

The power is calculated by the following formula;

$$P_{d(\text{dBm})} = P_{g(\text{dBm})} - \text{cable loss (dB)} + \text{antenna gain (dB)}$$

Where:  $P_d$  is the dipole equivalent power and  $P_g$  is the generator output power into the substitution antenna.

3. The maximum value is calculated by adding the forward power to the calibrated source plus its appropriate gain value.

These steps are repeated with the receiving antenna in both vertical and horizontal polarization. the difference between the gain of the horn and an isotropic antenna are taken into consideration

4. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
5. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

### 3.3 RADIATED SPURIOUS EMISSIONS

#### **Test Overview**

Radiated tests are performed in the Fully-anechoic chamber.

Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA-603-E-2016.


#### **Test Settings**

1. RBW = 100kHz for emissions below 1GHz and 1MHz for emissions above 1GHz
2. VBW  $\geq 3 \times$  RBW
3. Span = 1.5 times the OBW
4. No. of sweep points  $> 2 \times$  span / RBW
5. Detector = Peak
6. Trace mode = Max Hold
7. The trace was allowed to stabilize
8. Test channel : Low/ Middle/ High
9. Frequency range : We are performed all frequency to 10<sup>th</sup> harmonics from 9 kHz.

#### **Test Note**

1. Measurements value show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin  $> 20$  dB from the applicable limit) and considered that's already beyond the background noise floor.
2. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.  
The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the test data

### 3.4 PEAK- TO- AVERAGE RATIO

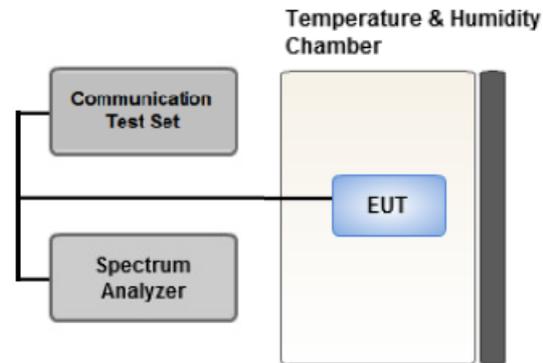

Test setup

#### ① CCDF Procedure for PAPR

##### Test Settings

1. Set resolution/measurement bandwidth  $\geq$  signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Set the measurement interval as follows:
  - .- for continuous transmissions, set to 1 ms,
  - .- or burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize and set the measurement interval to a time that is less than or equal to the burst duration.
4. Record the maximum PAPR level associated with a probability of 0.1%.

## ② Alternate Procedure for PAPR

Use one of the procedures presented in 5.2(ANSI C63.26-2015) to measure the total peak power and record as  $P_{Pk}$ .

Use one of the applicable procedures presented 5.2(ANSI C63.26-2015) to measure the total average power and record as  $P_{Avg}$ . Determine the P.A.R. from:

$$P.A.R_{(dB)} = P_{Pk (dBm)} - P_{Avg (dBm)} \quad (P_{Avg} = \text{Average Power} + \text{Duty cycle Factor})$$

### Test Settings(Peak Power)


The measurement instrument must have a RBW that is greater than or equal to the OBW of the signal to be measured and a VBW  $\geq 3 \times$  RBW.

1. Set the RBW  $\geq$  OBW.
2. Set VBW  $\geq 3 \times$  RBW.
3. Set span  $\geq 2 \times$  OBW.
4. Sweep time  $\geq 10 \times$  (number of points in sweep)  $\times$  (transmission symbol period).
5. Detector = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use the peak marker function to determine the peak amplitude level.

### Test Settings(Average Power)

1. Set span to  $2 \times$  to  $3 \times$  the OBW.
2. Set RBW  $\geq$  OBW.
3. Set VBW  $\geq 3 \times$  RBW.
4. Set number of measurement points in sweep  $\geq 2 \times$  span / RBW.
5. Sweep time:  
Set  $\geq [10 \times$  (number of points in sweep)  $\times$  (transmission period)] for single sweep (automation-compatible) measurement. The transmission period is the (on + off) time.
6. Detector = power averaging (rms).
7. Set sweep trigger to "free run."
8. Trace average at least 100 traces in power averaging (rms) mode if sweep is set to auto-couple. (To accurately determine the average power over the on and off period of the transmitter, it can be necessary to increase the number of traces to be averaged above 100 or, if using a manually configured sweep time, increase the sweep time.)
9. Use the peak marker function to determine the maximum amplitude level.
10. Add  $[10 \log (1/\text{duty cycle})]$  to the measured maximum power level to compute the average power during continuous transmission. For example, add  $[10 \log (1/0.25)] = 6$  dB if the duty cycle is a constant 25%.

### 3.5 OCCUPIED BANDWIDTH.

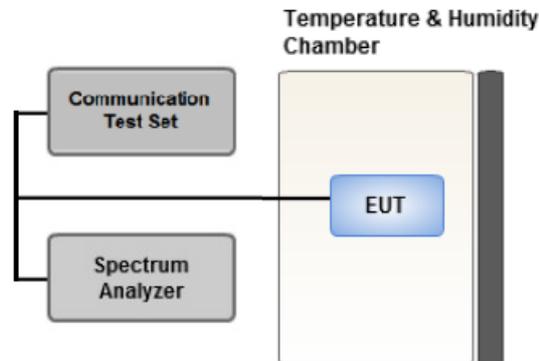

#### Test setup

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

The EUT makes a call to the communication simulator.


The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth

#### Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5% of the expected OBW
3. VBW  $\geq$  3 x RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5% of the 99% occupied bandwidth observed in Step 7

### 3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL

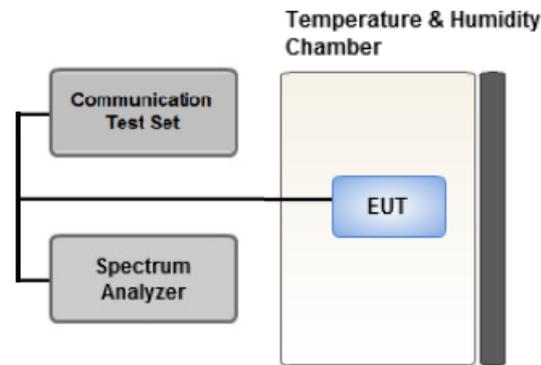

Test setup


#### Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

#### Test Settings

1. RBW = 1 MHz
2. VBW  $\geq$  3 MHz
3. Detector = Peak
4. Trace Mode = max hold
5. Sweep time = auto
6. Number of points in sweep  $\geq$  2 \* Span / RBW

### 3.7 BAND EDGE

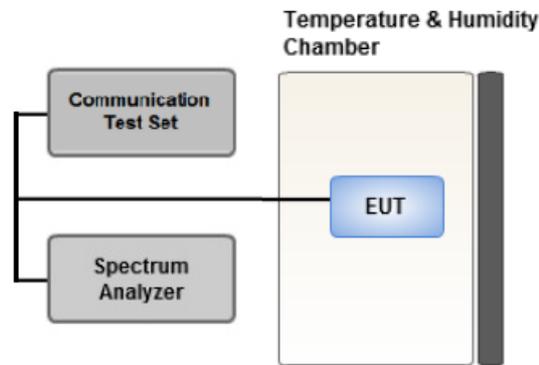

Test setup

#### Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

#### Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW > 1% of the emission bandwidth
4. VBW > 3 x RBW
5. Detector = RMS
6. Number of sweep points  $\geq 2 \times \text{Span/RBW}$
7. Trace mode = trace average
8. Sweep time = auto couple
9. The trace was allowed to stabilize


#### Test Notes

According to FCC 22.917, 24.238, 27.53 specified that power of any emission outside of The authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

All measurements were done at 2 channels(low and high operational frequency range.)

The band edge measurement used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

### 3.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

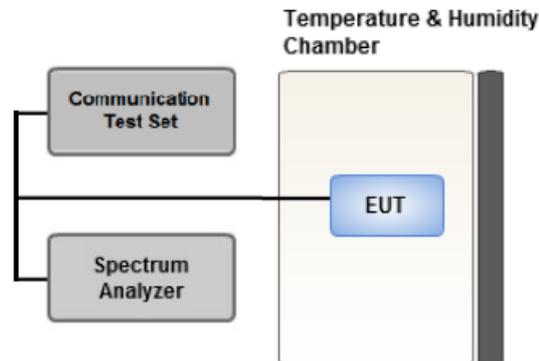

**Test setup**

#### **Test Overview**

Frequency stability testing is performed in accordance with the guidelines of ANSI C63.26-2015.

The frequency stability of the transmitter is measured by:

1. Temperature:

The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.

2. Primary Supply Voltage:

- Unless otherwise specified, vary primary supply voltage from 85% to 115% of the nominal value for other than hand carried battery equipment.

- For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.

#### **Test Settings**

1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
2. The equipment is turned on in a "standby" condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

## 4. LIST OF TEST EQUIPMENT

Manufacture	Model/ Equipment	Serial Number	Calibration Date	Calibration Interval	Calibration Due
REOHDE & SCHWARZ	SCU 18 / AMPLIFIER	10094	04/24/2017	Annual	04/24/2018
Wainwright	WHK1.2/15G-10EF/H.P.F	4	04/10/2017	Annual	04/10/2018
Wainwright	WHK3.3/18G-10EF/H.P.F	2	04/10/2017	Annual	04/10/2018
Hewlett Packard	11667B / Power Splitter(DC~26.5 GHz)	11275	05/04/2017	Annual	05/04/2018
Agilent	E3632A/DC Power Supply	KR75303243	07/18/2017	Annual	07/18/2018
Schwarzbeck	UHAP/ Dipole Antenna	557	03/31/2017	Biennial	03/31/2019
Schwarzbeck	UHAP/ Dipole Antenna	558	03/31/2017	Biennial	03/31/2019
ESPEC	SU-642 / Chamber	93000718	07/21/2017	Annual	07/21/2018
Schwarzbeck	BBHA 9120D/ Horn Antenna(1~18GHz)	147	09/09/2016	Biennial	09/09/2018
Schwarzbeck	BBHA 9120D/ Horn Antenna(1~18GHz)	9120D-1298	10/14/2016	Biennial	10/14/2018
Schwarzbeck	BBHA 9170/ Horn Antenna(15~40GHz)	BBHA9170342	04/25/2017	Biennial	04/25/2019
Schwarzbeck	BBHA 9170/ Horn Antenna(15~40GHz)	BBHA9170124	04/25/2017	Biennial	04/25/2019
Agilent	N9020A/Signal Analyzer(10Hz~26.5GHz)	MY52090906	06/01/2017	Annual	06/01/2018
Hewlett Packard	8493C/ATTENUATOR(20dB)	17280	06/22/2017	Annual	06/22/2018
REOHDE & SCHWARZ	FSV40/Spectrum Analyzer(10Hz~40GHz)	100931	10/30/2017	Annual	10/30/2018
Agilent	8960 (E5515C)/ Base Station	MY48360800	09/26/2017	Annual	09/26/2018
Schwarzbeck	FMZB1513/ Loop Antenna(9kHz~30MHz)	1513-175	04/19/2017	Biennial	04/19/2019
Schwarzbeck	VULB9160/ Bilog Antenna	3150	09/30/2016	Biennial	09/30/2018
Schwarzbeck	VULB9160/ Bilog Antenna	9360-3368	10/14/2016	Biennial	10/14/2018
Anritsu Corp.	MT8820C/Wideband Radio Communication Tester	6200863156	02/13/2018	Annual	02/13/2019
Anritsu Corp.	MT8820C/Wideband Radio Communication Tester	6201026545	02/08/2018	Annual	02/08/2019
REOHDE & SCHWARZ	SMB100A/ SIGNAL GENERATOR (100kHz~40GHz)	177633	07/18/2017	Annual	07/18/2018
REOHDE & SCHWARZ	FSV40/Spectrum Analyzer	100931	10/30/2017	Annual	10/30/2018
REOHDE & SCHWARZ	ESU40 / EMI TEST RECEIVER	100524	08/16/2017	Annual	08/16/2018
HCT CO., LTD.,	FCC LTE Mobile Conducted RF Automation Test Software	-	-	-	-

## 5. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4:2014.

All measurement uncertainty values are shown with a coverage factor of  $k = 2$  to indicate a 95 % level of confidence. The measurement data shown herein meets or exceeds the  $U_{\text{CISPR}}$  measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty ( $\pm$ dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	1.82
Radiated Disturbance (9 kHz ~ 30 MHz)	3.40
Radiated Disturbance (30 MHz ~ 1 GHz)	4.80
Radiated Disturbance (1 GHz ~ 18 GHz)	6.07

## 6. SUMMARY OF TEST RESULTS

### 6.1 Test Condition : Conducted Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Occupied Bandwidth	§2.1049	N/A	PASS
Band Edge / Spurious and Harmonic Emissions at Antenna Terminal.	§2.1051, §27.53(h)	< 43 + 10log10 (P[Watts]) at Band Edge and for all out-of-band emissions	PASS
Conducted Output Power	§2.1046	N/A	<u>See Note1</u>
Peak- to- Average Ratio	27.50(d)(5)	< 13 dB	PASS
Frequency stability / variation of ambient temperature	§2.1055, § 27.54	Emission must remain in band	PASS

**Note:**

1. See SAR Report

### 6.2 Test Condition : Radiated Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Equivalent Isotropic Radiated Power	27.50(d)(4)	< 1 Watts max. EIRP	PASS
Radiated Spurious and Harmonic Emissions	§2.1053, §27.53(h)	< 43 + 10log10 (P[Watts]) for all out-of band emissions	PASS

## 7. SAMPLE CALCULATION

### 7.1 ERP Sample Calculation

Ch./ Freq.		Measured Level(dBm)	Substitute Level(dBm)	Ant. Gain (dBd)	C.L	Pol.	ERP	
channel	Freq.(MHz)						W	dBm
128	824.20	-21.37	38.40	-10.61	0.95	H	0.483	26.84

#### ERP = Substitute LEVEL(dBm) + Ant. Gain – CL(Cable Loss)

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test , the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of effective radiated power.

### 7.2 EIRP Sample Calculation

Ch./ Freq.		Measured Level(dBm)	Substitute Level(dBm)	Ant. Gain (dBi)	C.L	Pol.	EIRP	
channel	Freq.(MHz)						W	dBm
20175	1,732.50	-15.75	18.45	9.90	1.76	H	0.456	26.59

#### EIRP = Substitute LEVEL(dBm) + Ant. Gain – CL(Cable Loss)

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test , the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of equivalent isotropic radiated power.

### 7.3. Emission Designator

#### GSM Emission Designator

**Emission Designator = 249KGXW**

GSM BW = 249 kHz

G = Phase Modulation

X = Cases not otherwise covered

W = Combination (Audio/Data)

#### EDGE Emission Designator

**Emission Designator = 249KG7W**

GSM BW = 249 kHz

G = Phase Modulation

7 = Quantized/Digital Info

W = Combination (Audio/Data)

#### WCDMA Emission Designator

**Emission Designator = 4M17F9W**

WCDMA BW = 4.17 MHz

F = Frequency Modulation

9 = Composite Digital Info

W = Combination (Audio/Data)

#### QPSK Modulation

**Emission Designator = 4M48G7D**

LTE BW = 4.48 MHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

#### 16QAM Modulation

**Emission Designator = 4M48W7D**

LTE BW = 4.48 MHz

W = Amplitude/Angle Modulated

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

## 8. TEST DATA

### 8.1 EQUIVALENT ISOTROPIC RADIATED POWER

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	Limit	EIRP	
								W	W	dBm
1710.7	LTE B4/ 1.4 MHz	QPSK	-19.90	12.68	9.37	1.92	V	< 1.00	0.103	20.13
		16-QAM	-20.60	11.98	9.37	1.92	V		0.088	19.43
1732.5		QPSK	-20.69	11.93	9.45	1.93	V		0.088	19.45
		16-QAM	-21.45	11.17	9.45	1.93	V		0.074	18.69
1754.3		QPSK	-20.81	11.80	9.52	1.94	V		0.087	19.38
		16-QAM	-21.48	11.13	9.52	1.94	V		0.074	18.71

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	Limit	EIRP	
								W	W	dBm
1711.5	LTE B4/ 3 MHz	QPSK	-19.76	12.82	9.37	1.92	V	< 1.00	0.106	20.27
		16-QAM	-20.51	12.07	9.37	1.92	V		0.090	19.52
1732.5		QPSK	-20.51	12.11	9.45	1.93	V		0.092	19.63
		16-QAM	-21.33	11.29	9.45	1.93	V		0.076	18.81
1753.5		QPSK	-20.72	11.88	9.52	1.94	V		0.088	19.46
		16-QAM	-21.44	11.16	9.52	1.94	V		0.075	18.74

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	Limit	EIRP	
								W	W	dBm
1712.5	LTE B4/ 5 MHz	QPSK	-19.84	12.74	9.37	1.92	V	< 1.00	0.104	20.19
		16-QAM	-20.58	12.00	9.37	1.92	V		0.088	19.45
1732.5		QPSK	-20.59	12.03	9.45	1.93	V		0.090	19.55
		16-QAM	-21.39	11.23	9.45	1.93	V		0.075	18.75
1752.5		QPSK	-20.92	11.68	9.52	1.94	V		0.084	19.26
		16-QAM	-21.63	10.97	9.52	1.94	V		0.072	18.55

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	Limit	EIRP	
								W	W	dBm
1715.0	LTE B4/ 10 MHz	QPSK	-19.80	12.78	9.39	1.92	V	< 1.00	0.106	20.25
		16-QAM	-20.55	12.03	9.39	1.92	V		0.089	19.50
1732.5		QPSK	-20.49	12.13	9.45	1.93	V		0.092	19.65
		16-QAM	-21.30	11.32	9.45	1.93	V		0.077	18.84
1750.0		QPSK	-21.08	11.52	9.51	1.94	V		0.081	19.09
		16-QAM	-21.80	10.80	9.51	1.94	V		0.069	18.37

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	Limit	EIRP	
								W	W	dBm
1717.5	LTE B4/ 15 MHz	QPSK	-19.80	12.79	9.39	1.92	V	< 1.00	0.106	20.26
		16-QAM	-20.54	12.05	9.39	1.92	V		0.090	19.52
1732.5		QPSK	-20.36	12.26	9.45	1.93	V		0.095	19.78
		16-QAM	-21.16	11.46	9.45	1.93	V		0.079	18.98
1747.5		QPSK	-20.99	11.62	9.50	1.94	V		0.083	19.18
		16-QAM	-21.74	10.87	9.50	1.94	V		0.070	18.43

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	Limit	EIRP	
								W	W	dBm
1720.0	LTE B4/ 20 MHz	QPSK	-19.76	12.82	9.40	1.92	V	< 1.00	0.107	20.30
		16-QAM	-20.50	12.08	9.40	1.92	V		0.090	19.56
1732.5		QPSK	-20.20	12.42	9.45	1.93	V		0.099	19.94
		16-QAM	-21.00	11.62	9.45	1.93	V		0.082	19.14
1745.0		QPSK	-20.83	11.79	9.49	1.94	V		0.086	19.34
		16-QAM	-21.61	11.01	9.49	1.94	V		0.072	18.56

**8.2 RADIATED SPURIOUS EMISSIONS**

- ▣ OPERATING FREQUENCY: 1710.70 MHz
- ▣ MEASURED OUTPUT POWER: 20.13 dBm = 0.103 W
- ▣ MODE: LTE B4
- ▣ MODULATION SIGNAL: 1.4 MHz QPSK
- ▣ DISTANCE: 3 meters
- ▣ LIMIT:  $43 + 10 \log_{10}(W) =$  33.13 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	dBc
19957 (1710.7)	3,421.40	-45.63	12.19	-52.61	2.78	V	-43.20	63.33
	5,132.10	-51.27	12.76	-51.94	3.44	H	-42.62	62.75
	6,842.80	-55.95	12.06	-52.00	3.99	H	-43.93	64.06
20175 (1732.5)	3,465.00	-49.11	12.28	-55.75	2.76	H	-46.23	66.36
	5,197.50	-53.52	12.86	-54.42	3.47	H	-45.03	65.16
	6,930.00	-55.79	11.87	-51.09	4.06	V	-43.28	63.41
20393 (1754.3)	3,508.60	-48.44	12.36	-54.65	2.82	H	-45.11	65.24
	5,262.90	-51.68	12.95	-53.36	3.49	H	-43.90	64.03
	7,017.20	-57.18	11.73	-53.93	3.98	V	-46.18	66.31

- ▣ OPERATING FREQUENCY: 1711.50 MHz
- ▣ MEASURED OUTPUT POWER: 20.27 dBm = 0.106 W
- ▣ MODE: LTE B4
- ▣ MODULATION SIGNAL: 3 MHz QPSK
- ▣ DISTANCE: 3 meters
- ▣ LIMIT:  $43 + 10 \log_{10}(W) =$  33.27 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	dBc
19965 (1711.5)	3,423.00	-46.25	12.20	-53.26	2.78	V	-43.84	64.11
	5,134.50	-51.49	12.76	-52.18	3.44	H	-42.86	63.13
	6,846.00	-55.72	12.05	-51.71	3.99	V	-43.65	63.92
20175 (1732.5)	3,465.00	-48.94	12.28	-55.58	2.76	H	-46.06	66.33
	5,197.50	-53.80	12.86	-54.70	3.47	H	-45.31	65.58
	6,930.00	-56.84	11.87	-52.14	4.06	V	-44.33	64.60
20385 (1753.5)	3,507.00	-48.49	12.36	-54.73	2.82	V	-45.19	65.46
	5,260.50	-52.17	12.95	-53.90	3.49	H	-44.44	64.71
	7,014.00	-57.55	11.73	-54.53	3.98	H	-46.78	67.05

- ▣ OPERATING FREQUENCY: 1712.50 MHz
- ▣ MEASURED OUTPUT POWER: 20.19 dBm = 0.104 W
- ▣ MODE: LTE B4
- ▣ MODULATION SIGNAL: 5 MHz QPSK
- ▣ DISTANCE: 3 meters
- ▣ LIMIT:  $43 + 10 \log_{10}(W) =$  33.19 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	dBc
19975 (1712.5)	3,425.00	-46.39	12.20	-53.44	2.78	V	-44.02	64.21
	5,137.50	-52.96	12.77	-53.69	3.44	V	-44.36	64.55
	6,850.00	-56.01	12.04	-51.90	4.00	H	-43.86	64.05
20175 (1732.5)	3,465.00	-48.41	12.28	-55.05	2.76	V	-45.53	65.72
	5,197.50	-55.00	12.86	-55.90	3.47	V	-46.51	66.70
	6,930.00	-56.81	11.87	-52.11	4.06	V	-44.30	64.49
20375 (1752.5)	3,505.00	-49.65	12.36	-55.93	2.82	V	-46.39	66.58
	5,257.50	-53.57	12.94	-55.29	3.48	H	-45.83	66.02
	7,010.00	-57.69	11.73	-54.96	3.98	H	-47.21	67.40

- ▣ OPERATING FREQUENCY: 1715.00 MHz
- ▣ MEASURED OUTPUT POWER: 20.25 dBm = 0.106 W
- ▣ MODE: LTE B4
- ▣ MODULATION SIGNAL: 10 MHz QPSK
- ▣ DISTANCE: 3 meters
- ▣ LIMIT:  $43 + 10 \log_{10}(W) =$  33.25 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	dBc
20000 (1715.0)	3,430.00	-46.28	12.21	-53.43	2.78	V	-44.00	64.25
	5,145.00	-51.13	12.77	-51.69	3.44	H	-42.36	62.61
	6,860.00	-57.27	12.01	-53.03	4.02	H	-45.04	65.29
20175 (1732.5)	3,465.00	-48.15	12.28	-54.79	2.76	V	-45.27	65.52
	5,197.50	-52.63	12.86	-53.53	3.47	H	-44.14	64.39
	6,930.00	-56.81	11.87	-52.11	4.06	H	-44.30	64.55
20350 (1750.0)	3,500.00	-50.94	12.35	-57.31	2.82	H	-47.78	68.03
	5,250.00	-52.52	12.93	-54.19	3.48	H	-44.74	64.99
	7,000.00	-56.37	11.73	-53.84	4.07	H	-46.18	66.43

- ▣ OPERATING FREQUENCY: 1717.50 MHz
- ▣ MEASURED OUTPUT POWER: 20.26 dBm = 0.106 W
- ▣ MODE: LTE B4
- ▣ MODULATION SIGNAL: 15 MHz QPSK
- ▣ DISTANCE: 3 meters
- ▣ LIMIT:  $43 + 10 \log_{10}(W) =$  33.26 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	dBc
20025 (1717.5)	3,435.00	-46.40	12.21	-53.42	2.78	V	-43.99	64.25
	5,152.50	-52.29	12.79	-52.80	3.45	H	-43.46	63.72
	6,870.00	-54.82	11.99	-50.85	4.03	H	-42.89	63.15
20175 (1732.5)	3,465.00	-47.97	12.28	-54.61	2.76	V	-45.09	65.35
	5,197.50	-54.88	12.86	-55.78	3.47	V	-46.39	66.65
	6,930.00	-55.66	11.87	-50.96	4.06	V	-43.15	63.41
20325 (1747.5)	3,495.00	-50.24	12.34	-56.60	2.81	V	-47.07	67.33
	5,242.50	-53.24	12.92	-54.72	3.48	H	-45.28	65.54
	6,990.00	-56.20	11.75	-50.96	4.05	H	-43.26	63.52

- ▣ OPERATING FREQUENCY: 1720.00 MHz
- ▣ MEASURED OUTPUT POWER: 20.30 dBm = 0.107 W
- ▣ MODE: LTE B4
- ▣ MODULATION SIGNAL: 20 MHz QPSK
- ▣ DISTANCE: 3 meters
- ▣ LIMIT:  $43 + 10 \log_{10}(W) =$  33.30 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	dBc
20050 (1720.0)	3,440.00	-43.55	12.23	-50.47	2.77	H	-41.01	61.31
	5,160.00	-51.65	12.80	-52.48	3.46	V	-43.14	63.44
	6,880.00	-55.84	11.97	-51.83	4.04	V	-43.90	64.20
20175 (1732.5)	3,465.00	-47.02	12.28	-53.66	2.76	V	-44.14	64.44
	5,197.50	-53.78	12.86	-54.68	3.47	H	-45.29	65.59
	6,930.00	-56.00	11.87	-51.30	4.06	H	-43.49	63.79
20300 (1745.0)	3,490.00	-48.93	12.33	-55.27	2.81	V	-45.75	66.05
	5,235.00	-54.70	12.91	-56.11	3.47	V	-46.67	66.97
	6,980.00	-55.54	11.77	-50.27	4.04	H	-42.54	62.84

**8.3 PEAK-TO-AVERAGE RATIO**

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (dB )
4	1.4 MHz	1732.5	QPSK	6	0	5.52
			16-QAM	6		6.15
	3 MHz		QPSK	15		5.53
			16-QAM	15		6.27
	5 MHz		QPSK	25		5.47
			16-QAM	25		6.27
	10 MHz		QPSK	50		5.56
			16-QAM	50		6.21
	15 MHz		QPSK	75		5.48
			16-QAM	75		6.23
	20 MHz		QPSK	100		5.48
			16-QAM	100		6.21

**Note:**

1. Plots of the EUT's Peak- to- Average Ratio are shown Page 45 ~ 50.

**8.4 OCCUPIED BANDWIDTH**

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data ( MHz )
4	1.4 MHz	1732.5	QPSK	6	0	1.0907
			16-QAM	6	0	1.0944
	3 MHz		QPSK	15	0	2.6983
			16-QAM	15	0	2.7021
	5 MHz		QPSK	25	0	4.5112
			16-QAM	25	0	4.5205
	10 MHz		QPSK	50	0	8.9938
			16-QAM	50	0	8.9816
	15 MHz		QPSK	75	0	13.527
			16-QAM	75	0	13.525
	20 MHz		QPSK	100	0	17.984
			16-QAM	100	0	17.943

**Note:**

1. Plots of the EUT's Occupied Bandwidth are shown Page 39 ~ 44.

**8.5 CONDUCTED SPURIOUS EMISSIONS**

Band	Band Width (MHz)	Frequency (MHz)	Frequency of Maximum Harmonic (GHz)	Factor (dB)	Measurement Maximum Data (dBm)	Result (dBm)	Limit (dBm)
4	1.4	1710.7	3.4213	27.976	-73.344	-45.368	-13.00
		1732.5	3.4647	27.976	-73.233	-45.257	
		1754.3	3.5100	27.976	-73.556	-45.580	
	3	1711.5	3.4213	27.976	-73.489	-45.513	
		1732.5	3.4632	27.976	-71.973	-43.997	
		1753.5	3.5100	27.976	-74.184	-46.208	
	5	1712.5	3.4213	27.976	-73.740	-45.764	
		1732.5	3.4612	27.976	-73.226	-45.250	
		1752.5	3.5100	27.976	-73.473	-45.497	
	10	1715.0	3.4218	27.976	-73.531	-45.555	
		1732.5	3.4567	27.976	-72.642	-44.666	
		1750.0	3.5095	27.976	-72.574	-44.598	
	15	1717.5	3.4223	27.976	-74.050	-46.074	
		1732.5	3.4522	27.976	-73.217	-45.241	
		1747.5	3.5090	27.976	-72.512	-44.536	
	20	1720.0	3.4228	27.976	-73.466	-45.490	
		1732.5	3.4477	27.976	-76.065	-48.089	
		1745.0	3.5085	27.976	-73.821	-45.845	

**Note:**

1. Plots of the EUT's Conducted Spurious Emissions are shown Page 69 ~ 86.
2. Conducted Spurious Emissions was Tested QPSK Modulation, Resource Block Size 1 and Resource Block Offset 0
3. Result (dBm) = Measurement Maximum Data (dBm) + Factor (dB)
4. Factor(dB) = Cable Loss + Attenuator + Power Splitter

Frequency Range (GHz)	Factor [dB]
0.03 – 1	25.270
1 – 5	27.976
5 – 10	28.591
10 – 15	29.116
15 – 20	29.489
Above 20	30.131


**8.6 BAND EDGE**

- Plots of the EUT's Band Edge are shown Page 51 ~ 68.

**8.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE**


- MODE: LTE 4
- OPERATING FREQUENCY: 1732,500,000 Hz
- CHANNEL: 20175 (1.4 MHz)
- REFERENCE VOLTAGE: 4.00 VDC
- DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	4.00	+20(Ref)	1732 500 008	0.0	0.000 000	0.000
100%		-30	1732 500 011	3.5	0.000 000	0.002
100%		-20	1732 500 011	3.2	0.000 000	0.002
100%		-10	1732 500 016	8.5	0.000 000	0.005
100%		0	1732 500 013	5.7	0.000 000	0.003
100%		+10	1732 500 013	5.4	0.000 000	0.003
100%		+30	1732 500 011	2.9	0.000 000	0.002
100%		+40	1732 500 016	8.4	0.000 000	0.005
100%		+50	1732 500 014	6.4	0.000 000	0.004
Batt. Endpoint		3.70	+20	1732 500 014	6.3	0.000 000

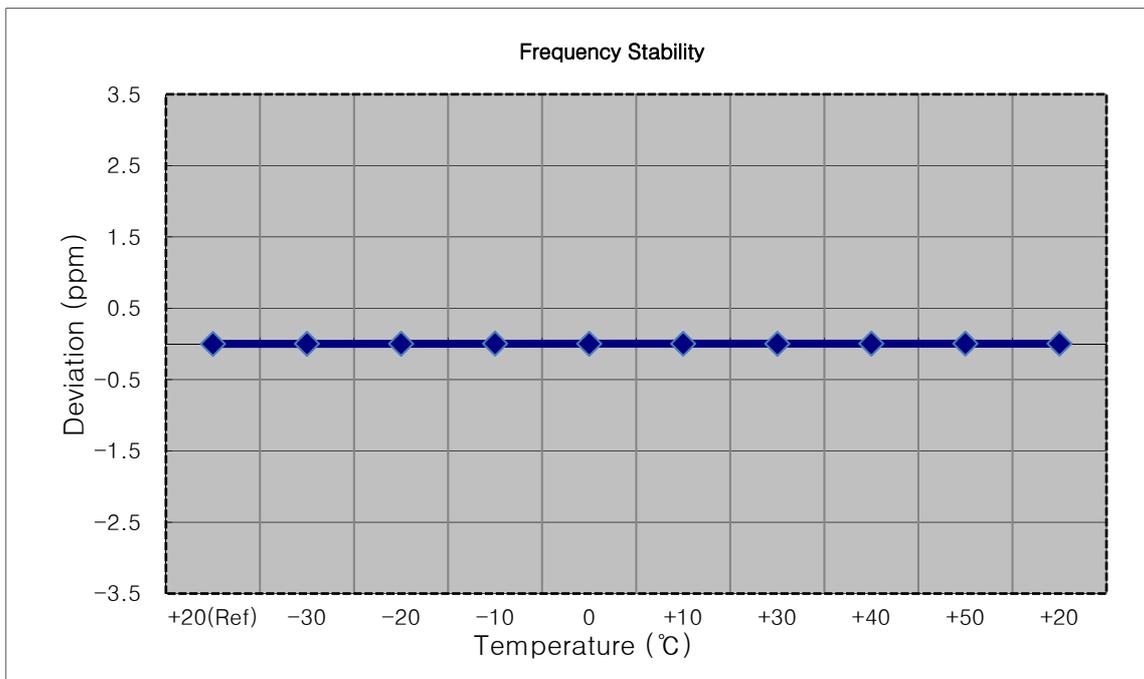


- MODE: LTE 4
- OPERATING FREQUENCY: 1732,500,000 Hz
- CHANNEL: 20175 (3 MHz)
- REFERENCE VOLTAGE: 4.00 VDC
- DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	4.00	+20(Ref)	1732 499 995	0.0	0.000 000	0.000
100%		-30	1732 499 992	-3.9	0.000 000	-0.002
100%		-20	1732 499 990	-5.5	0.000 000	-0.003
100%		-10	1732 499 999	3.8	0.000 000	0.002
100%		0	1732 499 989	-6.6	0.000 000	-0.004
100%		+10	1732 499 998	3.0	0.000 000	0.002
100%		+30	1732 499 990	-5.8	0.000 000	-0.003
100%		+40	1732 500 001	5.8	0.000 000	0.003
100%		+50	1732 499 989	-6.0	0.000 000	-0.003
Batt. Endpoint	3.70	+20	1732 499 992	-3.0	0.000 000	-0.002

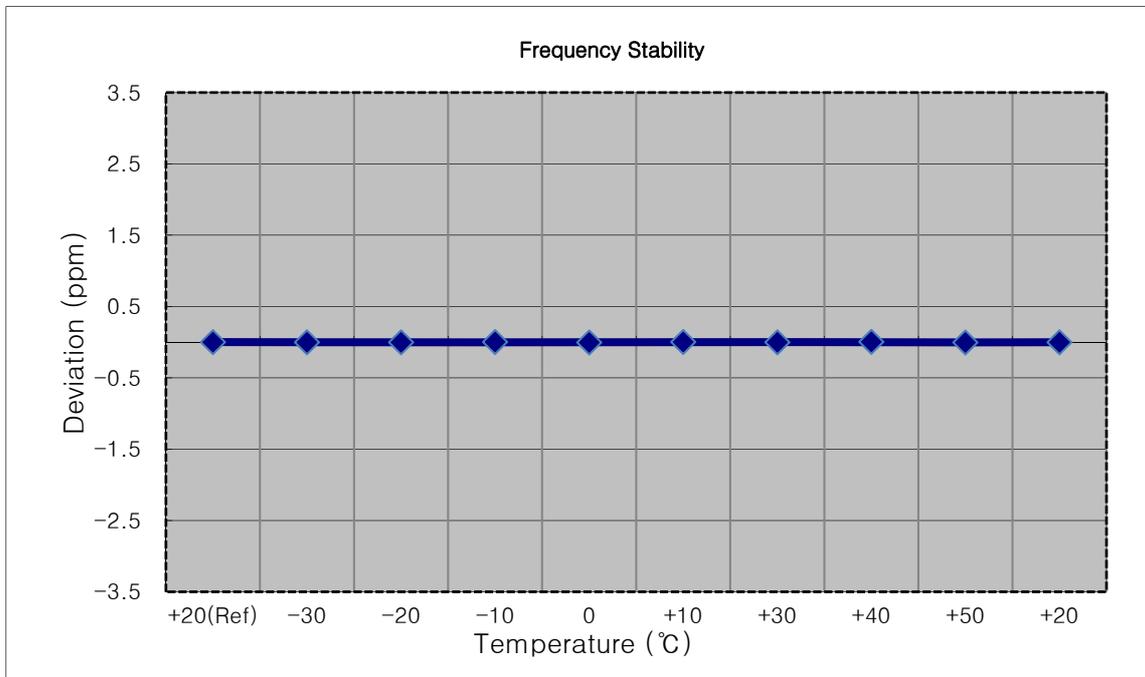


- MODE: LTE 4
- OPERATING FREQUENCY: 1732,500,000 Hz
- CHANNEL: 20175 (5 MHz)
- REFERENCE VOLTAGE: 4.00 VDC
- DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	4.00	+20(Ref)	1732 500 006	0.0	0.000 000	0.000
100%		-30	1732 500 001	-5.0	0.000 000	-0.003
100%		-20	1732 500 013	6.6	0.000 000	0.004
100%		-10	1732 500 009	3.0	0.000 000	0.002
100%		0	1732 500 009	3.0	0.000 000	0.002
100%		+10	1732 500 003	-2.9	0.000 000	-0.002
100%		+30	1732 500 009	3.1	0.000 000	0.002
100%		+40	1732 500 012	5.8	0.000 000	0.003
100%		+50	1732 500 010	3.8	0.000 000	0.002
Batt. Endpoint	3.70	+20	1732 500 003	-3.4	0.000 000	-0.002

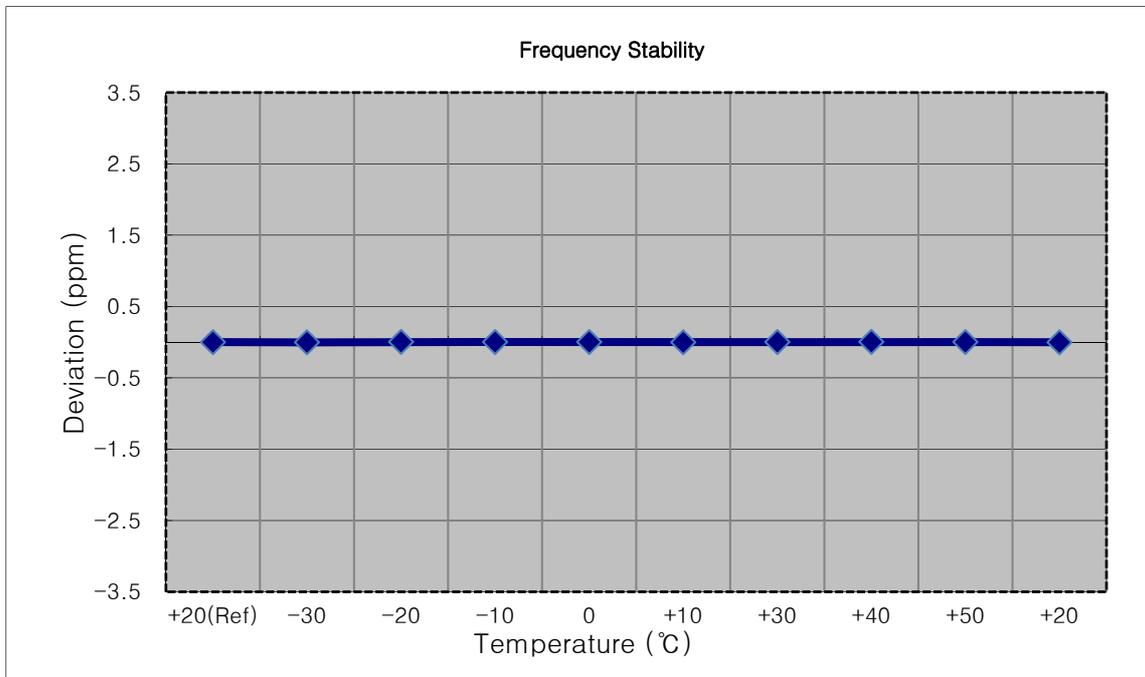


- MODE: LTE 4
- OPERATING FREQUENCY: 1732,500,000 Hz
- CHANNEL: 20175 (10 MHz)
- REFERENCE VOLTAGE: 4.00 VDC
- DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	4.00	+20(Ref)	1732 499 996	0.0	0.000 000	0.000
100%		-30	1732 499 992	-4.3	0.000 000	-0.002
100%		-20	1732 499 992	-4.0	0.000 000	-0.002
100%		-10	1732 499 992	-4.1	0.000 000	-0.002
100%		0	1732 500 002	6.1	0.000 000	0.004
100%		+10	1732 499 986	-10.5	-0.000 001	-0.006
100%		+30	1732 499 999	2.9	0.000 000	0.002
100%		+40	1732 500 001	5.0	0.000 000	0.003
100%		+50	1732 499 991	-5.1	0.000 000	-0.003
Batt. Endpoint	3.70	+20	1732 499 991	-5.2	0.000 000	-0.003

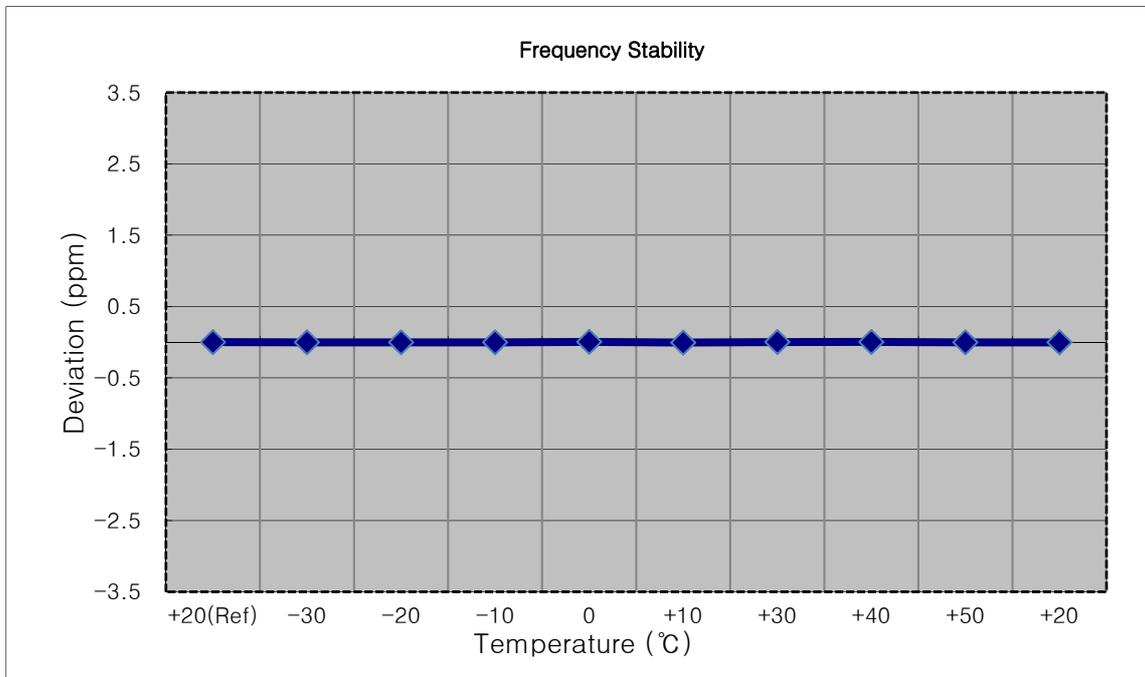


- MODE: LTE 4
- OPERATING FREQUENCY: 1732,500,000 Hz
- CHANNEL: 20175 (15 MHz)
- REFERENCE VOLTAGE: 4.00 VDC
- DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	4.00	+20(Ref)	1732 499 993	0.0	0.000 000	0.000
100%		-30	1732 499 990	-3.3	0.000 000	-0.002
100%		-20	1732 499 987	-6.3	0.000 000	-0.004
100%		-10	1732 499 989	-4.4	0.000 000	-0.003
100%		0	1732 499 997	4.0	0.000 000	0.002
100%		+10	1732 499 996	3.4	0.000 000	0.002
100%		+30	1732 499 989	-4.1	0.000 000	-0.002
100%		+40	1732 500 000	7.0	0.000 000	0.004
100%		+50	1732 499 985	-7.9	0.000 000	-0.005
Batt. Endpoint		3.70	+20	1732 499 998	4.5	0.000 000

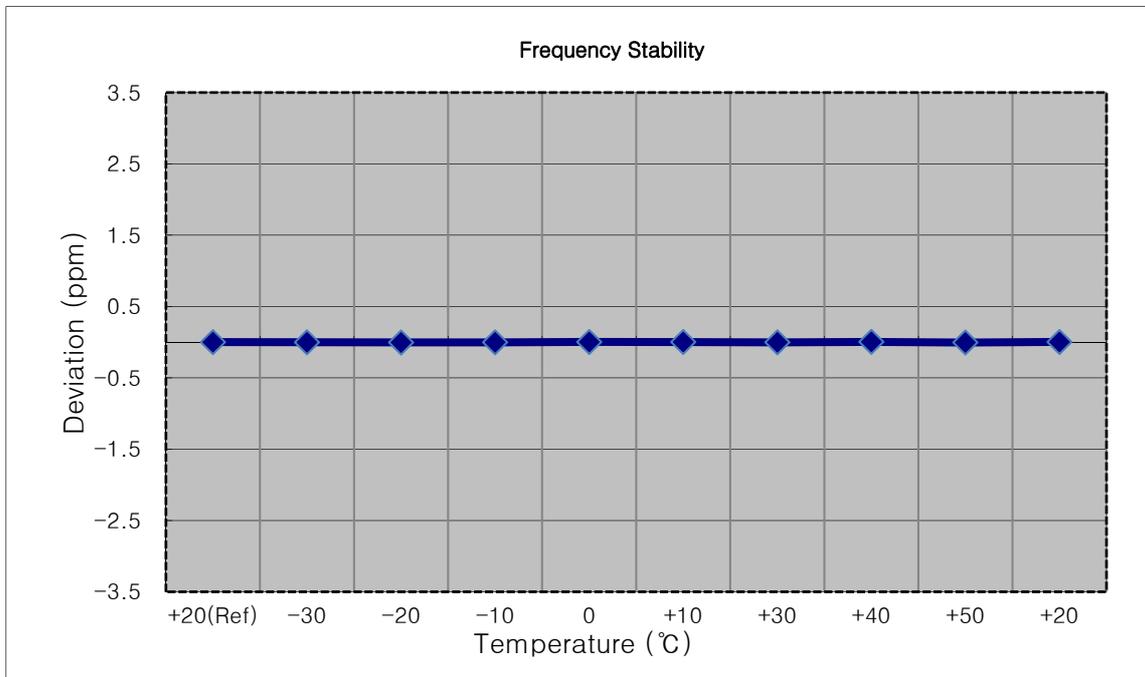


- MODE: LTE 4
- OPERATING FREQUENCY: 1732,500,000 Hz
- CHANNEL: 20175 (20 MHz)
- REFERENCE VOLTAGE: 4.00 VDC
- DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	4.00	+20(Ref)	1732 500 005	0.0	0.000 000	0.000
100%		-30	1732 499 997	-7.3	0.000 000	-0.004
100%		-20	1732 500 000	-4.2	0.000 000	-0.002
100%		-10	1732 499 998	-6.4	0.000 000	-0.004
100%		0	1732 499 997	-7.1	0.000 000	-0.004
100%		+10	1732 499 995	-10.0	-0.000 001	-0.006
100%		+30	1732 499 998	-6.9	0.000 000	-0.004
100%		+40	1732 500 011	6.3	0.000 000	0.004
100%		+50	1732 499 999	-5.5	0.000 000	-0.003
Batt. Endpoint	3.70	+20	1732 499 999	-5.9	0.000 000	-0.003

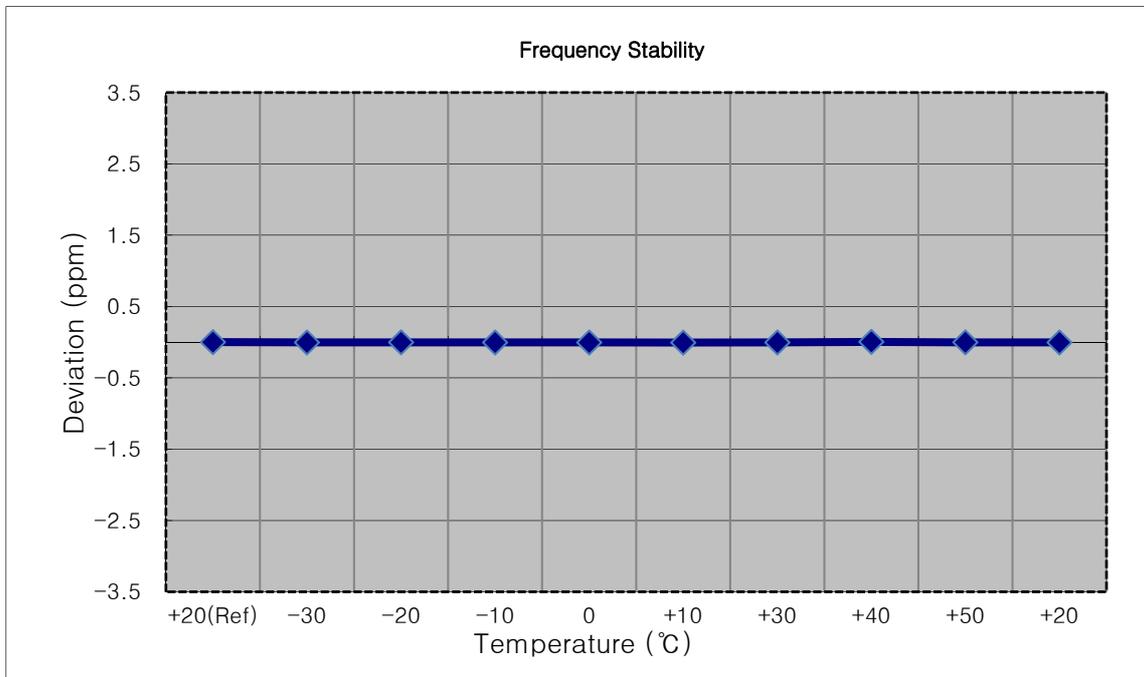


## **9. TEST PLOTS**


BAND 4. Occupied Bandwidth Plot (1.4M BW Ch.20175 QPSK RB 6)

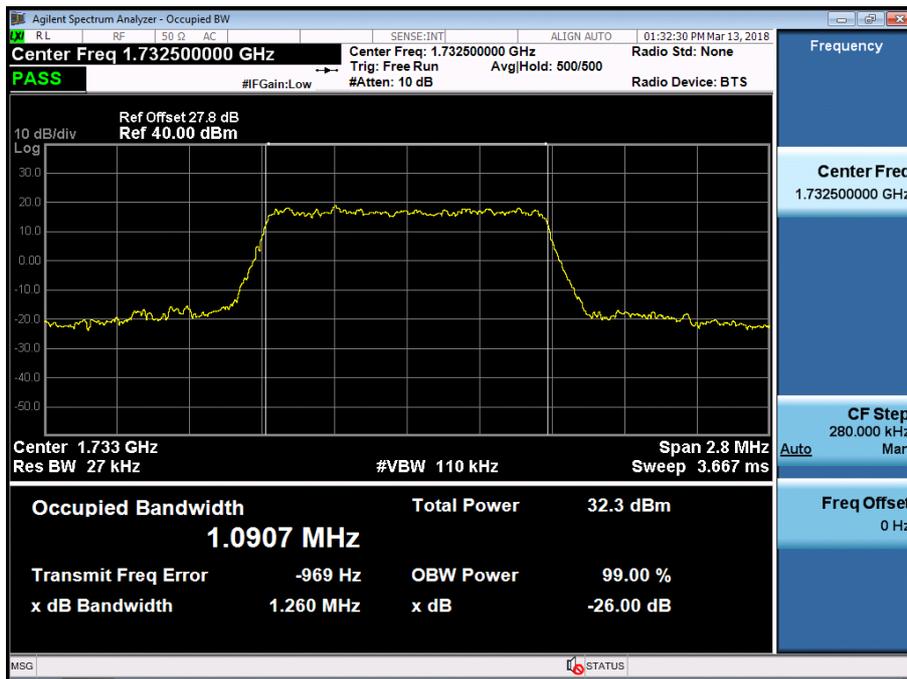


BAND 4. Occupied Bandwidth Plot (1.4M BW Ch.20175 16QAM RB 6)

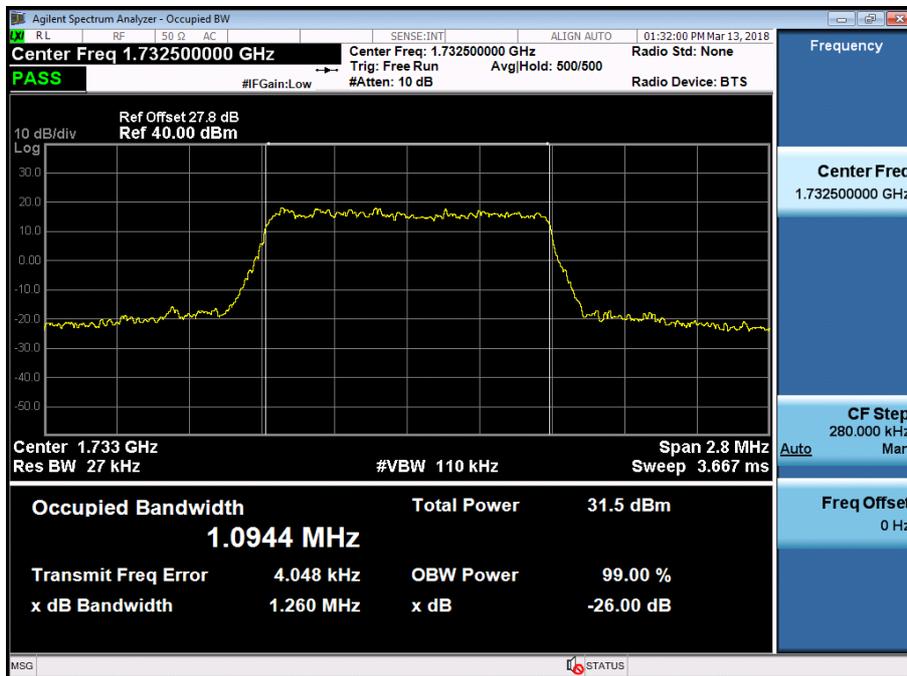


BAND 4. Occupied Bandwidth Plot (3M BW Ch.20175 QPSK RB 15)

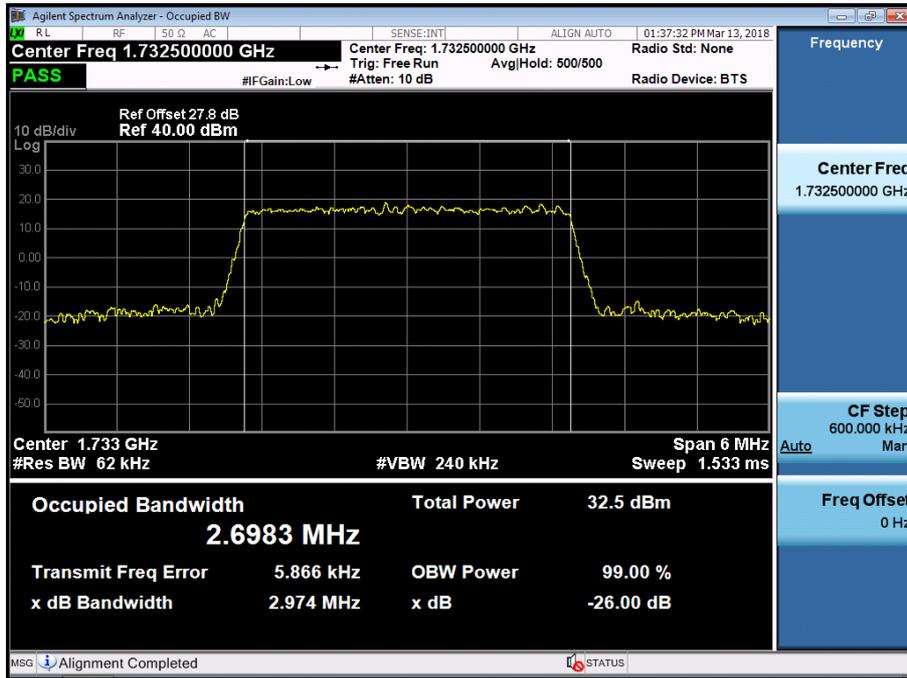


BAND 4. Occupied Bandwidth Plot (3M BW Ch.20175 16QAM RB 15)

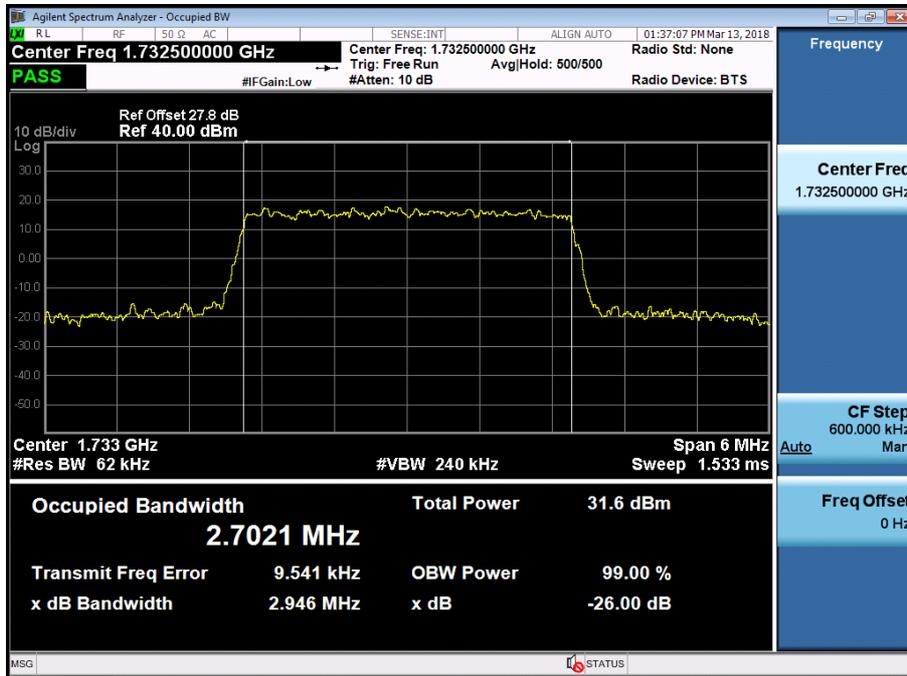


BAND 4. Occupied Bandwidth Plot (5M BW Ch.20175 QPSK RB 25)

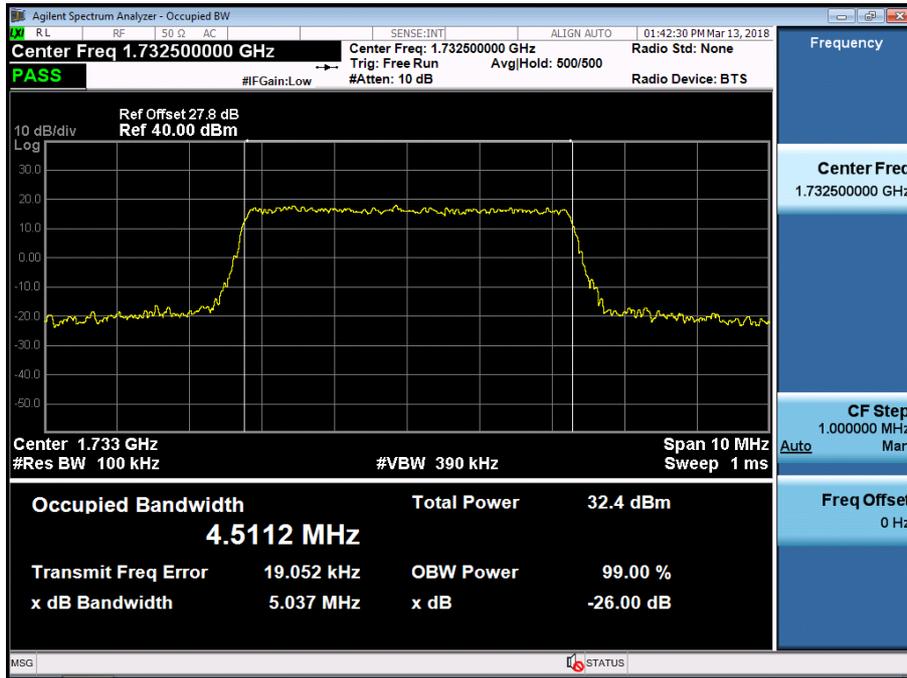


BAND 4. Occupied Bandwidth Plot (5M BW Ch.20175 16QAM RB 25)

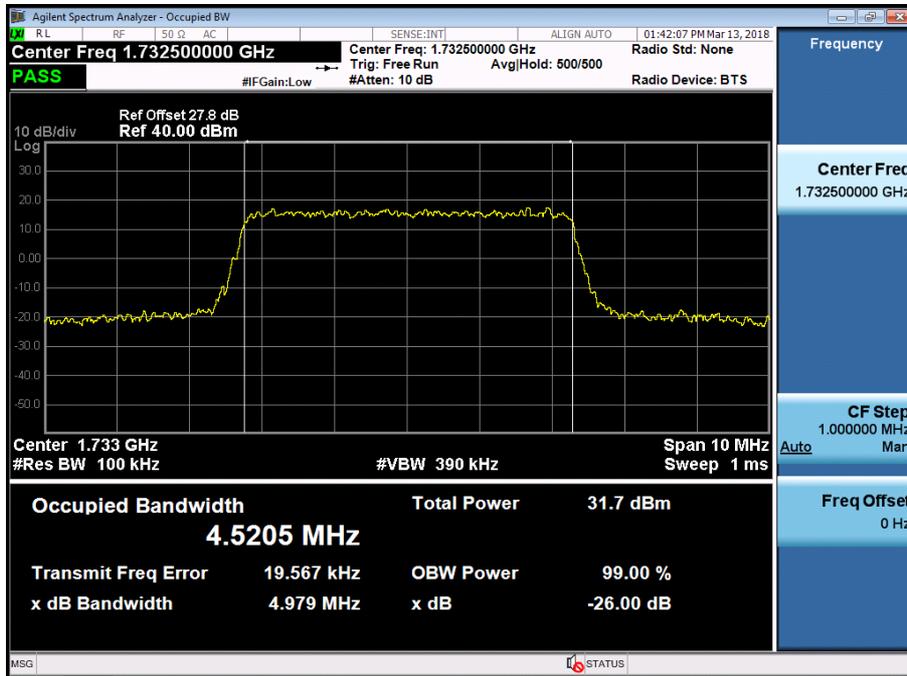


BAND 4. Occupied Bandwidth Plot (10M BW Ch.20175 QPSK RB 50)

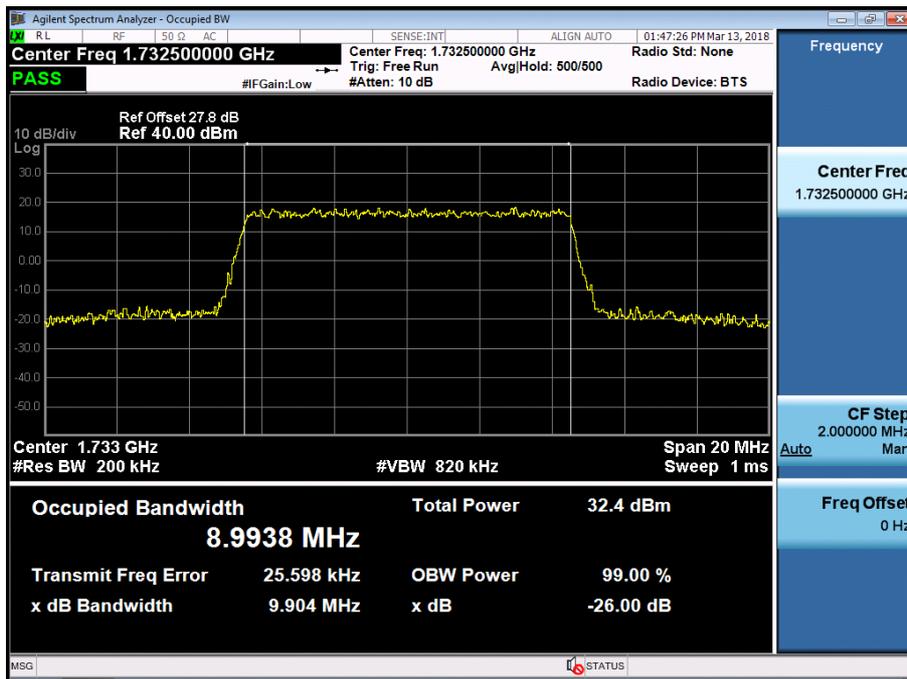


BAND 4. Occupied Bandwidth Plot (10M BW Ch.20175 16QAM RB 50)

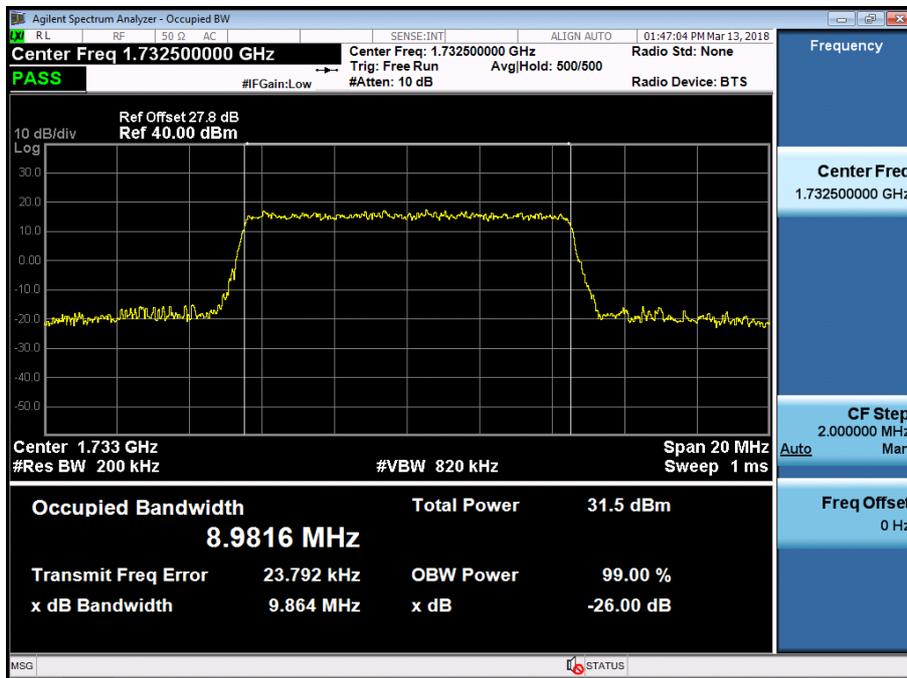


BAND 4. Occupied Bandwidth Plot (15M BW Ch.20175 QPSK RB 75)

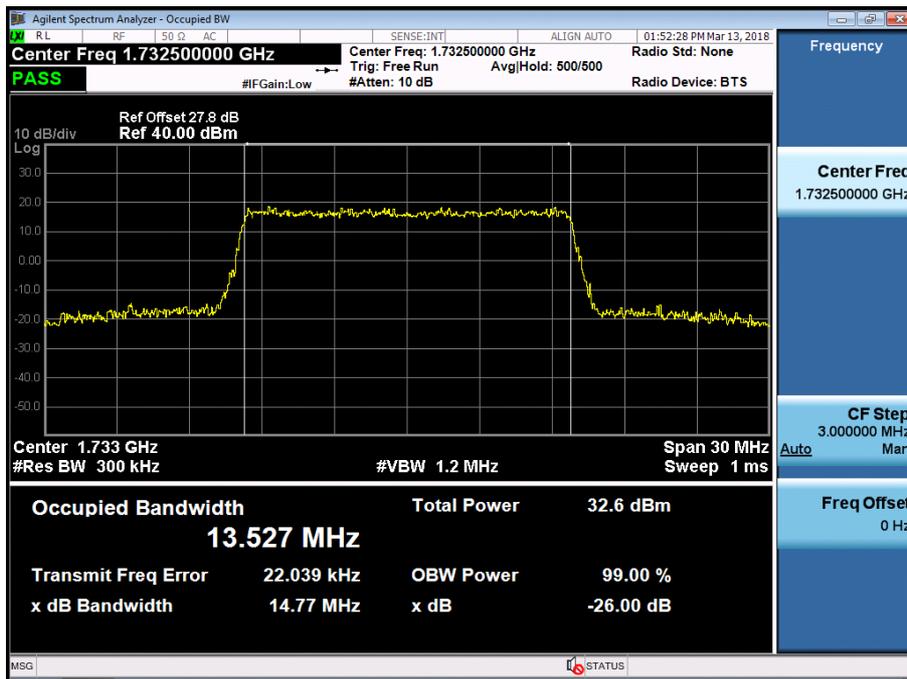


BAND 4. Occupied Bandwidth Plot (15M BW Ch.20175 16QAM RB 75)

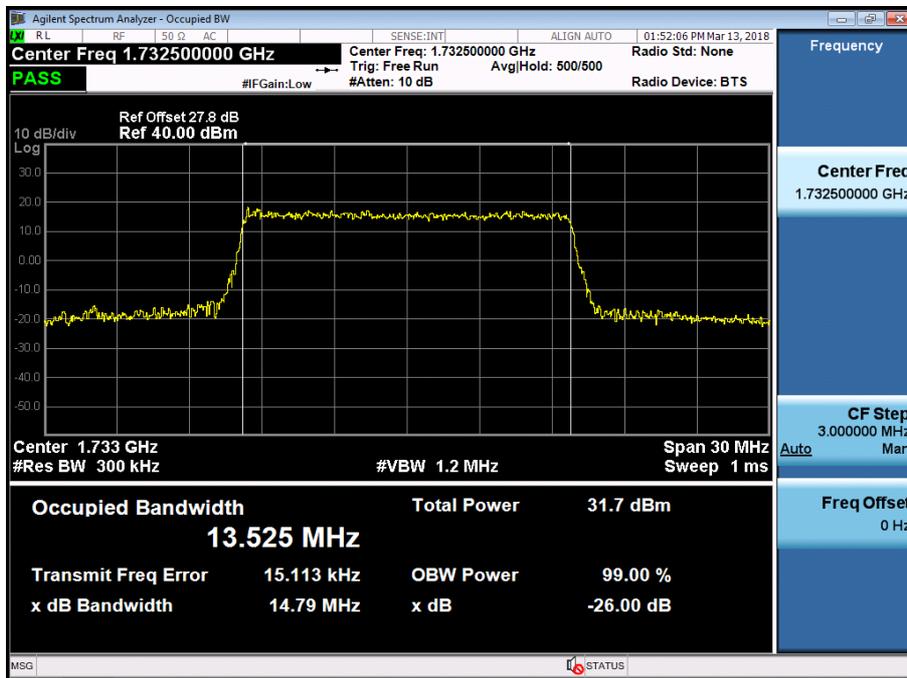


BAND 4. Occupied Bandwidth Plot (20M BW Ch.20175 QPSK RB 100)

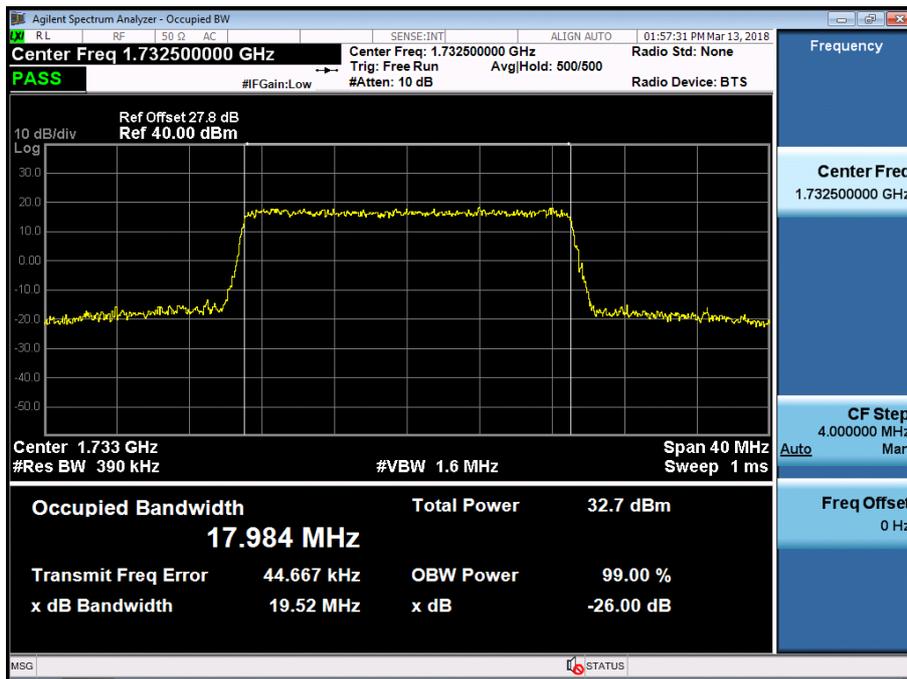


BAND 4. Occupied Bandwidth Plot (20M BW Ch.20175 16QAM RB 100)

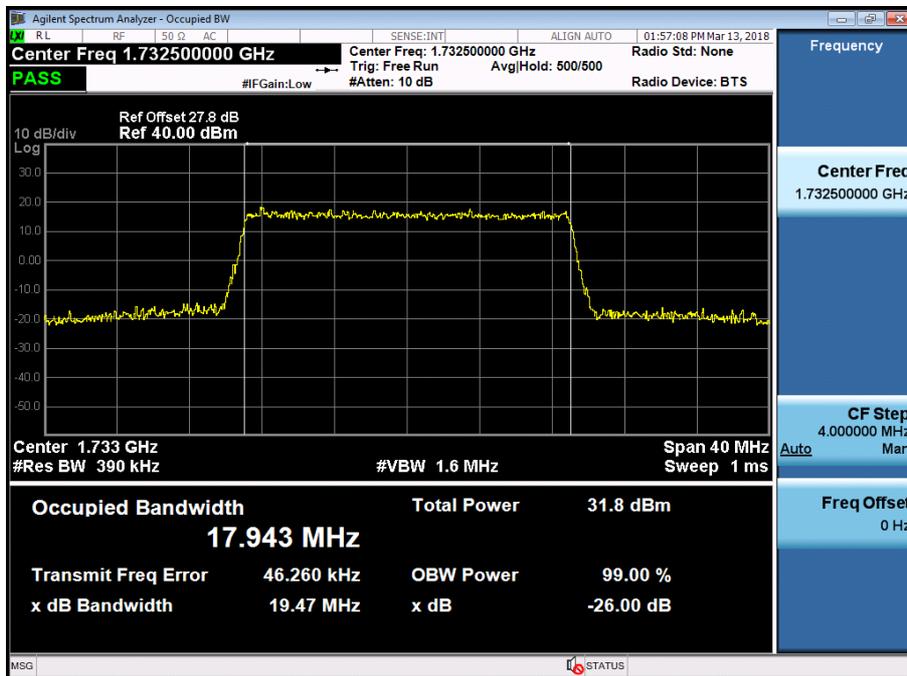


BAND 4. PAR Plot (1.4M BW\_Ch.20175\_QPSK\_RB6\_0)

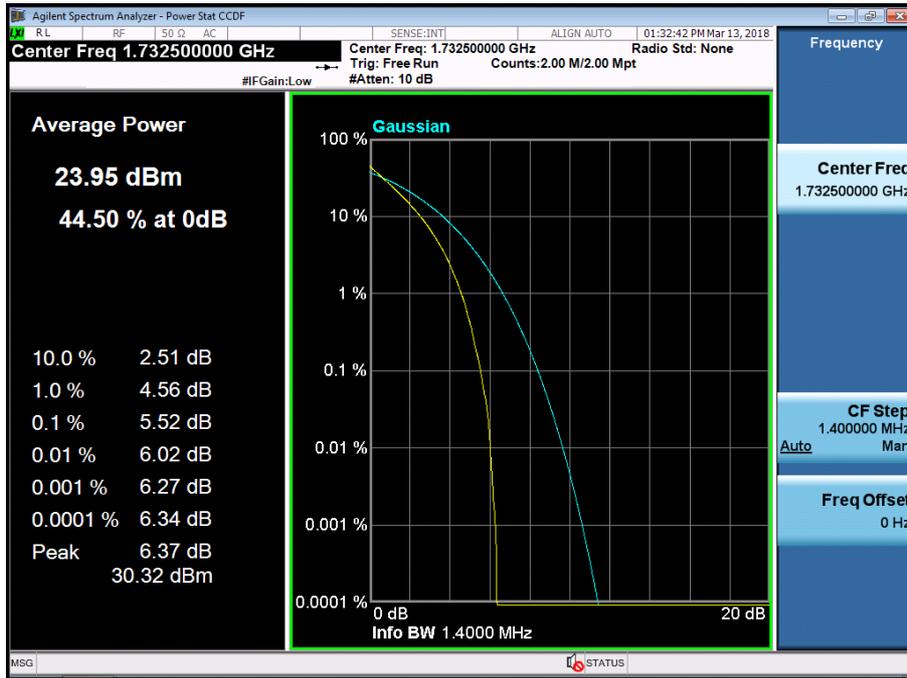


BAND 4. PAR Plot (1.4M BW\_Ch.20175\_16QAM\_RB6\_0)

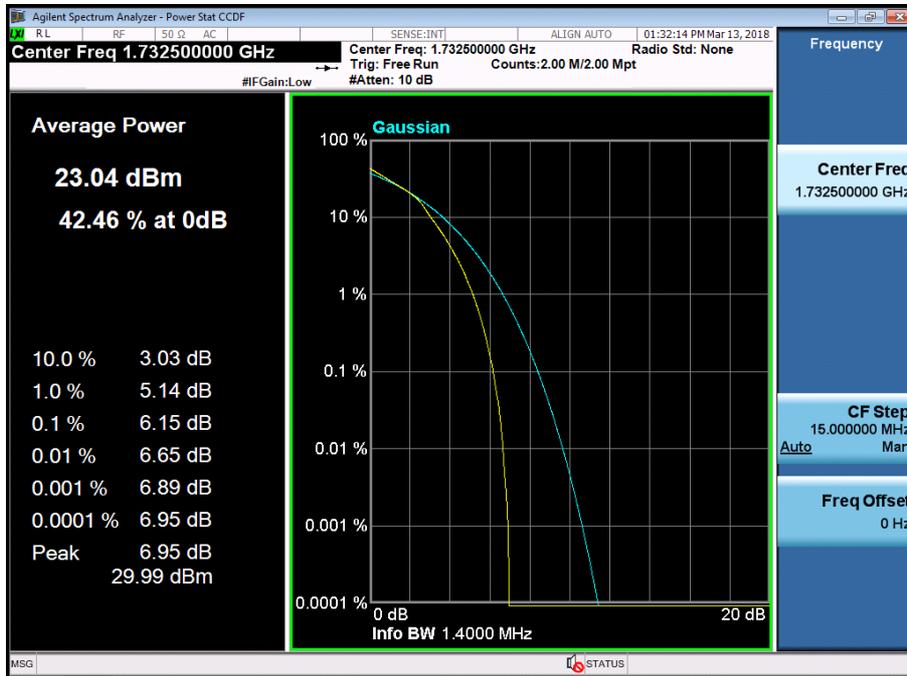


BAND 4. PAR Plot (3M BW\_Ch.20175\_QPSK\_RB15\_0)

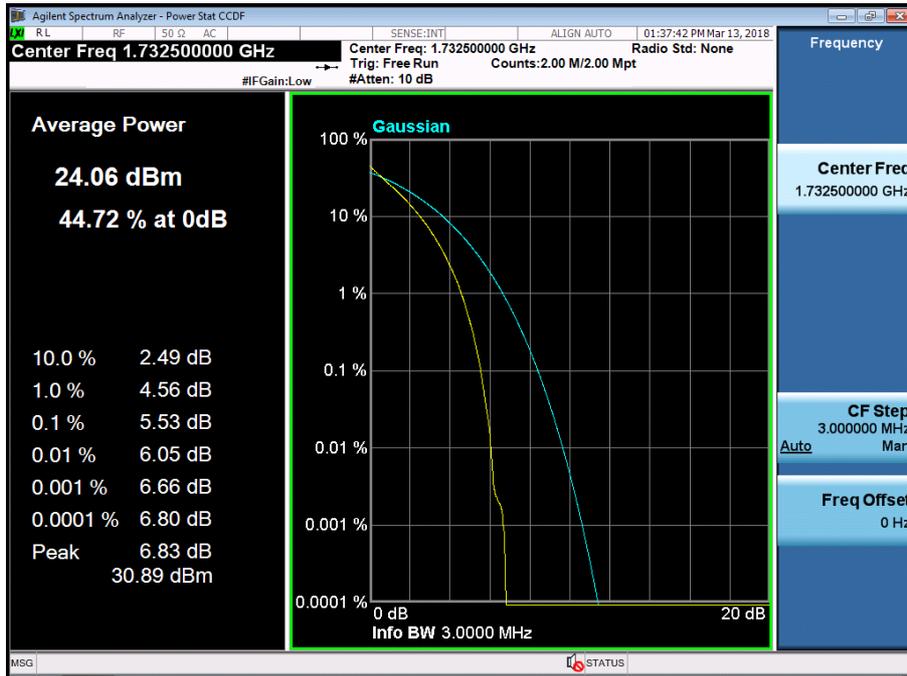


BAND 4. PAR Plot (3M BW\_Ch.20175\_16QAM\_RB15\_0)

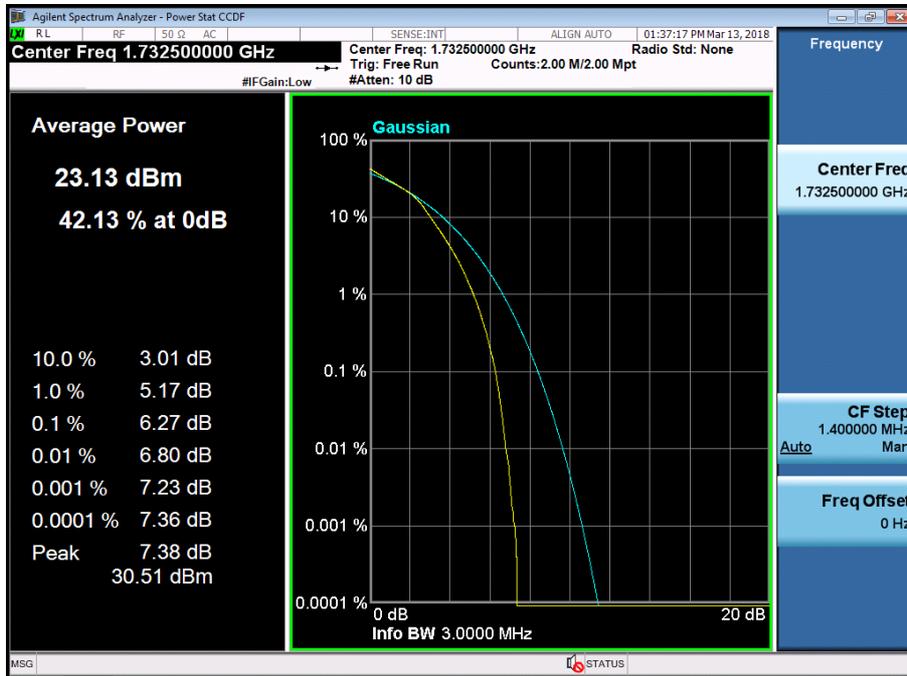


BAND 4. PAR Plot (5M BW\_Ch.20175\_QPSK\_RB25\_0)

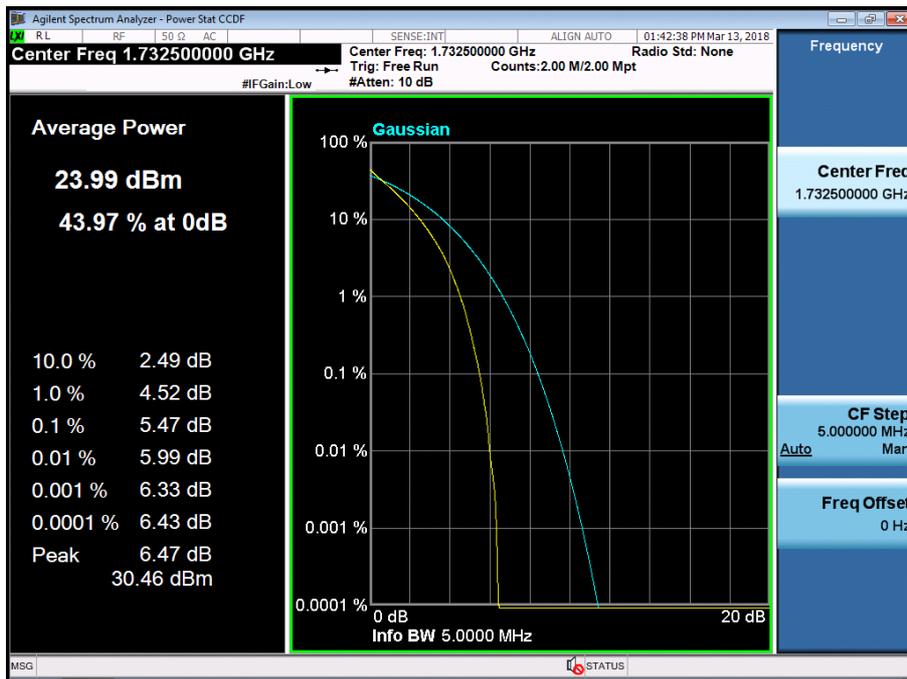


BAND 4. PAR Plot (5M BW\_Ch.20175\_16QAM\_RB25\_0)

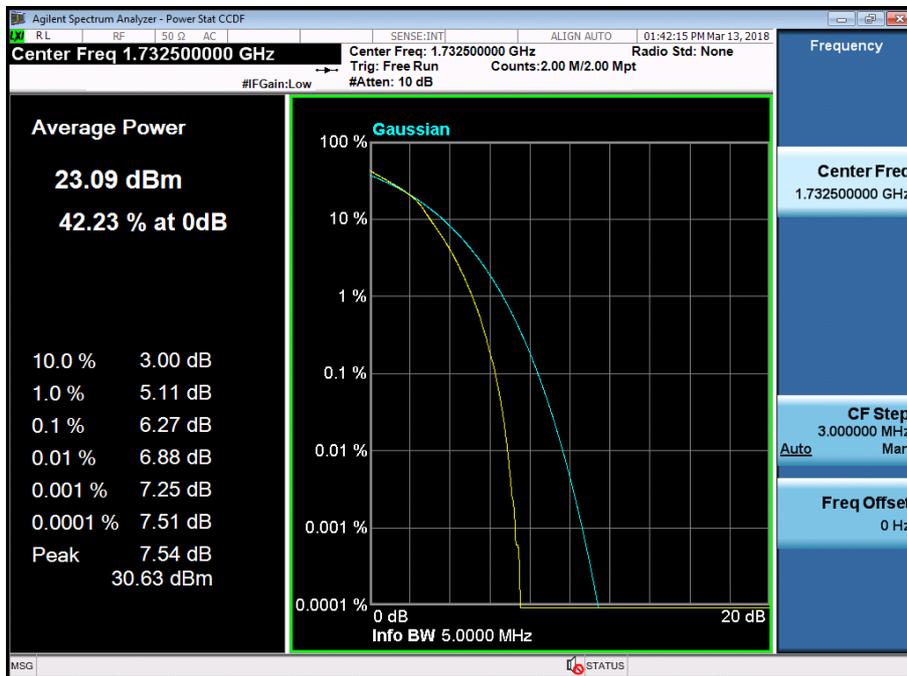


BAND 4. PAR Plot (10M BW\_Ch.20175\_QPSK\_RB50\_0)

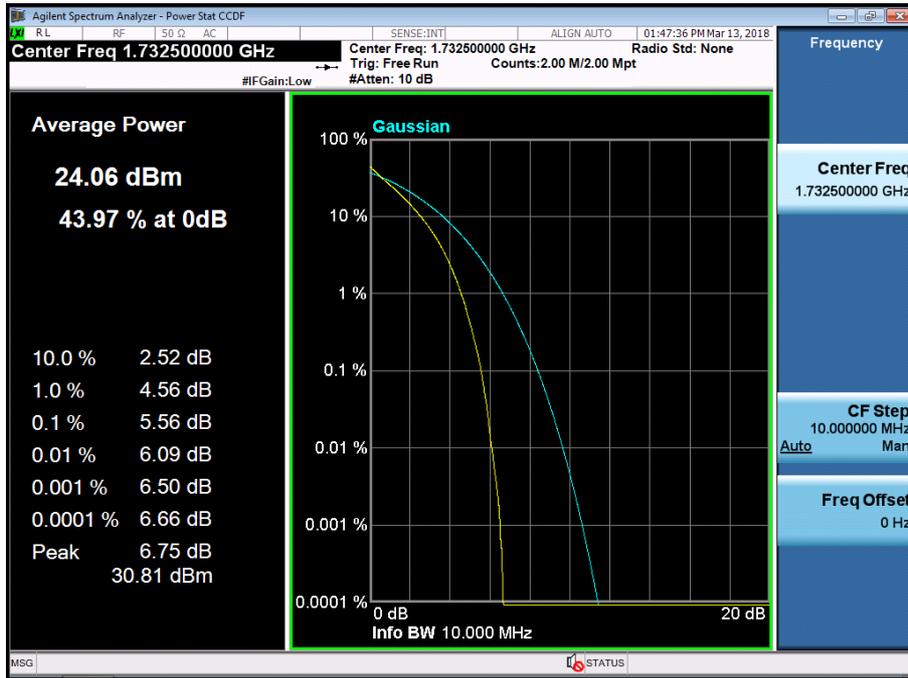


BAND 4. PAR Plot (10M BW\_Ch.20175\_16QAM\_RB50\_0)

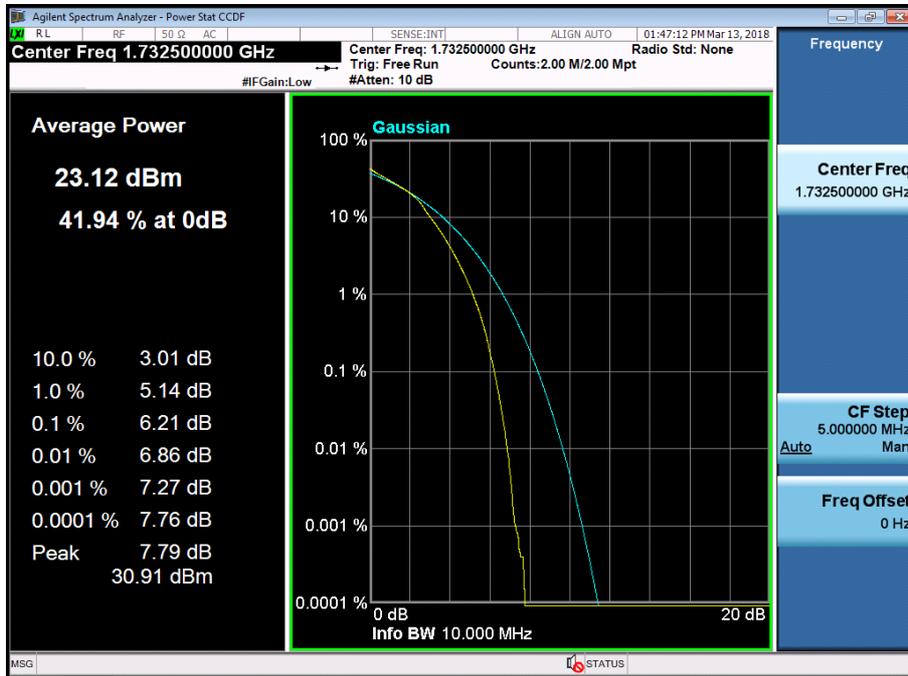


BAND 4. PAR Plot (15M BW\_Ch.20175\_QPSK\_RB75\_0)

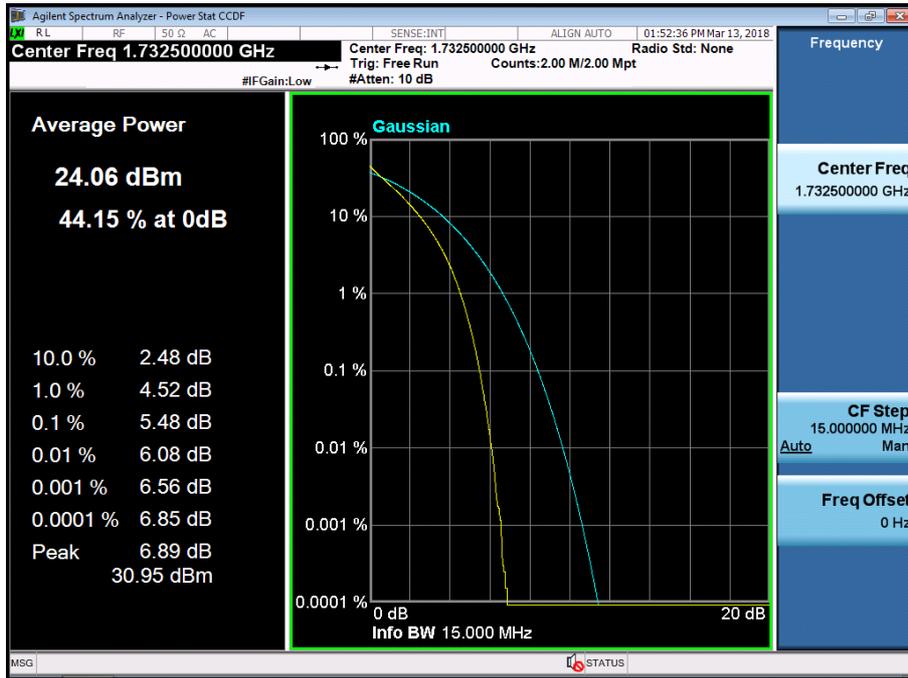


BAND 4. PAR Plot (15M BW\_Ch.20175\_16QAM\_RB75\_0)

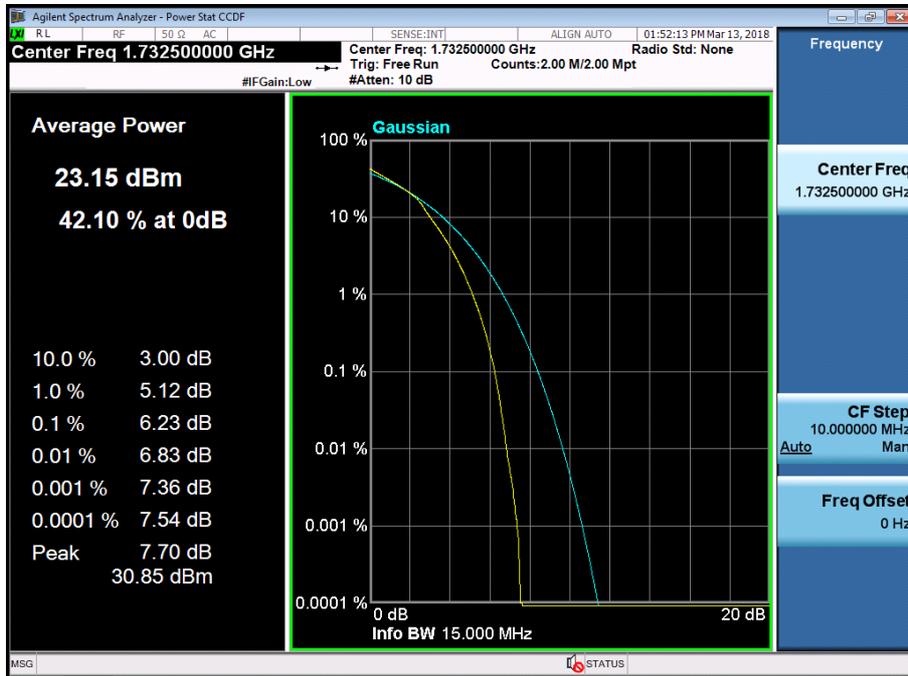


BAND 4. PAR Plot (20M BW\_Ch.20175\_QPSK\_RB100\_0)

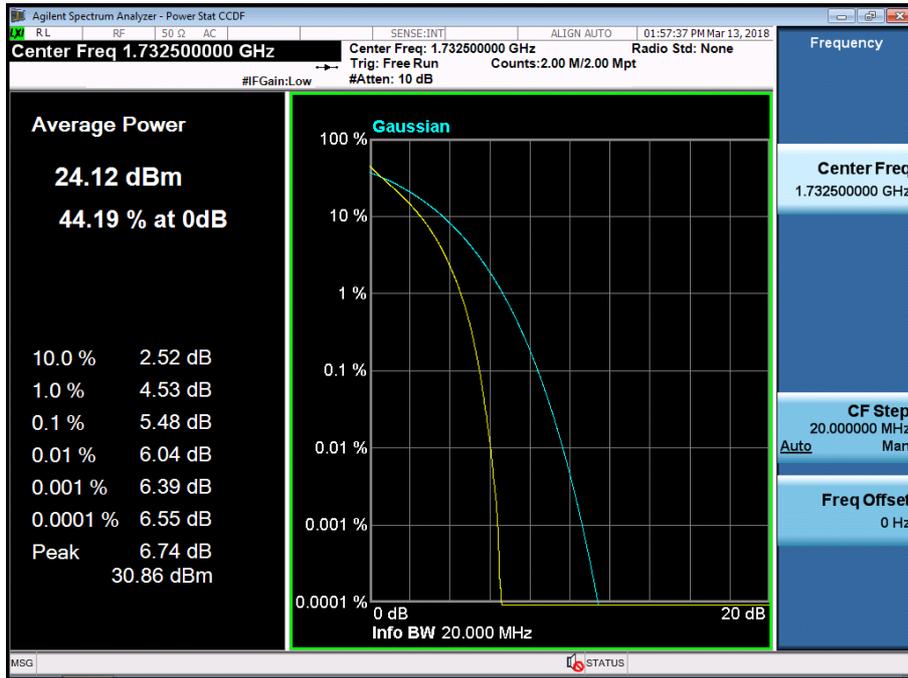


BAND 4. PAR Plot (20M BW\_Ch.20175\_16QAM\_RB100\_0)

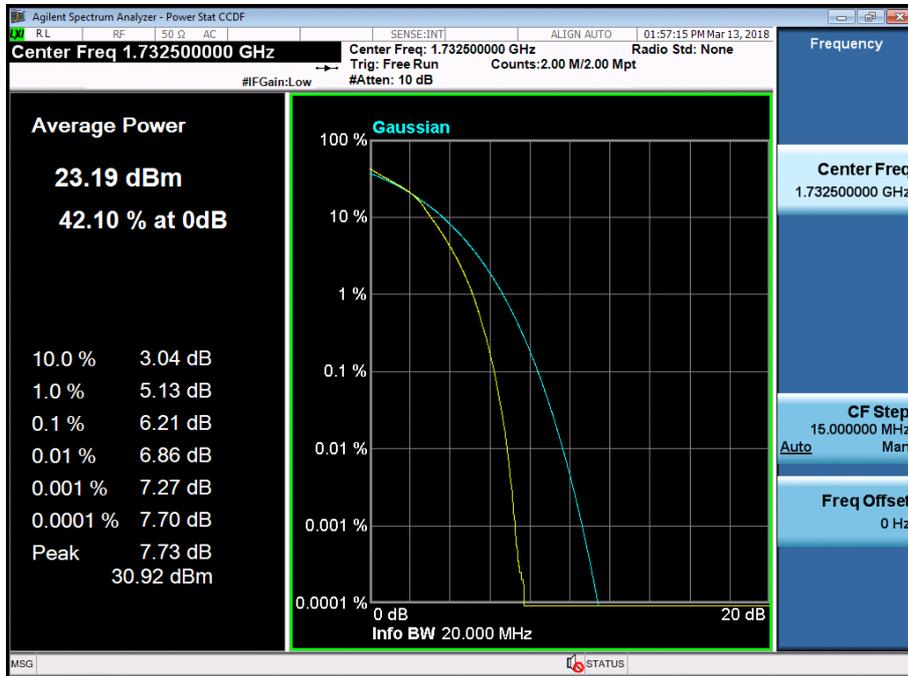

BAND 4. Lower Band Edge Plot (1.4M BW Ch.19957 QPSK RB 1, Offset 0) -1

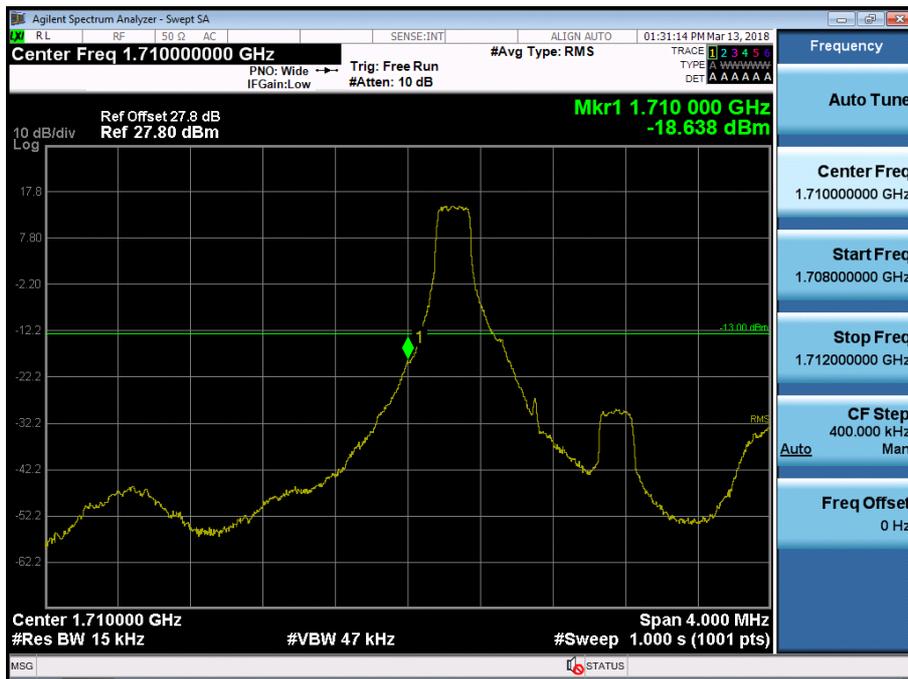

BAND 4. Lower Band Edge Plot (1.4M BW Ch.19957 QPSK RB 6) -2

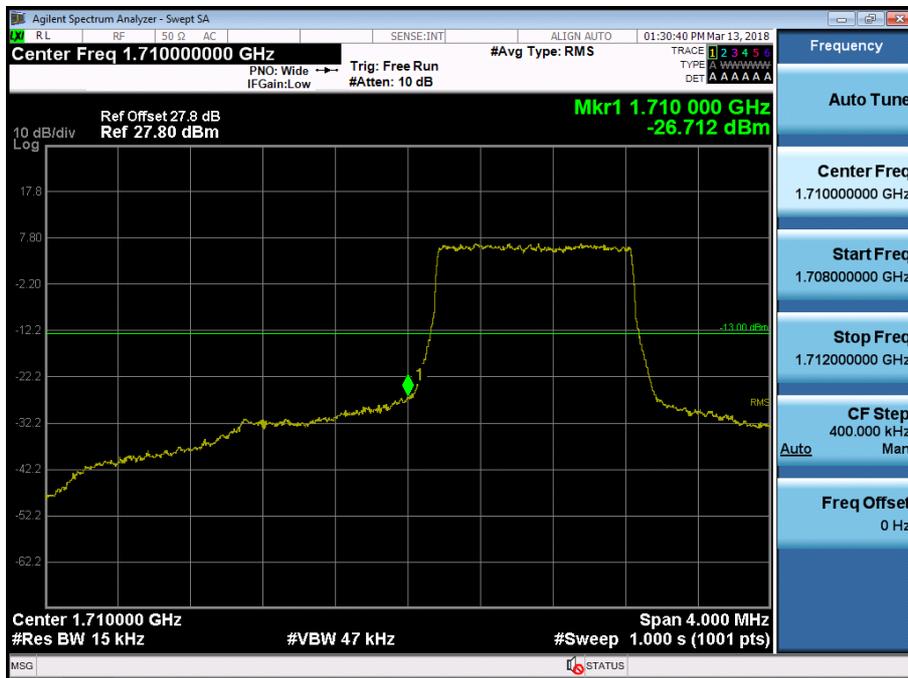


BAND 4. Lower Extended Band Edge Plot (1.4M BW Ch.19957 QPSK\_RB6\_0) -3




BAND 4. Lower Band Edge Plot (3M BW Ch.19965 QPSK RB 1, Offset 0) -1



BAND 4. Lower Band Edge Plot (3M BW Ch.19965 QPSK RB 15) -2

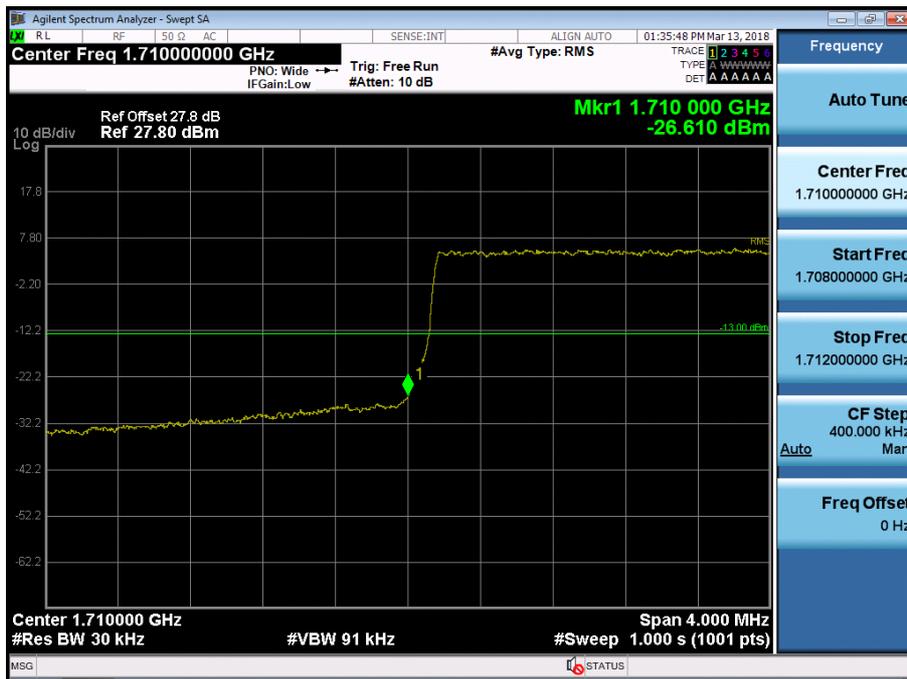


BAND 4. Lower Extended Band Edge Plot (3M BW Ch.19965 QPSK\_RB15\_0) -3

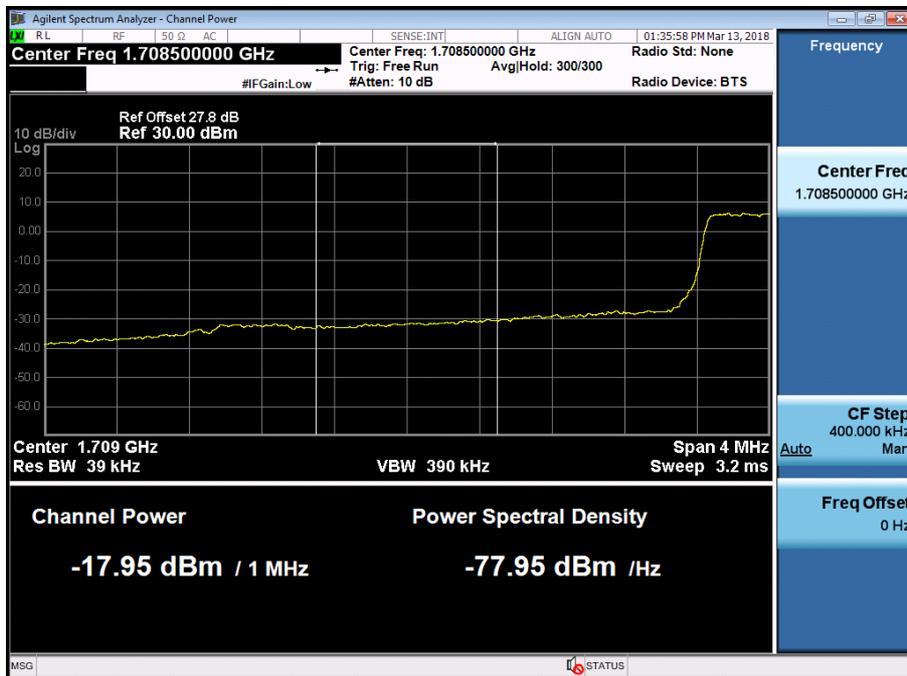

BAND 4. Lower Band Edge Plot (5M BW Ch.19975 QPSK RB 1, Offset 0) -1




BAND 4. Lower Band Edge Plot (5M BW Ch.19975 QPSK RB 25) -2

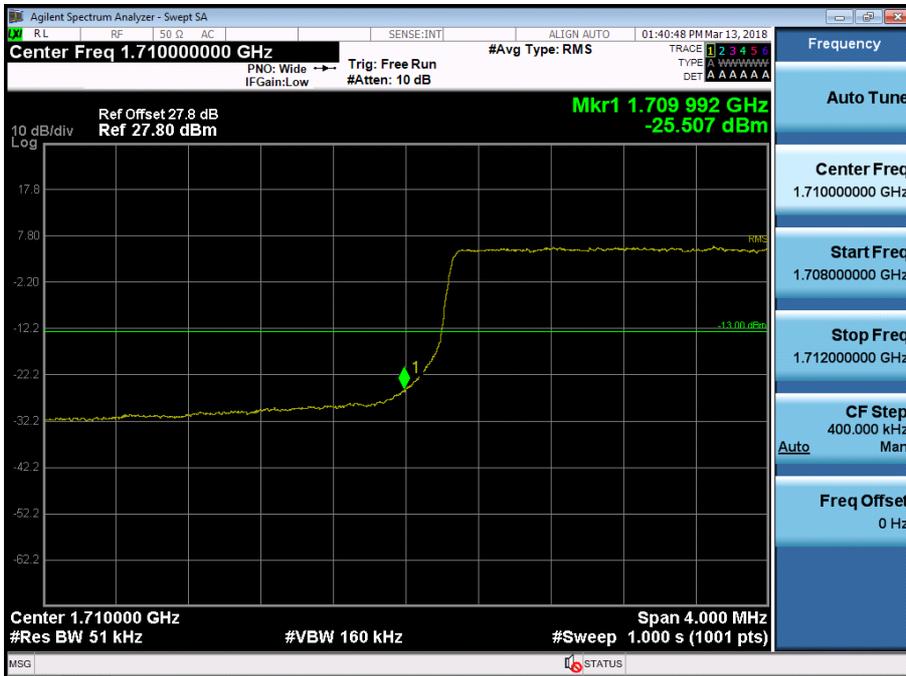


BAND 4. Lower Extended Band Edge Plot (5M BW Ch.19975 QPSK\_RB25\_0) -3




BAND 4. Lower Band Edge Plot (10M BW Ch.20000 QPSK RB 1, Offset 0) -1

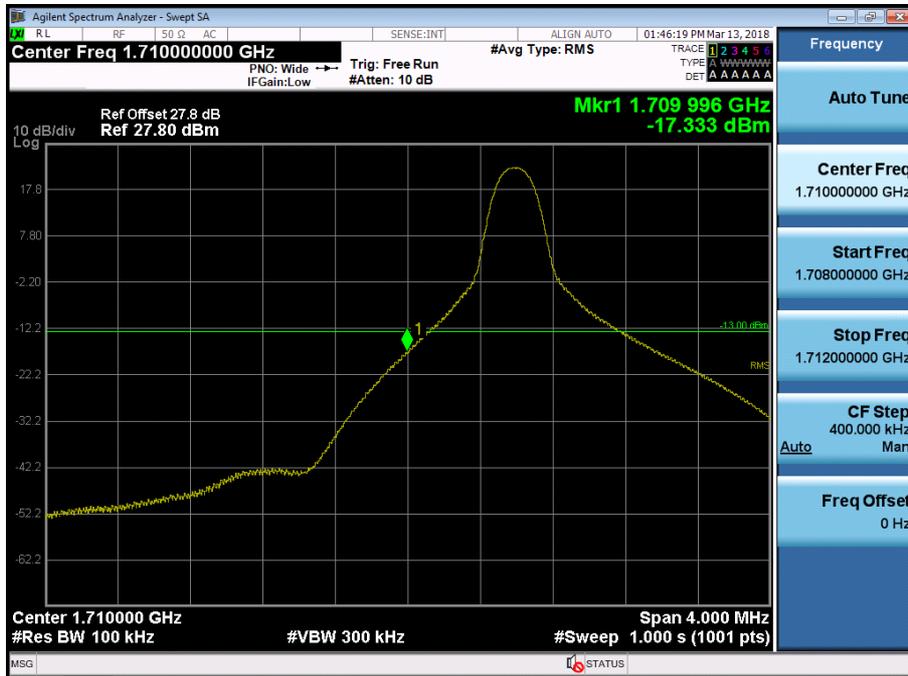


BAND 4. Lower Band Edge Plot (10M BW Ch.20000 QPSK RB 50) -2

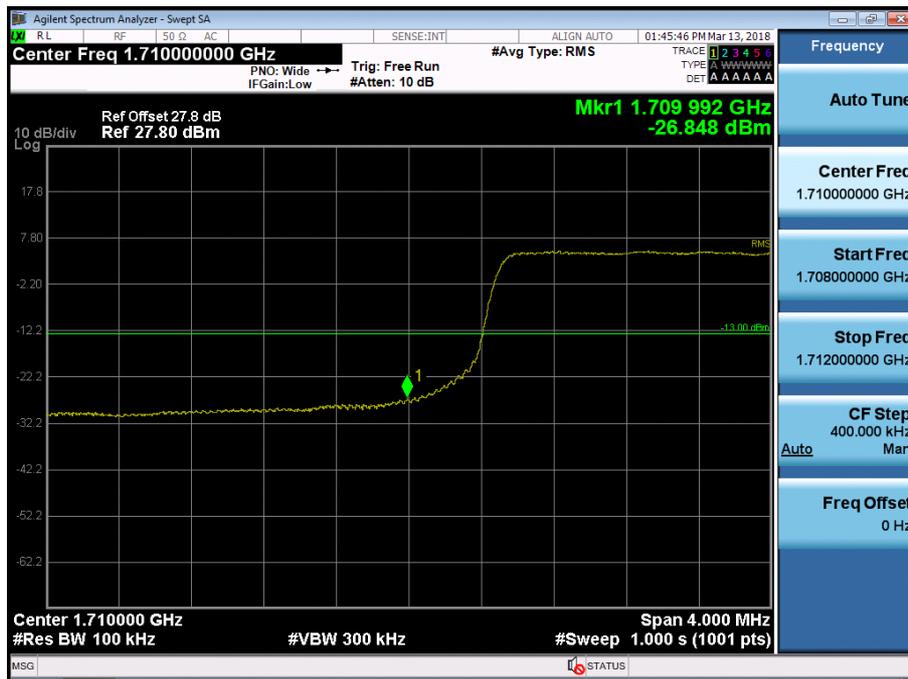


BAND 4. Lower Extended Band Edge Plot (10M BW Ch.20000 QPSK\_RB50\_0) -3

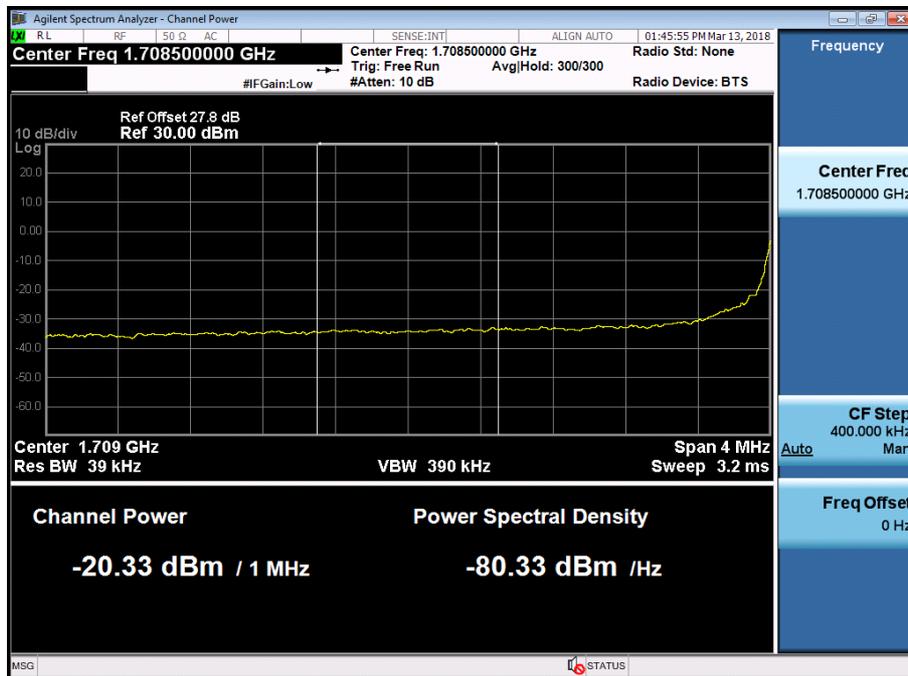

BAND 4. Lower Band Edge Plot (15M BW Ch.20025 QPSK RB 1, Offset 0) -1

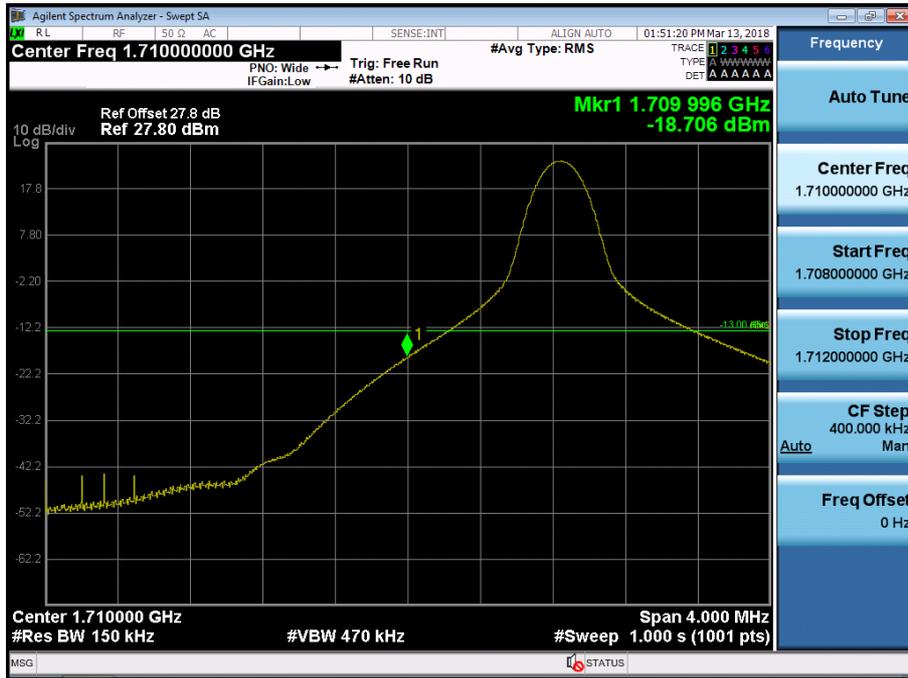


BAND 4. Lower Band Edge Plot (15M BW Ch.20025 QPSK RB 75) -2

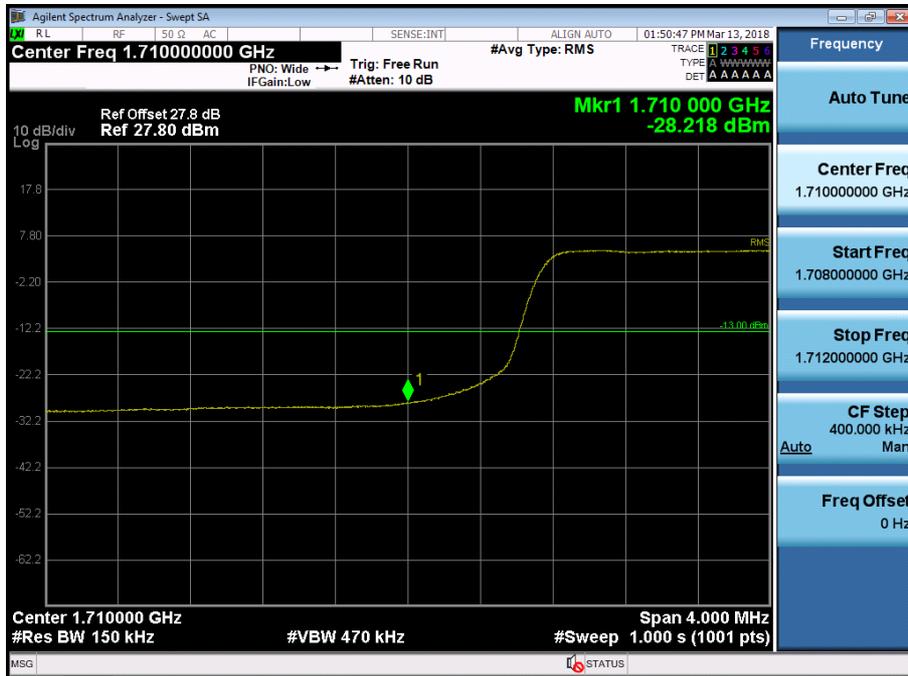


BAND 4. Lower Extended Band Edge Plot (15M BW Ch.20025 QPSK\_RB75\_0) -3




BAND 4. Lower Band Edge Plot (20M BW Ch.20050 QPSK RB 1, Offset 0) -1

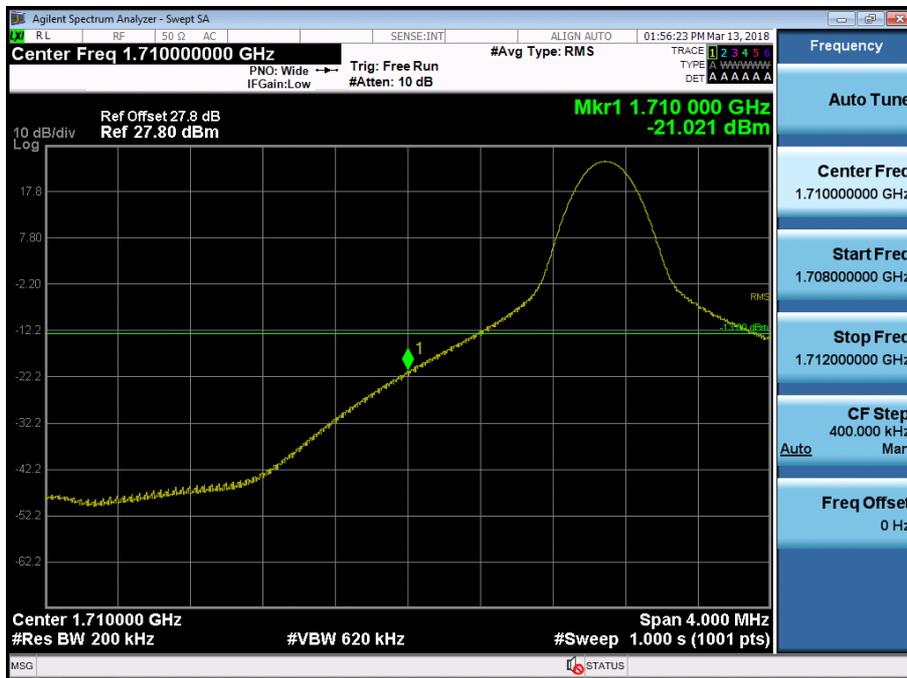


BAND 4. Lower Band Edge Plot (20M BW Ch.20050 QPSK RB 100) -2

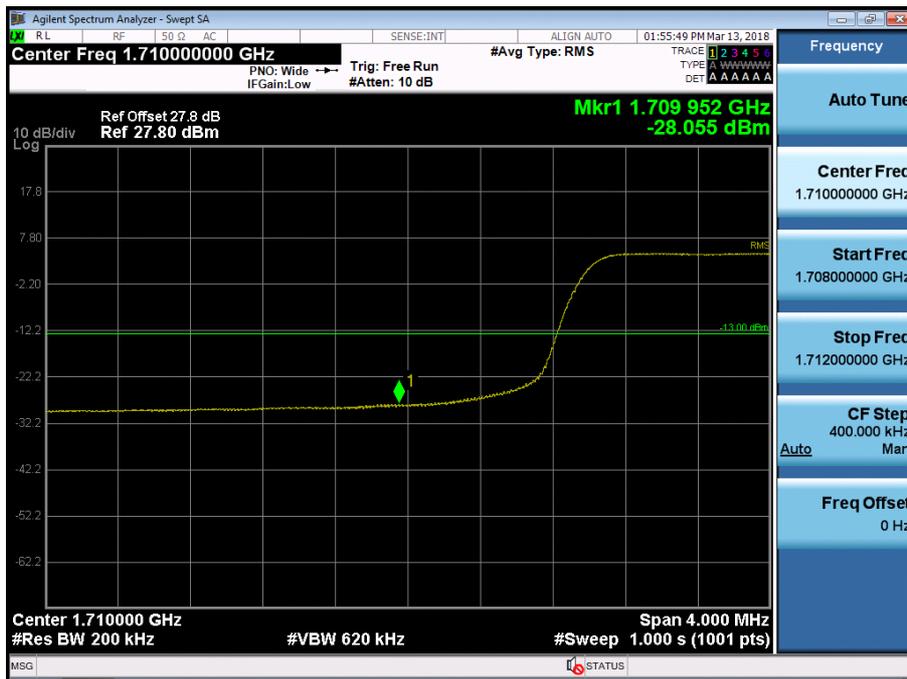

BAND 4. Lower Extended Band Edge Plot (20M BW Ch.20050 QPSK\_RB100\_0) -3

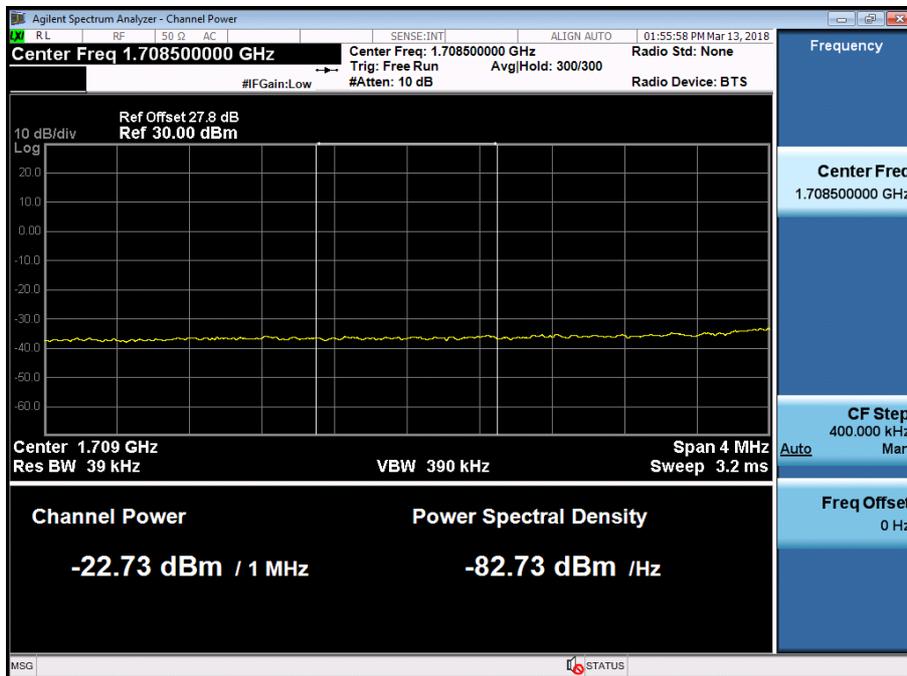


BAND 4. Upper Band Edge Plot (1.4M BW Ch.20393 QPSK\_RB1\_Offset 5) -1

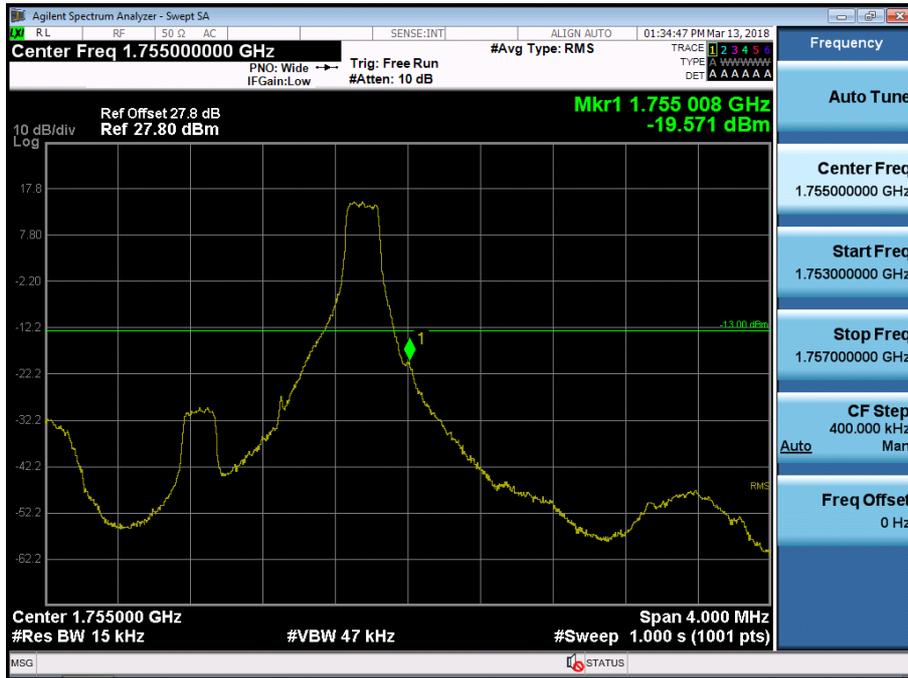

BAND 4. Upper Band Edge Plot (1.4M BW Ch.20393 QPSK\_RB6) -2



BAND 4. Upper Extended Band Edge Plot (1.4M BW Ch. 20393 QPSK\_RB6\_0) -3

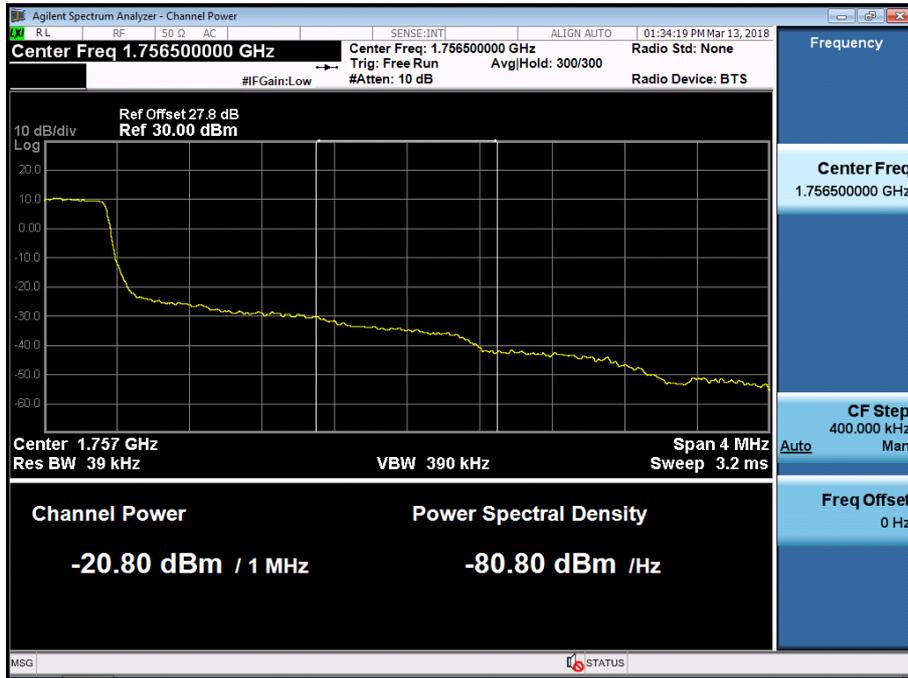


BAND 4. Upper Band Edge Plot (3M BW Ch.20385 QPSK\_RB1\_Offset 14) -1




BAND 4. Upper Band Edge Plot (3M BW Ch.20385 QPSK\_RB15) -2



BAND 4. Upper Extended Band Edge Plot (3M BW Ch.20385 QPSK\_RB15\_0) -3

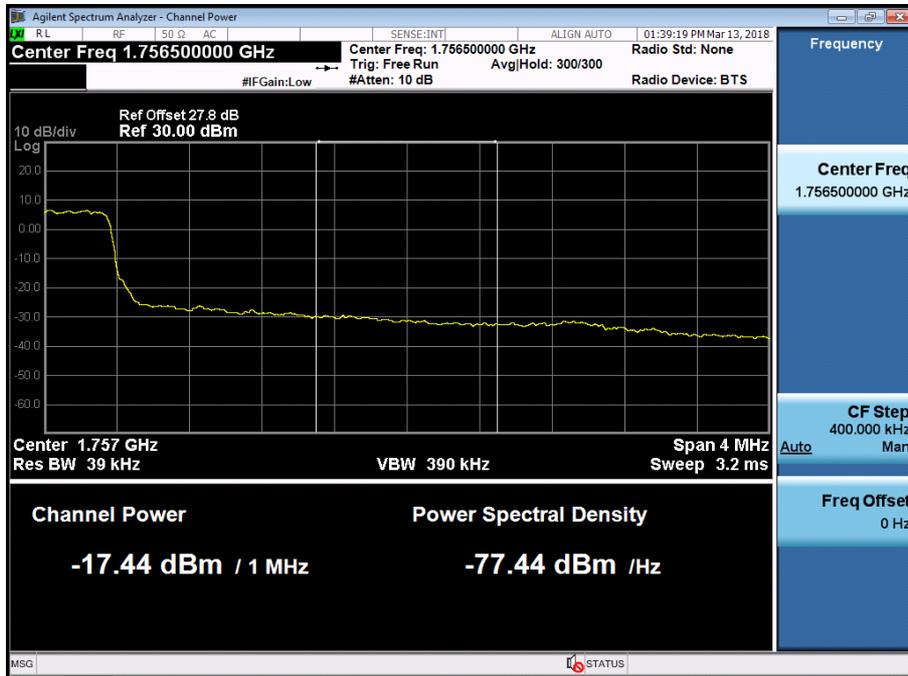


BAND 4. Upper Band Edge Plot (5M BW Ch.20375 QPSK\_RB1\_Offset 24) -1

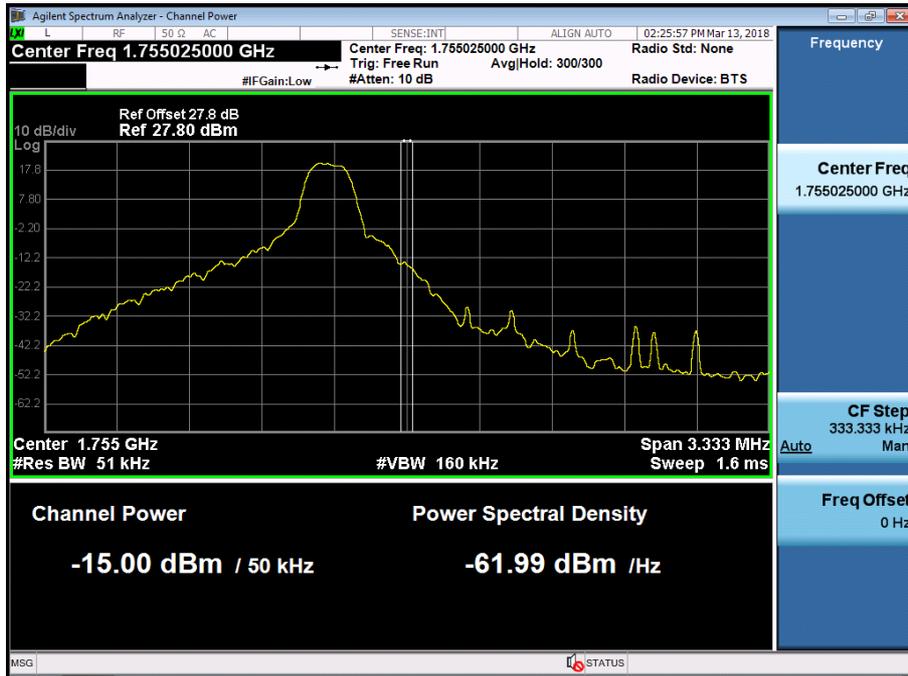


BAND 4. Upper Band Edge Plot (5M BW Ch.20375 QPSK\_RB25) -2



BAND 4. Upper Extended Band Edge Plot (5M BW Ch.20375 QPSK\_RB25) -3

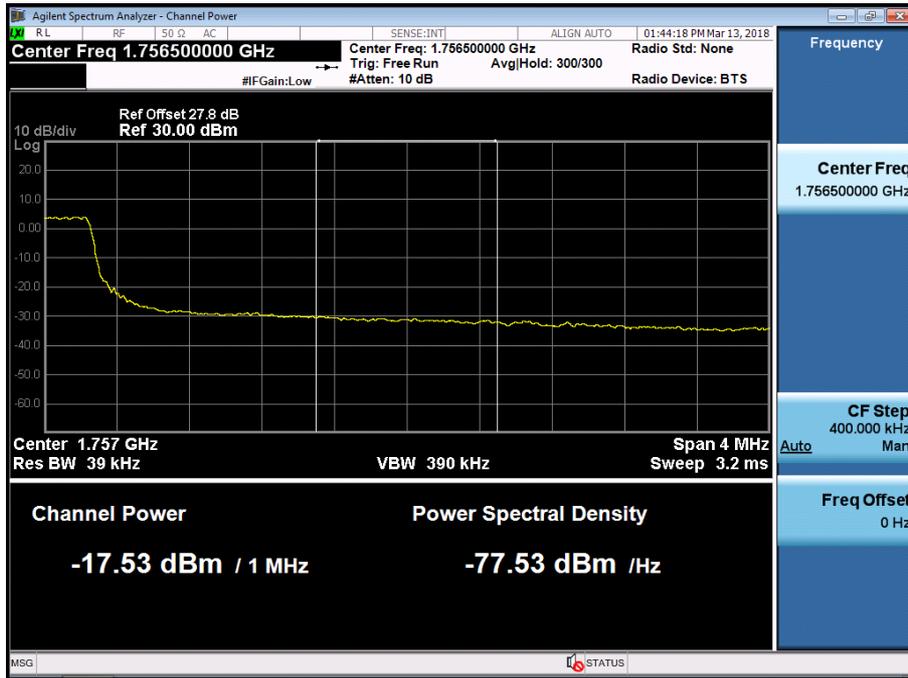


BAND 4. Upper Band Edge Plot (10M BW Ch.20350 QPSK\_RB1\_Offset 49) -1

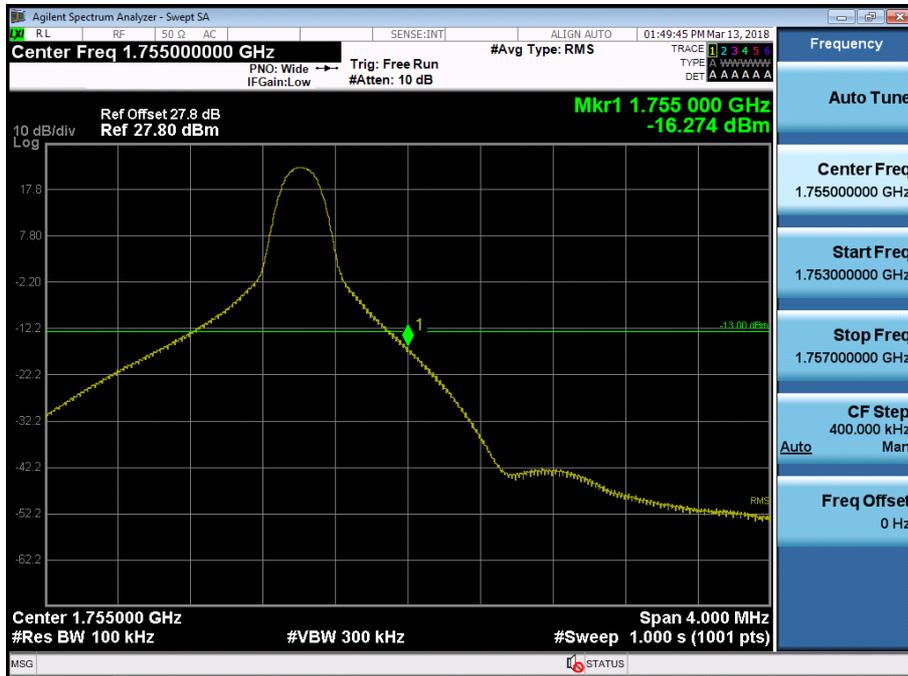


BAND 4. Upper Band Edge Plot (10M BW Ch.20350 QPSK\_RB50) -2



BAND 4. Upper Extended Band Edge Plot (10M BW Ch.20350 QPSK\_RB50) -3

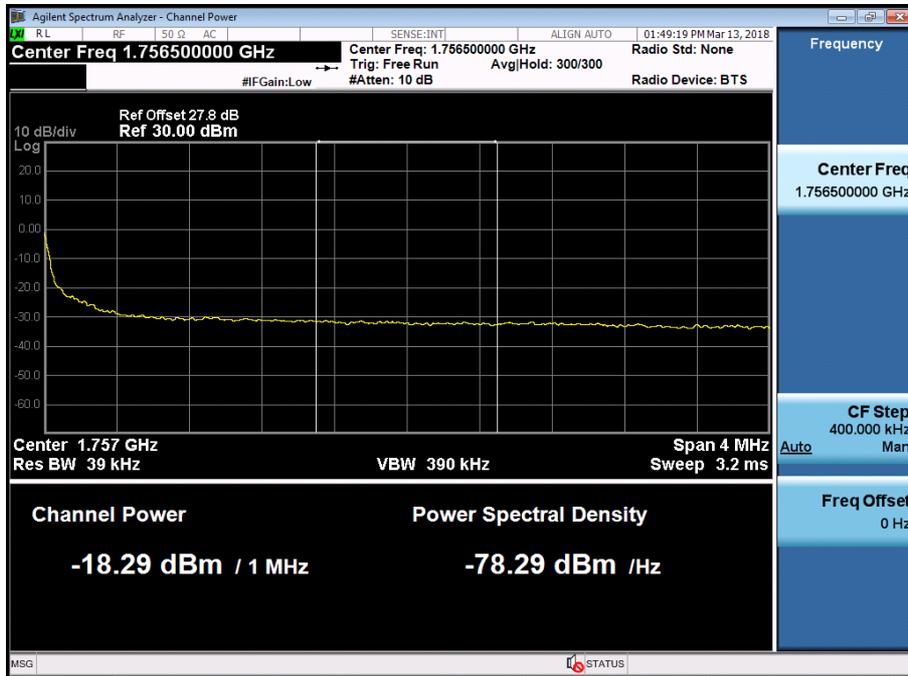


BAND 4. Upper Band Edge Plot (15M BW Ch.20325 QPSK\_RB1\_Offset 74) -1

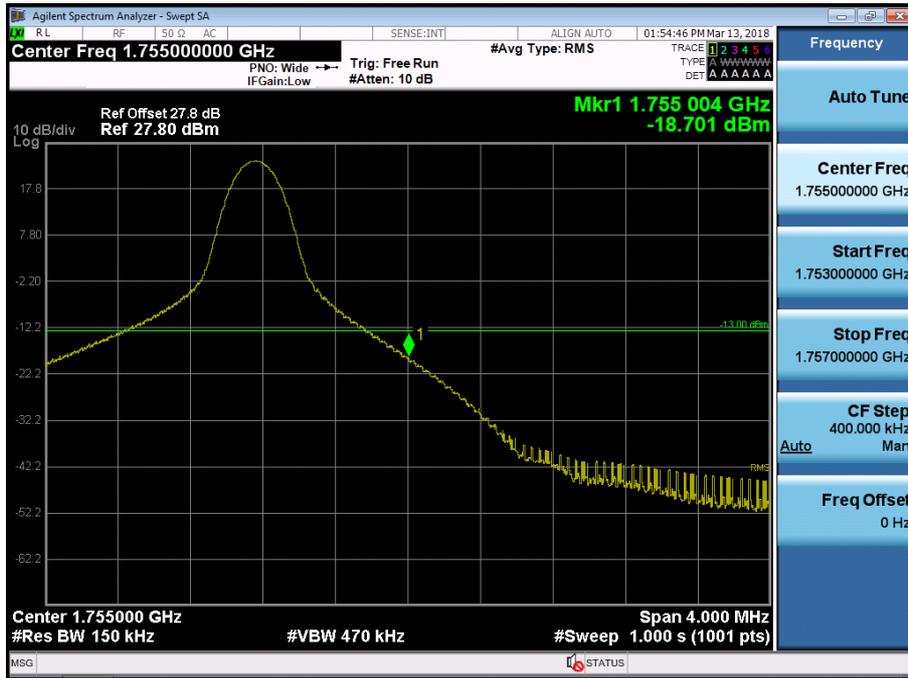

BAND 4. Upper Band Edge Plot (15M BW Ch.20325 QPSK\_RB75) -2



BAND 4. Upper Extended Band Edge Plot (15M BW Ch.20325 QPSK\_RB75) -3

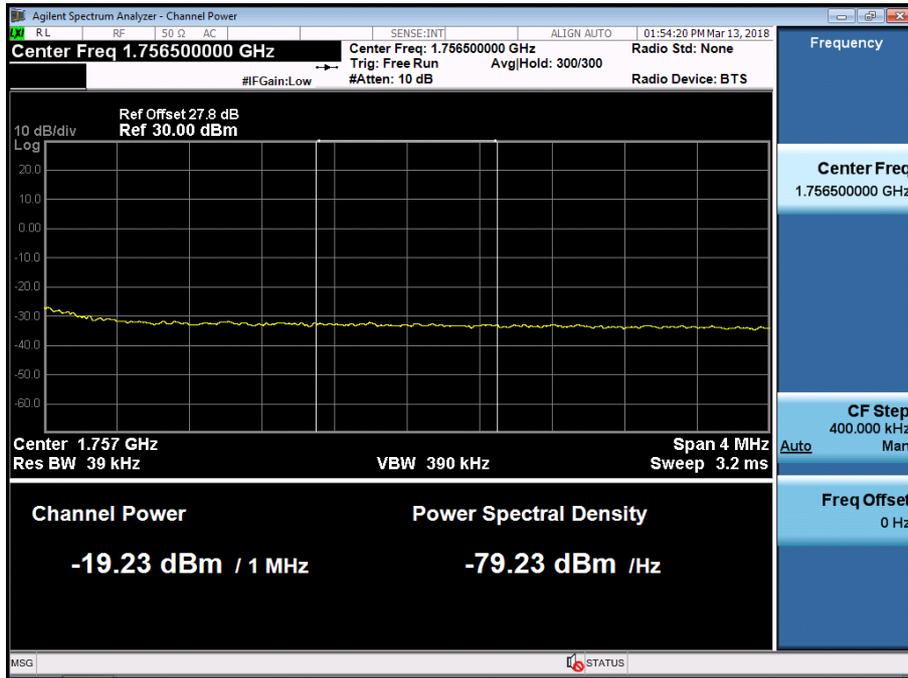


BAND 4. Upper Band Edge Plot (20M BW Ch.20300 QPSK\_RB1\_Offset 99) -1




BAND 4. Upper Band Edge Plot (20M BW Ch.20300 QPSK\_RB100) -2




BAND 4. Upper Extended Band Edge Plot (20M BW Ch.20300 QPSK\_RB100) -3

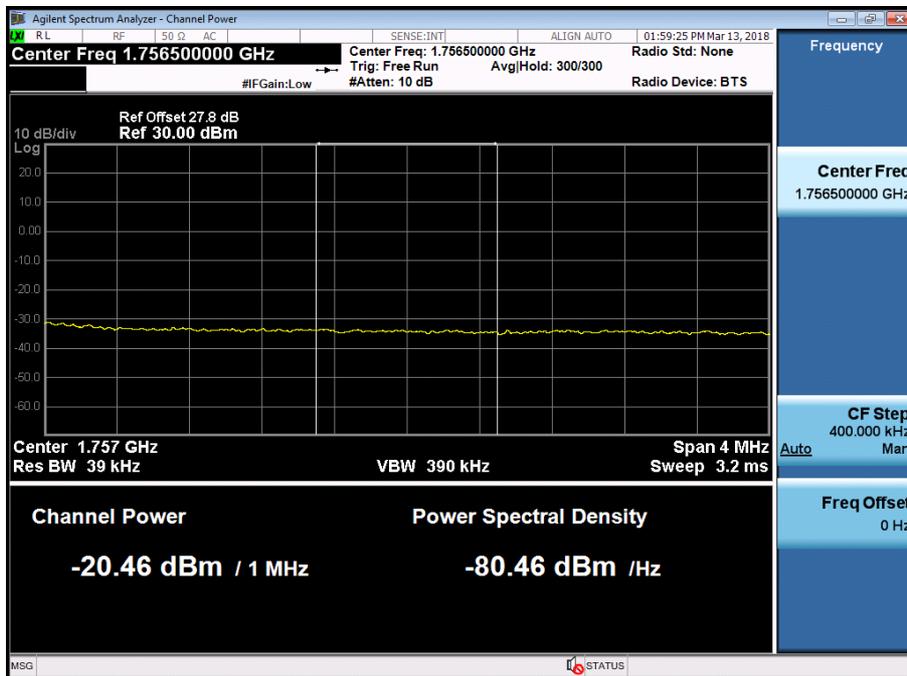


BAND 4. Conducted Spurious Plot\_1 (19957ch\_1.4MHz\_QPSK\_RB 1\_0)

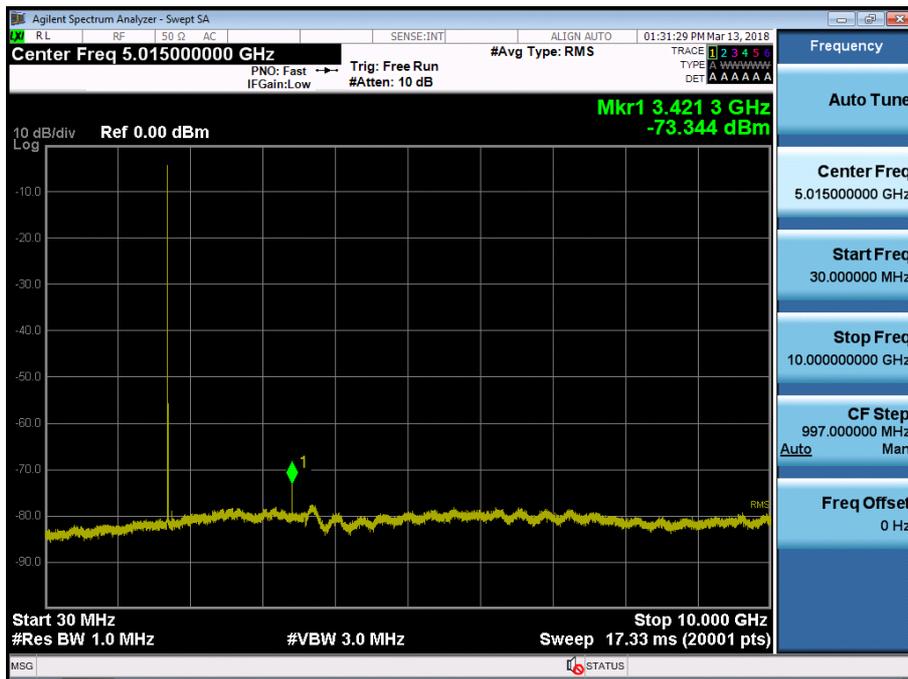


BAND 4. Conducted Spurious Plot\_2 (19957ch\_1.4MHz\_QPSK\_RB 1\_0)

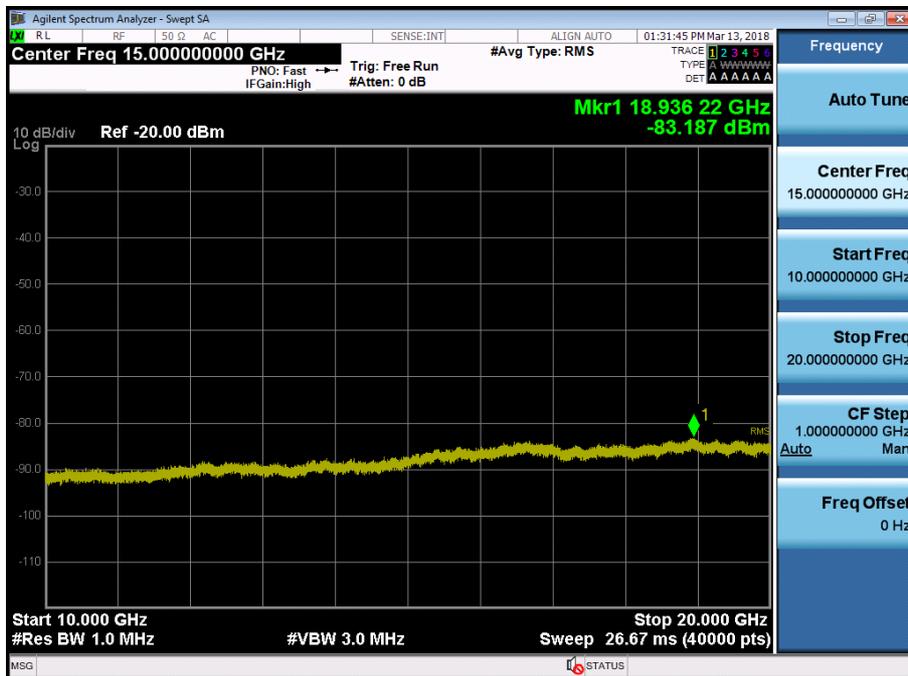


BAND 4. Conducted Spurious Plot\_1 (20175ch\_1.4MHz\_QPSK\_RB 1\_0)

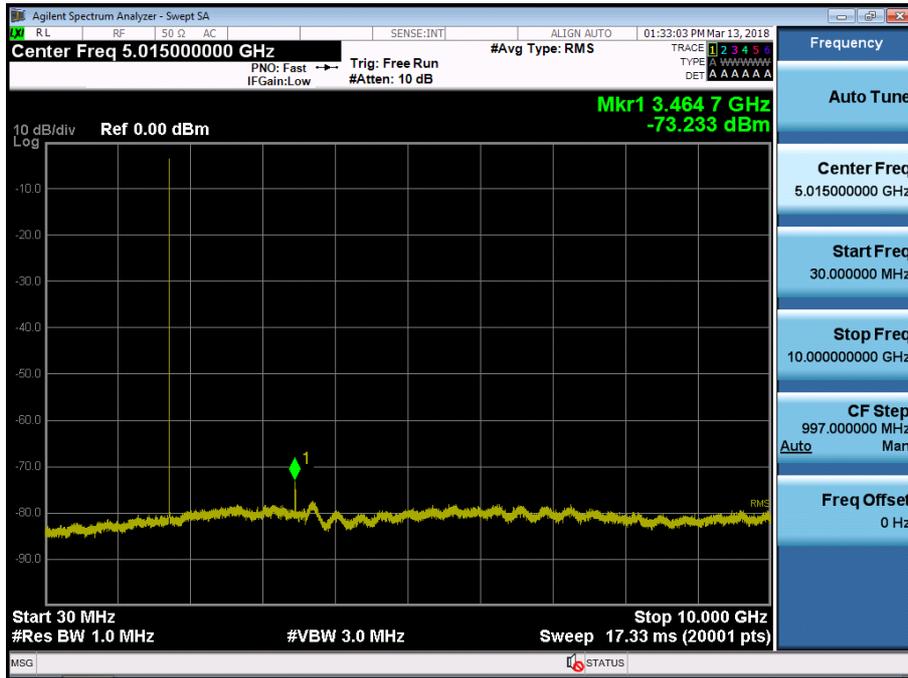


BAND 4. Conducted Spurious Plot\_2 (20175ch\_1.4MHz\_QPSK\_RB 1\_0)

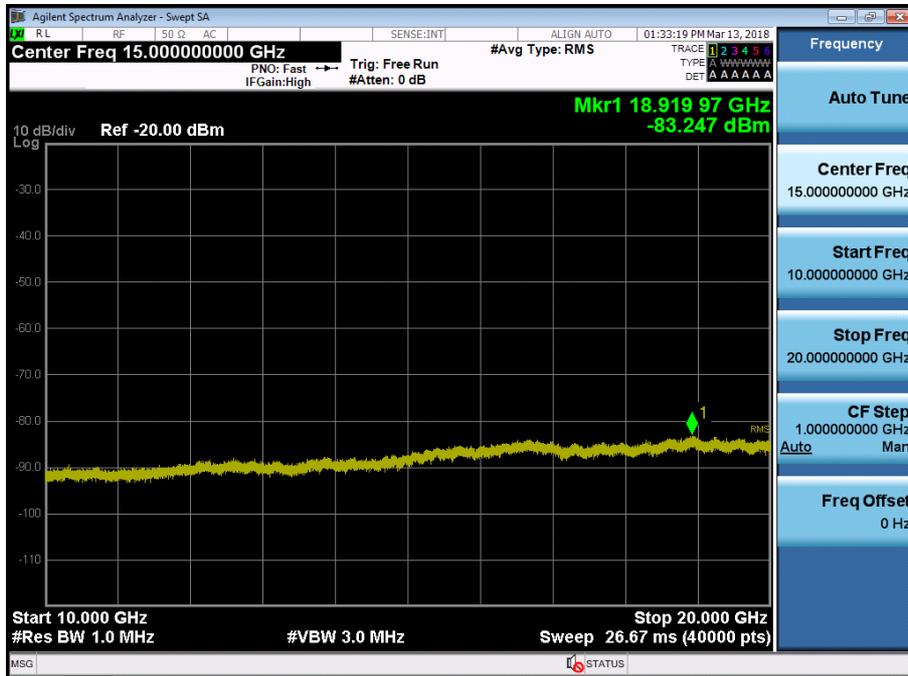


BAND 4. Conducted Spurious Plot\_1 (20393ch\_1.4MHz\_QPSK\_RB 1\_0)

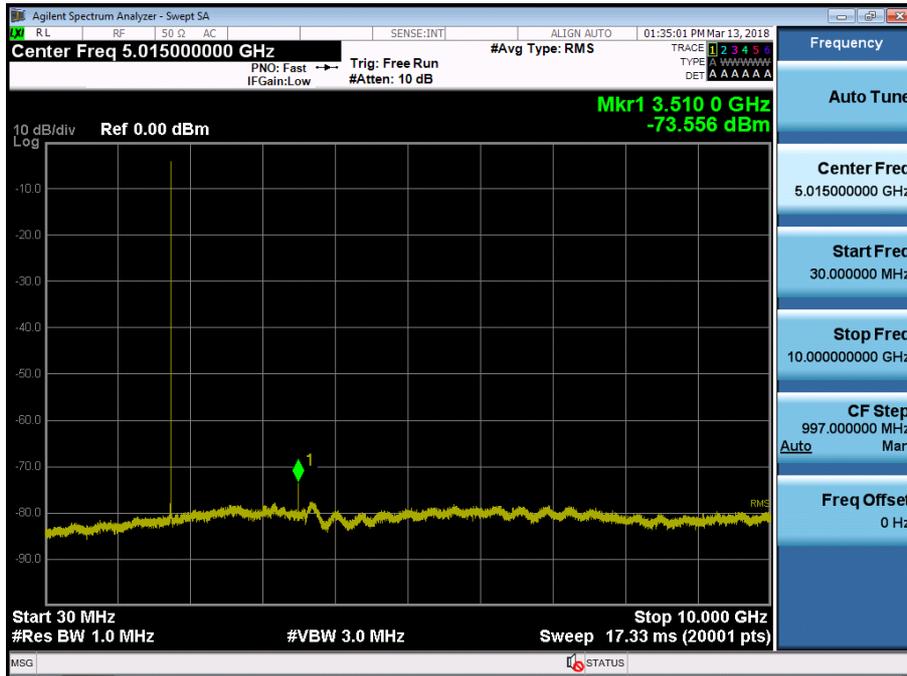


BAND 4. Conducted Spurious Plot\_2 (20393ch\_1.4MHz\_QPSK\_RB 1\_0)

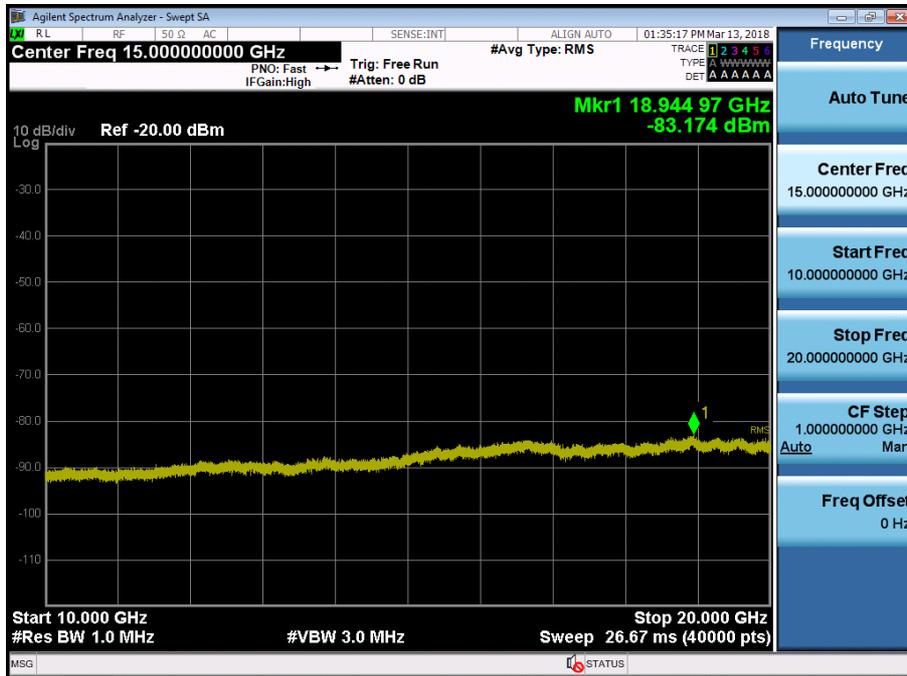


BAND 4. Conducted Spurious Plot\_1 (19965ch\_3MHz\_QPSK\_RB 1\_0)

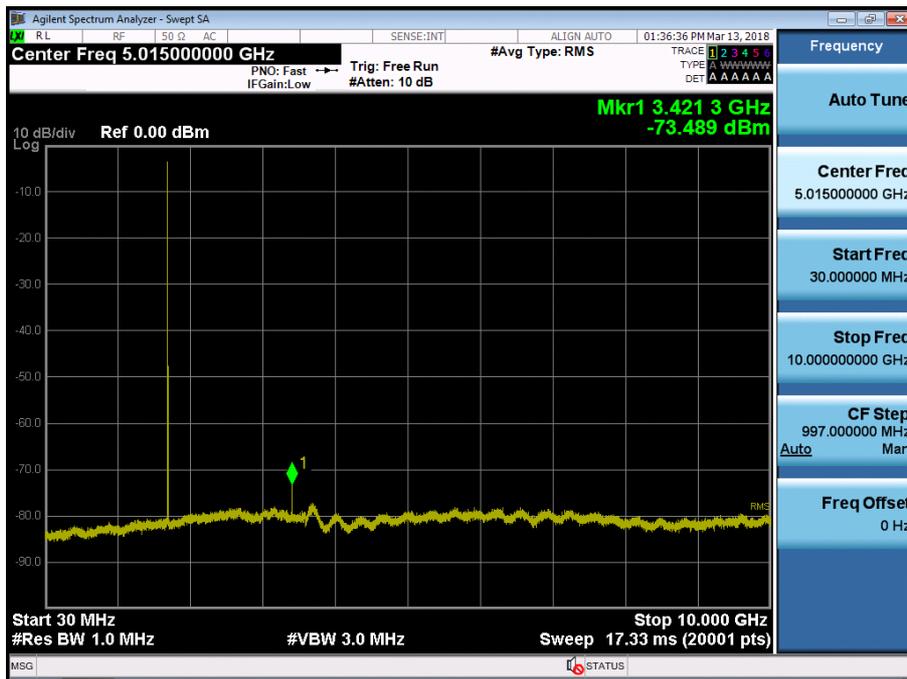


BAND 4. Conducted Spurious Plot\_2 (19965ch\_3MHz\_QPSK\_RB 1\_0)

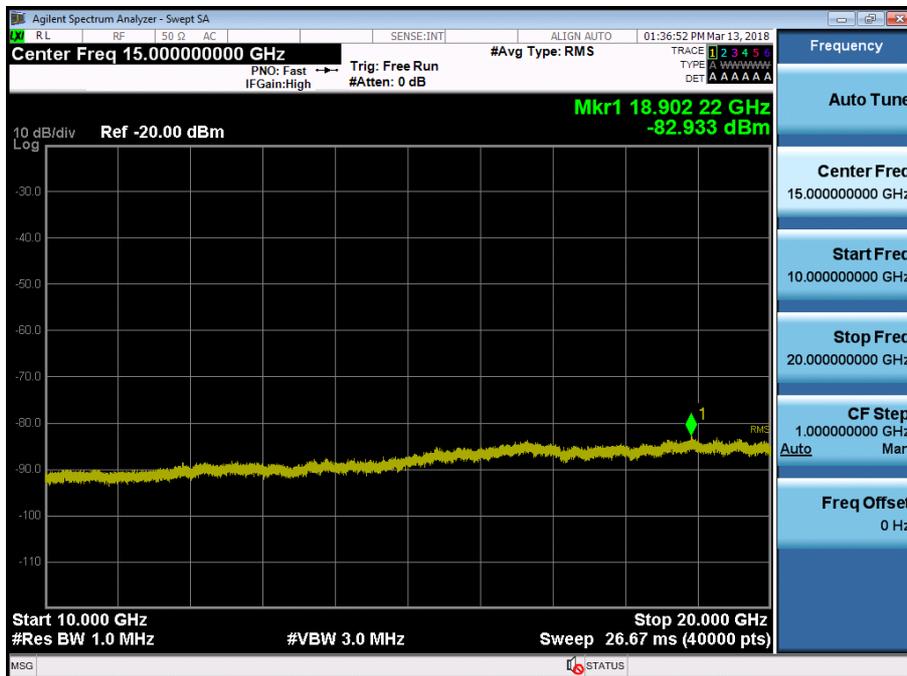


BAND 4. Conducted Spurious Plot\_1 (20175ch\_3MHz\_QPSK\_RB 1\_0)

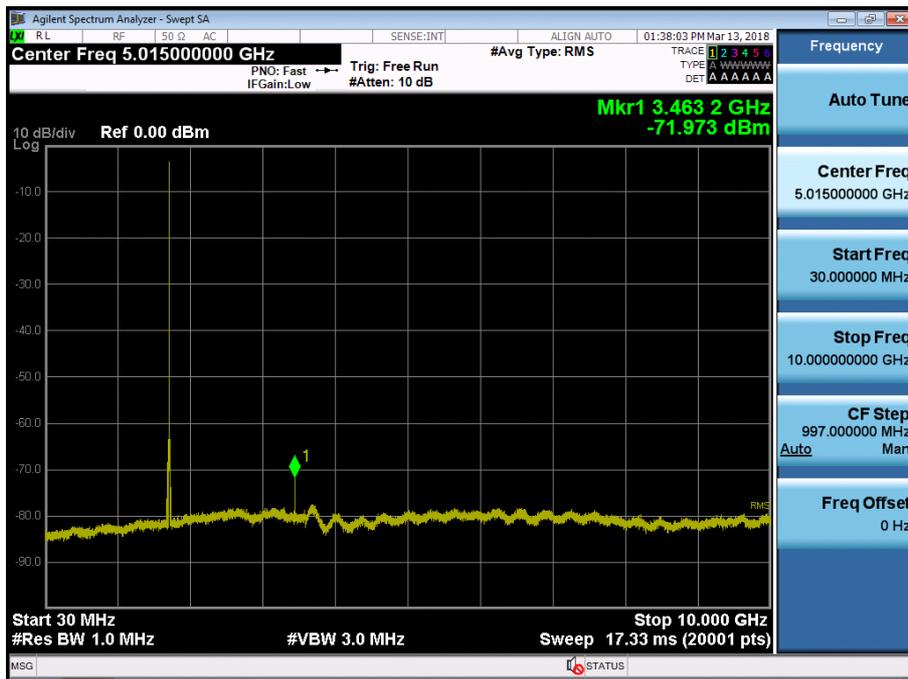


BAND 4. Conducted Spurious Plot\_2 (20175ch\_3MHz\_QPSK\_RB 1\_0)

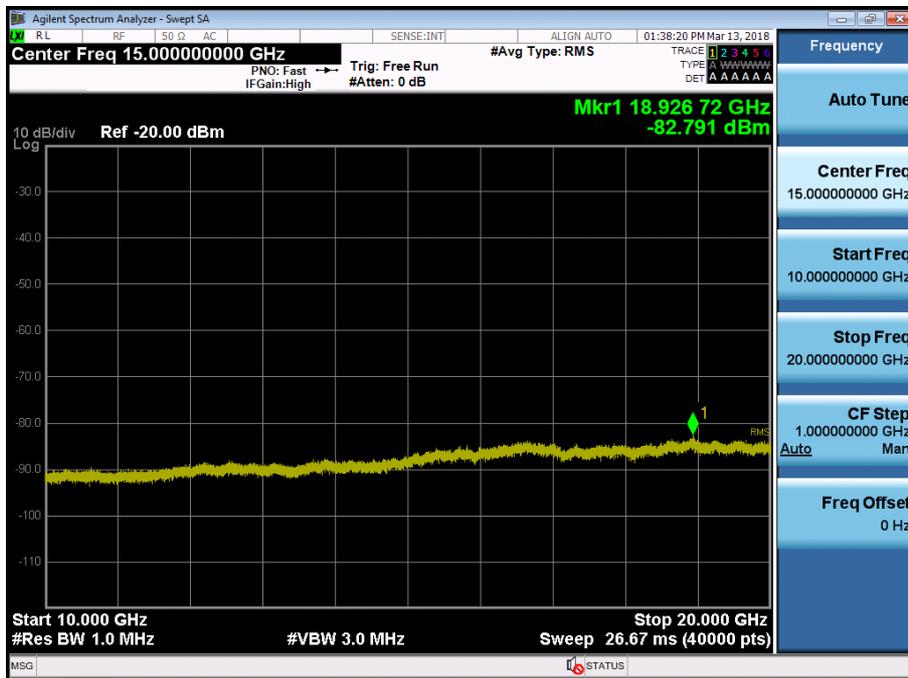


BAND 4. Conducted Spurious Plot\_1 (20385ch\_3MHz\_QPSK\_RB 1\_0)

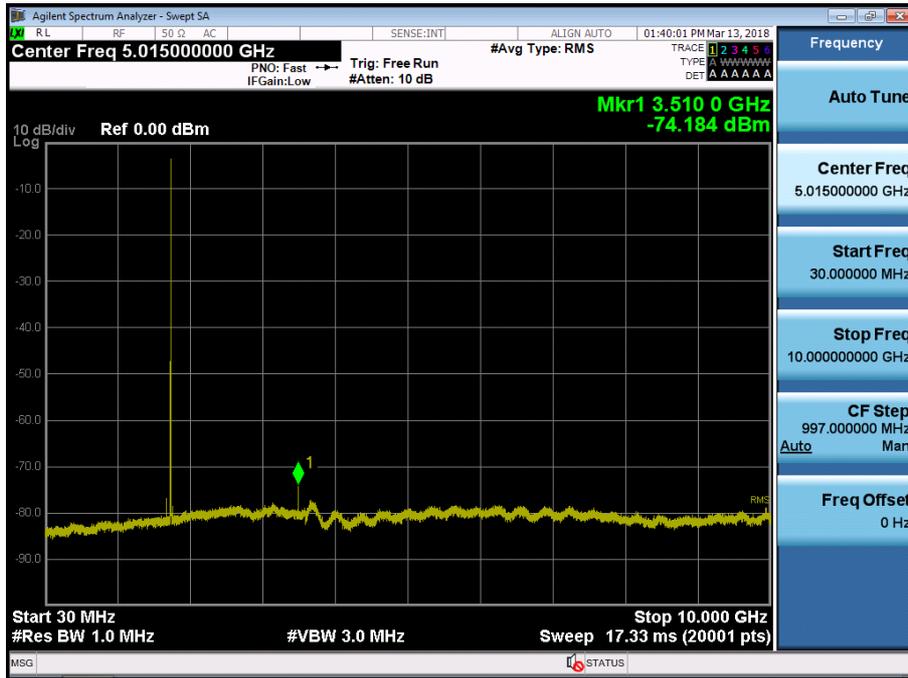


BAND 4. Conducted Spurious Plot\_2 (20385ch\_3MHz\_QPSK\_RB 1\_0)

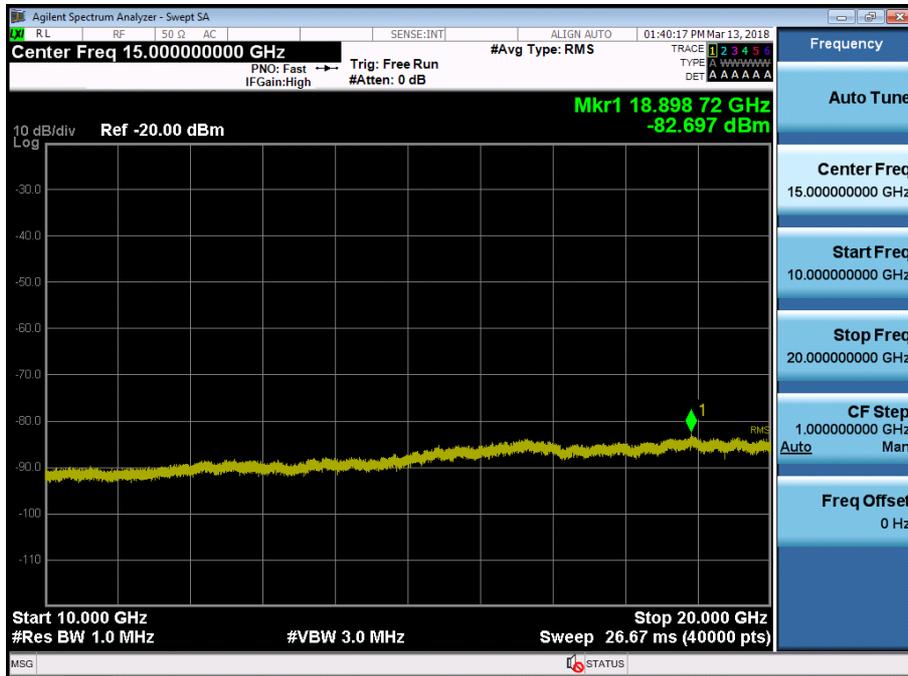


BAND 4. Conducted Spurious Plot\_1 (19975ch\_5MHz\_QPSK\_RB 1\_0)

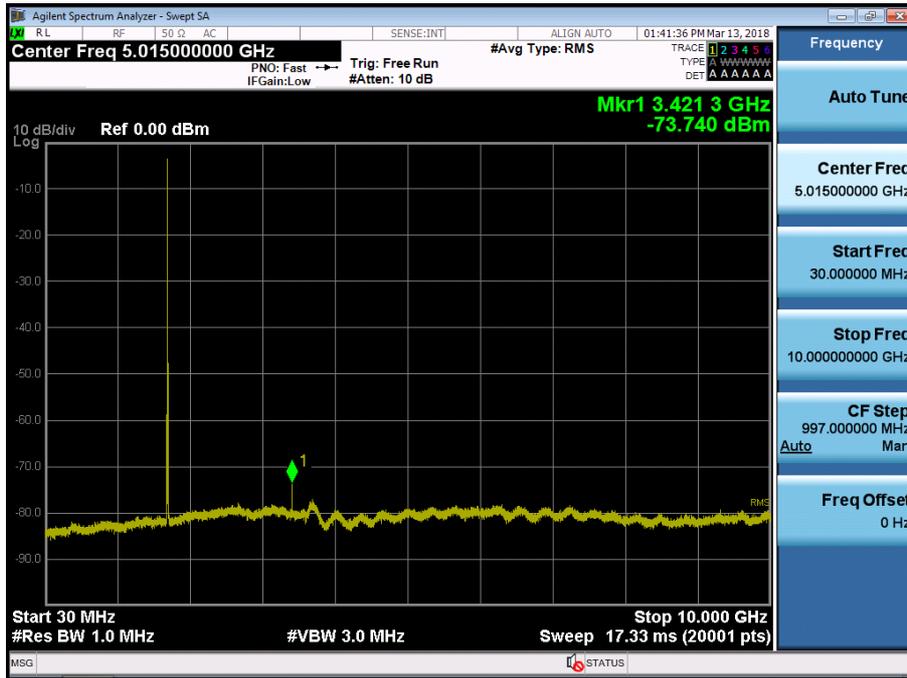

BAND 4. Conducted Spurious Plot\_2 (19975ch\_5MHz\_QPSK\_RB 1\_0)

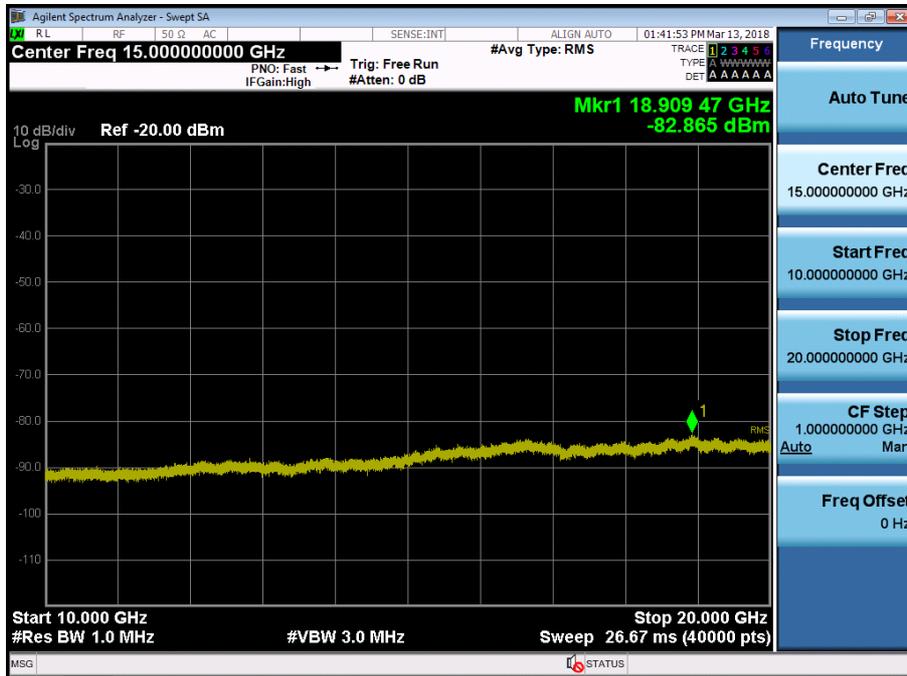


BAND 4. Conducted Spurious Plot\_1 (20175ch\_5MHz\_QPSK\_RB 1\_0)

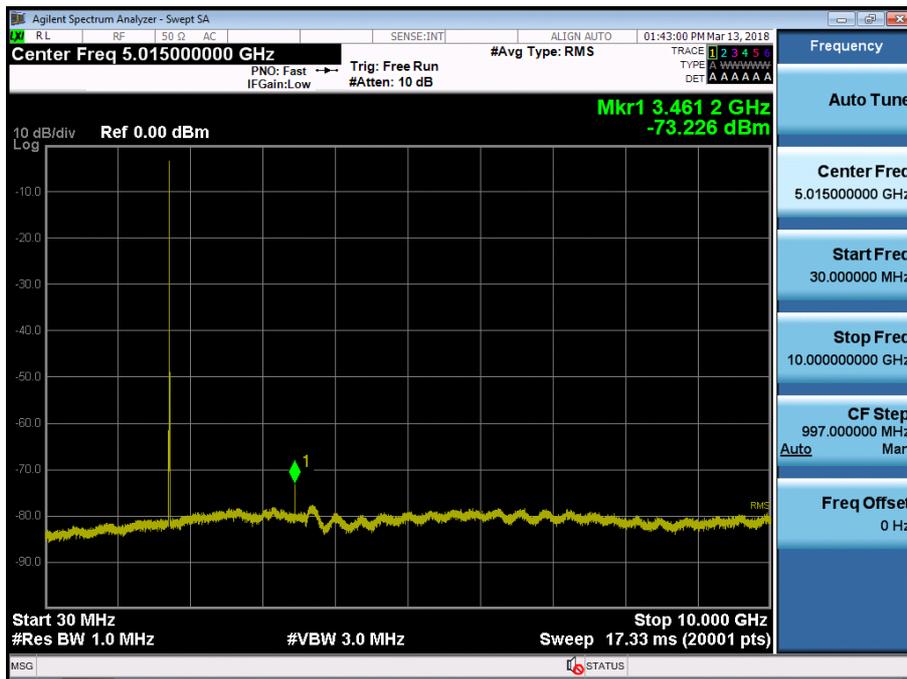

BAND 4. Conducted Spurious Plot\_2 (20175ch\_5MHz\_QPSK\_RB 1\_0)




BAND 4. Conducted Spurious Plot\_1 (20375ch\_5MHz\_QPSK\_RB 1\_0)

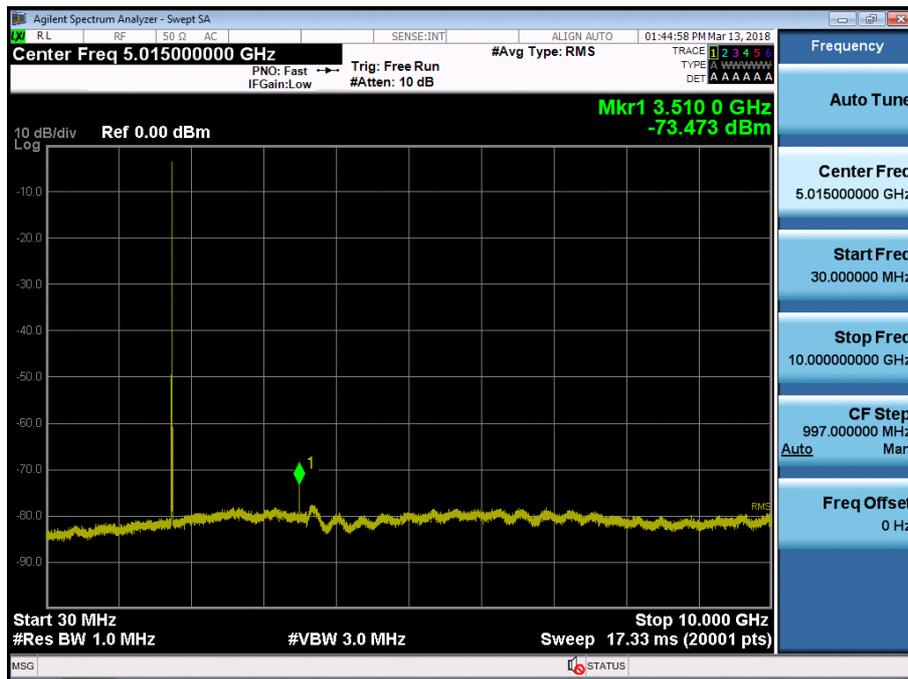


BAND 4. Conducted Spurious Plot\_2 (20375ch\_5MHz\_QPSK\_RB 1\_0)




BAND 4. Conducted Spurious Plot\_1 (20000ch\_10MHz\_QPSK\_RB 1\_0)

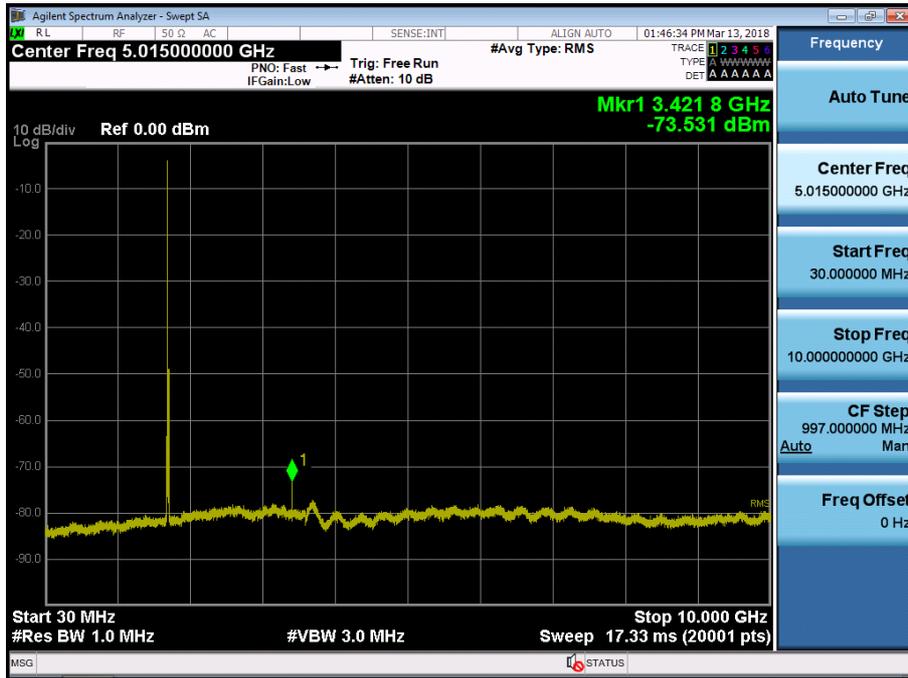

BAND 4. Conducted Spurious Plot\_2 (20000ch\_10MHz\_QPSK\_RB 1\_0)

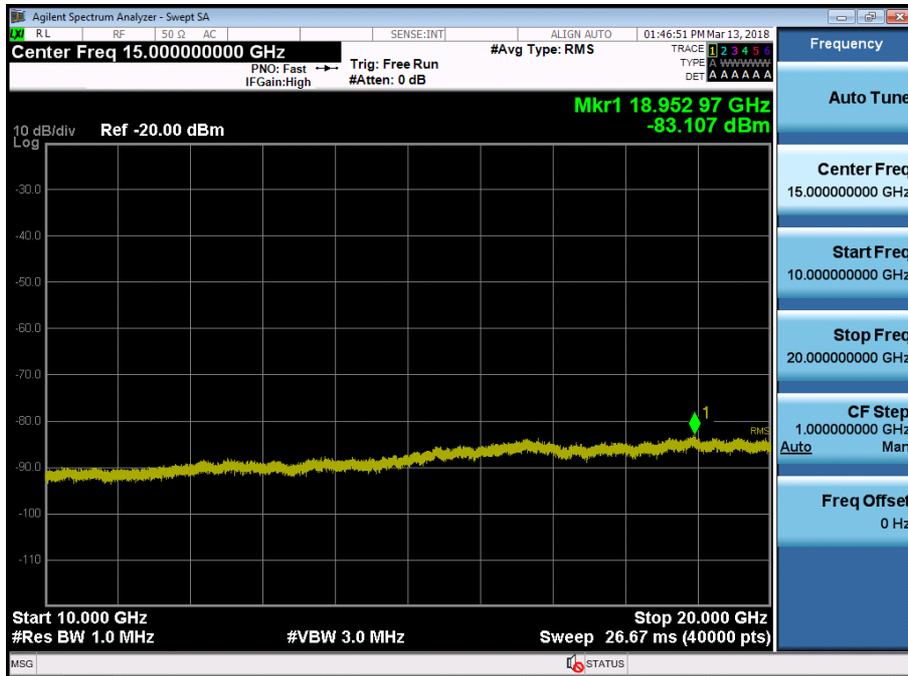


BAND 4. Conducted Spurious Plot\_1 (20175ch\_10MHz\_QPSK\_RB 1\_0)

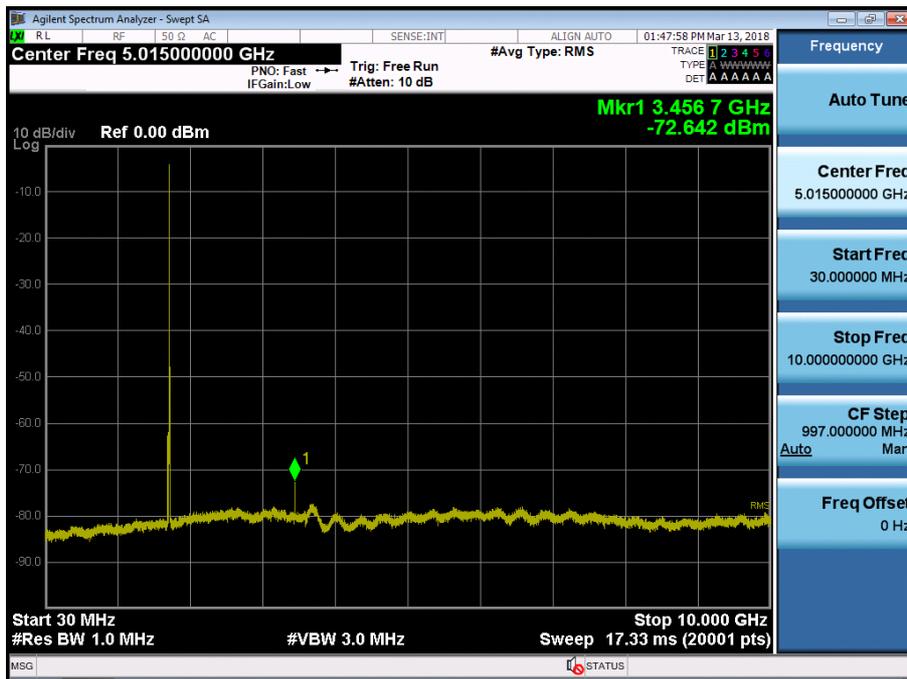


BAND 4. Conducted Spurious Plot\_2 (20175ch\_10MHz\_QPSK\_RB 1\_0)




BAND 4. Conducted Spurious Plot\_1 (20350ch\_10MHz\_QPSK\_RB 1\_0)

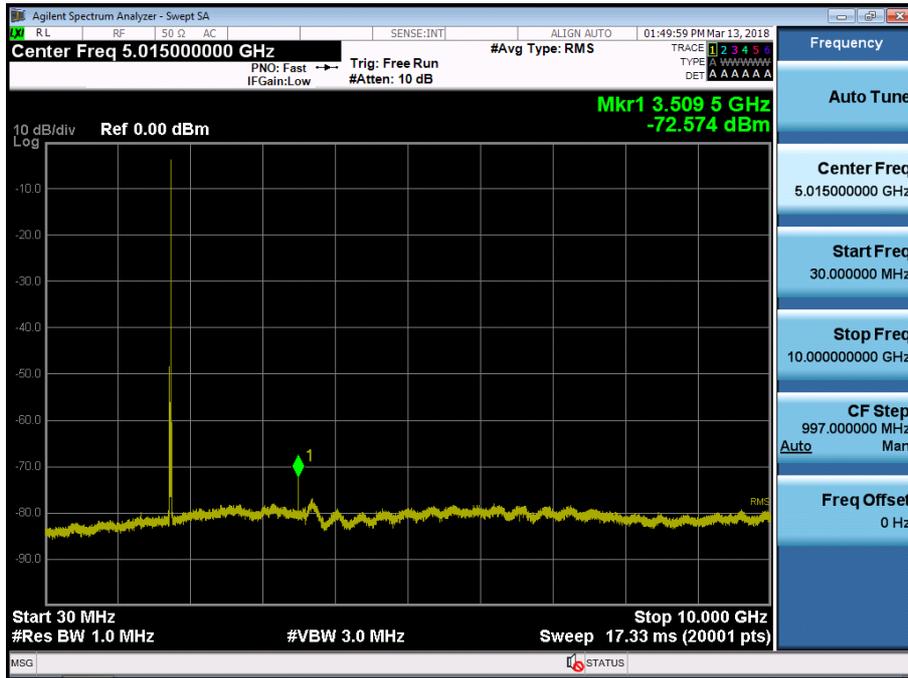


BAND 4. Conducted Spurious Plot\_2 (20350ch\_10MHz\_QPSK\_RB 1\_0)

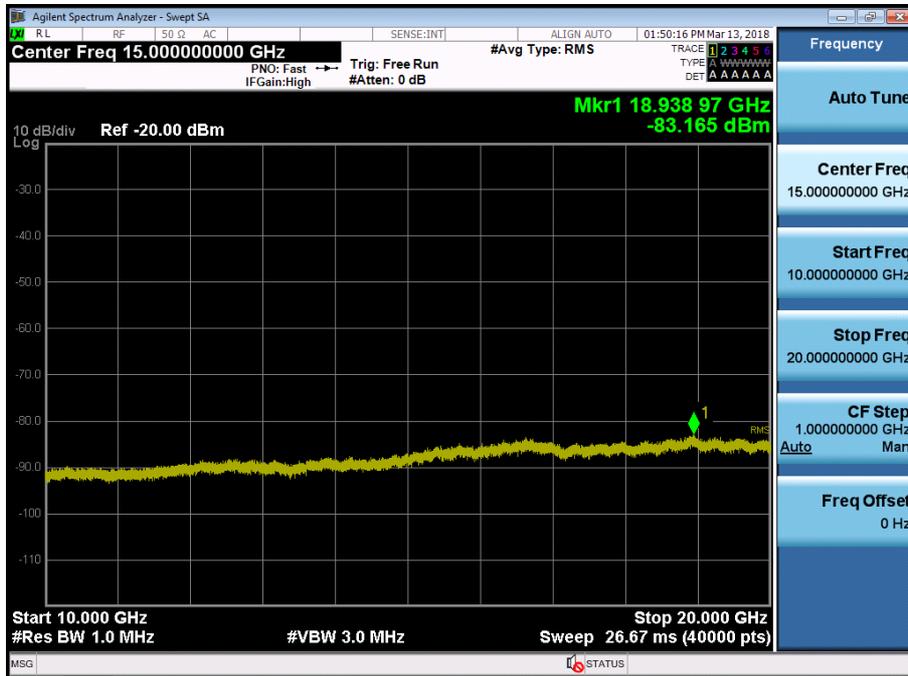


BAND 4. Conducted Spurious Plot\_1 (20025ch\_15MHz\_QPSK\_RB 1\_0)

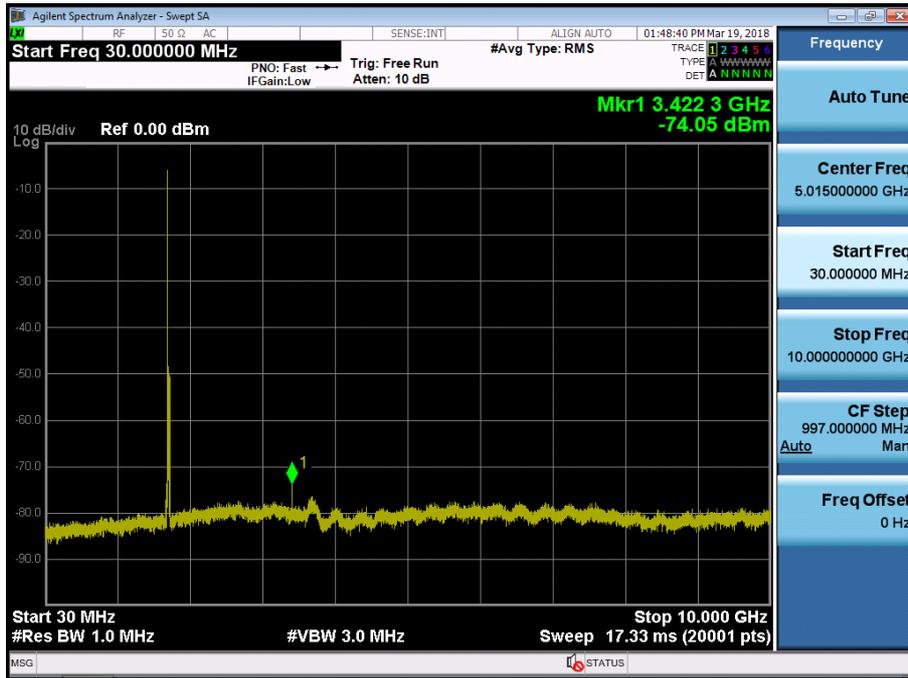


BAND 4. Conducted Spurious Plot\_2 (20025ch\_15MHz\_QPSK\_RB 1\_0)

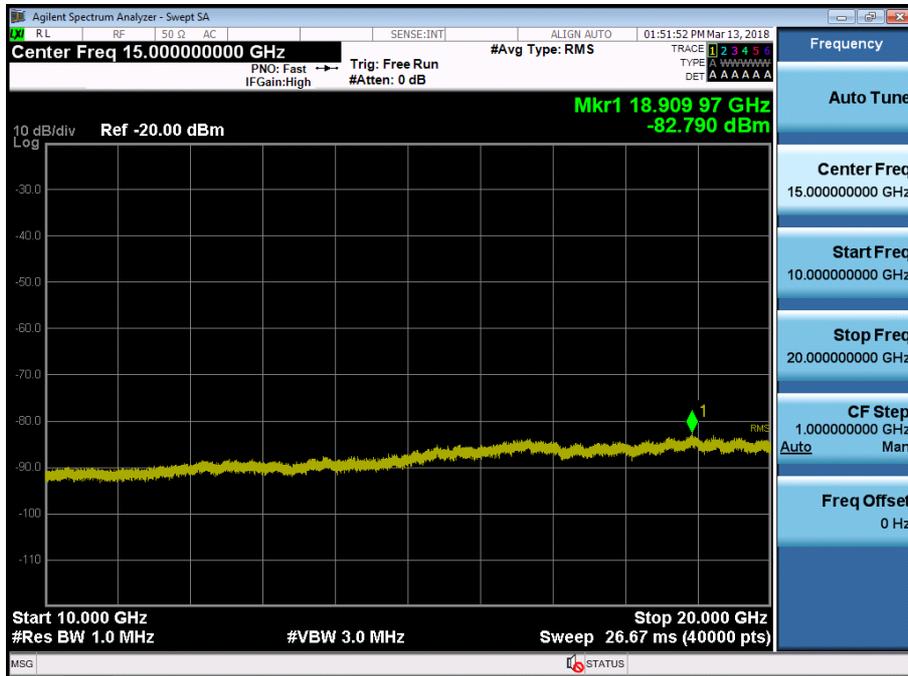


BAND 4. Conducted Spurious Plot\_1 (20175ch\_15MHz\_QPSK\_RB 1\_0)

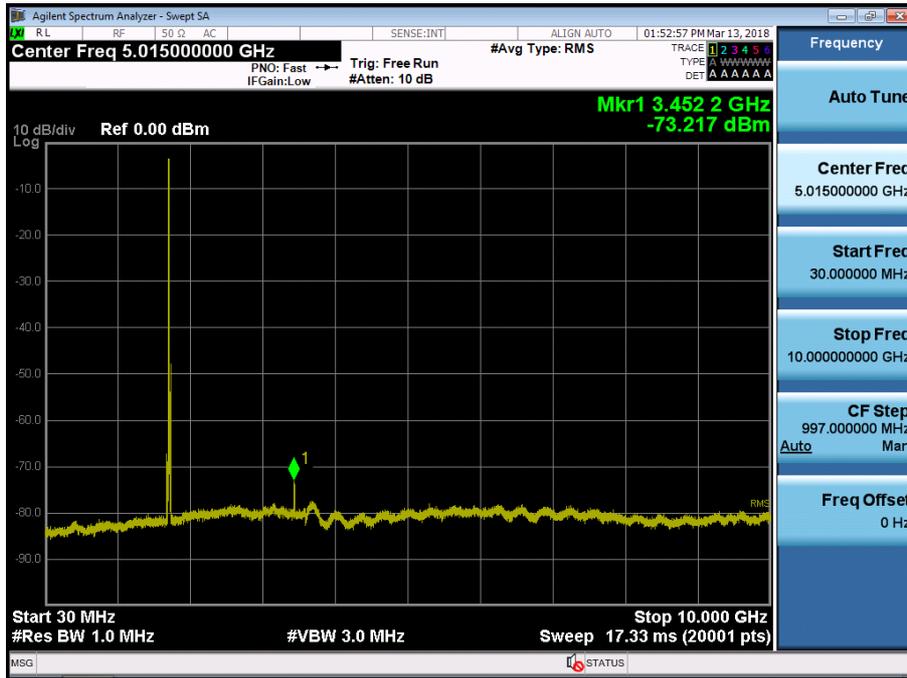


BAND 4. Conducted Spurious Plot\_2 (20175ch\_15MHz\_QPSK\_RB 1\_0)

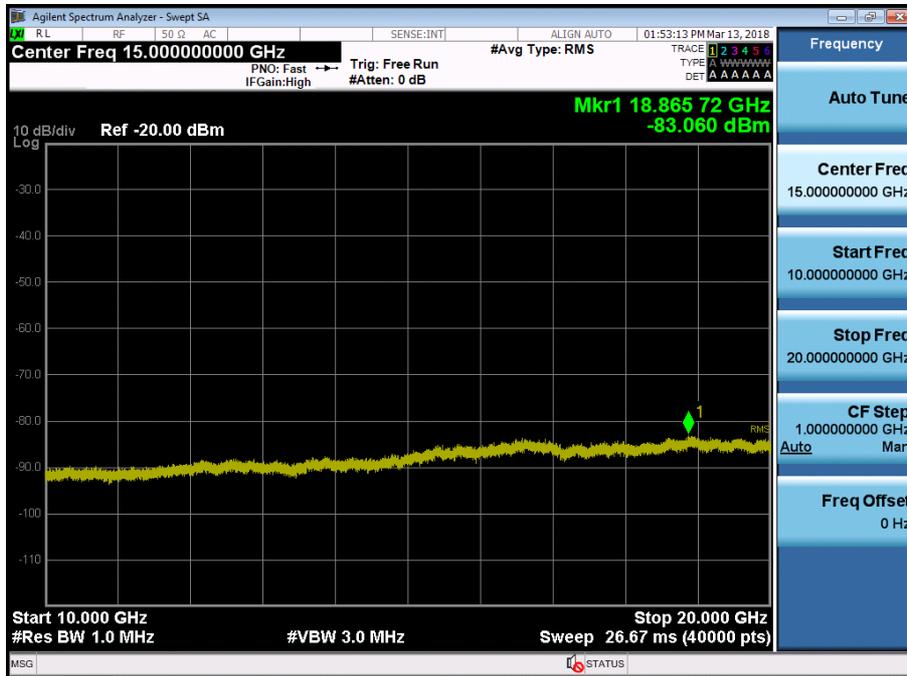


BAND 4. Conducted Spurious Plot\_1 (20325ch\_15MHz\_QPSK\_RB 1\_0)

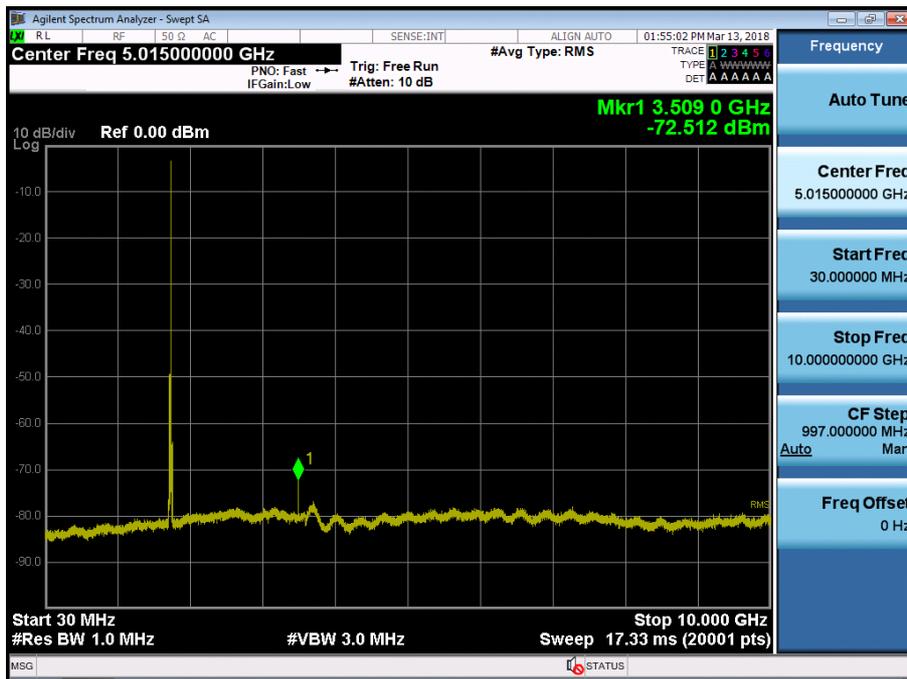


BAND 4. Conducted Spurious Plot\_2 (20325ch\_15MHz\_QPSK\_RB 1\_0)

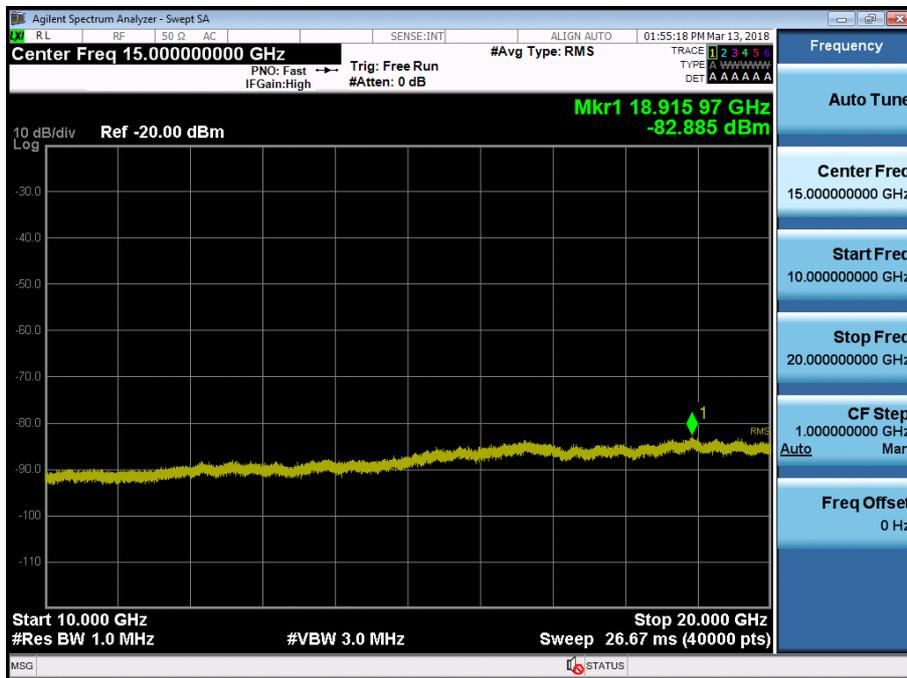


BAND 4. Conducted Spurious Plot\_1 (20050ch\_20MHz\_QPSK\_RB 1\_0)

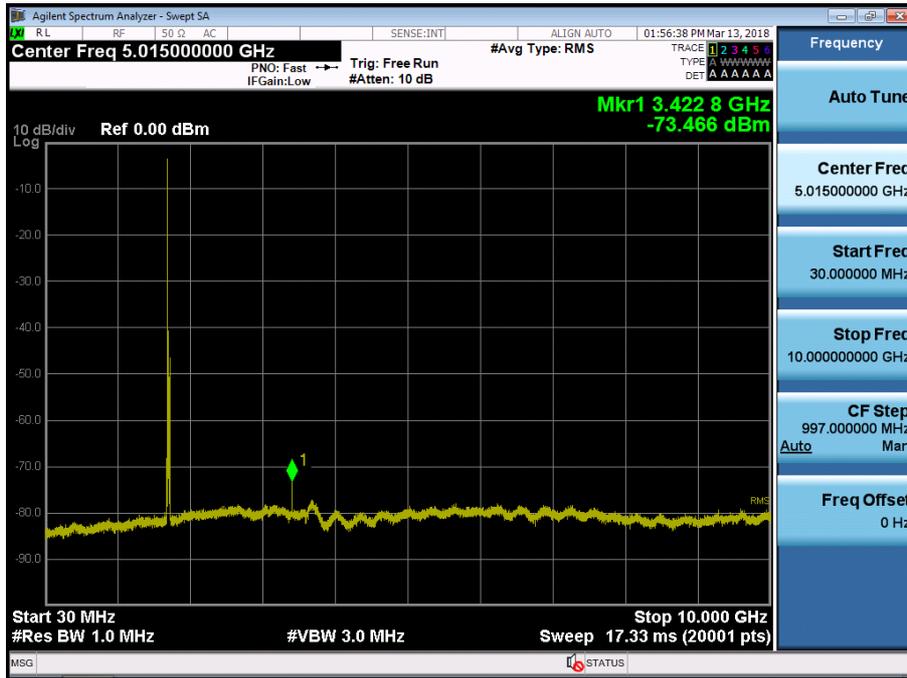


BAND 4. Conducted Spurious Plot\_2 (20050ch\_20MHz\_QPSK\_RB 1\_0)

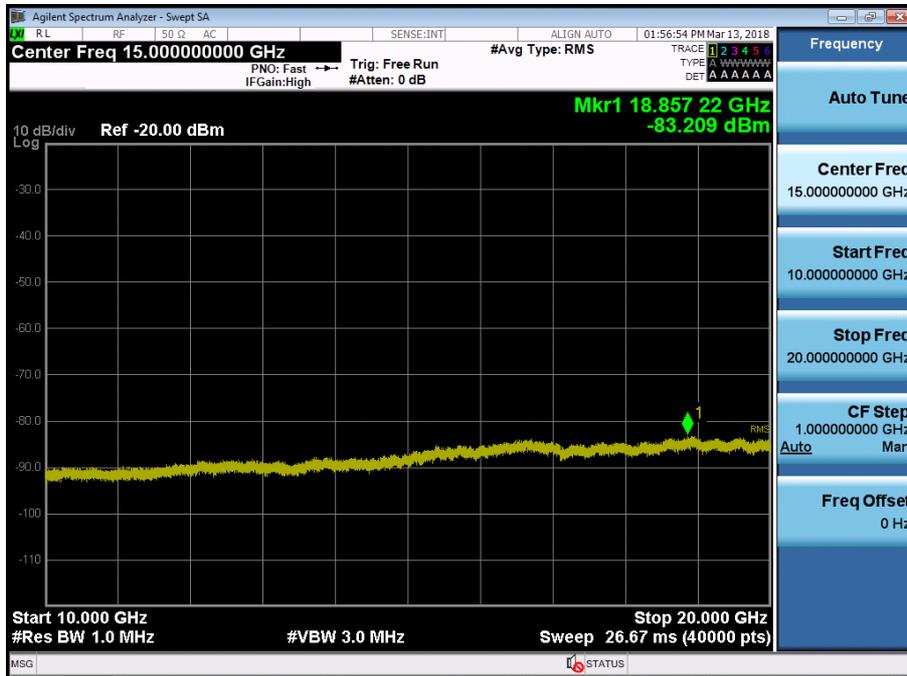


BAND 4. Conducted Spurious Plot\_1 (20175ch\_20MHz\_QPSK\_RB 1\_0)

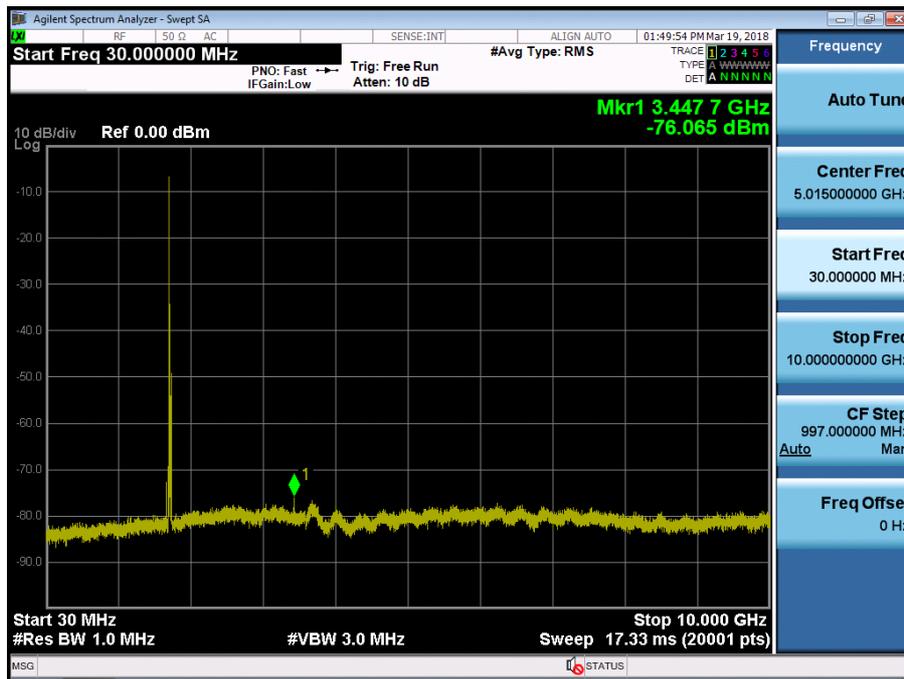

BAND 4. Conducted Spurious Plot\_2 (20175ch\_20MHz\_QPSK\_RB 1\_0)

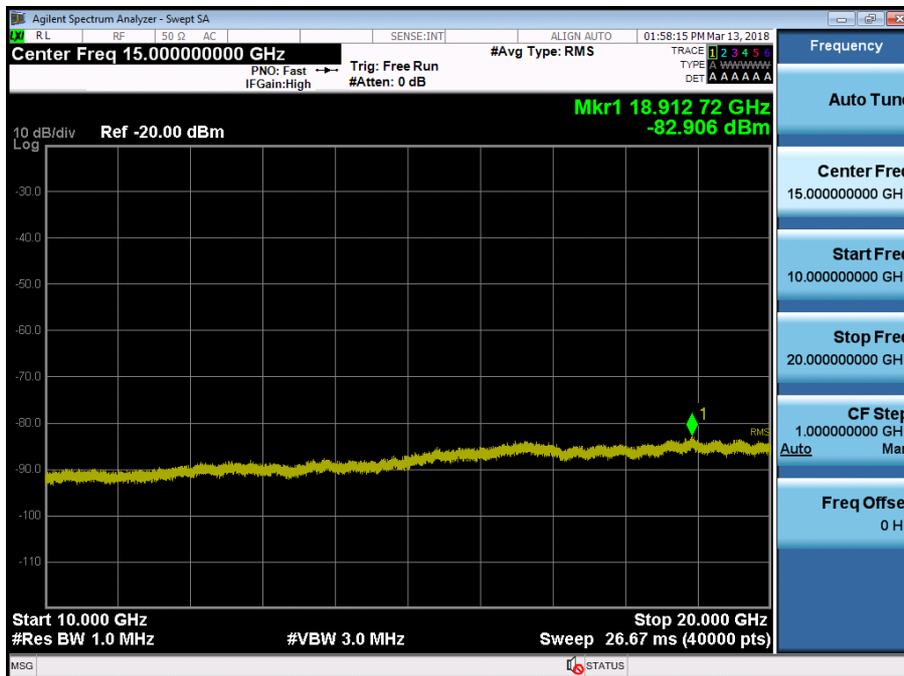

BAND 4. Conducted Spurious Plot\_1 (20300ch\_20MHz\_QPSK\_RB 1\_0)

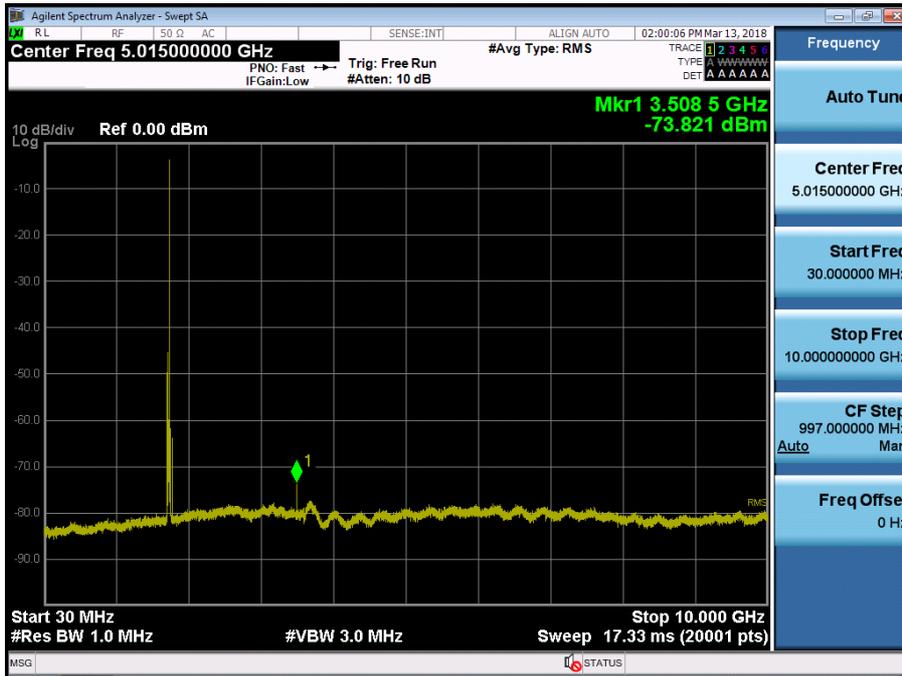

BAND 4. Conducted Spurious Plot\_2 (20300ch\_20MHz\_QPSK\_RB 1\_0)

