

TEST REPORT



DT&C Co., Ltd.

42, Yurim-ro, 154Beon-gil, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea, 17042
Tel : 031-321-2664, Fax : 031-321-1664

1. Report No : DRRFCC2006-0050(2)
2. Customer
 - Name : LG Electronics USA, Inc.
 - Address : 111 Sylvan Avenue, North Building Englewood Cliffs, NJ 07632
3. Use of Report : FCC Original Grant
4. Product Name / Model Name : Mobile Phone / LM-Q730BAW
FCC ID : ZNFQ730BAW
5. Test Method Used : IEEE 1528-2013, FCC SAR KDB Publications (Details in test report)
Test Specification : CFR 47 Part 2 subpart 2.1093
6. Date of Test : 2020.05.27 ~ 2020.06.18
7. Location of Test : ☒ Permanent Testing Lab ☐ On Site Testing
8. Testing Environment : Refer to appended test report.
9. Test Result : Refer to attached test report.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Affirmation	Tested by	Reviewed by
	Name : BumJun Park 	Name : HakMin Kim 

2020 . 07 . 01 .

DT&C Co., Ltd.

Not abided by KS Q ISO / IEC 17025 and KOLAS accreditation.

If this report is required to confirmation of authenticity, please contact to report@dtnc.net

Test Report Version

Test Report No.	Date	Description	Tested by	Reviewed by
DRRFCC2006-0050	Jun. 25, 2020	Initial issue	BumJun Park	HakMin Kim
DRRFCC2006-0050(1)	Jun. 30, 2020	Revise of Section 9.2 & 10.2	BumJun Park	HakMin Kim
DRRFCC2006-0050(2)	Jul. 1, 2020	Revise of Section 11.3, 12.6 & SAR Summary Table	BumJun Park	HakMin Kim

Table of Contents

1. DESCRIPTION OF DEVICE	5
1.1 General Information	5
1.2 Power Reduction for SAR	7
1.3 Nominal and Maximum Output Power Specifications	7
1.4 DUT Antenna Locations	7
1.5 Simultaneous Transmission Capabilities	7
1.6 Miscellaneous SAR Test Considerations	8
1.7 Guidance Applied	9
1.8 Device Serial Numbers	9
2. LTE INFORMATION	10
3. INTROCUCTION	11
4. DOSIMETRIC ASSESSMENT	12
4.1 Measurement Procedure	12
5. DEFINITION OF REFERENCE POINTS	14
5.1 Ear Reference Point	14
5.2 Handset Reference Points	14
6. TEST CONFIGURATION POSITIONS FOR HANDSETS	15
6.1 Device Holder	15
6.2 Positioning for Cheek/Touch	15
6.3 Positioning for Ear / 15 ° Tilt	15
6.4 Body-Worn Accessory Configurations	16
6.5 Extremity Exposure Configurations	16
6.6 Wireless Router Configurations	17
6.7 Phablet Configurations	17
6.8 Proximity Sensor Configurations	17
7. RF EXPOSURE LIMITS	18
8. FCC MEASUREMENT PROCEDURES	19
8.1 Measured and Reported SAR	19
8.2 Procedures Used to Establish RF Signal for SAR	19
8.3 SAR Measurement Conditions for WCDMA (UMTS)	19
8.3.1 Output Power Verification	19
8.3.2 Head SAR Measurements for Handsets	19
8.3.3 Body SAR Measurements	20
8.3.4 Release 5 HSDPA Data Devices	20
8.3.5 Release 6 HSUPA Data Devices	20
8.3.6 SAR Measurement Conditions for DC-HSDPA	21
8.4 SAR Measurement Conditions for LTE	22
8.4.1 Spectrum Plots for RB Configurations	22
8.4.2 MPR	22
8.4.3 A-MPR	22
8.4.4 Required RB Size and RB Offsets for SAR Testing	22
8.4.5 64QAM uplink	22
8.4.6 Downlink Only Carrier Aggregation and Downlink Only MIMO	23
8.5 SAR Testing with 802.11 Transmitters	23
8.5.1 General Device Setup	23
8.5.2 U-NII and U-NII-2A	24
8.5.3 U-NII-2C and U-NII-3	24
8.5.4 Initial Test Position Procedure	24
8.5.5 2.4 GHz SAR Test Requirements	24
8.5.6 OFDM Transmission Mode and SAR Test Channel Selection	25
8.5.7 Initial Test Configuration Procedure	25
8.5.8 Subsequent Test Configuration Procedures	25

9. RF CONDUCTED POWERS	26
9.1 GSM Nominal and Maximum Output Power Spec and Conducted Powers	26
9.2 WCDMA Nominal and Maximum Output Power Spec and Conducted Powers	27
9.3 LTE Nominal and Maximum Output Power Spec and Conducted Powers	29
9.4 WLAN Nominal and Maximum Output Power Spec and Conducted Powers	46
9.5 Bluetooth Conducted Powers	48
10. SYSTEM VERIFICATION	50
10.1 Tissue Verification	50
10.2 Test System Verification	53
11. SAR TEST RESULTS	54
11.1 Head SAR Results	54
11.2 Standalone Body-Worn SAR Worn SAR Results	57
11.3 Standalone Hotspot SAR Results	59
11.4 Standalone Phablet SAR Results	62
11.5 SAR Test Notes	64
12. FCC MULTI-TX AND ANTENNA SAR CONSIDERATIONS	67
12.1 Introduction	67
12.2 Simultaneous Transmission Procedures	67
12.3 Simultaneous Transmission Capabilities	67
12.4 Head SAR Simultaneous Transmission Analysis	69
12.5 Body-Worn Simultaneous Transmission Analysis	73
12.6 Hotspot SAR Simultaneous Transmission Analysis	76
12.7 Phablet SAR Simultaneous Transmission Analysis with proximity sensor enabled	82
12.8 Simultaneous Transmission Conclusion	82
13. SAR MEASUREMENT VARIABILITY	83
13.1 Measurement Variability	83
13.2 Measurement Uncertainty	83
14. EQUIPMENT LIST	84
15. MEASUREMENT UNCERTAINTIES	85
16. CONCLUSION	106
17. REFERENCES	107
APPENDIX A. – Probe Calibration Data	109
APPENDIX B. – Dipole Calibration Data	171
APPENDIX C. – SAR Tissue Specifications	236
APPENDIX D. – SAR SYSTEM VALIDATION	239
APPENDIX E. – Downlink LTE CA RF Conducted Powers	241
APPENDIX F. – Description of Test Equipment	248
APPENDIX G. – Power reduction verification with proximity sensor enabled	256

1. DESCRIPTION OF DEVICE

1.1 General Information

EUT type	Mobile Phone				
FCC ID	ZNFQ730BAW				
Equipment model name	LM-Q730BAW				
Equipment add model name	LMQ730BAW, Q730BAW, LM-Q730HA, LMQ730HA, Q730HA • 6 models are same mechanical, electrical and functional except follows. - LM-Q730HA, LMQ730HA, Q730HA : No differences - LM-Q730BAW, LMQ730BAW, Q730BAW: Dual SIM support(1 RF Path)				
Equipment serial no.	Identical prototype				
Mode(s) of Operation	GSM 850, GSM 1900, WCDMA 850, WCDMA 1700, WCDMA 1900, LTE Band 12, 17, 13, 5, 66, 4, 2, 7, 2.4 G W-LAN (802.11b/g/n-HT20), 5 G W-LAN (802.11a/n-HT20/n-HT40/ac-VHT20/ac-VHT40/ac-VHT80), Bluetooth				
TX Frequency Range	Band	Mode	Operating Modes	Bandwidth	Frequency
	GSM 850	GSM/GPRS/EDGE	Voice/Data	-	824.2 MHz ~ 848.8 MHz
	GSM 1900	GSM/GPRS/EDGE	Voice/Data	-	1 850.2 MHz ~ 1 909.8 MHz
	WCDMA 850	WCDMA	Voice/Data	-	826.4 MHz ~ 846.6 MHz
	WCDMA 1700	WCDMA	Voice/Data	-	1 712.4 MHz ~ 1 752.6 MHz
	WCDMA 1900	WCDMA	Voice/Data	-	1 852.4 MHz ~ 1 907.6 MHz
	LTE Band 12	LTE	Voice/Data	1.4/3/5/10MHz	699.7 MHz ~ 715.3 MHz
	LTE Band 17	LTE	Voice/Data	5/10MHz	706.5 MHz ~ 713.5 MHz
	LTE Band 13	LTE	Voice/Data	5/10MHz	779.5 MHz ~ 784.5 MHz
	LTE Band 5	LTE	Voice/Data	1.4/3/5/10MHz	824.7 MHz ~ 848.3 MHz
	LTE Band 66	LTE	Voice/Data	1.4/3/5/10/15/20MHz	1 710.7 MHz ~ 1 779.3 MHz
	LTE Band 4	LTE	Voice/Data	1.4/3/5/10/15/20MHz	1 710.7 MHz ~ 1 754.3 MHz
	LTE Band 2	LTE	Voice/Data	1.4/3/5/10/15/20MHz	1 850.7 MHz ~ 1 909.3 MHz
	LTE Band 7	LTE	Voice/Data	5/10/15/20MHz	2 502.5 MHz ~ 2 567.5 MHz
	2.4 GHz W-LAN	802.11b/g/n	Voice/Data	HT20	2 412 MHz ~ 2 472 MHz
	5.2 GHz W-LAN	802.11a/n/ac	Voice/Data	HT20/VHT20	5 180 MHz ~ 5 240 MHz
		802.11n/ac	Voice/Data	HT40/VHT40	5 190 MHz ~ 5 230 MHz
	5.3 GHz W-LAN	802.11ac	Voice/Data	VHT80	5 210 MHz
		802.11a/n/ac	Voice/Data	HT20/VHT20	5 260 MHz ~ 5 320 MHz
		802.11n/ac	Voice/Data	HT40/VHT40	5 270 MHz ~ 5 310 MHz
	5.6 GHz W-LAN	802.11ac	Voice/Data	VHT80	5 290 MHz
		802.11a/n/ac	Voice/Data	HT20/VHT20	5 500 MHz ~ 5 720 MHz
		802.11n/ac	Voice/Data	HT40/VHT40	5 510 MHz ~ 5 710 MHz
		802.11ac	Voice/Data	VHT80	5 530 MHz ~ 5 690 MHz
	5.8 GHz W-LAN	802.11a/n/ac	Voice/Data	HT20/VHT20	5 745 MHz ~ 5 825 MHz
		802.11n/ac	Voice/Data	HT40/VHT40	5 755 MHz ~ 5 795 MHz
		802.11ac	Voice/Data	VHT80	5 775 MHz
	Bluetooth	-	Data	-	2 402 MHz ~ 2 480 MHz
RX Frequency Range	GSM 850	GSM/GPRS/EDGE	Voice/Data	-	869.2 MHz ~ 893.8 MHz
	GSM 1900	GSM/GPRS/EDGE	Voice/Data	-	1 930.2 MHz ~ 1 989.8 MHz
	WCDMA 850	WCDMA	Voice/Data	-	871.4 MHz ~ 891.6 MHz
	WCDMA 1700	WCDMA	Voice/Data	-	2 112.4 MHz ~ 2 152.6 MHz
	WCDMA 1900	WCDMA	Voice/Data	-	1 932.4 MHz ~ 1 987.6 MHz
	LTE Band 12	LTE	Voice/Data	1.4/3/5/10MHz	729.7 MHz ~ 745.3 MHz
	LTE Band 17	LTE	Voice/Data	5/10MHz	736.5 MHz ~ 743.5 MHz
	LTE Band 13	LTE	Voice/Data	5/10MHz	748.5 MHz ~ 753.5 MHz
	LTE Band 5	LTE	Voice/Data	1.4/3/5/10MHz	869.7 MHz ~ 893.3 MHz
	LTE Band 66	LTE	Voice/Data	1.4/3/5/10/15/20MHz	2 110.7 MHz ~ 2 179.3 MHz
	LTE Band 4	LTE	Voice/Data	1.4/3/5/10/15/20MHz	2 110.7 MHz ~ 2 154.3 MHz
	LTE Band 2	LTE	Voice/Data	1.4/3/5/10/15/20MHz	1 930.7 MHz ~ 1 989.3 MHz
	LTE Band 7	LTE	Voice/Data	5/10/15/20MHz	2 622.5 MHz ~ 2 687.5 MHz
	2.4 GHz W-LAN	802.11b/g/n	Voice/Data	HT20	2 412 MHz ~ 2 472 MHz
	5.2 GHz W-LAN	802.11a/n/ac	Voice/Data	HT20/VHT20	5 180 MHz ~ 5 240 MHz
		802.11n/ac	Voice/Data	HT40/VHT40	5 190 MHz ~ 5 230 MHz
		802.11ac	Voice/Data	VHT80	5 210 MHz
	5.3 GHz W-LAN	802.11a/n/ac	Voice/Data	HT20/VHT20	5 260 MHz ~ 5 320 MHz
		802.11n/ac	Voice/Data	HT40/VHT40	5 270 MHz ~ 5 310 MHz
		802.11ac	Voice/Data	VHT80	5 290 MHz
	5.6 GHz W-LAN	802.11a/n/ac	Voice/Data	HT20/VHT20	5 500 MHz ~ 5 720 MHz
		802.11n/ac	Voice/Data	HT40/VHT40	5 510 MHz ~ 5 710 MHz
		802.11ac	Voice/Data	VHT80	5 530 MHz ~ 5 690 MHz
	5.8 GHz W-LAN	802.11a/n/ac	Voice/Data	HT20/VHT20	5 745 MHz ~ 5 825 MHz
		802.11n/ac	Voice/Data	HT40/VHT40	5 755 MHz ~ 5 795 MHz
		802.11ac	Voice/Data	VHT80	5 775 MHz
	Bluetooth	-	Data	-	2 402 MHz ~ 2 480 MHz

SAR Summary Table

Equipment Class	Band	Reported SAR			
		1g SAR (W/kg)			10g SAR (W/kg)
		Head	Body-Worn	Hotspot	Phablet
PCE	GSM 850	0.13	0.59	-	-
PCE	GPRS 850	0.24	1.12	1.12	-
PCE	GSM 1900	< 0.1	0.44	-	-
PCE	GPRS 1900	0.10	0.64	0.86	-
PCE	WCDMA 850	0.18	1.02	1.02	-
PCE	WCDMA 1700	0.12	0.74	1.10	2.99
PCE	WCDMA 1900	0.15	0.72	1.06	2.83
PCE	LTE Band 12	0.15	0.50	0.50	-
PCE	LTE Band 17	-	-	-	-
PCE	LTE Band 13	0.14	0.67	0.67	-
PCE	LTE Band 5	0.13	0.71	0.71	-
PCE	LTE Band 66	0.10	0.73	1.02	3.13
PCE	LTE Band 4	-	-	-	-
PCE	LTE Band 2	0.12	0.70	0.91	3.27
PCE	LTE Band 7	0.13	0.74	0.62	3.10
DTS	2.4 GHz W-LAN	0.68	0.17	0.29	-
U-NII-1	5.2 GHz W-LAN	-	-	0.28	-
U-NII-2A	5.3 GHz W-LAN	0.37	0.22	-	0.72
U-NII-2C	5.6 GHz W-LAN	0.74	0.42	-	0.81
U-NII-3	5.8 GHz W-LAN	0.61	0.30	0.30	-
DSS	Bluetooth	0.14	< 0.1	< 0.1	-
Simultaneous SAR per KDB 690783 D01v01r03		1.08	1.57	1.46	3.90
FCC Equipment Class	Licensed Portable Transmitter Held to Ear (PCE) Part 15 Spread Spectrum Transmitter(DSS) Digital Transmission System(DTS) Unlicensed National Information Infrastructure (UNII)				
Date(s) of Tests	2020.05.27 ~ 2020.06.18				
Antenna Type	Internal Antenna				
Functions	- GSM/GPRS/EDGE (GPRS/EDGE Class: 12) supported. * DTM not supported. - No simultaneous transmission between BT & 2.4GHz WLAN - Simultaneous transmission between [GSM, WCDMA voice & WLAN], [GPRS, WCDMA & WLAN], [LTE & WLAN]. - VoIP is supported. - W-LAN 2.4GHz is supported Hotspot. - W-LAN 5 GHz is supported Hotspot in UNII B1, B3.				

1.2 Power Reduction for SAR

This device uses a power reduction mechanism for SAR compliance. The power reduction mechanism (WCDMA 1700, WCDMA 1900, LTE B66, LTE B4, LTE B2, LTE B7) is activated when the device is used in close proximity to the user's body. FCC KDB Publication 616217 D04v01r02 Section 6 was used as a guideline for selecting SAR test distances for this device. Detailed descriptions of the power reduction mechanism are included in the operational description.

The LM-Q730BAW utilizes power reduction scheme during mobile hotspot mode operation (WCDMA 1700, WCDMA 1900, LTE B66, LTE B4, LTE B2, LTE B7). The operational description provides the details of the implementation and algorithm for the mobile hotspot operation and power reduction. The mobile hotspot mode & power reduction software are programmed into the firmware set at the factory. This firmware can not be changed by 3rd party or end-user. The power reduction is implemented during mobile hotspot mode conditions to limit maximum. The power reduction during the hotspot mode operation is necessary to limit RF exposure level. Various handset operating conditions will determine hotspot mode remains active, however, the firmware ensures that power reduction remains active while hotspot is enabled.

1.3 Nominal and Maximum Output Power Specifications

The Nominal and Maximum Output Power Specifications are in section 9 of this test report.

1.4 DUT Antenna Locations

The overall dimensions of this device are > 9 x 5 cm. A diagram showing the location of the device of the device antenna can be found in ZNFQ730BAW_Antenna Location. Since the diagonal dimension of this device is > 160 mm and < 200 mm. it is considered a "phablet".

Mode	Device Sides for SAR Testing					
	Top	Bottom	Front	Rear	Right	Left
GSM/GPRS/EDGE 850	X	O	O	O	X	O
GSM/GPRS/EDGE 1900	X	O	O	O	O	X
WCDMA 850	X	O	O	O	X	O
WCDMA 1700	X	O	O	O	O	X
WCDMA 1900	X	O	O	O	O	X
LTE Band 12	X	O	O	O	X	O
LTE Band 17	X	O	O	O	X	O
LTE Band 13	X	O	O	O	X	O
LTE Band 5	X	O	O	O	X	O
LTE Band 66	X	O	O	O	O	X
LTE Band 4	X	O	O	O	O	X
LTE Band 2	X	O	O	O	O	X
LTE Band 7	X	X	O	O	O	X
2.4G W-LAN	O	X	O	O	O	X
5G W-LAN	O Note 2	X	O	O	O Note 2	X
Bluetooth	O	X	O	O	O	X

Note 1: Particular DUT edges were not required to be evaluated for Hotspot SAR or Phablet SAR if the edges were greater than 2.5 cm from the transmitting antenna according to FCC KDB Publication 648474 D04v01r03. The antenna document shows the distances between the transmit antennas and the edges of the device.

Note 2: WLAN Hotspot UNII-1, 3 supported.

Note 3: O - Test / X - Not test.

1.5 Simultaneous Transmission Capabilities

The Simultaneous Transmission Capabilities are in section 12 of this test report.

1.6 Miscellaneous SAR Test Considerations

(A) WIFI/BT

Since U-NII-1 and U-NII-2A bands have the same maximum output power and the highest reported SAR for U-NII-2A is less than 1.2 W/kg, SAR is not required for U-NII-1 band according to FCC KDB publication 248227 D01v02r02.

Since Wireless Router operations are not allowed by the chipset firmware using U-NII-2A & U-NII-2C WIFI, only 2.4GHz, U-NII-1, U-NII-3 WIFI Hotspot SAR tests and combinations are considered for SAR with respect to Wireless Router configurations according to FCC KDB 941225 D06v02r01.

Per FCC KDB 447498 D01v06, the 1g SAR exclusion threshold for distances < 50 mm is defined by the following equation:

$$\frac{\text{Max Power of Channel (mW)}}{\text{Test Separation Dist (mm)}} * \sqrt{\text{Frequency (GHz)}} \leq 3.0$$

Based on the maximum conducted power of Bluetooth (rounded to the nearest mW) and the antenna to user separation distance, body-worn and hotspot **Bluetooth SAR were not required; [(10/10)*√2.480] = 1.6 (< 3.0)**. Per KDB Publication 447498 D01 v06, the maximum power of the channel was rounded to the nearest mW before calculation.

Per FCC KDB 447498 D01v06, the 10g SAR exclusion threshold for distance < 50 mm is defined by the following equation:

$$\frac{\text{Max Power of Channel (mW)}}{\text{Test Separation Dist (mm)}} * \sqrt{\text{Frequency (GHz)}} \leq 7.5$$

Based on the maximum conducted power of Bluetooth (rounded to the nearest mW) and the antenna to user separation distance, phablet **Bluetooth SAR was not required; [(10/5)*√2.480] = 3.1 (< 7.5)**. Per KDB Publication 447498 D01v06, the maximum power of the channel was rounded to the nearest mW before calculation.

Per FCC KDB Publication 648474 D04v01r03, this device is considered a “phablet” since the diagonal dimension is greater than 160 mm and less than 200 mm. Phablet SAR tests are required when wireless router mode does not apply or if wireless router 1g SAR > 1.2 W/kg. Because wireless router operations are not supported for U-NII-2A & U-NII-2C, phablet SAR tests were performed. Phablet SAR was not evaluated for 2.4 GHz WLAN & U-NII-3 operations since wireless router 1g SAR was < 1.2 W/kg.

(B) Licensed Transmitter(s)

GSM/GPRS/EDGE DTM is not supported for US bands. Therefore, the GSM Voice modes in this report do not transmit simultaneously with GPRS/EDGE Data.

LTE SAR for the higher modulations and lower bandwidths were not tested since the maximum average output power of all required channels and configurations was not more than 0.5 dB higher than the highest bandwidth and the reported LTE SAR for the highest bandwidth was less than 1.45 W/kg for all configurations according to FCC KDB 941225 D05v02r04.

This device supports LTE Carrier Aggregation (CA) in the downlink only. All uplink communications are identical to Release 8 specifications. Per FCC KDB Publication 941225 D05A v01r02, SAR for LTE CA operations was not needed since the maximum average output power in LTE CA mode was not > 0.25 dB higher than the maximum output power when downlink carrier aggregation was inactive.

Per FCC KDB Publication 648474 D04 v01r03, this device is considered a “phablet” since the diagonal dimension is greater than 160 mm and less than 200 mm. Therefore, phablet SAR tests are required when wireless router mode does not apply or if wireless router 1g SAR > 1.2 W/kg.

This device supports LTE capabilities with overlapping transmission frequency ranges. When the supported frequency range of an LTE Band falls completely within an LTE band with a larger transmission frequency range, both LTE bands have the same target power (or the band with the larger transmission frequency range has a higher target power), and both LTE bands share the same transmission path and signal characteristics, SAR was only assessed for the band with the larger transmission frequency range.

1.7 Guidance Applied

- IEEE 1528-2013
- FCC KDB Publication 941225 D01v03r01 (3G SAR Procedures)
- FCC KDB Publication 941225 D05v02r05 (SAR for LTE Devices)
- FCC KDB Publication 941225 D05Av01r02 (LTE Rel.10 KDB Inquiry Sheet)
- FCC KDB Publication 941225 D06v02r01 (Hotspot Mode)
- FCC KDB Publication 248227 D01v02r02 (802.11 Wi-Fi SAR)
- FCC KDB Publication 447498 D01v06 (General RF Exposure Guidance)
- FCC KDB Publication 648474 D04v01r03 (Handset SAR)
- FCC KDB Publication 690783 D01v01r03 (SAR Listings on Grants)
- FCC KDB Publication 865664 D01v01r04 (SAR Measurement 100 MHz to 6 GHz)
- FCC KDB Publication 865664 D02v01r02 (RF Exposure Reporting)
- October 2013 TCB Workshop Notes (GPRS testing criteria)
- April 2015 TCB Workshop Notes (Simultaneous transmission summation clarified)
- October 2016 TCB Workshop Notes (Bluetooth Duty Factor)
- April 2018 TCB Workshop Notes (LTE Carrier Aggregation)
- FCC KDB Inquiry (Tracking No. 372568)

1.8 Device Serial Numbers

Several samples with identical hardware were used to support SAR testing. The manufacturer has confirmed that the device(s) tested have the same physical, mechanical and thermal characteristics and are within operational tolerances expected for production units. The serial numbers used for each test are indicated alongside the results in Section 11.

2. LTE INFORMATION

LTE Information					
FCC ID	ZNFQ730BAW				
Form Factor	Mobile Phone				
Frequency Range of each LTE transmission Band	LTE Band 12 (699.7 ~ 715.3 MHz) LTE Band 17 (706.5 ~ 713.5 MHz) LTE Band 13 (779.5 ~ 784.5 MHz) LTE Band 5 (Cell) (824.7 ~ 848.3 MHz) LTE Band 66 (AWS) (1710.7 ~ 1779.3 MHz) LTE Band 4 (AWS) (1710.7 ~ 1754.3 MHz) LTE Band 2 (PCS) (1850.7 ~ 1909.3 MHz) LTE Band 7 (2502.5 ~ 2567.5 MHz)				
Channel Bandwidths	LTE Band 12 : 1.4 MHz, 3 MHz, 5 MHz, 10 MHz LTE Band 17 : 5 MHz, 10 MHz LTE Band 13 : 5 MHz, 10 MHz LTE Band 5 : 1.4 MHz, 3 MHz, 5 MHz, 10 MHz LTE Band 66 : 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, 20 MHz LTE Band 4 : 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, 20 MHz LTE Band 2 : 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, 20 MHz LTE Band 7 : 5 MHz, 10 MHz, 15 MHz, 20 MHz				
Channel Number and Frequencies(MHz)	Low	Low-Mid	Mid	Mid-High	High
LTE Band 12: 1.4 MHz	699.7 (23017)	N/A	707.5 (23095)	N/A	715.3 (23173)
LTE Band 12: 3 MHz	700.5 (23025)	N/A	707.5 (23095)	N/A	714.5 (23165)
LTE Band 12: 5 MHz	701.5 (23035)	N/A	707.5 (23095)	N/A	713.5 (23155)
LTE Band 12: 10 MHz	704.0 (23060)	N/A	707.5 (23095) ^{Note1}	N/A	711.0 (23130)
LTE Band 17: 5 MHz	706.5 (23755)	N/A	710.0 (23790)	N/A	713.5 (23825)
LTE Band 17: 10 MHz	709.0 (23780)	N/A	710.0 (23790)	N/A	711.0 (23800)
LTE Band 13: 5 MHz	779.5 (23205)	N/A	782.0 (23230) ^{Note2}	N/A	784.5 (23255)
LTE Band 13: 10 MHz	N/A	N/A	782.0 (23230)	N/A	N/A
LTE Band 5 (Cell): 1.4 MHz	824.7 (20407)	N/A	836.5 (20525)	N/A	848.3 (20643)
LTE Band 5 (Cell): 3 MHz	825.5 (20415)	N/A	836.5 (20525)	N/A	847.5 (20635)
LTE Band 5 (Cell): 5 MHz	826.5 (20425)	N/A	836.5 (20525)	N/A	846.5 (20625)
LTE Band 5 (Cell): 10 MHz	829.0 (20450)	N/A	836.5 (20525) ^{Note3}	N/A	844.0 (20600)
LTE Band 66 (AWS): 1.4 MHz	1710.7 (131979)	N/A	1745.0 (132322)	N/A	1779.3 (132665)
LTE Band 66 (AWS): 3 MHz	1711.5 (131987)	N/A	1745.0 (132322)	N/A	1778.5 (132657)
LTE Band 66 (AWS): 5 MHz	1712.5 (131997)	N/A	1745.0 (132322)	N/A	1777.5 (132647)
LTE Band 66 (AWS): 10 MHz	1715.0 (132022)	N/A	1745.0 (132322)	N/A	1775.0 (132622)
LTE Band 66 (AWS): 15 MHz	1717.5 (132047)	N/A	1745.0 (132322)	N/A	1772.5 (132597)
LTE Band 66 (AWS): 20 MHz	1720.0 (132072)	N/A	1745.0 (132322)	N/A	1770.0 (132572)
LTE Band 4 (AWS): 1.4 MHz	1710.7 (19957)	N/A	1732.5 (20175)	N/A	1754.3 (20393)
LTE Band 4 (AWS): 3 MHz	1711.5 (19965)	N/A	1732.5 (20175)	N/A	1753.5 (20385)
LTE Band 4 (AWS): 5 MHz	1712.5 (19975)	N/A	1732.5 (20175)	N/A	1752.5 (20375)
LTE Band 4 (AWS): 10 MHz	1715.0 (20000)	N/A	1732.5 (20175)	N/A	1750.0 (20350)
LTE Band 4 (AWS): 15 MHz	1717.5 (20025)	N/A	1732.5 (20175)	N/A	1747.5 (20325)
LTE Band 4 (AWS): 20 MHz	1720.0 (20050)	N/A	1732.5 (20175) ^{Note4}	N/A	1745.0 (20300)
LTE Band 2 (PCS): 1.4 MHz	1850.7 (18607)	N/A	1880.0 (18900)	N/A	1909.3 (19193)
LTE Band 2 (PCS): 3 MHz	1851.5 (18615)	N/A	1880.0 (18900)	N/A	1908.5 (19185)
LTE Band 2 (PCS): 5 MHz	1852.5 (18625)	N/A	1880.0 (18900)	N/A	1907.5 (19175)
LTE Band 2 (PCS): 10 MHz	1855.0 (18650)	N/A	1880.0 (18900)	N/A	1905.0 (19150)
LTE Band 2 (PCS): 15 MHz	1857.5 (18675)	N/A	1880.0 (18900)	N/A	1902.5 (19125)
LTE Band 2 (PCS): 20 MHz	1860.0 (18700)	N/A	1880.0 (18900)	N/A	1900.0 (19100)
LTE Band 7: 5 MHz	2502.5 (20775)	N/A	2535.0 (21100)	N/A	2567.5 (21425)
LTE Band 7: 10 MHz	2505.0 (20800)	N/A	2535.0 (21100)	N/A	2565.0 (21400)
LTE Band 7: 15 MHz	2507.5 (20825)	N/A	2535.0 (21100)	N/A	2562.5 (21375)
LTE Band 7: 20 MHz	2510.0 (20850)	N/A	2535.0 (21100)	N/A	2560.0 (21350)
UE Category	LTE Rel.11 DL UE Cat 6, UL UE Cat 5				
Modulations Supported in UL	QPSK, 16QAM, 64QAM				
LTE MPR Permanently implemented per 3GPP TS 36.101 section 6.2.3-6.2.5? (manufacturer attestation to be provided)	Yes				
A-MPR (Additional MPR) disabled for SAR Testing?	Yes				
LTE Carrier Aggregation Possible Combinations	The technical description includes all the possible carrier aggregation combinations This device does not support full CA features on 3GPP Release 11. It supports only downlink carrier aggregation. All uplink communications are identical to the Release 8 Specifications. Uplink communications are done on the PCC.				
LTE Additional Information	The following LTE Release 11 Features are not supported: Relay, HetNet, Enhanced MIMO, eCIC, WiFi Offloading, MDH, eMBMS, Cross-Carrier Scheduling, Enhanced SC-FDMA.				

Note(s)

1. LTE B12 can not contain three non-overlapping channels of 10 MHz bandwidth.
Per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
2. LTE B13 can not contain three non-overlapping channels of 5 MHz bandwidth.
Per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
3. LTE B5 (Cell) can not contain three non-overlapping channels of 10 MHz bandwidth.
Per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
4. LTE B4 (AWS) can not contain three non-overlapping channels of 20 MHz bandwidth.
Per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

3. INTROCUCTION

The FCC and Industry Canada have adopted the guidelines for evaluating the environmental effects of radio frequency (RF) radiation in ET Docket 93-62 on Aug. 6, 1996 and Health Canada Safety Code 6 to protect the public and workers from the potential hazards of RF emissions due to FCC-regulated portable devices.

The FCC has adopted the guidelines for evaluating the environmental effects of radio frequency radiation in ET Docket 93-62 on Aug. 6, 1996 to protect the public and workers from the potential hazards of RF emissions due to FCC-regulated portable devices. The safety limits used for the environmental evaluation measurements are based on the criteria published by the American National Standards Institute (ANSI) for localized specific absorption rate (SAR) in IEEE/ANSI C95.1-1992 Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz. The measurement procedure described in IEEE/ANSI C95.3-2002 Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave is used for guidance in measuring SAR due to the RF radiation exposure from the Equipment Under Test (EUT). These criteria for SAR evaluation are similar to those recommended by the National Council on Radiation Protection and Measurements (NCRP) in Biological Effects and Exposure Criteria for Radio frequency Electromagnetic Fields," NCRP Report No. 86 NCRP, 1986, Bethesda, MD 20814. SAR is a measure of the rate of energy absorption due to exposure to an RF transmitting source. SAR values have been related to threshold levels for potential biological hazards.

SAR Definition

Specific Absorption Rate (SAR) is defined as the time derivative (rate) of the incremental energy (dU) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dV) of a given density (ρ) It is also defined as the rate of RF energy absorption per unit mass at a point in an absorbing body (see Fig. 3.1)

$$SAR = \frac{d}{dt} \left(\frac{dU}{dm} \right) = \frac{d}{dt} \left(\frac{dU}{\rho dv} \right)$$

Fig. 3.1 SAR Mathematical Equation

SAR is expressed in units of Watts per Kilogram (W/kg).

$$SAR = \frac{\sigma \cdot E^2}{\rho}$$

where:

- σ = conductivity of the tissue-simulating material (S/m)
- ρ = mass density of the tissue-simulating material (kg/m³)
- E = Total RMS electric field strength (V/m)

NOTE: The primary factors that control rate of energy absorption were found to be the wavelength of the incident field in relations to the dimensions and geometry of the irradiated organism, the orientation of the organism in relation to the polarity of field vectors, the presence of reflecting surfaces, and whether conductive contact is made by the organism with a ground plane.

4. DOSIMETRIC ASSESSMENT

4.1 Measurement Procedure

The evaluation was performed using the following procedure compliant to FCC KDB Publication 865664 D01v01r04 and IEEE 1528-2013:

1. The SAR distribution at the exposed side of the head or body was measured at a distance no greater than 5.0 mm from the inner surface of the shell. The area covered the entire dimension of the device-head and body interface and the horizontal grid resolution was determined per FCC KDB Publication 865664 D01v01r04 (See Table 4.1) and IEEE1528-2013.
2. The point SAR measurement was taken at the maximum SAR region determined from Step 1 to enable the monitoring of SAR fluctuations/drifts during the 1g/10g cube evaluation. SAR at this fixed point was measured and used as a reference value.
3. Based on the area scan data, the peak of the region with maximum SAR was determined by spline interpolation. Around this point, a volume was assessed according to the measurement resolution and volume size requirements of FCC KDB Publication 865664 D01v01r04 (See Table 4.1) and IEEE 1528-2013. On the basis of this data set, the spatial peak SAR value was evaluated with the following procedure (see references or the DASY manual online for more details):
 - a. SAR values at the inner surface of the phantom are extrapolated from the measured values along the line away from the surface with spacing no greater than that in Table 4.1. The extrapolation was based on a least-squares algorithm. A polynomial of the fourth order was calculated through the points in the z-axis (normal to the phantom shell).
 - b. After the maximum interpolated values were calculated between the points in the cube, the SAR was averaged over the spatial volume (1g or 10g) using a 3D-Spline interpolation algorithm. The 3D-spline is composed of three one-dimensional splines with the "Not a knot" condition (in x, y, and z directions). The volume was then integrated with the trapezoidal algorithm. One thousand points (10 x 10 x 10) were obtained through interpolation, in order to calculate the averaged SAR.
 - c. All neighboring volumes were evaluated until no neighboring volume with a higher average value was found.
4. The SAR reference value, at the same location as step 2, was re-measured after the zoom scan was complete to calculate the SAR drift. If the drift deviated by more than 5%, the SAR test and drift measurements were repeated.




Figure 4.1
Sample SAR Area Scan

			≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface			5 mm $\pm$ 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2)$ mm $\pm$ 0.5 mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location			30° $\pm$ 1°	20° $\pm$ 1°
Maximum area scan spatial resolution: Δx_{Area} , Δy_{Area}			≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
			When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	
Maximum zoom scan spatial resolution: Δx_{Zoom} , Δy_{Zoom}			≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$		≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	graded grid	$\Delta z_{Zoom}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{Zoom}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$ mm	
Minimum zoom scan volume	x, y, z		≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see IEEE Std 1528-2013 for details.				
* When zoom scan is required and the <u>reported</u> SAR from the <u>area scan based 1-g SAR estimation</u> procedures of KDB Publication 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

Table 4.1 Area and Zoom Scan Resolutions per FCC KDB Publication 865664 D01v01r04*

Pages: 14 /260

6. TEST CONFIGURATION POSITIONS FOR HANDSETS

6.1 Device Holder

The device holder is made out of low-loss POM material having the following dielectric parameters: relative permittivity $\epsilon = 3$ and loss tangent $\delta = 0.02$.

6.2 Positioning for Cheek/Touch

1. The test device was positioned with the handset close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure 6.1), such that the plane defined by the vertical center line and the horizontal line of the phone is approximately parallel to the sagittal plane of the phantom.



Figure 6.1 Front, Side and Top View of Cheek/Touch Position

2. The handset was translated towards the phantom along the line passing through RE & LE until the handset touches the ear.
3. While maintaining the handset in this plane, the handset was rotated around the LE-RE line until the vertical centerline was in the plane normal to MB-NF including the line MB (reference plane).
4. The phone was then rotated around the vertical centerline until the phone (horizontal line) was symmetrical with respect to the line NF.
5. While maintaining the vertical centerline in the reference plane, keeping point A on the line passing through RE and LE, and maintaining the phone contact with the ear, the handset was rotated about the line NF until any point on the handset made contact with a phantom point below the ear (cheek). (See Figure 6.2)

6.3 Positioning for Ear / 15 ° Tilt

With the test device aligned in the “Cheek/Touch Position”:

1. While maintaining the orientation of the phone, the phone was retracted parallel to the reference plane far enough to enable a rotation of the phone by 15 degree.
2. The phone was then rotated around the horizontal line by 15 degree.
3. While maintaining the orientation of the phone, the phone was moved parallel to the reference plane until any part of the phone touches the head. (In this position, point A was located on the line RE-LE). The tilted position is obtained when the contact is on the pinna. If the contact was at any location other than the pinna, the angle of the phone would then be reduced. The tilted position was obtained when any part of the phone was in contact of the ear as well as a second part of the phone was in contact with the head (see Figure 6.3).




Figure 6.2 Side view w/relevant markings



Figure 6.3 Front, Side and Top View of Ear/15° Position

6.4 Body-Worn Accessory Configurations

Body-worn operating configurations are tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in a normal use configuration (see Figure 6.4). Per FCC KDB Publication 648474 D04v01r03, Body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in FCC KDB Publication 447498 D01v06 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode, when applicable. When the reported SAR for a body-worn accessory, measured without a headset connected to the handset, is $> 1.2 \text{ W/kg}$, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.



Figure 6.4 Sample Body-Worn Diagram

Accessories for Body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are tested with the device with each accessory. If multiple accessories share an identical metallic component (i.e. the same metallic belt-clip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

Body-worn accessories may not always be supplied or available as options for some devices intended to be authorized for body-worn use. In this case, a test configuration with a separation distance between the back of the device and the flat phantom is used. Test position spacing was documented.

Transmitters that are designed to operate in front of a person's face, as in push-to-talk configurations, are tested for SAR compliance with the front of the device positioned to face the flat phantom in head fluid. For devices that are carried next to the body such as a shoulder, waist or chest-worn transmitters, SAR compliance is tested with the accessories, including headsets and microphones, attached to the device and positioned against a flat phantom in a normal use configuration.

6.5 Extremity Exposure Configurations

Devices that are designed or intended for use on extremities or mainly operated in extremity only exposure conditions; i.e., hands, wrists, feet and ankles, may require extremity SAR evaluation. When the device also operates in close proximity to the user's body, SAR compliance for the body is also required. The 1-g body and 10-g extremity SAR Exclusion Thresholds found in KDB Publication 447498 D01v06 should be applied to determine SAR test requirements.

Per KDB Publication 447498 D01v06, Cell phones (handsets) are not normally designed to be used on extremities or operated in extremity only exposure conditions. The maximum output power levels of handsets generally do not require extremity SAR testing to show compliance. Therefore, extremity SAR was not evaluated for this device.

6.6 Wireless Router Configurations

Some battery-operated handsets have the capability to transmit and receive user data through simultaneous transmission of WIFI simultaneously with a separate licensed transmitter. The FCC has provided guidance in FCC KDB Publication 941225 D06v02r01 where SAR test considerations for handsets ($L \times W \geq 9 \text{ cm} \times 5 \text{ cm}$) are based on a composite test separation distance of 10 mm from the front, rear and edges of the device containing transmitting antennas within 2.5 cm of their edges, determined from general mixed use conditions for this type of devices. When the same wireless transmission configuration is used for testing body-worn accessory and hotspot mode SAR, respectively, in voice and data mode, SAR results for the most conservative test separation distance configuration may be used to support both SAR conditions.

When the user enables the personal wireless router functions for the handset, actual operations include simultaneous transmission of both the WIFI transmitter and another licensed transmitter. Both transmitter often do not transmit at the same transmitting frequency and thus cannot be evaluated for SAR under actual use conditions due to the limitations of the SAR assessment probes. Therefore, SAR must be evaluated for each KDB Publication 447498 D01v06 procedures. The "Portable Hotspot" feature on the handset was not activated during SAR assessment, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal at a time.

6.7 Phablet Configurations

For smart phones with a display diagonal $> 150 \text{ mm}$ or an overall diagonal dimension $> 160 \text{ mm}$ that provide similar mobile web access and multimedia support found in mini-tablets or UMPC mini-tablets that support voice calls next to the ear, the phablets procedures outlined in KDB Publication 648474 D04v01r03 should be applied to evaluate SAR compliance. A device marketed as phablets, regardless of form factors and operating characteristics must be tested as a phablet to determine SAR compliance. In addition to the normally required head and body-worn accessory SAR test procedures required for handsets, the UMPC mini-tablet procedures must also be applied to test the SAR of all surfaces and edges with an antenna $\leq 25 \text{ mm}$ from that surface or edge, in direct contact with the phantom, for 10g SAR. The UMPC mini-tablet 1g SAR at 5 mm is not required. When hotspot mode applies, 10g SAR is required only for the surfaces and edges with hotspot mode 1g SAR $> 1.2 \text{ W/kg}$.

6.8 Proximity Sensor Configurations

This device uses a power reduction mechanism to reduce output powers in certain use conditions when the device is used close the user's body.

When the device's antenna is within a certain distance of the user. The sensor activates and reduces the maximum allowed output power. However, the sensor is not active when the device is moved beyond the sensor triggering distance and the maximum output power is no longer limited. Therefore, additional evaluation is needed in the vicinity of the triggering distance to ensure SAR is compliant when the device is allowed to operate at a selecting SAR test distances for this device at these additional test positions. Sensor triggering distance summary data is included in Appendix G.

7. RF EXPOSURE LIMITS

Uncontrolled Environment:

UNCONTROLLED ENVIRONMENTS are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

Controlled Environment:

CONTROLLED ENVIRONMENTS are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. This exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Table 8.1.SAR Human Exposure Specified in ANSI/IEEE C95.1-1992

	HUMAN EXPOSURE LIMITS	
	General Public Exposure (W/kg) or (mW/g)	Occupational Exposure (W/kg) or (mW/g)
SPATIAL PEAK SAR * (Brain)	1.60	8.00
SPATIAL AVERAGE SAR ** (Whole Body)	0.08	0.40
SPATIAL PEAK SAR *** (Hands / Feet / Ankle / Wrist)	4.00	20.0

1. The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.
2. The Spatial Average value of the SAR averaged over the whole body.
3. The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e.as a result of employment or occupation).

8. FCC MEASUREMENT PROCEDURES

Power measurements were performed using a base station simulator under digital average power.

8.1 Measured and Reported SAR

Per FCC KDB Publication 447498 D01v06, When SAR is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance. For simultaneous transmission, the measured aggregate SAR must be scaled according to the sum of the differences between the maximum tune-up tolerance and actual power used to test each transmitter. When SAR is measured at or scaled to the maximum tune-up tolerance limit, the results are referred to as reported SAR. The highest reported SAR results are identified on the grant of equipment authorization according to procedures in KDB 690783 D01v01r03.

8.2 Procedures Used to Establish RF Signal for SAR

The following procedures are according to FCC KDB Publication 941225 D01v03r01.

The device was placed into a simulated call using a base station simulator in a RF shielded chamber. Establishing connections in this manner ensure a consistent means for testing SAR and are recommended for evaluating SAR [4]. Devices under test were evaluated prior to testing, with a fully charged battery and were configured to operate at maximum output power. In order to verify that the device was tested throughout the SAR test at maximum output power, the SAR measurement system measures a “point SAR” at an arbitrary reference point at the start and end of the 1 gram SAR evaluation, to assess for any power drifts during the evaluation. If the power drift deviated by more than 5%, the SAR test and drift measurements were repeated.

8.3 SAR Measurement Conditions for WCDMA (UMTS)

8.3.1 Output Power Verification

Maximum output power is measured on the High, Middle and Low channels for each applicable transmission band according to the general descriptions in section 5.2 of 3GPP TS 34.121, using the appropriate RMC or AMR with TPC (transmit power control) set to all “1s”.

Maximum output power is verified on the High, Middle and Low channels according to the general, descriptions in section 5.2 of 3GPP TS 34.121 (release 5), using the appropriate RMC with TPC, (transmit power control) set to all “1s” or applying the required inner loop power control procedures to maintain maximum output power while HSUPA is active. Results for all applicable physical channel configurations (DPCCH, DPDCHn and spreading codes, HS-DPCCH etc) are tabulated in this test report. All configurations that are not supported by the DUT or cannot be measured due to technical or equipment limitations are identified.

8.3.2 Head SAR Measurements for Handsets

SAR for head exposure configurations is measured using the 12.2 kbps RMC with TPC bits configured to all “1s”. SAR in AMR configurations is not required when the maximum average output of each RF channel for 12.2 kbps AMR is less than 0.25 dB higher than that measured in 12.2 kbps RMC. Otherwise, SAR is measured on the maximum output channel in 12.2 AMR with a 3.4 kbps SRB (signaling radio bearer) using the exposure configuration that resulted in the highest SAR for that RF channel in the 12.2 kbps RMC mode.

8.3.3 Body SAR Measurements

SAR for body exposure configurations is measured using the 12.2 kbps RMC with the TPC bits all "1s".

8.3.4 Release 5 HSDPA Data Devices

The following procedures are applicable to HSDPA data devices operating under 3GPP Release 5. SAR is required for devices in body-worn accessory and other body exposure conditions, including handsets and data modems operating in various electronic devices. HSDPA operates in conjunction with WCDMA and requires an active DPCCH. The default test configuration is to measure SAR in WCDMA with HSDPA remain inactive, to establish a radio link between the test device and a communication test set using a 12.2 kbps RMC configured in Test Loop Mode 1. SAR for HSDPA is selectively measured using the highest reported SAR configuration in WCDMA, with an FRC in H-set 1 and a 12.2 kbps RMC. SAR is selectively confirmed for other physical channel configurations (DPCCH & DPDCHn) according to exposure conditions, device operating capabilities and maximum output power specified for production units, including tune-up tolerance by applying the 3G SAR test reduction procedures. Maximum output power is verified according to the applicable versions of 3GPP TS 34.121. SAR must be measured based on these maximum output conditions and requirements in KDB Publication 447498, with respect to the UE Categories, and explained in the SAR report. When Maximum Power Reduction (MPR) applies, the implementations must be clearly identified in the SAR report to support test results according to Cubic Metric (CM) and, as appropriate, Enhanced MPR (E-MPR) requirements.

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	$\beta_{hs}^{(1)}$	CM (dB) ⁽²⁾
1	2/15	15/15	64	2/15	4/15	0.0
2	12/15 ⁽³⁾	15/15 ⁽³⁾	64	12/15 ⁽³⁾	24/15	1.0
3	15/15	8/15	64	15/8	30/15	1.5
4	15/15	4/15	64	15/4	30/15	1.5
Note 1: $\Delta_{ACK}, \Delta_{NACK}$ and $\Delta_{CQI} = 8 \Leftrightarrow A_{hs} = \beta_{hs}/\beta_c = 30/15 \Leftrightarrow \beta_{hs} = 30/15 * \beta_c$ Note 2: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. Note 3: For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$.						

Figure 9.1 Table 1

8.3.5 Release 6 HSUPA Data Devices

The following procedures are applicable to HSPA (HSUPA/HSDPA) data devices operating under 3GPP Release 6. SAR is required for devices in body-worn accessory and other body exposure conditions, including handsets and data modems operating in various electronic devices. HSUPA operates in conjunction with WCDMA and HSDPA. SAR is initially measured in WCDMA test configurations with HSPA remain inactive. The default test configuration is to establish a radio link between the test device and a communication test set to configure a 12.2 kbps RMC in Test Loop Mode 1. SAR for HSPA is selectively measured with HS-DPCCH, E-DPCCH and E-DPDCH, all enabled, along with a 12.2 kbps RMC using the highest reported SAR configuration in WCDMA with 12.2 kbps RMC only.

An FRC is configured according to HS-DPCCH Sub-test 1 using H-set 1 and QPSK. HSPA is configured according to E-DCH Sub-test 5 requirements. SAR for other HSPA sub-test configurations is confirmed selectively according to exposure conditions, E-DCH UE Category and maximum output power of production units, including tune-up tolerance by applying the 3G SAR test reduction procedure. Maximum output power is verified according to procedures in applicable versions of 3GPP TS 34.121. SAR must be measured based on these maximum output conditions and requirements in KDB Publication 447498, with respect to the UE Categories for HS-DPCCH and HSPA, and explained in the SAR report. When Maximum Power Reduction (MPR) applies, the implementations must be clearly identified in the SAR report to support test results according to Cubic Metric (CM) and, as appropriate, Enhanced MPR (E-MPR) requirements.

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	$\beta_{hs}^{(1)}$	β_{ec}	β_{ed}	β_{ed} (SF)	β_{ed} (codes)	CM ⁽²⁾ (dB)	MPR (dB)	AG ⁽⁴⁾ Index	E-TFCI
1	11/15 ⁽³⁾	15/15 ⁽³⁾	64	11/15 ⁽³⁾	22/15	209/225	1039/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	$\beta_{ed1}: 47/15$ $\beta_{ed2}: 47/15$	4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15 ⁽⁴⁾	15/15 ⁽⁴⁾	64	15/15 ⁽⁴⁾	30/15	24/15	134/15	4	1	1.0	0.0	21	81

Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 8 \Leftrightarrow A_{hs} = \beta_{hs}/\beta_c = 30/15 \Leftrightarrow \beta_{hs} = 30/15 * \beta_c$.

Note 2: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$.

Note 4: For subtest 5 the β_c/β_d ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 14/15$ and $\beta_d = 15/15$.

Note 5: Testing UE using E-DPDCH Physical Layer category 1 Sub-test 3 is not required according to TS 25.306 Table 5.1g.

Note 6: β_{ed} cannot be set directly; it is set by Absolute Grant Value.

Figure 9.2 Table 2

8.3.6 SAR Measurement Conditions for DC-HSDPA

In the following DB 941225 D01v03r01 procedures, the mode tested for SAR is referred to as the primary mode. The equivalent modes considered for SAR test reduction are denoted as secondary modes. Both primary and secondary modes must be in the same frequency band. When the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq 1/4$ dB higher than the primary mode or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the secondary mode. This is referred to as the 3G SAR test reduction procedure in the following SAR test guidance, where the primary mode is identified in the applicable wireless mode test procedures and the secondary mode is wireless mode being considered for SAR test reduction by that procedure. When the 3G SAR test reduction procedure is not satisfied, it is identified as “otherwise” in the applicable procedures; SAR measurement is required for the secondary mode.

SAR is required for Rel. 8 DC-HSDPA when SAR is required for Rel. 5 HSDPA; otherwise, the 3G SAR test reduction procedure is applied to DC-HSDPA with 12.2 kbps RMC as the primary mode. Power is measured for DC-HSDPA according to the H-Set 12, FRC configuration in Table C.8.1.12 of 3GPP TS 34.121-1 to determine SAR test reduction. A primary and a secondary serving HS-DSCH Cell are required to perform the power measurement and for the results to be acceptable.

8.4 SAR Measurement Conditions for LTE

LTE modes were tested according to FCC KDB 941225 D05v02r05 publication. Please see notes after the tabulated SAR data for required test configurations. Establishing connections with base station simulators ensure a consistent means for testing SAR and are recommended for evaluating SAR. The call simulator was used for LTE output power measurement and SAR testing. Closed loop power control was used so the UE transmits with maximum output power during SAR testing. SAR tests were performed with the same number of RB and RB offsets transmitting on all TTI frames (maximum TTI).

8.4.1 Spectrum Plots for RB Configurations

A properly configured base station simulator was used for SAR tests and power measurements. Therefore, spectrum plots for RB configurations were not required to be included in this report.

8.4.2 MPR

MPR is permanently implemented for this device by the manufacturer. The specific manufacturer target MPR is indicated alongside the SAR results. MPR is enabled for this device, according to 3GPP TS36. 101 Section 6.2.3 – 6.2.5 under Table 6.2.3-1.

8.4.3 A-MPR

A-MPR (Addition MPR) has been disabled for all SAR tests by setting NS=01 on the base station simulator.

8.4.4 Required RB Size and RB Offsets for SAR Testing

According to FCC KDB 941225 D05v02r05:

- a. Per Section 5.2.1, SAR is required for QPSK 1 RB Allocation for the largest bandwidth
 - i. The required channel and offset combination with the highest maximum output power is required for SAR.
 - ii. When the reported SAR is ≤ 0.8 W/kg, testing of the remaining RB offset configurations and required test channel is not required. Otherwise, SAR is required for the remaining required test channels using the RB offset configuration with highest output power for that channel.
 - iii. When the reported SAR for a required test channel is > 1.45 W/kg, SAR is required for all RB offset configurations for that channel.
- b. Per Section 5.2.2, SAR is required for 50% RB allocation using the largest bandwidth following the same procedures outlined in Section 5.2.1.
- c. Per Section 5.2.3, QPSK SAR is not required for the 100% allocation when the highest maximum output power for the 100% allocation is less than the highest maximum output power of the 1 RB and 50% RB allocations and the reported SAR for the 1 RB and 50% RB allocations is < 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
- d. Per Section 5.2.4 and 5.3, SAR tests for higher order modulations and lower bandwidths configurations are not required when the conducted power of the required test configurations determined by Sections 5.2.1 through 5.2.3 is less than or equal to 0.5 dB higher than the equivalent configuration using QPSK modulation and when the QPSK SAR for those configurations is < 1.45 W/kg.

8.4.5 64QAM uplink

(1) Per KDB 941225 D05 V02r05, we'll measure conducted powers per Section 5.1 for all uplink modulations (QPSK, 16QAM, 64QAM) and include in the test report.

(2) From these power measurements, we will apply the procedures in Section 5.2.4 ("Higher Order Modulations") to determine SAR test reduction for 16QAM and 64QAM test cases.

8.4.6 Downlink Only Carrier Aggregation and Downlink Only MIMO

Conducted power measurements with LTE Carrier Aggregation (CA) (downlink only) active are made in accordance to KDB Publication 941225 D05Av01r02, April 2018 TCB Workshop notes (LTE Carrier Aggregation) and May 2017 TCB Workshop (LTE 4x4 Downlink MIMO). The RCC connection is only handled by one cell, the primary component carrier (PCC) for downlink and uplink communications. After making a data connection to the PCC, the UE device adds secondary component carrier(s) (SCC) on the downlink only. All uplink communications and acknowledgements remain identical to specifications when downlink carrier aggregation is inactive on the PCC. For every supported combination of downlink only carrier aggregation, additional conducted output powers are measured with the downlink carrier aggregation active for configuration with highest measured maximum conducted power with downlink carrier aggregation inactive measured among the channel bandwidth, modulation, and RB combinations in each frequency band. Per FCC KDB Publication 941225 D05Av01r02, no SAR measurements are required for carrier aggregation configurations when the average output power with downlink only carrier aggregation active is not more than 0.25 dB higher than the average output power with downlink only carrier aggregation inactive.

8.5 SAR Testing with 802.11 Transmitters

The normal network operating configurations are not suitable for measuring the SAR of 802.11 b/g/n transmitters. Unpredictable fluctuations in network traffic and antenna diversity conditions can introduce undesirable variations in SAR results. The SAR for these devices should be measured using chipset based test mode software to ensure the results are consistent and reliable. See KDB Publication 248227D01v02r02 for more details.

8.5.1 General Device Setup

Chipset based test mode software is hardware dependent and generally varies among manufacturers. The device operating parameters established in test mode for SAR measurements must be identical to those programmed in production units, including output power levels, amplifier gain settings and other RF performance tuning parameters. The test frequencies should correspond to actual channel frequencies defined for domestic use. SAR for devices with switched diversity should be measured with only one antenna transmitting at a time during each SAR measurement, according to a fixed modulation and data rate. The same data pattern should be used for all measurements.

A periodic duty factor is required for current generation SAR systems to measure SAR. When 802.11 frame gaps are accounted for in the transmission, a maximum transmission duty factor of 92-96% is typically achievable in most test mode configurations. A minimum transmission duty factor of 85% is required to avoid certain hardware and device implementation issues related to wide range SAR scaling. The reported SAR is scaled to 100% transmission duty factor to determine compliance at the maximum tune-up tolerance limit.

8.5.2 U-NII and U-NII-2A

For devices that operate in only one of the U-NII-1 and U-NII-2A bands, the normally required SAR procedures for OFDM configurations are applied. For devices that operate in both U-NII bands using the same transmitter and antenna(s), SAR test reduction is determined according to the following, with respect to the highest reported SAR and maximum output power specified for production units. The procedures are applied independently to each exposure configuration; for example, head, body, hotspot mode etc.

- 1) When the same maximum output power is specified for both bands, begin SAR measurement in U-NII-2A band by applying the OFDM SAR requirements. If the highest reported SAR for a test configuration is ≤ 1.2 W/kg, SAR is not required for U-NII-1 band for that configuration (802.11 mode and exposure condition); otherwise, each band is tested independently for SAR.
- 2) When different maximum output power is specified for the bands, begin SAR measurement in the band with higher specified maximum output power. The highest reported SAR for the tested configuration is adjusted by the ratio of lower to higher specified maximum output power for the two bands. When the adjusted SAR is ≤ 1.2 W/kg, SAR is not required for the band with lower maximum output power in that test configuration; otherwise, each band is tested independently for SAR.

8.5.3 U-NII-2C and U-NII-3

The frequency range covered by U-NII-2C and U-NII-3 is 380 MHz (5.47 – 5.85 GHz), which requires a minimum of at least two SAR probe calibration frequency points to support SAR measurements.

When Terminal Doppler Weather Rader (TDWR) restriction applies, the channels at 5.60 – 5.65 GHz in U-NII-2C band must be disabled with acceptable mechanisms and documented in the equipment certification.

Unless band gap channels are permanently disabled, SAR must be considered for these channels. When band gap channels are disabled, each band is tested independently according to the normally required OFDM SAR measurements and probe calibration frequency points requirements.

8.5.4 Initial Test Position Procedure

For exposure conditions with multiple test positions, such as handset operating next to the ear, devices with hotspot mode or UMPC mini-tablet, procedures for initial test position can be applied. Using the transmission mode determined by the DSSS procedure or initial test configuration, area scans are measured for all position in an exposure condition. The test position with the highest extrapolated (peak) SAR is used as the initial test position. When reported SAR for the initial test position is ≤ 0.4 W/kg, no additional testing for the remaining test positions is required. Otherwise, SAR is evaluated at the subsequent highest peak SAR position until the reported SAR result is ≤ 0.8 W/kg or all test position are measured.

8.5.5 2.4 GHz SAR Test Requirements

SAR is measured for 2.4 GHz 802.11b DSSS using either a fixed test position or, when applicable, the initial test position procedure. SAR test reduction is determined according to the following:

- 1) When the reported SAR of the highest measured maximum output power channel for the exposure configuration is ≤ 0.8 W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration.
- 2) When the reported SAR is > 0.8 W/kg, SAR is required for that exposure configuration using the next highest measured output power channel. When any reported SAR is > 1.2 W/kg, SAR is required for the third channel; i.e., all channels require testing.

2.4 GHz 802.11 g/n OFDM are additionally evaluated for SAR if the highest reported SAR for 802.11b, adjusted by the ratio of the OFDM to DSSS specified maximum output power is > 1.2 W/kg. When SAR is required for OFDM modes in 2.4 GHz band, the Initial Test Configuration Procedures should be followed.

8.5.6 OFDM Transmission Mode and SAR Test Channel Selection

For the 2.4 GHz and 5 GHz bands, when the same maximum output power was specified for multiple OFDM transmission mode configurations in a frequency band or aggregated band, SAR is measured using the configuration with the largest channel bandwidth, lowest order modulation and lowest data rate. When the maximum output power of a channel is the same for equivalent OFDM configurations; for example, 802.11a and 802.11n or 802.11g and 802.11n with the same channel bandwidth, modulation and data rate etc., the lower order 802.11 mode i.e., 802.11a, then 802.11g then 802.11n is used for SAR measurement. When the maximum output power were the same for multiple test channels, either according to the default or additional power measurement requirements, SAR is measured using the channel closest to the middle of the frequency band or aggregated band. When there are multiple channels with the same maximum output power, SAR is measured using the higher number channel.

8.5.7 Initial Test Configuration Procedure

For OFDM, in both 2.4 and 5 GHz bands, an initial test configuration is determined for each frequency band and aggregated band, according to the transmission mode with the highest maximum output power specified for SAR measurements. When the same maximum output is specified for multiple OFDM transmission mode configurations in a frequency band or aggregated band, SAR is measured using the configuration(s) with the largest channel bandwidth, lowest order modulation, and lowest data rate. The channel of the transmission mode with the highest average RF output conducted power will be the initial test configuration.

When the reported SAR is ≤ 0.8 W/kg, no additional measurements on other test channels are required.

Otherwise, SAR is evaluated using the subsequent highest average RF output channel until the reported SAR result is ≤ 1.2 W/kg or all channels are measured.

8.5.8 Subsequent Test Configuration Procedures

For OFDM configurations, in each frequency band and aggregated band, SAR is evaluated for initial test configuration using the fixed test position or the initial test position procedure, when applicable. When the highest reported SAR for the initial test configuration, adjusted by the ratio of the subsequent test configuration to initial test configuration specified maximum output power is ≤ 1.2 W/kg, no additional SAR testing for the subsequent test configurations is required.

9. RF CONDUCTED POWERS

This device operates using the following maximum and nominal output power specifications. SAR values were scaled to the maximum allowed power to determine compliance per KDB Publication 447498 D01v06

9.1 GSM Nominal and Maximum Output Power Spec and Conducted Powers

Band & Mode		Voice[dBm]	Burst Average GMSK [dBm]				Burst Average GMSK [dBm]			
		1 TX Slot	1 TX Slot	2 TX Slot	3 TX Slot	4 TX Slot	1 TX Slot	2 TX Slot	3 TX Slot	4 TX Slot
GSM/GPRS/EDGE 850	Maximum	33.70	33.70	32.70	30.70	28.70	26.20	25.70	25.20	24.70
	Nominal	33.20	33.20	32.20	30.20	28.20	25.70	25.20	24.70	24.20
GSM/GPRS/EDGE 1900	Maximum	30.70	30.70	29.70	27.70	25.70	25.70	25.20	25.20	24.70
	Nominal	30.20	30.20	29.20	27.20	25.20	25.20	24.70	24.70	24.20

Table 9.1.1 GSM Nominal and Maximum Output Power Spec

Band	Channel	Maximum Burst-Averaged Output Power(dBm)								
		Voice	GPRS/EDGE Data (GMSK)				EDGE Data (8-PSK)			
		GSM CS 1 Slot	GPRS 1 TX Slot	GPRS 2 TX Slot	GPRS 3 TX Slot	GPRS 4 TX Slot	EDGE 1 TX Slot	EDGE 2 TX Slot	EDGE 3 TX Slot	EDGE 4 TX Slot
GSM850	128	33.10	33.10	32.30	30.50	28.20	25.60	25.40	25.10	24.40
	190	33.30	33.30	32.30	30.50	28.00	25.40	25.30	25.00	24.40
	251	33.40	33.40	32.20	30.40	27.70	25.30	25.30	25.00	24.40
PCS 1900	512	30.30	30.30	29.62	27.63	25.00	25.50	25.10	25.10	24.30
	661	30.30	30.30	29.61	27.62	25.00	25.40	25.10	25.10	24.40
	810	30.20	30.20	29.32	27.33	24.90	25.60	25.00	25.00	24.40
Band	Channel	Calculated Maximum Frame-Averaged Output Power(dBm)								
		Voice	GPRS/EDGE Data (GMSK)				EDGE Data (8-PSK)			
		GSM CS 1 Slot	GPRS 1 TX Slot	GPRS 2 TX Slot	GPRS 3 TX Slot	GPRS 4 TX Slot	EDGE 1 TX Slot	EDGE 2 TX Slot	EDGE 3 TX Slot	EDGE 4 TX Slot
GSM850	128	24.07	24.07	26.28	26.24	25.19	16.57	19.38	20.84	21.39
	190	24.27	24.27	26.28	26.24	24.99	16.37	19.28	20.74	21.39
	251	24.37	24.37	26.18	26.14	24.69	16.27	19.28	20.74	21.39
PCS 1900	512	21.27	21.27	23.60	23.37	21.99	16.47	19.08	20.84	21.29
	661	21.27	21.27	23.59	23.36	21.99	16.37	19.08	20.84	21.39
	810	21.17	21.17	23.30	23.07	21.89	16.57	18.98	20.74	21.39
GSM850	Frame Avg. Targets:	24.17	24.17	26.18	25.94	25.19	16.67	19.18	20.44	21.19
PCS 1900		21.17	21.17	23.18	22.94	22.19	16.17	18.68	20.44	21.19

Table 9.1.2 GSM Conducted Power

Note:

- Both burst-averaged and calculated frame-averaged powers are included. Frame-averaged power was calculated from the measured burst-averaged power by converting the slot powers into linear units and calculating the energy over 8 timeslots.
- GPRS (GMSK) output powers were measured with coding scheme setting of 1 (CS1) on the base station simulator. CS1 was configured to measure GPRS output power measurements and SAR to ensure GMSK modulation in the signal. Our Investigation has shown that CS1 - CS4 settings do not have any impact on the output levels or modulation in the GPRS modes.
- EDGE (8-PSK) output powers were measured with MCS7 on the base station simulator. MCS7 coding scheme was used to measure the output powers for EDGE since investigation has shown that choosing MCS7 coding scheme will ensure 8-PSK modulation. It has been shown that MCS levels that produce 8PSK modulation do not have an impact on output power.

GPRS Multislot class: 12 (max 4 TX Uplink slots)
EDGE Multislot class: 12 (max 4 TX Uplink slots)
DTM Multislot Class: N/A



Figure 9.1 Power Measurement Setup

9.2 WCDMA Nominal and Maximum Output Power Spec and Conducted Powers

3GPP Release Version	Mode		Cellular Band (dBm)		AWS Band (dBm)		PCS Band (dBm)		MPR (dB)
99	WCDMA	Voice	Maximum	25.2	24.7	24.7	24.7	24.7	-
			Nominal	24.7	24.2	24.2	24.2	24.2	-
5	HSDPA	Subtest 1	Maximum	25.2	24.7	24.7	24.7	24.7	0
			Nominal	24.7	24.2	24.2	24.2	24.2	0
5		Subtest 2	Maximum	25.2	24.7	24.7	24.7	24.7	0
			Nominal	24.7	24.2	24.2	24.2	24.2	0
5		Subtest 3	Maximum	24.7	24.2	24.2	24.2	24.2	0.5
			Nominal	24.2	23.7	23.7	23.7	23.7	0.5
5		Subtest 4	Maximum	24.7	24.2	24.2	24.2	24.2	0.5
			Nominal	24.2	23.7	23.7	23.7	23.7	0.5
6	HSUPA	Subtest 1	Maximum	23.2	22.7	22.7	22.7	22.7	2
			Nominal	22.7	22.2	22.2	22.2	22.2	2
6		Subtest 2	Maximum	23.2	22.7	22.7	22.7	22.7	2
			Nominal	22.7	22.2	22.2	22.2	22.2	2
6		Subtest 3	Maximum	24.2	23.7	23.7	23.7	23.7	1
			Nominal	23.7	23.2	23.2	23.2	23.2	1
6		Subtest 4	Maximum	22.7	22.2	22.2	22.2	22.2	2.5
			Nominal	22.2	21.7	21.7	21.7	21.7	2.5
6		Subtest 5	Maximum	24.2	23.7	23.7	23.7	23.7	1
			Nominal	23.7	23.2	23.2	23.2	23.2	1
8	DC-HSDPA	Subtest 1	Maximum	25.2	24.7	24.7	24.7	24.7	0
			Nominal	24.7	24.2	24.2	24.2	24.2	0
8		Subtest 2	Maximum	25.2	24.7	24.7	24.7	24.7	0
			Nominal	24.7	24.2	24.2	24.2	24.2	0
8		Subtest 3	Maximum	24.7	24.2	24.2	24.2	24.2	0.5
			Nominal	24.2	23.7	23.7	23.7	23.7	0.5
8		Subtest 4	Maximum	24.7	24.2	24.2	24.2	24.2	0.5
			Nominal	24.2	23.7	23.7	23.7	23.7	0.5

Table 9.2.1 WCDMA Nominal and Maximum Output Power Spec

3GPP Release Version	Mode	3GPP 34.121 Subtest	Cellular Band (dBm)			AWS Band (dBm)			PCS Band (dBm)			MPR (dB)
			4132	4183	4233	1312	1412	1513	9262	9400	9538	
99	WCDMA	12.2 kbps RMC	24.66	24.59	24.54	24.36	24.35	24.39	24.27	24.22	24.28	-
99		12.2 kbps AMR	24.65	24.58	24.54	24.32	24.31	24.35	24.26	24.18	24.27	-
5	HSDPA	Subtest 1	24.63	24.55	24.57	24.32	24.31	24.35	24.25	24.20	24.22	0
5		Subtest 2	24.64	24.57	24.56	24.32	24.30	24.34	24.23	24.18	24.27	0
5		Subtest 3	24.18	24.13	24.12	23.83	23.81	23.87	23.79	23.70	23.79	0.5
5		Subtest 4	24.17	24.12	24.11	23.83	23.80	23.85	23.77	23.68	23.78	0.5
6	HSUPA	Subtest 1	22.62	22.65	22.59	22.35	22.33	22.37	22.28	22.24	22.32	2
6		Subtest 2	22.63	22.65	22.58	22.35	22.33	22.36	22.27	22.23	22.32	2
6		Subtest 3	23.58	23.62	23.52	23.35	23.33	23.37	23.28	23.22	23.28	1
6		Subtest 4	22.06	22.10	22.01	21.90	21.88	21.92	21.83	21.76	21.84	2.5
6		Subtest 5	23.60	23.67	23.57	23.32	23.32	23.34	23.25	23.21	23.27	1
8	DC-HSDPA	Subtest 1	24.52	24.48	24.49	24.26	24.24	24.30	24.21	24.17	24.12	0
8		Subtest 2	24.50	24.48	24.47	24.23	24.00	24.25	24.18	24.17	24.16	0
8		Subtest 3	24.12	24.06	24.10	23.78	23.75	23.81	23.70	23.75	23.71	0.5
8		Subtest 4	24.10	24.03	24.09	23.75	23.73	23.76	23.68	23.71	23.70	0.5

Table 9.2.2 WCDMA Conducted Power

3GPP Release Version	Mode			AWS Band (dBm)		PCS Band (dBm)		MPR (dB)
99	WCDMA	Voice	Maximum	23.7	23.7	23.7	23.7	-
			Nominal	23.2	23.2	23.2	23.2	-
5	HSDPA	Subtest 1	Maximum	23.7	23.7	23.7	23.7	0
			Nominal	23.2	23.2	23.2	23.2	0
5		Subtest 2	Maximum	23.7	23.7	23.7	23.7	0
			Nominal	23.2	23.2	23.2	23.2	0
5		Subtest 3	Maximum	23.2	23.2	23.2	23.2	0.5
			Nominal	22.7	22.7	22.7	22.7	0.5
5		Subtest 4	Maximum	23.2	23.2	23.2	23.2	0.5
			Nominal	22.7	22.7	22.7	22.7	0.5
6	HSUPA	Subtest 1	Maximum	21.7	21.7	21.7	21.7	2
			Nominal	21.2	21.2	21.2	21.2	2
6		Subtest 2	Maximum	21.7	21.7	21.7	21.7	2
			Nominal	21.2	21.2	21.2	21.2	2
6		Subtest 3	Maximum	22.7	22.7	22.7	22.7	1
			Nominal	22.2	22.2	22.2	22.2	1
6		Subtest 4	Maximum	21.2	21.2	21.2	21.2	2.5
			Nominal	20.7	20.7	20.7	20.7	2.5
6		Subtest 5	Maximum	22.7	22.7	22.7	22.7	1
			Nominal	22.2	22.2	22.2	22.2	1
8	DC-HSDPA	Subtest 1	Maximum	23.7	23.7	23.7	23.7	0
			Nominal	23.2	23.2	23.2	23.2	0
8		Subtest 2	Maximum	23.7	23.7	23.7	23.7	0
			Nominal	23.2	23.2	23.2	23.2	0
8		Subtest 3	Maximum	23.2	23.2	23.2	23.2	0.5
			Nominal	22.7	22.7	22.7	22.7	0.5
8		Subtest 4	Maximum	23.2	23.2	23.2	23.2	0.5
			Nominal	22.7	22.7	22.7	22.7	0.5

Table 9.2.3 Reduced WCDMA Nominal and Maximum Output Power Spec

3GPP Release Version	Mode	3GPP 34.121 Subtest	AWS Band (dBm)			PCS Band (dBm)			MPR (dB)
			1312	1412	1513	9262	9400	9538	
99	WCDMA	12.2 kbps RMC	23.28	23.30	23.32	23.21	23.18	23.22	-
99		12.2 kbps AMR	23.27	23.27	23.27	23.18	23.15	23.18	-
5	HSDPA	Subtest 1	23.26	23.27	23.28	23.18	23.13	23.17	0
5		Subtest 2	23.26	23.25	23.24	23.17	23.13	23.16	0
5		Subtest 3	22.76	22.81	22.80	22.70	22.67	22.73	0.5
5		Subtest 4	22.74	22.77	22.77	22.68	22.65	22.70	0.5
6	HSUPA	Subtest 1	21.29	21.30	21.31	21.20	21.16	21.21	2
6		Subtest 2	21.28	21.29	21.31	21.20	21.16	21.22	2
6		Subtest 3	22.29	22.30	22.31	22.22	22.16	22.22	1
6		Subtest 4	20.81	20.82	20.83	20.72	20.68	20.74	2.5
6		Subtest 5	22.27	22.28	22.29	22.19	22.13	22.20	1
8	DC-HSDPA	Subtest 1	23.12	23.17	23.13	23.11	23.18	23.12	0
8		Subtest 2	23.10	23.11	23.09	23.08	23.14	23.09	0
8		Subtest 3	22.75	22.79	22.75	22.68	22.65	22.64	0.5
8		Subtest 4	22.72	22.75	22.71	22.64	22.61	22.63	0.5

Table 9.2.4 Reduced WCDMA Conducted Power

WCDMA SAR was tested under RMC 12.2 kbps with HSPA Inactive per KDB Publication 941225 D01v03r01. HSPA SAR was not required since the average output power of the HSPA subtests was not more than 0.25 dB higher than the RMC level and SAR was less than 1.2 W/kg.

The manufacturer declares that the HSDPA, HSUPA and DC-HSDPA transmitter's power will not exceed the R99 maximum transmit power in devices based on MTK's HSPA chipset solutions.

DC-HSDPA considerations

- 3GPP Specification 34.121-1 Release 8 Ver 8.10.0 was used for DC-HSDPA guidance.
- H-Set 12 (QPSK) was confirmed to be used during DC-HSDPA measurements.
- The DUT supports UE category 24 for HSDPA.



Figure 9.2 Power Measurement Setup

9.3 LTE Nominal and Maximum Output Power Spec and Conducted Powers

Band & Mode		Modulated Average[dBm]
LTE Band 12	Maximum	25.2
	Nominal	24.7

Table 9.3.1.1 Nominal and Maximum Output Power Spec

1) LTE Band 12

LTE Band 12 Conducted Power– 10 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			23095 (707.5 MHz)		
			Conducted Power (dBm)		
QPSK	1	0	24.86	≤ 1	0
	1	25	25.01		
	1	49	24.88		
	25	0	24.05		1
	25	12	24.10		
	25	25	24.08		
16QAM	50	0	24.05	≤ 1	1
	1	0	24.05		
	1	25	24.16		
	1	49	24.06		2
	25	0	22.95		
	25	12	23.03		
64QAM	25	25	23.01	≤ 2	2
	50	0	23.01		
	1	0	23.01		
	1	25	23.15		3
	1	49	23.07		
	25	0	22.00		
	25	12	22.05	≤ 3	3
	25	25	22.04		
	50	0	22.03		
					3

Table 9.3.1.2 LTE Conducted Power

Note : LTE B12 can not contain three non-overlapping channels of 10 MHz bandwidth.

Per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

LTE Band 12 Conducted Power– 5 MHz Bandwidth								
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)	
			23035 (701.5 MHz)	23095 (707.5 MHz)	23155 (713.5 MHz)			
			Conducted Power (dBm)					
QPSK	1	0	24.69	24.72	24.81	≤ 1	0	
	1	12	24.80	24.88	24.94			
	1	24	24.74	24.82	24.87			
	12	0	23.95	23.96	24.00		1	
	12	6	23.98	24.01	24.08			
	12	13	23.96	23.98	24.03			
16QAM	25	0	23.95	23.97	24.02	≤ 1	1	
	1	0	23.86	23.88	23.99			
	1	12	23.99	24.06	24.09			
	1	24	23.90	23.95	24.06		2	
	12	0	22.86	22.88	22.94			
	12	6	22.91	22.97	23.05			
64QAM	12	13	22.88	22.96	23.00	≤ 2	2	
	25	0	22.89	22.95	23.01			
	1	0	22.82	22.88	22.96			≤ 2
	1	12	22.97	23.03	23.10			
	1	24	22.90	22.96	23.03			
	64QAM	12	0	21.93	21.96		22.04	≤ 3
12		6	21.99	22.04	22.15			
12		13	21.98	22.00	22.10			
15		0	21.94	21.96	22.05	3		

Table 9.3.1.3 LTE Conducted Power

LTE Band 12 Conducted Power– 3 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			23025 (700.5 MHz)	23095 (707.5 MHz)	23165 (714.5 MHz)		
			Conducted Power (dBm)				
QPSK	1	0	24.78	24.83	24.88	≤ 1	0
	1	7	24.84	24.89	24.92		
	1	14	24.80	24.85	24.91		
	8	0	23.90	23.93	23.95		1
	8	4	23.95	23.98	24.03		
	8	7	23.93	23.94	23.98		
	15	0	23.94	23.91	24.01		
16QAM	1	0	23.95	23.97	24.04	≤ 1	1
	1	7	24.00	24.02	24.11		
	1	14	23.98	23.99	24.09		
	8	0	22.92	22.97	23.06	≤ 2	2
	8	4	22.97	23.00	23.08		
	8	7	22.95	22.99	23.06		
	15	0	22.88	22.95	23.05		
64QAM	1	0	22.97	23.01	23.04	≤ 2	2
	1	7	23.02	23.05	23.10		
	1	14	22.99	23.02	23.09		
	8	0	21.95	21.98	22.08	≤ 3	3
	8	4	22.01	22.04	22.11		
	8	7	22.00	22.02	22.07		
	15	0	21.91	21.96	22.03		

Table 9.3.1.4 LTE Conducted Power

LTE Band 12 Conducted Power– 1.4 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			23017 (699.7 MHz)	23095 (707.5 MHz)	23173 (715.3 MHz)		
			Conducted Power (dBm)				
QPSK	1	0	24.73	24.85	24.91	≤ 1	0
	1	2	24.94	24.96	25.04		
	1	5	24.87	24.88	24.93		
	3	0	24.88	24.92	24.98		0
	3	2	24.93	24.95	25.03		
	3	3	24.91	24.94	25.01		
	6	0	24.02	24.04	24.10	1	
16QAM	1	0	23.88	23.91	23.93	≤ 1	1
	1	2	23.98	24.00	24.18		
	1	5	23.94	23.95	24.09		
	3	0	23.82	23.94	24.03		1
	3	2	23.95	23.96	24.06		
	3	3	23.87	23.95	24.04		
	6	0	23.05	23.10	23.16	≤ 2	2
64QAM	1	0	22.91	23.01	23.04	≤ 2	2
	1	2	23.13	23.15	23.18		
	1	5	22.97	23.05	23.08		
	3	0	23.01	23.05	23.06		2
	3	2	23.08	23.10	23.12		
	3	3	23.02	23.06	23.07		
	6	0	22.01	22.06	22.08	≤ 3	3

Table 9.3.1.5 LTE Conducted Power

Band & Mode		Modulated Average[dBm]
LTE Band 13	Maximum	25.2
	Nominal	24.7

Table 9.3.2.1 Nominal and Maximum Output Power Spec

2) LTE Band 13

LTE Band 13 Conducted Power– 10 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			23230 (782.0 MHz)		
			Conducted Power (dBm)		
QPSK	1	0	25.02	≤ 1	0
	1	25	25.10		
	1	49	24.95		
	25	0	24.14		1
	25	12	24.15		
	25	25	24.09		
16QAM	50	0	24.12	≤ 1	1
	1	0	24.18		1
	1	25	24.19		
	1	49	24.14		
	25	0	23.13		2
	25	12	23.14		
64QAM	25	25	23.07		
	50	0	23.10	≤ 2	2
	1	0	23.18		2
	1	25	23.19		
	1	49	23.10		
	25	0	22.13		3
64QAM	25	12	22.16		
	25	25	22.06		
	50	0	22.08	≤ 3	3

Table 9.3.2.2 LTE Conducted Power

LTE Band 13 Conducted Power– 5 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			23230 (782.0 MHz)		
			Conducted Power (dBm)		
QPSK	1	0	24.91	≤ 1	0
	1	12	25.01		
	1	24	24.87		
	12	0	24.05		1
	12	6	24.08		
	12	13	24.03		
16QAM	25	0	24.07	≤ 1	1
	1	0	24.07		1
	1	12	24.15		
	1	24	24.05		
	12	0	23.04		2
	12	6	23.11		
64QAM	12	13	23.02		
	25	0	23.06	≤ 2	2
	1	0	23.04		2
	1	12	23.17		
	1	24	23.02		
	12	0	22.05		3
64QAM	12	6	22.13		
	12	13	22.04		
	15	0	22.07	≤ 3	3

Table 9.3.2.3 LTE Conducted Power

Note : LTE B13 can not contain three non-overlapping channels of 5 MHz bandwidth.

Per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

Band & Mode		Modulated Average[dBm]
LTE Band 5	Maximum	25.2
	Nominal	24.7

Table 9.3.3.1 Nominal and Maximum Output Power Spec

3) LTE Band 5 (Cell)

LTE Band 5 (Cell) Conducted Power– 10 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			20525 (836.5 MHz)		
			Conducted Power (dBm)		
QPSK	1	0	24.87	≤ 1	0
	1	25	24.98		
	1	49	24.86		
	25	0	23.89		1
	25	12	24.00		
	25	25	23.85		
16QAM	50	0	23.92	≤ 1	1
	1	0	24.05		1
	1	25	24.15		
	1	49	24.01		
	25	0	23.01		2
	25	12	23.06		
64QAM	25	25	22.89		
	50	0	23.01	≤ 2	2
	1	0	23.05		2
	1	25	23.09		
	1	49	23.02		
	25	0	21.98		3
64QAM	25	12	22.09		
	25	25	21.88		
	50	0	22.06	≤ 3	3
	1	0	23.05		2
	1	25	23.09		
	1	49	23.02		
	25	0	21.98		3
	25	12	22.09		
	25	25	21.88		
	50	0	22.06		3

Table 9.3.3.2 LTE Conducted Power

Note : LTE B5(Cell) can not contain three non-overlapping channels of 10 MHz bandwidth.

Per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

LTE Band 5 (Cell) Conducted Power– 5 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			20425 (826.5 MHz)	20525 (836.5 MHz)	20625 (846.5 MHz)		
			Conducted Power (dBm)				
QPSK	1	0	24.82	24.79	24.78	≤ 1	0
	1	12	24.95	24.86	24.88		
	1	24	24.81	24.73	24.76		
	12	0	23.98	23.89	23.90		1
	12	6	24.02	23.92	23.98		
	12	13	23.95	23.83	23.84		
	25	0	23.98	23.86	23.91		
16QAM	1	0	23.93	23.87	23.96	≤ 1	1
	1	12	24.06	24.00	24.06		
	1	24	23.87	23.81	23.95		
	12	0	23.06	22.95	22.97	≤ 2	2
	12	6	23.11	22.99	23.05		
	12	13	23.05	22.85	22.90		
	25	0	23.07	22.95	22.96		
64QAM	1	0	22.94	22.90	22.97	≤ 2	2
	1	12	23.04	23.00	23.04		
	1	24	22.87	22.86	22.93		
	12	0	22.11	21.99	22.02	≤ 3	3
	12	6	22.18	22.07	22.10		
	12	13	22.09	21.92	21.95		
	25	0	22.08	21.96	22.00		

Table 9.3.3.3 LTE Conducted Power

LTE Band 5 (Cell) Conducted Power– 3 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			20415 (825.5 MHz)	20525 (836.5 MHz)	20635 (847.5 MHz)		
			Conducted Power (dBm)				
QPSK	1	0	24.93	24.82	24.86	≤ 1	0
	1	7	24.94	24.84	24.88		
	1	14	24.91	24.81	24.84		
	8	0	23.97	23.87	23.89		1
	8	4	24.02	23.90	23.94		
	8	7	23.96	23.86	23.88		
	15	0	23.96	23.87	23.92		
16QAM	1	0	24.04	24.01	24.03	≤ 1	1
	1	7	24.06	24.03	24.05		
	1	14	24.02	23.95	24.01		
	8	0	23.13	23.00	23.01	≤ 2	2
	8	4	23.17	23.03	23.03		
	8	7	23.12	22.97	22.98		
	15	0	23.05	22.94	22.97		
64QAM	1	0	23.00	23.00	22.98	≤ 2	2
	1	7	23.01	23.02	23.06		
	1	14	22.97	22.91	22.95		
	8	0	22.16	22.06	22.08	≤ 3	3
	8	4	22.19	22.09	22.13		
	8	7	22.15	22.05	22.06		
	15	0	22.10	22.02	22.05		

Table 9.3.3.4 LTE Conducted Power

LTE Band 5 (Cell) Conducted Power– 1.4 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			20407 (824.7 MHz)	20525 (836.5 MHz)	20643 (848.3 MHz)		
			Conducted Power (dBm)				
QPSK	1	0	24.87	24.78	24.81	≤ 1	0
	1	2	25.01	24.94	24.97		
	1	5	24.86	24.76	24.77		
	3	0	24.98	24.87	24.92		0
	3	2	25.00	24.93	24.93		
	3	3	24.97	24.84	24.89		
	6	0	24.01	23.93	23.94		
16QAM	1	0	24.01	23.96	24.00	≤ 1	1
	1	2	24.15	24.07	24.14		
	1	5	23.97	23.95	23.96		
	3	0	24.04	23.87	23.88		1
	3	2	24.07	23.95	23.98		
	3	3	24.03	23.86	23.86		
	6	0	23.17	23.06	23.07		
64QAM	1	0	23.05	22.95	23.00	≤ 2	2
	1	2	23.09	23.05	23.08	≤ 2	2
	1	5	23.00	22.93	22.94		
	3	0	23.05	23.00	23.03		
	3	2	23.06	23.03	23.05		2
	3	3	23.03	22.99	23.01		
	6	0	22.09	22.00	22.01		
					≤ 3		

Table 9.3.3.5 LTE Conducted Power

Band & Mode		Modulated Average[dBm]
LTE Band 66 (AWS)	Maximum	24.7
	Nominal	24.2

Table 9.3.4.1 Nominal and Maximum Output Power Spec

4) LTE Band 66 (AWS)

LTE Band 66 (AWS) Conducted Power– 20 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			132072 (1 720.0 MHz)	132322 (1 745.0 MHz)	132572 (1 770.0 MHz)		
			Conducted Power (dBm)				
QPSK	1	0	24.54	24.50	24.55	≤ 1	0
	1	50	24.65	24.60	24.68		
	1	99	24.50	24.43	24.51		
	50	0	23.58	23.54	23.63		1
	50	25	23.65	23.59	23.67		
	50	50	23.54	23.53	23.58		
	100	0	23.50	23.49	23.66		
16QAM	1	0	23.63	23.62	23.64	≤ 1	1
	1	50	23.68	23.66	23.69		
	1	99	23.60	23.58	23.62		
	50	0	22.55	22.54	22.63	≤ 2	2
	50	25	22.58	22.56	22.65		
	50	50	22.48	22.45	22.57		
	100	0	22.49	22.46	22.60		
64QAM	1	0	22.66	22.64	22.67	≤ 2	2
	1	50	22.68	22.67	22.69		
	1	99	22.59	22.58	22.61		
	50	0	21.50	21.49	21.64	≤ 3	3
	50	25	21.58	21.55	21.66		
	50	50	21.51	21.48	21.61		
	100	0	21.51	21.47	21.63		

Table 9.3.4.2 LTE Conducted Power

LTE Band 66 (AWS) Conducted Power– 15 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			132047 (1 717.5 MHz)	132322 (1 745.0 MHz)	132597 (1 772.5 MHz)		
			Conducted Power (dBm)				
QPSK	1	0	24.49	24.45	24.52	≤ 1	0
	1	36	24.50	24.49	24.56		
	1	74	24.41	24.39	24.42		
	36	0	23.61	23.55	23.65		1
	36	18	23.62	23.60	23.66		
	36	37	23.55	23.53	23.58		
	75	0	23.56	23.55	23.61		1
16QAM	1	0	23.64	23.61	23.68	≤ 1	1
	1	36	23.68	23.65	23.69		
	1	74	23.58	23.55	23.61		
	36	0	22.54	22.51	22.60	≤ 2	2
	36	18	22.56	22.53	22.63		
	36	37	22.53	22.51	22.56		
	75	0	22.54	22.49	22.57		
64QAM	1	0	22.61	22.60	22.67	≤ 2	2
	1	36	22.68	22.65	22.68		
	1	74	22.59	22.53	22.60		
	36	0	21.56	21.56	21.64	≤ 3	3
	36	18	21.59	21.58	21.66		
	36	37	21.55	21.50	21.60		
	75	0	21.55	21.51	21.59		

Table 9.3.4.3 LTE Conducted Power

LTE Band 66 (AWS) Conducted Power– 10 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			132022 (1 715.0 MHz)	132322 (1 745.0 MHz)	132622 (1 775.0 MHz)		
			Conducted Power (dBm)				
QPSK	1	0	24.51	24.45	24.53	≤ 1	0
	1	25	24.59	24.54	24.61		
	1	49	24.42	24.41	24.49		
	25	0	23.60	23.57	23.63		1
	25	12	23.63	23.58	23.65		
	25	25	23.58	23.52	23.60		
	50	0	23.57	23.57	23.64		1
16QAM	1	0	23.64	23.63	23.66	≤ 1	1
	1	25	23.68	23.68	23.69		
	1	49	23.59	23.56	23.61		
	25	0	22.56	22.53	22.61	≤ 2	2
	25	12	22.58	22.55	22.63		
	25	25	22.52	22.51	22.59		
	50	0	22.55	22.51	22.62		
64QAM	1	0	22.63	22.60	22.64	≤ 2	2
	1	25	22.68	22.67	22.69		
	1	49	22.54	22.53	22.59		
	25	0	21.55	21.53	21.63	≤ 3	3
	25	12	21.59	21.58	21.65		
	25	25	21.53	21.52	21.62		
	50	0	21.53	21.53	21.64		

Table 9.3.4.4 LTE Conducted Power

LTE Band 66 (AWS) Conducted Power~ 5 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			131997 (1 712.5 MHz)	132322 (1 745.0 MHz)	132647 (1 777.5 MHz)		
			Conducted Power (dBm)				
QPSK	1	0	24.45	24.41	24.48	≤ 1	0
	1	12	24.55	24.52	24.59		
	1	24	24.37	24.35	24.43		
	12	0	23.60	23.51	23.63		1
	12	6	23.64	23.57	23.65		
	12	13	23.56	23.47	23.57		
	25	0	23.58	23.53	23.62		1
16QAM	1	0	23.64	23.58	23.64	≤ 1	1
	1	12	23.67	23.65	23.68		
	1	24	23.55	23.50	23.61		
	12	0	22.51	22.50	22.59	≤ 2	2
	12	6	22.56	22.56	22.63		
	12	13	22.49	22.44	22.56		
	25	0	22.51	22.53	22.59		2
64QAM	1	0	22.62	22.53	22.64	≤ 2	2
	1	12	22.65	22.64	22.69		
	1	24	22.52	22.52	22.60		
	12	0	21.59	21.57	21.63	≤ 3	3
	12	6	21.63	21.62	21.64		
	12	13	21.57	21.56	21.62		
	25	0	21.60	21.55	21.61		3

Table 9.3.4.5 LTE Conducted Power

LTE Band 66 (AWS) Conducted Power– 3 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			131987 (1 711.5 MHz)	132322 (1 745.0 MHz)	132657 (1 778.5 MHz)		
			Conducted Power (dBm)				
QPSK	1	0	24.53	24.49	24.55	≤ 1	0
	1	7	24.56	24.52	24.57		
	1	14	24.52	24.48	24.54		
	8	0	23.61	23.51	23.63		1
	8	4	23.65	23.57	23.66		
	8	7	23.59	23.51	23.61		
	15	0	23.57	23.53	23.62		1
16QAM	1	0	23.65	23.61	23.66	≤ 1	1
	1	7	23.67	23.63	23.68		
	1	14	23.64	23.60	23.65		
	8	0	22.62	22.58	22.65	≤ 2	2
	8	4	22.63	22.60	22.66		
	8	7	22.58	22.52	22.60		
	15	0	22.62	22.55	22.64	2	
64QAM	1	0	22.66	22.66	22.67	≤ 2	2
	1	7	22.67	22.67	22.68		
	1	14	22.61	22.59	22.63		
	8	0	21.59	21.59	21.60	≤ 3	3
	8	4	21.64	21.64	21.65		
	8	7	21.57	21.56	21.58		
	15	0	21.58	21.56	21.59	3	

Table 9.3.4.6 LTE Conducted Power

LTE Band 66 (AWS) Conducted Power-- 1.4 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			131979 (1 710.7 MHz)	132322 (1 745.0 MHz)	132665 (1 779.3 MHz)		
			Conducted Power (dBm)				
QPSK	1	0	24.47	24.45	24.48	≤ 1	0
	1	2	24.65	24.59	24.66		
	1	5	24.41	24.38	24.44		
	3	0	24.61	24.54	24.63		0
	3	2	24.62	24.55	24.64		
	3	3	24.59	24.53	24.63		
	6	0	23.61	23.60	23.62		1
16QAM	1	0	23.62	23.60	23.65	≤ 1	1
	1	2	23.68	23.68	23.69		
	1	5	23.55	23.52	23.59		
	3	0	23.57	23.49	23.59		1
	3	2	23.62	23.53	23.63		
	3	3	23.57	23.49	23.59		
	6	0	22.61	22.60	22.66		≤ 2
64QAM	1	0	22.65	22.61	22.67	≤ 2	2
	1	2	22.67	22.62	22.68		
	1	5	22.50	22.51	22.60		
	3	0	22.61	22.61	22.62		2
	3	2	22.64	22.62	22.65		
	3	3	22.60	22.60	22.61		
	6	0	21.58	21.57	21.63		≤ 3

Table 9.3.4.7 LTE Conducted Power

Band & Mode		Modulated Average[dBm]
LTE Band 66 (AWS)	Maximum	23.7
	Nominal	23.2

Table 9.3.5.1 Nominal and Maximum Output Power Spec (Reduced Conducted Powers – Proximity Sensor Triggering Active)

5) LTE Band 66 (AWS)

LTE Band 66 (AWS) Conducted Power– 20 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			132072 (1 720.0 MHz)	132322 (1 745.0 MHz)	132572 (1 770.0 MHz)		
			Conducted Power (dBm)				
QPSK	1	0	23.18	23.15	23.33	≤ 1	0
	1	50	23.32	23.28	23.41		
	1	99	23.11	23.05	23.28		
	50	0	23.21	23.18	23.34		0
	50	25	23.28	23.27	23.36		
	50	50	23.18	23.15	23.24		
	100	0	23.16	23.13	23.34		0
16QAM	1	0	23.33	23.32	23.51	≤ 1	0
	1	50	23.47	23.45	23.59		
	1	99	23.27	23.21	23.38		
	50	0	22.23	22.19	22.34	≤ 2	1
	50	25	22.32	22.27	22.36		
	50	50	22.16	22.15	22.24		
	100	0	22.21	22.18	22.29		1
64QAM	1	0	22.29	22.25	22.43	≤ 2	1
	1	50	22.49	22.45	22.55		
	1	99	22.25	22.21	22.35		
	50	0	21.23	21.19	21.37	≤ 3	2
	50	25	21.34	21.29	21.38		
	50	50	21.22	21.15	21.28		
	100	0	21.23	21.21	21.31		2

Table 9.3.5.2 LTE Conducted Power

LTE Band 66 (AWS) Conducted Power– 15 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			132047 (1 717.5 MHz)	132322 (1 745.0 MHz)	132597 (1 772.5 MHz)		
			Conducted Power (dBm)				
QPSK	1	0	23.25	23.24	23.27	≤ 1	0
	1	36	23.28	23.25	23.34		
	1	74	23.19	23.15	23.21		
	36	0	23.15	23.12	23.30		0
	36	18	23.25	23.23	23.31		
	36	37	23.10	23.05	23.26		
	75	0	23.16	23.15	23.30		0
16QAM	1	0	23.35	23.33	23.45	≤ 1	0
	1	36	23.47	23.39	23.51		
	1	74	23.33	23.32	23.40		
	36	0	22.25	22.23	22.32	≤ 2	1
	36	18	22.28	22.25	22.37		
	36	37	22.20	22.18	22.26		
	75	0	22.25	22.23	22.33		1
64QAM	1	0	22.36	22.30	22.39	≤ 2	1
	1	36	22.39	22.37	22.54		
	1	74	22.18	22.13	22.25		
	36	0	21.31	21.26	21.37	≤ 3	2
	36	18	21.33	21.29	21.40		
	36	37	21.26	21.23	21.31		
	75	0	21.27	21.23	21.32		2

Table 9.3.5.3 LTE Conducted Power

LTE Band 66 (AWS) Conducted Power– 10 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			132022 (1 715.0 MHz)	132322 (1 745.0 MHz)	132622 (1 775.0 MHz)		
			Conducted Power (dBm)				
QPSK	1	0	23.25	23.18	23.28	≤ 1	0
	1	25	23.30	23.29	23.34		
	1	49	23.18	23.12	23.21		
	25	0	23.28	23.27	23.30		0
	25	12	23.29	23.28	23.33		
	25	25	23.27	23.26	23.29		
	50	0	23.28	23.25	23.31		0
16QAM	1	0	23.43	23.35	23.47	≤ 1	0
	1	25	23.49	23.44	23.53		
	1	49	23.35	23.31	23.40		
	25	0	22.27	22.25	22.33	≤ 2	1
	25	12	22.32	22.31	22.34		
	25	25	22.25	22.24	22.30		
	50	0	22.21	22.20	22.33		1
64QAM	1	0	22.35	22.32	22.47	≤ 2	1
	1	25	22.37	22.33	22.49		
	1	49	22.33	22.29	22.40		
	25	0	21.32	21.28	21.39	≤ 3	2
	25	12	21.35	21.30	21.41		
	25	25	21.31	21.25	21.35		
	50	0	21.28	21.21	21.35		2

Table 9.3.5.4 LTE Conducted Power

LTE Band 66 (AWS) Conducted Power- 5 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			131997 (1 712.5 MHz)	132322 (1 745.0 MHz)	132647 (1 777.5 MHz)		
			Conducted Power (dBm)				
QPSK	1	0	23.26	23.24	23.34	≤ 1	0
	1	12	23.32	23.26	23.36		
	1	24	23.24	23.15	23.31		
	12	0	23.23	23.09	23.24		0
	12	6	23.26	23.23	23.34		
	12	13	23.19	23.08	23.21		
	25	0	23.20	23.09	23.26		0
16QAM	1	0	23.35	23.29	23.40	≤ 1	0
	1	12	23.37	23.34	23.48		
	1	24	23.33	23.24	23.35		
	12	0	22.24	22.22	22.31	≤ 2	1
	12	6	22.32	22.25	22.37		
	12	13	22.23	22.15	22.30		
	25	0	22.20	22.19	22.34		1
64QAM	1	0	22.30	22.28	22.39	≤ 2	1
	1	12	22.37	22.36	22.46		
	1	24	22.26	22.23	22.35		
	12	0	21.25	21.24	21.38	≤ 3	2
	12	6	21.28	21.32	21.40		
	12	13	21.24	21.22	21.37		
	25	0	21.23	21.21	21.35		2

Table 9.3.5.5 LTE Conducted Power

LTE Band 66 (AWS) Conducted Power- 3 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			131987 (1 711.5 MHz)	132322 (1 745.0 MHz)	132657 (1 778.5 MHz)		
			Conducted Power (dBm)				
QPSK	1	0	23.22	23.18	23.30	≤ 1	0
	1	7	23.27	23.23	23.34		
	1	14	23.20	23.17	23.28		
	8	0	23.21	23.20	23.29		0
	8	4	23.23	23.22	23.32		
	8	7	23.22	23.15	23.31		
	15	0	23.18	23.15	23.29		0
16QAM	1	0	23.39	23.34	23.43	≤ 1	0
	1	7	23.44	23.38	23.45		
	1	14	23.35	23.31	23.41		
	8	0	22.25	22.22	22.37	≤ 2	1
	8	4	22.27	22.26	22.39		
	8	7	22.23	22.20	22.35		
	15	0	22.22	22.20	22.33		1
64QAM	1	0	22.37	22.34	22.48	≤ 2	1
	1	7	22.42	22.36	22.50		
	1	14	22.35	22.33	22.45		
	8	0	21.35	21.29	21.38	≤ 3	2
	8	4	21.37	21.31	21.43		
	8	7	21.29	21.28	21.39		
	15	0	21.26	21.24	21.35		2

Table 9.3.5.6 LTE Conducted Power

LTE Band 66 (AWS) Conducted Power- 1.4 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			131979 (1 710.7 MHz)	132322 (1 745.0 MHz)	132665 (1 779.3 MHz)		
			Conducted Power (dBm)				
QPSK	1	0	23.20	23.08	23.24	≤ 1	0
	1	2	23.26	23.24	23.37		
	1	5	23.10	23.06	23.22		
	3	0	23.23	23.19	23.34		0
	3	2	23.25	23.23	23.35		
	3	3	23.22	23.21	23.33		
	6	0	23.23	23.19	23.33		0
16QAM	1	0	23.33	23.27	23.43	≤ 1	0
	1	2	23.43	23.39	23.51		
	1	5	23.28	23.25	23.41		
	3	0	23.15	23.12	23.23		0
	3	2	23.20	23.13	23.28		
	3	3	23.10	23.09	23.23		
	6	0	22.26	22.25	22.41		≤ 2
64QAM	1	0	22.31	22.26	22.41	≤ 2	1
	1	2	22.43	22.40	22.53		
	1	5	22.28	22.25	22.38		
	3	0	22.35	22.31	22.47		1
	3	2	22.37	22.35	22.48		
	3	3	22.32	22.30	22.45		
	6	0	21.23	21.20	21.38		≤ 3

Table 9.3.5.7 LTE Conducted Power

Band & Mode		Modulated Average[dBm]
LTE Band 2(PCS)	Maximum	24.7
	Nominal	24.2

Table 9.3.6.1 Nominal and Maximum Output Power Spec

6) LTE Band 2 (PCS)

LTE Band 2 (PCS) Conducted Power– 20 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			18700 (1 860.0 MHz)	18900 (1 880.0 MHz)	19100 (1 900.0 MHz)		
			Conducted Power (dBm)				
QPSK	1	0	24.41	24.35	24.42	≤ 1	0
	1	50	24.50	24.45	24.54		
	1	99	24.39	24.27	24.40		
	50	0	23.45	23.36	23.48		1
	50	25	23.56	23.41	23.60		
	50	50	23.34	23.32	23.46		
	100	0	23.46	23.31	23.53		
16QAM	1	0	23.53	23.52	23.54	≤ 1	1
	1	50	23.63	23.61	23.64		
	1	99	23.51	23.40	23.52		
	50	0	22.46	22.32	22.48	≤ 2	2
	50	25	22.55	22.34	22.57		
	50	50	22.34	22.29	22.46		
	100	0	22.44	22.31	22.53		
64QAM	1	0	22.46	22.45	22.47	≤ 2	2
	1	50	22.62	22.60	22.64		
	1	99	22.32	22.28	22.36		
	50	0	21.45	21.33	21.48	≤ 3	3
	50	25	21.56	21.39	21.57		
	50	50	21.34	21.29	21.46		
	100	0	21.43	21.30	21.54		

Table 9.3.6.2 LTE Conducted Power

LTE Band 2 (PCS) Conducted Power– 15 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			18675 (1 857.5 MHz)	18900 (1 880.0 MHz)	19125 (1 902.5 MHz)		
			Conducted Power (dBm)				
QPSK	1	0	24.35	24.32	24.37	≤ 1	0
	1	36	24.43	24.36	24.45		
	1	74	24.32	24.26	24.36		
	36	0	23.41	23.39	23.43		1
	36	18	23.48	23.41	23.49		
	36	37	23.40	23.35	23.42		
	75	0	23.43	23.38	23.44		
16QAM	1	0	23.51	23.50	23.56	≤ 1	1
	1	36	23.61	23.55	23.64		
	1	74	23.47	23.45	23.55		
	36	0	22.38	22.35	22.45	≤ 2	2
	36	18	22.44	22.36	22.46		
	36	37	22.37	22.34	22.41		
	75	0	22.39	22.35	22.40		
64QAM	1	0	22.48	22.45	22.50	≤ 2	2
	1	36	22.57	22.55	22.58		
	1	74	22.45	22.39	22.48		
	36	0	21.44	21.39	21.45	≤ 3	3
	36	18	21.47	21.40	21.50		
	36	37	21.40	21.38	21.41		
	75	0	21.41	21.38	21.43		

Table 9.3.6.3 LTE Conducted Power

LTE Band 2 (PCS) Conducted Power– 10 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			18650 (1 855.0 MHz)	18900 (1 880.0 MHz)	19150 (1 905.0 MHz)		
			Conducted Power (dBm)				
QPSK	1	0	24.39	24.35	24.43	≤ 1	0
	1	25	24.48	24.47	24.49		
	1	49	24.35	24.32	24.42		
	25	0	23.44	23.40	23.45		1
	25	12	23.54	23.42	23.56		
	25	25	23.38	23.35	23.42		
	50	0	23.47	23.36	23.49		
16QAM	1	0	23.57	23.54	23.61	≤ 1	1
	1	25	23.65	23.65	23.66		
	1	49	23.53	23.51	23.60		
	25	0	22.39	22.37	22.49	≤ 2	2
	25	12	22.45	22.38	22.55		
	25	25	22.35	22.33	22.45		
	50	0	22.41	22.36	22.46		
64QAM	1	0	22.48	22.45	22.55	≤ 2	2
	1	25	22.59	22.57	22.66		
	1	49	22.45	22.43	22.54		
	25	0	21.46	21.42	21.54	≤ 3.	3
	25	12	21.51	21.43	21.56		
	25	25	21.41	21.38	21.46		
	50	0	21.44	21.41	21.50		

Table 9.3.6.4 LTE Conducted Power

LTE Band 2 (PCS) Conducted Power- 5 MHz Bandwidth								
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)	
			18625 (1 852.5 MHz)	18900 (1 880.0 MHz)	19175 (1 907.5 MHz)			
			Conducted Power (dBm)					
QPSK	1	0	24.31	24.27	24.33	≤ 1	0	
	1	12	24.42	24.41	24.48		1	
	1	24	24.23	24.22	24.32			
	12	0	23.41	23.34	23.42			
	12	6	23.43	23.42	23.46			
	12	13	23.33	23.32	23.37			
	25	0	23.36	23.32	23.37		1	
16QAM	1	0	23.45	23.43	23.47	≤ 1	1	
	1	12	23.59	23.58	23.63			
	1	24	23.40	23.39	23.44			
	16QAM	12	0	22.35	22.34	22.39	≤ 2	2
		12	6	22.36	22.35	22.41		
		12	13	22.33	22.32	22.35		
		25	0	22.34	22.31	22.35		
2						2		
64QAM	1	0	22.41	22.40	22.46	≤ 2	2	
	1	12	22.54	22.52	22.56			
	1	24	22.37	22.33	22.45			
	64QAM	12	0	21.43	21.42	21.49	≤ 3	3
		12	6	21.49	21.47	21.51		
		12	13	21.38	21.36	21.41		
		25	0	21.38	21.35	21.41		
3						3		

Table 9.3.6.5 LTE Conducted Power

LTE Band 2 (PCS) Conducted Power- 3 MHz Bandwidth								
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)	
			18615 (1 851.5 MHz)	18900 (1 880.0 MHz)	19185 (1 908.5 MHz)			
			Conducted Power (dBm)					
QPSK	1	0	24.37	24.32	24.41	≤ 1	0	
	1	7	24.39	24.35	24.43			
	1	14	24.35	24.31	24.40			
	8	0	23.39	23.36	23.40		1	
	8	4	23.43	23.39	23.44			
	8	7	23.36	23.35	23.38			
	15	0	23.36	23.35	23.39		1	
16QAM	1	0	23.54	23.51	23.60	≤ 1	1	
	1	7	23.58	23.54	23.62			
	1	14	23.51	23.49	23.59			
	8	0	22.41	22.40	22.44		≤ 2	2
	8	4	22.44	22.42	22.47			
	8	7	22.37	22.36	22.43			
	15	0	22.36	22.35	22.37			2
64QAM	1	0	22.49	22.47	22.54	≤ 2	2	
	1	7	22.53	22.51	22.55			
	1	14	22.46	22.43	22.53			
	8	0	21.45	21.44	21.46		≤ 3	3
	8	4	21.50	21.49	21.54			
	8	7	21.41	21.40	21.43			
	15	0	21.40	21.39	21.41			3

Table 9.3.6.6 LTE Conducted Power

LTE Band 2 (PCS) Conducted Power- 1.4 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			18607 (1 850.7 MHz)	18900 (1 880.0 MHz)	19193 (1 909.3 MHz)		
			Conducted Power (dBm)				
QPSK	1	0	24.30	24.29	24.33	≤ 1	0
	1	2	24.42	24.41	24.44		
	1	5	24.27	24.24	24.29		
	3	0	24.39	24.36	24.41		0
	3	2	24.40	24.39	24.43		
	3	3	24.38	24.35	24.40		
	6	0	23.37	23.37	23.42		1
16QAM	1	0	23.44	23.42	23.46	≤ 1	1
	1	2	23.56	23.56	23.57		
	1	5	23.44	23.41	23.45		
	3	0	23.34	23.33	23.35		1
	3	2	23.38	23.35	23.41		
	3	3	23.33	23.29	23.35		
	6	0	22.42	22.40	22.47		≤ 2
64QAM	1	0	22.46	22.41	22.48	≤ 2	2
	1	2	22.54	22.52	22.58		
	1	5	22.42	22.40	22.45		
	3	0	22.48	22.47	22.49		2
	3	2	22.50	22.50	22.51		
	3	3	22.43	22.45	22.46		
	6	0	21.42	21.41	21.44		≤ 3

Table 9.3.6.7 LTE Conducted Power

Band & Mode		Modulated Average[dBm]
LTE Band 2(PCS)	Maximum	23.7
	Nominal	23.2

Table 9.3.7.1 Nominal and Maximum Output Power Spec (Reduced Conducted Powers – Proximity Sensor Triggering Active)

7) LTE Band 2 (PCS)

LTE Band 2 (PCS) Conducted Power– 20 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			18700 (1 860.0 MHz)	18900 (1 880.0 MHz)	19100 (1 900.0 MHz)		
			Conducted Power (dBm)				
QPSK	1	0	23.33	23.32	23.43	≤ 1	0
	1	50	23.47	23.45	23.63		
	1	99	23.24	23.21	23.39		
	50	0	23.33	23.25	23.36		0
	50	25	23.39	23.30	23.47		
	50	50	23.31	23.22	23.35		
	100	0	23.33	23.25	23.45		0
16QAM	1	0	23.46	23.45	23.51	≤ 1	0
	1	50	23.65	23.63	23.69		
	1	99	23.38	23.36	23.49		
	50	0	22.34	22.22	22.44	≤ 2	1
	50	25	22.44	22.29	22.51		
	50	50	22.27	22.23	22.38		
	100	0	22.34	22.20	22.45		
64QAM	1	0	22.36	22.35	22.37	≤ 2	1
	1	50	22.55	22.43	22.61		
	1	99	22.29	22.26	22.32		
	50	0	21.35	21.25	21.43	≤ 3	2
	50	25	21.45	21.31	21.54		
	50	50	21.29	21.24	21.39		
	100	0	21.38	21.24	21.49		

Table 9.3.7.2 LTE Conducted Power

LTE Band 2 (PCS) Conducted Power– 15 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			18675 (1 857.5 MHz)	18900 (1 880.0 MHz)	19125 (1 902.5 MHz)		
			Conducted Power (dBm)				
QPSK	1	0	23.37	23.33	23.40	≤ 1	0
	1	36	23.41	23.35	23.44		
	1	74	23.33	23.26	23.39		
	36	0	23.27	23.25	23.28		0
	36	18	23.31	23.27	23.33		
	36	37	23.22	23.15	23.24		
	75	0	23.29	23.26	23.25		
16QAM	1	0	23.50	23.48	23.51	≤ 1	0
	1	36	23.52	23.51	23.62		
	1	74	23.43	23.39	23.48		
	36	0	22.31	22.26	22.37	≤ 2	1
	36	18	22.33	22.27	22.39		
	36	37	22.26	22.23	22.36		
	75	0	22.30	22.26	22.38		
64QAM	1	0	22.42	22.40	22.45	≤ 2	1
	1	36	22.45	22.43	22.55		
	1	74	22.39	22.27	22.43		
	36	0	21.34	21.27	21.45	≤ 3	2
	36	18	21.37	21.33	21.46		
	36	37	21.33	21.32	21.42		
	75	0	21.31	21.26	21.41		

Table 9.3.7.3 LTE Conducted Power

LTE Band 2 (PCS) Conducted Power– 10 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			18650 (1 855.0 MHz)	18900 (1 880.0 MHz)	19150 (1 905.0 MHz)		
			Conducted Power (dBm)				
QPSK	1	0	23.35	23.33	23.38	≤ 1	0
	1	25	23.42	23.41	23.51		
	1	49	23.33	23.32	23.34		
	25	0	23.38	23.35	23.45		0
	25	12	23.39	23.36	23.46		
	25	25	23.33	23.29	23.41		
	50	0	23.37	23.32	23.44		
16QAM	1	0	23.53	23.50	23.56	≤ 1	0
	1	25	23.59	23.53	23.68		
	1	49	23.49	23.47	23.52		
	25	0	22.38	22.32	22.45	≤ 2	1
	25	12	22.39	22.33	22.46		
	25	25	22.30	22.29	22.42		
	50	0	22.31	22.29	22.44		
64QAM	1	0	22.41	22.39	22.49	≤ 2	1
	1	25	22.54	22.49	22.61		
	1	49	22.40	22.32	22.45		
	25	0	21.37	21.34	21.43	≤ 3.	2
	25	12	21.38	21.36	21.48		
	25	25	21.33	21.30	21.39		
	50	0	21.34	21.33	21.44		

Table 9.3.7.4 LTE Conducted Power

LTE Band 2 (PCS) Conducted Power- 5 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			18625 (1 852.5 MHz)	18900 (1 880.0 MHz)	19175 (1 907.5 MHz)		
			Conducted Power (dBm)				
QPSK	1	0	23.25	23.21	23.38	≤ 1	0
	1	12	23.36	23.35	23.42		
	1	24	23.21	23.18	23.37		
	12	0	23.30	23.28	23.31		0
	12	6	23.33	23.31	23.34		
	12	13	23.27	23.25	23.29		
	25	0	23.32	23.30	23.33		
16QAM	1	0	23.42	23.40	23.52	≤ 1	0
	1	12	23.52	23.45	23.57		
	1	24	23.39	23.36	23.45		
	12	0	22.25	22.24	22.36	≤ 2	1
	12	6	22.30	22.29	22.38		
	12	13	22.21	22.18	22.30		
	25	0	22.27	22.26	22.33		
64QAM	1	0	22.34	22.31	22.43	≤ 2	1
	1	12	22.44	22.43	22.48		
	1	24	22.28	22.25	22.37		
	12	0	21.34	21.31	21.41	≤ 3	2
	12	6	21.36	21.35	21.43		
	12	13	21.28	21.26	21.35		
	25	0	21.28	21.27	21.36		

Table 9.3.7.5 LTE Conducted Power

LTE Band 2 (PCS) Conducted Power- 3 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			18615 (1 851.5 MHz)	18900 (1 880.0 MHz)	19185 (1 908.5 MHz)		
			Conducted Power (dBm)				
QPSK	1	0	23.32	23.30	23.36	≤ 1	0
	1	7	23.34	23.32	23.39		
	1	14	23.30	23.25	23.35		
	8	0	23.30	23.29	23.34		0
	8	4	23.33	23.30	23.37		
	8	7	23.28	23.25	23.33		
	15	0	23.31	23.28	23.35		
16QAM	1	0	23.49	23.46	23.54	≤ 1	0
	1	7	23.51	23.49	23.55		
	1	14	23.48	23.43	23.53		
	8	0	22.31	22.30	22.40	≤ 2	1
	8	4	22.35	22.33	22.41		
	8	7	22.30	22.29	22.38		
	15	0	22.26	22.25	22.33		
64QAM	1	0	22.39	22.37	22.48	≤ 2	1
	1	7	22.44	22.43	22.52		
	1	14	22.38	22.30	22.43		
	8	0	21.34	21.33	21.42	≤ 3	2
	8	4	21.37	21.36	21.44		
	8	7	21.32	21.30	21.40		
	15	0	21.29	21.27	21.36		

Table 9.3.7.6 LTE Conducted Power

LTE Band 2 (PCS) Conducted Power- 1.4 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)		
			18607 (1 850.7 MHz)	18900 (1 880.0 MHz)	19193 (1 909.3 MHz)				
			Conducted Power (dBm)						
QPSK	1	0	23.28	23.23	23.33	≤ 1	0		
	1	2	23.38	23.37	23.47				
	1	5	23.27	23.21	23.31				
	3	0	23.32	23.30	23.41		0		
	3	2	23.35	23.34	23.43				
	3	3	23.31	23.29	23.40				
	6	0	23.33	23.32	23.42				
	6	0	23.33	23.32	23.42				
16QAM	1	0	23.43	23.41	23.51	≤ 1	0		
	1	2	23.57	23.51	23.59				
	1	5	23.42	23.40	23.49				
	3	0	23.29	23.27	23.34		0		
	3	2	23.33	23.31	23.35				
	3	3	23.26	23.25	23.33				
	6	0	22.38	22.37	22.43			≤ 2	1
	6	0	22.38	22.37	22.43				
64QAM	1	0	22.36	22.34	22.46	≤ 2	1		
	1	2	22.49	22.45	22.50				
	1	5	22.33	22.31	22.45				
	3	0	22.41	22.38	22.47		1		
	3	2	22.42	22.40	22.49				
	3	3	22.36	22.35	22.44				
	6	0	21.33	21.31	21.40			≤ 3	2
	6	0	21.33	21.31	21.40			≤ 3	2

Table 9.3.7.7 LTE Conducted Power

LTE Band 7	Band & Mode	Modulated Average(dBm)
	Maximum Nominal	24.2 23.7

Table 9.3.8.1 Nominal and Maximum Output Power Spec

8) LTE Band 7

LTE Band 7 Conducted Power– 20 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			20850 (2 510.0 MHz)	21100 (2 535.0 MHz)	21350 (2 560.0 MHz)		
			Conducted Power (dBm)				
QPSK	1	0	23.57	23.63	23.60	≤ 1	0
	1	50	23.61	23.67	23.64		
	1	99	23.56	23.62	23.57		
	50	0	22.60	22.63	22.61		1
	50	25	22.65	22.71	22.66		
	50	50	22.54	22.61	22.59		
	100	0	22.56	22.66	22.63		1
16QAM	1	0	22.73	22.75	22.74	≤ 1	1
	1	50	22.79	22.83	22.81		
	1	99	22.59	22.64	22.63		
	50	0	21.55	21.61	21.57	≤ 2	2
	50	25	21.58	21.68	21.67		
	50	50	21.50	21.58	21.56		
	100	0	21.51	21.58	21.60		2
64QAM	1	0	21.59	21.66	21.65	≤ 2	2
	1	50	21.76	21.81	21.78		
	1	99	21.51	21.56	21.53		
	50	0	20.61	20.66	20.62	≤ 3	3
	50	25	20.62	20.69	20.68		
	50	50	20.54	20.62	20.60		
	100	0	20.55	20.65	20.61		

Table 9.3.8.2 LTE Conducted Power

LTE Band 7 Conducted Power– 15 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			20825 (2 507.5 MHz)	21100 (2 535.0 MHz)	21375 (2 562.5 MHz)		
			Conducted Power (dBm)				
QPSK	1	0	23.55	23.59	23.57	≤ 1	0
	1	36	23.58	23.63	23.59		
	1	74	23.53	23.57	23.56		
	36	0	22.60	22.64	22.63		1
	36	18	22.62	22.65	22.64		
	36	37	22.52	22.61	22.60		
	75	0	22.60	22.62	22.61		
16QAM	1	0	22.68	22.72	22.71	≤ 1	1
	1	36	22.77	22.82	22.78		
	1	74	22.59	22.69	22.68		
	36	0	21.52	21.59	21.58	≤ 2	2
	36	18	21.53	21.68	21.65		
	36	37	21.51	21.58	21.55		
	75	0	21.52	21.60	21.54		2
64QAM	1	0	21.59	21.69	21.65	≤ 2	2
	1	36	21.63	21.78	21.74		
	1	74	21.51	21.65	21.62		
	36	0	20.58	20.66	20.65	≤ 3	3
	36	18	20.60	20.68	20.67		
	36	37	20.55	20.66	20.61		
	75	0	20.58	20.65	20.64		

Table 9.3.8.3 LTE Conducted Power

LTE Band 7 Conducted Power– 10 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			20800 (2 505.0 MHz)	21100 (2 535.0 MHz)	21400 (2 565.0 MHz)		
			Conducted Power (dBm)				
QPSK	1	0	23.53	23.56	23.55	≤ 1	0
	1	25	23.55	23.60	23.58		
	1	49	23.51	23.53	23.52		
	25	0	22.58	22.65	22.64		1
	25	12	22.59	22.67	22.65		
	25	25	22.52	22.63	22.58		
	50	0	22.58	22.65	22.63	1	
16QAM	1	0	22.71	22.72	22.71	≤ 1	1
	1	25	22.73	22.78	22.75		
	1	49	22.65	22.70	22.69		
	25	0	21.54	21.63	21.62	≤ 2	2
	25	12	21.55	21.65	21.63		
	25	25	21.52	21.60	21.59		
	50	0	21.53	21.60	21.59		2
64QAM	1	0	21.59	21.71	21.65	≤ 2	2
	1	25	21.72	21.79	21.77		
	1	49	21.57	21.66	21.63		
	25	0	20.60	20.69	20.65	≤ 3	3
	25	12	20.61	20.71	20.70		
	25	25	20.57	20.68	20.64		
	50	0	20.59	20.70	20.63		3

Table 9.3.8.4 LTE Conducted Power

LTE Band 7 Conducted Power– 5 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			20775 (2 502.5 MHz)	21100 (2 535.0 MHz)	21425 (2 567.5 MHz)		
			Conducted Power (dBm)				
QPSK	1	0	23.52	23.55	23.52	≤ 1	0
	1	12	23.53	23.58	23.55		
	1	24	23.51	23.52	23.51		
	12	0	22.51	22.58	22.54		1
	12	6	22.55	22.59	22.56		
	12	13	22.50	22.55	22.53		
	25	0	22.51	22.54	22.53		
16QAM	1	0	22.58	22.65	22.63	≤ 1	1
	1	12	22.67	22.75	22.74		
	1	24	22.56	22.64	22.61		
	12	0	21.55	21.63	21.58	≤ 2	2
	12	6	21.58	21.64	21.60		
	12	13	21.53	21.56	21.54		
	25	0	21.51	21.55	21.54		
64QAM	1	0	21.53	21.67	21.61	≤ 2	2
	1	12	21.62	21.73	21.72		
	1	24	21.51	21.65	21.59		
	12	0	20.62	20.71	20.65	≤ 3	3
	12	6	20.67	20.72	20.68		
	12	13	20.61	20.63	20.62		
	25	0	20.53	20.65	20.61		

Table 9.3.8.5 LTE Conducted Power

Band & Mode		Modulated Average(dBm)
LTE Band 7	Maximum	23.2
	Nominal	22.7

Table 9.3.9.1 Nominal and Maximum Output Power Spec (Reduced Conducted Powers – Proximity Sensor Triggering Active)

9) LTE Band 7

LTE Band 7 Conducted Power– 20 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			20850 (2 510.0 MHz)	21300 (2 535.0 MHz)	21350 (2 560.0 MHz)		
			Conducted Power (dBm)				
QPSK	1	0	22.55	22.58	22.56	≤ 1	0
	1	50	22.62	22.74	22.70		
	1	99	22.51	22.57	22.53		
	50	0	22.55	22.67	22.65		0
	50	25	22.61	22.71	22.69		
	50	50	22.51	22.61	22.55		
	100	0	22.59	22.69	22.68		0
16QAM	1	0	22.66	22.70	22.68	≤ 1	0
	1	50	22.75	22.91	22.88		
	1	99	22.56	22.63	22.59		
	50	0	21.55	21.63	21.59		1
	50	25	21.56	21.67	21.65		
	50	50	21.54	21.57	21.55		
	100	0	21.51	21.64	21.63		1
64QAM	1	0	21.60	21.67	21.66	≤ 1	1
	1	50	21.72	21.84	21.83		
	1	99	21.51	21.57	21.52		
	50	0	20.57	20.63	20.65	≤ 2	2
	50	25	20.58	20.69	20.68		
	50	50	20.54	20.59	20.57		
	100	0	20.52	20.67	20.64		

Table 9.3.9.2 LTE Conducted Power

LTE Band 7 Conducted Power– 15 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			20825 (2 507.5 MHz)	21100 (2 535.0 MHz)	21375 (2 562.5 MHz)		
			Conducted Power (dBm)				
QPSK	1	0	22.53	22.58	22.55	≤ 1	0
	1	36	22.61	22.73	22.68		
	1	74	22.51	22.55	22.52		
	36	0	22.55	22.67	22.65		0
	36	18	22.60	22.68	22.67		
	36	37	22.53	22.66	22.61		
	75	0	22.59	22.65	22.64		
16QAM	1	0	22.60	22.73	22.71	≤ 1	0
	1	36	22.71	22.81	22.79		
	1	74	22.59	22.72	22.67		
	36	0	21.54	21.61	21.58		1
	36	18	21.55	21.64	21.62		
	36	37	21.51	21.59	21.54		
	75	0	21.50	21.55	21.53		
64QAM	1	0	21.59	21.65	21.61	≤ 1	1
	1	36	21.60	21.77	21.69		
	1	74	21.58	21.63	21.60		
	36	0	20.53	20.69	20.62		≤ 2
	36	18	20.56	20.71	20.65		
	36	37	20.52	20.65	20.60		
	75	0	20.50	20.65	20.60		

Table 9.3.9.3 LTE Conducted Power

LTE Band 7 Conducted Power– 10 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			20800 (2 505.0 MHz)	21100 (2 535.0 MHz)	21400 (2 565.0 MHz)		
			Conducted Power (dBm)				
QPSK	1	0	22.55	22.61	22.57	≤ 1	0
	1	25	22.61	22.74	22.71		
	1	49	22.54	22.56	22.55		
	25	0	22.58	22.68	22.61		0
	25	12	22.59	22.70	22.63		
	25	25	22.57	22.65	22.59		
	50	0	22.55	22.65	22.62		0
16QAM	1	0	22.68	22.76	22.75	≤ 1	0
	1	25	22.70	22.87	22.85		
	1	49	22.65	22.75	22.74		
	25	0	21.58	21.65	21.63		1
	25	12	21.60	21.67	21.65		
	25	25	21.55	21.63	21.58		
	50	0	21.51	21.58	21.56		1
64QAM	1	0	21.55	21.67	21.63	≤ 1	1
	1	25	21.59	21.81	21.77		
	1	49	21.54	21.65	21.60		
	25	0	20.51	20.68	20.63	≤ 2	2
	25	12	20.56	20.69	20.65		
	25	25	20.50	20.66	20.61		
	50	0	20.50	20.63	20.58		

Table 9.3.9.4 LTE Conducted Power

LTE Band 7 Conducted Power– 5 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			20775 (2 502.5 MHz)	21100 (2 535.0 MHz)	21425 (2 567.5 MHz)		
			Conducted Power (dBm)				
QPSK	1	0	22.51	22.62	22.57	≤ 1	0
	1	12	22.60	22.69	22.64		
	1	24	22.50	22.58	22.54		
	12	0	22.58	22.64	22.62		0
	12	6	22.59	22.65	22.63		
	12	13	22.56	22.61	22.59		
16QAM	25	0	22.55	22.63	22.62	≤ 1	0
	1	0	22.58	22.68	22.64		0
	1	12	22.65	22.83	22.71		
	1	24	22.51	22.65	22.63		
	12	0	21.53	21.59	21.58		
	12	6	21.54	21.65	21.63		
64QAM	12	13	21.52	21.56	21.53	≤ 2	1
	25	0	21.50	21.60	21.57		1
	1	0	21.54	21.64	21.60		
	1	12	21.57	21.79	21.76		
	1	24	21.51	21.61	21.59		2
	12	0	20.54	20.68	20.66		
12	6	20.55	20.73	20.70	2		
12	13	20.51	20.61	20.60			
25	0	20.51	20.61	20.59			

Table 9.3.9.5 LTE Conducted Power

9.4 WLAN Nominal and Maximum Output Power Spec and Conducted Powers

Band (GHz)	Mode	Ch	Modulated Average[dBm]	
			Maximum	Nominal
2.4	802.11b	1~11	17.0	16.0
		12~13	6.0	5.0
	802.11g (6~18Mbps)	1	15.0	14.0
		2~10	16.0	15.0
		11	14.0	13.0
		12~13	6.0	5.0
	802.11g (24~54Mbps)	1	16.0	15.0
		2~10	16.0	15.0
		11	14.0	13.0
		12~13	6.0	5.0
	802.11n (MCS0~MCS4)	1	14.0	13.0
		2~10	15.0	14.0
		11	13.0	12.0
		12~13	6.0	5.0
	802.11n (MCS5~MCS7)	1	15.0	14.0
		2~10	15.0	14.0
		11	13.0	12.0
		12~13	6.0	5.0

Table 9.4.1 Nominal and Maximum Output Power Spec

Mode	Freq.	Channel	IEEE 802.11 (2.4 GHz) Conducted Power	
	(MHz)		[dBm]	
802.11b	2 412	1	16.66	
	2 437	6	16.87	
	2 462	11	16.74	
	2 467	12	5.80	
	2 472	13	5.70	
802.11g	2 412	1	14.61	
	2 437	6	15.83	
	2 462	11	13.80	
	2 467	12	5.75	
	2 472	13	5.53	
802.11n (HT-20)	2 412	1	13.53	
	2 437	6	14.88	
	2 462	11	12.74	
	2 467	12	5.67	
	2 472	13	5.50	

Table 9.4.2 IEEE 802.11 Average RF Power

Band (GHz)	Mode	Ch	Modulated Average[dBm]	
			Maximum	Nominal
5 (UNII)	802.11a 6~18Mbps	36-64	15.0	14.0
		100-112	16.0	15.0
		116-165	15.0	14.0
	802.11a 24~54Mbps	36-64	13.0	12.0
		100-112	14.0	13.0
		116-165	13.0	12.0
	802.11n/ac (20MHz) MCS0~4	36-64	15.0	14.0
		100-112	16.0	15.0
		116-165	15.0	14.0
	802.11n/ac (20MHz) MCS5~7	36-64	13.0	12.0
		100-112	14.0	13.0
		116-165	13.0	12.0
	802.11n/ac (40MHz) MCS0~4	38, 102	14.0	13.0
		46-62	15.0	14.0
		110	16.0	15.0
		118-159	15.0	14.0
	802.11n/ac (40MHz) MCS5~9	38-62	13.0	12.0
		102-110	14.0	13.0
		118-159	13.0	12.0
	802.11ac (80MHz) MCS0~9	42-58	13.0	12.0
		106	14.0	13.0
		122-155	13.0	12.0

Table 9.4.3 Nominal and Maximum Output Power Spec

Mode	Freq.	Channel	IEEE 802.11a (5 GHz) Conducted Power	
	(MHz)		[dBm]	
802.11a	5 180	36	14.46	
	5 200	40	14.52	
	5 220	44	14.61	
	5 240	48	14.76	
	5 260	52	14.87	
	5 280	56	14.97	
	5 300	60	14.98	
	5 320	64	14.97	
	5 500	100	15.99	
	5 600	120	14.97	
	5 660	132	14.98	
	5 720	144	14.87	
	5 745	149	14.93	
	5 785	157	14.83	
	5 825	165	14.59	

Table 9.4.4 IEEE 802.11a Average RF Power

Mode	Freq. (MHz)	Channel	IEEE 802.11n HT20 (5 GHz) Conducted Power
			[dBm]
802.11n (HT-20)	5 180	36	14.33
	5 200	40	14.41
	5 220	44	14.51
	5 240	48	14.63
	5 260	52	14.76
	5 280	56	14.88
	5 300	60	14.97
	5 320	64	14.98
	5 500	100	15.96
	5 600	120	14.95
	5 660	132	14.96
	5 720	144	14.83
	5 745	149	14.83
	5 785	157	14.76
	5 825	165	14.54

Table 9.4.5 IEEE 802.11n HT20 Average RF Power

Mode	Freq. (MHz)	Channel	IEEE 802.11ac VHT20 (5 GHz) Conducted Power
			[dBm]
802.11ac (VHT-20)	5 180	36	14.34
	5 200	40	14.42
	5 220	44	14.49
	5 240	48	14.66
	5 260	52	14.81
	5 280	56	14.90
	5 300	60	14.98
	5 320	64	14.95
	5 500	100	15.93
	5 600	120	14.97
	5 660	132	14.96
	5 720	144	14.89
	5 745	149	14.82
	5 785	157	14.73
	5 825	165	14.56

Table 9.4.6 IEEE 802.11ac VHT20 Average RF Power

Mode	Freq. (MHz)	Channel	IEEE 802.11n HT40 (5 GHz) Conducted Power
			[dBm]
802.11n (HT-40)	5 190	38	13.52
	5 230	46	14.78
	5 270	54	14.92
	5 310	62	14.97
	5 510	102	13.97
	5 550	110	15.98
	5 590	118	14.99
	5 670	134	14.98
	5 710	142	14.97
	5 755	151	14.92
	5 795	159	14.91

Table 9.4.7 IEEE 802.11n HT40 Average RF Power

Mode	Freq. (MHz)	Channel	IEEE 802.11ac VHT40 (5 GHz) Conducted Power
			[dBm]
802.11ac (VHT-40)	5 190	38	13.57
	5 230	46	14.79
	5 270	54	14.98
	5 310	62	14.97
	5 510	102	13.96
	5 550	110	15.96
	5 590	118	14.93
	5 670	134	14.97
	5 710	142	14.98
	5 755	151	14.98
	5 795	159	14.90

Table 9.4.8 IEEE 802.11ac VHT40 Average RF Power

Mode	Freq. (MHz)	Channel	IEEE 802.11ac VHT80 (5 GHz) Conducted Power
			[dBm]
802.11ac (VHT-80)	5 210	42	12.16
	5 290	58	12.67
	5 530	106	13.59
	5 610	122	12.78
	5 690	138	12.58
	5 775	155	12.50

Table 9.4.9 IEEE 802.11ac VHT80 Average RF Power

Justification for reduced test configurations for WIFI channels per KDB Publication 248227 D01v02r02:

- Power measurements were performed for the transmission mode configuration with the highest maximum output power specified for production units.
- For transmission modes with the same maximum output power specification, powers were measured for the largest channel bandwidth, lowest order modulation and lowest data rate.
- For transmission modes with identical maximum specified output power, channel bandwidth, modulation and data rates, power measurements were required for all identical configurations.
- For each transmission mode configuration, powers were measured for the highest and lowest channels; and at the mid-band channel(s) when there were at least 3 channels supported. For configurations with multiple mid-band channels, due to an even number of channels, both channels were measured.
- Output Power and SAR is not required for 802.11 g/n HT20/ac VHT20 channels when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjust SAR is ≤ 1.2 W/kg.
- The underlined data rate and channel above were tested for SAR.

The average output powers of this device were tested by below configuration.




Figure 9.4 Power Measurement Setup

9.5 Bluetooth Conducted Powers

Burst Modulated Average[dBm]		
Bluetooth 1 Mbps	Maximum	10.0
	Nominal	9.0
Bluetooth 2 Mbps	Maximum	10.0
	Nominal	9.0
Bluetooth 3 Mbps	Maximum	10.0
	Nominal	9.0
Bluetooth LE	Maximum	6.5
	Nominal	5.5

Table 9.5.1 Nominal and Maximum Output Power Spec (Burst)

Frame Modulated Average[dBm]		
Bluetooth 1 Mbps	Maximum	8.85
	Nominal	7.85
Bluetooth 2 Mbps	Maximum	8.85
	Nominal	7.85
Bluetooth 3 Mbps	Maximum	8.85
	Nominal	7.85
Bluetooth (LE / 1Mbps)	Maximum	5.80
	Nominal	4.80
Bluetooth (LE / 2Mbps)	Maximum	4.06
	Nominal	3.06

Table 9.5.2 Nominal and Maximum Output Power Spec (Frame)

Channel	Frequency	Burst AVG Output Power (1Mbps)	Frame AVG Output Power (1Mbps)	Burst AVG Output Power (2Mbps)	Frame AVG Output Power (2Mbps)	Burst AVG Output Power (3Mbps)	Frame AVG Output Power (3Mbps)
	(MHz)	(dBm)	(dBm)	(dBm)	(dBm)	(dBm)	(dBm)
Low	2 402	8.45	7.30	8.57	7.42	8.56	7.41
Mid	2 441	9.84	8.69	9.75	8.60	9.76	8.61
High	2 480	9.00	7.85	9.07	7.92	9.06	7.91

Table 9.5.3 Bluetooth Burst and Frame Average RF Power

Channel	Frequency	Burst AVG Output Power(LE / 1Mbps)	Frame AVG Output Power(LE / 1Mbps)	Burst AVG Output Power(LE / 2Mbps)	Frame AVG Output Power(LE / 2Mbps)
	(MHz)	(dBm)	(dBm)	(dBm)	(dBm)
Low	2 402	4.84	4.14	4.87	2.43
Mid	2 440	6.05	5.35	6.07	3.63
High	2 480	4.58	3.88	4.61	2.17

Table 9.5.4 Bluetooth LE Burst and Frame Average RF Power

Bluetooth Conducted Powers procedures

1. Bluetooth (BDR, EDR)

1) Enter DUT mode in EUT and operate it.

When it operating, The EUT is transmitting at maximum power level and duty cycle fixed.

2) Instruments and EUT were connected like Figure 9.5.1(A).

3) The maximum output powers of BDR(1 Mbps), EDR(2, 3 Mbps) and each frequency were set by a Bluetooth Tester.

4) Power levels were measured by a Power Meter.

2. Bluetooth (LE)

1) Enter LE mode in EUT and operate it.

When it operating, The EUT is transmitting at maximum power level and duty cycle fixed.

2) Instruments and EUT were connected like Figure 9.5.1(B).

3) The average conducted output powers of LE and each frequency can measurement according to setting program in EUT.

4) Power levels were measured by a Power Meter.

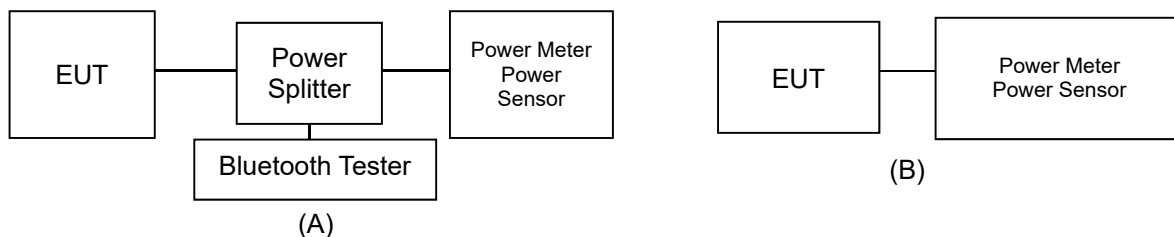


Figure 9.5.1 Average Power Measurement Setup

- Bluetooth Transmission Plot

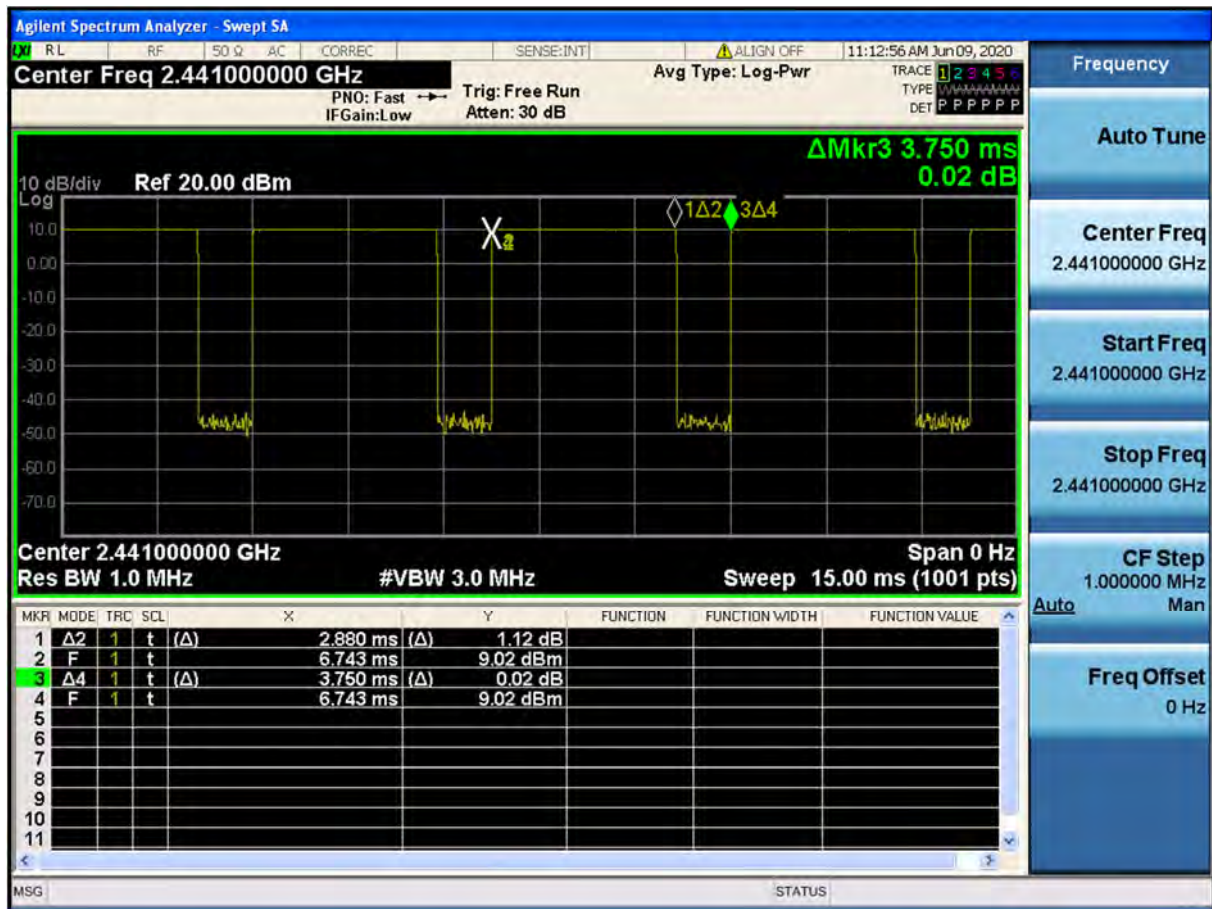


Figure 9.5.2 Bluetooth Transmission Plot

- Bluetooth Duty Cycle Calculation

$$\text{Duty Cycle} = \text{Pulse/Period} * 100\% = (2.880/3.750) * 100 = 76.8\%$$

10. SYSTEM VERIFICATION

10.1 Tissue Verification

MEASURED TISSUE PARAMETERS										
Date(s)	Tissue Type	Ambient Temp.[°C]	Liquid Temp.[°C]	Measured Frequency [MHz]	Target Dielectric Constant, ϵ_r	Target Conductivity, σ (S/m)	Measured Dielectric Constant, ϵ_r	Measured Conductivity, σ (S/m)	Er Deviation [%]	σ Deviation [%]
Jun. 5. 2020	750 Head	20.5	20.4	707.5	42.129	0.887	42.441	0.856	0.74	-3.49
				750.0	41.900	0.890	41.887	0.894	-0.03	0.45
				782.0	41.749	0.894	41.453	0.924	-0.71	3.36
Jun. 10. 2020	750 Body	20.8	20.6	707.5	55.672	0.957	57.799	0.926	3.82	-3.24
				750.0	55.500	0.960	57.372	0.964	3.37	0.42
				782.0	55.387	0.964	57.060	0.992	3.02	2.90
Jun. 9. 2020	835 Head	20.7	20.6	821.5	41.566	0.898	41.039	0.903	-1.27	0.56
				824.2	41.552	0.899	41.004	0.905	-1.32	0.67
				826.4	41.542	0.899	40.982	0.907	-1.35	0.89
				829.0	41.528	0.899	40.949	0.910	-1.39	1.22
				831.5	41.519	0.900	40.919	0.912	-1.45	1.33
				835.0	41.500	0.900	40.884	0.915	-1.48	1.67
				836.5	41.500	0.901	40.868	0.917	-1.52	1.78
				836.6	41.500	0.901	40.866	0.917	-1.53	1.78
				841.5	41.500	0.906	40.807	0.922	-1.67	1.77
				844.0	41.500	0.910	40.778	0.924	-1.74	1.54
				846.6	41.500	0.912	40.743	0.927	-1.82	1.64
				848.8	41.500	0.914	40.724	0.929	-1.87	1.64
Jun. 10. 2020	835 Body	20.3	20.2	821.5	55.255	0.969	53.351	0.994	-3.45	2.58
				824.2	55.243	0.969	53.329	0.997	-3.46	2.89
				826.4	55.235	0.969	53.305	0.999	-3.49	3.10
				829.0	55.223	0.970	53.283	1.001	-3.51	3.20
				831.5	55.216	0.970	53.255	1.004	-3.55	3.51
				835.0	55.200	0.970	53.218	1.007	-3.59	3.81
				836.5	55.197	0.971	53.204	1.008	-3.61	3.81
				836.6	55.197	0.971	53.204	1.008	-3.61	3.81
				841.5	55.182	0.977	53.162	1.012	-3.66	3.58
				844.0	55.172	0.981	53.130	1.015	-3.70	3.47
				846.6	55.166	0.984	53.103	1.017	-3.74	3.35
				848.8	55.160	0.986	53.082	1.019	-3.77	3.35
Jun. 8. 2020	1800 Head	21.3	21.5	1712.4	40.126	1.350	41.531	1.321	3.50	-2.15
				1720.0	40.114	1.354	41.501	1.328	3.46	-1.92
				1732.4	40.097	1.361	41.449	1.341	3.37	-1.47
				1732.5	40.097	1.361	41.449	1.341	3.37	-1.47
				1745.0	40.079	1.369	41.399	1.353	3.29	-1.17
				1752.6	40.069	1.373	41.365	1.361	3.23	-0.87
				1770.0	40.043	1.383	41.287	1.377	3.11	-0.43
				1800.0	40.000	1.400	41.162	1.406	2.91	0.43
Jun. 9. 2020	1800 Body	21.7	21.9	1712.4	53.596	1.464	51.711	1.456	-3.52	-0.55
				1720.0	53.580	1.469	51.696	1.463	-3.52	-0.41
				1732.4	53.556	1.477	51.674	1.474	-3.51	-0.20
				1732.5	53.556	1.477	51.674	1.474	-3.51	-0.20
				1745.0	53.530	1.485	51.642	1.485	-3.53	0.00
				1752.6	53.516	1.489	51.620	1.492	-3.54	0.20
				1770.0	53.480	1.501	51.574	1.508	-3.56	0.47
				1800.0	53.300	1.520	51.499	1.535	-3.38	0.99
Jun. 4. 2020	1900 Head	21.5	21.7	1850.2	40.000	1.400	38.794	1.393	-3.02	-0.50
				1852.4	40.000	1.400	38.789	1.395	-3.03	-0.36
				1860.0	40.000	1.400	38.772	1.402	-3.07	0.14
				1880.0	40.000	1.400	38.711	1.421	-3.22	1.50
				1900.0	40.000	1.400	38.645	1.441	-3.39	2.93
				1907.6	40.000	1.400	38.620	1.449	-3.45	3.50
				1909.8	40.000	1.400	38.614	1.451	-3.47	3.64
Jun. 5. 2020	1900 Body	21.3	21.2	1850.2	53.300	1.520	51.774	1.488	-2.86	-2.11
				1852.4	53.300	1.520	51.768	1.489	-2.87	-2.04
				1860.0	53.300	1.520	51.749	1.496	-2.91	-1.58
				1880.0	53.300	1.520	51.697	1.512	-3.01	-0.53
				1900.0	53.300	1.520	51.654	1.529	-3.09	0.59
				1907.6	53.300	1.520	51.639	1.536	-3.12	1.05
				1909.8	53.300	1.520	51.635	1.537	-3.12	1.12
May. 27. 2020	2450 Head	21.3	21.2	2402.0	39.282	1.757	40.725	1.697	3.67	-3.41
				2412.0	39.265	1.766	40.688	1.715	3.62	-2.89
				2437.0	39.222	1.788	40.612	1.759	3.54	-1.62
				2441.0	39.215	1.792	40.601	1.766	3.53	-1.45
				2450.0	39.200	1.800	40.589	1.776	3.54	-1.33
				2462.0	39.184	1.813	40.570	1.789	3.54	-1.32
				2467.0	39.177	1.818	40.564	1.792	3.54	-1.43
				2472.0	39.171	1.823	40.552	1.796	3.53	-1.48
May. 28. 2020	2450 Body	21.4	21.3	2480.0	39.160	1.832	40.523	1.804	3.48	-1.53
				2402.0	52.764	1.904	51.643	1.913	-2.12	0.47
				2412.0	52.751	1.914	51.620	1.926	-2.14	0.63
				2437.0	52.717	1.938	51.559	1.956	-2.20	0.93
				2441.0	52.712	1.941	51.547	1.961	-2.21	1.03
				2450.0	52.700	1.950	51.525	1.972	-2.23	1.13
				2462.0	52.685	1.967	51.498	1.986	-2.25	0.97
				2467.0	52.678	1.974	51.487	1.992	-2.26	0.91
				2472.0	52.672	1.981	51.472	1.998	-2.28	0.86
				2480.0	52.662	1.993	51.448	2.007	-2.31	0.70

MEASURED TISSUE PARAMETERS										
Date(s)	Tissue Type	Ambient Temp.[°C]	Liquid Temp.[°C]	Measured Frequency [MHz]	Target Dielectric Constant, ϵ_r	Target Conductivity, σ (S/m)	Measured Dielectric Constant, ϵ_r	Measured Conductivity, σ (S/m)	Er Deviation [%]	σ Deviation [%]
Jun. 4. 2020	2600 Head	21.5	21.7	2 510.0	39.120	1.864	38.945	1.912	-0.45	2.58
				2 535.0	39.087	1.891	38.855	1.938	-0.59	2.49
				2 560.0	39.053	1.917	38.783	1.964	-0.69	2.45
				2 600.0	39.000	1.960	38.656	2.010	-0.88	2.55
Jun. 18. 2020	2600 Body	22.1	21.9	2 510.0	52.624	2.035	52.178	1.979	-0.85	-2.75
				2 535.0	52.592	2.071	52.109	2.021	-0.92	-2.41
				2 560.0	52.560	2.106	52.055	2.067	-0.96	-1.85
				2 600.0	52.509	2.163	51.942	2.100	-1.08	-2.91
Jun. 8. 2020	5200 Body	21.6	21.7	5 180.0	49.041	5.276	47.430	5.163	-3.29	-2.14
				5 190.0	49.028	5.288	47.407	5.175	-3.31	-2.14
				5 200.0	49.014	5.299	47.385	5.189	-3.32	-2.08
				5 210.0	49.001	5.311	47.371	5.203	-3.33	-2.03
				5 220.0	48.987	5.323	47.356	5.214	-3.33	-2.05
				5 230.0	48.974	5.334	47.339	5.225	-3.34	-2.04
Jun. 1. 2020	5300 Head	20.6	20.5	5 240.0	48.960	5.346	47.319	5.238	-3.35	-2.02
				5 260.0	35.940	4.720	35.384	4.676	-1.55	-0.93
				5 270.0	35.930	4.730	35.378	4.687	-1.54	-0.91
				5 280.0	35.920	4.740	35.376	4.696	-1.51	-0.93
				5 290.0	35.910	4.750	35.366	4.704	-1.51	-0.97
				5 300.0	35.900	4.760	35.345	4.713	-1.55	-0.99
Jun. 8. 2020	5300 Body	21.6	21.7	5 310.0	35.890	4.770	35.326	4.727	-1.57	-0.90
				5 320.0	35.880	4.780	35.314	4.739	-1.58	-0.86
				5 260.0	48.933	5.369	47.282	5.266	-3.37	-1.92
				5 270.0	48.919	5.381	47.270	5.278	-3.37	-1.91
				5 280.0	48.906	5.393	47.260	5.289	-3.37	-1.93
				5 290.0	48.892	5.404	47.243	5.298	-3.37	-1.96
Jun. 4. 2020	5600 Head	21.1	21.2	5 300.0	48.879	5.416	47.217	5.311	-3.40	-1.94
				5 310.0	48.865	5.428	47.201	5.326	-3.41	-1.88
				5 320.0	48.851	5.439	47.187	5.339	-3.41	-1.84
				5 500.0	35.650	4.965	35.535	5.050	-0.32	1.71
				5 510.0	35.635	4.976	35.517	5.058	-0.33	1.65
				5 530.0	35.605	4.997	35.479	5.083	-0.35	1.72
				5 550.0	35.575	5.018	35.458	5.104	-0.33	1.71
				5 580.0	35.530	5.049	35.404	5.141	-0.35	1.82
				5 600.0	35.500	5.070	35.385	5.165	-0.32	1.87
				5 660.0	35.440	5.130	35.288	5.226	-0.43	1.87
Jun. 5. 2020	5600 Body	21.3	21.1	5 670.0	35.430	5.140	35.269	5.236	-0.45	1.87
				5 690.0	35.410	5.160	35.231	5.263	-0.51	2.00
				5 710.0	35.390	5.180	35.216	5.287	-0.49	2.07
				5 720.0	35.380	5.190	35.204	5.295	-0.50	2.02
				5 500.0	48.607	5.650	47.698	5.724	-1.87	1.31
				5 510.0	48.594	5.661	47.677	5.734	-1.89	1.29
				5 530.0	48.566	5.685	47.637	5.761	-1.91	1.34
				5 550.0	48.539	5.708	47.606	5.785	-1.92	1.35
				5 580.0	48.499	5.743	47.549	5.825	-1.96	1.43
				5 600.0	48.471	5.766	47.529	5.850	-1.94	1.46
Jun. 4. 2020	5600 Head	21.1	21.2	5 660.0	48.390	5.836	47.418	5.922	-2.01	1.47
				5 670.0	48.376	5.848	47.396	5.934	-2.03	1.47
				5 690.0	48.349	5.872	47.357	5.962	-2.05	1.53
				5 710.0	48.322	5.895	47.336	5.987	-2.04	1.56
				5 720.0	48.309	5.907	47.318	5.996	-2.05	1.51

MEASURED TISSUE PARAMETERS										
Date(s)	Tissue Type	Ambient Temp.[°C]	Liquid Temp.[°C]	Measured Frequency [MHz]	Target Dielectric Constant, ϵ_r	Target Conductivity, σ (S/m)	Measured Dielectric Constant, ϵ_r	Measured Conductivity, σ (S/m)	Er Deviation [%]	σ Deviation [%]
Jun. 4. 2020	5800 Head	21.1	21.2	5 745.0	35.355	5.215	35.150	5.325	-0.58	2.11
				5 755.0	35.345	5.225	35.138	5.337	-0.59	2.14
				5 775.0	35.325	5.245	35.106	5.353	-0.62	2.06
				5 785.0	35.315	5.255	35.083	5.365	-0.66	2.09
				5 795.0	35.305	5.265	35.062	5.379	-0.69	2.17
				5 800.0	35.300	5.270	35.054	5.386	-0.70	2.20
				5 825.0	35.275	5.296	35.033	5.411	-0.69	2.17
Jun. 5. 2020	5800 Body	21.3	21.1	5 745.0	48.275	5.936	47.264	6.031	-2.09	1.60
				5 755.0	48.261	5.947	47.248	6.044	-2.10	1.63
				5 775.0	48.234	5.971	47.214	6.067	-2.11	1.61
				5 785.0	48.220	5.982	47.193	6.080	-2.13	1.64
				5 795.0	48.207	5.994	47.175	6.095	-2.14	1.69
				5 800.0	48.200	6.000	47.165	6.102	-2.15	1.70
				5 825.0	48.166	6.029	47.130	6.130	-2.15	1.68

The above measured tissue parameters were used in the DASY software. The DASY software was used to perform interpolation to determine the dielectric parameters at the SAR test device frequencies (per KDB 865664 and IEEE 1528-2013 6.6.1.2). The tissue parameters listed in the SAR test plots may slightly differ from the table above due to significant digit rounding in the software.

Measurement Procedure for Tissue verification:

- 1) The network analyzer and probe system was configured and calibrated.
- 2) The probe was immersed in the sample which was placed in a nonmetallic container. Trapped air bubbles beneath the flange were minimized by placing the probe at a slight angle.
- 3) The complex admittance with respect to the probe aperture was measured
- 4) The complex relative permittivity , for example from the below equation (Pournaropoulos and Misra):

$$Y = \frac{j2\omega\epsilon_r\epsilon_0}{[\ln(b/a)]^2} \int_a^b \int_a^b \int_0^\pi \cos\phi' \frac{\exp[-j\omega r(\mu_0\epsilon_r\epsilon_0)^{1/2}]}{r} d\phi' d\rho' d\rho$$

where Y is the admittance of the probe in contact with the sample, the primed and unprimed coordinates refer to source and observation points, respectively, $r^2 = \rho^2 + \rho'^2 - 2\rho\rho'\cos\phi'$, ω is the angular frequency, and $j = \sqrt{-1}$.

10.2 Test System Verification

Prior to assessment, the system is verified to the $\pm 10\%$ of the specifications at using the SAR Dipole kit(s). (Graphic Plots Attached)

Table 10.2.1 System Verification Results (1g)

SYSTEM DIPOLE VERIFICATION TARGET & MEASURED												
SAR System #	Freq. [MHz]	SAR Dipole kits	Date(s)	Tissue Type	Ambient Temp. [°C]	Liquid Temp. [°C]	Probe S/N	Input Power (mW)	1 W Target SAR _{1g} (W/kg)	Measured SAR _{1g} (W/kg)	1 W Normalized SAR _{1g} (W/kg)	Deviation [%]
F	750	D750V3, SN:1049	Jun. 5. 2020	Head	20.5	20.4	7368	250	8.47	2.06	8.24	-2.72
F	750	D750V3, SN:1049	Jun. 10. 2020	Body	20.8	20.6	3866	250	8.43	2.07	8.28	-1.78
E	835	D835V2, SN:464	Jun. 9. 2020	Head	20.7	20.6	7337	250	9.59	2.26	9.04	-5.74
E	835	D835V2, SN:464	Jun. 10. 2020	Body	20.3	20.2	7337	250	9.68	2.48	9.92	2.48
B	1 800	D1800V2, SN:2d202	Jun. 8. 2020	Head	21.3	21.5	3327	100	39.6	4.05	40.50	2.27
B	1 800	D1800V2, SN:2d202	Jun. 9. 2020	Body	21.7	21.9	3327	100	39.0	3.96	39.60	1.54
B	1 900	D1900V2, SN:5d029	Jun. 4. 2020	Head	21.5	21.7	3327	100	40.4	4.03	40.30	-0.25
B	1 900	D1900V2, SN:5d029	Jun. 5. 2020	Body	21.3	21.2	3327	100	39.9	3.81	38.10	-4.51
A	2 450	D2450V2, SN: 726	May. 27. 2020	Head	21.3	21.2	3930	100	51.2	5.19	51.90	1.37
A	2 450	D2450V2, SN: 726	May. 28. 2020	Body	21.4	21.3	3930	100	52.0	5.02	50.20	-3.46
B	2 600	D2600V2, SN: 1103	Jun. 18. 2020	Head	21.5	21.6	3327	100	57.8	5.86	58.60	1.38
B	2 600	D2600V2, SN: 1103	Jun. 18. 2020	Body	22.1	21.9	3327	100	55.8	5.58	55.80	0.00
A	5 200	D5GHZV2, SN:1212	Jun. 8. 2020	Body	21.6	21.7	3930	100	72.8	7.14	71.40	-1.92
A	5 300	D5GHZV2, SN:1212	Jun. 1. 2020	Head	20.6	20.5	3930	100	81.3	8.19	81.90	0.74
A	5 300	D5GHZV2, SN:1212	Jun. 8. 2020	Body	21.6	21.7	3930	100	72.8	7.25	72.50	-0.41
A	5 500	D5GHZV2, SN:1212	Jun. 4. 2020	Head	21.1	21.2	3930	100	86.3	8.71	87.10	0.93
A	5 500	D5GHZV2, SN:1212	Jun. 5. 2020	Body	21.3	21.1	3930	100	78.6	7.45	74.50	-5.22
A	5 800	D5GHZV2, SN:1212	Jun. 4. 2020	Head	21.1	21.2	3930	100	81.5	8.15	81.50	0.00
A	5 800	D5GHZV2, SN:1212	Jun. 5. 2020	Body	21.3	21.1	3930	100	73.7	7.13	71.30	-3.26

Table 10.2.2 System Verification Results (10g)

SYSTEM DIPOLE VERIFICATION TARGET & MEASURED												
SAR System #	Freq. [MHz]	SAR Dipole kits	Date(s)	Tissue Type	Ambient Temp. [°C]	Liquid Temp. [°C]	Probe S/N	Input Power (mW)	1 W Target SAR _{10g} (W/kg)	Measured SAR _{10g} (W/kg)	1 W Normalized SAR _{10g} (W/kg)	Deviation [%]
B	1 800	D1800V2, SN:2d002	Jun. 9. 2020	Body	21.7	21.9	3327	100	20.4	2.12	21.20	3.92
B	1 900	D1900V2, SN:5d029	Jun. 5. 2020	Body	21.3	21.2	3327	100	21.0	1.99	19.90	-5.24
B	2 600	D2600V2, SN: 1103	Jun. 18. 2020	Body	22.1	21.9	3327	100	24.9	2.41	24.10	-3.21
A	5 300	D5GHZV2, SN:1212	Jun. 8. 2020	Body	21.6	21.7	3930	100	20.2	2.06	20.60	1.98
A	5 500	D5GHZV2, SN:1212	Jun. 5. 2020	Body	21.3	21.1	3930	100	21.6	2.13	21.30	-1.39

Note1 : System Verification was measured with input 250 mW, 100 mW and normalized to 1W.

Note2 : Full system validation status and results can be found in Appendix D.




Figure 10.1 Dipole Verification Test Setup Diagram & Photo

11. SAR TEST RESULTS

11.1 Head SAR Results

Table 11.1.1 GSM/GPRS 850 Head SAR

MEASUREMENT RESULTS														
FREQUENCY		Mode/ Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	# of Time Slots	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #
MHz	Ch													
836.6	190	GSM850	GSM	33.70	33.30	-0.030	Left Touch	FCC #1	1	1:8.3	0.115	1.096	0.126	A1
836.6	190	GSM850	GSM	33.70	33.30	0.060	Right Touch	FCC #1	1	1:8.3	0.119	1.096	0.130	
836.6	190	GSM850	GSM	33.70	33.30	-0.130	Left Tilt	FCC #1	1	1:8.3	0.061	1.096	0.067	
836.6	190	GSM850	GSM	33.70	33.30	0.120	Right Tilt	FCC #1	1	1:8.3	0.038	1.096	0.042	
836.6	190	GSM850	GPRS	30.70	30.50	0.100	Left Touch	FCC #1	3	1:2.77	0.199	1.047	0.208	A2
836.6	190	GSM850	GPRS	30.70	30.50	0.170	Right Touch	FCC #1	3	1:2.77	0.226	1.047	0.237	
836.6	190	GSM850	GPRS	30.70	30.50	-0.140	Left Tilt	FCC #1	3	1:2.77	0.113	1.047	0.118	
836.6	190	GSM850	GPRS	30.70	30.50	-0.130	Right Tilt	FCC #1	3	1:2.77	0.073	1.047	0.076	
836.6	190	GSM850	GPRS	30.70	30.50	-0.120	Right Touch	FCC #1	3	1:2.77	0.204	1.047	0.214	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure								Head 1.6 W/kg (mW/g) averaged over 1 gram						
Note: Purple entries represent SIM2 (This device supports Dual SIM and is 1 RF Path.) measurements.														

Note: Purple entries represent SIM2 (This device supports Dual SIM and is 1 RF Path.) measurements.

Table 11.1.2 PCS/GPRS 1900 Head SAR

MEASUREMENT RESULTS														
FREQUENCY		Mode/ Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	# of Time Slots	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #
MHz	Ch													
1880.0	661	PCS1900	PCS	30.70	30.30	0.170	Left Touch	FCC #1	1	1:8.3	0.048	1.096	0.053	A3
1880.0	661	PCS1900	PCS	30.70	30.30	0.040	Right Touch	FCC #1	1	1:8.3	0.062	1.096	0.068	
1880.0	661	PCS1900	PCS	30.70	30.30	-0.150	Left Tilt	FCC #1	1	1:8.3	0.037	1.096	0.041	
1880.0	661	PCS1900	PCS	30.70	30.30	0.000	Right Tilt	FCC #1	1	1:8.3	0.033	1.096	0.036	
1880.0	661	PCS1900	GPRS	27.70	27.62	-0.060	Left Touch	FCC #1	3	1:2.77	0.078	1.019	0.079	A4
1880.0	661	PCS1900	GPRS	27.70	27.62	-0.000	Right Touch	FCC #1	3	1:2.77	0.102	1.019	0.104	
1880.0	661	PCS1900	GPRS	27.70	27.62	0.130	Left Tilt	FCC #1	3	1:2.77	0.057	1.019	0.058	
1880.0	661	PCS1900	GPRS	27.70	27.62	-0.020	Right Tilt	FCC #1	3	1:2.77	0.045	1.019	0.046	
1880.0	661	PCS1900	GPRS	27.70	27.62	0.140	Right Touch	FCC #1	3	1:2.77	0.092	1.019	0.094	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure								Head 1.6 W/kg (mW/g) averaged over 1 gram						

Note: Purple entries represent SIM2 (This device supports Dual SIM and is 1 RF Path.) measurements.

Table 11.1.3 WCDMA 850 Head SAR

MEASUREMENT RESULTS													
FREQUENCY		Mode/ Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #
MHz	Ch												
836.6	4183	WCDMA 850	RMC	25.20	24.59	0.130	Left Touch	FCC #1	1:1	0.160	1.151	0.184	A5
836.6	4183	WCDMA 850	RMC	25.20	24.59	0.150	Right Touch	FCC #1	1:1	0.153	1.151	0.176	
836.6	4183	WCDMA 850	RMC	25.20	24.59	0.030	Left Tilt	FCC #1	1:1	0.081	1.151	0.093	
836.6	4183	WCDMA 850	RMC	25.20	24.59	0.110	Right Tilt	FCC #1	1:1	0.060	1.151	0.069	
836.6	4183	WCDMA 850	RMC	25.20	24.59	0.180	Left Touch	FCC #1	1:1	0.154	1.151	0.177	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure								Head 1.6 W/kg (mW/g) averaged over 1 gram					

Note: Purple entries represent SIM2 (This device supports Dual SIM and is 1 RF Path.) measurements.

Table 11.1.4 WCDMA 1700 Head SAR

MEASUREMENT RESULTS													
FREQUENCY		Mode/ Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #
MHz	Ch												
1 732.4	1412	WCDMA 1700	RMC	24.70	24.35	-0.130	Left Touch	FCC #1	1:1	0.103	1.084	0.112	A6
1 732.4	1412	WCDMA 1700	RMC	24.70	24.35	-0.000	Right Touch	FCC #1	1:1	0.112	1.084	0.121	
1 732.4	1412	WCDMA 1700	RMC	24.70	24.35	0.130	Left Tilt	FCC #1	1:1	0.060	1.084	0.065	
1 732.4	1412	WCDMA 1700	RMC	24.70	24.35	0.130	Right Tilt	FCC #1	1:1	0.054	1.084	0.059	
1 732.4	1412	WCDMA 1700	RMC	24.70	24.35	0.130	Right Touch	FCC #1	1:1	0.111	1.084	0.120	
ANSI / IEEE C95.1-2005– SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure								Head 1.6 W/kg (mW/g) averaged over 1 gram					

Note: Purple entries represent SIM2 (This device supports Dual SIM and is 1 RF Path.) measurements.

Table 11.1.5 WCDMA 1900 Head SAR

MEASUREMENT RESULTS													
FREQUENCY		Mode/ Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #
MHz	Ch												
1 880.0	9400	WCDMA 1900	RMC	24.70	24.22	-0.030	Left Touch	FCC #1	1:1	0.081	1.117	0.090	A7
1 880.0	9400	WCDMA 1900	RMC	24.70	24.22	0.010	Right Touch	FCC #1	1:1	0.132	1.117	0.147	
1 880.0	9400	WCDMA 1900	RMC	24.70	24.22	-0.010	Left Tilt	FCC #1	1:1	0.071	1.117	0.079	
1 880.0	9400	WCDMA 1900	RMC	24.70	24.22	0.080	Right Tilt	FCC #1	1:1	0.057	1.117	0.064	
1 880.0	9400	WCDMA 1900	RMC	24.70	24.22	0.160	Right Touch	FCC #1	1:1	0.124	1.117	0.139	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure								Head 1.6 W/kg (mW/g) averaged over 1 gram					

Note: Purple entries represent SIM2 (This device supports Dual SIM and is 1 RF Path.) measurements.

Table 11.1.6 LTE Band 12 Head SAR

MEASUREMENT RESULTS																	
FREQUENCY		Mode/ Band	BW [MHz]	Max Allowed Power [dBm]	Cond. PWR [dBm]	Drift Power [dB]	MPR	Position	Device Serial Number	Mod.	RB Size	RB Offs.	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #
MHz	Ch																
707.5	23095	LTE B12	10	25.20	25.01	-0.110	0	Left Touch	FCC #1	QPSK	1	25	1:1	0.121	1.045	0.126	A8
707.5	23095	LTE B12	10	24.20	24.10	0.010	1	Left Touch	FCC #1	QPSK	25	12	1:1	0.101	1.023	0.103	
707.5	23095	LTE B12	10	25.20	25.01	-0.070	0	Right Touch	FCC #1	QPSK	1	25	1:1	0.141	1.045	0.147	
707.5	23095	LTE B12	10	24.20	24.10	-0.170	1	Right Touch	FCC #1	QPSK	25	12	1:1	0.121	1.023	0.124	
707.5	23095	LTE B12	10	25.20	25.01	0.180	0	Left Tilt	FCC #1	QPSK	1	25	1:1	0.064	1.045	0.067	
707.5	23095	LTE B12	10	24.20	24.10	0.130	1	Left Tilt	FCC #1	QPSK	25	12	1:1	0.052	1.023	0.053	
707.5	23095	LTE B12	10	25.20	25.01	0.190	0	Right Tilt	FCC #1	QPSK	1	25	1:1	0.055	1.045	0.057	
707.5	23095	LTE B12	10	24.20	24.10	-0.120	1	Right Tilt	FCC #1	QPSK	25	12	1:1	0.044	1.023	0.045	
707.5	23095	LTE B12	10	25.20	25.01	-0.120	0	Right Touch	FCC #1	QPSK	1	25	1:1	0.131	1.045	0.137	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure										Head 1.6 W/kg (mW/g) averaged over 1 gram							

Note: Purple entries represent SIM2 (This device supports Dual SIM and is 1 RF Path.) measurements.

Table 11.1.7 LTE Band 13 Head SAR

MEASUREMENT RESULTS																	
FREQUENCY		Mode/ Band	BW [MHz]	Max Allowed Power [dBm]	Cond. PWR [dBm]	Drift Power [dB]	MPR	Position	Device Serial Number	Mod.	RB Size	RB Offs.	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #
MHz	Ch																
782.0	23230	LTE B13	10	25.20	25.10	0.080	0	Left Touch	FCC #1	QPSK	1	25	1:1	0.120	1.023	0.123	A9
782.0	23230	LTE B13	10	24.20	24.15	0.080	1	Left Touch	FCC #1	QPSK	25	12	1:1	0.098	1.012	0.099	
782.0	23230	LTE B13	10	25.20	25.10	0.190	0	Right Touch	FCC #1	QPSK	1	25	1:1	0.140	1.023	0.143	
782.0	23230	LTE B13	10	24.20	24.15	0.170	1	Right Touch	FCC #1	QPSK	25	12	1:1	0.113	1.012	0.114	
782.0	23230	LTE B13	10	25.20	25.10	0.018	0	Left Tilt	FCC #1	QPSK	1	25	1:1	0.075	1.023	0.077	
782.0	23230	LTE B13	10	24.20	24.15	-0.000	1	Left Tilt	FCC #1	QPSK	25	12	1:1	0.059	1.012	0.060	
782.0	23230	LTE B13	10	25.20	25.10	0.090	0	Right Tilt	FCC #1	QPSK	1	25	1:1	0.061	1.023	0.062	
782.0	23230	LTE B13	10	24.20	24.15	0.180	1	Right Tilt	FCC #1	QPSK	25	12	1:1	0.048	1.012	0.049	
782.0	23230	LTE B13	10	25.20	25.10	0.080	0	Right Touch	FCC #1	QPSK	1	25	1:1	0.134	1.023	0.137	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure										Head 1.6 W/kg (mW/g) averaged over 1 gram							

Note: Purple entries represent SIM2 (This device supports Dual SIM and is 1 RF Path.) measurements.

Table 11.1.8 LTE Band 5 (Cell) Head SAR

MEASUREMENT RESULTS																	
FREQUENCY		Mode/ Band	BW [MHz]	Max Allowed Power [dBm]	Cond. PWR [dBm]	Drift Power [dB]	MPR	Position	Device Serial Number	Mod.	RB Size	RB Offs.	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #
MHz	Ch																
836.5	20525	LTE B5	10	25.20	24.98	0.150	0	Left Touch	FCC #1	QPSK	1	25	1:1	0.116	1.052	0.122	A10
836.5	20525	LTE B5	10	24.20	24.00	0.120	1	Left Touch	FCC #1	QPSK	25	12	1:1	0.089	1.047	0.093	
836.5	20525	LTE B5	10	25.20	24.98	0.160	0	Right Touch	FCC #1	QPSK	1	25	1:1	0.120	1.052	0.126	
836.5	20525	LTE B5	10	24.20	24.00	-0.010	1	Right Touch	FCC #1	QPSK	25	12	1:1	0.115	1.047	0.120	
836.5	20525	LTE B5	10	25.20	24.98	0.060	0	Left Tilt	FCC #1	QPSK	1	25	1:1	0.076	1.052	0.080	
836.5	20525	LTE B5	10	24.20	24.00	0.190	1	Left Tilt	FCC #1	QPSK	25	12	1:1	0.046	1.047	0.048	
836.5	20525	LTE B5	10	25.20	24.98	-0.030	0	Right Tilt	FCC #1	QPSK	1	25	1:1	0.063	1.052	0.066	
836.5	20525	LTE B5	10	24.20	24.00	0.020	1	Right Tilt	FCC #1	QPSK	25	12	1:1	0.045	1.047	0.047	
836.5	20525	LTE B5	10	25.20	24.98	-0.160	0	Right Touch	FCC #1	QPSK	1	25	1:1	0.119	1.052	0.125	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure									Head 1.6 W/kg (mW/g) averaged over 1 gram								

Note: Purple entries represent SIM2 (This device supports Dual SIM and is 1 RF Path.) measurements.

Table 11.1.9 LTE Band 66 (AWS) Head SAR

MEASUREMENT RESULTS																	
FREQUENCY		Mode/ Band	BW [MHz]	Max Allowed Power [dBm]	Cond. PWR [dBm]	Drift Power [dB]	MPR	Position	Device Serial Number	Mod.	RB Size	RB Offs.	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #
MHz	Ch																
1 770.0	132572	LTE B66	20	24.70	24.68	0.110	0	Left Touch	FCC #1	QPSK	1	50	1:1	0.080	1.005	0.080	A11
1 770.0	132572	LTE B66	20	23.70	23.67	0.100	1	Left Touch	FCC #1	QPSK	50	25	1:1	0.065	1.007	0.065	
1 770.0	132572	LTE B66	20	24.70	24.68	0.180	0	Right Touch	FCC #1	QPSK	1	50	1:1	0.101	1.005	0.102	
1 770.0	132572	LTE B66	20	23.70	23.67	0.070	1	Right Touch	FCC #1	QPSK	50	25	1:1	0.073	1.007	0.074	
1 770.0	132572	LTE B66	20	24.70	24.68	0.080	0	Left Tilt	FCC #1	QPSK	1	50	1:1	0.039	1.005	0.039	
1 770.0	132572	LTE B66	20	23.70	23.67	-0.160	1	Left Tilt	FCC #1	QPSK	50	25	1:1	0.027	1.007	0.027	
1 770.0	132572	LTE B66	20	24.70	24.68	-0.180	0	Right Tilt	FCC #1	QPSK	1	50	1:1	0.059	1.005	0.059	
1 770.0	132572	LTE B66	20	23.70	23.67	0.040	1	Right Tilt	FCC #1	QPSK	50	25	1:1	0.041	1.007	0.041	
1 770.0	132572	LTE B66	20	24.70	24.65	-0.120	0	Right Touch	FCC #1	QPSK	1	50	1:1	0.099	1.012	0.100	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure										Head 1.6 W/kg (mW/g) averaged over 1 gram							

Note: Purple entries represent SIM2 (This device supports Dual SIM and is 1 RF Path.) measurements.

Table 11.1.10 LTE Band 2 (PCS) Head SAR

MEASUREMENT RESULTS																	
FREQUENCY		Mode/ Band	BW [MHz]	Max Allowed Power [dBm]	Cond. PWR [dBm]	Drift Power [dB]	MPR	Position	Device Serial Number	Mod.	RB Size	RB Offs.	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #
MHz	Ch																
1 900.0	19100	LTE B2	20	24.70	24.54	0.080	0	Left Touch	FCC #1	QPSK	1	50	1:1	0.101	1.038	0.105	A12
1 900.0	19100	LTE B2	20	23.70	23.60	0.060	1	Left Touch	FCC #1	QPSK	50	25	1:1	0.072	1.023	0.074	
1 900.0	19100	LTE B2	20	24.70	24.54	0.130	0	Right Touch	FCC #1	QPSK	1	50	1:1	0.117	1.038	0.121	
1 900.0	19100	LTE B2	20	23.70	23.60	0.190	1	Right Touch	FCC #1	QPSK	50	25	1:1	0.088	1.023	0.090	
1 900.0	19100	LTE B2	20	24.70	24.54	0.180	0	Left Tilt	FCC #1	QPSK	1	50	1:1	0.090	1.038	0.093	
1 900.0	19100	LTE B2	20	23.70	23.60	0.190	1	Left Tilt	FCC #1	QPSK	50	25	1:1	0.077	1.023	0.079	
1 900.0	19100	LTE B2	20	24.70	24.54	0.160	0	Right Tilt	FCC #1	QPSK	1	50	1:1	0.066	1.038	0.069	
1 900.0	19100	LTE B2	20	23.70	23.60	-0.150	1	Right Tilt	FCC #1	QPSK	50	25	1:1	0.041	1.023	0.042	
1 900.0	19100	LTE B2	20	24.70	24.54	0.100	0	Right Touch	FCC #1	QPSK	1	50	1:1	0.092	1.038	0.095	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure										Head 1.6 W/kg (mW/g) averaged over 1 gram							

Note: Purple entries represent SIM2 (This device supports Dual SIM and is 1 RF Path.) measurements.

Table 11.1.11 LTE Band 7 Head SAR

MEASUREMENT RESULTS																	
FREQUENCY		Mode/ Band	BW [MHz]	Max Allowed Power [dBm]	Cond. PWR [dBm]	Drift Power [dB]	MPR	Position	Device Serial Number	Mod.	RB Size	RB Offs.	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #
MHz	Ch																
2 535.0	21100	LTE B7	20	24.20	23.67	0.130	0	Left Touch	FCC #1	QPSK	1	50	1:1	0.090	1.130	0.102	A13
2 535.0	21100	LTE B7	20	23.20	22.71	-0.180	1	Left Touch	FCC #1	QPSK	50	25	1:1	0.080	1.119	0.090	
2 535.0	21100	LTE B7	20	24.20	23.67	0.030	0	Right Touch	FCC #1	QPSK	1	50	1:1	0.119	1.130	0.134	
2 535.0	21100	LTE B7	20	23.20	22.71	0.140	1	Right Touch	FCC #1	QPSK	50	25	1:1	0.091	1.119	0.102	
2 535.0	21100	LTE B7	20	24.20	23.67	0.000	0	Left Tilt	FCC #1	QPSK	1	50	1:1	0.071	1.130	0.080	
2 535.0	21100	LTE B7	20	23.20	22.71	0.180	1	Left Tilt	FCC #1	QPSK	50	25	1:1	0.063	1.119	0.070	
2 535.0	21100	LTE B7	20	24.20	23.67	0.170	0	Right Tilt	FCC #1	QPSK	1	50	1:1	0.044	1.130	0.050	
2 535.0	21100	LTE B7	20	23.20	22.71	0.050	1	Right Tilt	FCC #1	QPSK	50	25	1:1	0.042	1.119	0.047	
2 535.0	21100	LTE B7	20	24.20	23.67	0.050	0	Right Touch	FCC #1	QPSK	1	50	1:1	0.117	1.130	0.132	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure										Head 1.6 W/kg (mW/g) averaged over 1 gram							
Note: Purple entries represent SIM2 (This device supports Dual SIM and is 1 RF Path.) measurements.																	

Table 11.1.12 DTS Head SAR

MEASUREMENT RESULTS															
FREQUENCY		Mode	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Peak SAR of Area Scan	Data Rate [Mbps]	Duty Cycle	1g SAR (W/kg)	Scaling Factor	Scaling Factor (Duty Cycle)	1g Scaled SAR (W/kg)	Plot s #
MHz	Ch														
2 437.0	6	802.11b	17.00	16.87	0.180	Left Touch	FCC #2	0.629	1	99.1	0.655	1.030	1.009	0.681	A14
2 437.0	6	802.11b	17.00	16.87	-0.040	Right Touch	FCC #2	0.214	1	99.1	0.219	1.030	1.009	0.228	
2 437.0	6	802.11b	17.00	16.87	0.180	Left Tilt	FCC #2	0.371	1	99.1	0.368	1.030	1.009	0.382	
2 437.0	6	802.11b	17.00	16.87	0.150	Right Tilt	FCC #2	0.184	1	99.1	0.188	1.030	1.009	0.195	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure										Head 1.6 W/kg (mW/g) averaged over 1 gram					

Adjusted SAR results for OFDM SAR												
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	1g Scaled SAR (W/kg)	FREQUENCY [MHz]	Mode	Service	Maximum Allowed Power [dBm]	Ratio of OFDM to DSSS	1g Adjusted SAR (W/kg)	Determine OFDM SAR
MHz	Ch											
2 437	6	802.11b	DSSS	17.0	0.681	2 437	802.11g	OFDM	16.0	0.794	0.541	X
2 437	6	802.11b	DSSS	17.0	0.681	2 437	802.11n	OFDM	15.0	0.631	0.430	X
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure										Head 1.6 W/kg (mW/g) averaged over 1 gram		

Note: SAR is not required for the following 2.4 GHz OFDM conditions. When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.

Table 11.1.13 UNII Head SAR

MEASUREMENT RESULTS															
FREQUENCY		Mode	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Peak SAR of Area Scan	Data Rate [Mbps]	Duty Cycle	1g SAR (W/kg)	Scaling Factor	Scaling Factor (Duty Cycle)	1g Scaled SAR (W/kg)	Plots #
MHz	Ch														
5 310.0	62	802.11n (HT-40)	15.00	14.97	0.030	Left Touch	FCC #2	0.293	MCS0	86.2	0.320	1.007	1.160	0.374	A15
5 310.0	62	802.11n (HT-40)	15.00	14.97	0.010	Right Touch	FCC #2	0.117	MCS0	86.2	0.111	1.007	1.160	0.130	
5 310.0	62	802.11n (HT-40)	15.00	14.97	0.080	Left Tilt	FCC #2	0.243	MCS0	86.2	0.278	1.007	1.160	0.325	
5 310.0	62	802.11n (HT-40)	15.00	14.97	-0.110	Right Tilt	FCC #2	0.115	MCS0	86.2	0.114	1.007	1.160	0.133	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure										Head 1.6 W/kg (mW/g) averaged over 1 gram					

Adjusted SAR results for UNII-1 and UNII-2A SAR												
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	1g Scaled SAR (W/kg)	FREQUENCY [MHz]	Mode	Service	Maximum Allowed Power [dBm]	Adjusted Factor	1g Adjusted SAR (W/kg)	SAR for the band with lower maximum output power
MHz	Ch											
5 310.0	62	802.11n (HT-40)	OFDM	15.00	0.374	5 240.0	802.11a	OFDM	15.00	1.000	0.374	X
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure										Head 1.6 W/kg (mW/g) averaged over 1 gram		

Note: U-NII-1 and U-NII-2A Bands: When different maximum output power is specified for the bands, begin SAR measurement in the band with higher specified maximum output power. The highest reported SAR for the tested configuration is adjusted by the ratio of lower to higher specified maximum output power for the two bands. When the adjusted SAR is ≤ 1.2 W/kg, SAR is not required for the band with lower maximum output power in that test configuration.

Table 11.1.14 UNII Head SAR

MEASUREMENT RESULTS															
FREQUENCY		Mode	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Peak SAR of Area Scan	Data Rate [Mbps]	Duty Cycle	1g SAR (W/kg)	Scaling Factor	Scaling Factor (Duty Cycle)	1g Scaled SAR (W/kg)	Plots #
MHz	Ch														
5 550.0	110	802.11n (HT-40)	16.00	15.98	0.110	Left Touch	FCC #2	0.668	MCS0	86.2	0.631	1.005	1.160	0.736	A16
5 550.0	110	802.11n (HT-40)	16.00	15.98	-0.030	Right Touch	FCC #2	0.165	MCS0	86.2	0.150	1.005	1.160	0.175	
5 550.0	110	802.11n (HT-40)	16.00	15.98	0.130	Left Tilt	FCC #2	0.284	MCS0	86.2	0.322	1.005	1.160	0.375	
5 550.0	110	802.11n (HT-40)	16.00	15.98	0.180	Right Tilt	FCC #2	0.176	MCS0	86.2	0.166	1.005	1.160	0.194	
5 755.0	151	802.11n (HT-40)	15.00	14.92	0.110	Left Touch	FCC #2	0.496	MCS0	86.2	0.512	1.018	1.160	0.605	A17
5 755.0	151	802.11n (HT-40)	15.00	14.92	0.120	Right Touch	FCC #2	0.106	MCS0	86.2	0.086	1.018	1.160	0.102	
5 755.0	151	802.11n (HT-40)	15.00	14.92	-0.070	Left Tilt	FCC #2	0.170	MCS0	86.2	0.234	1.018	1.160	0.276	
5 755.0	151	802.11n (HT-40)	15.00	14.92	-0.070	Right Tilt	FCC #2	0.104	MCS0	86.2	0.102	1.018	1.160	0.120	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure										Head 1.6 W/kg (mW/g) averaged over 1 gram					

Table 11.1.15 Bluetooth Head SAR

MEASUREMENT RESULTS														
FREQUENCY		Mode	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Rate [Mbps]	Duty Cycle (%)	1g SAR (W/kg)	Scaling Factor	Scaling Factor (Duty Cycle)	1g Scaled SAR (W/kg)	Plots #
MHz	Ch													
2 441.0	39	Bluetooth	8.85	8.69	-0.130	Left Touch	FCC #2	1	76.8	0.100	1.038	1.302	0.135	A18
2 441.0	39	Bluetooth	8.85	8.69	-0.110	Right Touch	FCC #2	1	76.8	0.026	1.038	1.302	0.035	
2 441.0	39	Bluetooth	8.85	8.69	-0.120	Left Tilt	FCC #2	1	76.8	0.051	1.038	1.302	0.069	
2 441.0	39	Bluetooth	8.85	8.69	-0.120	Left Tilt	FCC #2	1	76.8	0.051	1.038	1.302	0.069	
2 441.0	39	Bluetooth	8.85	8.69	-0.110	Right Tilt	FCC #2	1	76.8	0.019	1.038	1.302	0.026	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure									Head 1.6 W/kg (mW/g) averaged over 1 gram					

11.2 Standalone Body-Worn SAR Worn SAR Results

Table 11.2.1 GSM/PCS/GPRS/WCDMA Body-Worn SAR

MEASUREMENT RESULTS														
FREQUENCY		Mode/ Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Spacing [Side]	Device Serial Number	# of Time Slots	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #
MHz	Ch													
836.6	190	GSM850	GSM	33.70	33.30	0.030	10 mm [Front]	FCC #1	1	1:8.3	0.349	1.096	0.383	A19
836.6	190	GSM850	GSM	33.70	33.30	-0.040	10 mm [Rear]	FCC #1	1	1:8.3	0.539	1.096	0.591	
836.6	190	GSM850	GPRS	30.70	30.50	-0.060	10 mm [Front]	FCC #1	3	1:2.77	0.635	1.047	0.665	
824.2	128	GSM850	GPRS	30.70	30.50	0.040	10 mm [Rear]	FCC #1	3	1:2.77	0.938	1.047	0.982	
836.6	190	GSM850	GPRS	30.70	30.50	-0.060	10 mm [Rear]	FCC #1	3	1:2.77	0.988	1.047	1.034	A20
848.8	251	GSM850	GPRS	30.70	30.40	0.000	10 mm [Rear]	FCC #1	3	1:2.77	1.040	1.072	1.115	
848.8	251	GSM850	GPRS	30.70	30.40	0.040	10 mm [Rear]	FCC #1	3	1:2.77	1.030	1.072	1.104	
848.8	251	GSM850	GPRS	30.70	30.40	-0.000	10 mm [Rear]	FCC #1	3	1:2.77	1.040	1.072	1.115	
1880.0	661	PCS1900	PCS	30.70	30.30	0.020	10 mm [Front]	FCC #1	1	1:8.3	0.307	1.096	0.336	A21
1880.0	661	PCS1900	PCS	30.70	30.30	0.040	10 mm [Rear]	FCC #1	1	1:8.3	0.398	1.096	0.436	
1880.0	661	PCS1900	GPRS	27.70	27.62	-0.070	10 mm [Front]	FCC #1	3	1:2.77	0.458	1.019	0.467	
1880.0	661	PCS1900	GPRS	27.70	27.62	-0.090	10 mm [Rear]	FCC #1	3	1:2.77	0.623	1.019	0.635	
836.6	4183	WCDMA 850	RMC	25.20	24.59	-0.100	10 mm [Front]	FCC #1	N/A	1:1	0.473	1.151	0.544	A23
826.4	4132	WCDMA 850	RMC	25.20	24.66	0.010	10 mm [Rear]	FCC #1	N/A	1:1	0.725	1.132	0.821	
836.6	4183	WCDMA 850	RMC	25.20	24.59	-0.030	10 mm [Rear]	FCC #1	N/A	1:1	0.825	1.151	0.950	
846.6	4233	WCDMA 850	RMC	25.20	24.54	0.010	10 mm [Rear]	FCC #1	N/A	1:1	0.873	1.164	1.016	
846.6	4233	WCDMA 850	RMC	25.20	24.54	0.000	10 mm [Rear]	FCC #1	N/A	1:1	0.870	1.164	1.013	A24
846.6	4233	WCDMA 850	RMC	25.20	24.54	-0.000	10 mm [Rear]	FCC #1	N/A	1:1	0.872	1.164	1.015	
1732.4	1412	WCDMA 1700	RMC	24.70	24.35	-0.010	10 mm [Front]	FCC #1	N/A	1:1	0.534	1.084	0.579	
1732.4	1412	WCDMA 1700	RMC	24.70	24.35	-0.010	10 mm [Rear]	FCC #1	N/A	1:1	0.684	1.084	0.741	
1732.4	1412	WCDMA 1700	RMC	24.70	24.35	-0.020	10 mm [Rear]	FCC #1	N/A	1:1	0.683	1.084	0.740	A25
1880.0	9400	WCDMA 1900	RMC	24.70	24.22	-0.070	10 mm [Front]	FCC #1	N/A	1:1	0.573	1.117	0.640	
1880.0	9400	WCDMA 1900	RMC	24.70	24.22	-0.150	10 mm [Rear]	FCC #1	N/A	1:1	0.643	1.117	0.718	
1880.0	9400	WCDMA 1900	RMC	24.70	24.22	-0.030	10 mm [Rear]	FCC #1	N/A	1:1	0.640	1.117	0.715	
ANSI / IEEE C95.1-1992- SAFETY LIMIT								Body						
Spatial Peak								1.6 W/kg (mW/g)						
Uncontrolled Exposure/General Population Exposure								averaged over 1 gram						

Note(s):

1. Purple entries represent SIM2 (This device supports Dual SIM and is 1 RF Path.) measurements.
2. Gray entries represent variability measurements.

Table 11.2.2 LTE B12, B13, B5, B66 Body-Worn SAR

MEASUREMENT RESULTS																	
FREQUENCY		Mode/ Band	BW [MHz]	Max Allowed Power [dBm]	Cond. PWR [dBm]	Drift Power [dB]	MPR	Position	Device Serial Number	Mod.	RB Size	RB Offs.	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #
MHz	Ch																
707.5	23095	LTE B12	10	25.20	25.01	-0.010	0	10 mm [Front]	FCC #1	QPSK	1	25	1:1	0.287	1.045	0.300	A26
707.5	23095	LTE B12	10	24.20	24.10	-0.010	1	10 mm [Front]	FCC #1	QPSK	25	12	1:1	0.228	1.023	0.233	
707.5	23095	LTE B12	10	25.20	25.01	0.050	0	10 mm [Rear]	FCC #1	QPSK	1	25	1:1	0.479	1.045	0.501	
707.5	23095	LTE B12	10	24.20	24.10	0.000	1	10 mm [Rear]	FCC #1	QPSK	25	12	1:1	0.394	1.023	0.403	
707.5	23095	LTE B12	10	25.20	25.01	-0.010	0	10 mm [Rear]	FCC #1	QPSK	1	25	1:1	0.446	1.045	0.466	
782.0	23230	LTE B13	10	25.20	25.10	0.010	0	10 mm [Front]	FCC #1	QPSK	1	25	1:1	0.463	1.023	0.474	A27
782.0	23230	LTE B13	10	24.20	24.15	-0.020	1	10 mm [Front]	FCC #1	QPSK	25	12	1:1	0.374	1.012	0.378	
782.0	23230	LTE B13	10	25.20	25.10	-0.030	0	10 mm [Rear]	FCC #1	QPSK	1	25	1:1	0.658	1.023	0.673	
782.0	23230	LTE B13	10	24.20	24.15	-0.020	1	10 mm [Rear]	FCC #1	QPSK	25	12	1:1	0.529	1.012	0.535	
782.0	23230	LTE B13	10	25.20	25.10	-0.010	0	10 mm [Rear]	FCC #1	QPSK	1	25	1:1	0.634	1.023	0.649	
836.5	20525	LTE B5	10	25.20	24.98	-0.010	0	10 mm [Front]	FCC #1	QPSK	1	25	1:1	0.410	1.052	0.431	A28
836.5	20525	LTE B5	10	24.20	24.00	-0.010	1	10 mm [Front]	FCC #1	QPSK	25	12	1:1	0.320	1.047	0.335	
836.5	20525	LTE B5	10	25.20	24.98	-0.030	0	10 mm [Rear]	FCC #1	QPSK	1	25	1:1	0.671	1.052	0.706	
836.5	20525	LTE B5	10	24.20	24.00	0.020	1	10 mm [Rear]	FCC #1	QPSK	25	12	1:1	0.526	1.047	0.551	
836.5	20525	LTE B5	10	25.20	24.98	-0.000	0	10 mm [Rear]	FCC #1	QPSK	1	25	1:1	0.671	1.052	0.706	
1770.0	132572	LTE B66	20	24.70	24.68	0.020	0	10 mm [Front]	FCC #1	QPSK	1	50	1:1	0.525	1.005	0.528	A29
1770.0	132572	LTE B66	20	23.70	23.67	0.010	1	10 mm [Front]	FCC #1	QPSK	50	25	1:1	0.414	1.007	0.417	
1770.0	132572	LTE B66	20	24.70	24.68	-0.040	0	10 mm [Rear]	FCC #1	QPSK	1	50	1:1	0.724	1.005	0.728	
1770.0	132572	LTE B66	20	23.70	23.67	-0.050	1	10 mm [Rear]	FCC #1	QPSK	50	25	1:1	0.544	1.007	0.548	
1770.0	132572	LTE B66	20	24.70	24.65	-0.010	0	10 mm [Rear]	FCC #1	QPSK	1	50	1:1	0.694	1.012	0.702	
ANSI / IEEE C95.1-1992- SAFETY LIMIT										Body							
Spatial Peak										1.6 W/kg (mW/g)							
Uncontrolled Exposure/General Population Exposure										averaged over 1 gram							

Note: Purple entries represent SIM2 (This device supports Dual SIM and is 1 RF Path.) measurements.

Table 11.2.3 LTE B2, B7 Body-Worn SAR

MEASUREMENT RESULTS																	
FREQUENCY		Mode/ Band	BW [MHz]	Max Allowed Power [dBm]	Cond. PWR [dBm]	Drift Power [dB]	MPR	Position	Device Serial Number	Mod.	RB Size	RB Offs.	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #
MHz	Ch																
1 900.0	19100	LTE B2	20	24.70	24.54	-0.070	0	10 mm [Front]	FCC #1	QPSK	1	50	1:1	0.565	1.038	0.586	A30
1 900.0	19100	LTE B2	20	23.70	23.60	-0.060	1	10 mm [Front]	FCC #1	QPSK	50	25	1:1	0.516	1.023	0.528	
1 900.0	19100	LTE B2	20	24.70	24.54	-0.000	0	10 mm [Rear]	FCC #1	QPSK	1	50	1:1	0.677	1.038	0.703	
1 900.0	19100	LTE B2	20	23.70	23.60	0.070	1	10 mm [Rear]	FCC #1	QPSK	50	25	1:1	0.530	1.023	0.542	
1 900.0	19100	LTE B2	20	24.70	24.54	0.080	0	10 mm [Rear]	FCC #1	QPSK	1	50	1:1	0.653	1.038	0.678	
2 535.0	21100	LTE B7	20	24.20	23.67	0.070	0	10 mm [Front]	FCC #1	QPSK	1	50	1:1	0.393	1.130	0.444	A31
2 535.0	21100	LTE B7	20	23.20	22.71	0.010	1	10 mm [Front]	FCC #1	QPSK	50	25	1:1	0.331	1.119	0.370	
2 535.0	21100	LTE B7	20	24.20	23.67	-0.080	0	10 mm [Rear]	FCC #1	QPSK	1	50	1:1	0.650	1.130	0.735	
2 535.0	21100	LTE B7	20	23.20	22.71	-0.060	1	10 mm [Rear]	FCC #1	QPSK	50	25	1:1	0.559	1.119	0.626	
2 535.0	21100	LTE B7	20	24.20	23.67	-0.010	0	10 mm [Rear]	FCC #1	QPSK	1	50	1:1	0.615	1.130	0.695	
ANSI / IEEE C95.1-1992- SAFETY LIMIT									Body								
Spatial Peak									1.6 W/kg (mW/g)								
Uncontrolled Exposure/General Population Exposure									averaged over 1 gram								

Note: Purple entries represent SIM2 (This device supports Dual SIM and is 1 RF Path.) measurements.

Table 11.2.4 DTS Body-Worn SAR

MEASUREMENT RESULTS															
FREQUENCY		Mode	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Peak SAR of Area Scan	Data Rate [Mbps]	Duty Cycle	1g SAR (W/kg)	Scaling Factor	Scaling Factor (Duty Cycle)	SAR (W/kg)	Plots #
MHz	Ch														
2 437.0	6	802.11b	17.00	16.87	0.000	10 mm [Front]	FCC #2	0.121	1	99.1	0.119	1.030	1.009	0.124	A32
2 437.0	6	802.11b	17.00	16.87	0.050	10 mm [Rear]	FCC #2	0.165	1	99.1	0.160	1.030	1.009	0.166	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure								Body 1.6 W/kg (mW/g) averaged over 1 gram							

Adjusted SAR results for OFDM SAR												
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	1g Scaled SAR (W/kg)	FREQUENCY [MHz]	Mode	Service	Maximum Allowed Power [dBm]	Ratio of OFDM to DSSS	1g Adjusted SAR (W/kg)	Determine OFDM SAR
MHz	Ch											
2 437	6	802.11b	DSSS	17.0	0.166	2 437	802.11g	OFDM	16.0	0.794	0.132	X
2 437	6	802.11b	DSSS	17.0	0.166	2 437	802.11n	OFDM	15.0	0.631	0.105	X
ANSI / IEEE C95.1-1992~ SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure						Body 1.6 W/kg (mW/g) averaged over 1 gram						

Note: SAR is not required for the following 2.4 GHz OFDM conditions. When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.

Table 11.2.5 UNII Body-Worn SAR

MEASUREMENT RESULTS															
FREQUENCY		Mode	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Peak SAR of Area Scan	Data Rate [Mbps]	Duty Cycle	1g SAR (W/kg)	Scaling Factor	Scaling Factor (Duty Cycle)	1g Scaled SAR (W/kg)	Plots #
MHz	Ch														
5 310.0	62	802.11n (HT-40)	15.00	14.97	0.170	10 mm [Front]	FCC #2	0.056	MCS0	86.2	0.047	1.007	1.160	0.055	A33
5 310.0	62	802.11n (HT-40)	15.00	14.97	0.160	10 mm [Rear]	FCC #2	0.170	MCS0	86.2	0.191	1.007	1.160	0.223	
ANSI / IEEE C95.1-2005- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure								Body 1.6 W/kg (mW/g) averaged over 1 gram							

Adjusted SAR results for UNII-1 and UNII-2A SAR												
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	1g Scaled SAR (W/kg)	FREQUENCY [MHz]	Mode	Service	Maximum Allowed Power [dBm]	Adjusted Factor	1g Adjusted SAR (W/kg)	SAR for the band with lower maximum output power
MHz	Ch											
5 310.0	62	802.11n (HT-40)	OFDM	15.00	0.223	5 240.0	802.11a	OFDM	15.00	1.000	0.223	X
ANSI / IEEE C95.1-1992– SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure						Body 1.6 W/kg (mW/g) averaged over 1 gram						

Note: U-NII-1 and U-NII-2A Bands: When different maximum output power is specified for the bands, begin SAR measurement in the band with higher specified maximum output power. The highest reported SAR for the tested configuration is adjusted by the ratio of lower to higher specified maximum output power for the two bands. When the adjusted SAR is ≤ 1.2 W/kg, SAR is not required for the band with lower maximum output power in that test configuration.

Table 11.2.6 UNII Body-Worn SAR

MEASUREMENT RESULTS															
FREQUENCY		Mode	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Peak SAR of Area Scan	Data Rate [Mbps]	Duty Cycle	1g SAR (W/kg)	Scaling Factor	Scaling Factor (Duty Cycle)	1g Scaled SAR (W/kg)	Plots #
MHz	Ch														
5 550.0	110	802.11n (HT-40)	15.00	14.97	-0.100	10 mm [Front]	FCC #2	0.152	MCS0	86.2	0.143	1.007	1.160	0.167	A34
5 550.0	110	802.11n (HT-40)	15.00	14.97	-0.130	10 mm [Rear]	FCC #2	0.332	MCS0	86.2	0.359	1.007	1.160	0.419	
5 755.0	151	802.11n (HT-40)	15.00	14.59	0.040	10 mm [Front]	FCC #2	0.090	MCS0	86.2	0.080	1.098	1.160	0.102	A35
5 755.0	151	802.11n (HT-40)	15.00	14.59	0.080	10 mm [Rear]	FCC #2	0.227	MCS0	86.2	0.237	1.098	1.160	0.302	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure									Body 1.6 W/kg (mW/g) averaged over 1 gram						

Table 11.2.7 Bluetooth Body-Worn SAR

MEASUREMENT RESULTS														
FREQUENCY		Mode	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Rate [Mbps]	Duty Cycle (%)	1g SAR (W/kg)	Scaling Factor	Scaling Factor (Duty Cycle)	1g Scaled SAR (W/kg)	Plots #
MHz	Ch													
2 441.0	39	Bluetooth	8.85	8.69	0.020	10 mm [Front]	FCC #2	1	76.8	0.020	1.038	1.302	0.027	A36
2 441.0	39	Bluetooth	8.85	8.69	0.030	10 mm [Rear]	FCC #2	1	76.8	0.028	1.038	1.302	0.038	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure								Body 1.6 W/kg (mW/g) averaged over 1 gram						

11.3 Standalone Hotspot SAR Results

Table 11.3.1 GPRS/WCDMA Hotspot SAR

MEASUREMENT RESULTS														
FREQUENCY		Mode/ Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Spacing [Side]	Device Serial Number	# of Time Slots	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #
MHz	Ch													
836.6	190	GSM850	GPRS	30.70	30.50	0.030	10 mm [Bottom]	FCC #1	3	1.2.77	0.516	1.047	0.540	A20
836.6	190	GSM850	GPRS	30.70	30.50	-0.060	10 mm [Front]	FCC #1	3	1.2.77	0.635	1.047	0.665	
824.2	128	GSM850	GPRS	30.70	30.50	0.040	10 mm [Rear]	FCC #1	3	1.2.77	0.938	1.047	0.982	
836.6	190	GSM850	GPRS	30.70	30.50	-0.060	10 mm [Rear]	FCC #1	3	1.2.77	0.988	1.047	1.034	
848.8	251	GSM850	GPRS	30.70	30.40	0.000	10 mm [Rear]	FCC #1	3	1.2.77	1.040	1.072	1.115	
836.6	190	GSM850	GPRS	30.70	30.50	-0.110	10 mm [Left]	FCC #1	3	1.2.77	0.263	1.047	0.275	
848.8	251	GSM850	GPRS	30.70	30.40	0.040	10 mm [Rear]	FCC #1	3	1.2.77	1.030	1.072	1.104	
848.8	251	GSM850	GPRS	30.70	30.40	-0.000	10 mm [Rear]	FCC #1	3	1.2.77	1.040	1.072	1.115	
1 850.2	512	PCS1900	GPRS	27.70	27.63	-0.170	10 mm [Bottom]	FCC #1	3	1.2.77	0.722	1.016	0.734	A37
1 880.0	661	PCS1900	GPRS	27.70	27.62	0.080	10 mm [Bottom]	FCC #1	3	1.2.77	0.841	1.019	0.857	
1 909.8	810	PCS1900	GPRS	27.70	27.33	-0.180	10 mm [Bottom]	FCC #1	3	1.2.77	0.776	1.089	0.845	
1 880.0	661	PCS1900	GPRS	27.70	27.62	-0.070	10 mm [Front]	FCC #1	3	1.2.77	0.458	1.019	0.467	
1 880.0	661	PCS1900	GPRS	27.70	27.62	-0.090	10 mm [Rear]	FCC #1	3	1.2.77	0.623	1.019	0.635	
1 880.0	661	PCS1900	GPRS	27.70	27.62	-0.000	10 mm [Right]	FCC #1	3	1.2.77	0.137	1.019	0.140	
1 880.0	661	PCS1900	GPRS	27.70	27.62	-0.170	10 mm [Bottom]	FCC #1	3	1.2.77	0.822	1.019	0.838	
1 880.0	661	PCS1900	GPRS	27.70	27.62	-0.100	10 mm [Bottom]	FCC #1	3	1.2.77	0.839	1.019	0.855	
836.6	4183	WCDMA 850	RMC	25.20	24.59	-0.130	10 mm [Bottom]	FCC #1	N/A	1:1	0.399	1.151	0.459	A23
836.6	4183	WCDMA 850	RMC	25.20	24.59	-0.100	10 mm [Front]	FCC #1	N/A	1:1	0.473	1.151	0.544	
826.4	4132	WCDMA 850	RMC	25.20	24.66	0.010	10 mm [Rear]	FCC #1	N/A	1:1	0.725	1.132	0.821	
836.6	4183	WCDMA 850	RMC	25.20	24.59	-0.030	10 mm [Rear]	FCC #1	N/A	1:1	0.825	1.151	0.950	
846.6	4233	WCDMA 850	RMC	25.20	24.54	0.010	10 mm [Rear]	FCC #1	N/A	1:1	0.873	1.164	1.016	
836.6	4183	WCDMA 850	RMC	25.20	24.59	-0.020	10 mm [Left]	FCC #1	N/A	1:1	0.164	1.151	0.189	
846.6	4233	WCDMA 850	RMC	25.20	24.54	0.000	10 mm [Rear]	FCC #1	N/A	1:1	0.870	1.164	1.013	
846.6	4233	WCDMA 850	RMC	25.20	24.54	-0.000	10 mm [Rear]	FCC #1	N/A	1:1	0.872	1.164	1.015	
1 712.4	1312	WCDMA 1700	RMC	23.70	23.28	-0.190	10 mm [Bottom]	FCC #1	N/A	1:1	0.935	1.102	1.030	A38
1 732.4	1412	WCDMA 1700	RMC	23.70	23.30	-0.180	10 mm [Bottom]	FCC #1	N/A	1:1	0.966	1.096	1.059	
1752.6	1513	WCDMA 1700	RMC	23.70	23.32	-0.180	10 mm [Bottom]	FCC #1	N/A	1:1	1.010	1.091	1.102	
1 732.4	1412	WCDMA 1700	RMC	23.70	23.30	0.050	10 mm [Front]	FCC #1	N/A	1:1	0.467	1.096	0.512	
1 732.4	1412	WCDMA 1700	RMC	23.70	23.30	-0.060	10 mm [Rear]	FCC #1	N/A	1:1	0.577	1.096	0.632	
1732.4	1412	WCDMA 1700	RMC	23.70	23.30	-0.060	10 mm [Right]	FCC #1	N/A	1:1	0.161	1.096	0.176	
1752.6	1513	WCDMA 1700	RMC	23.70	23.32	-0.190	10 mm [Bottom]	FCC #1	N/A	1:1	0.940	1.091	1.026	
1752.6	1513	WCDMA 1700	RMC	23.70	23.32	-0.190	10 mm [Bottom]	FCC #1	N/A	1:1	1.010	1.091	1.102	
1 852.4	9262	WCDMA 1900	RMC	23.70	23.21	0.190	10 mm [Bottom]	FCC #1	N/A	1:1	0.838	1.119	0.938	A39
1 880.0	9400	WCDMA 1900	RMC	23.70	23.18	0.190	10 mm [Bottom]	FCC #1	N/A	1:1	0.878	1.127	0.990	
1 907.6	9538	WCDMA 1900	RMC	23.70	23.22	-0.190	10 mm [Bottom]	FCC #1	N/A	1:1	0.951	1.117	1.062	
1 880.0	9400	WCDMA 1900	RMC	23.70	23.18	0.000	10 mm [Front]	FCC #1	N/A	1:1	0.426	1.127	0.480	
1 880.0	9400	WCDMA 1900	RMC	23.70	23.18	0.010	10 mm [Rear]	FCC #1	N/A	1:1	0.506	1.127	0.570	
1 880.0	9400	WCDMA 1900	RMC	23.70	23.18	-0.150	10 mm [Right]	FCC #1	N/A	1:1	0.152	1.127	0.171	
1 907.6	9538	WCDMA 1900	RMC	23.70	23.22	-0.170	10 mm [Bottom]	FCC #1	N/A	1:1	0.921	1.117	1.029	
1907.6	9538	WCDMA 1900	RMC	23.70	23.22	-0.170	10 mm [Bottom]	FCC #1	N/A	1:1	0.949	1.117	1.060	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure								Body 1.6 W/kg (mW/g) averaged over 1 gram						

Note(s):

1. Purple entries represent SIM2 (This device supports Dual SIM and is 1 RF Path.) measurements.
2. Gray entries represent variability measurements.

Table 11.3.2 LTE B12, B13, B5 Hotspot SAR

MEASUREMENT RESULTS																	
FREQUENCY		Mode/ Band	BW [MHz]	Max Allowed Power [dBm]	Cond. PWR [dBm]	Drift Power [dB]	MPR	Position	Device Serial Number	Mod.	RB Size	RB Offs.	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #
MHz	Ch																
707.5	23095	LTE B12	10	25.20	25.01	-0.060	0	10 mm (Bottom)	FCC #1	QPSK	1	25	1:1	0.146	1.045	0.153	A26
707.5	23095	LTE B12	10	24.20	24.10	-0.020	1	10 mm (Bottom)	FCC #1	QPSK	25	12	1:1	0.117	1.023	0.120	
707.5	23095	LTE B12	10	25.20	25.01	-0.010	0	10 mm (Front)	FCC #1	QPSK	1	25	1:1	0.287	1.045	0.300	
707.5	23095	LTE B12	10	24.20	24.10	-0.010	1	10 mm (Front)	FCC #1	QPSK	25	12	1:1	0.228	1.023	0.233	
707.5	23095	LTE B12	10	25.20	25.01	0.050	0	10 mm (Rear)	FCC #1	QPSK	1	25	1:1	0.479	1.045	0.501	
707.5	23095	LTE B12	10	24.20	24.10	0.000	1	10 mm (Rear)	FCC #1	QPSK	25	12	1:1	0.394	1.023	0.403	
707.5	23095	LTE B12	10	25.20	25.01	-0.020	0	10 mm (Left)	FCC #1	QPSK	1	25	1:1	0.188	1.045	0.196	
707.5	23095	LTE B12	10	24.20	24.10	0.010	1	10 mm (Left)	FCC #1	QPSK	25	12	1:1	0.153	1.023	0.157	
707.5	23095	LTE B12	10	25.20	25.01	-0.010	0	10 mm (Rear)	FCC #1	QPSK	1	25	1:1	0.446	1.045	0.466	A27
782.0	23230	LTE B13	10	25.20	25.10	-0.060	0	10 mm (Bottom)	FCC #1	QPSK	1	25	1:1	0.239	1.023	0.244	
782.0	23230	LTE B13	10	24.20	24.15	-0.050	1	10 mm (Bottom)	FCC #1	QPSK	25	12	1:1	0.192	1.012	0.194	
782.0	23230	LTE B13	10	25.20	25.10	0.010	0	10 mm (Front)	FCC #1	QPSK	1	25	1:1	0.463	1.023	0.474	
782.0	23230	LTE B13	10	24.20	24.15	-0.020	1	10 mm (Front)	FCC #1	QPSK	25	12	1:1	0.374	1.012	0.378	
782.0	23230	LTE B13	10	25.20	25.10	-0.030	0	10 mm (Rear)	FCC #1	QPSK	1	25	1:1	0.658	1.023	0.673	
782.0	23230	LTE B13	10	24.20	24.15	-0.020	1	10 mm (Rear)	FCC #1	QPSK	25	12	1:1	0.529	1.012	0.535	
782.0	23230	LTE B13	10	25.20	25.10	0.020	0	10 mm (Left)	FCC #1	QPSK	1	25	1:1	0.244	1.023	0.250	
782.0	23230	LTE B13	10	24.20	24.15	-0.000	1	10 mm (Left)	FCC #1	QPSK	25	12	1:1	0.196	1.012	0.198	A28
782.0	23230	LTE B13	10	25.20	25.10	-0.010	0	10 mm (Rear)	FCC #1	QPSK	1	25	1:1	0.634	1.023	0.649	
836.5	20525	LTE B5	10	25.20	24.98	-0.020	0	10 mm (Bottom)	FCC #1	QPSK	1	25	1:1	0.341	1.052	0.359	
836.5	20525	LTE B5	10	24.20	24.00	-0.000	1	10 mm (Bottom)	FCC #1	QPSK	25	12	1:1	0.271	1.047	0.284	
836.5	20525	LTE B5	10	25.20	24.98	-0.010	0	10 mm (Front)	FCC #1	QPSK	1	25	1:1	0.410	1.052	0.431	
836.5	20525	LTE B5	10	24.20	24.00	-0.010	1	10 mm (Front)	FCC #1	QPSK	25	12	1:1	0.320	1.047	0.335	
836.5	20525	LTE B5	10	25.20	24.98	-0.030	0	10 mm (Rear)	FCC #1	QPSK	1	25	1:1	0.671	1.052	0.706	
836.5	20525	LTE B5	10	24.20	24.00	0.020	1	10 mm (Rear)	FCC #1	QPSK	25	12	1:1	0.526	1.047	0.551	
836.5	20525	LTE B5	10	25.20	24.98	-0.070	0	10 mm (Left)	FCC #1	QPSK	1	25	1:1	0.180	1.052	0.189	A28
836.5	20525	LTE B5	10	24.20	24.00	-0.050	1	10 mm (Left)	FCC #1	QPSK	25	12	1:1	0.137	1.047	0.143	
836.5	20525	LTE B5	10	25.20	24.98	-0.000	0	10 mm (Rear)	FCC #1	QPSK	1	25	1:1	0.671	1.052	0.706	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure									Body 1.6 W/kg (mW/g) averaged over 1 gram								

Note: Purple entries represent SIM2 (This device supports Dual SIM and is 1 RF Path.) measurements.

Table 11.3.3 LTE B66 Hotspot SAR

MEASUREMENT RESULTS																		
FREQUENCY		Mode/ Band	BW [MHz]	Max Allowed Power [dBm]	Cond. PWR [dBm]	Drift Power [dB]	MPR	Position	Device Serial Number	Mod.	RB Size	RB Offs.	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #	
MHz	Ch																	
1 720.0	132072	LTE B66	20	23.70	23.32	-0.040	0	10 mm (Bottom)	FCC #1	QPSK	1	50	1:1	0.895	1.091	0.976	A40	
1 720.0	132072	LTE B66	20	23.70	23.28	-0.180	1	10 mm (Bottom)	FCC #1	QPSK	50	25	1:1	0.866	1.102	0.954		
1 745.0	132322	LTE B66	20	23.70	23.28	-0.020	0	10 mm (Bottom)	FCC #1	QPSK	1	50	1:1	0.921	1.102	1.015		
1 745.0	132322	LTE B66	20	23.70	23.27	0.010	1	10 mm (Bottom)	FCC #1	QPSK	50	25	1:1	0.915	1.104	1.010		
1 770.0	132572	LTE B66	20	23.70	23.41	-0.150	0	10 mm (Bottom)	FCC #1	QPSK	1	50	1:1	0.951	1.069	1.017		
1 770.0	132572	LTE B66	20	23.70	23.36	-0.110	1	10 mm (Bottom)	FCC #1	QPSK	50	25	1:1	0.939	1.081	1.015		
1 770.0	132572	LTE B66	20	23.70	23.34	-0.020	1	10 mm (Bottom)	FCC #1	QPSK	100	0	1:1	0.876	1.086	0.951		
1 770.0	132572	LTE B66	20	23.70	23.41	-0.030	0	10 mm (Front)	FCC #1	QPSK	1	50	1:1	0.418	1.069	0.447		
1 770.0	132572	LTE B66	20	23.70	23.36	-0.010	1	10 mm (Front)	FCC #1	QPSK	50	25	1:1	0.410	1.081	0.443		
1 770.0	132572	LTE B66	20	23.70	23.41	-0.100	0	10 mm (Rear)	FCC #1	QPSK	1	50	1:1	0.535	1.069	0.572		
1 770.0	132572	LTE B66	20	23.70	23.36	0.010	1	10 mm (Rear)	FCC #1	QPSK	50	25	1:1	0.507	1.081	0.548		
1 770.0	132572	LTE B66	20	23.70	23.41	-0.050	0	10 mm (Right)	FCC #1	QPSK	1	50	1:1	0.140	1.069	0.150		
1 770.0	132572	LTE B66	20	23.70	23.36	-0.030	1	10 mm (Right)	FCC #1	QPSK	50	25	1:1	0.136	1.081	0.147		
1 770.0	132572	LTE B66	20	23.70	23.41	-0.080	0	10 mm (Bottom)	FCC #1	QPSK	1	50	1:1	0.911	1.069	0.974		
1 770.0	132572	LTE B66	20	23.70	23.41	-0.130	0	10 mm (Bottom)	FCC #1	QPSK	1	50	1:1	0.950	1.069	1.016		
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure										Body 1.6 W/kg (mW/g) averaged over 1 gram								

Note(s):

1. Purple entries represent SIM2 (This device supports Dual SIM and is 1 RF Path.) measurements.

2. Gray entries represent variability measurements.

Table 11.3.4 LTE B2 Hotspot SAR

MEASUREMENT RESULTS																	
FREQUENCY		Mode/ Band	BW [MHz]	Max Allowed Power [dBm]	Cond. PWR [dBm]	Drift Power [dB]	MPR	Position	Device Serial Number	Mod.	RB Size	RB Offs.	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #
MHz	Ch																
1 860.0	18700	LTE B2	20	23.70	23.47	-0.190	0	10 mm (Bottom)	FCC #1	QPSK	1	50	1:1	0.781	1.054	0.823	A41
1 860.0	18700	LTE B2	20	23.70	23.39	-0.190	1	10 mm (Bottom)	FCC #1	QPSK	50	25	1:1	0.764	1.074	0.821	
1 880.0	18900	LTE B2	20	23.70	23.45	-0.190	0	10 mm (Bottom)	FCC #1	QPSK	1	50	1:1	0.814	1.059	0.862	
1 880.0	18900	LTE B2	20	23.70	23.30	-0.180	1	10 mm (Bottom)	FCC #1	QPSK	50	25	1:1	0.790	1.096	0.866	
1 900.0	19100	LTE B2	20	23.70	23.63	-0.180	0	10 mm (Bottom)	FCC #1	QPSK	1	50	1:1	0.899	1.016	0.913	
1 900.0	19100	LTE B2	20	23.70	23.47	-0.180	1	10 mm (Bottom)	FCC #1	QPSK	50	25	1:1	0.828	1.054	0.873	
1 900.0	19100	LTE B2	20	23.70	23.45	-0.190	1	10 mm (Bottom)	FCC #1	QPSK	100	0	1:1	0.807	1.059	0.855	
1 900.0	19100	LTE B2	20	23.70	23.63	-0.040	0	10 mm (Front)	FCC #1	QPSK	1	50	1:1	0.491	1.016	0.499	
1 900.0	19100	LTE B2	20	23.70	23.47	-0.070	1	10 mm (Front)	FCC #1	QPSK	50	25	1:1	0.477	1.054	0.503	
1 900.0	19100	LTE B2	20	23.70	23.63	0.020	0	10 mm (Rear)	FCC #1	QPSK	1	50	1:1	0.550	1.016	0.559	
1 900.0	19100	LTE B2	20	23.70	23.47	0.020	1	10 mm (Rear)	FCC #1	QPSK	50	25	1:1	0.542	1.054	0.571	
1 905.0	19100	LTE B2	20	23.70	23.63	-0.010	0	10 mm (Right)	FCC #1	QPSK	1	50	1:1	0.152	1.016	0.154	
1 905.0	19100	LTE B2	20	23.70	23.47	-0.020	1	10 mm (Right)	FCC #1	QPSK	50	25	1:1	0.141	1.054	0.149	
1 900.0	19100	LTE B2	20	23.70	23.63	-0.190	0	10 mm (Bottom)	FCC #1	QPSK	1	50	1:1	0.869	1.016	0.883	
1 900.0	19100	LTE B2	20	23.70	23.63	-0.170	0	10 mm (Bottom)	FCC #1	QPSK	1	25	1:1	0.858	1.016	0.872	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure									Body 1.6 W/kg (mW/g) averaged over 1 gram								

Note(s):

1. Purple entries represent SIM2 (This device supports Dual SIM and is 1 RF Path.) measurements.

2. Gray entries represent variability measurements.

Table 11.3.5 LTE B7 Hotspot SAR

MEASUREMENT RESULTS																	
FREQUENCY		Mode/ Band	BW [MHz]	Max Allowed Power [dBm]	Cond. PWR [dBm]	Drift Power [dB]	MPR	Position	Device Serial Number	Mod.	RB Size	RB Offs.	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #
MHz	Ch																
2 535.0	21100	LTE B7	20	23.20	22.74	0.030	0	10 mm (Bottom)	FCC #1	QPSK	1	50	1:1	0.555	1.112	0.617	A42
2 535.0	21100	LTE B7	20	23.20	22.71	0.080	1	10 mm (Bottom)	FCC #1	QPSK	50	25	1:1	0.521	1.119	0.583	
2 535.0	21100	LTE B7	20	23.20	22.74	-0.020	0	10 mm (Front)	FCC #1	QPSK	1	50	1:1	0.319	1.112	0.355	
2 535.0	21100	LTE B7	20	23.20	22.71	0.050	1	10 mm (Front)	FCC #1	QPSK	50	25	1:1	0.311	1.119	0.348	
2 535.0	21100	LTE B7	20	23.20	22.74	-0.070	0	10 mm (Rear)	FCC #1	QPSK	1	50	1:1	0.538	1.112	0.598	
2 535.0	21100	LTE B7	20	23.20	22.71	-0.070	1	10 mm (Rear)	FCC #1	QPSK	50	25	1:1	0.494	1.119	0.553	
2 535.0	21100	LTE B7	20	23.20	22.74	0.010	0	10 mm (Right)	FCC #1	QPSK	1	50	1:1	0.118	1.112	0.131	
2 535.0	21100	LTE B7	20	23.20	22.71	-0.040	1	10 mm (Right)	FCC #1	QPSK	50	25	1:1	0.115	1.119	0.129	
2 535.0	21100	LTE B7	20	23.20	22.74	0.070	0	10 mm (Bottom)	FCC #1	QPSK	1	50	1:1	0.551	1.112	0.613	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure										Body 1.6 W/kg (mW/g) averaged over 1 gram							

Note: Purple entries represent SIM2 (This device supports Dual SIM and is 1 RF Path.) measurements.

Table 11.3.6 DTS Hotspot SAR

MEASUREMENT RESULTS															
FREQUENCY		Mode	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Peak SAR of Area Scan	Data Rate [Mbps]	Duty Cycle	1g SAR (W/kg)	Scaling Factor	Scaling Factor (Duty Cycle)	SAR (W/kg)	Plots #
MHz	Ch														
2 437.0	6	802.11b	17.00	16.87	-0.090	10 mm [Top]	FCC #2	0.084	1	99.1	0.081	1.030	1.009	0.084	
2 437.0	6	802.11b	17.00	16.87	0.000	10 mm [Front]	FCC #2	0.121	1	99.1	0.119	1.030	1.009	0.124	
2 437.0	6	802.11b	17.00	16.87	0.050	10 mm [Rear]	FCC #2	0.165	1	99.1	0.160	1.030	1.009	0.166	
2 437.0	6	802.11b	17.00	16.87	-0.140	10 mm [Right]	FCC #2	0.240	1	99.1	0.277	1.030	1.009	0.288	A43
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure								Body 1.6 W/kg (mW/g) averaged over 1 gram							

Adjusted SAR results for OFDM SAR												
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	1g Scaled SAR (W/kg)	FREQUENCY [MHz]	Mode	Service	Maximum Allowed Power [dBm]	Ratio of OFDM to DSSS	1g Adjusted SAR (W/kg)	Determine OFDM SAR
MHz	Ch											
2 437.0	6	802.11b	DSSS	17.0	0.288	2 437.0	802.11g	OFDM	16.0	0.794	0.229	X
2 437.0	6	802.11b	DSSS	17.0	0.288	2 437.0	802.11n	OFDM	15.0	0.631	0.182	X
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure										Body 1.6 W/kg (mW/g) averaged over 1 gram		

Note: SAR is not required for the following 2.4 GHz OFDM conditions. When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.

Table 11.3.7 UNII Hotspot SAR

MEASUREMENT RESULTS															
FREQUENCY		Mode	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Peak SAR of Area Scan	Data Rate [Mbps]	Duty Cycle	1g SAR (W/kg)	Scaling Factor	Scaling Factor (Duty Cycle)	1g Scaled SAR (W/kg)	Plots #
MHz	Ch														
5 230.0	46	802.11n (HT-40)	15.00	14.78	-0.160	10 mm [Top]	FCC #2	0.068	MCS0	86.2	0.058	1.052	1.160	0.071	
5 230.0	46	802.11n (HT-40)	15.00	14.78	-0.120	10 mm [Front]	FCC #2	0.056	MCS0	86.2	0.035	1.052	1.160	0.043	
5 230.0	46	802.11n (HT-40)	15.00	14.78	0.000	10 mm [Rear]	FCC #2	0.191	MCS0	86.2	0.193	1.052	1.160	0.236	
5 230.0	46	802.11n (HT-40)	15.00	14.78	-0.090	10 mm [Right]	FCC #2	0.224	MCS0	86.2	0.226	1.052	1.160	0.276	A44
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure									Body 1.6 W/kg (mW/g) averaged over 1 gram						

Table 11.3.8 UNII Hotspot SAR

MEASUREMENT RESULTS															
FREQUENCY		Mode	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Peak SAR of Area Scan	Data Rate [Mbps]	Duty Cycle	1g SAR (W/kg)	Scaling Factor	Scaling Factor (Duty Cycle)	1g Scaled SAR (W/kg)	Plot #
MHz	Ch														
5 755.0	151	802.11n (HT-40)	15.00	14.59	0.180	10 mm [Top]	FCC #2	0.051	MCS0	86.2	0.049	1.098	1.160	0.062	A35
5 755.0	151	802.11n (HT-40)	15.00	14.59	0.040	10 mm [Front]	FCC #2	0.090	MCS0	86.2	0.080	1.098	1.160	0.102	
5 755.0	151	802.11n (HT-40)	15.00	14.59	0.080	10 mm [Rear]	FCC #2	0.227	MCS0	86.2	0.237	1.098	1.160	0.302	
5 755.0	151	802.11n (HT-40)	15.00	14.59	0.030	10 mm [Right]	FCC #2	0.214	MCS0	86.2	0.214	1.098	1.160	0.273	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure									Body 1.6 W/kg (mW/g) averaged over 1 gram						

Table 11.3.9 Bluetooth Hotspot SAR

MEASUREMENT RESULTS														
FREQUENCY		Mode	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Rate [Mbps]	Duty Cycle (%)	1g SAR (W/kg)	Scaling Factor	Scaling Factor (Duty Cycle)	1g Scaled SAR (W/kg)	Plots #
MHz	Ch													
2 441.0	39	Bluetooth	8.85	8.69	0.160	10 mm [Top]	FCC #2	1	76.8	0.009	1.038	1.302	0.012	A45
2 441.0	39	Bluetooth	8.85	8.69	0.020	10 mm [Front]	FCC #2	1	76.8	0.020	1.038	1.302	0.027	
2 441.0	39	Bluetooth	8.85	8.69	0.030	10 mm [Rear]	FCC #2	1	76.8	0.028	1.038	1.302	0.038	
2 441.0	39	Bluetooth	8.85	8.69	-0.100	10 mm [Right]	FCC #2	1	76.8	0.033	1.038	1.302	0.045	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure								Body 1.6 W/kg (mW/g) averaged over 1 gram						

11.4 Standalone Phablet SAR Results

Per FCC KDB Publication 648474 D04 Handset SAR, Phablet SAR tests were not required when Hotspot 1g SAR (scaled to maximum output power including tolerance) < 1.2 W/kg.

Since the proximity sensor is enabled in WCDMA 1700, WCDMA 1900, LTE B66, LTE B4, LTE B2, and LTE B7 of this device, Phablet SAR Evaluation was performed.

Table 11.4.1 WCDMA Phablet SAR

FREQUENCY		Mode/ Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Spacing [Side]	Device Serial Number	# of Time Slots	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #
1732.4	1412	WCDMA 1700	RMC	24.70	24.35	0.030	5 mm [Bottom]	FCC #1	N/A	1:1	1.470	1.084	1.593	
1732.4	1412	WCDMA 1700	RMC	24.70	24.35	-0.030	2 mm [Front]	FCC #1	N/A	1:1	1.230	1.084	1.333	
1712.4	1312	WCDMA 1700	RMC	24.70	24.36	-0.080	1 mm [Rear]	FCC #1	N/A	1:1	2.300	1.081	2.486	
1732.4	1412	WCDMA 1700	RMC	24.70	24.35	-0.090	1 mm [Rear]	FCC #1	N/A	1:1	2.340	1.084	2.537	
1752.6	1513	WCDMA 1700	RMC	24.70	24.39	-0.120	1 mm [Rear]	FCC #1	N/A	1:1	2.360	1.074	2.535	
1732.4	1412	WCDMA 1700	RMC	24.70	24.35	0.030	0 mm [Right]	FCC #1	N/A	1:1	0.473	1.084	0.513	
1712.4	1312	WCDMA 1700	RMC	23.70	23.28	-0.190	0 mm [Bottom]	FCC #1	N/A	1:1	2.710	1.102	2.986	A46
1732.4	1412	WCDMA 1700	RMC	23.70	23.30	-0.010	0 mm [Bottom]	FCC #1	N/A	1:1	2.690	1.096	2.948	
1752.6	1513	WCDMA 1700	RMC	23.70	23.32	-0.120	0 mm [Bottom]	FCC #1	N/A	1:1	2.560	1.091	2.793	
1732.4	1412	WCDMA 1700	RMC	23.70	23.30	-0.030	0 mm [Front]	FCC #1	N/A	1:1	1.630	1.096	1.786	
1712.4	1312	WCDMA 1700	RMC	23.70	23.28	-0.000	0 mm [Rear]	FCC #1	N/A	1:1	2.160	1.102	2.380	
1732.4	1412	WCDMA 1700	RMC	23.70	23.30	-0.010	0 mm [Rear]	FCC #1	N/A	1:1	2.190	1.096	2.400	
1752.6	1513	WCDMA 1700	RMC	23.70	23.32	0.020	0 mm [Rear]	FCC #1	N/A	1:1	2.200	1.091	2.400	
1712.4	1312	WCDMA 1700	RMC	23.70	23.28	-0.040	0 mm [Bottom]	FCC #1	N/A	1:1	2.680	1.102	2.953	
1712.4	1312	WCDMA 1700	RMC	23.70	23.28	0.080	0 mm [Bottom]	FCC #1	N/A	1:1	2.710	1.102	2.986	
1880.0	9400	WCDMA 1900	RMC	24.70	24.22	0.090	5 mm [Bottom]	FCC #1	N/A	1:1	1.040	1.117	1.162	
1880.0	9400	WCDMA 1900	RMC	24.70	24.22	-0.140	2 mm [Front]	FCC #1	N/A	1:1	1.460	1.117	1.631	
1852.4	9262	WCDMA 1900	RMC	24.70	24.27	0.190	1 mm [Rear]	FCC #1	N/A	1:1	2.380	1.104	2.628	
1880.0	9400	WCDMA 1900	RMC	24.70	24.22	0.060	1 mm [Rear]	FCC #1	N/A	1:1	2.140	1.117	2.390	
1907.6	9538	WCDMA 1900	RMC	24.70	24.28	0.190	1 mm [Rear]	FCC #1	N/A	1:1	2.080	1.102	2.292	
1880.0	9400	WCDMA 1900	RMC	24.70	24.22	-0.040	0 mm [Right]	FCC #1	N/A	1:1	0.466	1.117	0.521	
1852.4	9262	WCDMA 1900	RMC	23.70	23.21	-0.070	0 mm [Bottom]	FCC #1	N/A	1:1	2.460	1.119	2.753	
1880.0	9400	WCDMA 1900	RMC	23.70	23.18	-0.150	0 mm [Bottom]	FCC #1	N/A	1:1	2.510	1.127	2.829	A47
1907.6	9538	WCDMA 1900	RMC	23.70	23.22	0.060	0 mm [Bottom]	FCC #1	N/A	1:1	2.480	1.117	2.770	
1852.4	9262	WCDMA 1900	RMC	23.70	23.21	-0.040	0 mm [Front]	FCC #1	N/A	1:1	1.960	1.119	2.193	
1880.0	9400	WCDMA 1900	RMC	23.70	23.18	-0.050	0 mm [Front]	FCC #1	N/A	1:1	1.840	1.127	2.074	
1907.6	9538	WCDMA 1900	RMC	23.70	23.22	-0.050	0 mm [Front]	FCC #1	N/A	1:1	1.870	1.117	2.089	
1852.4	9262	WCDMA 1900	RMC	23.70	23.21	-0.080	0 mm [Rear]	FCC #1	N/A	1:1	2.370	1.119	2.652	
1880.0	9400	WCDMA 1900	RMC	23.70	23.18	-0.100	0 mm [Rear]	FCC #1	N/A	1:1	2.140	1.127	2.412	
1907.6	9538	WCDMA 1900	RMC	23.70	23.22	-0.090	0 mm [Rear]	FCC #1	N/A	1:1	2.120	1.117	2.368	
1880.0	9400	WCDMA 1900	RMC	23.70	23.18	-0.040	0 mm [Bottom]	FCC #1	N/A	1:1	2.410	1.127	2.716	
1880.0	9400	WCDMA 1900	RMC	23.70	23.18	0.000	0 mm [Bottom]	FCC #1	N/A	1:1	2.510	1.127	2.829	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure								Phablet 4.0 W/kg (mW/g) averaged over 10 gram						

Note(s):

1. Purple entries represent SIM2 (This device supports Dual SIM and is 1 RF Path.) measurements.
2. Gray entries represent variability measurements.

Table 11.4.2 LTE Phablet SAR

MEASUREMENT RESULTS																	
FREQUENCY		Mode/ Band	BW [MHz]	Max Allowed Power [dBm]	Cond. PWR [dBm]	Drift Power [dB]	MPR	Position	Device Serial Number	Mod.	RB Size	RB Offs.	Duty Cycle	10g SAR (W/kg)	Scaling Factor	10g Scaled SAR (W/kg)	Plots #
MHz	Ch																
1 770.0	132572	LTE B66	20	24.70	24.68	-0.111	0	5 mm [Bottom]	FCC #1	QPSK	1	50	1:1	1.380	1.005	1.387	A48
1 770.0	132572	LTE B66	20	23.70	23.67	0.100	1	5 mm [Bottom]	FCC #1	QPSK	50	25	1:1	1.100	1.007	1.108	
1 770.0	132572	LTE B66	20	24.70	24.68	0.090	0	2 mm [Front]	FCC #1	QPSK	1	50	1:1	1.290	1.005	1.296	
1 770.0	132572	LTE B66	20	23.70	23.67	0.090	1	2 mm [Front]	FCC #1	QPSK	50	25	1:1	1.020	1.007	1.027	
1 720.0	132072	LTE B66	20	24.70	24.65	-0.010	0	1 mm [Rear]	FCC #1	QPSK	1	50	1:1	1.700	1.012	1.720	
1 745.0	132322	LTE B66	20	24.70	24.60	-0.030	0	1 mm [Rear]	FCC #1	QPSK	1	50	1:1	1.740	1.023	1.780	
1 770.0	132572	LTE B66	20	24.70	24.68	-0.010	0	1 mm [Rear]	FCC #1	QPSK	1	50	1:1	1.830	1.005	1.839	
1 770.0	132572	LTE B66	20	23.70	23.67	-0.030	1	1 mm [Rear]	FCC #1	QPSK	50	25	1:1	1.470	1.007	1.480	
1 770.0	132572	LTE B66	20	23.70	23.66	-0.010	1	1 mm [Rear]	FCC #1	QPSK	100	0	1:1	1.403	1.009	1.416	
1 770.0	132572	LTE B66	20	24.70	24.68	0.190	0	0 mm [Right]	FCC #1	QPSK	1	0	1:1	0.457	1.005	0.459	
1 770.0	132572	LTE B66	20	23.70	23.67	0.140	1	0 mm [Right]	FCC #1	QPSK	50	0	1:1	0.354	1.007	0.356	
1 720.0	132072	LTE B66	20	23.70	23.32	0.060	0	0 mm [Bottom]	FCC #1	QPSK	1	50	1:1	2.820	1.091	3.077	
1 720.0	132072	LTE B66	20	23.70	23.28	0.080	1	0 mm [Bottom]	FCC #1	QPSK	50	25	1:1	2.660	1.102	2.931	
1 745.0	132322	LTE B66	20	23.70	23.28	0.040	0	0 mm [Bottom]	FCC #1	QPSK	1	50	1:1	2.770	1.102	3.053	
1 745.0	132322	LTE B66	20	23.70	23.27	0.190	1	0 mm [Bottom]	FCC #1	QPSK	50	25	1:1	2.660	1.104	2.937	
1 770.0	132572	LTE B66	20	23.70	23.41	-0.030	0	0 mm [Bottom]	FCC #1	QPSK	1	50	1:1	2.930	1.069	3.132	
1 770.0	132572	LTE B66	20	23.70	23.36	-0.130	1	0 mm [Bottom]	FCC #1	QPSK	50	25	1:1	2.860	1.081	3.092	
1 770.0	132572	LTE B66	20	23.70	23.34	-0.050	1	0 mm [Bottom]	FCC #1	QPSK	100	0	1:1	2.730	1.086	2.965	
1 770.0	132572	LTE B66	20	23.70	23.41	0.160	0	0 mm [Front]	FCC #1	QPSK	1	50	1:1	1.510	1.069	1.614	
1 770.0	132572	LTE B66	20	23.70	23.36	0.100	1	0 mm [Front]	FCC #1	QPSK	50	25	1:1	1.490	1.081	1.611	
1 720.0	132072	LTE B66	20	23.70	23.32	0.170	0	0 mm [Rear]	FCC #1	QPSK	1	50	1:1	1.950	1.091	2.127	
1 720.0	132072	LTE B66	20	23.70	23.28	0.190	1	0 mm [Rear]	FCC #1	QPSK	50	25	1:1	1.870	1.102	2.061	
1 745.0	132322	LTE B66	20	23.70	23.28	0.190	0	0 mm [Rear]	FCC #1	QPSK	1	50	1:1	1.970	1.102	2.171	
1 745.0	132322	LTE B66	20	23.70	23.27	0.170	1	0 mm [Rear]	FCC #1	QPSK	50	25	1:1	1.920	1.104	2.120	
1 770.0	132572	LTE B66	20	23.70	23.41	0.190	0	0 mm [Rear]	FCC #1	QPSK	1	50	1:1	2.040	1.069	2.181	
1 770.0	132572	LTE B66	20	23.70	23.36	0.120	1	0 mm [Rear]	FCC #1	QPSK	50	25	1:1	2.010	1.081	2.173	
1 770.0	132572	LTE B66	20	23.70	23.34	-0.120	1	0 mm [Rear]	FCC #1	QPSK	100	0	1:1	1.930	1.086	2.096	
1 770.0	132572	LTE B66	20	23.70	23.41	0.080	0	0 mm [Bottom]	FCC #1	QPSK	1	50	1:1	2.750	1.069	2.940	
1 770.0	132572	LTE B66	20	23.70	23.41	0.080	0	0 mm [Bottom]	FCC #1	QPSK	1	25	1:1	2.920	1.069	3.121	
1 900.0	19100	LTE B2	20	24.70	24.54	-0.170	0	5 mm [Bottom]	FCC #1	QPSK	1	50	1:1	1.420	1.038	1.474	
1 900.0	19100	LTE B2	20	23.70	23.60	-0.090	1	5 mm [Bottom]	FCC #1	QPSK	50	25	1:1	1.140	1.023	1.166	
1 900.0	19100	LTE B2	20	24.70	24.54	-0.100	0	2 mm [Front]	FCC #1	QPSK	1	50	1:1	1.260	1.038	1.308	
1 900.0	19100	LTE B2	20	23.70	23.60	-0.110	1	2 mm [Front]	FCC #1	QPSK	50	25	1:1	1.090	1.023	1.115	
1 860.0	18700	LTE B2	20	24.70	24.90	0.170	0	1 mm [Rear]	FCC #1	QPSK	1	50	1:1	2.130	0.955	2.034	
1 880.0	18900	LTE B2	20	24.70	24.83	0.180	0	1 mm [Rear]	FCC #1	QPSK	1	50	1:1	2.050	0.971	1.991	
1 900.0	19100	LTE B2	20	24.70	24.54	0.180	0	1 mm [Rear]	FCC #1	QPSK	1	50	1:1	1.950	1.038	2.024	
1 900.0	19100	LTE B2	20	23.70	23.60	0.100	1	1 mm [Rear]	FCC #1	QPSK	50	25	1:1	1.820	1.023	1.862	
1 905.0	26590	LTE B2	20	24.20	23.92	0.090	1	0 mm [Rear]	FCC #1	QPSK	100	0	1:1	1.710	1.067	1.825	
1 905.0	26590	LTE B2	20	24.70	24.54	-0.190	0	0 mm [Right]	FCC #1	QPSK	1	50	1:1	0.470	1.038	0.488	
1 905.0	26590	LTE B2	20	23.70	23.60	-0.190	1	0 mm [Right]	FCC #1	QPSK	50	25	1:1	0.389	1.023	0.398	
1 860.0	18700	LTE B2	20	23.70	23.47	0.080	0	0 mm [Bottom]	FCC #1	QPSK	1	50	1:1	3.040	1.054	3.204	
1 860.0	18700	LTE B2	20	23.70	23.39	0.190	1	0 mm [Bottom]	FCC #1	QPSK	50	25	1:1	2.820	1.074	3.029	
1 880.0	18900	LTE B2	20	23.70	23.45	0.160	0	0 mm [Bottom]	FCC #1	QPSK	1	50	1:1	3.050	1.059	3.230	
1 880.0	18900	LTE B2	20	23.70	23.30	0.070	1	0 mm [Bottom]	FCC #1	QPSK	50	25	1:1	2.840	1.096	3.113	
1 900.0	19100	LTE B2	20	23.70	23.63	0.040	0	0 mm [Bottom]	FCC #1	QPSK	1	50	1:1	3.220	1.016	3.272	
1 900.0	19100	LTE B2	20	23.70	23.47	-0.140	1	0 mm [Bottom]	FCC #1	QPSK	50	25	1:1	3.100	1.054	3.267	
1 900.0	19100	LTE B2	20	23.70	23.45	0.190	1	0 mm [Bottom]	FCC #1	QPSK	100	0	1:1	2.930	1.059	3.103	
1 860.0	18700	LTE B2	20	23.70	23.47	-0.080	0	0 mm [Front]	FCC #1	QPSK	1	50	1:1	1.950	1.054	2.055	
1 860.0	18700	LTE B2	20	23.70	23.39	-0.070	1	0 mm [Front]	FCC #1	QPSK	50	25	1:1	1.810	1.074	1.944	
1 880.0	18900	LTE B2	20	23.70	23.45	-0.080	0	0 mm [Front]	FCC #1	QPSK	1	50	1:1	1.910	1.059	2.023	
1 880.0	18900	LTE B2	20	23.70	23.30	-0.080	1	0 mm [Front]	FCC #1	QPSK	50	25	1:1	1.820	1.096	1.995	
1 900.0	19100	LTE B2	20	23.70	23.63	-0.080	0	0 mm [Front]	FCC #1	QPSK	1	0	1:1	2.060	1.016	2.093	
1 900.0	19100	LTE B2	20	23.70	23.47	-0.070	1	0 mm [Front]	FCC #1	QPSK	50	50	1:1	1.910	1.054	2.013	
1 900.0	19100	LTE B2	20	23.70	23.45	-0.060	1	0 mm [Front]	FCC #1	QPSK	100	0	1:1	1.810	1.059	1.917	
1 860.0	18700	LTE B2	20	23.70	23.47	0.140	0	0 mm [Rear]	FCC #1	QPSK	1	50	1:1	2.570	1.054	2.709	
1 860.0	18700	LTE B2	20	23.70	23.39	0.000	1	0 mm [Rear]	FCC #1	QPSK	50	25	1:1	2.460	1.074	2.642	
1 880.0	18900	LTE B2	20	23.70	23.45	0.150	0	0 mm [Rear]	FCC #1	QPSK	1	50	1:1	2.490	1.059	2.637	
1 880.0	18900	LTE B2	20	23.70	23.30	0.000	1	0 mm [Rear]	FCC #1	QPSK	50	25	1:1	2.310	1.096	2.532	
1 900.0	19100	LTE B2	20	23.70	23.63	0.180	0	0 mm [Rear]	FCC #1	QPSK	1	25	1:1	2.290	1.016	2.327	
1 900.0	19100	LTE B2	20	23.70	23.47	0.190	1	0 mm [Rear]	FCC #1	QPSK	50	0	1:1	2.280	1.054	2.403	
1 900.0	19100	LTE B2	20	23.70	23.45	0.070	1	0 mm [Rear]	FCC #1	QPSK	100	0	1:1	2.340	1.059	2.478	
1 900.0	19100	LTE B2	20	23.70	23.63	0.050	0	0 mm [Bottom]	FCC #1	QPSK	1	25	1:1	3.000	1.016	3.048	

Table 11.4.3 UNII Phablet SAR

MEASUREMENT RESULTS															
FREQUENCY		Mode	Maximum Allowed Power (dBm)	Conducted Power (dBm)	Drift Power (dB)	Phantom Position	Device Serial Number	Peak SAR of Area Scan	Data Rate (Mbps)	Duty Cycle	10g SAR (W/kg)	Scaling Factor	Scaling Factor (Duty Cycle)	10g Scaled SAR (W/kg)	Photo #
MHz	Ch														
5 310.0	62	802.11n (HT-40)	15.00	14.97	-0.050	0 mm [Top]	FCC #2	0.098	MCS0	86.2	0.098	1.007	1.160	0.114	A51
5 310.0	62	802.11n (HT-40)	15.00	14.97	-0.180	0 mm [Front]	FCC #2	0.116	MCS0	86.2	0.148	1.007	1.160	0.173	
5 310.0	62	802.11n (HT-40)	15.00	14.97	-0.080	0 mm [Rear]	FCC #2	0.328	MCS0	86.2	0.441	1.007	1.160	0.515	
5 310.0	62	802.11n (HT-40)	15.00	14.97	0.140	0 mm [Right]	FCC #2	0.489	MCS0	86.2	0.612	1.007	1.160	0.715	
5550.0	110	802.11n (HT-40)	16.00	15.98	-0.110	0 mm [Top]	FCC #2	0.181	MCS0	86.2	0.222	1.005	1.160	0.259	
5550.0	110	802.11n (HT-40)	16.00	15.98	0.070	0 mm [Front]	FCC #2	0.372	MCS0	86.2	0.357	1.005	1.160	0.416	A52
5550.0	110	802.11n (HT-40)	16.00	15.98	-0.110	0 mm [Rear]	FCC #2	0.614	MCS0	86.2	0.692	1.005	1.160	0.807	
5550.0	110	802.11n (HT-40)	16.00	15.98	0.010	0 mm [Right]	FCC #2	0.516	MCS0	86.2	0.653	1.005	1.160	0.761	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure												Phablet 4.0 W/kg (mW/g) averaged over 10 grams			

11.5 SAR Test Notes

General Notes:

- The test data reported are the worst-case SAR values according to test procedures specified in IEEE 1528-2013, and FCC KDB Publication 447498 D01v06.
- Batteries are fully charged at the beginning of the SAR measurements. A standard battery was used for all SAR measurements.
- Liquid tissue depth was at least 15.0 cm for all frequencies.
- The manufacturer has confirmed that the device(s) tested have the same physical, mechanical and thermal characteristics and are within operational tolerances expected for production units
- SAR results were scaled to the maximum allowed power to demonstrate compliance per FCC KDB Publication 447498 D01v06.
- Device was tested using a fixed spacing for body-worn accessory testing. A separation distance of 10 mm was considered because the manufacturer has determined that there will be body-worn accessories available in the marketplace for users to support this separation distance.
- Per FCC KDB Publication 648474 D04v01r03, body-worn SAR was evaluated without a headset connected to the device. Since the standalone reported boy-worn SAR was not > 1.2 W/kg, no additional body-worn SAR evaluations using a headset cable were performed.
- During SAR Testing for the Wireless Router conditions per FCC KDB Publication 941225 D06v02r01, the actual Portable Hotspot operation (with actual simultaneous transmission of a transmitter with WIFI) was not activated.
- SAR measurements were performed using the DASY5 automated system. The procedure for spatial peak SAR evaluation has been implemented according to the IEEE 1528 standard. During a maximum search, global and local maxima searches are automatically performed in 2-D after each area scan measurement. The algorithm will find the global maximum and all local maxima within 2 dB of the global maxima for all SAR distributions. All local maxima within 2 dB of the global maximum were searched and passed for the Zoom Scan measurement.

GSM Notes:

- Body-Worn accessory testing is typically associated with voice operations. Therefore, GSM voice was evaluated for body-worn SAR.
- This device supports GSM VOIP in the head and body-worn configurations; therefore GPRS was additionally evaluated for head and body-worn compliance.
- Justification for reduced test configurations per KDB Publication 941225 D01v03r01 and October2013 TCB Workshop Notes: The source-based frame-averaged output power was evaluated for all GPRS/EDGE slot configurations. The configuration with the highest target frame averaged output power was evaluated for hotspot SAR.
- Per FCC KDB Publication 447498 D01v06, if the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is ≤ 0.8 W/kg then testing at the other channels is not required for such test configuration(s). Since the maximum output power variation across the required test channels is not > ½ dB, the middle channel was used for testing.

WCDMA (UMTS) Notes:

1. WCDMA (UMTS) mode in was tested under RMC 12.2 kbps with HSPA Inactive per KDB Publication 941225 D01v03r01. AMR and HSPA SAR was not required since the average output power of the HSPA subtests was not more than 0.25 dB higher than the RMC level and SAR was less than 1.2 W/kg.
2. Per FCC KDB Publication 447498 D01v06, if the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is ≤ 0.8 W/kg then testing at the other channels is not required for such test configuration(s). When the maximum output power variation across the required test channels is $> \frac{1}{2}$ dB, instead of the middle channel, the highest output power channel was used.

LTE Notes:

1. LTE Considerations: LTE test configurations are determined according to SAR Evaluation Considerations for LTE Devices in FCC KDB Publication 941225 D05v02r05. The general test procedures used for testing can be found in Section 8.4.4.
2. According to FCC KDB 941225 D05v02r05, when the reported SAR is ≤ 0.8 W/kg, testing of the 100% RB allocation and required test channels is not required.
Otherwise, SAR is required for the remaining required test channels using the 1 RB, 50% RB and 100% RB allocation with highest output power for that channel.
Only one channel, and as reported SAR values for 1 RB allocation and 50% RB allocation were less than 1.45 W/kg only the highest power RB offset for each allocation was required.
3. MPR is permanently implemented for this device by the manufacturer. The specific manufacturer target MPR is indicated alongside the SAR results. MPR is enabled for this device, according to 3GPP TS36. 101 Section 6.2.3 – 6.2.5 under Table 6.2.3-1.
4. A-MPR was disabled for all SAR tests by setting NS=1 on the base station simulator. SAR tests were performed with the same number of RB and RB offsets transmitting on all TTI frames (maximum TTI).
5. Per KDB Publication 941225 D05Av01r02, SAR for LTE CA operations was not needed since the maximum average output power in LTE CA mode was not > 0.25 dB higher than the maximum output power when downlink carrier aggregation was inactive.
6. SAR test reduction is applied using the following criteria:
Start with the largest channel bandwidth and measure SAR for QPSK with 1 RB, and 50% RB allocation, using the RB offset and required test channel combination with the highest maximum output power among RB offsets at the upper edge, middle and lower edge of each required test channel. When the reported SAR is > 0.8 W/kg, testing for other channels is performed at the highest output power level for 1 RB, and 50% RB configuration for that channel. Testing for 100% RB configuration is performed at the highest output power level for 100% RB configuration across the Low, Mid and High channel when the highest reported SAR for 1 RB and 50% RB are > 0.8 W/kg, Testing for the remaining required channels is not needed because the reported SAR for 100% RB Allocation < 1.45 W/kg. Testing for 16QAM modulation is not required because the reported SAR for QPSK is < 1.45 W/kg and its output power is not more than 0.5 dB higher than that a QPSK. Testing for the other channel bandwidths is not required because the reported SAR for the highest channel bandwidth is < 1.45 W/kg and its output power is not more than 0.5 dB higher than that of the highest channel bandwidth.

WLAN Notes:

1. The initial test position procedures were applied. The test position with the highest extrapolated peak SAR will be used as the initial test position. When reported SAR for the initial test position is ≤ 0.4 W/kg, no additional testing for the remaining test positions was required. Otherwise, SAR is evaluated at the subsequent highest peak SAR positions until the reported SAR result is ≤ 0.8 W/kg or all test positions are measured.
2. Justification for test configurations for WLAN per KDB Publication 248227 D01v02r02 for 2.4 GHz WIFI single transmission chain operations, the highest measured maximum output power channel for DSSS was selected for SAR measurement. SAR for OFDM modes (2.4 GHz 802.11g/n) was not required due to the maximum allowed powers and the highest reported DSSS SAR when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output and the adjust SAR is ≤ 1.2 W/kg.
3. Justification for test configurations for WLAN per KDB Publication 248227 D01v02r02 for 5 GHz WIFI single transmission chain operations, the initial test configuration was selected according to the transmission mode with the highest maximum allowed powers. Other transmission modes were not investigated since the highest reported SAR for initial test configuration adjusted by the ratio of maximum output powers is less than 1.2 W/kg.
4. When the maximum reported 1g averaged SAR ≤ 0.8 W/kg, SAR testing on additional channels was not required. Otherwise, SAR for the next highest output power channel was required until the reported SAR result was ≤ 1.20 W/kg or all test channels were measured.
5. The device was configured to transmit continuously at the required data rate, channel bandwidth and signal modulation, using the highest transmission duty factor to determine compliance.

Bluetooth Notes:

1. Bluetooth SAR was measured with the device connected to a call with hopping disabled with DH5 operation and Tx test mode type. Per October 2016 TCB Workshop Notes, the reported SAR was scaled to the 100% transmission duty factor to determine compliance. Refer to section 9.5 for the time-domain plot and calculation for the duty factor of the device.
2. Head and hotspot Bluetooth SAR were evaluated for BT tethering applications.

12. FCC MULTI-TX AND ANTENNA SAR CONSIDERATIONS

12.1 Introduction

The following procedures adopted from FCC KDB Publication 447498 D01v06 are applicable to handsets with built-in unlicensed transmitters such as 802.11b/g/n and Bluetooth devices which may simultaneously transmit with the licensed transmitter.

12.2 Simultaneous Transmission Procedures

This device contains transmitters that may operate simultaneously. Therefore simultaneous transmission analysis is required. Per FCC KDB 447498 D01v06 4.3.2 and IEEE 1528-2013 Section 6.3.4.1.2, simultaneous transmission SAR test exclusion may be applied when the sum of the sum 1-g SAR for all the simultaneous transmitting antennas in a specific physical test configuration is ≤ 1.6 W/kg. The different test position in an exposure condition may be considered collectively to determine SAR test exclusion according to the sum of 1-g or 10-g SAR.

12.3 Simultaneous Transmission Capabilities

According to FCC KDB Publication 447498 D01v06, transmitters are considered to be transmitting simultaneously when there is overlapping transmission, with the exception of transmissions during network hand-offs with maximum hand-off duration less than 30 seconds.

This device contains multiple transmitters that may operate simultaneously, and therefore requires a simultaneous transmission analysis according to FCC KDB Publication 447498 D01v06.

Table 12.3.1 Simultaneous SAR Cases

No.	Capable Transmit Configuration	Head SAR	Body-Worn SAR	Hotspot SAR	Phablet SAR	Note
1	GSM Voice + Wi-Fi 2.4 GHz	Yes	Yes	N/A	Yes	
2	GSM Voice + Wi-Fi 5 GHz	Yes	Yes	N/A	Yes	
3	GSM Voice + Bluetooth 2.4 GHz	Yes^	Yes	N/A	Yes	^Bluetooth Tethering is considered.
4	GSM Voice + Bluetooth 2.4 GHz + Wi-Fi 5 GHz	Yes^	Yes	N/A	Yes	^Bluetooth Tethering is considered.
5	WCDMA + Wi-Fi 2.4 GHz	Yes	Yes	Yes	Yes	
6	WCDMA + Wi-Fi 5 GHz	Yes	Yes	Yes	Yes	^ Hotspot of UNII-1 & UNII-3 can be operated simultaneous transmission.
7	WCDMA + Bluetooth 2.4 GHz	Yes^	Yes	Yes	Yes	^Bluetooth Tethering is considered.
8	WCDMA + Bluetooth 2.4 GHz + Wi-Fi 5 GHz	Yes^	Yes	Yes	Yes	^Bluetooth Tethering is considered. ^ Hotspot of UNII-1 & UNII-3 can be operated simultaneous transmission.
9	LTE + Wi-Fi 2.4 GHz	Yes	Yes	Yes	Yes	
10	LTE + Wi-Fi 5 GHz	Yes	Yes	Yes	Yes	^ Hotspot of UNII-1 & UNII-3 can be operated simultaneous transmission.
11	LTE + Bluetooth 2.4 GHz	Yes^	Yes	Yes	Yes	^Bluetooth Tethering is considered.
12	LTE + Bluetooth 2.4 GHz + Wi-Fi 5GHz	Yes^	Yes	Yes	Yes	^Bluetooth Tethering is considered. ^ Hotspot of UNII-1 & UNII-3 can be operated simultaneous transmission.
13	GPRS/EDGE + Wi-Fi 2.4 GHz	Yes*	Yes*	Yes	Yes	*Pre-installed VOIP applications are considered.
14	GPRS/EDGE + Wi-Fi 5 GHz	Yes*	Yes*	Yes	Yes	*Pre-installed VOIP applications are considered. ^ Hotspot of UNII-1 & UNII-3 can be operated simultaneous transmission.
15	GPRS/EDGE + Bluetooth 2.4 GHz	Yes^*	Yes*	Yes	Yes	*Pre-installed VOIP applications are considered. ^Bluetooth Tethering is considered.
16	GPRS/EDGE + Bluetooth 2.4 GHz + Wi-Fi 5 GHz	Yes^*	Yes*	Yes	Yes	*Pre-installed VOIP applications are considered. ^Bluetooth Tethering is considered. ^ Hotspot of UNII-1 & UNII-3 can be operated simultaneous transmission.
17	Bluetooth 2.4 GHz + Wi-Fi 5 GHz	Yes^	Yes	N/A	Yes	^Bluetooth Tethering is considered.
Notes: 1. WiFi 2.4GHz is supported Hotspot and WiFi-Direct(GO/GC). 2. WiFi 5GHz is supported Hotspot in UNII B1,B3 and WiFi-Direct(GO/GC) in UNII B1,B3. 3. LTE, WCDMA, GPRS/EDGE is supported Hotspot. 4. VoIP is supported in LTE, WCDMA, GSM(e.g. 3rd part VoIP and VoLTE). 5. Bluetooth and WiFi 2.4GHz can not transmit simultaneously since they share the same chip. 6. GSM, WCDMA and LTE can not transmit simultaneously since they share the same chip. 7. When the user utilizes multiple services in UMTS 3G mode it uses multi-Radio Access Bearer or multi-RAB. The power control is based on a physical control channel (Dedicated Physical Control Channel [DPCCH]) and power control will be adjusted to meet the needs of both services. Therefore, the UMTS+WLAN scenario also represents the UMTS Voice/DATA + WLAN Hotspot scenario. 8. Per the manufacturer, WIFI Direct is expected to be used in conjunction with a held-to-ear or body-worn accessory voice call. Simultaneous transmission scenarios involving WIFI direct are included in the above table.						

12.4 Head SAR Simultaneous Transmission Analysis

Table 12.4.1 Simultaneous Transmission Scenario : 2G/3G/4G + Bluetooth + 5.3 GHz W-LAN (Held to Ear)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	Bluetooth SAR (W/kg)	5.3G W-LAN SAR (W/kg)	1+2	1+3	1+2+3
Head SAR	GSM 850	Left Touch	0.126	0.135	0.374	0.261	0.500	0.635
		Right Touch	0.130	0.035	0.130	0.165	0.250	0.295
		Left Tilt	0.067	0.069	0.325	0.136	0.392	0.461
		Right Tilt	0.042	0.026	0.133	0.068	0.175	0.201
	GPRS 850	Left Touch	0.208	0.135	0.374	0.343	0.582	0.717
		Right Touch	0.237	0.035	0.130	0.272	0.367	0.402
		Left Tilt	0.118	0.069	0.325	0.187	0.443	0.512
		Right Tilt	0.076	0.026	0.133	0.102	0.209	0.235
	GSM 1900	Left Touch	0.053	0.135	0.374	0.188	0.427	0.562
		Right Touch	0.068	0.035	0.130	0.103	0.198	0.233
		Left Tilt	0.041	0.069	0.325	0.110	0.366	0.435
		Right Tilt	0.036	0.026	0.133	0.062	0.169	0.195
	GPRS 1900	Left Touch	0.079	0.135	0.374	0.214	0.453	0.588
		Right Touch	0.104	0.035	0.130	0.139	0.234	0.269
		Left Tilt	0.058	0.069	0.325	0.127	0.383	0.452
		Right Tilt	0.046	0.026	0.133	0.072	0.179	0.205
	WCDMA 850	Left Touch	0.184	0.135	0.374	0.319	0.558	0.693
		Right Touch	0.176	0.035	0.130	0.211	0.306	0.341
		Left Tilt	0.063	0.069	0.325	0.162	0.418	0.487
		Right Tilt	0.069	0.026	0.133	0.095	0.202	0.228
	WCDMA 1700	Left Touch	0.112	0.135	0.374	0.247	0.486	0.621
		Right Touch	0.121	0.035	0.130	0.156	0.251	0.286
		Left Tilt	0.065	0.069	0.325	0.134	0.390	0.459
		Right Tilt	0.059	0.026	0.133	0.085	0.192	0.218
	WCDMA 1900	Left Touch	0.090	0.135	0.374	0.225	0.464	0.599
		Right Touch	0.147	0.035	0.130	0.182	0.277	0.312
		Left Tilt	0.079	0.069	0.325	0.148	0.404	0.473
		Right Tilt	0.064	0.026	0.133	0.090	0.197	0.223
	LTE Band 12	Left Touch	0.126	0.135	0.374	0.251	0.500	0.635
		Right Touch	0.147	0.035	0.130	0.182	0.277	0.312
		Left Tilt	0.067	0.069	0.325	0.136	0.392	0.461
		Right Tilt	0.057	0.026	0.133	0.083	0.190	0.216
	LTE Band 13	Left Touch	0.123	0.135	0.374	0.258	0.497	0.632
		Right Touch	0.143	0.035	0.130	0.178	0.273	0.308
		Left Tilt	0.077	0.069	0.325	0.146	0.402	0.471
		Right Tilt	0.062	0.026	0.133	0.088	0.195	0.221
	LTE Band 5	Left Touch	0.122	0.135	0.374	0.257	0.496	0.631
		Right Touch	0.126	0.035	0.130	0.161	0.256	0.291
		Left Tilt	0.080	0.069	0.325	0.149	0.405	0.474
		Right Tilt	0.066	0.026	0.133	0.092	0.199	0.225
	LTE Band 66	Left Touch	0.080	0.135	0.374	0.215	0.454	0.589
		Right Touch	0.102	0.035	0.130	0.137	0.232	0.267
		Left Tilt	0.039	0.069	0.325	0.108	0.364	0.433
		Right Tilt	0.059	0.026	0.133	0.085	0.192	0.218
	LTE Band 2	Left Touch	0.105	0.135	0.374	0.240	0.479	0.614
		Right Touch	0.121	0.035	0.130	0.156	0.251	0.286
		Left Tilt	0.093	0.069	0.325	0.162	0.418	0.487
		Right Tilt	0.069	0.026	0.133	0.095	0.202	0.228
	LTE Band 7	Left Touch	0.102	0.135	0.374	0.237	0.476	0.611
		Right Touch	0.134	0.035	0.130	0.169	0.264	0.296
		Left Tilt	0.080	0.069	0.325	0.149	0.405	0.474
		Right Tilt	0.050	0.026	0.133	0.076	0.183	0.209

Table 12.4.2 Simultaneous Transmission Scenario : 2G/3G/4G + Bluetooth + 5.6 GHz W-LAN (Held to Ear)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	Bluetooth SAR (W/kg)	5.6G W-LAN SAR (W/kg)	1+2	1+3	1+2+3
Head SAR	GSM 850	Left Touch	0.126	0.135	0.736	0.261	0.882	0.997
		Right Touch	0.130	0.035	0.175	0.165	0.305	0.340
		Left Tilt	0.067	0.069	0.375	0.136	0.442	0.511
		Right Tilt	0.042	0.026	0.194	0.068	0.236	0.262
	GPRS 850	Left Touch	0.208	0.135	0.736	0.343	0.944	1.079
		Right Touch	0.237	0.035	0.175	0.272	0.412	0.447
		Left Tilt	0.118	0.069	0.375	0.187	0.493	0.562
		Right Tilt	0.076	0.026	0.194	0.102	0.270	0.296
	GSM 1900	Left Touch	0.053	0.135	0.736	0.188	0.789	0.924
		Right Touch	0.068	0.035	0.175	0.103	0.243	0.278
		Left Tilt	0.041	0.069	0.375	0.110	0.416	0.485
		Right Tilt	0.036	0.026	0.194	0.062	0.230	0.256
	GPRS 1900	Left Touch	0.079	0.135	0.736	0.214	0.815	0.950
		Right Touch	0.104	0.035	0.175	0.139	0.279	0.314
		Left Tilt	0.058	0.069	0.375	0.127	0.433	0.502
		Right Tilt	0.046	0.026	0.194	0.072	0.240	0.266
	WCDMA 850	Left Touch	0.184	0.135	0.736	0.319	0.820	1.055
		Right Touch	0.176	0.035	0.175	0.211	0.351	0.386
		Left Tilt	0.093	0.069	0.375	0.162	0.468	0.537
		Right Tilt	0.069	0.026	0.194	0.095	0.263	0.289
	WCDMA 1700	Left Touch	0.112	0.135	0.736	0.247	0.848	0.983
		Right Touch	0.121	0.035	0.175	0.156	0.296	0.331
		Left Tilt	0.065	0.069	0.375	0.134	0.440	0.509
		Right Tilt	0.059	0.026	0.194	0.085	0.253	0.279
	WCDMA 1900	Left Touch	0.090	0.135	0.736	0.225	0.826	0.961
		Right Touch	0.147	0.035	0.175	0.182	0.322	0.357
		Left Tilt	0.079	0.069	0.375	0.148	0.454	0.523
		Right Tilt	0.064	0.026	0.194	0.090	0.258	0.284
	LTE Band 12	Left Touch	0.126	0.135	0.736	0.261	0.882	0.997
		Right Touch	0.147	0.035	0.175	0.182	0.322	0.357
		Left Tilt	0.067	0.069	0.375	0.136	0.442	0.511
		Right Tilt	0.057	0.026	0.194	0.083	0.251	0.277
	LTE Band 13	Left Touch	0.123	0.135	0.736	0.258	0.859	0.994
		Right Touch	0.143	0.035	0.175	0.178	0.318	0.353
		Left Tilt	0.077	0.069	0.375	0.146	0.432	0.521
		Right Tilt	0.062	0.026	0.194	0.088	0.256	0.282
	LTE Band 5	Left Touch	0.122	0.135	0.736	0.257	0.858	0.993
		Right Touch	0.126	0.035	0.175	0.161	0.301	0.336
		Left Tilt	0.080	0.069	0.375	0.149	0.455	0.524
		Right Tilt	0.066	0.026	0.194	0.092	0.260	0.286
	LTE Band 66	Left Touch	0.080	0.135	0.736	0.215	0.816	0.951
		Right Touch	0.102	0.035	0.175	0.137	0.277	0.312
		Left Tilt	0.039	0.069	0.375	0.108	0.363	0.433
		Right Tilt	0.059	0.026	0.194	0.085	0.253	0.279
	LTE Band 2	Left Touch	0.105	0.135	0.736	0.240	0.841	0.976
		Right Touch	0.121	0.035	0.175	0.156	0.296	0.331
		Left Tilt	0.093	0.069	0.375	0.162	0.468	0.537
		Right Tilt	0.069	0.026	0.194	0.095	0.263	0.289
	LTE Band 7	Left Touch	0.102	0.135	0.736	0.237	0.838	0.973
		Right Touch	0.134	0.035	0.175	0.169	0.309	0.344
		Left Tilt	0.080	0.069	0.375	0.149	0.455	0.524
		Right Tilt	0.050	0.026	0.194	0.076	0.244	0.270

Table 12.4.3 Simultaneous Transmission Scenario : 2G/3G/4G + Bluetooth + 5.8 GHz W-LAN (Held to Ear)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	Bluetooth SAR (W/kg)	5.8G W-LAN SAR (W/kg)	1+2	1+3	1+2+3
Head SAR	GSM 850	Left Touch	0.126	0.135	0.605	0.251	0.731	0.866
		Right Touch	0.130	0.035	0.102	0.165	0.232	0.267
		Left Tilt	0.067	0.069	0.276	0.136	0.343	0.412
		Right Tilt	0.042	0.026	0.120	0.068	0.162	0.188
	GPRS 850	Left Touch	0.208	0.135	0.605	0.343	0.813	0.948
		Right Touch	0.237	0.035	0.102	0.272	0.339	0.374
		Left Tilt	0.118	0.069	0.276	0.187	0.394	0.463
		Right Tilt	0.076	0.026	0.120	0.102	0.196	0.222
	GSM 1900	Left Touch	0.053	0.135	0.605	0.188	0.658	0.793
		Right Touch	0.068	0.035	0.102	0.103	0.170	0.205
		Left Tilt	0.041	0.069	0.276	0.110	0.317	0.386
		Right Tilt	0.036	0.026	0.120	0.062	0.156	0.182
	GPRS 1900	Left Touch	0.079	0.135	0.605	0.214	0.684	0.819
		Right Touch	0.104	0.035	0.102	0.139	0.206	0.241
		Left Tilt	0.058	0.069	0.276	0.127	0.334	0.403
		Right Tilt	0.046	0.026	0.120	0.072	0.166	0.192
	WCDMA 850	Left Touch	0.184	0.135	0.605	0.319	0.789	0.924
		Right Touch	0.176	0.035	0.102	0.211	0.278	0.313
		Left Tilt	0.093	0.069	0.276	0.162	0.369	0.438
		Right Tilt	0.069	0.026	0.120	0.095	0.189	0.215
	WCDMA 1700	Left Touch	0.112	0.135	0.605	0.247	0.717	0.852
		Right Touch	0.121	0.035	0.102	0.156	0.223	0.258
		Left Tilt	0.065	0.069	0.276	0.134	0.341	0.410
		Right Tilt	0.059	0.026	0.120	0.085	0.179	0.205
	WCDMA 1900	Left Touch	0.090	0.135	0.605	0.225	0.695	0.830
		Right Touch	0.147	0.035	0.102	0.182	0.249	0.284
		Left Tilt	0.079	0.069	0.276	0.148	0.355	0.424
		Right Tilt	0.064	0.026	0.120	0.090	0.184	0.210
	LTE Band 12	Left Touch	0.126	0.135	0.605	0.251	0.731	0.866
		Right Touch	0.147	0.035	0.102	0.182	0.249	0.284
		Left Tilt	0.067	0.069	0.276	0.136	0.343	0.412
		Right Tilt	0.057	0.026	0.120	0.083	0.177	0.203
	LTE Band 13	Left Touch	0.123	0.135	0.605	0.258	0.728	0.863
		Right Touch	0.143	0.035	0.102	0.178	0.245	0.280
		Left Tilt	0.077	0.069	0.276	0.146	0.353	0.422
		Right Tilt	0.062	0.026	0.120	0.088	0.182	0.208
	LTE Band 5	Left Touch	0.122	0.135	0.605	0.257	0.727	0.862
		Right Touch	0.126	0.035	0.102	0.161	0.228	0.263
		Left Tilt	0.080	0.069	0.276	0.149	0.356	0.425
		Right Tilt	0.066	0.026	0.120	0.092	0.186	0.212
	LTE Band 66	Left Touch	0.080	0.135	0.605	0.215	0.685	0.820
		Right Touch	0.102	0.035	0.102	0.137	0.204	0.239
		Left Tilt	0.039	0.069	0.276	0.108	0.315	0.384
		Right Tilt	0.059	0.026	0.120	0.085	0.179	0.205
	LTE Band 2	Left Touch	0.105	0.135	0.605	0.240	0.710	0.845
		Right Touch	0.121	0.035	0.102	0.156	0.223	0.258
		Left Tilt	0.083	0.069	0.276	0.162	0.369	0.438
		Right Tilt	0.069	0.026	0.120	0.095	0.189	0.215
	LTE Band 7	Left Touch	0.102	0.135	0.605	0.237	0.707	0.842
		Right Touch	0.134	0.035	0.102	0.169	0.236	0.271
		Left Tilt	0.080	0.069	0.276	0.149	0.356	0.425
		Right Tilt	0.050	0.026	0.120	0.076	0.170	0.196

Table 12.4.4 Simultaneous Transmission Scenario : 2G/3G/4G + 2.4 GHz W-LAN (Held to Ear)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	2.4G W-LAN SAR (W/kg)	ΣSAR (W/kg)
Head SAR	GSM 850	Left Touch	0.126	0.681	0.807
		Right Touch	0.130	0.228	0.358
		Left Tilt	0.067	0.382	0.449
		Right Tilt	0.042	0.195	0.237
	GPRS 850	Left Touch	0.208	0.681	0.889
		Right Touch	0.237	0.228	0.465
		Left Tilt	0.118	0.382	0.500
		Right Tilt	0.076	0.195	0.271
	GSM 1900	Left Touch	0.053	0.681	0.734
		Right Touch	0.068	0.228	0.296
		Left Tilt	0.041	0.382	0.423
		Right Tilt	0.036	0.195	0.231
	GPRS 1900	Left Touch	0.079	0.681	0.760
		Right Touch	0.104	0.228	0.332
		Left Tilt	0.058	0.382	0.440
		Right Tilt	0.046	0.195	0.241
	WCDMA 850	Left Touch	0.184	0.681	0.865
		Right Touch	0.176	0.228	0.404
		Left Tilt	0.093	0.382	0.475
		Right Tilt	0.069	0.195	0.264
	WCDMA 1700	Left Touch	0.112	0.681	0.793
		Right Touch	0.121	0.228	0.349
		Left Tilt	0.065	0.382	0.447
		Right Tilt	0.059	0.195	0.254
	WCDMA 1900	Left Touch	0.090	0.681	0.771
		Right Touch	0.147	0.228	0.375
		Left Tilt	0.079	0.382	0.461
		Right Tilt	0.064	0.195	0.259
	LTE Band 12	Left Touch	0.126	0.681	0.807
		Right Touch	0.147	0.228	0.375
		Left Tilt	0.067	0.382	0.449
		Right Tilt	0.057	0.195	0.252
	LTE Band 13	Left Touch	0.123	0.681	0.804
		Right Touch	0.143	0.228	0.371
		Left Tilt	0.077	0.382	0.459
		Right Tilt	0.062	0.195	0.257
	LTE Band 5	Left Touch	0.122	0.681	0.803
		Right Touch	0.126	0.228	0.354
		Left Tilt	0.080	0.382	0.462
		Right Tilt	0.066	0.195	0.261
	LTE Band 66	Left Touch	0.080	0.681	0.761
		Right Touch	0.102	0.228	0.330
		Left Tilt	0.039	0.382	0.421
		Right Tilt	0.059	0.195	0.254
	LTE Band 2	Left Touch	0.105	0.681	0.786
		Right Touch	0.121	0.228	0.349
		Left Tilt	0.093	0.382	0.475
		Right Tilt	0.069	0.195	0.264
	LTE Band 7	Left Touch	0.102	0.681	0.783
		Right Touch	0.134	0.228	0.362
		Left Tilt	0.080	0.382	0.462
		Right Tilt	0.050	0.195	0.245

Table 12.4.5 Simultaneous Transmission Scenario : 2G/3G/4G + 5.3 GHz W-LAN (Held to Ear)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	5.3G W-LAN SAR (W/kg)	ΣSAR (W/kg)
			1	2	1+2
Head SAR	GSM 850	Left Touch	0.126	0.374	0.500
		Right Touch	0.130	0.130	0.260
		Left Tilt	0.067	0.325	0.392
		Right Tilt	0.042	0.133	0.175
	GPRS 850	Left Touch	0.208	0.374	0.582
		Right Touch	0.237	0.130	0.367
		Left Tilt	0.118	0.325	0.443
		Right Tilt	0.076	0.133	0.209
	GSM 1900	Left Touch	0.053	0.374	0.427
		Right Touch	0.068	0.130	0.198
		Left Tilt	0.041	0.325	0.366
		Right Tilt	0.036	0.133	0.169
	GPRS 1900	Left Touch	0.079	0.374	0.453
		Right Touch	0.104	0.130	0.234
		Left Tilt	0.058	0.325	0.383
		Right Tilt	0.046	0.133	0.179
	WCDMA 850	Left Touch	0.184	0.374	0.558
		Right Touch	0.176	0.130	0.306
		Left Tilt	0.093	0.325	0.418
		Right Tilt	0.069	0.133	0.202
	WCDMA 1700	Left Touch	0.112	0.374	0.486
		Right Touch	0.121	0.130	0.251
		Left Tilt	0.065	0.325	0.390
		Right Tilt	0.059	0.133	0.192
	WCDMA 1900	Left Touch	0.090	0.374	0.464
		Right Touch	0.147	0.130	0.277
		Left Tilt	0.079	0.325	0.404
		Right Tilt	0.064	0.133	0.197
	LTE Band 12	Left Touch	0.126	0.374	0.500
		Right Touch	0.147	0.130	0.277
		Left Tilt	0.067	0.325	0.392
		Right Tilt	0.057	0.133	0.190
	LTE Band 13	Left Touch	0.123	0.374	0.497
		Right Touch	0.143	0.130	0.273
		Left Tilt	0.077	0.325	0.402
		Right Tilt	0.062	0.133	0.195
	LTE Band 5	Left Touch	0.122	0.374	0.496
		Right Touch	0.126	0.130	0.256
		Left Tilt	0.080	0.325	0.405
		Right Tilt	0.066	0.133	0.199
	LTE Band 66	Left Touch	0.080	0.374	0.454
		Right Touch	0.102	0.130	0.232
		Left Tilt	0.039	0.325	0.364
		Right Tilt	0.059	0.133	0.192
	LTE Band 2	Left Touch	0.105	0.374	0.479
		Right Touch	0.121	0.130	0.251
		Left Tilt	0.093	0.325	0.418
		Right Tilt	0.069	0.133	0.202
	LTE Band 7	Left Touch	0.102	0.374	0.476
		Right Touch	0.134	0.130	0.264
		Left Tilt	0.080	0.325	0.405
		Right Tilt	0.050	0.133	0.183

Table 12.4.6 Simultaneous Transmission Scenario : 2G/3G/4G + 5.6 GHz W-LAN (Held to Ear)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	5.6G W-LAN SAR (W/kg)	ΣSAR (W/kg)
			1	2	1+2
Head SAR	GSM 850	Left Touch	0.126	0.736	0.862
		Right Touch	0.130	0.175	0.305
		Left Tilt	0.067	0.375	0.442
		Right Tilt	0.042	0.194	0.236
	GPRS 850	Left Touch	0.208	0.736	0.944
		Right Touch	0.237	0.175	0.412
		Left Tilt	0.118	0.375	0.493
		Right Tilt	0.076	0.194	0.270
	GSM 1900	Left Touch	0.053	0.736	0.789
		Right Touch	0.068	0.175	0.243
		Left Tilt	0.041	0.375	0.416
		Right Tilt	0.036	0.194	0.230
	GPRS 1900	Left Touch	0.079	0.736	0.815
		Right Touch	0.104	0.175	0.279
		Left Tilt	0.058	0.375	0.433
		Right Tilt	0.046	0.194	0.240
	WCDMA 850	Left Touch	0.184	0.736	0.920
		Right Touch	0.176	0.175	0.351
		Left Tilt	0.093	0.375	0.468
		Right Tilt	0.069	0.194	0.263
	WCDMA 1700	Left Touch	0.112	0.736	0.848
		Right Touch	0.121	0.175	0.296
		Left Tilt	0.065	0.375	0.440
		Right Tilt	0.059	0.194	0.253
	WCDMA 1900	Left Touch	0.090	0.736	0.826
		Right Touch	0.147	0.175	0.322
		Left Tilt	0.079	0.375	0.454
		Right Tilt	0.064	0.194	0.258
	LTE Band 12	Left Touch	0.126	0.736	0.862
		Right Touch	0.147	0.175	0.322
		Left Tilt	0.067	0.375	0.442
		Right Tilt	0.057	0.194	0.251
	LTE Band 13	Left Touch	0.123	0.736	0.859
		Right Touch	0.143	0.175	0.318
		Left Tilt	0.077	0.375	0.452
		Right Tilt	0.062	0.194	0.256
	LTE Band 5	Left Touch	0.122	0.736	0.858
		Right Touch	0.126	0.175	0.301
		Left Tilt	0.080	0.375	0.455
		Right Tilt	0.066	0.194	0.260
	LTE Band 66	Left Touch	0.080	0.736	0.816
		Right Touch	0.102	0.175	0.277
		Left Tilt	0.039	0.375	0.414
		Right Tilt	0.059	0.194	0.253
	LTE Band 2	Left Touch	0.105	0.736	0.841
		Right Touch	0.121	0.175	0.296
		Left Tilt	0.093	0.375	0.468
		Right Tilt	0.069	0.194	0.263
	LTE Band 7	Left Touch	0.102	0.736	0.838
		Right Touch	0.134	0.175	0.309
		Left Tilt	0.080	0.375	0.455
		Right Tilt	0.050	0.194	0.244

Table 12.4.7 Simultaneous Transmission Scenario : 2G/3G/4G + 5.8 GHz W-LAN (Held to Ear)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	5.8G W-LAN SAR (W/kg)	ΣSAR (W/kg)
			1	2	1+2
Head SAR	GSM 850	Left Touch	0.126	0.605	0.731
		Right Touch	0.130	0.102	0.232
		Left Tilt	0.067	0.276	0.343
		Right Tilt	0.042	0.120	0.162
	GPRS 850	Left Touch	0.208	0.605	0.813
		Right Touch	0.237	0.102	0.339
		Left Tilt	0.118	0.276	0.394
		Right Tilt	0.076	0.120	0.196
	GSM 1900	Left Touch	0.053	0.605	0.658
		Right Touch	0.068	0.102	0.170
		Left Tilt	0.041	0.276	0.317
		Right Tilt	0.036	0.120	0.156
	GPRS 1900	Left Touch	0.079	0.605	0.684
		Right Touch	0.104	0.102	0.206
		Left Tilt	0.058	0.276	0.334
		Right Tilt	0.046	0.120	0.166
	WCDMA 850	Left Touch	0.184	0.605	0.789
		Right Touch	0.176	0.102	0.278
		Left Tilt	0.093	0.276	0.369
		Right Tilt	0.069	0.120	0.189
	WCDMA 1700	Left Touch	0.112	0.605	0.717
		Right Touch	0.121	0.102	0.223
		Left Tilt	0.065	0.276	0.341
		Right Tilt	0.059	0.120	0.179
	WCDMA 1900	Left Touch	0.090	0.605	0.695
		Right Touch	0.147	0.102	0.249
		Left Tilt	0.079	0.276	0.355
		Right Tilt	0.064	0.120	0.184
	LTE Band 12	Left Touch	0.126	0.605	0.731
		Right Touch	0.147	0.102	0.249
		Left Tilt	0.067	0.276	0.343
		Right Tilt	0.057	0.120	0.177
	LTE Band 13	Left Touch	0.123	0.605	0.728
		Right Touch	0.143	0.102	0.245
		Left Tilt	0.077	0.276	0.353
		Right Tilt	0.062	0.120	0.182
	LTE Band 5	Left Touch	0.122	0.605	0.727
		Right Touch	0.126	0.102	0.228
		Left Tilt	0.080	0.276	0.356
		Right Tilt	0.066	0.120	0.186
	LTE Band 66	Left Touch	0.080	0.605	0.685
		Right Touch	0.102	0.102	0.204
		Left Tilt	0.039	0.276	0.315
		Right Tilt	0.059	0.120	0.179
	LTE Band 2	Left Touch	0.105	0.605	0.710
		Right Touch	0.121	0.102	0.223
		Left Tilt	0.083	0.276	0.369
		Right Tilt	0.069	0.120	0.189
	LTE Band 7	Left Touch	0.102	0.605	0.707
		Right Touch	0.134	0.102	0.236
		Left Tilt	0.080	0.276	0.356
		Right Tilt	0.050	0.120	0.170

Table 12.4.8 Simultaneous Transmission Scenario : 2G/3G/4G + Bluetooth (Held to Ear)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	Bluetooth SAR (W/kg)	ΣSAR (W/kg)
			1	2	1+2
Head SAR	GSM 850	Left Touch	0.126	0.135	0.261
		Right Touch	0.130	0.035	0.165
		Left Tilt	0.067	0.069	0.136
		Right Tilt	0.042	0.026	0.068
	GPRS 850	Left Touch	0.208	0.135	0.343
		Right Touch	0.237	0.035	0.272
		Left Tilt	0.118	0.069	0.187
		Right Tilt	0.076	0.026	0.102
	GSM 1900	Left Touch	0.053	0.135	0.188
		Right Touch	0.068	0.035	0.103
		Left Tilt	0.041	0.069	0.110
		Right Tilt	0.036	0.026	0.062
	GPRS 1900	Left Touch	0.079	0.135	0.214
		Right Touch	0.104	0.035	0.139
		Left Tilt	0.058	0.069	0.127
		Right Tilt	0.046	0.026	0.072
	WCDMA 850	Left Touch	0.184	0.135	0.319
		Right Touch	0.176	0.035	0.211
		Left Tilt	0.093	0.069	0.162
		Right Tilt	0.069	0.026	0.095
	WCDMA 1700	Left Touch	0.112	0.135	0.247
		Right Touch	0.121	0.035	0.156
		Left Tilt	0.065	0.069	0.134
		Right Tilt	0.059	0.026	0.085
	WCDMA 1900	Left Touch	0.090	0.135	0.225
		Right Touch	0.147	0.035	0.182
		Left Tilt	0.079	0.069	0.148
		Right Tilt	0.064	0.026	0.090
	LTE Band 12	Left Touch	0.126	0.135	0.261
		Right Touch	0.147	0.035	0.182
		Left Tilt	0.067	0.069	0.136
		Right Tilt	0.057	0.026	0.083
	LTE Band 13	Left Touch	0.123	0.135	0.258
		Right Touch	0.143	0.035	0.178
		Left Tilt	0.077	0.069	0.146
		Right Tilt	0.062	0.026	0.088
	LTE Band 5	Left Touch	0.122	0.135	0.257
		Right Touch	0.126	0.035	0.161
		Left Tilt	0.080	0.069	0.149
		Right Tilt	0.066	0.026	0.092
	LTE Band 66	Left Touch	0.080	0.135	0.215
		Right Touch	0.102	0.035	0.137
		Left Tilt	0.039	0.069	0.108
		Right Tilt	0.059	0.026	0.085
	LTE Band 2	Left Touch	0.105	0.135	0.240
		Right Touch	0.121	0.035	0.156
		Left Tilt	0.083	0.069	0.152
		Right Tilt	0.069	0.026	0.095
	LTE Band 7	Left Touch	0.102	0.135	0.237
		Right Touch	0.134	0.035	0.169
		Left Tilt	0.080	0.069	0.149
		Right Tilt	0.050	0.026	0.076

Table 12.4.9 Simultaneous Transmission Scenario : Bluetooth + 5 GHz W-LAN (Held to Ear)

Exposure Condition	Mode	Configuration	Bluetooth SAR (W/kg)	5G W-LAN SAR (W/kg)	ΣSAR (W/kg)
			1	2	1+2
Head SAR	5.3G W-LAN	Left Touch	0.135	0.374	0.509
		Right Touch	0.035	0.130	0.165
		Left Tilt	0.069	0.325	0.394
		Right Tilt	0.026	0.133	0.159
	5.6G W-LAN	Left Touch	0.135	0.736	0.871
		Right Touch	0.035	0.175	0.210
		Left Tilt	0.069	0.375	0.444
		Right Tilt	0.026	0.194	0.220
	5.8G W-LAN	Left Touch	0.135	0.605	0.740
		Right Touch	0.035	0.102	0.137
		Left Tilt	0.069	0.276	0.345
		Right Tilt	0.026	0.120	0.146

12.5 Body-Worn Simultaneous Transmission Analysis

Table 12.5.1 Simultaneous Transmission Scenario : 2G/3G/4G + Bluetooth + 5.3 GHz W-LAN (Body-Worn at 10 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	Bluetooth SAR (W/kg)	5.3G W-LAN SAR (W/kg)	ΣSAR (W/kg)		
			1	2	3	1+2	1+3	1+2+3
Body-Worn SAR	GSM 850	Front	0.383	0.027	0.055	0.410	0.438	0.465
		Rear	0.591	0.038	0.223	0.629	0.814	0.852
	GPRS 850	Front	0.665	0.027	0.055	0.692	0.720	0.747
		Rear	1.115	0.038	0.223	1.153	1.338	1.376
	GSM 1900	Front	0.336	0.027	0.055	0.383	0.391	0.418
		Rear	0.436	0.038	0.223	0.474	0.659	0.697
	GPRS 1900	Front	0.467	0.027	0.055	0.494	0.522	0.549
		Rear	0.635	0.038	0.223	0.673	0.858	0.896
	WCDMA 850	Front	0.544	0.027	0.055	0.571	0.599	0.626
		Rear	1.016	0.038	0.223	1.054	1.239	1.277
	WCDMA 1700	Front	0.579	0.027	0.055	0.606	0.634	0.661
		Rear	0.741	0.038	0.223	0.779	0.964	1.002
	WCDMA 1900	Front	0.640	0.027	0.055	0.667	0.695	0.722
		Rear	0.718	0.038	0.223	0.756	0.941	0.979
	LTE Band 12	Front	0.300	0.027	0.055	0.327	0.355	0.382
		Rear	0.501	0.038	0.223	0.539	0.724	0.762
	LTE Band 13	Front	0.474	0.027	0.055	0.501	0.529	0.556
		Rear	0.673	0.038	0.223	0.711	0.896	0.934
	LTE Band 5	Front	0.431	0.027	0.055	0.458	0.486	0.513
		Rear	0.706	0.038	0.223	0.744	0.929	0.967
	LTE Band 66	Front	0.528	0.027	0.055	0.555	0.583	0.610
		Rear	0.728	0.038	0.223	0.766	0.951	0.989
	LTE Band 2	Front	0.586	0.027	0.055	0.613	0.641	0.668
		Rear	0.703	0.038	0.223	0.741	0.926	0.964
	LTE Band 7	Front	0.444	0.027	0.055	0.471	0.499	0.526
		Rear	0.735	0.038	0.223	0.773	0.958	0.996

Table 12.5.2 Simultaneous Transmission Scenario : 2G/3G/4G + Bluetooth + 5.6 GHz W-LAN (Body-Worn at 10 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	Bluetooth SAR (W/kg)	5.6G W-LAN SAR (W/kg)	ΣSAR (W/kg)		
			1	2	3	1+2	1+3	1+2+3
Body-Worn SAR	GSM 850	Front	0.383	0.027	0.167	0.410	0.550	0.577
		Rear	0.591	0.038	0.419	0.629	1.010	1.048
	GPRS 850	Front	0.665	0.027	0.167	0.692	0.832	0.859
		Rear	1.115	0.038	0.419	1.153	1.634	1.572
	GSM 1900	Front	0.336	0.027	0.167	0.383	0.503	0.530
		Rear	0.436	0.038	0.419	0.474	0.855	0.893
	GPRS 1900	Front	0.467	0.027	0.167	0.494	0.634	0.661
		Rear	0.635	0.038	0.419	0.673	1.054	1.092
	WCDMA 850	Front	0.544	0.027	0.167	0.571	0.711	0.738
		Rear	1.016	0.038	0.419	1.054	1.435	1.473
	WCDMA 1700	Front	0.579	0.027	0.167	0.606	0.746	0.773
		Rear	0.741	0.038	0.419	0.779	1.160	1.198
	WCDMA 1900	Front	0.640	0.027	0.167	0.667	0.807	0.834
		Rear	0.718	0.038	0.419	0.756	1.137	1.175
	LTE Band 12	Front	0.300	0.027	0.167	0.327	0.467	0.494
		Rear	0.501	0.038	0.419	0.539	0.920	0.958
	LTE Band 13	Front	0.474	0.027	0.167	0.501	0.641	0.668
		Rear	0.673	0.038	0.419	0.711	1.092	1.130
	LTE Band 5	Front	0.431	0.027	0.167	0.458	0.598	0.625
		Rear	0.706	0.038	0.419	0.744	1.125	1.163
	LTE Band 66	Front	0.528	0.027	0.167	0.555	0.695	0.722
		Rear	0.728	0.038	0.419	0.766	1.147	1.185
	LTE Band 2	Front	0.586	0.027	0.167	0.613	0.753	0.780
		Rear	0.703	0.038	0.419	0.741	1.122	1.160
	LTE Band 7	Front	0.444	0.027	0.167	0.471	0.611	0.638
		Rear	0.735	0.038	0.419	0.773	1.154	1.192

Table 12.5.3 Simultaneous Transmission Scenario : 2G/3G/4G + Bluetooth + 5.8 GHz W-LAN (Body-Worn at 10 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	Bluetooth SAR (W/kg)	5.8G W-LAN SAR (W/kg)	ΣSAR (W/kg)		
			1	2	3	1+2	1+3	1+2+3
Body-Worn SAR	GSM 850	Front	0.383	0.027	0.102	0.410	0.485	0.512
		Rear	0.591	0.038	0.302	0.629	0.893	0.931
	GPRS 850	Front	0.665	0.027	0.102	0.692	0.767	0.794
		Rear	1.115	0.038	0.302	1.153	1.417	1.455
	GSM 1900	Front	0.336	0.027	0.102	0.383	0.438	0.465
		Rear	0.436	0.038	0.302	0.474	0.738	0.776
	GPRS 1900	Front	0.467	0.027	0.102	0.494	0.569	0.596
		Rear	0.635	0.038	0.302	0.673	0.937	0.975
	WCDMA 850	Front	0.544	0.027	0.102	0.571	0.646	0.673
		Rear	1.016	0.038	0.302	1.054	1.318	1.356
	WCDMA 1700	Front	0.579	0.027	0.102	0.606	0.681	0.708
		Rear	0.741	0.038	0.302	0.779	1.043	1.081
	WCDMA 1900	Front	0.640	0.027	0.102	0.667	0.742	0.769
		Rear	0.718	0.038	0.302	0.756	1.020	1.058
	LTE Band 12	Front	0.300	0.027	0.102	0.327	0.402	0.429
		Rear	0.501	0.038	0.302	0.539	0.839	0.841
	LTE Band 13	Front	0.474	0.027	0.102	0.501	0.576	0.603
		Rear	0.673	0.038	0.302	0.711	0.975	1.013
	LTE Band 5	Front	0.431	0.027	0.102	0.458	0.533	0.560
		Rear	0.706	0.038	0.302	0.744	1.008	1.046
	LTE Band 66	Front	0.528	0.027	0.102	0.555	0.630	0.657
		Rear	0.728	0.038	0.302	0.766	1.030	1.068
	LTE Band 2	Front	0.586	0.027	0.102	0.613	0.688	0.715
		Rear	0.703	0.038	0.302	0.741	1.005	1.043
	LTE Band 7	Front	0.444	0.027	0.102	0.471	0.546	0.573
		Rear	0.735	0.038	0.302	0.773	1.037	1.075

Table 12.5.4 Simultaneous Transmission Scenario : 2G/3G/4G + 2.4 GHz W-LAN (Body-Worn at 10 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	2.4G W-LAN SAR (W/kg)	ΣSAR (W/kg)
			1	2	1+2
Body-Worn SAR	GSM 850	Front	0.383	0.124	0.507
		Rear	0.591	0.166	0.757
	GPRS 850	Front	0.665	0.124	0.789
		Rear	1.115	0.166	1.281
	GSM 1900	Front	0.336	0.124	0.460
		Rear	0.436	0.166	0.602
	GPRS 1900	Front	0.467	0.124	0.591
		Rear	0.635	0.166	0.801
	WCDMA 850	Front	0.544	0.124	0.668
		Rear	1.016	0.166	1.182
	WCDMA 1700	Front	0.579	0.124	0.703
		Rear	0.741	0.166	0.907
	WCDMA 1900	Front	0.640	0.124	0.764
		Rear	0.718	0.166	0.884
	LTE Band 12	Front	0.300	0.124	0.424
		Rear	0.501	0.166	0.667
	LTE Band 13	Front	0.474	0.124	0.598
		Rear	0.673	0.166	0.839
	LTE Band 5	Front	0.431	0.124	0.555
		Rear	0.706	0.166	0.872
	LTE Band 66	Front	0.528	0.124	0.652
		Rear	0.728	0.166	0.894
	LTE Band 2	Front	0.586	0.124	0.710
		Rear	0.703	0.166	0.869
	LTE Band 7	Front	0.444	0.124	0.568
		Rear	0.735	0.166	0.901

Table 12.5.5 Simultaneous Transmission Scenario : 2G/3G/4G + 5.3 GHz W-LAN (Body-Worn at 10 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	5.3G W-LAN SAR (W/kg)	ΣSAR (W/kg)
Body-Worn SAR	GSM 850	Front	0.383	0.055	0.438
		Rear	0.591	0.223	0.814
	GPRS 850	Front	0.665	0.055	0.720
		Rear	1.115	0.223	1.338
	GSM 1900	Front	0.336	0.055	0.391
		Rear	0.436	0.223	0.659
	GPRS 1900	Front	0.467	0.055	0.522
		Rear	0.635	0.223	0.858
	WCDMA 850	Front	0.544	0.055	0.599
		Rear	1.016	0.223	1.239
	WCDMA 1700	Front	0.579	0.055	0.634
		Rear	0.741	0.223	0.964
	WCDMA 1900	Front	0.640	0.055	0.695
		Rear	0.718	0.223	0.941
	LTE Band 12	Front	0.300	0.055	0.355
		Rear	0.501	0.223	0.724
	LTE Band 13	Front	0.474	0.055	0.529
		Rear	0.673	0.223	0.896
	LTE Band 5	Front	0.431	0.055	0.486
		Rear	0.706	0.223	0.929
	LTE Band 66	Front	0.528	0.055	0.583
		Rear	0.728	0.223	0.951
	LTE Band 2	Front	0.586	0.055	0.641
		Rear	0.703	0.223	0.926
	LTE Band 7	Front	0.444	0.055	0.499
		Rear	0.735	0.223	0.958

Table 12.5.6 Simultaneous Transmission Scenario : 2G/3G/4G + 5.6 GHz W-LAN (Body-Worn at 10 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	5.6G W-LAN SAR (W/kg)	ΣSAR (W/kg)
Body-Worn SAR	GSM 850	Front	0.383	0.167	0.550
		Rear	0.591	0.419	1.010
	GPRS 850	Front	0.665	0.167	0.832
		Rear	1.115	0.419	1.534
	GSM 1900	Front	0.336	0.167	0.503
		Rear	0.436	0.419	0.855
	GPRS 1900	Front	0.467	0.167	0.634
		Rear	0.635	0.419	1.054
	WCDMA 850	Front	0.544	0.167	0.711
		Rear	1.016	0.419	1.435
	WCDMA 1700	Front	0.579	0.167	0.746
		Rear	0.741	0.419	1.160
	WCDMA 1900	Front	0.640	0.167	0.807
		Rear	0.718	0.419	1.137
	LTE Band 12	Front	0.300	0.167	0.467
		Rear	0.501	0.419	0.920
	LTE Band 13	Front	0.474	0.167	0.641
		Rear	0.673	0.419	1.092
	LTE Band 5	Front	0.431	0.167	0.598
		Rear	0.706	0.419	1.125
	LTE Band 66	Front	0.528	0.167	0.695
		Rear	0.728	0.419	1.147
	LTE Band 2	Front	0.586	0.167	0.753
		Rear	0.703	0.419	1.122
	LTE Band 7	Front	0.444	0.167	0.611
		Rear	0.735	0.419	1.154

Table 12.5.7 Simultaneous Transmission Scenario : 2G/3G/4G + 5.8 GHz W-LAN (Body-Worn at 10 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	5.8G W-LAN SAR (W/kg)	ΣSAR (W/kg)
Body-Worn SAR	GSM 850	Front	0.383	0.102	0.485
		Rear	0.591	0.302	0.893
	GPRS 850	Front	0.665	0.102	0.767
		Rear	1.115	0.302	1.417
	GSM 1900	Front	0.336	0.102	0.438
		Rear	0.436	0.302	0.738
	GPRS 1900	Front	0.467	0.102	0.569
		Rear	0.635	0.302	0.937
	WCDMA 850	Front	0.544	0.102	0.646
		Rear	1.016	0.302	1.318
	WCDMA 1700	Front	0.579	0.102	0.681
		Rear	0.741	0.302	1.043
	WCDMA 1900	Front	0.640	0.102	0.742
		Rear	0.718	0.302	1.020
	LTE Band 12	Front	0.300	0.102	0.402
		Rear	0.501	0.302	0.803
	LTE Band 13	Front	0.474	0.102	0.576
		Rear	0.673	0.302	0.975
	LTE Band 5	Front	0.431	0.102	0.533
		Rear	0.706	0.302	1.008
	LTE Band 66	Front	0.528	0.102	0.630
		Rear	0.728	0.302	1.030
	LTE Band 2	Front	0.586	0.102	0.688
		Rear	0.703	0.302	1.005
	LTE Band 7	Front	0.444	0.102	0.546
		Rear	0.735	0.302	1.037

Table 12.5.8 Simultaneous Transmission Scenario : 2G/3G/4G + Bluetooth (Body-Worn at 10 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	Bluetooth SAR (W/kg)	ΣSAR (W/kg)
Body-Worn SAR	GSM 850	Front	0.383	0.027	0.410
		Rear	0.591	0.038	0.629
	GPRS 850	Front	0.665	0.027	0.692
		Rear	1.115	0.038	1.153
	GSM 1900	Front	0.336	0.027	0.363
		Rear	0.436	0.038	0.474
	GPRS 1900	Front	0.467	0.027	0.494
		Rear	0.635	0.038	0.673
	WCDMA 850	Front	0.544	0.027	0.571
		Rear	1.016	0.038	1.054
	WCDMA 1700	Front	0.579	0.027	0.606
		Rear	0.741	0.038	0.779
	WCDMA 1900	Front	0.640	0.027	0.667
		Rear	0.718	0.038	0.756
	LTE Band 12	Front	0.300	0.027	0.327
		Rear	0.501	0.038	0.539
	LTE Band 13	Front	0.474	0.027	0.501
		Rear	0.673	0.038	0.711
	LTE Band 5	Front	0.431	0.027	0.458
		Rear	0.706	0.038	0.744
	LTE Band 66	Front	0.528	0.027	0.555
		Rear	0.728	0.038	0.766
	LTE Band 2	Front	0.586	0.027	0.613
		Rear	0.703	0.038	0.741
	LTE Band 7	Front	0.444	0.027	0.471
		Rear	0.735	0.038	0.773

Table 12.5.9 Simultaneous Transmission Scenario : Bluetooth + 5 GHz W-LAN (Body-Worn at 10 mm)

Exposure Condition	Mode	Configuration	Bluetooth SAR (W/kg)	5G W-LAN SAR (W/kg)	Σ SAR (W/kg)
Body-Worn SAR	5.3G W-LAN	Front	0.027	0.055	0.082
		Rear	0.038	0.223	0.261
	5.6G W-LAN	Front	0.027	0.167	0.194
		Rear	0.038	0.419	0.457
	5.8G W-LAN	Front	0.027	0.102	0.129
		Rear	0.038	0.302	0.340

12.6 Hotspot SAR Simultaneous Transmission Analysis

Per FCC KDB Publication 941225 D06v02r01, the device edges with antennas more than 2.5 cm from edge are not required to be evaluated for SAR ("").

Table 12.6.1 Simultaneous Transmission Scenario : 2G/3G/4G + Bluetooth + 5.2 GHz W-LAN (Hotspot at 10 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	Bluetooth SAR (W/kg)	5.2G W-LAN SAR (W/kg)	ΣSAR (W/kg)		
			1	2	3	1+2	1+3	1+2+3
Hotspot SAR	GPRS 850	Top	-	0.012	0.071	0.012	0.071	0.083
		Bottom	0.540	-	-	0.540	0.540	0.540
		Front	0.665	0.027	0.043	0.692	0.708	0.735
		Rear	1.115	0.038	0.236	1.153	1.351	1.389
		Right	-	0.045	0.276	0.045	0.276	0.321
		Left	0.275	-	-	0.275	0.275	0.275
	GPRS 1900	Top	-	0.012	0.071	0.012	0.071	0.083
		Bottom	0.857	-	-	0.857	0.857	0.857
		Front	0.467	0.027	0.043	0.494	0.510	0.537
		Rear	0.635	0.038	0.236	0.673	0.871	0.909
		Right	0.140	0.045	0.276	0.185	0.416	0.461
		Left	-	-	-	-	-	-
	WCDMA 850	Top	-	0.012	0.071	0.012	0.071	0.083
		Bottom	0.459	-	-	0.459	0.459	0.459
		Front	0.544	0.027	0.043	0.571	0.587	0.614
		Rear	1.016	0.038	0.236	1.054	1.252	1.290
		Right	-	0.045	0.276	0.045	0.276	0.321
		Left	0.189	-	-	0.189	0.189	0.189
	WCDMA 1700	Top	-	0.012	0.071	0.012	0.071	0.083
		Bottom	1.102	-	-	1.102	1.102	1.102
		Front	0.512	0.027	0.043	0.539	0.555	0.582
		Rear	0.632	0.038	0.236	0.670	0.868	0.906
		Right	0.176	0.045	0.276	0.221	0.452	0.497
		Left	-	-	-	-	-	-
	WCDMA 1900	Top	-	0.012	0.071	0.012	0.071	0.083
		Bottom	1.062	-	-	1.062	1.062	1.062
		Front	0.480	0.027	0.043	0.507	0.523	0.550
		Rear	0.570	0.038	0.236	0.608	0.806	0.844
		Right	0.171	0.045	0.276	0.216	0.447	0.492
		Left	-	-	-	-	-	-
	LTE Band 12	Top	-	0.012	0.071	0.012	0.071	0.083
		Bottom	0.153	-	-	0.153	0.153	0.153
		Front	0.300	0.027	0.043	0.327	0.343	0.370
		Rear	0.901	0.038	0.236	0.939	0.737	0.775
		Right	-	0.045	0.276	0.045	0.276	0.321
		Left	0.196	-	-	0.196	0.196	0.196
	LTE Band 13	Top	-	0.012	0.071	0.012	0.071	0.083
		Bottom	0.244	-	-	0.244	0.244	0.244
		Front	0.474	0.027	0.043	0.501	0.517	0.544
		Rear	0.673	0.038	0.236	0.711	0.909	0.947
		Right	-	0.045	0.276	0.045	0.276	0.321
		Left	0.250	-	-	0.250	0.250	0.250
	LTE Band 5	Top	-	0.012	0.071	0.012	0.071	0.083
		Bottom	0.359	-	-	0.359	0.359	0.359
		Front	0.431	0.027	0.043	0.458	0.474	0.501
		Rear	0.706	0.038	0.236	0.744	0.942	0.980
		Right	-	0.045	0.276	0.045	0.276	0.321
		Left	0.189	-	-	0.189	0.189	0.189
	LTE Band 66	Top	-	0.012	0.071	0.012	0.071	0.083
		Bottom	1.017	-	-	1.017	1.017	1.017
		Front	0.447	0.027	0.043	0.474	0.490	0.517
		Rear	0.572	0.038	0.236	0.610	0.808	0.846
		Right	0.150	0.045	0.276	0.195	0.426	0.471
		Left	-	-	-	-	-	-
	LTE Band 2	Top	-	0.012	0.071	0.012	0.071	0.083
		Bottom	0.913	-	-	0.913	0.913	0.913
		Front	0.503	0.027	0.043	0.530	0.546	0.573
		Rear	0.571	0.038	0.236	0.609	0.807	0.845
		Right	0.154	0.045	0.276	0.199	0.430	0.475
		Left	-	-	-	-	-	-
	LTE Band 7	Top	-	0.012	0.071	0.012	0.071	0.083
		Bottom	0.617	-	-	0.617	0.617	0.617
		Front	0.355	0.027	0.043	0.382	0.398	0.425
		Rear	0.598	0.038	0.236	0.636	0.834	0.872
		Right	0.131	0.045	0.276	0.176	0.407	0.452
		Left	-	-	-	-	-	-

Table 12.6.2 Simultaneous Transmission Scenario : 2G/3G/4G + Bluetooth + 5.8 GHz W-LAN (Hotspot at 10 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	Bluetooth SAR (W/kg)	5.8G W-LAN SAR (W/kg)	ΣSAR (W/kg)		
			1	2	3	1+2	1+3	1+2+3
Hotspot SAR	GPRS 850	Top	-	0.012	0.062	0.012	0.062	0.074
		Bottom	0.540	-	-	0.540	0.540	0.540
		Front	0.665	0.027	0.102	0.692	0.767	0.794
		Rear	1.115	0.038	0.302	1.153	1.417	1.455
		Right	-	0.045	0.273	0.045	0.273	0.318
		Left	0.275	-	-	0.275	0.275	0.275
	GPRS 1900	Top	-	0.012	0.062	0.012	0.062	0.074
		Bottom	0.857	-	-	0.857	0.857	0.857
		Front	0.467	0.027	0.102	0.494	0.569	0.596
		Rear	0.635	0.038	0.302	0.673	0.937	0.975
		Right	0.140	0.045	0.273	0.185	0.413	0.458
		Left	-	-	-	-	-	-
	WCDMA 850	Top	-	0.012	0.062	0.012	0.062	0.074
		Bottom	0.459	-	-	0.459	0.459	0.459
		Front	0.544	0.027	0.102	0.571	0.646	0.673
		Rear	1.016	0.038	0.302	1.054	1.318	1.356
		Right	-	0.045	0.273	0.045	0.273	0.318
		Left	0.189	-	-	0.189	0.189	0.189
	WCDMA 1700	Top	-	0.012	0.062	0.012	0.062	0.074
		Bottom	1.102	-	-	1.102	1.102	1.102
		Front	0.512	0.027	0.102	0.539	0.614	0.641
		Rear	0.632	0.038	0.302	0.670	0.934	0.972
		Right	0.176	0.045	0.273	0.221	0.449	0.494
		Left	-	-	-	-	-	-
	WCDMA 1900	Top	-	0.012	0.062	0.012	0.062	0.074
		Bottom	1.062	-	-	1.062	1.062	1.062
		Front	0.480	0.027	0.102	0.507	0.582	0.609
		Rear	0.570	0.038	0.302	0.608	0.872	0.910
		Right	0.171	0.045	0.273	0.216	0.444	0.489
		Left	-	-	-	-	-	-
	LTE Band 12	Top	-	0.012	0.062	0.012	0.062	0.074
		Bottom	0.153	-	-	0.153	0.153	0.153
		Front	0.300	0.027	0.102	0.327	0.402	0.429
		Rear	0.501	0.038	0.302	0.539	0.803	0.841
		Right	-	0.045	0.273	0.045	0.273	0.318
		Left	0.196	-	-	0.196	0.196	0.196
	LTE Band 13	Top	-	0.012	0.062	0.012	0.062	0.074
		Bottom	0.244	-	-	0.244	0.244	0.244
		Front	0.474	0.027	0.102	0.501	0.576	0.603
		Rear	0.673	0.038	0.302	0.711	0.975	1.013
		Right	-	0.045	0.273	0.045	0.273	0.318
		Left	0.250	-	-	0.250	0.250	0.250
	LTE Band 5	Top	-	0.012	0.062	0.012	0.062	0.074
		Bottom	0.359	-	-	0.359	0.359	0.359
		Front	0.431	0.027	0.102	0.458	0.533	0.560
		Rear	0.706	0.038	0.302	0.744	1.008	1.046
		Right	-	0.045	0.273	0.045	0.273	0.318
		Left	0.189	-	-	0.189	0.189	0.189
	LTE Band 66	Top	-	0.012	0.062	0.012	0.062	0.074
		Bottom	1.017	-	-	1.017	1.017	1.017
		Front	0.447	0.027	0.102	0.474	0.549	0.576
		Rear	0.572	0.038	0.302	0.610	0.874	0.912
		Right	0.150	0.045	0.273	0.195	0.423	0.468
		Left	-	-	-	-	-	-
	LTE Band 2	Top	-	0.012	0.062	0.012	0.062	0.074
		Bottom	0.913	-	-	0.913	0.913	0.913
		Front	0.503	0.027	0.102	0.530	0.605	0.632
		Rear	0.571	0.038	0.302	0.609	0.873	0.911
		Right	0.154	0.045	0.273	0.199	0.427	0.472
		Left	-	-	-	-	-	-
	LTE Band 7	Top	-	0.012	0.062	0.012	0.062	0.074
		Bottom	0.617	-	-	0.617	0.617	0.617
		Front	0.355	0.027	0.102	0.382	0.457	0.484
		Rear	0.596	0.038	0.302	0.636	0.900	0.938
		Right	0.131	0.045	0.273	0.176	0.404	0.449
		Left	-	-	-	-	-	-

Table 12.6.3 Simultaneous Transmission Scenario : 2G/3G/4G + 2.4 GHz W-LAN (Hotspot at 10 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	2.4G W-LAN SAR (W/kg)	ΣSAR (W/kg)
			1	2	1+2
Hotspot SAR	GPRS 850	Top	-	0.084	0.084
		Bottom	0.540	0.000	0.540
		Front	0.665	0.124	0.789
		Rear	1.115	0.166	1.281
		Right	-	0.288	0.288
		Left	0.275	-	0.275
	GPRS 1900	Top	-	0.084	0.084
		Bottom	0.857	0.000	0.857
		Front	0.467	0.124	0.591
		Rear	0.635	0.166	0.801
		Right	0.140	0.288	0.428
		Left	-	-	-
	WCDMA 850	Top	-	0.084	0.084
		Bottom	0.459	0.000	0.459
		Front	0.544	0.124	0.668
		Rear	1.016	0.166	1.182
		Right	-	0.288	0.288
		Left	0.189	-	0.189
	WCDMA 1700	Top	-	0.084	0.084
		Bottom	1.102	0.000	1.102
		Front	0.512	0.124	0.636
		Rear	0.632	0.166	0.798
		Right	0.176	0.288	0.464
		Left	-	-	-
	WCDMA 1900	Top	-	0.084	0.084
		Bottom	1.062	0.000	1.062
		Front	0.480	0.124	0.604
		Rear	0.570	0.166	0.736
		Right	0.171	0.288	0.459
		Left	-	-	-
	LTE Band 12	Top	-	0.084	0.084
		Bottom	0.153	0.000	0.153
		Front	0.300	0.124	0.424
		Rear	0.501	0.166	0.667
		Right	-	0.288	0.288
		Left	0.196	-	0.196
	LTE Band 13	Top	-	0.084	0.084
		Bottom	0.244	0.000	0.244
		Front	0.474	0.124	0.598
		Rear	0.673	0.166	0.839
		Right	-	0.288	0.288
		Left	0.250	-	0.250
	LTE Band 5	Top	-	0.084	0.084
		Bottom	0.359	0.000	0.359
		Front	0.431	0.124	0.555
		Rear	0.706	0.166	0.872
		Right	-	0.288	0.288
		Left	0.189	-	0.189
	LTE Band 66	Top	-	0.084	0.084
		Bottom	1.017	0.000	1.017
		Front	0.447	0.124	0.571
		Rear	0.572	0.166	0.738
		Right	0.150	0.288	0.438
		Left	-	-	-
	LTE Band 2	Top	-	0.084	0.084
		Bottom	0.913	0.000	0.913
		Front	0.503	0.124	0.627
		Rear	0.571	0.166	0.737
		Right	0.154	0.288	0.442
		Left	-	-	-
	LTE Band 7	Top	-	0.084	0.084
		Bottom	0.617	0.000	0.617
		Front	0.355	0.124	0.479
		Rear	0.598	0.166	0.764
		Right	0.131	0.288	0.419
		Left	-	-	-

Table 12.6.4 Simultaneous Transmission Scenario : 2G/3G/4G + 5.2 GHz W-LAN (Hotspot at 10 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	5.2G W-LAN SAR (W/kg)	ΣSAR (W/kg)
			1	2	1+2
Hotspot SAR	GPRS 850	Top	-	0.071	0.071
		Bottom	0.540	-	0.540
		Front	0.665	0.043	0.708
		Rear	1.115	0.236	1.351
		Right	-	0.276	0.276
		Left	0.275	-	0.275
	GPRS 1900	Top	-	0.071	0.071
		Bottom	0.857	-	0.857
		Front	0.467	0.043	0.510
		Rear	0.635	0.236	0.871
		Right	0.140	0.276	0.416
		Left	-	-	-
	WCDMA 850	Top	-	0.071	0.071
		Bottom	0.459	-	0.459
		Front	0.544	0.043	0.587
		Rear	1.016	0.236	1.252
		Right	-	0.276	0.276
		Left	0.189	-	0.189
	WCDMA 1700	Top	-	0.071	0.071
		Bottom	1.102	-	1.102
		Front	0.512	0.043	0.555
		Rear	0.632	0.236	0.868
		Right	0.176	0.276	0.452
		Left	-	-	-
	WCDMA 1900	Top	-	0.071	0.071
		Bottom	1.062	-	1.062
		Front	0.480	0.043	0.523
		Rear	0.570	0.236	0.806
		Right	0.171	0.276	0.447
		Left	-	-	-
	LTE Band 12	Top	-	0.071	0.071
		Bottom	0.153	-	0.153
		Front	0.300	0.043	0.343
		Rear	0.501	0.236	0.737
		Right	-	0.276	0.276
		Left	0.198	-	0.198
	LTE Band 13	Top	-	0.071	0.071
		Bottom	0.244	-	0.244
		Front	0.474	0.043	0.517
		Rear	0.673	0.236	0.909
		Right	-	0.276	0.276
		Left	0.250	-	0.250
	LTE Band 5	Top	-	0.071	0.071
		Bottom	0.359	-	0.359
		Front	0.431	0.043	0.474
		Rear	0.706	0.236	0.942
		Right	-	0.276	0.276
		Left	0.189	-	0.189
	LTE Band 66	Top	-	0.071	0.071
		Bottom	1.017	-	1.017
		Front	0.447	0.043	0.490
		Rear	0.572	0.236	0.808
		Right	0.150	0.276	0.426
		Left	-	-	-
	LTE Band 2	Top	-	0.071	0.071
		Bottom	0.913	-	0.913
		Front	0.503	0.043	0.546
		Rear	0.571	0.236	0.807
		Right	0.154	0.276	0.430
		Left	-	-	-
	LTE Band 7	Top	-	0.071	0.071
		Bottom	0.617	-	0.617
		Front	0.355	0.043	0.398
		Rear	0.598	0.236	0.834
		Right	0.131	0.276	0.407
		Left	-	-	-

Table 12.6.5 Simultaneous Transmission Scenario : 2G/3G/4G + 5.8 GHz W-LAN (Hotspot at 10 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	5.8G W-LAN SAR (W/kg)	ΣSAR (W/kg)
			1	2	1+2
Hotspot SAR	GPRS 850	Top	-	0.062	0.062
		Bottom	0.540	-	0.540
		Front	0.665	0.102	0.767
		Rear	1.115	0.302	1.417
		Right	-	0.273	0.273
		Left	0.275	-	0.275
	GPRS 1900	Top	-	0.062	0.062
		Bottom	0.857	-	0.857
		Front	0.467	0.102	0.569
		Rear	0.635	0.302	0.937
		Right	0.140	0.273	0.413
		Left	-	-	-
	WCDMA 850	Top	-	0.062	0.062
		Bottom	0.459	-	0.459
		Front	0.544	0.102	0.646
		Rear	1.016	0.302	1.318
		Right	-	0.273	0.273
		Left	0.189	-	0.189
	WCDMA 1700	Top	-	0.062	0.062
		Bottom	1.102	-	1.102
		Front	0.512	0.102	0.614
		Rear	0.632	0.302	0.934
		Right	0.176	0.273	0.449
		Left	-	-	-
	WCDMA 1900	Top	-	0.062	0.062
		Bottom	1.062	-	1.062
		Front	0.480	0.102	0.582
		Rear	0.570	0.302	0.872
		Right	0.171	0.273	0.444
		Left	-	-	-
	LTE Band 12	Top	-	0.062	0.062
		Bottom	0.153	-	0.153
		Front	0.300	0.102	0.402
		Rear	0.501	0.302	0.803
		Right	-	0.273	0.273
		Left	0.196	-	0.196
	LTE Band 13	Top	-	0.062	0.062
		Bottom	0.244	-	0.244
		Front	0.474	0.102	0.576
		Rear	0.673	0.302	0.975
		Right	-	0.273	0.273
		Left	0.250	-	0.250
	LTE Band 5	Top	-	0.062	0.062
		Bottom	0.359	-	0.359
		Front	0.431	0.102	0.533
		Rear	0.706	0.302	1.008
		Right	-	0.273	0.273
		Left	0.189	-	0.189
	LTE Band 66	Top	-	0.062	0.062
		Bottom	1.017	-	1.017
		Front	0.447	0.102	0.549
		Rear	0.572	0.302	0.874
		Right	0.150	0.273	0.423
		Left	-	-	-
	LTE Band 2	Top	-	0.062	0.062
		Bottom	0.913	-	0.913
		Front	0.503	0.102	0.605
		Rear	0.571	0.302	0.873
		Right	0.154	0.273	0.427
		Left	-	-	-
	LTE Band 7	Top	-	0.062	0.062
		Bottom	0.617	-	0.617
		Front	0.355	0.102	0.457
		Rear	0.598	0.302	0.900
		Right	0.131	0.273	0.404
		Left	-	-	-

Table 12.6.6 Simultaneous Transmission Scenario : 2G/3G/4G + Bluetooth (Hotspot at 10 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	Bluetooth SAR (W/kg)	ΣSAR (W/kg)
			1	2	1+2
Hotspot SAR	GPRS 850	Top	-	0.012	0.012
		Bottom	0.540	-	0.540
		Front	0.665	0.027	0.692
		Rear	1.115	0.038	1.153
		Right	-	0.045	0.045
		Left	0.275	-	0.275
	GPRS 1900	Top	-	0.012	0.012
		Bottom	0.857	-	0.857
		Front	0.467	0.027	0.494
		Rear	0.635	0.038	0.673
		Right	0.140	0.045	0.185
		Left	-	-	-
	WCDMA 850	Top	-	0.012	0.012
		Bottom	0.459	-	0.459
		Front	0.544	0.027	0.571
		Rear	1.016	0.038	1.054
		Right	-	0.045	0.045
		Left	0.189	-	0.189
	WCDMA 1700	Top	-	0.012	0.012
		Bottom	1.102	-	1.102
		Front	0.512	0.027	0.539
		Rear	0.632	0.038	0.670
		Right	0.176	0.045	0.221
		Left	-	-	-
	WCDMA 1900	Top	-	0.012	0.012
		Bottom	1.062	-	1.062
		Front	0.480	0.027	0.507
		Rear	0.570	0.038	0.608
		Right	0.171	0.045	0.216
		Left	-	-	-
	LTE Band 12	Top	-	0.012	0.012
		Bottom	0.153	-	0.153
		Front	0.300	0.027	0.327
		Rear	0.501	0.038	0.539
		Right	-	0.045	0.045
		Left	0.196	-	0.196
	LTE Band 13	Top	-	0.012	0.012
		Bottom	0.244	-	0.244
		Front	0.474	0.027	0.501
		Rear	0.673	0.038	0.711
		Right	-	0.045	0.045
		Left	0.250	-	0.250
	LTE Band 5	Top	-	0.012	0.012
		Bottom	0.359	-	0.359
		Front	0.431	0.027	0.458
		Rear	0.706	0.038	0.744
		Right	-	0.045	0.045
		Left	0.189	-	0.189
	LTE Band 66	Top	-	0.012	0.012
		Bottom	1.017	-	1.017
		Front	0.447	0.027	0.474
		Rear	0.572	0.038	0.610
		Right	0.150	0.045	0.195
		Left	-	-	-
	LTE Band 2	Top	-	0.012	0.012
		Bottom	0.913	-	0.913
		Front	0.503	0.027	0.530
		Rear	0.571	0.038	0.609
		Right	0.154	0.045	0.199
		Left	-	-	-
	LTE Band 7	Top	-	0.012	0.012
		Bottom	0.617	-	0.617
		Front	0.355	0.027	0.382
		Rear	0.598	0.038	0.636
		Right	0.131	0.045	0.176
		Left	-	-	-

Table 12.6.7 Simultaneous Transmission Scenario : Bluetooth + 5 GHz W-LAN (Hotspot at 10 mm)

Exposure Condition	Mode	Configuration	Bluetooth SAR (W/kg)	5G W-LAN SAR (W/kg)	ΣSAR (W/kg)
			1	2	1+2
Hotspot SAR	5.2G W-LAN	Top	0.012	0.071	0.083
		Bottom	-	-	-
		Front	0.027	0.043	0.070
		Rear	0.038	0.236	0.274
		Right	0.045	0.276	0.321
		Left	-	-	-
	5.8G W-LAN	Top	0.012	0.062	0.074
		Bottom	-	-	-
		Front	0.027	0.102	0.129
		Rear	0.038	0.302	0.340
		Right	0.045	0.273	0.318
		Left	-	-	-

12.7 Phablet SAR Simultaneous Transmission Analysis with proximity sensor enabled

Per FCC KDB Publication 648474 D04 Handset SAR, Phablet SAR tests were not required when Hotspot 1g SAR (scaled to maximum output power including tolerance) < 1.2 W/kg.

Since the proximity sensor is enabled in WCDMA 1700, WCDMA 1900, LTE B66, LTE B4, LTE B25, LTE B2, and LTE B7 of this device, Phablet SAR Evaluation was performed.

Table 12.7.1 Simultaneous Transmission Scenario : 3G/4G + 5.3 GHz W-LAN (Phablet at 0 mm)

Exposure Condition	Mode	Configuration	3G/4G SAR (W/kg)	5.3G W-LAN SAR (W/kg)	ΣSAR (W/kg)
			1	2	1+2
Phablet SAR	WCDMA 1700	Top	-	0.114	0.114
		Bottom	2.986	-	2.986
		Front	1.786	0.173	1.959
		Rear	2.537	0.515	3.052
		Right	0.513	-	0.513
		Left	-	0.715	0.715
	WCDMA 1900	Top	-	0.114	0.114
		Bottom	2.829	-	2.829
		Front	2.193	0.173	2.366
		Rear	2.652	0.515	3.167
		Right	0.521	-	0.521
		Left	-	0.715	0.715
	LTE Band 66	Top	-	0.114	0.114
		Bottom	3.132	-	3.132
		Front	1.614	0.173	1.787
		Rear	2.181	0.515	2.696
		Right	0.459	-	0.459
		Left	-	0.715	0.715
	LTE Band 2	Top	-	0.114	0.114
		Bottom	3.272	-	3.272
		Front	2.093	0.173	2.266
		Rear	2.709	0.515	3.224
		Right	0.488	-	0.488
		Left	-	0.715	0.715
	LTE Band 7	Top	-	0.114	0.114
		Bottom	2.749	-	2.749
		Front	1.946	0.173	2.119
		Rear	3.096	0.515	3.611
		Right	0.457	-	0.457
		Left	-	0.715	0.715

Table 12.7.2 Simultaneous Transmission Scenario : 3G/4G + 5.6 GHz W-LAN (Phablet at 0 mm)

Exposure Condition	Mode	Configuration	3G/4G SAR (W/kg)	5.6G W-LAN SAR (W/kg)	ΣSAR (W/kg)
			1	2	1+2
Phablet SAR	WCDMA 1700	Top	-	0.259	0.259
		Bottom	2.986	-	2.986
		Front	1.786	0.416	2.203
		Rear	2.537	0.807	3.343
		Right	0.513	-	0.513
		Left	-	0.761	0.761
	WCDMA 1900	Top	-	0.259	0.259
		Bottom	2.829	-	2.829
		Front	2.193	0.416	2.609
		Rear	2.652	0.807	3.459
		Right	0.521	-	0.521
		Left	-	0.761	0.761
	LTE Band 66	Top	-	0.259	0.259
		Bottom	3.132	-	3.132
		Front	1.614	0.416	2.030
		Rear	2.181	0.807	2.988
		Right	0.459	-	0.459
		Left	-	0.761	0.761
	LTE Band 2	Top	-	0.259	0.259
		Bottom	3.272	-	3.272
		Front	2.093	0.416	2.509
		Rear	2.709	0.807	3.516
		Right	0.488	-	0.488
		Left	-	0.761	0.761
	LTE Band 7	Top	-	0.259	0.259
		Bottom	2.749	-	2.749
		Front	1.946	0.416	2.362
		Rear	3.096	0.807	3.903
		Right	0.457	-	0.457
		Left	-	0.761	0.761

12.8 Simultaneous Transmission Conclusion

The above numerical summed SAR results for all the worst-case simultaneous transmission conditions were below the SAR limit. Therefore, the above analysis is sufficient to determine that simultaneous transmission cases will not exceed the SAR limit and therefore no measured volumetric simultaneous SAR summation is required per FCC KDB Publication 447498 D01v06 and IEEE 1528-2013 Section 6.3.4.1.2.

13. SAR MEASUREMENT VARIABILITY

13.1 Measurement Variability

Per FCC KDB Publication 865664 D01v01r04, SAR measurement variability was assessed for each frequency band, which was determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. When both head and body tissue-equivalent media were required for SAR measurements in a frequency band, the variability measurement procedures were applied to the tissue medium with the highest measured SAR, using the highest measured SAR configuration for that tissue-equivalent medium. These additional measurements were repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device was returned to ambient conditions (normal room temperature) with the battery fully charged before it was re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

SAR Measurement Variability was assessed using the following procedures for each frequency band:

1. When the original highest measured SAR is ≥ 0.80 W/kg, the measurement was repeated once.
2. A second repeated measurement was performed only if the ratio of largest to smallest SAR for the original and first repeated measurements was > 1.20 or when the original or repeated measurement was ≥ 1.45 W/kg (~10% from the 1-g SAR limit).
3. A third repeated measurement was performed only if the original, first or second repeated measurement was ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .
4. Repeated measurements are not required when the original highest measured SAR is < 0.80 W/kg
5. The same procedures should be adapted for measurements according to extremity exposure limits by applying a factor of 2.5 for extremity exposure to the corresponding SAR thresholds.

Table 13.1 Body-Worn SAR Measurement Variability Results

Frequency		Mode	Service	# of Time Slots	Spacing [Side]	Measured SAR (1g)	1st Repeated SAR(1g)	Ratio	2nd Repeated SAR(1g)	Ratio	3rd Repeated SAR(1g)	Ratio
MHz	Ch.					(W/kg)	(W/kg)		(W/kg)		(W/kg)	
848.8	251	GSM850	GPRS	3	10 mm [Rear]	1.040	1.040	1.00	-	-	-	-
846.6	4233	WCDMA 850	RMC	-	10 mm [Rear]	0.873	0.872	1.00	-	-	-	-
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure						Body 1.6 W/kg (mW/g) averaged over 1 gram						

Table 13.2 Hotspot SAR Measurement Variability Results

Frequency		Mode	Service	# of Time Slots	Spacing [Side]	Measured SAR (1g)	1st Repeated SAR(1g)	Ratio	2nd Repeated SAR(1g)	Ratio	3rd Repeated SAR(1g)	Ratio
MHz	Ch.					(W/kg)	(W/kg)		(W/kg)		(W/kg)	
848.8	251	GSM850	GPRS	3	10 mm [Rear]	1.040	1.040	1.00	-	-	-	-
1 880.0	661	PCS1900	GPRS	3	10 mm [Bottom]	0.841	0.839	1.00	-	-	-	-
846.6	4233	WCDMA 850	RMC	-	10 mm [Rear]	0.873	0.872	1.00	-	-	-	-
1 752.6	1513	WCDMA 1700	RMC	-	10 mm [Bottom]	1.010	1.010	1.00	-	-	-	-
1 907.6	9538	WCDMA 1900	RMC	-	10 mm [Bottom]	0.951	0.949	1.00	-	-	-	-
1 770.0	132572	LTE B66	-	-	10 mm [Bottom]	0.951	0.950	1.00	-	-	-	-
1 900.0	19100	LTE B2	-	-	10 mm [Bottom]	0.899	0.858	1.05	-	-	-	-
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure						Body 1.6 W/kg (mW/g) averaged over 1 gram						

Table 13.2 Phablet SAR Measurement Variability Results

Frequency		Mode	Service	# of Time Slots	Spacing [Side]	Measured SAR (10g)	1st Repeated SAR(10g)	Ratio	2nd Repeated SAR(10g)	Ratio	3rd Repeated SAR(10g)	Ratio
MHz	Ch.					(W/kg)	(W/kg)		(W/kg)		(W/kg)	
1 712.4	1312	WCDMA 1700	RMC	-	0 mm [Bottom]	2.710	2.710	1.00	-	-	-	-
1 880.0	9400	WCDMA 1900	RMC	-	0 mm [Bottom]	2.510	2.510	1.00	-	-	-	-
1 770.0	132572	LTE B66	-	-	0 mm [Bottom]	2.930	2.920	1.00	-	-	-	-
1 900.0	19100	LTE B2	-	-	0 mm [Bottom]	3.220	3.200	1.01	-	-	-	-
2 535.0	21100	LTE B7	-	-	0 mm [Bottom]	2.740	2.700	1.01	-	-	-	-
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure						Phablet 4.0 W/kg (mW/g) averaged over 10 gram						

13.2 Measurement Uncertainty

The measured SAR was < 1.5 W/kg for 1g and < 3.75 W/kg for 10g for all frequency bands. Therefore, per KDB Publication 865664 D01v01r04, the extended measurement uncertainty analysis per IEEE 1528-2013 was not required.

14. EQUIPMENT LIST

Table 15.1.1 Test Equipment Calibration

	Type	Manufacturer	Model	Cal.Date	Next.Cal.Date	S/N
☒	SEMITEC Engineering	SEMITEC	N/A	N/A	N/A	Shield Room
☒	SEMITEC Engineering	SEMITEC	N/A	N/A	N/A	Shield Room
☒	SEMITEC Engineering	SEMITEC	N/A	N/A	N/A	Shield Room
☒	SEMITEC Engineering	SEMITEC	N/A	N/A	N/A	Shield Room
☒	Robot	SPEAG	TX60L	N/A	N/A	F12/5LP5A1/A/01
☒	Robot	SPEAG	TX60L	N/A	N/A	F14/5VR2A1/A/01
☒	Robot	SPEAG	TX60L	N/A	N/A	F15/50NHA1/A/01
☒	Robot	SPEAG	TX60L	N/A	N/A	F14/5WV5D1/A/01
☒	Robot Controller	SPEAG	CS8C	N/A	N/A	F12/5LP5A1/C/01
☒	Robot Controller	SPEAG	CS8C	N/A	N/A	F14/5VR2A1/C/01
☒	Robot Controller	SPEAG	CS8C	N/A	N/A	F15/50NHA1/C/01
☒	Robot Controller	SPEAG	CS8C	N/A	N/A	F14/5WV5D1/C/01
☒	Joystick	SPEAG	N/A	N/A	N/A	S-12030401
☒	Joystick	SPEAG	N/A	N/A	N/A	D21142605A
☒	Joystick	SPEAG	N/A	N/A	N/A	D21142605A
☒	Joystick	SPEAG	P21142605A	N/A	N/A	005695
☒	Intel Core i7-2 600 3.40 GHz Windows 7 Professional	N/A	N/A	N/A	N/A	N/A
☒	Intel Core i7-4 770 3.40 GHz Windows 7 Professional	N/A	N/A	N/A	N/A	N/A
☒	Intel Core i7-8 700K 3.70 GHz Windows 10 Pro	N/A	N/A	N/A	N/A	N/A
☒	Intel Core i7-4 770 3.40 GHz Windows 7 Professional	N/A	N/A	N/A	N/A	N/A
☒	Probe Alignment Unit LB	N/A	N/A	N/A	N/A	SE UKS 030 AA
☒	Probe Alignment Unit LB	N/A	N/A	N/A	N/A	SE UKS 030 AA
☒	Probe Alignment Unit LB	N/A	N/A	N/A	N/A	SE UKS 030 AA
☒	Probe Alignment Unit LB	N/A	N/A	N/A	N/A	SE UKS 030 AA
☒	Device Holder	SPEAG	SD000H01KA	N/A	N/A	N/A
☒	Device Holder	SPEAG	SD000H01HA	N/A	N/A	N/A
☒	Device Holder	SPEAG	SD000H01KA	N/A	N/A	N/A
☒	Device Holder	SPEAG	SD000H01KA	N/A	N/A	N/A
☒	Twin SAM Phantom	SPEAG	QD000P40CD	N/A	N/A	1679
☒	Twin SAM Phantom	SPEAG	QD000P40CD	N/A	N/A	1220
☒	Twin SAM Phantom	SPEAG	QD000P40CD	N/A	N/A	1895
☒	Twin SAM Phantom	SPEAG	QD000P40CD	N/A	N/A	1837
☒	Data Acquisition Electronics	SPEAG	DAE4V1	2020-04-22	2021-04-22	1391
☒	Data Acquisition Electronics	SPEAG	DAE4V1	2019-09-04	2020-09-04	1396
☒	Data Acquisition Electronics	SPEAG	DAE4V1	2020-03-20	2021-03-20	1394
☒	Data Acquisition Electronics	SPEAG	DAE4V1	2019-09-20	2020-09-20	1453
☒	Dosimetric E-Field Probe	SPEAG	EX3DV4	2019-11-18	2020-11-18	3930
☒	Dosimetric E-Field Probe	SPEAG	ES3DV3	2019-08-27	2020-08-27	3327
☒	Dosimetric E-Field Probe	SPEAG	EX3DV4	2019-11-27	2020-11-27	7337
☒	Dosimetric E-Field Probe	SPEAG	EX3DV4	2020-01-30	2021-01-30	7368
☒	Dosimetric E-Field Probe	SPEAG	EX3DV4	2020-05-27	2021-05-27	3866
☒	750MHz SAR Dipole	SPEAG	D750V3	2020-01-22	2022-01-22	1049
☒	835MHz SAR Dipole	SPEAG	D835V2	2019-07-18	2021-07-18	464
☒	1 800MHz SAR Dipole	SPEAG	D1800V2	2020-03-20	2022-03-20	2d202
☒	1 900MHz SAR Dipole	SPEAG	D1900V2	2019-07-17	2021-07-17	5d029
☒	2 450MHz SAR Dipole	SPEAG	D2450V2	2019-09-19	2021-09-19	726
☒	2 600MHz SAR Dipole	SPEAG	D2600V2	2020-02-20	2022-02-20	1103
☒	5GHz SAR Dipole	SPEAG	D5GHZV2	2020-02-27	2022-02-27	1212
☒	Network Analyzer	Agilent	E5071C	2019-06-24	2020-06-24	MY46106970
☒	Signal Generator	Agilent	E4438C	2019-06-24	2020-06-24	US41461520
☒	Amplifier	RFBAY,Inc	MPA-40-40	2019-12-16	2020-12-16	21151801
☒	Amplifier	EMPOWER	BBS3Q7ELU	2019-06-24	2020-06-24	1020
☒	High Power RF Amplifier	EMPOWER	BBS3Q8CCJ	2019-06-24	2020-06-24	1005
☒	Power Meter	HP	EPM-442A	2019-12-16	2020-12-16	GB37170267
☒	Power Meter	HP	EPM-442A	2019-12-16	2020-12-16	GB37170413
☒	Power Sensor	HP	8481A	2019-12-16	2020-12-16	US37294267
☒	Power Sensor	HP	8481A	2019-12-16	2020-12-16	3318A96566
☒	Power Sensor	HP	8481A	2019-12-16	2020-12-16	2702A65976
☒	Dual Directional Coupler	Agilent	778D-012	2019-12-16	2020-12-16	50228
☒	Directional Coupler	HP	772D	2019-06-24	2020-06-24	2889A01064
☒	Low Pass Filter 1GHz	Wainwright Instruments	WLK6-1000-1400-9000-60SS	2019-06-24	2020-06-24	165
☒	Low Pass Filter 1.5GHz	Micro LAB	LA-15N	2019-06-24	2020-06-24	2
☒	Low Pass Filter 3.0GHz	Micro LAB	LA-30N	2019-06-24	2020-06-24	2
☒	Low Pass Filter 6.0GHz	Micro LAB	LA-60N	2019-12-16	2020-12-16	03942
☒	Attenuators(10 dB)	WEINSCHEL	23-10-34	2019-12-16	2020-12-16	BP4387
☒	Attenuators	Cernexwave	CFADC2603U5	2019-06-27	2020-06-27	C11740
☒	Dielectric Probe kit	SPEAG	DAK-3.5	2019-11-19	2020-11-19	1092
☒	8960 Series 10 Wireless Comms. Test Set	Agilent	E5515C	2019-06-28	2020-06-28	GB41321164
☒	Wideband Radio Communication Tester	Rohde Schwarz	CMW500	2019-12-16	2020-12-16	101414
☒	Wideband Radio Communication Tester	Rohde Schwarz	CMW500	2020-04-29	2021-04-29	147898
☒	Radio Communication Analyzer	Agilent	E5515E	2019-06-28	2020-06-28	MY52113012
☒	Radio Communication Analyzer	KEYSIGHT	E7515A	2019-07-05	2020-07-05	MY55210201
☒	Radio Communication Analyzer	KEYSIGHT	E7515A	2019-12-16	2020-12-16	MY57270113
☒	Power Splitter	Anritsu	K241B	2019-12-16	2020-12-16	1301183
☒	Bluetooth Tester	TESCOM	TC-3000C	2019-06-24	2020-06-24	3000C000563

NOTE(S):

1. The E-field probe was calibrated by SPEAG, by temperature measurement procedure. Dipole Verification measurement is performed by DT&C before each test. The brain and muscle simulating material are calibrated by DT&C using the dielectric probe system and network analyzer to determine the conductivity and permittivity (dielectric constant) of the brain and muscle-equivalent material. Each equipment item was used solely within its respective calibration period.
2. CBT(Calibrated Before Testing). Prior to testing, the measurement paths containing a cable, amplifier, attenuator, coupler or filter were connected to a calibrated source (i.e. signal generator) to determine the losses of the measurement path. The power meter offset was then adjusted to compensate for the measurement system losses. This level offset is stored within the power meter before measurements are made. This calibration verification procedure applies to the system verification and output power measurements. The calibrated reading is then taken directly from the power meter after compensation of the losses for all final power measurements.

15. MEASUREMENT UNCERTAINTIES

750 MHz Head (SN: 7368)

Error Description	Uncertainty value ±%	Probability Distribution	Divisor	(Ci) 1 g	(Ci) 10 g	Standard 1 g (± %)	Standard 10 g (± %)	vi 2 or Veff
Measurement System								
Probe calibration	6.0	Normal	1	1	1	6.0	6.0	∞
Isotropy	1.3	Normal	1	1	1	1.3	1.3	∞
Boundary Effects	2.0	Rectangular	√3	1	1	1.2	1.2	∞
Probe Linearity	0.3	Normal	1	1	1	0.3	0.3	∞
Probe modulation response	0.0	Rectangular	√3	1	1	0.0	0.0	∞
Detection limits	0.25	Rectangular	√3	1	1	0.14	0.14	∞
Readout Electronics	0.3	Normal	1	1	1	0.3	0.3	∞
Response time	0.8	Rectangular	√3	1	1	0.46	0.46	∞
Integration time	2.6	Rectangular	√3	1	1	1.5	1.5	∞
RF Ambient Conditions – Noise	3.0	Rectangular	√3	1	1	1.7	1.7	∞
RF Ambient Conditions – Reflections	3.0	Rectangular	√3	1	1	1.7	1.7	∞
Probe Positioner	0.8	Rectangular	√3	1	1	0.46	0.46	∞
Probe Positioning	6.7	Rectangular	√3	1	1	3.9	3.9	∞
Algorithms for Max. SAR Eval.	4.0	Rectangular	√3	1	1	2.3	2.3	∞
Test Sample Related								
Device Positioning	2.9	Normal	1	1	1	2.9	2.9	145
Device Holder	3.6	Normal	1	1	1	3.6	3.6	5
Power Drift	5.0	Rectangular	√3	1	1	2.9	2.9	∞
SAR Scaling	0.0	Rectangular	√3	1	1	0.0	0.0	∞
Physical Parameters								
Phantom Shell	7.6	Rectangular	√3	1	1	4.4	4.4	∞
SAR correction	0.0	Normal	1	1	0.84	0.0	0.0	∞
Liquid conductivity (Target)	5.0	Rectangular	√3	0.64	0.43	1.8	1.2	∞
Liquid conductivity (Meas.)	4.0	Normal	1	0.78	0.71	3.1	2.8	10
Liquid permittivity (Target)	5.0	Rectangular	√3	0.60	0.49	1.7	1.4	∞
Liquid permittivity (Meas.)	4.0	Normal	1	0.23	0.26	0.9	1.0	10
Temp. unc. - Conductivity	2.0	Rectangular	√3	0.78	0.71	0.9	0.8	∞
Temp. unc. - Permittivity	1.9	Rectangular	√3	0.23	0.26	0.3	0.3	∞
Combined Standard Uncertainty						12	11	330
Expanded Uncertainty (k=2)						24	22	

$$U(1\text{ g}) = k \cdot u_c$$

$$= 2 \cdot 12\%$$

$$= 24\% \text{ (The confidence level is about 95 \% } k = 2)$$

$$U(10\text{ g}) = k \cdot u_c$$

$$= 2 \cdot 11\%$$

$$= 22\% \text{ (The confidence level is about 95 \% } k = 2)$$

The above measurement uncertainties are according to IEEE Std 1528

750 MHz Body (SN: 3866)

Error Description	Uncertainty value $\pm\%$	Probability Distribution	Divisor	(Ci) 1 g	(Ci) 10 g	Standard 1 g ($\pm\%$)	Standard 10 g ($\pm\%$)	vi 2 or Veff
Measurement System								
Probe calibration	6.0	Normal	1	1	1	6.0	6.0	∞
Isotropy	1.3	Normal	1	1	1	1.3	1.3	∞
Boundary Effects	2.0	Rectangular	$\sqrt{3}$	1	1	1.2	1.2	∞
Probe Linearity	0.3	Normal	1	1	1	0.3	0.3	∞
Probe modulation response	0.0	Rectangular	$\sqrt{3}$	1	1	0.0	0.0	∞
Detection limits	0.25	Rectangular	$\sqrt{3}$	1	1	0.14	0.14	∞
Readout Electronics	0.3	Normal	1	1	1	0.3	0.3	∞
Response time	0.8	Rectangular	$\sqrt{3}$	1	1	0.46	0.46	∞
Integration time	2.6	Rectangular	$\sqrt{3}$	1	1	1.5	1.5	∞
RF Ambient Conditions – Noise	3.0	Rectangular	$\sqrt{3}$	1	1	1.7	1.7	∞
RF Ambient Conditions – Reflections	3.0	Rectangular	$\sqrt{3}$	1	1	1.7	1.7	∞
Probe Positioner	0.8	Rectangular	$\sqrt{3}$	1	1	0.46	0.46	∞
Probe Positioning	6.7	Rectangular	$\sqrt{3}$	1	1	3.9	3.9	∞
Algorithms for Max. SAR Eval.	4.0	Rectangular	$\sqrt{3}$	1	1	2.3	2.3	∞
Test Sample Related								
Device Positioning	2.9	Normal	1	1	1	2.9	2.9	145
Device Holder	3.6	Normal	1	1	1	3.6	3.6	5
Power Drift	5.0	Rectangular	$\sqrt{3}$	1	1	2.9	2.9	∞
SAR Scaling	0.0	Rectangular	$\sqrt{3}$	1	1	0.0	0.0	∞
Physical Parameters								
Phantom Shell	7.6	Rectangular	$\sqrt{3}$	1	1	4.4	4.4	∞
SAR correction	0.0	Normal	1	1	0.84	0.0	0.0	∞
Liquid conductivity (Target)	5.0	Rectangular	$\sqrt{3}$	0.64	0.43	1.8	1.2	∞
Liquid conductivity (Meas.)	3.8	Normal	1	0.78	0.71	3.0	2.7	10
Liquid permittivity (Target)	5.0	Rectangular	$\sqrt{3}$	0.60	0.49	1.7	1.4	∞
Liquid permittivity (Meas.)	3.9	Normal	1	0.23	0.26	0.9	1.0	10
Temp. unc. - Conductivity	1.8	Rectangular	$\sqrt{3}$	0.78	0.71	0.8	0.7	∞
Temp. unc. - Permittivity	1.9	Rectangular	$\sqrt{3}$	0.23	0.26	0.3	0.3	∞
Combined Standard Uncertainty						12	11	330
Expanded Uncertainty (k=2)						24	22	

$$U(1\text{ g}) = k \cdot u_c$$

$$= 2 \cdot 12\%$$

= 24 % (The confidence level is about 95 % $k = 2$)

$$U(10\text{ g}) = k \cdot u_c$$

$$= 2 \cdot 11\%$$

= 22 % (The confidence level is about 95 % $k = 2$)

The above measurement uncertainties are according to IEEE Std 1528

835 MHz Head (SN: 7337)

Error Description	Uncertainty value $\pm\%$	Probability Distribution	Divisor	(Ci) 1 g	(Ci) 10 g	Standard 1 g ($\pm\%$)	Standard 10 g ($\pm\%$)	vi 2 or Veff
Measurement System								
Probe calibration	6.0	Normal	1	1	1	6.0	6.0	∞
Isotropy	1.3	Normal	1	1	1	1.3	1.3	∞
Boundary Effects	2.0	Rectangular	$\sqrt{3}$	1	1	1.2	1.2	∞
Probe Linearity	0.3	Normal	1	1	1	0.3	0.3	∞
Probe modulation response	0.0	Rectangular	$\sqrt{3}$	1	1	0.0	0.0	∞
Detection limits	0.25	Rectangular	$\sqrt{3}$	1	1	0.14	0.14	∞
Readout Electronics	0.3	Normal	1	1	1	0.3	0.3	∞
Response time	0.8	Rectangular	$\sqrt{3}$	1	1	0.46	0.46	∞
Integration time	2.6	Rectangular	$\sqrt{3}$	1	1	1.5	1.5	∞
RF Ambient Conditions – Noise	3.0	Rectangular	$\sqrt{3}$	1	1	1.7	1.7	∞
RF Ambient Conditions – Reflections	3.0	Rectangular	$\sqrt{3}$	1	1	1.7	1.7	∞
Probe Positioner	0.8	Rectangular	$\sqrt{3}$	1	1	0.46	0.46	∞
Probe Positioning	6.7	Rectangular	$\sqrt{3}$	1	1	3.9	3.9	∞
Algorithms for Max. SAR Eval.	4.0	Rectangular	$\sqrt{3}$	1	1	2.3	2.3	∞
Test Sample Related								
Device Positioning	2.9	Normal	1	1	1	2.9	2.9	145
Device Holder	3.6	Normal	1	1	1	3.6	3.6	5
Power Drift	5.0	Rectangular	$\sqrt{3}$	1	1	2.9	2.9	∞
SAR Scaling	0.0	Rectangular	$\sqrt{3}$	1	1	0.0	0.0	∞
Physical Parameters								
Phantom Shell	7.6	Rectangular	$\sqrt{3}$	1	1	4.4	4.4	∞
SAR correction	0.0	Normal	1	1	0.84	0.0	0.0	∞
Liquid conductivity (Target)	5.0	Rectangular	$\sqrt{3}$	0.64	0.43	1.8	1.2	∞
Liquid conductivity (Meas.)	3.9	Normal	1	0.78	0.71	3.0	2.8	10
Liquid permittivity (Target)	5.0	Rectangular	$\sqrt{3}$	0.60	0.49	1.7	1.4	∞
Liquid permittivity (Meas.)	3.8	Normal	1	0.23	0.26	0.9	1.0	10
Temp. unc. - Conductivity	1.8	Rectangular	$\sqrt{3}$	0.78	0.71	0.8	0.7	∞
Temp. unc. - Permittivity	2.0	Rectangular	$\sqrt{3}$	0.23	0.26	0.3	0.3	∞
Combined Standard Uncertainty						12	11	330
Expanded Uncertainty (k=2)						24	22	

$$U(1\text{ g}) = k \cdot u_c$$

$$= 2 \cdot 12\%$$

= 24 % (The confidence level is about 95 % $k = 2$)

$$U(10\text{ g}) = k \cdot u_c$$

$$= 2 \cdot 11\%$$

= 22 % (The confidence level is about 95 % $k = 2$)

The above measurement uncertainties are according to IEEE Std 1528

835 MHz Body (SN: 7337)

Error Description	Uncertainty value $\pm\%$	Probability Distribution	Divisor	(Ci) 1 g	(Ci) 10 g	Standard 1 g ($\pm\%$)	Standard 10 g ($\pm\%$)	vi 2 or Veff
Measurement System								
Probe calibration	6.0	Normal	1	1	1	6.0	6.0	∞
Isotropy	1.3	Normal	1	1	1	1.3	1.3	∞
Boundary Effects	2.0	Rectangular	$\sqrt{3}$	1	1	1.2	1.2	∞
Probe Linearity	0.3	Normal	1	1	1	0.3	0.3	∞
Probe modulation response	0.0	Rectangular	$\sqrt{3}$	1	1	0.0	0.0	∞
Detection limits	0.25	Rectangular	$\sqrt{3}$	1	1	0.14	0.14	∞
Readout Electronics	0.3	Normal	1	1	1	0.3	0.3	∞
Response time	0.8	Rectangular	$\sqrt{3}$	1	1	0.46	0.46	∞
Integration time	2.6	Rectangular	$\sqrt{3}$	1	1	1.5	1.5	∞
RF Ambient Conditions – Noise	3.0	Rectangular	$\sqrt{3}$	1	1	1.7	1.7	∞
RF Ambient Conditions – Reflections	3.0	Rectangular	$\sqrt{3}$	1	1	1.7	1.7	∞
Probe Positioner	0.8	Rectangular	$\sqrt{3}$	1	1	0.46	0.46	∞
Probe Positioning	6.7	Rectangular	$\sqrt{3}$	1	1	3.9	3.9	∞
Algorithms for Max. SAR Eval.	4.0	Rectangular	$\sqrt{3}$	1	1	2.3	2.3	∞
Test Sample Related								
Device Positioning	2.9	Normal	1	1	1	2.9	2.9	145
Device Holder	3.6	Normal	1	1	1	3.6	3.6	5
Power Drift	5.0	Rectangular	$\sqrt{3}$	1	1	2.9	2.9	∞
SAR Scaling	0.0	Rectangular	$\sqrt{3}$	1	1	0.0	0.0	∞
Physical Parameters								
Phantom Shell	7.6	Rectangular	$\sqrt{3}$	1	1	4.4	4.4	∞
SAR correction	0.0	Normal	1	1	0.84	0.0	0.0	∞
Liquid conductivity (Target)	5.0	Rectangular	$\sqrt{3}$	0.64	0.43	1.8	1.2	∞
Liquid conductivity (Meas.)	4.0	Normal	1	0.78	0.71	3.1	2.8	10
Liquid permittivity (Target)	5.0	Rectangular	$\sqrt{3}$	0.60	0.49	1.7	1.4	∞
Liquid permittivity (Meas.)	3.9	Normal	1	0.23	0.26	0.9	1.0	10
Temp. unc. - Conductivity	1.9	Rectangular	$\sqrt{3}$	0.78	0.71	0.9	0.8	∞
Temp. unc. - Permittivity	1.9	Rectangular	$\sqrt{3}$	0.23	0.26	0.3	0.3	∞
Combined Standard Uncertainty						12	11	330
Expanded Uncertainty (k=2)						24	22	

$$U(1\text{ g}) = k \cdot u_c$$

$$= 2 \cdot 12\%$$

$$= 24\% \text{ (The confidence level is about 95 \% } k = 2 \text{)}$$

$$U(10\text{ g}) = k \cdot u_c$$

$$= 2 \cdot 11\%$$

$$= 22\% \text{ (The confidence level is about 95 \% } k = 2 \text{)}$$

The above measurement uncertainties are according to IEEE Std 1528

1 800 MHz Head (SN: 3327)

Error Description	Uncertainty value ±%	Probability Distribution	Divisor	(Ci) 1 g	(Ci) 10 g	Standard 1 g (± %)	Standard 10 g (± %)	vi 2 or Veff
Measurement System								
Probe calibration	6.0	Normal	1	1	1	6.0	6.0	∞
Isotropy	1.3	Normal	1	1	1	1.3	1.3	∞
Boundary Effects	2.0	Rectangular	√3	1	1	1.2	1.2	∞
Probe Linearity	0.3	Normal	1	1	1	0.3	0.3	∞
Probe modulation response	0.0	Rectangular	√3	1	1	0.0	0.0	∞
Detection limits	0.25	Rectangular	√3	1	1	0.14	0.14	∞
Readout Electronics	0.3	Normal	1	1	1	0.3	0.3	∞
Response time	0.8	Rectangular	√3	1	1	0.46	0.46	∞
Integration time	2.6	Rectangular	√3	1	1	1.5	1.5	∞
RF Ambient Conditions – Noise	3.0	Rectangular	√3	1	1	1.7	1.7	∞
RF Ambient Conditions – Reflections	3.0	Rectangular	√3	1	1	1.7	1.7	∞
Probe Positioner	0.8	Rectangular	√3	1	1	0.46	0.46	∞
Probe Positioning	6.7	Rectangular	√3	1	1	3.9	3.9	∞
Algorithms for Max. SAR Eval.	4.0	Rectangular	√3	1	1	2.3	2.3	∞
Test Sample Related								
Device Positioning	2.9	Normal	1	1	1	2.9	2.9	145
Device Holder	3.6	Normal	1	1	1	3.6	3.6	5
Power Drift	5.0	Rectangular	√3	1	1	2.9	2.9	∞
SAR Scaling	0.0	Rectangular	√3	1	1	0.0	0.0	∞
Physical Parameters								
Phantom Shell	7.6	Rectangular	√3	1	1	4.4	4.4	∞
SAR correction	0.0	Normal	1	1	0.84	0.0	0.0	∞
Liquid conductivity (Target)	5.0	Rectangular	√3	0.64	0.43	1.8	1.2	∞
Liquid conductivity (Meas.)	4.0	Normal	1	0.78	0.71	3.1	2.8	10
Liquid permittivity (Target)	5.0	Rectangular	√3	0.60	0.49	1.7	1.4	∞
Liquid permittivity (Meas.)	4.2	Normal	1	0.23	0.26	1.0	1.1	10
Temp. unc. - Conductivity	1.9	Rectangular	√3	0.78	0.71	0.9	0.8	∞
Temp. unc. - Permittivity	1.9	Rectangular	√3	0.23	0.26	0.3	0.3	∞
Combined Standard Uncertainty						12	11	330
Expanded Uncertainty (k=2)						24	22	

$$U(1\text{ g}) = k \cdot u_c$$

$$= 2 \cdot 12\%$$

$$= 24\% \text{ (The confidence level is about 95 \% } k = 2)$$

$$U(10\text{ g}) = k \cdot u_c$$

$$= 2 \cdot 11\%$$

$$= 22\% \text{ (The confidence level is about 95 \% } k = 2)$$

The above measurement uncertainties are according to IEEE Std 1528

1 800 MHz Body (SN: 3327)

Error Description	Uncertainty value $\pm\%$	Probability Distribution	Divisor	(Ci) 1 g	(Ci) 10 g	Standard 1 g ($\pm\%$)	Standard 10 g ($\pm\%$)	vi 2 or Veff
Measurement System								
Probe calibration	6.0	Normal	1	1	1	6.0	6.0	∞
Isotropy	1.3	Normal	1	1	1	1.3	1.3	∞
Boundary Effects	2.0	Rectangular	$\sqrt{3}$	1	1	1.2	1.2	∞
Probe Linearity	0.3	Normal	1	1	1	0.3	0.3	∞
Probe modulation response	0.0	Rectangular	$\sqrt{3}$	1	1	0.0	0.0	∞
Detection limits	0.25	Rectangular	$\sqrt{3}$	1	1	0.14	0.14	∞
Readout Electronics	0.3	Normal	1	1	1	0.3	0.3	∞
Response time	0.8	Rectangular	$\sqrt{3}$	1	1	0.46	0.46	∞
Integration time	2.6	Rectangular	$\sqrt{3}$	1	1	1.5	1.5	∞
RF Ambient Conditions – Noise	3.0	Rectangular	$\sqrt{3}$	1	1	1.7	1.7	∞
RF Ambient Conditions – Reflections	3.0	Rectangular	$\sqrt{3}$	1	1	1.7	1.7	∞
Probe Positioner	0.8	Rectangular	$\sqrt{3}$	1	1	0.46	0.46	∞
Probe Positioning	6.7	Rectangular	$\sqrt{3}$	1	1	3.9	3.9	∞
Algorithms for Max. SAR Eval.	4.0	Rectangular	$\sqrt{3}$	1	1	2.3	2.3	∞
Test Sample Related								
Device Positioning	2.9	Normal	1	1	1	2.9	2.9	145
Device Holder	3.6	Normal	1	1	1	3.6	3.6	5
Power Drift	5.0	Rectangular	$\sqrt{3}$	1	1	2.9	2.9	∞
SAR Scaling	0.0	Rectangular	$\sqrt{3}$	1	1	0.0	0.0	∞
Physical Parameters								
Phantom Shell	7.6	Rectangular	$\sqrt{3}$	1	1	4.4	4.4	∞
SAR correction	0.0	Normal	1	1	0.84	0.0	0.0	∞
Liquid conductivity (Target)	5.0	Rectangular	$\sqrt{3}$	0.64	0.43	1.8	1.2	∞
Liquid conductivity (Meas.)	3.9	Normal	1	0.78	0.71	3.0	2.8	10
Liquid permittivity (Target)	5.0	Rectangular	$\sqrt{3}$	0.60	0.49	1.7	1.4	∞
Liquid permittivity (Meas.)	3.8	Normal	1	0.23	0.26	0.9	1.0	10
Temp. unc. - Conductivity	1.8	Rectangular	$\sqrt{3}$	0.78	0.71	0.8	0.7	∞
Temp. unc. - Permittivity	1.8	Rectangular	$\sqrt{3}$	0.23	0.26	0.2	0.3	∞
Combined Standard Uncertainty						12	11	330
Expanded Uncertainty (k=2)						24	22	

$$U(1\text{ g}) = k \cdot u_c$$

$$= 2 \cdot 12\%$$

$$= 24\% \text{ (The confidence level is about 95 \% } k = 2)$$

$$U(10\text{ g}) = k \cdot u_c$$

$$= 2 \cdot 11\%$$

$$= 22\% \text{ (The confidence level is about 95 \% } k = 2)$$

The above measurement uncertainties are according to IEEE Std 1528

1 900 MHz Head (SN: 3327)

Error Description	Uncertainty value $\pm\%$	Probability Distribution	Divisor	(Ci) 1 g	(Ci) 10 g	Standard 1 g ($\pm\%$)	Standard 10 g ($\pm\%$)	vi 2 or Veff
Measurement System								
Probe calibration	6.0	Normal	1	1	1	6.0	6.0	∞
Isotropy	1.3	Normal	1	1	1	1.3	1.3	∞
Boundary Effects	2.0	Rectangular	$\sqrt{3}$	1	1	1.2	1.2	∞
Probe Linearity	0.3	Normal	1	1	1	0.3	0.3	∞
Probe modulation response	0.0	Rectangular	$\sqrt{3}$	1	1	0.0	0.0	∞
Detection limits	0.25	Rectangular	$\sqrt{3}$	1	1	0.14	0.14	∞
Readout Electronics	0.3	Normal	1	1	1	0.3	0.3	∞
Response time	0.8	Rectangular	$\sqrt{3}$	1	1	0.46	0.46	∞
Integration time	2.6	Rectangular	$\sqrt{3}$	1	1	1.5	1.5	∞
RF Ambient Conditions – Noise	3.0	Rectangular	$\sqrt{3}$	1	1	1.7	1.7	∞
RF Ambient Conditions – Reflections	3.0	Rectangular	$\sqrt{3}$	1	1	1.7	1.7	∞
Probe Positioner	0.8	Rectangular	$\sqrt{3}$	1	1	0.46	0.46	∞
Probe Positioning	6.7	Rectangular	$\sqrt{3}$	1	1	3.9	3.9	∞
Algorithms for Max. SAR Eval.	4.0	Rectangular	$\sqrt{3}$	1	1	2.3	2.3	∞
Test Sample Related								
Device Positioning	2.9	Normal	1	1	1	2.9	2.9	145
Device Holder	3.6	Normal	1	1	1	3.6	3.6	5
Power Drift	5.0	Rectangular	$\sqrt{3}$	1	1	2.9	2.9	∞
SAR Scaling	0.0	Rectangular	$\sqrt{3}$	1	1	0.0	0.0	∞
Physical Parameters								
Phantom Shell	7.6	Rectangular	$\sqrt{3}$	1	1	4.4	4.4	∞
SAR correction	0.0	Normal	1	1	0.84	0.0	0.0	∞
Liquid conductivity (Target)	5.0	Rectangular	$\sqrt{3}$	0.64	0.43	1.8	1.2	∞
Liquid conductivity (Meas.)	3.9	Normal	1	0.78	0.71	3.0	2.8	10
Liquid permittivity (Target)	5.0	Rectangular	$\sqrt{3}$	0.60	0.49	1.7	1.4	∞
Liquid permittivity (Meas.)	4.4	Normal	1	0.23	0.26	1.0	1.1	10
Temp. unc. - Conductivity	2.0	Rectangular	$\sqrt{3}$	0.78	0.71	0.9	0.8	∞
Temp. unc. - Permittivity	2.0	Rectangular	$\sqrt{3}$	0.23	0.26	0.3	0.3	∞
Combined Standard Uncertainty						12	11	330
Expanded Uncertainty (k=2)						24	22	

$$U(1\text{ g}) = k \cdot u_c$$

$$= 2 \cdot 12\%$$

$$= 24\% \text{ (The confidence level is about 95 \% } k = 2 \text{)}$$

$$U(10\text{ g}) = k \cdot u_c$$

$$= 2 \cdot 11\%$$

$$= 22\% \text{ (The confidence level is about 95 \% } k = 2 \text{)}$$

The above measurement uncertainties are according to IEEE Std 1528

1 900 MHz Body (SN: 3327)

Error Description	Uncertainty value $\pm\%$	Probability Distribution	Divisor	(Ci) 1 g	(Ci) 10 g	Standard 1 g ($\pm\%$)	Standard 10 g ($\pm\%$)	vi 2 or Veff
Measurement System								
Probe calibration	6.0	Normal	1	1	1	6.0	6.0	∞
Isotropy	1.3	Normal	1	1	1	1.3	1.3	∞
Boundary Effects	2.0	Rectangular	$\sqrt{3}$	1	1	1.2	1.2	∞
Probe Linearity	0.3	Normal	1	1	1	0.3	0.3	∞
Probe modulation response	0.0	Rectangular	$\sqrt{3}$	1	1	0.0	0.0	∞
Detection limits	0.25	Rectangular	$\sqrt{3}$	1	1	0.14	0.14	∞
Readout Electronics	0.3	Normal	1	1	1	0.3	0.3	∞
Response time	0.8	Rectangular	$\sqrt{3}$	1	1	0.46	0.46	∞
Integration time	2.6	Rectangular	$\sqrt{3}$	1	1	1.5	1.5	∞
RF Ambient Conditions – Noise	3.0	Rectangular	$\sqrt{3}$	1	1	1.7	1.7	∞
RF Ambient Conditions – Reflections	3.0	Rectangular	$\sqrt{3}$	1	1	1.7	1.7	∞
Probe Positioner	0.8	Rectangular	$\sqrt{3}$	1	1	0.46	0.46	∞
Probe Positioning	6.7	Rectangular	$\sqrt{3}$	1	1	3.9	3.9	∞
Algorithms for Max. SAR Eval.	4.0	Rectangular	$\sqrt{3}$	1	1	2.3	2.3	∞
Test Sample Related								
Device Positioning	2.9	Normal	1	1	1	2.9	2.9	145
Device Holder	3.6	Normal	1	1	1	3.6	3.6	5
Power Drift	5.0	Rectangular	$\sqrt{3}$	1	1	2.9	2.9	∞
SAR Scaling	0.0	Rectangular	$\sqrt{3}$	1	1	0.0	0.0	∞
Physical Parameters								
Phantom Shell	7.6	Rectangular	$\sqrt{3}$	1	1	4.4	4.4	∞
SAR correction	0.0	Normal	1	1	0.84	0.0	0.0	∞
Liquid conductivity (Target)	5.0	Rectangular	$\sqrt{3}$	0.64	0.43	1.8	1.2	∞
Liquid conductivity (Meas.)	3.9	Normal	1	0.78	0.71	3.0	2.8	10
Liquid permittivity (Target)	5.0	Rectangular	$\sqrt{3}$	0.60	0.49	1.7	1.4	∞
Liquid permittivity (Meas.)	3.6	Normal	1	0.23	0.26	0.8	0.9	10
Temp. unc. - Conductivity	2.0	Rectangular	$\sqrt{3}$	0.78	0.71	0.9	0.8	∞
Temp. unc. - Permittivity	1.9	Rectangular	$\sqrt{3}$	0.23	0.26	0.3	0.3	∞
Combined Standard Uncertainty						12	11	330
Expanded Uncertainty (k=2)						24	22	

$$U(1\text{ g}) = k \cdot u_c$$

$$= 2 \cdot 12\%$$

$$= 24\% \text{ (The confidence level is about 95 \% } k = 2)$$

$$U(10\text{ g}) = k \cdot u_c$$

$$= 2 \cdot 11\%$$

$$= 22\% \text{ (The confidence level is about 95 \% } k = 2)$$

The above measurement uncertainties are according to IEEE Std 1528

2 450 MHz Head (SN: 3930)

Error Description	Uncertainty value $\pm\%$	Probability Distribution	Divisor	(Ci) 1 g	(Ci) 10 g	Standard 1 g ($\pm\%$)	Standard 10 g ($\pm\%$)	vi 2 or Veff
Measurement System								
Probe calibration	6.0	Normal	1	1	1	6.0	6.0	∞
Isotropy	1.3	Normal	1	1	1	1.3	1.3	∞
Boundary Effects	2.0	Rectangular	$\sqrt{3}$	1	1	1.2	1.2	∞
Probe Linearity	0.3	Normal	1	1	1	0.3	0.3	∞
Probe modulation response	0.0	Rectangular	$\sqrt{3}$	1	1	0.0	0.0	∞
Detection limits	0.25	Rectangular	$\sqrt{3}$	1	1	0.14	0.14	∞
Readout Electronics	0.3	Normal	1	1	1	0.3	0.3	∞
Response time	0.8	Rectangular	$\sqrt{3}$	1	1	0.46	0.46	∞
Integration time	2.6	Rectangular	$\sqrt{3}$	1	1	1.5	1.5	∞
RF Ambient Conditions – Noise	3.0	Rectangular	$\sqrt{3}$	1	1	1.7	1.7	∞
RF Ambient Conditions – Reflections	3.0	Rectangular	$\sqrt{3}$	1	1	1.7	1.7	∞
Probe Positioner	0.8	Rectangular	$\sqrt{3}$	1	1	0.46	0.46	∞
Probe Positioning	6.7	Rectangular	$\sqrt{3}$	1	1	3.9	3.9	∞
Algorithms for Max. SAR Eval.	4.0	Rectangular	$\sqrt{3}$	1	1	2.3	2.3	∞
Test Sample Related								
Device Positioning	2.9	Normal	1	1	1	2.9	2.9	145
Device Holder	3.6	Normal	1	1	1	3.6	3.6	5
Power Drift	5.0	Rectangular	$\sqrt{3}$	1	1	2.9	2.9	∞
SAR Scaling	0.0	Rectangular	$\sqrt{3}$	1	1	0.0	0.0	∞
Physical Parameters								
Phantom Shell	7.6	Rectangular	$\sqrt{3}$	1	1	4.4	4.4	∞
SAR correction	0.0	Normal	1	1	0.84	0.0	0.0	∞
Liquid conductivity (Target)	5.0	Rectangular	$\sqrt{3}$	0.64	0.43	1.8	1.2	∞
Liquid conductivity (Meas.)	3.9	Normal	1	0.78	0.71	3.0	2.8	10
Liquid permittivity (Target)	5.0	Rectangular	$\sqrt{3}$	0.60	0.49	1.7	1.4	∞
Liquid permittivity (Meas.)	4.2	Normal	1	0.23	0.26	1.0	1.1	10
Temp. unc. - Conductivity	1.9	Rectangular	$\sqrt{3}$	0.78	0.71	0.9	0.8	∞
Temp. unc. - Permittivity	1.9	Rectangular	$\sqrt{3}$	0.23	0.26	0.3	0.3	∞
Combined Standard Uncertainty						12	11	330
Expanded Uncertainty (k=2)						24	22	

$$U(1\text{ g}) = k \cdot u_c$$

$$= 2 \cdot 12\%$$

$$= 24\% \text{ (The confidence level is about 95 \% } k = 2 \text{)}$$

$$U(10\text{ g}) = k \cdot u_c$$

$$= 2 \cdot 11\%$$

$$= 22\% \text{ (The confidence level is about 95 \% } k = 2 \text{)}$$

The above measurement uncertainties are according to IEEE Std 1528

2 450 MHz Body (SN: 3930)

Error Description	Uncertainty value $\pm\%$	Probability Distribution	Divisor	(Ci) 1 g	(Ci) 10 g	Standard 1 g ($\pm\%$)	Standard 10 g ($\pm\%$)	vi 2 or Veff
Measurement System								
Probe calibration	6.0	Normal	1	1	1	6.0	6.0	∞
Isotropy	1.3	Normal	1	1	1	1.3	1.3	∞
Boundary Effects	2.0	Rectangular	$\sqrt{3}$	1	1	1.2	1.2	∞
Probe Linearity	0.3	Normal	1	1	1	0.3	0.3	∞
Probe modulation response	0.0	Rectangular	$\sqrt{3}$	1	1	0.0	0.0	∞
Detection limits	0.25	Rectangular	$\sqrt{3}$	1	1	0.14	0.14	∞
Readout Electronics	0.3	Normal	1	1	1	0.3	0.3	∞
Response time	0.8	Rectangular	$\sqrt{3}$	1	1	0.46	0.46	∞
Integration time	2.6	Rectangular	$\sqrt{3}$	1	1	1.5	1.5	∞
RF Ambient Conditions – Noise	3.0	Rectangular	$\sqrt{3}$	1	1	1.7	1.7	∞
RF Ambient Conditions – Reflections	3.0	Rectangular	$\sqrt{3}$	1	1	1.7	1.7	∞
Probe Positioner	0.8	Rectangular	$\sqrt{3}$	1	1	0.46	0.46	∞
Probe Positioning	6.7	Rectangular	$\sqrt{3}$	1	1	3.9	3.9	∞
Algorithms for Max. SAR Eval.	4.0	Rectangular	$\sqrt{3}$	1	1	2.3	2.3	∞
Test Sample Related								
Device Positioning	2.9	Normal	1	1	1	2.9	2.9	145
Device Holder	3.6	Normal	1	1	1	3.6	3.6	5
Power Drift	5.0	Rectangular	$\sqrt{3}$	1	1	2.9	2.9	∞
SAR Scaling	0.0	Rectangular	$\sqrt{3}$	1	1	0.0	0.0	∞
Physical Parameters								
Phantom Shell	7.6	Rectangular	$\sqrt{3}$	1	1	4.4	4.4	∞
SAR correction	0.0	Normal	1	1	0.84	0.0	0.0	∞
Liquid conductivity (Target)	5.0	Rectangular	$\sqrt{3}$	0.64	0.43	1.8	1.2	∞
Liquid conductivity (Meas.)	4.0	Normal	1	0.78	0.71	3.1	2.8	10
Liquid permittivity (Target)	5.0	Rectangular	$\sqrt{3}$	0.60	0.49	1.7	1.4	∞
Liquid permittivity (Meas.)	3.9	Normal	1	0.23	0.26	0.9	1.0	10
Temp. unc. - Conductivity	2.0	Rectangular	$\sqrt{3}$	0.78	0.71	0.9	0.8	∞
Temp. unc. - Permittivity	2.0	Rectangular	$\sqrt{3}$	0.23	0.26	0.3	0.3	∞
Combined Standard Uncertainty						12	11	330
Expanded Uncertainty (k=2)						24	22	

$$U(1\text{ g}) = k \cdot u_c$$

$$= 2 \cdot 12\%$$

$$= 24\% \text{ (The confidence level is about 95 \% } k = 2 \text{)}$$

$$U(10\text{ g}) = k \cdot u_c$$

$$= 2 \cdot 11\%$$

$$= 22\% \text{ (The confidence level is about 95 \% } k = 2 \text{)}$$

The above measurement uncertainties are according to IEEE Std 1528

2 600 MHz Head (SN: 3327)

Error Description	Uncertainty value $\pm\%$	Probability Distribution	Divisor	(Ci) 1 g	(Ci) 10 g	Standard 1 g ($\pm\%$)	Standard 10 g ($\pm\%$)	vi 2 or Veff
Measurement System								
Probe calibration	6.0	Normal	1	1	1	6.0	6.0	∞
Isotropy	1.3	Normal	1	1	1	1.3	1.3	∞
Boundary Effects	2.0	Rectangular	$\sqrt{3}$	1	1	1.2	1.2	∞
Probe Linearity	0.3	Normal	1	1	1	0.3	0.3	∞
Probe modulation response	0.0	Rectangular	$\sqrt{3}$	1	1	0.0	0.0	∞
Detection limits	0.25	Rectangular	$\sqrt{3}$	1	1	0.14	0.14	∞
Readout Electronics	0.3	Normal	1	1	1	0.3	0.3	∞
Response time	0.8	Rectangular	$\sqrt{3}$	1	1	0.46	0.46	∞
Integration time	2.6	Rectangular	$\sqrt{3}$	1	1	1.5	1.5	∞
RF Ambient Conditions – Noise	3.0	Rectangular	$\sqrt{3}$	1	1	1.7	1.7	∞
RF Ambient Conditions – Reflections	3.0	Rectangular	$\sqrt{3}$	1	1	1.7	1.7	∞
Probe Positioner	0.8	Rectangular	$\sqrt{3}$	1	1	0.46	0.46	∞
Probe Positioning	6.7	Rectangular	$\sqrt{3}$	1	1	3.9	3.9	∞
Algorithms for Max. SAR Eval.	4.0	Rectangular	$\sqrt{3}$	1	1	2.3	2.3	∞
Test Sample Related								
Device Positioning	2.9	Normal	1	1	1	2.9	2.9	145
Device Holder	3.6	Normal	1	1	1	3.6	3.6	5
Power Drift	5.0	Rectangular	$\sqrt{3}$	1	1	2.9	2.9	∞
SAR Scaling	0.0	Rectangular	$\sqrt{3}$	1	1	0.0	0.0	∞
Physical Parameters								
Phantom Shell	7.6	Rectangular	$\sqrt{3}$	1	1	4.4	4.4	∞
SAR correction	0.0	Normal	1	1	0.84	0.0	0.0	∞
Liquid conductivity (Target)	5.0	Rectangular	$\sqrt{3}$	0.64	0.43	1.8	1.2	∞
Liquid conductivity (Meas.)	3.9	Normal	1	0.78	0.71	3.0	2.8	10
Liquid permittivity (Target)	5.0	Rectangular	$\sqrt{3}$	0.60	0.49	1.7	1.4	∞
Liquid permittivity (Meas.)	3.8	Normal	1	0.23	0.26	0.9	1.0	10
Temp. unc. - Conductivity	1.9	Rectangular	$\sqrt{3}$	0.78	0.71	0.9	0.8	∞
Temp. unc. - Permittivity	1.9	Rectangular	$\sqrt{3}$	0.23	0.26	0.3	0.3	∞
Combined Standard Uncertainty						12	11	330
Expanded Uncertainty (k=2)						24	22	

$$U(1\text{ g}) = k \cdot u_c$$

$$= 2 \cdot 12\%$$

= 24 % (The confidence level is about 95 % $k = 2$)

$$U(10\text{ g}) = k \cdot u_c$$

$$= 2 \cdot 11\%$$

= 22 % (The confidence level is about 95 % $k = 2$)

The above measurement uncertainties are according to IEEE Std 1528

2 600 MHz Body (SN: 3327)

Error Description	Uncertainty value $\pm\%$	Probability Distribution	Divisor	(Ci) 1 g	(Ci) 10 g	Standard 1 g ($\pm\%$)	Standard 10 g ($\pm\%$)	vi 2 or Veff
Measurement System								
Probe calibration	6.0	Normal	1	1	1	6.0	6.0	∞
Isotropy	1.3	Normal	1	1	1	1.3	1.3	∞
Boundary Effects	2.0	Rectangular	$\sqrt{3}$	1	1	1.2	1.2	∞
Probe Linearity	0.3	Normal	1	1	1	0.3	0.3	∞
Probe modulation response	0.0	Rectangular	$\sqrt{3}$	1	1	0.0	0.0	∞
Detection limits	0.25	Rectangular	$\sqrt{3}$	1	1	0.14	0.14	∞
Readout Electronics	0.3	Normal	1	1	1	0.3	0.3	∞
Response time	0.8	Rectangular	$\sqrt{3}$	1	1	0.46	0.46	∞
Integration time	2.6	Rectangular	$\sqrt{3}$	1	1	1.5	1.5	∞
RF Ambient Conditions – Noise	3.0	Rectangular	$\sqrt{3}$	1	1	1.7	1.7	∞
RF Ambient Conditions – Reflections	3.0	Rectangular	$\sqrt{3}$	1	1	1.7	1.7	∞
Probe Positioner	0.8	Rectangular	$\sqrt{3}$	1	1	0.46	0.46	∞
Probe Positioning	6.7	Rectangular	$\sqrt{3}$	1	1	3.9	3.9	∞
Algorithms for Max. SAR Eval.	4.0	Rectangular	$\sqrt{3}$	1	1	2.3	2.3	∞
Test Sample Related								
Device Positioning	2.9	Normal	1	1	1	2.9	2.9	145
Device Holder	3.6	Normal	1	1	1	3.6	3.6	5
Power Drift	5.0	Rectangular	$\sqrt{3}$	1	1	2.9	2.9	∞
SAR Scaling	0.0	Rectangular	$\sqrt{3}$	1	1	0.0	0.0	∞
Physical Parameters								
Phantom Shell	7.6	Rectangular	$\sqrt{3}$	1	1	4.4	4.4	∞
SAR correction	0.0	Normal	1	1	0.84	0.0	0.0	∞
Liquid conductivity (Target)	5.0	Rectangular	$\sqrt{3}$	0.64	0.43	1.8	1.2	∞
Liquid conductivity (Meas.)	3.9	Normal	1	0.78	0.71	3.0	2.8	10
Liquid permittivity (Target)	5.0	Rectangular	$\sqrt{3}$	0.60	0.49	1.7	1.4	∞
Liquid permittivity (Meas.)	4.2	Normal	1	0.23	0.26	1.0	1.1	10
Temp. unc. - Conductivity	1.8	Rectangular	$\sqrt{3}$	0.78	0.71	0.8	0.7	∞
Temp. unc. - Permittivity	1.9	Rectangular	$\sqrt{3}$	0.23	0.26	0.3	0.3	∞
Combined Standard Uncertainty						12	11	330
Expanded Uncertainty (k=2)						24	22	

$$U(1\text{ g}) = k \cdot u_c$$

$$= 2 \cdot 12\%$$

= 24 % (The confidence level is about 95 % $k = 2$)

$$U(10\text{ g}) = k \cdot u_c$$

$$= 2 \cdot 11\%$$

= 22 % (The confidence level is about 95 % $k = 2$)

The above measurement uncertainties are according to IEEE Std 1528

5 200 MHz Body (SN: 3930)

Error Description	Uncertainty value $\pm\%$	Probability Distribution	Divisor	(Ci) 1 g	(Ci) 10 g	Standard 1 g ($\pm\%$)	Standard 10 g ($\pm\%$)	vi 2 or Veff
Measurement System								
Probe calibration	6.55	Normal	1	1	1	6.6	6.6	∞
Isotropy	1.3	Normal	1	1	1	1.3	1.3	∞
Boundary Effects	2.0	Rectangular	$\sqrt{3}$	1	1	1.2	1.2	∞
Probe Linearity	0.3	Normal	1	1	1	0.3	0.3	∞
Probe modulation response	0.0	Rectangular	$\sqrt{3}$	1	1	0.0	0.0	∞
Detection limits	0.25	Rectangular	$\sqrt{3}$	1	1	0.14	0.14	∞
Readout Electronics	0.3	Normal	1	1	1	0.3	0.3	∞
Response time	0.8	Rectangular	$\sqrt{3}$	1	1	0.46	0.46	∞
Integration time	2.6	Rectangular	$\sqrt{3}$	1	1	1.5	1.5	∞
RF Ambient Conditions – Noise	3.0	Rectangular	$\sqrt{3}$	1	1	1.7	1.7	∞
RF Ambient Conditions – Reflections	3.0	Rectangular	$\sqrt{3}$	1	1	1.7	1.7	∞
Probe Positioner	0.8	Rectangular	$\sqrt{3}$	1	1	0.46	0.46	∞
Probe Positioning	6.7	Rectangular	$\sqrt{3}$	1	1	3.9	3.9	∞
Algorithms for Max. SAR Eval.	4.0	Rectangular	$\sqrt{3}$	1	1	2.3	2.3	∞
Test Sample Related								
Device Positioning	2.9	Normal	1	1	1	2.9	2.9	145
Device Holder	3.6	Normal	1	1	1	3.6	3.6	5
Power Drift	5.0	Rectangular	$\sqrt{3}$	1	1	2.9	2.9	∞
SAR Scaling	0.0	Rectangular	$\sqrt{3}$	1	1	0.0	0.0	∞
Physical Parameters								
Phantom Shell	7.6	Rectangular	$\sqrt{3}$	1	1	4.4	4.4	∞
SAR correction	0.0	Normal	1	1	0.84	0.0	0.0	∞
Liquid conductivity (Target)	5.0	Rectangular	$\sqrt{3}$	0.64	0.43	1.8	1.2	∞
Liquid conductivity (Meas.)	4.2	Normal	1	0.78	0.71	3.3	3.0	10
Liquid permittivity (Target)	5.0	Rectangular	$\sqrt{3}$	0.60	0.49	1.7	1.4	∞
Liquid permittivity (Meas.)	4.0	Normal	1	0.23	0.26	0.9	1.0	10
Temp. unc. - Conductivity	1.8	Rectangular	$\sqrt{3}$	0.78	0.71	0.8	0.7	∞
Temp. unc. - Permittivity	1.8	Rectangular	$\sqrt{3}$	0.23	0.26	0.2	0.3	∞
Combined Standard Uncertainty						12.	12	330
Expanded Uncertainty (k=2)						24	24	

$$U(1\text{ g}) = k \cdot u_c$$

$$= 2 \cdot 12\%$$

$$= 24\% \text{ (The confidence level is about 95 \% } k = 2)$$

$$U(10\text{ g}) = k \cdot u_c$$

$$= 2 \cdot 12\%$$

$$= 24\% \text{ (The confidence level is about 95 \% } k = 2)$$

The above measurement uncertainties are according to IEEE Std 1528

5 300 MHz Head (SN: 3930)

Error Description	Uncertainty value $\pm\%$	Probability Distribution	Divisor	(Ci) 1 g	(Ci) 10 g	Standard 1 g ($\pm\%$)	Standard 10 g ($\pm\%$)	vi 2 or Veff
Measurement System								
Probe calibration	6.55	Normal	1	1	1	6.6	6.6	∞
Isotropy	1.3	Normal	1	1	1	1.3	1.3	∞
Boundary Effects	2.0	Rectangular	$\sqrt{3}$	1	1	1.2	1.2	∞
Probe Linearity	0.3	Normal	1	1	1	0.3	0.3	∞
Probe modulation response	0.0	Rectangular	$\sqrt{3}$	1	1	0.0	0.0	∞
Detection limits	0.25	Rectangular	$\sqrt{3}$	1	1	0.14	0.14	∞
Readout Electronics	0.3	Normal	1	1	1	0.3	0.3	∞
Response time	0.8	Rectangular	$\sqrt{3}$	1	1	0.46	0.46	∞
Integration time	2.6	Rectangular	$\sqrt{3}$	1	1	1.5	1.5	∞
RF Ambient Conditions – Noise	3.0	Rectangular	$\sqrt{3}$	1	1	1.7	1.7	∞
RF Ambient Conditions – Reflections	3.0	Rectangular	$\sqrt{3}$	1	1	1.7	1.7	∞
Probe Positioner	0.8	Rectangular	$\sqrt{3}$	1	1	0.46	0.46	∞
Probe Positioning	6.7	Rectangular	$\sqrt{3}$	1	1	3.9	3.9	∞
Algorithms for Max. SAR Eval.	4.0	Rectangular	$\sqrt{3}$	1	1	2.3	2.3	∞
Test Sample Related								
Device Positioning	2.9	Normal	1	1	1	2.9	2.9	145
Device Holder	3.6	Normal	1	1	1	3.6	3.6	5
Power Drift	5.0	Rectangular	$\sqrt{3}$	1	1	2.9	2.9	∞
SAR Scaling	0.0	Rectangular	$\sqrt{3}$	1	1	0.0	0.0	∞
Physical Parameters								
Phantom Shell	7.6	Rectangular	$\sqrt{3}$	1	1	4.4	4.4	∞
SAR correction	0.0	Normal	1	1	0.84	0.0	0.0	∞
Liquid conductivity (Target)	5.0	Rectangular	$\sqrt{3}$	0.64	0.43	1.8	1.2	∞
Liquid conductivity (Meas.)	3.9	Normal	1	0.78	0.71	3.0	2.8	10
Liquid permittivity (Target)	5.0	Rectangular	$\sqrt{3}$	0.60	0.49	1.7	1.4	∞
Liquid permittivity (Meas.)	3.8	Normal	1	0.23	0.26	0.9	1.0	10
Temp. unc. - Conductivity	2.0	Rectangular	$\sqrt{3}$	0.78	0.71	0.9	0.8	∞
Temp. unc. - Permittivity	1.7	Rectangular	$\sqrt{3}$	0.23	0.26	0.2	0.3	∞
Combined Standard Uncertainty						12.	12	330
Expanded Uncertainty (k=2)						24	24	

$$U(1\text{ g}) = k \cdot u_c$$

$$= 2 \cdot 12\%$$

$$= 24\% \text{ (The confidence level is about 95 \% } k = 2)$$

$$U(10\text{ g}) = k \cdot u_c$$

$$= 2 \cdot 12\%$$

$$= 24\% \text{ (The confidence level is about 95 \% } k = 2)$$

The above measurement uncertainties are according to IEEE Std 1528

5 300 MHz Body (SN: 3930)

Error Description	Uncertainty value $\pm\%$	Probability Distribution	Divisor	(Ci) 1 g	(Ci) 10 g	Standard 1 g ($\pm\%$)	Standard 10 g ($\pm\%$)	vi 2 or Veff
Measurement System								
Probe calibration	6.55	Normal	1	1	1	6.6	6.6	∞
Isotropy	1.3	Normal	1	1	1	1.3	1.3	∞
Boundary Effects	2.0	Rectangular	$\sqrt{3}$	1	1	1.2	1.2	∞
Probe Linearity	0.3	Normal	1	1	1	0.3	0.3	∞
Probe modulation response	0.0	Rectangular	$\sqrt{3}$	1	1	0.0	0.0	∞
Detection limits	0.25	Rectangular	$\sqrt{3}$	1	1	0.14	0.14	∞
Readout Electronics	0.3	Normal	1	1	1	0.3	0.3	∞
Response time	0.8	Rectangular	$\sqrt{3}$	1	1	0.46	0.46	∞
Integration time	2.6	Rectangular	$\sqrt{3}$	1	1	1.5	1.5	∞
RF Ambient Conditions – Noise	3.0	Rectangular	$\sqrt{3}$	1	1	1.7	1.7	∞
RF Ambient Conditions – Reflections	3.0	Rectangular	$\sqrt{3}$	1	1	1.7	1.7	∞
Probe Positioner	0.8	Rectangular	$\sqrt{3}$	1	1	0.46	0.46	∞
Probe Positioning	6.7	Rectangular	$\sqrt{3}$	1	1	3.9	3.9	∞
Algorithms for Max. SAR Eval.	4.0	Rectangular	$\sqrt{3}$	1	1	2.3	2.3	∞
Test Sample Related								
Device Positioning	2.9	Normal	1	1	1	2.9	2.9	145
Device Holder	3.6	Normal	1	1	1	3.6	3.6	5
Power Drift	5.0	Rectangular	$\sqrt{3}$	1	1	2.9	2.9	∞
SAR Scaling	0.0	Rectangular	$\sqrt{3}$	1	1	0.0	0.0	∞
Physical Parameters								
Phantom Shell	7.6	Rectangular	$\sqrt{3}$	1	1	4.4	4.4	∞
SAR correction	0.0	Normal	1	1	0.84	0.0	0.0	∞
Liquid conductivity (Target)	5.0	Rectangular	$\sqrt{3}$	0.64	0.43	1.8	1.2	∞
Liquid conductivity (Meas.)	4.2	Normal	1	0.78	0.71	3.3	3.0	10
Liquid permittivity (Target)	5.0	Rectangular	$\sqrt{3}$	0.60	0.49	1.7	1.4	∞
Liquid permittivity (Meas.)	4.0	Normal	1	0.23	0.26	0.9	1.0	10
Temp. unc. - Conductivity	1.9	Rectangular	$\sqrt{3}$	0.78	0.71	0.9	0.8	∞
Temp. unc. - Permittivity	2.0	Rectangular	$\sqrt{3}$	0.23	0.26	0.3	0.3	∞
Combined Standard Uncertainty						12.	12	330
Expanded Uncertainty (k=2)						24	24	

$$U(1\text{ g}) = k \cdot u_c$$

$$= 2 \cdot 12\%$$

$$= 24\% \text{ (The confidence level is about 95 \% } k = 2)$$

$$U(10\text{ g}) = k \cdot u_c$$

$$= 2 \cdot 12\%$$

$$= 24\% \text{ (The confidence level is about 95 \% } k = 2)$$

The above measurement uncertainties are according to IEEE Std 1528

5 500 MHz Head (SN: 3930)

Error Description	Uncertainty value $\pm\%$	Probability Distribution	Divisor	(Ci) 1 g	(Ci) 10 g	Standard 1 g ($\pm\%$)	Standard 10 g ($\pm\%$)	vi 2 or Veff
Measurement System								
Probe calibration	6.55	Normal	1	1	1	6.6	6.6	∞
Isotropy	1.3	Normal	1	1	1	1.3	1.3	∞
Boundary Effects	2.0	Rectangular	$\sqrt{3}$	1	1	1.2	1.2	∞
Probe Linearity	0.3	Normal	1	1	1	0.3	0.3	∞
Probe modulation response	0.0	Rectangular	$\sqrt{3}$	1	1	0.0	0.0	∞
Detection limits	0.25	Rectangular	$\sqrt{3}$	1	1	0.14	0.14	∞
Readout Electronics	0.3	Normal	1	1	1	0.3	0.3	∞
Response time	0.8	Rectangular	$\sqrt{3}$	1	1	0.46	0.46	∞
Integration time	2.6	Rectangular	$\sqrt{3}$	1	1	1.5	1.5	∞
RF Ambient Conditions – Noise	3.0	Rectangular	$\sqrt{3}$	1	1	1.7	1.7	∞
RF Ambient Conditions – Reflections	3.0	Rectangular	$\sqrt{3}$	1	1	1.7	1.7	∞
Probe Positioner	0.8	Rectangular	$\sqrt{3}$	1	1	0.46	0.46	∞
Probe Positioning	6.7	Rectangular	$\sqrt{3}$	1	1	3.9	3.9	∞
Algorithms for Max. SAR Eval.	4.0	Rectangular	$\sqrt{3}$	1	1	2.3	2.3	∞
Test Sample Related								
Device Positioning	2.9	Normal	1	1	1	2.9	2.9	145
Device Holder	3.6	Normal	1	1	1	3.6	3.6	5
Power Drift	5.0	Rectangular	$\sqrt{3}$	1	1	2.9	2.9	∞
SAR Scaling	0.0	Rectangular	$\sqrt{3}$	1	1	0.0	0.0	∞
Physical Parameters								
Phantom Shell	7.6	Rectangular	$\sqrt{3}$	1	1	4.4	4.4	∞
SAR correction	0.0	Normal	1	1	0.84	0.0	0.0	∞
Liquid conductivity (Target)	5.0	Rectangular	$\sqrt{3}$	0.64	0.43	1.8	1.2	∞
Liquid conductivity (Meas.)	3.7	Normal	1	0.78	0.71	2.9	2.6	10
Liquid permittivity (Target)	5.0	Rectangular	$\sqrt{3}$	0.60	0.49	1.7	1.4	∞
Liquid permittivity (Meas.)	3.9	Normal	1	0.23	0.26	0.9	1.0	10
Temp. unc. - Conductivity	1.8	Rectangular	$\sqrt{3}$	0.78	0.71	0.8	0.7	∞
Temp. unc. - Permittivity	2.1	Rectangular	$\sqrt{3}$	0.23	0.26	0.3	0.3	∞
Combined Standard Uncertainty						12.	12	330
Expanded Uncertainty (k=2)						24	24	

$$U(1\text{ g}) = k \cdot u_c$$

$$= 2 \cdot 12\%$$

$$= 24\% \text{ (The confidence level is about 95 \% } k = 2)$$

$$U(10\text{ g}) = k \cdot u_c$$

$$= 2 \cdot 12\%$$

$$= 24\% \text{ (The confidence level is about 95 \% } k = 2)$$

The above measurement uncertainties are according to IEEE Std 1528

5 500 MHz Body (SN: 3930)

Error Description	Uncertainty value $\pm\%$	Probability Distribution	Divisor	(Ci) 1 g	(Ci) 10 g	Standard 1 g ($\pm\%$)	Standard 10 g ($\pm\%$)	vi 2 or Veff
Measurement System								
Probe calibration	6.55	Normal	1	1	1	6.6	6.6	∞
Isotropy	1.3	Normal	1	1	1	1.3	1.3	∞
Boundary Effects	2.0	Rectangular	$\sqrt{3}$	1	1	1.2	1.2	∞
Probe Linearity	0.3	Normal	1	1	1	0.3	0.3	∞
Probe modulation response	0.0	Rectangular	$\sqrt{3}$	1	1	0.0	0.0	∞
Detection limits	0.25	Rectangular	$\sqrt{3}$	1	1	0.14	0.14	∞
Readout Electronics	0.3	Normal	1	1	1	0.3	0.3	∞
Response time	0.8	Rectangular	$\sqrt{3}$	1	1	0.46	0.46	∞
Integration time	2.6	Rectangular	$\sqrt{3}$	1	1	1.5	1.5	∞
RF Ambient Conditions – Noise	3.0	Rectangular	$\sqrt{3}$	1	1	1.7	1.7	∞
RF Ambient Conditions – Reflections	3.0	Rectangular	$\sqrt{3}$	1	1	1.7	1.7	∞
Probe Positioner	0.8	Rectangular	$\sqrt{3}$	1	1	0.46	0.46	∞
Probe Positioning	6.7	Rectangular	$\sqrt{3}$	1	1	3.9	3.9	∞
Algorithms for Max. SAR Eval.	4.0	Rectangular	$\sqrt{3}$	1	1	2.3	2.3	∞
Test Sample Related								
Device Positioning	2.9	Normal	1	1	1	2.9	2.9	145
Device Holder	3.6	Normal	1	1	1	3.6	3.6	5
Power Drift	5.0	Rectangular	$\sqrt{3}$	1	1	2.9	2.9	∞
SAR Scaling	0.0	Rectangular	$\sqrt{3}$	1	1	0.0	0.0	∞
Physical Parameters								
Phantom Shell	7.6	Rectangular	$\sqrt{3}$	1	1	4.4	4.4	∞
SAR correction	0.0	Normal	1	1	0.84	0.0	0.0	∞
Liquid conductivity (Target)	5.0	Rectangular	$\sqrt{3}$	0.64	0.43	1.8	1.2	∞
Liquid conductivity (Meas.)	3.8	Normal	1	0.78	0.71	3.0	2.7	10
Liquid permittivity (Target)	5.0	Rectangular	$\sqrt{3}$	0.60	0.49	1.7	1.4	∞
Liquid permittivity (Meas.)	4.1	Normal	1	0.23	0.26	0.9	1.1	10
Temp. unc. - Conductivity	1.9	Rectangular	$\sqrt{3}$	0.78	0.71	0.9	0.8	∞
Temp. unc. - Permittivity	1.9	Rectangular	$\sqrt{3}$	0.23	0.26	0.3	0.3	∞
Combined Standard Uncertainty						12.	12	330
Expanded Uncertainty (k=2)						24	24	

$$U(1\text{ g}) = k \cdot u_c$$

$$= 2 \cdot 12\%$$

$$= 24\% \text{ (The confidence level is about 95 \% } k = 2 \text{)}$$

$$U(10\text{ g}) = k \cdot u_c$$

$$= 2 \cdot 12\%$$

$$= 24\% \text{ (The confidence level is about 95 \% } k = 2 \text{)}$$

The above measurement uncertainties are according to IEEE Std 1528

5 600 MHz Head (SN: 3930)

Error Description	Uncertainty value $\pm\%$	Probability Distribution	Divisor	(Ci) 1 g	(Ci) 10 g	Standard 1 g ($\pm\%$)	Standard 10 g ($\pm\%$)	vi 2 or Veff
Measurement System								
Probe calibration	6.55	Normal	1	1	1	6.6	6.6	∞
Isotropy	1.3	Normal	1	1	1	1.3	1.3	∞
Boundary Effects	2.0	Rectangular	$\sqrt{3}$	1	1	1.2	1.2	∞
Probe Linearity	0.3	Normal	1	1	1	0.3	0.3	∞
Probe modulation response	0.0	Rectangular	$\sqrt{3}$	1	1	0.0	0.0	∞
Detection limits	0.25	Rectangular	$\sqrt{3}$	1	1	0.14	0.14	∞
Readout Electronics	0.3	Normal	1	1	1	0.3	0.3	∞
Response time	0.8	Rectangular	$\sqrt{3}$	1	1	0.46	0.46	∞
Integration time	2.6	Rectangular	$\sqrt{3}$	1	1	1.5	1.5	∞
RF Ambient Conditions – Noise	3.0	Rectangular	$\sqrt{3}$	1	1	1.7	1.7	∞
RF Ambient Conditions – Reflections	3.0	Rectangular	$\sqrt{3}$	1	1	1.7	1.7	∞
Probe Positioner	0.8	Rectangular	$\sqrt{3}$	1	1	0.46	0.46	∞
Probe Positioning	6.7	Rectangular	$\sqrt{3}$	1	1	3.9	3.9	∞
Algorithms for Max. SAR Eval.	4.0	Rectangular	$\sqrt{3}$	1	1	2.3	2.3	∞
Test Sample Related								
Device Positioning	2.9	Normal	1	1	1	2.9	2.9	145
Device Holder	3.6	Normal	1	1	1	3.6	3.6	5
Power Drift	5.0	Rectangular	$\sqrt{3}$	1	1	2.9	2.9	∞
SAR Scaling	0.0	Rectangular	$\sqrt{3}$	1	1	0.0	0.0	∞
Physical Parameters								
Phantom Shell	7.6	Rectangular	$\sqrt{3}$	1	1	4.4	4.4	∞
SAR correction	0.0	Normal	1	1	0.84	0.0	0.0	∞
Liquid conductivity (Target)	5.0	Rectangular	$\sqrt{3}$	0.64	0.43	1.8	1.2	∞
Liquid conductivity (Meas.)	3.9	Normal	1	0.78	0.71	3.0	2.8	10
Liquid permittivity (Target)	5.0	Rectangular	$\sqrt{3}$	0.60	0.49	1.7	1.4	∞
Liquid permittivity (Meas.)	4.2	Normal	1	0.23	0.26	1.0	1.1	10
Temp. unc. - Conductivity	2.0	Rectangular	$\sqrt{3}$	0.78	0.71	0.9	0.8	∞
Temp. unc. - Permittivity	2.0	Rectangular	$\sqrt{3}$	0.23	0.26	0.3	0.3	∞
Combined Standard Uncertainty						12.	12	330
Expanded Uncertainty (k=2)						24	24	

$$U(1\text{ g}) = k \cdot u_c$$

$$= 2 \cdot 12\%$$

$$= 24\% \text{ (The confidence level is about 95 \% } k = 2)$$

$$U(10\text{ g}) = k \cdot u_c$$

$$= 2 \cdot 12\%$$

$$= 24\% \text{ (The confidence level is about 95 \% } k = 2)$$

The above measurement uncertainties are according to IEEE Std 1528

5 600 MHz Body (SN: 3930)

Error Description	Uncertainty value $\pm\%$	Probability Distribution	Divisor	(Ci) 1 g	(Ci) 10 g	Standard 1 g ($\pm\%$)	Standard 10 g ($\pm\%$)	vi 2 or Veff
Measurement System								
Probe calibration	6.55	Normal	1	1	1	6.6	6.6	∞
Isotropy	1.3	Normal	1	1	1	1.3	1.3	∞
Boundary Effects	2.0	Rectangular	$\sqrt{3}$	1	1	1.2	1.2	∞
Probe Linearity	0.3	Normal	1	1	1	0.3	0.3	∞
Probe modulation response	0.0	Rectangular	$\sqrt{3}$	1	1	0.0	0.0	∞
Detection limits	0.25	Rectangular	$\sqrt{3}$	1	1	0.14	0.14	∞
Readout Electronics	0.3	Normal	1	1	1	0.3	0.3	∞
Response time	0.8	Rectangular	$\sqrt{3}$	1	1	0.46	0.46	∞
Integration time	2.6	Rectangular	$\sqrt{3}$	1	1	1.5	1.5	∞
RF Ambient Conditions – Noise	3.0	Rectangular	$\sqrt{3}$	1	1	1.7	1.7	∞
RF Ambient Conditions – Reflections	3.0	Rectangular	$\sqrt{3}$	1	1	1.7	1.7	∞
Probe Positioner	0.8	Rectangular	$\sqrt{3}$	1	1	0.46	0.46	∞
Probe Positioning	6.7	Rectangular	$\sqrt{3}$	1	1	3.9	3.9	∞
Algorithms for Max. SAR Eval.	4.0	Rectangular	$\sqrt{3}$	1	1	2.3	2.3	∞
Test Sample Related								
Device Positioning	2.9	Normal	1	1	1	2.9	2.9	145
Device Holder	3.6	Normal	1	1	1	3.6	3.6	5
Power Drift	5.0	Rectangular	$\sqrt{3}$	1	1	2.9	2.9	∞
SAR Scaling	0.0	Rectangular	$\sqrt{3}$	1	1	0.0	0.0	∞
Physical Parameters								
Phantom Shell	7.6	Rectangular	$\sqrt{3}$	1	1	4.4	4.4	∞
SAR correction	0.0	Normal	1	1	0.84	0.0	0.0	∞
Liquid conductivity (Target)	5.0	Rectangular	$\sqrt{3}$	0.64	0.43	1.8	1.2	∞
Liquid conductivity (Meas.)	4.2	Normal	1	0.78	0.71	3.3	3.0	10
Liquid permittivity (Target)	5.0	Rectangular	$\sqrt{3}$	0.60	0.49	1.7	1.4	∞
Liquid permittivity (Meas.)	4.1	Normal	1	0.23	0.26	0.9	1.1	10
Temp. unc. - Conductivity	1.9	Rectangular	$\sqrt{3}$	0.78	0.71	0.9	0.8	∞
Temp. unc. - Permittivity	2.0	Rectangular	$\sqrt{3}$	0.23	0.26	0.3	0.3	∞
Combined Standard Uncertainty						12.	12	330
Expanded Uncertainty (k=2)						24	24	

$$U(1\text{ g}) = k \cdot u_c$$

$$= 2 \cdot 12\%$$

$$= 24\% \text{ (The confidence level is about 95 \% } k = 2)$$

$$U(10\text{ g}) = k \cdot u_c$$

$$= 2 \cdot 12\%$$

$$= 24\% \text{ (The confidence level is about 95 \% } k = 2)$$

The above measurement uncertainties are according to IEEE Std 1528

5 800 MHz Head (SN: 3930)

Error Description	Uncertainty value $\pm\%$	Probability Distribution	Divisor	(Ci) 1 g	(Ci) 10 g	Standard 1 g ($\pm\%$)	Standard 10 g ($\pm\%$)	vi 2 or Veff
Measurement System								
Probe calibration	6.55	Normal	1	1	1	6.6	6.6	∞
Isotropy	1.3	Normal	1	1	1	1.3	1.3	∞
Boundary Effects	2.0	Rectangular	$\sqrt{3}$	1	1	1.2	1.2	∞
Probe Linearity	0.3	Normal	1	1	1	0.3	0.3	∞
Probe modulation response	0.0	Rectangular	$\sqrt{3}$	1	1	0.0	0.0	∞
Detection limits	0.25	Rectangular	$\sqrt{3}$	1	1	0.14	0.14	∞
Readout Electronics	0.3	Normal	1	1	1	0.3	0.3	∞
Response time	0.8	Rectangular	$\sqrt{3}$	1	1	0.46	0.46	∞
Integration time	2.6	Rectangular	$\sqrt{3}$	1	1	1.5	1.5	∞
RF Ambient Conditions – Noise	3.0	Rectangular	$\sqrt{3}$	1	1	1.7	1.7	∞
RF Ambient Conditions – Reflections	3.0	Rectangular	$\sqrt{3}$	1	1	1.7	1.7	∞
Probe Positioner	0.8	Rectangular	$\sqrt{3}$	1	1	0.46	0.46	∞
Probe Positioning	6.7	Rectangular	$\sqrt{3}$	1	1	3.9	3.9	∞
Algorithms for Max. SAR Eval.	4.0	Rectangular	$\sqrt{3}$	1	1	2.3	2.3	∞
Test Sample Related								
Device Positioning	2.9	Normal	1	1	1	2.9	2.9	145
Device Holder	3.6	Normal	1	1	1	3.6	3.6	5
Power Drift	5.0	Rectangular	$\sqrt{3}$	1	1	2.9	2.9	∞
SAR Scaling	0.0	Rectangular	$\sqrt{3}$	1	1	0.0	0.0	∞
Physical Parameters								
Phantom Shell	7.6	Rectangular	$\sqrt{3}$	1	1	4.4	4.4	∞
SAR correction	0.0	Normal	1	1	0.84	0.0	0.0	∞
Liquid conductivity (Target)	5.0	Rectangular	$\sqrt{3}$	0.64	0.43	1.8	1.2	∞
Liquid conductivity (Meas.)	3.8	Normal	1	0.78	0.71	3.0	2.7	10
Liquid permittivity (Target)	5.0	Rectangular	$\sqrt{3}$	0.60	0.49	1.7	1.4	∞
Liquid permittivity (Meas.)	3.8	Normal	1	0.23	0.26	0.9	1.0	10
Temp. unc. - Conductivity	1.8	Rectangular	$\sqrt{3}$	0.78	0.71	0.8	0.7	∞
Temp. unc. - Permittivity	1.8	Rectangular	$\sqrt{3}$	0.23	0.26	0.2	0.3	∞
Combined Standard Uncertainty						12.	12	330
Expanded Uncertainty (k=2)						24	24	

$$U(1\text{ g}) = k \cdot u_c$$

$$= 2 \cdot 12\%$$

$$= 24\% \text{ (The confidence level is about 95 \% } k = 2)$$

$$U(10\text{ g}) = k \cdot u_c$$

$$= 2 \cdot 12\%$$

$$= 24\% \text{ (The confidence level is about 95 \% } k = 2)$$

The above measurement uncertainties are according to IEEE Std 1528

5 800 MHz Body (SN: 3930)

Error Description	Uncertainty value $\pm\%$	Probability Distribution	Divisor	(Ci) 1 g	(Ci) 10 g	Standard 1 g ($\pm\%$)	Standard 10 g ($\pm\%$)	vi 2 or Veff
Measurement System								
Probe calibration	6.55	Normal	1	1	1	6.6	6.6	∞
Isotropy	1.3	Normal	1	1	1	1.3	1.3	∞
Boundary Effects	2.0	Rectangular	$\sqrt{3}$	1	1	1.2	1.2	∞
Probe Linearity	0.3	Normal	1	1	1	0.3	0.3	∞
Probe modulation response	0.0	Rectangular	$\sqrt{3}$	1	1	0.0	0.0	∞
Detection limits	0.25	Rectangular	$\sqrt{3}$	1	1	0.14	0.14	∞
Readout Electronics	0.3	Normal	1	1	1	0.3	0.3	∞
Response time	0.8	Rectangular	$\sqrt{3}$	1	1	0.46	0.46	∞
Integration time	2.6	Rectangular	$\sqrt{3}$	1	1	1.5	1.5	∞
RF Ambient Conditions – Noise	3.0	Rectangular	$\sqrt{3}$	1	1	1.7	1.7	∞
RF Ambient Conditions – Reflections	3.0	Rectangular	$\sqrt{3}$	1	1	1.7	1.7	∞
Probe Positioner	0.8	Rectangular	$\sqrt{3}$	1	1	0.46	0.46	∞
Probe Positioning	6.7	Rectangular	$\sqrt{3}$	1	1	3.9	3.9	∞
Algorithms for Max. SAR Eval.	4.0	Rectangular	$\sqrt{3}$	1	1	2.3	2.3	∞
Test Sample Related								
Device Positioning	2.9	Normal	1	1	1	2.9	2.9	145
Device Holder	3.6	Normal	1	1	1	3.6	3.6	5
Power Drift	5.0	Rectangular	$\sqrt{3}$	1	1	2.9	2.9	∞
SAR Scaling	0.0	Rectangular	$\sqrt{3}$	1	1	0.0	0.0	∞
Physical Parameters								
Phantom Shell	7.6	Rectangular	$\sqrt{3}$	1	1	4.4	4.4	∞
SAR correction	0.0	Normal	1	1	0.84	0.0	0.0	∞
Liquid conductivity (Target)	5.0	Rectangular	$\sqrt{3}$	0.64	0.43	1.8	1.2	∞
Liquid conductivity (Meas.)	3.8	Normal	1	0.78	0.71	3.0	2.7	10
Liquid permittivity (Target)	5.0	Rectangular	$\sqrt{3}$	0.60	0.49	1.7	1.4	∞
Liquid permittivity (Meas.)	4.0	Normal	1	0.23	0.26	0.9	1.0	10
Temp. unc. - Conductivity	2.0	Rectangular	$\sqrt{3}$	0.78	0.71	0.9	0.8	∞
Temp. unc. - Permittivity	1.8	Rectangular	$\sqrt{3}$	0.23	0.26	0.2	0.3	∞
Combined Standard Uncertainty						12.	12	330
Expanded Uncertainty (k=2)						24	24	

$$U(1\text{ g}) = k \cdot u_c$$

$$= 2 \cdot 12\%$$

$$= 24\% \text{ (The confidence level is about 95 \% } k = 2)$$

$$U(10\text{ g}) = k \cdot u_c$$

$$= 2 \cdot 12\%$$

$$= 24\% \text{ (The confidence level is about 95 \% } k = 2)$$

The above measurement uncertainties are according to IEEE Std 1528

16. CONCLUSION

Measurement Conclusion

The SAR measurement indicates that the EUT complies with the RF radiation exposure limits of the FCC. These measurements are taken to simulate the RF effects exposure under the worst-case conditions. Precise laboratory measures were taken to assure repeatability of the tests. The tested device complies with the requirements in respect to all parameters subject to the test. The test results and statements relate only to the item(s) tested.

Please note that the absorption and distribution of electromagnetic energy in the body are every complex phenomena that depend on the mass, shape, and size of the body, the orientation of the body with respect to the field vectors, and the electrical properties of both the body and the environment. Other variables that may play a substantial role impossible biological effect are those that characterize the environment (e.g. ambient temperature, air velocity, relative humidity, and body insulation) and those that characterize the individual (e.g. age, gender, activity level, debilitation, or disease).

Because innumerable factors may interact to determine the specific biological outcome of an exposure to electromagnetic fields, any protection guide shall consider maximal amplification of biological effects as a result of field-body interactions, environmental conditions, and physiological variables.

17. REFERENCES

- [1] Federal Communications Commission, ET Docket 93-62, Guidelines for Evaluating the Environmental Effects of Radiofrequency Radiation, Aug. 1996.
- [2] ANSI/IEEE C95.1-2005, American National Standard safety levels with respect to human exposure to radiofrequency electromagnetic fields, 3kHz to 300GHz, New York: IEEE, 2006.
- [3] ANSI/IEEE C95.1-1992, American National Standard safety levels with respect to human exposure to radiofrequency electromagnetic fields, 3kHz to 300GHz, New York: IEEE, Sept. 1992.
- [4] ANSI/IEEE C95.3-2002, IEEE Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave, New York: IEEE, December 2002.
- [5] IEEE Standards Coordinating Committee 39 –Standards Coordinating Committee 34 – IEEE Std. 1528-2003, Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Body Due to Wireless Communications Devices.
- [6] NCRP, National Council on Radiation Protection and Measurements, Biological Effects and Exposure Criteria for Radio Frequency Electromagnetic Fields, NCRP Report No. 86, 1986. Reprinted Feb. 1995.
- [7] T. Schmid, O. Egger, N. Kuster, Automated E-field scanning system for dosimetric assessments, IEEE Transaction on Microwave Theory and Techniques, vol. 44, Jan. 1996, pp. 105-113.
- [8] K. Pokovic, T. Schmid, N. Kuster, Robust setup for precise calibration of E-field probes in tissue simulating liquids at mobile communications frequencies, ICECOM97, Oct. 1997, pp. -124.
- [9] K. Pokovic, T. Schmid, and N. Kuster, E-field Probe with improved isotropy in brain simulating liquids, Proceedings of the ELMAR, Zadar, Croatia, June 23-25, 1996, pp. 172-175.
- [10] Schmid& Partner Engineering AG, Application Note: Data Storage and Evaluation, June 1998, p2.
- [11] V. Hombach, K. Meier, M. Burkhardt, E. Kuhn, N. Kuster, The Dependence of EM Energy Absorption upon Human Modeling at 900 MHz, IEEE Transaction on Microwave Theory and Techniques, vol. 44 no. 10, Oct.1996, pp. 1865-1873.
- [12] N. Kuster and Q. Balzano, Energy absorption mechanism by biological bodies in the near field of dipole antennas above 300MHz, IEEE Transaction on Vehicular Technology, vol. 41, no. 1, Feb. 1992, pp. 17-23.
- [13] G. Hartsgrrove, A. Kraszewski, A. Surowiec, Simulated Biological Materials for Electromagnetic Radiation Absorption Studies, University of Ottawa, Bio electromagnetics, Canada: 1987, pp. 29-36.
- [14] Q. Balzano, O. Garay, T. Manning Jr., Electromagnetic Energy Exposure of Simulated Users of Portable Cellular Telephones, IEEE Transactions on Vehicular Technology, vol. 44, no.3, Aug. 1995.
- [15] W. Gander, Computer mathematick, Birkhaeuser, Basel, 1992.
- [16] W.H. Press, S.A. Teukolsky, W.T. Vetterling, and B.P. Flannery, Numerical Recipes in C, The Art of Scientific Computing, Second edition, Cambridge University Press, 1992.
- [17] N. Kuster, R. Kastle, T. Schmid, Dosimetric evaluation of mobile communications equipment with known precision, IEEE Transaction on Communications, vol. E80-B, no. 5, May 1997, pp. 645-652.
- [18] CENELEC CLC/SC111B, European Prestandard (prENV 50166-2), Human Exposure to Electromagnetic Fields High-frequency: 10kHz-300GHz, Jan. 1995.
- [19] Prof. Dr. Niels Kuster, ETH, Eidgenössische Technische Hochschule Zürich, Dosimetric Evaluation of the Cellular Phone.

- [20] IEC 62209-1, Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Human models, instrumentation, and procedures - Part 1: Procedure to determine the specific absorption rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300MHz to 3 GHz), Feb. 2005.
- [21] Industry Canada RSS-102 Radio Frequency Exposure Compliance of Radio communication Apparatus (All Frequency Bands) Issue 5, March 2015.
- [22] Health Canada Safety Code 6 Limits of Human Exposure to Radio Frequency Electromagnetic Fields in the Frequency Range from 3 kHz – 300 GHz, 2009
- [23] FCC SAR Test Procedures for 2G-3G Devices, Mobile Hotspot and UMPC Devices KDB Publications 941225,D01-D07
- [24] SAR Measurement procedures for IEEE 802.11a/b/g KDB Publication 248227 D01v02
- [25] FCC SAR Considerations for Handsets with Multiple Transmitters and Antennas, KDB Publications 648474D02-D04
- [26] FCC SAR Evaluation Considerations for Laptop, Notebook, Netbook and Tablet Computers, FCC KDB Publication 616217 D04
- [27] FCC SAR Measurement and Reporting Requirements for 100MHz – 6 GHz, KDB Publications 865664 D01-D02
- [28] FCC General RF Exposure Guidance and SAR Procedures for Dongles, KDB Publication 447498, D01-D02
- [29] 615223 D01 802 16e Wi-Max SAR Guidance v01, Nov. 13, 2009
- [30] Anexo à Resolução No. 533, de 10 de September de 2009.
- [31] IEC 62209-2, Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Human models, instrumentation, and procedures - Part 2: Procedure to determine the specific absorption rate (SAR) for wireless communication devices used in close proximity to the human body(frequency range of 30 MHz to 6 GHz), Mar. 2010.

APPENDIX A. – Probe Calibration Data

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 0108

Client **DT&C (Dymstec)**

Certificate No: EX3-3930_Nov19

CALIBRATION CERTIFICATE

Object **EX3DV4 - SN:3930**

Calibration procedure(s) **QA CAL-01.v9, QA CAL-14.v5, QA CAL-23.v5, QA CAL-25.v7**
Calibration procedure for dosimetric E-field probes

Calibration date: **November 18, 2019**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	03-Apr-19 (No. 217-02892/02893)	Apr-20
Power sensor NRP-Z91	SN: 103244	03-Apr-19 (No. 217-02892)	Apr-20
Power sensor NRP-Z91	SN: 103245	03-Apr-19 (No. 217-02893)	Apr-20
Reference 20 dB Attenuator	SN: S5277 (20x)	04-Apr-19 (No. 217-02894)	Apr-20
DAE4	SN: 660	07-Oct-19 (No. DAE4-660_Oct19)	Oct-20
Reference Probe ES3DV2	SN: 3013	31-Dec-18 (No. ES3-3013_Dec18)	Dec-19
Secondary Standards	ID	Check Date (in house)	Scheduled Check
Power meter E4419B	SN: GB41293874	06-Apr-16 (in house check Jun-18)	In house check: Jun-20
Power sensor E4412A	SN: MY41498087	06-Apr-16 (in house check Jun-18)	In house check: Jun-20
Power sensor E4412A	SN: 000110210	06-Apr-16 (in house check Jun-18)	In house check: Jun-20
RF generator HP 8648C	SN: US3642U01700	04-Aug-99 (in house check Jun-18)	In house check: Jun-20
Network Analyzer E8358A	SN: US41080477	31-Mar-14 (in house check Oct-19)	In house check: Oct-20

	Name	Function	Signature
Calibrated by:	Jeton Kastrati	Laboratory Technician	
Approved by:	Katja Pokovic	Technical Manager	
Issued: November 18, 2019			
This calibration certificate shall not be reproduced except in full without written approval of the laboratory.			

Calibration Laboratory of
Schmid & Partner
Engineering AG
 Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
 Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 0108**

The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Glossary:

TSL	tissue simulating liquid
NORM _{x,y,z}	sensitivity in free space
ConvF	sensitivity in TSL / NORM _{x,y,z}
DCP	diode compression point
CF	crest factor (1/duty_cycle) of the RF signal
A, B, C, D	modulation dependent linearization parameters
Polarization ϕ	ϕ rotation around probe axis
Polarization ϑ	ϑ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis
Connector Angle	information used in DASY system to align probe sensor X to the robot coordinate system

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Methods Applied and Interpretation of Parameters:

- NORM_{x,y,z}**: Assessed for E-field polarization $\vartheta = 0$ ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: R22 waveguide). NORM_{x,y,z} are only intermediate values, i.e., the uncertainties of NORM_{x,y,z} does not affect the E²-field uncertainty inside TSL (see below ConvF).
- NORM(f)_{x,y,z}** = NORM_{x,y,z} * frequency_response (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- DCP_{x,y,z}**: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- PAR**: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- A_{x,y,z}; B_{x,y,z}; C_{x,y,z}; D_{x,y,z}; VR_{x,y,z}**: A, B, C, D are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media, VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for $f \leq 800$ MHz) and inside waveguide using analytical field distributions based on power measurements for $f > 800$ MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM_{x,y,z} * ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- Spherical isotropy (3D deviation from isotropy)**: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- Connector Angle**: The angle is assessed using the information gained by determining the NORM_x (no uncertainty required).

EX3DV4 – SN:3930

November 18, 2019

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3930

Basic Calibration Parameters

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm ($\mu\text{V}/(\text{V}/\text{m})^2$) ^A	0.38	0.36	0.44	± 10.1 %
DCP (mV) ^B	106.8	104.5	106.6	

Calibration Results for Modulation Response

UID	Communication System Name		A dB	B dB $\sqrt{\mu\text{V}}$	C	D dB	VR mV	Max dev.	Unc ^E (k=2)
0	CW	X	0.0	0.0	1.0	0.00	144.6	±3.3 %	± 4.7 %
		Y	0.0	0.0	1.0		152.8		
		Z	0.0	0.0	1.0		156.3		

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

^A The uncertainties of Norm X,Y,Z do not affect the E²-field uncertainty inside TSL (see Pages 5 and 6).

^B Numerical linearization parameter: uncertainty not required.

^E Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

EX3DV4-- SN:3930

November 18, 2019

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3930**Other Probe Parameters**

Sensor Arrangement	Triangular
Connector Angle (°)	102.9
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disabled
Probe Overall Length	337 mm
Probe Body Diameter	10 mm
Tip Length	9 mm
Tip Diameter	2.5 mm
Probe Tip to Sensor X Calibration Point	1 mm
Probe Tip to Sensor Y Calibration Point	1 mm
Probe Tip to Sensor Z Calibration Point	1 mm
Recommended Measurement Distance from Surface	1.4 mm

EX3DV4- SN:3930

November 18, 2019

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3930

Calibration Parameter Determined in Head Tissue Simulating Media

f (MHz) ^C	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha ^G	Depth ^G (mm)	Unc (k=2)
2450	39.2	1.80	7.66	7.66	7.66	0.41	0.90	± 12.0 %
2600	39.0	1.96	7.50	7.50	7.50	0.45	0.90	± 12.0 %
3300	38.2	2.71	7.00	7.00	7.00	0.35	1.30	± 13.1 %
3500	37.9	2.91	6.95	6.95	6.95	0.35	1.30	± 13.1 %
3700	37.7	3.12	6.80	6.80	6.80	0.35	1.30	± 13.1 %
3900	37.5	3.32	6.50	6.50	6.50	0.40	1.50	± 13.1 %
4100	37.2	3.53	6.27	6.27	6.27	0.40	1.50	± 13.1 %
4200	37.1	3.63	6.26	6.26	6.26	0.40	1.50	± 13.1 %
4400	36.9	3.84	6.09	6.09	6.09	0.40	1.60	± 13.1 %
4600	36.7	4.04	6.08	6.08	6.08	0.40	1.70	± 13.1 %
4800	36.4	4.25	5.92	5.92	5.92	0.40	1.80	± 13.1 %
4950	36.3	4.40	5.87	5.87	5.87	0.40	1.80	± 13.1 %
5200	36.0	4.66	5.55	5.55	5.55	0.40	1.80	± 13.1 %
5300	35.9	4.76	5.30	5.30	5.30	0.40	1.80	± 13.1 %
5500	35.6	4.96	4.99	4.99	4.99	0.40	1.80	± 13.1 %
5600	35.5	5.07	4.81	4.81	4.81	0.40	1.80	± 13.1 %
5800	35.3	5.27	4.90	4.90	4.90	0.40	1.80	± 13.1 %

^C Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Validity of ConvF assessed at 6 MHz is 4-9 MHz, and ConvF assessed at 13 MHz is 9-19 MHz. Above 5 GHz frequency validity can be extended to ± 110 MHz.

^F At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

^G Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

EX3DV4- SN:3930

November 18, 2019

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3930

Calibration Parameter Determined in Body Tissue Simulating Media

f (MHz) ^C	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha ^G	Depth ^G (mm)	Unc (k=2)
2450	52.7	1.95	7.88	7.88	7.88	0.30	0.90	± 12.0 %
2600	52.5	2.16	7.74	7.74	7.74	0.29	0.90	± 12.0 %
3300	51.6	3.08	6.65	6.65	6.65	0.40	1.35	± 13.1 %
3500	51.3	3.31	6.44	6.44	6.44	0.40	1.35	± 13.1 %
3700	51.0	3.55	6.34	6.34	6.34	0.40	1.35	± 13.1 %
3900	51.2	3.78	6.47	6.47	6.47	0.40	1.50	± 13.1 %
4100	50.5	4.01	6.18	6.18	6.18	0.40	1.50	± 13.1 %
4200	50.4	4.13	5.82	5.82	5.82	0.40	1.50	± 13.1 %
4400	50.1	4.37	5.73	5.73	5.73	0.40	1.60	± 13.1 %
4600	49.8	4.60	5.61	5.61	5.61	0.40	1.80	± 13.1 %
4800	49.6	4.83	5.38	5.38	5.38	0.50	1.90	± 13.1 %
4950	49.4	5.01	5.10	5.10	5.10	0.50	1.90	± 13.1 %
5200	49.0	5.30	4.65	4.65	4.65	0.50	1.90	± 13.1 %
5300	48.9	5.42	4.50	4.50	4.50	0.50	1.90	± 13.1 %
5500	48.6	5.65	4.30	4.30	4.30	0.50	1.90	± 13.1 %
5600	48.5	5.77	4.12	4.12	4.12	0.50	1.90	± 13.1 %
5800	48.2	6.00	4.10	4.10	4.10	0.50	1.90	± 13.1 %

^C Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Validity of ConvF assessed at 6 MHz is 4-9 MHz, and ConvF assessed at 13 MHz is 9-19 MHz. Above 5 GHz frequency validity can be extended to ± 110 MHz.


^F At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

^G Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

EX3DV4-- SN:3930

November 18, 2019

Frequency Response of E-Field (TEM-Cell:ifi110 EXX, Waveguide: R22)

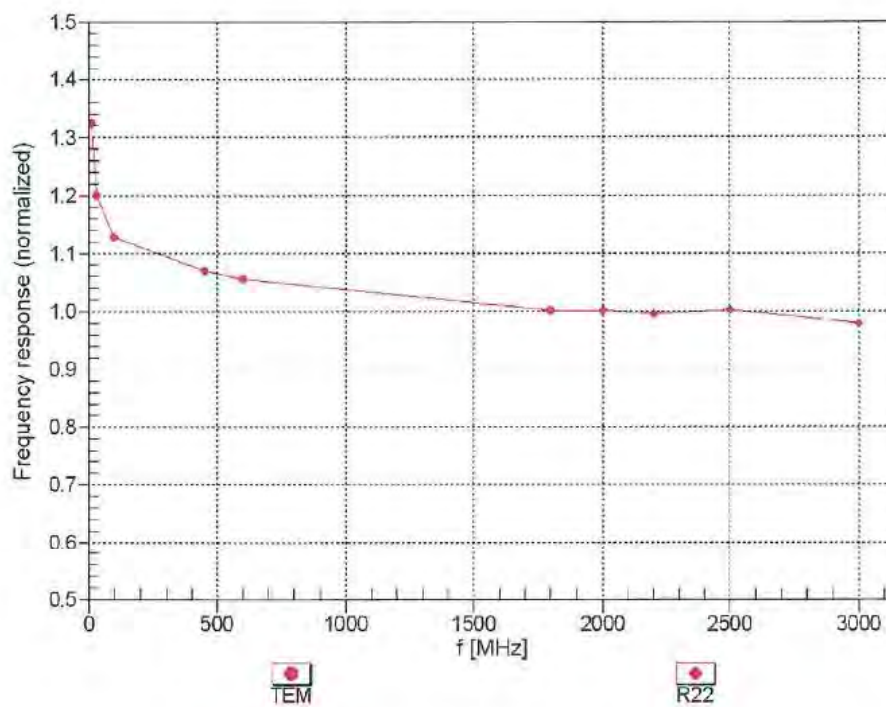


Uncertainty of Frequency Response of E-field: $\pm 6.3\%$ ($k=2$)

EX3DV4- SN:3930

November 18, 2019

Receiving Pattern (ϕ), $\vartheta = 0^\circ$


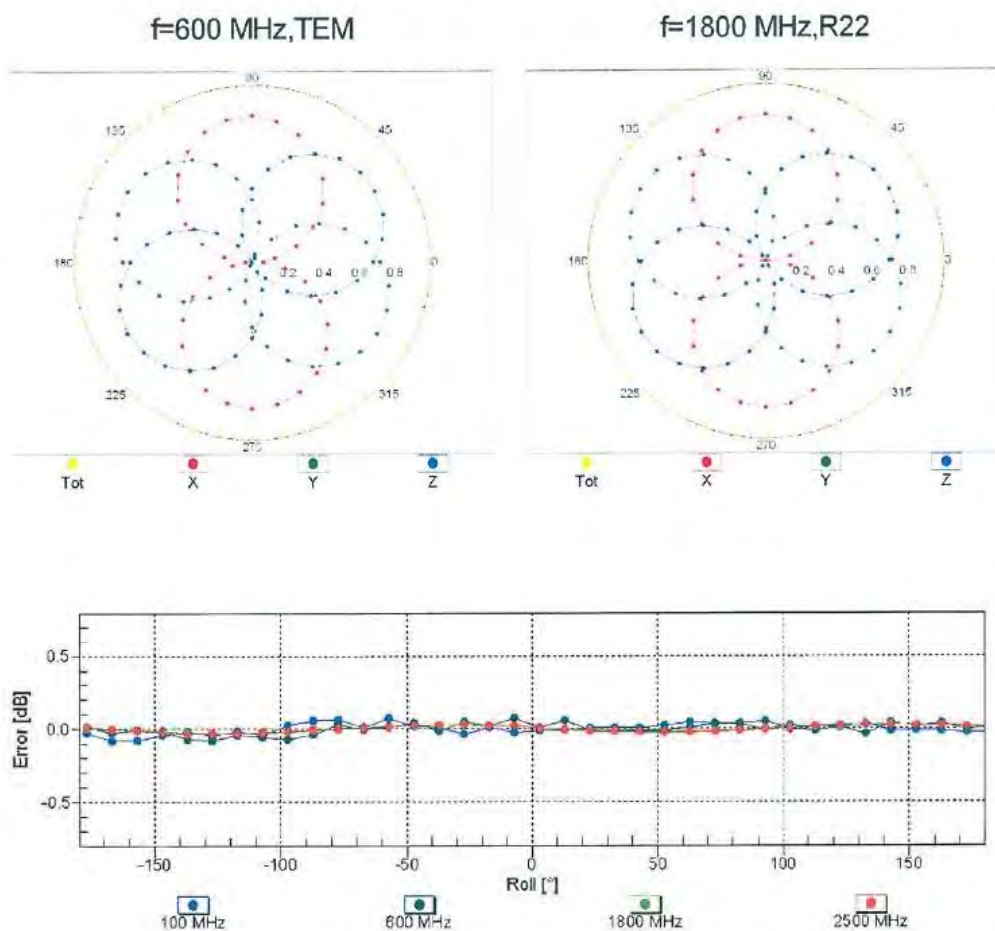


Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ ($k=2$)

EX3DV4—SN:3930

November 18, 2019


Dynamic Range $f(\text{SAR}_{\text{head}})$ (TEM cell, $f_{\text{eval}} = 1900 \text{ MHz}$)

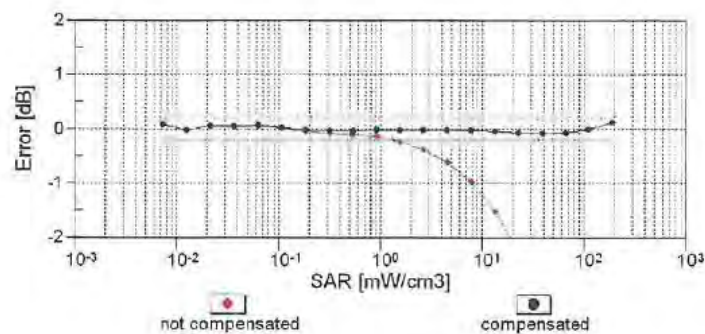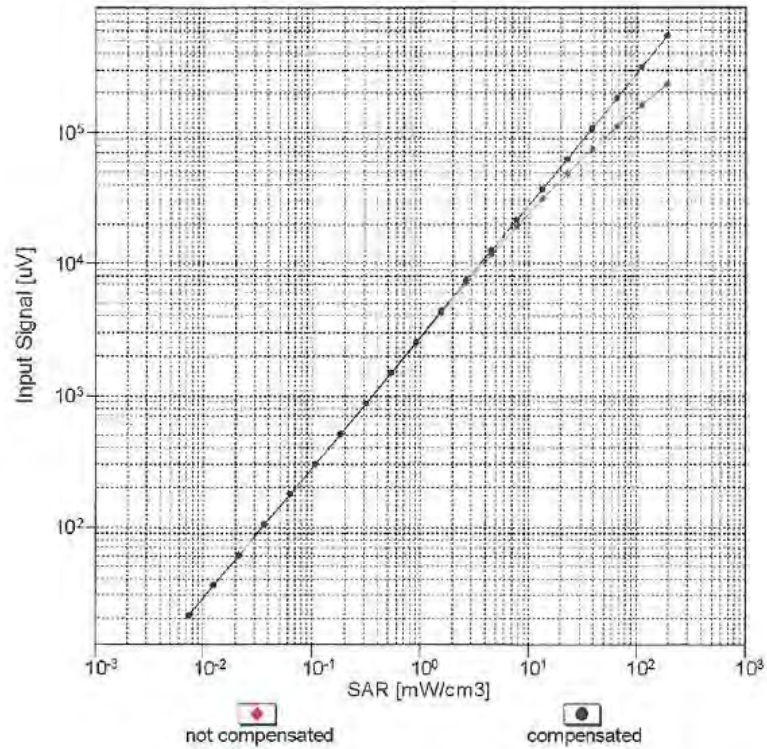Uncertainty of Linearity Assessment: $\pm 0.6\%$ ($k=2$)


EX3DV4- SN:3930

November 18, 2019

Conversion Factor Assessment

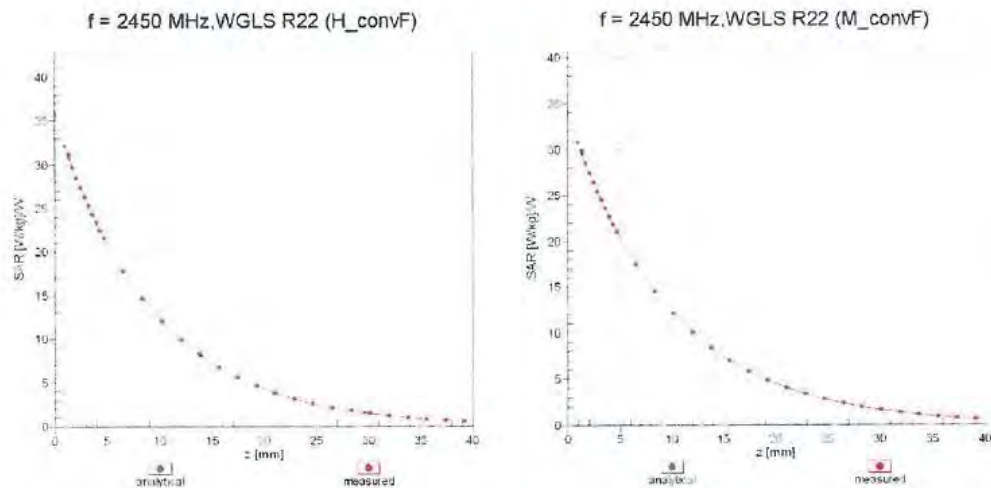

Deviation from Isotropy in Liquid Error (ϕ, θ), f = 900 MHz

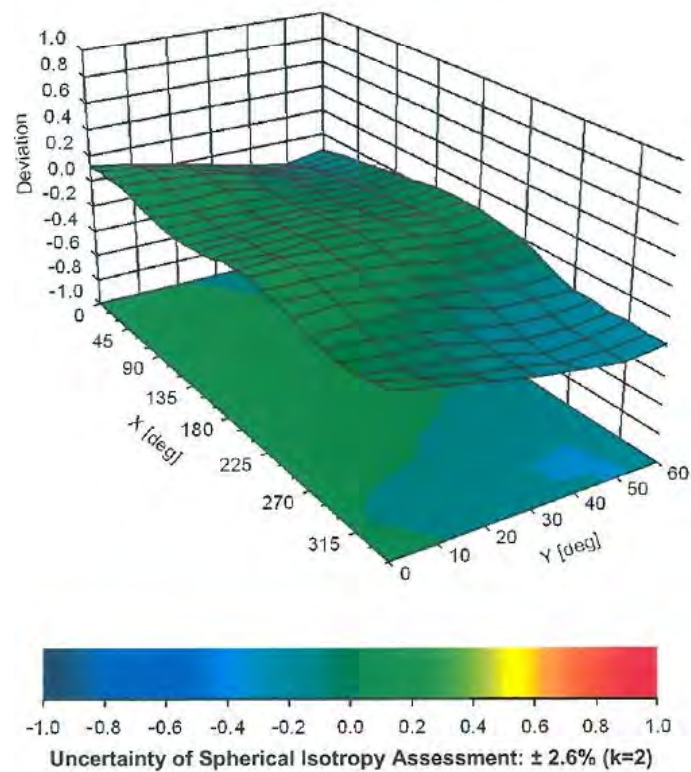

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **DT&C (Dymstec)**

Certificate No: **ES3-3327_Aug19**

CALIBRATION CERTIFICATE

Object **ES3DV3 - SN:3327**

Calibration procedure(s) **QA CAL-01.v9, QA CAL-23.v5, QA CAL-25.v7
Calibration procedure for dosimetric E-field probes**

Calibration date: **August 27, 2019**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	03-Apr-19 (No. 217-02892/02893)	Apr-20
Power sensor NRP-Z91	SN: 103244	03-Apr-19 (No. 217-02892)	Apr-20
Power sensor NRP-Z91	SN: 103245	03-Apr-19 (No. 217-02893)	Apr-20
Reference 20 dB Attenuator	SN: S5277 (20x)	04-Apr-19 (No. 217-02894)	Apr-20
DAE4	SN: 660	19-Dec-18 (No. DAE4-660_Dec18)	Dec-19
Reference Probe ES3DV2	SN: 3013	31-Dec-18 (No. ES3-3013_Dec18)	Dec-19
Secondary Standards	ID	Check Date (in house)	Scheduled Check
Power meter E4419B	SN: GB41293874	06-Apr-16 (in house check Jun-18)	In house check: Jun-20
Power sensor E4412A	SN: MY41498087	06-Apr-16 (in house check Jun-18)	In house check: Jun-20
Power sensor E4412A	SN: 000110210	06-Apr-16 (in house check Jun-18)	In house check: Jun-20
RF generator HP 8648C	SN: US3642U01700	04-Aug-99 (in house check Jun-18)	In house check: Jun-20
Network Analyzer E8358A	SN: US41080477	31-Mar-14 (in house check Oct-18)	In house check: Oct-19

	Name	Function	Signature
Calibrated by:	Manu Sietz	Laboratory Technician	
Approved by:	Katja Pokovic	Technical Manager	
Issued: August 29, 2019			
This calibration certificate shall not be reproduced except in full without written approval of the laboratory.			

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 0108**

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Glossary:

TSL	tissue simulating liquid
NORM _{x,y,z}	sensitivity in free space
ConvF	sensitivity in TSL / NORM _{x,y,z}
DCP	diode compression point
CF	crest factor (1/duty_cycle) of the RF signal
A, B, C, D	modulation dependent linearization parameters
Polarization ϕ	ϕ rotation around probe axis
Polarization ϑ	ϑ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis
Connector Angle	information used in DASY system to align probe sensor X to the robot coordinate system

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Methods Applied and Interpretation of Parameters:

- NORM_{x,y,z}**: Assessed for E-field polarization $\vartheta = 0$ ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: R22 waveguide). NORM_{x,y,z} are only intermediate values, i.e., the uncertainties of NORM_{x,y,z} does not affect the E²-field uncertainty inside TSL (see below ConvF).
- NORM(f)_{x,y,z}** = NORM_{x,y,z} * frequency_response (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- DCP_{x,y,z}**: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- PAR**: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- A_{x,y,z}; B_{x,y,z}; C_{x,y,z}; D_{x,y,z}; VR_{x,y,z}**: A, B, C, D are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for $f \leq 800$ MHz) and inside waveguide using analytical field distributions based on power measurements for $f > 800$ MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM_{x,y,z} * ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- Spherical isotropy (3D deviation from isotropy)**: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- Connector Angle**: The angle is assessed using the information gained by determining the NORM_x (no uncertainty required).

ES3DV3 – SN:3327

August 27, 2019

DASY/EASY - Parameters of Probe: ES3DV3 - SN:3327

Basic Calibration Parameters

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm ($\mu\text{V}/(\text{V}/\text{m})^2$) ^A	1.12	1.08	1.01	± 10.1 %
DCP (mV) ^B	105.3	106.4	106.5	

Calibration Results for Modulation Response

UID	Communication System Name		A dB	B dB $\sqrt{\mu\text{V}}$	C	D dB	VR mV	Max dev.	Unc ^E (k=2)
0	CW	X	0.0	0.0	1.0	0.00	198.0	±3.0 %	± 4.7 %
		Y	0.0	0.0	1.0		196.8		
		Y	0.0	0.0	1.0		194.1		

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

^A The uncertainties of Norm X,Y,Z do not affect the E²-field uncertainty inside TSL (see Pages 5 and 6).

^B Numerical linearization parameter: uncertainty not required.

^E Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

ES3DV3- SN:3327

August 27, 2019

DASY/EASY - Parameters of Probe: ES3DV3 - SN:3327**Other Probe Parameters**

Sensor Arrangement	Triangular
Connector Angle (°)	6
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disabled
Probe Overall Length	337 mm
Probe Body Diameter	10 mm
Tip Length	10 mm
Tip Diameter	4 mm
Probe Tip to Sensor X Calibration Point	2 mm
Probe Tip to Sensor Y Calibration Point	2 mm
Probe Tip to Sensor Z Calibration Point	2 mm
Recommended Measurement Distance from Surface	3 mm

ES3DV3- SN:3327

August 27, 2019

DASY/EASY - Parameters of Probe: ES3DV3 - SN:3327

Calibration Parameter Determined in Head Tissue Simulating Media

f (MHz) ^C	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha ^G	Depth ^G (mm)	Unc (k=2)
750	41.9	0.89	6.64	6.64	6.64	0.60	1.34	± 12.0 %
835	41.5	0.90	6.46	6.46	6.46	0.75	1.19	± 12.0 %
900	41.5	0.97	6.35	6.35	6.35	0.49	1.45	± 12.0 %
1750	40.1	1.37	5.59	5.59	5.59	0.80	1.18	± 12.0 %
1900	40.0	1.40	5.34	5.34	5.34	0.73	1.24	± 12.0 %
2450	39.2	1.80	4.65	4.65	4.65	0.75	1.27	± 12.0 %
2600	39.0	1.96	4.58	4.58	4.58	0.80	1.32	± 12.0 %

^C Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Validity of ConvF assessed at 6 MHz is 4-9 MHz, and ConvF assessed at 13 MHz is 9-19 MHz. Above 5 GHz frequency validity can be extended to ± 110 MHz.

^F At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

^G Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

ES3DV3- SN:3327

August 27, 2019

DASY/EASY - Parameters of Probe: ES3DV3 - SN:3327

Calibration Parameter Determined in Body Tissue Simulating Media

f (MHz) ^C	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha ^G	Depth ^G (mm)	Unc (k=2)
750	55.5	0.96	6.49	6.49	6.49	0.80	1.14	± 12.0 %
835	55.2	0.97	6.38	6.38	6.38	0.80	1.15	± 12.0 %
900	55.0	1.05	6.28	6.28	6.28	0.70	1.28	± 12.0 %
1750	53.4	1.49	5.27	5.27	5.27	0.65	1.38	± 12.0 %
1900	53.3	1.52	5.00	5.00	5.00	0.63	1.50	± 12.0 %
2450	52.7	1.95	4.61	4.61	4.61	0.80	1.24	± 12.0 %
2600	52.5	2.16	4.41	4.41	4.41	0.80	1.25	± 12.0 %

^C Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Validity of ConvF assessed at 6 MHz is 4-9 MHz, and ConvF assessed at 13 MHz is 9-19 MHz. Above 5 GHz frequency validity can be extended to ± 110 MHz.


^F At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

^G Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

ES3DV3- SN:3327

August 27, 2019

Frequency Response of E-Field (TEM-Cell: ifi110 EXX, Waveguide: R22)

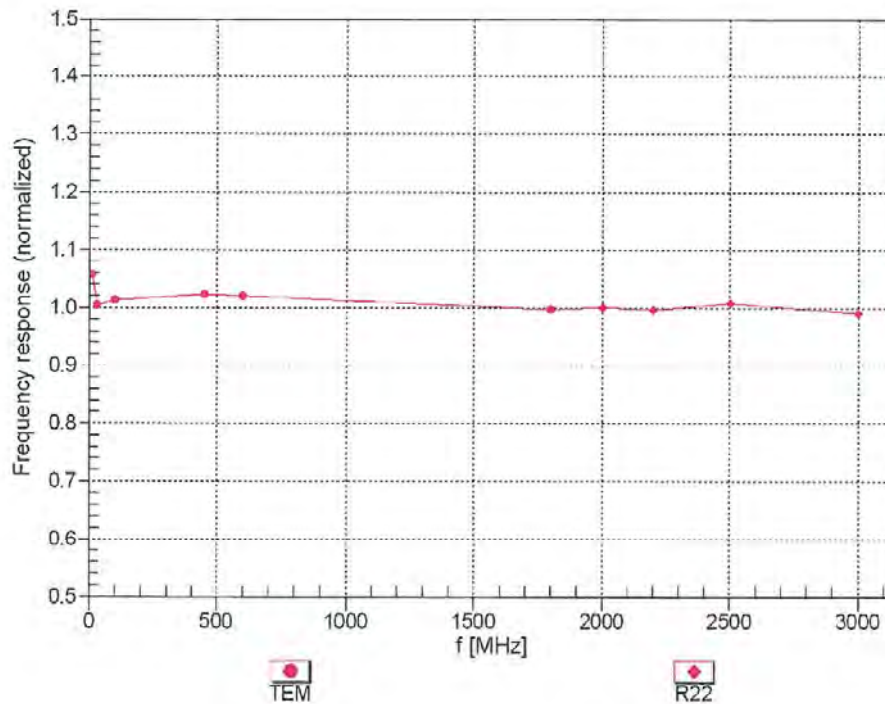


Uncertainty of Frequency Response of E-field: $\pm 6.3\%$ ($k=2$)

ES3DV3- SN:3327



August 27, 2019

Receiving Pattern (ϕ), $\theta = 0^\circ$

f=600 MHz,TEM

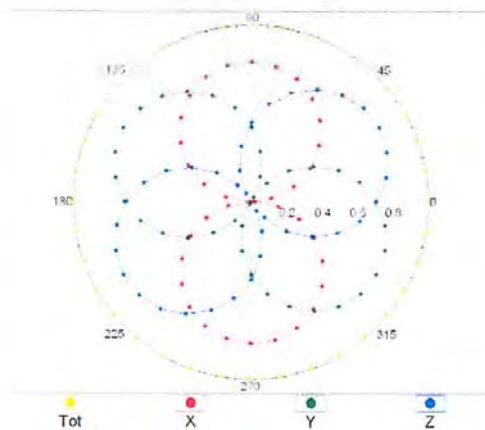


f=1800 MHz,R22

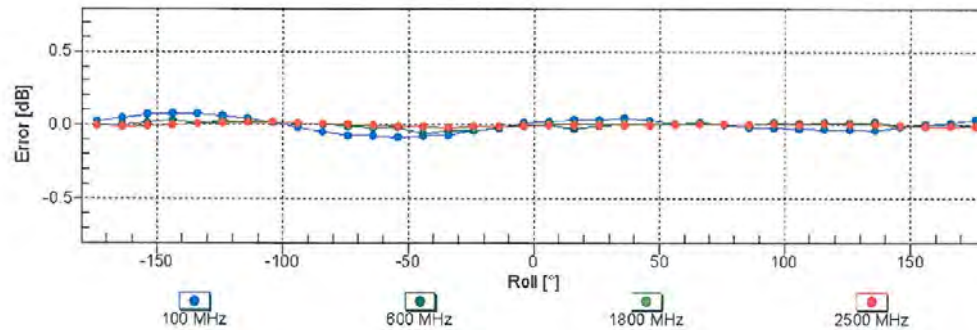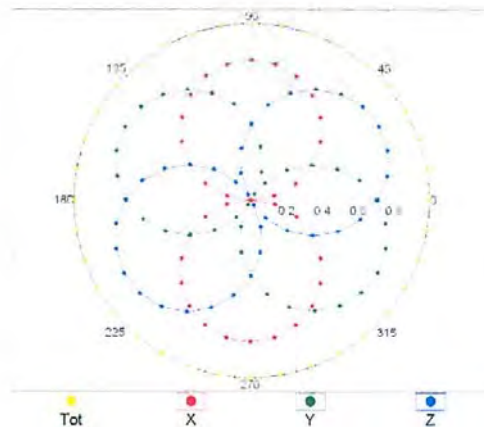Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ ($k=2$)

ES3DV3- SN:3327

August 27, 2019


Dynamic Range $f(\text{SAR}_{\text{head}})$ (TEM cell, $f_{\text{eval}} = 1900 \text{ MHz}$)

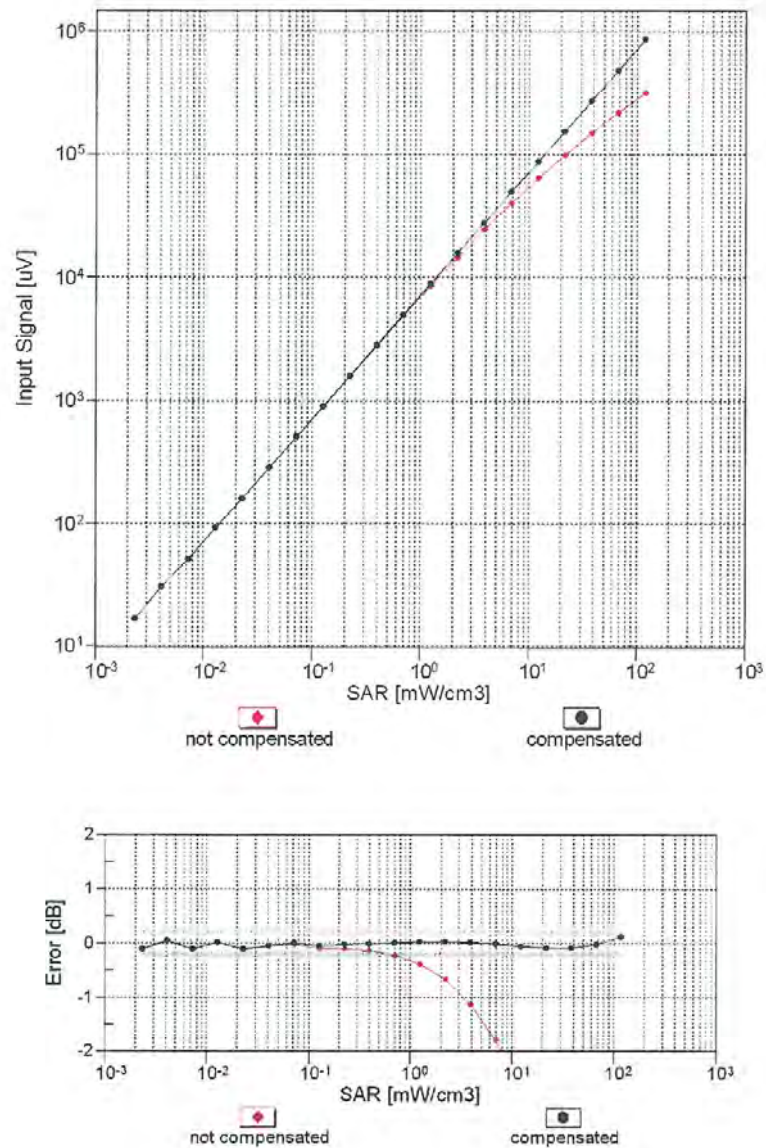Uncertainty of Linearity Assessment: $\pm 0.6\%$ ($k=2$)

ES3DV3- SN:3327

August 27, 2019

Conversion Factor Assessment

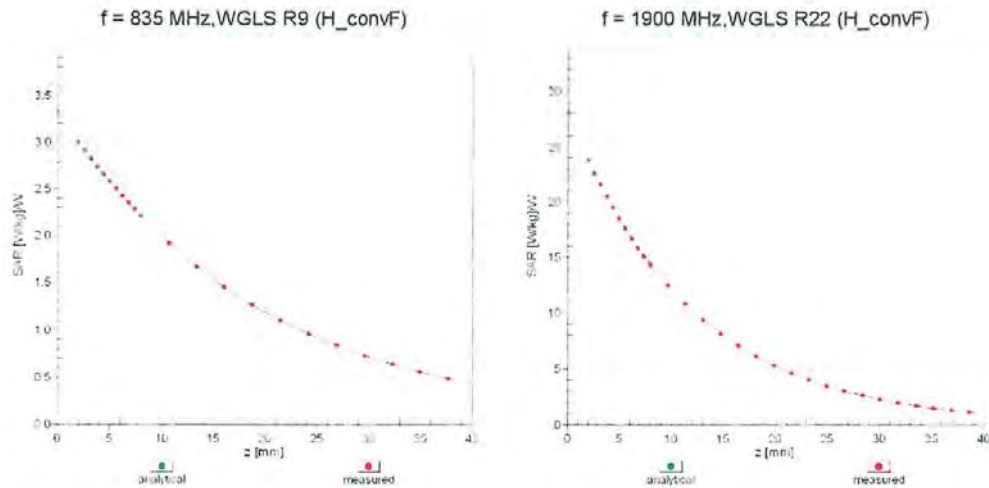

Deviation from Isotropy in Liquid Error (ϕ , θ), $f = 900 \text{ MHz}$

