

Attachment 1. – Dipole Validation Plots

DIGITAL EMC CO., LTD**DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN:464**

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.891 \text{ mho/m}$; $\epsilon_r = 41.2$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(8.94, 8.94, 8.94); Calibrated: 2012-01-27; Electronics: DAE3 Sn519

Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186


Test Date: 2012-06-01; Ambient Temp: 22.1; Tissue Temp: 22.3

Dipole Validation**Area Scan (41x111x1):** Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ **Zoom Scan (7x7x7)/Cube 0:** Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Power Drift = 0.009 dB

Peak SAR (extrapolated) = 3.91 W/kg

SAR(1 g) = 2.45 W/kg; SAR(10 g) = 1.54 W/kg

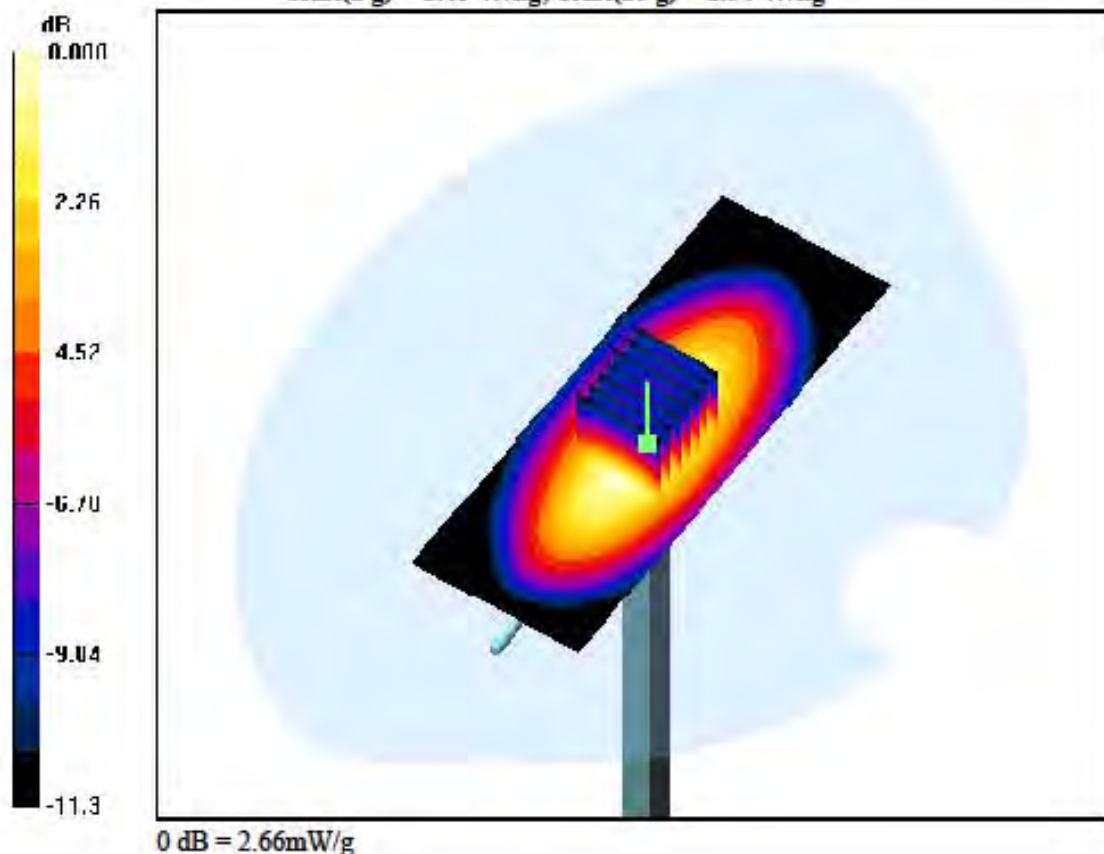

DIGITAL EMC CO., LTD

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN:464

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.969 \text{ mho/m}$; $\epsilon_r = 53.4$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(9.12, 9.12, 9.12); Calibrated: 2012-01-27; Electronics: DAE3 Sn519

Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2012-06-01; Ambient Temp: 22.1; Tissue Temp: 22.3

Dipole Validation


Area Scan (61x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Power Drift = 0.014 dB

Peak SAR (extrapolated) = 3.65 W/kg

SAR(1 g) = 2.43 W/kg; SAR(10 g) = 1.59 W/kg

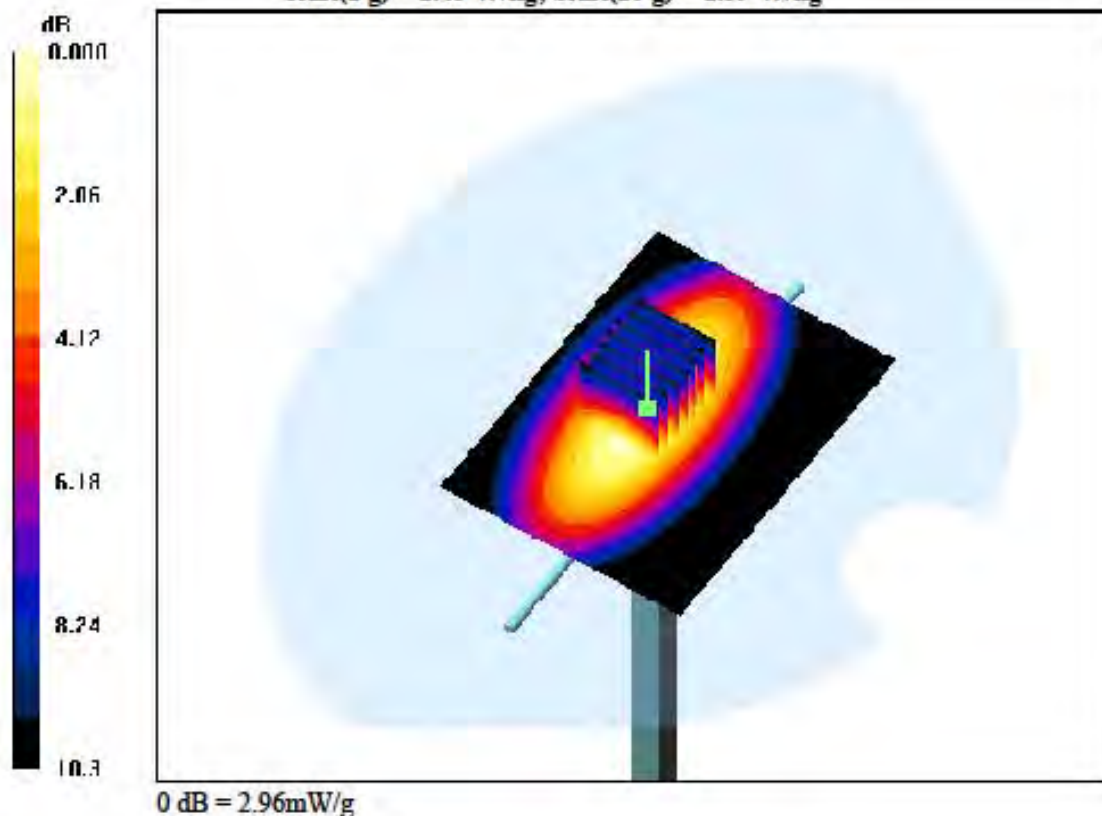

DIGITAL EMC CO., LTD

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d029

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1900 \text{ MHz}$; $\sigma = 1.36 \text{ mho/m}$; $\epsilon_r = 39.8$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(7.97, 7.97, 7.97); Calibrated: 2012-01-27; Electronics: DAE3 Sn519

Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2012-06-04; Ambient Temp: 21.9; Tissue Temp: 22.1

Dipole Validation


Area Scan (41x61x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Power Drift = 0.011 dB

Peak SAR (extrapolated) = 18.5 W/kg

SAR(1 g) = 9.9 W/kg; SAR(10 g) = 5.21 W/kg

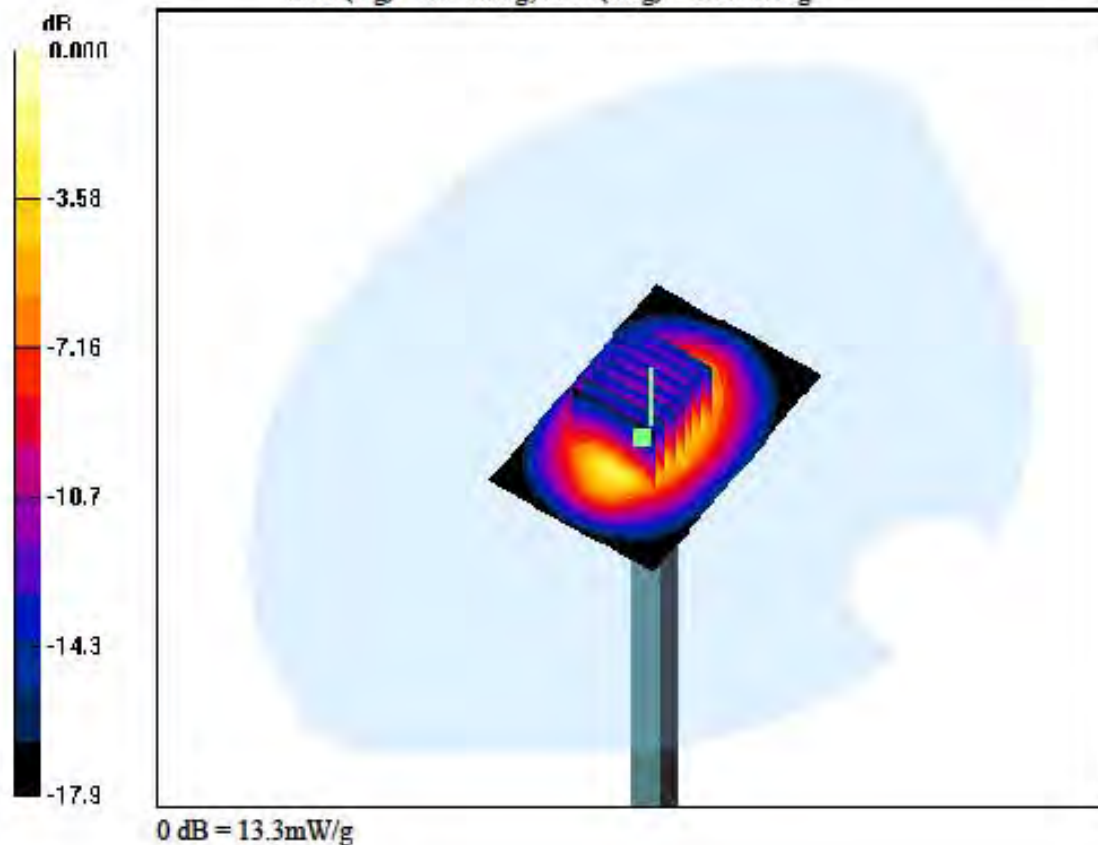

DIGITAL EMC CO., LTD**DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d029**

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1900 \text{ MHz}$; $\sigma = 1.56 \text{ mho/m}$; $\epsilon_r = 51.4$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(7.34, 7.34, 7.34); Calibrated: 2012-01-27; Electronics: DAE3 Sn519

Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186


Test Date: 2012-06-04; Ambient Temp: 21.9; Tissue Temp: 22.1

Dipole Validation**Area Scan (61x91x1):** Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$ **Zoom Scan (7x7x7)/Cube 0:** Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Power Drift = 0.031 dB

Peak SAR (extrapolated) = 19.1 W/kg

SAR(1 g) = 10 W/kg; SAR(10 g) = 5.15 W/kg

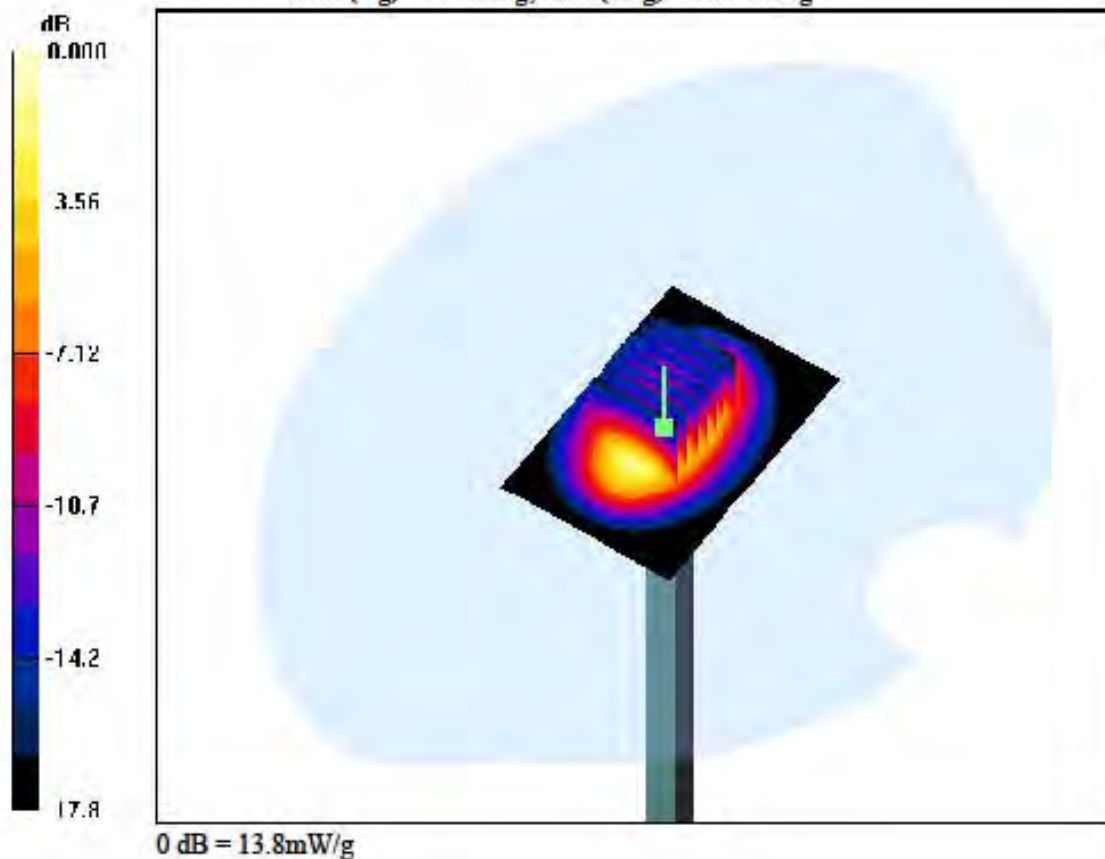

DIGITAL EMC CO., LTD**DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN:726**

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2450 \text{ MHz}$; $\sigma = 1.84 \text{ mho/m}$; $\epsilon_r = 38.6$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(7.12, 7.12, 7.12); Calibrated: 2012-01-27; Electronics: DAE3 Sn519

Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186


Test Date: 2012-06-05; Ambient Temp: 22.0; Tissue Temp: 22.4

Dipole Validation**Area Scan (51x101x1):** Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ **Zoom Scan (7x7x7)/Cube 0:** Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Power Drift = 0.042 dB

Peak SAR (extrapolated) = 28.8 W/kg

SAR(1 g) = 13.1 W/kg; SAR(10 g) = 5.95 W/kg

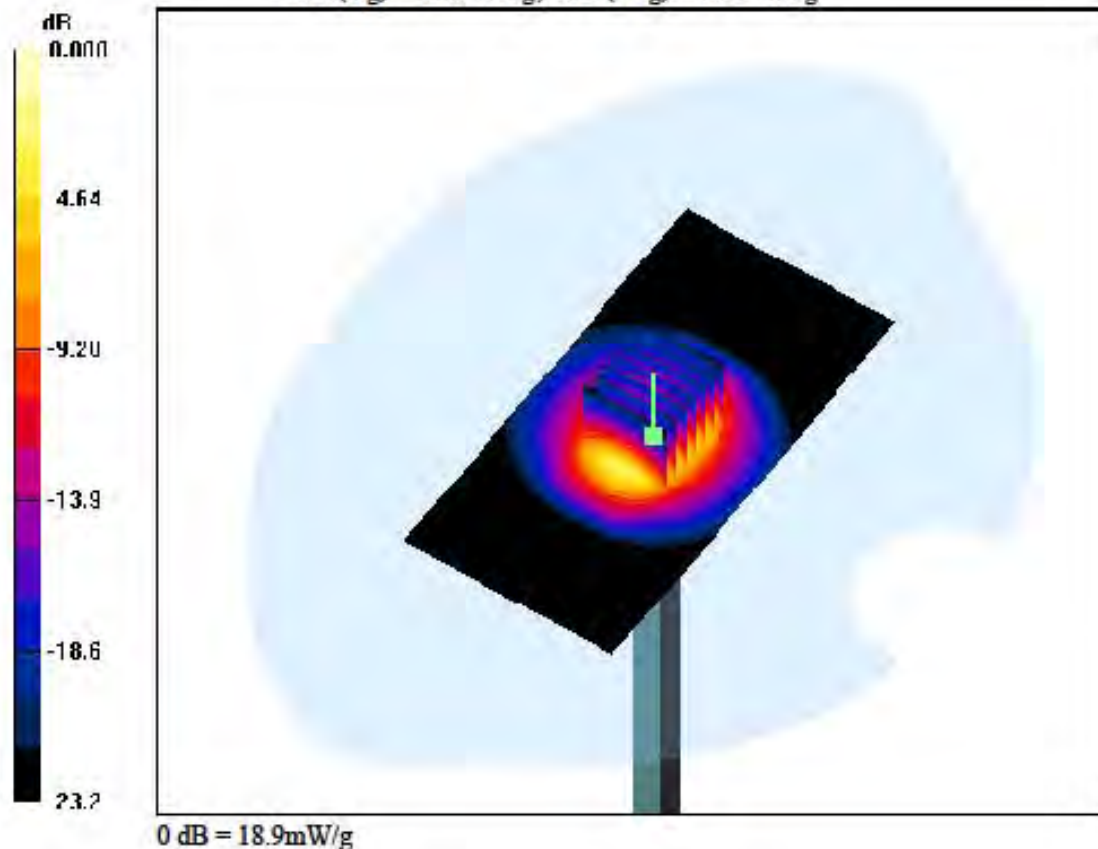

DIGITAL EMC CO., LTD**DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN:726**

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2450$ MHz; $\sigma = 2$ mho/m; $\epsilon_r = 53.1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(6.95, 6.95, 6.95); Calibrated: 2012-01-27; Electronics: DAE3 Sn519

Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186


Test Date: 2012-06-05; Ambient Temp: 22.0; Tissue Temp: 22.4

Dipole Validation**Area Scan (51x71x1):** Measurement grid: $dx=15$ mm, $dy=15$ mm**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Power Drift = -0.037 dB

Peak SAR (extrapolated) = 27.3 W/kg

SAR(1 g) = 12.8 W/kg; SAR(10 g) = 5.88 W/kg

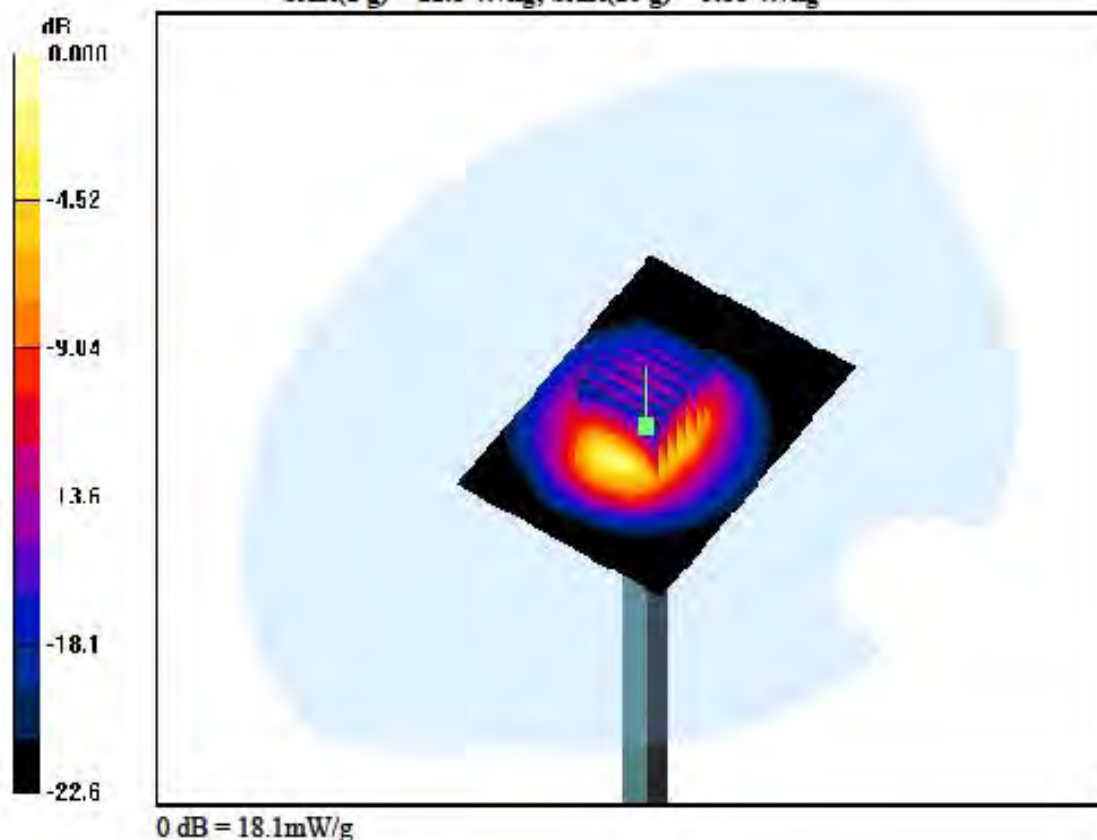

Attachment 2. – SAR Test Plots

DIGITAL EMC CO., LTD**DUT: LG-T385b; Type: Bar**

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 836.6 \text{ MHz}$; $\sigma = 0.899 \text{ mho/m}$; $\epsilon_r = 41.3$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(8.94, 8.94, 8.94); Calibrated: 2012-01-27; Electronics: DAE3 Sn519

Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2012-06-01; Ambient Temp: 22.1; Tissue Temp: 22.3

Left Touch, GSM850 Ch. 190, Ant Internal, Standard Battery**Area Scan (71x101x1):** Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ **Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = -0.095 dB

Peak SAR (extrapolated) = 0.538 W/kg

SAR(1 g) = 0.389 W/kg; SAR(10 g) = 0.279 W/kg



DIGITAL EMC CO., LTD**DUT: LG-T385b; Type: Bar**

Communication System: GSM 850; Frequency: 824.2 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 824.2 \text{ MHz}$; $\sigma = 0.877 \text{ mho/m}$; $\epsilon_r = 41$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(8.94, 8.94, 8.94); Calibrated: 2012-01-27; Electronics: DAE3 Sn519

Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186


Test Date: 2012-06-01; Ambient Temp: 22.1; Tissue Temp: 22.3

Right Touch, GSM850 Ch. 128, Ant Internal, Standard Battery**Area Scan (71x101x1):** Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ **Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = -0.153 dB

Peak SAR (extrapolated) = 0.392 W/kg

SAR(1 g) = 0.313 W/kg; SAR(10 g) = 0.234 W/kg

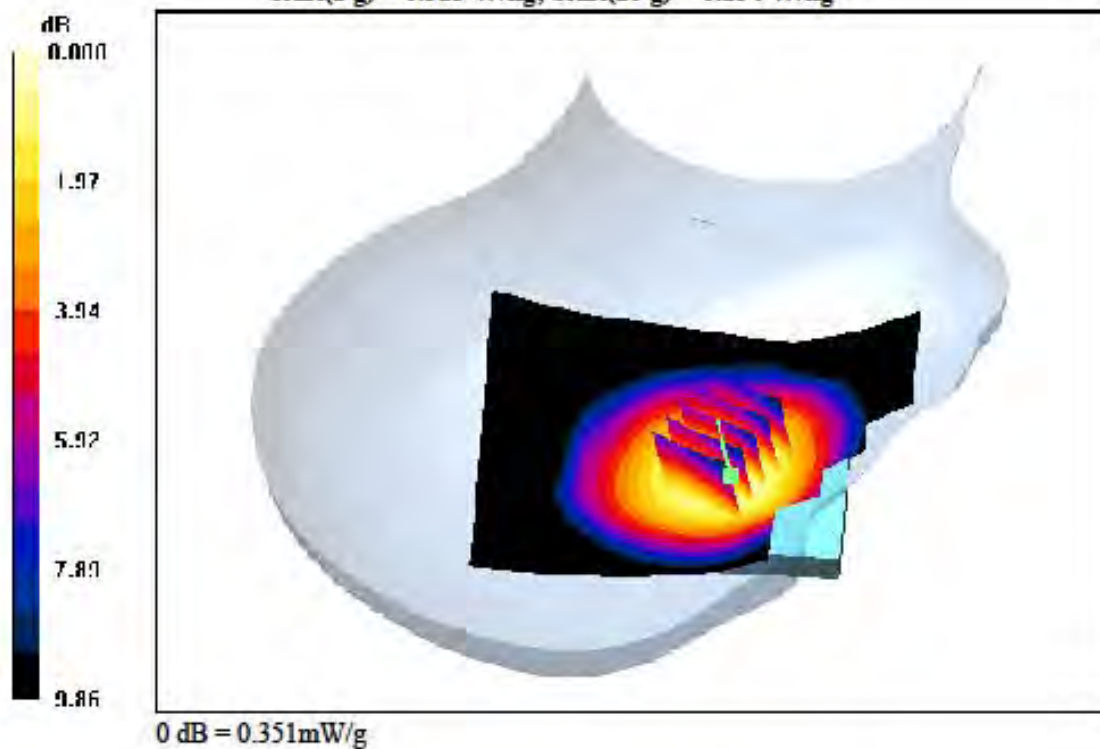

DIGITAL EMC CO., LTD**DUT: LG-T385b; Type: Bar**

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 836.6 \text{ MHz}$; $\sigma = 0.899 \text{ mho/m}$; $\epsilon_r = 41.3$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(8.94, 8.94, 8.94); Calibrated: 2012-01-27; Electronics: DAE3 Sn519

Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186


Test Date: 2012-06-01; Ambient Temp: 22.1; Tissue Temp: 22.3

Right Touch, GSM850 Ch. 190, Ant Internal, Standard Battery**Area Scan (71x101x1):** Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ **Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = 0.013 dB

Peak SAR (extrapolated) = 0.548 W/kg

SAR(1 g) = 0.442 W/kg; SAR(10 g) = 0.328 W/kg

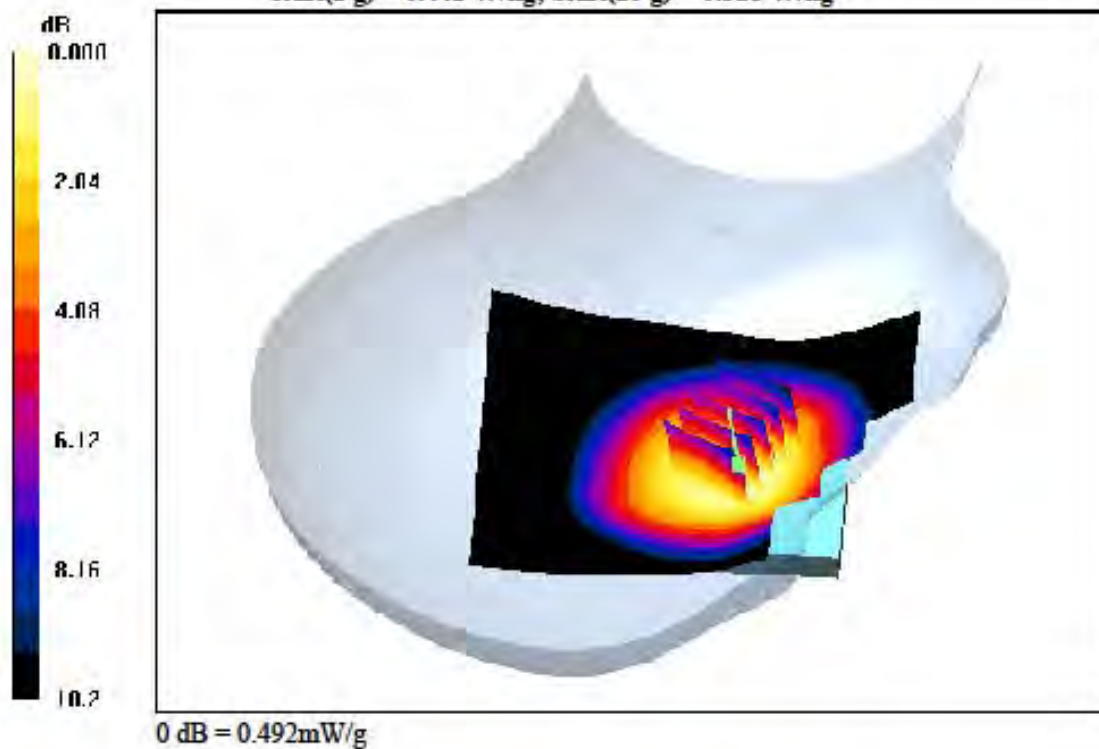

DIGITAL EMC CO., LTD**DUT: LG-T385b; Type: Bar**

Communication System: GSM 850; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 848.8 \text{ MHz}$; $\sigma = 0.927 \text{ mho/m}$; $\epsilon_r = 41.9$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(8.94, 8.94, 8.94); Calibrated: 2012-01-27; Electronics: DAE3 Sn519

Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186


Test Date: 2012-06-01; Ambient Temp: 22.1; Tissue Temp: 22.3

Right Touch, GSM850 Ch. 251, Ant Internal, Standard Battery**Area Scan (71x101x1):** Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ **Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = 0.033 dB

Peak SAR (extrapolated) = 0.417 W/kg

SAR(1 g) = 0.334 W/kg; SAR(10 g) = 0.250 W/kg

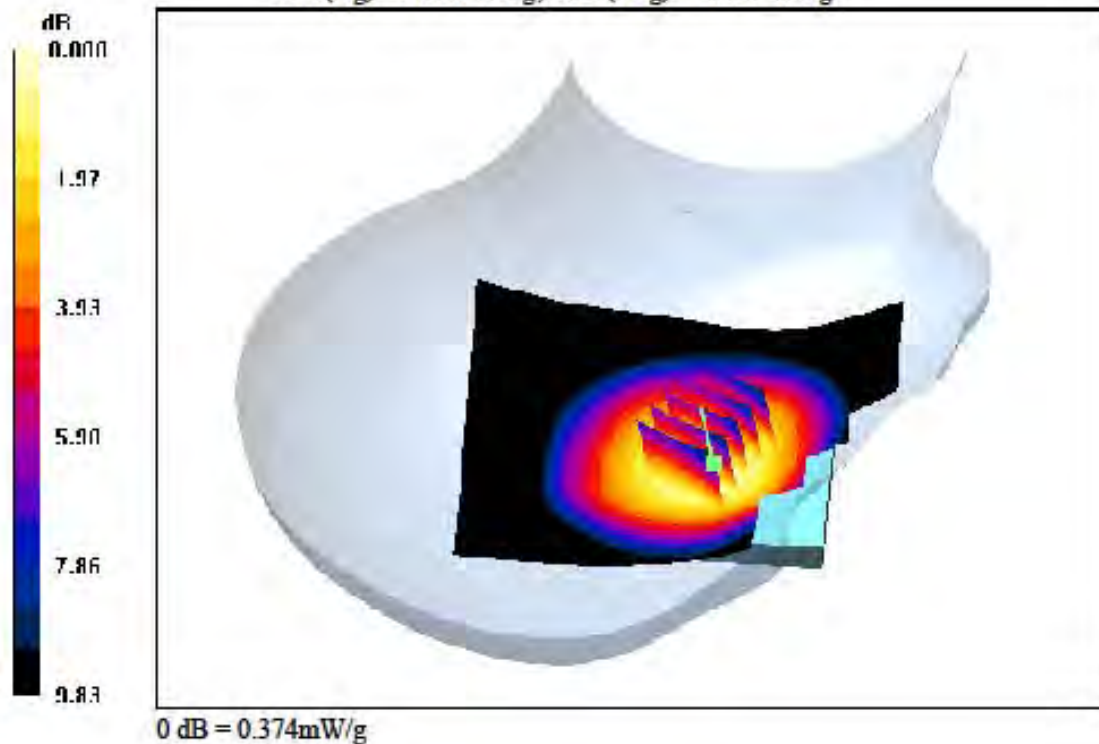

DIGITAL EMC CO., LTD**DUT: LG-T385b; Type: Bar**

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 836.6 \text{ MHz}$; $\sigma = 0.899 \text{ mho/m}$; $\epsilon_r = 41.3$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(8.94, 8.94, 8.94); Calibrated: 2012-01-27; Electronics: DAE3 Sn519

Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2012-06-01; Ambient Temp: 22.1; Tissue Temp: 22.3

Left Tilt, GSM850 Ch. 190, Ant Internal, Standard Battery**Area Scan (71x101x1):** Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ **Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = 0.109 dB

Peak SAR (extrapolated) = 0.314 W/kg

SAR(1 g) = 0.244 W/kg; SAR(10 g) = 0.185 W/kg



DIGITAL EMC CO., LTD**DUT: LG-T385b; Type: Bar**

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 836.6 \text{ MHz}$; $\sigma = 0.899 \text{ mho/m}$; $\epsilon_r = 41.3$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(8.94, 8.94, 8.94); Calibrated: 2012-01-27; Electronics: DAE3 Sn519

Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2012-06-01; Ambient Temp: 22.1; Tissue Temp: 22.3

Right Tilt, GSM850 Ch. 190, Ant Internal, Standard Battery**Area Scan (71x101x1):** Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ **Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = -0.138 dB

Peak SAR (extrapolated) = 0.288 W/kg

SAR(1 g) = 0.232 W/kg; SAR(10 g) = 0.176 W/kg



DIGITAL EMC CO., LTD**DUT: LG-T385b; Type: Bar**

Communication System: PCS1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3
Medium parameters used: $f = 1850.2$ MHz; $\sigma = 1.42$ mho/m; $\epsilon_r = 40.1$; $\rho = 1000$ kg/m³
Phantom section: Left Section


DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(7.97, 7.97, 7.97); Calibrated: 2012-01-27; Electronics: DAE3 Sn519
Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2012-06-04; Ambient Temp: 21.9; Tissue Temp: 22.1

Left Touch, PCS1900 Ch. 512, Ant Internal, Standard Battery

Area Scan (71x101x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Power Drift = -0.001 dB
Peak SAR (extrapolated) = 1.53 W/kg
SAR(1 g) = 0.985 W/kg; SAR(10 g) = 0.563 W/kg

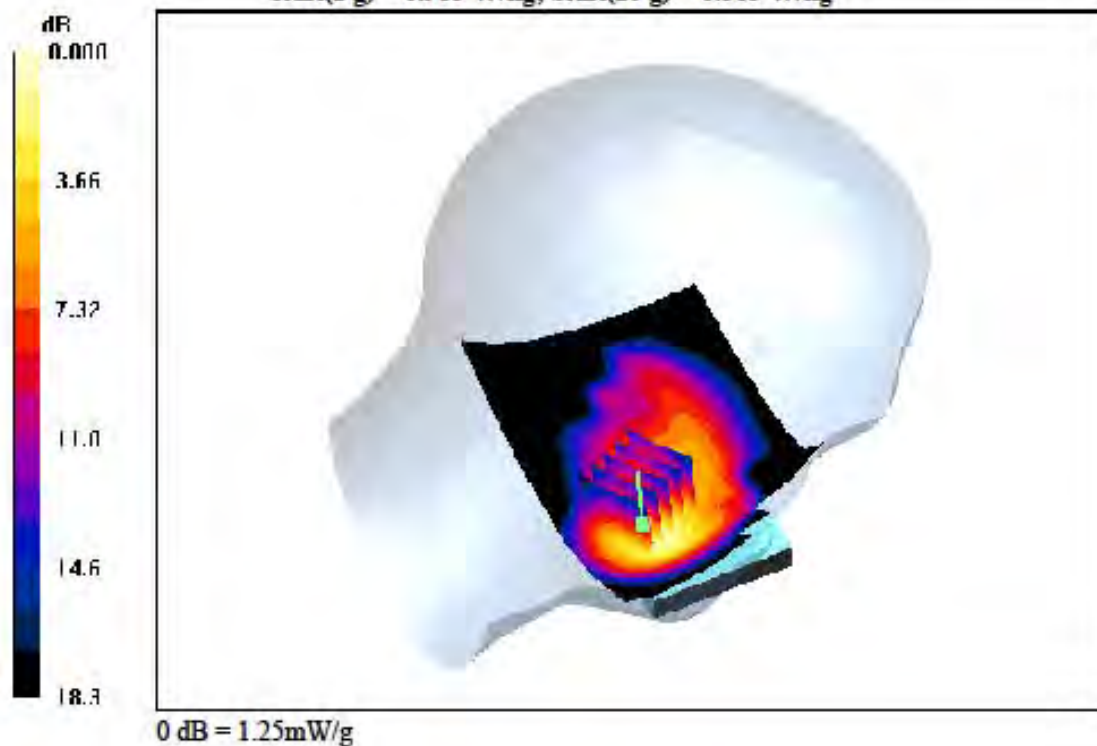

DIGITAL EMC CO., LTD**DUT: LG-T385b; Type: Bar**

Communication System: PCS1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3
Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.36 \text{ mho/m}$; $\epsilon_r = 40.1$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Left Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(7.97, 7.97, 7.97); Calibrated: 2012-01-27; Electronics: DAE3 Sn519
Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2012-06-04; Ambient Temp: 21.9; Tissue Temp: 22.1

Left Touch, PCS1900 Ch. 661, Ant Internal, Standard Battery

Area Scan (71x101x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Power Drift = -0.001 dB
Peak SAR (extrapolated) = 1.52 W/kg
SAR(1 g) = 0.960 W/kg; SAR(10 g) = 0.545 W/kg



DIGITAL EMC CO., LTD**DUT: LG-T385b; Type: Bar**

Communication System: PCS1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3
Medium parameters used: $f = 1909.8 \text{ MHz}$; $\sigma = 1.39 \text{ mho/m}$; $\epsilon_r = 39.7$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Left Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(7.97, 7.97, 7.97); Calibrated: 2012-01-27; Electronics: DAE3 Sn519
Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2012-06-04; Ambient Temp: 21.9; Tissue Temp: 22.1

Left Touch, PCS1900 Ch. 810, Ant Internal, Standard Battery


Area Scan (71x101x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = 0.026 dB

Peak SAR (extrapolated) = 1.56 W/kg

SAR(1 g) = 0.975 W/kg; SAR(10 g) = 0.544 W/kg

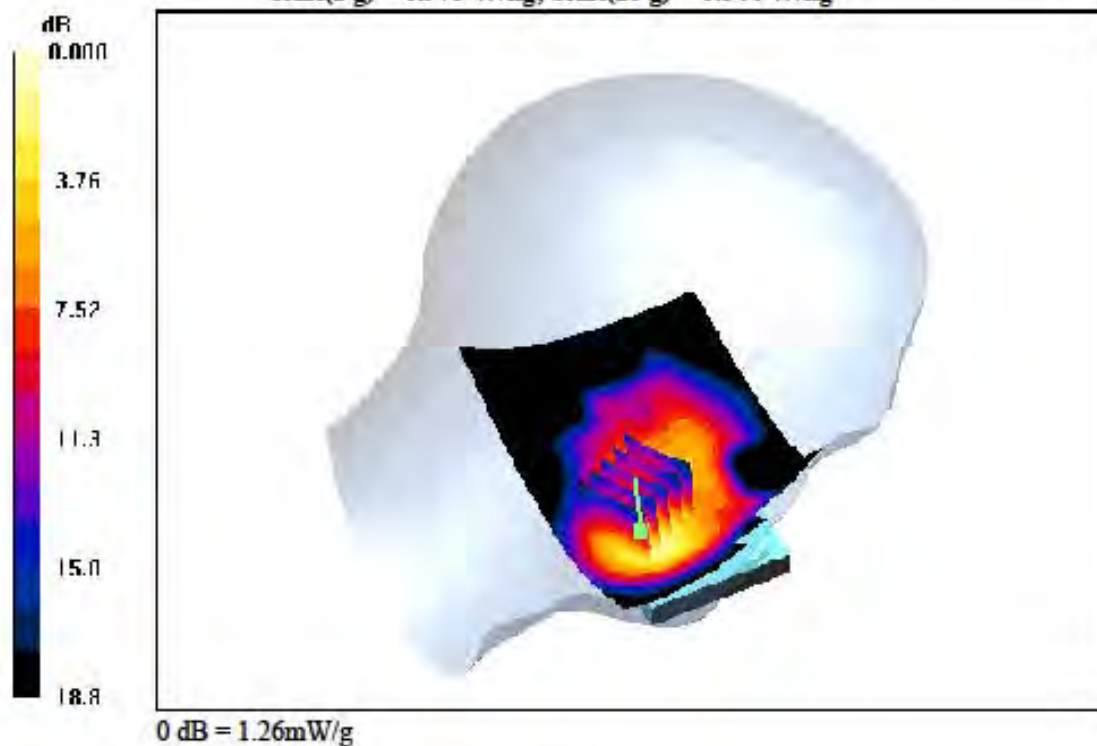

DIGITAL EMC CO., LTD**DUT: LG-T385b; Type: Bar**

Communication System: PCS1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.36 \text{ mho/m}$; $\epsilon_r = 40.1$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(7.97, 7.97, 7.97); Calibrated: 2012-01-27; Electronics: DAE3 Sn519

Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186


Test Date: 2012-06-04; Ambient Temp: 21.9; Tissue Temp: 22.1

Right Touch, PCS1900 Ch. 661, Ant Internal, Standard Battery**Area Scan (71x101x1):** Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ **Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = 0.099 dB

Peak SAR (extrapolated) = 0.742 W/kg

SAR(1 g) = 0.494 W/kg; SAR(10 g) = 0.312 W/kg

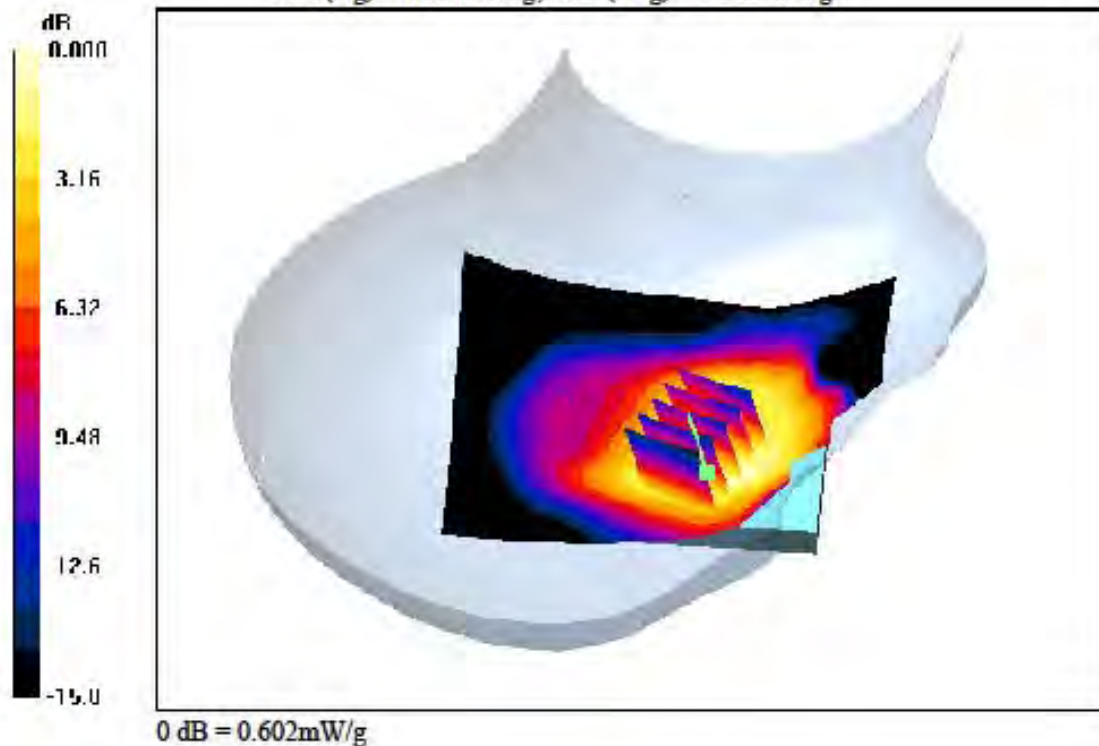

DIGITAL EMC CO., LTD**DUT: LG-T385b; Type: Bar**

Communication System: PCS1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3
Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.36 \text{ mho/m}$; $\epsilon_r = 40.1$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Left Section


DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(7.97, 7.97, 7.97); Calibrated: 2012-01-27; Electronics: DAE3 Sn519
Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2012-06-04; Ambient Temp: 21.9; Tissue Temp: 22.1

Left Tilt, PCS1900 Ch. 661, Ant Internal, Standard Battery

Area Scan (71x101x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Power Drift = 0.120 dB
Peak SAR (extrapolated) = 0.216 W/kg
SAR(1 g) = 0.147 W/kg; SAR(10 g) = 0.096 W/kg

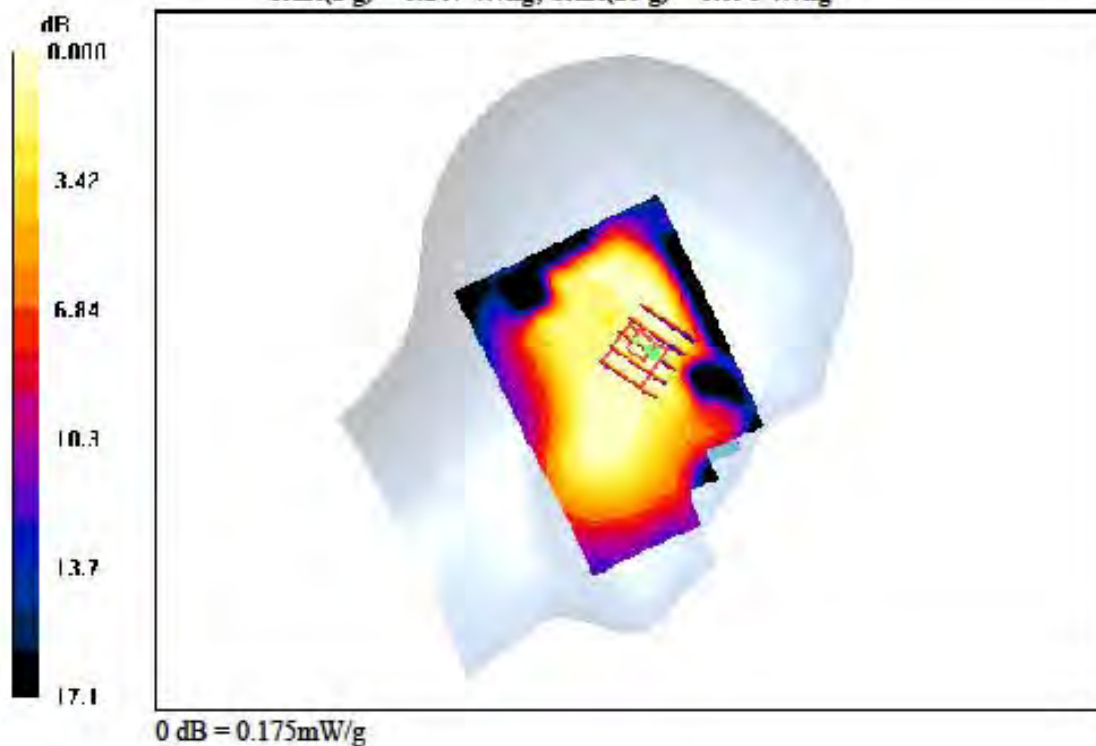

DIGITAL EMC CO., LTD**DUT: LG-T385b; Type: Bar**

Communication System: PCS1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3
Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.36 \text{ mho/m}$; $\epsilon_r = 40.1$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Right Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(7.97, 7.97, 7.97); Calibrated: 2012-01-27; Electronics: DAE3 Sn519
Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2012-06-04; Ambient Temp: 21.9; Tissue Temp: 22.1

Right Tilt, PCS1900 Ch. 661, Ant Internal, Standard Battery


Area Scan (71x101x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = -0.125 dB

Peak SAR (extrapolated) = 0.192 W/kg

SAR(1 g) = 0.121 W/kg; SAR(10 g) = 0.081 W/kg

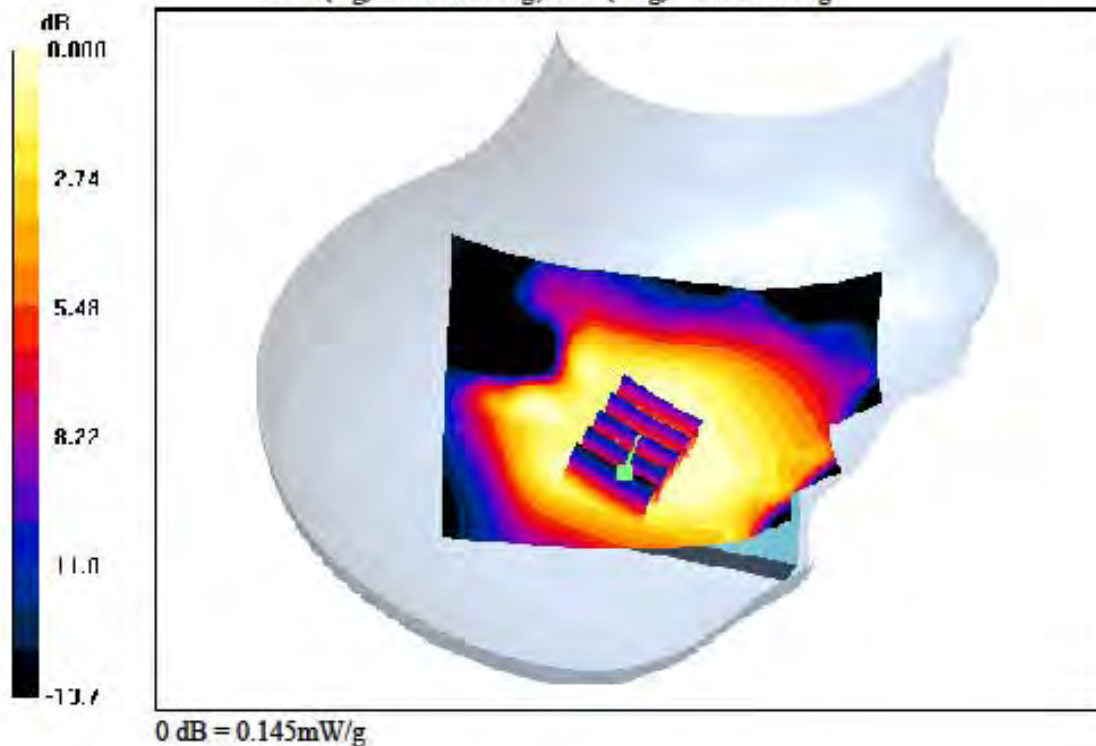

DIGITAL EMC CO., LTD**DUT: LG-T385b; Type: Bar**

Communication System: W-LAN; Frequency: 2462 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2462 \text{ MHz}$; $\sigma = 1.86 \text{ mho/m}$; $\epsilon_r = 38.4$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Left Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(7.12, 7.12, 7.12); Calibrated: 2012-01-27; Electronics: DAE3 Sn519
Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186


Test Date: 2012-06-05; Ambient Temp: 22.0; Tissue Temp: 22.4

Left Touch, W-LAN(802.11b) Ch. 11, Ant Internal, Standard Battery**Area Scan (81x101x1):** Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ **Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = 0.065 dB

Peak SAR (extrapolated) = 0.208 W/kg

SAR(1 g) = 0.113 W/kg; SAR(10 g) = 0.060 W/kg

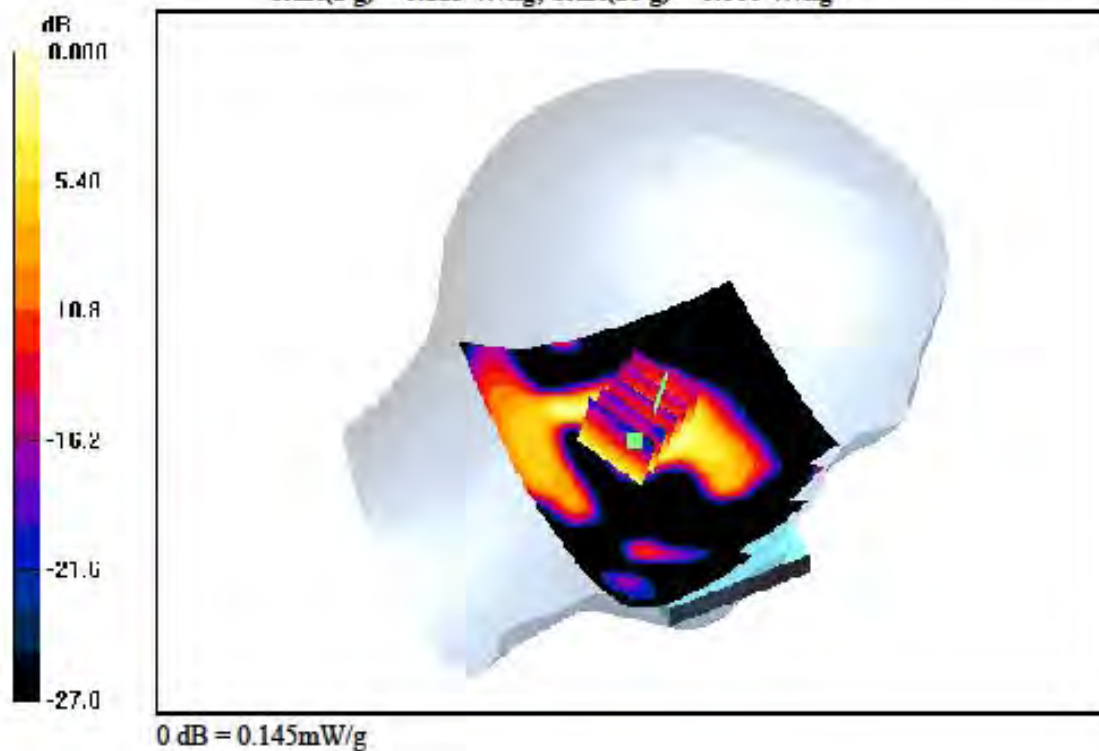

DIGITAL EMC CO., LTD**DUT: LG-T385b; Type: Bar**

Communication System: W-LAN; Frequency: 2412 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2412 \text{ MHz}$; $\sigma = 1.81 \text{ mho/m}$; $\epsilon_r = 38.8$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Right Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(7.12, 7.12, 7.12); Calibrated: 2012-01-27; Electronics: DAE3 Sn519
Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186


Test Date: 2012-06-05; Ambient Temp: 22.0; Tissue Temp: 22.4

Right Touch, W-LAN(802.11b) Ch. 1, Ant Internal, Standard Battery**Area Scan (81x111x1):** Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ **Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = 0.146 dB

Peak SAR (extrapolated) = 0.556 W/kg

SAR(1 g) = 0.254 W/kg; SAR(10 g) = 0.129 W/kg

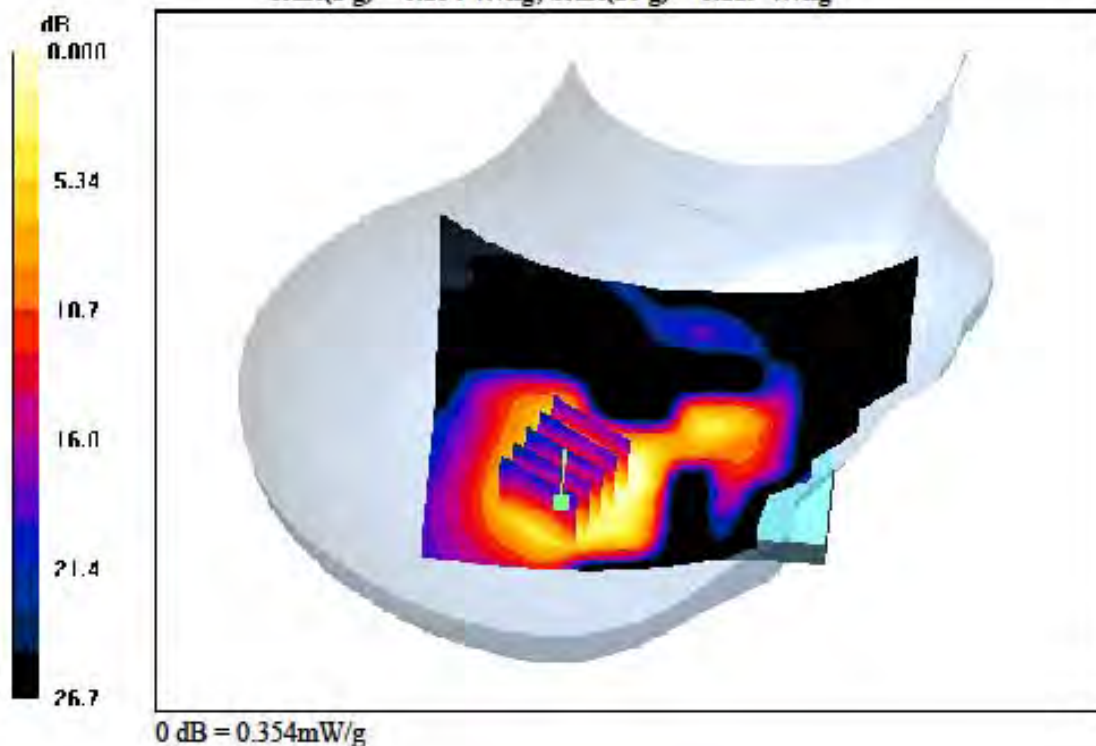

DIGITAL EMC CO., LTD**DUT: LG-T385b; Type: Bar**

Communication System: W-LAN; Frequency: 2437 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2437 \text{ MHz}$; $\sigma = 1.83 \text{ mho/m}$; $\epsilon_r = 38.6$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Right Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(7.12, 7.12, 7.12); Calibrated: 2012-01-27; Electronics: DAE3 Sn519
Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186


Test Date: 2012-06-05; Ambient Temp: 22.0; Tissue Temp: 22.4

Right Touch, W-LAN(802.11b) Ch. 6, Ant Internal, Standard Battery**Area Scan (81x111x1):** Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ **Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = 0.196 dB

Peak SAR (extrapolated) = 0.472 W/kg

SAR(1 g) = 0.221 W/kg; SAR(10 g) = 0.106 W/kg

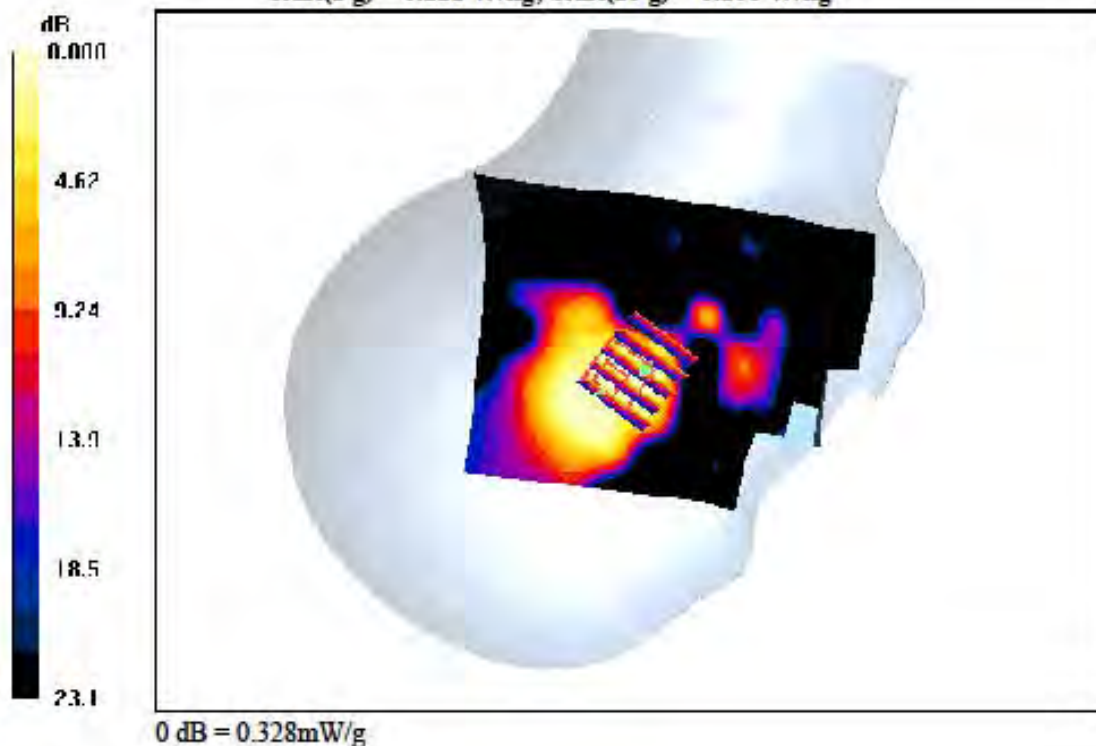

DIGITAL EMC CO., LTD**DUT: LG-T385b; Type: Bar**

Communication System: W-LAN; Frequency: 2462 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2462 \text{ MHz}$; $\sigma = 1.86 \text{ mho/m}$; $\epsilon_r = 38.4$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Right Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(7.12, 7.12, 7.12); Calibrated: 2012-01-27; Electronics: DAE3 Sn519
Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186


Test Date: 2012-06-05; Ambient Temp: 22.0; Tissue Temp: 22.4

Right Touch, W-LAN(802.11b) Ch. 11, Ant Internal, Standard Battery**Area Scan (81x111x1):** Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ **Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = -0.075 dB

Peak SAR (extrapolated) = 0.498 W/kg

SAR(1 g) = 0.222 W/kg; SAR(10 g) = 0.111 W/kg

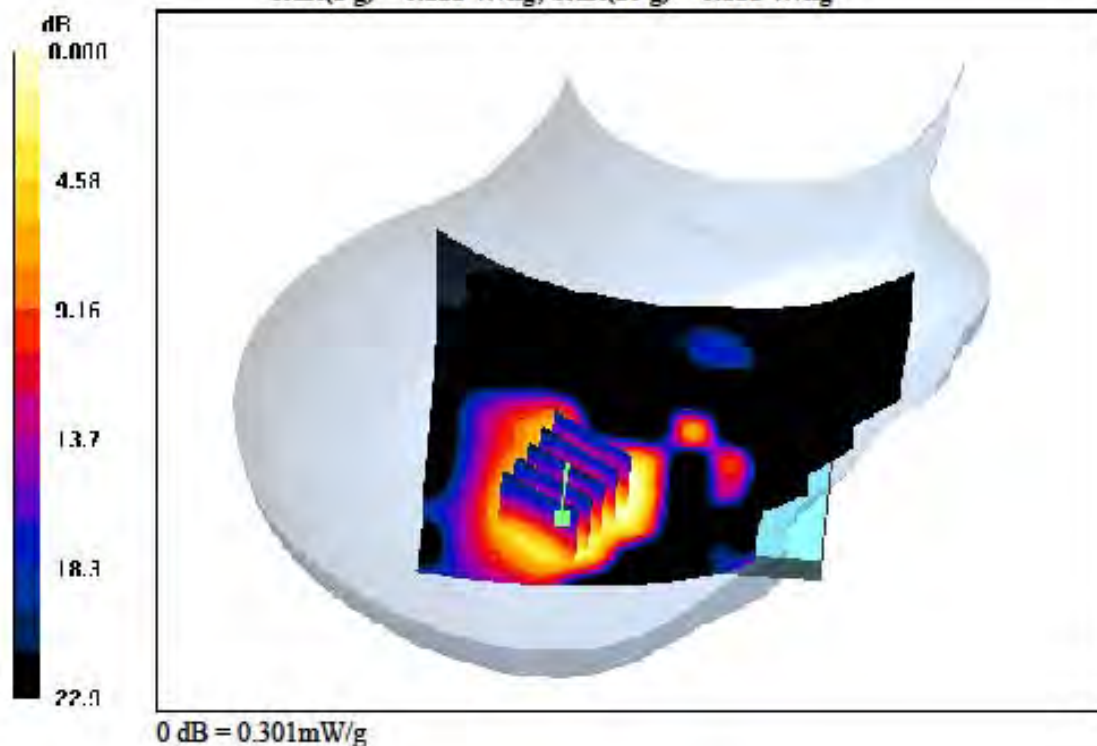

DIGITAL EMC CO., LTD**DUT: LG-T385b; Type: Bar**

Communication System: W-LAN; Frequency: 2462 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2462 \text{ MHz}$; $\sigma = 1.86 \text{ mho/m}$; $\epsilon_r = 38.4$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Left Section


DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(7.12, 7.12, 7.12); Calibrated: 2012-01-27; Electronics: DAE3 Sn519
Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2012-06-05; Ambient Temp: 22.0; Tissue Temp: 22.4

Left Tilt, W-LAN(802.11b) Ch. 11, Ant Internal, Standard Battery

Area Scan (81x111x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Power Drift = 0.023 dB
Peak SAR (extrapolated) = 0.149 W/kg
SAR(1 g) = 0.078 W/kg; SAR(10 g) = 0.040 W/kg

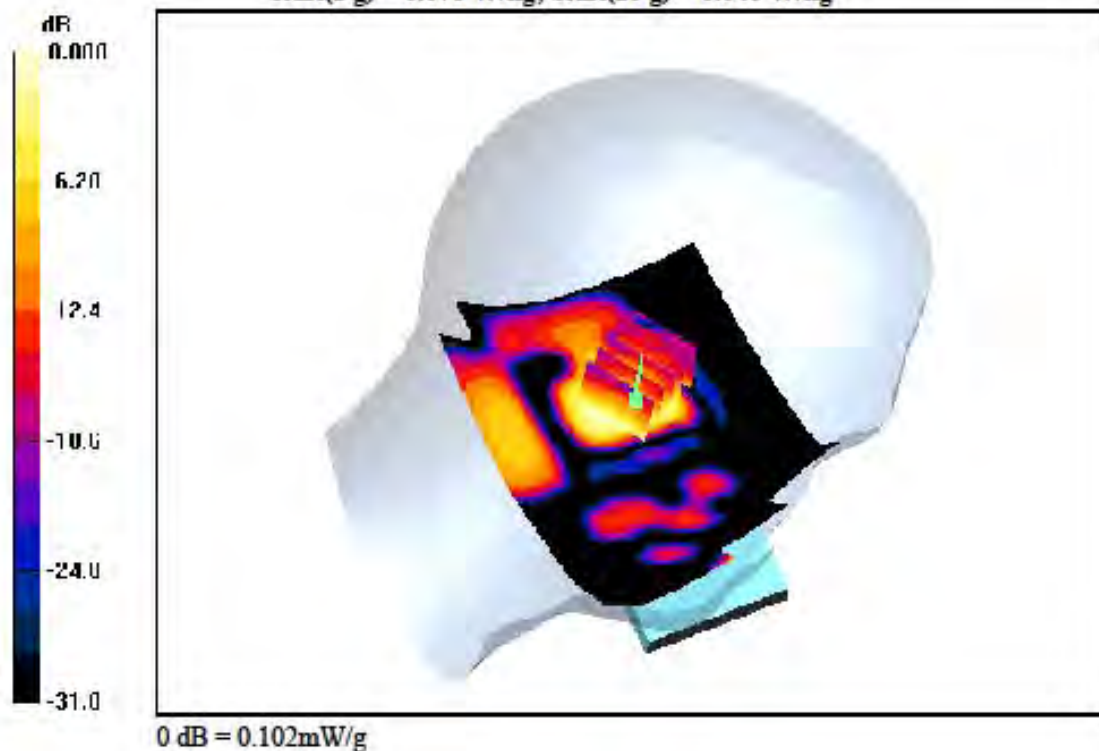

DIGITAL EMC CO., LTD**DUT: LG-T385b; Type: Bar**

Communication System: W-LAN; Frequency: 2462 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2462 \text{ MHz}$; $\sigma = 1.86 \text{ mho/m}$; $\epsilon_r = 38.4$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Right Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(7.12, 7.12, 7.12); Calibrated: 2012-01-27; Electronics: DAE3 Sn519
Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2012-06-05; Ambient Temp: 22.0; Tissue Temp: 22.4

Right Tilt, W-LAN(802.11b) Ch. 11, Ant Internal, Standard Battery


Area Scan (81x111x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = -0.093 dB

Peak SAR (extrapolated) = 0.257 W/kg

SAR(1 g) = 0.103 W/kg; SAR(10 g) = 0.048 W/kg

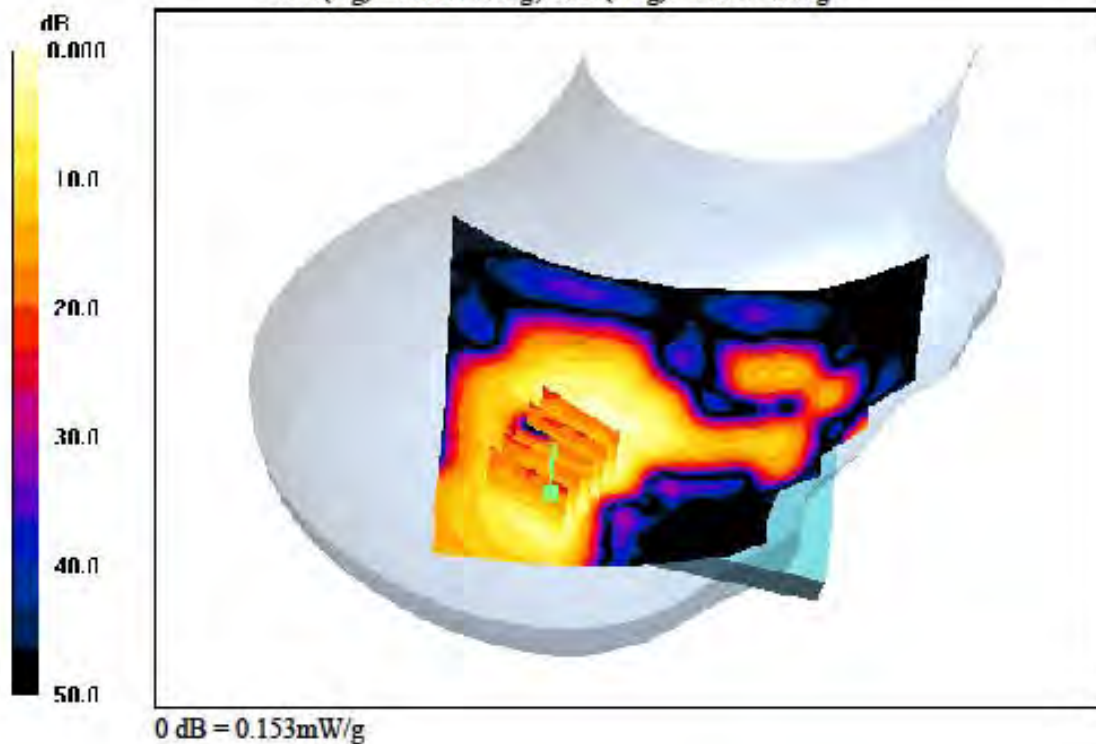

DIGITAL EMC CO., LTD**DUT: LG-T385b; Type: Bar**

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:4.15

Medium parameters used: $f = 836.6 \text{ MHz}$; $\sigma = 0.97 \text{ mho/m}$; $\epsilon_r = 53.4$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(9.12, 9.12, 9.12); Calibrated: 2012-01-27; Electronics: DAE3 Sn519

Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186


Test Date: 2012-06-01; Ambient Temp: 22.1; Tissue Temp: 22.3

1.5 cm space from Body, Front, GSM850 GPRS Class 10, Ch. 190, Ant Internal**Area Scan (71x111x1):** Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ **Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = -0.004 dB

Peak SAR (extrapolated) = 0.540 W/kg

SAR(1 g) = 0.407 W/kg; SAR(10 g) = 0.297 W/kg

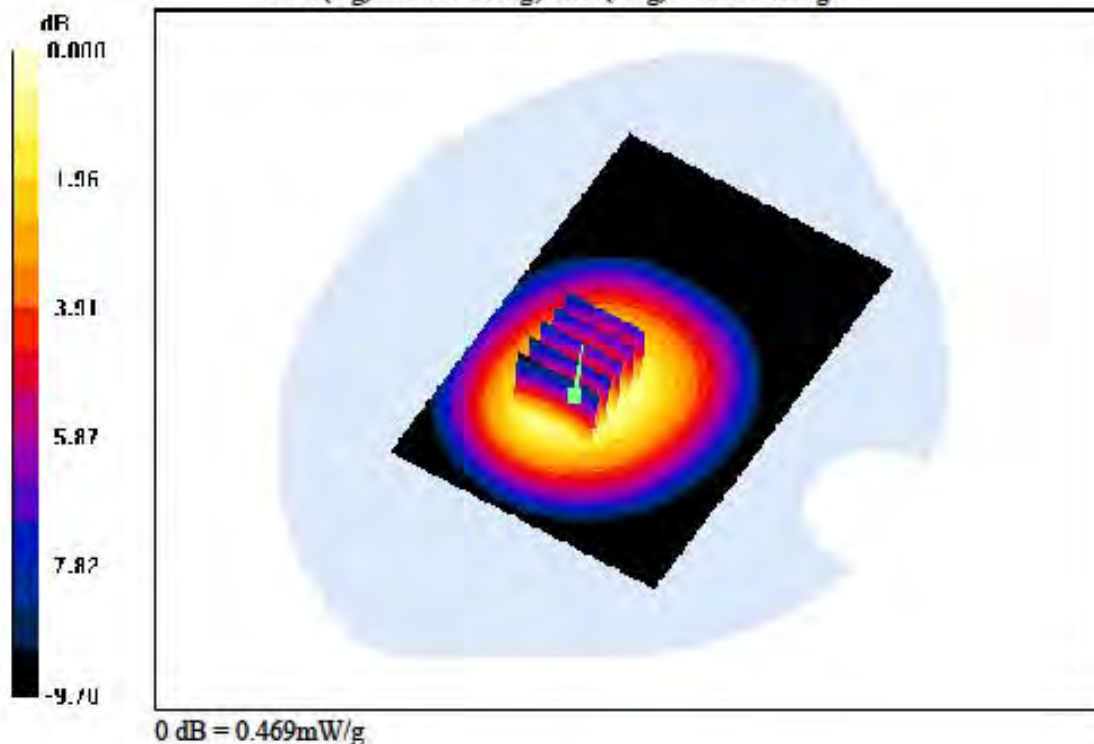

DIGITAL EMC CO., LTD**DUT: LG-T385b; Type: Bar**

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 836.6 \text{ MHz}$; $\sigma = 0.97 \text{ mho/m}$; $\epsilon_r = 53.4$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(9.12, 9.12, 9.12); Calibrated: 2012-01-27; Electronics: DAE3 Sn519

Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186


Test Date: 2012-06-01; Ambient Temp: 22.1; Tissue Temp: 22.3

1.5 cm space from Body, Rear, GSM850, Ch. 190, Ant Internal**Area Scan (71x111x1):** Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ **Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = -0.093 dB

Peak SAR (extrapolated) = 0.539 W/kg

SAR(1 g) = 0.399 W/kg; SAR(10 g) = 0.287 W/kg

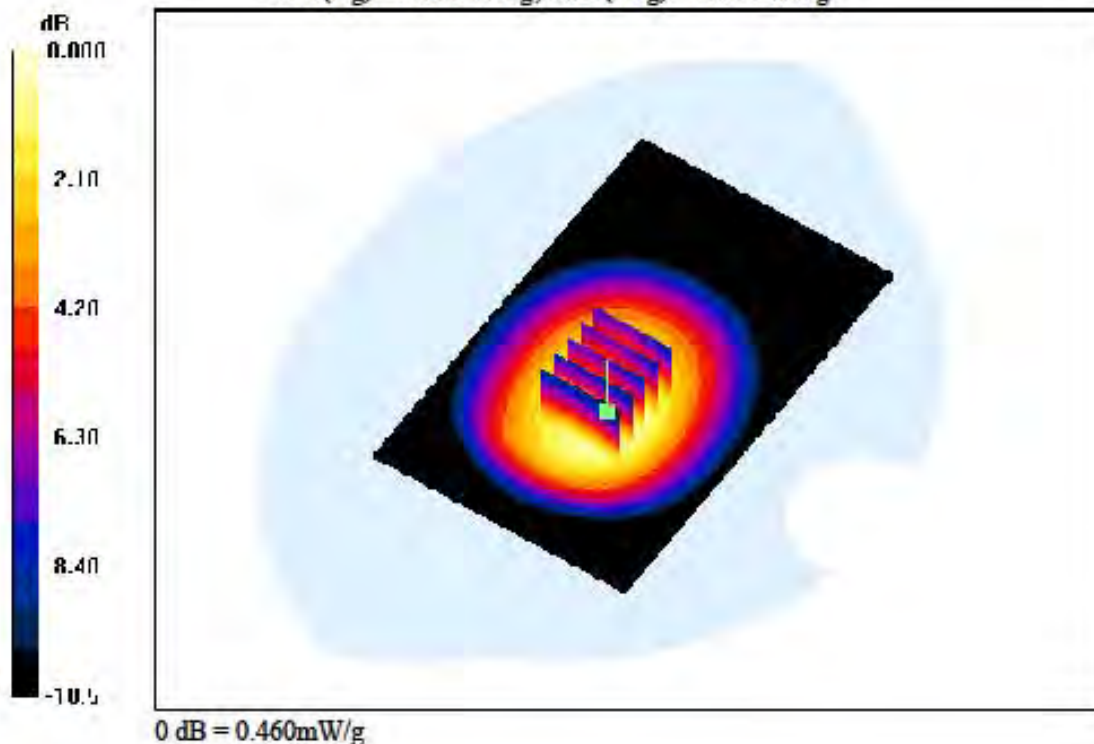

DIGITAL EMC CO., LTD**DUT: LG-T385b; Type: Bar**

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 836.6 \text{ MHz}$; $\sigma = 0.97 \text{ mho/m}$; $\epsilon_r = 53.4$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(9.12, 9.12, 9.12); Calibrated: 2012-01-27; Electronics: DAE3 Sn519

Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186


Test Date: 2012-06-01; Ambient Temp: 22.1; Tissue Temp: 22.3

1.5 cm space from Body, Rear, GSM850 GPRS Class 8, Ch. 190, Ant Internal**Area Scan (71x111x1):** Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ **Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = 0.029 dB

Peak SAR (extrapolated) = 0.505 W/kg

SAR(1 g) = 0.373 W/kg; SAR(10 g) = 0.268 W/kg

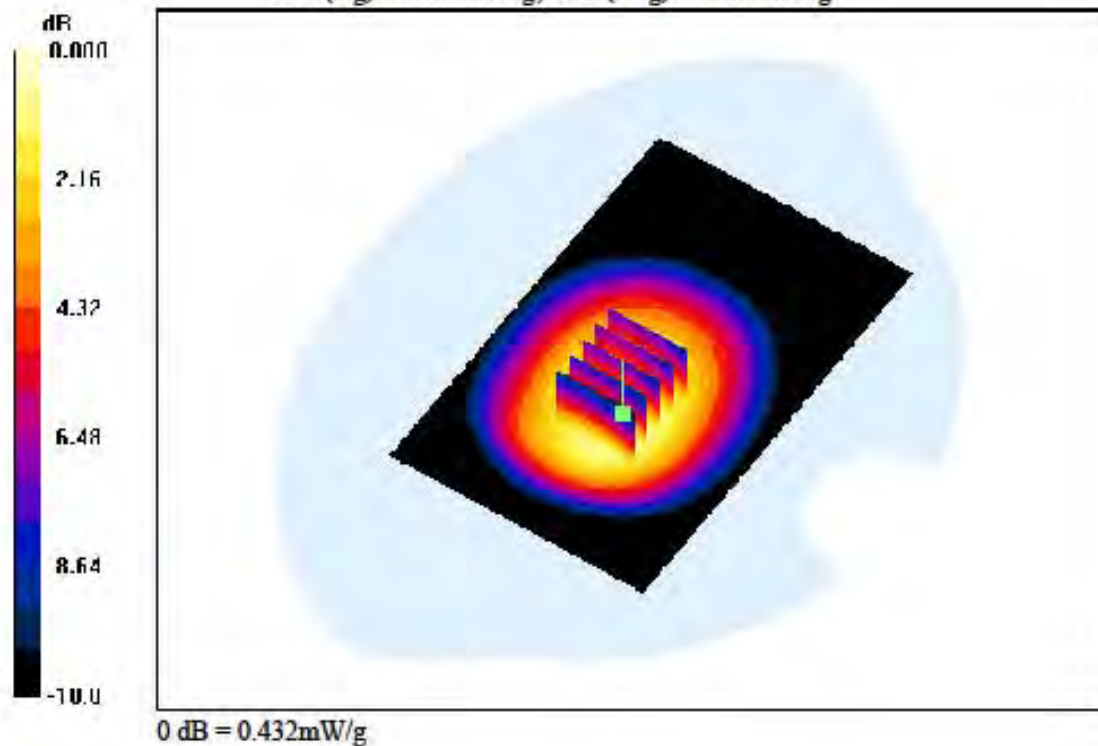

DIGITAL EMC CO., LTD**DUT: LG-T385b; Type: Bar**

Communication System: GSM 850; Frequency: 824.2 MHz; Duty Cycle: 1:4.15
Medium parameters used: $f = 824.2 \text{ MHz}$; $\sigma = 0.958 \text{ mho/m}$; $\epsilon_r = 53.5$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(9.12, 9.12, 9.12); Calibrated: 2012-01-27; Electronics: DAE3 Sn519
Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2012-06-01; Ambient Temp: 22.1; Tissue Temp: 22.3

1.5 cm space from Body, Rear, GSM850 GPRS Class 10, Ch. 128, Ant Internal


Area Scan (71x111x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = 0.036 dB

Peak SAR (extrapolated) = 0.645 W/kg

SAR(1 g) = 0.489 W/kg; SAR(10 g) = 0.342 W/kg

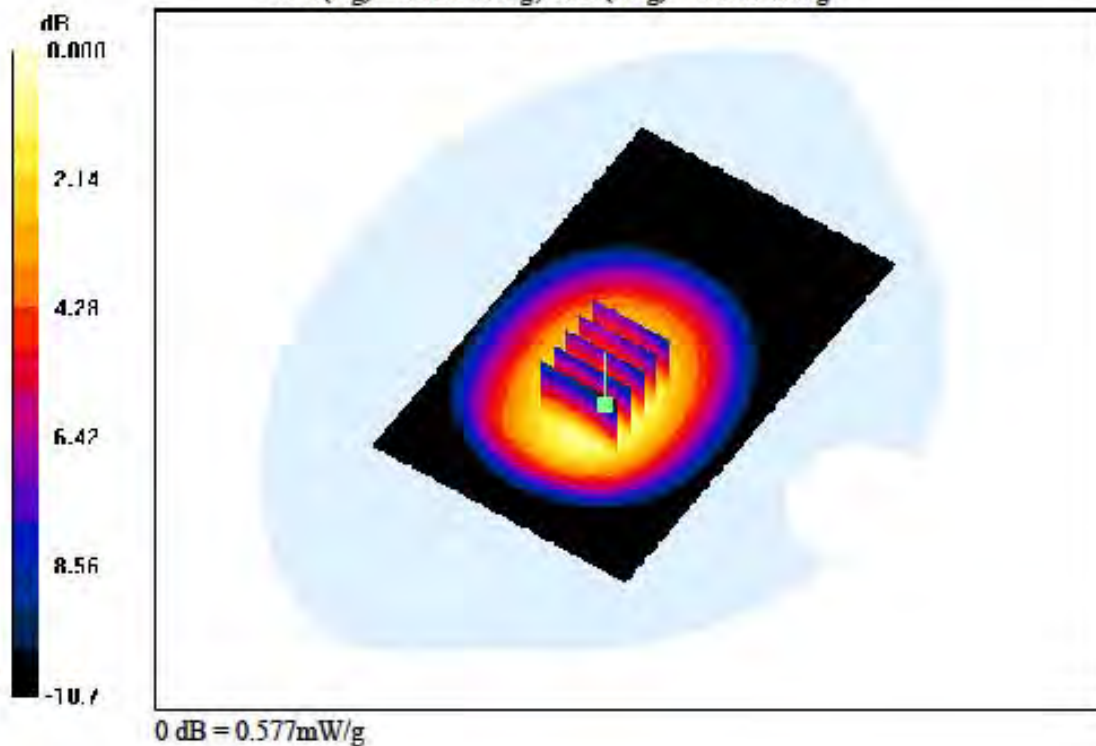

DIGITAL EMC CO., LTD**DUT: LG-T385b; Type: Bar**

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:4.15

Medium parameters used: $f = 836.6 \text{ MHz}$; $\sigma = 0.97 \text{ mho/m}$; $\epsilon_r = 53.4$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(9.12, 9.12, 9.12); Calibrated: 2012-01-27; Electronics: DAE3 Sn519

Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186


Test Date: 2012-06-01; Ambient Temp: 22.1; Tissue Temp: 22.3

1.5 cm space from Body, Rear, GSM850 GPRS Class 10, Ch. 190, Ant Internal**Area Scan (71x111x1):** Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ **Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = -0.015 dB

Peak SAR (extrapolated) = 1.14 W/kg

SAR(1 g) = 0.848 W/kg; SAR(10 g) = 0.608 W/kg

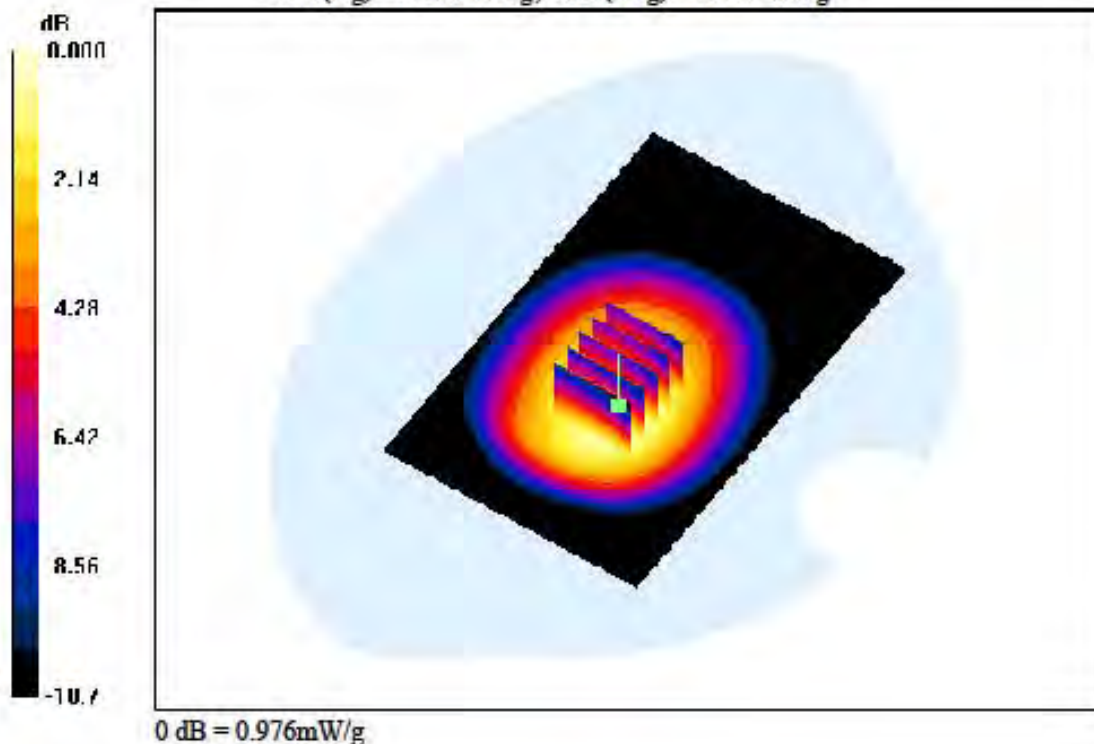

DIGITAL EMC CO., LTD**DUT: LG-T385b; Type: Bar**

Communication System: GSM 850; Frequency: 848.8 MHz; Duty Cycle: 1:4.15
Medium parameters used: $f = 848.8 \text{ MHz}$; $\sigma = 0.982 \text{ mho/m}$; $\epsilon_r = 53.3$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(9.12, 9.12, 9.12); Calibrated: 2012-01-27; Electronics: DAE3 Sn519
Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2012-06-01; Ambient Temp: 22.1; Tissue Temp: 22.3

1.5 cm space from Body, Rear, GSM850 GPRS Class 10, Ch. 251, Ant Internal


Area Scan (71x111x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = -0.106 dB

Peak SAR (extrapolated) = 1.05 W/kg

SAR(1 g) = 0.776 W/kg; SAR(10 g) = 0.557 W/kg

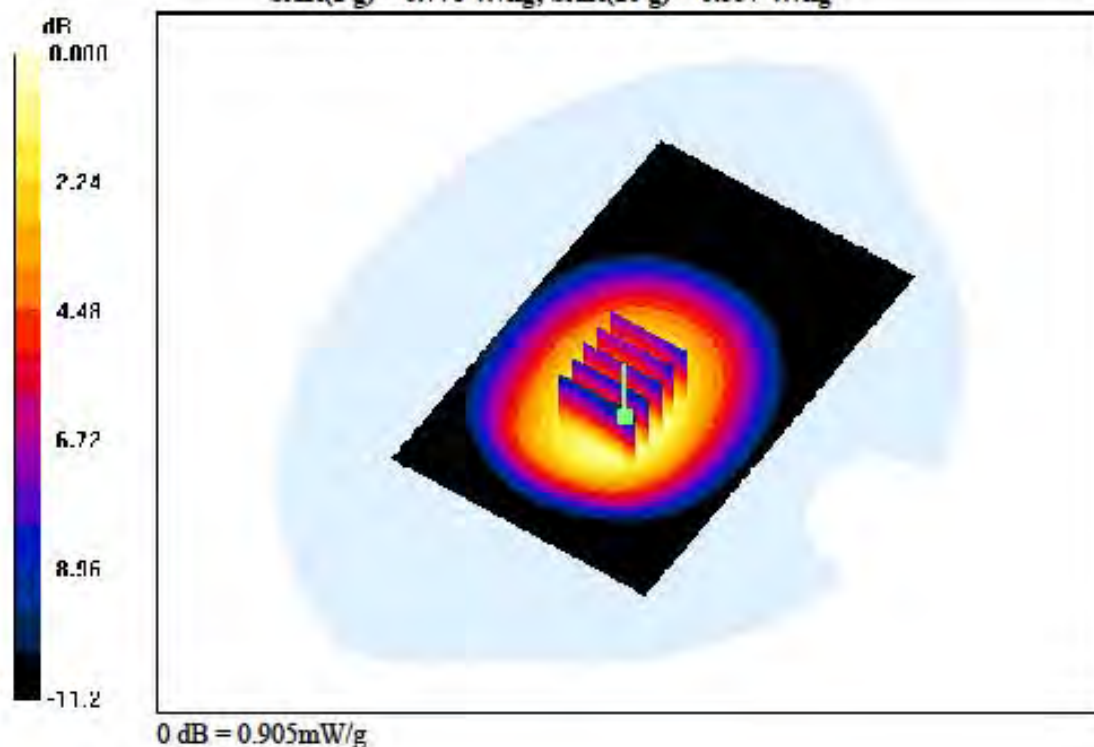

DIGITAL EMC CO., LTD**DUT: LG-T385b; Type: Bar**

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:2.77

Medium parameters used: $f = 836.6 \text{ MHz}$; $\sigma = 0.97 \text{ mho/m}$; $\epsilon_r = 53.4$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(9.12, 9.12, 9.12); Calibrated: 2012-01-27; Electronics: DAE3 Sn519

Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186


Test Date: 2012-06-01; Ambient Temp: 22.1; Tissue Temp: 22.3

1.5 cm space from Body, Rear, GSM850 GPRS Class 11, Ch. 190, Ant Internal**Area Scan (71x121x1):** Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ **Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = -0.018 dB

Peak SAR (extrapolated) = 1.59 W/kg

SAR(1 g) = 0.781 W/kg; SAR(10 g) = 0.553 W/kg

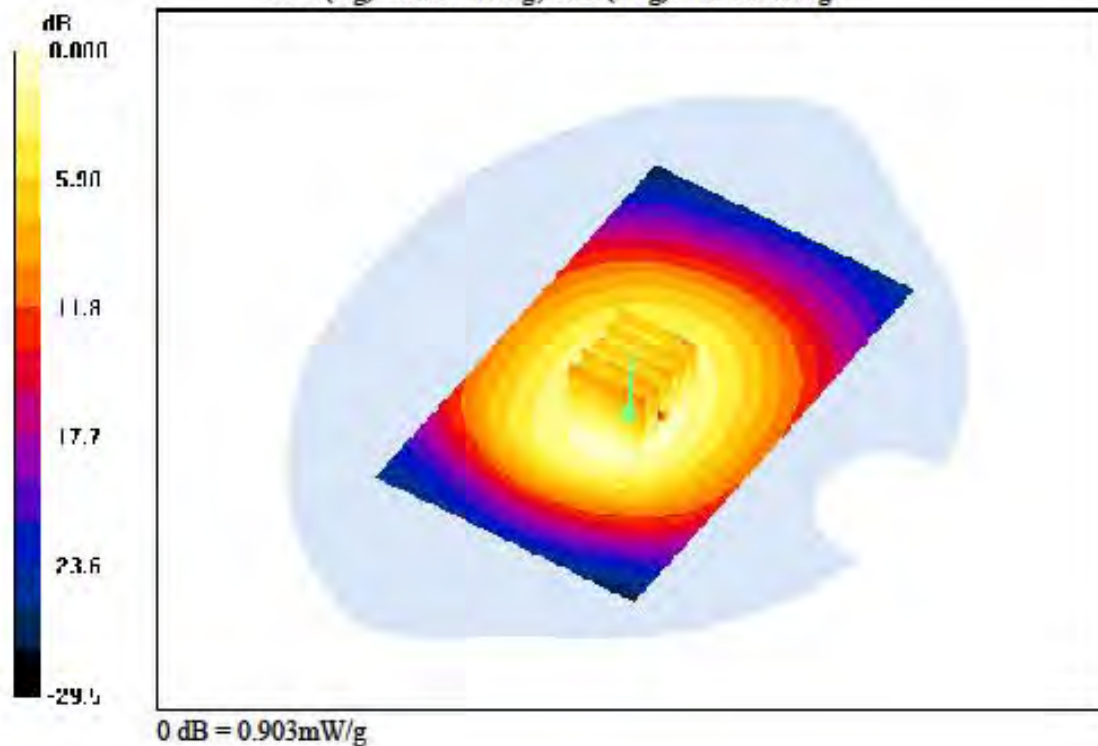

DIGITAL EMC CO., LTD**DUT: LG-T385b; Type: Bar**

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:2.075

Medium parameters used: $f = 836.6 \text{ MHz}$; $\sigma = 0.97 \text{ mho/m}$; $\epsilon_r = 53.4$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(9.12, 9.12, 9.12); Calibrated: 2012-01-27; Electronics: DAE3 Sn519

Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186


Test Date: 2012-06-01; Ambient Temp: 22.1; Tissue Temp: 22.3

1.5 cm space from Body, Rear, GSM850 GPRS Class 12, Ch. 190, Ant Internal**Area Scan (71x111x1):** Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ **Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = 0.152 dB

Peak SAR (extrapolated) = 0.870 W/kg

SAR(1 g) = 0.643 W/kg; SAR(10 g) = 0.455 W/kg

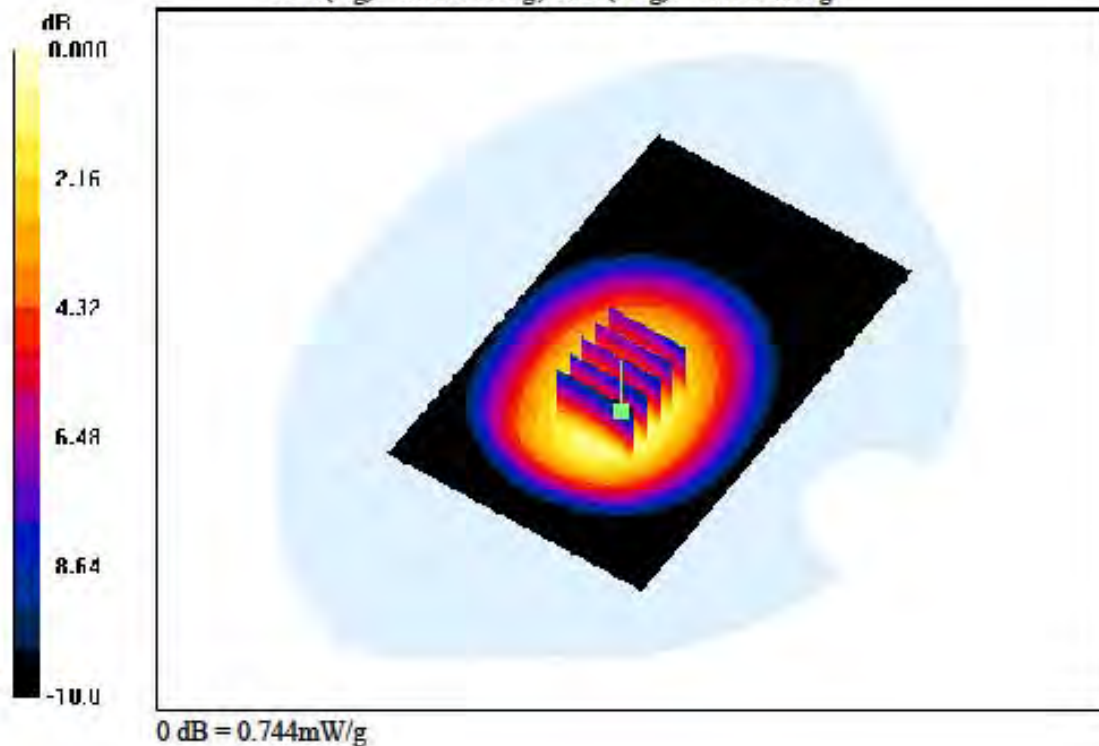

DIGITAL EMC CO., LTD**DUT: LG-T385b; Type: Bar**

Communication System: PCS1900; Frequency: 1880 MHz; Duty Cycle: 1:2.77

Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.54 \text{ mho/m}$; $\epsilon_r = 51.4$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(7.34, 7.34, 7.34); Calibrated: 2012-01-27; Electronics: DAE3 Sn519

Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186


Test Date: 2012-06-04; Ambient Temp: 21.9; Tissue Temp: 22.1

1.5 cm space from Body, Front, PCS1900 GPRS Class 11, Ch. 661, Ant Internal**Area Scan (71x121x1):** Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ **Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = -0.096 dB

Peak SAR (extrapolated) = 0.825 W/kg

SAR(1 g) = 0.513 W/kg; SAR(10 g) = 0.324 W/kg

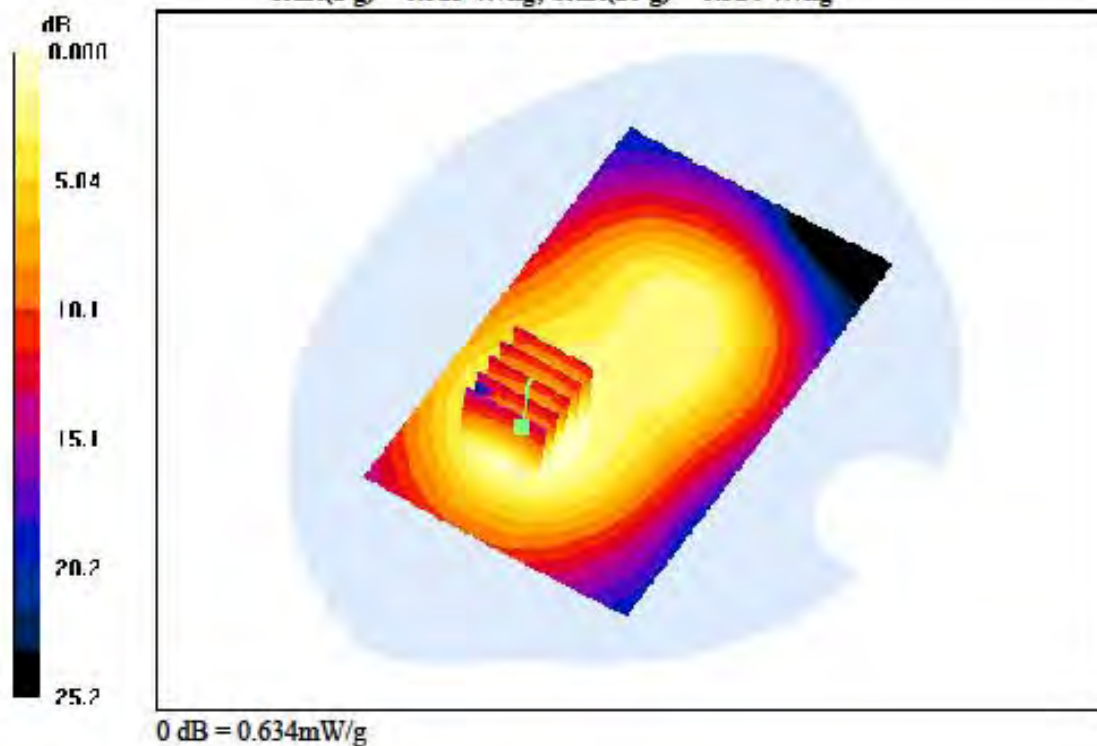

DIGITAL EMC CO., LTD**DUT: LG-T385b; Type: Bar**

Communication System: PCS1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.54 \text{ mho/m}$; $\epsilon_r = 51.4$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(7.34, 7.34, 7.34); Calibrated: 2012-01-27; Electronics: DAE3 Sn519

Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186


Test Date: 2012-06-04; Ambient Temp: 21.9; Tissue Temp: 22.1

1.5 cm space from Body, Rear, PCS1900, Ch. 661, Ant Internal**Area Scan (71x121x1):** Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ **Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = -0.054 dB

Peak SAR (extrapolated) = 0.859 W/kg

SAR(1 g) = 0.497 W/kg; SAR(10 g) = 0.285 W/kg

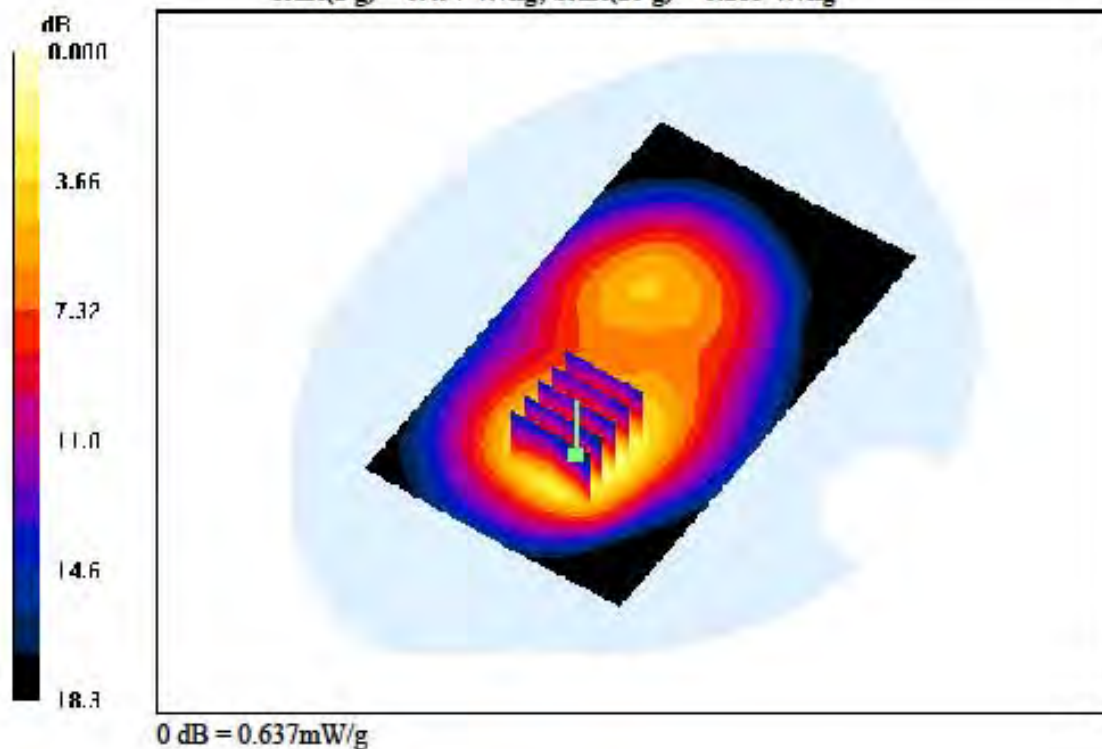

DIGITAL EMC CO., LTD**DUT: LG-T385b; Type: Bar**

Communication System: PCS1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.54 \text{ mho/m}$; $\epsilon_r = 51.4$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(7.34, 7.34, 7.34); Calibrated: 2012-01-27; Electronics: DAE3 Sn519

Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186


Test Date: 2012-06-04; Ambient Temp: 21.9; Tissue Temp: 22.1

1.5 cm space from Body, Rear, PCS1900 GPRS Class 8, Ch. 66L, Ant Internal**Area Scan (71x121x1):** Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ **Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = -0.070 dB

Peak SAR (extrapolated) = 0.844 W/kg

SAR(1 g) = 0.486 W/kg; SAR(10 g) = 0.280 W/kg

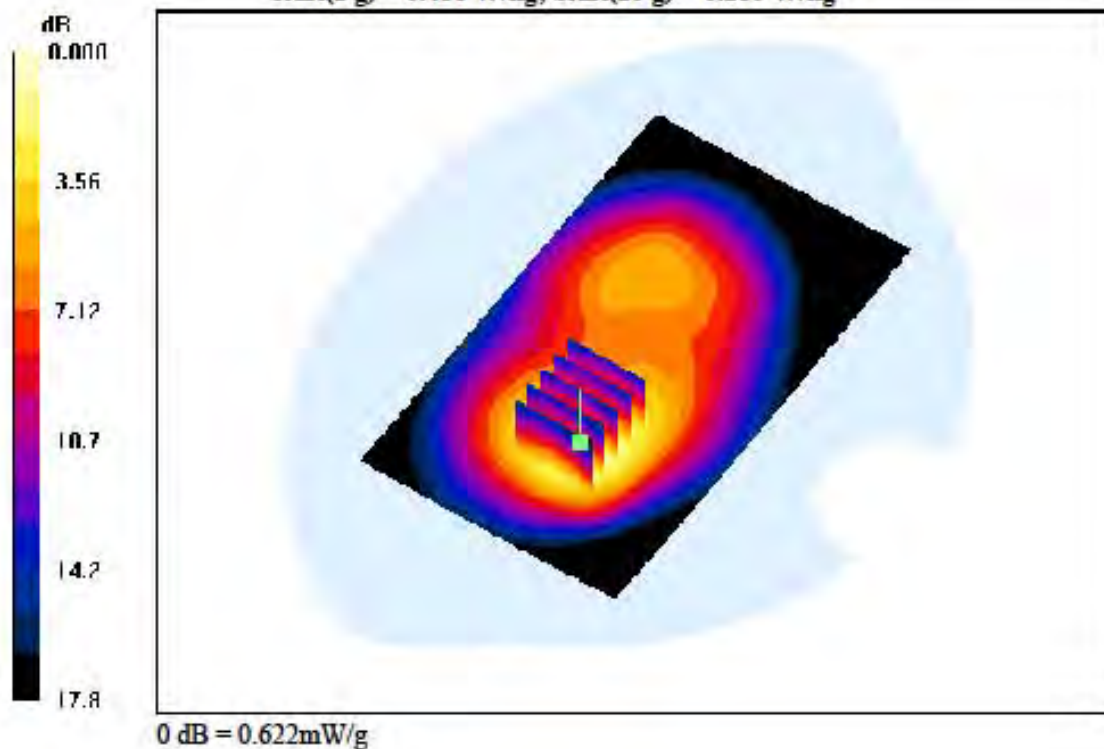

DIGITAL EMC CO., LTD**DUT: LG-T385b; Type: Bar**

Communication System: PCS1900; Frequency: 1880 MHz; Duty Cycle: 1:4.15

Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.54 \text{ mho/m}$; $\epsilon_r = 51.4$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(7.34, 7.34, 7.34); Calibrated: 2012-01-27; Electronics: DAE3 Sn519

Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186


Test Date: 2012-06-04; Ambient Temp: 21.9; Tissue Temp: 22.1

1.5 cm space from Body, Rear, PCS1900 GPRS Class 10, Ch. 661, Ant Internal**Area Scan (71x121x1):** Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ **Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = -0.004 dB

Peak SAR (extrapolated) = 1.06 W/kg

SAR(1 g) = 0.608 W/kg; SAR(10 g) = 0.348 W/kg

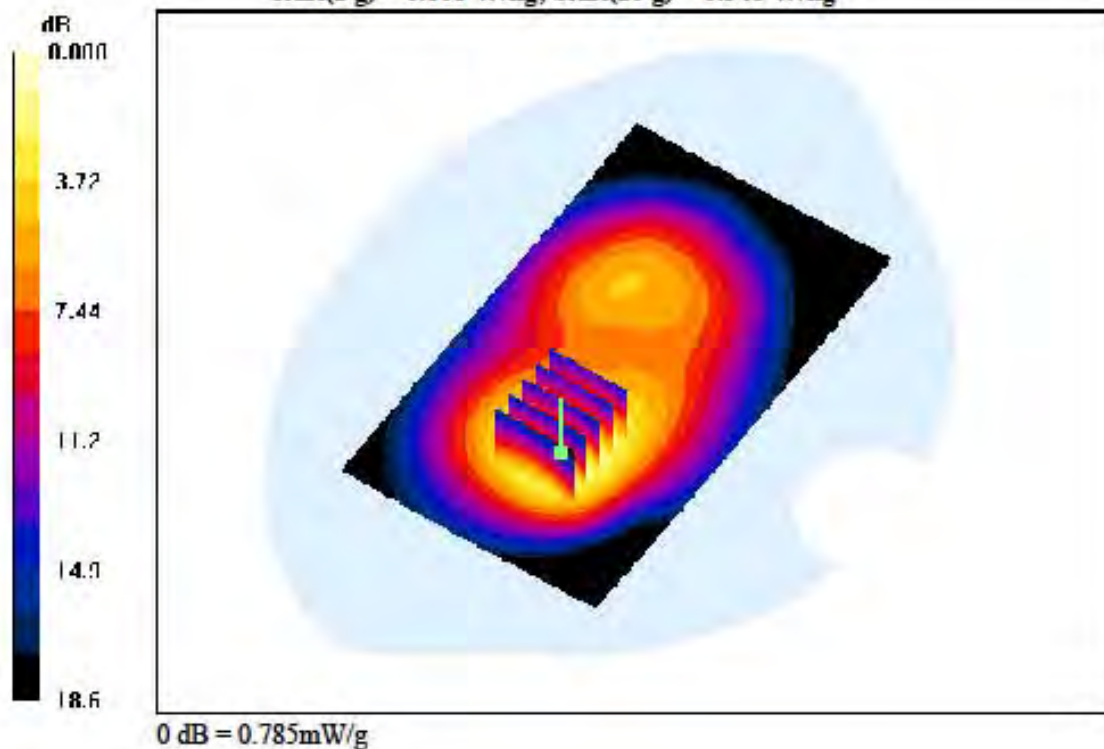

DIGITAL EMC CO., LTD**DUT: LG-T385b; Type: Bar**

Communication System: PCS1900; Frequency: 1850.2 MHz; Duty Cycle: 1:2.77

Medium parameters used: $f = 1850.2 \text{ MHz}$; $\sigma = 1.5 \text{ mho/m}$; $\epsilon_r = 51.5$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(7.34, 7.34, 7.34); Calibrated: 2012-01-27; Electronics: DAE3 Sn519

Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186


Test Date: 2012-06-04; Ambient Temp: 21.9; Tissue Temp: 22.1

1.5 cm space from Body, Rear, PCS1900 GPRS Class 11, Ch. 512, Ant Internal**Area Scan (71x121x1):** Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ **Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = 0.048 dB

Peak SAR (extrapolated) = 1.35 W/kg

SAR(1 g) = 0.771 W/kg; SAR(10 g) = 0.438 W/kg

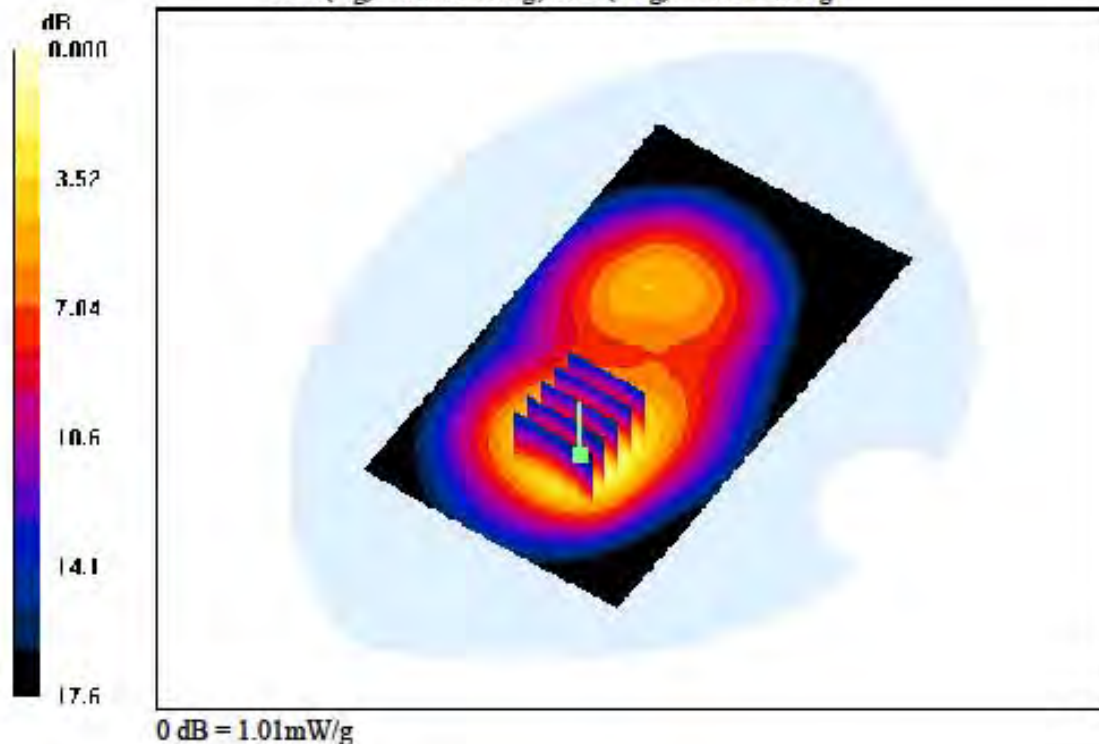

DIGITAL EMC CO., LTD**DUT: LG-T385b; Type: Bar**

Communication System: PCS1900; Frequency: 1880 MHz; Duty Cycle: 1:2.77

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.54$ mho/m; $\epsilon_r = 51.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(7.34, 7.34, 7.34); Calibrated: 2012-01-27; Electronics: DAE3 Sn519

Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186


Test Date: 2012-06-04; Ambient Temp: 21.9; Tissue Temp: 22.1

1.5 cm space from Body, Rear, PCS1900 GPRS Class 11, Ch. 661, Ant Internal**Area Scan (71x121x1):** Measurement grid: dx=15mm, dy=15mm**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Power Drift = 0.001 dB

Peak SAR (extrapolated) = 1.63 W/kg

SAR(1 g) = 0.935 W/kg; SAR(10 g) = 0.538 W/kg

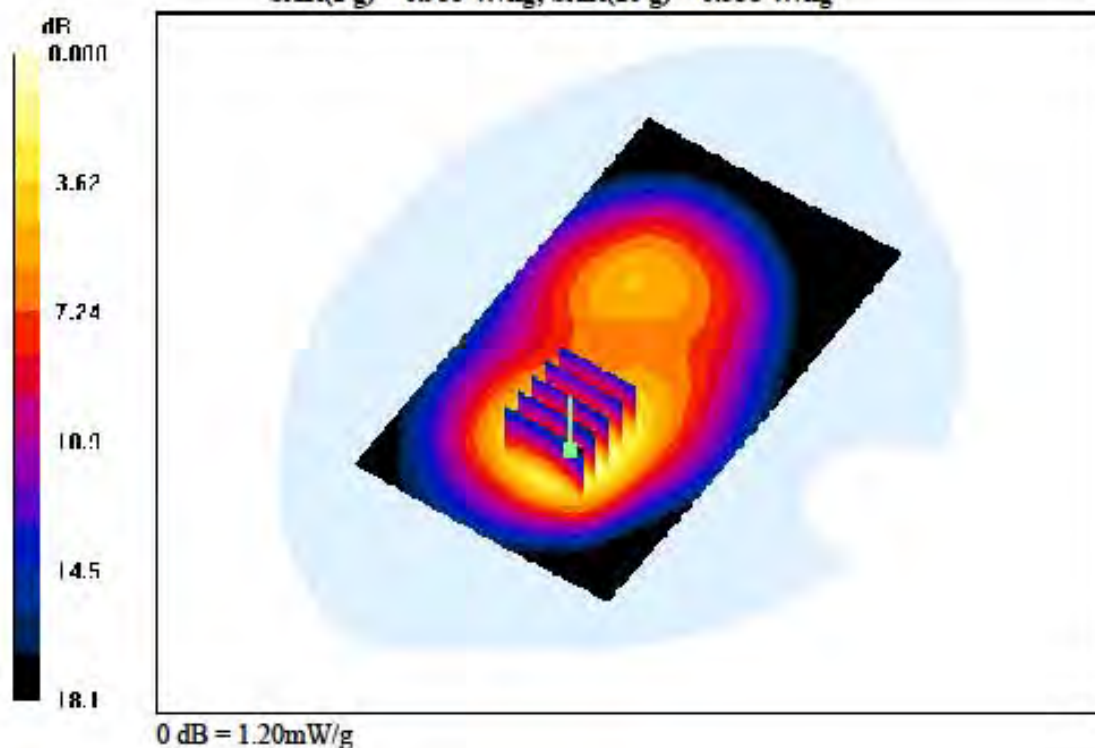

DIGITAL EMC CO., LTD**DUT: LG-T385b; Type: Bar**

Communication System: PCS1900; Frequency: 1909.8 MHz; Duty Cycle: 1:2.77

Medium parameters used: $f = 1909.8$ MHz; $\sigma = 1.57$ mho/m; $\epsilon_r = 51.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(7.34, 7.34, 7.34); Calibrated: 2012-01-27; Electronics: DAE3 Sn519

Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2012-06-04; Ambient Temp: 21.9; Tissue Temp: 22.1

1.5 cm space from Body, Rear, PCS1900 GPRS Class 11, Ch. 810, Ant Internal**Area Scan (71x121x1):** Measurement grid: dx=15mm, dy=15mm**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Power Drift = 0.034 dB

Peak SAR (extrapolated) = 1.62 W/kg

SAR(1 g) = 0.912 W/kg; SAR(10 g) = 0.517 W/kg



DIGITAL EMC CO., LTD**DUT: LG-T385b; Type: Bar**

Communication System: PCS1900; Frequency: 1880 MHz; Duty Cycle: 1:2.075
Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.54 \text{ mho/m}$; $\epsilon_r = 51.4$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(7.34, 7.34, 7.34); Calibrated: 2012-01-27; Electronics: DAE3 Sn519
Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2012-06-04; Ambient Temp: 21.9; Tissue Temp: 22.1

1.5 cm space from Body, Rear, PCS1900 GPRS Class 12, Ch. 661, Ant Internal


Area Scan (71x111x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = -0.024 dB

Peak SAR (extrapolated) = 1.38 W/kg

SAR(1 g) = 0.793 W/kg; SAR(10 g) = 0.454 W/kg

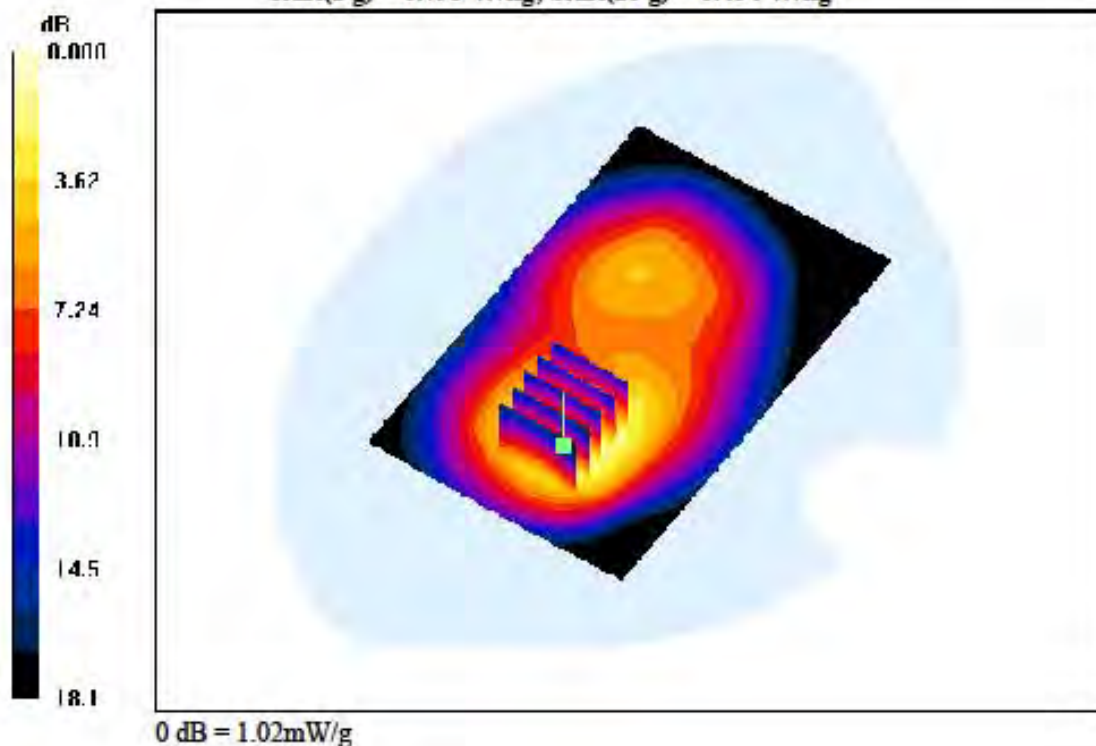

DIGITAL EMC CO., LTD**DUT: LG-T385b; Type: Bar**

Communication System: W-LAN; Frequency: 2462 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2462 \text{ MHz}$; $\sigma = 2.01 \text{ mho/m}$; $\epsilon_r = 52.9$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(6.95, 6.95, 6.95); Calibrated: 2012-01-27; Electronics: DAE3 Sn519
Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2012-06-05; Ambient Temp: 22.0; Tissue Temp: 22.4

1.5 cm space from Body, Front, W-LAN(802.11b) Ch. 11, Ant Internal


Area Scan (81x121x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = 0.005 dB

Peak SAR (extrapolated) = 0.089 W/kg

SAR(1 g) = 0.048 W/kg; SAR(10 g) = 0.027 W/kg

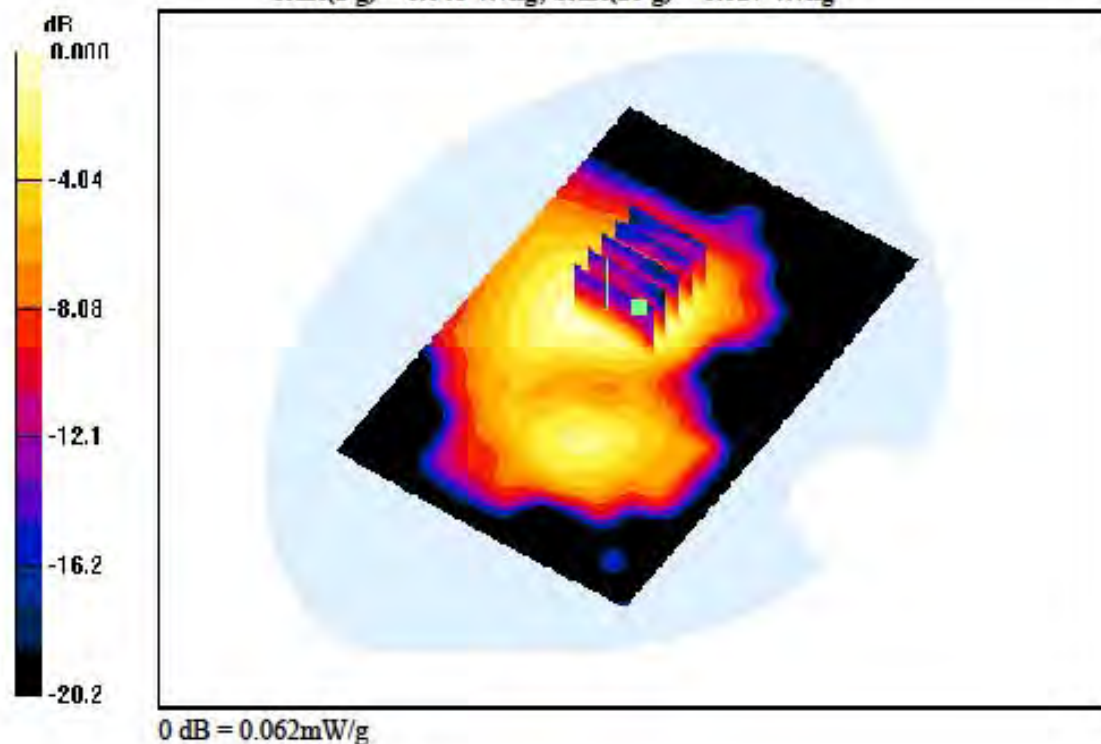

DIGITAL EMC CO., LTD**DUT: LG-T385b; Type: Bar**

Communication System: W-LAN; Frequency: 2412 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2412 \text{ MHz}$; $\sigma = 1.92 \text{ mho/m}$; $\epsilon_r = 53.6$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(6.95, 6.95, 6.95); Calibrated: 2012-01-27; Electronics: DAE3 Sn519
Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2012-06-05; Ambient Temp: 22.0; Tissue Temp: 22.4

1.5 cm space from Body, Rear, W-LAN(802.11b) Ch. 1, Ant Internal


Area Scan (81x121x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = -0.148 dB

Peak SAR (extrapolated) = 0.170 W/kg

SAR(1 g) = 0.085 W/kg; SAR(10 g) = 0.044 W/kg

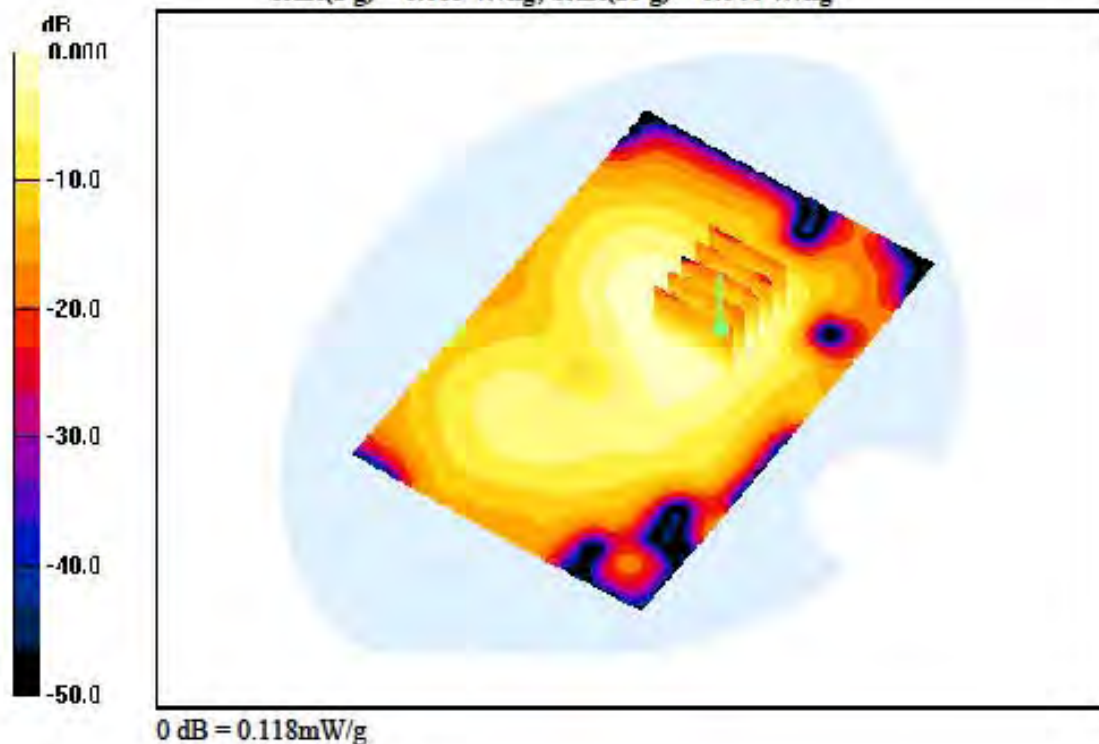

DIGITAL EMC CO., LTD**DUT: LG-T385b; Type: Bar**

Communication System: W-LAN; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2437 \text{ MHz}$; $\sigma = 1.96 \text{ mho/m}$; $\epsilon_r = 53.3$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(6.95, 6.95, 6.95); Calibrated: 2012-01-27; Electronics: DAE3 Sn519

Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186


Test Date: 2012-06-05; Ambient Temp: 22.0; Tissue Temp: 22.4

1.5 cm space from Body, Rear, W-LAN(802.11b) Ch. 6, Ant Internal**Area Scan (81x121x1):** Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ **Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = -0.088 dB

Peak SAR (extrapolated) = 0.202 W/kg

SAR(1 g) = 0.096 W/kg; SAR(10 g) = 0.049 W/kg

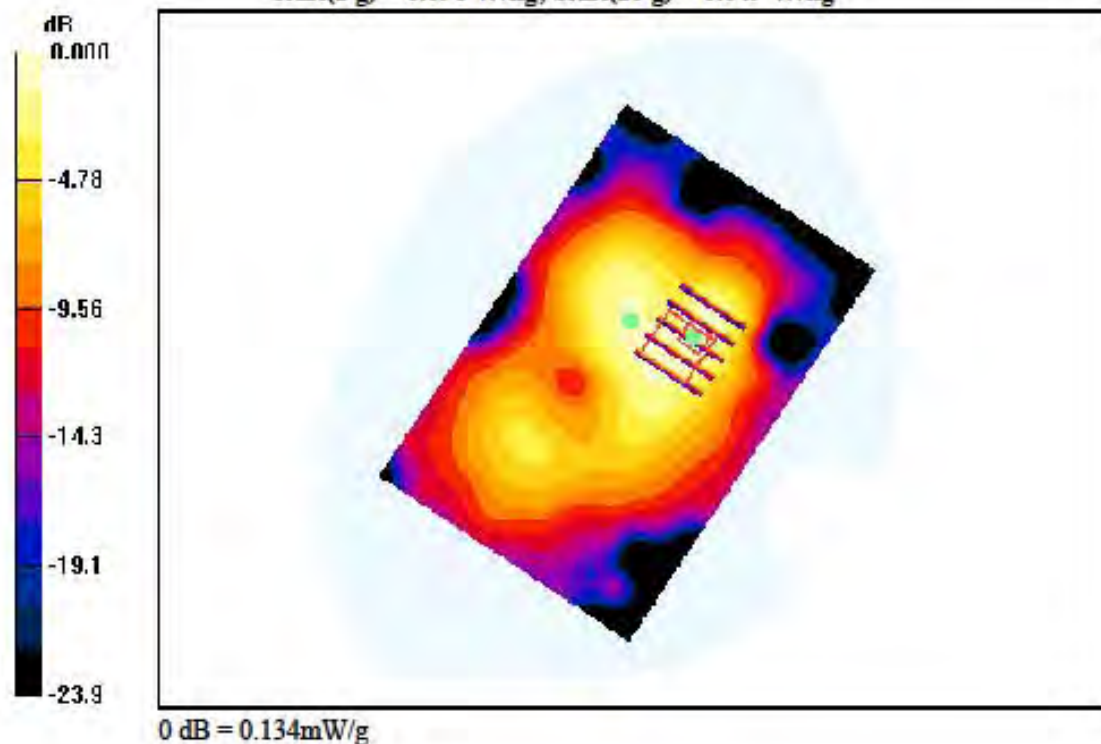

DIGITAL EMC CO., LTD**DUT: LG-T385b; Type: Bar**

Communication System: W-LAN; Frequency: 2437 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2437 \text{ MHz}$; $\sigma = 1.96 \text{ mho/m}$; $\epsilon_r = 53.3$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(6.95, 6.95, 6.95); Calibrated: 2012-01-27; Electronics: DAE3 Sn519
Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2012-06-05; Ambient Temp: 22.0; Tissue Temp: 22.4

1.5 cm space from Body, Rear, W-LAN(802.11b) Ch. 6, Ant Internal


Area Scan (81x121x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 1: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = -0.088 dB

Peak SAR (extrapolated) = 0.159 W/kg

SAR(1 g) = 0.078 W/kg SAR(10 g) = 0.043 W/kg

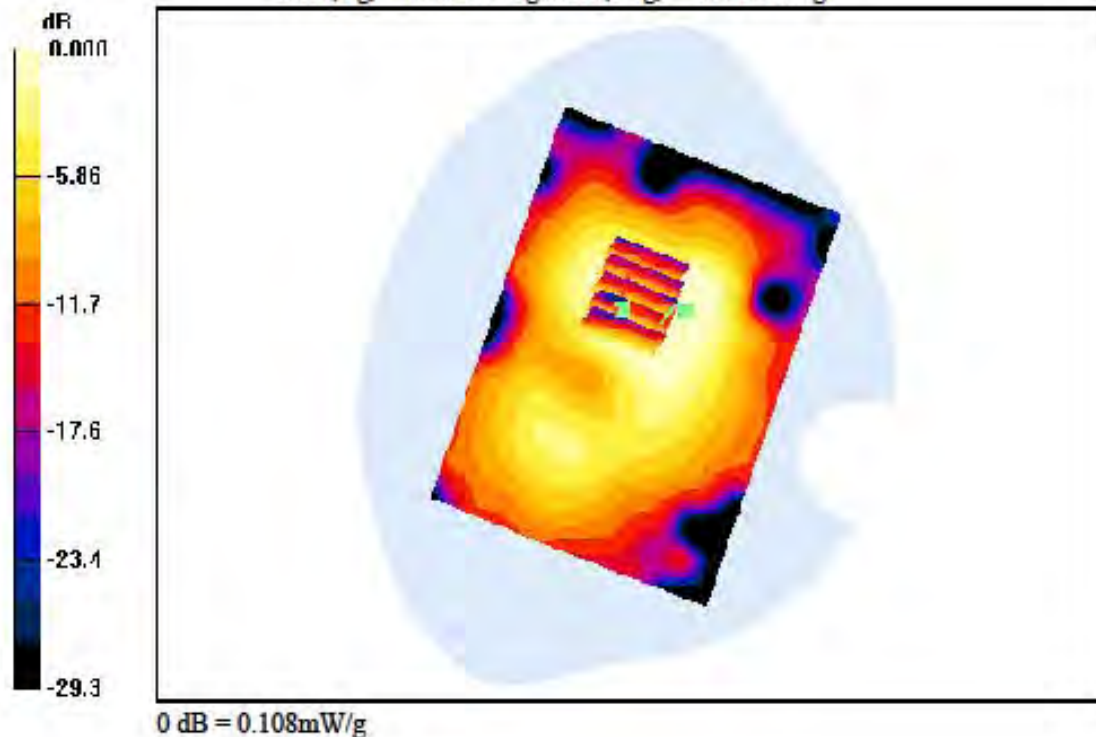

DIGITAL EMC CO., LTD**DUT: LG-T385b; Type: Bar**

Communication System: W-LAN; Frequency: 2462 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2462 \text{ MHz}$; $\sigma = 2.01 \text{ mho/m}$; $\epsilon_r = 52.9$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section


DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(6.95, 6.95, 6.95); Calibrated: 2012-01-27; Electronics: DAE3 Sn519
Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2012-06-05; Ambient Temp: 22.0; Tissue Temp: 22.4

1.5 cm space from Body, Rear, W-LAN(802.11b) Ch. 11, Ant Internal

Area Scan (81x121x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Power Drift = 0.014 dB
Peak SAR (extrapolated) = 0.188 W/kg
SAR(1 g) = 0.090 W/kg; SAR(10 g) = 0.045 W/kg

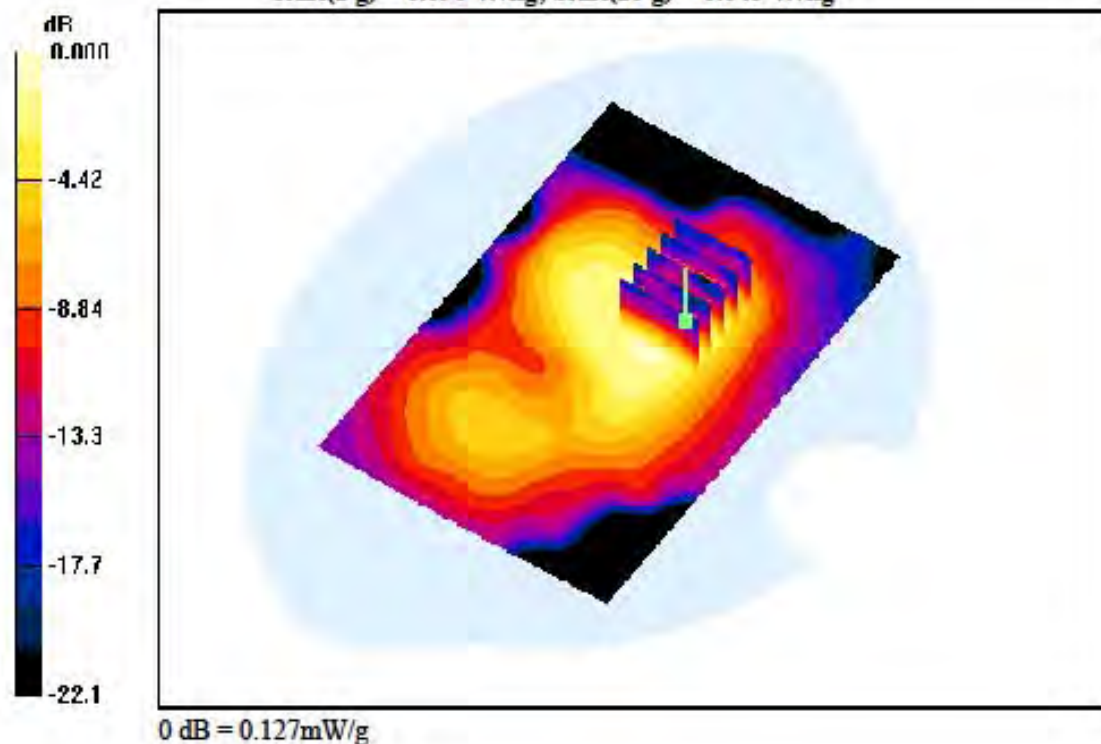

DIGITAL EMC CO., LTD**DUT: LG-T385b; Type: Bar**

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 836.6 \text{ MHz}$; $\sigma = 0.899 \text{ mho/m}$; $\epsilon_r = 41.3$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(8.94, 8.94, 8.94); Calibrated: 2012-01-27; Electronics: DAE3 Sn519

Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186


Test Date: 2012-06-01; Ambient Temp: 22.1; Tissue Temp: 22.3

Right Touch, GSM850 Ch. 190, Ant Internal, Standard Battery**Area Scan (71x101x1):** Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ **Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = 0.013 dB

Peak SAR (extrapolated) = 0.548 W/kg

SAR(1 g) = 0.442 W/kg; SAR(10 g) = 0.328 W/kg

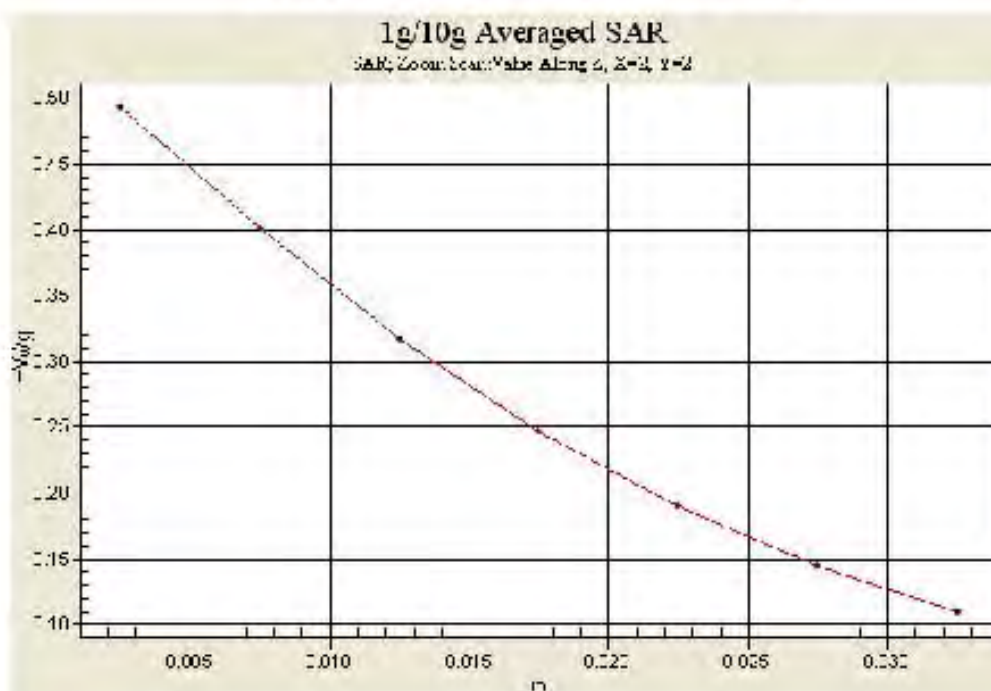

DIGITAL EMC CO., LTD**DUT: LG-T385b; Type: Bar**

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:4.15

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.97$ mho/m; $\epsilon_r = 53.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(9.12, 9.12, 9.12); Calibrated: 2012-01-27; Electronics: DAE3 Sn519

Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186


Test Date: 2012-06-01; Ambient Temp: 22.1; Tissue Temp: 22.3

1.5 cm space from Body, Rear, GSM850 GPRS Class 10, Ch. 190, Ant Internal**Area Scan (71x111x1):** Measurement grid: dx=15mm, dy=15mm**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Power Drift = -0.015 dB

Peak SAR (extrapolated) = 1.14 W/kg

SAR(1 g) = 0.848 W/kg; SAR(10 g) = 0.608 W/kg

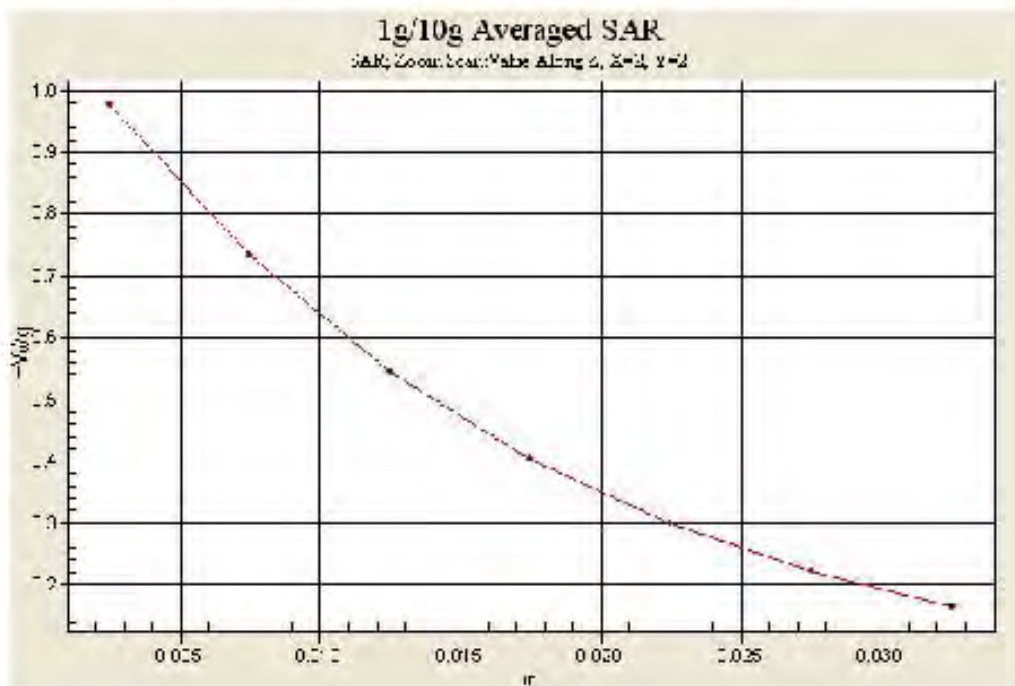

DIGITAL EMC CO., LTD**DUT: LG-T385b; Type: Bar**

Communication System: PCS1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3
 Medium parameters used: $f = 1850.2$ MHz; $\sigma = 1.42$ mho/m; $\epsilon_r = 40.1$; $\rho = 1000$ kg/m³
 Phantom section: Left Section


DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(7.97, 7.97, 7.97); Calibrated: 2012-01-27; Electronics: DAE3 Sn519
 Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224
 Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2012-06-04; Ambient Temp: 21.9; Tissue Temp: 22.1

Left Touch, PCS1900 Ch. 512, Ant Internal, Standard Battery

Area Scan (71x101x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Power Drift = -0.001 dB
 Peak SAR (extrapolated) = 1.53 W/kg
 SAR(1 g) = 0.985 W/kg; SAR(10 g) = 0.563 W/kg

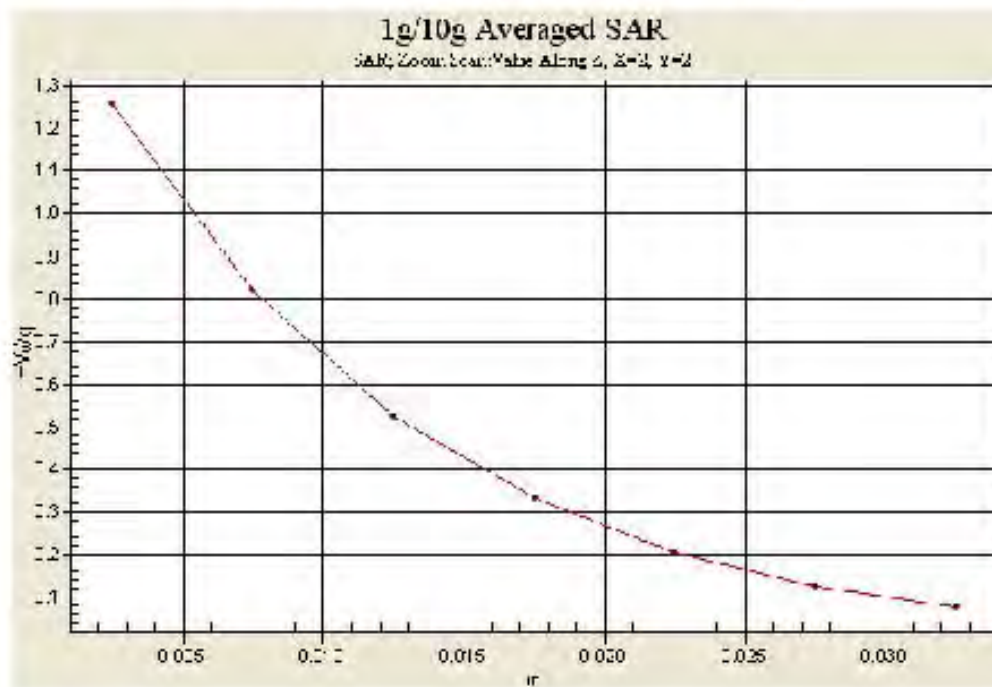

DIGITAL EMC CO., LTD**DUT: LG-T385b; Type: Bar**

Communication System: PCS1900; Frequency: 1880 MHz; Duty Cycle: 1:2.77

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.54$ mho/m; $\epsilon_r = 51.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(7.34, 7.34, 7.34); Calibrated: 2012-01-27; Electronics: DAE3 Sn519

Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186


Test Date: 2012-06-04; Ambient Temp: 21.9; Tissue Temp: 22.1

1.5 cm space from Body, Rear, PCS1900 GPRS Class 11, Ch. 661, Ant Internal**Area Scan (71x121x1):** Measurement grid: dx=15mm, dy=15mm**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Power Drift = 0.001 dB

Peak SAR (extrapolated) = 1.63 W/kg

SAR(1 g) = 0.935 W/kg; SAR(10 g) = 0.538 W/kg

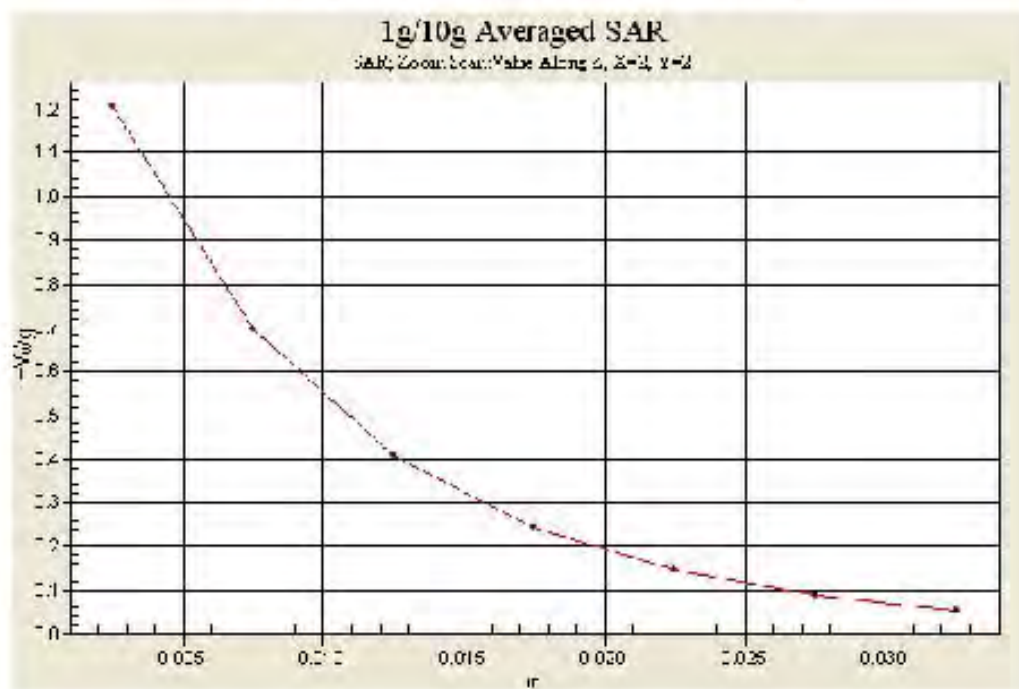

DIGITAL EMC CO., LTD**DUT: LG-T385b; Type: Bar**

Communication System: W-LAN; Frequency: 2412 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 2412 \text{ MHz}$; $\sigma = 1.81 \text{ mho/m}$; $\epsilon_r = 38.8$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Right Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(7.12, 7.12, 7.12); Calibrated: 2012-01-27; Electronics: DAE3 Sn519
 Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224
 Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2012-06-05; Ambient Temp: 22.0; Tissue Temp: 22.4

Right Touch, W-LAN(802.11b) Ch. 1, Ant Internal, Standard Battery


Area Scan (81x111x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = 0.146 dB

Peak SAR (extrapolated) = 0.556 W/kg

SAR(1 g) = 0.254 W/kg; SAR(10 g) = 0.129 W/kg

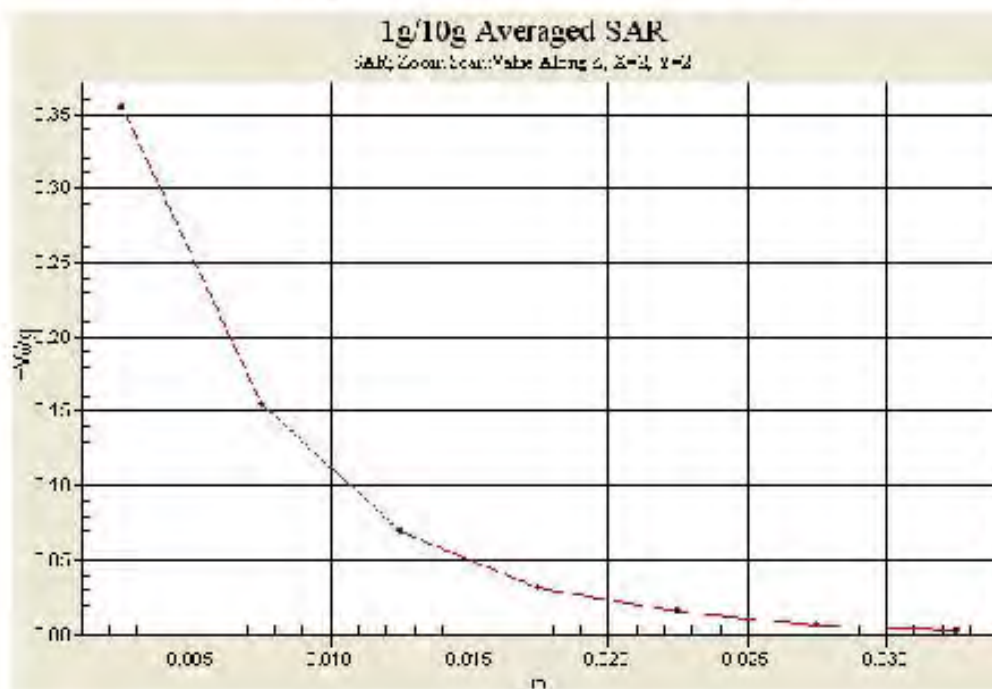

DIGITAL EMC CO., LTD**DUT: LG-T385b; Type: Bar**

Communication System: W-LAN; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.96$ mho/m; $\epsilon_r = 53.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(6.95, 6.95, 6.95); Calibrated: 2012-01-27; Electronics: DAE3 Sn519

Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2012-06-05; Ambient Temp: 22.0; Tissue Temp: 22.4

1.5 cm space from Body, Rear, W-LAN(802.11b) Ch. 6, Ant Internal**Area Scan (81x121x1):** Measurement grid: dx=15mm, dy=15mm**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Power Drift = -0.088 dB

Peak SAR (extrapolated) = 0.202 W/kg

SAR(1 g) = 0.096 W/kg; SAR(10 g) = 0.049 W/kg

