

EMC TEST REPORT

Test item : Cellular/PCS GSM/GPRS Phone with Bluetooth and WLAN

Model No. : LG-T565b, T565b, LGT565b

Order No. : 1110-01446

Date of receipt : 2011-10-26

Test duration : 2011-12-13

Use of report : FCC Marking

Date of Issue : 2011-12-13

Applicant : LG Electronics MobileComm U.S.A., Inc.
10101 Old Grove Road., San Diego, CA 92131

Test laboratory : Digital EMC Co., Ltd.
683-3, Yubang-Dong, Cheoin-Gu, Yongin-Si, Gyeonggi-Do, 449-080, Korea

Test specification : ANSI C 63.4:2003
FCC Part 15 Subpart B
(Type of Device : Class B Personal Computers and Peripherals (JBP))

Test environment : Temperature (21 ~ 22) °C,
Humidity (37 ~ 38) % R.H.

Test result : ☒ Comply ☐ Not Comply

The test results presented in this test report are limited only to the sample supplied by applicant and the use of this test report is inhibited other than its purpose. This test report shall not be reproduced except in full, without the written approval of DIGITAL EMC CO., LTD.

Tested by:

Reviewed by:



Manager
H.S.KO



General Manager
C.H.LEE

The above test report is the accredited test results by Korea Laboratory Accreditation Scheme, which signed the ILAC-MRA.

PRESIDENT OF DIGITAL EMC CO., LTD.

CONTENTS

1. General Remarks	3
2. Test Laboratory	3
3. General Information of EUT	4
3.1 Product Description	4
3.2 Product Information	4
4. Test Summary	5
4.1 Applied standards and test results	5
4.2 Test environment and conditions	5
4.3 Test result Summary	5
5. Test Set-up and operation mode	6
5.1 Principle of Configuration Selection	6
5.2 Test Operation Mode	6
5.3 Support Equipment Used	6
6. Test Results : Emission	7
6.1 Conducted Disturbance	7
6.2 Radiated Disturbance	10
Appendix 1.....	16
List of Test and Measurement Instruments	16

1. General Remarks

This report contains the result of tests performed by:

DIGITAL EMC CO., LTD.

Address : 683-3, Yubang-Dong, Cheoin-Gu, Yongin-Si, Gyeonggi-Do, 449-080, Korea

<http://www.digitalemc.com>

Tel: +82-31-321-2664 Fax: +82-31-321-1664

2. Test Laboratory

Digital EMC Co., Ltd. has been accredited / filed / authorized by the agencies listed in the following table;

Certificate	Nation	Agency	Code	Mark
Accreditation	Korea	KOLAS	393	ISO/IEC 17025
Site Filing	USA	FCC	101842 678747	Test Facility list & NSA Data
	Japan	VCCI	C-1427 R-1364, R-3385 T-1442, G-338	Test Facility list & NSA Data
Certification	Korea	KC	KR0034	Test Facility list & NSA Data
	Germany	TUV	ROK1028C	ISO/IEC 17025

Quality control in the testing laboratory is implemented as per ISO/IEC 17025 which is the "General requirements for the competent of calibration and testing laboratory".

3. General Information of EUT

3.1 Product Description

Equipment Under Test (E.U.T) is Cellular/PCS GSM/GPRS Phone with Bluetooth and WLAN Model: LG-T565b manufactured by LG Electronics Inc. Its basic purpose is used for communications.

3.2 Product Information

Model No.	LG-T565b
Add Model No.	T565b, LGT565b
EUT Type	Cellular/PCS GSM/GPRS Phone with Bluetooth and WLAN
Serial No	NONE
FCC ID	ZNFT565B
Type of Sample Tested	Pre-Production
High Frequency	208MHz
Supplied Power for Test	AC120V, 60Hz
Applicant	LG Electronics MobileComm U.S.A., Inc. 10101 Old Grove Road., San Diego, CA 92131
TX Frequency	824.20 MHz to 848.80 MHz (GSM850) 1850.20 MHz to 1909.80 MHz (GSM1900)
RX Frequency	869.20 MHz to 893.80 MHz (GSM850) 1930.20 MHz to 1989.80 MHz (GSM1900)
Date of Receipt of Sample	2011-10-26

Related Submittal(s) / Grant(s)

Original submittal only.

4. Test Summary

4.1 Applied standards and test results

Test Items	Applied Standards	Results
Conducted Disturbance	ANSI C63.4:2003	Comply
Radiated Disturbance	ANSI C63.4:2003	Comply

The data in this test report are traceable to the national or international standards.

4.2 Test environment and conditions

Test Items	Test date (MM-DD)	Temp ()	Humidity (% R.H.)	Pressure (hPa)
Conducted Disturbance	12-13	22	38	-
Radiated Disturbance	12-13	21	37	

4.3 Test result Summary

(1) Conducted Emission

Frequency [MHz]	Result [dB μ V]	Phase	Detector	Limit [dB μ V]	Margin [dB]
0.15540	54.3	N	Quasi-Peak	65.7	11.4
0.15255	54.4	L1	Quasi-Peak	65.9	11.5

(2) Radiated emission

Frequency [MHz]	Pol.	Reading [dB μ V]	C.F. [dB/m]	Result [dB(μ V/m)]	Limit [dB(μ V/m)]	Margin [dB]
377.875	V	46.5	-5.8	40.7	46.0	5.3

Note) 1. Emission Level = Reading Value + Correction Factor.

2. Correction Factor = Cable loss - Amp gain + Antenna Factor

3. Margin = Limit - Emission level

5. Test Set-up and operation mode

5.1 Principle of Configuration Selection

Emission : The equipment under test (EUT) was configured to measure its highest possible radiation level. The test modes were adapted accordingly in reference to the instructions for use.


5.2 Test Operation Mode

- PC link mode (The measurement was made of the maximized by: Write/Read/Remove the “H” pattern mode; data exchange speed; moving the cable)

5.3 Support Equipment Used

Unit	Model No.	Serial No.	Manufacturer	CABLE			Backshell	FCC ID
				Connect type	Length (m)	shield		
NOTE PC	LGX14	F022040	LG	USB DC Power USB	1.1 1.6 1.4	Shield	Plastic	DOC
ADAPTOR	ADP-40PH	6T1094	DELTA ELECTRONICS INC	AC Power	1.2	Shield	Plastic	VER
MOUSE	M-UAE96	N/A	LOGITECH Inc.	USB	1.4	Shield	Plastic	DOC
EARMIC	SGEY0003744	N/A	Cresyn	STEREO	1.2	Shield	Plastic	DOC
LCD Monitor	U2312HMT	W-036N7K-74445-199-440L	DELL	DSUB POWER	1.8 1.8	Non- Shield	Plastic	DOC

(Configuration of Tested System)

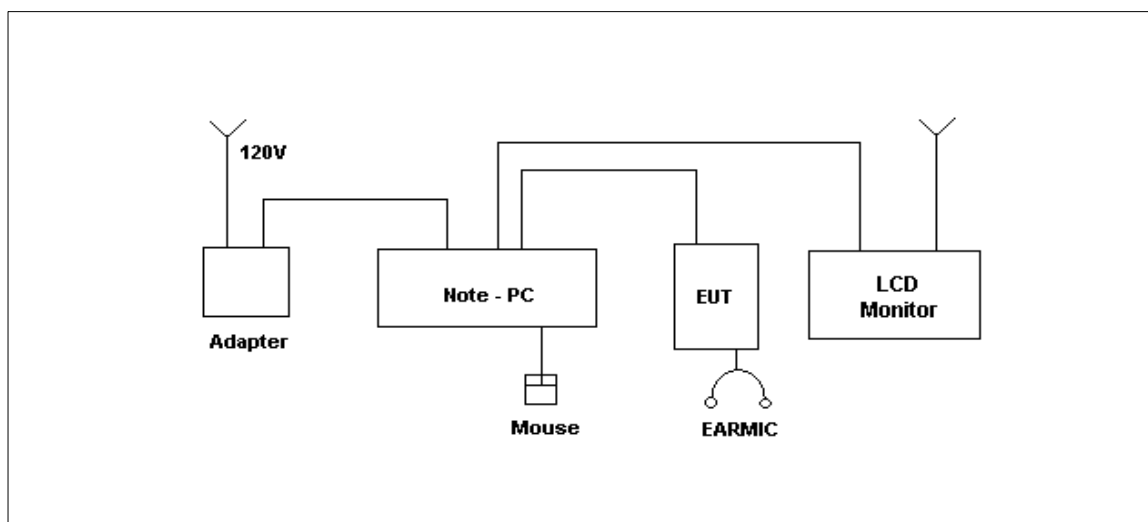

6. Test Results : Emission

6.1 Conducted Disturbance

6.1.1 Measurement Procedure

In the range of 0.15MHz to 30MHz, the conducted disturbance was measured and set-up was made accordance with **ANSI C63.4:2003**.

If the EUT is table top equipment, it was placed on a wooden table with a height of 0.8m above the reference ground plane and 0.4m from the conducting wall of the shielded room.

Also if the EUT is floor-standing equipment, it was placed on a non-conducted support with a height up to 0.15m above the reference ground plane.

Connect the EUT's power source lines to the appropriate power mains / peripherals through the LISN. All the other peripherals are connected to the 2nd LISN, if any.

Unused measuring port of the LISN was resistively terminated by 50 ohm terminator.

The measuring port of the LISN for EUT was connected to spectrum analyzer.

Using conducted emission test software, the emissions were scanned with peak detector mode.

After scanning over the frequency range, suspected emissions were selected to perform final measurement. When performing final measurement, the receiver was used which has Quasi-Peak detector and Average detector.

By varying the configuration of the test sample and the cable routing it was attempted to maximize the emission.

For further description of the configuration refer to the picture of the test set-up.

6.1.2 Limit for Conducted Disturbance

(1) Conducted disturbance at mains ports.

Frequency range (MHz)	Limits dB(μV)			
	Quasi-peak		Average	
	Class A	Class B	Class A	Class B
0.15 to 0.50	79	66 to 56	66	56 to 46
0.50 to 5	73	56	60	46
5 to 30		60		50
Note 1 The lower limit shall apply at the transition frequencies.				
Note 2 The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.				

Test Result



Results of Conducted Emission



Digital EMC
Date : 2011-12-13

Model No. : LG-T565b
Type :
Serial No. :
Test Condition : PC link mode

Reference No. :
Power Supply : 120 V 60 Hz
Temp/Humi. : 22 °C 38 % R. H.
Operator : H.S KO

Memo :

LIMIT : CISPR22_B OP
CISPR22_B AV

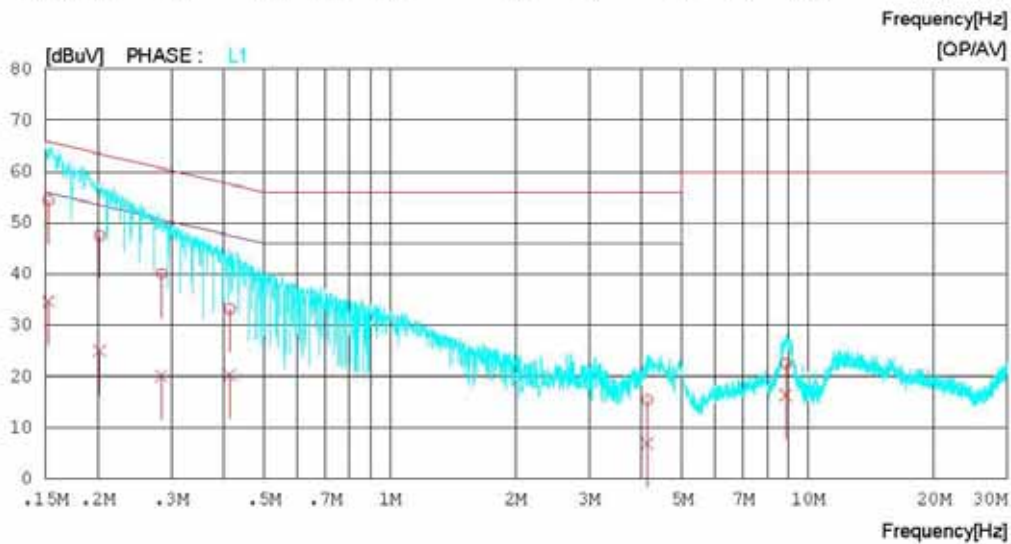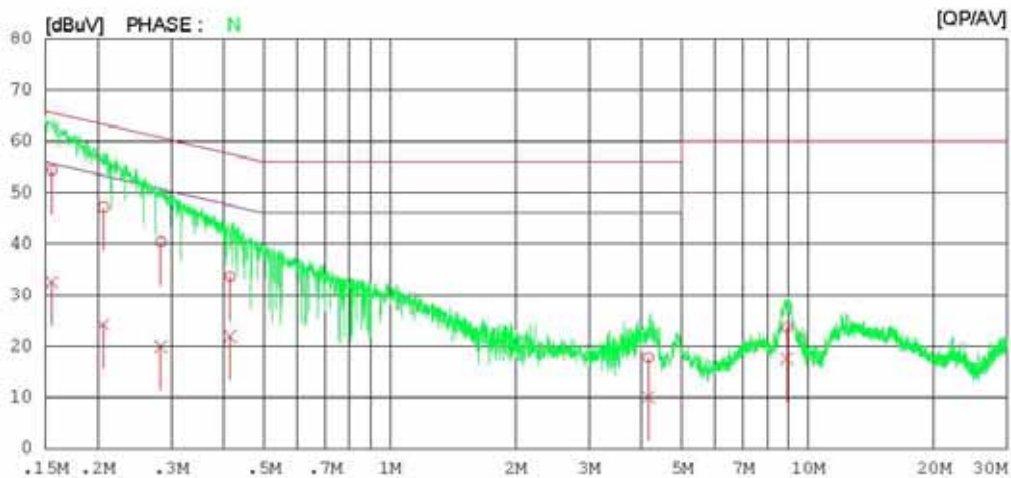

Results of Conducted Emission

Digital EMC
Date : 2011-12-13

Model No. : LG-T565b
Type :
Serial No. :
Test Condition : PC link mode

Reference No. :
Power Supply : 120 V 60 Hz
Temp/Humi. : 22 °C 38 % R. H.
Operator : H.S KO

Memo :

LIMIT : CISPR22_B QP
CISPR22_B AV

NO	FREQ [MHz]	READING		C.FACTOR [dB]	RESULT		LIMIT		MARGIN		PHASE
		QP [dBuV]	AV [dBuV]		QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	
1	0.15540	54.1	32.3	0.2	54.3	32.5	65.7	55.7	11.4	23.2	N
2	0.20653	47.0	24.2	0.1	47.1	24.3	63.3	53.3	16.2	29.0	N
3	0.28295	40.2	19.9	0.1	40.3	20.0	60.7	50.7	20.4	30.7	N
4	0.41480	33.4	21.7	0.2	33.6	21.9	57.6	47.6	24.0	25.7	N
5	4.15200	17.4	9.7	0.4	17.8	10.1	56.0	46.0	38.2	35.9	N
6	8.90550	23.1	16.9	0.6	23.7	17.5	60.0	50.0	36.3	32.5	N
7	0.15255	54.2	34.4	0.2	54.4	34.6	65.9	55.9	11.5	21.3	L1
8	0.20215	47.4	24.9	0.1	47.5	25.0	63.5	53.5	16.0	28.5	L1
9	0.28446	40.0	20.0	0.1	40.1	20.1	60.7	50.7	20.6	30.6	L1
10	0.41445	33.0	20.1	0.2	33.2	20.3	57.6	47.6	24.4	27.3	L1
11	4.13050	15.1	6.6	0.4	15.5	7.0	56.0	46.0	40.5	39.0	L1
12	8.85600	21.9	15.7	0.6	22.5	16.3	60.0	50.0	37.5	33.7	L1

6.2 Radiated Disturbance

6.2.1 Measurement Procedure

The radiated disturbance was measured and set-up was made accordance with **ANSI C63.4:2003**.

If the EUT is tabletop equipment, it was placed on a wooden table with a height of 0.8m above the reference ground plane and 3m away from the interference receiving antenna in the **10m semi-anechoic chamber**.

Also if the EUT is floor-standing equipment, it was placed on a non-conducted support with a height up to 0.15m above the reference ground plane.

Rotate the EUT from 0° to 360° and position the receiving antenna at heights from 1 to 4m above the reference ground plane continuously to determine associated with higher emission levels and record them.

The measurement was made in both the vertical and horizontal polarization, and the maximum value is presented in the report.

For below 1GHz frequency range, Quasi-Peak detector with 120kHz RBW was used.

Also Peak and Average detector with 1MHz RBW were used for above 1GHz frequency range.

For further description of the configuration refer to the picture of the test set-up.

6.2.2 Limit for Radiated Disturbance

- The test frequency range of Radiated Disturbance measurements are listed below.

Highest frequency generated or used in the device or on which the device operates or tunes (MHz)	Upper frequency of measurement range (MHz)
Below 108	1000
108 – 500	2000
500 – 1000	5000
Above 1000	5 th harmonic of the highest frequency or 40GHz, whichever is lower

(1) Limit for Radiated Emission below 1000MHz

Frequency range (MHz)	Class A Equipment (10m distance)	Class B Equipment (3m distance)
	Quasi-peak limits (dB μ V/m)	Quasi-peak limits (dB μ V/m)
30 to 88	39.1	40
88 to 216	43.5	43.5
216 to 960	46.4	46
960 to 1000	49.5	54
Note 1 The lower limit shall apply at the transition frequency. Note 2 Additional provisions may be required for cases where interference occurs. Note 3 According to 15.109(g), as an alternative to the radiated emission limit shown above, digital devices may be shown to comply with the standards(CISPR), Pub. 22 shown as below.		
30 to 230	40	30
230 to 1000	47	37

(2) Limits for Radiated Emission in the frequency range 1000 - 2000MHz at a measuring distance of 10m

Frequency (GHz)	Class A Equipment		Class B Equipment	
	peak (dB μ V/m)	peak (dB μ V/m)	peak (dB μ V/m)	Average (dB μ V/m)
1 to 2	69.5	49.5	63.5	43.5

(3) Limits for Radiated Emission above 1000MHz at a measuring distance of 3m

Frequency (GHz)	Class A Equipment		Class B Equipment	
	peak (dB μ V/m)	peak (dB μ V/m)	peak (dB μ V/m)	Average (dB μ V/m)
1 to 40	80	60	74	54

Test Result

< 30 MHz ~ 1 GHz >

RADIATED EMISSION


Date : 2011-12-13

Model Name : LG-T565b
Model No. :
Serial No. :
Test Condition : PC link mode

Reference No. :
Power Supply : 120V 60Hz
Temp/Humi : 21 °C 37 % R.H.
Operator : H.S KO

Memo :

LIMIT : FCC Part15 Subpart B Class B (3m)
MARGIN: 3 dB

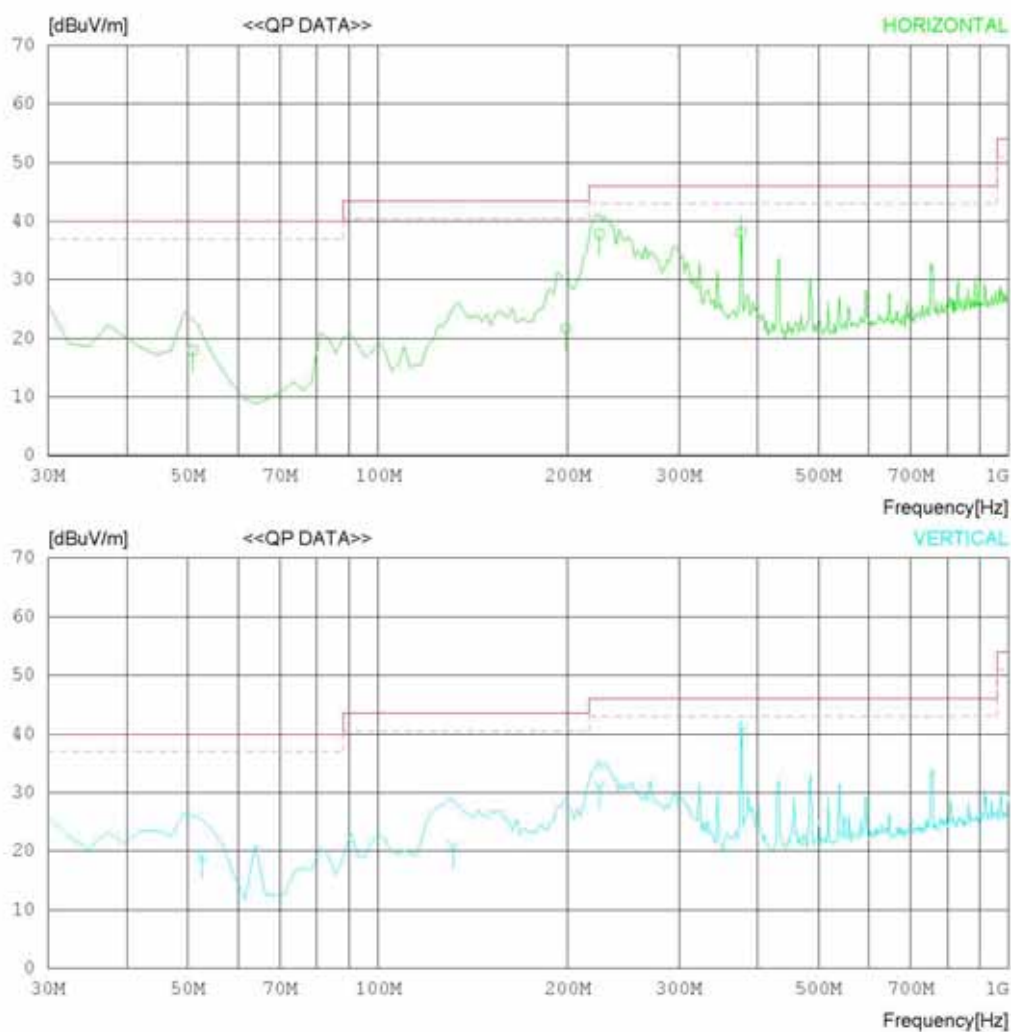

RADIATED EMISSION

Date : 2011-12-13

Model Name : LG-T565b	Reference No. :
Model No. :	Power Supply : 120V 60Hz
Serial No. :	Temp/Humi : 21 °C 37 % R.H.
Test Condition : PC link mode	Operator : H.S KO

Memo :

LIMIT : FCC Part15 Subpart B Class B (3m)
MARGIN: 3 dB

No.	FREQ [MHz]	READING QP [dBuV]	ANT FACTOR [dB]	LOSS [dB]	GAIN [dB]	RESULT [dBuV/m]	LIMIT [dBuV/m]	MARGIN [dB]	ANTENNA [cm]	TABLE [DEG]
----- Horizontal -----										
1	50.854	30.5	9.1	1.0	22.6	18.0	40.0	22.0	136	358
2	198.692	33.2	9.7	2.0	23.2	21.7	43.5	21.8	100	358
3	224.146	47.7	11.3	2.2	23.4	37.8	46.0	8.2	134	358
4	376.521	43.8	15.5	2.9	24.2	38.0	46.0	8.0	100	342
----- Vertical -----										
5	52.500	32.3	8.4	1.0	22.6	19.1	40.0	20.9	113	1
6	131.779	30.7	11.4	1.6	22.9	20.8	43.5	22.8	121	176
7	224.625	40.8	11.3	2.2	23.4	30.9	46.0	15.1	199	358
8	377.875	46.5	15.5	2.9	24.2	40.7	46.0	5.3	124	1

< 1 GHz ~ 2 GHz_PEAK >

RADIATED EMISSION

Date : 2011-12-13

Model Name : LG-T565b
 Model No. :
 Serial No. :
 Test Condition : PC link mode

Reference No. :
 Power Supply : 120 V 60 Hz
 Temp/Humi : 21 °C 37 % R.H.
 Operator : H.S.KO

Memo :

LIMIT : FCC Part15 Subpart B Class B (3m) - 18G(Peak)
 FCC Part15 Subpart B Class B (3m) - 18G(Avg)



No.	FREQ [MHz]	READING PEAK [dBuV]	ANT FACTOR [dB]	LOSS [dB]	GAIN [dB]	RESULT [dBuV/m]	LIMIT [dBuV/m]	MARGIN [dB]	ANTENNA [cm]	TABLE [DBG]
----- Horizontal -----										
1	1325.000	54.4	24.6	5.6	41.9	42.7	74.0	31.3	100	222
2	1675.000	53.5	25.2	6.3	41.9	43.1	74.0	30.9	100	358
----- Vertical -----										
3	1325.000	58.6	24.6	5.6	41.9	46.9	74.0	27.1	100	108
4	1650.000	57.3	25.2	6.3	41.9	46.9	74.0	27.1	100	28
5	1987.500	55.7	25.2	7.0	42.0	45.9	74.0	28.1	100	358

< 1 GHz ~ 2 GHz_AV >

RADIATED EMISSION


Date : 2011-12-13

Model Name : LG-T565b
 Model No. :
 Serial No. :
 Test Condition : PC link mode

Reference No. :
 Power Supply : 120 V 60 Hz
 Temp/Humi : 21 °C 37 % R.H.
 Operator : H.S.KO

Memo :

LIMIT : FCC Part15 Subpart B Class B (3m) - 18G(Avg)
 FCC Part15 Subpart B Class B (3m) - 18G(Peak)

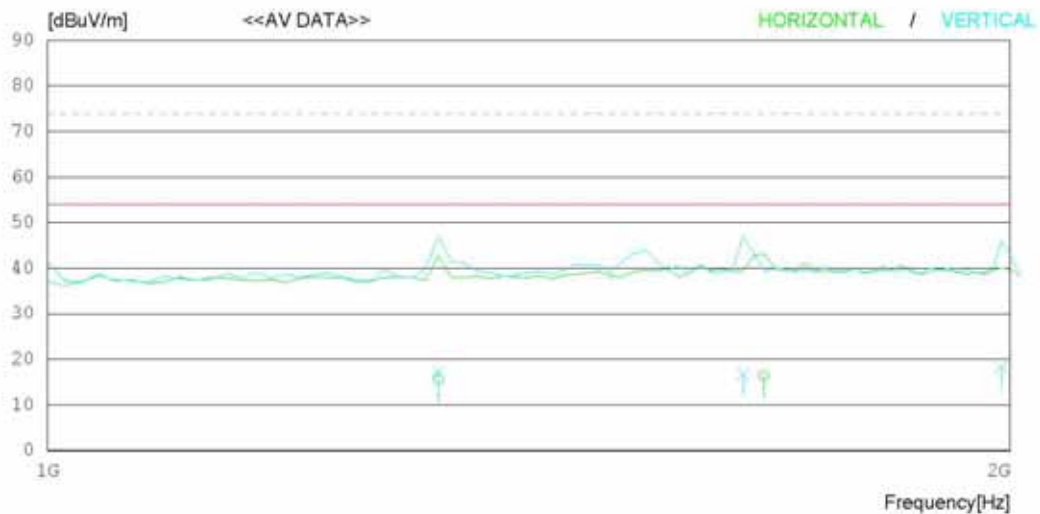

No.	FREQ [MHz]	READING AV [dBuV]	ANT FACTOR [dB]	LOSS [dB]	GAIN [dB]	RESULT [dBuV/m]	LIMIT [dBuV/m]	MARGIN [dB]	ANTENNA [cm]	TABLE [DBG]
----- Horizontal -----										
1	1325.000	27.3	24.6	5.6	41.9	15.6	54.0	38.4	100	222
2	1675.000	26.8	25.2	6.3	41.9	16.4	54.0	37.6	100	358
----- Vertical -----										
3	1325.000	29.0	24.6	5.6	41.9	17.3	54.0	36.7	100	108
4	1650.000	27.2	25.2	6.3	41.9	16.8	54.0	37.2	100	28
5	1987.500	28.1	25.2	7.0	42.0	18.3	54.0	35.7	100	358

Appendix 1

List of Test and Measurement Instruments

1. Conducted Disturbance

Name of Instrument	Model No.	Serial No.	Manufacturer	Cal. Date	Next Cal. Date
☒ EMI Test Receiver	ESCI	100364	Rohde & Schwarz	2011.03.08	2012.03.08
☒ LISN	LISN1600	197204	TTI	2011.07.02	2012.07.02
☒ LISN(EUT)	ESH2-Z5	828739/006	R&S	2011.09.30	2012.09.30
☒ 50 ohm Terminator	CT-01	N/A	TME	2011.01.11	2012.01.11
☐ UNIVERSAL RADIO COMMUNICATION TESTER	CMU200	106760	R&S	2011.03.07	2012.03.07
☐ Spectrum Analyzer	8591E	3649A05889	H/P	2011.03.07	2012.03.07
☐ RFI/Field intensity Meter	KNM-2402	4N-170-3	KYORITSU	2011.07.02	2012.07.02
☐ LISN	KNW-407	8-317-8	KYORITSU	2011.01.11	2012.01.11
☐ LISN	KNW-242	8-654-15	KYORITSU	2011.07.02	2012.07.02
☐ 50 ohm Terminator	CT-01	N/A	TME	2011.01.11	2012.01.11
☐ ISN	T4A	24869	Teseq GmbH	2011.01.11	2012.01.11
☐ LISN(DC)	NNBM8125	8125-821	SCHWARZBECK	2011.07.01	2012.07.01

2. Radiated Disturbance

Name of Instrument	Model No.	Serial No.	Manufacturer	Cal. Date	Next Cal. Date
☒ EMI Test Receiver	ESU	100014	Rohde & Schwarz	2011.01.20	2012.01.20
☒ Bilog Antenna	CBL6112B	2737	SCHAFFNER	2010.07.14	2012.07.14
☒ Horn Antenna	BBHA9120A	322	SCHWARZBECK	2010.04.13	2012.04.13
☒ Amplifier(22dB)	8447E	2945A02865	H/P	2011.01.11	2012.01.11
☒ Pre Amplifier	MLA-00108-B02-36	1518831	TSJ	2011.01.11	2012.01.11
☒ Controller	5905A	N/A	TOKIN	-	-
☒ ANT.master	N/A	N/A	TOKIN	-	-
☐ UNIVERSAL RADIO COMMUNICATION TESTER	CMU200	106760	R&S	2011.03.07	2012.03.07
☐ EMI Test Receiver	ESCI	100364	Rohde & Schwarz	2011.03.08	2012.03.08
☐ BICONICAL ANT.	VHA 9103	91031946	SCHWARZBECK	2010.12.21	2012.12.21
☐ LOG-PERIODIC ANT.	UHALP 9108A-A1	1098	SCHWARZBECK	2010.11.29	2012.11.29
☐ Pre Amplifier	MLA-100K01-B01-26	1252741	TSJ	2011.03.07	2012.03.07
☐ Position Controller	5901T	14173	TOKIN	-	-
☐ DRIVER	5902T2	14174	TOKIN	-	-
☐ Spectrum Analyzer	E4411B	US41062735	Agilent	2011.07.01	2012.07.01
☐ Amplifier (25dB)	8447D	2443A03690	Agilent	2011.07.01	2012.07.01
☐ Bilog Antenna	VULB9160	3151	SCHAFFNER	2010.08.25	2012.08.25
☐ Controller	5900	N/A	TOKIN	-	-