**MEASUREMENT REPORT**
LTE**Applicant Name:**LG Electronics USA, Inc.
1000 Sylvan Avenue
Englewood Cliffs, NJ 07632
United States**Date of Testing:**

1/13 - 2/14/2020

Test Site/Location:

PCTEST Lab. Columbia, MD, USA

Test Report Serial No.:

1M2001100004-03.ZNF

FCC ID:**ZNFT600TS****APPLICANT:****LG Electronics USA, Inc.****Application Type:**

Certification

Model:

LM-T600TS

Additional Model(s):

LMT600TS, T600TS

EUT Type:

Portable Tablet

FCC Classification:

PCS Licensed Transmitter (PCB)

FCC Rule Part(s):

22, 24, & 27

Test Procedure(s):

ANSI C63.26-2015, ANSI/TIA-603-E-2016, KDB 971168 D01 v03r01

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in §2.947. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.



Randy Ortanez
President

FCC ID: ZNFT600TS		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2001100004-03.ZNF	Test Dates: 1/13 - 2/14/2020	EUT Type: Portable Tablet	Page 1 of 213	

TABLE OF CONTENTS


1.0	INTRODUCTION	6
1.1	Scope	6
1.2	PCTEST Test Location.....	6
1.3	Test Facility / Accreditations.....	6
2.0	PRODUCT INFORMATION.....	7
2.1	Equipment Description	7
2.2	Device Capabilities.....	7
2.3	Test Configuration	7
2.4	EMI Suppression Device(s)/Modifications	7
3.0	DESCRIPTION OF TESTS	8
3.1	Measurement Procedure.....	8
3.2	Block C Frequency Range	8
3.3	Block A Frequency Range.....	8
3.4	Cellular - Base Frequency Blocks	8
3.5	Cellular - Mobile Frequency Blocks	8
3.6	PCS - Base Frequency Blocks	9
3.7	PCS - Mobile Frequency Blocks.....	9
3.8	AWS - Base Frequency Blocks	9
3.9	AWS - Mobile Frequency Blocks.....	9
3.10	BRS/EBS Frequency Block.....	10
3.11	Radiated Power and Radiated Spurious Emissions	10
4.0	MEASUREMENT UNCERTAINTY	12
5.0	TEST EQUIPMENT CALIBRATION DATA	13
6.0	SAMPLE CALCULATIONS	14
7.0	TEST RESULTS	15
7.1	Summary	15
7.2	Occupied Bandwidth	17
7.3	Spurious and Harmonic Emissions at Antenna Terminal	65
7.4	Band Edge Emissions at Antenna Terminal	98
7.5	Peak-Average Ratio	161
7.6	Radiated Power (ERP/EIRP).....	171
7.7	Radiated Spurious Emissions Measurements.....	180
7.8	Frequency Stability / Temperature Variation	198
8.0	CONCLUSION.....	213

FCC ID: ZNFT600TS	 PCTEST	MEASUREMENT REPORT (CERTIFICATION)	 LG
Test Report S/N: 1M2001100004-03.ZNF	Test Dates: 1/13 - 2/14/2020	EUT Type: Portable Tablet	Approved by: Quality Manager
			Page 2 of 213



MEASUREMENT REPORT

FCC Part 22, 24, & 27



Mode	FCC Rule Part	Tx Frequency (MHz)	ERP		EIRP		Emission Designator	Modulation
			Max. Power (W)	Max. Power (dBm)	Max. Power (W)	Max. Power (dBm)		
LTE Band 71	27	665.5 - 695.5	0.073	18.65			4M53G7D	QPSK
LTE Band 71	27	665.5 - 695.5	0.052	17.17			4M53W7D	16QAM
LTE Band 71	27	665.5 - 695.5	0.046	16.64			4M53W7D	64QAM
LTE Band 71	27	668 - 693	0.065	18.10			9M01G7D	QPSK
LTE Band 71	27	668 - 693	0.047	16.69			9M01W7D	16QAM
LTE Band 71	27	668 - 693	0.042	16.28			8M99W7D	64QAM
LTE Band 71	27	670.5 - 690.5	0.076	18.78			13M5G7D	QPSK
LTE Band 71	27	670.5 - 690.5	0.053	17.25			13M5W7D	16QAM
LTE Band 71	27	670.5 - 690.5	0.048	16.82			13M5W7D	64QAM
LTE Band 71	27	673 - 688	0.075	18.77			18M0G7D	QPSK
LTE Band 71	27	673 - 688	0.055	17.41			18M0W7D	16QAM
LTE Band 71	27	673 - 688	0.049	16.91			18M0W7D	64QAM
LTE Band 12	27	699.7 - 715.3	0.099	19.96	0.163	22.11	1M09G7D	QPSK
LTE Band 12	27	699.7 - 715.3	0.068	18.31	0.111	20.46	1M11W7D	16QAM
LTE Band 12	27	699.7 - 715.3	0.062	17.95	0.102	20.10	1M09W7D	64QAM
LTE Band 12	27	700.5 - 714.5	0.097	19.87	0.159	22.02	2M72G7D	QPSK
LTE Band 12	27	700.5 - 714.5	0.070	18.44	0.115	20.59	2M71W7D	16QAM
LTE Band 12	27	700.5 - 714.5	0.063	17.98	0.103	20.13	2M72W7D	64QAM
LTE Band 12	27	701.5 - 713.5	0.092	19.62	0.150	21.77	4M57G7D	QPSK
LTE Band 12	27	701.5 - 713.5	0.067	18.26	0.110	20.41	4M53W7D	16QAM
LTE Band 12	27	701.5 - 713.5	0.059	17.73	0.097	19.88	4M52W7D	64QAM
LTE Band 12	27	704 - 711	0.100	20.01	0.164	22.16	9M00G7D	QPSK
LTE Band 12	27	704 - 711	0.071	18.52	0.117	20.67	9M04W7D	16QAM
LTE Band 12	27	704 - 711	0.065	18.13	0.107	20.28	9M00W7D	64QAM
LTE Band 13	27	779.5 - 784.5	0.091	19.60	0.150	21.75	4M55G7D	QPSK
LTE Band 13	27	779.5 - 784.5	0.065	18.13	0.107	20.28	4M53W7D	16QAM
LTE Band 13	27	779.5 - 784.5	0.058	17.63	0.095	19.78	4M56W7D	64QAM
LTE Band 13	27	782	0.065	18.16	0.107	20.31	8M99G7D	QPSK
LTE Band 13	27	782	0.046	16.59	0.075	18.74	9M02W7D	16QAM
LTE Band 13	27	782	0.041	16.12	0.067	18.27	8M99W7D	64QAM
LTE Band 26/5	22H	824.7 - 848.3	0.114	20.56	0.187	22.71	1M09G7D	QPSK
LTE Band 26/5	22H	824.7 - 848.3	0.079	18.97	0.129	21.12	1M11W7D	16QAM
LTE Band 26/5	22H	824.7 - 848.3	0.070	18.47	0.115	20.62	1M10W7D	64QAM
LTE Band 26/5	22H	825.5 - 847.5	0.115	20.59	0.188	22.74	2M71G7D	QPSK
LTE Band 26/5	22H	825.5 - 847.5	0.079	18.99	0.130	21.14	2M70W7D	16QAM
LTE Band 26/5	22H	825.5 - 847.5	0.071	18.53	0.117	20.68	2M72W7D	64QAM
LTE Band 26/5	22H	826.5 - 846.5	0.105	20.23	0.173	22.38	4M55G7D	QPSK
LTE Band 26/5	22H	826.5 - 846.5	0.085	19.28	0.139	21.43	4M52W7D	16QAM
LTE Band 26/5	22H	826.5 - 846.5	0.074	18.69	0.121	20.84	4M55W7D	64QAM
LTE Band 26/5	22H	829 - 844	0.113	20.52	0.185	22.67	9M03G7D	QPSK
LTE Band 26/5	22H	829 - 844	0.080	19.01	0.131	21.16	9M02W7D	16QAM
LTE Band 26/5	22H	829 - 844	0.071	18.51	0.116	20.66	9M01W7D	64QAM
LTE Band 26	22H	831.5 - 841.5	0.116	20.63	0.190	22.78	13M6G7D	QPSK
LTE Band 26	22H	831.5 - 841.5	0.081	19.06	0.132	21.21	13M5W7D	16QAM
LTE Band 26	22H	831.5 - 841.5	0.073	18.62	0.119	20.77	13M6W7D	64QAM

EUT Overview (<1 GHz)

FCC ID: ZNFT600TS	 MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M2001100004-03.ZNF	Test Dates: 1/13 - 2/14/2020	EUT Type: Portable Tablet	Page 3 of 213	

Mode	FCC Rule Part	Tx Frequency (MHz)	EIRP		Emission Designator	Modulation
			Max. Power (W)	Max. Power (dBm)		
LTE Band 66/4	27	1710.7 - 1779.3	0.171	22.32	1M11G7D	QPSK
LTE Band 66/4	27	1710.7 - 1779.3	0.117	20.67	1M10W7D	16QAM
LTE Band 66/4	27	1710.7 - 1779.3	0.102	20.10	1M10W7D	64QAM
LTE Band 66/4	27	1711.5 - 1778.5	0.174	22.40	2M72G7D	QPSK
LTE Band 66/4	27	1711.5 - 1778.5	0.121	20.82	2M71W7D	16QAM
LTE Band 66/4	27	1711.5 - 1778.5	0.103	20.13	2M71W7D	64QAM
LTE Band 66/4	27	1712.5 - 1777.5	0.179	22.54	4M56G7D	QPSK
LTE Band 66/4	27	1712.5 - 1777.5	0.115	20.62	4M53W7D	16QAM
LTE Band 66/4	27	1712.5 - 1777.5	0.102	20.07	4M53W7D	64QAM
LTE Band 66/4	27	1715 - 1775	0.195	22.89	9M03G7D	QPSK
LTE Band 66/4	27	1715 - 1775	0.135	21.30	9M03W7D	16QAM
LTE Band 66/4	27	1715 - 1775	0.116	20.65	9M01W7D	64QAM
LTE Band 66/4	27	1717.5 - 1772.5	0.207	23.15	13M5G7D	QPSK
LTE Band 66/4	27	1717.5 - 1772.5	0.154	21.88	13M6W7D	16QAM
LTE Band 66/4	27	1717.5 - 1772.5	0.130	21.15	13M5W7D	64QAM
LTE Band 66/4	27	1720 - 1770	0.206	23.14	18M1G7D	QPSK
LTE Band 66/4	27	1720 - 1770	0.149	21.72	18M0W7D	16QAM
LTE Band 66/4	27	1720 - 1770	0.127	21.03	18M0W7D	64QAM
LTE Band 25/2	24E	1850.7 - 1914.3	0.240	23.80	1M09G7D	QPSK
LTE Band 25/2	24E	1850.7 - 1914.3	0.165	22.19	1M10W7D	16QAM
LTE Band 25/2	24E	1850.7 - 1914.3	0.145	21.61	1M09W7D	64QAM
LTE Band 25/2	24E	1851.5 - 1913.5	0.215	23.32	2M71G7D	QPSK
LTE Band 25/2	24E	1851.5 - 1913.5	0.150	21.76	2M72W7D	16QAM
LTE Band 25/2	24E	1851.5 - 1913.5	0.128	21.07	2M72W7D	64QAM
LTE Band 25/2	24E	1852.5 - 1912.5	0.228	23.58	4M55G7D	QPSK
LTE Band 25/2	24E	1852.5 - 1912.5	0.158	21.98	4M54W7D	16QAM
LTE Band 25/2	24E	1852.5 - 1912.5	0.141	21.49	4M56W7D	64QAM
LTE Band 25/2	24E	1855 - 1910	0.235	23.70	9M04G7D	QPSK
LTE Band 25/2	24E	1855 - 1910	0.163	22.11	9M04W7D	16QAM
LTE Band 25/2	24E	1855 - 1910	0.142	21.53	9M02W7D	64QAM
LTE Band 25/2	24E	1857.5 - 1907.5	0.253	24.03	13M6G7D	QPSK
LTE Band 25/2	24E	1857.5 - 1907.5	0.174	22.40	13M6W7D	16QAM
LTE Band 25/2	24E	1857.5 - 1907.5	0.151	21.80	13M6W7D	64QAM
LTE Band 25/2	24E	1860 - 1905	0.287	24.58	18M1G7D	QPSK
LTE Band 25/2	24E	1860 - 1905	0.200	23.00	18M1W7D	16QAM
LTE Band 25/2	24E	1860 - 1905	0.172	22.36	18M1W7D	64QAM

EUT Overview (Mid Bands)

FCC ID: ZNFT600TS		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2001100004-03.ZNF	Test Dates: 1/13 - 2/14/2020	EUT Type: Portable Tablet	Page 4 of 213	

Mode	FCC Rule Part	Tx Frequency (MHz)	EIRP		Emission Designator	Modulation
			Max. Power (W)	Max. Power (dBm)		
LTE Band 41 (PC2)	27	2498.5 - 2687.5	0.341	25.33	4M51G7D	QPSK
LTE Band 41 (PC2)	27	2498.5 - 2687.5	0.281	24.48	4M52W7D	16QAM
LTE Band 41 (PC2)	27	2498.5 - 2687.5	0.228	23.58	4M53W7D	64QAM
LTE Band 41 (PC2)	27	2501 - 2685	0.361	25.58	9M00G7D	QPSK
LTE Band 41 (PC2)	27	2501 - 2685	0.269	24.30	8M99W7D	16QAM
LTE Band 41 (PC2)	27	2501 - 2685	0.239	23.79	8M96W7D	64QAM
LTE Band 41 (PC2)	27	2503.5 - 2682.5	0.338	25.29	13M5G7D	QPSK
LTE Band 41 (PC2)	27	2503.5 - 2682.5	0.293	24.67	13M5W7D	16QAM
LTE Band 41 (PC2)	27	2503.5 - 2682.5	0.240	23.80	13M5W7D	64QAM
LTE Band 41 (PC2)	27	2506 - 2680	0.350	25.44	18M0G7D	QPSK
LTE Band 41 (PC2)	27	2506 - 2680	0.280	24.48	18M0W7D	16QAM
LTE Band 41 (PC2)	27	2506 - 2680	0.286	24.56	18M0W7D	64QAM

EUT Overview (High Bands)

FCC ID: ZNFT600TS		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2001100004-03.ZNF	Test Dates: 1/13 - 2/14/2020	EUT Type: Portable Tablet	Page 5 of 213	

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.

1.2 PCTEST Test Location

These measurement tests were conducted at the PCTEST facility located at 7185 Oakland Mills Road, Columbia, MD 21046. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014.

1.3 Test Facility / Accreditations

Measurements were performed at PCTEST located in Columbia, MD 21046, U.S.A.

- PCTEST is an ISO 17025-2005 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.01 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISED Standards (RSS).
- PCTEST facility is a registered (2451B) test laboratory with the site description on file with ISED.

FCC ID: ZNFT600TS	 MEASUREMENT REPORT (CERTIFICATION) 		Approved by: Quality Manager
Test Report S/N: 1M2001100004-03.ZNF	Test Dates: 1/13 - 2/14/2020	EUT Type: Portable Tablet	Page 6 of 213

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **LG Portable Tablet FCC ID: ZNFT600TS**. The test data contained in this report pertains only to the emissions due to the EUT's LTE function.

Test Device Serial No.: 02180, 02495, 04160

2.2 Device Capabilities

This device contains the following capabilities:

850/1700/1900 WCDMA/HSPA, Multi-band LTE, 802.11b/g/n WLAN, 802.11a/n/ac UNII, Bluetooth (1x, EDR, LE)

LTE Band 26 (814.7 – 849 MHz) overlaps the entire frequency range of LTE Band 5 (824 – 849 MHz). Therefore, test data provided in this report covers Band 5 and the portion of Band 26 subject to Part 22.

LTE Band 66 (1710 - 1780 MHz) overlaps the entire frequency range of LTE Band 4 (1710 - 1755 MHz). Therefore, test data provided in this report covers Band 4 as well as Band 66.

LTE Band 25 (1850 - 1915 MHz) overlaps the entire frequency range of LTE Band 2 (1850 - 1910 MHz). Therefore, test data provided in this report covers Band 2 as well as Band 25.

2.3 Test Configuration

The EUT was tested per the guidance of ANSI/TIA-603-E-2016 and KDB 971168 D01 v03r01. See Section 7.0 of this test report for a description of the radiated and antenna port conducted emissions tests.

2.4 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

FCC ID: ZNFT600TS		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2001100004-03.ZNF	Test Dates: 1/13 - 2/14/2020	EUT Type: Portable Tablet	Page 7 of 213	

3.0 DESCRIPTION OF TESTS

3.1 Measurement Procedure

The measurement procedures described in the document titled “Land Mobile FM or PM – Communications Equipment – Measurements and Performance Standards” (ANSI/TIA-603-E-2016) and “Procedures for Compliance Measurement of the Fundamental Emission Power of Licensed Wideband (> 1 MHz) Digital Transmission Systems” (KDB 971168 D01 v03r01) were used in the measurement of the EUT.

3.2 Block C Frequency Range

Two paired channels of 11 megahertz each are available for assignment in Block C in the 746-757 MHz and 776-787 MHz bands. In the event that no licenses for two channels in this Block C are assigned based on the results of the first auction in which such licenses were offered because the auction results do not satisfy the applicable reserve price, the spectrum in the 746-757 MHz and 776-787 MHz bands will instead be made available for assignment at a subsequent auction as follows: (i) Two paired channels of 6 megahertz each available for assignment in Block C1 in the 746-752 MHz and 776-782 MHz bands. (ii) Two paired channels of 5 megahertz each available for assignment in Block C2 in the 752-757 MHz and 782-787 MHz bands.

3.3 Block A Frequency Range

698-746 MHz band. The following frequencies are available for licensing pursuant to this part in the 698-746 MHz band: (1) Three paired channel blocks of 12 megahertz each are available for assignment as follows:

Block A: 698-704 MHz and 728-734 MHz;
 Block B: 704-710 MHz and 734-740 MHz; and
 Block C: 710-716 MHz and 740-746 MHz.


3.4 Cellular - Base Frequency Blocks



BLOCK 1: 869 – 880 MHz (A* Low + A)
BLOCK 2: 880 – 890 MHz (B)

BLOCK 3: 890 – 891.5 MHz (A* High)
BLOCK 4: 891.5 – 894 MHz (B*)

3.5 Cellular - Mobile Frequency Blocks

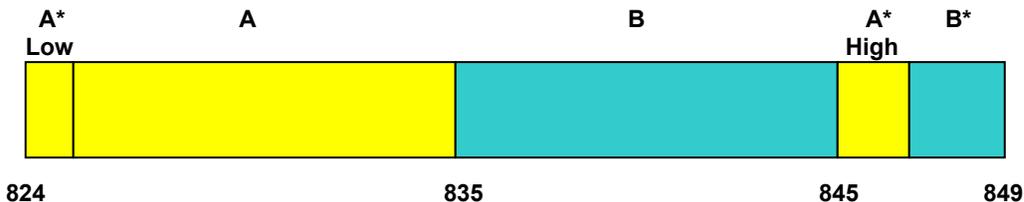


BLOCK 1: 824 – 835 MHz (A* Low + A)
BLOCK 2: 835 – 845 MHz (B)

BLOCK 3: 845 – 846.5 MHz (A* High)
BLOCK 4: 846.5 – 849 MHz (B*)


FCC ID: ZNFT600TS		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2001100004-03.ZNF	Test Dates: 1/13 - 2/14/2020	EUT Type: Portable Tablet		Page 8 of 213

3.6 PCS - Base Frequency Blocks

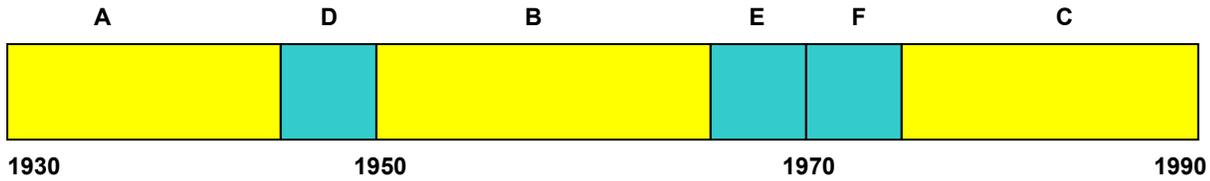


- BLOCK 1: 1930 – 1945 MHz (A)
- BLOCK 2: 1945 – 1950 MHz (D)
- BLOCK 3: 1950 – 1965 MHz (B)
- BLOCK 4: 1965 – 1970 MHz (E)
- BLOCK 5: 1970 – 1975 MHz (F)
- BLOCK 6: 1975 – 1990 MHz (C)

3.7 PCS - Mobile Frequency Blocks

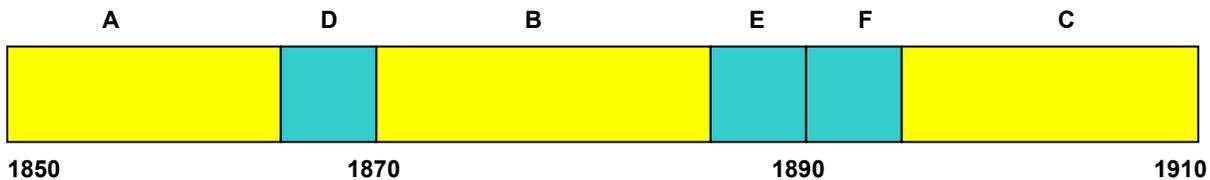


- BLOCK 1: 1850 – 1865 MHz (A)
- BLOCK 2: 1865 – 1870 MHz (D)
- BLOCK 3: 1870 – 1885 MHz (B)
- BLOCK 4: 1885 – 1890 MHz (E)
- BLOCK 5: 1890 – 1895 MHz (F)
- BLOCK 6: 1895 – 1910 MHz (C)

3.8 AWS - Base Frequency Blocks

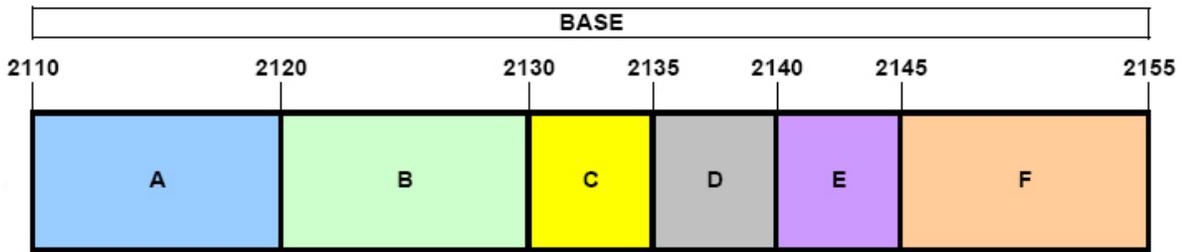

- BLOCK 1: 2110 – 2120 MHz (A)
- BLOCK 2: 2120 – 2130 MHz (B)
- BLOCK 3: 2130 – 2135 MHz (C)
- BLOCK 4: 2135 – 2140 MHz (D)
- BLOCK 5: 2140 – 2145 MHz (E)
- BLOCK 6: 2145 – 2155 MHz (F)


3.9 AWS - Mobile Frequency Blocks

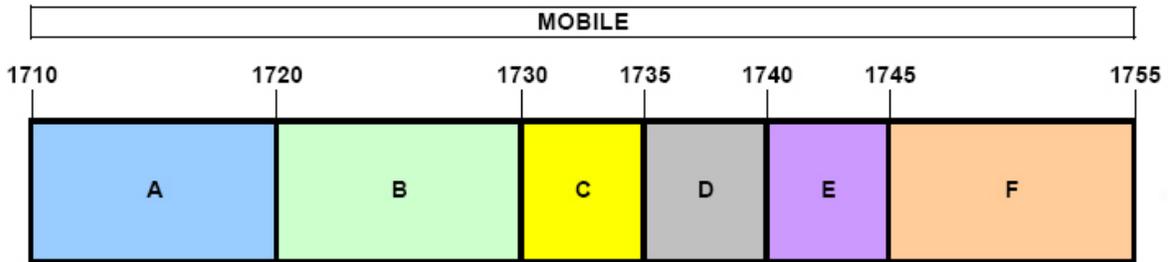

- BLOCK 1: 1710 – 1720 MHz (A)
- BLOCK 2: 1720 – 1730 MHz (B)
- BLOCK 4: 1735 – 1740 MHz (D)
- BLOCK 5: 1740 – 1745 MHz (E)

FCC ID: ZNFT600TS		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2001100004-03.ZNF	Test Dates: 1/13 - 2/14/2020	EUT Type: Portable Tablet	Page 9 of 213	

3.10 BRS/EBS Frequency Block

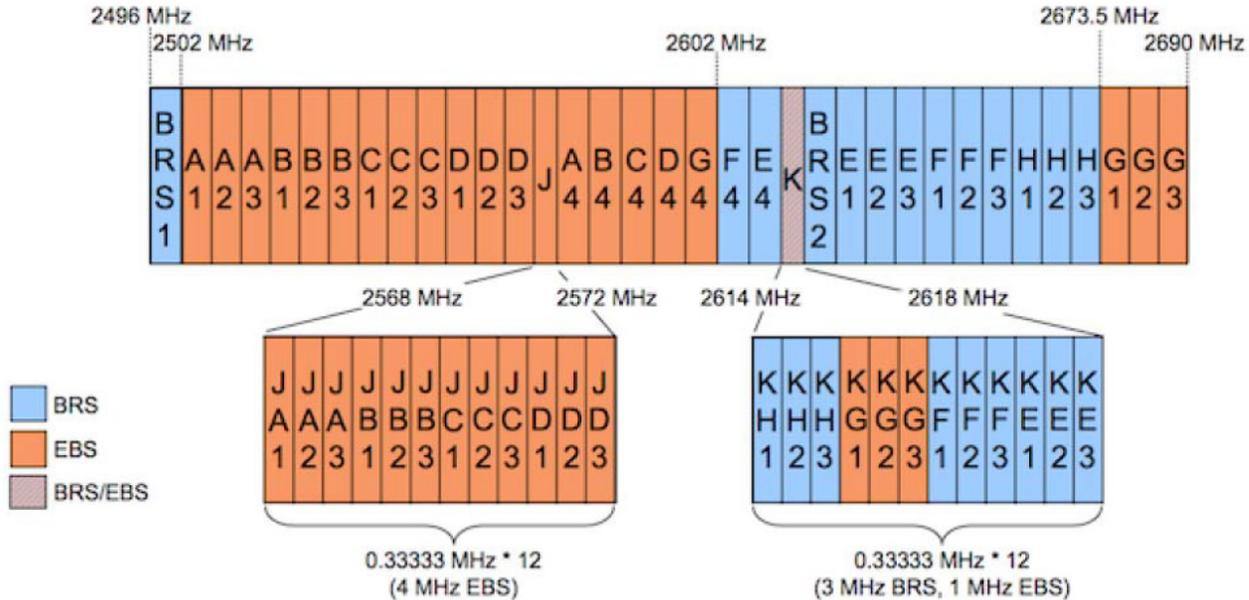

3.11 Radiated Power and Radiated Spurious Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. For measurements below 1GHz, the absorbers are removed. A raised turntable is used for radiated measurement. The turn table is a continuously rotatable, remote-controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm tall test table made of Styrodur is placed on top of the turn table. A Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

The equipment under test was transmitting while connected to its integral antenna and is placed on a turntable 3 meters from the receive antenna. The receive antenna height is adjusted between 1 and 4 meter height, the turntable is rotated through 360 degrees, and the EUT is manipulated through all orthogonal planes representative of its typical use to achieve the highest reading on the receive spectrum analyzer. Radiated power levels are also investigated with the receive antenna horizontally and vertically polarized. The maximized power level is recorded using the spectrum analyzer “Channel Power” function with the integration band set to the emissions’ occupied bandwidth, a RMS detector, RBW = 100kHz, VBW = 300kHz, and a 1 second sweep time over a minimum of 10 sweeps, per the guidelines of KDB 971168 D01 v03r01.

Per the guidance of ANSI/TIA-603-E-2016, a half-wave dipole is then substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator with the level of the signal generator being adjusted to obtain the same receive spectrum analyzer level

FCC ID: ZNFT600TS		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2001100004-03.ZNF	Test Dates: 1/13 - 2/14/2020	EUT Type: Portable Tablet		Page 10 of 213

previously recorded from the spurious emission from the EUT. The power of the emission is calculated using the following formula:

$$P_d \text{ [dBm]} = P_g \text{ [dBm]} - \text{cable loss [dB]} + \text{antenna gain [dBd/dBi]}$$

Where, P_d is the dipole equivalent power, P_g is the generator output into the substitution antenna, and the antenna gain is the gain of the substitute antenna used relative to either a half-wave dipole (dBd) or an isotropic source (dBi). The substitute level is equal to $P_g \text{ [dBm]} - \text{cable loss [dB]}$.

The calculated P_d levels are then compared to the absolute spurious emission limit of -13dBm which is equivalent to the required minimum attenuation of $43 + 10 \log_{10}(\text{Power [Watts]})$. For Band 41, the calculated P_d levels are compared to the absolute spurious emission limit of -25dBm which is equivalent to the required minimum attenuation of $55 + 10 \log_{10}(\text{Power [Watts]})$.

All radiated measurements are performed in a chamber that meets the site requirements per ANSI C63.4-2014. Additionally, radiated emissions below 30MHz are also validated on an Open Area Test Site to assert correlation with the chamber measurements per the requirements of KDB 474788 D01.

FCC ID: ZNFT600TS	 MEASUREMENT REPORT (CERTIFICATION) 		Approved by: Quality Manager
Test Report S/N: 1M2001100004-03.ZNF	Test Dates: 1/13 - 2/14/2020	EUT Type: Portable Tablet	Page 11 of 213

4.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4-2014. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty (\pm dB)
Conducted Bench Top Measurements	1.13
Radiated Disturbance (<1GHz)	4.98
Radiated Disturbance (>1GHz)	5.07
Radiated Disturbance (>18GHz)	5.09

FCC ID: ZNFT600TS		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2001100004-03.ZNF	Test Dates: 1/13 - 2/14/2020	EUT Type: Portable Tablet	Page 12 of 213	

5.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
-	LTx1	Licensed Transmitter Cable Set	6/4/2019	Annual	6/4/2020	LTx1
-	LTx5	Licensed Transmitter Cable Set	6/5/2019	Annual	6/5/2020	LTx5
Agilent	N9020A	MXA Signal Analyzer	4/20/2019	Annual	4/20/2020	US46470561
Agilent	N9038A	MXE EMI Receiver	7/17/2019	Annual	7/17/2020	MY51210133
Agilent	N9030A	PXA Signal Analyzer (44GHz)	6/12/2019	Annual	6/12/2020	MY52350166
Com-Power	PAM-103	Pre-Amplifier (1-1000MHz)	5/10/2019	Annual	5/10/2020	441112
Emco	3115	Horn Antenna (1-18GHz)	3/28/2018	Biennial	3/28/2020	9704-5182
EMCO	3160-09	Small Horn (18 - 26.5GHz)	8/9/2018	Biennial	8/9/2020	135427
ETS Lindgren	3117	1-18 GHz DRG Horn (Medium)	2/14/2019	Biennial	2/14/2021	125518
ETS Lindgren	3164-08	Quad Ridge Horn Antenna	2/22/2019	Biennial	2/22/2021	128338
Mini Circuits	TVA-11-422	RF Power Amp	N/A			QA1317001
Mini-Circuits	SSG-4000HP	Synthesized Signal Generator	N/A			11208010032
Mini-Circuits	PWR-SEN-4RMS	USB Power Sensor	4/20/2019	Annual	4/20/2020	11210140001
Mini-Circuits	SSG-4000HP	Synthesized Signal Generator	N/A			11403100002
Rohde & Schwarz	CMW500	Radio Communication Tester	N/A			100976
Rohde & Schwarz	ESU26	EMI Test Receiver (26.5GHz)	6/5/2019	Annual	6/5/2020	100342
Rohde & Schwarz	SFUNIT-Rx	Shielded Filter Unit	7/11/2019	Annual	7/11/2020	102134
Schwarzbeck	UHA 9105	Dipole Antenna (400 - 1GHz) Tx	4/30/2018	Biennial	4/30/2020	9105-2403
Seekonk	NC-100	Torque Wrench (8" lb)	5/10/2018	Biennial	5/10/2020	N/A
Sunol	DRH-118	Horn Antenna (1-18GHz)	10/3/2019	Biennial	10/3/2021	A050307
Sunol	JB5	Bi-Log Antenna (30M - 5GHz)	4/19/2018	Biennial	4/19/2020	A051107

Table 5-1. Test Equipment

Notes:

1. For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.
2. Equipment with a calibration date of "N/A" shown in this list was not used to make direct calibrated measurements.

FCC ID: ZNFT600TS		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2001100004-03.ZNF	Test Dates: 1/13 - 2/14/2020	EUT Type: Portable Tablet	Page 13 of 213	

6.0 SAMPLE CALCULATIONS

Emission Designator

QPSK Modulation

Emission Designator = 8M62G7D

LTE BW = 8.62 MHz
 G = Phase Modulation
 7 = Quantized/Digital Info
 D = Data transmission, telemetry, telecommand

QAM Modulation

Emission Designator = 8M45W7D

LTE BW = 8.45 MHz
 W = Amplitude/Angle Modulated
 7 = Quantized/Digital Info
 D = Data transmission, telemetry, telecommand

Spurious Radiated Emission – LTE Band

Example: Middle Channel LTE Mode 2nd Harmonic (1564 MHz)

The average spectrum analyzer reading at 3 meters with the EUT on the turntable was -81.0 dBm. The gain of the substituted antenna is 8.1 dBi. The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of -81.0 dBm on the spectrum analyzer. The loss of the cable between the signal generator and the terminals of the substituted antenna is 2.0 dB at 1564 MHz. So 6.1 dB is added to the signal generator reading of -30.9 dBm yielding -24.80 dBm. The fundamental EIRP was 25.501 dBm so this harmonic was 25.501 dBm – (-24.80).

FCC ID: ZNFT600TS		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2001100004-03.ZNF	Test Dates: 1/13 - 2/14/2020	EUT Type: Portable Tablet	Page 14 of 213	

7.0 TEST RESULTS

7.1 Summary

Company Name: LG Electronics USA, Inc.
 FCC ID: ZNFT600TS
 FCC Classification: PCS Licensed Transmitter (PCB)
 Mode(s): LTE

FCC Part Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
2.1049	Occupied Bandwidth	N/A	CONDUCTED	PASS	Section 7.2
2.1051 22.917(a) 24.238(a) 27.53(c) 27.53(g) 27.53(h)	Out of Band Emissions	$> 43 + 10 \log_{10}(P[\text{Watts}])$ at Band Edge and for all out-of-band emissions			Section 7.3, 7.4
27.53(m)	Out of Band Emissions	Undesirable emissions must meet the limits detailed in 27.53(m)			Section 7.3, 7.4
24.232(d)	Peak-Average Ratio	< 13 dB			Section 7.5
2.1046	Transmitter Conducted Output Power	N/A			See RF Exposure Report
2.1055 22.355 24.235 27.54	Frequency Stability	< 2.5 ppm (Part 22) and fundamental emissions stay within authorized frequency block (Part 24, 27)			Section 7.8

Table 7-1. Summary of Conducted Test Results

FCC ID: ZNFT600TS		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2001100004-03.ZNF	Test Dates: 1/13 - 2/14/2020	EUT Type: Portable Tablet	Page 15 of 213	

FCC Part Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
22.913(a)(5)	Effective Radiated Power / Equivalent Isotropic Radiated Power (Band 5/26)	< 7 Watts max. ERP	RADIATED	PASS	Section 7.6
27.50(b)(10) 27.50(c)(10)	Effective Radiated Power / Equivalent Isotropic Radiated Power (Band 71, 12, 13)	< 3 Watts max. ERP			Section 7.6
24.232(c) 27.50(h)(2)	Equivalent Isotropic Radiated Power (Band 2/25, 41)	< 2 Watts max. EIRP			Section 7.6
27.50(d)(4)	Equivalent Isotropic Radiated Power (Band 4/66)	< 1 Watts max. EIRP			Section 7.6
2.1053 22.917(a) 24.238(a) 27.53(c) 27.53(g) 27.53(h)	Undesirable Emissions (Band 12, 13, 26/5, 66/4, 25/2)	> 43 + 10 log ₁₀ (P[Watts]) for all out-of-band emissions			Section 7.7
27.53(f)	Undesirable Emissions (Band 13)	< -70 dBW/MHz (for wideband signals) < -80 dBW (for discrete emissions less than 700Hz BW) For all emissions in the band 1559 – 1610 MHz			Section 7.7
27.53(m)	Undesirable Emissions (Band 41)	Undesirable emissions must meet the limits detailed in 27.53(m)			Section 7.7

Table 7-2. Summary of Radiated Test Results

Notes:

- 1) All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots (Sections 7.2, 7.3, 7.4, 7.5) were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables, directional couplers, and attenuators used as part of the system to maintain a link between the call box and the EUT at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables, attenuators, and couplers.
- 4) For conducted spurious emissions, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is PCTEST "LTE Automation," Version 5.6.
- 5) For operation <1GHz, the EIRP limits in the table above are referenced to the specifications written in the relevant Radio Standards Specifications for Innovation, Science, and Economic Development Canada.

FCC ID: ZNFT600TS		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2001100004-03.ZNF	Test Dates: 1/13 - 2/14/2020	EUT Type: Portable Tablet	Page 16 of 213	

7.2 Occupied Bandwidth

Test Overview

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Procedure Used

KDB 971168 D01 v03r01 – Section 4.2

Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5% of the expected OBW
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5% of the 99% occupied bandwidth observed in Step 7

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

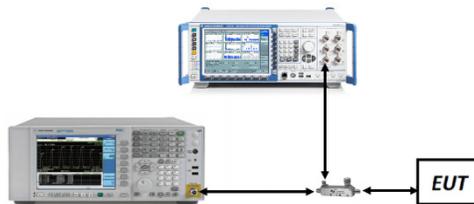



Figure 7-1. Test Instrument & Measurement Setup

Test Notes


None.

FCC ID: ZNFT600TS		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2001100004-03.ZNF	Test Dates: 1/13 - 2/14/2020	EUT Type: Portable Tablet		Page 17 of 213

Band 71

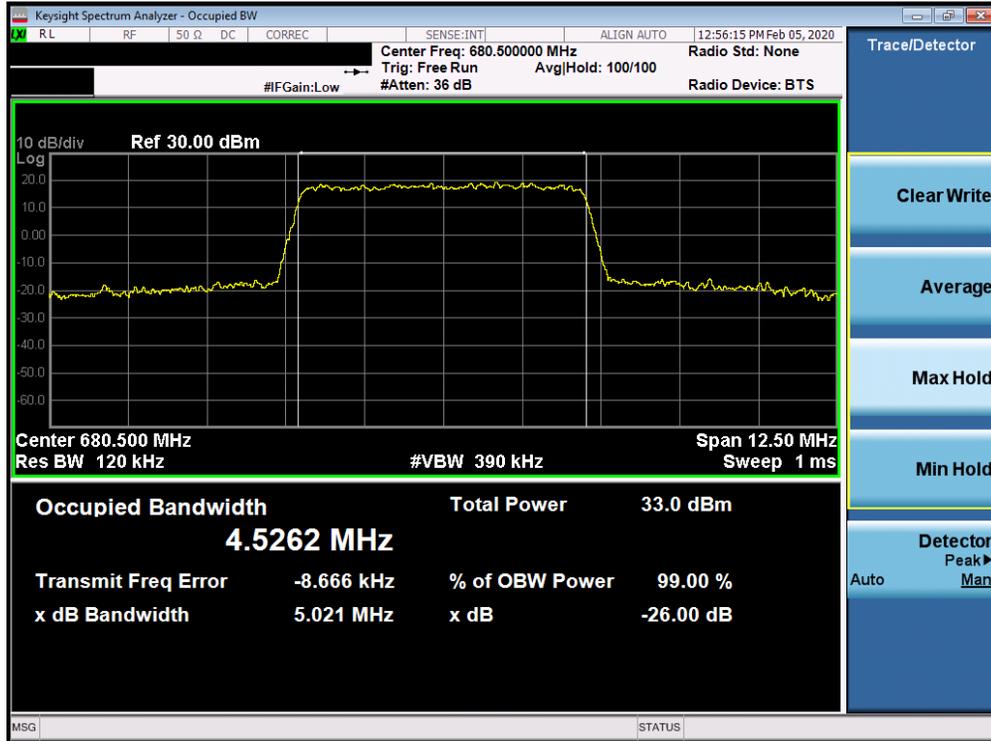


Plot 7-1. Occupied Bandwidth Plot (Band 71 - 5.0MHz QPSK - Full RB Configuration)

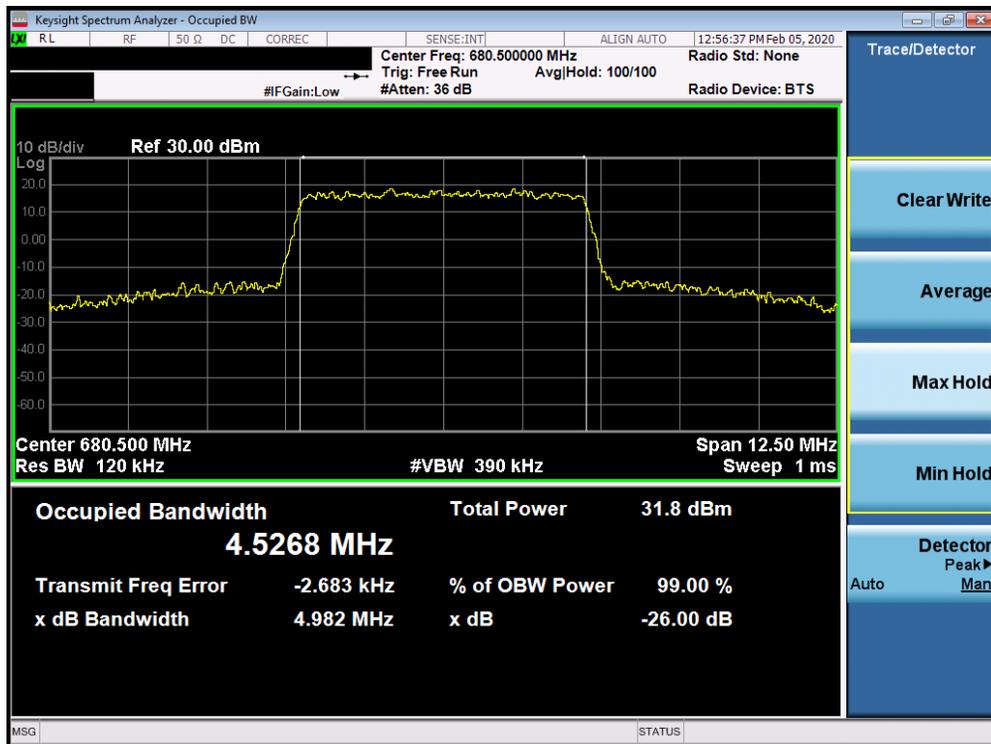

Plot 7-2. Occupied Bandwidth Plot (Band 71 - 5.0MHz 16-QAM - Full RB Configuration)

FCC ID: ZNFT600TS		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2001100004-03.ZNF	Test Dates: 1/13 - 2/14/2020	EUT Type: Portable Tablet		Page 18 of 213

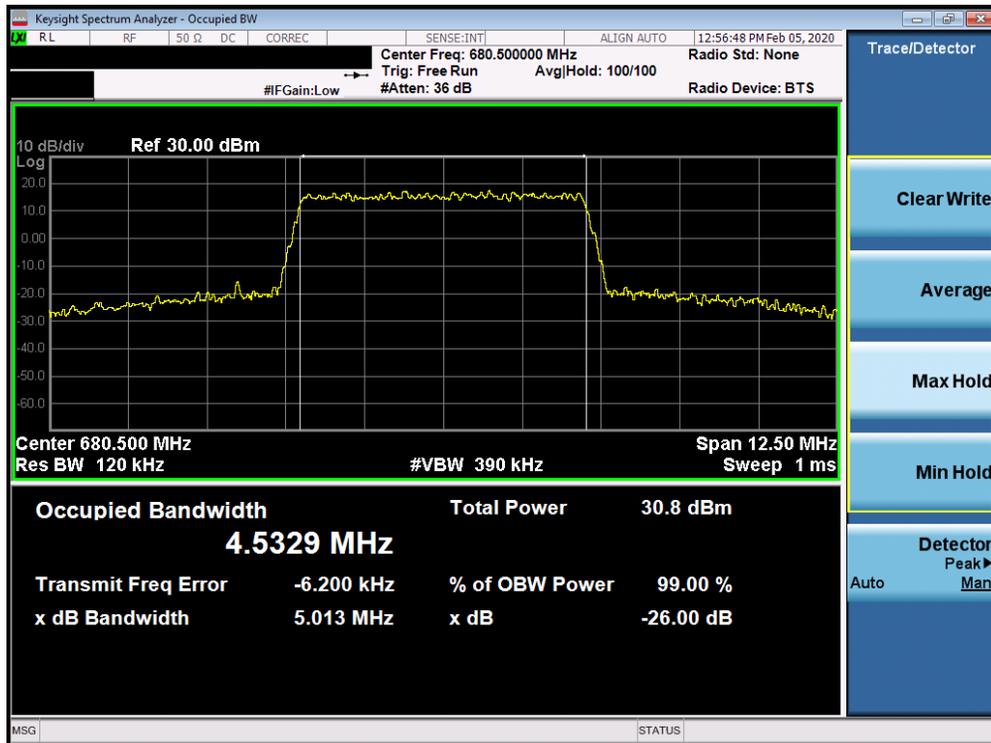

Plot 7-3. Occupied Bandwidth Plot (Band 71 - 5.0MHz 64-QAM - Full RB Configuration)




Plot 7-4. Occupied Bandwidth Plot (Band 71 - 10.0MHz QPSK - Full RB Configuration)

FCC ID: ZNFT600TS		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2001100004-03.ZNF	Test Dates: 1/13 - 2/14/2020	EUT Type: Portable Tablet		Page 19 of 213



Plot 7-5. Occupied Bandwidth Plot (Band 71 - 10.0MHz 16-QAM - Full RB Configuration)

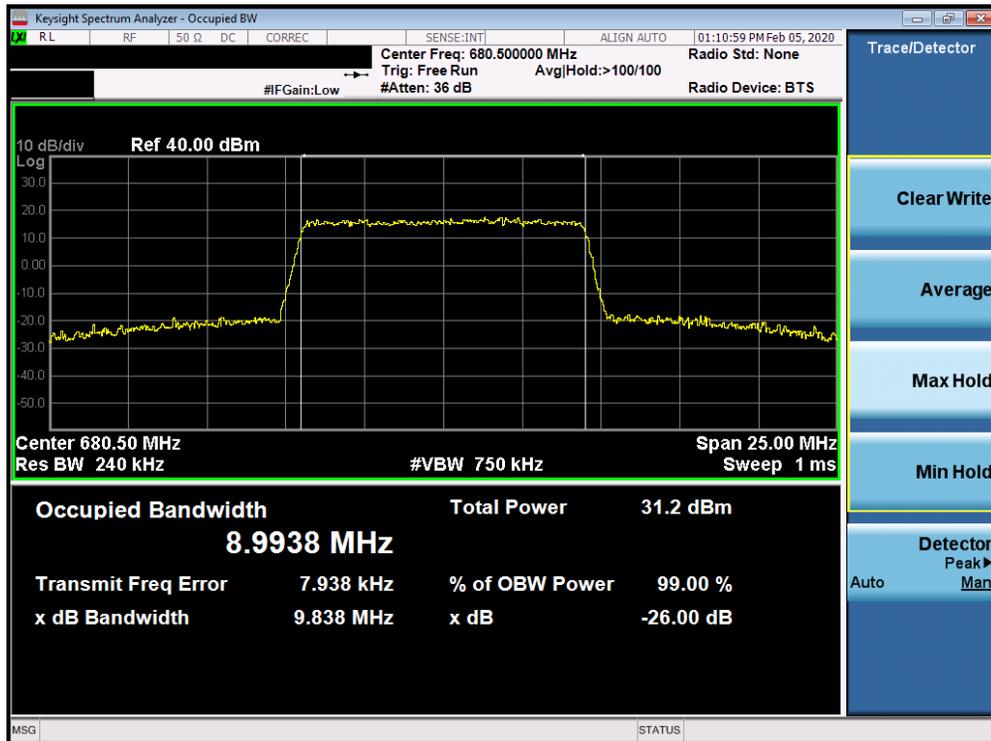


Plot 7-6. Occupied Bandwidth Plot (Band 71 - 10.0MHz 64-QAM - Full RB Configuration)

FCC ID: ZNFT600TS		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2001100004-03.ZNF	Test Dates: 1/13 - 2/14/2020	EUT Type: Portable Tablet		Page 20 of 213



Plot 7-7. Occupied Bandwidth Plot (Band 71 - 15.0MHz QPSK - Full RB Configuration)

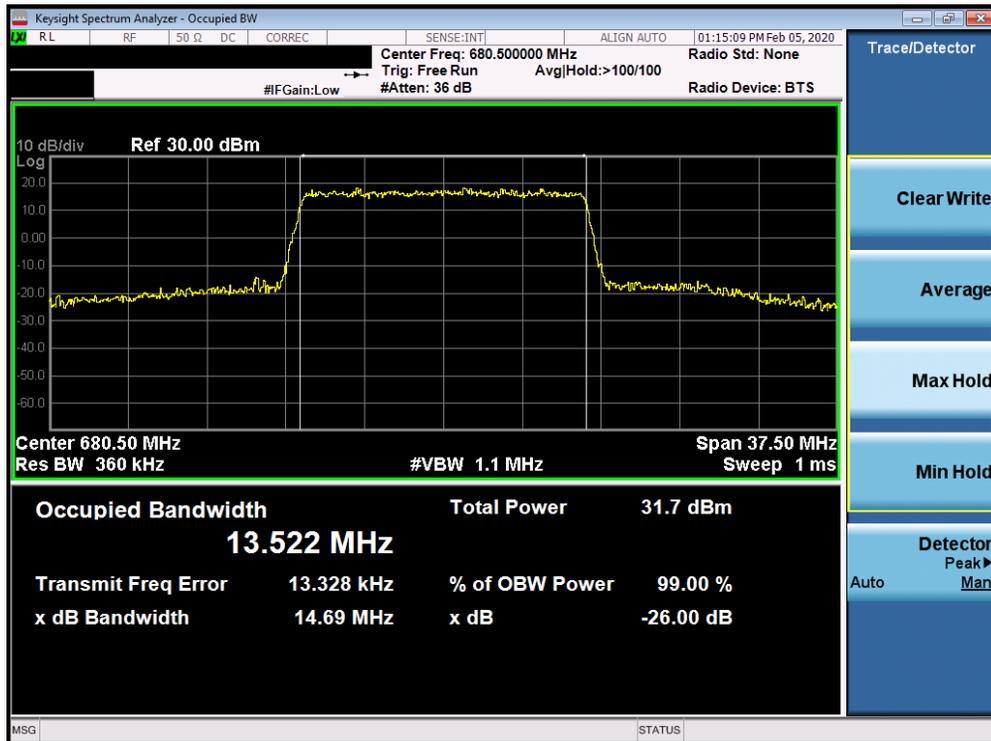

Plot 7-8. Occupied Bandwidth Plot (Band 71 - 15.0MHz 16-QAM - Full RB Configuration)

FCC ID: ZNFT600TS		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2001100004-03.ZNF	Test Dates: 1/13 - 2/14/2020	EUT Type: Portable Tablet		Page 21 of 213



Plot 7-9. Occupied Bandwidth Plot (Band 71 - 15.0MHz 64-QAM - Full RB Configuration)




Plot 7-10. Occupied Bandwidth Plot (Band 71 - 20.0MHz QPSK - Full RB Configuration)

FCC ID: ZNFT600TS		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2001100004-03.ZNF	Test Dates: 1/13 - 2/14/2020	EUT Type: Portable Tablet		Page 22 of 213




Plot 7-11. Occupied Bandwidth Plot (Band 71 - 20.0MHz 16-QAM - Full RB Configuration)

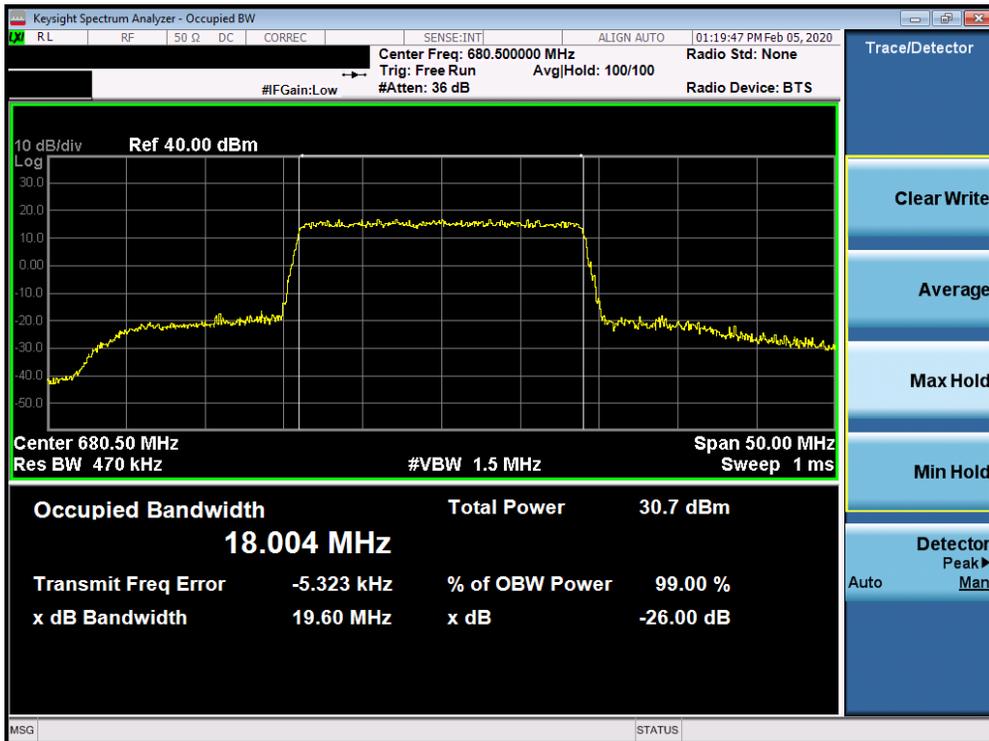


Plot 7-12. Occupied Bandwidth Plot (Band 71 - 20.0MHz 64-QAM - Full RB Configuration)

FCC ID: ZNFT600TS		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2001100004-03.ZNF	Test Dates: 1/13 - 2/14/2020	EUT Type: Portable Tablet		Page 23 of 213

Band 12

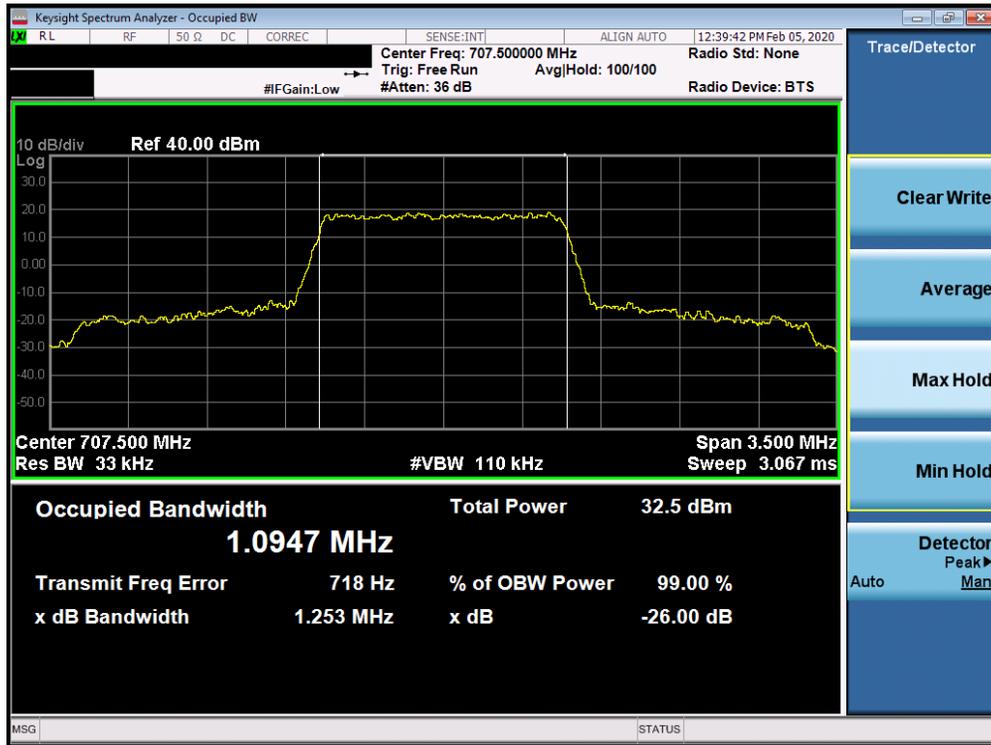

Plot 7-13. Occupied Bandwidth Plot (Band 12 - 1.4MHz QPSK - Full RB Configuration)

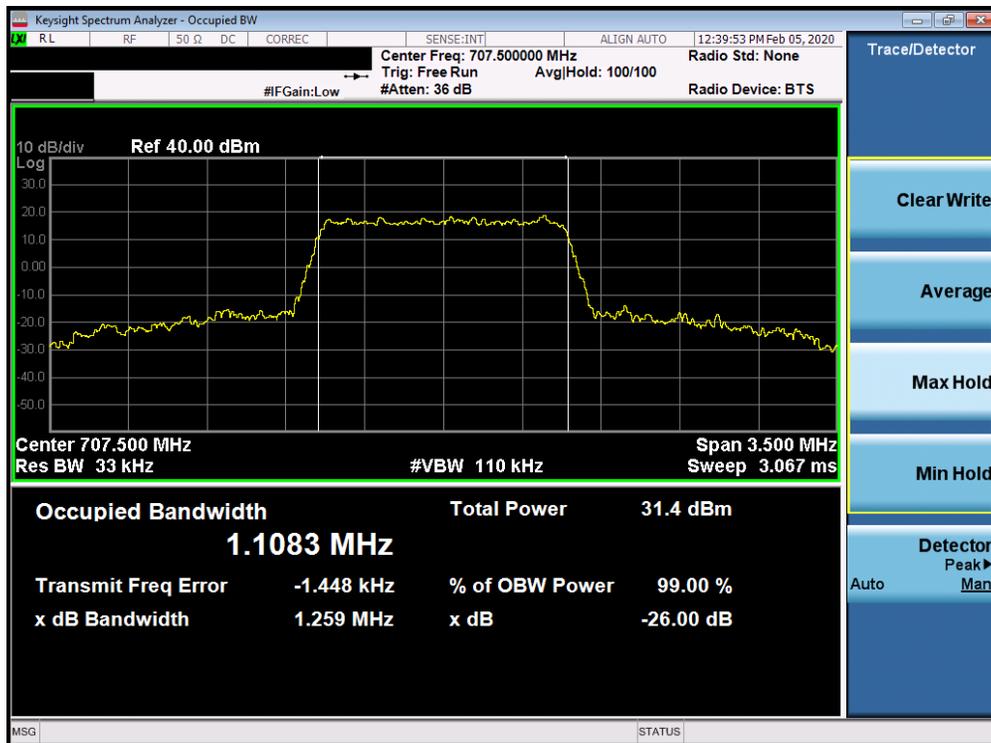


Plot 7-14. Occupied Bandwidth Plot (Band 12 - 1.4MHz 16-QAM - Full RB Configuration)

FCC ID: ZNFT600TS		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2001100004-03.ZNF	Test Dates: 1/13 - 2/14/2020	EUT Type: Portable Tablet		Page 24 of 213




Plot 7-15. Occupied Bandwidth Plot (Band 12 - 1.4MHz 64-QAM - Full RB Configuration)

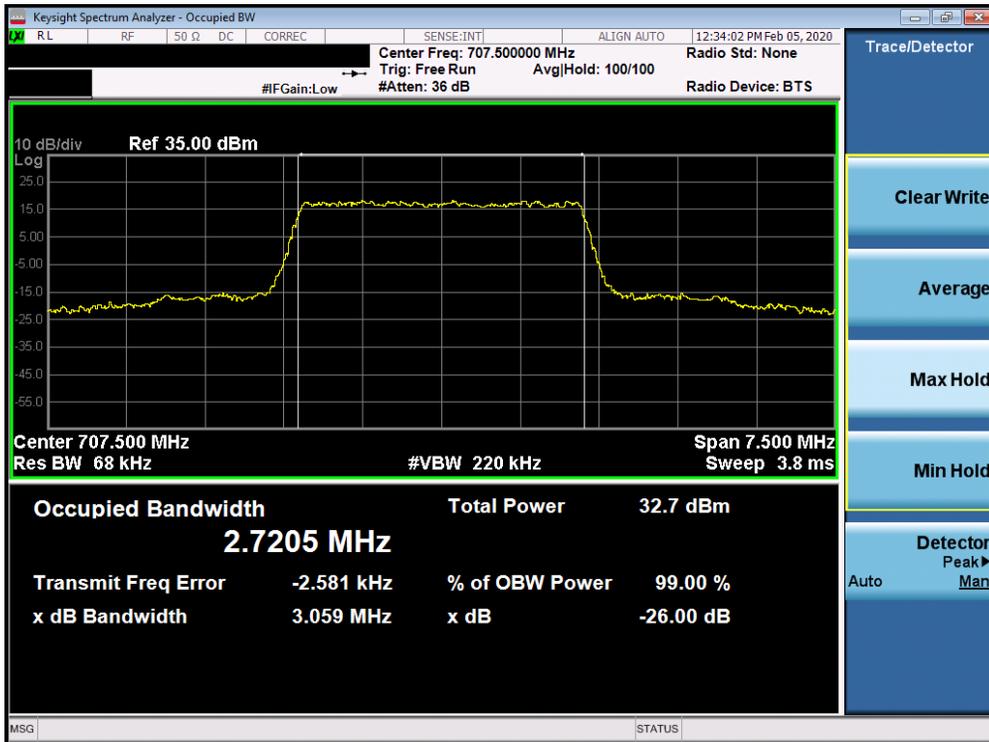


Plot 7-16. Occupied Bandwidth Plot (Band 12 - 3.0MHz QPSK - Full RB Configuration)

FCC ID: ZNFT600TS		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2001100004-03.ZNF	Test Dates: 1/13 - 2/14/2020	EUT Type: Portable Tablet		Page 25 of 213

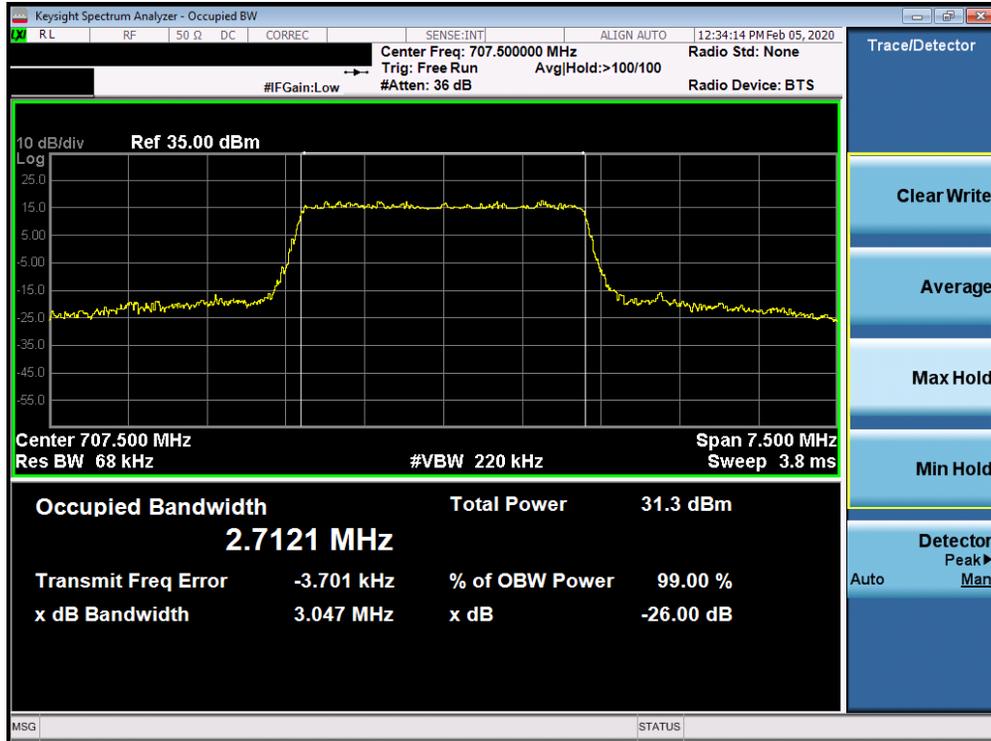


Plot 7-17. Occupied Bandwidth Plot (Band 12 - 3.0MHz 16-QAM - Full RB Configuration)

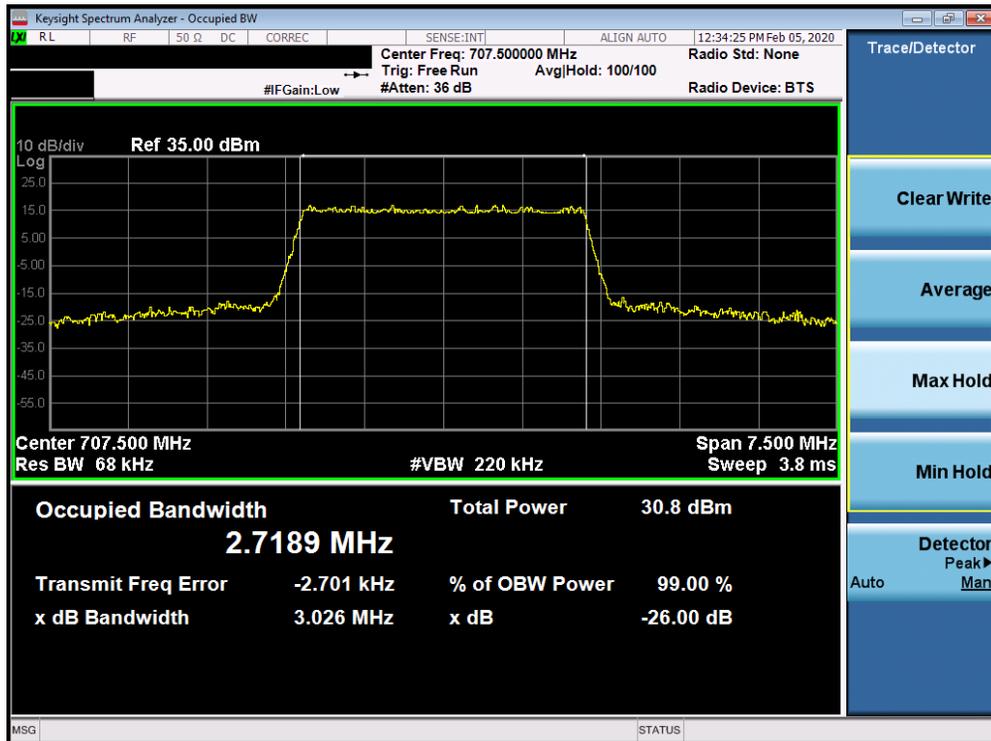


Plot 7-18. Occupied Bandwidth Plot (Band 12 - 3.0MHz 64-QAM - Full RB Configuration)

FCC ID: ZNFT600TS		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2001100004-03.ZNF	Test Dates: 1/13 - 2/14/2020	EUT Type: Portable Tablet		Page 26 of 213

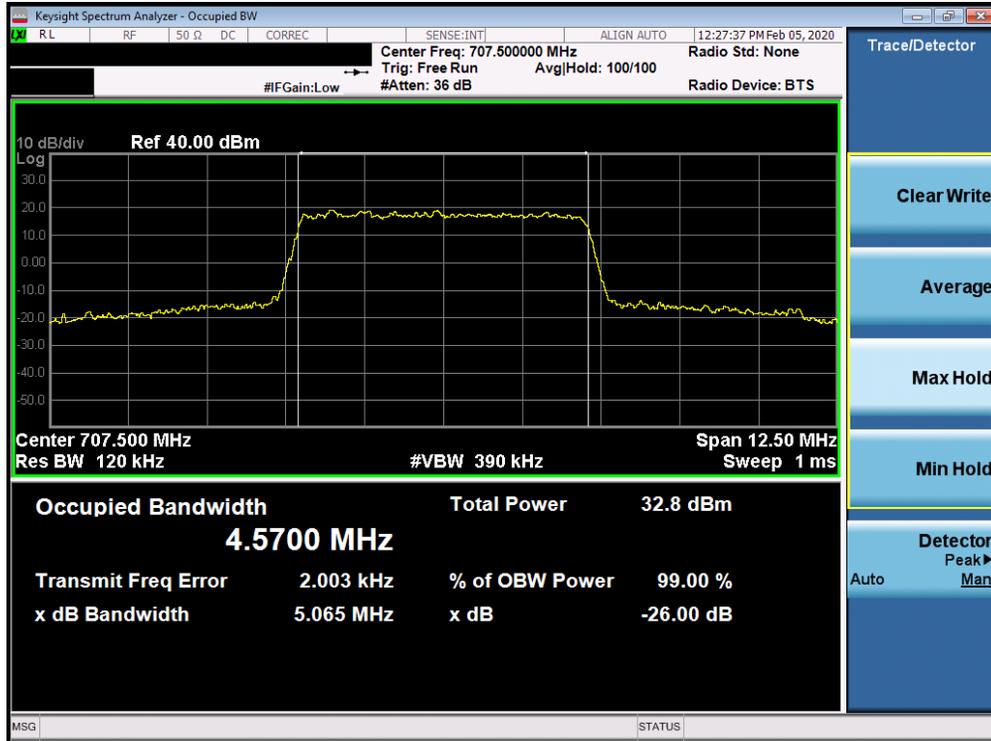


Plot 7-19. Occupied Bandwidth Plot (Band 12 - 5.0MHz QPSK - Full RB Configuration)

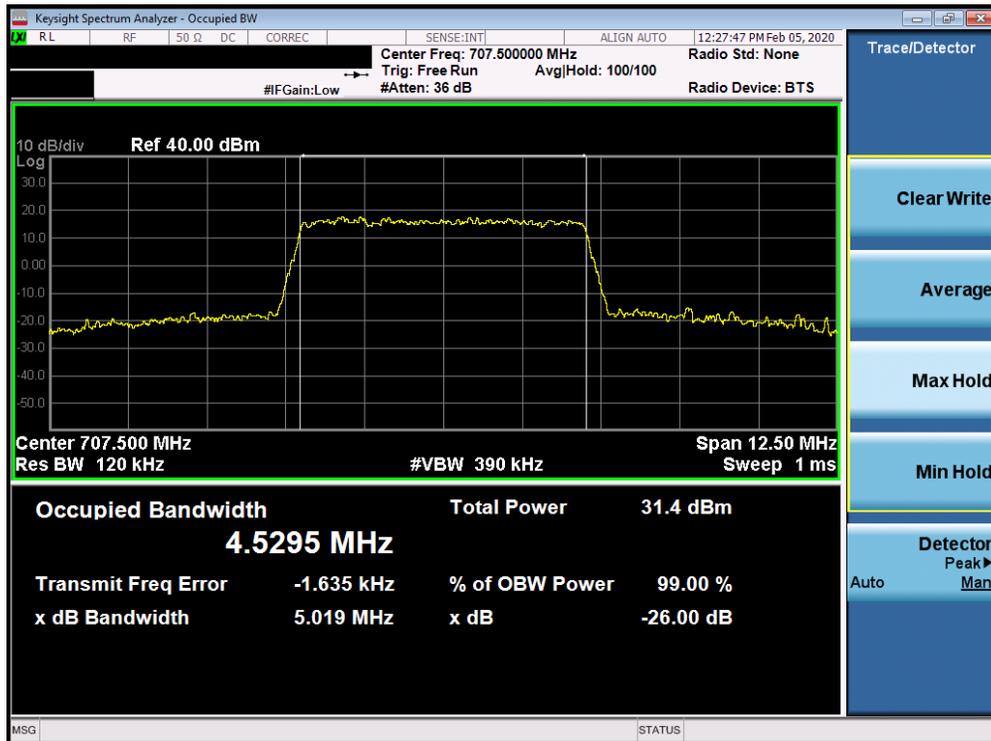


Plot 7-20. Occupied Bandwidth Plot (Band 12 - 5.0MHz 16-QAM - Full RB Configuration)

FCC ID: ZNFT600TS		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2001100004-03.ZNF	Test Dates: 1/13 - 2/14/2020	EUT Type: Portable Tablet		Page 27 of 213

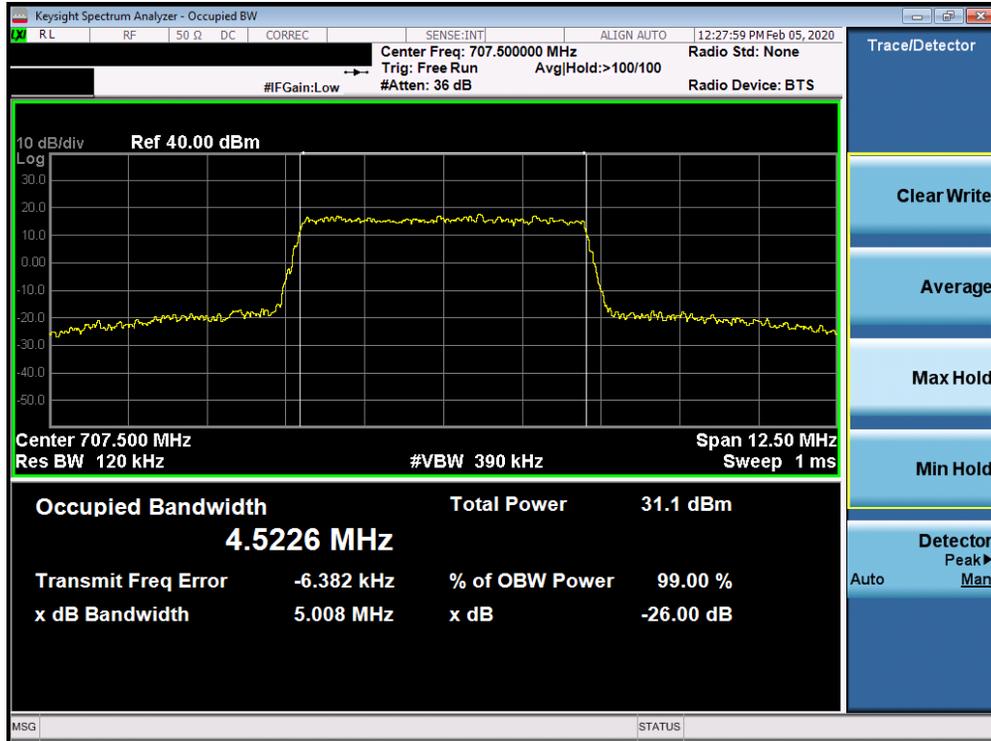

Plot 7-21. Occupied Bandwidth Plot (Band 12 - 5.0MHz 64-QAM - Full RB Configuration)

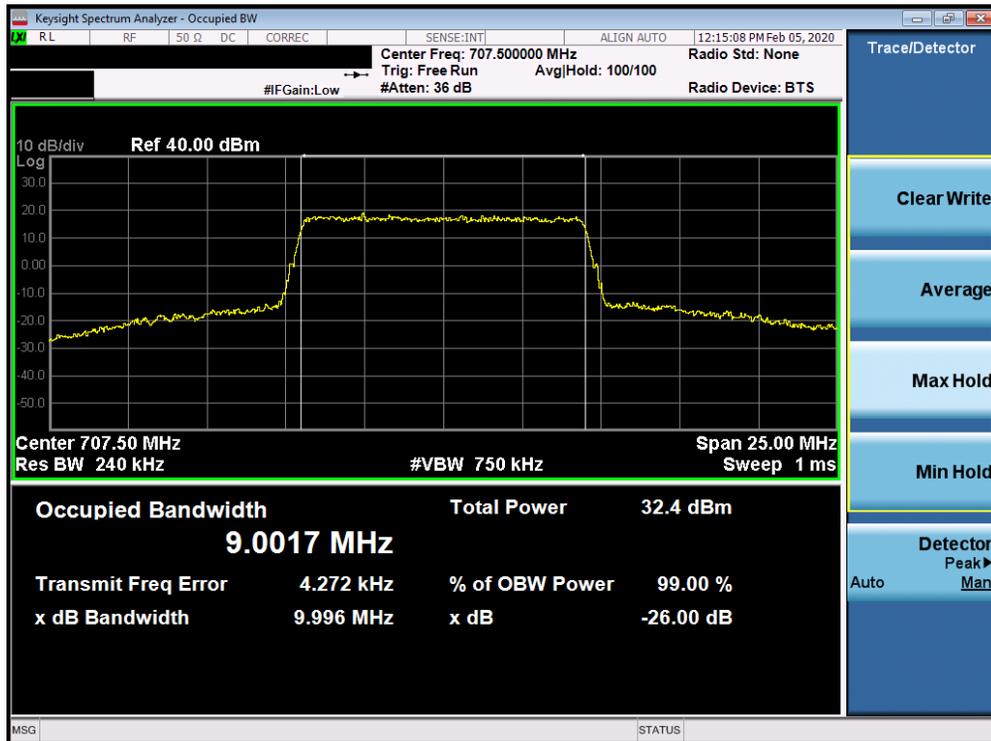


Plot 7-22. Occupied Bandwidth Plot (Band 12 - 10.0MHz QPSK - Full RB Configuration)

FCC ID: ZNFT600TS		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2001100004-03.ZNF	Test Dates: 1/13 - 2/14/2020	EUT Type: Portable Tablet		Page 28 of 213




Plot 7-23. Occupied Bandwidth Plot (Band 12 - 10.0MHz 16-QAM - Full RB Configuration)

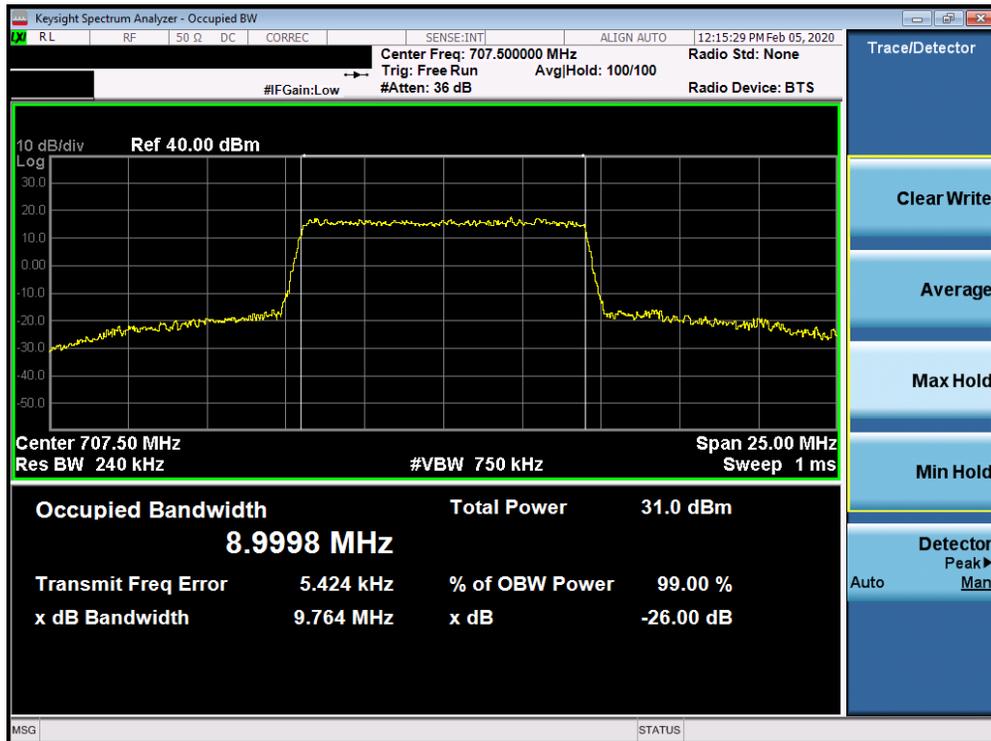

Plot 7-24. Occupied Bandwidth Plot (Band 12 - 10.0MHz 64-QAM - Full RB Configuration)

FCC ID: ZNFT600TS		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2001100004-03.ZNF	Test Dates: 1/13 - 2/14/2020	EUT Type: Portable Tablet		Page 29 of 213

Band 13

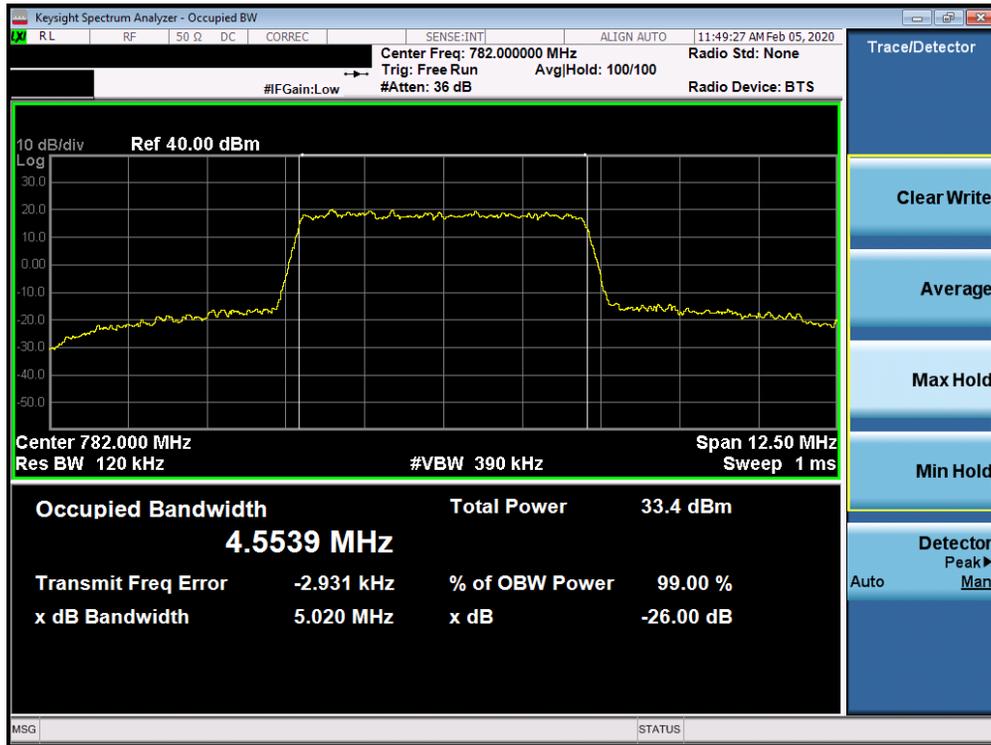

Plot 7-25. Occupied Bandwidth Plot (Band 13 - 5.0MHz QPSK - Full RB Configuration)




Plot 7-26. Occupied Bandwidth Plot (Band 13 - 5.0MHz 16-QAM - Full RB Configuration)

FCC ID: ZNFT600TS		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2001100004-03.ZNF	Test Dates: 1/13 - 2/14/2020	EUT Type: Portable Tablet		Page 30 of 213




Plot 7-27. Occupied Bandwidth Plot (Band 13 - 5.0MHz 64-QAM - Full RB Configuration)

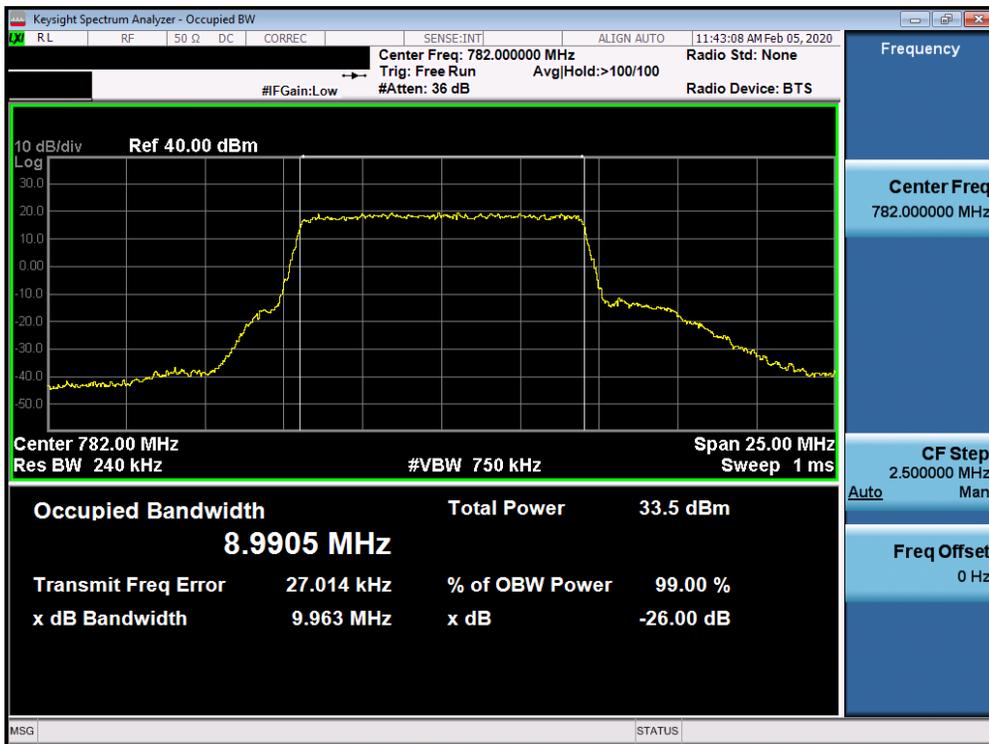


Plot 7-28. Occupied Bandwidth Plot (Band 13 - 10.0MHz QPSK - Full RB Configuration)

FCC ID: ZNFT600TS		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2001100004-03.ZNF	Test Dates: 1/13 - 2/14/2020	EUT Type: Portable Tablet		Page 31 of 213

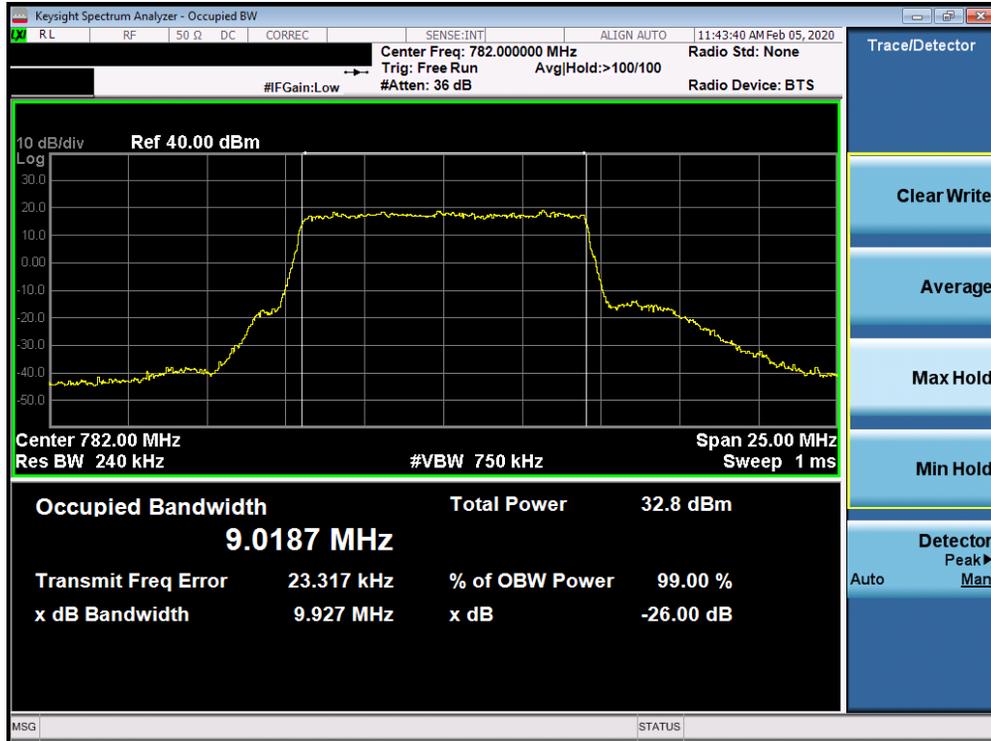

Plot 7-29. Occupied Bandwidth Plot (Band 13 - 10.0MHz 16-QAM - Full RB Configuration)

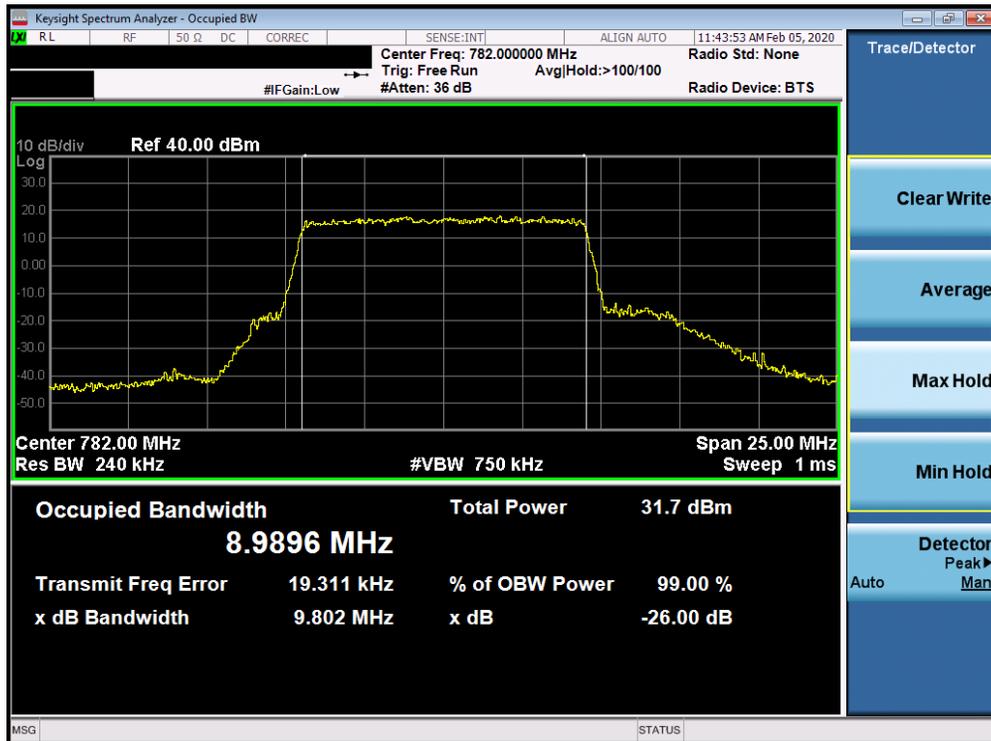


Plot 7-30. Occupied Bandwidth Plot (Band 13 - 10.0MHz 64-QAM - Full RB Configuration)

FCC ID: ZNFT600TS		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2001100004-03.ZNF	Test Dates: 1/13 - 2/14/2020	EUT Type: Portable Tablet		Page 32 of 213

Band 26/5




Plot 7-31. Occupied Bandwidth Plot (Band 26/5 - 1.4MHz QPSK - Full RB Configuration)

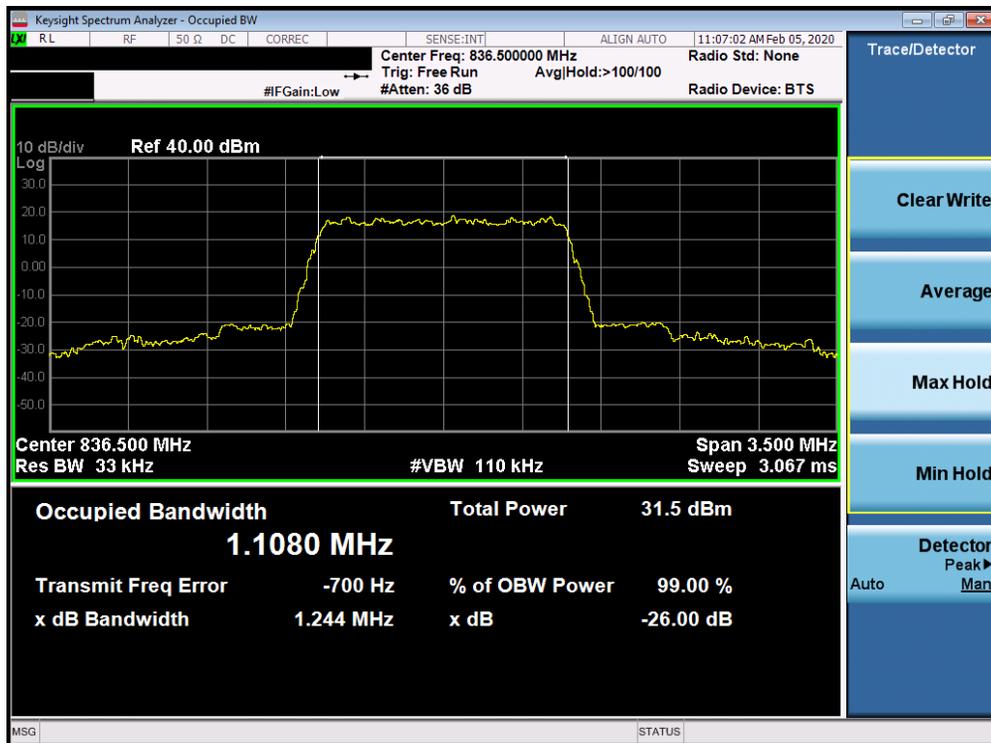


Plot 7-32. Occupied Bandwidth Plot (Band 26/5 - 1.4MHz 16-QAM - Full RB Configuration)

FCC ID: ZNFT600TS		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2001100004-03.ZNF	Test Dates: 1/13 - 2/14/2020	EUT Type: Portable Tablet		Page 33 of 213

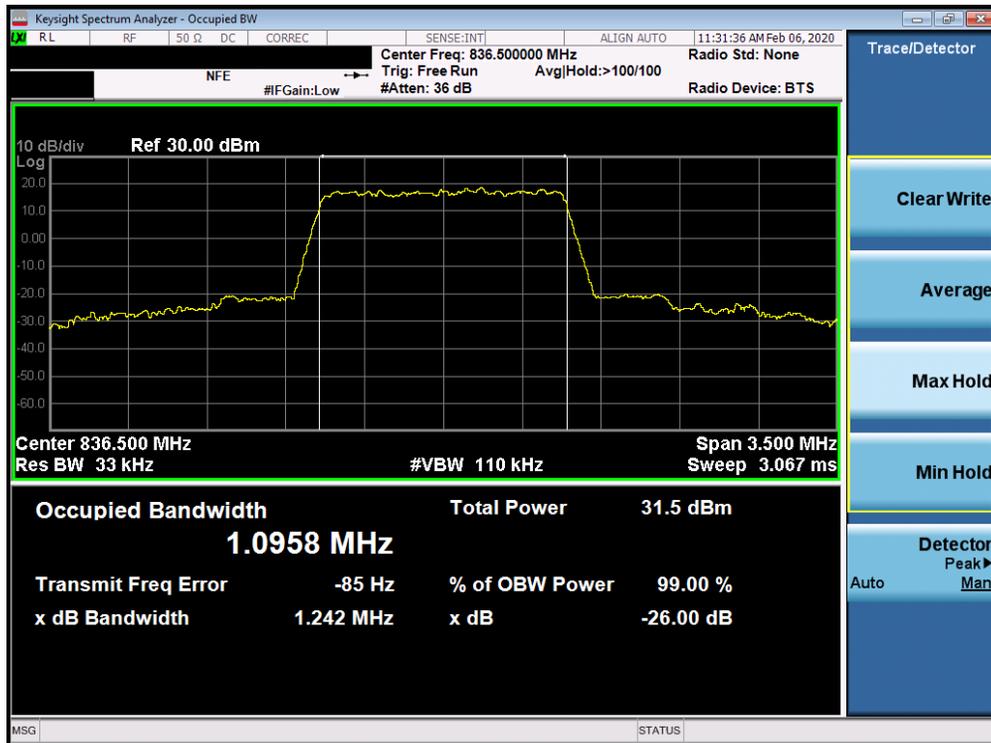


Plot 7-33. Occupied Bandwidth Plot (Band 26/5 - 1.4MHz 64-QAM - Full RB Configuration)

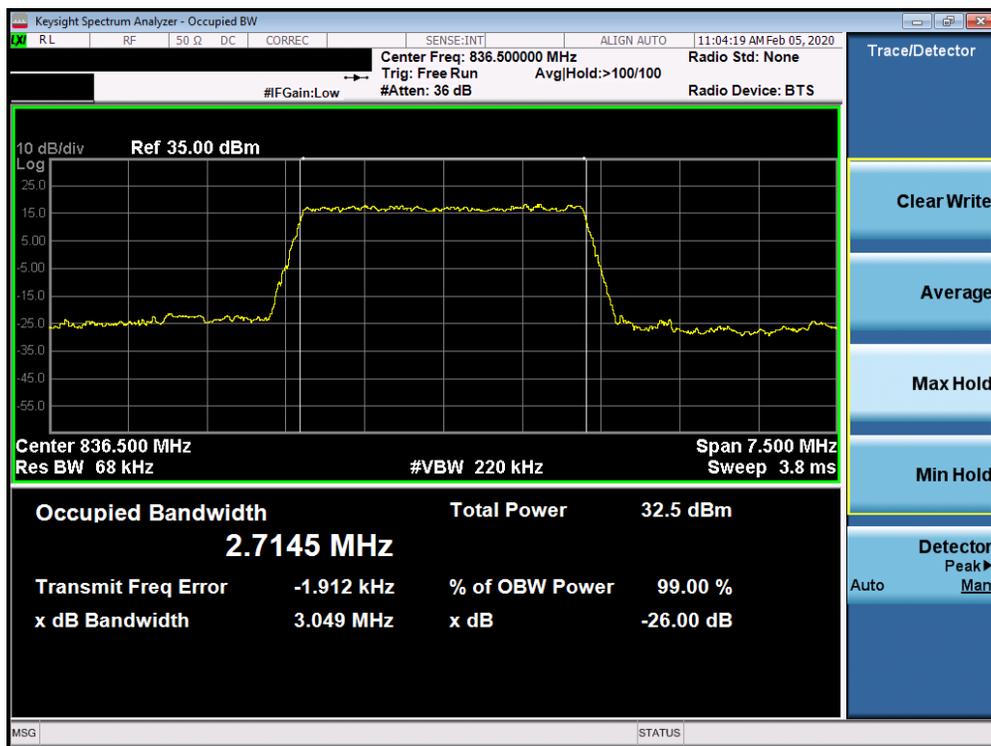


Plot 7-34. Occupied Bandwidth Plot (Band 26/5 - 3.0MHz QPSK - Full RB Configuration)

FCC ID: ZNFT600TS		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2001100004-03.ZNF	Test Dates: 1/13 - 2/14/2020	EUT Type: Portable Tablet		Page 34 of 213

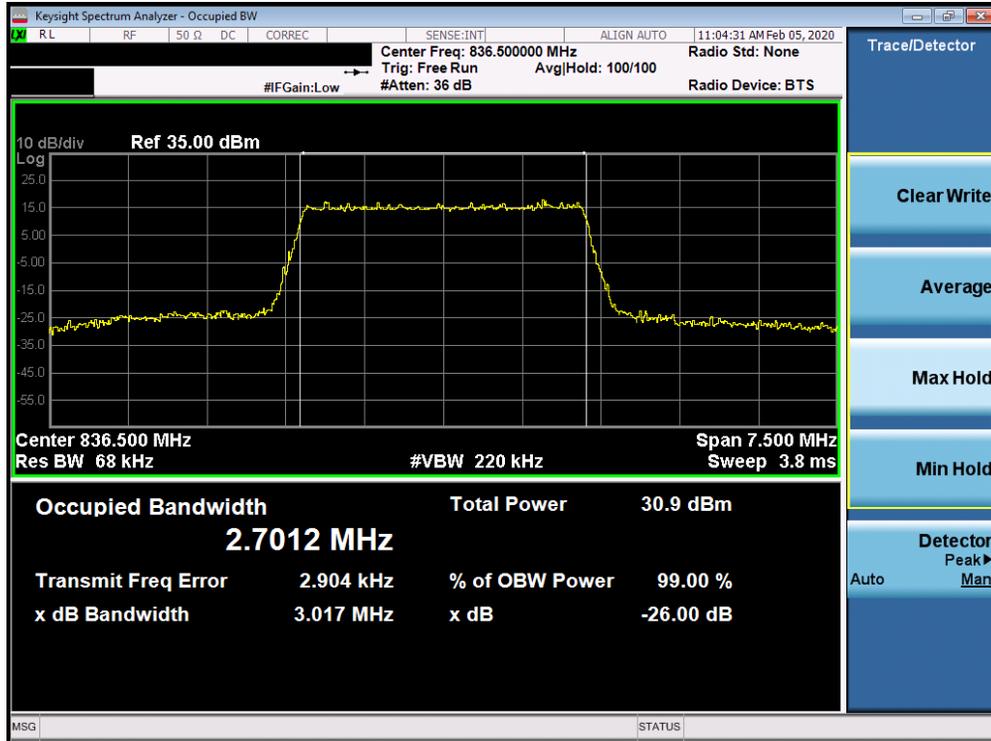


Plot 7-35. Occupied Bandwidth Plot (Band 26/5 - 3.0MHz 16-QAM - Full RB Configuration)

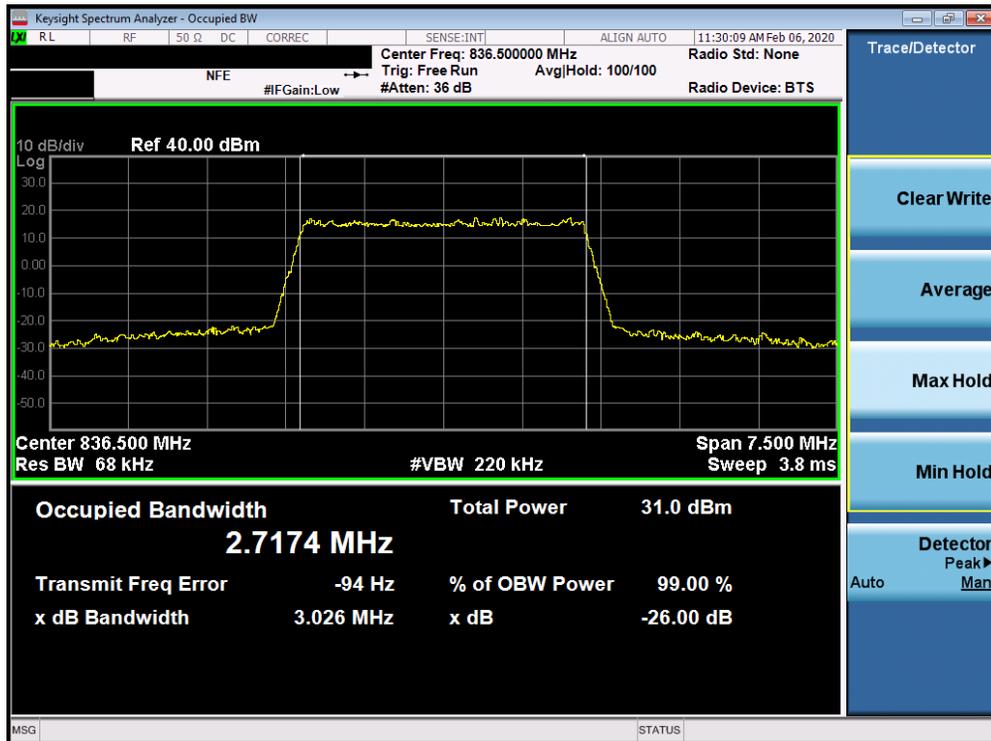


Plot 7-36. Occupied Bandwidth Plot (Band 26/5 - 3.0MHz 64-QAM - Full RB Configuration)

FCC ID: ZNFT600TS		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2001100004-03.ZNF	Test Dates: 1/13 - 2/14/2020	EUT Type: Portable Tablet		Page 35 of 213

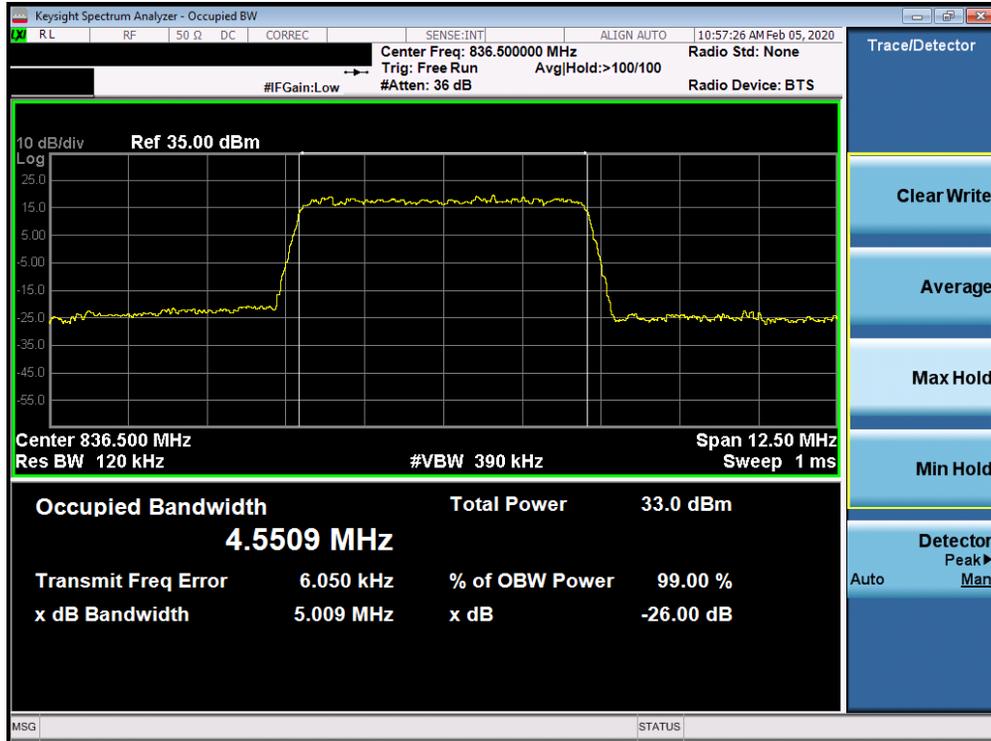


Plot 7-37. Occupied Bandwidth Plot (Band 26/5 - 5.0MHz QPSK - Full RB Configuration)

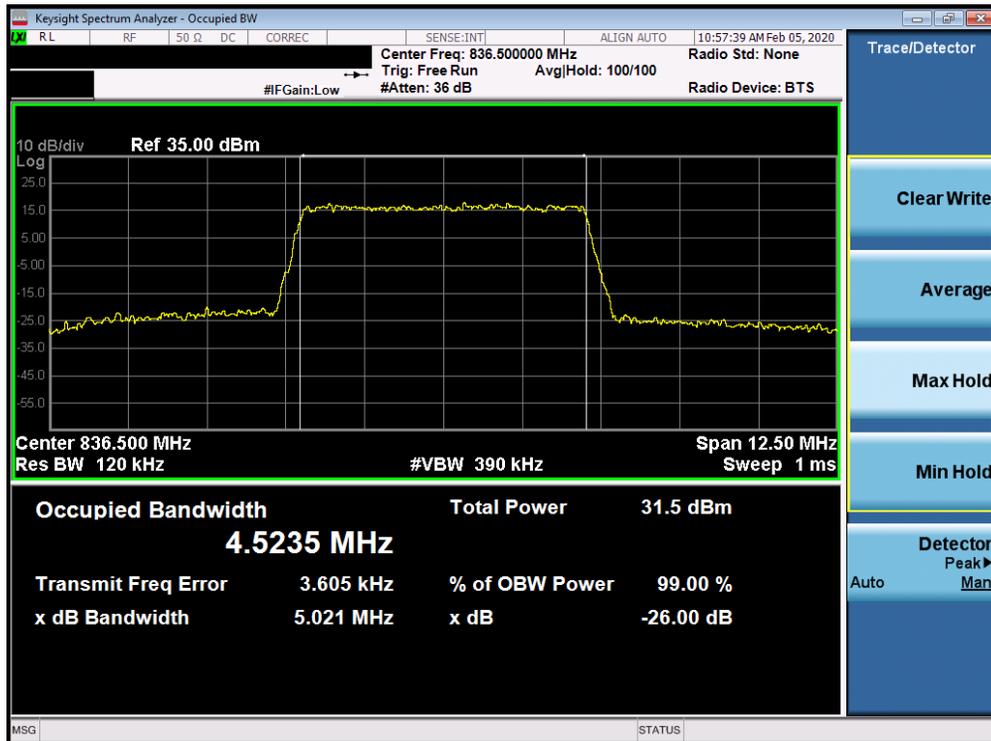


Plot 7-38. Occupied Bandwidth Plot (Band 26/5 - 5.0MHz 16-QAM - Full RB Configuration)

FCC ID: ZNFT600TS		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2001100004-03.ZNF	Test Dates: 1/13 - 2/14/2020	EUT Type: Portable Tablet		Page 36 of 213

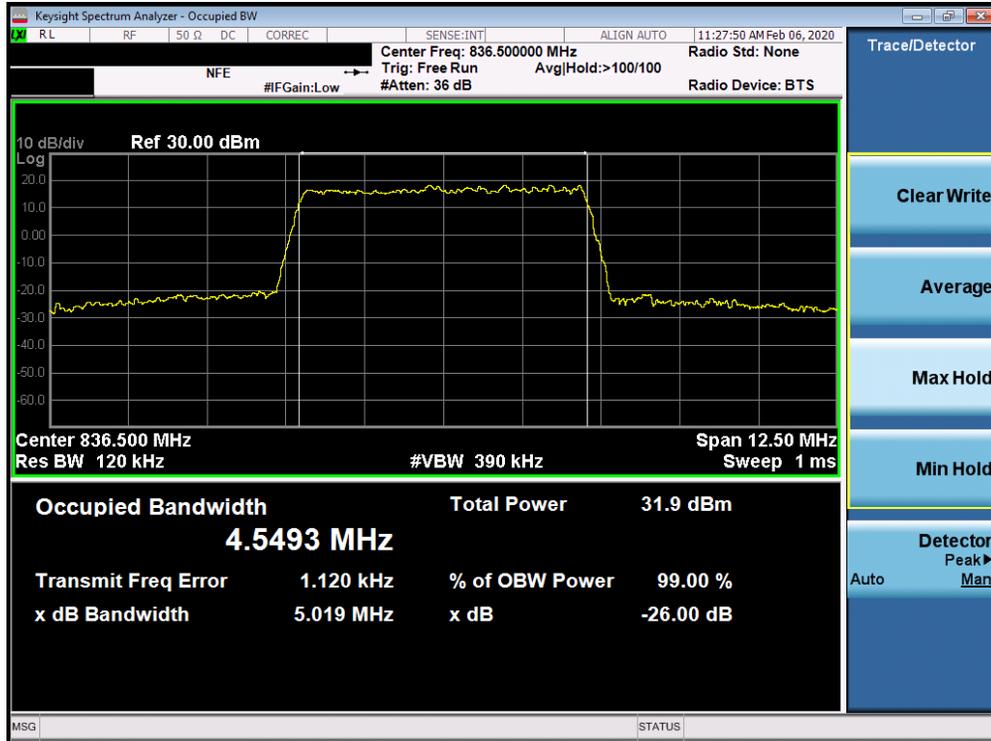

Plot 7-39. Occupied Bandwidth Plot (Band 26/5 - 5.0MHz 64-QAM - Full RB Configuration)

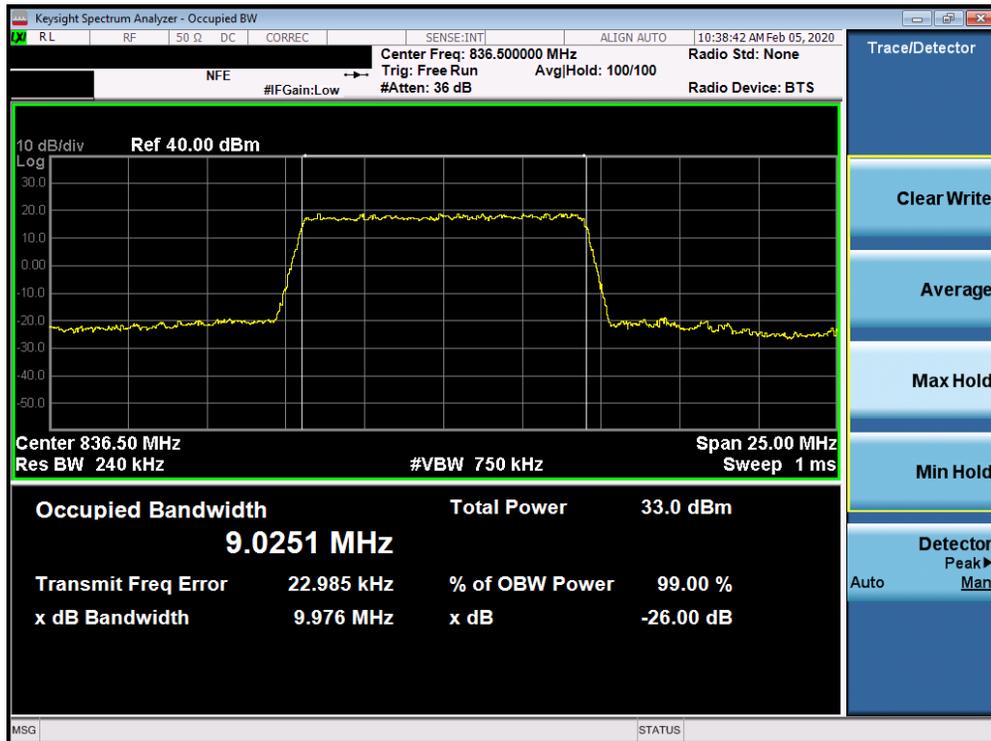


Plot 7-40. Occupied Bandwidth Plot (Band 26/5 - 10.0MHz QPSK - Full RB Configuration)

FCC ID: ZNFT600TS		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2001100004-03.ZNF	Test Dates: 1/13 - 2/14/2020	EUT Type: Portable Tablet		Page 37 of 213



Plot 7-41. Occupied Bandwidth Plot (Band 26/5 - 10.0MHz 16-QAM - Full RB Configuration)

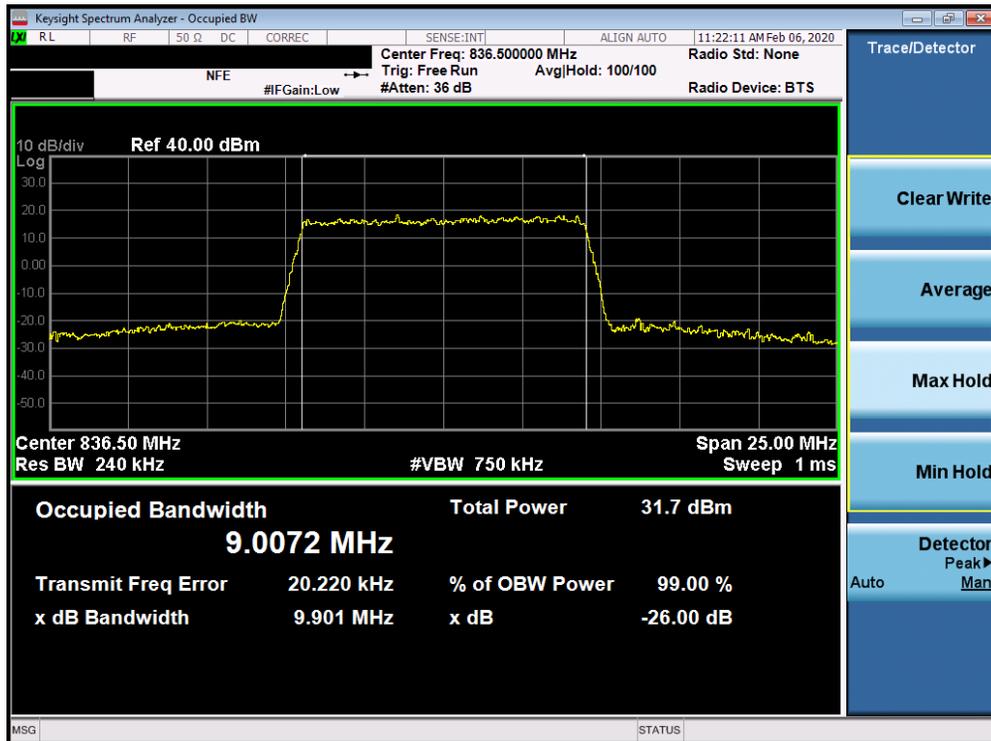


Plot 7-42. Occupied Bandwidth Plot (Band 26/5 - 10.0MHz 64-QAM - Full RB Configuration)

FCC ID: ZNFT600TS		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2001100004-03.ZNF	Test Dates: 1/13 - 2/14/2020	EUT Type: Portable Tablet		Page 38 of 213




Plot 7-43. Occupied Bandwidth Plot (Band 26 - 15.0MHz QPSK - Full RB Configuration)

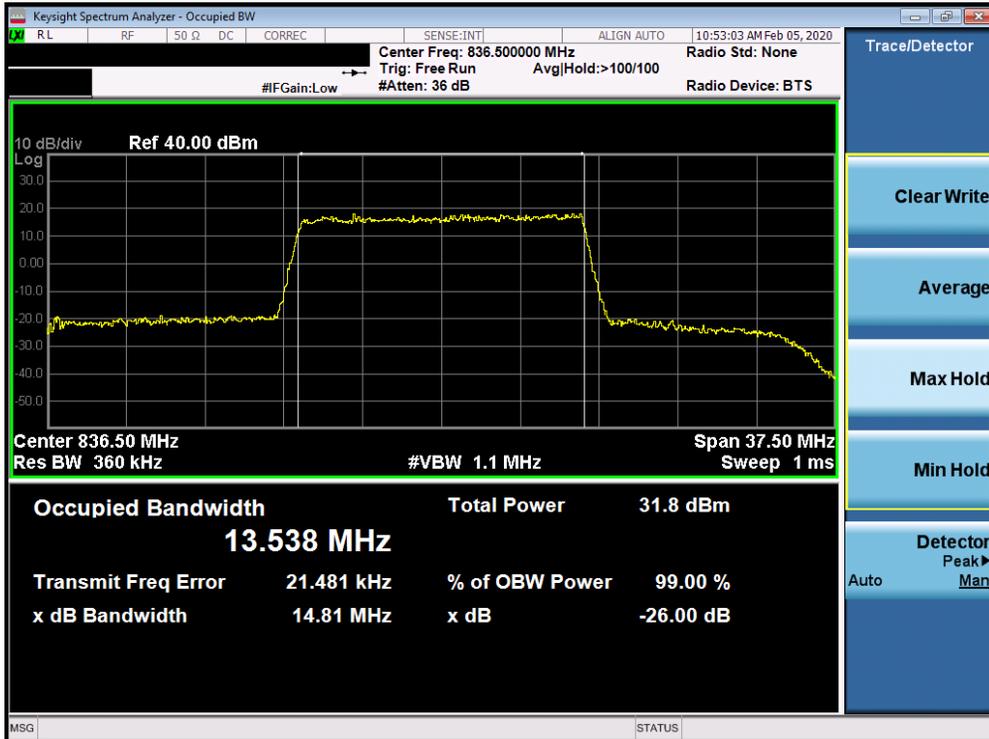

Plot 7-44. Occupied Bandwidth Plot (Band 26 - 15.0MHz 16-QAM - Full RB Configuration)


FCC ID: ZNFT600TS		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2001100004-03.ZNF	Test Dates: 1/13 - 2/14/2020	EUT Type: Portable Tablet		Page 39 of 213

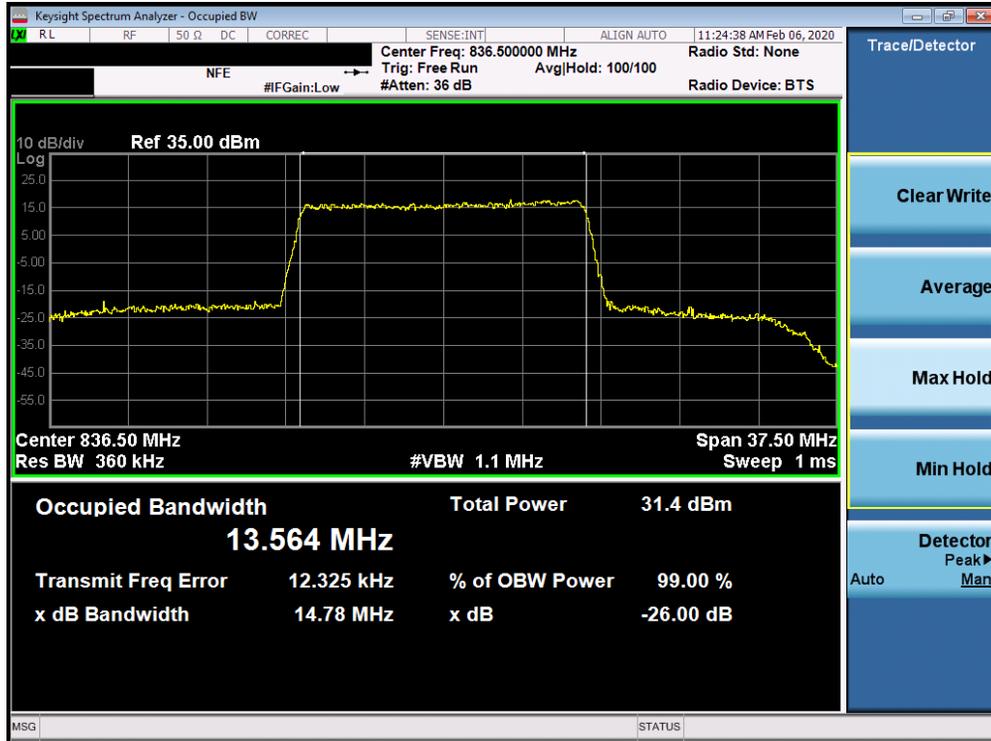


Plot 7-45. Occupied Bandwidth Plot (Band 26 - 15.0MHz 64-QAM - Full RB Configuration)

FCC ID: ZNFT600TS		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2001100004-03.ZNF	Test Dates: 1/13 - 2/14/2020	EUT Type: Portable Tablet		Page 40 of 213

Band 66/4

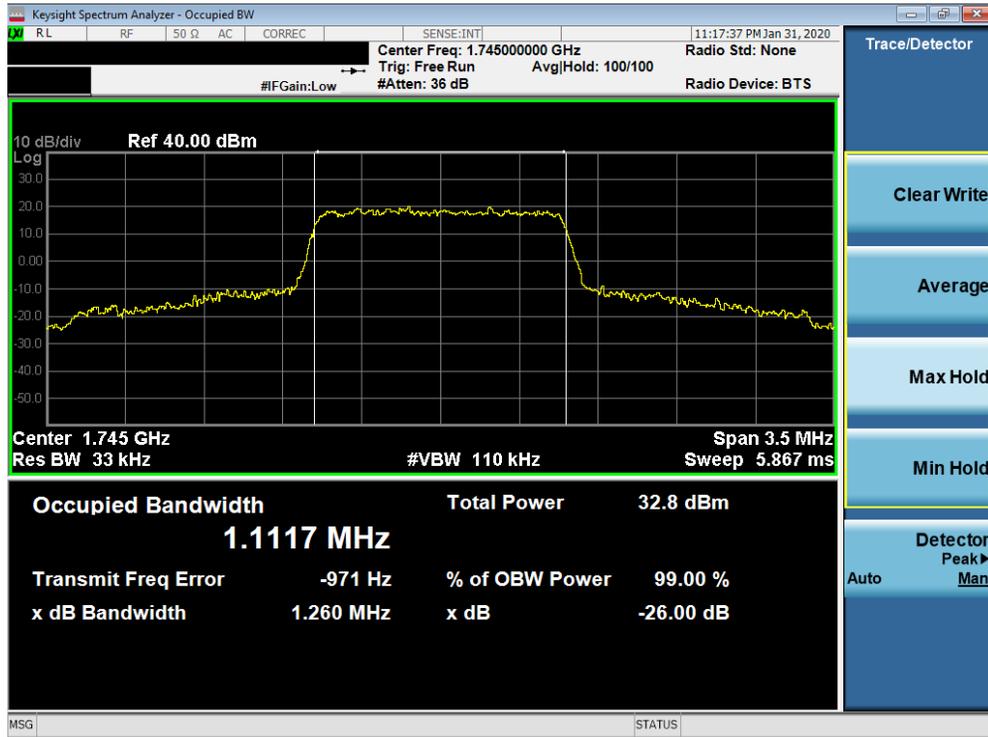


Plot 7-46. Occupied Bandwidth Plot (Band 66/4 - 1.4MHz QPSK - Full RB Configuration)

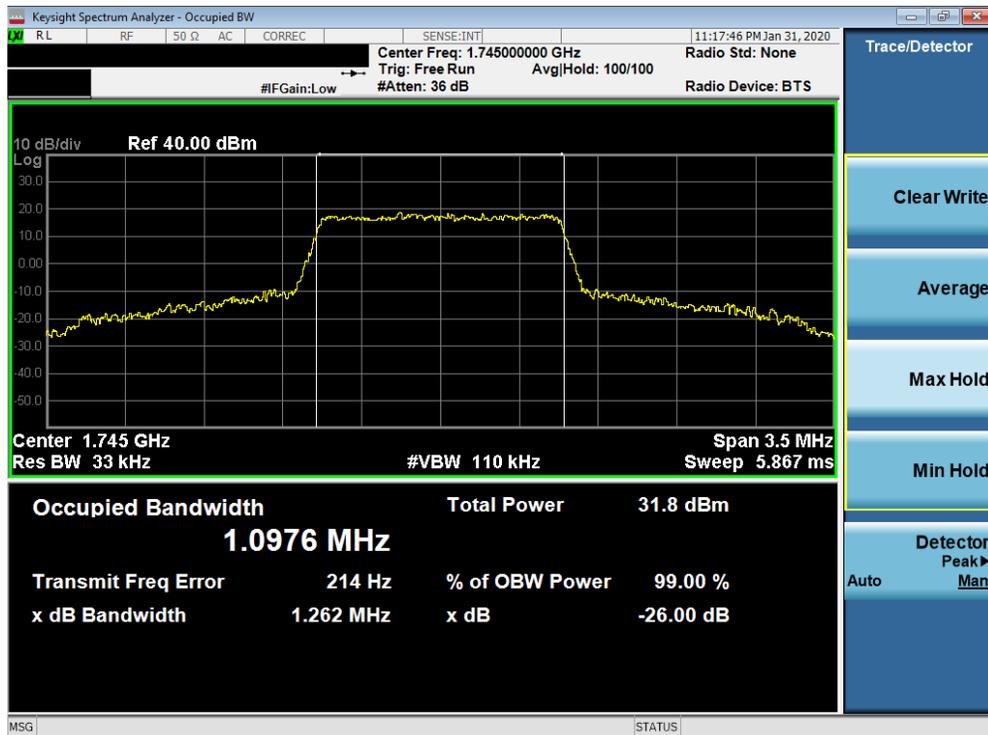


Plot 7-47. Occupied Bandwidth Plot (Band 66/4 - 1.4MHz 16-QAM - Full RB Configuration)

FCC ID: ZNFT600TS		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2001100004-03.ZNF	Test Dates: 1/13 - 2/14/2020	EUT Type: Portable Tablet		Page 41 of 213

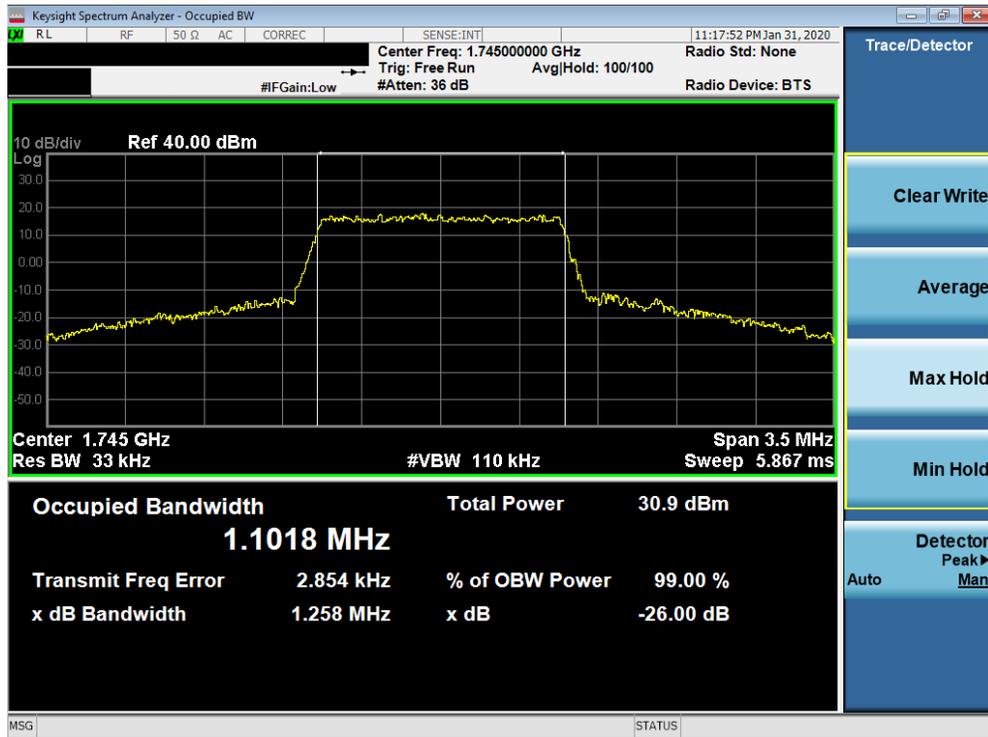


Plot 7-48. Occupied Bandwidth Plot (Band 66/4 - 1.4MHz 64-QAM - Full RB Configuration)

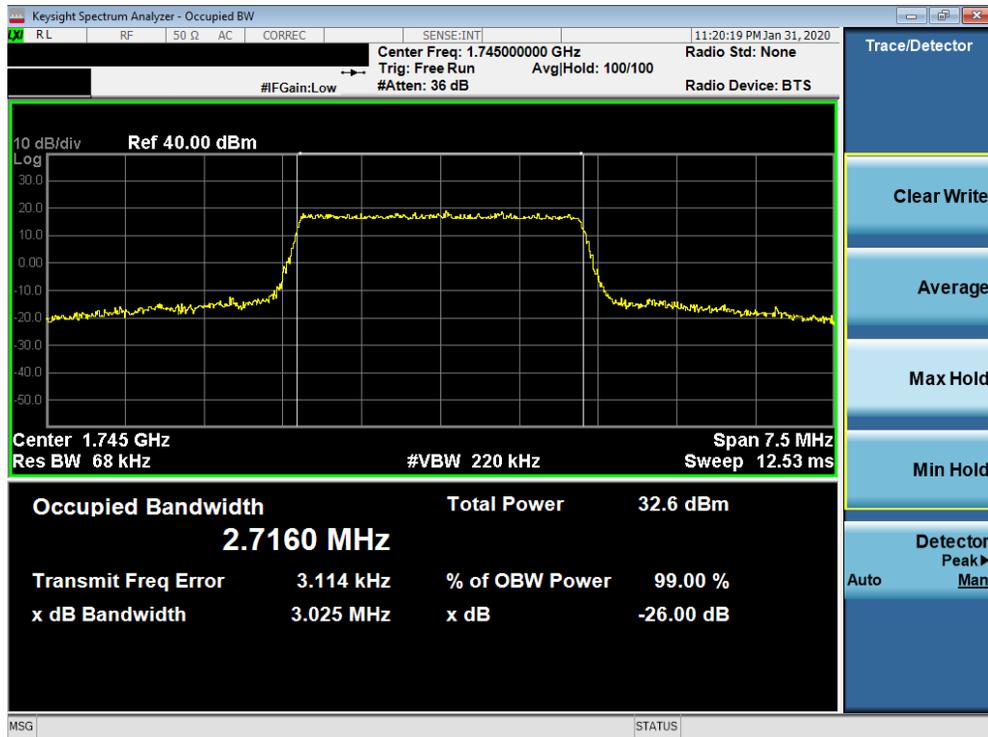

Plot 7-49. Occupied Bandwidth Plot (Band 66/4 - 3.0MHz QPSK - Full RB Configuration)

FCC ID: ZNFT600TS		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2001100004-03.ZNF	Test Dates: 1/13 - 2/14/2020	EUT Type: Portable Tablet		Page 42 of 213

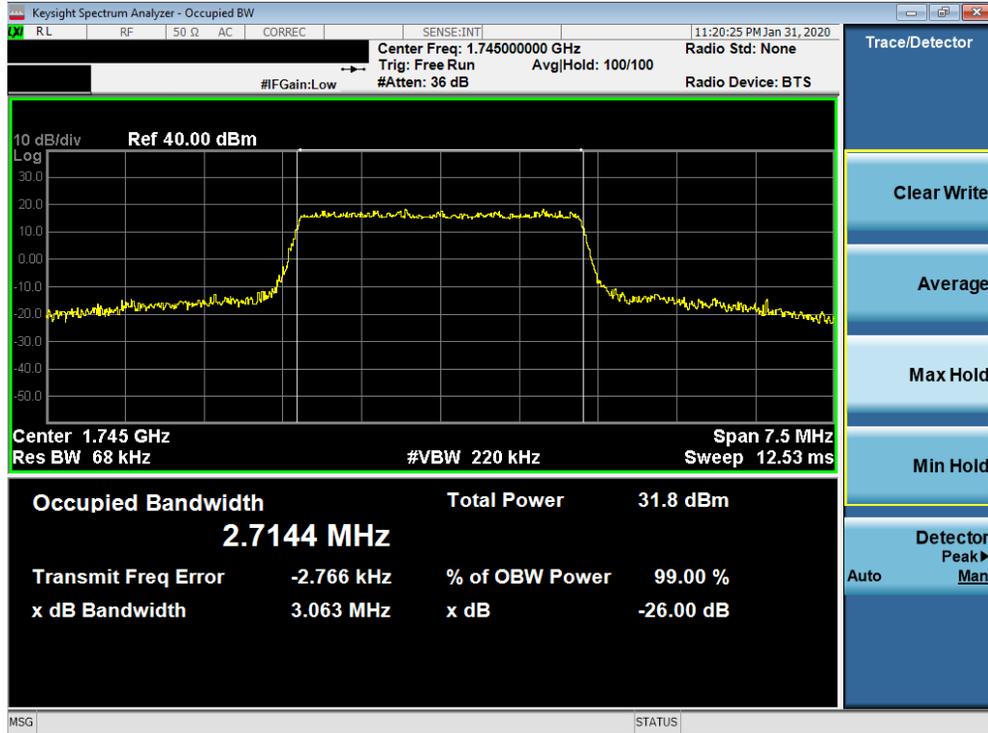


Plot 7-50. Occupied Bandwidth Plot (Band 66/4 - 3.0MHz 16-QAM - Full RB Configuration)




Plot 7-51. Occupied Bandwidth Plot (Band 66/4 - 3.0MHz 64-QAM - Full RB Configuration)

FCC ID: ZNFT600TS		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2001100004-03.ZNF	Test Dates: 1/13 - 2/14/2020	EUT Type: Portable Tablet		Page 43 of 213

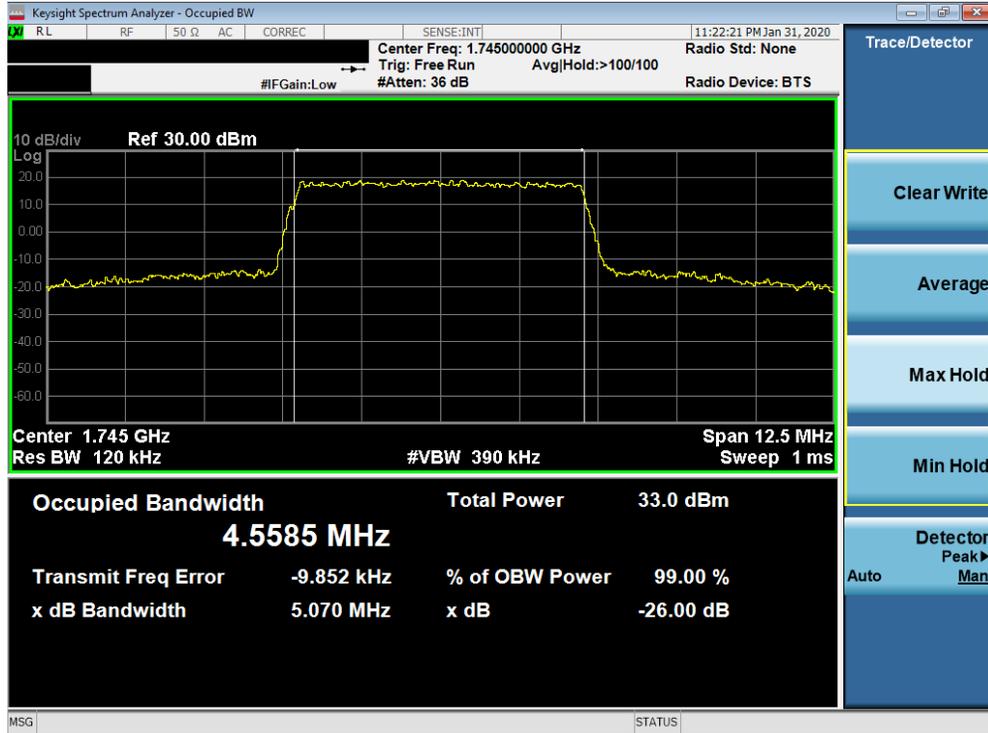


Plot 7-52. Occupied Bandwidth Plot (Band 66/4 - 5.0MHz QPSK - Full RB Configuration)

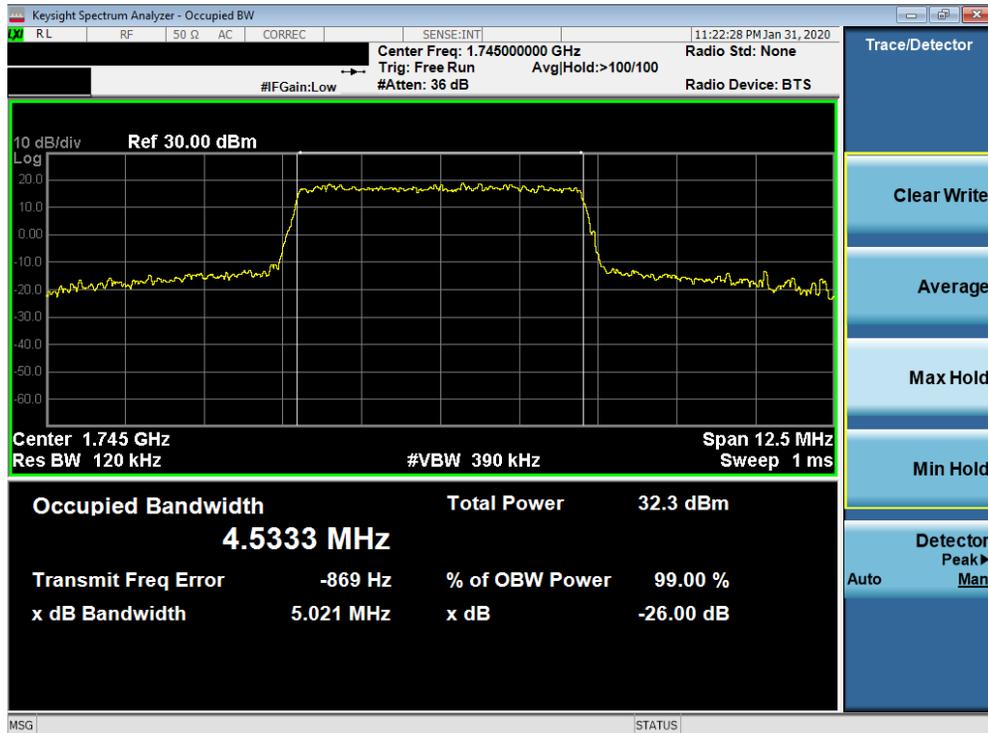

Plot 7-53. Occupied Bandwidth Plot (Band 66/4 - 5.0MHz 16-QAM - Full RB Configuration)

FCC ID: ZNFT600TS		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2001100004-03.ZNF	Test Dates: 1/13 - 2/14/2020	EUT Type: Portable Tablet		Page 44 of 213

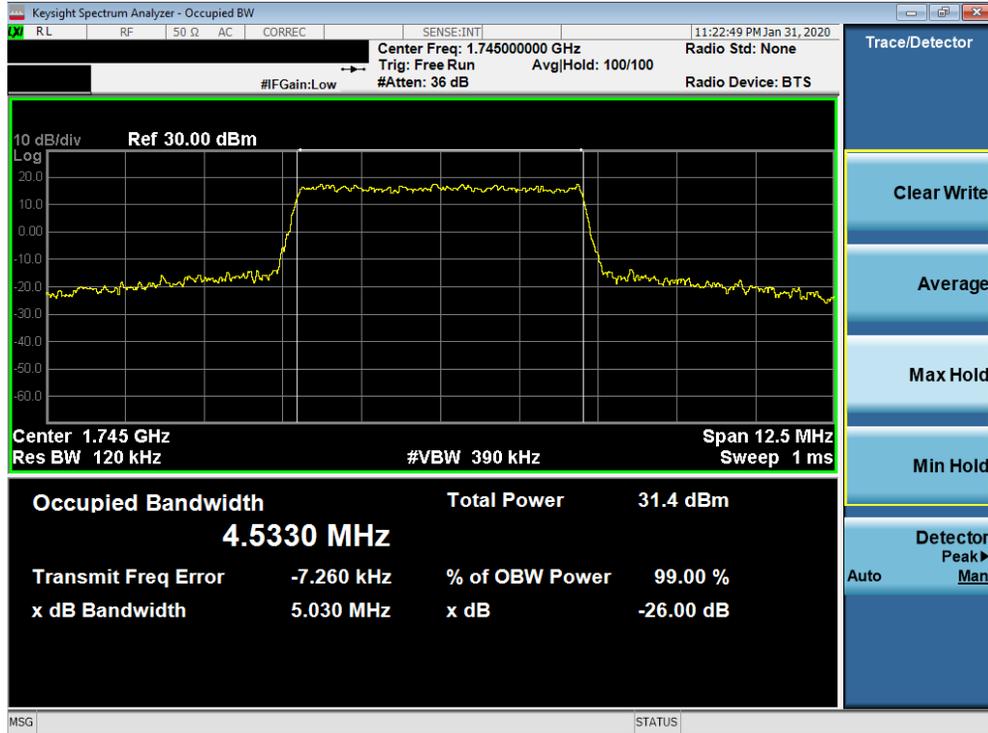

Plot 7-54. Occupied Bandwidth Plot (Band 66/4 - 5.0MHz 64-QAM - Full RB Configuration)




Plot 7-55. Occupied Bandwidth Plot (Band 66/4 - 10.0MHz QPSK - Full RB Configuration)

FCC ID: ZNFT600TS		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2001100004-03.ZNF	Test Dates: 1/13 - 2/14/2020	EUT Type: Portable Tablet		Page 45 of 213




Plot 7-56. Occupied Bandwidth Plot (Band 66/4 - 10.0MHz 16-QAM - Full RB Configuration)

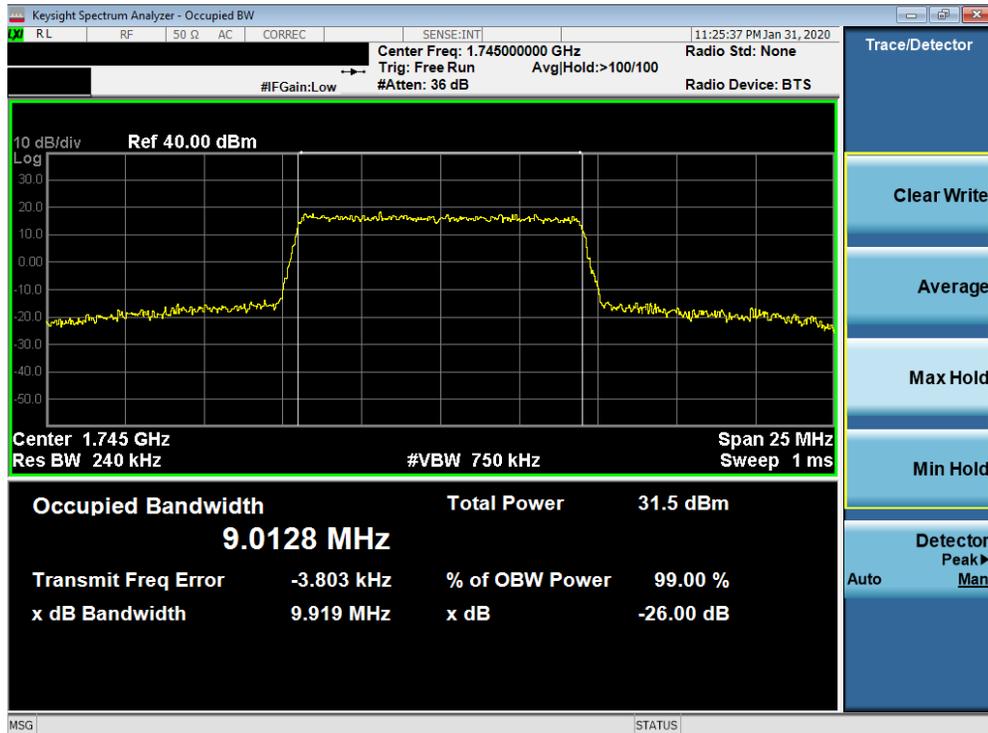


Plot 7-57. Occupied Bandwidth Plot (Band 66/4 - 10.0MHz 64-QAM - Full RB Configuration)

FCC ID: ZNFT600TS		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2001100004-03.ZNF	Test Dates: 1/13 - 2/14/2020	EUT Type: Portable Tablet		Page 46 of 213

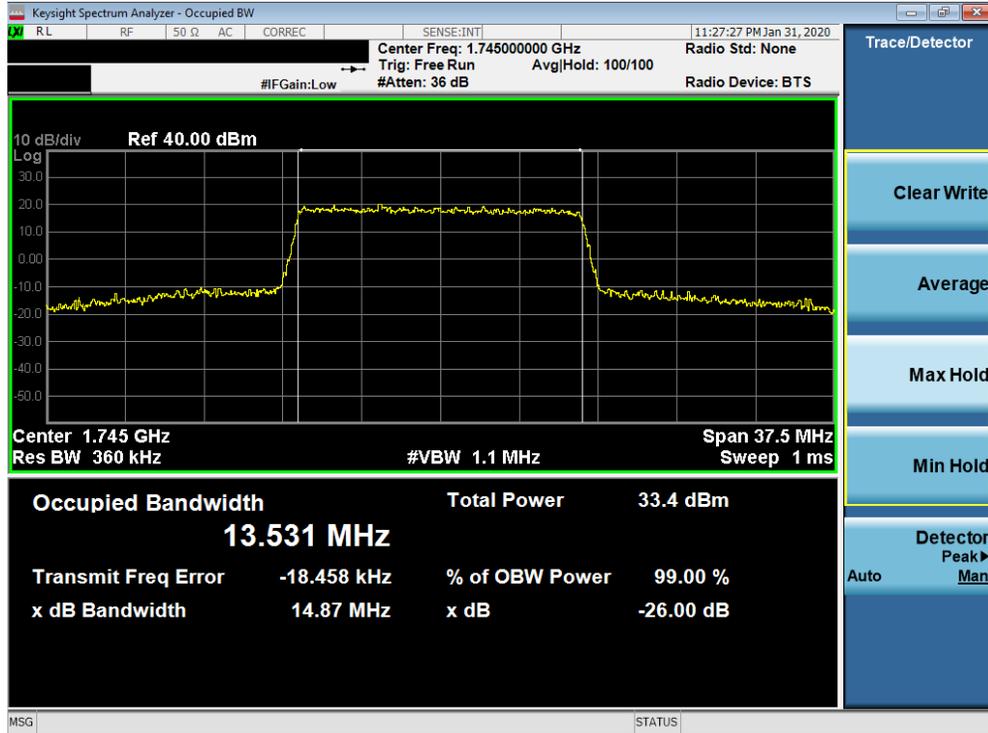


Plot 7-58. Occupied Bandwidth Plot (Band 66/4 - 15.0MHz QPSK - Full RB Configuration)

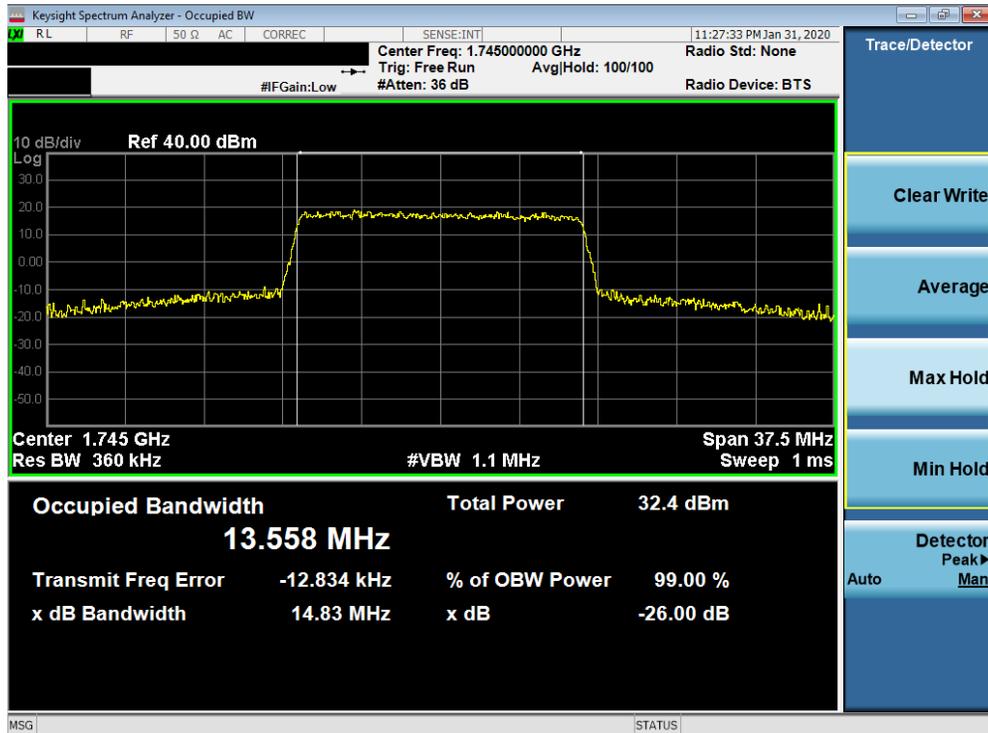

Plot 7-59. Occupied Bandwidth Plot (Band 66/4 - 15.0MHz 16-QAM - Full RB Configuration)

FCC ID: ZNFT600TS		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2001100004-03.ZNF	Test Dates: 1/13 - 2/14/2020	EUT Type: Portable Tablet		Page 47 of 213

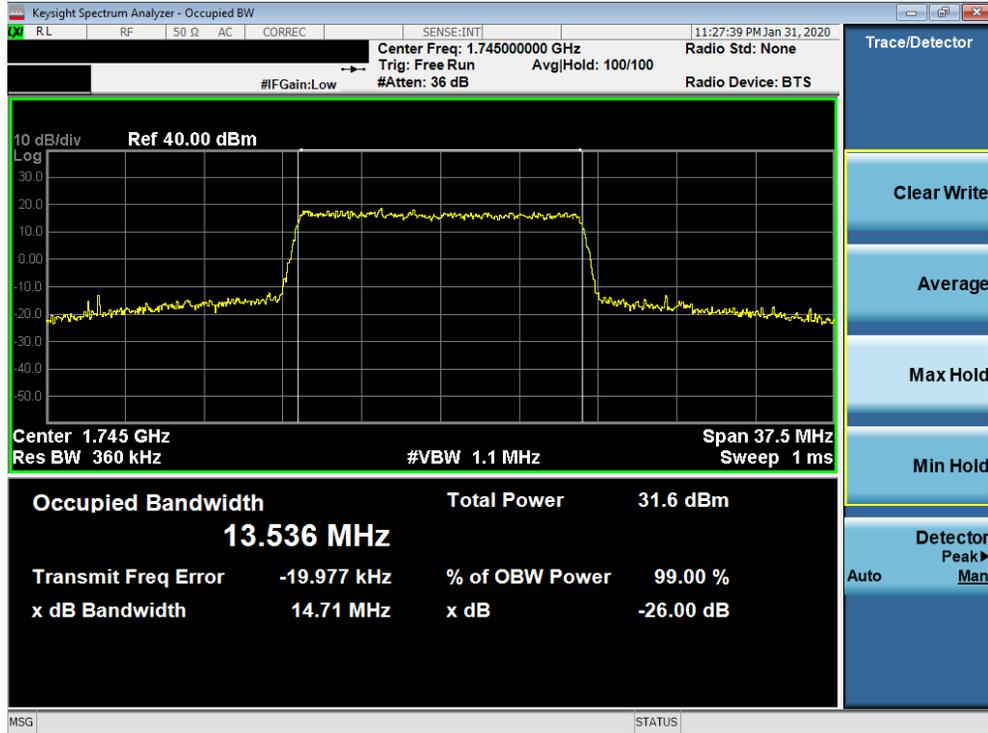


Plot 7-60. Occupied Bandwidth Plot (Band 66/4 - 15.0MHz 64-QAM - Full RB Configuration)




Plot 7-61. Occupied Bandwidth Plot (Band 66/4 - 20.0MHz QPSK - Full RB Configuration)

FCC ID: ZNFT600TS		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2001100004-03.ZNF	Test Dates: 1/13 - 2/14/2020	EUT Type: Portable Tablet		Page 48 of 213

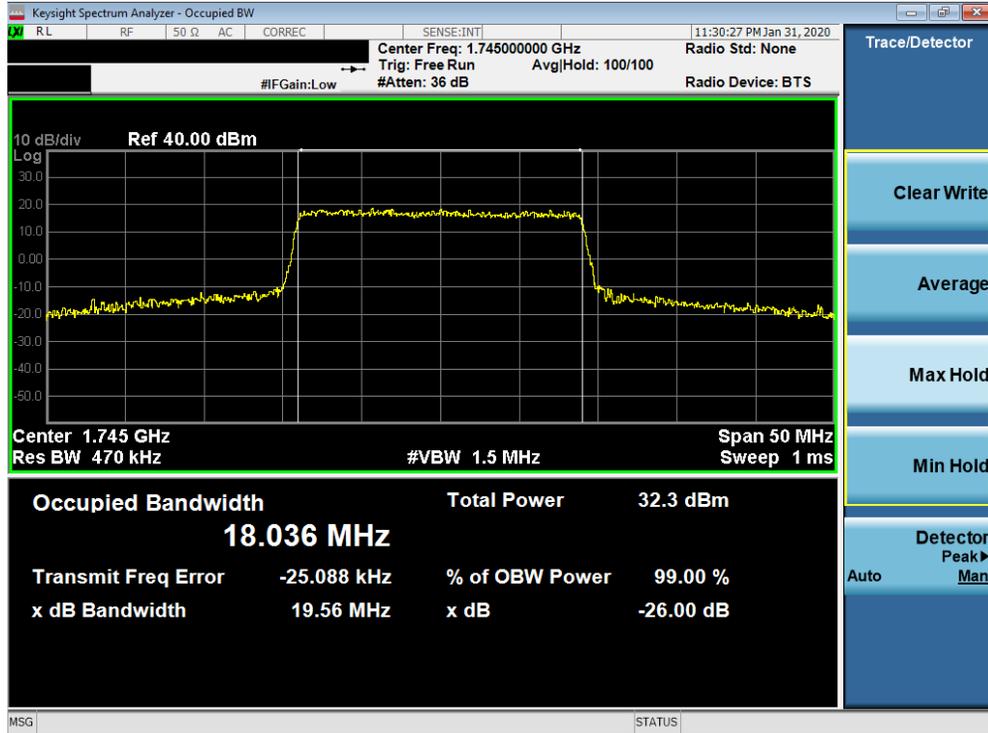


Plot 7-62. Occupied Bandwidth Plot (Band 66/4 - 20.0MHz 16-QAM - Full RB Configuration)

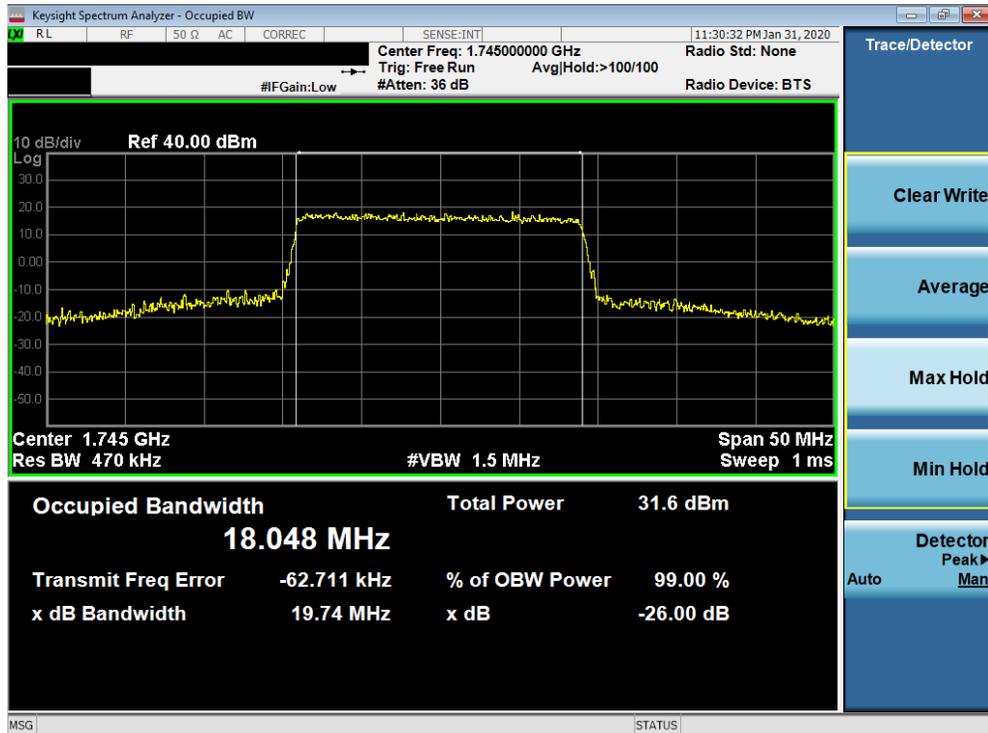


Plot 7-63. Occupied Bandwidth Plot (Band 66/4 - 20.0MHz 64-QAM - Full RB Configuration)

FCC ID: ZNFT600TS		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2001100004-03.ZNF	Test Dates: 1/13 - 2/14/2020	EUT Type: Portable Tablet		Page 49 of 213

Band 25/2

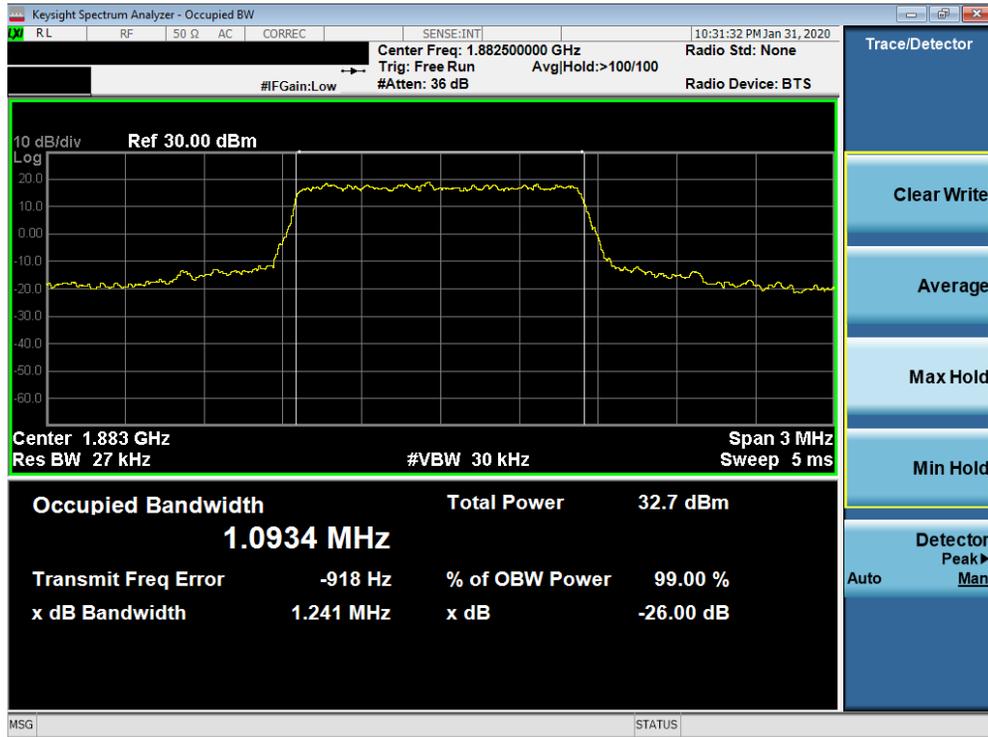


Plot 7-64. Occupied Bandwidth Plot (Band 25/2 - 1.4MHz QPSK - Full RB Configuration)

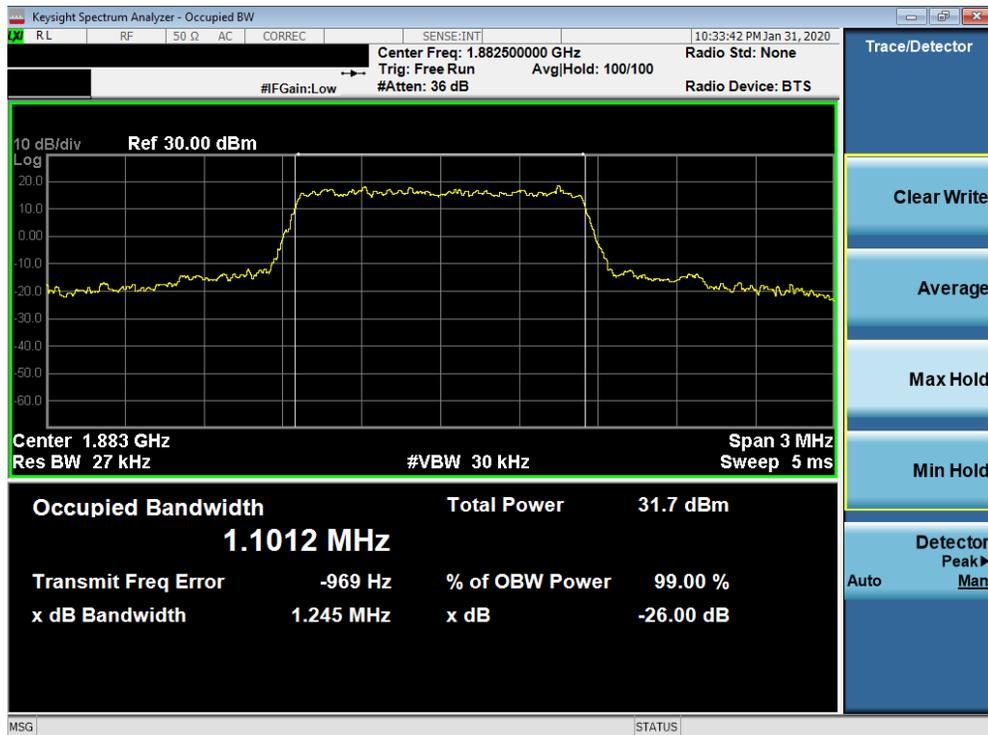


Plot 7-65. Occupied Bandwidth Plot (Band 25/2 - 1.4MHz 16-QAM - Full RB Configuration)

FCC ID: ZNFT600TS		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2001100004-03.ZNF	Test Dates: 1/13 - 2/14/2020	EUT Type: Portable Tablet		Page 50 of 213

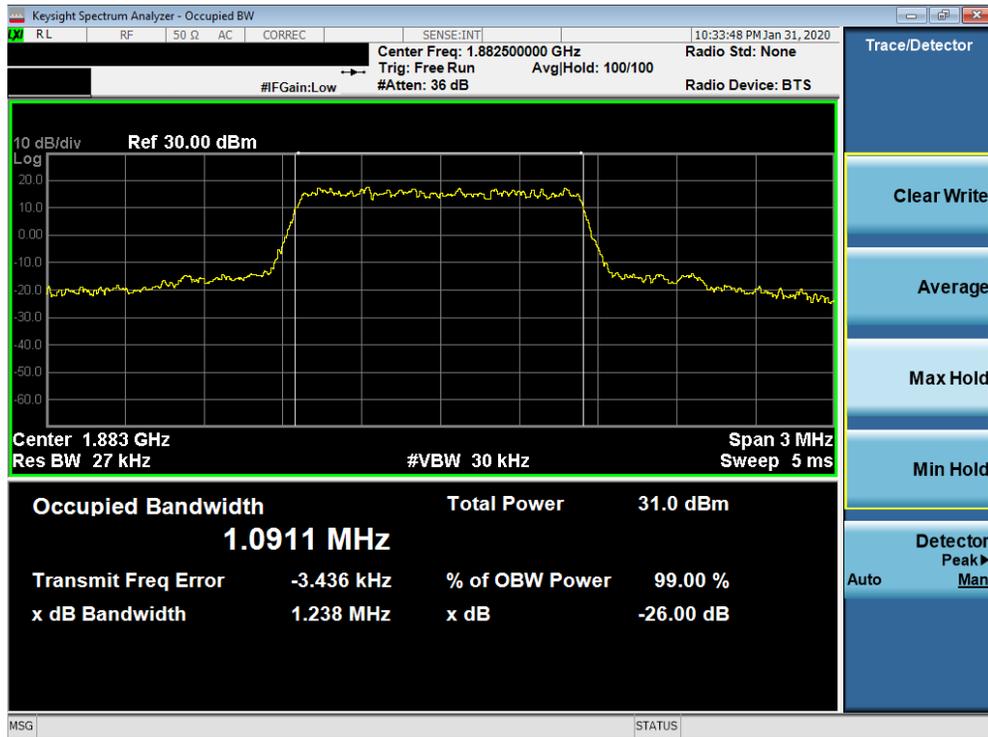


Plot 7-66. Occupied Bandwidth Plot (Band 25/2 - 1.4MHz 64-QAM - Full RB Configuration)

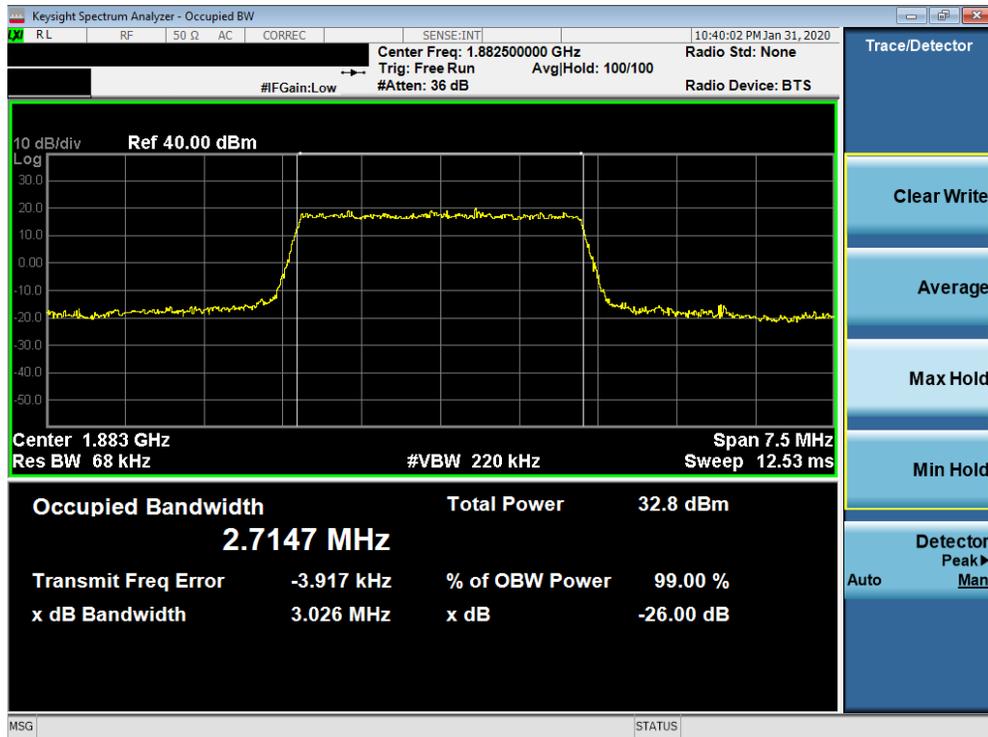


Plot 7-67. Occupied Bandwidth Plot (Band 25/2 - 3.0MHz QPSK - Full RB Configuration)

FCC ID: ZNFT600TS		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2001100004-03.ZNF	Test Dates: 1/13 - 2/14/2020	EUT Type: Portable Tablet		Page 51 of 213

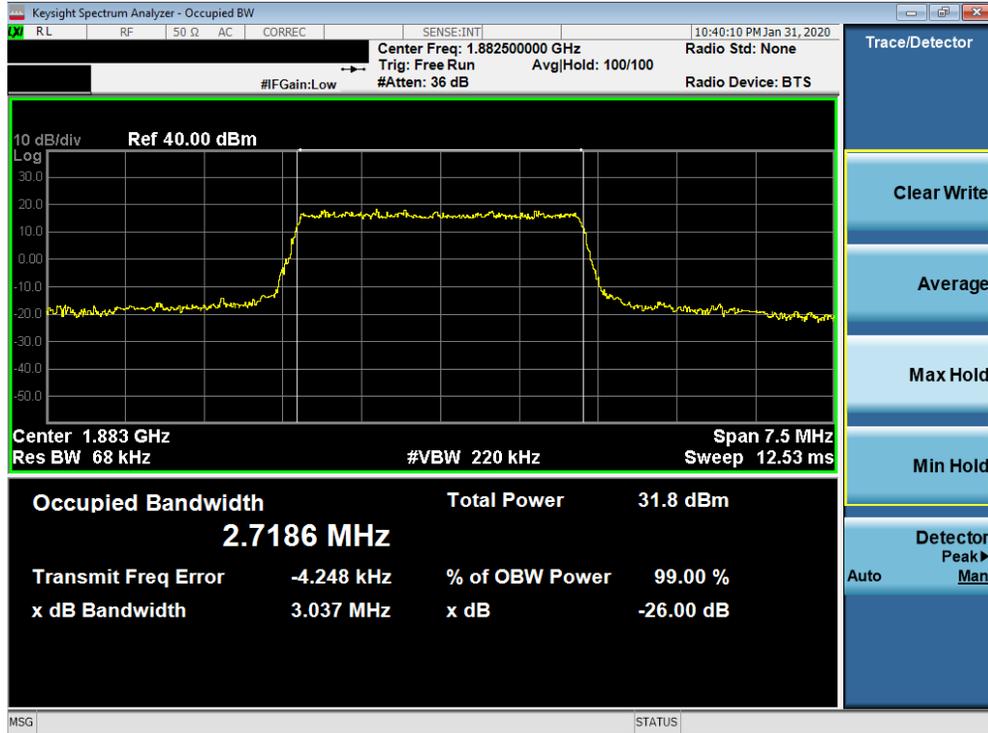


Plot 7-68. Occupied Bandwidth Plot (Band 25/2 - 3.0MHz 16-QAM - Full RB Configuration)

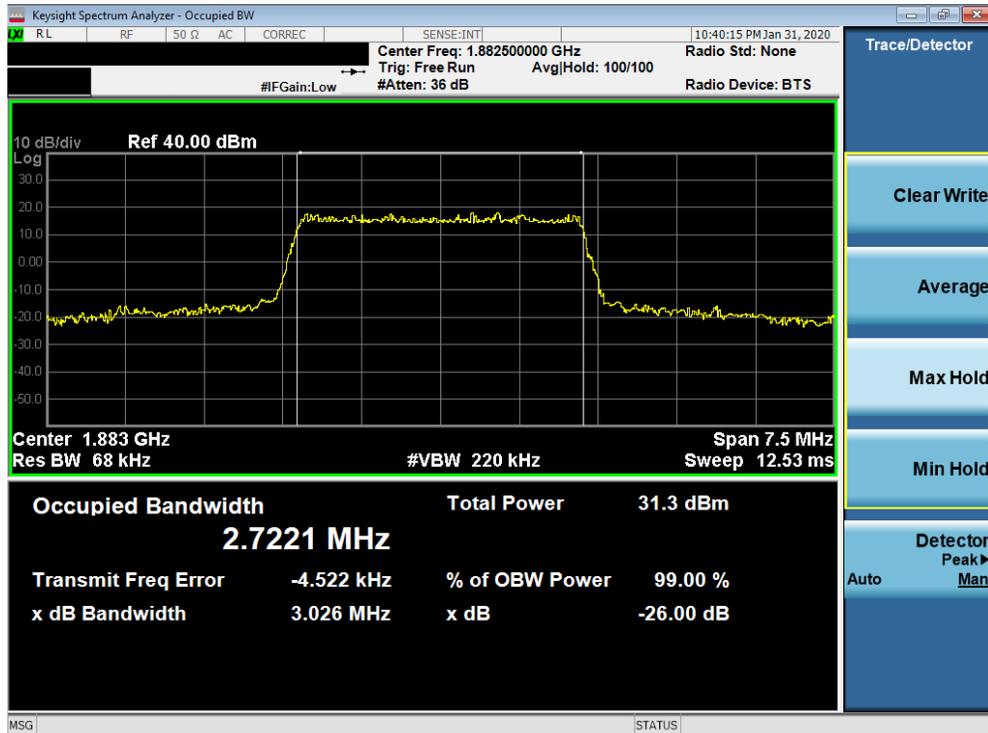

Plot 7-69. Occupied Bandwidth Plot (Band 25/2 - 3.0MHz 64-QAM - Full RB Configuration)

FCC ID: ZNFT600TS		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2001100004-03.ZNF	Test Dates: 1/13 - 2/14/2020	EUT Type: Portable Tablet		Page 52 of 213

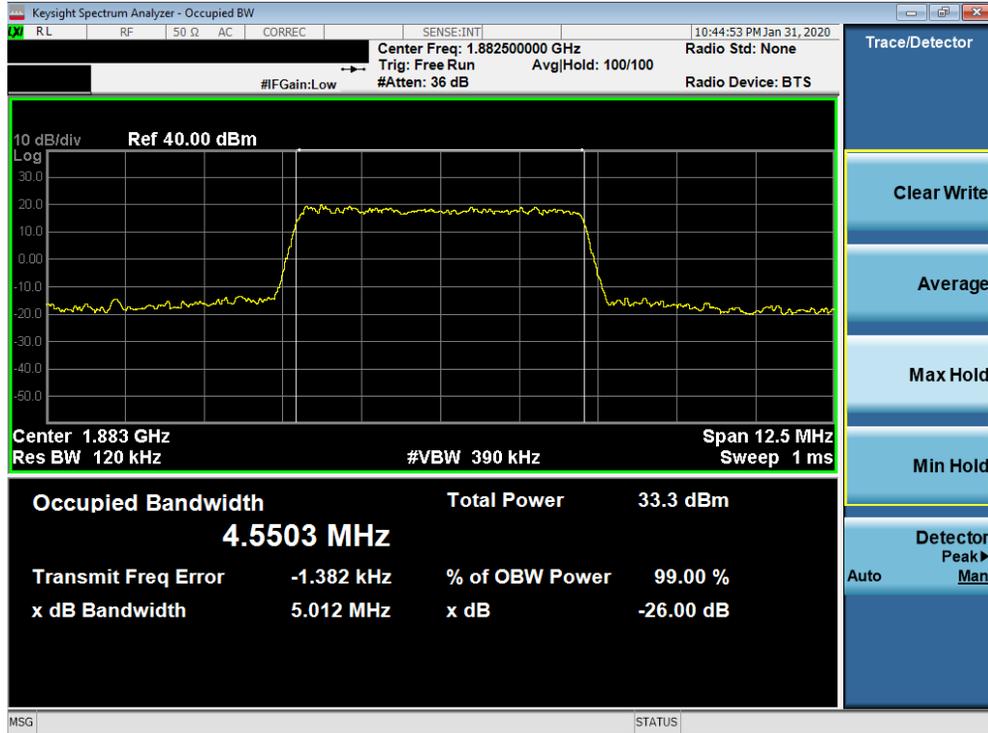


Plot 7-70. Occupied Bandwidth Plot (Band 25/2 - 5.0MHz QPSK - Full RB Configuration)



Plot 7-71. Occupied Bandwidth Plot (Band 25/2 - 5.0MHz 16-QAM - Full RB Configuration)

FCC ID: ZNFT600TS		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2001100004-03.ZNF	Test Dates: 1/13 - 2/14/2020	EUT Type: Portable Tablet		Page 53 of 213

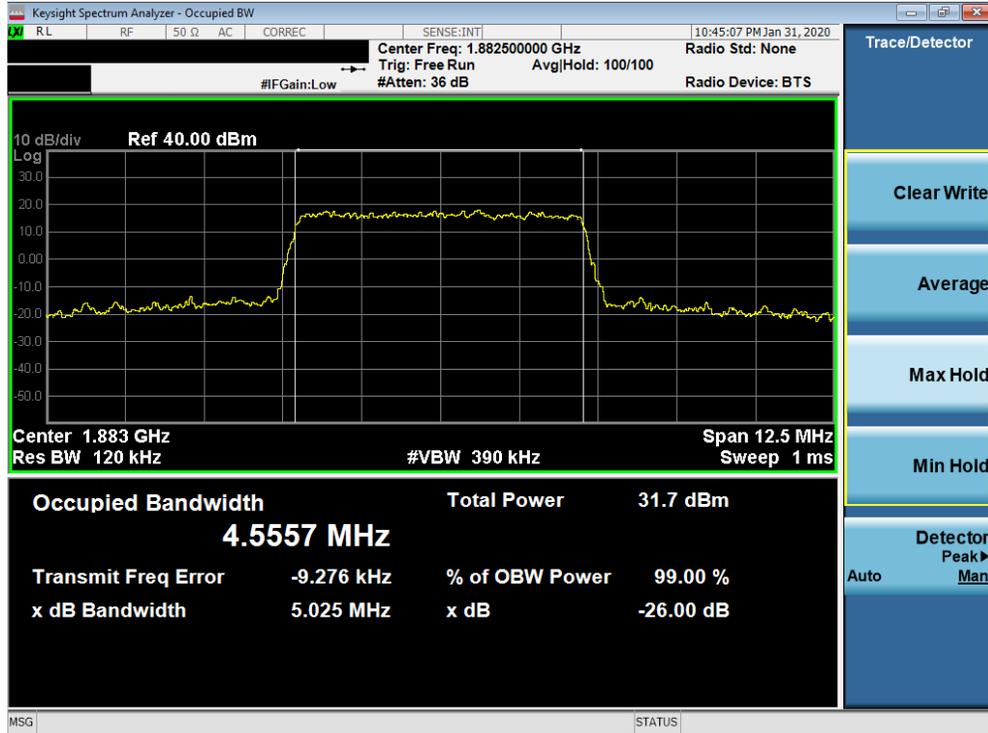


Plot 7-72. Occupied Bandwidth Plot (Band 25/2 - 5.0MHz 64-QAM - Full RB Configuration)




Plot 7-73. Occupied Bandwidth Plot (Band 25/2 - 10.0MHz QPSK - Full RB Configuration)

FCC ID: ZNFT600TS		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2001100004-03.ZNF	Test Dates: 1/13 - 2/14/2020	EUT Type: Portable Tablet		Page 54 of 213

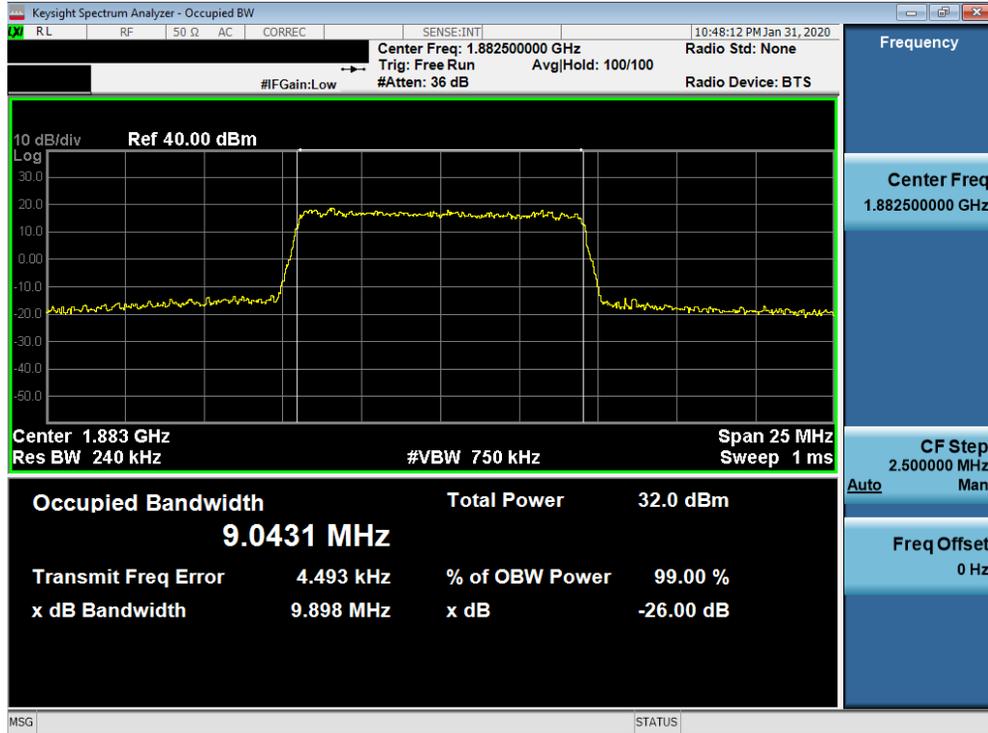


Plot 7-74. Occupied Bandwidth Plot (Band 25/2 - 10.0MHz 16-QAM - Full RB Configuration)

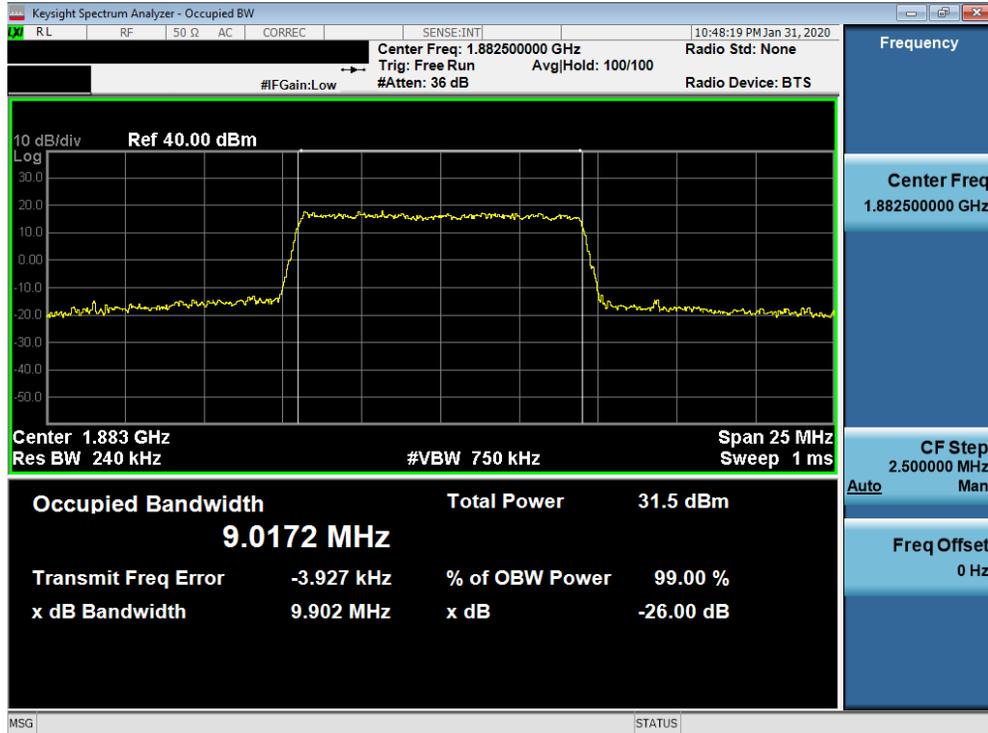


Plot 7-75. Occupied Bandwidth Plot (Band 25/2 - 10.0MHz 64-QAM - Full RB Configuration)

FCC ID: ZNFT600TS		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2001100004-03.ZNF	Test Dates: 1/13 - 2/14/2020	EUT Type: Portable Tablet		Page 55 of 213

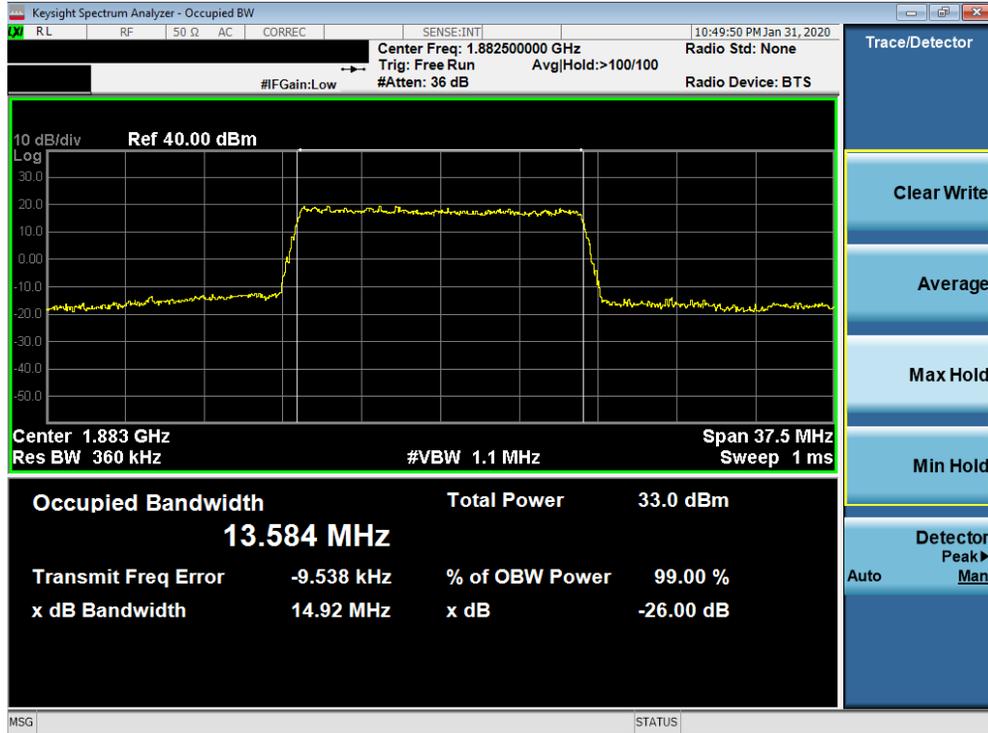


Plot 7-76. Occupied Bandwidth Plot (Band 25/2 - 15.0MHz QPSK - Full RB Configuration)

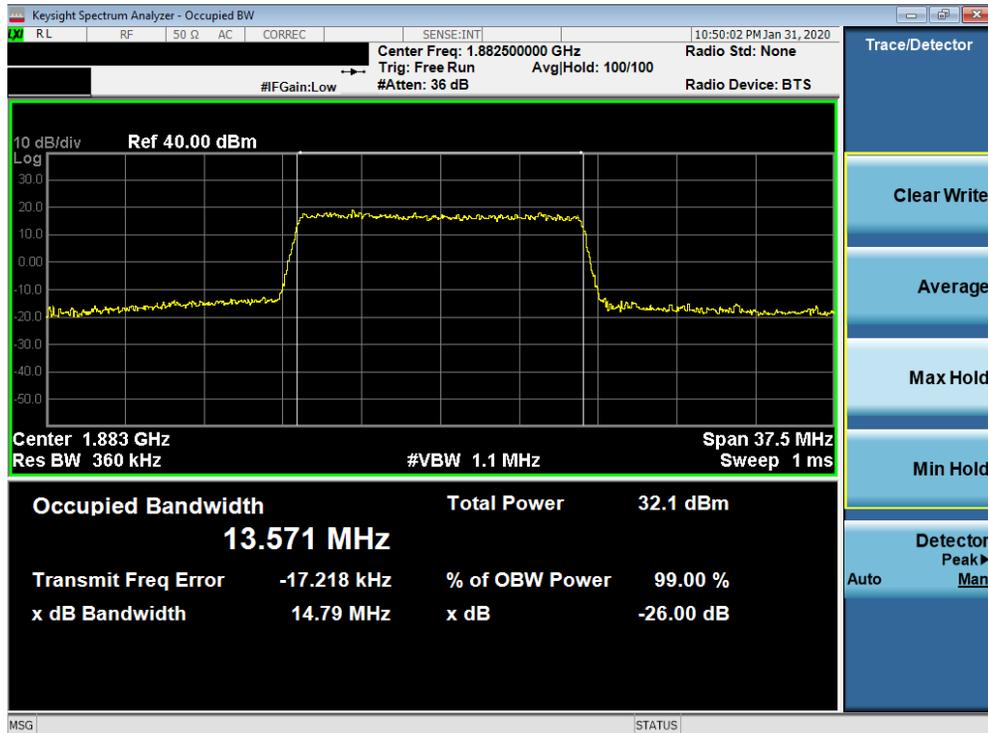


Plot 7-77. Occupied Bandwidth Plot (Band 25/2 - 15.0MHz 16-QAM - Full RB Configuration)

FCC ID: ZNFT600TS		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2001100004-03.ZNF	Test Dates: 1/13 - 2/14/2020	EUT Type: Portable Tablet		Page 56 of 213

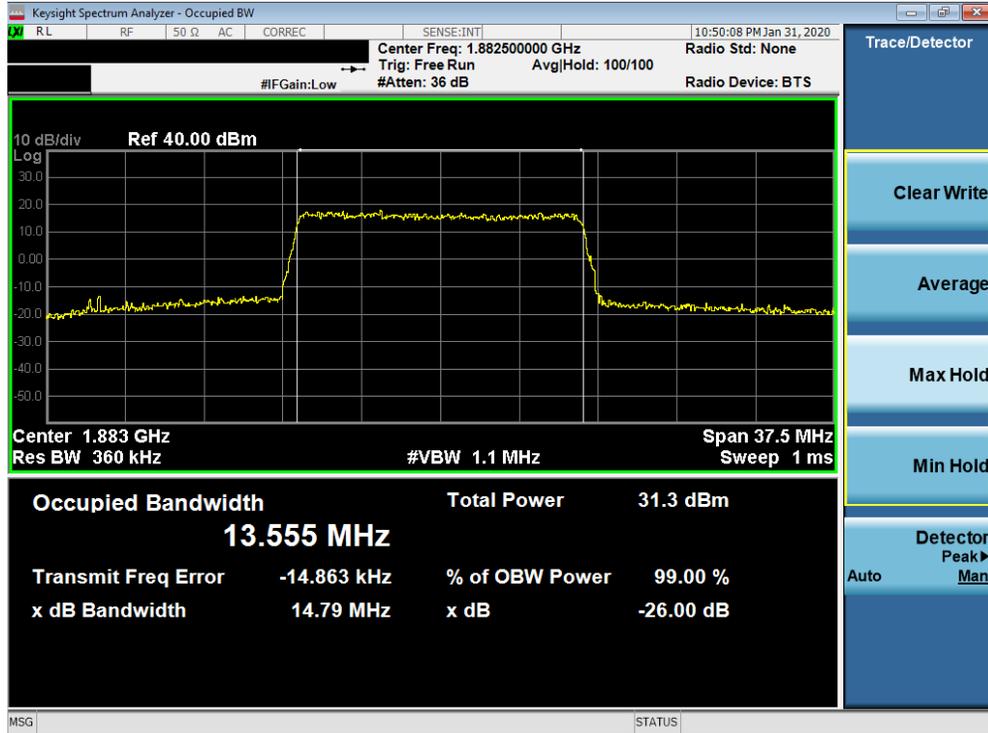

Plot 7-78. Occupied Bandwidth Plot (Band 25/2 - 15.0MHz 64-QAM - Full RB Configuration)

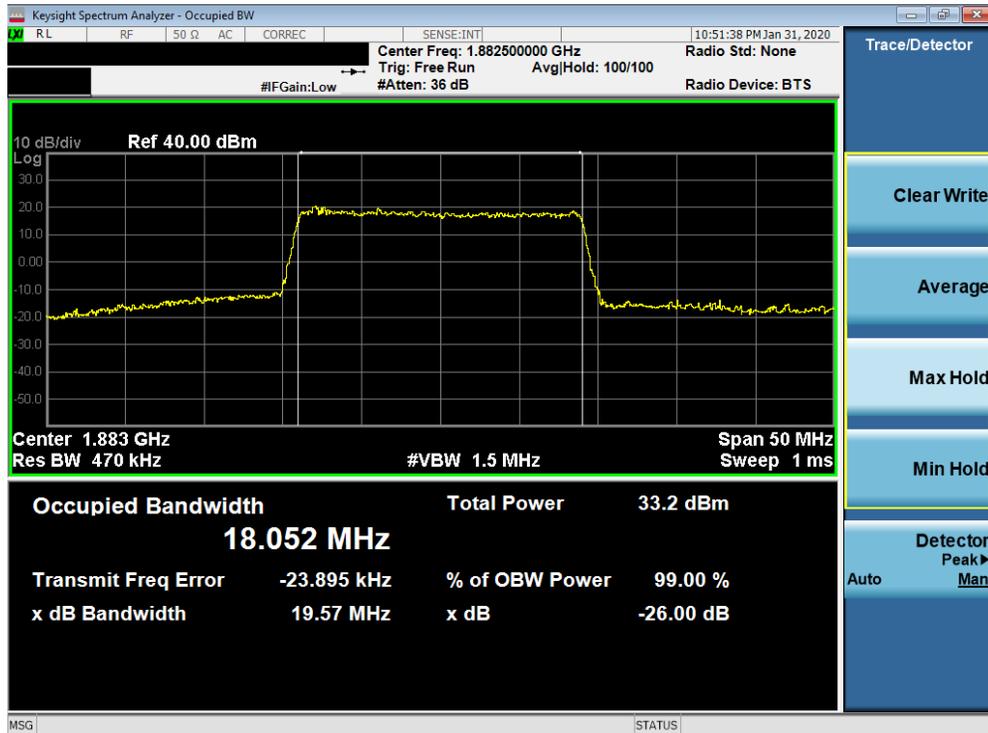


Plot 7-79. Occupied Bandwidth Plot (Band 25/2 - 20.0MHz QPSK - Full RB Configuration)

FCC ID: ZNFT600TS		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2001100004-03.ZNF	Test Dates: 1/13 - 2/14/2020	EUT Type: Portable Tablet		Page 57 of 213



Plot 7-80. Occupied Bandwidth Plot (Band 25/2 - 20.0MHz 16-QAM - Full RB Configuration)

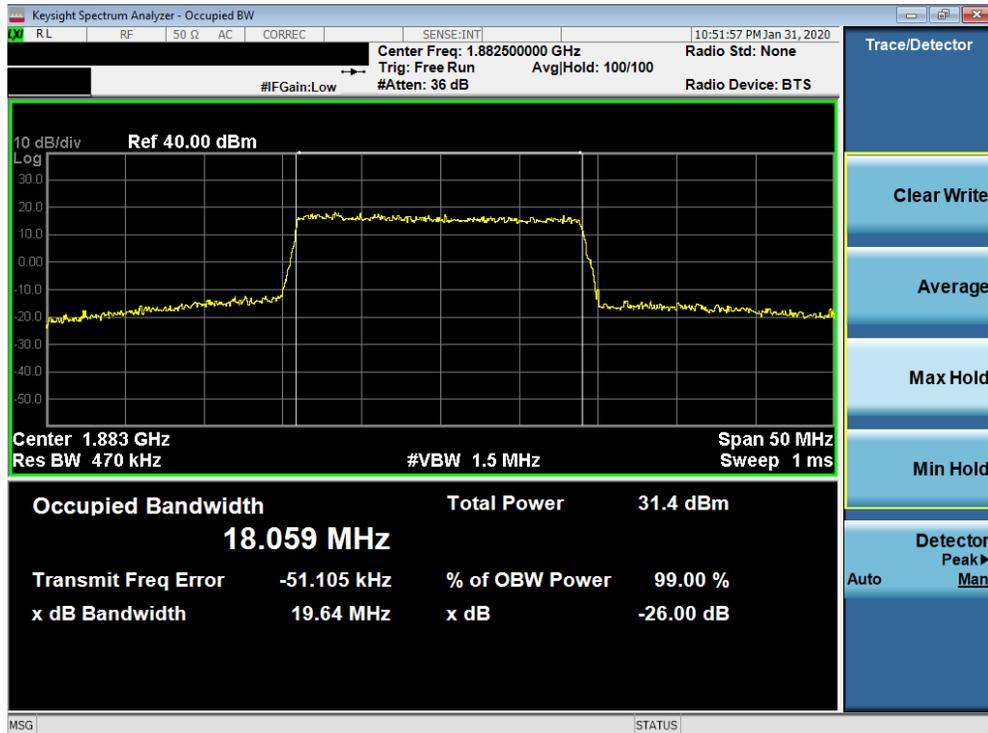

Plot 7-81. Occupied Bandwidth Plot (Band 25/2 - 20.0MHz 64-QAM - Full RB Configuration)

FCC ID: ZNFT600TS		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2001100004-03.ZNF	Test Dates: 1/13 - 2/14/2020	EUT Type: Portable Tablet		Page 58 of 213

Band 41 (PC2)




Plot 7-82. Occupied Bandwidth Plot (Band 41 (PC2) - 5.0MHz QPSK - Full RB Configuration)




Plot 7-83. Occupied Bandwidth Plot (Band 41 (PC2) - 5.0MHz 16-QAM - Full RB Configuration)

FCC ID: ZNFT600TS		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2001100004-03.ZNF	Test Dates: 1/13 - 2/14/2020	EUT Type: Portable Tablet		Page 59 of 213

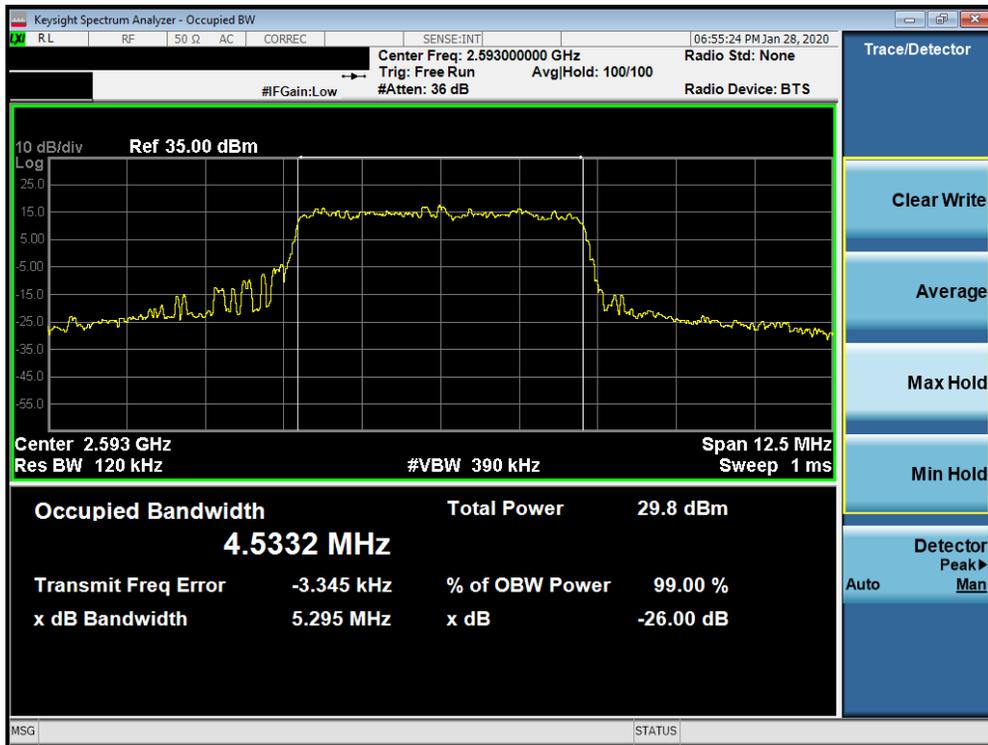


Plot 7-84. Occupied Bandwidth Plot (Band 41 (PC2) - 5.0MHz 64-QAM - Full RB Configuration)

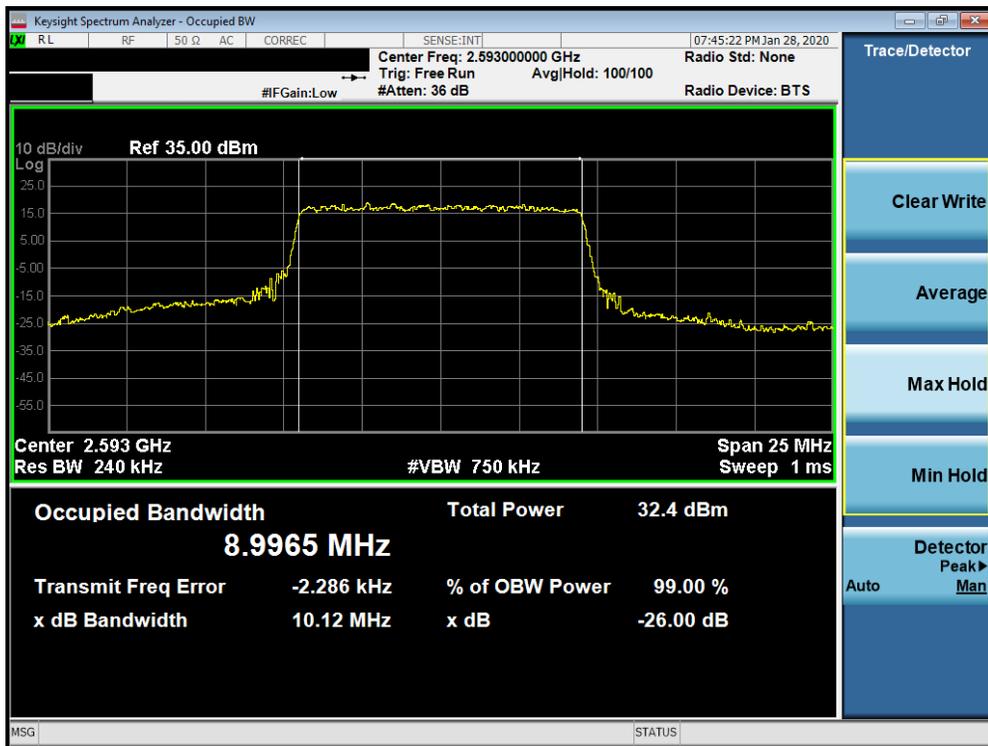


Plot 7-85. Occupied Bandwidth Plot (Band 41 (PC2) - 10.0MHz QPSK - Full RB Configuration)

FCC ID: ZNFT600TS		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2001100004-03.ZNF	Test Dates: 1/13 - 2/14/2020	EUT Type: Portable Tablet		Page 60 of 213

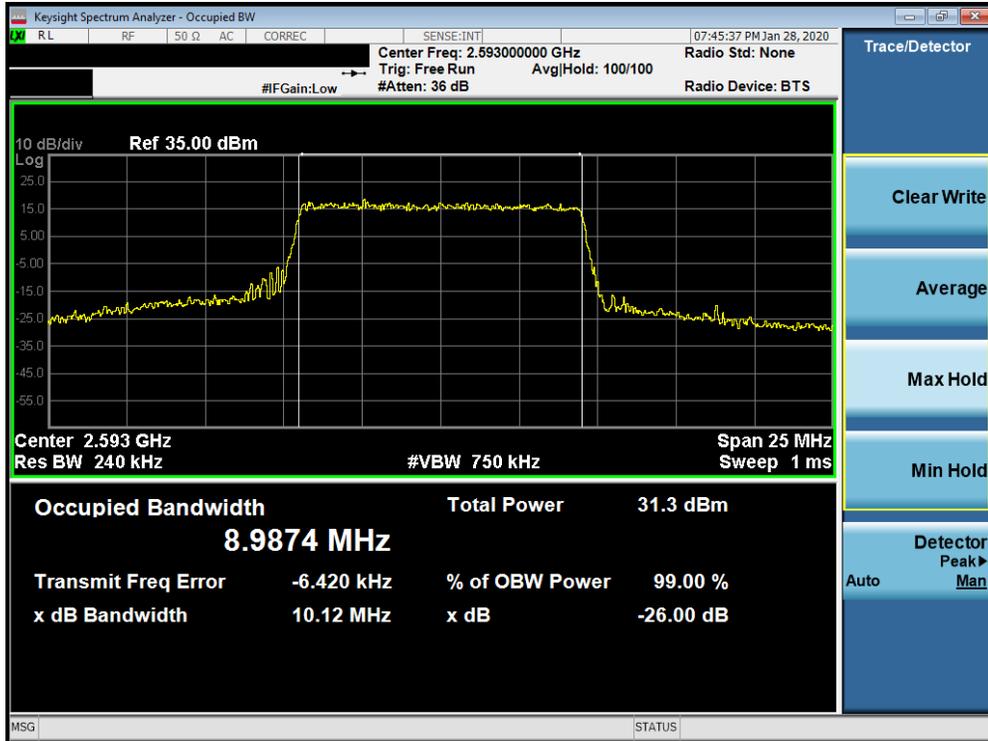


Plot 7-86. Occupied Bandwidth Plot (Band 41 (PC2) - 10.0MHz 16-QAM - Full RB Configuration)

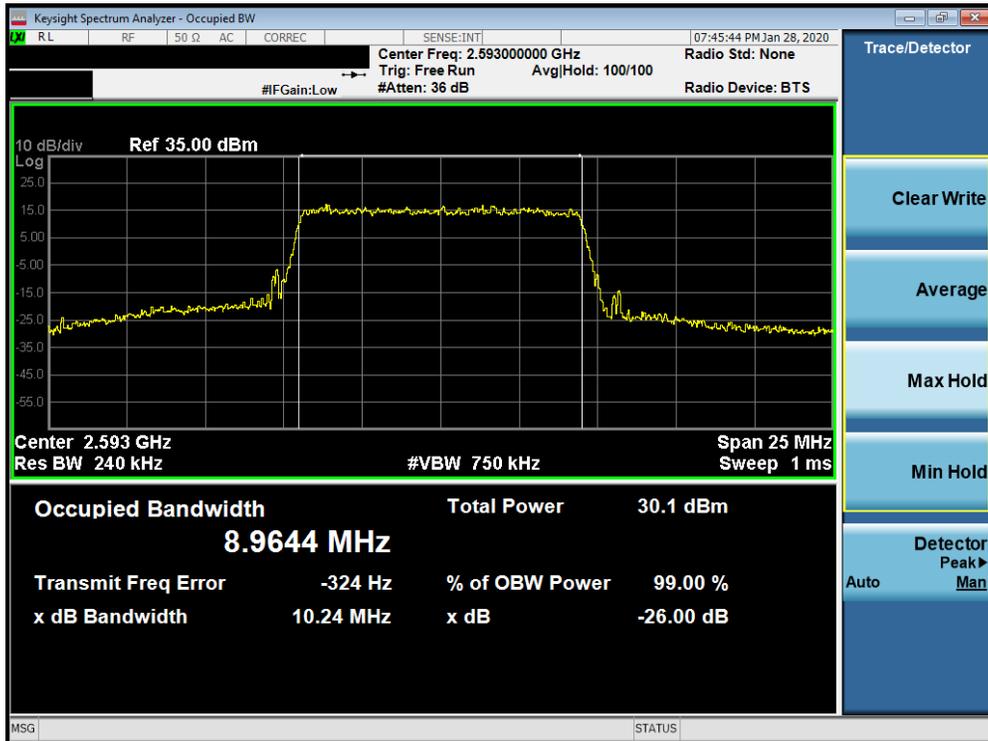


Plot 7-87. Occupied Bandwidth Plot (Band 41 (PC2) - 10.0MHz 64-QAM - Full RB Configuration)

FCC ID: ZNFT600TS		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2001100004-03.ZNF	Test Dates: 1/13 - 2/14/2020	EUT Type: Portable Tablet		Page 61 of 213

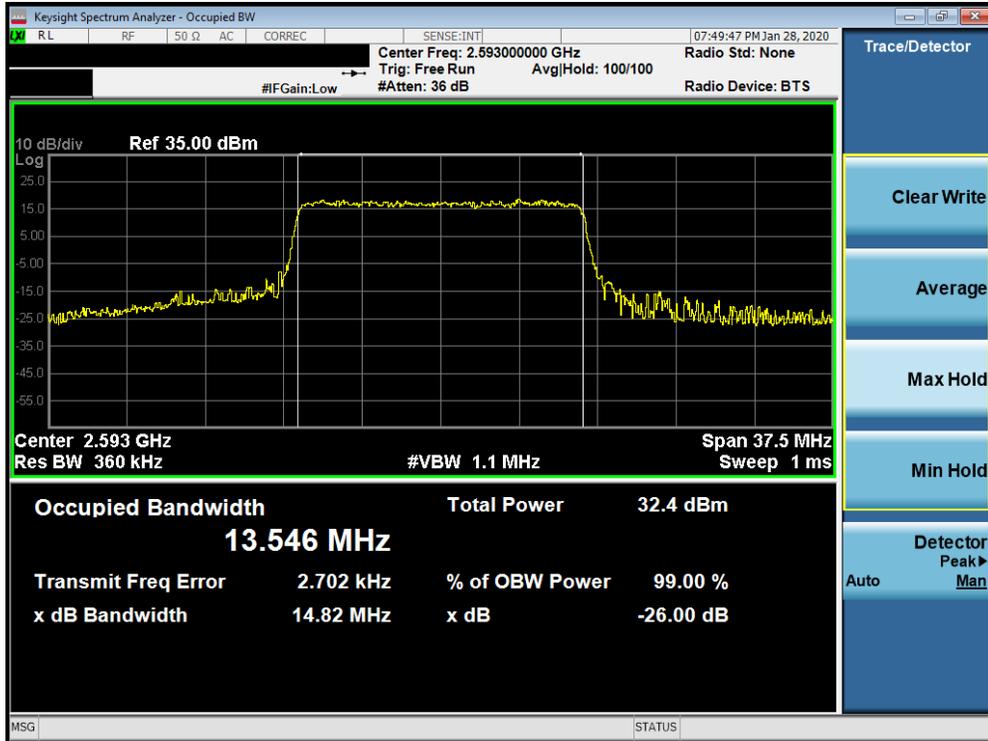


Plot 7-88. Occupied Bandwidth Plot (Band 41 (PC2) - 15.0MHz QPSK - Full RB Configuration)

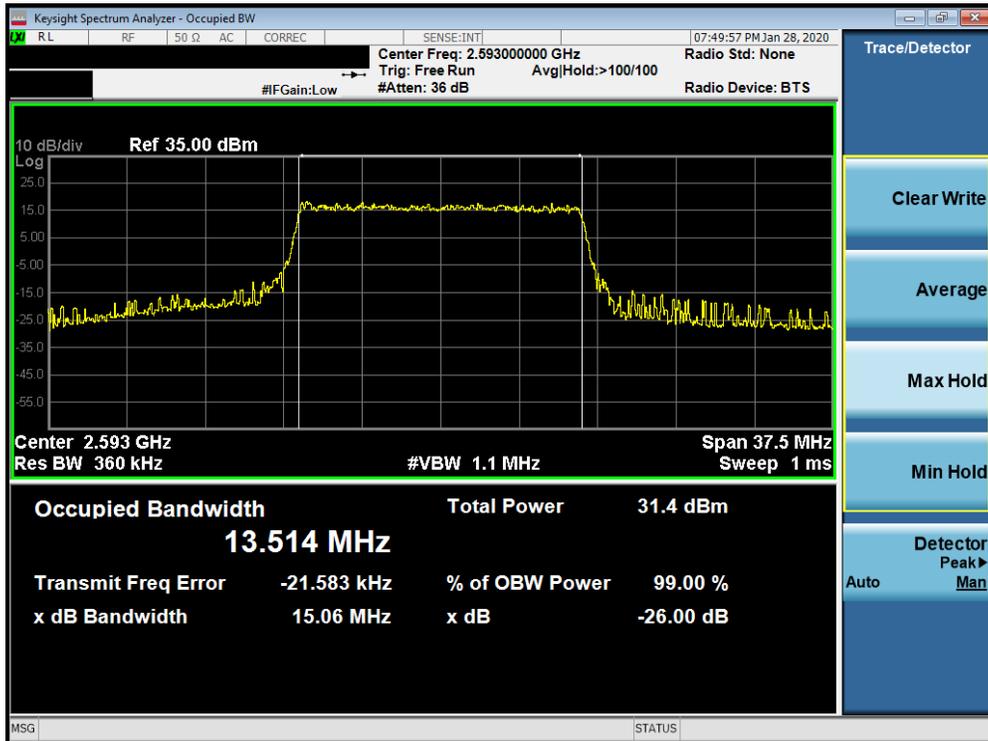


Plot 7-89. Occupied Bandwidth Plot (Band 41 (PC2) - 15.0MHz 16-QAM - Full RB Configuration)

FCC ID: ZNFT600TS		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2001100004-03.ZNF	Test Dates: 1/13 - 2/14/2020	EUT Type: Portable Tablet		Page 62 of 213

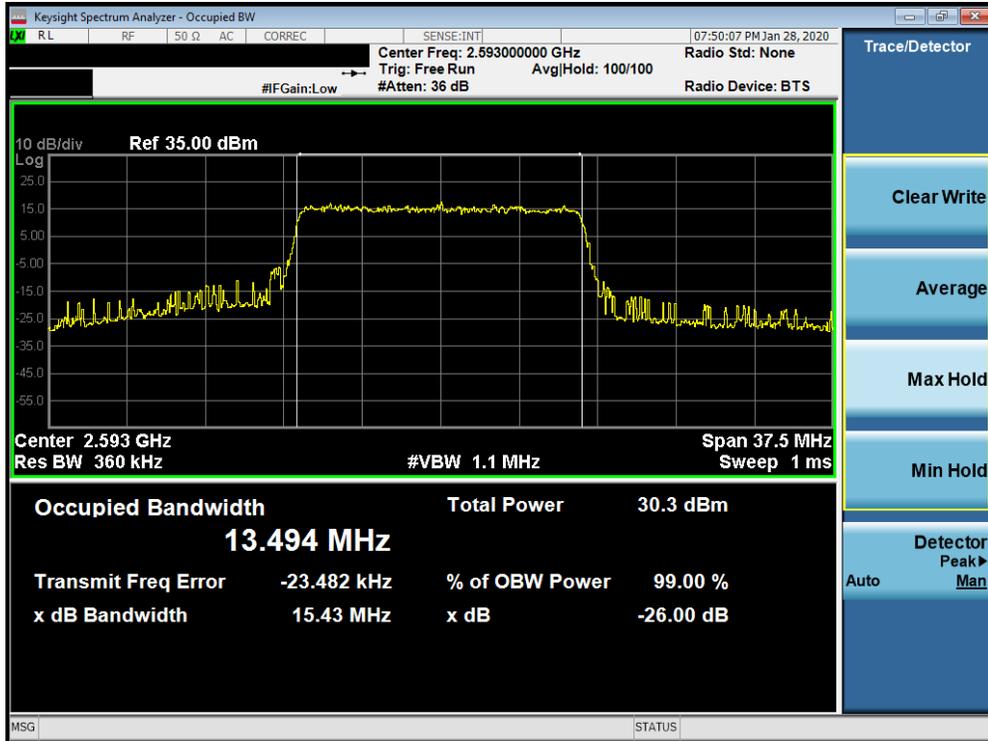

Plot 7-90. Occupied Bandwidth Plot (Band 41 (PC2) - 15.0MHz 64-QAM - Full RB Configuration)

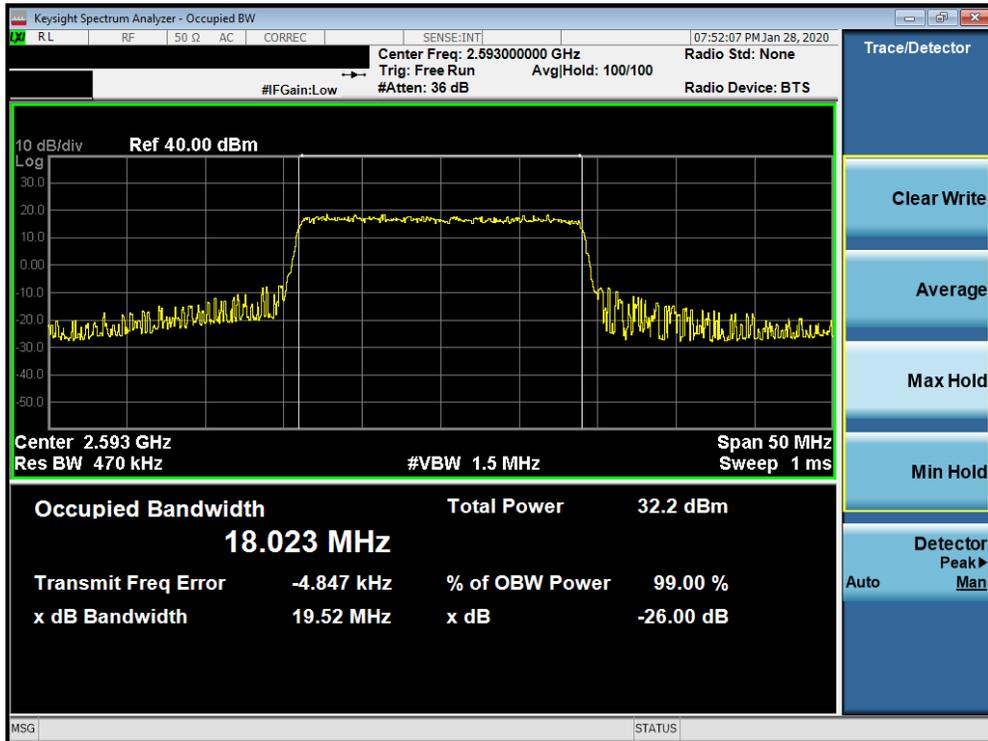


Plot 7-91. Occupied Bandwidth Plot (Band 41 (PC2) - 20.0MHz QPSK - Full RB Configuration)

FCC ID: ZNFT600TS		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2001100004-03.ZNF	Test Dates: 1/13 - 2/14/2020	EUT Type: Portable Tablet		Page 63 of 213



Plot 7-92. Occupied Bandwidth Plot (Band 41 (PC2) - 20.0MHz 16-QAM - Full RB Configuration)

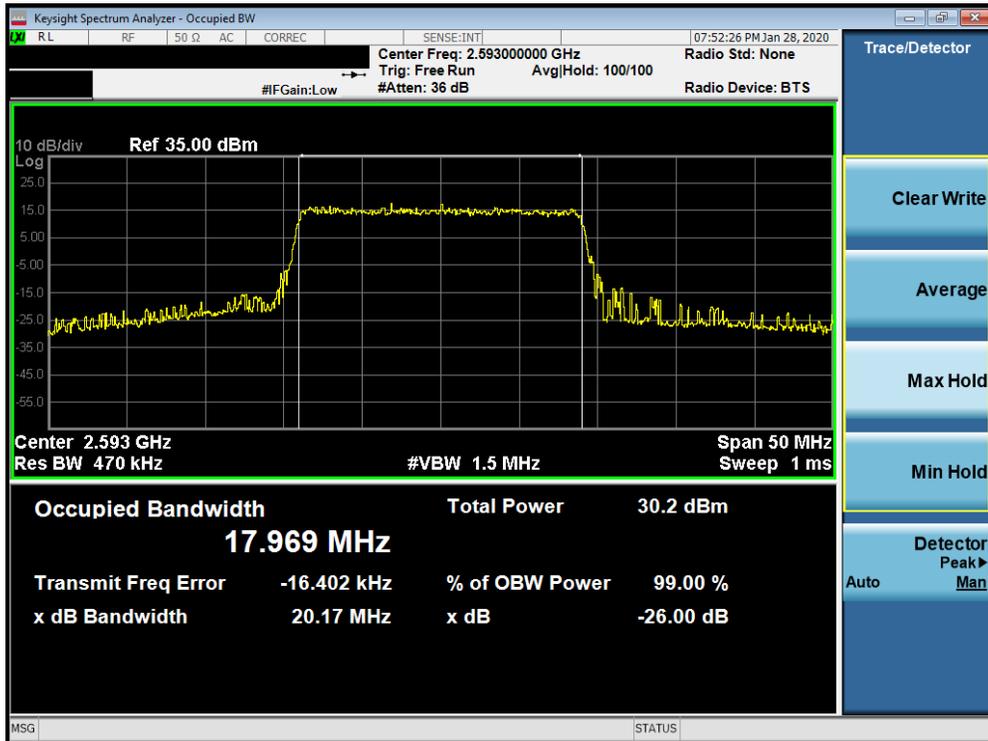

Plot 7-93. Occupied Bandwidth Plot (Band 41 (PC2) - 20.0MHz 64-QAM - Full RB Configuration)

FCC ID: ZNFT600TS		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2001100004-03.ZNF	Test Dates: 1/13 - 2/14/2020	EUT Type: Portable Tablet		Page 64 of 213

7.3 Spurious and Harmonic Emissions at Antenna Terminal

Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

The minimum permissible attenuation level of any spurious emission is $43 + 10 \log_{10}(P_{[Watts]})$, where P is the transmitter power in Watts.

For Band 41, the minimum permissible attenuation level of any spurious emission is $55 + 10 \log_{10}(P_{[Watts]})$.

Test Procedure Used

KDB 971168 D01 v03r01 – Section 6.0

Test Settings

1. Start frequency was set to 30MHz and stop frequency was set to at least 10 * the fundamental frequency (separated into at least two plots per channel)
2. Detector = RMS
3. Trace mode = trace average for continuous emissions, max hold for pulse emissions
4. Sweep time = auto couple
5. The trace was allowed to stabilize
6. Please see test notes below for RBW and VBW settings

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

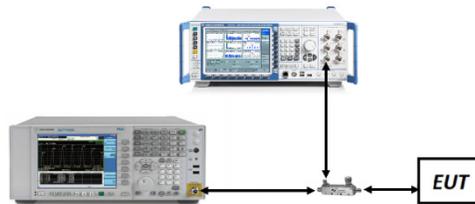


Figure 7-2. Test Instrument & Measurement Setup

Test Notes

Compliance with the applicable limits is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater for frequencies less than 1 GHz and 1 MHz or greater for frequencies greater than 1 GHz. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.

FCC ID: ZNFT600TS		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2001100004-03.ZNF	Test Dates: 1/13 - 2/14/2020	EUT Type: Portable Tablet		Page 65 of 213