



PCTEST ENGINEERING LABORATORY, INC.

6660-B Dobbin Road, Columbia, MD 21045 USA
Tel. 410.290.6652 / Fax 410.290.6654
http://www.pctestlab.com



MEASUREMENT REPORT

FCC Part 22, 24, & 27 / IC RSS-132/RSS-133/RSS-139

Applicant Name:
LG Electronics MobileComm U.S.A
1000 Sylvan Avenue
Englewood Cliffs, NJ 07632
United States

Date of Testing:
July 16 - 17, 2012
Test Site/Location:
PCTEST Lab., Columbia, MD, USA
Test Report Serial No.:
0Y1207090913.ZNF

FCC ID:	ZNFUS730
APPLICANT:	LG ELECTRONICS MOBILECOMM U.S.A

Application Type: Class II Permissive Change
Model(s): US730, LG-US730, LW730, LG-LW730
EUT Type: Portable Handset
FCC Classification: PCS Licensed Transmitter Held to Ear (PCE)
FCC Rule Part(s): §2; §22(H), §24(E), §27(C)
Test Procedure(s): ANSI/TIA-603-C-2004
Test Device Serial No.: *identical prototype* [S/N: N/A]
Class II Permissive Change: Please see FCC change document
Original Grant Date: May 07, 2012

Mode	Tx Frequency (MHz)	Emission Designator	ERP/EIRP	
			Max. Power (W)	Max. Power (dBm)
CDMA850	824.70 - 848.31	1M27F9W	0.249	23.97
CDMA1700	1711.25 - 1753.75	1M28F9W	0.408	26.10
CDMA1900	1851.25 - 1908.75	1M27F9W	0.619	27.92

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in §2.947. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

PCTEST certifies that no party to this application has been subject to a denial of Federal benefits that includes FCC benefits pursuant to Section 5301 of the Anti-Drug Abuse Act of 1988, 21 U.S.C. 862.

Randy Ortanez
President



FCC ID: ZNFUS730		FCC Pt. 22/24/27 CDMA / EvDO MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1207090913.ZNF	Test Dates: July 16 - 17, 2012	EUT Type: Portable Handset		Page 1 of 23

T A B L E O F C O N T E N T S


FCC PART 22, 24 & 27 MEASUREMENT REPORT.....		3
1.0 INTRODUCTION		4
1.1 SCOPE		4
1.2 TESTING FACILITY.....		4
2.0 PRODUCT INFORMATION.....		5
2.1 EQUIPMENT DESCRIPTION		5
2.2 DEVICE CAPABILITIES.....		5
2.3 TEST CONFIGURATION.....		5
2.4 EMI SUPPRESSION DEVICE(S)/MODIFICATIONS		5
2.5 LABELING REQUIREMENTS.....		5
3.0 DESCRIPTION OF TESTS		6
3.1 EVALUATION PROCEDURE		6
3.2 CELLULAR - BASE FREQUENCY BLOCKS.....		6
3.3 CELLULAR - MOBILE FREQUENCY BLOCKS.....		6
3.4 AWS - BASE FREQUENCY BLOCKS		7
3.5 AWS - MOBILE FREQUENCY BLOCKS		7
3.6 PCS - BASE FREQUENCY BLOCKS.....		7
3.7 PCS - MOBILE FREQUENCY BLOCKS.....		8
3.8 RADIATED POWER AND RADIATED SPURIOUS EMISSIONS		9
4.0 TEST EQUIPMENT CALIBRATION DATA		10
5.0 SAMPLE CALCULATIONS		11
6.0 TEST RESULTS.....		12
6.1 SUMMARY.....		12
6.2 EFFECTIVE RADIATED POWER OUTPUT DATA		13
6.3 EQUIVALENT ISOTROPIC RADIATED POWER OUTPUT DATA.....		13
6.4 CELLULAR CDMA RADIATED MEASUREMENTS.....		14
6.5 AWS CDMA RADIATED MEASUREMENTS		17
6.6 PCS CDMA RADIATED MEASUREMENTS.....		20
7.0 CONCLUSION.....		23

FCC ID: ZNFUS730	 FCC Pt. 22/24/27 CDMA / EvDO MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1207090913.ZNF	Test Dates: July 16 - 17, 2012	EUT Type: Portable Handset	
			Page 2 of 23



MEASUREMENT REPORT

FCC Part 22, 24, & 27




§2.1033 General Information

APPLICANT: LG Electronics MobileComm U.S.A
APPLICANT ADDRESS: 1000 Sylvan Avenue
 Englewood Cliffs, NJ 07632
TEST SITE: PCTEST ENGINEERING LABORATORY, INC.
TEST SITE ADDRESS: 6660-B Dobbin Road, Columbia, MD 21045 USA
FCC RULE PART(S): §2; §22(H), §24(E), §27(C)(L)
IC SPECIFICATION(S): RSS-132 Issue 2; RSS-133 Issue 5; RSS-139 Issue 2
BASE MODEL: US730
FCC ID: ZNFUS730
FCC CLASSIFICATION: PCS Licensed Transmitter Held to Ear (PCE)
MODE: CDMA / EvDO
FREQUENCY TOLERANCE: ±0.00025 % (2.5 ppm)
Test Device Serial No.: N/A Production Pre-Production Engineering
DATE(S) OF TEST: July 16 - 17, 2012
TEST REPORT S/N: 0Y1207090913.ZNF

Test Facility / Accreditations

Measurements were performed at PCTEST Engineering Lab. located in Columbia, MD 21045, U.S.A.



- PCTEST facility is an FCC registered (PCTEST Reg. No. 90864) test facility with the site description report on file and has met all the requirements specified in Section 2.948 of the FCC Rules and Industry Canada (2451A-1).
- PCTEST Lab is accredited to ISO 17025 by U.S. National Institute of Standards and Technology (NIST) under the National Voluntary Laboratory Accreditation Program (NVLAP Lab code: 100431-0) in EMC, FCC and Telecommunications.
- PCTEST Lab is accredited to ISO 17025-2005 by the American Association for Laboratory Accreditation (A2LA) in Specific Absorption Rate (SAR) testing, Hearing Aid Compatibility (HAC) testing, CTIA Test Plans, and wireless testing for FCC and Industry Canada Rules.
- PCTEST Lab is a recognized U.S. Conformity Assessment Body (CAB) in EMC and R&TTE (n.b. 0982) under the U.S.-EU Mutual Recognition Agreement (MRA).
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC Guide 65 by the American National Standards Institute (ANSI) in all scopes of FCC Rules and Industry Canada Standards (RSS).
- PCTEST facility is an IC registered (2451A-1) test laboratory with the site description on file at Industry Canada.
- PCTEST is a CTIA Authorized Test Laboratory (CATL) for AMPS, CDMA, and EvDO wireless devices and for Over-the-Air (OTA) Antenna Performance testing for AMPS, CDMA, GSM, GPRS, EGPRS, UMTS (W-CDMA), CDMA 1xEVDO, and CDMA 1xRTT.

FCC ID: ZNFUS730	 PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22/24/27 CDMA / EvDO MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	 LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1207090913.ZNF	Test Dates: July 16 - 17, 2012	EUT Type: Portable Handset	Page 3 of 23	

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EME) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Industry Canada Certification and Engineering Bureau.

1.2 Testing Facility

The map below shows the location of the PCTEST LABORATORY, its proximity to the FCC Laboratory, the Columbia vicinity, the Baltimore-Washington Internt'l (BWI) airport, the city of Baltimore and the Washington, DC area. (See Figure 1-1).

These measurement tests were conducted at the PCTEST Engineering Laboratory, Inc. facility in New Concept Business Park, Guilford Industrial Park, Columbia, Maryland. The site address is 6660-B Dobbin Road, Columbia, MD 21045. The test site is one of the highest points in the Columbia area with an elevation of 390 feet above mean sea level. The site coordinates are 39° 11'15" N latitude and 76° 49'38" W longitude. The facility is 1.5 miles North of the FCC laboratory, and the ambient signal and ambient signal strength are approximately equal to those of the FCC laboratory. There are no FM or TV transmitters within 15 miles of the site. The detailed description of the measurement facility was found to be in compliance with the requirements of § 2.948 according to ANSI C63.4-2003 on January 10, 2012.

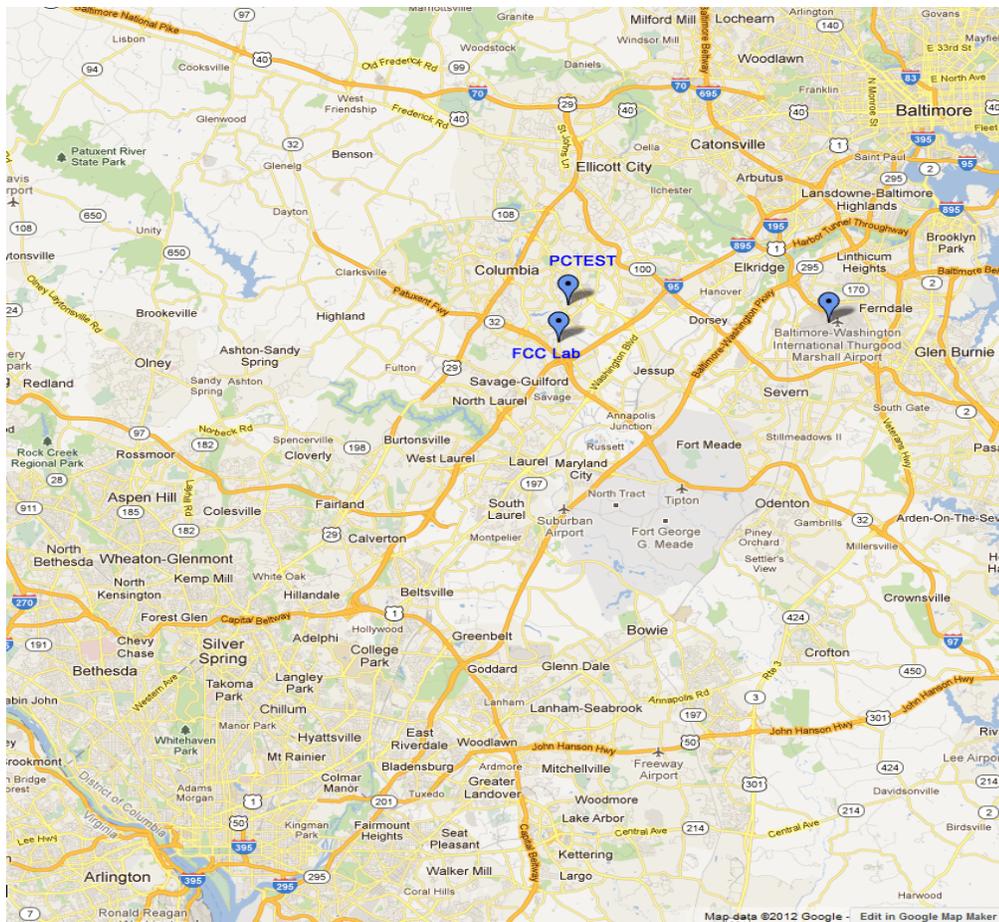


Figure 1-1. Map of the Greater Baltimore and Metropolitan Washington, D.C. area

FCC ID: ZNFUS730	 PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22/24/27 CDMA / EVD0 MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1207090913.ZNF	Test Dates: July 16 - 17, 2012	EUT Type: Portable Handset		Page 4 of 23

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **LGE Portable Handset FCC ID: ZNFUS730**. The test data contained in this report pertains only to the emissions due to the EUT's licensed transmitter.

2.2 Device Capabilities

This device contains the following capabilities:

850/1700/1900 CDMA/EvDO Rev 0/A (BC0, BC1, BC15), 802.11b/g/n WLAN, Bluetooth (1x,EDR)

2.3 Test Configuration

The LGE Portable Handset FCC ID: ZNFUS730 was tested per the guidance of ANSI/TIA-603-C-2004. See Section 3.0 of this test report for a description of the radiated emissions test.

2.4 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

2.5 Labeling Requirements

Per 2.925

The FCC identifier shall be permanently affixed to the equipment and shall be readily visible to the purchaser at the time of purchase.

Per 15.19; Docket 95-19

In addition to this requirement, a device subject to certification shall be labeled as follows:

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

The label shall be permanently affixed at a conspicuous location on the device; instruction manual or pamphlet supplied to the user and be readily visible to the purchaser at the time of purchase. However, when the device is so small wherein placement of the label with specified statement is not practical, only the trade name and FCC ID must be displayed on the device per Section 15.19(b)(2).

Please see attachment for FCC ID label and label location.

FCC ID: ZNFUS730		FCC Pt. 22/24/27 CDMA / EvDO MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1207090913.ZNF	Test Dates: July 16 - 17, 2012	EUT Type: Portable Handset	Page 5 of 23	


3.0 DESCRIPTION OF TESTS

3.1 Evaluation Procedure

The measurement procedures described in the document titled “Land Mobile FM or PM – Communications Equipment – Measurements and Performance Standards” (ANSI/TIA-603-C-2004) was used in the measurement of the measurement of the **LGE Portable Handset FCC ID: ZNFUS730**.

Deviation from Measurement Procedure.....None

3.2 Cellular - Base Frequency Blocks

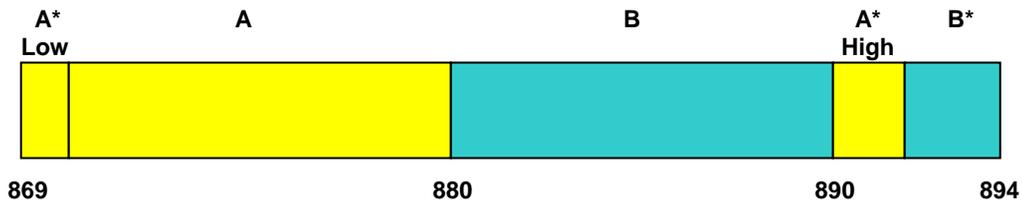


BLOCK 1: 869 – 880 MHz (A* Low + A)

BLOCK 3: 890 – 891.5 MHz (A* High)

BLOCK 2: 880 – 890 MHz (B)

BLOCK 4: 891.5 – 894 MHz (B*)

3.3 Cellular - Mobile Frequency Blocks

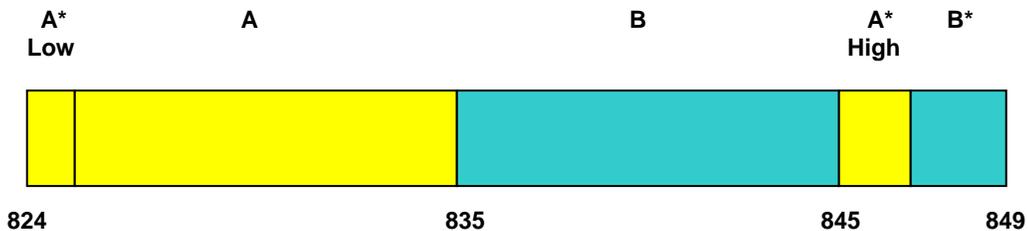

BLOCK 1: 824 – 835 MHz (A* Low + A)

BLOCK 3: 845 – 846.5 MHz (A* High)


BLOCK 2: 835 – 845 MHz (B)

BLOCK 4: 846.5 – 849 MHz (B*)

FCC ID: ZNFUS730	 PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22/24/27 CDMA / EvDO MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	 LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1207090913.ZNF	Test Dates: July 16 - 17, 2012	EUT Type: Portable Handset	Page 6 of 23	

3.4 AWS - Base Frequency Blocks

§27.5(h)

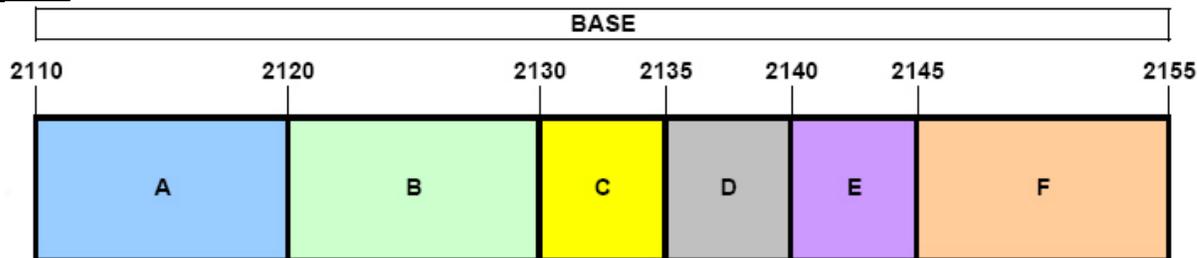

BLOCK 1: 2110 – 2120 MHz (A)

BLOCK 4: 2135 – 2140 MHz (D)

BLOCK 2: 2120 – 2130 MHz (B)


BLOCK 5: 2140 – 2145 MHz (E)

BLOCK 3: 2130 – 2135 MHz (C)

BLOCK 6: 2145 – 2155 MHz (E)

3.5 AWS - Mobile Frequency Blocks

§27.5(h)

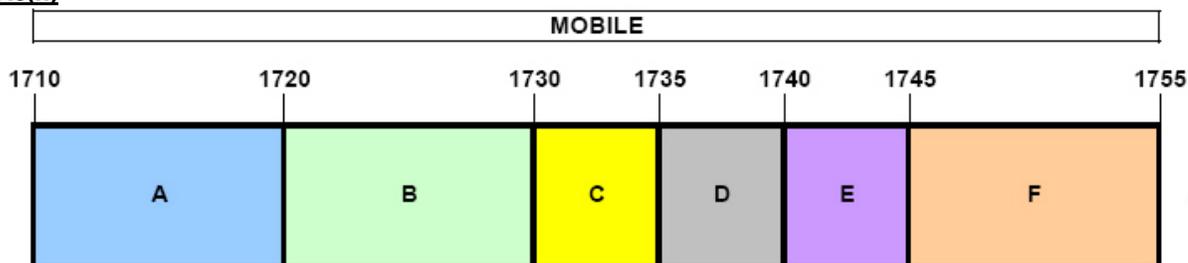

BLOCK 1: 1710 – 1720 MHz (A)

BLOCK 4: 1735 – 1740 MHz (D)


BLOCK 2: 1720 – 1730 MHz (B)

BLOCK 5: 1740 – 1745 MHz (E)

BLOCK 3: 1730 – 1735 MHz (C)

BLOCK 6: 1745 – 1755 MHz (F)

3.6 PCS - Base Frequency Blocks

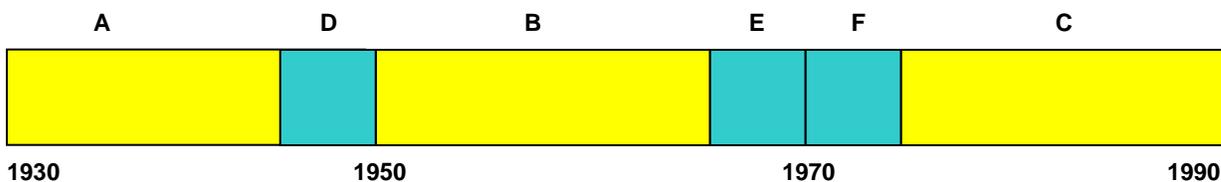

BLOCK 1: 1930 – 1945 MHz (A)

BLOCK 4: 1965 – 1970 MHz (E)

BLOCK 2: 1945 – 1950 MHz (D)


BLOCK 5: 1970 – 1975 MHz (F)

BLOCK 3: 1950 – 1965 MHz (B)

BLOCK 6: 1975 – 1990 MHz (C)

FCC ID: ZNFUS730	 PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22/24/27 CDMA / EvDO MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	 LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1207090913.ZNF	Test Dates: July 16 - 17, 2012	EUT Type: Portable Handset		Page 7 of 23

3.7 PCS - Mobile Frequency Blocks

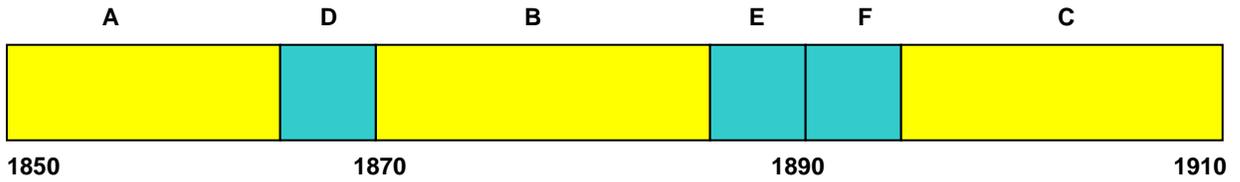

BLOCK 1: 1850 – 1865 MHz (A)

BLOCK 4: 1885 – 1890 MHz (E)

BLOCK 2: 1865 – 1870 MHz (D)

BLOCK 5: 1890 – 1895 MHz (F)

BLOCK 3: 1870 – 1885 MHz (B)

BLOCK 6: 1895 – 1910 MHz (C)

FCC ID: ZNFUS730	 PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22/24/27 CDMA / EvDO MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	 LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1207090913.ZNF	Test Dates: July 16 - 17, 2012	EUT Type: Portable Handset		Page 8 of 23

3.8 Radiated Power and Radiated Spurious Emissions

§2.1053, 22.917(a), 22., 24.232(c), 24.238(a), §27.53(h)

Radiated spurious emissions are investigated indoors in a semi-anechoic chamber to determine the frequencies producing the worst case emissions. Final measurements for radiated power and radiated spurious emissions are performed on the 3 meter OATS per the guidelines of ANSI/TIA-603-C-2004. The measurement area is situated on an 18 meter x 20 meter galvanized 1/2" hardware cloth as the conducting ground plane. This material is sewn together in sections 4 feet wide and 60 feet long. A total of eighteen sections are required to cover the entire measurement area. Sections are laid across the width of the pad, overlapped 1" and sewn and soldered together at intervals of 3" (7.6 cm.) The terrain of the test site is reasonably flat and level. Power and cable to the test site are buried 18" deep into the ground outside the perimeter of the site. An all-weather non-metallic housing is situated on a 2 x 3 meter area adjacent to the measurement area to house the test equipment. The equipment under test was transmitting while connected to its integral antenna and is placed on a wooden turntable 80cm above the ground plane and 3 meters from the receive antenna. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. The receive antenna height is adjusted between 1 and 4 meter height, the turntable is rotated through 360 degrees, and the EUT is manipulated through all orthogonal planes representative of its typical use to achieve the highest reading on the receive spectrum analyzer. Emissions are also investigated with the receive antenna horizontally and vertically polarized. The level of the maximized emission is recorded with the spectrum analyzer using a peak detector with RBW = 1MHz, VBW = 3MHz for emissions greater than 1GHz. For emissions below 1GHz, the spectrum analyzer is set to RBW = 100kHz and VBW = 300kHz.

A half-wave dipole is then substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator with the level of the signal generator being adjusted to obtain the same receive spectrum analyzer level previously recorded from the spurious emission from the EUT. The power of the emission is calculated using the following formula:

$$P_d \text{ [dBm]} = P_g \text{ [dBm]} - \text{cable loss [dB]} + \text{antenna gain [dBd/dBi]}$$

Where, P_d is the dipole equivalent power, P_g is the generator output into the substitution antenna, and the antenna gain is the gain of the substitute antenna used relative to either a half-wave dipole (dBd) or an isotropic source (dBi). The substitute level is equal to $P_g \text{ [dBm]} - \text{cable loss [dB]}$.

The calculated P_d levels are then compared to the absolute spurious emission limit of -13dBm which is equivalent to the required minimum attenuation of $43 + 10\log_{10}(\text{Power}_{\text{[Watts]}})$ specified in 22.917(a) and 24.238(a).

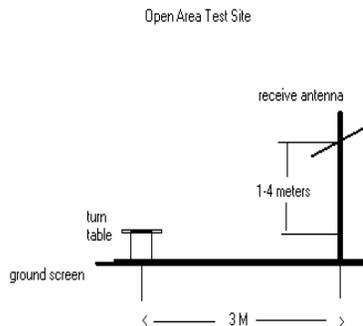


Figure 3-1. Diagram of 3-meter outdoor test range

FCC ID: ZNFUS730	 PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22/24/27 CDMA / EvDO MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	 LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1207090913.ZNF	Test Dates: July 16 - 17, 2012	EUT Type: Portable Handset		Page 9 of 23

4.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST).

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
-	LTX1	Licensed Transmitter Cable Set	1/25/2012	Annual	1/25/2013	N/A
-	RE1	Radiated Emissions Cable Set (UHF/EHF)	6/7/2012	Annual	6/7/2013	N/A
-	RE2	Radiated Emissions Cable Set (VHF/UHF)	2/13/2012	Annual	2/13/2013	N/A
-	LTX2	Licensed Transmitter Cable Set	2/17/2012	Annual	2/17/2013	N/A
Agilent	8447D	Broadband Amplifier	5/8/2012	Annual	5/8/2013	1937A03348
Agilent	8449B	(1-26.5GHz) Pre-Amplifier	2/15/2012	Annual	2/15/2013	3008A00985
Agilent	8648D	(9kHz-4GHz) Signal Generator	10/10/2011	Annual	10/10/2012	3613A00315
Agilent	E4448A	PSA (3Hz-50GHz) Spectrum Analyzer	2/15/2012	Annual	2/15/2013	US42510244
Agilent	N9020A	MXA Signal Analyzer	10/10/2011	Annual	10/10/2012	US46470561
Agilent	N9038A	MXE EMI Receiver	8/5/2011	Annual	8/5/2012	MY51210133
Agilent	N9030A	PXA Signal Analyzer	2/23/2012	Annual	2/23/2013	MY49432391
Anritsu	MA2411B	Power Sensor	3/5/2012	Annual	3/5/2013	846215
Anritsu	ML2495A	Power Meter	10/13/2011	Annual	10/13/2012	1039008
Espec	ESX-2CA	Environmental Chamber	5/21/2013	Annual	5/21/2013	17620
Mini-Circuits	VHF-1300+	High Pass Filter	2/7/2012	Annual	2/7/2013	30716
Mini-Circuits	VHF-3100+	High Pass Filter	1/15/2012	Annual	1/15/2013	30841
Pasternack	PE2208-6	Bidirectional Coupler	6/3/2012	Annual	6/3/2013	N/A
Rohde & Schwarz	CMU200	Base Station Simulator	N/A		N/A	836536/0005
Schwarzbeck	UHA 9105	Dipole Antenna (400 - 1GHz) Tx	10/3/2011	Biennial	10/3/2013	91052522TX
Schwarzbeck	UHA 9105	Dipole Antenna (400 - 1GHz) Rx	10/3/2011	Biennial	10/3/2013	91052523RX
Seekonk	NC-100	Torque Wrench (8" lb)	3/5/2012	Triennial	3/5/2015	N/A
Sunol	DRH-118	Horn Antenna (1 - 18GHz)	7/5/2011	Biennial	7/5/2013	A050307
Sunol	DRH-118	Horn Antenna (1-18 GHz)	6/17/2011	Biennial	6/17/2013	A042511

Table 4-1. Test Equipment

Note: The Rohde & Schwarz CMU200 Base Station Simulator was used for test signaling purposes only and not for measuring purposes.

FCC ID: ZNFUS730		FCC Pt. 22/24/27 CDMA / EvDo MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1207090913.ZNF	Test Dates: July 16 - 17, 2012	EUT Type: Portable Handset	Page 10 of 23	

5.0 SAMPLE CALCULATIONS

Emission Designator

Emission Designator = 1M25F9W

CDMA BW = 1.25 MHz

F = Frequency Modulation

9 = Composite Digital Info

W = Combination (Audio/Data) (Measured at the 99.75% power bandwidth)

Spurious Radiated Emission - PCS Band

Example: Channel 25 PCS Mode 2nd Harmonic (3702.50 MHz)

The receive spectrum analyzer reading at 3 meters with the EUT on the turntable was -81.0 dBm. The gain of the substituted antenna is 8.1 dBi. The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of -81.0 dBm on the spectrum analyzer. The loss of the cable between the signal generator and the terminals of the substituted antenna is 2.0 dB at 3702.50 MHz. So 6.1 dB is added to the signal generator reading of -30.9 dBm yielding -24.80 dBm. The fundamental EIRP was 25.50 dBm so this harmonic was 25.50 dBm $- (-24.80) = 50.3$ dBc.

FCC ID: ZNFUS730		FCC Pt. 22/24/27 CDMA / EvDO MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1207090913.ZNF	Test Dates: July 16 - 17, 2012	EUT Type: Portable Handset		Page 11 of 23

6.0 TEST RESULTS

6.1 Summary

Company Name: LG Electronics MobileComm U.S.A
 FCC ID: ZNFUS730
 FCC Classification: PCS Licensed Transmitter Held to Ear (PCE)
 Mode(s): CDMA / EvDO

FCC Part Section(s)	RSS Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
TRANSMITTER MODE (TX)						
22.913(a)(2)	RSS-132 (4.4) [SRSP-503(5.1.3)]	Effective Radiated Power	< 7 Watts max. ERP	RADIATED	PASS	Section 6.2
24.232(c), 27.50(d)(4)	RSS-133 (6.4) [SRSP-510 (5.1.2)] RSS-139 (6.4)	Equivalent Isotropic Radiated Power	< 2 Watts max. EIRP (PCS) < 1 Watt max. EIRP (AWS)		PASS	Section 6.3
2.1053, 22.917(a), 24.238(a), 27.53(g)	RSS-132 (4.5.1) RSS-133 (6.5.1) RSS-139 (6.5)	Undesirable Emissions	< 43 + 10log ₁₀ (P[Watts]) for all out-of-band emissions		PASS	Sections 6.4, 6.5, 6.6

Table 6-1. Summary of Test Results

Notes:

1) All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.

FCC ID: ZNFUS730	 PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22/24/27 CDMA / EvDO MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	 LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1207090913.ZNF	Test Dates: July 16 - 17, 2012	EUT Type: Portable Handset	Page 12 of 23	

6.2 Effective Radiated Power Output Data

§22.913(a)(2); RSS-132 (4.4) [SRSP-503(5.1.3)]

Frequency [MHz]	Mode	Battery Type	Substitute Level [dBm]	Antenna Gain [dBd]	Pol [H/V]	ERP [dBm]	ERP [Watts]	ERP Limit [dBm]	Margin [dB]
824.70	CDMA850	Standard	22.23	0.00	H	22.23	0.167	38.45	-16.22
836.52	CDMA850	Standard	22.77	0.00	H	22.77	0.189	38.45	-15.68
848.31	CDMA850	Standard	23.97	0.00	H	23.97	0.249	38.45	-14.48

Table 6-2. Effective Radiated Power Output Data (Cellular Band)

6.3 Equivalent Isotropic Radiated Power Output Data

§24.232(c), §27.50(d)(2); RSS-133 (6.4) [SRSP-510 (5.1.2)], RSS-139 (6.4)

Frequency [MHz]	Mode	Battery Type	Substitute Level [dBm]	Antenna Gain [dBi]	Pol [H/V]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
1711.25	CDMA1700	Standard	16.39	8.59	H	24.98	0.315	30.00	-5.02
1732.50	CDMA1700	Standard	16.76	8.58	H	25.34	0.342	30.00	-4.66
1753.75	CDMA1700	Standard	17.50	8.61	H	26.10	0.408	30.00	-3.90

Table 6-3. Equivalent Isotropic Radiated Power Output Data (AWS Band)

Frequency [MHz]	Mode	Battery Type	Substitute Level [dBm]	Antenna Gain [dBi]	Pol [H/V]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
1851.25	CDMA1900	Standard	19.18	8.59	H	27.77	0.599	33.01	-5.24
1880.00	CDMA1900	Standard	18.90	8.58	H	27.48	0.560	33.01	-5.53
1908.75	CDMA1900	Standard	19.31	8.61	H	27.92	0.619	33.01	-5.09

Table 6-4. Equivalent Isotropic Radiated Power Output Data (PCS Band)

NOTES:

1. This device was tested under all R.C.s and S.O.s and the worst case is reported with RC3/SO55 with "All Up" power control bits.
2. This unit was tested with its standard battery.
3. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case test configuration was found in the horizontal setup. The data reported in the table above was measured in this test setup.

FCC ID: ZNFUS730		FCC Pt. 22/24/27 CDMA / EvDO MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1207090913.ZNF	Test Dates: July 16 - 17, 2012	EUT Type: Portable Handset	Page 13 of 23	

6.4 Cellular CDMA Radiated Measurements

§2.1053, 22.917(a); RSS-132 (4.5.1)

Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 824.70 MHz
 CHANNEL: 1013
 MEASURED OUTPUT POWER: 22.23 dBm = 0.167 W
 MODULATION SIGNAL: CDMA
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10}(W) =$ 35.23 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
1649.40	-47.35	6.33	-41.02	H	63.2
2474.10	-54.82	6.81	-48.01	H	70.2
3298.80	-93.25	7.10	-86.16	H	108.4
4123.50	-91.22	7.57	-83.65	H	105.9
4948.20	-90.66	8.98	-81.68	H	103.9

Table 6-5. Radiated Spurious Data (Cellular CDMA Mode – Ch. 1013)

NOTES:

1. This device was tested under all R.C.s and S.O.s and the worst case is reported with RC3/SO55 with "All Up" power control bits.
2. This unit was tested with its standard battery.
3. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case test configuration was found in the horizontal setup. The data reported in the table above was measured in this test setup.

FCC ID: ZNFUS730	 PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22/24/27 CDMA / EvDO MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	 LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1207090913.ZNF	Test Dates: July 16 - 17, 2012	EUT Type: Portable Handset	Page 14 of 23	

Cellular CDMA Radiated Measurements (Cont'd)
§2.1053, 22.917(a)

Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 836.52 MHz
 CHANNEL: 384
 MEASURED OUTPUT POWER: 22.77 dBm = 0.189 W
 MODULATION SIGNAL: CDMA
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10}(W) =$ 35.77 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
1673.04	-50.63	6.29	-44.34	H	67.1
2509.56	-55.41	6.84	-48.56	H	71.3
3346.08	-93.36	7.24	-86.12	H	108.9
4182.60	-91.77	7.96	-83.81	H	106.6
5019.12	-90.22	8.90	-81.32	H	104.1

Table 6-6. Radiated Spurious Data (Cellular CDMA Mode – Ch. 384)

NOTES:

1. This device was tested under all R.C.s and S.O.s and the worst case is reported with RC3/SO55 with "All Up" power control bits.
2. This unit was tested with its standard battery.
3. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case test configuration was found in the horizontal setup. The data reported in the table above was measured in this test setup.

FCC ID: ZNFUS730	 PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22/24/27 CDMA / EvDO MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	 LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1207090913.ZNF	Test Dates: July 16 - 17, 2012	EUT Type: Portable Handset	Page 15 of 23	

Cellular CDMA Radiated Measurements (Cont'd)
§2.1053, 22.917(a)

Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 848.31 MHz
 CHANNEL: 777
 MEASURED OUTPUT POWER: 23.97 dBm = 0.249 W
 MODULATION SIGNAL: CDMA
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10}(W) =$ 36.97 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
1696.62	-52.56	6.25	-46.31	H	70.3
2544.93	-57.15	6.93	-50.22	H	74.2
3393.24	-93.46	7.37	-86.09	H	110.1
4241.55	-92.19	8.28	-83.91	H	107.9
5089.86	-89.47	8.69	-80.78	H	104.7

Table 6-7. Radiated Spurious Data (Cellular CDMA Mode – Ch. 777)

NOTES:

1. This device was tested under all R.C.s and S.O.s and the worst case is reported with RC3/SO55 with "All Up" power control bits.
2. This unit was tested with its standard battery.
3. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case test configuration was found in the horizontal setup. The data reported in the table above was measured in this test setup.

FCC ID: ZNFUS730	 PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22/24/27 CDMA / EvDO MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	 LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1207090913.ZNF	Test Dates: July 16 - 17, 2012	EUT Type: Portable Handset	Page 16 of 23	

6.5 AWS CDMA Radiated Measurements §2.1053, 27.53(g)

Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 1711.25 MHz
 CHANNEL: 25
 MEASURED OUTPUT POWER: 24.98 dBm = 0.315 W
 MODULATION SIGNAL: CDMA
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 37.98 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
3422.50	-46.11	9.61	-36.50	H	61.5
5133.75	-90.72	10.79	-79.93	H	104.9
6845.00	-85.78	10.60	-75.18	H	100.2
8556.25	-83.86	11.55	-72.31	H	97.3
10267.50	-82.23	12.71	-69.52	H	94.5

Table 6-8. Radiated Spurious Data (AWS CDMA Mode – Ch. 25)

NOTES:

1. This device was tested under all R.C.s and S.O.s and the worst case is reported with RC3/SO55 with "All Up" power control bits.
2. This unit was tested with its standard battery.
3. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case test configuration was found in the horizontal setup. The data reported in the table above was measured in this test setup.

FCC ID: ZNFUS730	 PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22/24/27 CDMA / EvDO MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	 LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1207090913.ZNF	Test Dates: July 16 - 17, 2012	EUT Type: Portable Handset	Page 17 of 23	

AWS CDMA Radiated Measurements (Cont'd)
§2.1053, 27.53(g)

Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 1732.50 MHz
 CHANNEL: 450
 MEASURED OUTPUT POWER: 25.34 dBm = 0.342 W
 MODULATION SIGNAL: CDMA
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 38.34 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
3465.00	-50.59	9.72	-40.87	H	66.2
5197.50	-90.41	10.75	-79.66	H	105.0
6930.00	-85.83	10.75	-75.09	H	100.4
8662.50	-83.85	11.70	-72.14	H	97.5
10395.00	-81.76	12.66	-69.10	H	94.4

Table 6-9. Radiated Spurious Data (AWS CDMA Mode – Ch. 450)

NOTES:

1. This device was tested under all R.C.s and S.O.s and the worst case is reported with RC3/SO55 with "All Up" power control bits.
2. This unit was tested with its standard battery.
3. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case test configuration was found in the horizontal setup. The data reported in the table above was measured in this test setup.

FCC ID: ZNFUS730	 PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22/24/27 CDMA / EvDO MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	 LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1207090913.ZNF	Test Dates: July 16 - 17, 2012	EUT Type: Portable Handset	Page 18 of 23	

AWS CDMA Radiated Measurements (Cont'd)
§2.1053, 27.53(g)

Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 1753.75 MHz
 CHANNEL: 875
 MEASURED OUTPUT POWER: 26.10 dBm = 0.408 W
 MODULATION SIGNAL: CDMA
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 39.10 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
3507.50	-51.62	9.83	-41.79	H	67.9
5261.25	-90.46	10.89	-79.58	H	105.7
7015.00	-85.96	10.92	-75.04	H	101.1
8768.75	-83.93	11.89	-72.03	H	98.1
10522.50	-81.32	12.62	-68.70	H	94.8

Table 6-10. Radiated Spurious Data (AWS CDMA Mode – Ch. 875)

NOTES:

1. This device was tested under all R.C.s and S.O.s and the worst case is reported with RC3/SO55 with "All Up" power control bits.
2. This unit was tested with its standard battery.
3. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case test configuration was found in the horizontal setup. The data reported in the table above was measured in this test setup.

FCC ID: ZNFUS730	 PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22/24/27 CDMA / EvDO MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	 LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1207090913.ZNF	Test Dates: July 16 - 17, 2012	EUT Type: Portable Handset	Page 19 of 23	

6.6 PCS CDMA Radiated Measurements §2.1053, 24.238(a)

Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 1851.25 MHz
 CHANNEL: 25
 MEASURED OUTPUT POWER: 27.77 dBm = 0.599 W
 MODULATION SIGNAL: CDMA
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10}(W) =$ 40.77 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
3702.50	-53.03	9.94	-43.09	H	70.9
5553.75	-89.81	10.96	-78.85	H	106.6
7405.00	-85.03	10.80	-74.23	H	102.0
9256.25	-83.90	12.33	-71.57	H	99.3
11107.50	-80.45	13.06	-67.39	H	95.2

Table 6-11. Radiated Spurious Data (PCS CDMA Mode – Ch. 25)

NOTES:

1. This device was tested under all R.C.s and S.O.s and the worst case is reported with RC3/SO55 with "All Up" power control bits.
2. This unit was tested with its standard battery.
3. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case test configuration was found in the horizontal setup. The data reported in the table above was measured in this test setup.

FCC ID: ZNFUS730	 PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22/24/27 CDMA / EvDO MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	 LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1207090913.ZNF	Test Dates: July 16 - 17, 2012	EUT Type: Portable Handset	Page 20 of 23	

PCS CDMA Radiated Measurements (Cont'd)
§2.1053, 24.238(a)

Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 1880.00 MHz
 CHANNEL: 600
 MEASURED OUTPUT POWER: 27.48 dBm = 0.560 W
 MODULATION SIGNAL: CDMA
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 40.48 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
3760.00	-49.44	9.60	-39.84	H	67.3
5640.00	-90.01	11.16	-78.86	H	106.3
7520.00	-85.40	11.08	-74.32	H	101.8
9400.00	-83.47	12.22	-71.25	H	98.7
11280.00	-80.44	13.23	-67.20	H	94.7

Table 6-12. Radiated Spurious Data (PCS CDMA Mode – Ch. 600)

NOTES:

1. This device was tested under all R.C.s and S.O.s and the worst case is reported with RC3/SO55 with "All Up" power control bits.
2. This unit was tested with its standard battery.
3. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case test configuration was found in the horizontal setup. The data reported in the table above was measured in this test setup.

FCC ID: ZNFUS730	 PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22/24/27 CDMA / EvDO MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	 LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1207090913.ZNF	Test Dates: July 16 - 17, 2012	EUT Type: Portable Handset	Page 21 of 23	

PCS CDMA Radiated Measurements (Cont'd)
§2.1053, 24.238(a)

Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 1908.75 MHz
 CHANNEL: 1175
 MEASURED OUTPUT POWER: 27.92 dBm = 0.619 W
 MODULATION SIGNAL: CDMA
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 40.92 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
3817.50	-47.75	9.32	-38.43	H	66.3
5726.25	-90.15	11.32	-78.83	H	106.7
7635.00	-85.69	11.35	-74.34	H	102.3
9543.75	-83.57	12.40	-71.17	H	99.1
11452.50	-80.18	13.33	-66.85	H	94.8

Table 6-13. Radiated Spurious Data (PCS CDMA Mode – Ch. 1175)

NOTES:

1. This device was tested under all R.C.s and S.O.s and the worst case is reported with RC3/SO55 with "All Up" power control bits.
2. This unit was tested with its standard battery.
3. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case test configuration was found in the horizontal setup. The data reported in the table above was measured in this test setup.

FCC ID: ZNFUS730	 PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22/24/27 CDMA / EvDO MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	 LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1207090913.ZNF	Test Dates: July 16 - 17, 2012	EUT Type: Portable Handset	Page 22 of 23	

7.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the **LGE Portable Handset FCC ID: ZNFUS730** complies with all the requirements of Parts 2, 22, 24, and 27 of the FCC rules and RSS-139 of the Industry Canada rules.

FCC ID: ZNFUS730		FCC Pt. 22/24/27 CDMA / EvDO MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1207090913.ZNF	Test Dates: July 16 - 17, 2012	EUT Type: Portable Handset		Page 23 of 23