


Antenna-2 Power Spectral Density Measurements

	Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured Power Density [dBm]	Max Permissible Power Density [dBm/MHz]	Margin [dB]
Band 1	5180	36	a	6	7.06	11.0	-3.94
	5200	40	a	6	6.92	11.0	-4.08
	5240	48	a	6	6.97	11.0	-4.03
	5180	36	n (20MHz)	6.5/7.2 (MCS0)	6.03	11.0	-4.97
	5200	40	n (20MHz)	6.5/7.2 (MCS0)	6.38	11.0	-4.62
	5240	48	n (20MHz)	6.5/7.2 (MCS0)	6.19	11.0	-4.81
	5190	38	n (40MHz)	13.5/15 (MCS0)	0.21	11.0	-10.79
	5230	46	n (40MHz)	13.5/15 (MCS0)	2.44	11.0	-8.56
	5210	42	ac (80MHz)	29.3/32.5 (MCS0)	-3.08	11.0	-14.08
Band 2A	5260	52	a	6	6.65	11.0	-4.35
	5280	56	a	6	6.50	11.0	-4.50
	5320	64	a	6	6.83	11.0	-4.17
	5260	52	n (20MHz)	6.5/7.2 (MCS0)	6.16	11.0	-4.84
	5280	56	n (20MHz)	6.5/7.2 (MCS0)	6.12	11.0	-4.88
	5320	64	n (20MHz)	6.5/7.2 (MCS0)	6.51	11.0	-4.49
	5270	54	n (40MHz)	13.5/15 (MCS0)	2.56	11.0	-8.44
	5310	62	n (40MHz)	13.5/15 (MCS0)	0.70	11.0	-10.30
	5290	58	ac (80MHz)	29.3/32.5 (MCS0)	-5.20	11.0	-16.20
Band 2C	5500	100	a	6	6.67	11.0	-4.33
	5580	116	a	6	6.67	11.0	-4.33
	5720	144	a	6	6.46	11.0	-4.54
	5500	100	n (20MHz)	6.5/7.2 (MCS0)	6.42	11.0	-4.58
	5580	116	n (20MHz)	6.5/7.2 (MCS0)	6.58	11.0	-4.42
	5720	144	n (20MHz)	6.5/7.2 (MCS0)	6.13	11.0	-4.87
	5510	102	n (40MHz)	13.5/15 (MCS0)	0.36	11.0	-10.64
	5550	110	n (40MHz)	13.5/15 (MCS0)	2.49	11.0	-8.51
	5710	142	n (40MHz)	13.5/15 (MCS0)	2.18	11.0	-8.82
	5530	106	ac (80MHz)	29.3/32.5 (MCS0)	-3.23	11.0	-14.23
	5690	138	ac (80MHz)	29.3/32.5 (MCS0)	-3.94	11.0	-14.94

Table 7-20. Conducted Power Spectral Density Measurements

FCC ID: ZNFV30A		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1706070187-05.ZNF	Test Dates: 6/6 - 7/14/2017	EUT Type: Portable Handset		Page 86 of 211

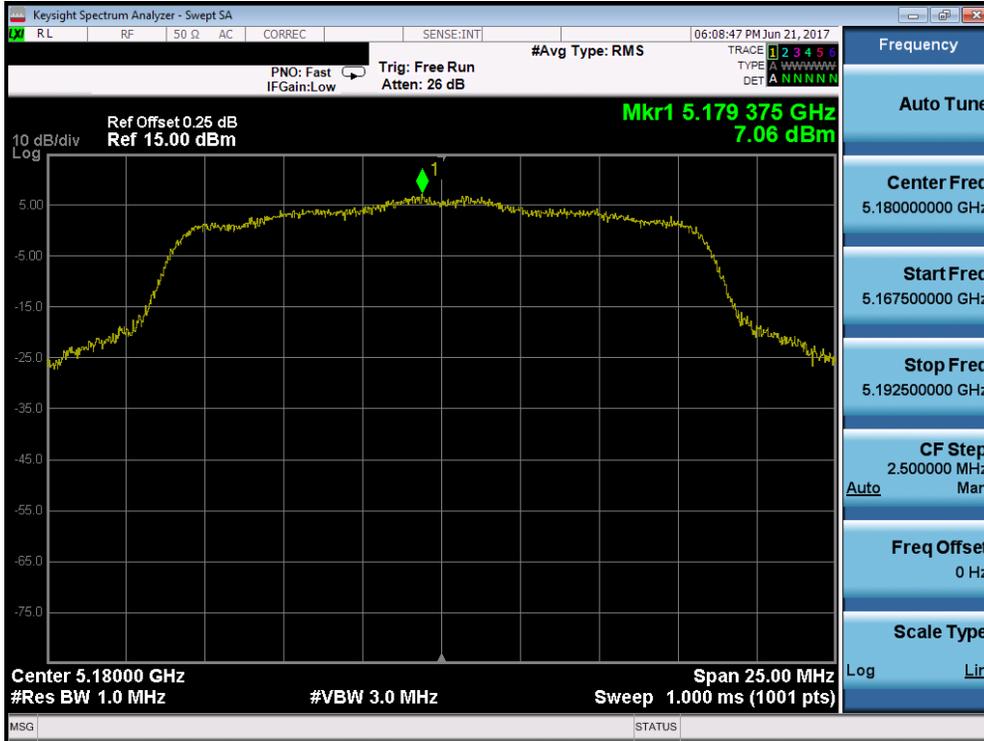

Plot 7-115. Power Spectral Density Plot (802.11a (UNII Band 1) – Ch. 36)




Plot 7-116. Power Spectral Density Plot (802.11a (UNII Band 1) – Ch. 40)

FCC ID: ZNFV30A	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1706070187-05.ZNF	Test Dates: 6/6 - 7/14/2017	EUT Type: Portable Handset		Page 87 of 211




Plot 7-117. Power Spectral Density Plot (802.11a (UNII Band 1) – Ch. 48)

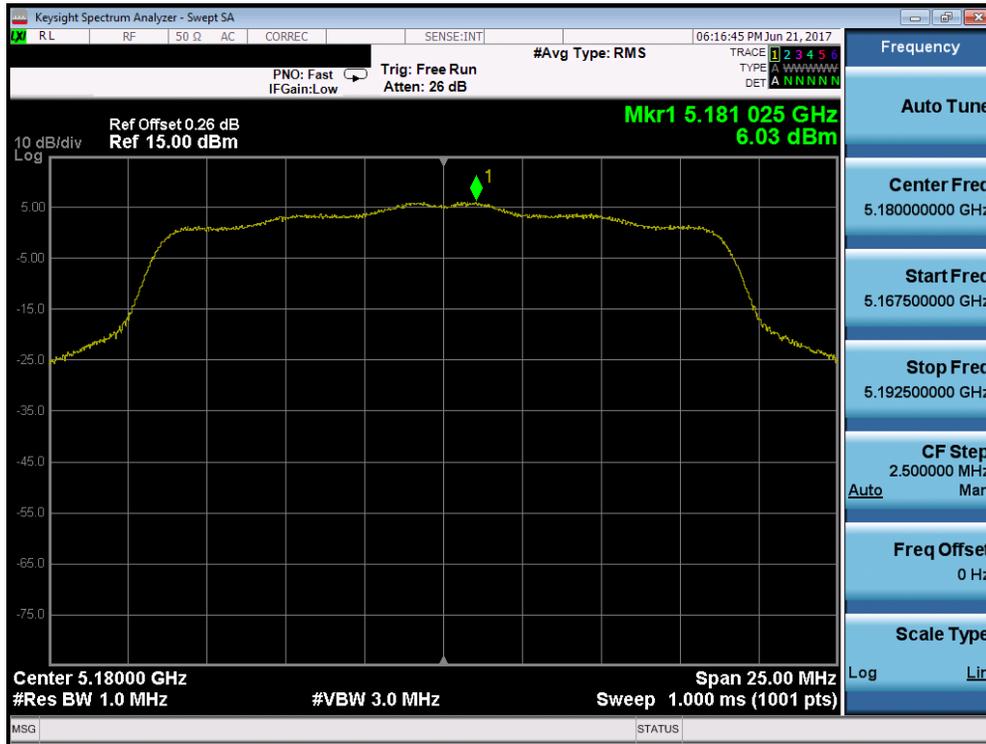

Plot 7-118. Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 1) – Ch. 36)

FCC ID: ZNFV30A		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1706070187-05.ZNF	Test Dates: 6/6 - 7/14/2017	EUT Type: Portable Handset		Page 88 of 211

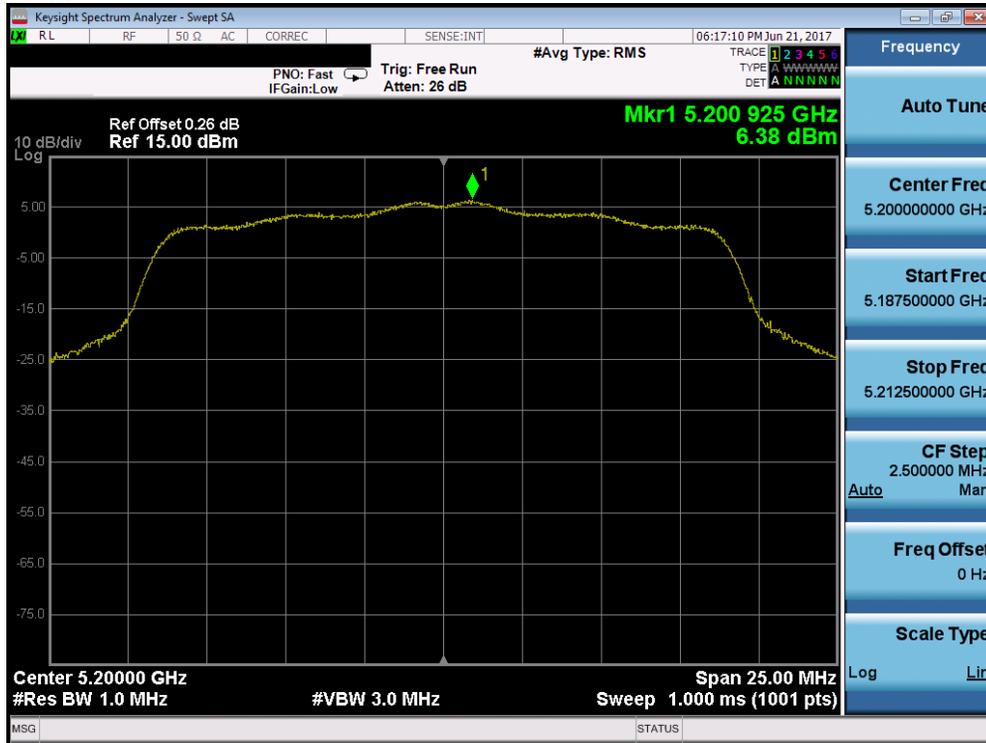


Plot 7-119. Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 1) – Ch. 40)




Plot 7-120. Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 1) – Ch. 48)

FCC ID: ZNFV30A		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1706070187-05.ZNF	Test Dates: 6/6 - 7/14/2017	EUT Type: Portable Handset		Page 89 of 211

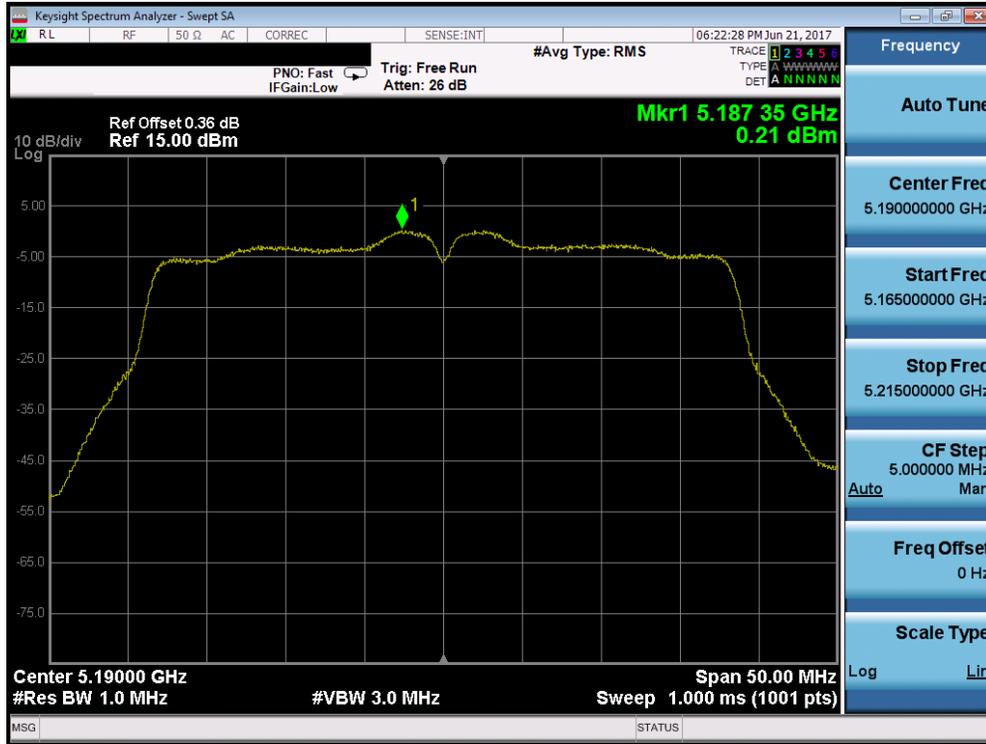


Plot 7-121. Power Spectral Density Plot (40MHz BW 802.11n (UNII Band 1) – Ch. 38)

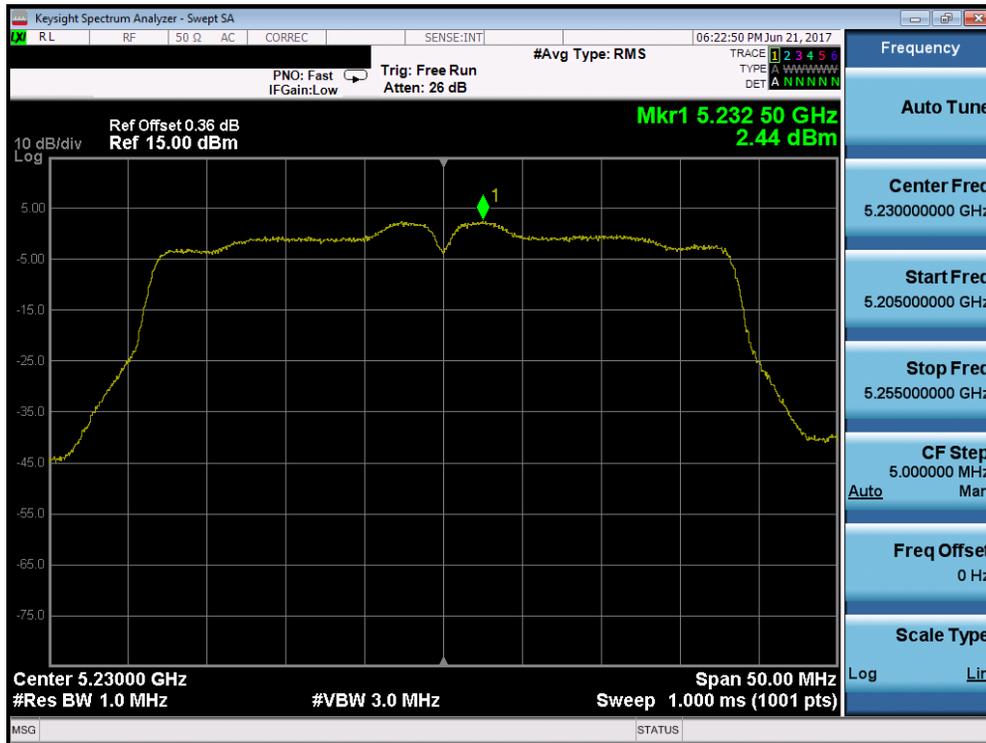


Plot 7-122. Power Spectral Density Plot (40MHz BW 802.11n (UNII Band 1) – Ch. 46)

FCC ID: ZNFV30A	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1706070187-05.ZNF	Test Dates: 6/6 - 7/14/2017	EUT Type: Portable Handset		Page 90 of 211

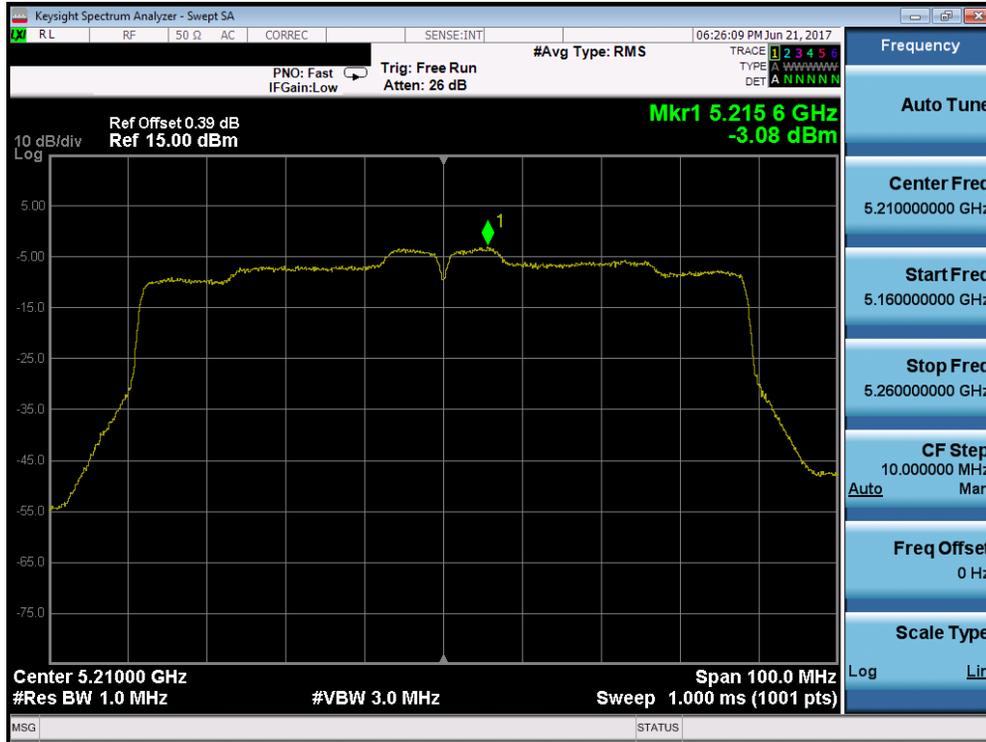

Plot 7-123. Power Spectral Density Plot (80MHz BW 802.11ac (UNII Band 1) – Ch. 42)

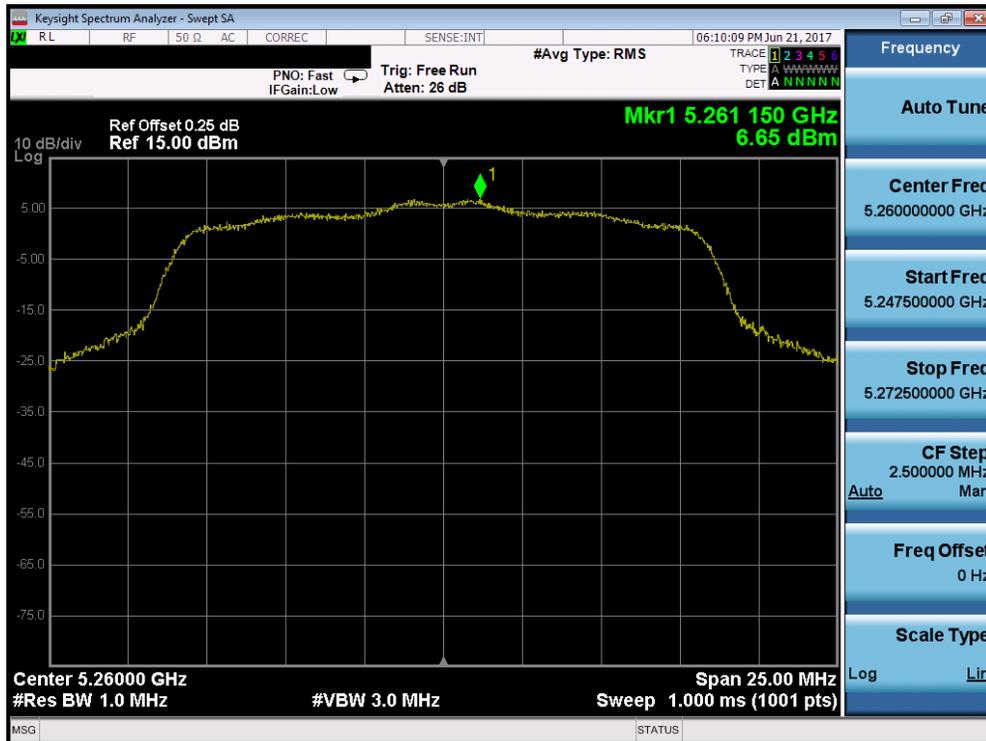


Plot 7-124. Power Spectral Density Plot (802.11a (UNII Band 2A) – Ch. 52)

FCC ID: ZNFV30A	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1706070187-05.ZNF	Test Dates: 6/6 - 7/14/2017	EUT Type: Portable Handset		Page 91 of 211




Plot 7-125. Power Spectral Density Plot (802.11a (UNII Band 2A) – Ch. 56)

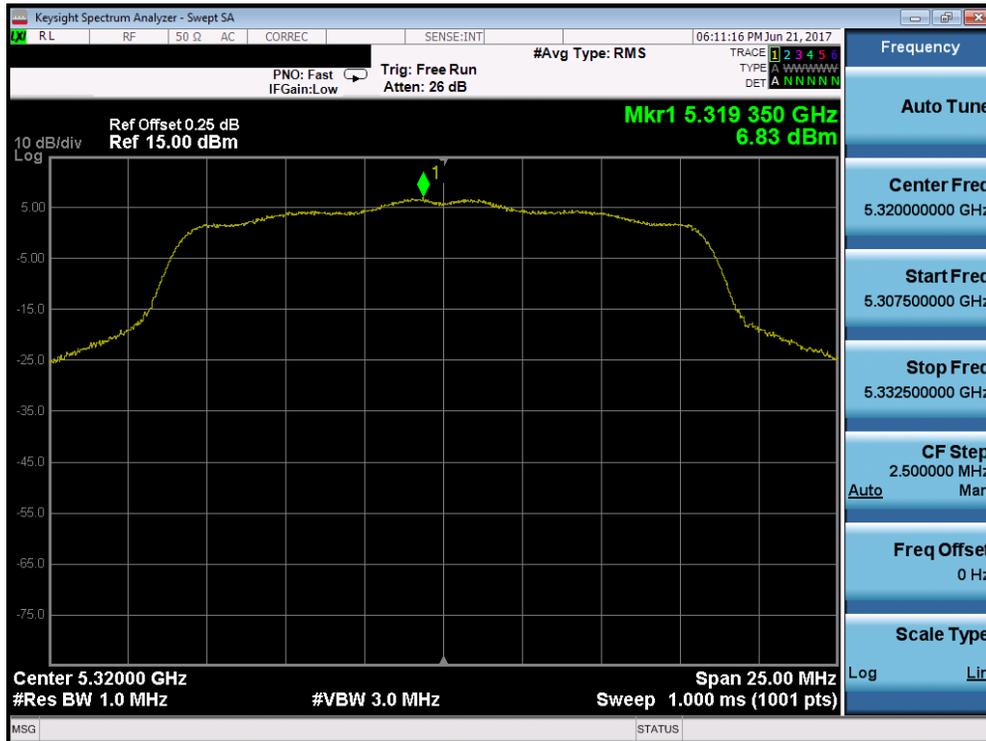


Plot 7-126. Power Spectral Density Plot (802.11a (UNII Band 2A) – Ch. 64)

FCC ID: ZNFV30A		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1706070187-05.ZNF	Test Dates: 6/6 - 7/14/2017	EUT Type: Portable Handset		Page 92 of 211

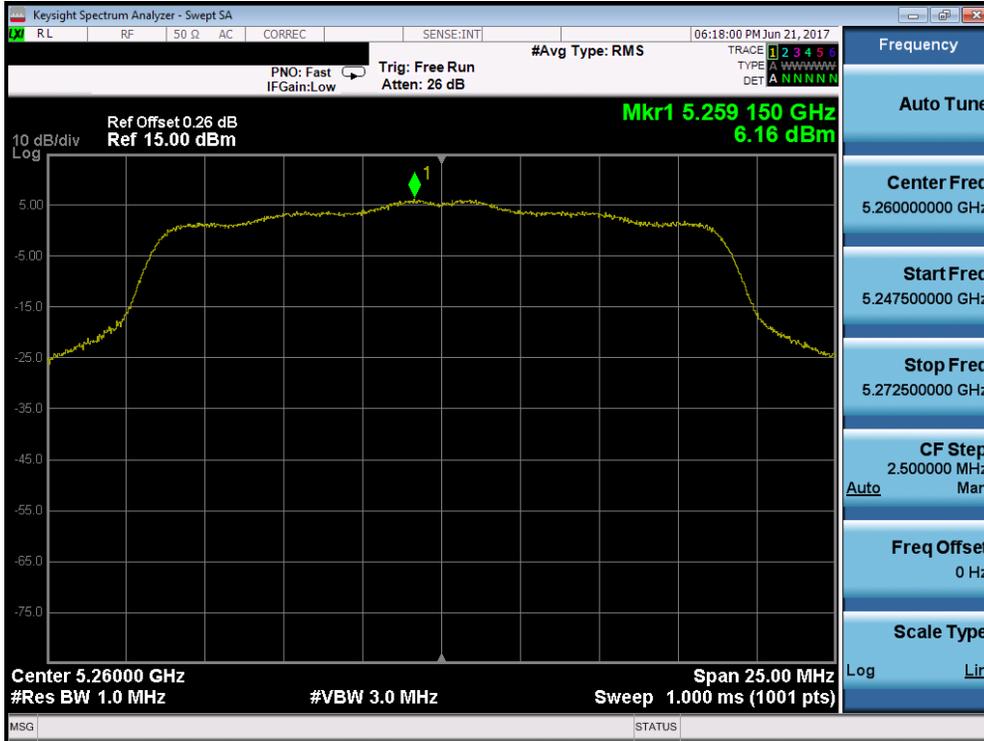

Plot 7-127. Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 2A) – Ch. 52)

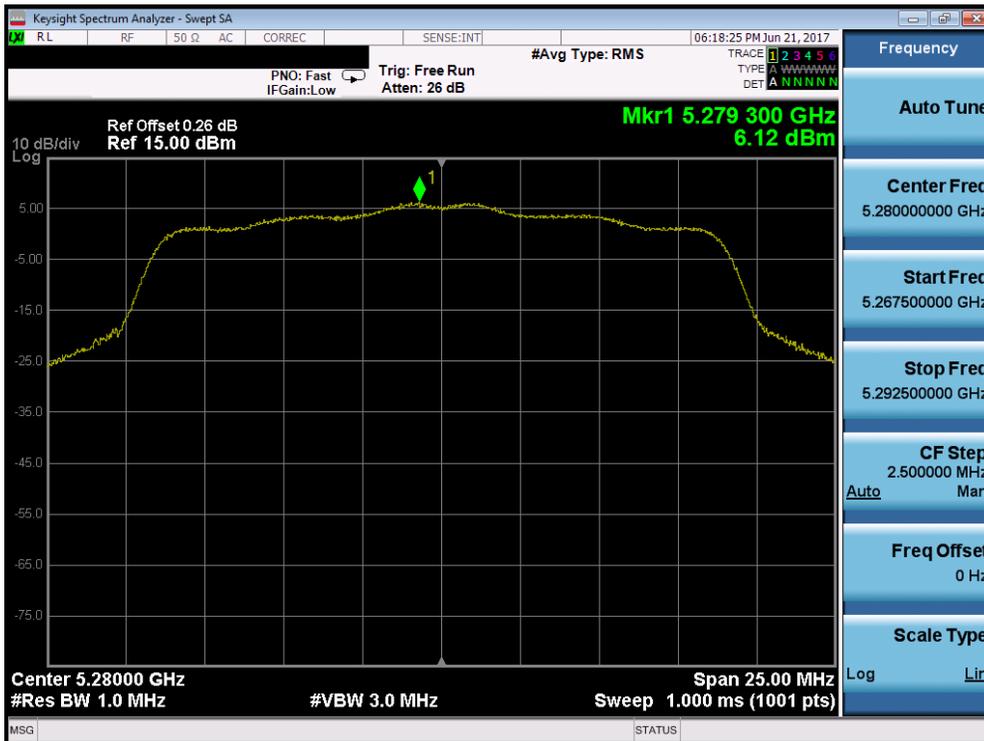

Plot 7-128. Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 2A) – Ch. 56)

FCC ID: ZNFV30A	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1706070187-05.ZNF	Test Dates: 6/6 - 7/14/2017	EUT Type: Portable Handset		Page 93 of 211




Plot 7-129. Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 2A) – Ch. 64)




Plot 7-130. Power Spectral Density Plot (40MHz BW 802.11n (UNII Band 2A) – Ch. 54)

FCC ID: ZNFV30A		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1706070187-05.ZNF	Test Dates: 6/6 - 7/14/2017	EUT Type: Portable Handset		Page 94 of 211

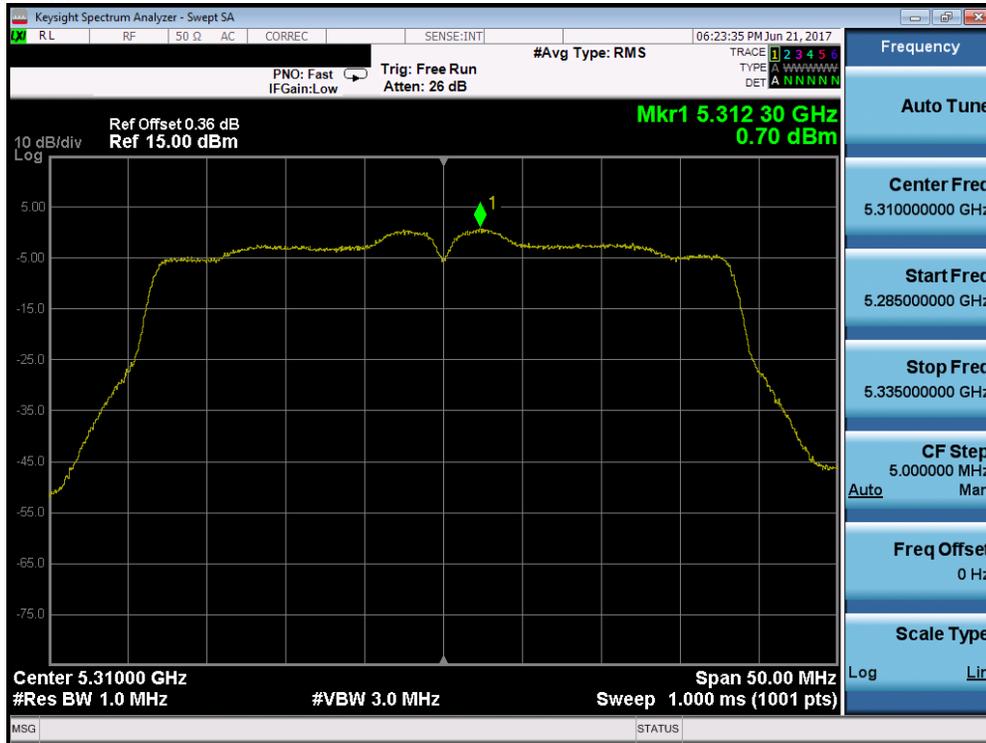


Plot 7-131. Power Spectral Density Plot (40MHz BW 802.11n (UNII Band 2A) – Ch. 62)

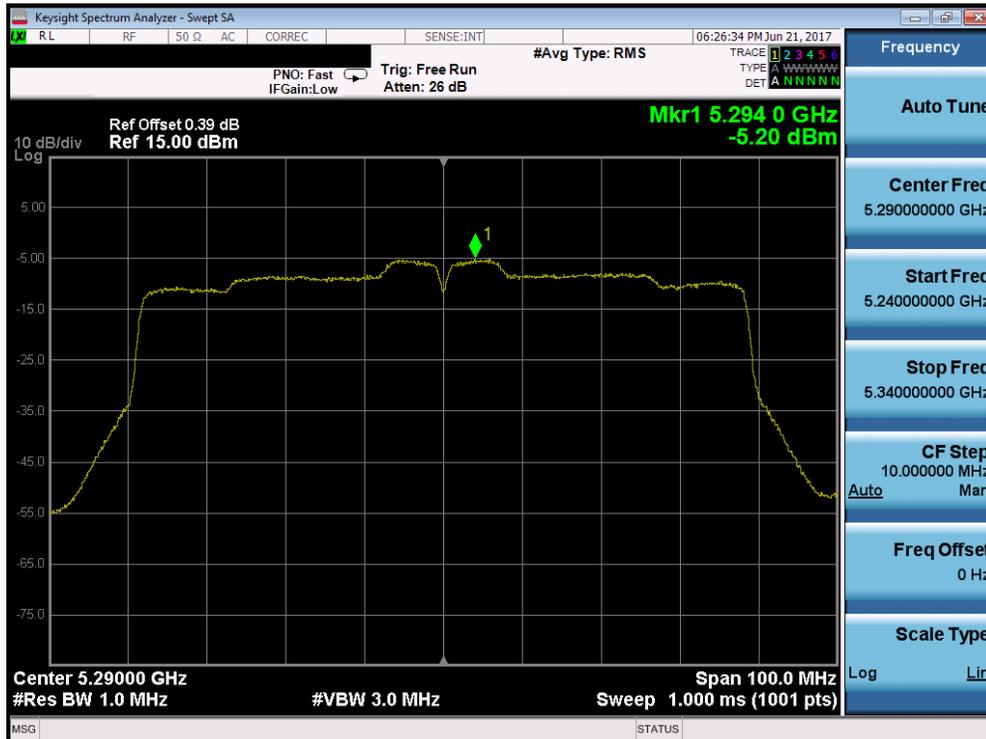


Plot 7-132. Power Spectral Density Plot (80MHz BW 802.11ac (UNII Band 2A) – Ch. 58)

FCC ID: ZNFV30A	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1706070187-05.ZNF	Test Dates: 6/6 - 7/14/2017	EUT Type: Portable Handset		Page 95 of 211

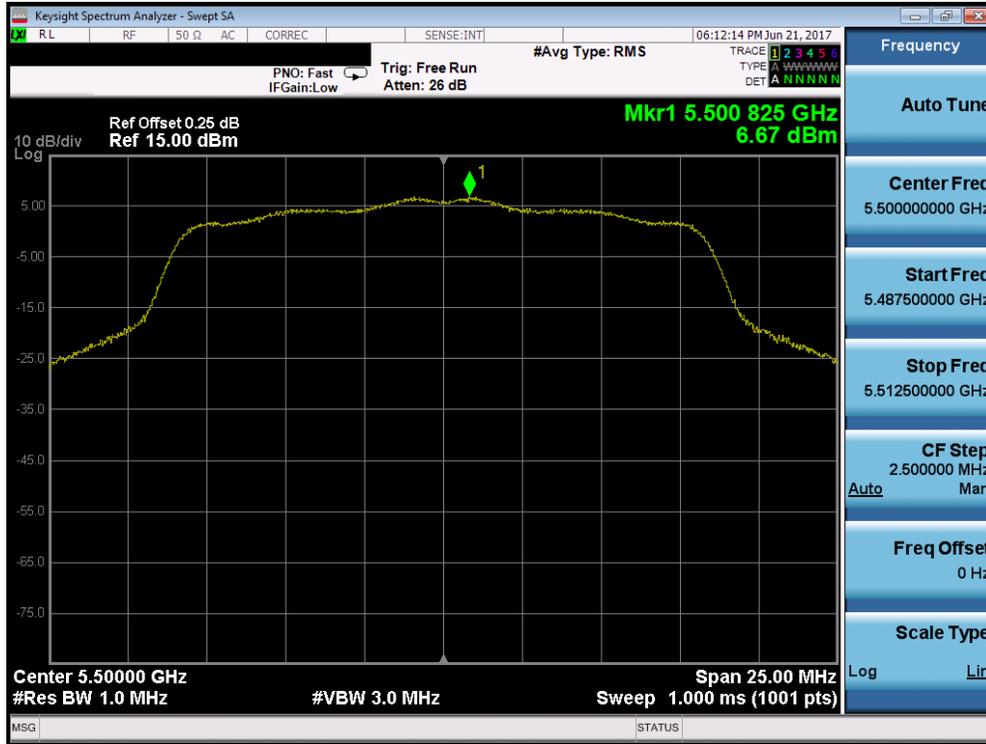


Plot 7-133. Power Spectral Density Plot (802.11a (UNII Band 2C) – Ch. 100)

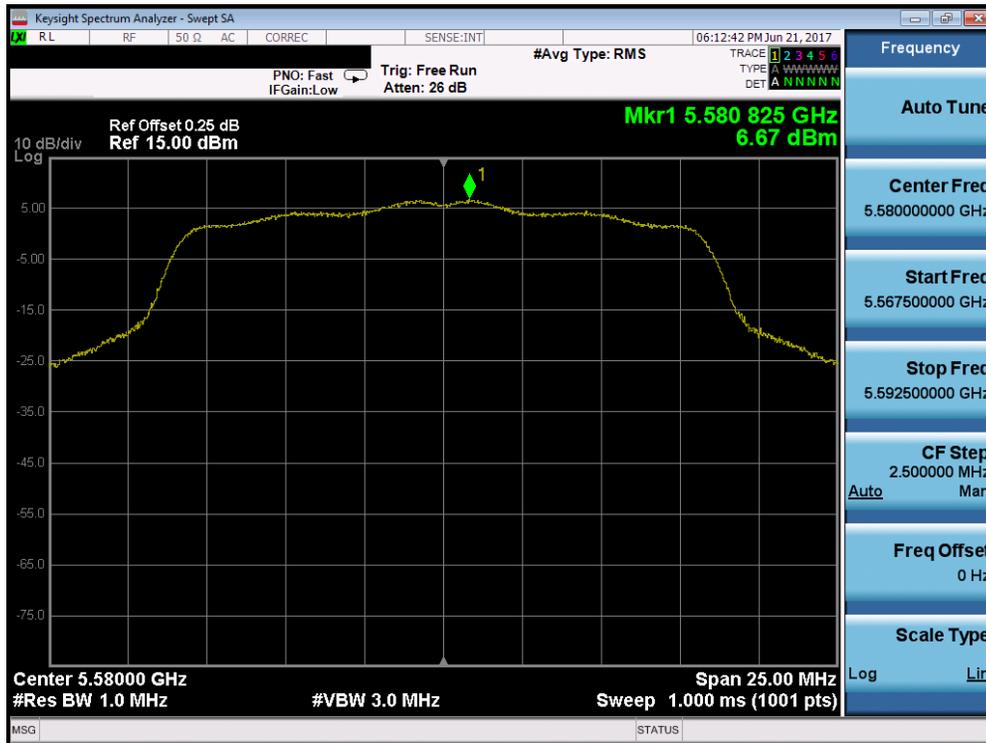

Plot 7-134. Power Spectral Density Plot (802.11a (UNII Band 2C) – Ch. 116)

FCC ID: ZNFV30A	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1706070187-05.ZNF	Test Dates: 6/6 - 7/14/2017	EUT Type: Portable Handset		Page 96 of 211

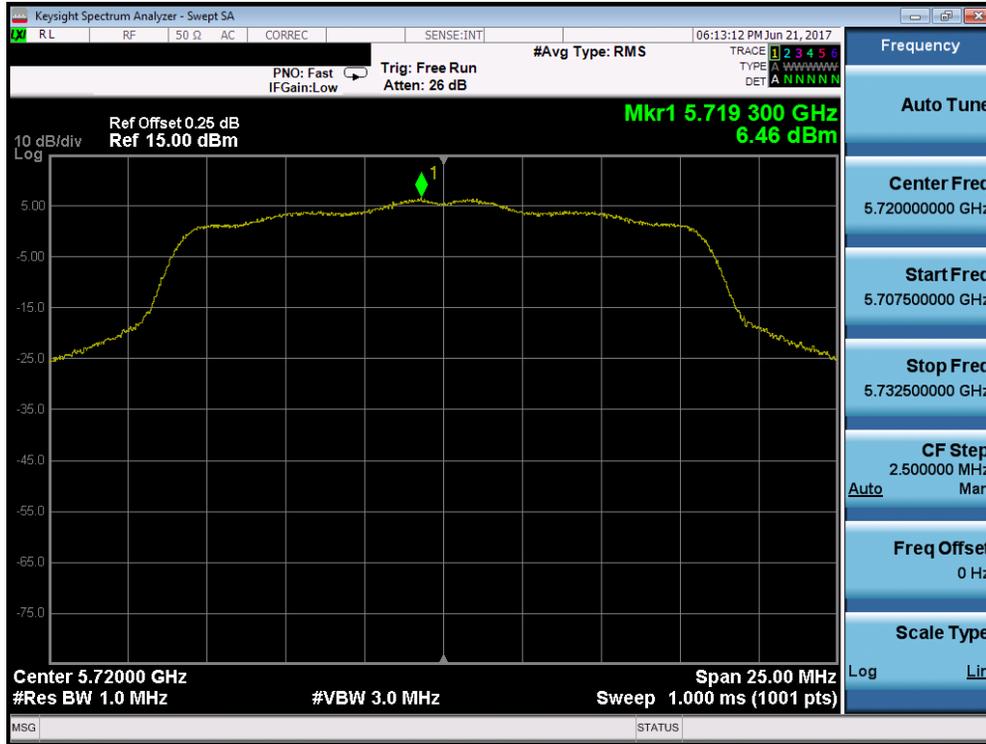


Plot 7-135. Power Spectral Density Plot (802.11a (UNII Band 2C) – Ch. 144)




Plot 7-136. Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 2C) – Ch. 100)

FCC ID: ZNFV30A	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1706070187-05.ZNF	Test Dates: 6/6 - 7/14/2017	EUT Type: Portable Handset		Page 97 of 211

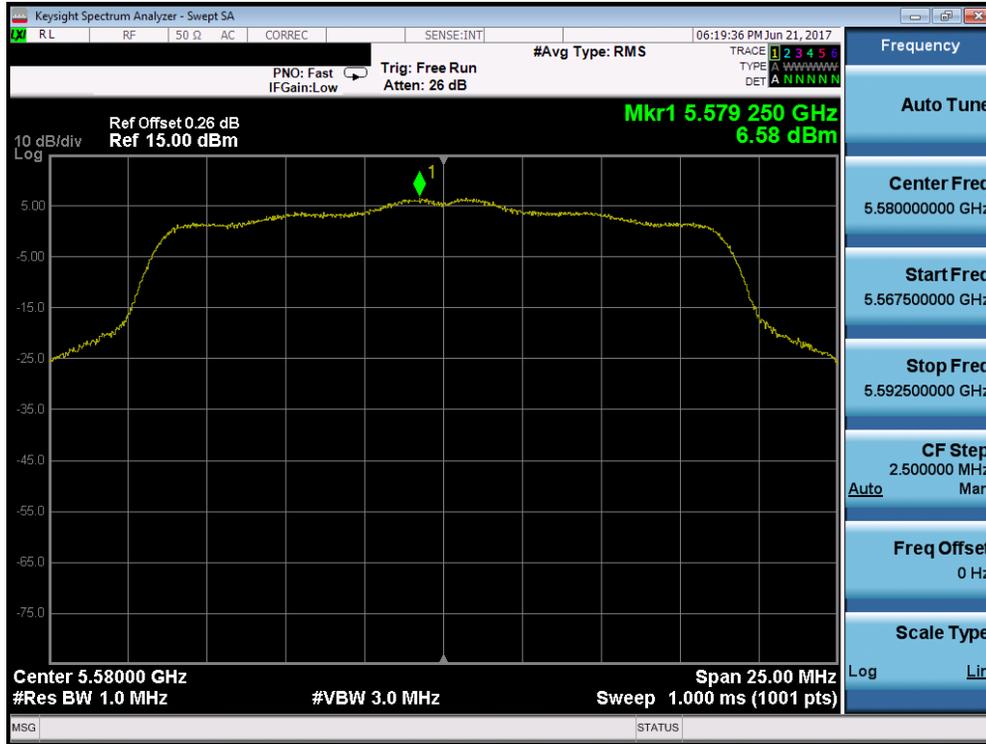


Plot 7-137. Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 2C) – Ch. 116)

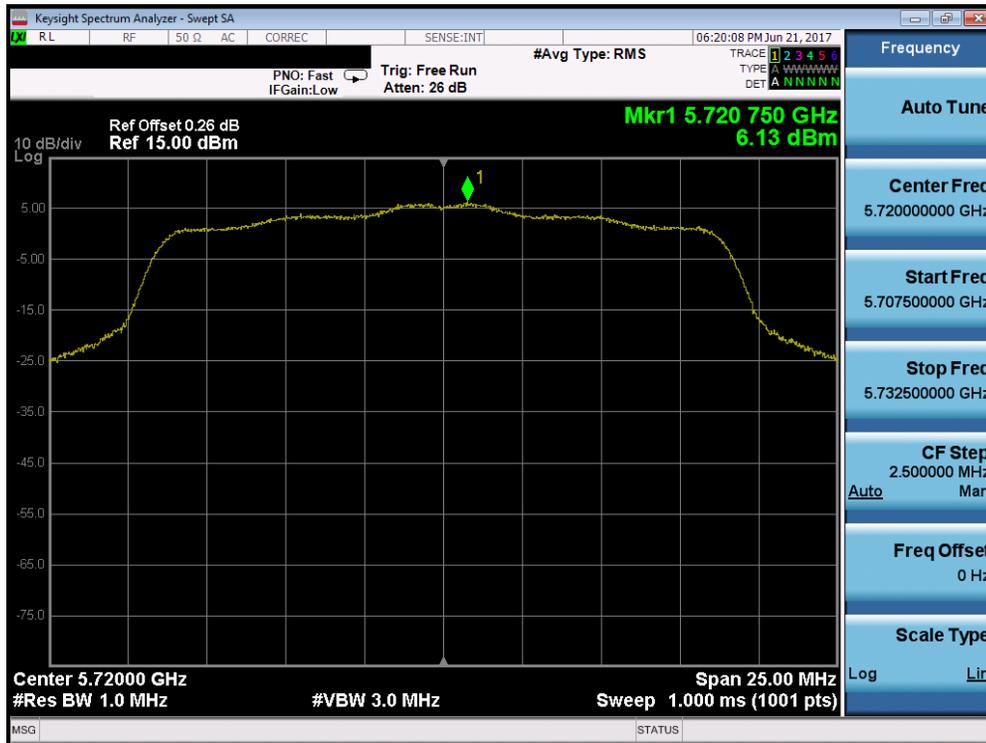


Plot 7-138. Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 2C) – Ch. 144)

FCC ID: ZNFV30A	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1706070187-05.ZNF	Test Dates: 6/6 - 7/14/2017	EUT Type: Portable Handset		Page 98 of 211

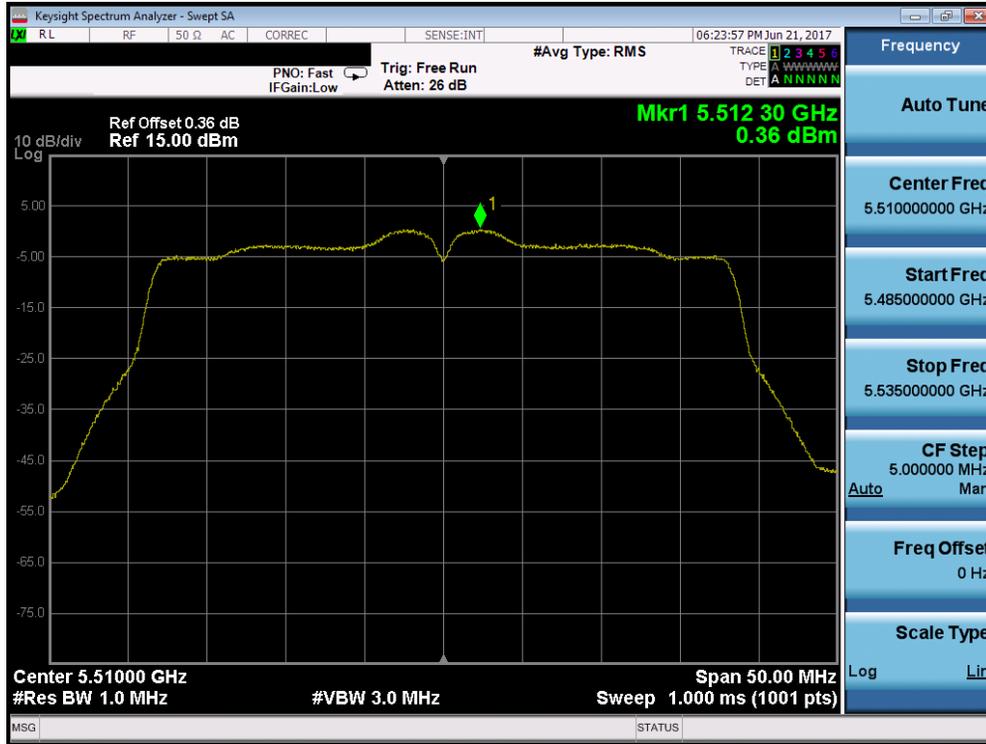


Plot 7-139. Power Spectral Density Plot (40MHz BW 802.11n (UNII Band 2C) – Ch. 102)

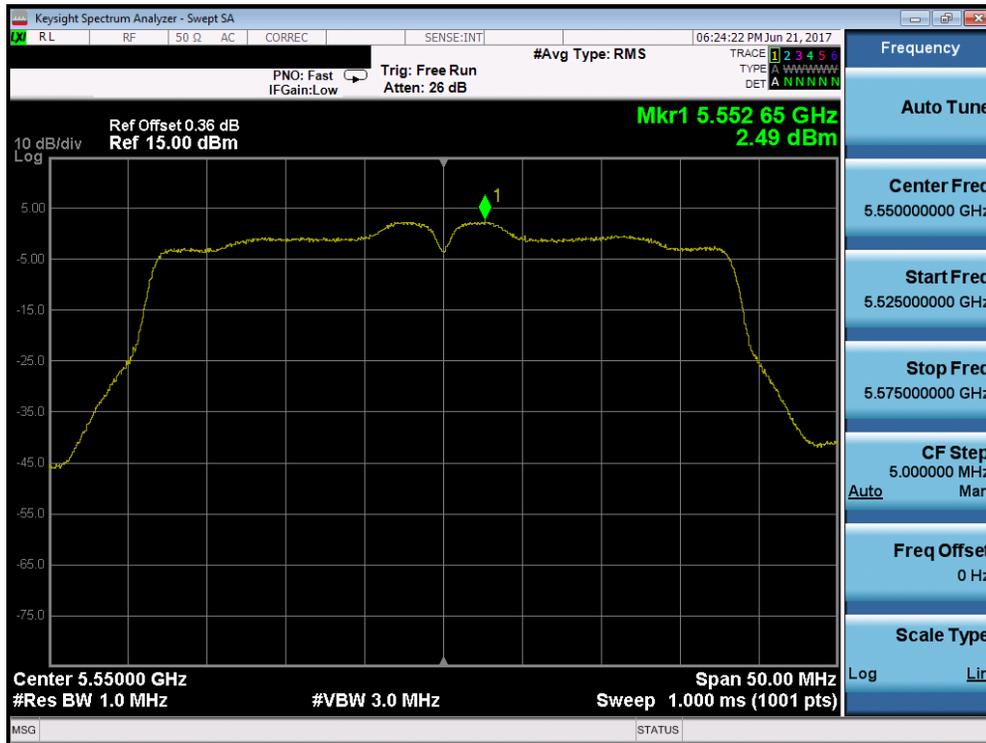


Plot 7-140. Power Spectral Density Plot (40MHz BW 802.11n (UNII Band 2C) – Ch. 110)

FCC ID: ZNFV30A	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1706070187-05.ZNF	Test Dates: 6/6 - 7/14/2017	EUT Type: Portable Handset		Page 99 of 211

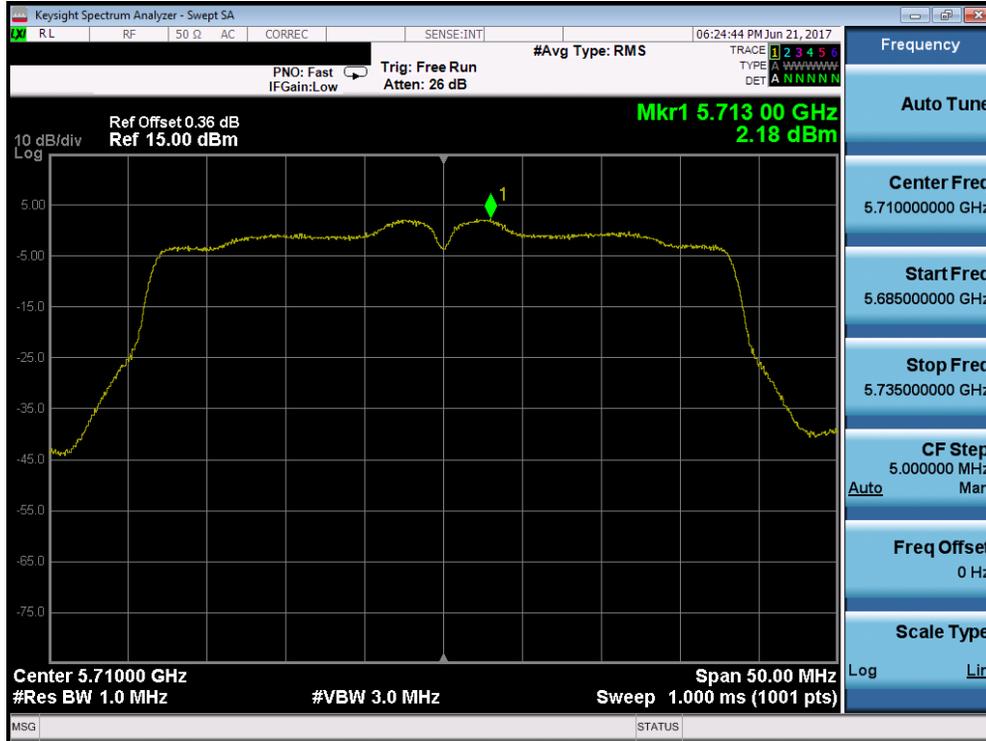


Plot 7-141. Power Spectral Density Plot (40MHz BW 802.11n (UNII Band 2C) – Ch. 142)

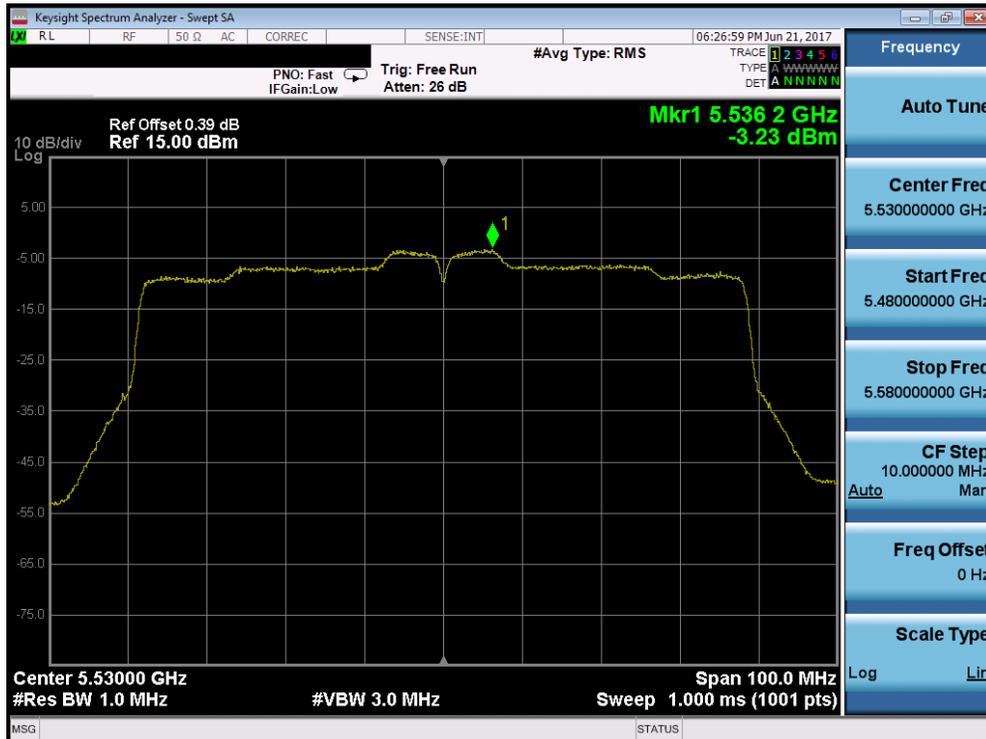

Plot 7-142. Power Spectral Density Plot (80MHz BW 802.11ac (UNII Band 2C) – Ch. 106)

FCC ID: ZNFV30A	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1706070187-05.ZNF	Test Dates: 6/6 - 7/14/2017	EUT Type: Portable Handset		Page 100 of 211

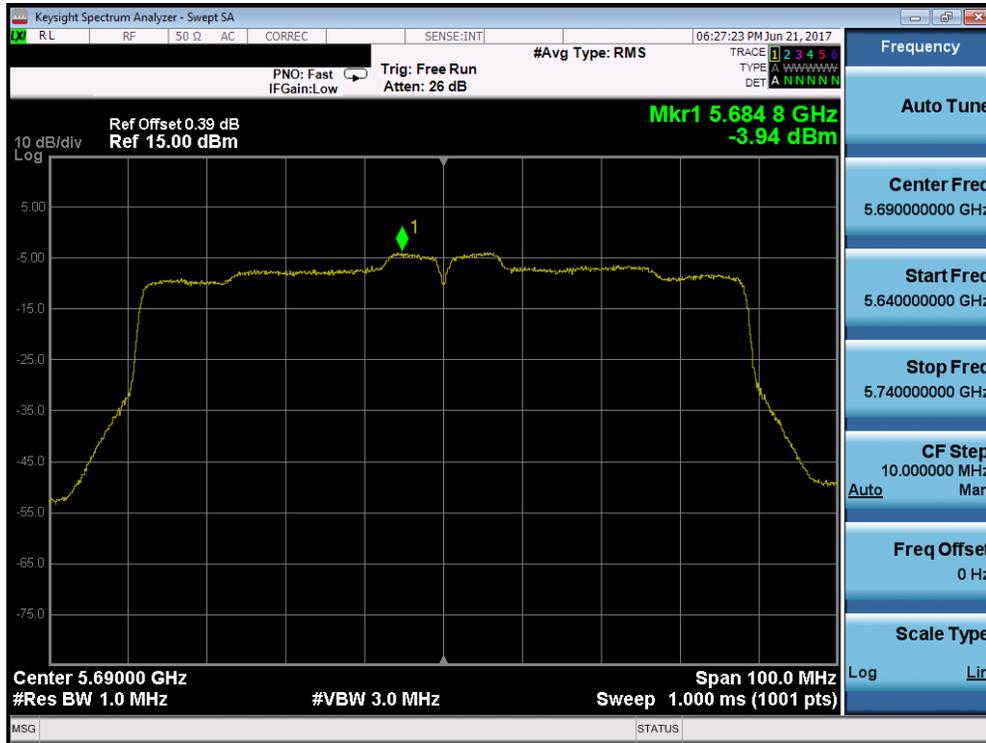


Plot 7-143. Power Spectral Density Plot (80MHz BW 802.11ac (UNII Band 2C) - Ch. 138)

FCC ID: ZNFV30A	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1706070187-05.ZNF	Test Dates: 6/6 - 7/14/2017	EUT Type: Portable Handset		Page 101 of 211


	Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured Power Density [dBm]	Max Permissible Power Density [dBm/500kHz]	Margin [dB]
Band 3	5745	149	a	6	4.31	30.0	-25.69
	5785	157	a	6	3.94	30.0	-26.06
	5825	165	a	6	4.18	30.0	-25.82
	5745	149	n (20MHz)	6.5/7.2 (MCS0)	3.80	30.0	-26.20
	5785	157	n (20MHz)	6.5/7.2 (MCS0)	3.82	30.0	-26.18
	5825	165	n (20MHz)	6.5/7.2 (MCS0)	3.66	30.0	-26.34
	5755	151	n (40MHz)	13.5/15 (MCS0)	-0.29	30.0	-30.29
	5795	159	n (40MHz)	13.5/15 (MCS0)	-0.26	30.0	-30.26
	5775	155	ac (80MHz)	29.3/32.5 (MCS0)	-6.72	30.0	-36.72

Table 7-21. Band 3 Conducted Power Spectral Density Measurements

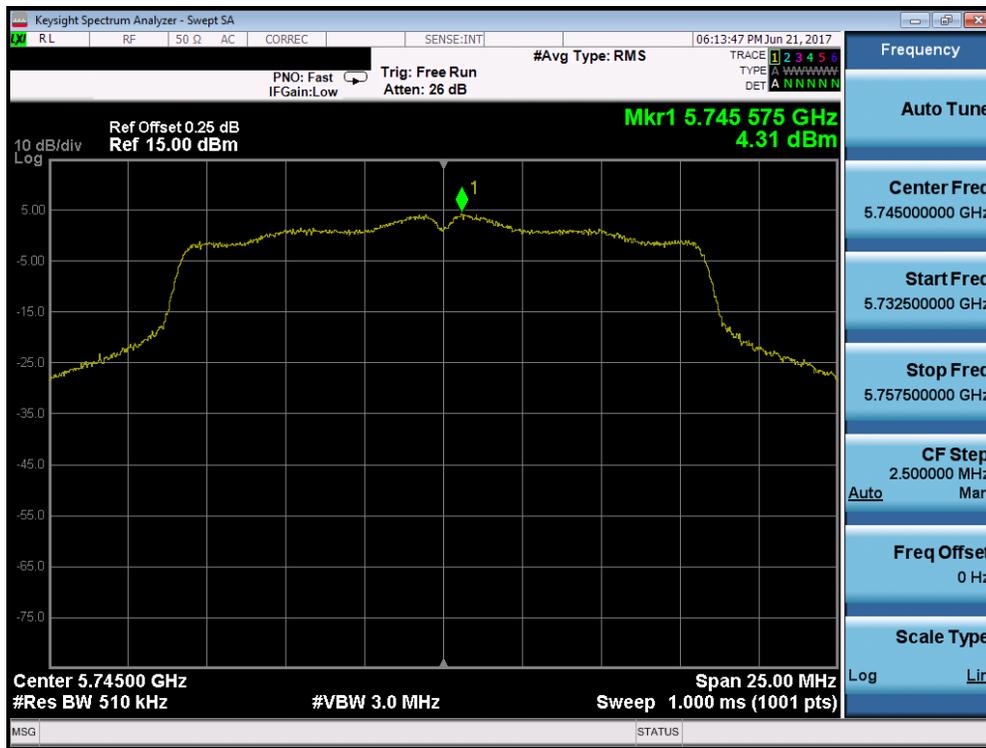


Plot 7-144. Power Spectral Density Plot (802.11a (UNII Band 3) – Ch. 149)

FCC ID: ZNFV30A		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1706070187-05.ZNF	Test Dates: 6/6 - 7/14/2017	EUT Type: Portable Handset		Page 102 of 211

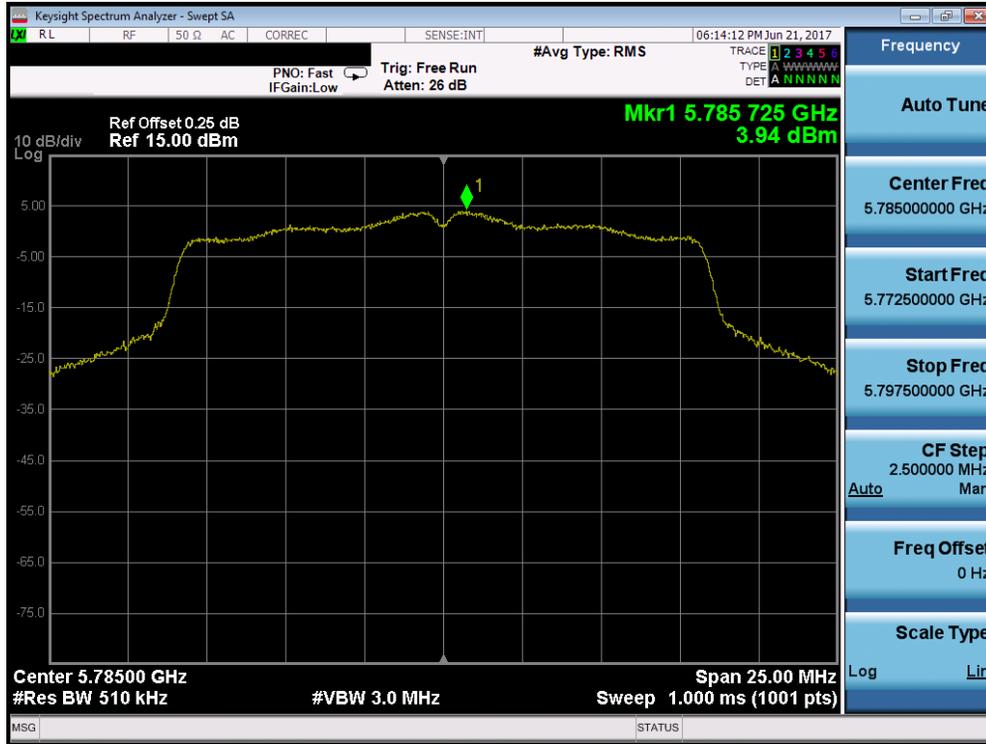


Plot 7-145. Power Spectral Density Plot (802.11a (UNII Band 3) – Ch. 157)

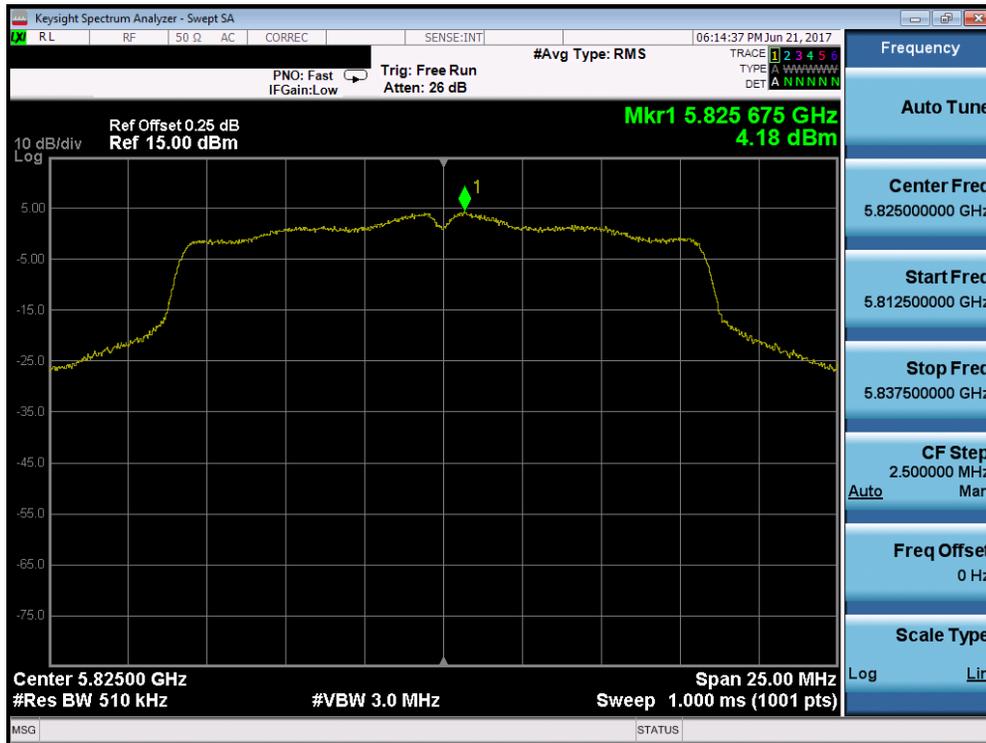


Plot 7-146. Power Spectral Density Plot (802.11a (UNII Band 3) – Ch. 165)

FCC ID: ZNFV30A	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1706070187-05.ZNF	Test Dates: 6/6 - 7/14/2017	EUT Type: Portable Handset		Page 103 of 211

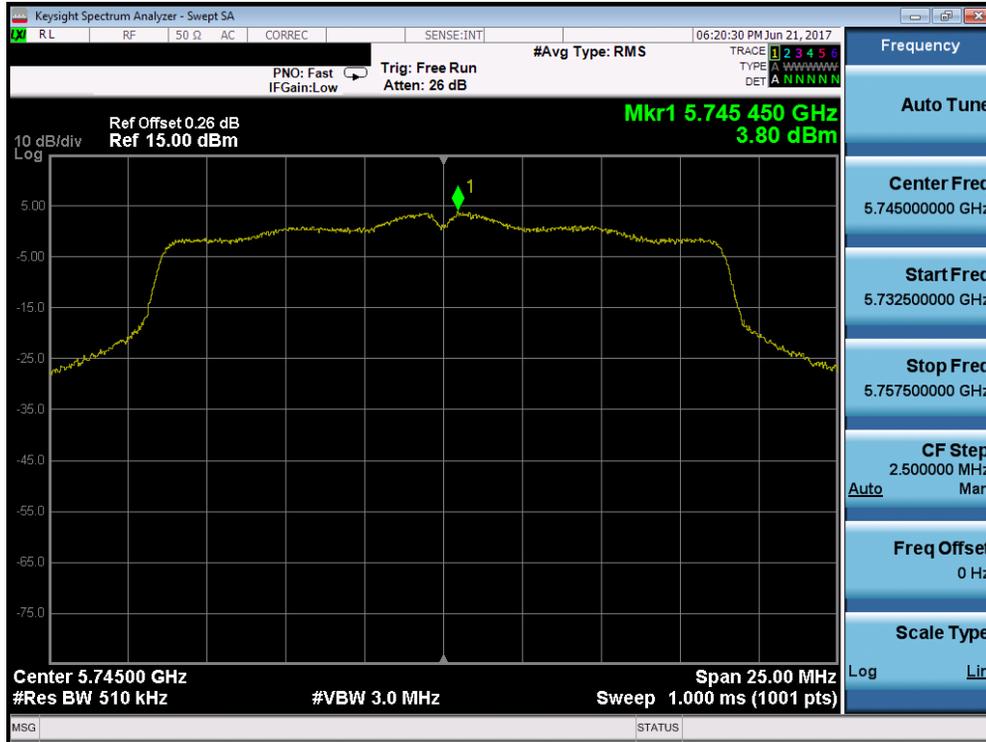

Plot 7-147. Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 3) – Ch. 149)

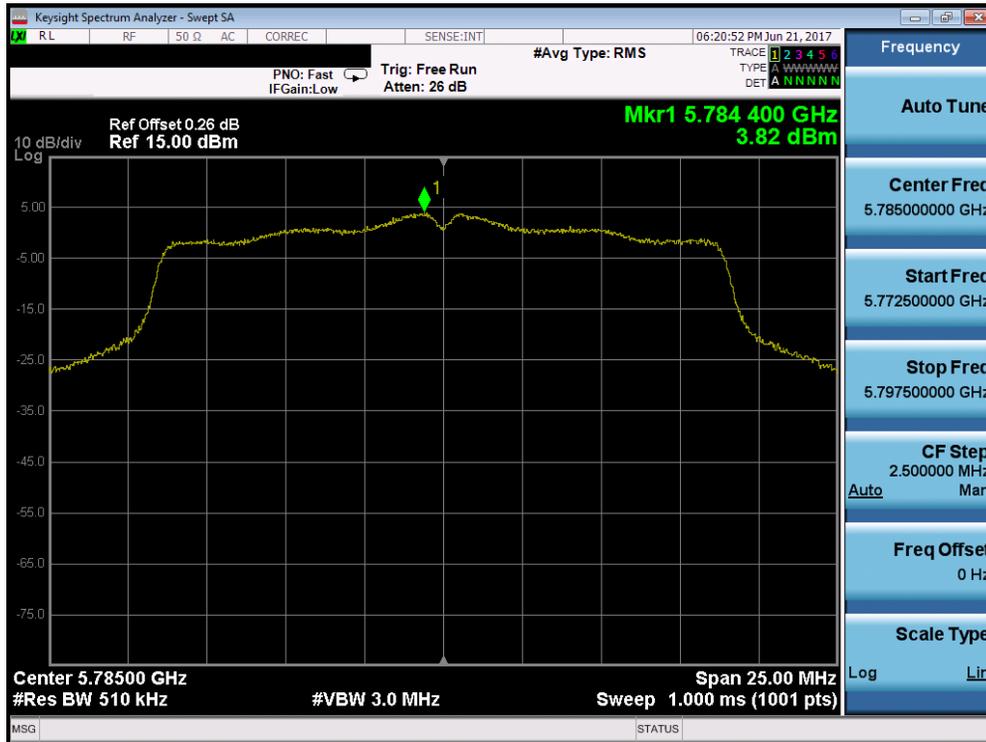


Plot 7-148. Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 3) – Ch. 157)

FCC ID: ZNFV30A	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1706070187-05.ZNF	Test Dates: 6/6 - 7/14/2017	EUT Type: Portable Handset		Page 104 of 211




Plot 7-149. Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 3) – Ch. 165)

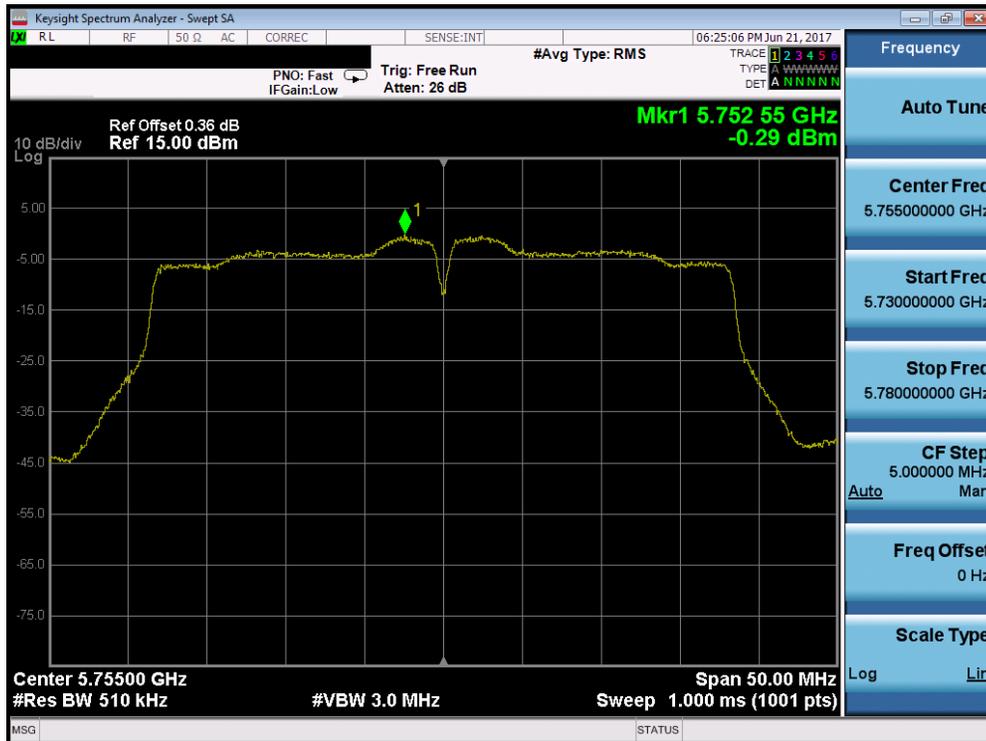


Plot 7-150. Power Spectral Density Plot (40MHz BW 802.11n (UNII Band 3) – Ch. 151)

FCC ID: ZNFV30A	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1706070187-05.ZNF	Test Dates: 6/6 - 7/14/2017	EUT Type: Portable Handset		Page 105 of 211

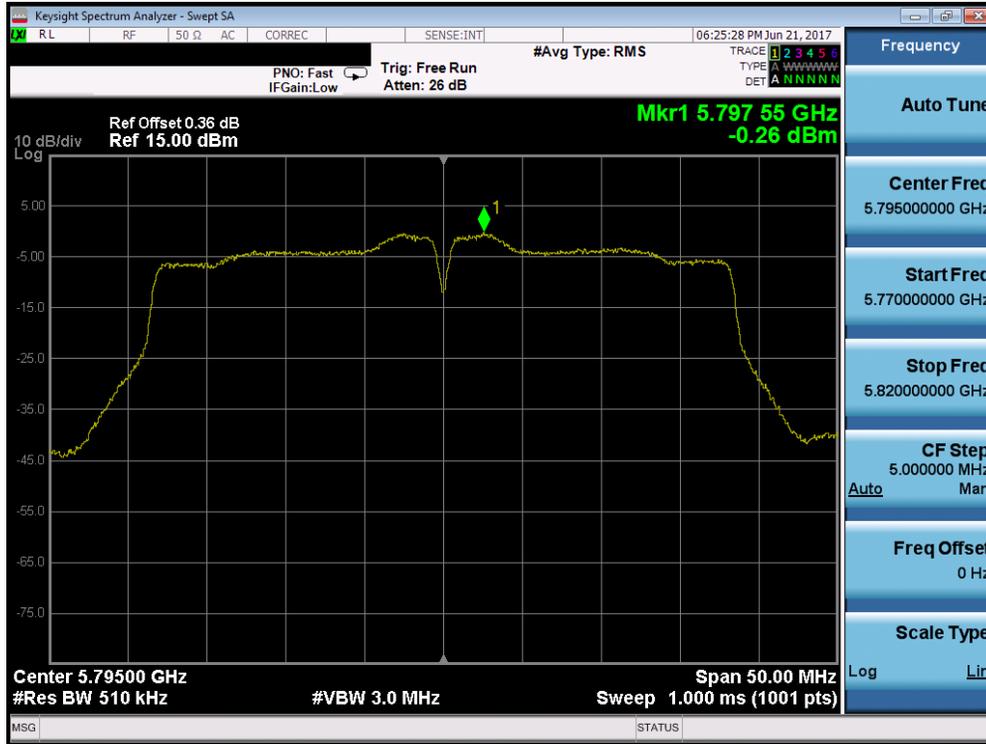

Plot 7-151. Power Spectral Density Plot (40MHz BW 802.11n (UNII Band 3) – Ch. 159)

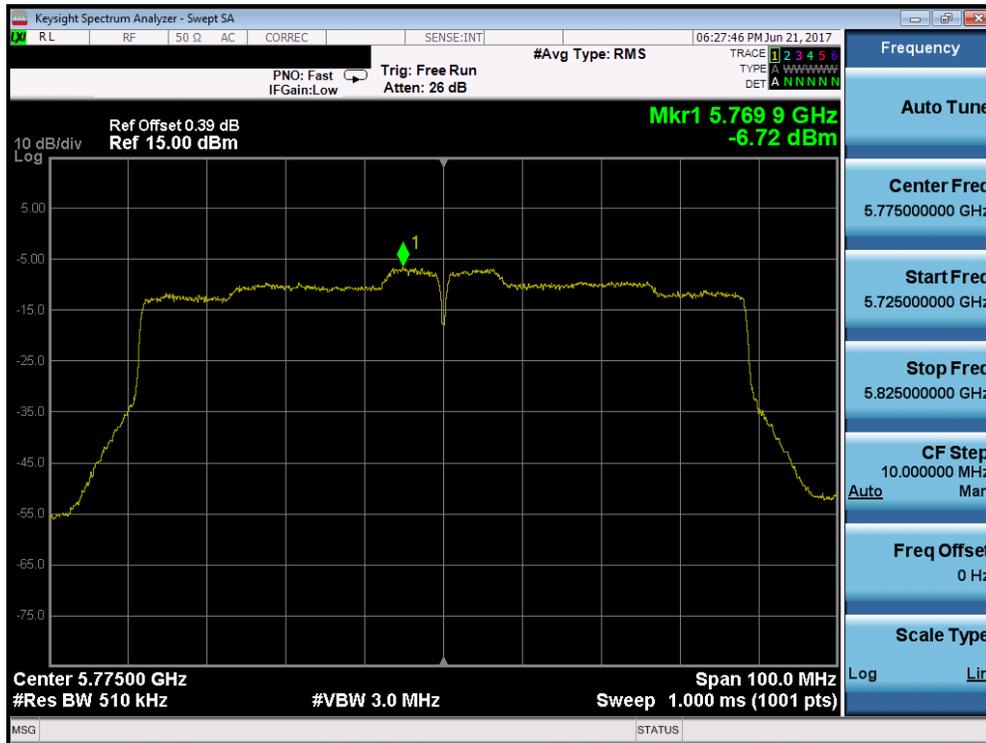

Plot 7-152. Power Spectral Density Plot (80MHz BW 802.11ac (UNII Band 3) – Ch. 155)

FCC ID: ZNFV30A	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1706070187-05.ZNF	Test Dates: 6/6 - 7/14/2017	EUT Type: Portable Handset		Page 106 of 211

Summed MIMO/CDD Power Spectral Density Measurements

	Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Antenn-1 Power Density [dBm]	Antenn-2 Power Density [dBm]	Summed MIMO/CDD Power Density	Max Permissible Power Density [dBm/MHz]	Margin [dB]
Band 1	5180	36	a	6	6.01	7.06	9.58	11.0	-1.42
	5200	40	a	6	6.79	6.92	9.87	11.0	-1.13
	5240	48	a	6	6.92	6.97	9.95	11.0	-1.05
	5180	36	n (20MHz)	6.5/7.2 (MCS0)	6.63	6.03	9.35	11.0	-1.65
	5200	40	n (20MHz)	6.5/7.2 (MCS0)	6.44	6.38	9.42	11.0	-1.58
	5240	48	n (20MHz)	6.5/7.2 (MCS0)	6.69	6.19	9.46	11.0	-1.54
	5190	38	n (40MHz)	13.5/15 (MCS0)	0.92	0.21	3.59	11.0	-7.41
	5230	46	n (40MHz)	13.5/15 (MCS0)	1.97	2.44	5.22	11.0	-5.78
	5210	42	ac (80MHz)	29.3/32.5 (MCS0)	-3.60	-3.08	-0.32	11.0	-11.32
Band 2A	5260	52	a	6	6.62	6.65	9.64	11.0	-1.36
	5280	56	a	6	7.05	6.50	9.80	11.0	-1.20
	5320	64	a	6	7.17	6.83	10.01	11.0	-0.99
	5260	52	n (20MHz)	6.5/7.2 (MCS0)	6.67	6.16	9.43	11.0	-1.57
	5280	56	n (20MHz)	6.5/7.2 (MCS0)	6.73	6.12	9.45	11.0	-1.55
	5320	64	n (20MHz)	6.5/7.2 (MCS0)	7.00	6.51	9.77	11.0	-1.23
	5270	54	n (40MHz)	13.5/15 (MCS0)	1.89	2.56	5.25	11.0	-5.75
	5310	62	n (40MHz)	13.5/15 (MCS0)	0.95	0.70	3.84	11.0	-7.16
	5290	58	ac (80MHz)	29.3/32.5 (MCS0)	-4.46	-5.20	-1.80	11.0	-12.80
Band 2C	5500	100	a	6	7.33	6.67	10.02	11.0	-0.98
	5580	116	a	6	7.38	6.67	10.05	11.0	-0.95
	5720	144	a	6	7.11	6.46	9.81	11.0	-1.19
	5500	100	n (20MHz)	6.5/7.2 (MCS0)	6.99	6.42	9.72	11.0	-1.28
	5580	116	n (20MHz)	6.5/7.2 (MCS0)	7.25	6.58	9.94	11.0	-1.06
	5720	144	n (20MHz)	6.5/7.2 (MCS0)	7.04	6.13	9.62	11.0	-1.38
	5510	102	n (40MHz)	13.5/15 (MCS0)	0.99	0.36	3.70	11.0	-7.30
	5550	110	n (40MHz)	13.5/15 (MCS0)	2.13	2.49	5.32	11.0	-5.68
	5710	142	n (40MHz)	13.5/15 (MCS0)	1.87	2.18	5.04	11.0	-5.96
5530	106	ac (80MHz)	29.3/32.5 (MCS0)	-3.76	-3.23	-0.48	11.0	-11.48	
5690	138	ac (80MHz)	29.3/32.5 (MCS0)	-3.50	-3.94	-0.70	11.0	-11.70	

Table 7-22. Bands 1, 2A, 2C MIMO/CDD Conducted Power Spectral Density Measurements

	Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Antenn-1 Power Density [dBm]	Antenn-2 Power Density [dBm]	Summed MIMO/CDD Power Density	Max Permissible Power Density [dBm/500kHz]	Margin [dB]
Band 3	5745	149	a	6	4.72	4.31	7.53	30.0	-22.47
	5785	157	a	6	4.82	3.94	7.41	30.0	-22.59
	5825	165	a	6	4.46	4.18	7.33	30.0	-22.67
	5745	149	n (20MHz)	6.5/7.2 (MCS0)	4.38	3.80	7.11	30.0	-22.89
	5785	157	n (20MHz)	6.5/7.2 (MCS0)	4.35	3.82	7.10	30.0	-22.90
	5825	165	n (20MHz)	6.5/7.2 (MCS0)	4.19	3.66	6.94	30.0	-23.06
	5755	151	n (40MHz)	13.5/15 (MCS0)	0.76	-0.29	3.28	30.0	-26.72
	5795	159	n (40MHz)	13.5/15 (MCS0)	0.02	-0.26	2.89	30.0	-27.11
	5775	155	ac (80MHz)	29.3/32.5 (MCS0)	-5.99	-6.72	-3.33	30.0	-33.33

Table 7-23. Band 3 MIMO/CDD Conducted Power Spectral Density Measurements

FCC ID: ZNFV30A			FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1706070187-05.ZNF	Test Dates: 6/6 - 7/14/2017	EUT Type: Portable Handset	Page 107 of 211		

Note:

Per KDB 662911 v02r01 Section E)2), the power spectral density at Antenna 1 and Antenna 2 were first measured separately as shown in the section above. The measured values were then summed in linear power units then converted back to dBm.

Sample MIMO/CDD Calculation:

At 5180MHz n mode, the average conducted power spectral density was measured to be 6.63 dBm for Antenna-1 and 6.03 dBm for Antenna-2.

$$\text{Antenna 1} + \text{Antenna 2} = \text{MIMO}$$

$$(6.63 \text{ dBm} + 6.03 \text{ dBm}) = (4.60 \text{ mW} + 4.01 \text{ mW}) = 8.61 \text{ mW} = 9.35 \text{ dBm}$$

FCC ID: ZNFV30A		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1706070187-05.ZNF	Test Dates: 6/6 - 7/14/2017	EUT Type: Portable Handset	Page 108 of 211	

7.6 Frequency Stability

§15.407(g)

The EUT was placed inside of an environmental chamber as the temperature in the chamber was varied between -30°C and +50°C. The temperature was incremented by 10° intervals and the unit was allowed to stabilize at each temperature before each measurement. The center frequency of the transmitting channel was evaluated at each temperature and the frequency deviation from the channel's center frequency was recorded. Data for the worst case channel is shown below.

OPERATING FREQUENCY: 5,180,000,000 Hz
 CHANNEL: 36
 REFERENCE VOLTAGE: 3.85 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.85	+ 20 (Ref)	5,179,999,655	-345	-0.00000666
100 %		- 30	5,180,000,175	175	0.00000338
100 %		- 20	5,180,000,162	162	0.00000313
100 %		- 10	5,179,999,750	-250	-0.00000483
100 %		0	5,180,000,313	313	0.00000604
100 %		+ 10	5,179,999,969	-31	-0.00000060
100 %		+ 20	5,179,999,914	-86	-0.00000166
100 %		+ 30	5,179,999,790	-210	-0.00000405
100 %		+ 40	5,179,999,881	-119	-0.00000230
100 %		+ 50	5,179,999,606	-394	-0.00000761
BATT. ENDPOINT		3.45	+ 20	5,180,000,311	311

Table 7-24. Frequency Stability Measurements for UNII Band 1 (Ch. 36)

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

FCC ID: ZNFV30A		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1706070187-05.ZNF	Test Dates: 6/6 - 7/14/2017	EUT Type: Portable Handset	Page 109 of 211	

Frequency Stability

§15.407(g)

The EUT was placed inside of an environmental chamber as the temperature in the chamber was varied between -30°C and +50°C. The temperature was incremented by 10° intervals and the unit was allowed to stabilize at each temperature before each measurement. The center frequency of the transmitting channel was evaluated at each temperature and the frequency deviation from the channel's center frequency was recorded. Data for the worst case channel is shown below.

OPERATING FREQUENCY: 5,260,000,000 Hz
 CHANNEL: 52
 REFERENCE VOLTAGE: 3.85 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.85	+ 20 (Ref)	5,260,000,237	237	0.00000451
100 %		- 30	5,259,999,812	-188	-0.00000357
100 %		- 20	5,259,999,722	-278	-0.00000529
100 %		- 10	5,260,000,217	217	0.00000413
100 %		0	5,260,000,079	79	0.00000150
100 %		+ 10	5,259,999,656	-344	-0.00000654
100 %		+ 20	5,260,000,345	345	0.00000656
100 %		+ 30	5,260,000,007	7	0.00000013
100 %		+ 40	5,260,000,166	166	0.00000316
100 %		+ 50	5,259,999,896	-104	-0.00000198
BATT. ENDPOINT		3.45	+ 20	5,260,000,090	90

Table 7-25. Frequency Stability Measurements for UNII Band 2A (Ch. 52)

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

FCC ID: ZNFV30A		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1706070187-05.ZNF	Test Dates: 6/6 - 7/14/2017	EUT Type: Portable Handset	Page 110 of 211	

Frequency Stability

§15.407(g)

The EUT was placed inside of an environmental chamber as the temperature in the chamber was varied between -30°C and +50°C. The temperature was incremented by 10° intervals and the unit was allowed to stabilize at each temperature before each measurement. The center frequency of the transmitting channel was evaluated at each temperature and the frequency deviation from the channel's center frequency was recorded. Data for the worst case channel is shown below.

OPERATING FREQUENCY: 5,500,000,000 Hz
 CHANNEL: 100
 REFERENCE VOLTAGE: 3.85 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.85	+ 20 (Ref)	5,499,999,969	-31	-0.00000056
100 %		- 30	5,500,000,011	11	0.00000020
100 %		- 20	5,500,000,161	161	0.00000293
100 %		- 10	5,500,000,112	112	0.00000204
100 %		0	5,500,000,030	30	0.00000055
100 %		+ 10	5,500,000,366	366	0.00000665
100 %		+ 20	5,500,000,343	343	0.00000624
100 %		+ 30	5,500,000,237	237	0.00000431
100 %		+ 40	5,499,999,895	-105	-0.00000191
100 %		+ 50	5,500,000,074	74	0.00000135
BATT. ENDPOINT		3.45	+ 20	5,499,999,948	-52

Table 7-26. Frequency Stability Measurements for UNII Band 2C (Ch. 100)

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

FCC ID: ZNFV30A		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1706070187-05.ZNF	Test Dates: 6/6 - 7/14/2017	EUT Type: Portable Handset	Page 111 of 211	

Frequency Stability

§15.407(g)

The EUT was placed inside of an environmental chamber as the temperature in the chamber was varied between -30°C and +50°C. The temperature was incremented by 10° intervals and the unit was allowed to stabilize at each temperature before each measurement. The center frequency of the transmitting channel was evaluated at each temperature and the frequency deviation from the channel's center frequency was recorded. Data for the worst case channel is shown below.

OPERATING FREQUENCY: 5,745,000,000 Hz
 CHANNEL: 149
 REFERENCE VOLTAGE: 3.85 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.85	+ 20 (Ref)	5,745,000,036	36	0.0000063
100 %		- 30	5,744,999,919	-81	-0.0000141
100 %		- 20	5,745,000,031	31	0.0000054
100 %		- 10	5,744,999,903	-97	-0.0000169
100 %		0	5,745,000,102	102	0.0000178
100 %		+ 10	5,744,999,941	-59	-0.0000103
100 %		+ 20	5,744,999,821	-179	-0.0000312
100 %		+ 30	5,744,999,763	-237	-0.0000413
100 %		+ 40	5,745,000,126	126	0.0000219
100 %		+ 50	5,744,999,985	-15	-0.0000026
BATT. ENDPOINT		3.45	+ 20	5,744,999,655	-345

Table 7-27. Frequency Stability Measurements for UNII Band 3 (Ch. 149)

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

FCC ID: ZNFV30A		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1706070187-05.ZNF	Test Dates: 6/6 - 7/14/2017	EUT Type: Portable Handset	Page 112 of 211	

7.7 Radiated Spurious Emission Measurements – Above 1GHz

§15.407(b) §15.205 §15.209

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in KDB 789033 D02 v01r04, and at the appropriate frequencies. All channels, modes (e.g. 802.11a, 802.11n (20MHz BW), 802.11n (40MHz BW), and 802.11ac (80MHz)), and modulations/data rates were investigated among all UNII bands. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

For transmitters operating in the 5.15-5.25 GHz and 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz.

For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an EIRP of -27 dBm/MHz.

For transmitters operating in the 5.725-5.85 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table 7-28 per Section 15.209.

Frequency	Field Strength [$\mu\text{V}/\text{m}$]	Measured Distance [Meters]
Above 960.0 MHz	500	3

Table 7-28. Radiated Limits

Test Procedures Used

KDB 789033 D02 v01r04 – Section G

Test Settings

Average Measurements above 1GHz (Method AD)

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = power average (RMS)
5. Number of measurement points = 1001 (Number of points must be $\geq 2 \times \text{span}/\text{RBW}$)
6. Averaging type = power (RMS)
7. Sweep time = auto couple
8. Trace was averaged over 100 sweeps

FCC ID: ZNFV30A		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1706070187-05.ZNF	Test Dates: 6/6 - 7/14/2017	EUT Type: Portable Handset	Page 113 of 211	

Peak Measurements above 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Peak Measurements below 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. Span was set greater than 1MHz
3. RBW = 120kHz
4. Detector = CISPR quasi-peak
5. Sweep time = auto couple
6. Trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

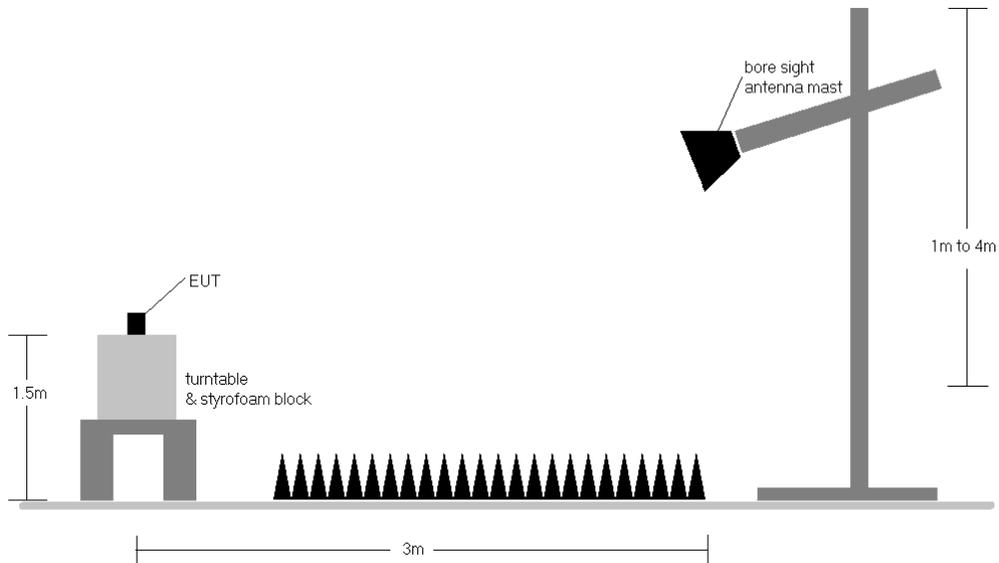


Figure 7-5. Test Instrument & Measurement Setup

FCC ID: ZNFV30A		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1706070187-05.ZNF	Test Dates: 6/6 - 7/14/2017	EUT Type: Portable Handset	Page 114 of 211	

Test Notes

1. All radiated spurious emissions levels were measured in a radiated test setup per the guidance of KDB 789033 D02 v01r04 Section G.
2. All emissions that lie in the restricted bands (denoted by a * next to the frequency) specified in §15.205 are below the limit shown in Table 7-28.
3. All spurious emissions lying in restricted bands specified in §15.205 are below the limit shown in Table 7-28. All spurious emissions that do not lie in a restricted band are subject to a peak limit of -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions of 68.2dBμV/m.
4. The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
5. This unit was tested with its standard battery.
6. The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter using CISPR quasi peak detector below 1GHz. Above 1 GHz, average and peak measurements were taken using linearly polarized horn antennas. The worst-case emissions are reported however emissions whose levels were not within 20dB of the respective limits were not reported.
7. Emissions below 18GHz were measured at a 3 meter test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.
8. Radiated spurious emissions were investigated while operating in MIMO mode, however, it was determined that single antenna operation produced the worst case emissions. Since the emissions produced from MIMO operation were found to be more than 20dB below the limit, the MIMO emissions are not reported.
9. The wide spectrum spurious emissions plots shown on the following pages are used only for the purpose of emission identification. Any emissions found to be within 20dB of the limit are fully investigated and the results are shown in this section. Rohde & Schwarz EMC32, Version 9.15.00 automated test software was used to perform the Radiated Spurious Emissions Pre-Scan testing.
10. The "-" shown in the following RSE tables are used to denote a noise floor measurement.

FCC ID: ZNFV30A		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1706070187-05.ZNF	Test Dates: 6/6 - 7/14/2017	EUT Type: Portable Handset	Page 115 of 211	

Sample Calculations

Determining Spurious Emissions Levels

- Field Strength Level $_{[dB\mu V/m]} = \text{Analyzer Level }_{[dBm]} + 107 + \text{AFCL }_{[dB/m]}$
- $\text{AFCL }_{[dB/m]} = \text{Antenna Factor }_{[dB/m]} + \text{Cable Loss }_{[dB]}$
- $\text{Margin }_{[dB]} = \text{Field Strength Level }_{[dB\mu V/m]} - \text{Limit }_{[dB\mu V/m]}$


Radiated Band Edge Measurement Offset

- The amplitude offset shown in the radiated restricted band edge plots in Section 7.7 was calculated using the formula:


$$\text{Offset (dB)} = (\text{Antenna Factor} + \text{Cable Loss} + \text{Attenuator}) - \text{Preamplifier Gain}$$

FCC ID: ZNFV30A		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1706070187-05.ZNF	Test Dates: 6/6 - 7/14/2017	EUT Type: Portable Handset	Page 116 of 211	

7.7.1 Antenna-1 Radiated Spurious Emission Measurements

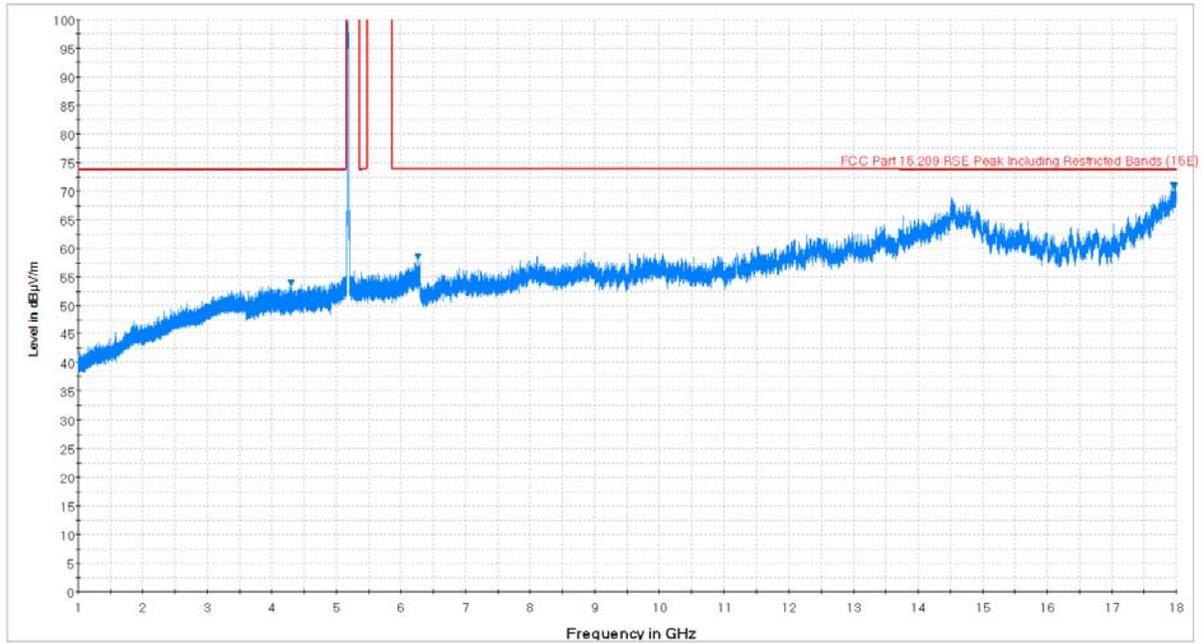


Plot 7-153. Radiated Spurious Plot above 1GHz (802.11a – U1 Ch. 40, Ant. Pol. H)

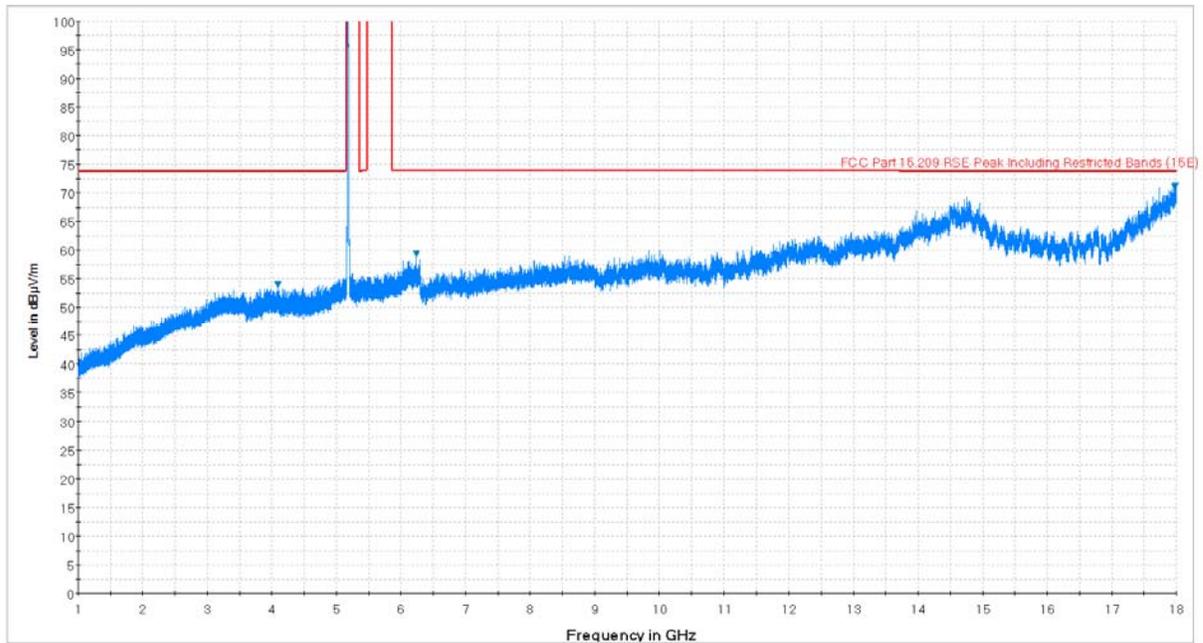


Plot 7-154. Radiated Spurious Plot above 1GHz (802.11a – U1 Ch. 40, Ant. Pol. V)

FCC ID: ZNFV30A		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1706070187-05.ZNF	Test Dates: 6/6 - 7/14/2017	EUT Type: Portable Handset		Page 117 of 211

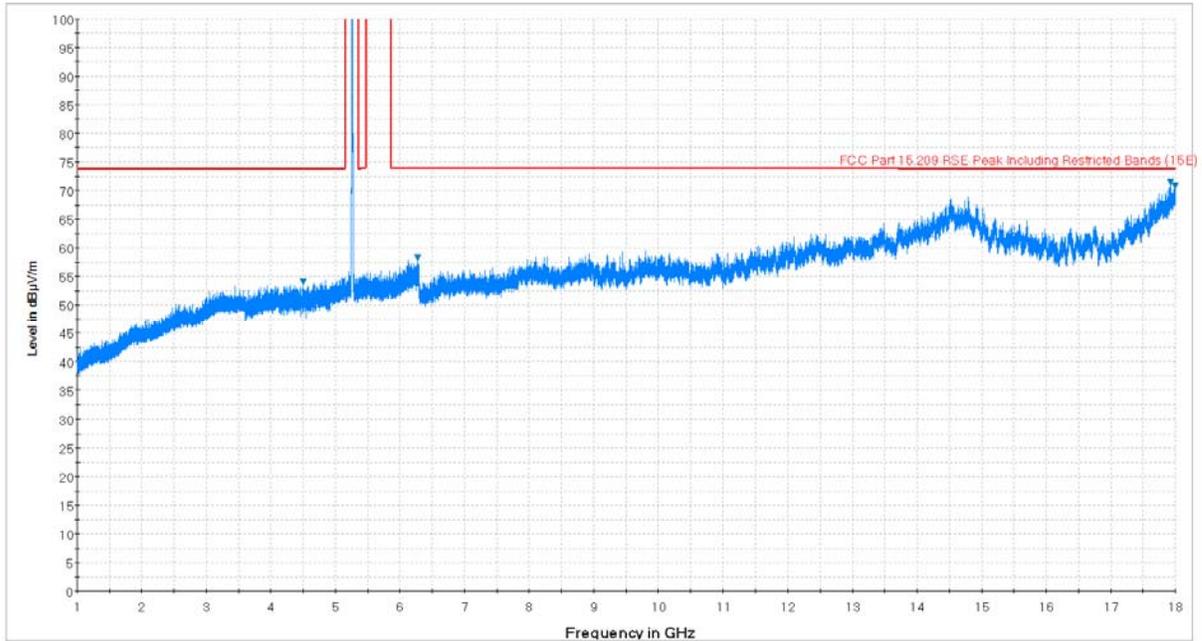


Plot 7-155. Radiated Spurious Plot above 1GHz (802.11a – U2A Ch. 56, Ant. Pol. H)

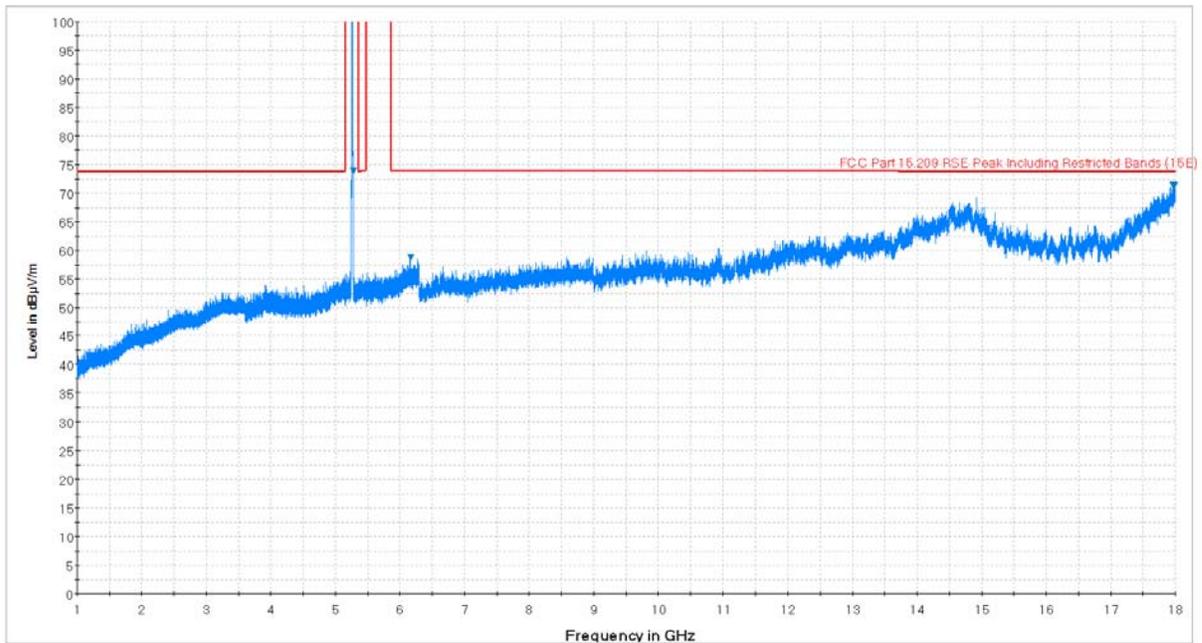


Plot 7-156. Radiated Spurious Plot above 1GHz (802.11a – U2A Ch. 56, Ant. Pol. V)

FCC ID: ZNFV30A		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1706070187-05.ZNF	Test Dates: 6/6 - 7/14/2017	EUT Type: Portable Handset	Page 118 of 211	

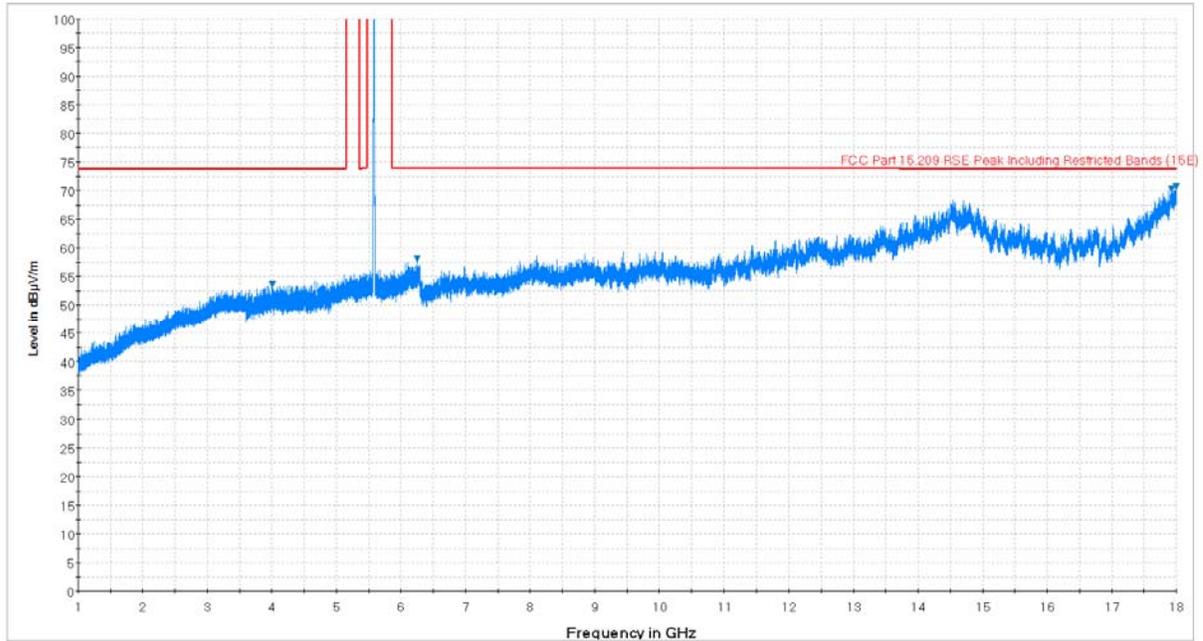


Plot 7-157. Radiated Spurious Plot above 1GHz (802.11a – U2C Ch. 116, Ant. Pol. H)

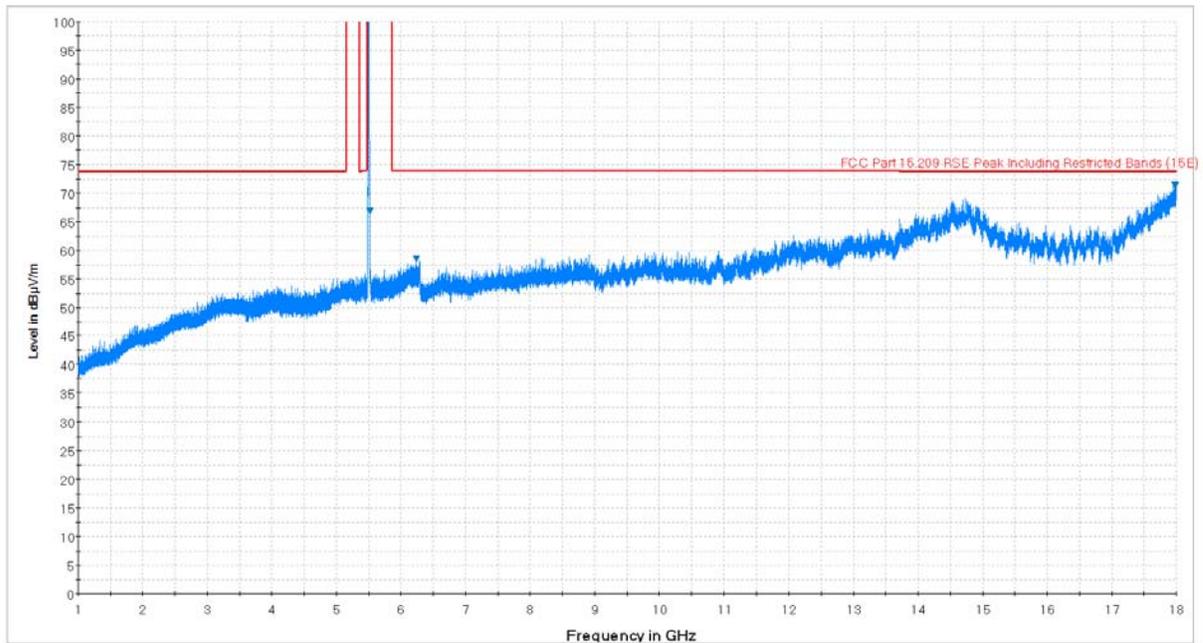


Plot 7-158. Radiated Spurious Plot above 1GHz (802.11a – U2C Ch. 116, Ant. Pol. V)

FCC ID: ZNFV30A		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1706070187-05.ZNF	Test Dates: 6/6 - 7/14/2017	EUT Type: Portable Handset	Page 119 of 211	

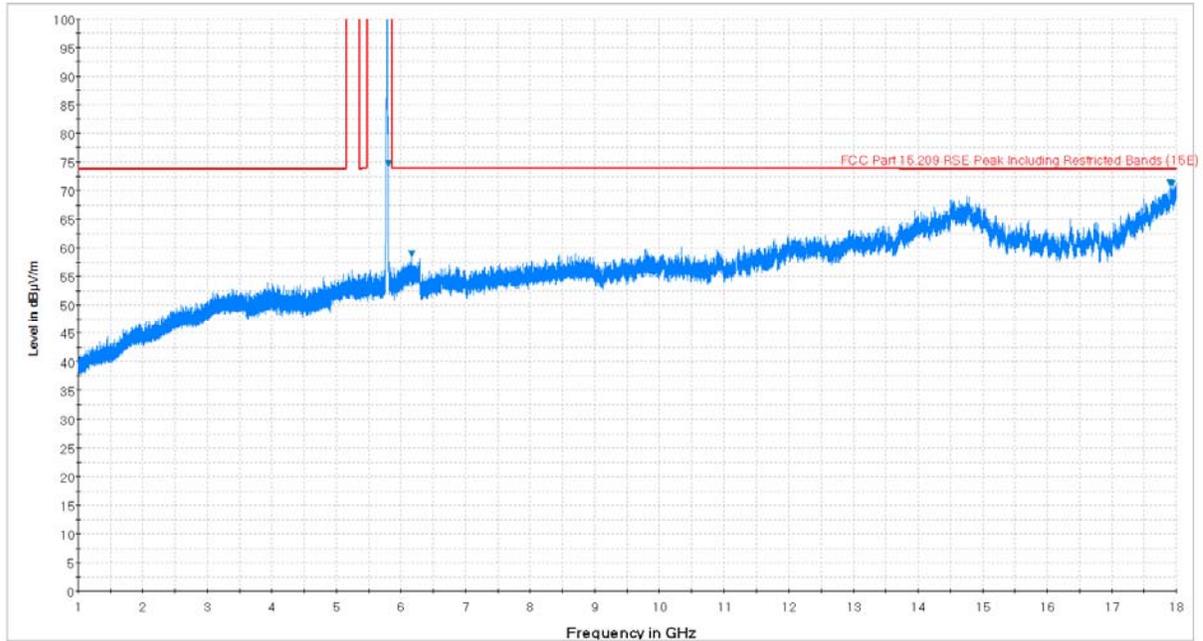

Plot 7-159. Radiated Spurious Plot above 1GHz (802.11a – U3 Ch. 157, Ant. Pol. H)

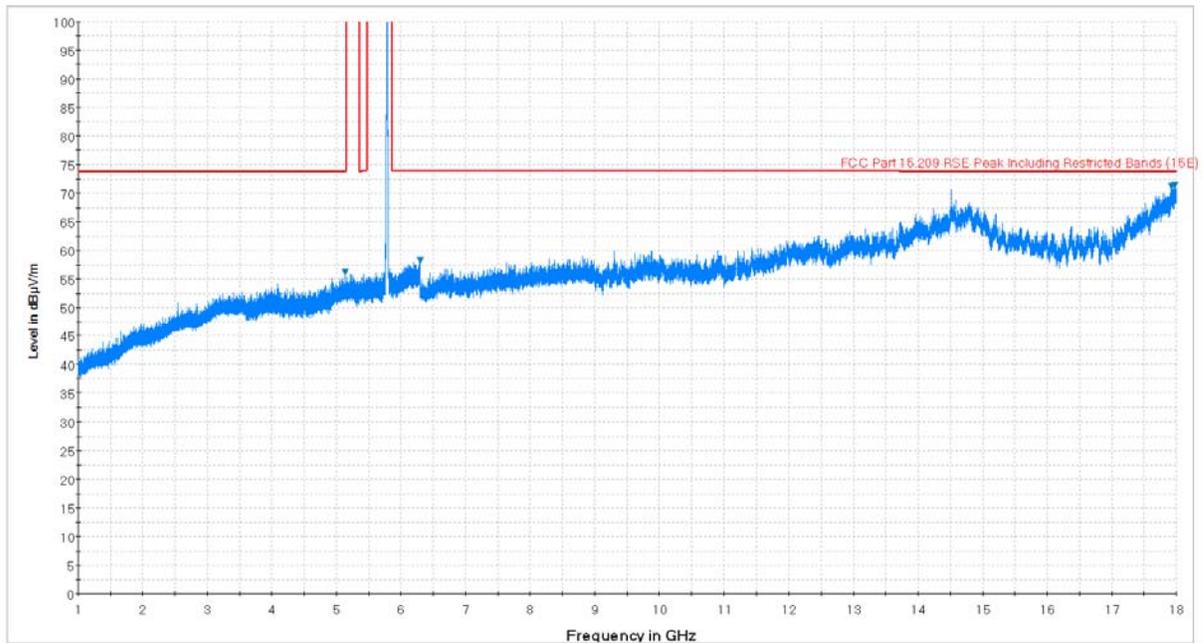


Plot 7-160. Radiated Spurious Plot above 1GHz (802.11a – U3 Ch. 157, Ant. Pol. V)

FCC ID: ZNFV30A		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1706070187-05.ZNF	Test Dates: 6/6 - 7/14/2017	EUT Type: Portable Handset	Page 120 of 211	


Antenna-1 Radiated Spurious Emissions Measurements (Above 18GHz)

§15.209

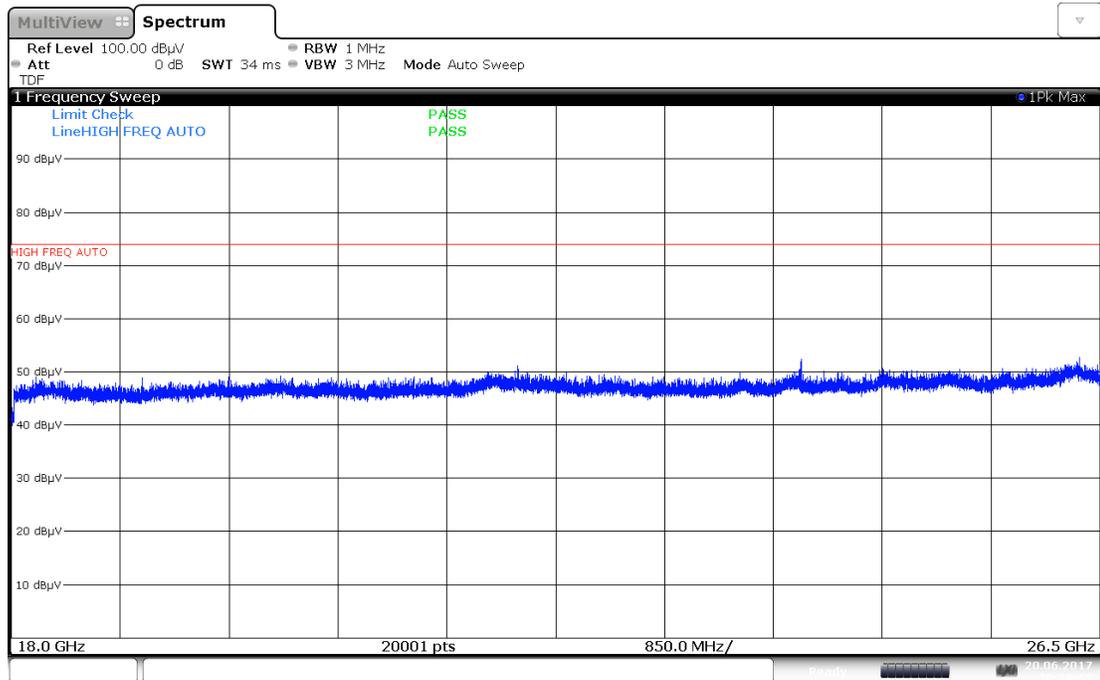

20:28:53 20.06.2017

Plot 7-161. Radiated Spurious Plot 18GHz - 26.5GHz (802.11a – Ant. Pol. H)

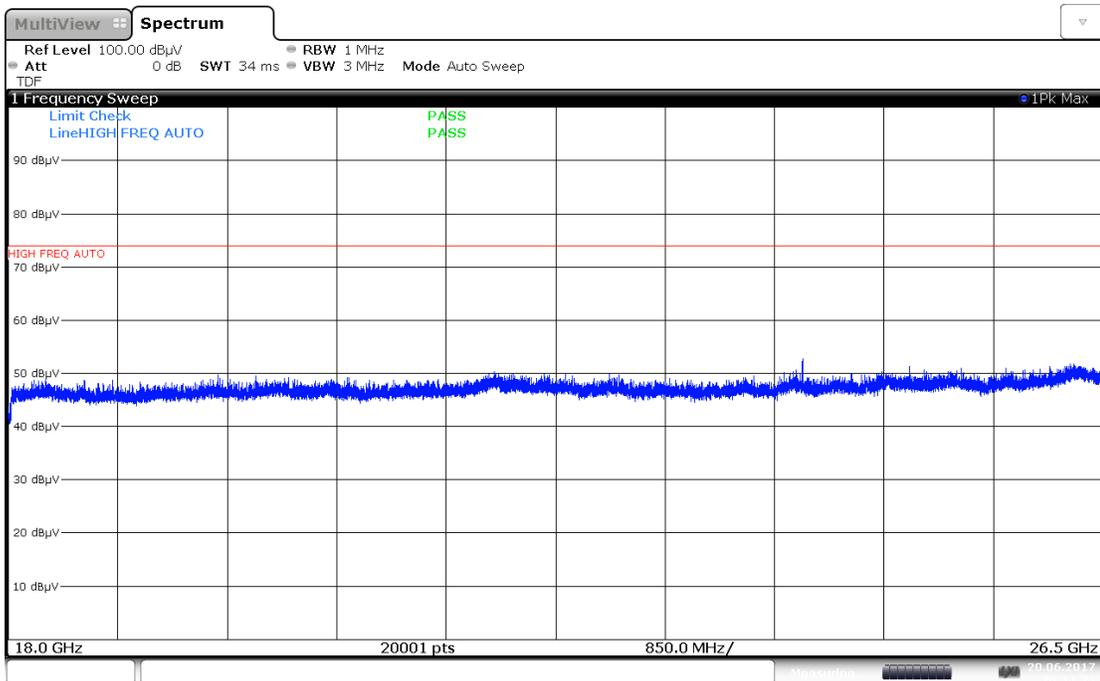


20:44:25 20.06.2017

Plot 7-162. Radiated Spurious Plot above 18GHz - 26.5GHz (802.11a – Ant. Pol. V)

FCC ID: ZNFV30A	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1706070187-05.ZNF	Test Dates: 6/6 - 7/14/2017	EUT Type: Portable Handset		Page 121 of 211


Antenna-1 Radiated Spurious Emissions Measurements (Above 18GHz)

§15.209

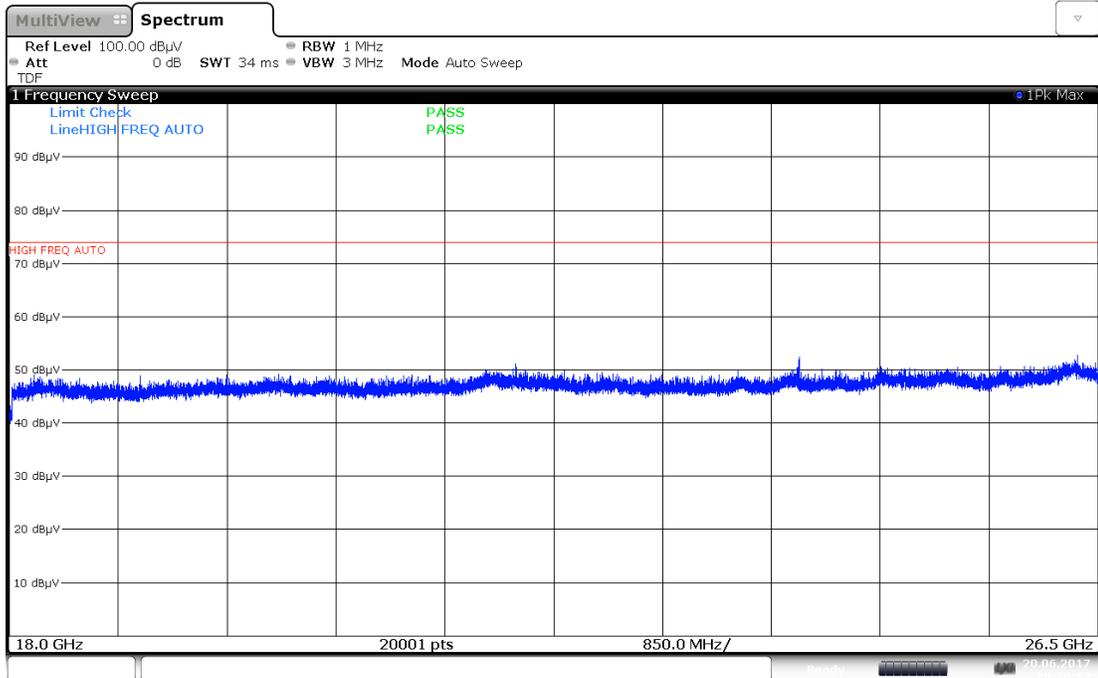

20:28:53 20.06.2017

Plot 7-163. Radiated Spurious Plot 26.5GHz - 40GHz (802.11a – Ant. Pol. H)

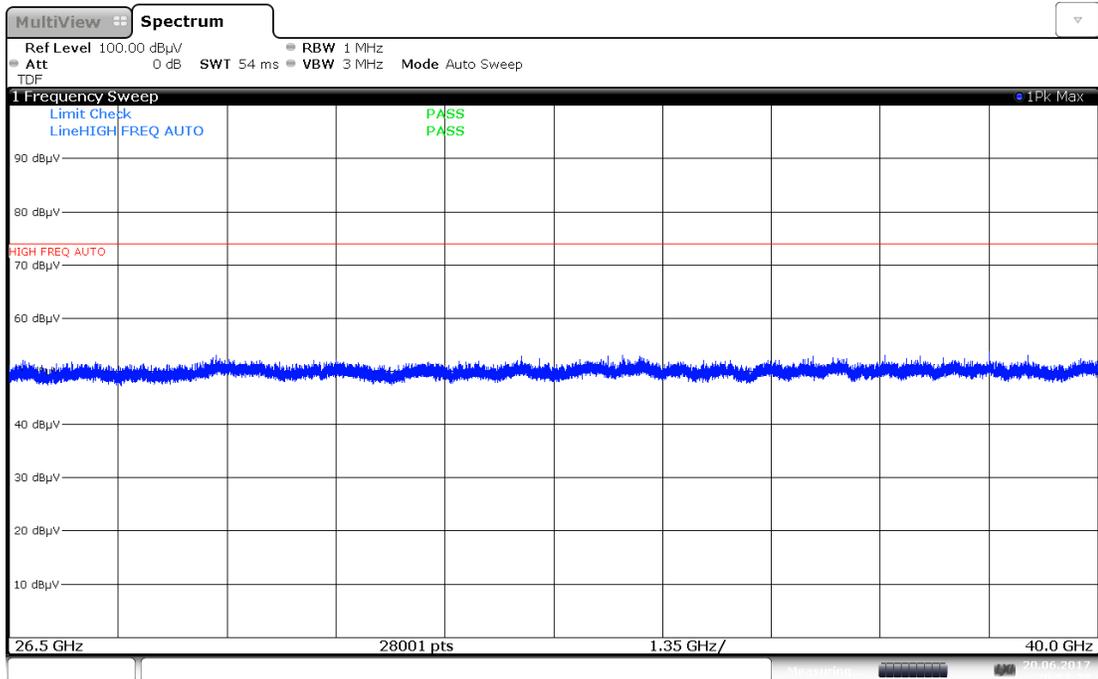

20:51:27 20.06.2017

Plot 7-164. Radiated Spurious Plot above 26.5GHz - 40GHz (802.11a – Ant. Pol. V)

FCC ID: ZNFV30A	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1706070187-05.ZNF	Test Dates: 6/6 - 7/14/2017	EUT Type: Portable Handset		Page 122 of 211

Antenna-1 Radiated Spurious Emission Measurements

§15.247(d) §15.205 & §15.209

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 1 Meter
 Operating Frequency: 5180MHz
 Channel: 36

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
10360.00	Peak	H	100	141	-60.07	12.13	-9.54	49.52	68.20	-18.68
* 15540.00	Average	H	-	-	-74.20	14.49	-9.54	37.75	53.98	-16.23
* 15540.00	Peak	H	-	-	-63.30	14.49	-9.54	48.65	73.98	-25.33
* 20720.00	Average	H	-	-	-72.13	7.94	-9.54	33.27	53.98	-20.71
* 20720.00	Peak	H	-	-	-60.71	7.94	-9.54	44.69	73.98	-29.29
25900.00	Peak	H	-	-	-47.48	8.46	-9.54	58.44	68.20	-9.76

Table 7-29. Radiated Measurements

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 1 Meter
 Operating Frequency: 5200MHz
 Channel: 40

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
10400.00	Peak	H	100	135	-60.72	12.12	-9.54	48.86	68.20	-19.34
* 15600.00	Average	H	-	-	-74.30	14.31	-9.54	37.47	53.98	-16.51
* 15600.00	Peak	H	-	-	-62.77	14.31	-9.54	49.00	73.98	-24.98
* 20800.00	Average	H	-	-	-72.20	7.95	-9.54	33.21	53.98	-20.77
* 20800.00	Peak	H	-	-	-59.43	7.95	-9.54	45.98	73.98	-28.00
26000.00	Peak	H	-	-	-46.79	8.60	-9.54	59.27	68.20	-8.93

Table 7-30. Radiated Measurements

FCC ID: ZNFV30A		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1706070187-05.ZNF	Test Dates: 6/6 - 7/14/2017	EUT Type: Portable Handset	Page 123 of 211	

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 1 Meter
 Operating Frequency: 5240MHz
 Channel: 48

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10480.00	Peak	H	100	66	-60.07	12.09	-9.54	49.48	68.20	-18.72
* 15720.00	Average	H	-	-	-74.38	14.02	-9.54	37.10	53.98	-16.88
* 15720.00	Peak	H	-	-	-63.56	14.02	-9.54	47.92	73.98	-26.06
* 20960.00	Average	H	-	-	-72.29	7.91	-9.54	33.08	53.98	-20.90
* 20960.00	Peak	H	-	-	-58.77	7.91	-9.54	46.60	73.98	-27.38
26200.00	Peak	H	-	-	-46.73	8.62	-9.54	59.35	68.20	-8.85

Table 7-31. Radiated Measurements

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 1 Meter
 Operating Frequency: 5180 MHz
 Channel: 36

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10360.00	Peak	H	100	257	-63.68	12.13	-9.54	45.91	68.20	-22.29
* 15540.00	Average	H	-	-	-74.93	14.49	-9.54	37.02	53.98	-16.96
* 15540.00	Peak	H	-	-	-62.27	14.49	-9.54	49.68	73.98	-24.30
* 20720.00	Average	H	-	-	-72.10	7.94	-9.54	33.30	53.98	-20.68
* 20720.00	Peak	H	-	-	-59.12	7.94	-9.54	46.28	73.98	-27.70
25900.00	Peak	H	-	-	-47.95	8.46	-9.54	57.97	68.20	-10.23

Table 7-32. Radiated Measurements with WCP

FCC ID: ZNFV30A		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1706070187-05.ZNF	Test Dates: 6/6 - 7/14/2017	EUT Type: Portable Handset	Page 124 of 211	

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 1 Meter
 Operating Frequency: 5260MHz
 Channel: 52

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10520.00	Peak	H	100	135	-60.47	12.16	-9.54	49.15	68.20	-19.05
* 15780.00	Average	H	-	-	-74.26	14.03	-9.54	37.23	53.98	-16.75
* 15780.00	Peak	H	-	-	-63.46	14.03	-9.54	48.03	73.98	-25.95
* 21040.00	Average	H	-	-	-71.85	7.92	-9.54	33.53	53.98	-20.45
* 21040.00	Peak	H	-	-	-59.38	7.92	-9.54	46.00	73.98	-27.98
26300.00	Peak	H	-	-	-46.13	8.73	-9.54	60.06	68.20	-8.14

Table 7-33. Radiated Measurements

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 1 Meter
 Operating Frequency: 5280MHz
 Channel: 56

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10520.00	Peak	H	100	135	-60.47	12.16	-9.54	49.15	68.20	-19.05
* 15780.00	Average	H	-	-	-74.26	14.03	-9.54	37.23	53.98	-16.75
* 15780.00	Peak	H	-	-	-63.46	14.03	-9.54	48.03	73.98	-25.95
* 21040.00	Average	H	-	-	-71.85	7.92	-9.54	33.53	53.98	-20.45
* 21040.00	Peak	H	-	-	-59.38	7.92	-9.54	46.00	73.98	-27.98
26300.00	Peak	H	-	-	-46.13	8.73	-9.54	60.06	68.20	-8.14

Table 7-34. Radiated Measurements

FCC ID: ZNFV30A		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1706070187-05.ZNF	Test Dates: 6/6 - 7/14/2017	EUT Type: Portable Handset	Page 125 of 211	

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 1 Meter
 Operating Frequency: 5320MHz
 Channel: 64

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 10640.00	Average	H	100	129	-70.62	12.06	-9.54	38.90	53.98	-15.08
* 10640.00	Peak	H	100	129	-59.50	12.06	-9.54	50.02	73.98	-23.96
* 15960.00	Average	H	-	-	-73.33	14.55	-9.54	38.68	53.98	-15.30
* 15960.00	Peak	H	-	-	-62.79	14.55	-9.54	49.22	73.98	-24.76
* 21280.00	Average	H	-	-	-71.32	8.04	-9.54	34.18	53.98	-19.80
* 21280.00	Peak	H	-	-	-58.94	8.04	-9.54	46.56	73.98	-27.42
26600.00	Peak	H	-	-	-45.67	-8.30	-9.54	43.48	68.20	-24.72

Table 7-35. Radiated Measurements

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 1 Meter
 Operating Frequency: 5320MHz
 Channel: 64

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10640.00	Average	H	100	200	-73.64	12.06	-9.54	35.88	53.98	-18.10
* 10640.00	Peak	H	100	200	-61.42	12.06	-9.54	48.10	73.98	-25.88
* 15960.00	Average	H	-	-	-74.55	14.55	-9.54	37.46	53.98	-16.52
* 15960.00	Peak	H	-	-	-62.09	14.55	-9.54	49.92	73.98	-24.06
* 21280.00	Average	H	-	-	-71.20	8.04	-9.54	34.30	53.98	-19.68
21280.00	Peak	H	-	-	-58.44	8.04	-9.54	47.06	73.98	-26.92
26600.00	Peak	H	-	-	-46.05	-8.30	-9.54	43.10	68.20	-25.10

Table 7-36. Radiated Measurements with WCP

FCC ID: ZNFV30A		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1706070187-05.ZNF	Test Dates: 6/6 - 7/14/2017	EUT Type: Portable Handset	Page 126 of 211	

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 1 Meter
 Operating Frequency: 5500MHz
 Channel: 100

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11000.00	Average	H	100	61	-74.56	12.87	-9.54	35.77	53.98	-18.21
* 11000.00	Peak	H	100	61	-61.02	12.87	-9.54	49.31	73.98	-24.67
16500.00	Peak	H	-	-	-61.46	16.61	-9.54	52.61	68.20	-15.59
22000.00	Peak	H	-	-	-57.88	8.43	-9.54	48.00	68.20	-20.20
27500.00	Peak	H	-	-	-45.71	-8.80	-9.54	42.95	68.20	-25.25

Table 7-37. Radiated Measurements

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 1 Meter
 Operating Frequency: 5580MHz
 Channel: 116

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11160.00	Average	H	100	96	-73.56	12.64	-9.54	36.54	53.98	-17.44
* 11160.00	Peak	H	100	96	-63.65	12.64	-9.54	46.45	73.98	-27.53
16740.00	Peak	H	-	-	-61.80	16.21	-9.54	51.87	68.20	-16.33
* 22320.00	Average	H	-	-	-70.65	8.08	-9.54	34.89	53.98	-19.09
* 22320.00	Peak	H	-	-	-58.18	8.08	-9.54	47.36	73.98	-26.62
27900.00	Peak	H	-	-	-45.90	-9.08	-9.54	42.48	68.20	-25.72

Table 7-38. Radiated Measurements

FCC ID: ZNFV30A		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1706070187-05.ZNF	Test Dates: 6/6 - 7/14/2017	EUT Type: Portable Handset	Page 127 of 211	

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 1 Meter
 Operating Frequency: 5720MHz
 Channel: 144

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11440.00	Average	H	-	-	-75.46	12.47	-9.54	34.47	53.98	-19.51
* 11440.00	Peak	H	-	-	-64.47	12.47	-9.54	45.46	73.98	-28.52
17160.00	Peak	H	-	-	-61.02	18.06	-9.54	54.50	68.20	-13.70
* 22880.00	Average	H	-	-	-72.54	8.37	-9.54	33.29	53.98	-20.69
* 22880.00	Peak	H	-	-	-59.67	8.37	-9.54	46.16	73.98	-27.82
28600.00	Peak	H	-	-	-44.66	-8.95	-9.54	43.85	68.20	-24.35

Table 7-39. Radiated Measurements

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 1 Meter
 Operating Frequency: 5580MHz
 Channel: 116

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11160.00	Average	H	100	210	-75.50	12.64	-9.54	34.60	53.98	-19.38
* 11160.00	Peak	H	100	210	-63.44	12.64	-9.54	46.66	73.98	-27.32
16740.00	Peak	H	-	-	-61.66	16.21	-9.54	52.01	68.20	-16.19
* 22320.00	Average	H	-	-	-71.04	8.08	-9.54	34.50	53.98	-19.48
* 22320.00	Peak	H	-	-	-58.44	8.08	-9.54	47.10	73.98	-26.88
27900.00	Peak	H	-	-	-45.18	-9.08	-9.54	43.20	68.20	-25.00

Table 7-40. Radiated Measurements with WCP

FCC ID: ZNFV30A		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1706070187-05.ZNF	Test Dates: 6/6 - 7/14/2017	EUT Type: Portable Handset	Page 128 of 211	

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 1 Meter
 Operating Frequency: 5745MHz
 Channel: 149

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11490.00	Average	H	-	-	-75.35	12.43	-9.54	34.54	53.98	-19.44
* 11490.00	Peak	H	-	-	-64.27	12.43	-9.54	45.62	73.98	-28.36
17235.00	Peak	H	-	-	-61.88	18.61	-9.54	54.19	68.20	-14.01
* 22980.00	Average	H	-	-	-72.31	8.16	-9.54	33.31	53.98	-20.67
* 22980.00	Peak	H	-	-	-58.94	8.16	-9.54	46.68	73.98	-27.30
28725.00	Peak	H	-	-	-44.11	-9.24	-9.54	44.11	68.20	-24.09

Table 7-41. Radiated Measurements

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 1 Meter
 Operating Frequency: 5785MHz
 Channel: 157

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11570.00	Average	H	-	-	-75.28	12.54	-9.54	34.72	53.98	-19.26
* 11570.00	Peak	H	-	-	-64.56	12.54	-9.54	45.44	73.98	-28.54
17355.00	Peak	H	-	-	-60.65	18.73	-9.54	55.54	68.20	-12.66
23140.00	Peak	H	-	-	-58.64	8.37	-9.54	47.19	68.20	-21.01
28925.00	Peak	H	-	-	-43.35	-9.65	-9.54	44.46	68.20	-23.74

Table 7-42. Radiated Measurements

FCC ID: ZNFV30A		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1706070187-05.ZNF	Test Dates: 6/6 - 7/14/2017	EUT Type: Portable Handset	Page 129 of 211	

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 1 Meter
 Operating Frequency: 5825MHz
 Channel: 165

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11650.00	Average	H	-	-	-75.03	12.99	-9.54	35.41	53.98	-18.57
* 11650.00	Peak	H	-	-	-64.38	12.99	-9.54	46.06	73.98	-27.92
17475.00	Peak	H	-	-	-60.53	19.25	-9.54	56.17	68.20	-12.03
23300.00	Peak	H	-	-	-59.71	8.50	-9.54	46.24	68.20	-21.96
29125.00	Peak	H	-	-	-43.79	-9.87	-9.54	43.80	68.20	-24.40

Table 7-43. Radiated Measurements


Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 1 Meter
 Operating Frequency: 5825MHz
 Channel: 165

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11650.00	Average	H	-	-	-75.77	12.99	-9.54	34.67	53.98	-19.31
* 11650.00	Peak	H	-	-	-63.21	12.99	-9.54	47.23	73.98	-26.75
17475.00	Peak	H	-	-	-60.41	19.25	-9.54	56.29	68.20	-11.91
23300.00	Peak	H	-	-	-59.20	8.50	-9.54	46.75	68.20	-21.45
29125.00	Peak	H	-	-	-44.03	-9.87	-9.54	43.56	68.20	-24.64


Table 7-44. Radiated Measurements with WCP

FCC ID: ZNFV30A		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1706070187-05.ZNF	Test Dates: 6/6 - 7/14/2017	EUT Type: Portable Handset	Page 130 of 211	

7.7.2 Antenna-2 Radiated Spurious Emission Measurements

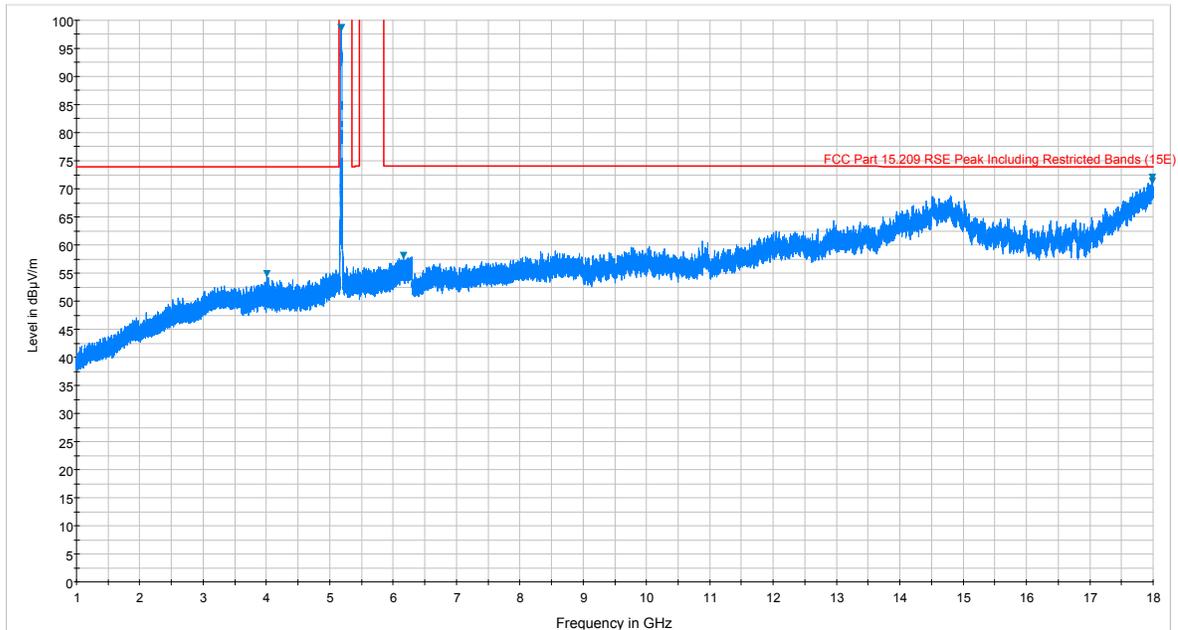


Plot 7-165. Radiated Spurious Plot above 1GHz (802.11a – U1 Ch. 40, Ant. Pol. H)

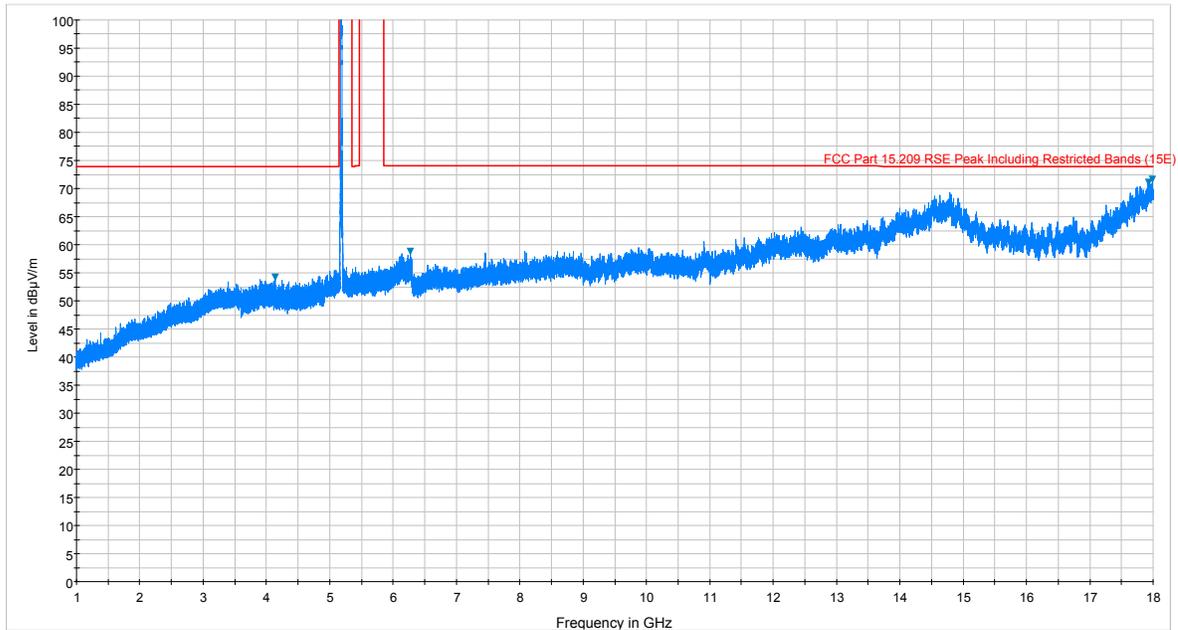


Plot 7-166. Radiated Spurious Plot above 1GHz (802.11a – U1 Ch. 40, Ant. Pol. V)

FCC ID: ZNFV30A		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1706070187-05.ZNF	Test Dates: 6/6 - 7/14/2017	EUT Type: Portable Handset	Page 131 of 211	

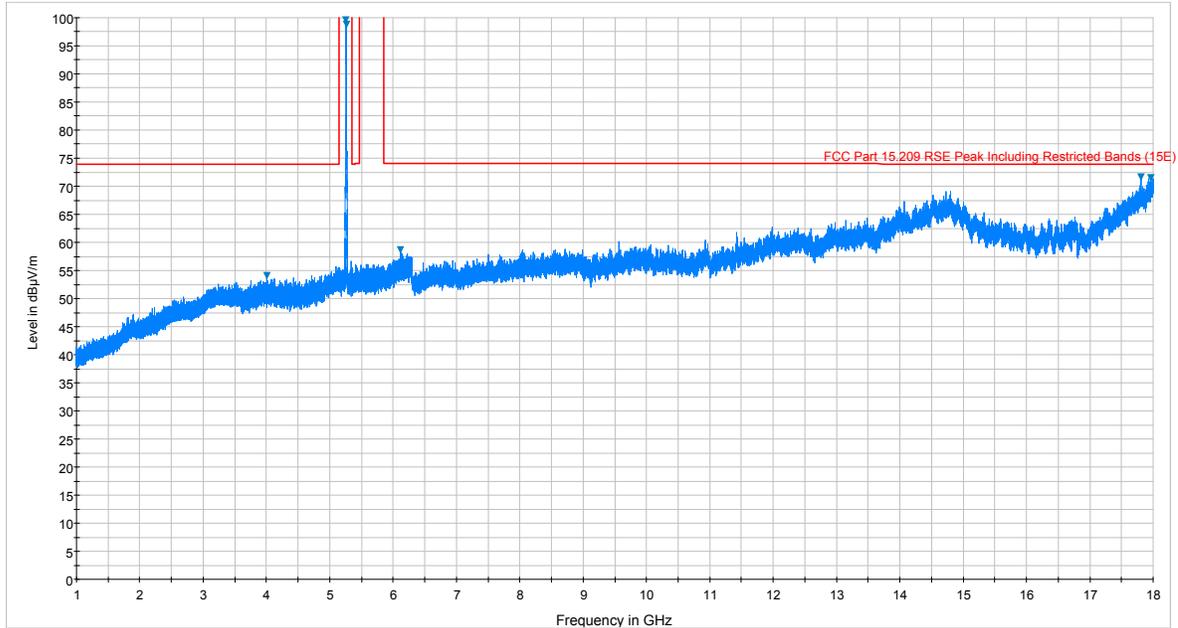


Plot 7-167. Radiated Spurious Plot above 1GHz (802.11a – U2A Ch. 56, Ant. Pol. H)

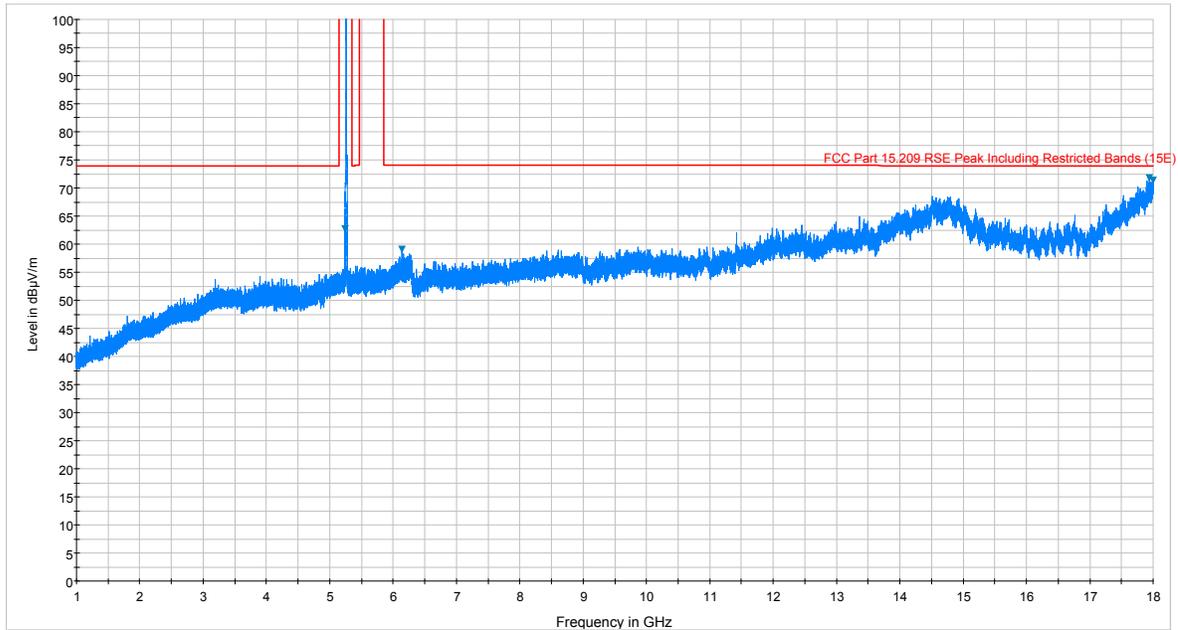


Plot 7-168. Radiated Spurious Plot above 1GHz (802.11a – U2A Ch. 56, Ant. Pol. V)

FCC ID: ZNFV30A		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1706070187-05.ZNF	Test Dates: 6/6 - 7/14/2017	EUT Type: Portable Handset	Page 132 of 211	

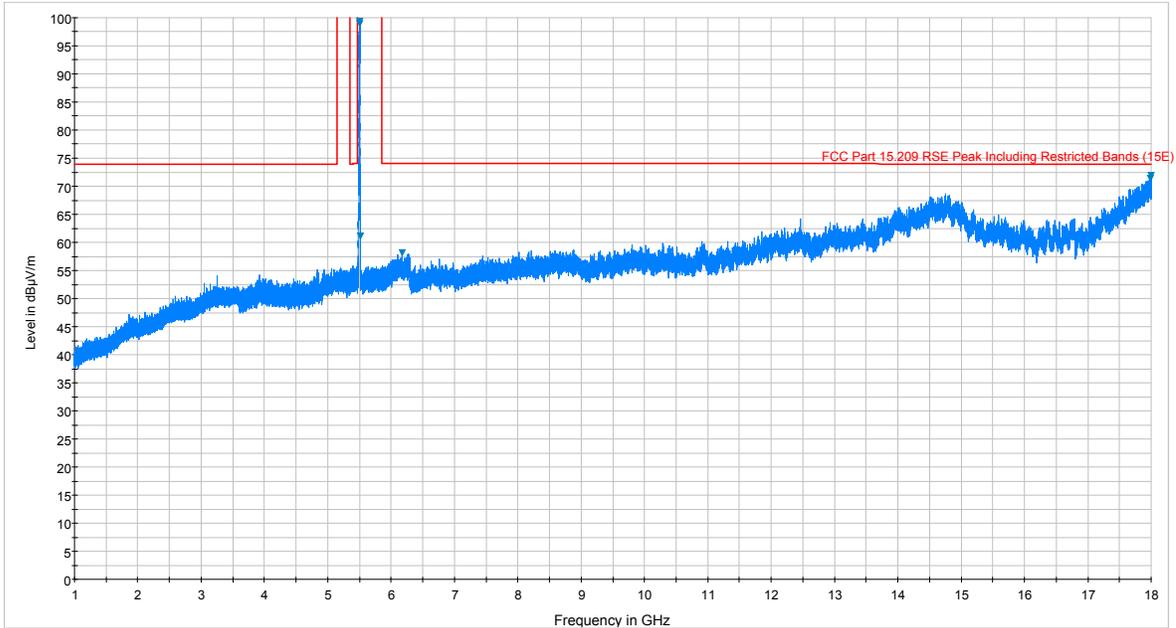


Plot 7-169. Radiated Spurious Plot above 1GHz (802.11a – U2C Ch. 116, Ant. Pol. H)

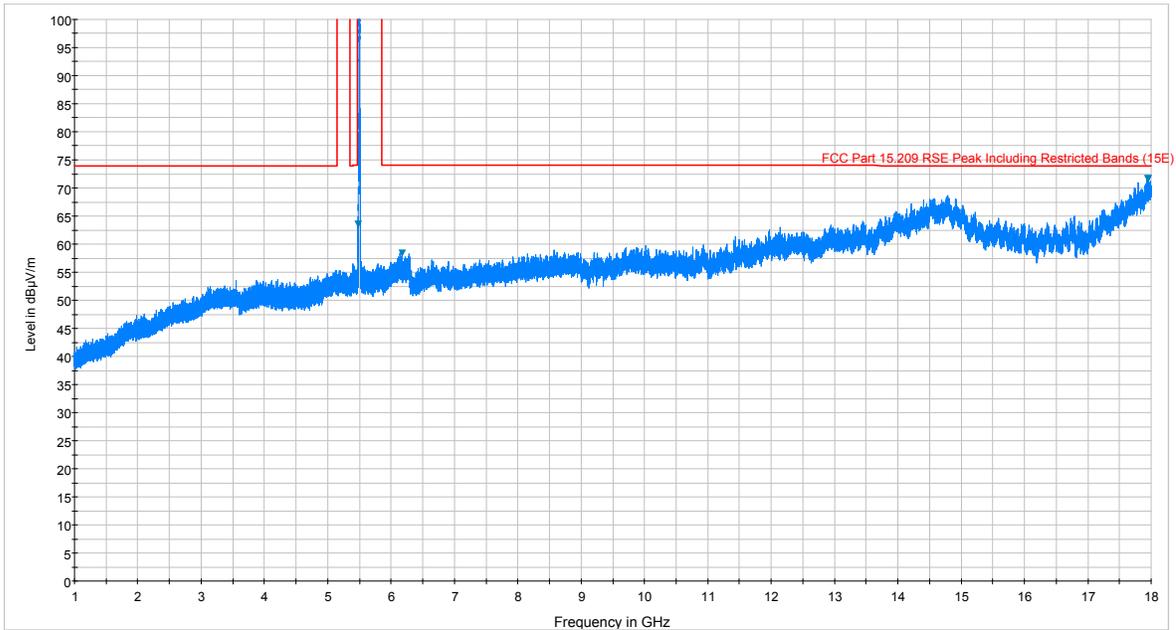


Plot 7-170. Radiated Spurious Plot above 1GHz (802.11a – U2C Ch. 116, Ant. Pol. V)

FCC ID: ZNFV30A		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1706070187-05.ZNF	Test Dates: 6/6 - 7/14/2017	EUT Type: Portable Handset	Page 133 of 211	

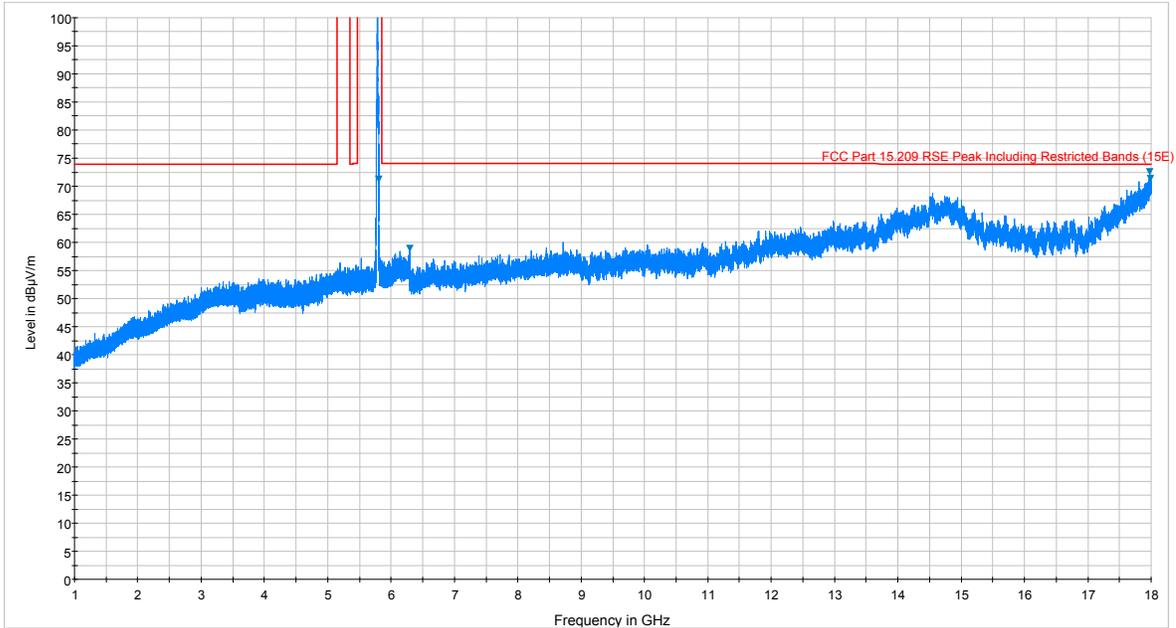

Plot 7-171. Radiated Spurious Plot above 1GHz (802.11a – U3 Ch. 157, Ant. Pol. H)

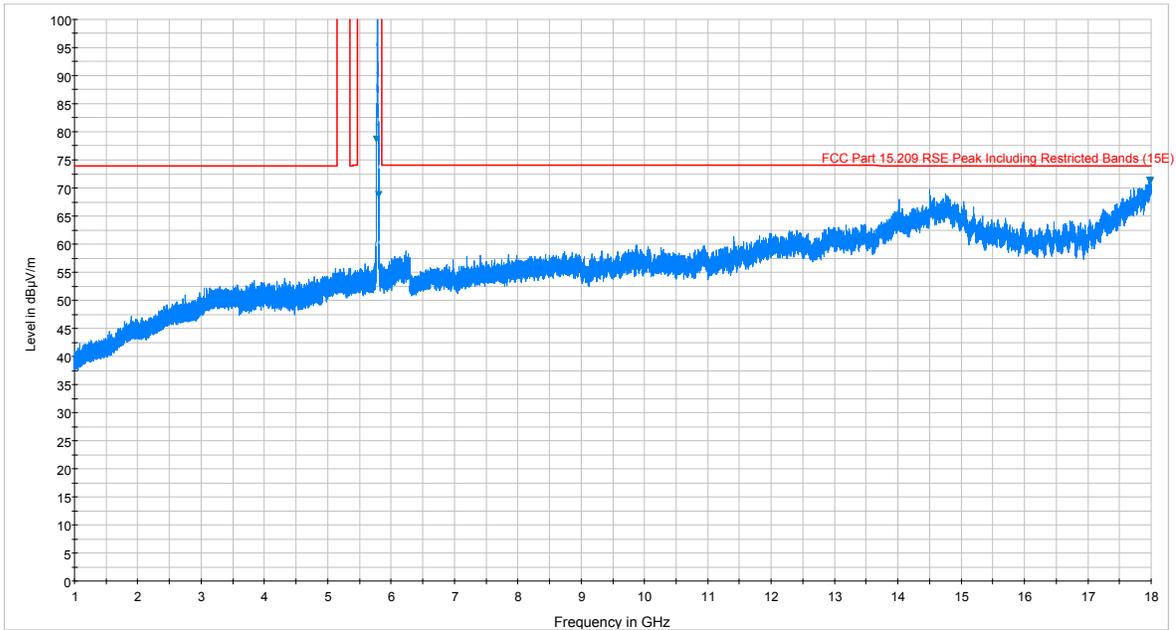


Plot 7-172. Radiated Spurious Plot above 1GHz (802.11a – U3 Ch. 157, Ant. Pol. V)


FCC ID: ZNFV30A		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1706070187-05.ZNF	Test Dates: 6/6 - 7/14/2017	EUT Type: Portable Handset	Page 134 of 211	

Antenna-2 Radiated Spurious Emissions Measurements (Above 18GHz)

§15.209

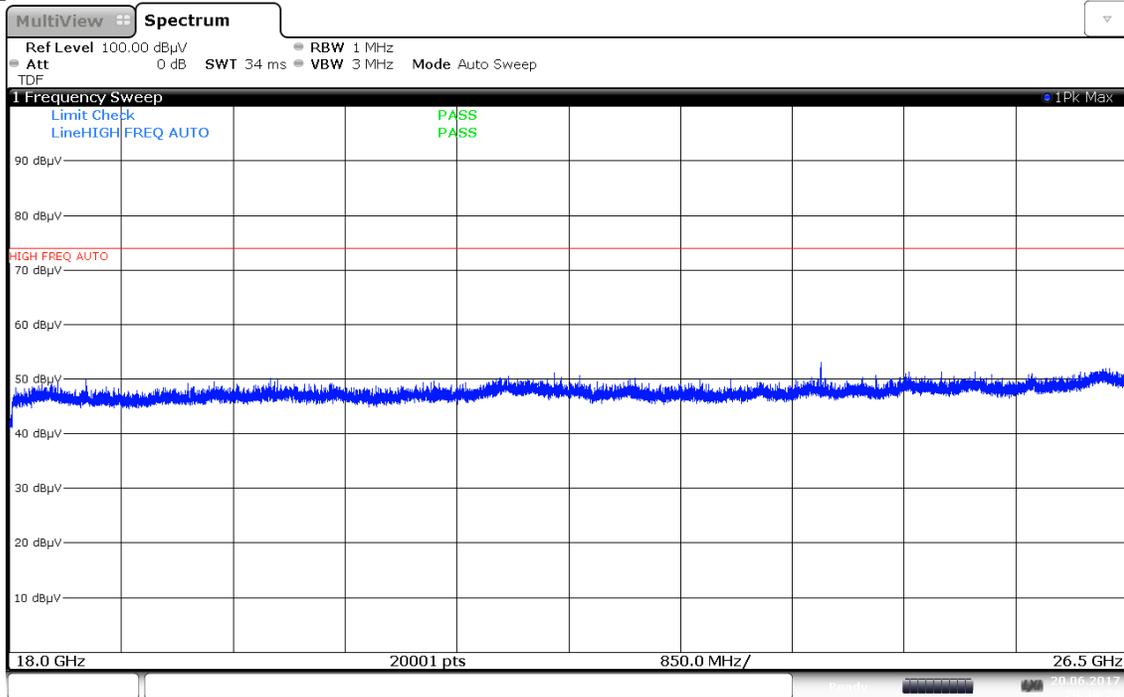

Plot 7-173. Radiated Spurious Plot above 18GHz - 26.5GHz (802.11a – Ant. Pol. H)

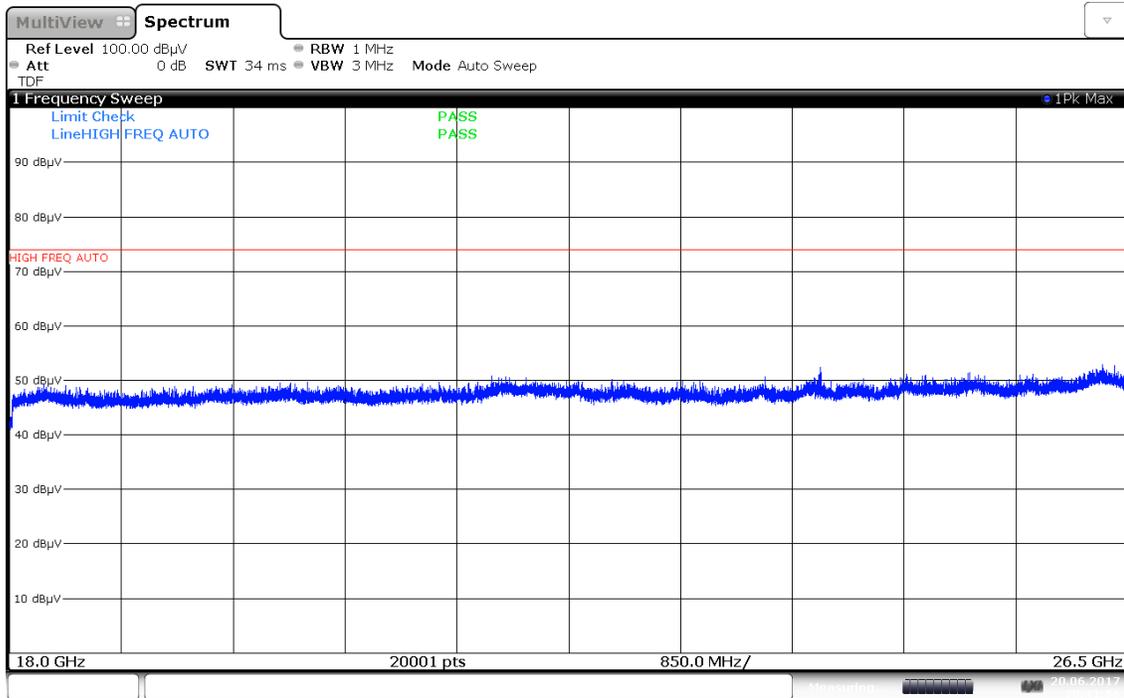


Plot 7-174. Radiated Spurious Plot above 18GHz - 26.5GHz (802.11a – Ant. Pol. V)

FCC ID: ZNFV30A	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1706070187-05.ZNF	Test Dates: 6/6 - 7/14/2017	EUT Type: Portable Handset		Page 135 of 211


Antenna-2 Radiated Spurious Emissions Measurements (Above 18GHz)

§15.209

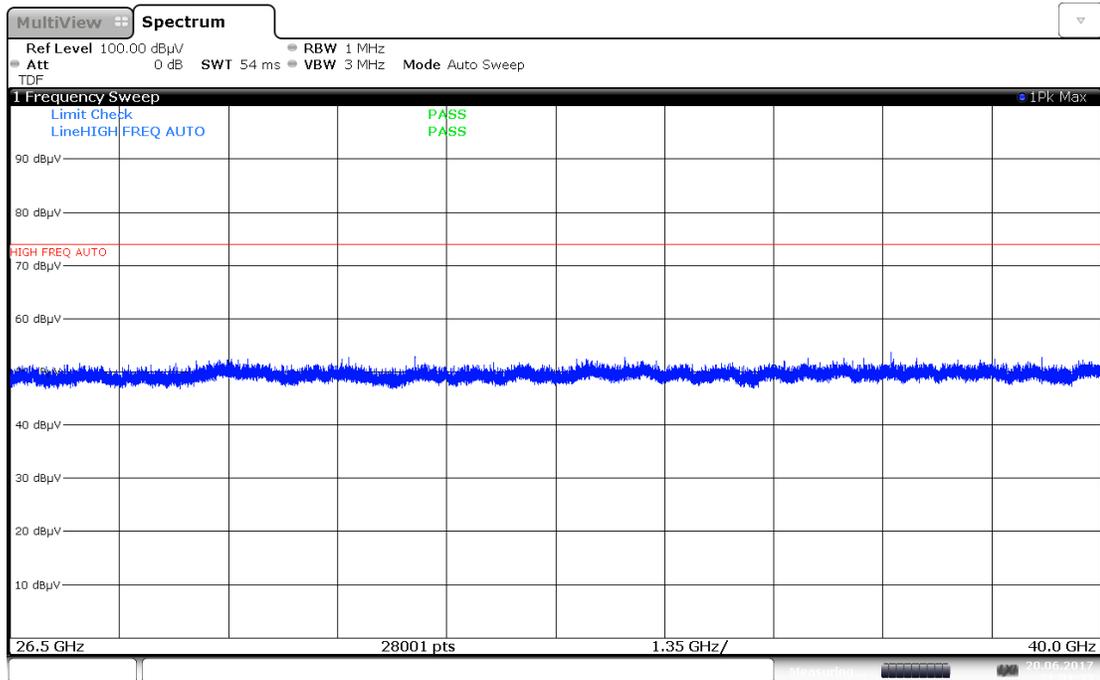

21:01:34 20.06.2017

Plot 7-175. Radiated Spurious Plot 26.5GHz - 40GHz (802.11a – Ant. Pol. H)

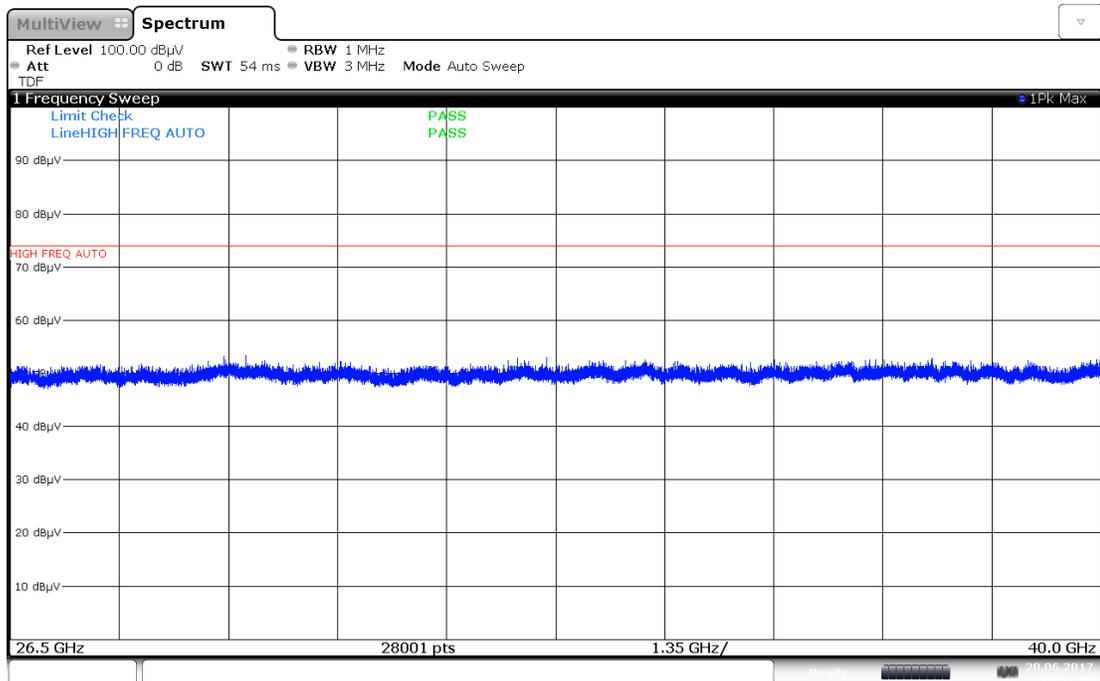

20:54:31 20.06.2017

Plot 7-176. Radiated Spurious Plot above 26.5GHz - 40GHz (802.11a – Ant. Pol. V)

FCC ID: ZNFV30A	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1706070187-05.ZNF	Test Dates: 6/6 - 7/14/2017	EUT Type: Portable Handset		Page 136 of 211

Antenna-2 Radiated Spurious Emission Measurements

§15.247(d) §15.205 & §15.209

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 1 Meter
 Operating Frequency: 5180MHz
 Channel: 36

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
10360.00	Peak	H	-	-	-63.90	12.13	-9.54	45.69	68.20	-22.51
* 15540.00	Average	H	-	-	-74.24	14.49	-9.54	37.71	53.98	-16.27
* 15540.00	Peak	H	-	-	-63.97	14.49	-9.54	47.98	73.98	-26.00
* 20720.00	Average	H	-	-	-72.12	7.94	-9.54	33.28	53.98	-20.70
* 20720.00	Peak	H	-	-	-58.71	7.94	-9.54	46.69	73.98	-27.29
25900.00	Peak	H	-	-	-47.28	8.46	-9.54	58.64	68.20	-9.56

Table 7-45. Radiated Measurements

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 1 Meter
 Operating Frequency: 5200MHz
 Channel: 40

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
10400.00	Peak	H	-	-	-64.21	12.12	-9.54	45.37	68.20	-22.83
* 15600.00	Average	H	-	-	-74.29	14.31	-9.54	37.48	53.98	-16.50
* 15600.00	Peak	H	-	-	-63.92	14.31	-9.54	47.85	73.98	-26.13
* 20800.00	Average	H	-	-	-71.98	7.95	-9.54	33.43	53.98	-20.55
* 20800.00	Peak	H	-	-	-58.82	7.95	-9.54	46.59	73.98	-27.39
26000.00	Peak	H	-	-	-46.68	8.60	-9.54	59.38	68.20	-8.82

Table 7-46. Radiated Measurements

FCC ID: ZNFV30A		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1706070187-05.ZNF	Test Dates: 6/6 - 7/14/2017	EUT Type: Portable Handset	Page 137 of 211	

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 1 Meter
 Operating Frequency: 5240MHz
 Channel: 48

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10480.00	Peak	H	-	-	-64.46	12.09	-9.54	45.09	68.20	-23.11
* 15720.00	Average	H	-	-	-74.07	14.02	-9.54	37.41	53.98	-16.57
* 15720.00	Peak	H	-	-	-63.95	14.02	-9.54	47.53	73.98	-26.45
* 20960.00	Average	H	-	-	-72.38	7.91	-9.54	32.99	53.98	-20.99
* 20960.00	Peak	H	-	-	-59.74	7.91	-9.54	45.63	73.98	-28.35
26200.00	Peak	H	-	-	-46.45	8.62	-9.54	59.63	68.20	-8.57

Table 7-47. Radiated Measurements

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 1 Meter
 Operating Frequency: 5200MHz
 Channel: 40

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10400.00	Peak	H	-	-	-63.65	12.12	-9.54	45.93	68.20	-22.27
* 15600.00	Average	H	-	-	-75.01	14.31	-9.54	36.76	53.98	-17.22
* 15600.00	Peak	H	-	-	-62.42	14.31	-9.54	49.35	73.98	-24.63
* 20800.00	Average	H	-	-	-72.12	7.95	-9.54	33.29	53.98	-20.69
* 20800.00	Peak	H	-	-	-59.46	7.95	-9.54	45.95	73.98	-28.03
26000.00	Peak	H	-	-	-46.77	8.60	-9.54	59.29	68.20	-8.91

Table 7-48. Radiated Measurements with WCP

FCC ID: ZNFV30A		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1706070187-05.ZNF	Test Dates: 6/6 - 7/14/2017	EUT Type: Portable Handset	Page 138 of 211	

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 1 Meter
 Operating Frequency: 5260MHz
 Channel: 52

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10520.00	Peak	H	-	-	-63.57	12.16	-9.54	46.05	68.20	-22.15
* 15780.00	Average	H	-	-	-74.07	14.03	-9.54	37.42	53.98	-16.56
* 15780.00	Peak	H	-	-	-63.84	14.03	-9.54	47.65	73.98	-26.33
* 21040.00	Average	H	-	-	-71.82	7.92	-9.54	33.56	53.98	-20.42
* 21040.00	Peak	H	-	-	-59.05	7.92	-9.54	46.33	73.98	-27.65
26300.00	Peak	H	-	-	-46.59	8.73	-9.54	59.60	68.20	-8.60

Table 7-49. Radiated Measurements

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 1 Meter
 Operating Frequency: 5280MHz
 Channel: 56

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10560.00	Peak	H	-	-	-65.22	12.04	-9.54	44.28	68.20	-23.92
* 15840.00	Average	H	-	-	-73.68	14.25	-9.54	38.02	53.98	-15.96
* 15840.00	Peak	H	-	-	-63.43	14.25	-9.54	48.27	73.98	-25.71
* 21120.00	Average	H	-	-	-71.82	7.96	-9.54	33.60	53.98	-20.38
* 21120.00	Peak	H	-	-	-58.92	7.96	-9.54	46.50	73.98	-27.48
26400.00	Peak	H	-	-	-46.16	8.94	-9.54	60.24	68.20	-7.96

Table 7-50. Radiated Measurements

FCC ID: ZNFV30A		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1706070187-05.ZNF	Test Dates: 6/6 - 7/14/2017	EUT Type: Portable Handset	Page 139 of 211	

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 1 Meter
 Operating Frequency: 5320MHz
 Channel: 64

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 10640.00	Average	H	-	-	-74.96	12.06	-9.54	34.56	53.98	-19.42
* 10640.00	Peak	H	-	-	-64.55	12.06	-9.54	44.97	73.98	-29.01
* 15960.00	Average	H	-	-	-73.46	14.55	-9.54	38.55	53.98	-15.43
* 15960.00	Peak	H	-	-	-62.93	14.55	-9.54	49.08	73.98	-24.90
* 21280.00	Average	H	-	-	-69.51	8.04	-9.54	35.99	53.98	-17.99
* 21280.00	Peak	H	-	-	-57.40	8.04	-9.54	48.10	73.98	-25.88
26600.00	Peak	H	-	-	-46.01	-8.30	-9.54	43.14	68.20	-25.06

Table 7-51. Radiated Measurements

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 1 Meter
 Operating Frequency: 5280MHz
 Channel: 56

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10560.00	Peak	H	-	-	-63.55	12.04	-9.54	45.95	68.20	-22.25
* 15840.00	Average	H	-	-	-74.79	14.25	-9.54	36.91	53.98	-17.07
* 15840.00	Peak	H	-	-	-62.40	14.25	-9.54	49.30	73.98	-24.68
* 21120.00	Average	H	-	-	-71.70	7.96	-9.54	33.72	53.98	-20.26
* 21120.00	Peak	H	-	-	-59.05	7.96	-9.54	46.37	73.98	-27.61
26400.00	Peak	H	-	-	-45.96	8.94	-9.54	60.44	68.20	-7.76

Table 7-52. Radiated Measurements with WCP

FCC ID: ZNFV30A		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1706070187-05.ZNF	Test Dates: 6/6 - 7/14/2017	EUT Type: Portable Handset	Page 140 of 211	

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 1 Meter
 Operating Frequency: 5500MHz
 Channel: 100

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11000.00	Average	H	-	-	-76.07	12.87	-9.54	34.26	53.98	-19.72
* 11000.00	Peak	H	-	-	-65.28	12.87	-9.54	45.05	73.98	-28.93
16500.00	Peak	H	-	-	-61.32	16.61	-9.54	52.75	68.20	-15.45
22000.00	Peak	H	-	-	-57.87	8.43	-9.54	48.01	68.20	-20.19
27500.00	Peak	H	-	-	-45.25	-8.80	-9.54	43.41	68.20	-24.79

Table 7-53. Radiated Measurements

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 1 Meter
 Operating Frequency: 5580MHz
 Channel: 116

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11160.00	Average	H	-	-	-75.03	12.64	-9.54	35.07	53.98	-18.91
* 11160.00	Peak	H	-	-	-64.36	12.64	-9.54	45.74	73.98	-28.24
16740.00	Peak	H	-	-	-63.01	16.21	-9.54	50.66	68.20	-17.54
* 22320.00	Average	H	-	-	-70.86	8.08	-9.54	34.68	53.98	-19.30
* 22320.00	Peak	H	-	-	-58.03	8.08	-9.54	47.51	73.98	-26.47
27900.00	Peak	H	-	-	-45.13	-9.08	-9.54	43.25	68.20	-24.95

Table 7-54. Radiated Measurements

FCC ID: ZNFV30A		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1706070187-05.ZNF	Test Dates: 6/6 - 7/14/2017	EUT Type: Portable Handset	Page 141 of 211	

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 1 Meter
 Operating Frequency: 5720MHz
 Channel: 144

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11400.00	Average	H	-	-	-75.62	12.47	-9.54	34.31	53.98	-19.67
* 11400.00	Peak	H	-	-	-65.10	12.47	-9.54	44.83	73.98	-29.15
17100.00	Peak	H	-	-	-62.39	18.06	-9.54	53.13	68.20	-15.07
* 22800.00	Average	H	-	-	-72.43	8.37	-9.54	33.40	53.98	-20.58
* 22800.00	Peak	H	-	-	-59.86	8.37	-9.54	45.97	73.98	-28.01
28500.00	Peak	H	-	-	-44.91	-8.95	-9.54	43.60	68.20	-24.60

Table 7-55. Radiated Measurements

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 1 Meter
 Operating Frequency: 5580MHz
 Channel: 116

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11160.00	Average	H	-	-	-75.92	12.64	-9.54	34.18	53.98	-19.80
* 11160.00	Peak	H	-	-	-63.54	12.64	-9.54	46.56	73.98	-27.42
16740.00	Peak	H	-	-	-61.14	16.21	-9.54	52.53	68.20	-15.67
* 22320.00	Average	H	-	-	-71.01	8.08	-9.54	34.53	53.98	-19.45
* 22320.00	Peak	H	-	-	-57.61	8.08	-9.54	47.93	73.98	-26.05
27900.00	Peak	H	-	-	-46.39	-9.08	-9.54	41.99	68.20	-26.21

Table 7-56. Radiated Measurements with WCP

FCC ID: ZNFV30A		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1706070187-05.ZNF	Test Dates: 6/6 - 7/14/2017	EUT Type: Portable Handset	Page 142 of 211	

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 1 Meter
 Operating Frequency: 5745MHz
 Channel: 149

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11490.00	Average	H	-	-	-75.32	12.43	-9.54	34.57	53.98	-19.41
* 11490.00	Peak	H	-	-	-64.10	12.43	-9.54	45.79	73.98	-28.19
17235.00	Peak	H	-	-	-62.00	18.61	-9.54	54.07	68.20	-14.13
* 22980.00	Average	H	-	-	-72.37	8.16	-9.54	33.25	53.98	-20.73
* 22980.00	Peak	H	-	-	-59.64	8.16	-9.54	45.98	73.98	-28.00
28725.00	Peak	H	-	-	-44.18	-9.24	-9.54	44.04	68.20	-24.16

Table 7-57. Radiated Measurements

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 1 Meter
 Operating Frequency: 5785MHz
 Channel: 157

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11570.00	Average	H	-	-	-74.96	12.54	-9.54	35.04	53.98	-18.94
* 11570.00	Peak	H	-	-	-64.10	12.54	-9.54	45.90	73.98	-28.08
17355.00	Peak	H	-	-	-61.24	18.73	-9.54	54.95	68.20	-13.25
23140.00	Peak	H	-	-	-58.21	8.37	-9.54	47.62	68.20	-20.58
28925.00	Peak	H	-	-	-44.69	-9.65	-9.54	43.12	68.20	-25.08

Table 7-58. Radiated Measurements

FCC ID: ZNFV30A		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1706070187-05.ZNF	Test Dates: 6/6 - 7/14/2017	EUT Type: Portable Handset	Page 143 of 211	

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 1 Meter
 Operating Frequency: 5825MHz
 Channel: 165

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11650.00	Average	H	-	-	-74.97	12.99	-9.54	35.47	53.98	-18.51
* 11650.00	Peak	H	-	-	-63.81	12.99	-9.54	46.63	73.98	-27.35
17475.00	Peak	H	-	-	-62.53	19.25	-9.54	54.17	68.20	-14.03
23300.00	Peak	H	-	-	-59.54	8.50	-9.54	46.41	68.20	-21.79
29125.00	Peak	H	-	-	-43.29	-9.87	-9.54	44.30	68.20	-23.90

Table 7-59. Radiated Measurements

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 1 Meter
 Operating Frequency: 5785MHz
 Channel: 157

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11570.00	Average	H	-	-	-75.81	12.54	-9.54	34.19	53.98	-19.79
* 11570.00	Peak	H	-	-	-63.21	12.54	-9.54	46.79	73.98	-27.19
17355.00	Peak	H	-	-	-60.16	18.73	-9.54	56.03	68.20	-12.17
23140.00	Peak	H	-	-	-58.56	8.37	-9.54	47.27	68.20	-20.93
28925.00	Peak	H	-	-	-44.31	-9.65	-9.54	43.50	68.20	-24.70


Table 7-60. Radiated Measurements with WCP

FCC ID: ZNFV30A		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1706070187-05.ZNF	Test Dates: 6/6 - 7/14/2017	EUT Type: Portable Handset	Page 144 of 211	


7.7.3 Simultaneous Tx Radiated Spurious Emissions Measurements §15.247(d) §15.205 & §15.209

Description	2.4 GHz Emission	5 GHz Emission
Antenna	1	2
Channel	6	48
Operating Frequency (MHz)	2437	5240
Data Rate (Mbps)	MCS0	MCS0
Mode	n	n

Table 7-61. Simultaneous Transmission Config-1

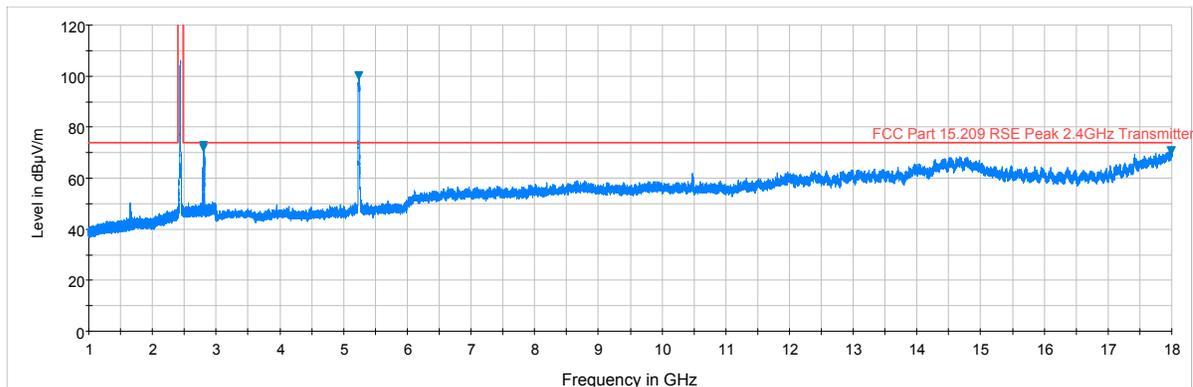


Plot 7-177. Radiated Spurious Plot above 1GHz (2.4GHz – 5GHz, Ant. Pol. H)

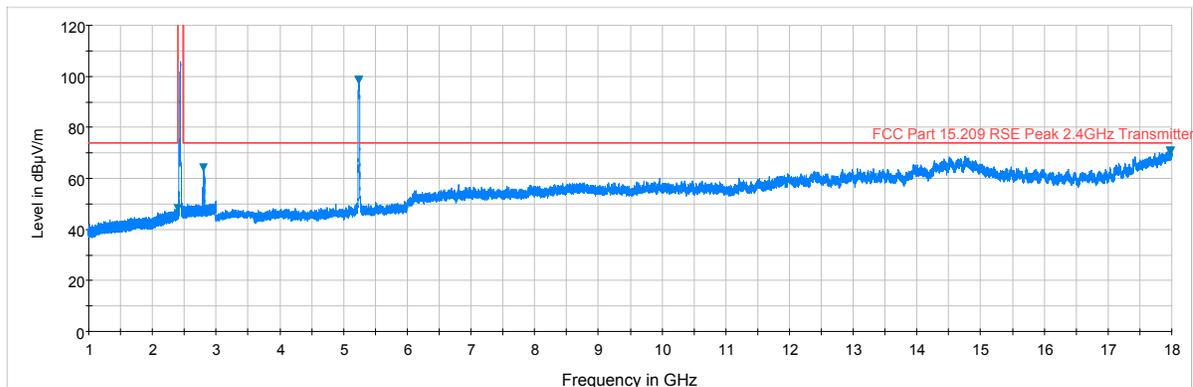

Plot 7-178. Radiated Spurious Plot above 1GHz (2.4GHz – 5GHz, Ant. Pol. V)


Note: Spurious Emissions found in radiated spurious plots were investigated and determined to be ambient noise

FCC ID: ZNFV30A		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1706070187-05.ZNF	Test Dates: 6/6 - 7/14/2017	EUT Type: Portable Handset		Page 145 of 211

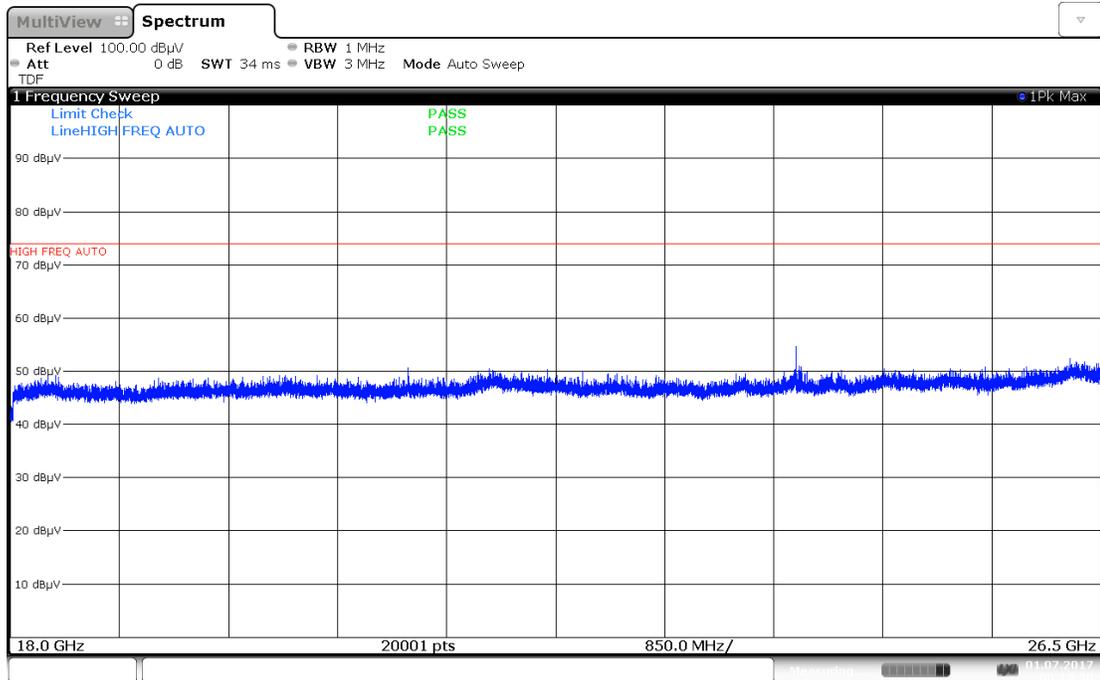

00:19:30 01.07.2017


Plot 7-179. Radiated Spurious Plot 18GHz – 26.5GHz (2.4GHz – 5GHz, Ant. Pol. H)

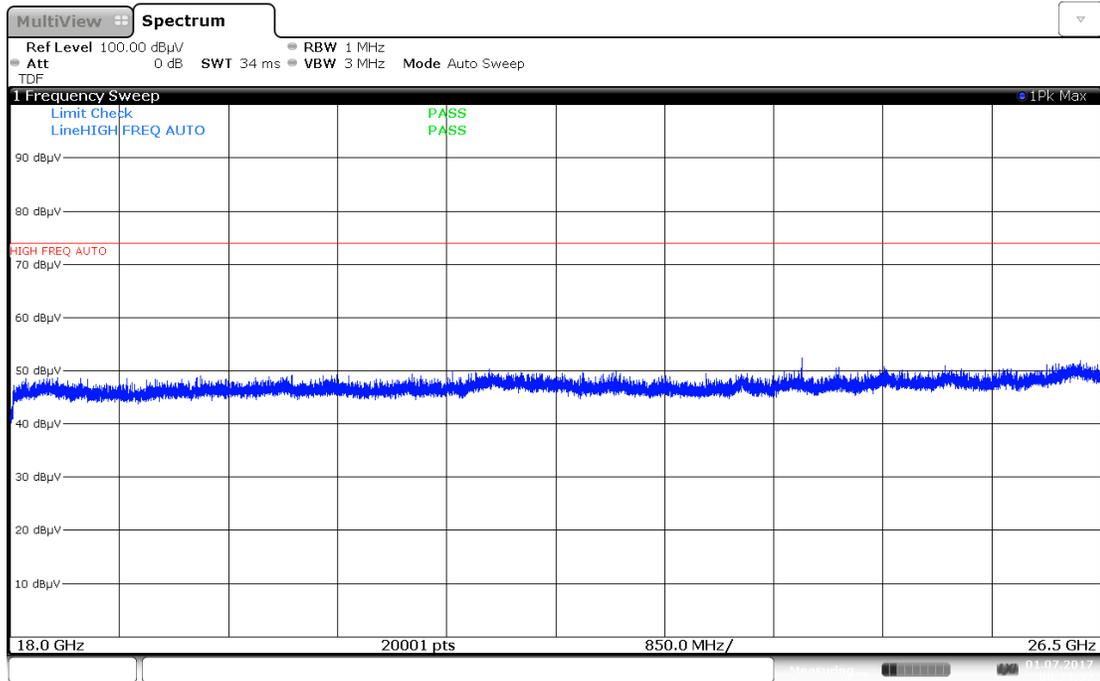

00:21:33 01.07.2017


Plot 7-180. Radiated Spurious Plot 18GHz – 26.5GHz (2.4GHz – 5GHz, Ant. Pol. V)

FCC ID: ZNFV30A	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1706070187-05.ZNF	Test Dates: 6/6 - 7/14/2017	EUT Type: Portable Handset		Page 146 of 211

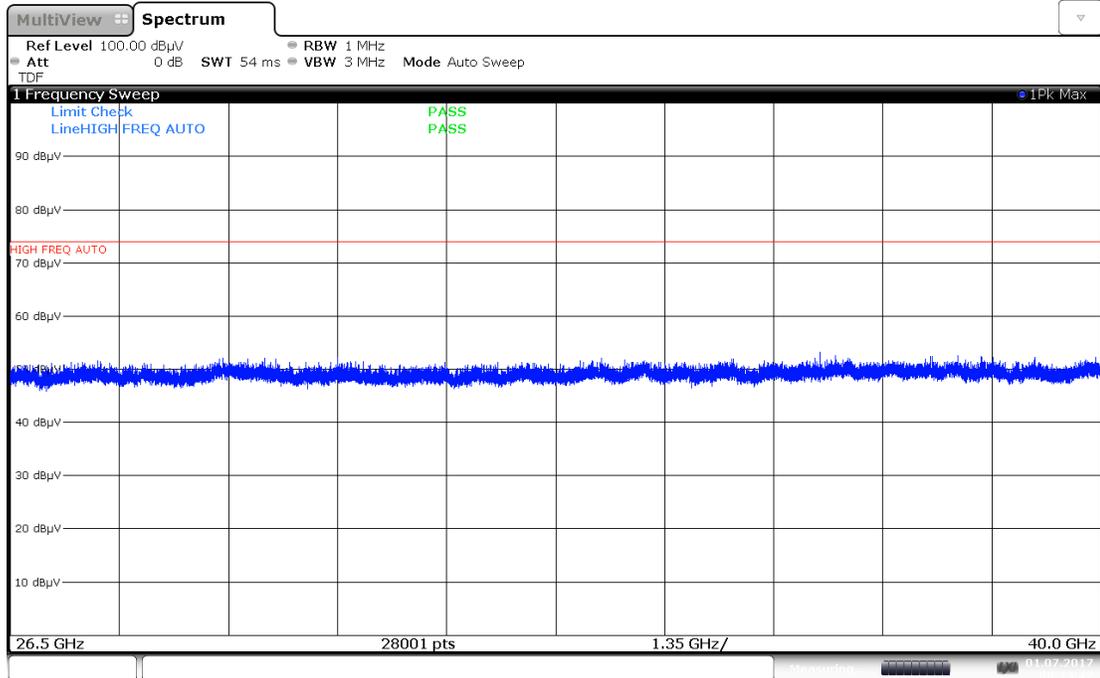

00:13:43 01.07.2017

Plot 7-181. Radiated Spurious Plot above 26.5GHz (2.4GHz – 5GHz, Ant. Pol. H)

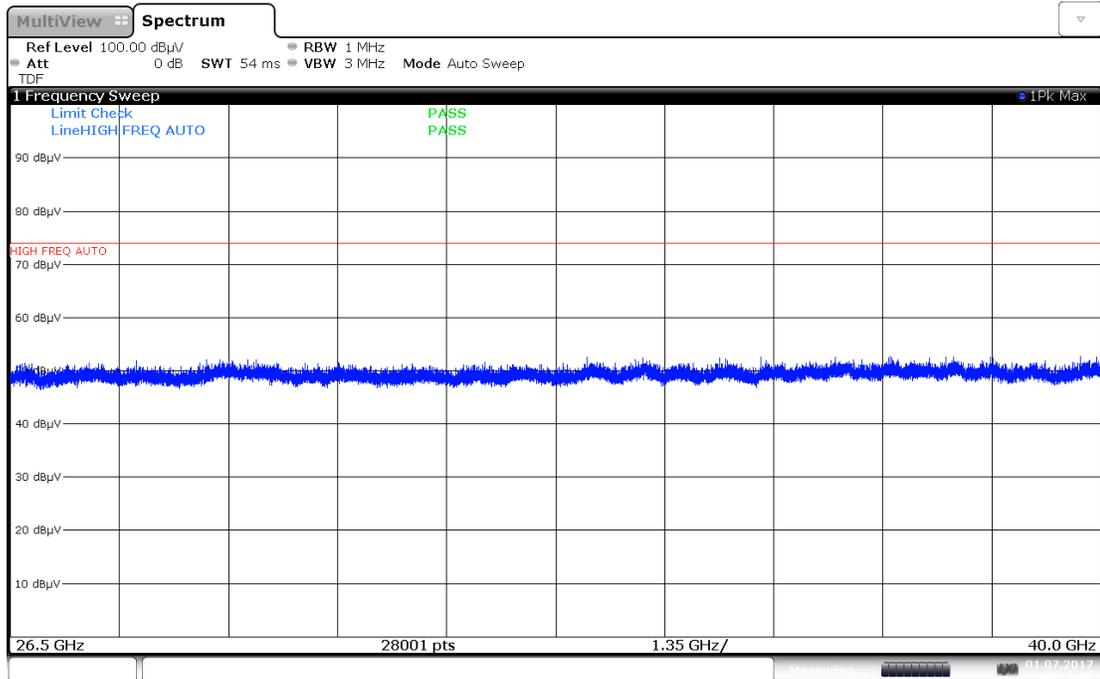

00:16:31 01.07.2017

Plot 7-182. Radiated Spurious Plot above 26.5GHz (2.4GHz – 5GHz, Ant. Pol. V)

FCC ID: ZNFV30A		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1706070187-05.ZNF	Test Dates: 6/6 - 7/14/2017	EUT Type: Portable Handset	Page 147 of 211	

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
*	3169.00	Average	H	-	-	-69.30	-3.34	0.00	34.36	53.98	-19.62
*	3169.00	Peak	H	-	-	-57.98	-3.34	0.00	45.68	73.98	-28.30
*	5972.00	Average	H	-	-	-70.64	3.52	0.00	39.88	53.98	-14.10
*	5972.00	Peak	H	-	-	-58.86	3.52	0.00	51.66	73.98	-22.32
*	8043.00	Average	H	-	-	-71.41	11.01	0.00	46.60	53.98	-7.37
*	8043.00	Peak	H	-	-	-59.40	11.01	0.00	58.61	73.98	-15.36
*	8775.00	Average	H	-	-	-71.65	12.04	0.00	47.39	53.98	-6.59
*	8775.00	Peak	H	-	-	-59.99	12.04	0.00	59.05	73.98	-14.93
*	10846.00	Peak	H	-	-	-60.06	11.76	0.00	58.70	73.98	-15.28
	10846.00	Average	H	-	-	-71.43	11.76	0.00	47.33	53.98	-6.65
	13649.00	Peak	H	-	-	-58.67	17.90	0.00	66.23	73.98	-7.75
*	13649.00	Average	H	-	-	-71.52	17.90	-9.54	43.84	53.98	-10.14
*	16452.00	Peak	H	-	-	-58.92	18.34	-9.54	56.87	73.98	-17.11

Table 7-62. Radiated Measurements (ANT1 2.4GHz – ANT2 5GHz)

FCC ID: ZNFV30A		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1706070187-05.ZNF	Test Dates: 6/6 - 7/14/2017	EUT Type: Portable Handset		Page 148 of 211

7.7.4 Antenna-1 Radiated Band Edge Measurements (20MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209



Worst Case Mode: 802.11a

Worst Case Transfer Rate: 6 Mbps

Distance of Measurements: 3 Meters

Operating Frequency: 5180MHz

Channel: 36

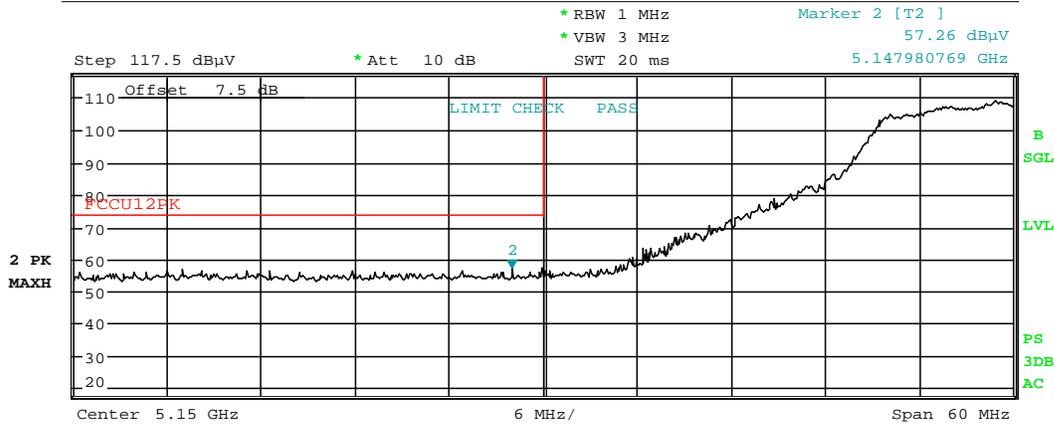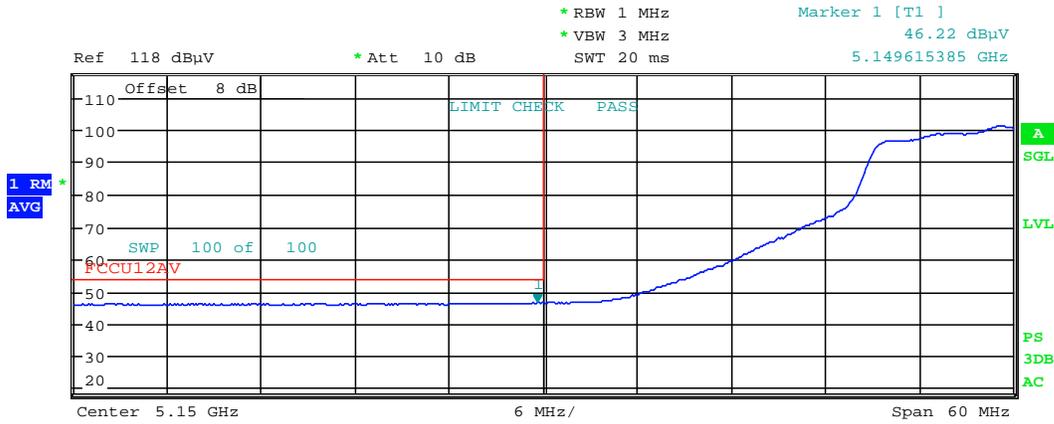

Date: 21.JUN.2017 01:29:04

Plot 7-183. Radiated Restricted Lower Band Edge Plot (Average & Peak – UNII Band 1)

FCC ID: ZNFV30A		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1706070187-05.ZNF	Test Dates: 6/6 - 7/14/2017	EUT Type: Portable Handset		Page 149 of 211

Antenna-1 Radiated Band Edge Measurements (20MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209



Worst Case Mode: 802.11a

Worst Case Transfer Rate: 6 Mbps

Distance of Measurements: 3 Meters

Operating Frequency: 5320MHz

Channel: 64

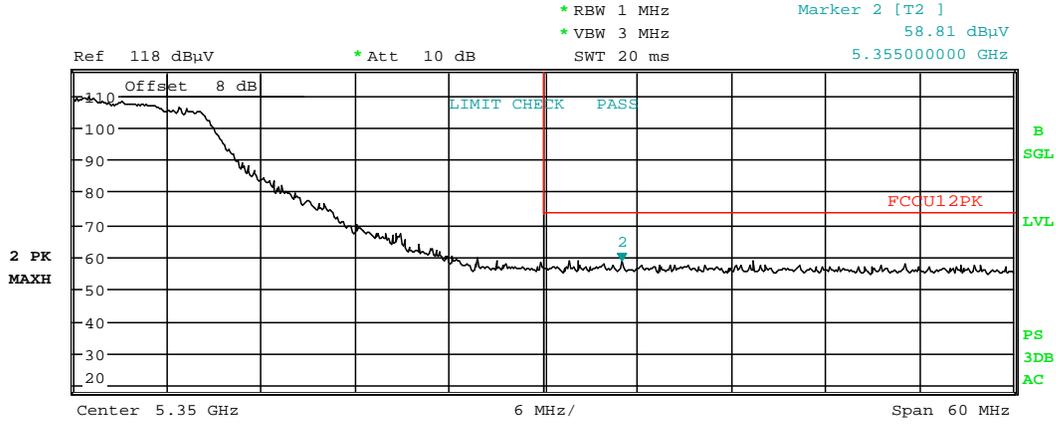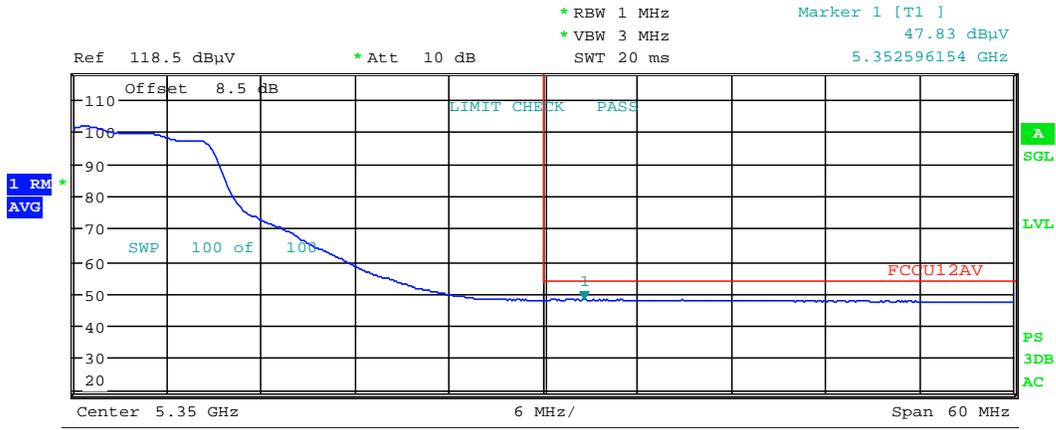



Date: 21.JUN.2017 01:35:34

Plot 7-184. Radiated Restricted Upper Band Edge Plot (Average & Peak – UNII Band 2A)

FCC ID: ZNFV30A		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1706070187-05.ZNF	Test Dates: 6/6 - 7/14/2017	EUT Type: Portable Handset		Page 150 of 211

Antenna-1 Radiated Band Edge Measurements (20MHz BW)
§15.407(b.1)(b.2) §15.205 §15.209

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 3 Meters
 Operating Frequency: 5500MHz
 Channel: 100

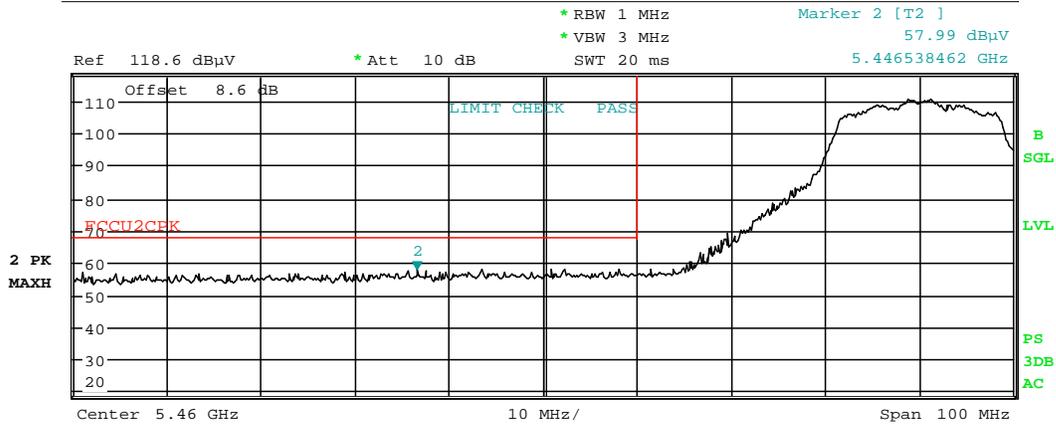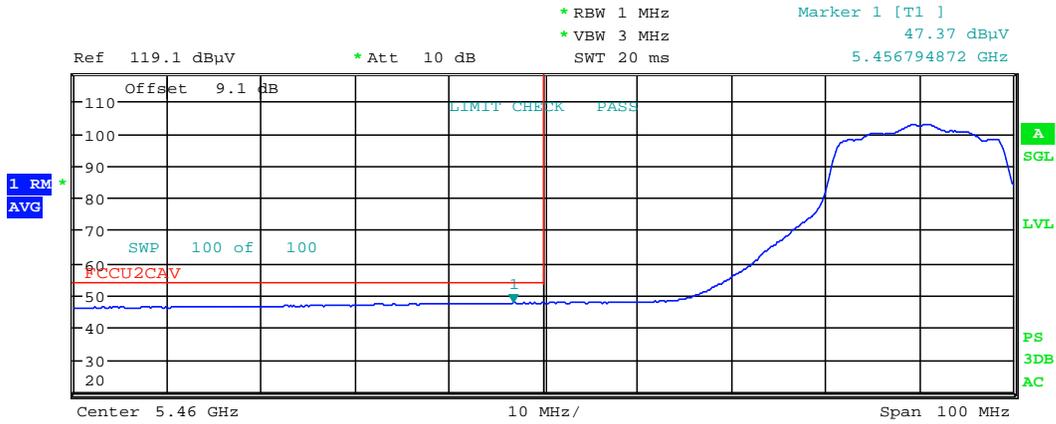


Date: 21.JUN.2017 01:39:41

Plot 7-185. Radiated Restricted Lower Band Edge Plot (Average & Peak – UNII Band 2C)

FCC ID: ZNFV30A	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1706070187-05.ZNF	Test Dates: 6/6 - 7/14/2017	EUT Type: Portable Handset		Page 151 of 211

Antenna-1 Radiated Band Edge Measurements (20MHz BW)
§15.407(b.1)(b.2) §15.205 §15.209

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 3 Meters
 Operating Frequency: 5825MHz
 Channel: 165

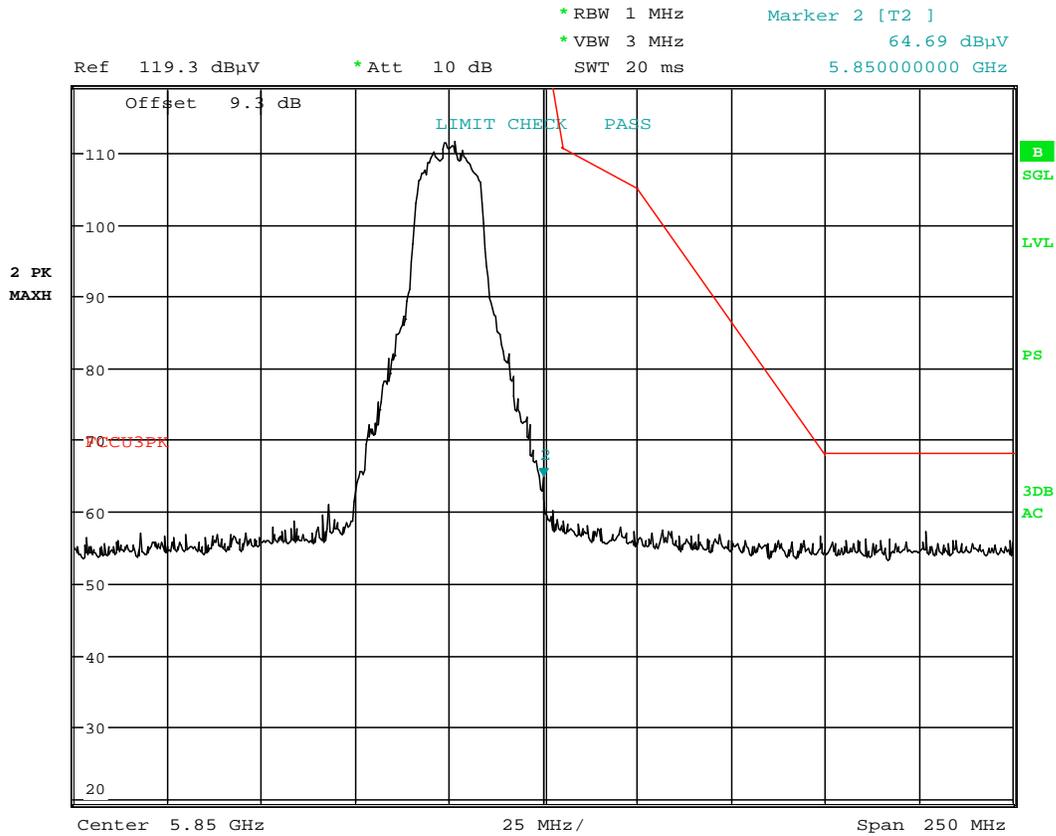



Date: 21.JUN.2017 01:46:22

Plot 7-186. Radiated Upper Band Edge Plot (Peak – UNII Band 3)

FCC ID: ZNFV30A	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1706070187-05.ZNF	Test Dates: 6/6 - 7/14/2017	EUT Type: Portable Handset		Page 152 of 211

Antenna-1 WCP Radiated Band Edge Measurements (20MHz BW)
§15.407(b.1)(b.2) §15.205 §15.209

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 3 Meters
 Operating Frequency: 5320MHz
 Channel: 64

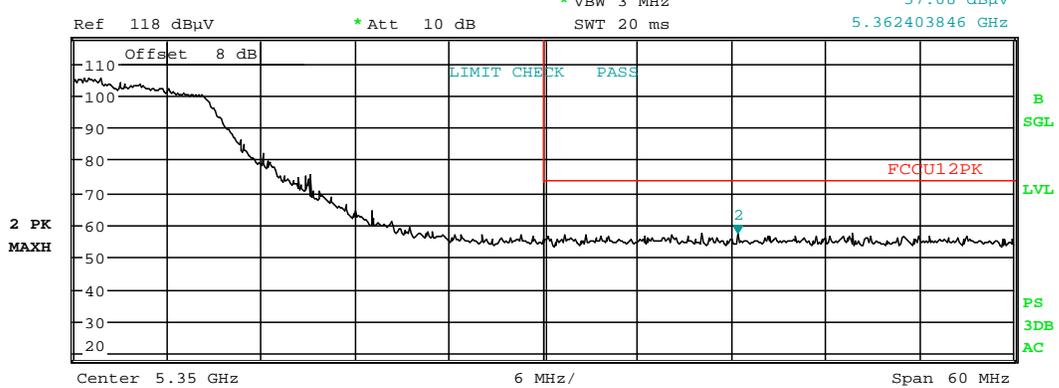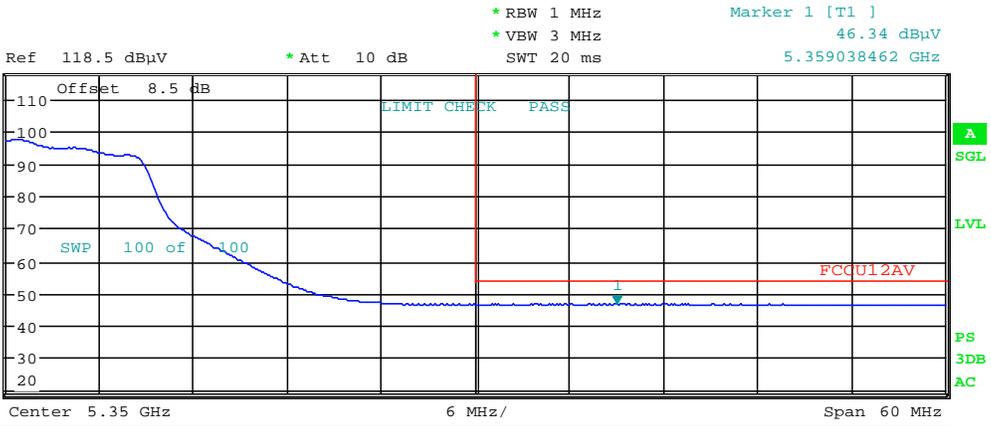



Date: 22.JUN.2017 00:20:09

Plot 7-187. Radiated Restricted Band Edge Plot with WCP

FCC ID: ZNFV30A		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1706070187-05.ZNF	Test Dates: 6/6 - 7/14/2017	EUT Type: Portable Handset		Page 153 of 211

7.7.5 Antenna-1 Radiated Band Edge Measurements (40MHz BW) §15.407(b.1)(b.2) §15.205 §15.209

Worst Case Mode: 802.11n (40MHz)
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5190MHz
 Channel: 38

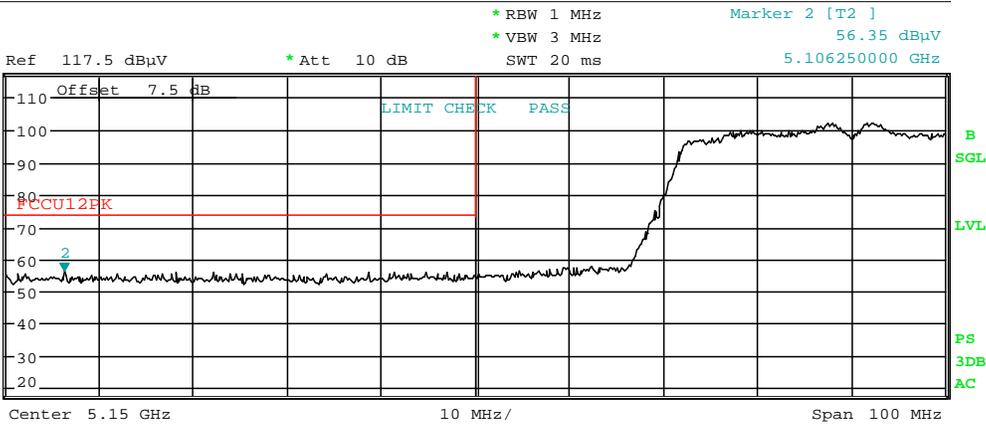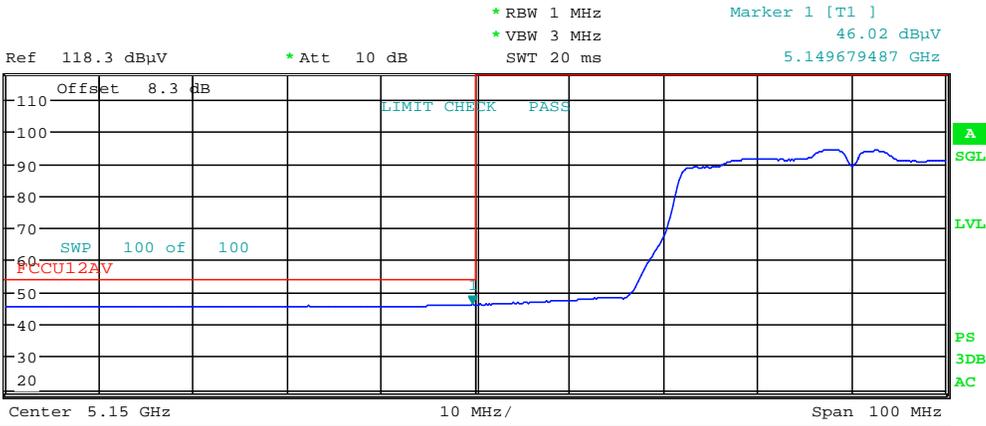

Date: 21.JUN.2017 21:09:29

Plot 7-188. Radiated Restricted Lower Band Edge Plot (Average & Peak – UNII Band 1)

FCC ID: ZNFV30A	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1706070187-05.ZNF	Test Dates: 6/6 - 7/14/2017	EUT Type: Portable Handset		Page 154 of 211

Antenna-1 Radiated Band Edge Measurements (40MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209



Worst Case Mode: 802.11n (40MHz)

Worst Case Transfer Rate: MCS0

Distance of Measurements: 3 Meters

Operating Frequency: 5310MHz

Channel: 62

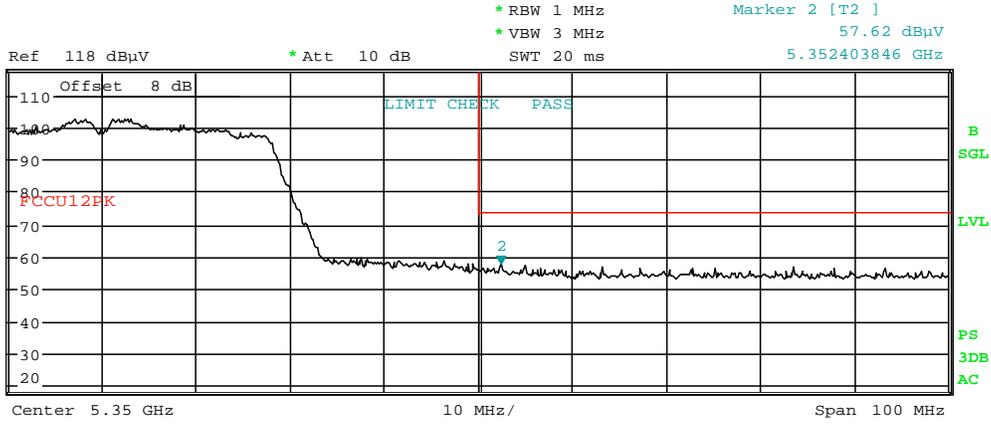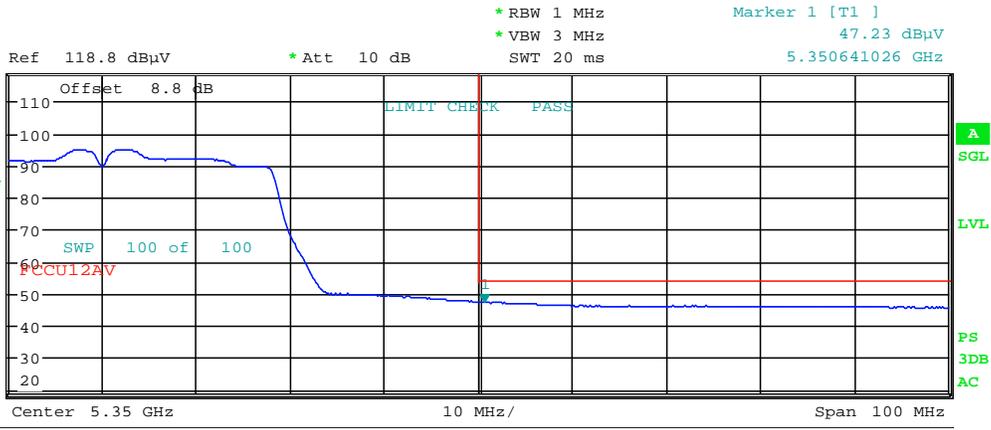

Date: 21.JUN.2017 21:19:49

Plot 7-189. Radiated Restricted Upper Band Edge Plot (Average & Peak – UNII Band 2A)

FCC ID: ZNFV30A	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1706070187-05.ZNF	Test Dates: 6/6 - 7/14/2017	EUT Type: Portable Handset		Page 155 of 211

Antenna-1 Radiated Band Edge Measurements (40MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209



Worst Case Mode: 802.11n (40MHz)

Worst Case Transfer Rate: MCS0

Distance of Measurements: 3 Meters

Operating Frequency: 5510MHz

Channel: 102

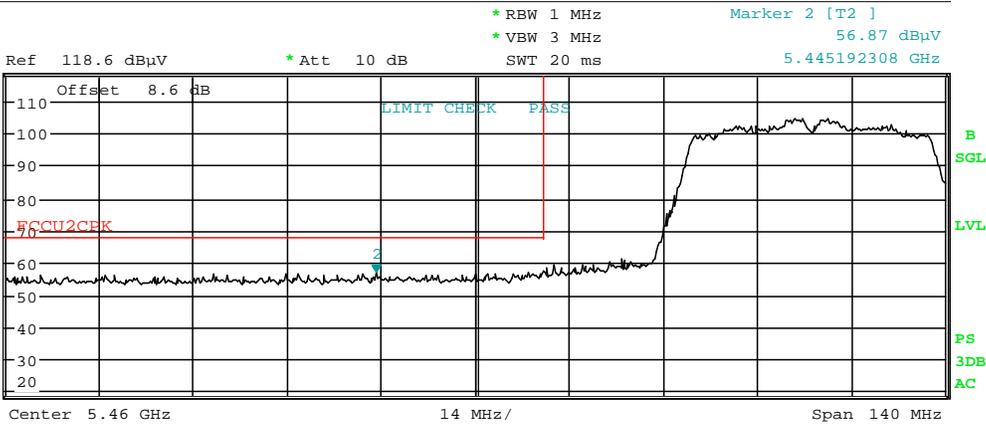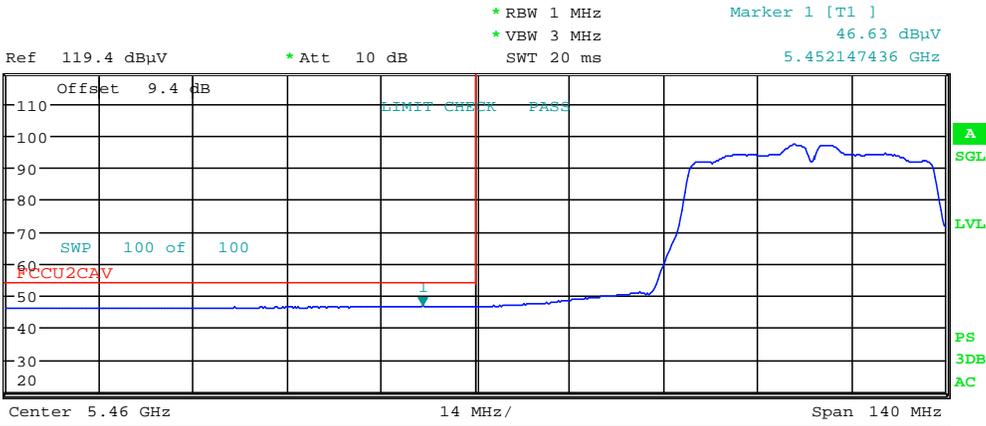


Date: 21.JUN.2017 21:25:35

Plot 7-190. Radiated Restricted Lower Band Edge Plot (Average & Peak – UNII Band 2C)

FCC ID: ZNFV30A		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1706070187-05.ZNF	Test Dates: 6/6 - 7/14/2017	EUT Type: Portable Handset		Page 156 of 211

Antenna-1 Radiated Band Edge Measurements (40MHz BW)
§15.407(b.1)(b.2) §15.205 §15.209

Worst Case Mode: 802.11n (40MHz)
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5795MHz
 Channel: 159

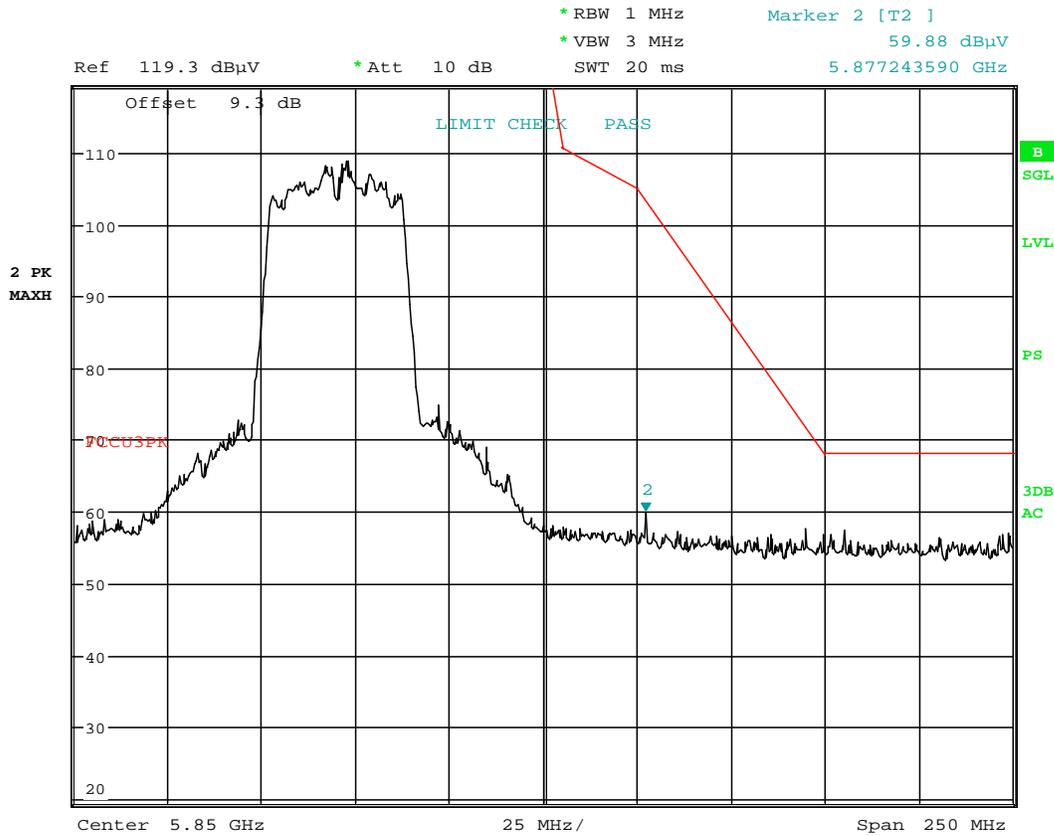

Date: 21.JUN.2017 01:48:57

Plot 7-191. Radiated Upper Band Edge Plot (Peak – UNII Band 3)

FCC ID: ZNFV30A	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1706070187-05.ZNF	Test Dates: 6/6 - 7/14/2017	EUT Type: Portable Handset		Page 157 of 211

Antenna-1 WCP Radiated Band Edge Measurements (40MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209



Worst Case Mode: 802.11a

Worst Case Transfer Rate: 6 Mbps

Distance of Measurements: 3 Meters

Operating Frequency: 5310MHz

Channel: 62

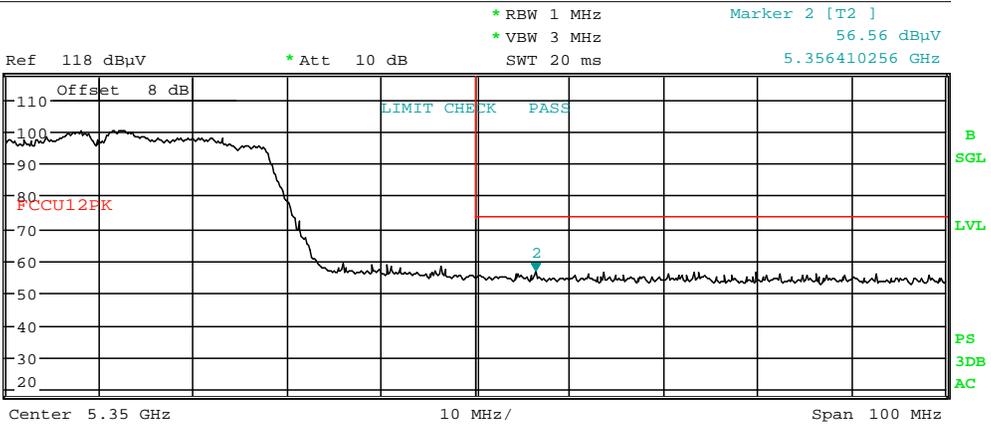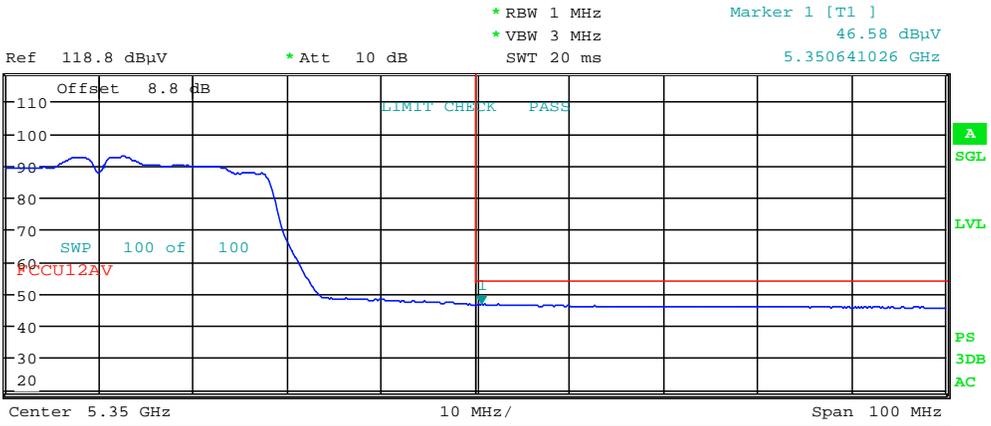



Date: 22.JUN.2017 00:21:33

Plot 7-192. Radiated Restricted Band Edge Plot with WCP

FCC ID: ZNFV30A		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1706070187-05.ZNF	Test Dates: 6/6 - 7/14/2017	EUT Type: Portable Handset		Page 158 of 211

Antenna-1 Radiated Band Edge Measurements (80MHz BW)
§15.407(b.1)(b.2) §15.205 §15.209

Worst Case Mode: 802.11ac (80MHz)
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5290MHz
 Channel: 58

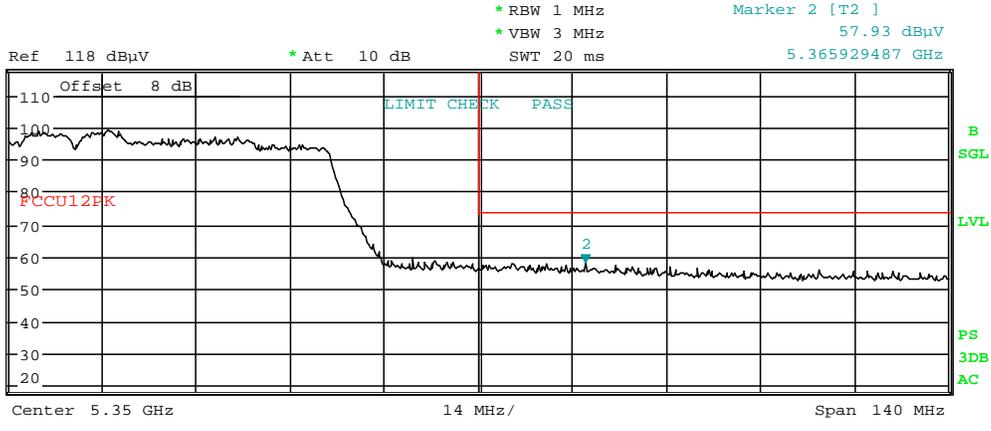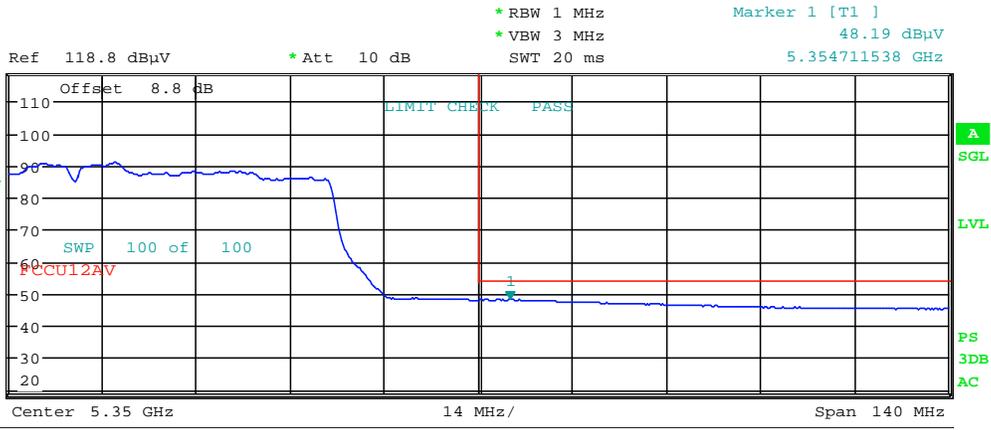



Date: 21.JUN.2017 21:20:58

Plot 7-194. Radiated Restricted Upper Band Edge Plot (Average & Peak – UNII Band 2A)

FCC ID: ZNFV30A	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1706070187-05.ZNF	Test Dates: 6/6 - 7/14/2017	EUT Type: Portable Handset		Page 160 of 211

Antenna-1 Radiated Band Edge Measurements (80MHz BW)
§15.407(b.1)(b.2) §15.205 §15.209

Worst Case Mode: 802.11ac (80MHz)
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5530MHz
 Channel: 106

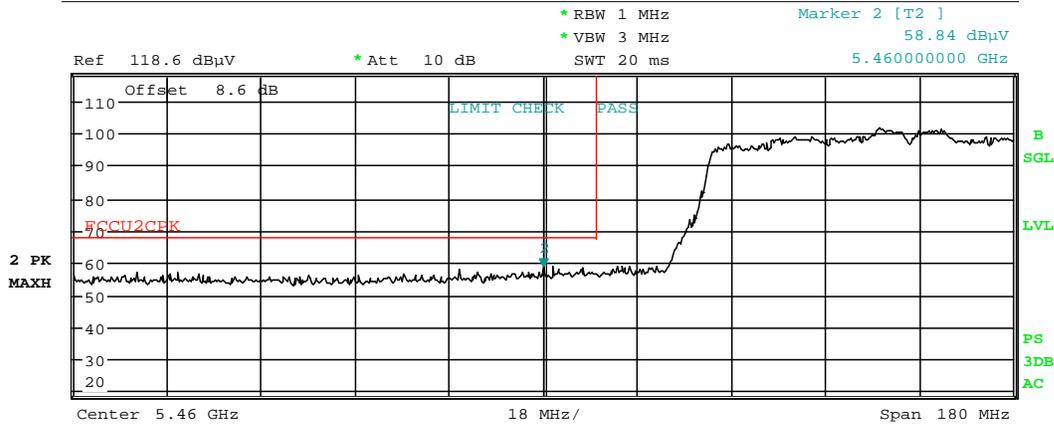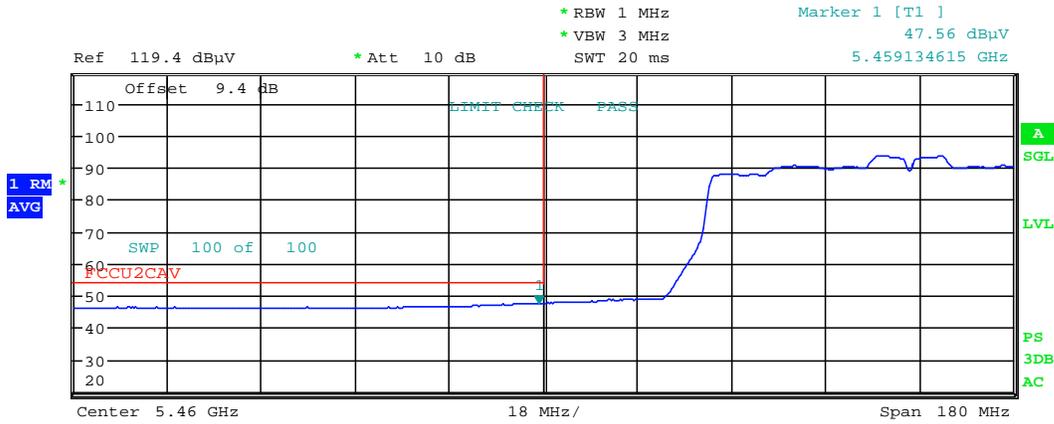


Date: 21.JUN.2017 01:41:40

Plot 7-195. Radiated Restricted Lower Band Edge Plot (Average & Peak – UNII Band 2C)

FCC ID: ZNFV30A	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1706070187-05.ZNF	Test Dates: 6/6 - 7/14/2017	EUT Type: Portable Handset		Page 161 of 211

Antenna-1 Radiated Band Edge Measurements (80MHz BW)
§15.407(b.1)(b.2) §15.205 §15.209

Worst Case Mode: 802.11ac (80MHz)
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5775MHz
 Channel: 155

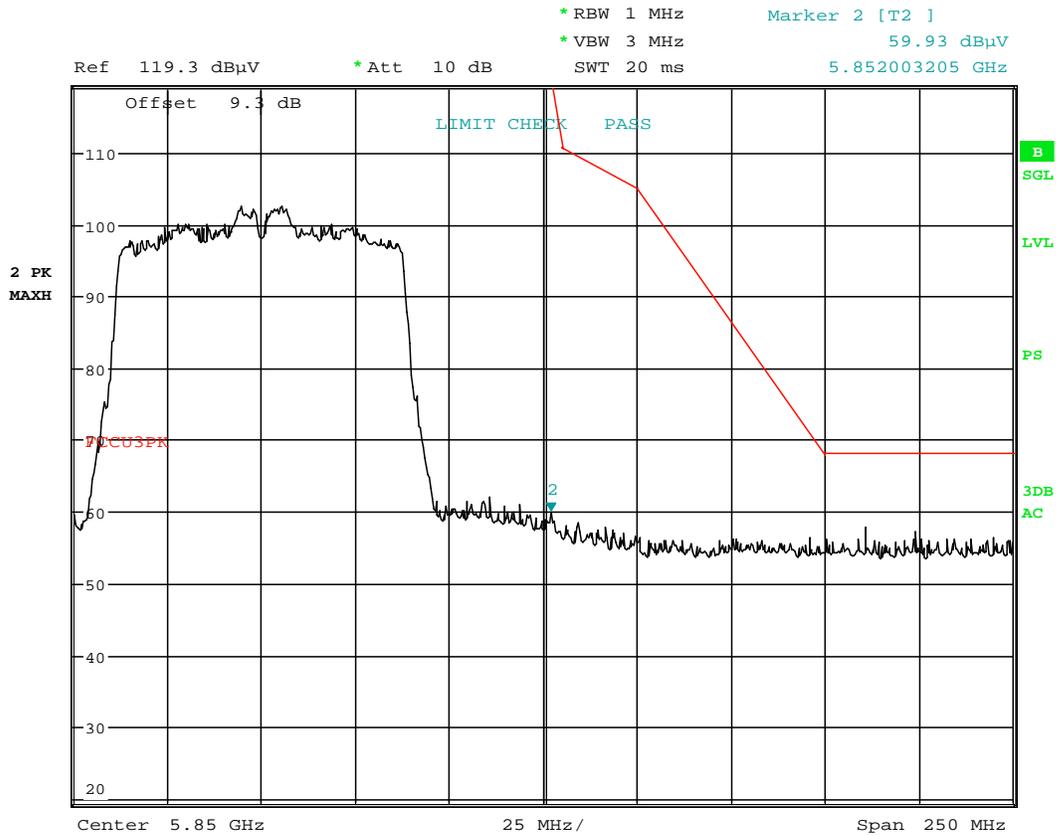



Date: 21.JUN.2017 01:50:35

Plot 7-196. Radiated Upper Band Edge Plot (Peak – UNII Band 3)

FCC ID: ZNFV30A	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1706070187-05.ZNF	Test Dates: 6/6 - 7/14/2017	EUT Type: Portable Handset		Page 162 of 211

Antenna-1 WCP Radiated Band Edge Measurements (80MHz BW)
§15.407(b.1)(b.2) §15.205 §15.209

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 3 Meters
 Operating Frequency: 5290MHz
 Channel: 58

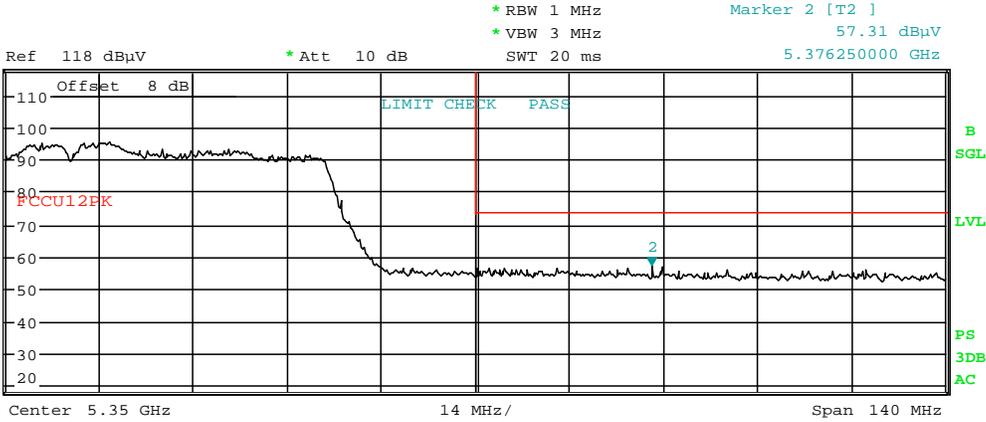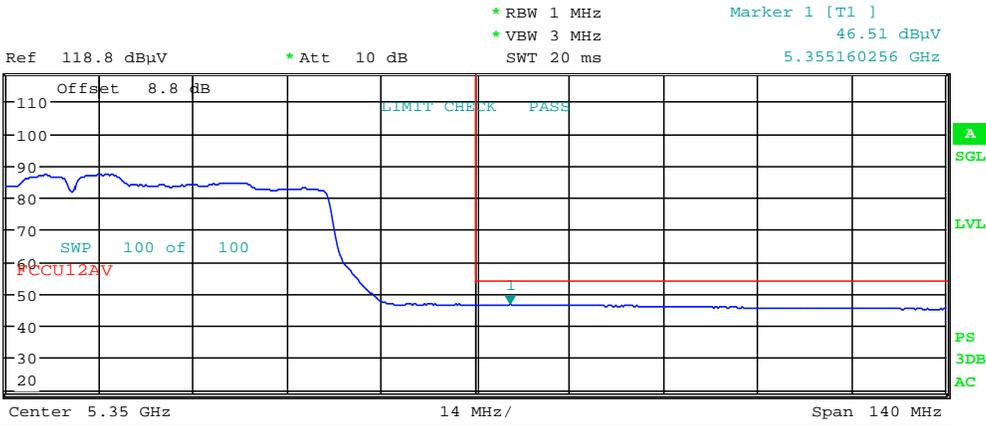

Date: 22.JUN.2017 00:22:40

Plot 7-197. Radiated Restricted Band Edge Plot with WCP

FCC ID: ZNFV30A		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1706070187-05.ZNF	Test Dates: 6/6 - 7/14/2017	EUT Type: Portable Handset		Page 163 of 211

7.7.7 Antenna-2 Radiated Band Edge Measurements (20MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209



Worst Case Mode: 802.11a

Worst Case Transfer Rate: 6 Mbps

Distance of Measurements: 3 Meters

Operating Frequency: 5180MHz

Channel: 36

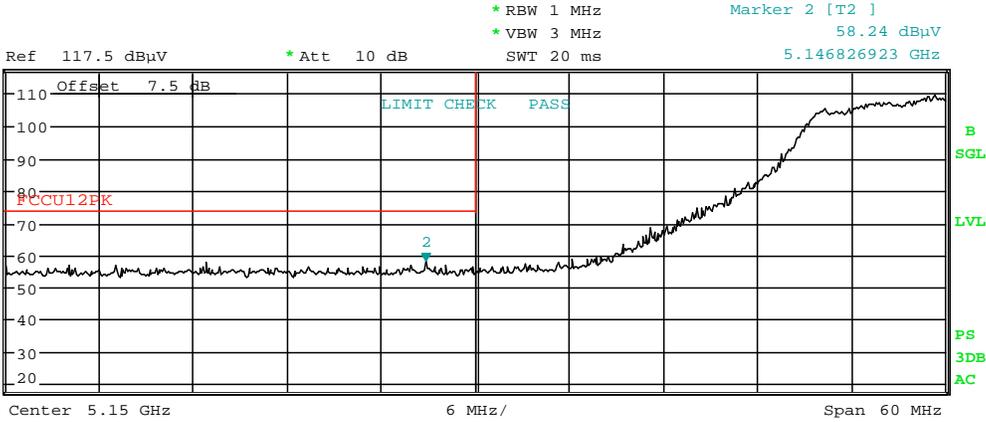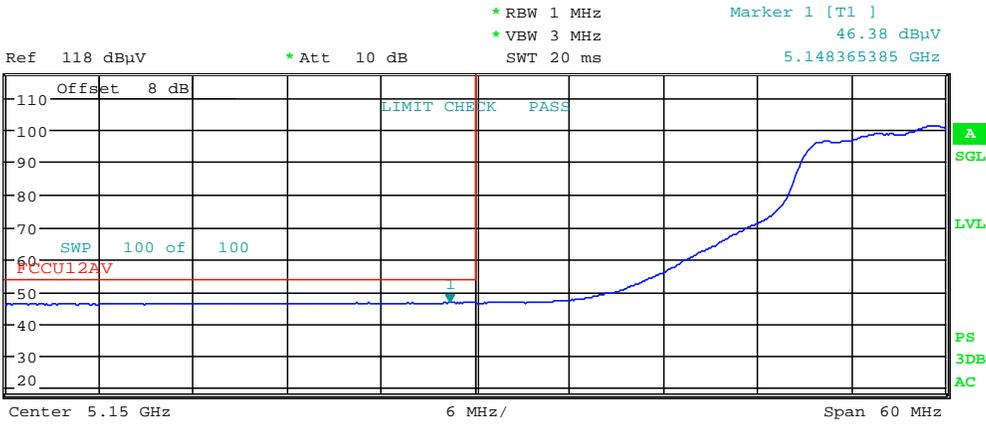

Date: 21.JUN.2017 22:12:47

Plot 7-198. Radiated Restricted Lower Band Edge Plot (Average & Peak – UNII Band 1)

FCC ID: ZNFV30A	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1706070187-05.ZNF	Test Dates: 6/6 - 7/14/2017	EUT Type: Portable Handset		Page 164 of 211

Antenna-2 Radiated Band Edge Measurements (20MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209



Worst Case Mode: 802.11a

Worst Case Transfer Rate: 6 Mbps

Distance of Measurements: 3 Meters

Operating Frequency: 5320MHz

Channel: 64

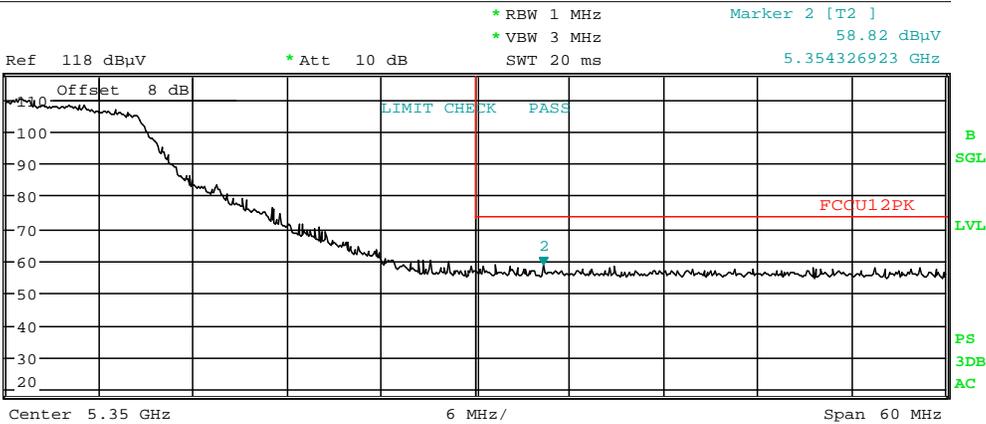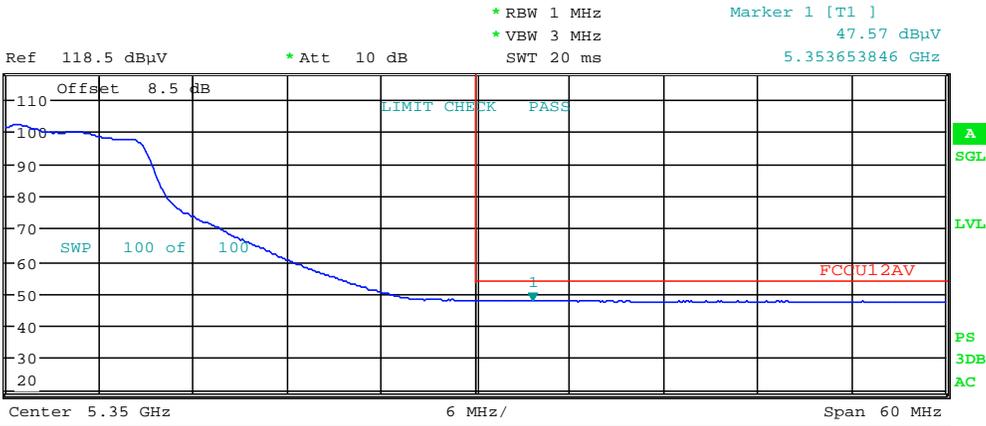

Date: 21.JUN.2017 22:23:14

Plot 7-199. Radiated Restricted Upper Band Edge Plot (Average & Peak – UNII Band 2A)

FCC ID: ZNFV30A		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1706070187-05.ZNF	Test Dates: 6/6 - 7/14/2017	EUT Type: Portable Handset		Page 165 of 211

Antenna-2 Radiated Band Edge Measurements (20MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209



Worst Case Mode: 802.11a

Worst Case Transfer Rate: 6 Mbps

Distance of Measurements: 3 Meters

Operating Frequency: 5500MHz

Channel: 100

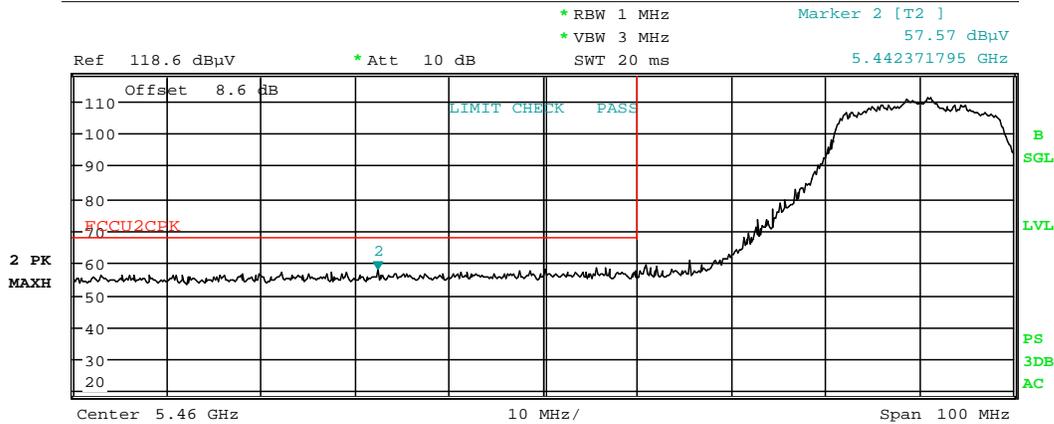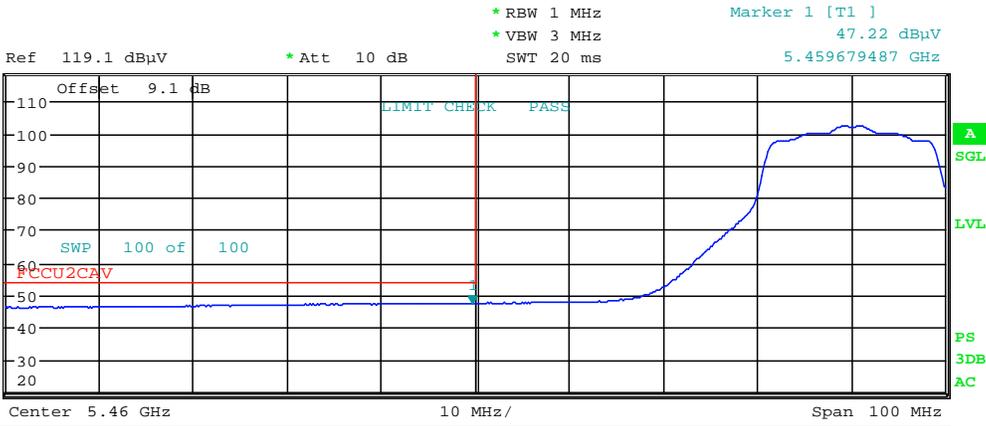


Date: 21.JUN.2017 22:37:02

Plot 7-200. Radiated Restricted Lower Band Edge Plot (Average & Peak – UNII Band 2C)

FCC ID: ZNFV30A		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1706070187-05.ZNF	Test Dates: 6/6 - 7/14/2017	EUT Type: Portable Handset		Page 166 of 211

Antenna-2 Radiated Band Edge Measurements (20MHz BW)
§15.407(b.1)(b.2) §15.205 §15.209

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 3 Meters
 Operating Frequency: 5825MHz
 Channel: 165

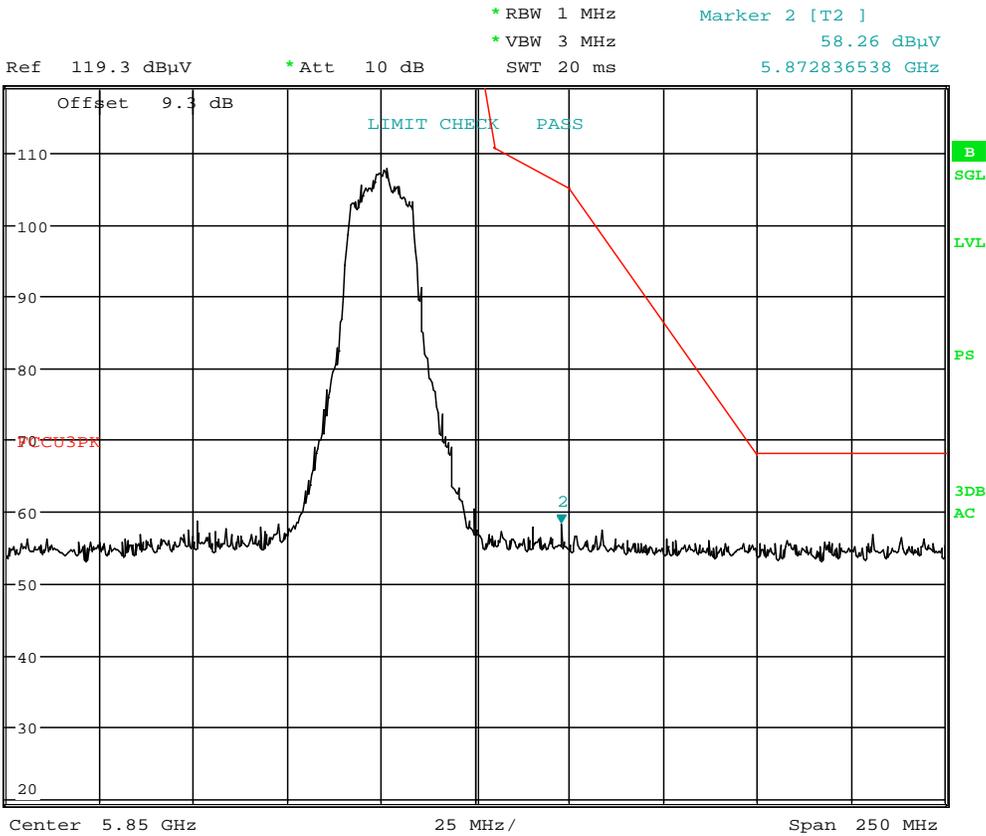



Date: 21.JUN.2017 22:40:58

Plot 7-201. Radiated Upper Band Edge Plot (Peak – UNII Band 3)

FCC ID: ZNFV30A	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1706070187-05.ZNF	Test Dates: 6/6 - 7/14/2017	EUT Type: Portable Handset		Page 167 of 211

Antenna-2 WCP Radiated Band Edge Measurements (20MHz BW)
§15.407(b.1)(b.2) §15.205 §15.209

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 3 Meters
 Operating Frequency: 5320MHz
 Channel: 64

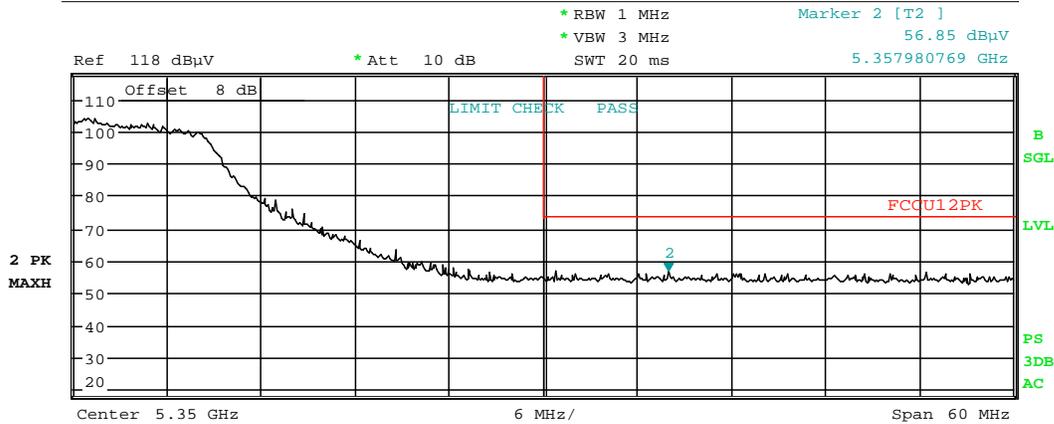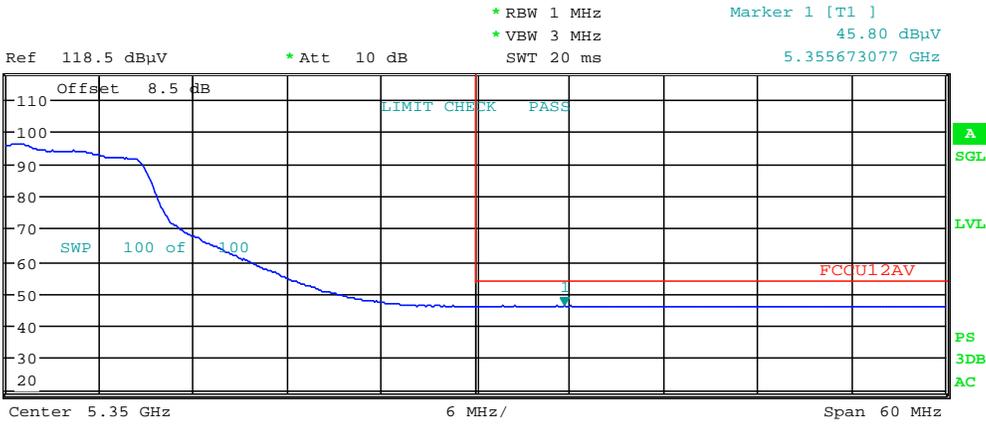



Date: 22.JUN.2017 00:33:49

Plot 7-202. Radiated Restricted Band Edge Plot with WCP

FCC ID: ZNFV30A		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1706070187-05.ZNF	Test Dates: 6/6 - 7/14/2017	EUT Type: Portable Handset		Page 168 of 211

7.7.8 Antenna-2 Radiated Band Edge Measurements (40MHz BW) §15.407(b.1)(b.2) §15.205 §15.209

Worst Case Mode: 802.11n (40MHz)
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5190MHz
 Channel: 38

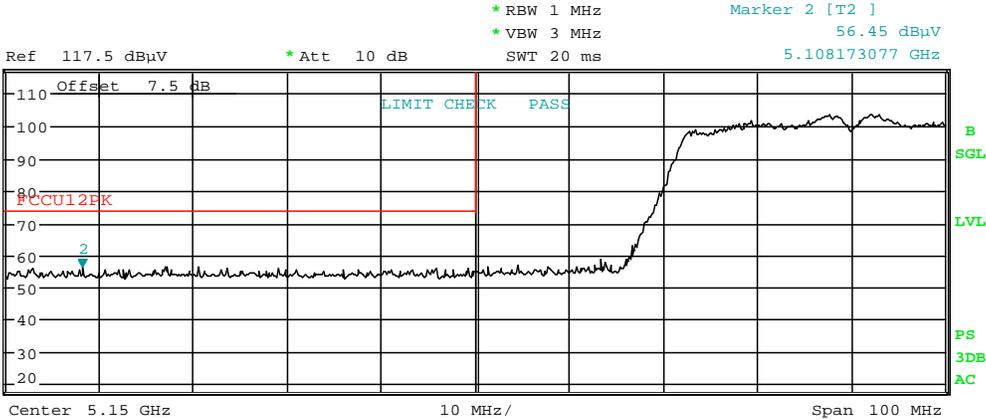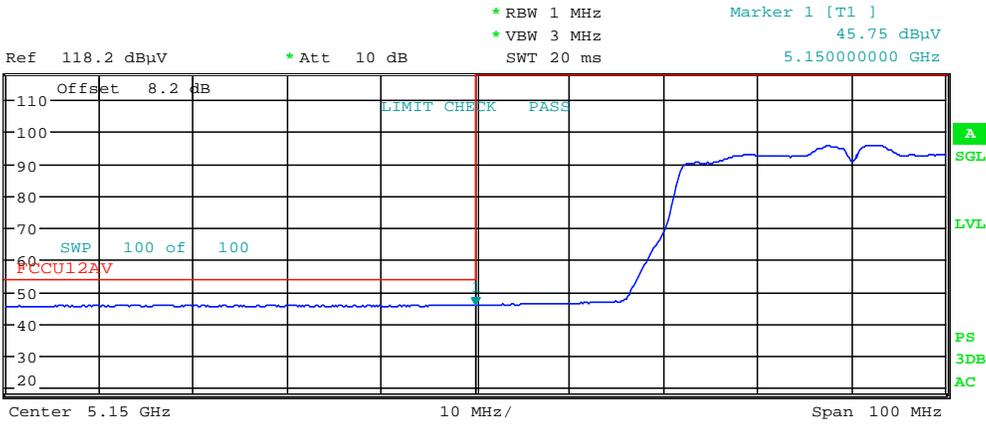



Date: 21.JUN.2017 22:13:52

Plot 7-203. Radiated Restricted Lower Band Edge Plot (Average & Peak – UNII Band 1)

FCC ID: ZNFV30A		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1706070187-05.ZNF	Test Dates: 6/6 - 7/14/2017	EUT Type: Portable Handset		Page 169 of 211

Antenna-2 Radiated Band Edge Measurements (40MHz BW)
§15.407(b.1)(b.2) §15.205 §15.209

Worst Case Mode: 802.11n (40MHz)
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5310MHz
 Channel: 62

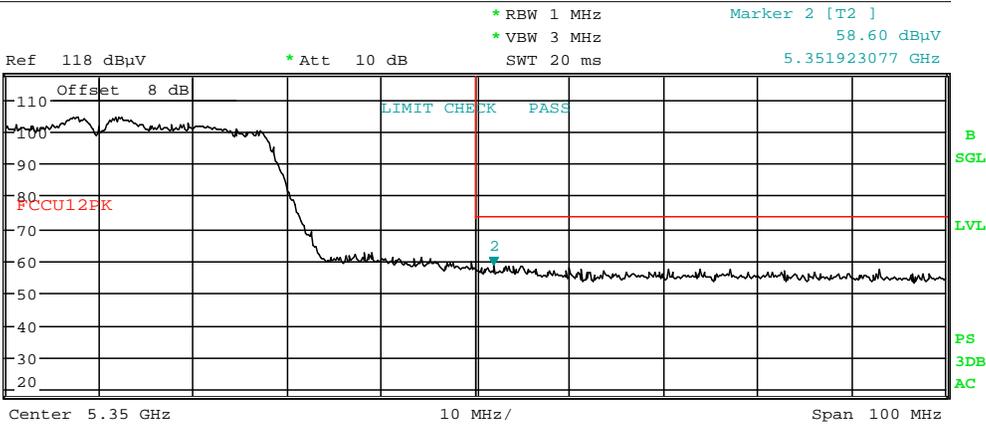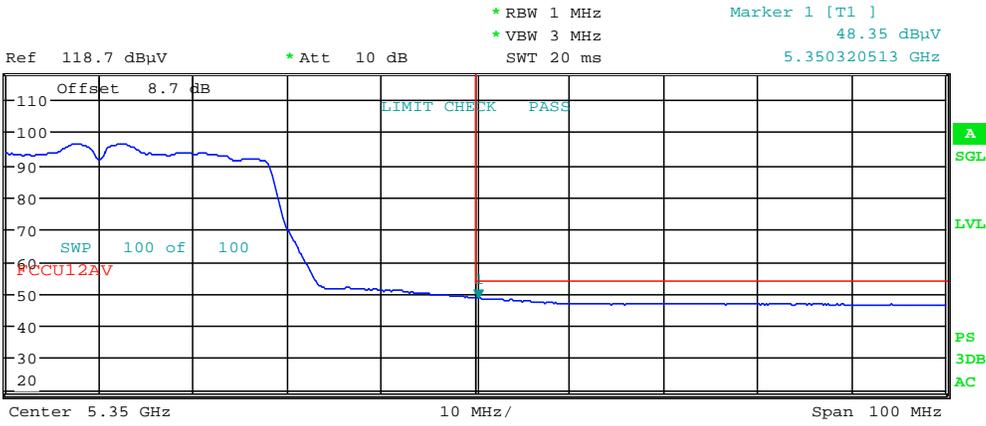




Date: 21.JUN.2017 22:24:18

Plot 7-204. Radiated Restricted Upper Band Edge Plot (Average & Peak – UNII Band 2A)

FCC ID: ZNFV30A	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1706070187-05.ZNF	Test Dates: 6/6 - 7/14/2017	EUT Type: Portable Handset		Page 170 of 211

Antenna-2 Radiated Band Edge Measurements (40MHz BW)
§15.407(b.1)(b.2) §15.205 §15.209

Worst Case Mode: 802.11n (40MHz)
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5510MHz
 Channel: 102

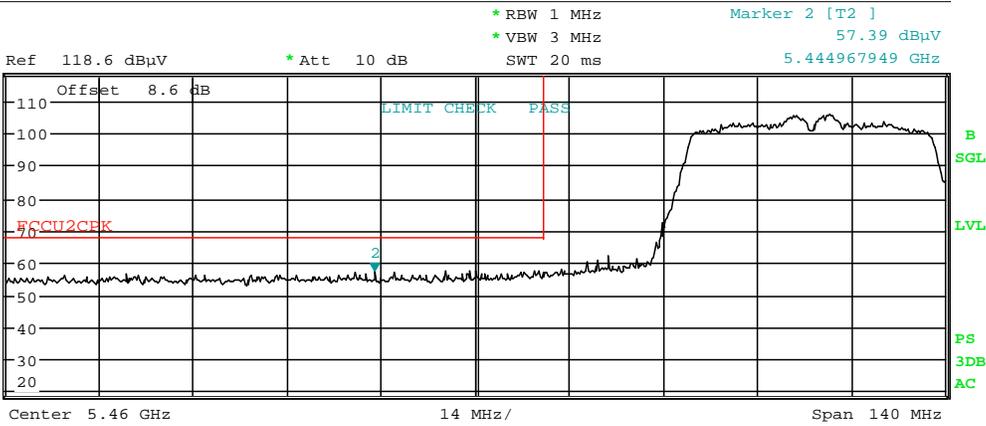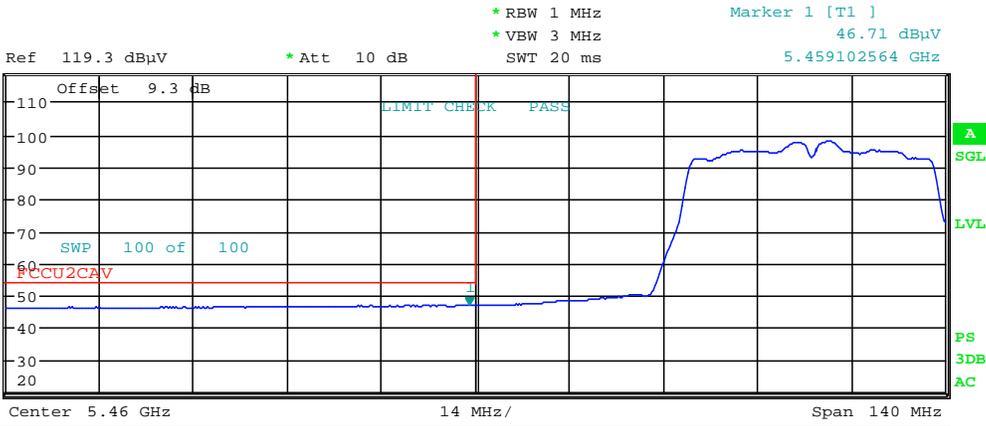

Date: 21.JUN.2017 22:38:06


Plot 7-205. Radiated Restricted Lower Band Edge Plot (Average & Peak – UNII Band 2C)

FCC ID: ZNFV30A		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1706070187-05.ZNF	Test Dates: 6/6 - 7/14/2017	EUT Type: Portable Handset		Page 171 of 211

Antenna-2 Radiated Band Edge Measurements (40MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209

Worst Case Mode: 802.11n (40MHz)
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5795MHz
 Channel: 159

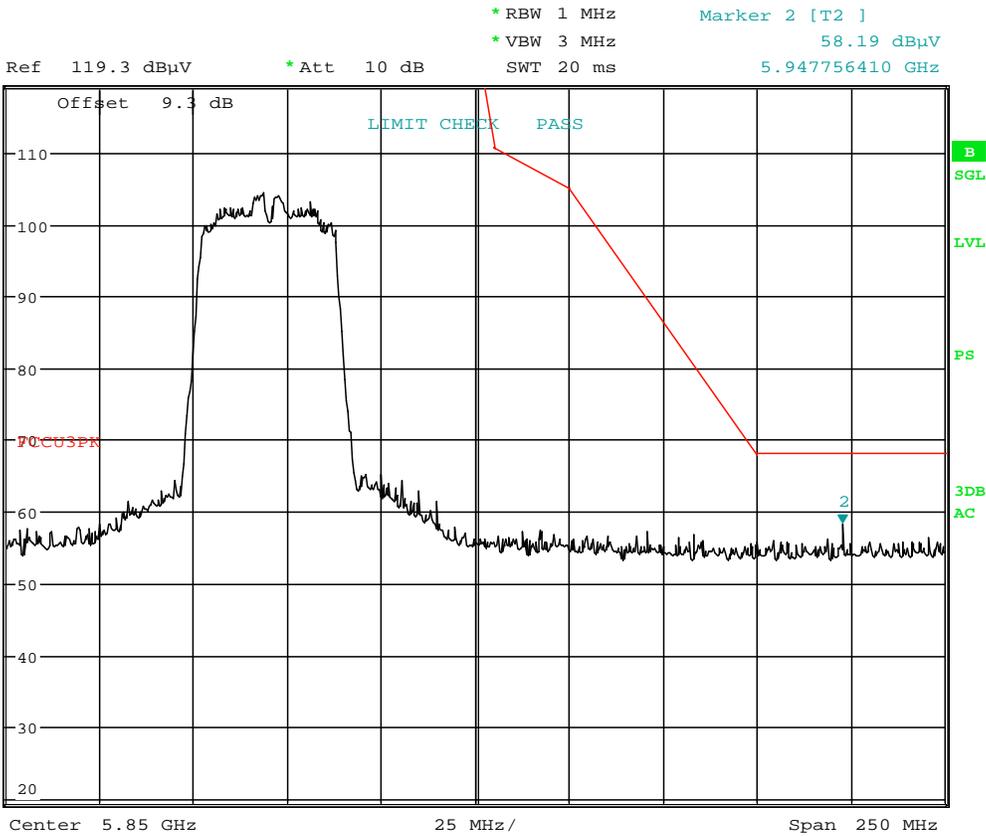

Date: 21.JUN.2017 22:42:36

Plot 7-206. Radiated Upper Band Edge Plot (Peak – UNII Band 3)

FCC ID: ZNFV30A		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1706070187-05.ZNF	Test Dates: 6/6 - 7/14/2017	EUT Type: Portable Handset		Page 172 of 211

Antenna-2 WCP Radiated Band Edge Measurements (40MHz BW)
§15.407(b.1)(b.2) §15.205 §15.209



Worst Case Mode: 802.11a

Worst Case Transfer Rate: 6 Mbps

Distance of Measurements: 3 Meters

Operating Frequency: 5310MHz

Channel: 62

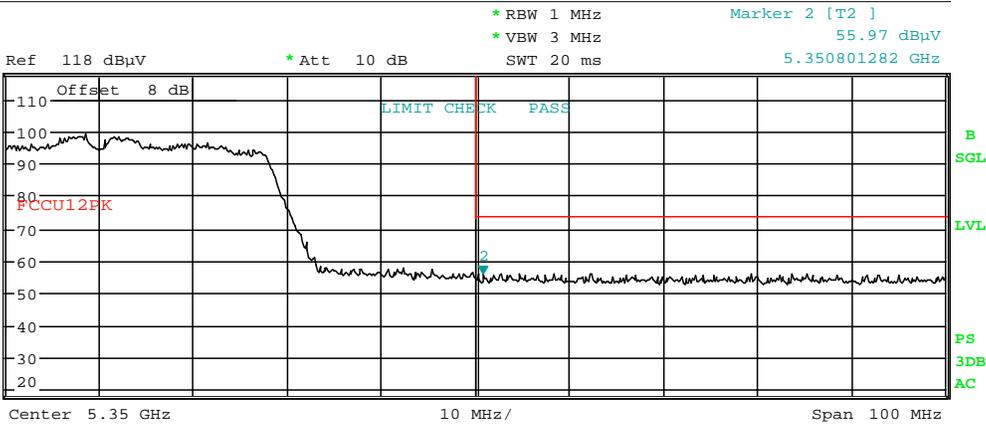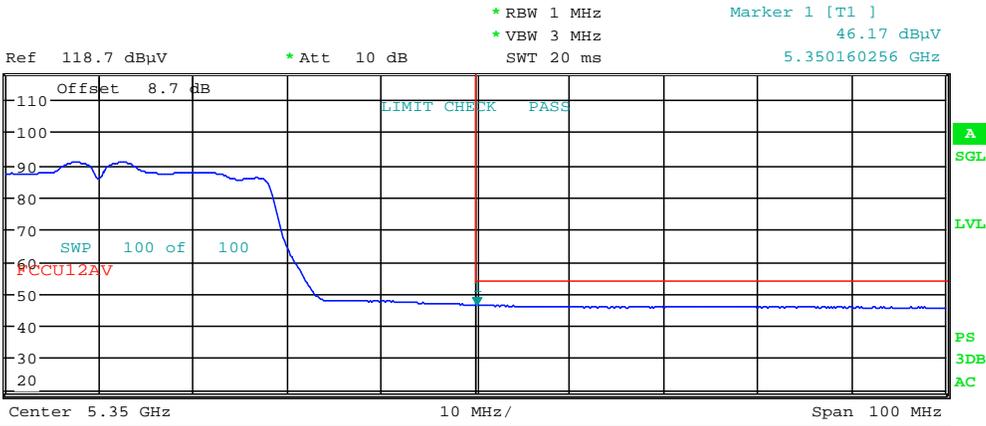

Date: 22.JUN.2017 00:35:39

Plot 7-207. Radiated Restricted Band Edge Plot with WCP

FCC ID: ZNFV30A		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1706070187-05.ZNF	Test Dates: 6/6 - 7/14/2017	EUT Type: Portable Handset		Page 173 of 211

7.7.9 Antenna-2 Radiated Band Edge Measurements (80MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209



Worst Case Mode: 802.11n (80MHz)

Worst Case Transfer Rate: MCS0

Distance of Measurements: 3 Meters

Operating Frequency: 5210MHz

Channel: 42

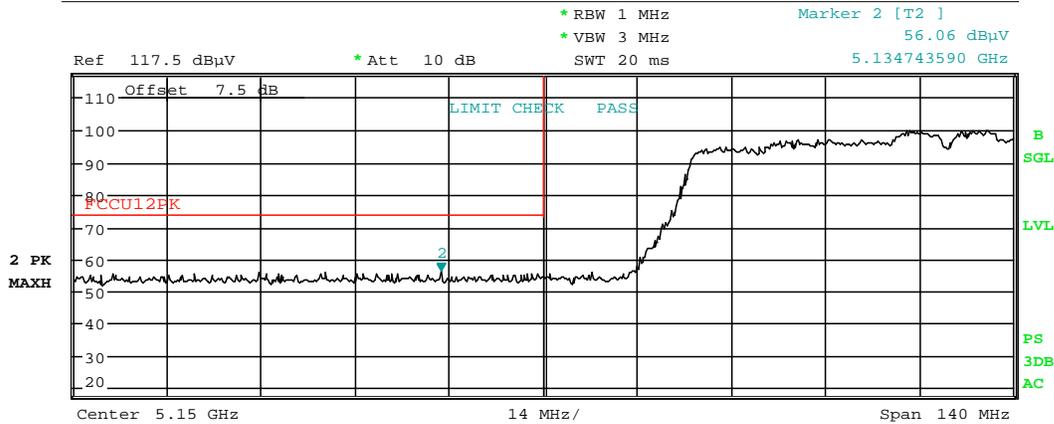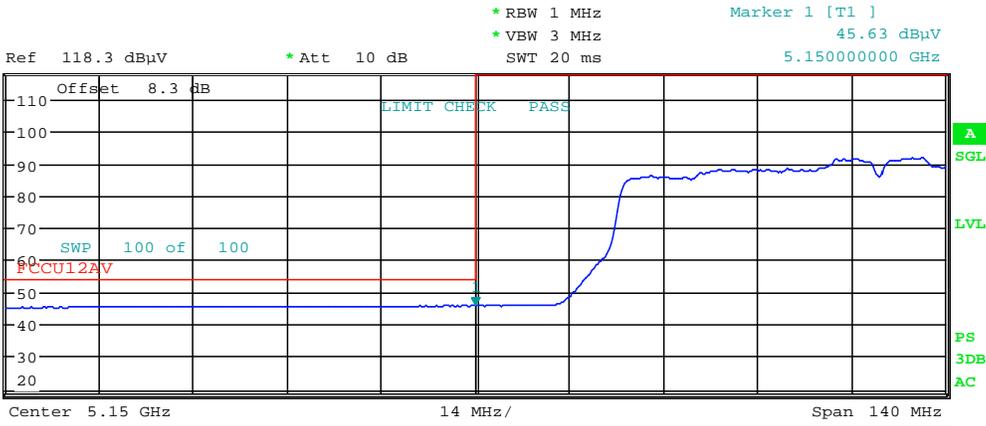



Date: 21.JUN.2017 22:14:50

Plot 7-208. Radiated Restricted Lower Band Edge Plot (Average & Peak – UNII Band 1)

FCC ID: ZNFV30A	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1706070187-05.ZNF	Test Dates: 6/6 - 7/14/2017	EUT Type: Portable Handset		Page 174 of 211

Antenna-2 Radiated Band Edge Measurements (80MHz BW)
§15.407(b.1)(b.2) §15.205 §15.209

Worst Case Mode: 802.11ac (80MHz)
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5290MHz
 Channel: 58

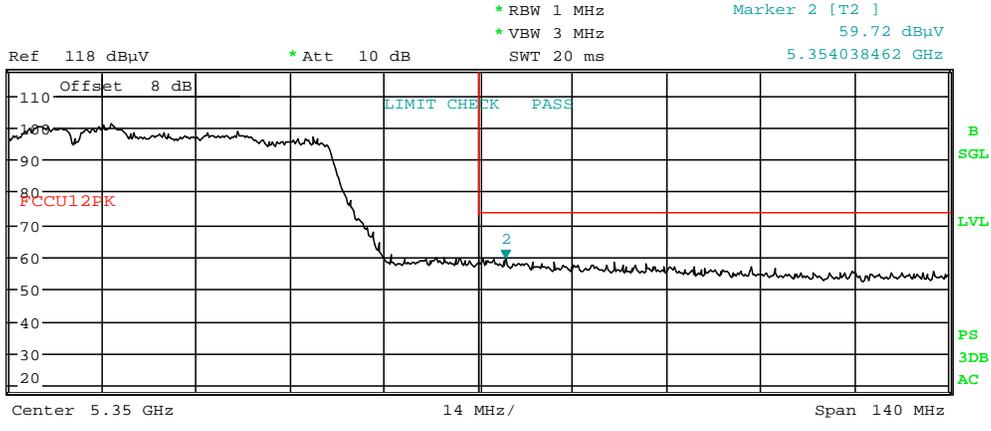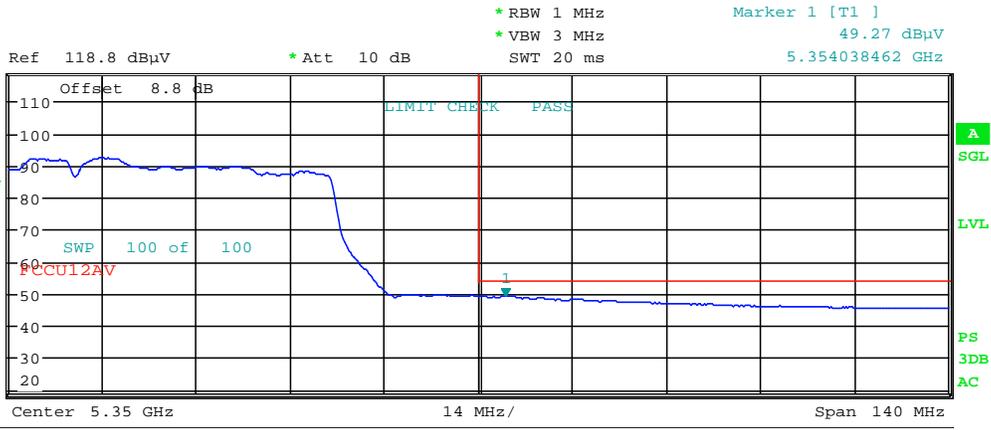



Date: 21.JUN.2017 22:25:43

Plot 7-209. Radiated Restricted Upper Band Edge Plot (Average & Peak – UNII Band 2A)

FCC ID: ZNFV30A		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1706070187-05.ZNF	Test Dates: 6/6 - 7/14/2017	EUT Type: Portable Handset		Page 175 of 211

Antenna-2 Radiated Band Edge Measurements (80MHz BW)
§15.407(b.1)(b.2) §15.205 §15.209

Worst Case Mode: 802.11ac (80MHz)
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5530MHz
 Channel: 106

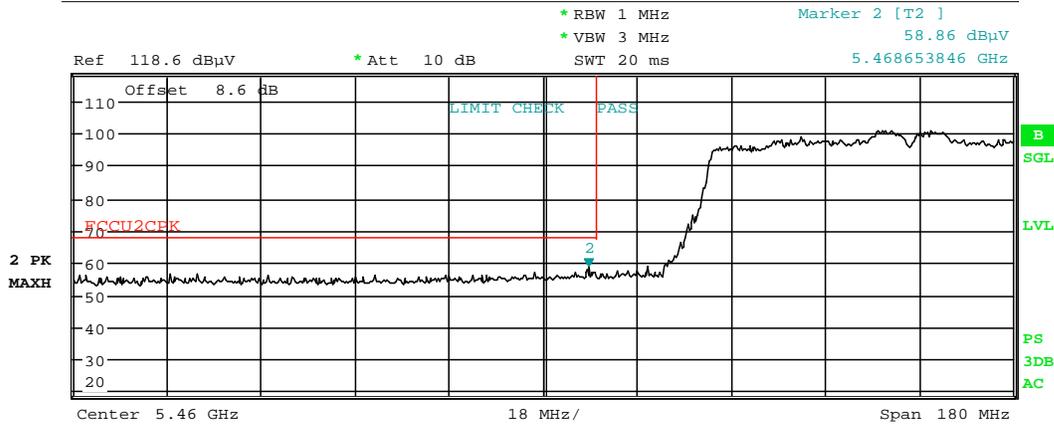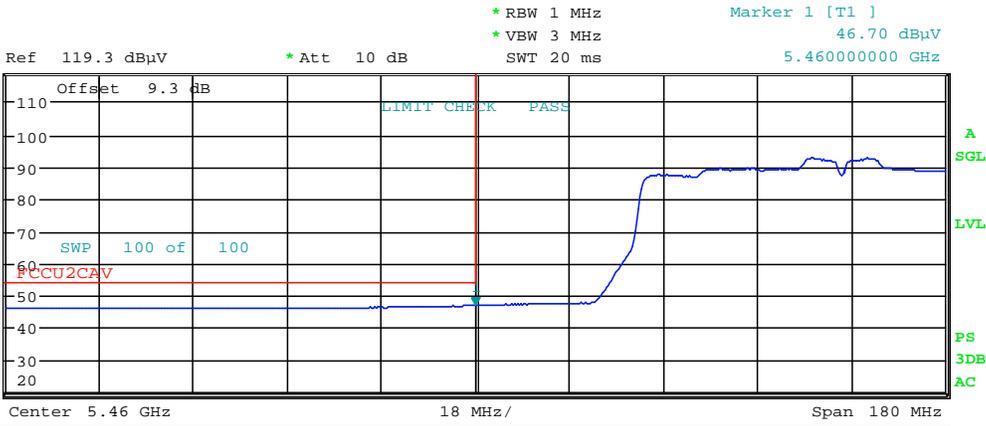


Date: 21.JUN.2017 22:39:11

Plot 7-210. Radiated Restricted Lower Band Edge Plot (Average & Peak – UNII Band 2C)

FCC ID: ZNFV30A	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1706070187-05.ZNF	Test Dates: 6/6 - 7/14/2017	EUT Type: Portable Handset		Page 176 of 211

Antenna-2 Radiated Band Edge Measurements (80MHz BW)
§15.407(b.1)(b.2) §15.205 §15.209

Worst Case Mode: 802.11ac (80MHz)
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5775MHz
 Channel: 155

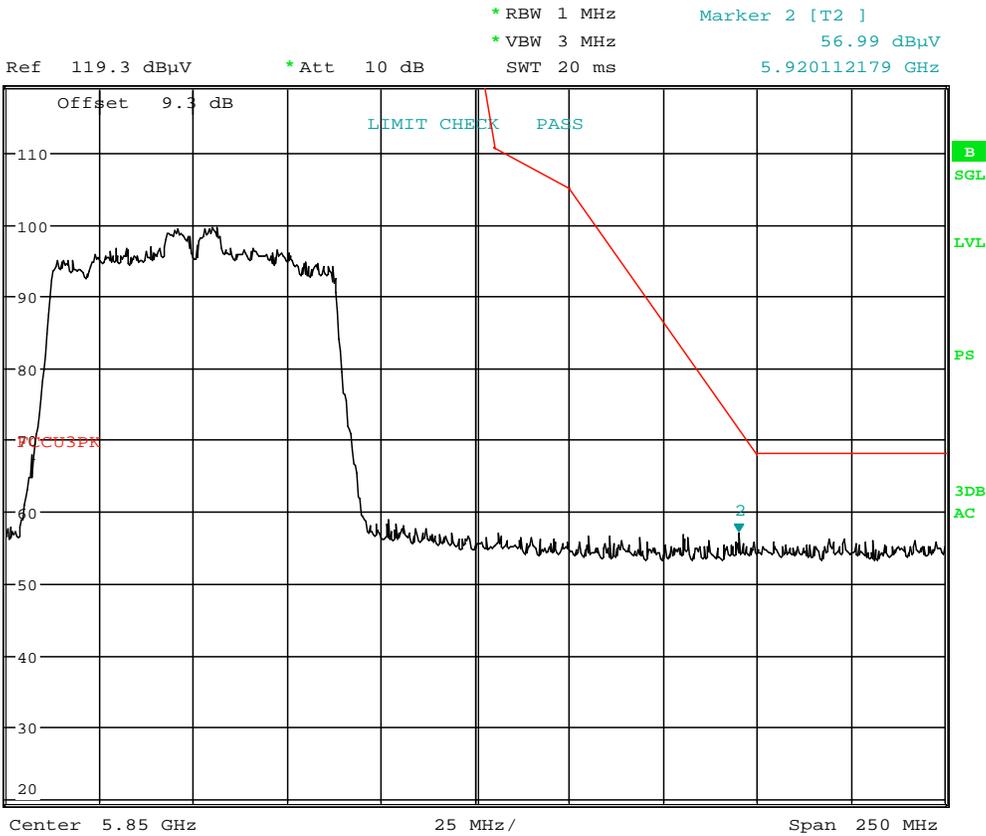



Date: 21.JUN.2017 22:40:10

Plot 7-211. Radiated Upper Band Edge Plot (Peak – UNII Band 3)

FCC ID: ZNFV30A	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1706070187-05.ZNF	Test Dates: 6/6 - 7/14/2017	EUT Type: Portable Handset	Page 177 of 211	

Antenna-2 WCP Radiated Band Edge Measurements (80MHz BW)
§15.407(b.1)(b.2) §15.205 §15.209

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 3 Meters
 Operating Frequency: 5290MHz
 Channel: 58

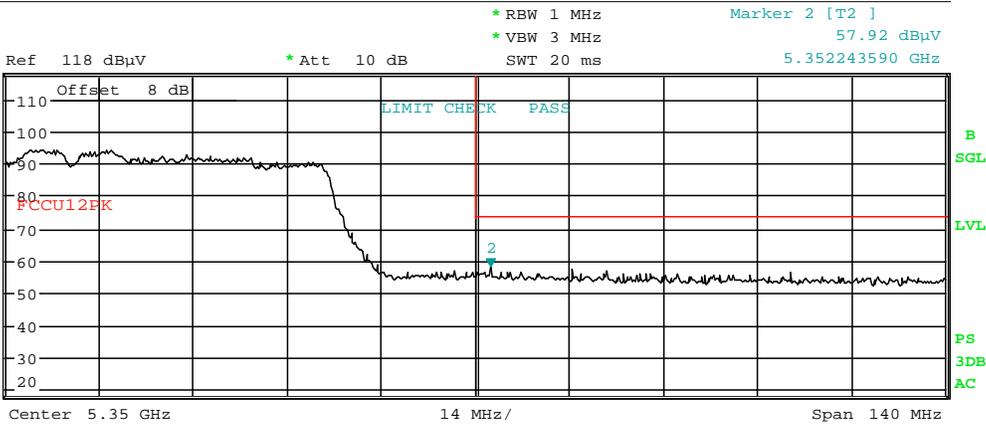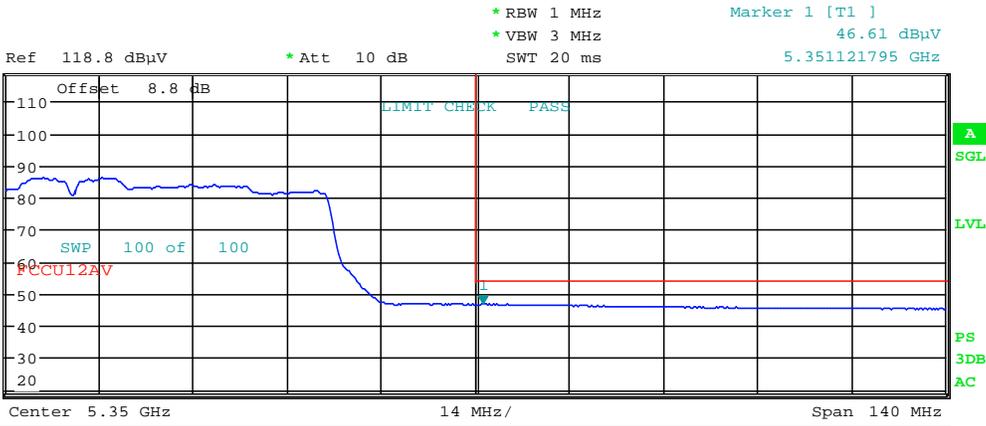

Date: 22.JUN.2017 00:36:35

Plot 7-212. Radiated Restricted Band Edge Plot with WCP

FCC ID: ZNFV30A		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1706070187-05.ZNF	Test Dates: 6/6 - 7/14/2017	EUT Type: Portable Handset		Page 178 of 211

7.7.10 MIMO Radiated Band Edge Measurements (20MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209



Worst Case Mode: 802.11n (20MHz)

Worst Case Transfer Rate: MCS8

Distance of Measurements: 3 Meters

Operating Frequency: 5180MHz

Channel: 36

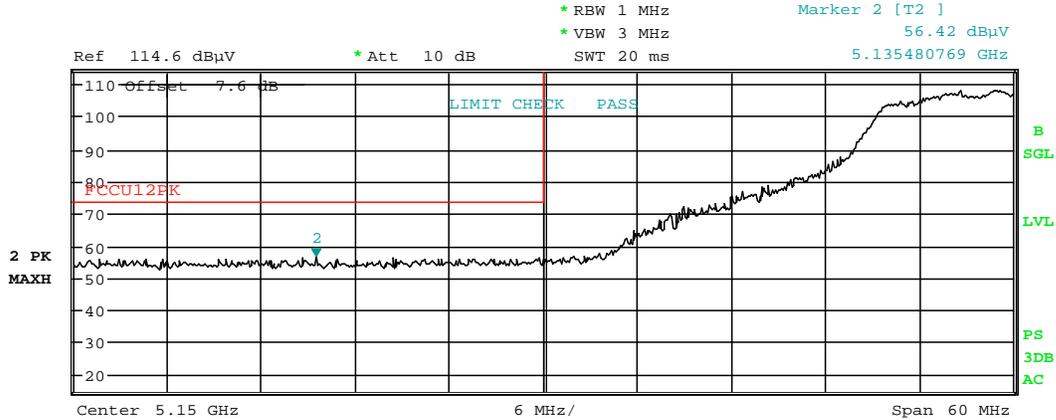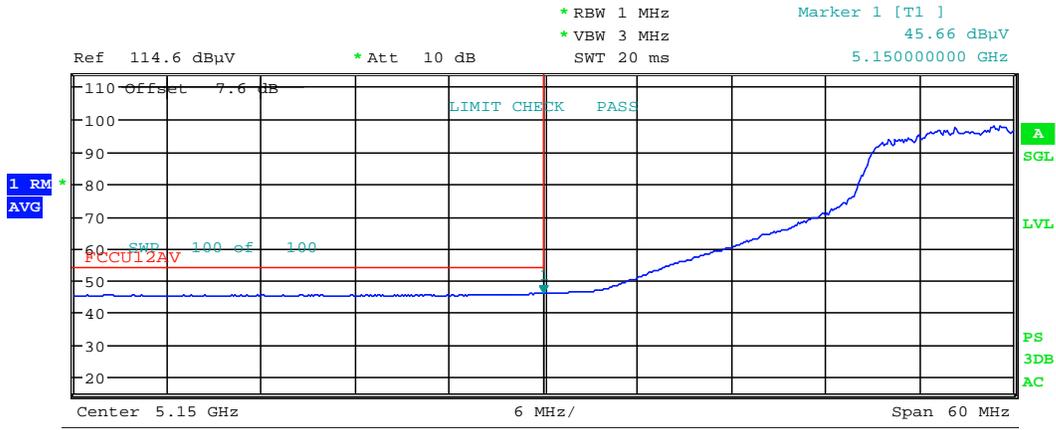

Date: 20.JUN.2017 00:48:15

Plot 7-213. Radiated Restricted Lower Band Edge Plot (Average & Peak – UNII Band 1)

FCC ID: ZNFV30A		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1706070187-05.ZNF	Test Dates: 6/6 - 7/14/2017	EUT Type: Portable Handset		Page 179 of 211

MIMO Radiated Band Edge Measurements (20MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209



Worst Case Mode: 802.11n (20MHz)

Worst Case Transfer Rate: MCS8

Distance of Measurements: 3 Meters

Operating Frequency: 5320MHz

Channel: 64

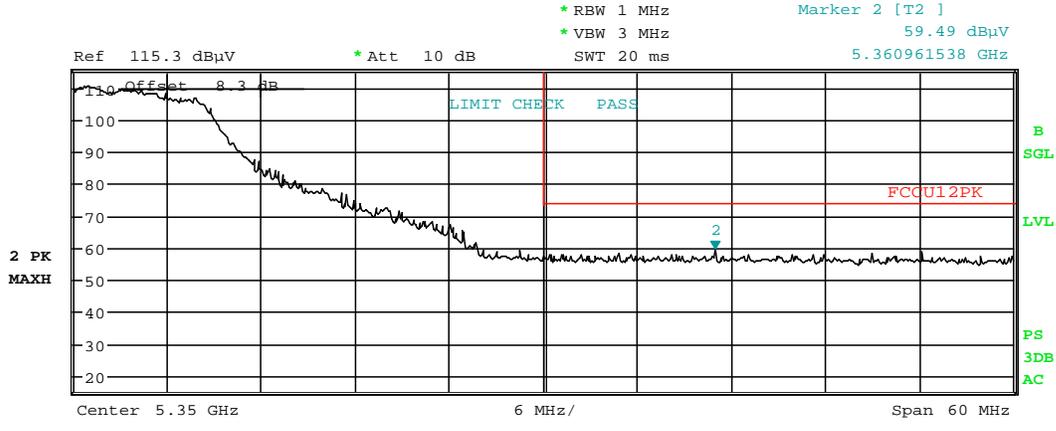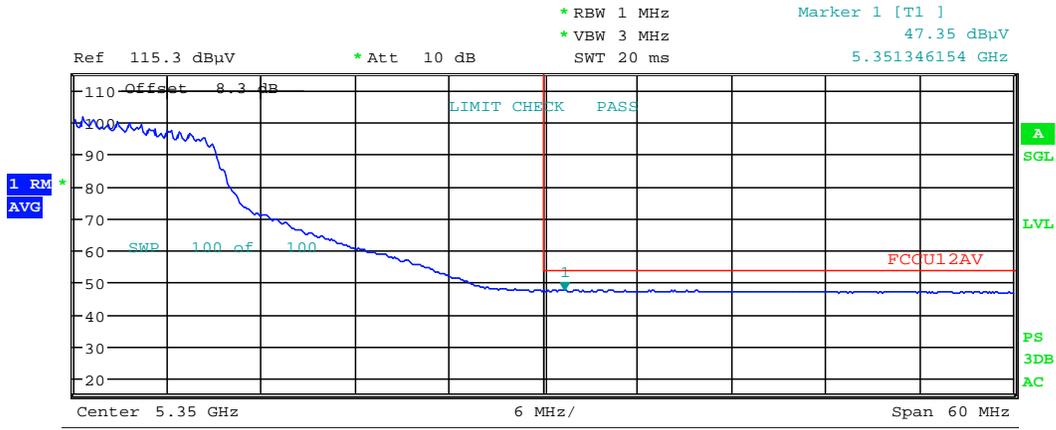

Date: 20.JUN.2017 00:32:57

Plot 7-214. Radiated Restricted Upper Band Edge Plot (Average & Peak – UNII Band 2A)

FCC ID: ZNFV30A		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1706070187-05.ZNF	Test Dates: 6/6 - 7/14/2017	EUT Type: Portable Handset		Page 180 of 211

MIMO Radiated Band Edge Measurements (20MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209



Worst Case Mode: 802.11n (20MHz)

Worst Case Transfer Rate: MCS8

Distance of Measurements: 3 Meters

Operating Frequency: 5500MHz

Channel: 100

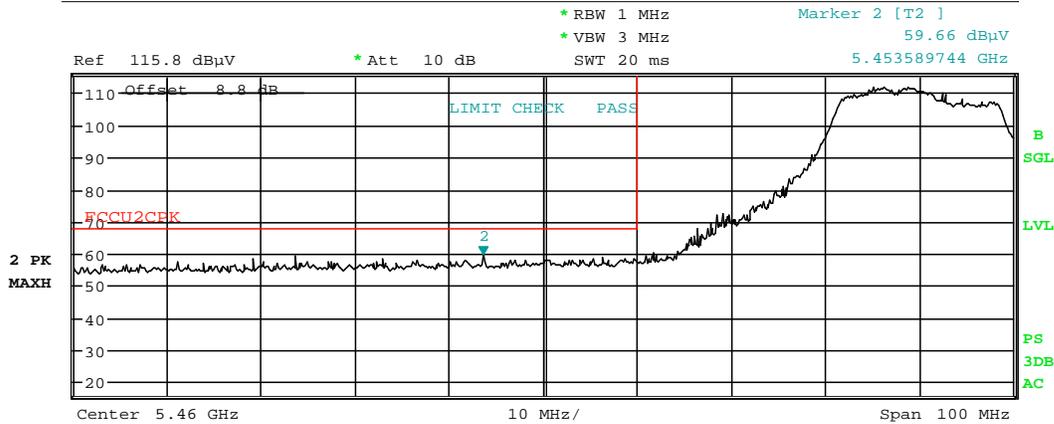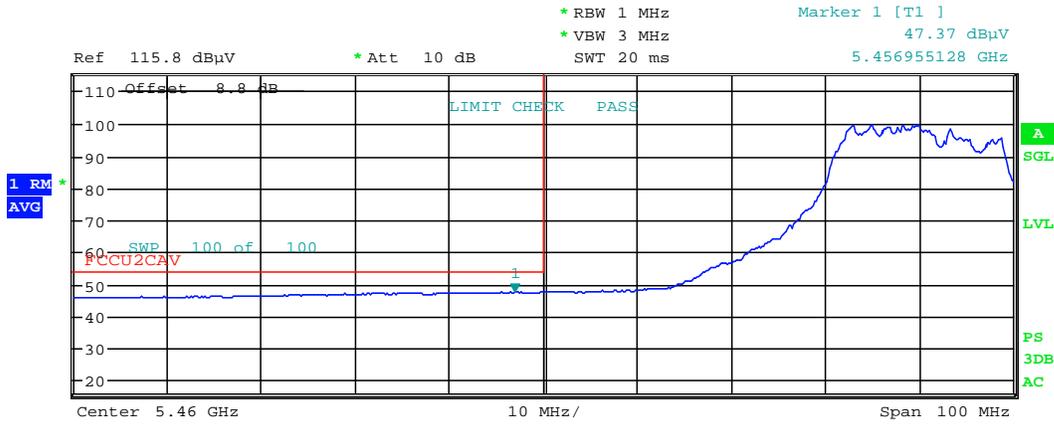

Date: 20.JUN.2017 00:27:14

Plot 7-215. Radiated Restricted Lower Band Edge Plot (Average & Peak – UNII Band 2C)

FCC ID: ZNFV30A		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1706070187-05.ZNF	Test Dates: 6/6 - 7/14/2017	EUT Type: Portable Handset		Page 181 of 211

MIMO Radiated Band Edge Measurements (20MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209


Worst Case Mode: 802.11n (20MHz)

Worst Case Transfer Rate: MCS8

Distance of Measurements: 3 Meters

Operating Frequency: 5825MHz

Channel: 165

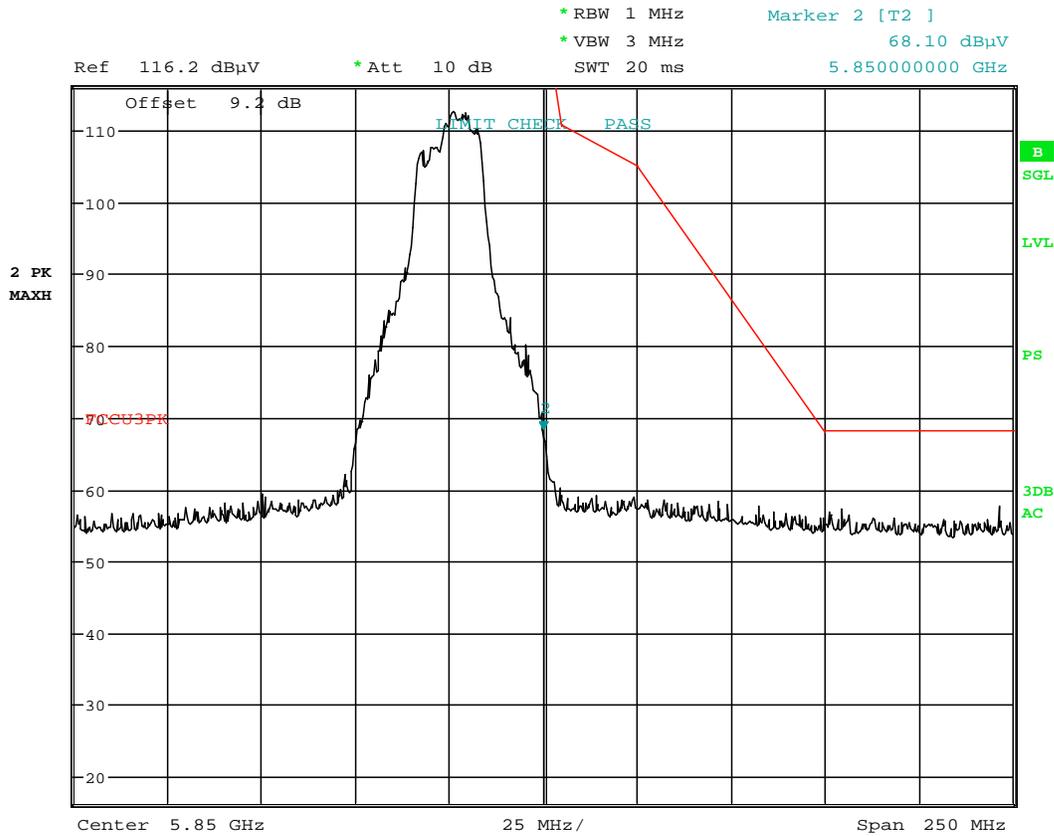

Date: 20.JUN.2017 00:14:52

Plot 7-216. Radiated Upper Band Edge Plot (Peak – UNII Band 3)

FCC ID: ZNFV30A		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1706070187-05.ZNF	Test Dates: 6/6 - 7/14/2017	EUT Type: Portable Handset		Page 182 of 211

MIMO WCP Radiated Band Edge Measurements (20MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209



Worst Case Mode: 802.11n (20MHz)

Worst Case Transfer Rate: MCS8

Distance of Measurements: 3 Meters

Operating Frequency: 5500MHz

Channel: 100

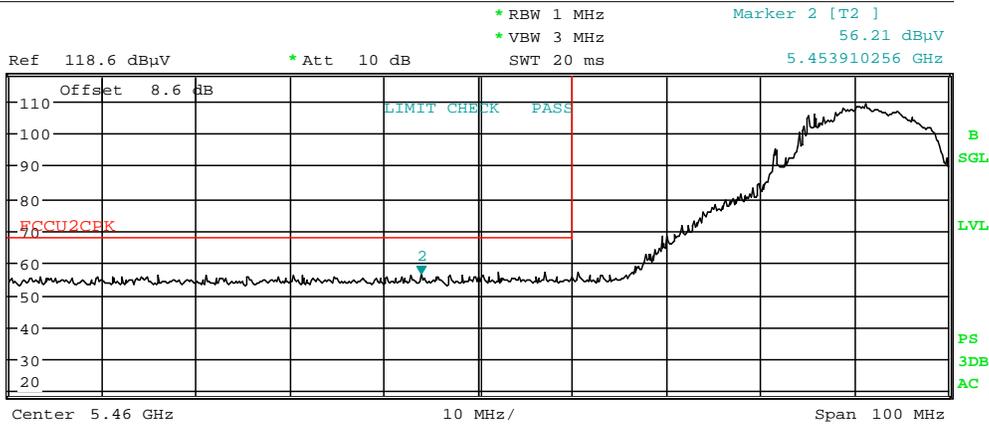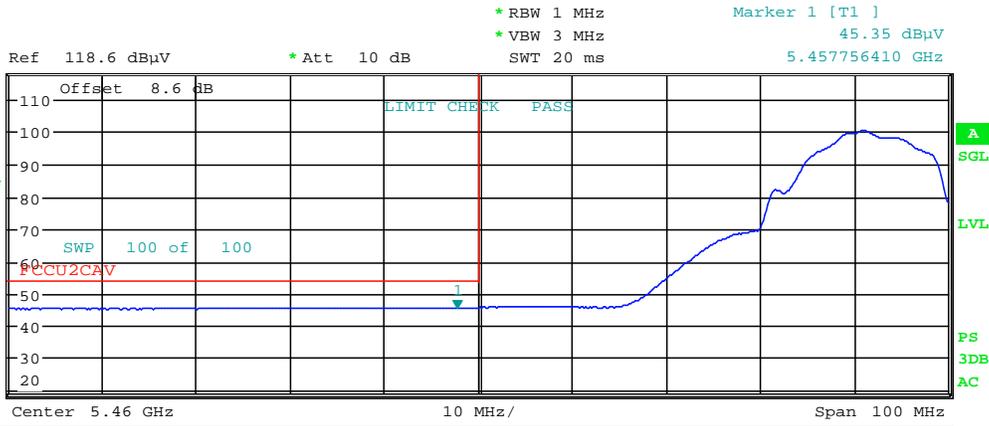



Date: 22.JUN.2017 00:02:30

Plot 7-217. Radiated Restricted Band Edge Plot with WCP

FCC ID: ZNFV30A	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1706070187-05.ZNF	Test Dates: 6/6 - 7/14/2017	EUT Type: Portable Handset		Page 183 of 211

7.7.11 MIMO Radiated Band Edge Measurements (40MHz BW) §15.407(b.1)(b.2) §15.205 §15.209

Worst Case Mode: 802.11n (40MHz)
 Worst Case Transfer Rate: MCS8
 Distance of Measurements: 3 Meters
 Operating Frequency: 5190MHz
 Channel: 38

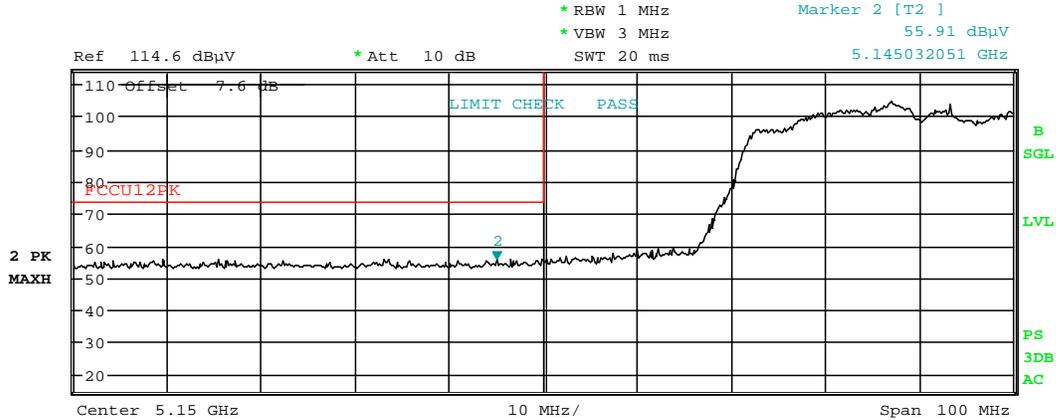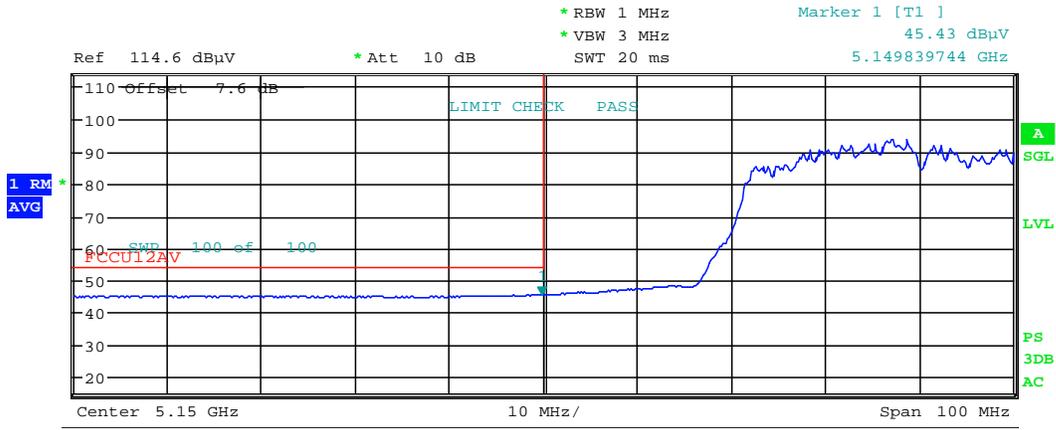



Date: 20.JUN.2017 01:15:48

Plot 7-218. Radiated Restricted Lower Band Edge Plot (Average & Peak – UNII Band 1)

FCC ID: ZNFV30A		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1706070187-05.ZNF	Test Dates: 6/6 - 7/14/2017	EUT Type: Portable Handset		Page 184 of 211

MIMO Radiated Band Edge Measurements (40MHz BW)
§15.407(b.1)(b.2) §15.205 §15.209

Worst Case Mode: 802.11n (40MHz)
 Worst Case Transfer Rate: MCS8
 Distance of Measurements: 3 Meters
 Operating Frequency: 5310MHz
 Channel: 62

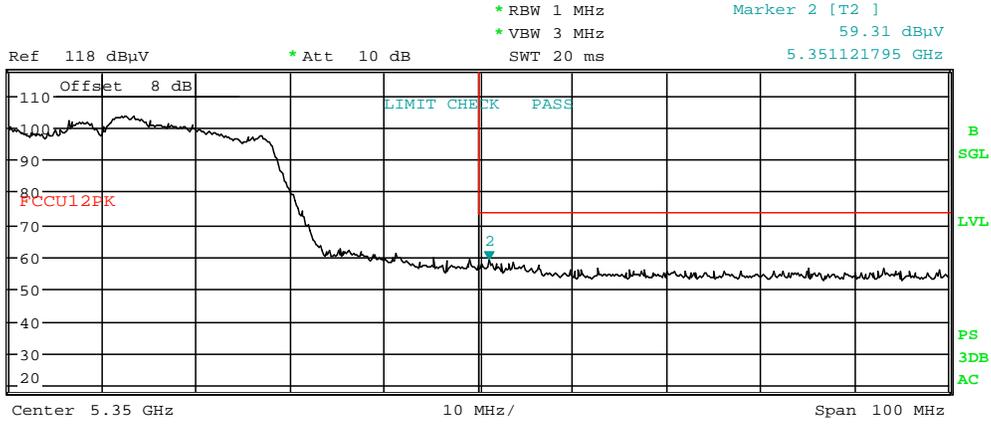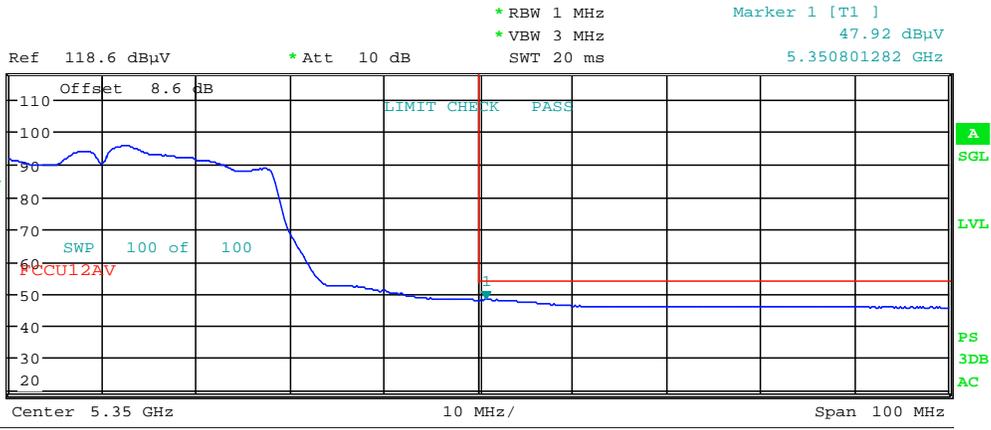



Date: 21.JUN.2017 23:24:35

Plot 7-219. Radiated Restricted Upper Band Edge Plot (Average & Peak – UNII Band 2A)

FCC ID: ZNFV30A	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1706070187-05.ZNF	Test Dates: 6/6 - 7/14/2017	EUT Type: Portable Handset		Page 185 of 211

MIMO Radiated Band Edge Measurements (40MHz BW)
§15.407(b.1)(b.2) §15.205 §15.209

Worst Case Mode: 802.11n (40MHz)
 Worst Case Transfer Rate: MCS8
 Distance of Measurements: 3 Meters
 Operating Frequency: 5510MHz
 Channel: 102

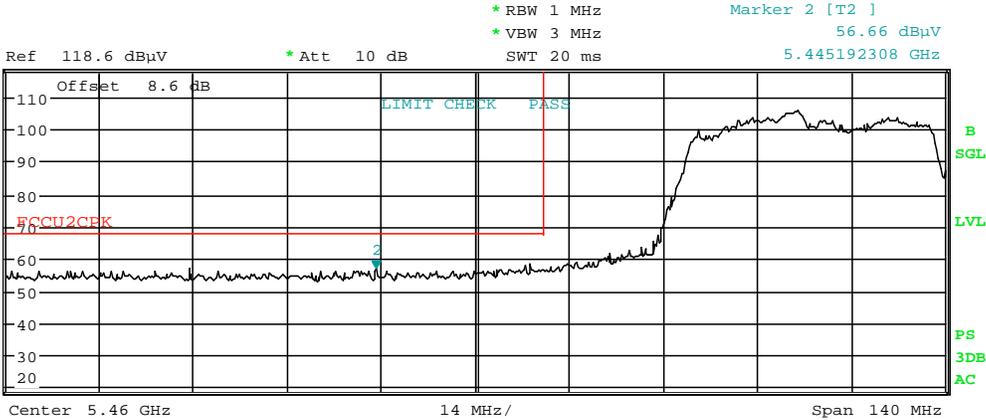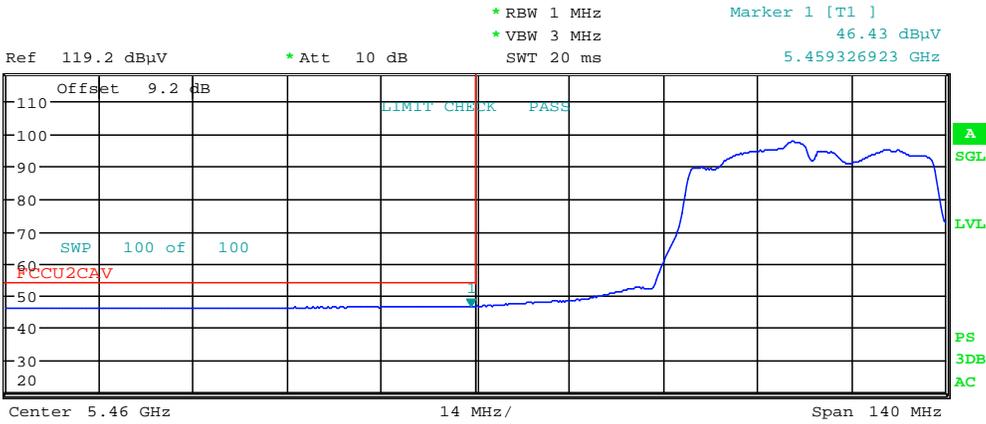


Date: 21.JUN.2017 23:31:47

Plot 7-220. Radiated Restricted Lower Band Edge Plot (Average & Peak – UNII Band 2C)

FCC ID: ZNFV30A		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1706070187-05.ZNF	Test Dates: 6/6 - 7/14/2017	EUT Type: Portable Handset		Page 186 of 211

MIMO Radiated Band Edge Measurements (40MHz BW)
§15.407(b.1)(b.2) §15.205 §15.209

Worst Case Mode: 802.11n (40MHz)
 Worst Case Transfer Rate: MCS8
 Distance of Measurements: 3 Meters
 Operating Frequency: 5795MHz
 Channel: 159

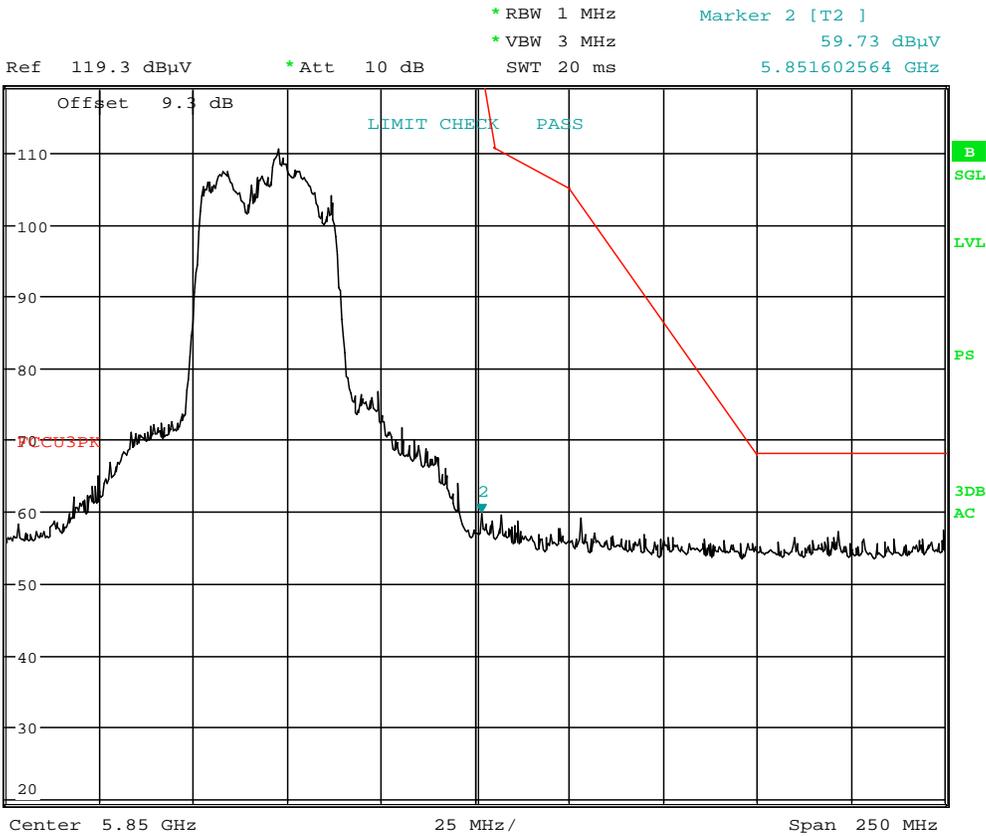



Date: 21.JUN.2017 23:38:17

Plot 7-221. Radiated Upper Band Edge Plot (Peak – UNII Band 3)

FCC ID: ZNFV30A	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1706070187-05.ZNF	Test Dates: 6/6 - 7/14/2017	EUT Type: Portable Handset		Page 187 of 211

MIMO WCP Radiated Band Edge Measurements (40MHz BW)
§15.407(b.1)(b.2) §15.205 §15.209

Worst Case Mode: 802.11n (40MHz)
 Worst Case Transfer Rate: MCS8
 Distance of Measurements: 3 Meters
 Operating Frequency: 5310MHz
 Channel: 62

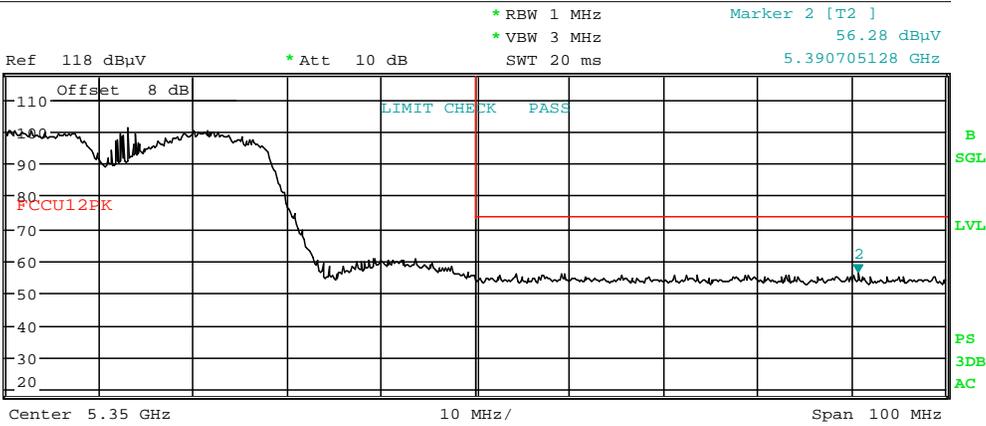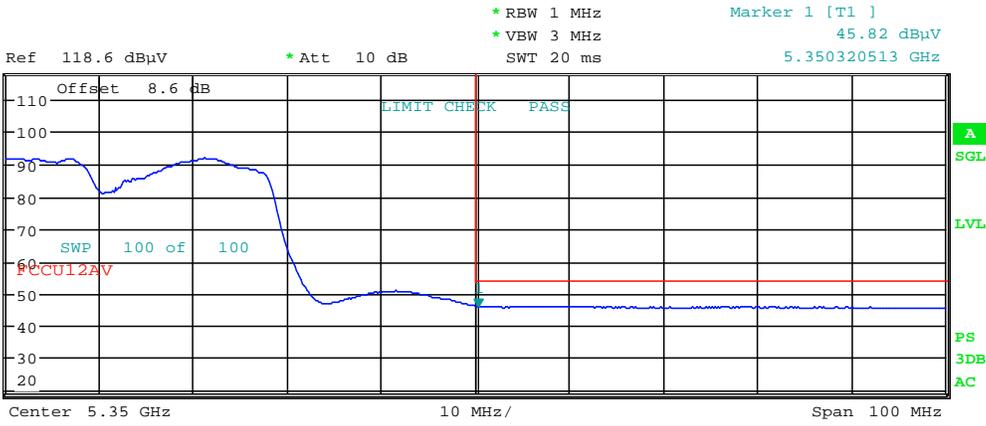



Date: 21.JUN.2017 23:57:17

Plot 7-222. Radiated Restricted Band Edge Plot with WCP

FCC ID: ZNFV30A		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1706070187-05.ZNF	Test Dates: 6/6 - 7/14/2017	EUT Type: Portable Handset		Page 188 of 211

7.7.12 MIMO Radiated Band Edge Measurements (80MHz BW)
§15.407(b.1)(b.2) §15.205 §15.209

Worst Case Mode: 802.11ac (80MHz)
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5210MHz
 Channel: 42

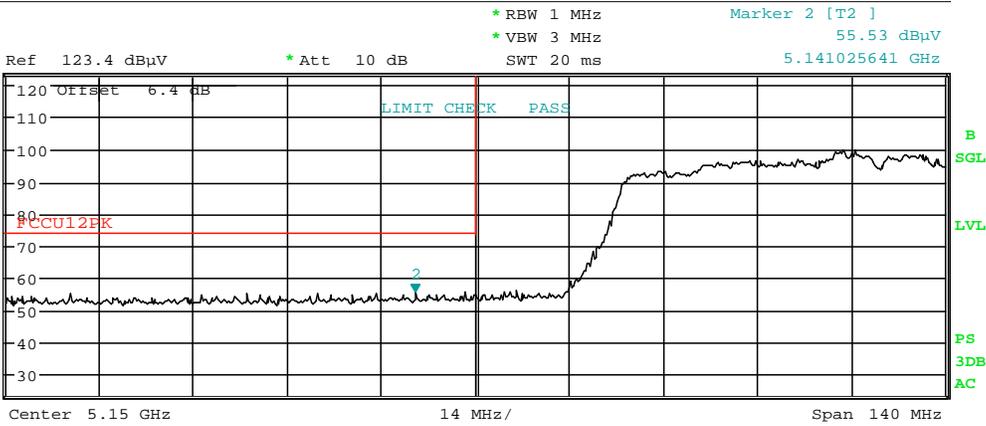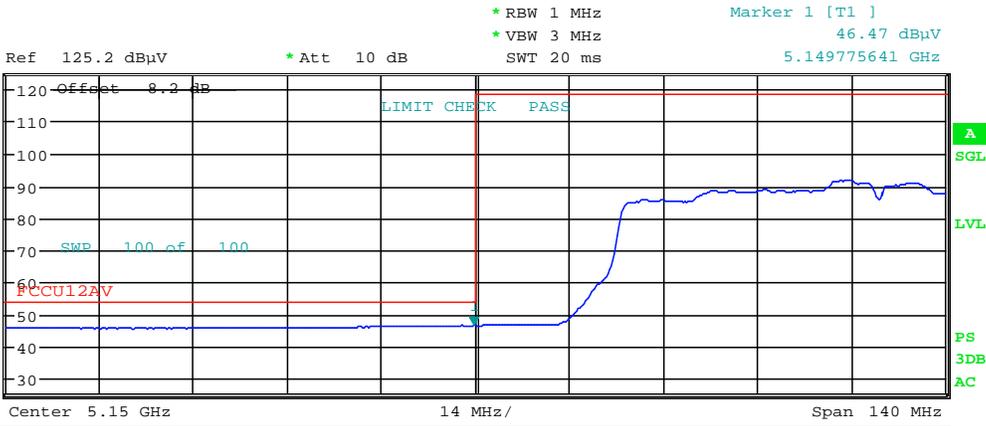



Date: 14.JUN.2017 01:33:16

Plot 7-223. Radiated Restricted Lower Band Edge Plot (Average & Peak – UNII Band 1)

FCC ID: ZNFV30A	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1706070187-05.ZNF	Test Dates: 6/6 - 7/14/2017	EUT Type: Portable Handset		Page 189 of 211

MIMO Radiated Band Edge Measurements (80MHz BW)
§15.407(b.1)(b.2) §15.205 §15.209

Worst Case Mode: 802.11ac (80MHz)
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5290MHz
 Channel: 58

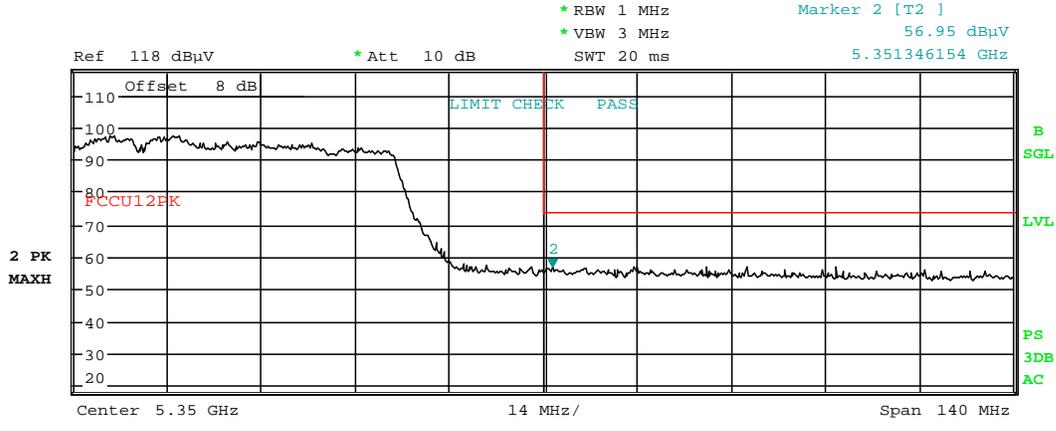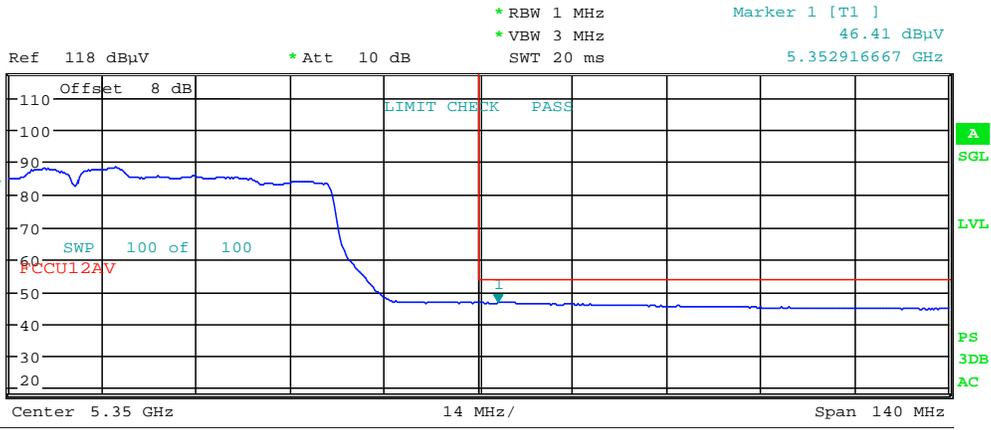



Date: 21.JUN.2017 23:27:05

Plot 7-224. Radiated Restricted Upper Band Edge Plot (Average & Peak – UNII Band 2A)

FCC ID: ZNFV30A	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1706070187-05.ZNF	Test Dates: 6/6 - 7/14/2017	EUT Type: Portable Handset	Page 190 of 211	

MIMO Radiated Band Edge Measurements (80MHz BW)
§15.407(b.1)(b.2) §15.205 §15.209

Worst Case Mode: 802.11ac (80MHz)
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5530MHz
 Channel: 106

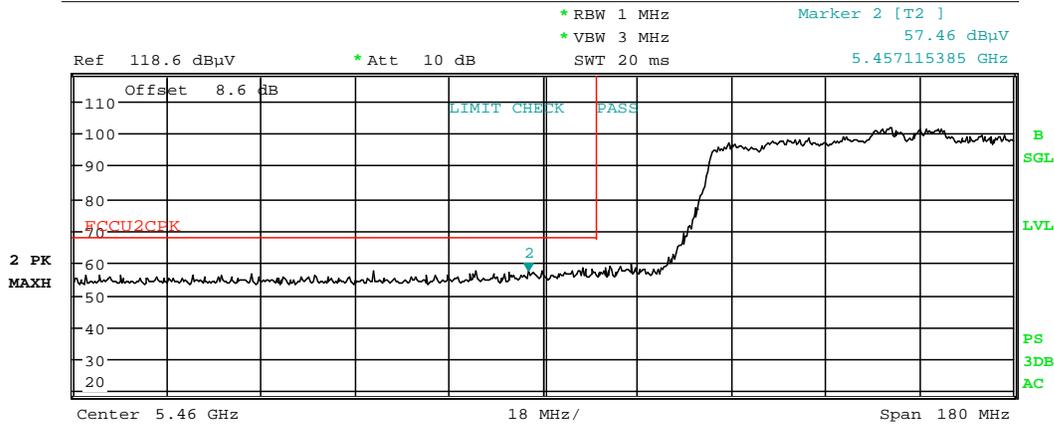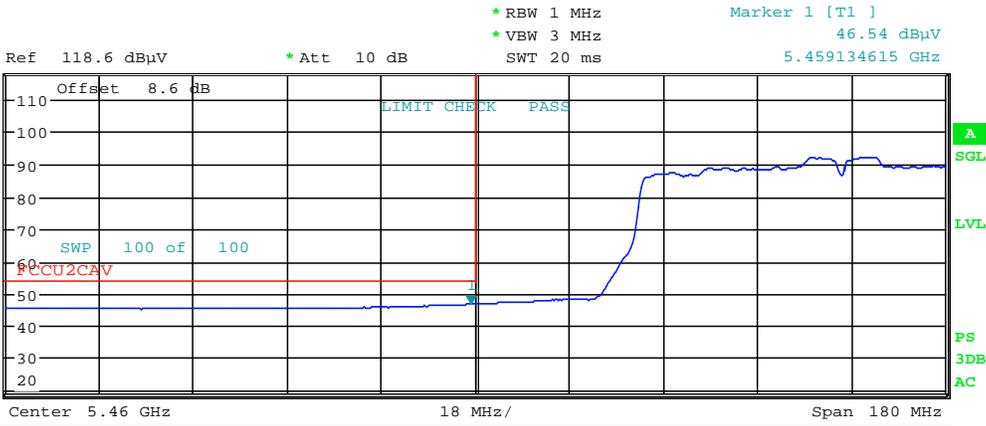


Date: 21.JUN.2017 23:34:11

Plot 7-225. Radiated Restricted Lower Band Edge Plot (Average & Peak – UNII Band 2C)

FCC ID: ZNFV30A		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1706070187-05.ZNF	Test Dates: 6/6 - 7/14/2017	EUT Type: Portable Handset		Page 191 of 211

MIMO Radiated Band Edge Measurements (80MHz BW)
§15.407(b.1)(b.2) §15.205 §15.209

Worst Case Mode: 802.11ac (80MHz)
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5775MHz
 Channel: 155

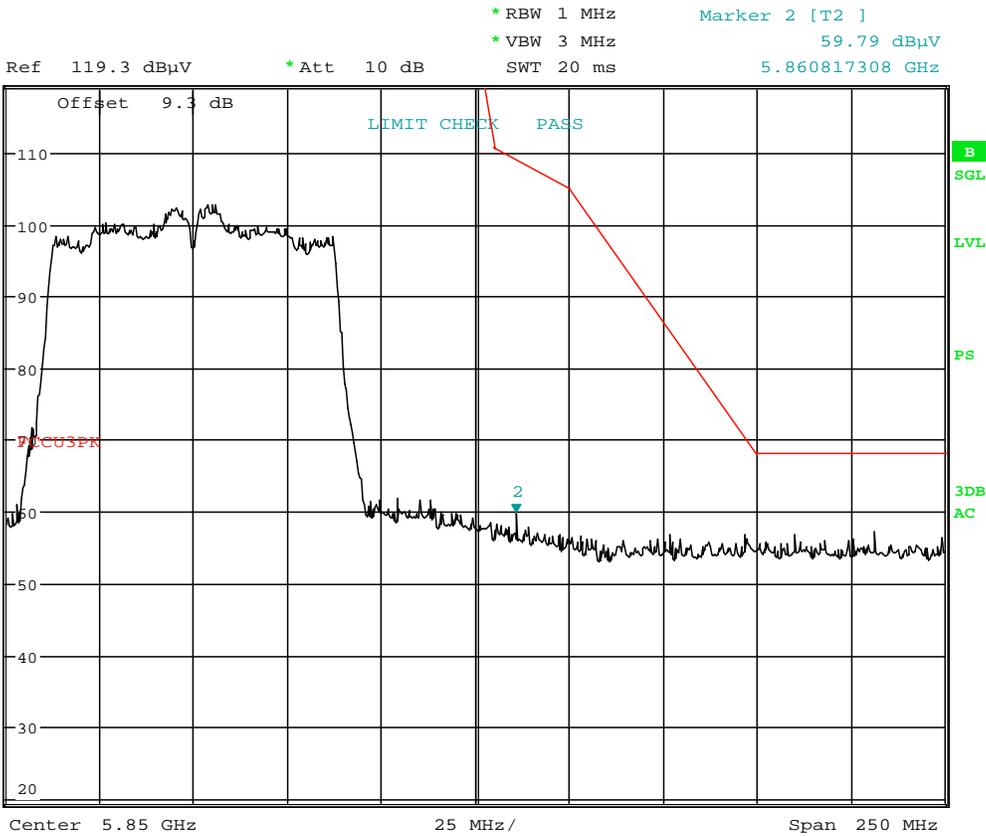

Date: 21.JUN.2017 23:37:27

Plot 7-226. Radiated Upper Band Edge Plot (Peak – UNII Band 3)

FCC ID: ZNFV30A	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1706070187-05.ZNF	Test Dates: 6/6 - 7/14/2017	EUT Type: Portable Handset		Page 192 of 211

MIMO WCP Radiated Band Edge Measurements (80MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209



Worst Case Mode: 802.11ac (80MHz)

Worst Case Transfer Rate: MCS0

Distance of Measurements: 3 Meters

Operating Frequency: 5530MHz

Channel: 106

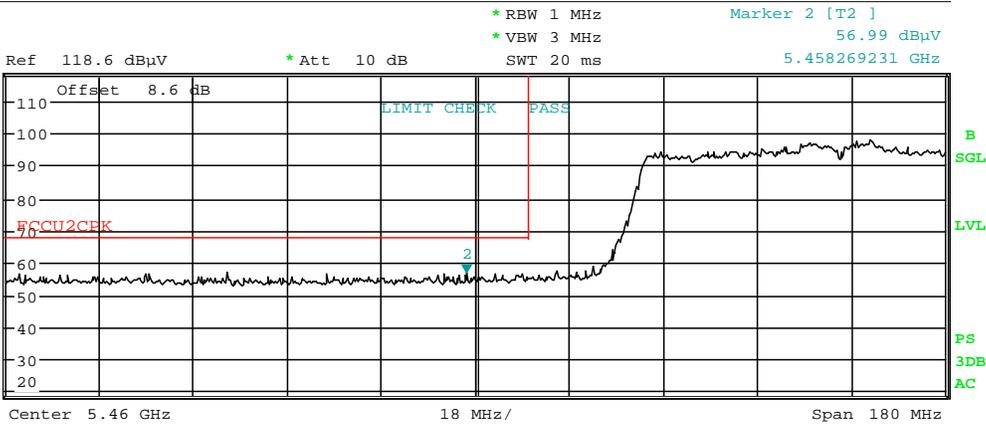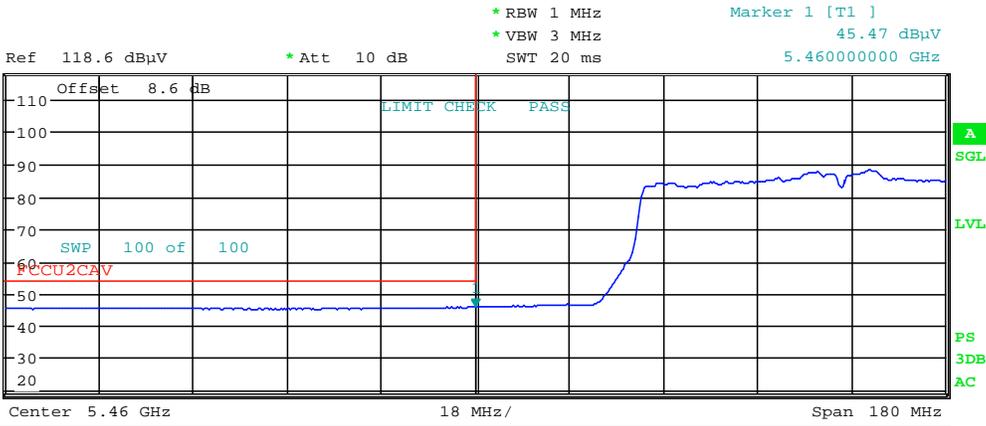

Date: 22.JUN.2017 00:13:31

Plot 7-227. Radiated Restricted Band Edge Plot with WCP

FCC ID: ZNFV30A		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1706070187-05.ZNF	Test Dates: 6/6 - 7/14/2017	EUT Type: Portable Handset		Page 193 of 211

CDD Radiated Band Edge Measurements

§15.407(b.1)(b.2) §15.205 §15.209



Worst Case Mode: 802.11a

Worst Case Transfer Rate: 6Mbps

Distance of Measurements: 3 Meters

Operating Frequency: 5180MHz

Channel: 36

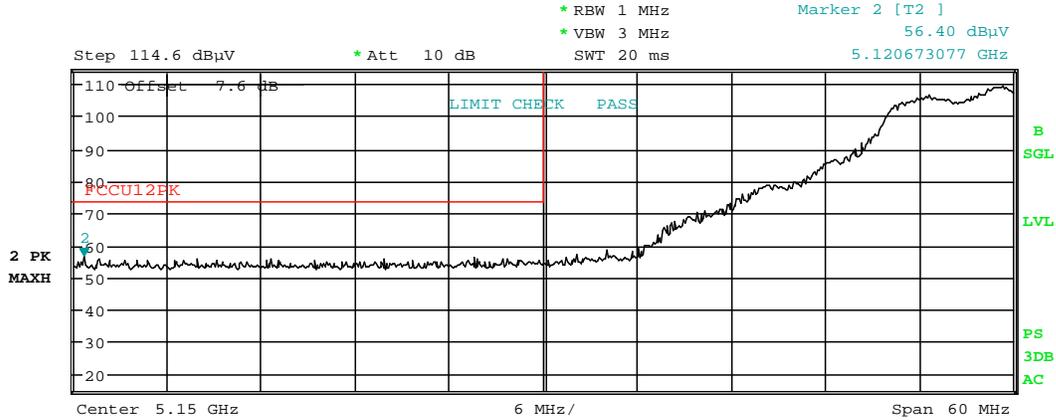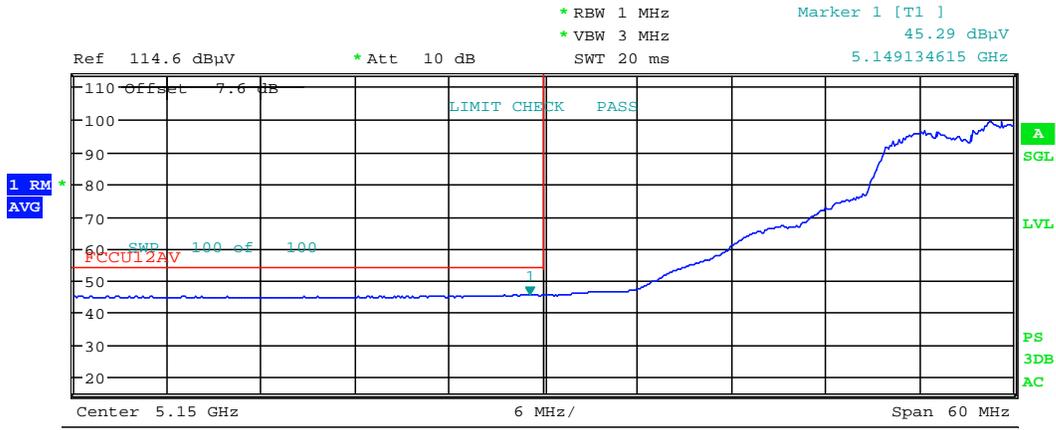

Date: 19.JUN.2017 23:55:27

Plot 7-228. Radiated Restricted Lower Band Edge Plot (Average & Peak – UNII Band 1)

FCC ID: ZNFV30A		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1706070187-05.ZNF	Test Dates: 6/6 - 7/14/2017	EUT Type: Portable Handset		Page 194 of 211

CDD Radiated Band Edge Measurements

§15.407(b.1)(b.2) §15.205 §15.209



Worst Case Mode: 802.11a

Worst Case Transfer Rate: 6Mbps

Distance of Measurements: 3 Meters

Operating Frequency: 5320MHz

Channel: 64

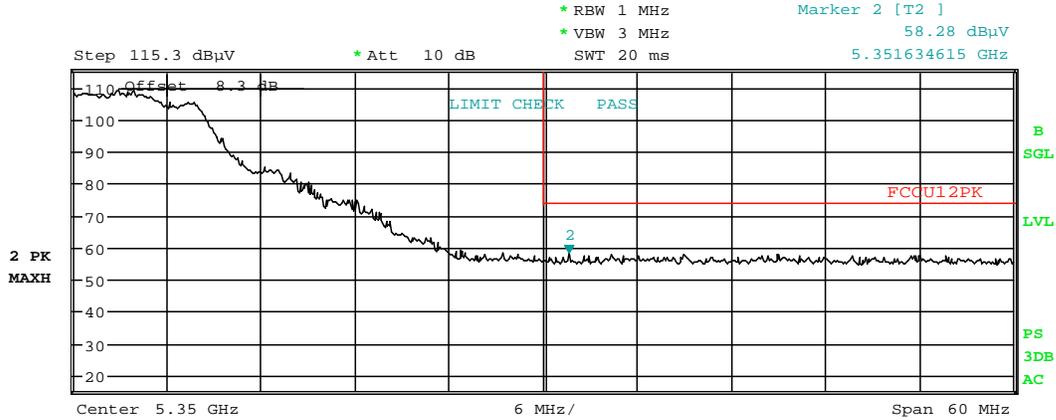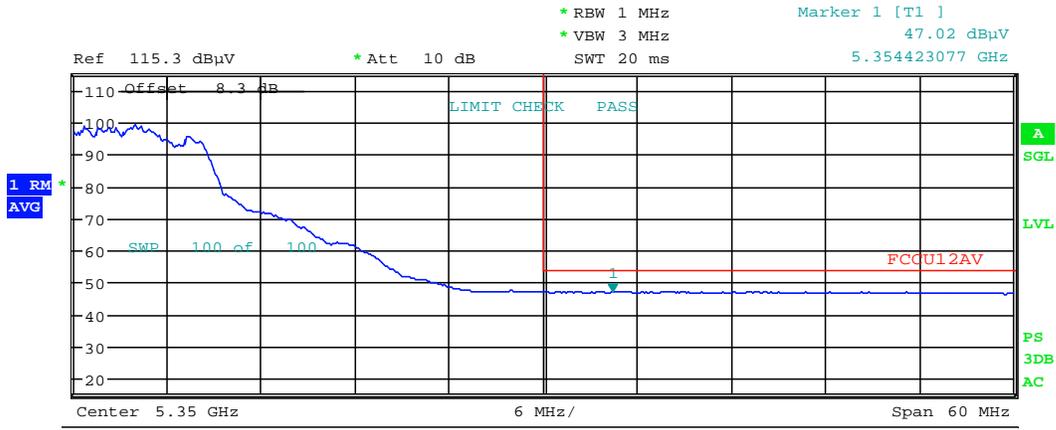

Date: 20.JUN.2017 00:03:29

Plot 7-229. Radiated Restricted Upper Band Edge Plot (Average & Peak – UNII Band 2A)

FCC ID: ZNFV30A		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1706070187-05.ZNF	Test Dates: 6/6 - 7/14/2017	EUT Type: Portable Handset		Page 195 of 211

CDD Radiated Band Edge Measurements

§15.407(b.1)(b.2) §15.205 §15.209



Worst Case Mode: 802.11a

Worst Case Transfer Rate: 6Mbps

Distance of Measurements: 3 Meters

Operating Frequency: 5500MHz

Channel: 100

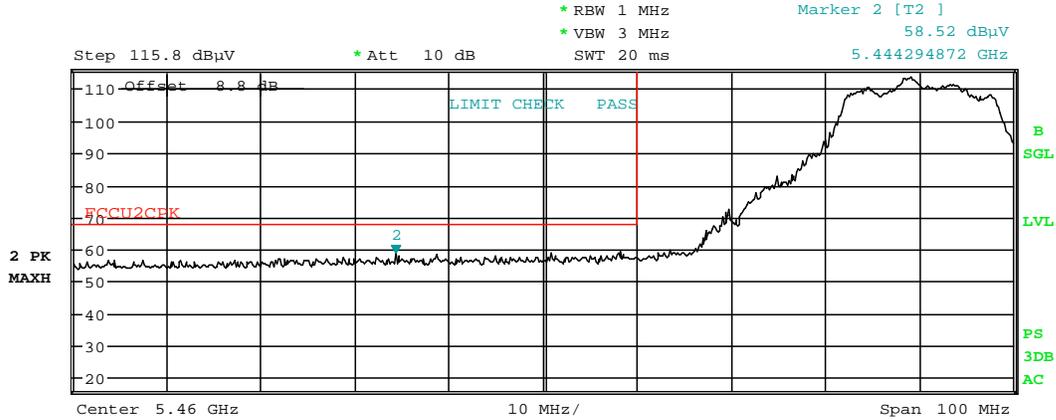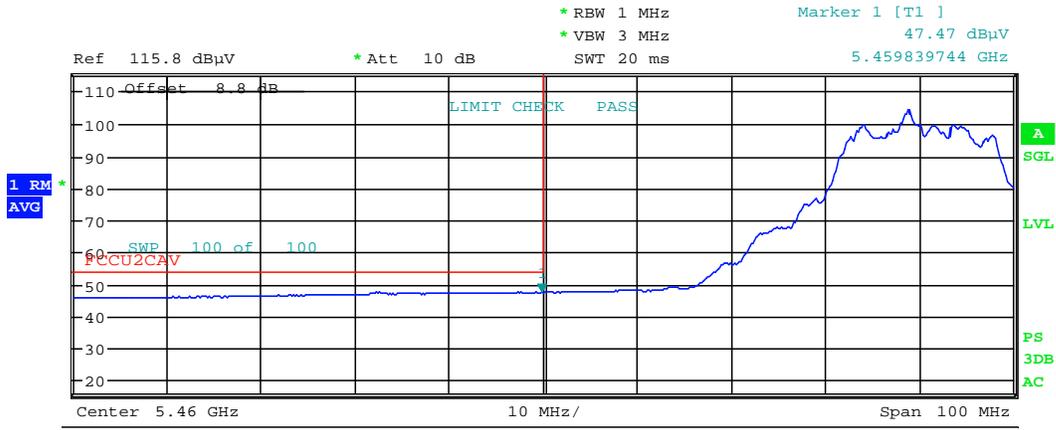

Date: 20.JUN.2017 00:08:29

Plot 7-230. Radiated Restricted Lower Band Edge Plot (Average & Peak – UNII Band 2C)

FCC ID: ZNFV30A		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1706070187-05.ZNF	Test Dates: 6/6 - 7/14/2017	EUT Type: Portable Handset		Page 196 of 211

CDD WCP Radiated Band Edge Measurements

§15.407(b.1)(b.2) §15.205 §15.209



Worst Case Mode: 802.11a

Worst Case Transfer Rate: 6Mbps

Distance of Measurements: 3 Meters

Operating Frequency: 5500MHz

Channel: 100

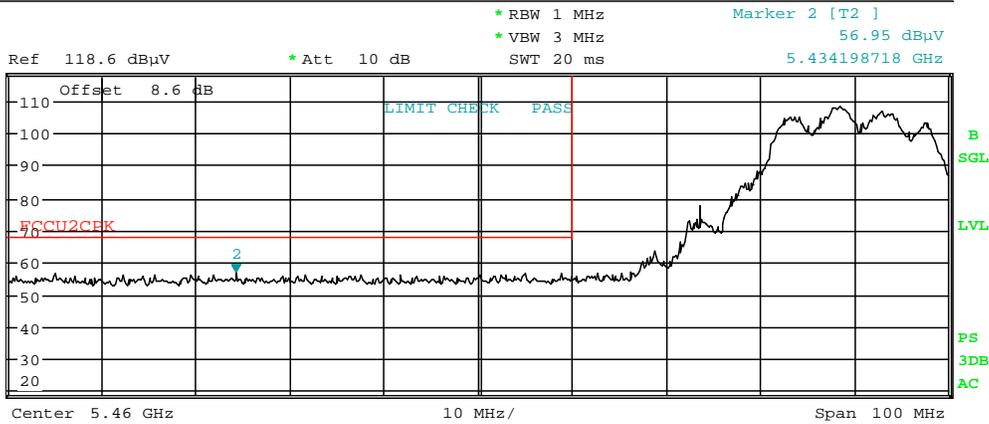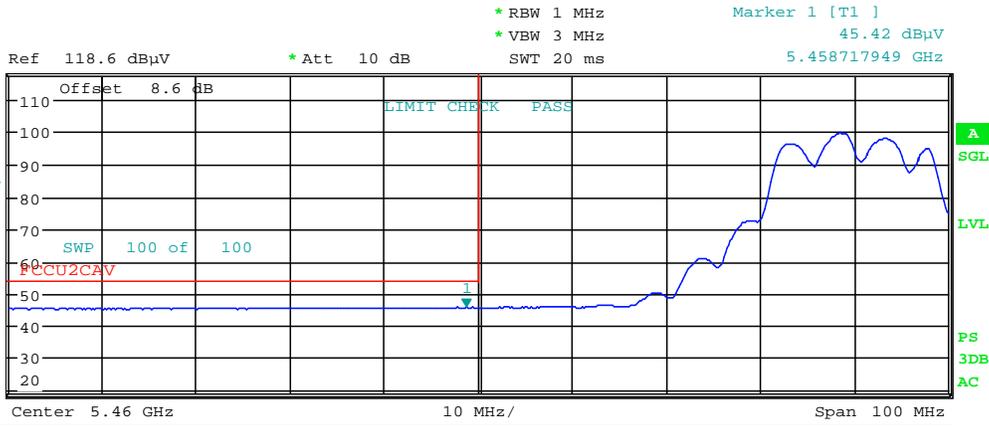

Date: 22.JUN.2017 00:03:40

Plot 7-232. Radiated Restricted Band Edge Plot with WCP

FCC ID: ZNFV30A	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1706070187-05.ZNF	Test Dates: 6/6 - 7/14/2017	EUT Type: Portable Handset		Page 198 of 211

7.8 Radiated Spurious Emissions Measurements – Below 1GHz

§15.209

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for radiated spurious emissions. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table 7-63 per Section 15.209.

Frequency	Field Strength [$\mu\text{V/m}$]	Measured Distance [Meters]
0.009 – 0.490 MHz	2400/F (kHz)	300
0.490 – 1.705 MHz	24000/F (kHz)	30
1.705 – 30.00 MHz	30	30
30.00 – 88.00 MHz	100	3
88.00 – 216.0 MHz	150	3
216.0 – 960.0 MHz	200	3
Above 960.0 MHz	500	3

Table 7-63. Radiated Limits

Test Procedures Used

ANSI C63.10-2013

Test Settings

Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

FCC ID: ZNFV30A		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1706070187-05.ZNF	Test Dates: 6/6 - 7/14/2017	EUT Type: Portable Handset	Page 199 of 211	

Test Setup

The EUT and measurement equipment were set up as shown in the diagrams below.

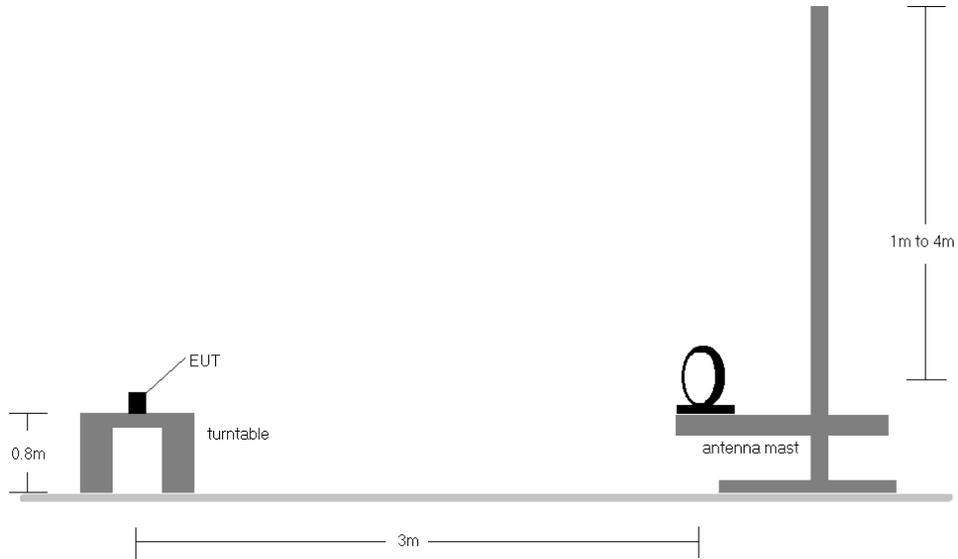


Figure 7-6. Radiated Test Setup < 30MHz

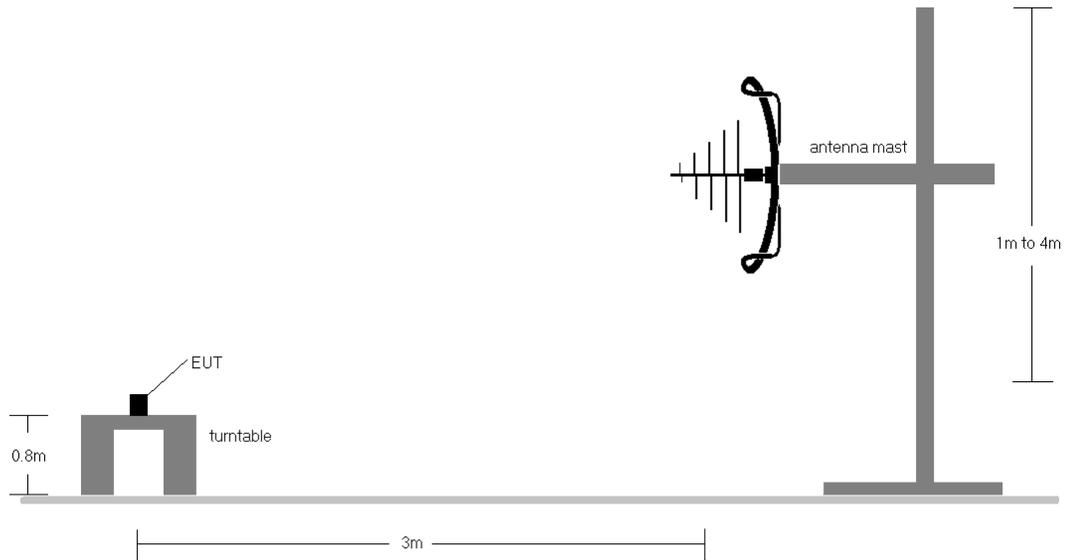


Figure 7-7. Radiated Test Setup < 1GHz

FCC ID: ZNFV30A		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1706070187-05.ZNF	Test Dates: 6/6 - 7/14/2017	EUT Type: Portable Handset	Page 200 of 211	


Test Notes

1. All emissions lying in restricted bands specified in §15.205 are below the limit shown in Table 7-63.
2. The broadband receive antenna is manipulated through vertical and horizontal polarizations during the tests. The EUT is manipulated through three orthogonal planes.
3. This unit was tested with its standard battery.
4. The spectrum is investigated using a peak detector and final measurements are recorded using CISPR quasi peak detector. The worst-case emissions are reported however emissions whose levels were not within 20dB of the respective limits were not reported.
5. Emissions were measured at a 3 meter test distance.
6. Emissions are investigated while operating on the center channel of the mode, band, and modulation that produced the worst case results during the transmitter spurious emissions testing.
7. No spurious emissions were detected within 20dB of the limit below 30MHz.
8. The results recorded using the broadband antenna is known to correlate with the results obtained by using a tuned dipole with an acceptable degree of accuracy. The VSWR for the measurement antenna was found to be less than 2:1.
9. The wide spectrum spurious emissions plots shown on the following pages are used only for the purpose of emission identification. There were no emissions detected in the 30MHz – 1GHz frequency range, as shown in the subsequent plots.


FCC ID: ZNFV30A		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1706070187-05.ZNF	Test Dates: 6/6 - 7/14/2017	EUT Type: Portable Handset	Page 201 of 211	

Antenna-1 Radiated Spurious Emissions Measurements (Below 1GHz)

§15.209

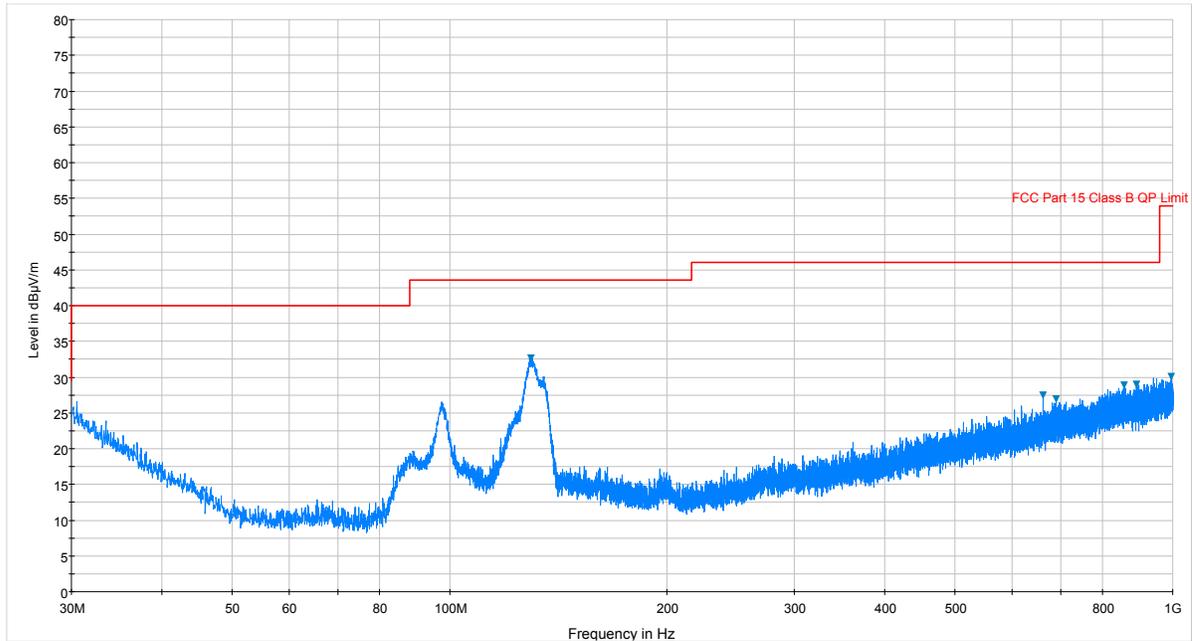

Plot 7-233. Radiated Spurious Plot below 1GHz (802.11a – U3 Ch. 157, Ant. Pol. H)

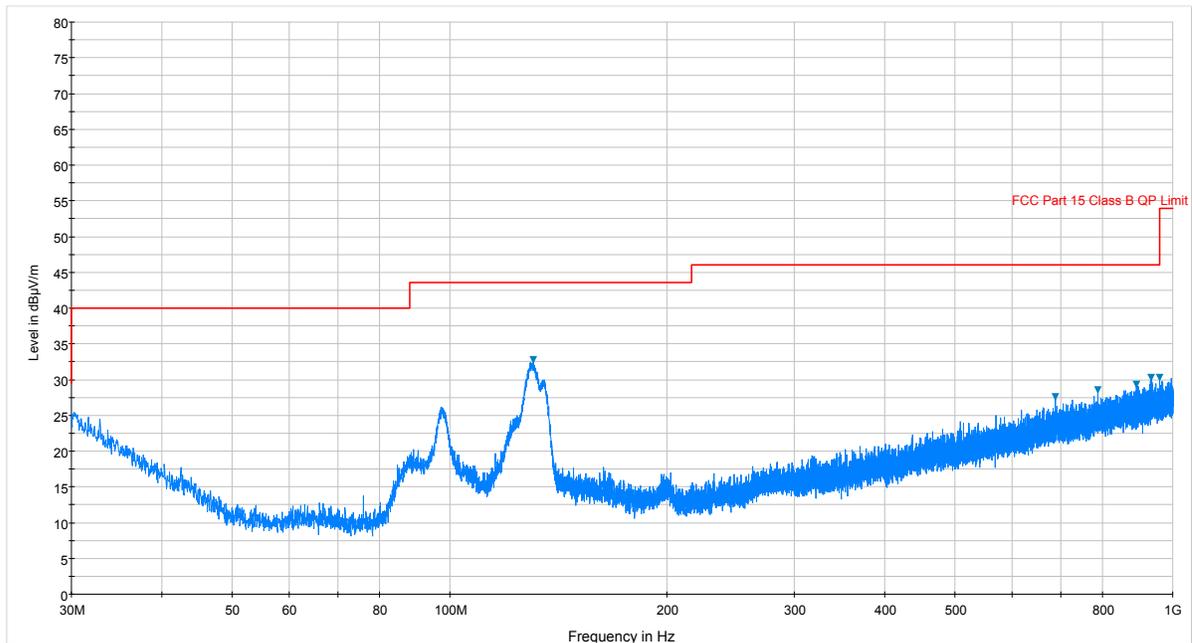


Plot 7-234. Radiated Spurious Plot below 1GHz (802.11a – U3 Ch. 157, Ant. Pol. V)

Note: Spurious Emissions found in radiated spurious plots were investigated and determined to be ambient noise


FCC ID: ZNFV30A		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1706070187-05.ZNF	Test Dates: 6/6 - 7/14/2017	EUT Type: Portable Handset	Page 202 of 211	

Antenna-2 Radiated Spurious Emissions Measurements (Below 1GHz)

§15.209

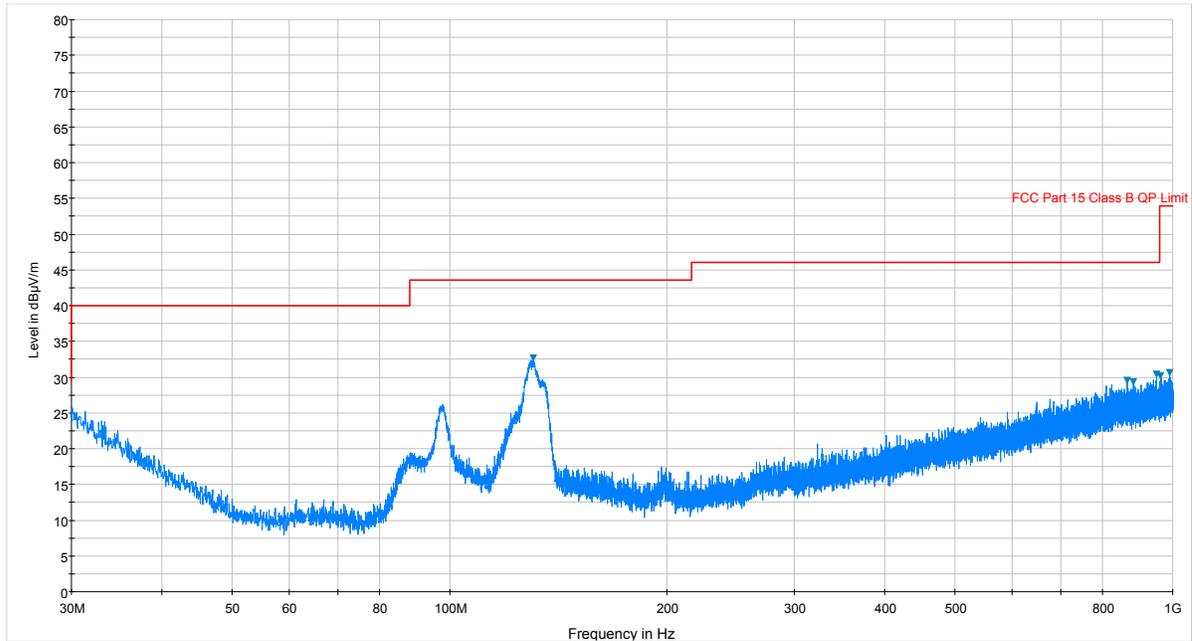

Plot 7-235. Radiated Spurious Plot below 1GHz (802.11a – U3 Ch. 157, Ant. Pol. H)

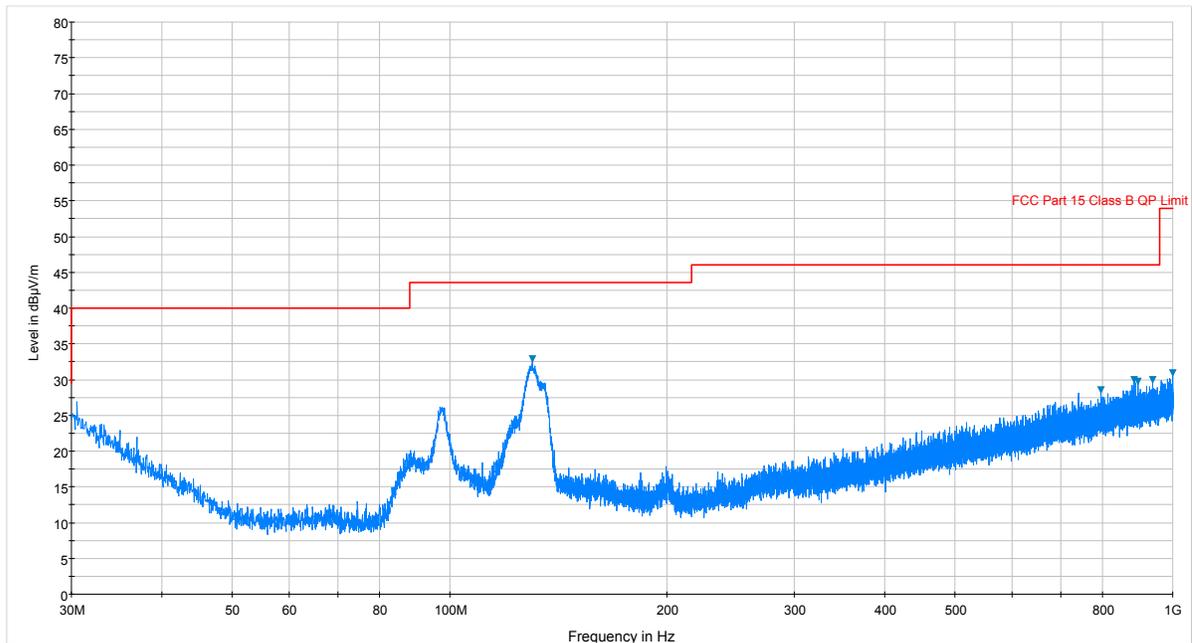


Plot 7-236. Radiated Spurious Plot below 1GHz (802.11a – U3 Ch. 157, Ant. Pol. V)

Note: Spurious Emissions found in radiated spurious plots were investigated and determined to be ambient noise


FCC ID: ZNFV30A		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1706070187-05.ZNF	Test Dates: 6/6 - 7/14/2017	EUT Type: Portable Handset		Page 203 of 211

Simultaneous Tx Radiated Spurious Emissions Measurements (Below 1GHz) §15.209

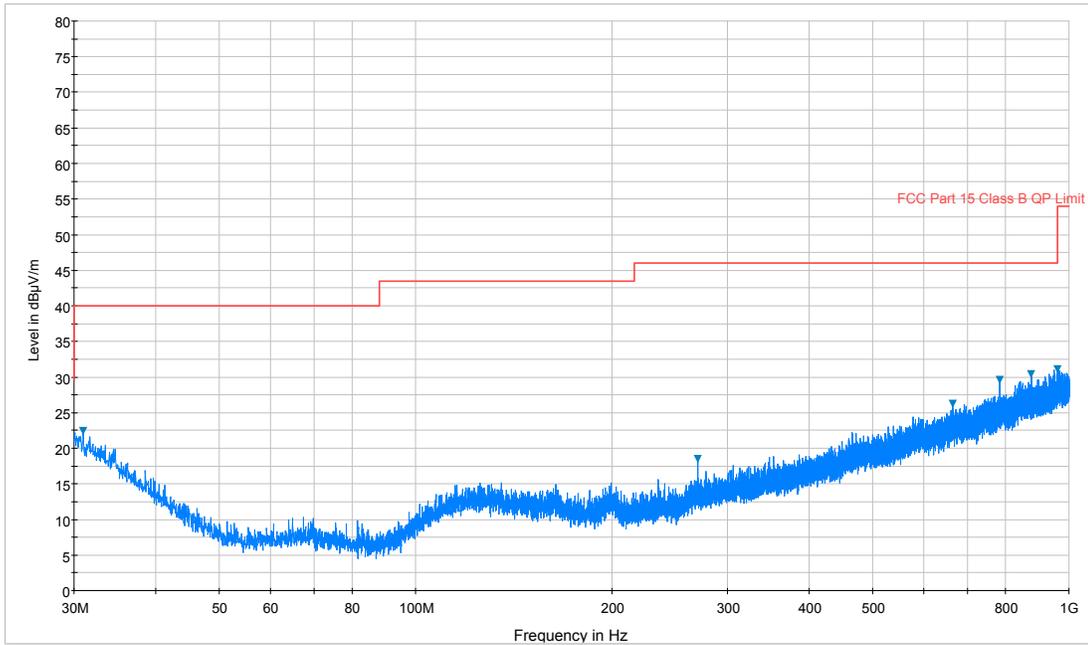

— Preview Result 1H-PK+ — FCC Part 15 Class B QP Limit ▼ Final_Result PK+

Plot 7-237. Radiated Spurious Plot below 1GHz (2.4GHz – 5GHz, Ant. Pol. H)

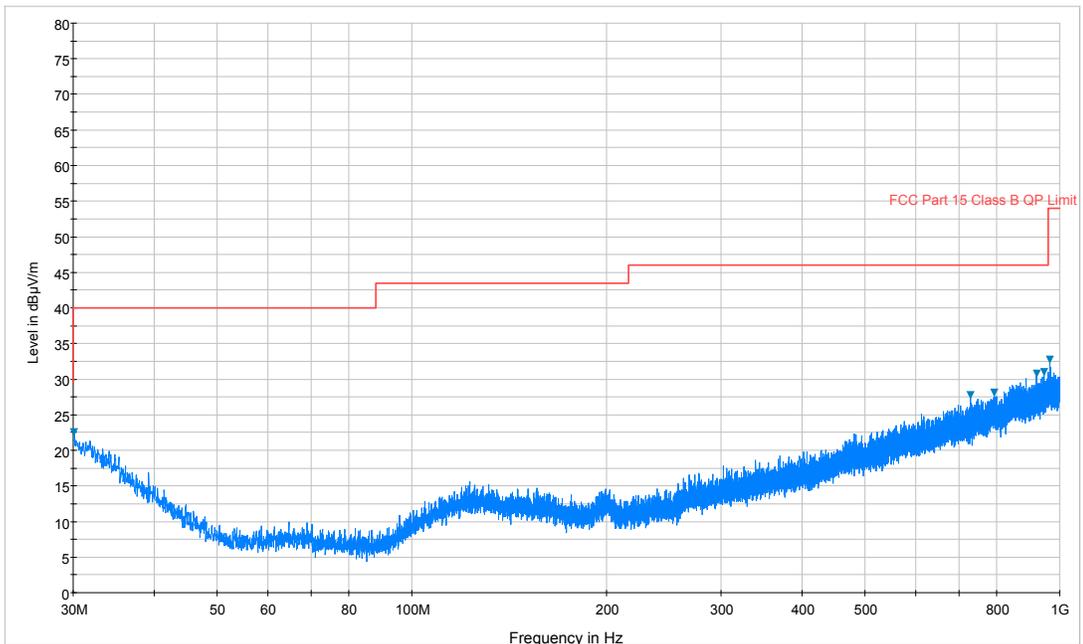

— Preview Result 1H-PK+ — FCC Part 15 Class B QP Limit ▼ Final_Result PK+

Plot 7-238. Radiated Spurious Plot below 1GHz (2.4GHz – 5GHz, Ant. Pol. V)

FCC ID: ZNFV30A		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1706070187-05.ZNF	Test Dates: 6/6 - 7/14/2017	EUT Type: Portable Handset	Page 204 of 211	

7.9 Line-Conducted Test Data

§15.407

Test Overview and Limit

All AC line conducted spurious emissions are measured with a receiver connected to a grounded LISN while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for conducted spurious emissions. Only the conducted emissions of the configuration that produced the worst case emissions are reported in this section.

All conducted emissions must not exceed the limits shown in the table below, per Section 15.207.

Frequency of emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30	60	50

Table 7-64. Conducted Limits

*Decreases with the logarithm of the frequency.

Test Procedures Used

ANSI C63.10-2013, Section 6.2

Test Settings

Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

Average Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = RMS
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

FCC ID: ZNFV30A		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1706070187-05.ZNF	Test Dates: 6/6 - 7/14/2017	EUT Type: Portable Handset	Page 205 of 211	

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.


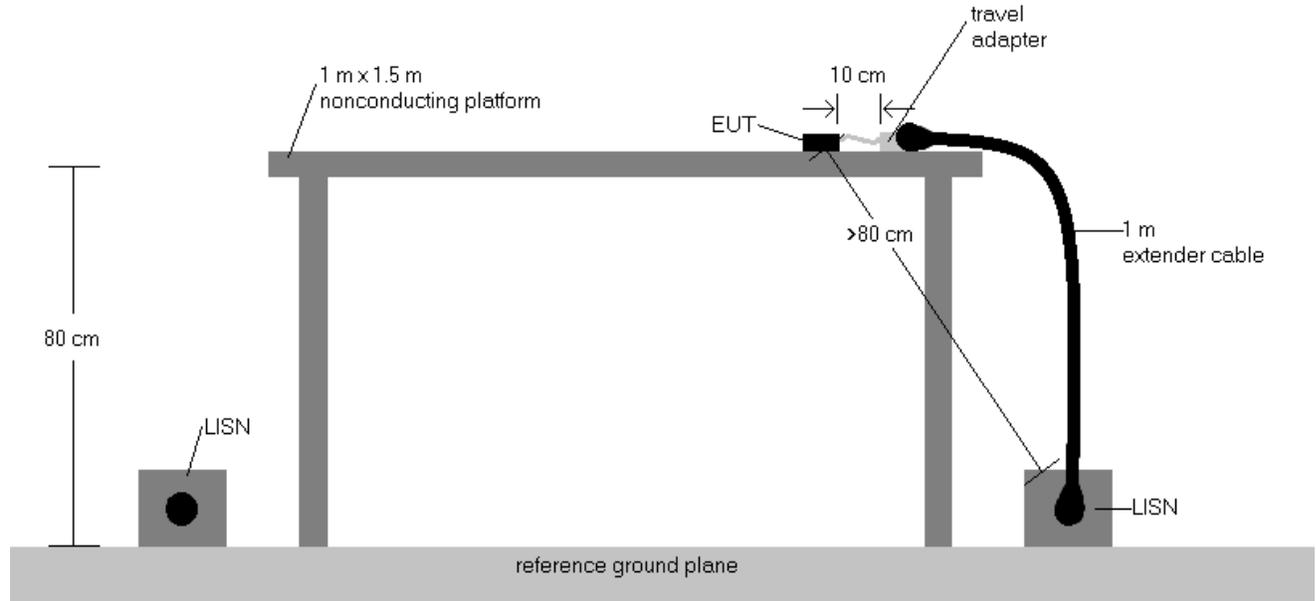


Figure 7-8. Test Instrument & Measurement Setup


Test Notes

1. All modes of operation were investigated and the worst-case emissions are reported using mid channel. The emissions found were not affected by the choice of channel used during testing.
2. The limit for an intentional radiator from 150kHz to 30MHz are specified in 15.207.
3. $\text{Corr. (dB)} = \text{Cable loss (dB)} + \text{LISN insertion factor (dB)}$
4. $\text{QP/AV Level (dB}\mu\text{V)} = \text{QP/AV Analyzer/Receiver Level (dB}\mu\text{V)} + \text{Corr. (dB)}$
5. $\text{Margin (dB)} = \text{QP/AV Limit (dB}\mu\text{V)} - \text{QP/AV Level (dB}\mu\text{V)}$
6. Traces shown in plot are made using a peak detector.
7. Deviations to the Specifications: None.

FCC ID: ZNFV30A		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1706070187-05.ZNF	Test Dates: 6/6 - 7/14/2017	EUT Type: Portable Handset		Page 206 of 211

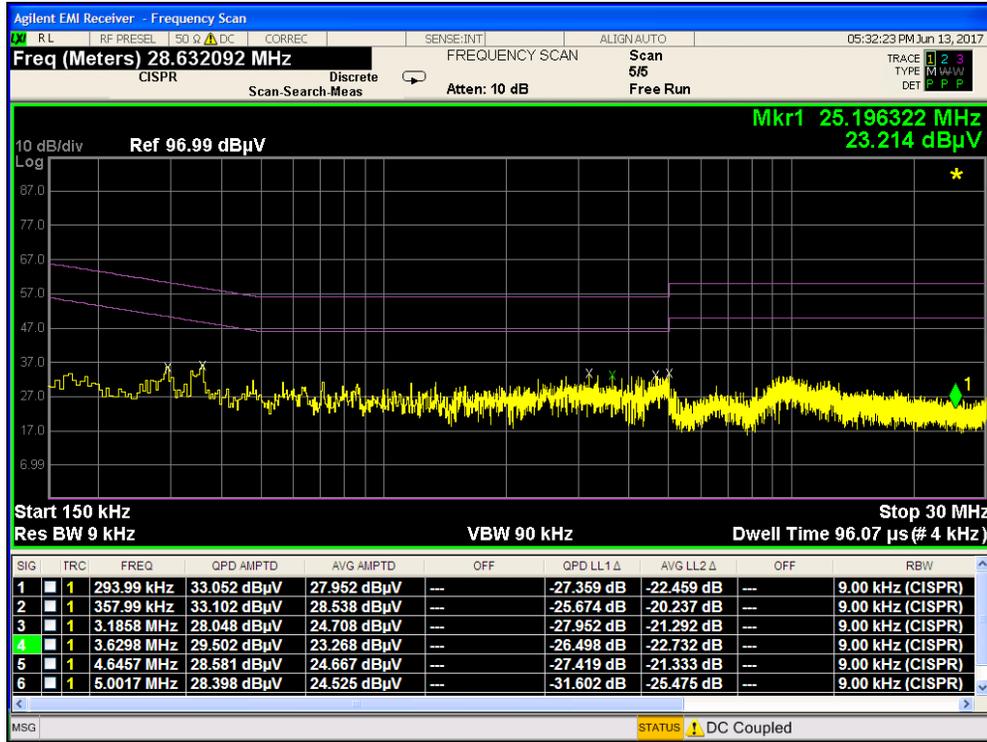


Plot 7-239. Line Conducted Plot with 802.11a UNII Band 1 (L1)

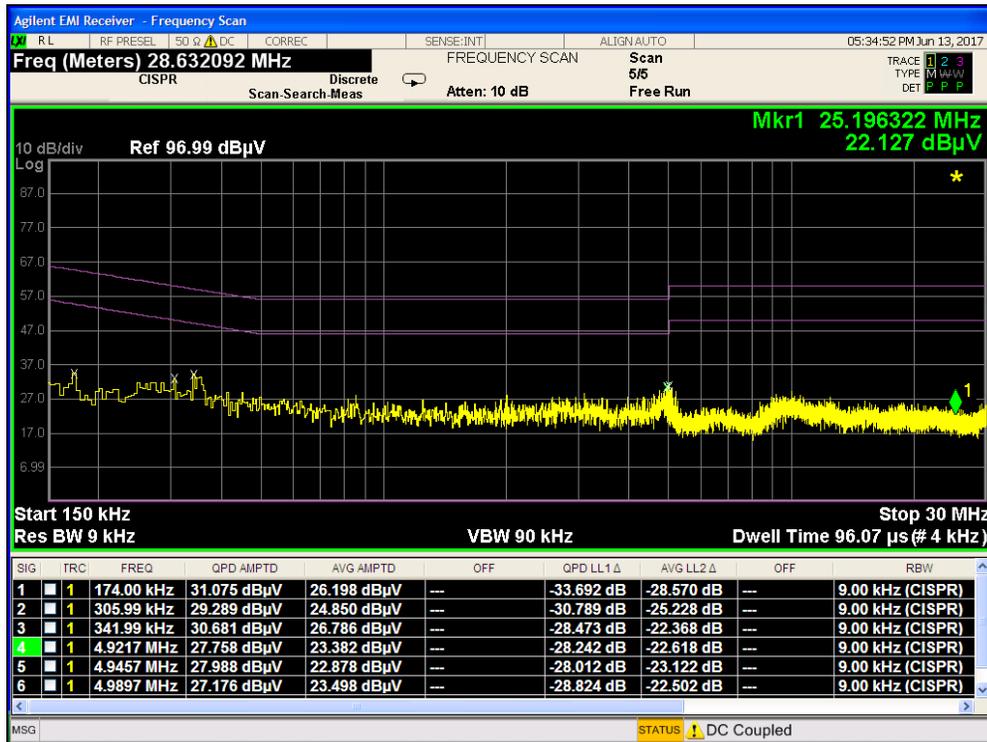


Plot 7-240. Line Conducted Plot with 802.11a UNII Band 1 (N)

FCC ID: ZNFV30A		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1706070187-05.ZNF	Test Dates: 6/6 - 7/14/2017	EUT Type: Portable Handset		Page 207 of 211

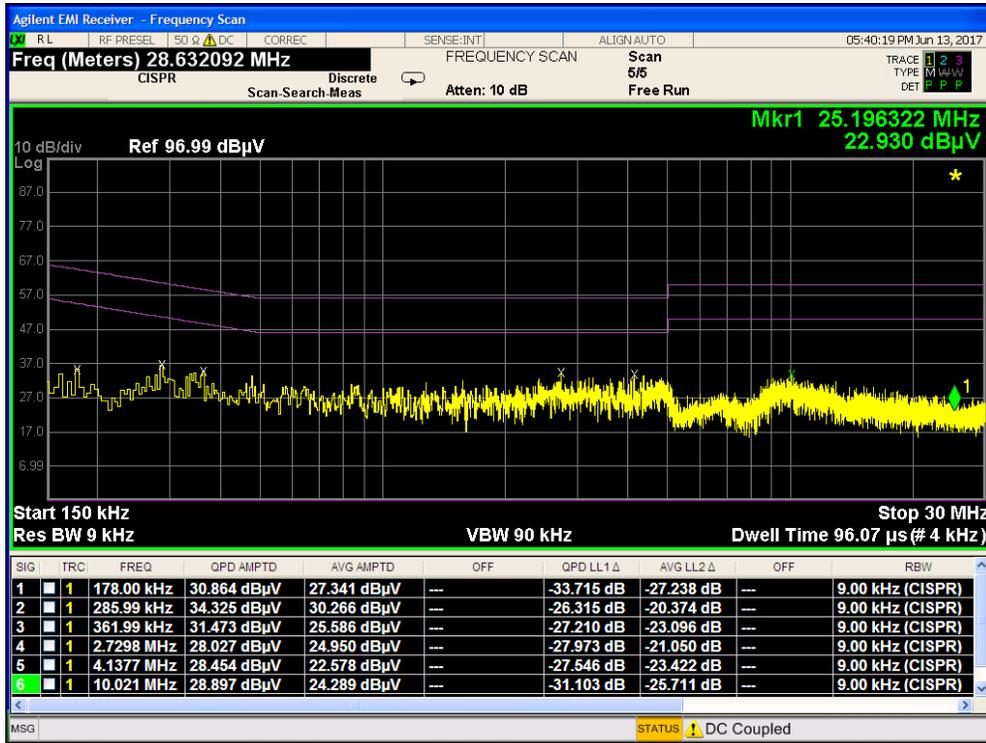


Plot 7-241. Line Conducted Plot with 802.11a UNII Band 2A (L1)

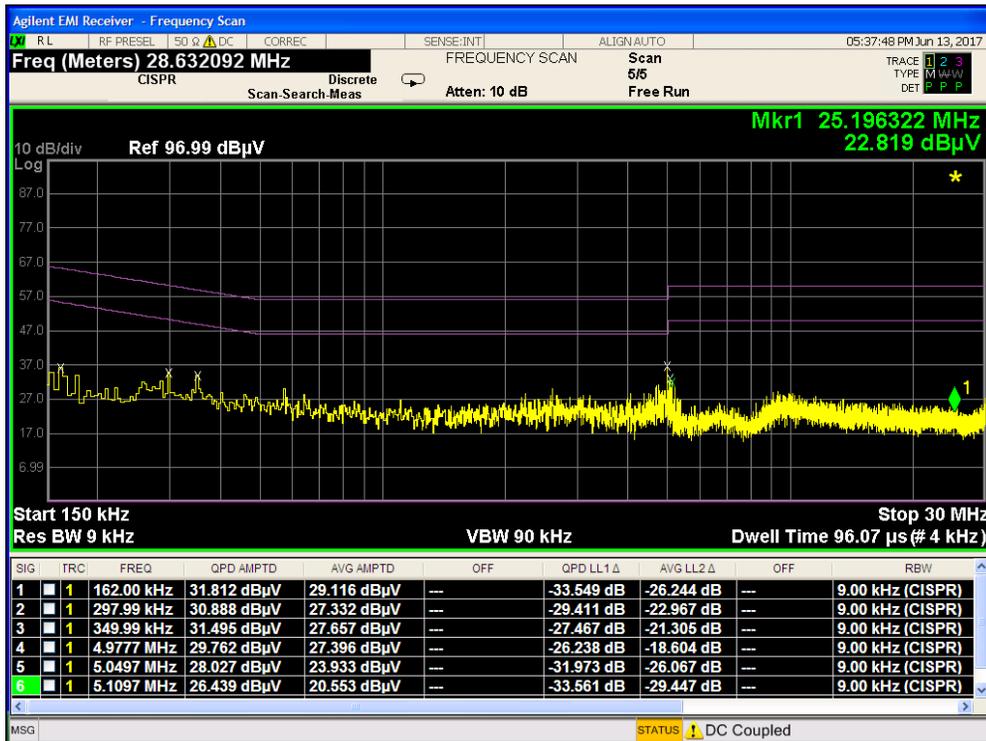


Plot 7-242. Line Conducted Plot with 802.11a UNII Band 2A (N)

FCC ID: ZNFV30A		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1706070187-05.ZNF	Test Dates: 6/6 - 7/14/2017	EUT Type: Portable Handset		Page 208 of 211

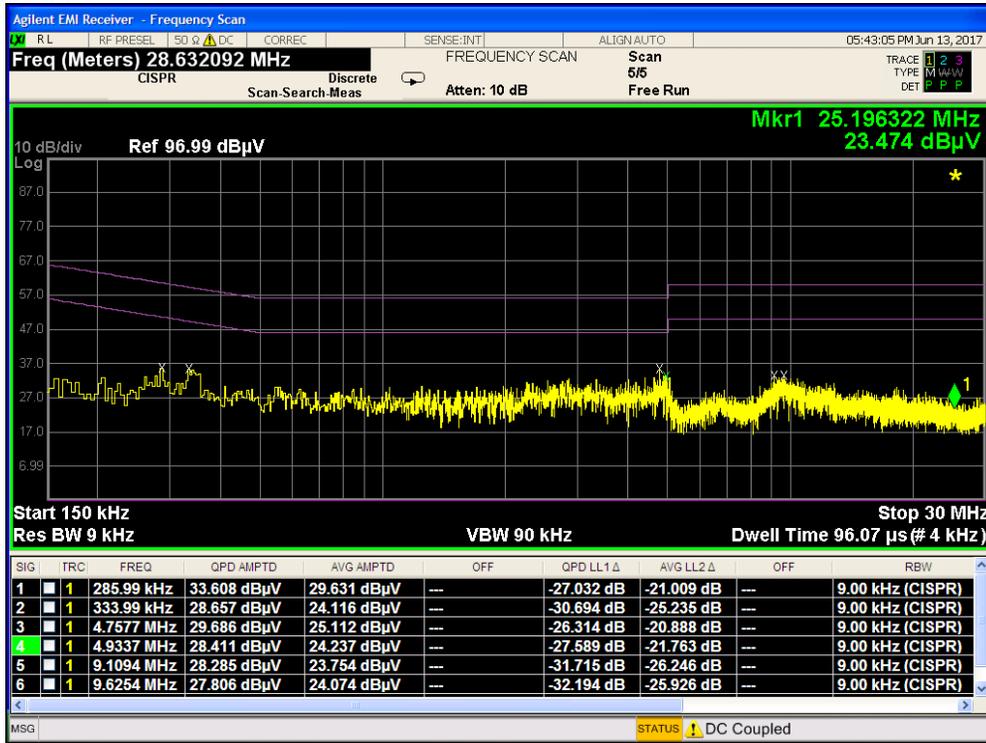


Plot 7-243. Line Conducted Plot with 802.11a UNII Band 2C (L1)

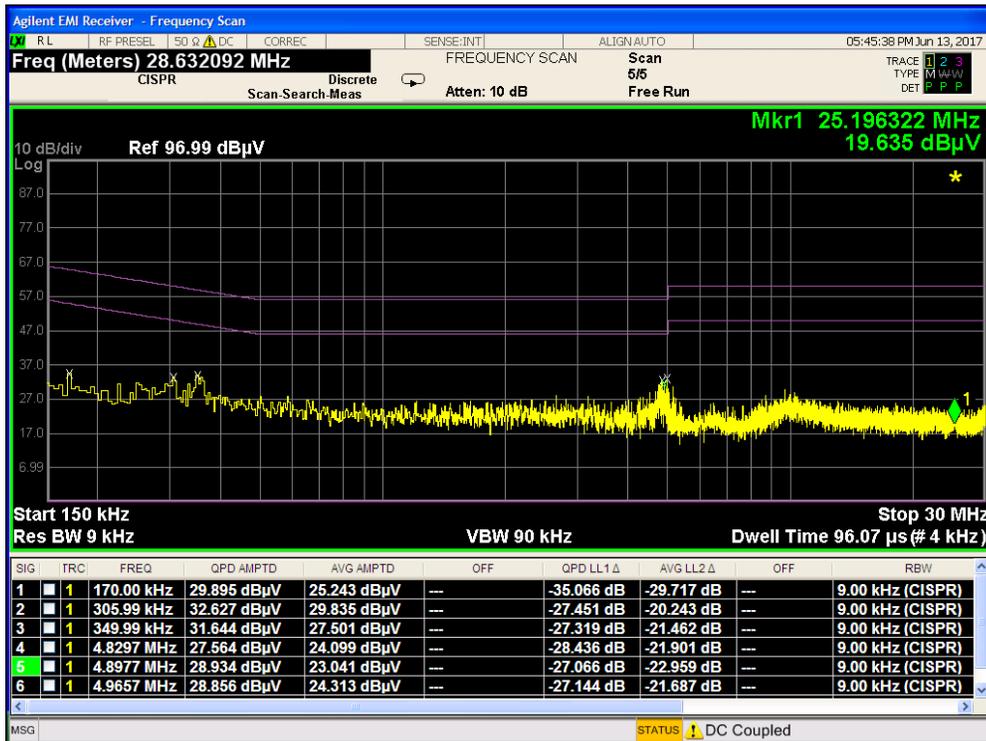


Plot 7-244. Line Conducted Plot with 802.11a UNII Band 2C (N)

FCC ID: ZNFV30A	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1706070187-05.ZNF	Test Dates: 6/6 - 7/14/2017	EUT Type: Portable Handset		Page 209 of 211

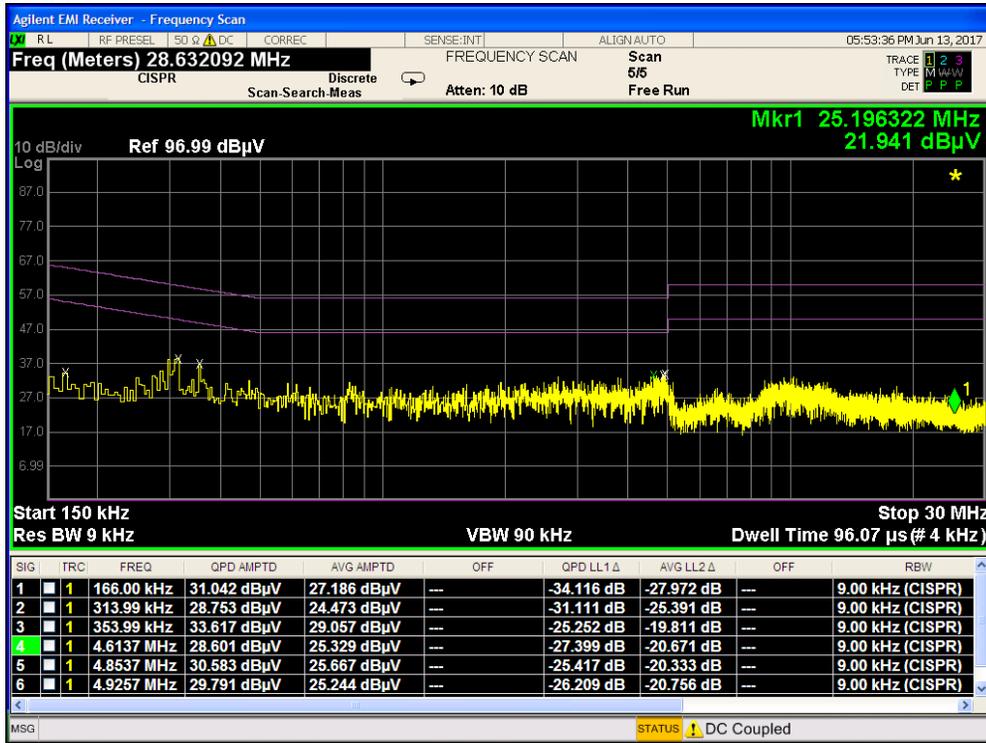

Plot 7-245. Line Conducted Plot with 802.11a UNII Band 3 (L1)

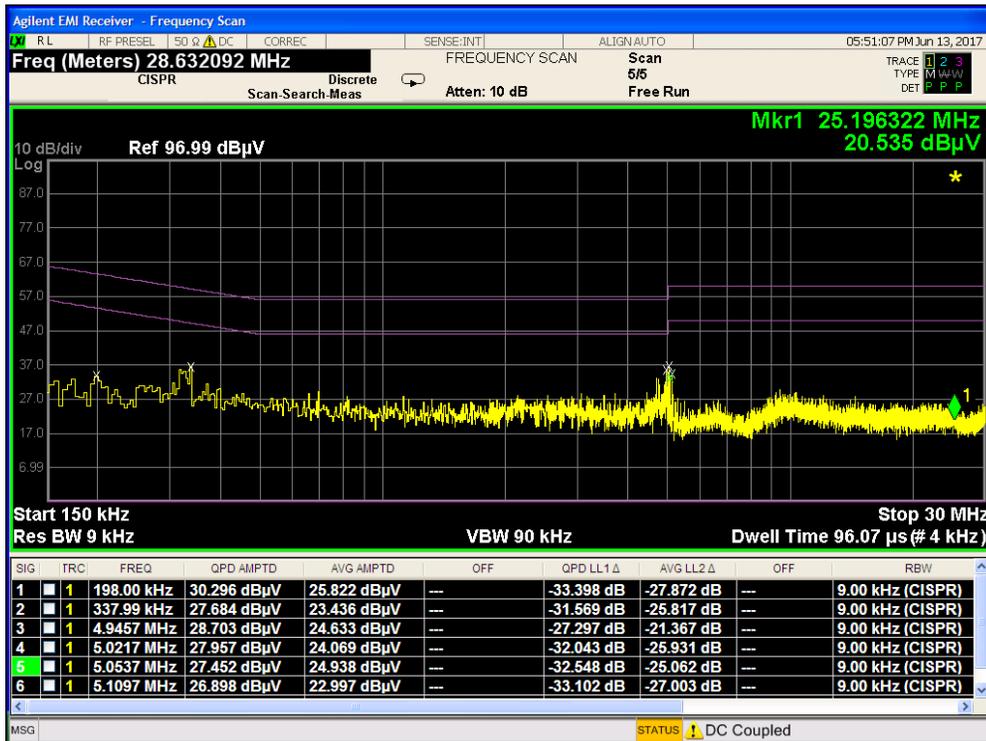

Plot 7-246. Line Conducted Plot with 802.11a UNII Band 3 (N)

FCC ID: ZNFV30A		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1706070187-05.ZNF	Test Dates: 6/6 - 7/14/2017	EUT Type: Portable Handset		Page 210 of 211

8.0 CONCLUSION

The data collected relate only the item(s) tested and show that the **LG Portable Handset FCC ID: ZNFV30A** is in compliance with Part 15E of the FCC Rules.

FCC ID: ZNFV30A		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1706070187-05.ZNF	Test Dates: 6/6 - 7/14/2017	EUT Type: Portable Handset	Page 211 of 211	