



HCT CO., LTD.

CERTIFICATE OF COMPLIANCE FCC Class II Permissive Change

Applicant Name:
LG Electronics MobileComm U.S.A., Inc.

Address:
1000 Sylvan Avenue, Englewood Cliffs NJ 07632

Date of Issue:
May 08, 2014

Test Site/Location:
HCT CO., LTD., 74, Seoicheon-ro 578beon-gil, Majang-
myeon, Icheon-si, Gyeonggi-do, Korea

Report No.: HCT-R-1404-F021-2

HCT FRN: 0005866421

IC Recognition No.: 5944A-3

FCC ID	: ZNFV400
IC	: 2703C-V400
APPLICANT	: LG Electronics MobileComm U.S.A., Inc.

FCC/ IC Model(s): LG-V400
EUT Type: 2.4/5GHz BT/WiFi Tablet
Frequency Range: 2402 MHz - 2480 MHz (Bluetooth)
Modulation type GFSK(Normal), $\pi/4$ DQPSK and 8DPSK(EDR)
FCC Classification: FCC Part 15 Spread Spectrum Transmitter
FCC Rule Part(s): Part 15 subpart C 15.247
IC Rule : RSS-210 Issue 8 , RSS-GEN Issue 3

Engineering Statement:

The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998,21 U.S. C.853(a)

Report prepared by
: Kyoung Houn Seo
Test engineer of RF Team

Approved by
: Chang Seok Choi
Manager of RF Team

This report only responds to the tested sample and may not be reproduced, except in full, without written approval of the HCT Co., Ltd.

FCC PT.15.247 TEST REPORT	FCC Class II Permissive Change REPORT			www.hct.co.kr
Test Report No. HCT-R-1404-F021-2	Date of Issue: May 08, 2014	EUT Type: 2.4/5GHz BT/WiFi Tablet	FCC ID: ZNFV400	IC: 2703C-V400

Version

TEST REPORT NO.	DATE	DESCRIPTION
HCT-R-1404-F021	April 28, 2014	- First Approval Report
HCT-R-1404-F021-1	May 07, 2014	- Remove output power measurement data on page 1 and 3 -Add note calibration status throughout the entire testing period. -Revised the comment for 6 dBi in Section 6. - Revised of the data table column header for section 8.1.1 and section 8.1.3
HCT-R-1404-F021-2	May 08, 2014	- Revised the calibration note and equipment lists on page 23

Table of Contents

1.	GENERAL INFORMATION	4
2.	EUT DESCRIPTION	4
3.	TEST METHODOLOGY	5
3.1	EUT CONFIGURATION	5
3.2	EUT EXERCISE	5
3.3	GENERAL TEST PROCEDURES	5
3.4	DESCRIPTION OF TEST MODES	6
4.	INSTRUMENT CALIBRATION	6
5.	FACILITIES AND ACCREDITATIONS	6
5.1	FACILITIES	6
5.2	EQUIPMENT	6
6.	ANTENNA REQUIREMENTS.....	6
7.	SUMMARY OF TEST RESULTS.....	7
7.1	FCC Part	7
7.2	IC Part	7
8.	FCC PART 15.247 REQUIREMENTS	8
8.1	SPURIOUS EMISSIONS.....	8
8.1.1	RADIATED SPURIOUS EMISSIONS	8
8.1.2	RECEIVER SPURIOUS EMISSIONS.....	19
8.1.3	RADIATED RESTRICTED BAND EDGES	20
9.	LIST OF TEST EQUIPMENT.....	23
9.1	LIST OF TEST EQUIPMENT(Radiated Test).....	23

FCC PT.15.247 TEST REPORT	FCC Class II Permissive Change REPORT			www.hct.co.kr
Test Report No. HCT-R-1404-F021-2	Date of Issue: May 08, 2014	EUT Type: 2.4/5GHz BT/WiFi Tablet	FCC ID: ZNFV400	IC: 2703C-V400



1. GENERAL INFORMATION

Applicant: LG Electronics MobileComm U.S.A., Inc.
Address: 1000 Sylvan Avenue, Englewood Cliffs NJ 07632
FCC ID: ZNFV400
IC: 2703C-V400
EUT Type: 2.4/5GHz BT/WiFi Tablet
FCC/ IC Model name(s): LG-V400
Date(s) of Tests: April 09, 2014 ~ April 15, 2014
Place of Tests: HCT Co., Ltd.
 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Korea
 (IC Recognition No. : 5944A-3)

2. EUT DESCRIPTION

EUT Type	2.4/5GHz BT/WiFi Tablet
FCC/ IC Model Name	LG-V400
Power Supply	DC 3.8 V
Battery type	Li-ion Battery(Standard)
Frequency Range	2402 MHz - 2480 MHz (Bluetooth)
BT Operating Mode	Normal, EDR, AFH
Modulation Type	GFSK(Normal), $\pi/4$ DQPSK and 8DPSK(EDR)
Modulation Technique	FHSS
Number of Channels	79Channels, Minimum 20 Channels(AFH)
Antenna Specification	Manufacturer: Ace Technology Antenna type: Planar Inverted F Antenna Peak Gain : 1.96 dBi

15.247 Requirements for Bluetooth transmitter

- This Bluetooth module has been tested by a Bluetooth Qualification Lab, and we confirm the following:
 - 1) This system is hopping pseudo-randomly.
 - 2) Each frequency is used equally on the average by each transmitter.
 - 3) The receiver input bandwidths that match the hopping channel bandwidths of their corresponding transmitters
 - 4) The receiver shifts frequencies in synchronization with the transmitted signals.
- 15.247(g): The system, consisting of both the transmitter and the receiver, must be designed to comply with all of the regulations in this Section 15.247 should the transmitter be presented with a continuous data (or information) stream.
- 15.247(h): The coordination of frequency hopping systems in any other manner for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters is not permitted.

FCC PT.15.247 TEST REPORT	FCC Class II Permissive Change REPORT			www.hct.co.kr
Test Report No. HCT-R-1404-F021-2	Date of Issue: May 08, 2014	EUT Type: 2.4/5GHz BT/WiFi Tablet	FCC ID: ZNFV400	IC: 2703C-V400



3. TEST METHODOLOGY

The measurement procedure described in the American National Standard for Testing Unlicensed Wireless Devices(ANSI C63.4-2003) and FCC Public Notice DA 00-705 dated March 30, 2000 entitled “Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems” were used in the measurement of the **LG Electronics MobileComm U.S.A., Inc.**

2.4/5GHz BT/WiFi Tablet FCC ID: ZNFV400

3.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

3.2 EUT EXERCISE

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

3.3 GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4. (Version :2003) Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 13.1.4.1 of ANSI C63.4. (Version: 2003). To record the final measurements, the analyzer detector function was set to CISPR quasi-peak mode and the bandwidth of the spectrum analyzer was set to 120 kHz for frequencies below 1 GHz or 1 MHz for frequencies above 1 GHz. For average measurements above 1 GHz, the analyzer was set to peak detector with a reduced VBW setting(RBW = 1 MHz, VBW = 1/T Hz, where T = Pulse width).

Conducted Antenna Terminal

See Section from 8.1 to 8.6.1.(DA 00-705)

FCC PT.15.247 TEST REPORT		FCC Class II Permissive Change REPORT		www.hct.co.kr
Test Report No. HCT-R-1404-F021-2	Date of Issue: May 08, 2014	EUT Type: 2.4/5GHz BT/WiFi Tablet	FCC ID: ZNFV400	IC: 2703C-V400



3.4 DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

Channel low, mid and high with highest data rate (worst case) is chosen for full testing.

4. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipments, which is traceable to recognized national standards.

5. FACILITIES AND ACCREDITATIONS

5.1 FACILITIES

The SAC(Semi-Anechoic Chamber) and conducted measurement facility used to collect the radiated data are located at the 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Korea. The site is constructed in conformance with the requirements of ANSI C63.4. (Version :2003) and CISPR Publication 22. Detailed description of test facility was submitted to the Commission and accepted dated February 28, 2014 (Registration Number: 90661)

5.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of Linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements. Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers. Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

6. ANTENNA REQUIREMENTS

According to FCC 47 CFR §15.203, RSS-GEN 7.1.2

"An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section."

- * The antennas of this E.U.T are permanently attached.
- * The directional gain of this E.U.T antenna does not exceed 6 dBi
- * The E.U.T Complies with the requirement of §15.203, RSS-GEN 7.1.2

FCC PT.15.247 TEST REPORT	FCC Class II Permissive Change REPORT			www.hct.co.kr
Test Report No. HCT-R-1404-F021-2	Date of Issue: May 08, 2014	EUT Type: 2.4/5GHz BT/WiFi Tablet	FCC ID: ZNFV400	IC: 2703C-V400



7. SUMMARY OF TEST RESULTS

7.1 FCC Part

Test Description	IC Part Section(s)	FCC Part Section(s)	Test Limit	Test Condition	Test Result
Radiated Spurious Emissions	RSS-210, A2.9, A 8.5	§15.247(d), 15.205, 15.209	cf. Section 8.6.2	RADIATED	PASS
Radiated Restricted Band Edge	RSS-210, A2.9, A 8.5	§15.247(d), 15.205, 15.209	cf. Section 8.6.4		PASS

7.2 IC Part

Test Description	IC Part Section(s)	FCC Part Section(s)	Test Limit	Test Condition	Test Result
Radiated Spurious Emissions	RSS-210, A2.9, A 8.5	§15.247(d), 15.205, 15.209	cf. Section 8.6.2	RADIATED	PASS
Receiver Spurious Emissions	RSS-GEN, Section 7.2.3	§15.109	cf. Section 8.6.3		PASS
Radiated Restricted Band Edge	RSS-210, A2.9, A 8.5	§15.247(d), 15.205, 15.209	cf. Section 8.6.4		PASS



8. FCC PART 15.247 REQUIREMENTS

8.1 SPURIOUS EMISSIONS

8.1.1 RADIATED SPURIOUS EMISSIONS

LIMIT : §15.247(d), §15.205, §15.209


1. 20dBc in any 100kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequency (MHz)	Field Strength (uV/m)	Measurement Distance (m)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3


FCC PT.15.247 TEST REPORT	FCC Class II Permissive Change REPORT			www.hct.co.kr
Test Report No. HCT-R-1404-F021-2	Date of Issue: May 08, 2014	EUT Type: 2.4/5GHz BT/WiFi Tablet	FCC ID: ZNFV400	IC: 2703C-V400

Test Configuration


Below 30 MHz

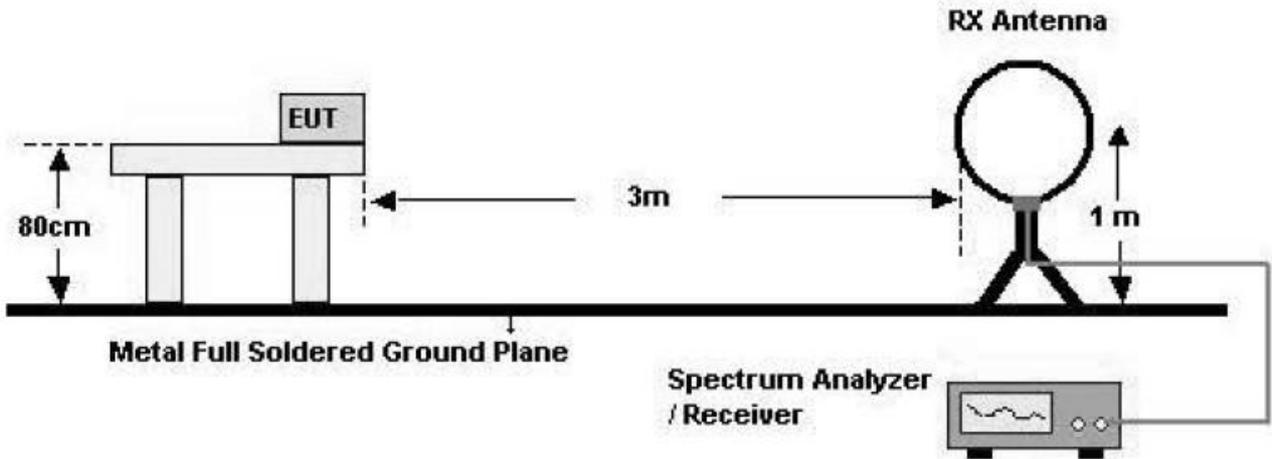

30 MHz - 1 GHz

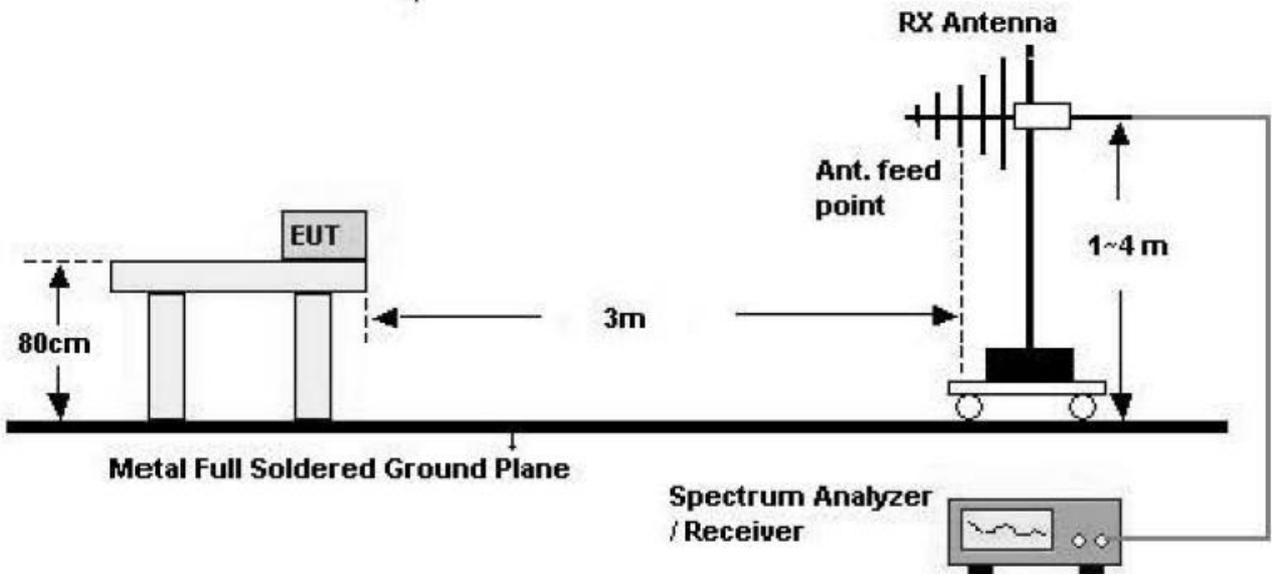

Above 1 GHz

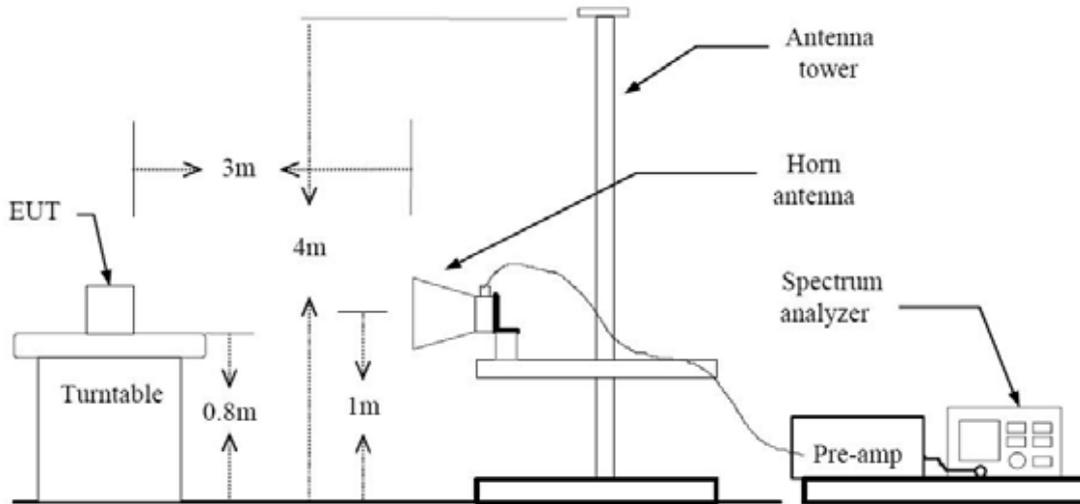

TEST PROCEDURE

1. The EUT is placed on a turntable, which is 0.8 m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. Spectrum Setting
 - a. Peak Setting 1 GHz – 26 GHz, RBW = 1 MHz, VBW = 1 MHz.
 - b. AV Setting 1 GHz – 26 GHz, RBW = 1 MHz, VBW = 1 kHz $\geq 1/\tau$ Hz, where τ = pulse width in seconds.

FCC PT.15.247 TEST REPORT		FCC Class II Permissive Change REPORT		www.hct.co.kr	
Test Report No. HCT-R-1404-F021-2	Date of Issue: May 08, 2014	EUT Type: 2.4/5GHz BT/WiFi Tablet	FCC ID: ZNFV400	IC: 2703C-V400	



TEST RESULTS

9 kHz – 30MHz

Operation Mode: Normal Mode

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dB μ V	dB /m	dB	(H/V)	dB μ V/m	dB μ V/m	dB
No Critical peaks found							

Notes:

1. Measuring frequencies from 9 kHz to the 30MHz.
2. The reading of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to be measured.
3. Distance extrapolation factor = 40 log (specific distance / test distance) (dB)
4. Limit line = specific Limits (dBuV) + Distance extrapolation factor
5. This test is performed with hopping off.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

FCC PT.15.247 TEST REPORT	FCC Class II Permissive Change REPORT			www.hct.co.kr
Test Report No. HCT-R-1404-F021-2	Date of Issue: May 08, 2014	EUT Type: 2.4/5GHz BT/WiFi Tablet	FCC ID: ZNFV400	IC: 2703C-V400



TEST RESULTS

Below 1 GHz

Operation Mode: Normal Mode

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dB μ V	dB /m	dB	(H/V)	dB μ V/m	dB μ V/m	dB
No Critical peaks found							

Notes:

1. Measuring frequencies from 30 MHz to the 1 GHz.
2. Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Quasi peak detector mode.
3. This test is performed with hopping off.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

FCC PT.15.247 TEST REPORT	FCC Class II Permissive Change REPORT			www.hct.co.kr
Test Report No. HCT-R-1404-F021-2	Date of Issue: May 08, 2014	EUT Type: 2.4/5GHz BT/WiFi Tablet	FCC ID: ZNFV400	IC: 2703C-V400



Above 1 GHz

Operation Mode: CH Low(GFSK)

Frequency [MHz]	Reading DBuV	A.F+CL-AMP GAIN [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4804	48.53	-2.16	V	46.37	73.98	27.61	PK
4804	35.18	-2.16	V	33.02	53.98	20.96	AV
7206	45.62	7.31	V	52.93	73.98	21.05	PK
7206	32.07	7.31	V	39.38	53.98	14.60	AV
4804	48.87	-2.16	H	46.71	73.98	27.27	PK
4804	35.13	-2.16	H	32.97	53.98	21.01	AV
7206	45.77	7.31	H	53.08	73.98	20.90	PK
7206	32.23	7.31	H	39.54	53.98	14.44	AV

Operation Mode: CH Low(8DPSK)

Frequency [MHz]	Reading DBuV	A.F+CL-AMP GAIN [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4804	49.22	-2.16	V	47.06	73.98	26.92	PK
4804	35.38	-2.16	V	33.22	53.98	20.76	AV
7206	45.95	7.31	V	53.26	73.98	20.72	PK
7206	32.46	7.31	V	39.77	53.98	14.21	AV
4804	49.48	-2.16	H	47.32	73.98	26.66	PK
4804	35.29	-2.16	H	33.13	53.98	20.85	AV
7206	46.72	7.31	H	54.03	73.98	19.95	PK
7206	32.69	7.31	H	40.00	53.98	13.98	AV



Operation Mode: CH Low($\pi/4$ DQPSK)

Frequency [MHz]	Reading DBuV	A.F+CL-AMP GAIN [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4804	49.76	-2.16	V	47.60	73.98	26.38	PK
4804	35.29	-2.16	V	33.13	53.98	20.85	AV
7206	45.73	7.31	V	53.04	73.98	20.94	PK
7206	32.22	7.31	V	39.53	53.98	14.45	AV
4804	49.29	-2.16	H	47.13	73.98	26.85	PK
4804	35.34	-2.16	H	33.18	53.98	20.80	AV
7206	46.18	7.31	H	53.49	73.98	20.49	PK
7206	32.48	7.31	H	39.79	53.98	14.19	AV

A:F: ANTENNA FACTOR

C:L: CABLE LOSS

AMP GAIN: AMPLIFIER GAIN

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000 MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. Spectrum setting:
 - a. Peak Setting 1 GHz – 26 GHz, RBW = 1 MHz, VBW = 1 MHz.
 - b. AV Setting 1 GHz – 26 GHz, RBW = 1 MHz, VBW = 1 kHz $\geq 1/\tau$ Hz, where τ = pulse width in seconds.
We performed using a reduced video BW method was done with the analyzer in linear mode.
6. We have done Normal Mode and EDR Mode test.
7. This test is performed with hopping off.
8. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

FCC PT.15.247 TEST REPORT	FCC Class II Permissive Change REPORT			www.hct.co.kr
Test Report No. HCT-R-1404-F021-2	Date of Issue: May 08, 2014	EUT Type: 2.4/5GHz BT/WiFi Tablet	FCC ID: ZNFV400	IC: 2703C-V400

Operation Mode: CH Mid(GFSK)

Frequency [MHz]	Reading dBuV	A.F+CL-AMP GAIN [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4882	49.29	-1.95	V	47.34	73.98	26.64	PK
4882	35.74	-1.95	V	33.79	53.98	20.19	AV
7323	46.19	7.34	V	53.53	73.98	20.45	PK
7323	32.38	7.34	V	39.72	53.98	14.26	AV
4882	49.21	-1.95	H	47.26	73.98	26.72	PK
4882	35.80	-1.95	H	33.85	53.98	20.13	AV
7323	46.25	7.34	H	53.59	73.98	20.39	PK
7323	32.37	7.34	H	39.71	53.98	14.27	AV

Operation Mode: CH Mid(8DPSK)

Frequency [MHz]	Reading DBuV	A.F+CL-AMP GAIN [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4882	49.72	-1.95	V	47.77	73.98	26.21	PK
4882	35.84	-1.95	V	33.89	53.98	20.09	AV
7323	47.67	7.34	V	55.01	73.98	18.97	PK
7323	32.66	7.34	V	40.00	53.98	13.98	AV
4882	49.38	-1.95	H	47.43	73.98	26.55	PK
4882	36.28	-1.95	H	34.33	53.98	19.65	AV
7323	47.61	7.34	H	54.95	73.98	19.03	PK
7323	32.82	7.34	H	40.16	53.98	13.82	AV



Operation Mode: CH Mid($\pi/4$ DQPSK)

Frequency [MHz]	Reading DBuV	A.F+CL-AMP GAIN [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4882	49.97	-1.95	V	48.02	73.98	25.96	PK
4882	35.78	-1.95	V	33.83	53.98	20.15	AV
7323	47.21	7.34	V	54.55	73.98	19.43	PK
7323	32.39	7.34	V	39.73	53.98	14.25	AV
4882	49.84	-1.95	H	47.89	73.98	26.09	PK
4882	36.21	-1.95	H	34.26	53.98	19.72	AV
7323	47.19	7.34	H	54.53	73.98	19.45	PK
7323	32.48	7.34	H	39.82	53.98	14.16	AV

A:F: ANTENNA FACTOR

C:L: CABLE LOSS

AMP GAIN: AMPLIFIER GAIN

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000 MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. Spectrum setting:
 - a. Peak Setting 1 GHz – 26 GHz, RBW = 1 MHz, VBW = 1 MHz.
 - b. AV Setting 1 GHz – 26 GHz, RBW = 1 MHz, VBW = 1 kHz $\geq 1/\tau$ Hz, where τ = pulse width in seconds.
We performed using a reduced video BW method was done with the analyzer in linear mode.
6. We have done Normal Mode and EDR Mode test.
7. This test is performed with hopping off.
8. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

FCC PT.15.247 TEST REPORT	FCC Class II Permissive Change REPORT			www.hct.co.kr
Test Report No. HCT-R-1404-F021-2	Date of Issue: May 08, 2014	EUT Type: 2.4/5GHz BT/WiFi Tablet	FCC ID: ZNFV400	IC: 2703C-V400



Operation Mode: CH High(GFSK)

Frequency [MHz]	Reading dBuV	A.F+CL-AMP GAIN [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4960	49.53	-1.84	V	47.69	73.98	26.29	PK
4960	35.84	-1.84	V	34.00	53.98	19.98	AV
7440	45.72	7.13	V	52.85	73.98	21.13	PK
7440	32.11	7.13	V	39.24	53.98	14.74	AV
4960	49.61	-1.84	H	47.77	73.98	26.21	PK
4960	35.85	-1.84	H	34.01	53.98	19.97	AV
7440	45.80	7.13	H	52.93	73.98	21.05	PK
7440	32.11	7.13	H	39.24	53.98	14.74	AV

Operation Mode: CH High(8DPSK)

Frequency [MHz]	Reading DBuV	A.F+CL-AMP GAIN [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4960	49.64	-1.84	V	47.80	73.98	26.18	PK
4960	36.20	-1.84	V	34.36	53.98	19.62	AV
7440	46.38	7.13	V	53.51	73.98	20.47	PK
7440	32.49	7.13	V	39.62	53.98	14.36	AV
4960	49.35	-1.84	H	47.51	73.98	26.47	PK
4960	36.43	-1.84	H	34.59	53.98	19.39	AV
7440	46.87	7.13	H	54.00	73.98	19.98	PK
7440	32.32	7.13	H	39.45	53.98	14.53	AV



Operation Mode: CH High ($\pi/4$ DQPSK)

Frequency [MHz]	Reading DBuV	A.F+CL-AMP GAIN [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4960	49.85	-1.84	V	48.01	73.98	25.97	PK
4960	36.26	-1.84	V	34.42	53.98	19.56	AV
7440	46.15	7.13	V	53.28	73.98	20.70	PK
7440	32.34	7.13	V	39.47	53.98	14.51	AV
4960	49.58	-1.84	H	47.74	73.98	26.24	PK
4960	36.48	-1.84	H	34.64	53.98	19.34	AV
7440	46.28	7.13	H	53.41	73.98	20.57	PK
7440	32.68	7.13	H	39.81	53.98	14.17	AV

A:F: ANTENNA FACTOR

C:L: CABLE LOSS

AMP GAIN: AMPLIFIER GAIN

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000 MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. Spectrum setting:
 - a. Peak Setting 1 GHz – 26 GHz, RBW = 1 MHz, VBW = 1 MHz.
 - b. AV Setting 1 GHz – 26 GHz, RBW = 1 MHz, VBW = 1 kHz $\geq 1/\tau$ Hz, where τ = pulse width in seconds.
We performed using a reduced video BW method was done with the analyzer in linear mode.
6. We have done Normal Mode and EDR Mode test.
7. This test is performed with hopping off.
8. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

FCC PT.15.247 TEST REPORT	FCC Class II Permissive Change REPORT			www.hct.co.kr
Test Report No. HCT-R-1404-F021-2	Date of Issue: May 08, 2014	EUT Type: 2.4/5GHz BT/WiFi Tablet	FCC ID: ZNFV400	IC: 2703C-V400



8.1.3 RADIATED RESTRICTED BAND EDGES

Test Requirements and limit, §15.247(d), §15.205, §15.209

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in section 15.209(a) (See section 15.205(c)).

Operation Mode	Normal(GFSK)
Operating Frequency	2402 MHz , 2480 MHz
Channel No	CH 0, CH 78

Frequency [MHz]	Reading dBuV	A.F.+CL [dB]	Ant. Pol. [H/V]	Duty Cycle Correction [dB]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2390.0	35.83	31.47	H	0	67.30	73.98	6.68	PK
2390.0	22.60	31.47	H	-24.73	29.33	53.98	24.65	AV
2390.0	36.02	31.47	V	0	67.49	73.98	6.49	PK
2390.0	22.59	31.47	V	-24.73	29.32	53.98	24.66	AV
2483.5	37.18	31.46	H	0	68.64	73.98	5.34	PK
2483.5	31.87	31.46	H	-24.73	38.60	53.98	15.38	AV
2483.5	38.31	31.46	V	0	69.77	73.98	4.21	PK
2483.5	33.89	31.46	V	-24.73	40.62	53.98	13.36	AV



Operation Mode EDR(8DPSK)
 Operating Frequency 2402 MHz , 2480 MHz
 Channel No CH 0, CH 78

Frequency [MHz]	Reading dBuV	A.F.+CL [dB]	Ant. Pol. [H/V]	Duty Cycle Correction [dB]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2390.0	35.09	31.47	H	0	66.56	73.98	7.42	PK
2390.0	22.57	31.47	H	-24.73	29.30	53.98	24.68	AV
2390.0	35.95	31.47	V	0	67.42	73.98	6.56	PK
2390.0	22.67	31.47	V	-24.73	29.40	53.98	24.58	AV
2483.5	37.20	31.46	H	0	68.66	73.98	5.32	PK
2483.5	30.84	31.46	H	-24.73	37.57	53.98	16.41	AV
2483.5	39.05	31.46	V	0	70.51	73.98	3.47	PK
2483.5	32.78	31.46	V	-24.73	39.51	53.98	14.47	AV

Operation Mode EDR(π /4DQPSK)
 Operating Frequency 2402 MHz , 2480 MHz
 Channel No CH 0, CH 78

Frequency [MHz]	Reading dBuV	A.F.+CL [dB]	Ant. Pol. [H/V]	Duty Cycle Correction [dB]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2390.0	35.55	31.47	H	0	67.02	73.98	6.96	PK
2390.0	22.54	31.47	H	-24.73	29.27	53.98	24.71	AV
2390.0	36.23	31.47	V	0	67.70	73.98	6.28	PK
2390.0	22.58	31.47	V	-24.73	29.31	53.98	24.67	AV
2483.5	37.35	31.46	H	0	68.81	73.98	5.17	PK
2483.5	30.78	31.46	H	-24.73	37.51	53.98	16.47	AV
2483.5	38.55	31.46	V	0	70.01	73.98	3.97	PK
2483.5	32.73	31.46	V	-24.73	39.46	53.98	14.52	AV

A:F: ANTENNA FACTOR
 C:L: CABLE LOSS
 AMP GAIN: AMPLIFIER GAIN

Notes:

1. Frequency range of measurement = 2483.5 MHz ~ 2500 MHz
2. Total = Fundamental Reading Value + Antenna Factor + Cable Loss + Duty Cycle Correction Factor

FCC PT.15.247 TEST REPORT	FCC Class II Permissive Change REPORT			www.hct.co.kr
Test Report No. HCT-R-1404-F021-2	Date of Issue: May 08, 2014	EUT Type: 2.4/5GHz BT/WiFi Tablet		FCC ID: ZNFV400 IC: 2703C-V400



3. Spectrum setting:

- a. Peak Setting 1 GHz – 26 GHz, RBW = 1 MHz, VBW = 1 MHz.
- b. AV Setting 1 GHz – 26 GHz, RBW = 1 MHz, VBW = 1 kHz $\geq 1/\tau$ Hz, where τ = pulse width in seconds.
We performed using a reduced video BW method was done with the analyzer in linear mode.

4. FYI : Duty Cycle Correction Factor (79 channel hopping)

- a. Time to cycle through all channels= $\Delta t = \tau$ [ms] x 79 channels = 229.100 ms, where τ = pulse width
- b. $100 \text{ ms} / \Delta t$ [ms] = $H \rightarrow$ Round up to next highest integer, $H' = 1$
- c. Worst Case Dwell Time = τ [ms] x $H' = 2.900$ ms
- d. Duty Cycle Correction = $20\log(\text{Worst Case Dwell Time} / 100\text{ms})$ dB = -30.752 dB

5. Duty Cycle Correction Factor(AFH mode – minimum channel number case - 20 channels)

- a. Time to cycle through all channels= $\Delta t = \tau$ [ms] x 20 channels = 58.00 ms, where τ = pulse width
- b. $100 \text{ ms} / \Delta t$ [ms] = $H \rightarrow$ Round up to next highest integer, $H' = 2$
- c. Worst Case Dwell Time = τ [ms] x $H' = 5.800$ ms
- d. Duty Cycle Correction(AFH) = $20\log(\text{Worst Case Dwell Time} / 100\text{ms})$ dB = -24.7314 dB
- e. We applied DCCF in the test result which hopping channel number is 20.

6. We have done Normal Mode, EDR Mode.

7. This test is performed with hopping off.

8. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

FCC PT.15.247 TEST REPORT		FCC Class II Permissive Change REPORT		www.hct.co.kr
Test Report No. HCT-R-1404-F021-2	Date of Issue: May 08, 2014	EUT Type: 2.4/5GHz BT/WiFi Tablet	FCC ID: ZNFV400	IC: 2703C-V400

9. LIST OF TEST EQUIPMENT

9.1 LIST OF TEST EQUIPMENT(Radiated Test)

Manufacturer	Model / Equipment	Calibration Date	Calibration Interval	Calibration Due	Serial No.
Schwarzbeck	VULB 9160/ TRILOG Antenna	12/17/2012	Biennial	12/17/2014	3150
Rohde & Schwarz	ESCI / EMI TEST RECEIVER	01/24/2014	Annual	01/24/2015	100584
HD	MA240/ Antenna Position Tower	N/A	N/A	N/A	556
EMCO	1050/ Turn Table	N/A	N/A	N/A	114
HD GmbH	HD 100/ Controller	N/A	N/A	N/A	13
HD GmbH	KMS 560/ SlideBar	N/A	N/A	N/A	12
Rohde & Schwarz	SCU-18/ Signal Conditioning Unit	09/10/2013	Annual	09/10/2014	10094
CERNEX	CBL18265035 / POWER AMP	07/24/2013	Annual	07/24/2014	22966
CERNEX	CBL26405040 / POWER AMP	04/04/2014	Annual	04/04/2015	19660
Schwarzbeck	BBHA 9120D/ Horn Antenna	07/05/2013	Biennial	07/05/2015	1151
Schwarzbeck	BBHA9170 / Horn Antenna(15 GHz ~ 40 GHz)	10/30/2012	Biennial	10/30/2014	BBHA9170124
Rohde & Schwarz	FSP / Spectrum Analyzer	01/24/2014	Annual	01/24/2015	839117/011
Wainwright Instrument	WHF3.0/18G-10EF / High Pass Filter	02/03/2014	Annual	02/03/2015	F6
Wainwright Instrument	WHNX6.0/26.5G-6SS / High Pass Filter	04/09/2014	Annual	04/09/2015	1
Wainwright Instrument	WHNX7.0/18G-8SS / High Pass Filter	04/04/2014	Annual	04/04/2015	29
Wainwright Instrument	WRCJ2400/2483.5-2370/2520-60/14SS Band Reject Filter	06/24/2013	Annual	06/24/2014	1
TESCOM	TC-3000C / BLUETOOTH TESTER	04/11/2014	Annual	04/11/2015	3000C000276
Rohde & Schwarz	CBT / BLUETOOTH TESTER	04/25/2013	Annual	04/25/2014	100422
Rohde & Schwarz	LOOP ANTENNA	08/14/2012	Biennial	08/14/2014	100179
CERNEX	CBL06185030 / POWER AMP	07/24/2013	Annual	07/24/2014	22965
CERNEX	CBLU1183540 / POWER AMP	07/24/2013	Annual	07/24/2014	22964

note : This equipment (WHNX6.0/26.5G-6SS / High Pass Filter) is used after 04/10/2014

and actual calibration date is 04/09/2014

This equipment (TC-3000C / BLUETOOTH TESTER) is used after 04/11/2014

and actual calibration date is 04/11/2014