



## MEASUREMENT REPORT FCC Part 22, 24, & 27 LTE

**Applicant Name:**  
 LG Electronics MobileComm U.S.A  
 1000 Sylvan Avenue  
 Englewood Cliffs, NJ 07632  
 United States

**Date of Testing:**  
 04/23 - 05/05/14; 6/20/14  
**Test Site/Location:**  
 PCTEST Lab., Columbia, MD, USA  
**Test Report Serial No.:**  
 0Y1404210803.ZNF

<b>FCC ID :</b>	<b>ZNFV410</b>
<b>APPLICANT:</b>	<b>LG ELECTRONICS MOBILECOMM U.S.A</b>

**FCC Classification:** PCS Licensed Transmitter (PCB)  
**FCC Rule Part(s):** §2; §22; §24; §27  
**Test Procedure(s):** ANSI/TIA-603-C-2004, KDB 971168 v02r01  
**EUT Type:** Portable Tablet  
**Model(s):** LG-V410, V410, LGV410  
**Test Device Serial No.:** *identical prototype* [S/N: EIRP#1, RF Cond.#1, RF Cond.#3]

Mode	Tx Frequency (MHz)	Emission Designator	Modulation	ERP/EIRP	
				Max. Power (W)	Max. Power (dBm)
LTE Band 17	706.5 - 713.5	4M51G7D	QPSK	0.037	15.64
LTE Band 17	706.5 - 713.5	4M50W7D	16QAM	0.028	14.45
LTE Band 17	709 - 711	8M96G7D	QPSK	0.037	15.71
LTE Band 17	709 - 711	8M98W7D	16QAM	0.028	14.45
LTE Band 5	826.5 - 846.5	4M49G7D	QPSK	0.053	17.27
LTE Band 5	826.5 - 846.5	4M50W7D	16QAM	0.041	16.09
LTE Band 5	829 - 844	8M99G7D	QPSK	0.050	16.98
LTE Band 5	829 - 844	8M97W7D	16QAM	0.039	15.95
LTE Band 4	1712.5 - 1752.5	4M50G7D	QPSK	0.298	24.75
LTE Band 4	1712.5 - 1752.5	4M50W7D	16QAM	0.235	23.71
LTE Band 4	1715 - 1750	8M99G7D	QPSK	0.324	25.11
LTE Band 4	1715 - 1750	8M95W7D	16QAM	0.252	24.01
LTE Band 2	1852.5 - 1907.5	4M50G7D	QPSK	0.247	23.93
LTE Band 2	1852.5 - 1907.5	4M50W7D	16QAM	0.187	22.72
LTE Band 2	1855 - 1905	8M98G7D	QPSK	0.259	24.14
LTE Band 2	1855 - 1905	8M98W7D	16QAM	0.196	22.92

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in §2.947. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

  
 Randy Ortanez  
 President




<b>FCC ID:</b> ZNFV410		<b>FCC Pt. 22, 24, &amp; 27 LTE MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1404210803.ZNF	<b>Test Dates:</b> 04/23 - 05/05/14; 6/20/14	<b>EUT Type:</b> Portable Tablet		Page 1 of 76

# T A B L E O F C O N T E N T S

FCC PART 22, 24, & 27 MEASUREMENT REPORT .....		3
1.0 INTRODUCTION .....		4
1.1 SCOPE .....		4
1.2 TESTING FACILITY .....		4
2.0 PRODUCT INFORMATION .....		5
2.1 EQUIPMENT DESCRIPTION .....		5
2.2 DEVICE CAPABILITIES .....		5
2.3 EMI SUPPRESSION DEVICE(S)/MODIFICATIONS .....		5
2.4 LABELING REQUIREMENTS .....		5
3.0 DESCRIPTION OF TESTS .....		6
3.1 MEASUREMENT PROCEDURE .....		6
3.2 BLOCK A FREQUENCY RANGE .....		6
3.3 CELLULAR - BASE FREQUENCY BLOCKS .....		6
3.4 CELLULAR - MOBILE FREQUENCY BLOCKS .....		6
3.5 PCS - BASE FREQUENCY BLOCKS .....		7
3.6 PCS - MOBILE FREQUENCY BLOCKS .....		7
3.7 AWS - BASE FREQUENCY BLOCKS .....		7
3.8 AWS - MOBILE FREQUENCY BLOCKS .....		7
3.9 RADIATED POWER AND RADIATED SPURIOUS EMISSIONS .....		8
4.0 TEST EQUIPMENT CALIBRATION DATA .....		9
5.0 SAMPLE CALCULATIONS .....		10
6.0 TEST RESULTS .....		11
6.1 SUMMARY .....		11
6.2 OCCUPIED BANDWIDTH .....		12
6.3 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL .....		21
6.4 BAND EDGE EMISSIONS AT ANTENNA TERMINAL .....		35
6.5 PEAK-AVERAGE RATIO .....		50
6.6 RADIATED POWER (ERP/EIRP) .....		55
6.7 RADIATED SPURIOUS EMISSIONS MEASUREMENTS .....		59
6.8 FREQUENCY STABILITY / TEMPERATURE VARIATION .....		67
7.0 CONCLUSION .....		76

<b>FCC ID:</b> ZNFV410	 <b>FCC Pt. 22, 24, &amp; 27 LTE MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1404210803.ZNF	<b>Test Dates:</b> 04/23 - 05/05/14; 6/20/14	<b>EUT Type:</b> Portable Tablet	Page 2 of 76



# MEASUREMENT REPORT

## FCC Part 22, 24, & 27





### §2.1033 General Information

**APPLICANT:** LG Electronics MobileComm U.S.A  
**APPLICANT ADDRESS:** 1000 Sylvan Avenue  
 Englewood Cliffs, NJ 07632, United States  
**TEST SITE:** PCTEST ENGINEERING LABORATORY, INC.  
**TEST SITE ADDRESS:** 7185 Oakland Mills Road, Columbia, MD 21045 USA  
**FCC RULE PART(S):** §2; §22; §24; §27  
**BASE MODEL:** LG-V410  
**FCC ID:** ZNFV410  
**FCC CLASSIFICATION:** PCS Licensed Transmitter (PCB)  
**FREQUENCY TOLERANCE:** ±0.00025 % (2.5 ppm)  
**Test Device Serial No.:** EIRP#1, RF Cond.#1, RF Cond.#3       Production     Pre-Production     Engineering  
**DATE(S) OF TEST:** 04/23 - 05/05/14; 6/20/14  
**TEST REPORT S/N:** 0Y1404210803.ZNF

### Test Facility / Accreditations

Measurements were performed at PCTEST Engineering Lab located in Columbia, MD 21046, U.S.A.

- PCTEST facility is an FCC registered (PCTEST Reg. No. 159966) test facility with the site description report on file and has met all the requirements specified in Section 2.948 of the FCC Rules and Industry Canada (2451B-1).
- PCTEST Lab is accredited to ISO 17025 by U.S. National Institute of Standards and Technology (NIST) under the National Voluntary Laboratory Accreditation Program (NVLAP Lab code: 100431-0) in EMC, FCC and Telecommunications.
- PCTEST Lab is accredited to ISO 17025-2005 by the American Association for Laboratory Accreditation (A2LA) in Specific Absorption Rate (SAR) testing, Hearing Aid Compatibility (HAC) testing, CTIA Test Plans, and wireless testing for FCC and Industry Canada Rules.
- PCTEST Lab is a recognized U.S. Conformity Assessment Body (CAB) in EMC and R&TTE (n.b. 0982) under the U.S.-EU Mutual Recognition Agreement (MRA).
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC Guide 65 by the American National Standards Institute (ANSI) in all scopes of FCC Rules and Industry Canada Standards (RSS).
- PCTEST facility is an IC registered (2451B-1) test laboratory with the site description on file at Industry Canada.
- PCTEST is a CTIA Authorized Test Laboratory (CATL) for AMPS, CDMA, and EvDO wireless devices and for Over-the-Air (OTA) Antenna Performance testing for AMPS, CDMA, GSM, GPRS, EGPRS, UMTS (W-CDMA), CDMA 1xEVDO, and CDMA 1xRTT.



FCC ID: ZNFV410	 <b>FCC Pt. 22, 24, &amp; 27 LTE MEASUREMENT REPORT (CERTIFICATION)</b> 		Reviewed by: Quality Manager
Test Report S/N: 0Y1404210803.ZNF	Test Dates: 04/23 - 05/05/14; 6/20/14	EUT Type: Portable Tablet	Page 3 of 76

# 1.0 INTRODUCTION


## 1.1 Scope

Measurement and determination of electromagnetic emissions (EME) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Industry Canada Certification and Engineering Bureau.

## 1.2 Testing Facility

The map below shows the location of the PCTEST LABORATORY, its proximity to the FCC Laboratory, the Columbia vicinity, the Baltimore-Washington Intern't'l (BWI) airport, the city of Baltimore and the Washington, DC area. (See Figure 1-1).

These measurement tests were conducted at the PCTEST Engineering Laboratory, Inc. facility located at 7185 Oakland Mills Road, Columbia, MD 21046. The site coordinates are 39° 10'23" N latitude and 76° 49'50" W longitude. The facility is 0.4 miles North of the FCC laboratory, and the ambient signal and ambient signal strength are approximately equal to those of the FCC laboratory. The detailed description of the measurement facility was found to be in compliance with the requirements of § 2.948 according to ANSI C63.4-2003 on February 15, 2012.

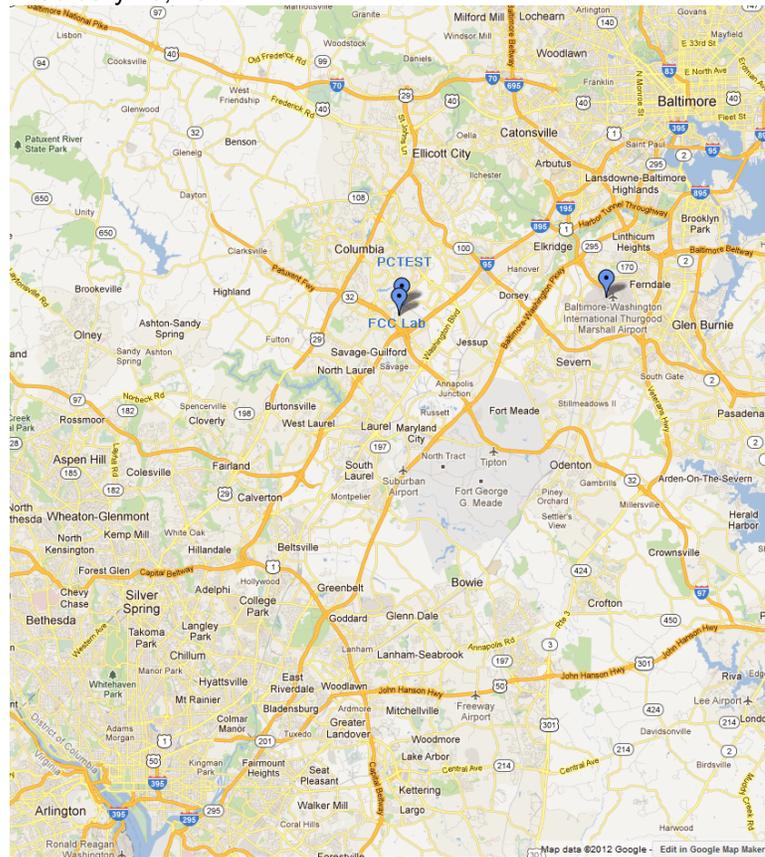

**Figure 1-1. Map of the Greater Baltimore and Metropolitan Washington, D.C. area**

FCC ID: ZNFV410	 <b>FCC Pt. 22, 24, &amp; 27 LTE MEASUREMENT REPORT (CERTIFICATION)</b>			Reviewed by: Quality Manager
Test Report S/N: 0Y1404210803.ZNF	Test Dates: 04/23 - 05/05/14; 6/20/14	EUT Type: Portable Tablet	Page 4 of 76	

## 2.0 PRODUCT INFORMATION

### 2.1 Equipment Description

The Equipment Under Test (EUT) is the **LG Portable Tablet FCC ID: ZNFV410**. The test data contained in this report pertains only to the emissions due to the EUT's LTE function.

### 2.2 Device Capabilities

This device contains the following capabilities:

850/1900 WCDMA/HSPA, Band 17 (5, 10MHz BW), 5 (5, 10MHz BW), 4 (5, 10MHz BW), 2 (5, 10MHz BW) LTE, 802.11a/b/g/n WLAN, 802.11a/n UNII, Bluetooth (1x, EDR, LE)

### 2.3 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

### 2.4 Labeling Requirements

Per 2.925


The FCC identifier shall be permanently affixed to the equipment and shall be readily visible to the purchaser at the time of purchase.

FCC ID: ZNFV410	 <b>FCC Pt. 22, 24, &amp; 27 LTE MEASUREMENT REPORT (CERTIFICATION)</b>			<b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1404210803.ZNF	<b>Test Dates:</b> 04/23 - 05/05/14; 6/20/14	<b>EUT Type:</b> Portable Tablet	Page 5 of 76	



### 3.5 PCS - Base Frequency Blocks


§24.229

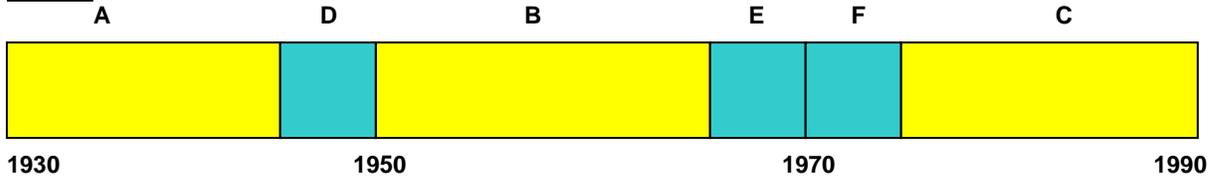

- BLOCK 1: 1930 – 1945 MHz (A)
- BLOCK 2: 1945 – 1950 MHz (D)
- BLOCK 3: 1950 – 1965 MHz (B)
- BLOCK 4: 1965 – 1970 MHz (E)
- BLOCK 5: 1970 – 1975 MHz (F)
- BLOCK 6: 1975 – 1990 MHz (C)

### 3.6 PCS - Mobile Frequency Blocks


§24.229

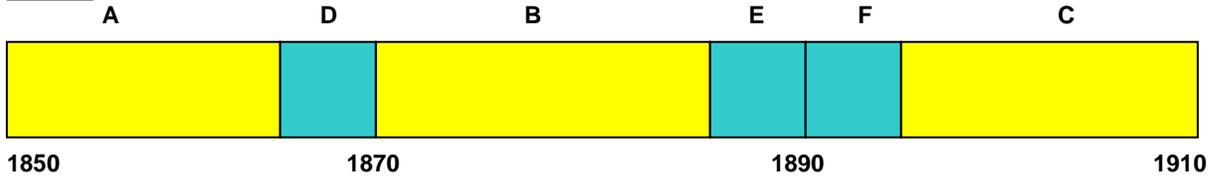

- BLOCK 1: 1850 – 1865 MHz (A)
- BLOCK 2: 1865 – 1870 MHz (D)
- BLOCK 3: 1870 – 1885 MHz (B)
- BLOCK 4: 1885 – 1890 MHz (E)
- BLOCK 5: 1890 – 1895 MHz (F)
- BLOCK 6: 1895 – 1910 MHz (C)

### 3.7 AWS - Base Frequency Blocks


§27.5(h)

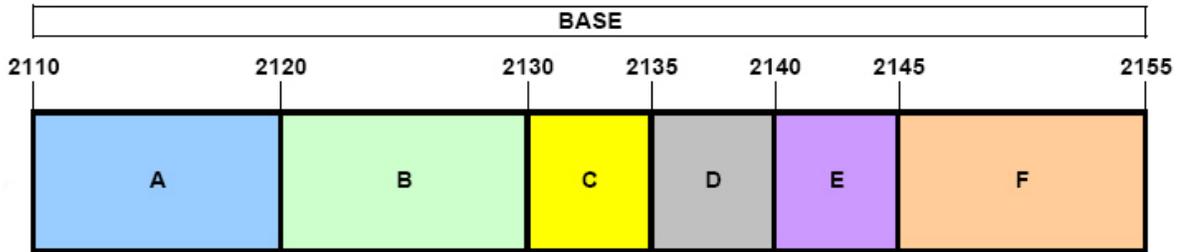

- BLOCK 1: 2110 – 2120 MHz (A)
- BLOCK 2: 2120 – 2130 MHz (B)
- BLOCK 3: 2130 – 2135 MHz (C)
- BLOCK 4: 2135 – 2140 MHz (D)
- BLOCK 5: 2140 – 2145 MHz (E)
- BLOCK 6: 2145 – 2155 MHz (F)

### 3.8 AWS - Mobile Frequency Blocks

§27.5(h)

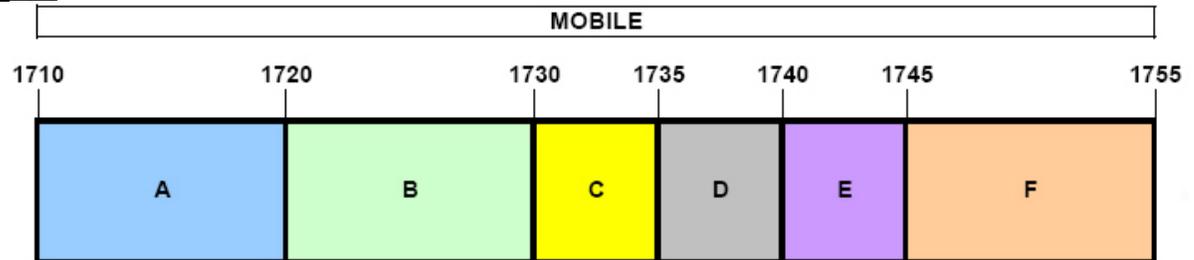

- BLOCK 1: 1710 – 1720 MHz (A)
- BLOCK 2: 1720 – 1730 MHz (B)
- BLOCK 3: 1730 – 1735 MHz (C)
- BLOCK 4: 1735 – 1740 MHz (D)
- BLOCK 5: 1740 – 1745 MHz (E)
- BLOCK 6: 1745 – 1755 MHz (F)

FCC ID: ZNFV410			FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1404210803.ZNF	Test Dates: 04/23 - 05/05/14; 6/20/14	EUT Type: Portable Tablet			Page 7 of 76

### 3.9 Radiated Power and Radiated Spurious Emissions

§2.1053 §22.913(a.2) §22.917(a) §24.232(c) §24.238(a) §27.50(c.10) §27.50(d.4) §27.53(f) §27.53(g) §27.53(h)

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. For measurements above 1GHz absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections. For measurements below 1GHz, the absorbers are removed. An ETS Lindgren Model 2188 raised turntable is used for radiated measurement. It is a continuously rotatable, remote-controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. A 78cm high PVC support structure is placed on top of the turntable. A ¾" (~1.9cm) sheet of high density polyethylene is used as the table top and is placed on top of the PVC supports to bring the total height of the table to 80cm.

The equipment under test was transmitting while connected to its integral antenna and is placed on a wooden turntable 80cm above the ground plane and 3 meters from the receive antenna. The receive antenna height is adjusted between 1 and 4 meter height, the turntable is rotated through 360 degrees, and the EUT is manipulated through all orthogonal planes representative of its typical use to achieve the highest reading on the receive spectrum analyzer. Radiated power levels are also investigated with the receive antenna horizontally and vertically polarized. The maximized power level is recorded using the spectrum analyzer "Channel Power" function with the integration band set to the emissions' occupied bandwidth, a RMS detector, RBW = 100kHz, VBW = 300kHz, and a 1 second sweep time over a minimum of 10 sweeps, per the guidelines of KDB 971168.

Per the guidance of ANSI/TIA-603-C-2004, a half-wave dipole is then substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator with the level of the signal generator being adjusted to obtain the same receive spectrum analyzer level previously recorded from the spurious emission from the EUT. The power of the emission is calculated using the following formula:

$$P_d [dBm] = P_g [dBm] - \text{cable loss} [dB] + \text{antenna gain} [dBd/dBi]$$

Where,  $P_d$  is the dipole equivalent power,  $P_g$  is the generator output into the substitution antenna, and the antenna gain is the gain of the substitute antenna used relative to either a half-wave dipole (dBd) or an isotropic source (dBi). The substitute level is equal to  $P_g [dBm] - \text{cable loss} [dB]$ .

The calculated  $P_d$  levels are then compared to the absolute spurious emission limit of -13dBm which is equivalent to the required minimum attenuation of  $43 + 10\log_{10}(\text{Power} [Watts])$ .

FCC ID: ZNFV410	 <b>FCC Pt. 22, 24, &amp; 27 LTE MEASUREMENT REPORT (CERTIFICATION)</b> 		Reviewed by: Quality Manager
Test Report S/N: 0Y1404210803.ZNF	Test Dates: 04/23 - 05/05/14; 6/20/14	EUT Type: Portable Tablet	Page 8 of 76

## 4.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST).

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
-	LTX1	Licensed Transmitter Cable Set	1/29/2014	Annual	1/29/2015	N/A
-	RE1	Radiated Emissions Cable Set (UHF/EHF)	3/25/2014	Annual	3/25/2015	N/A
Agilent	8447D	Broadband Amplifier	5/31/2013	Annual	5/31/2014	2443A01900
Agilent	N9020A	MXA Signal Analyzer	10/29/2013	Annual	10/29/2014	US46470561
Emco	3115	Horn Antenna (1-18GHz)	1/30/2014	Biennial	1/30/2016	9704-5182
Espec	ESX-2CA	Environmental Chamber	4/16/2014	Annual	4/16/2015	17620
ETS Lindgren	3160-09	18-26.5 GHz Standard Gain Horn	5/30/2012	Biennial	5/30/2014	135427
ETS Lindgren	3164-08	Quad Ridge Horn Antenna	3/12/2014	Biennial	3/12/2016	128337
Mini-Circuits	PWR-SENS-4RMS	USB Power Sensor	4/17/2014	Annual	4/17/2015	11210140001
Mini-Circuits	SSG-4000HP	USB Synthesized Signal Generator	N/A			11208010032
Mini-Circuits	TVA-11-422	RF Power Amp	N/A			QA1303002
Mini-Circuits	VHF-1200+	High Pass Filter	1/27/2014	Annual	1/27/2015	30923
Mini-Circuits	VHF-3100+	High Pass Filter	1/27/2014	Annual	1/27/2015	30841
Rohde & Schwarz	CMW500	LTE Radio Communication Tester	N/A			100976
Rohde & Schwarz	ESU26	EMI Test Receiver (26.5GHz)	1/27/2014	Annual	1/27/2015	100342
Rohde & Schwarz	TS-PR18	1-18 GHz Pre-Amplifier	5/31/2013	Annual	5/31/2014	100071
Rohde & Schwarz	TS-PR26	18-26.5 GHz Pre-Amplifier	5/31/2013	Annual	5/31/2014	100040
Schwarzbeck	UHA 9105	Dipole Antenna (400 - 1GHz) Rx	11/21/2013	Biennial	11/21/2015	9105-2404
Seekonk	NC-100	Torque Wrench (8" lb)	4/16/2014	Biennial	4/16/2016	N/A
Sunol	JB5	Bi-Log Antenna (30M - 5GHz)	1/28/2014	Biennial	1/28/2016	A051107

**Table 4-1. Test Equipment**

**Notes:**

1. Equipment with a calibration date of "N/A" shown in this list was not used to make direct calibrated measurements.
2. For equipment listed above that has a calibration due date that falls within the test date range, care was taken to ensure that this equipment was utilized prior to the calibration due date.

FCC ID: ZNFV410		<b>FCC Pt. 22, 24, &amp; 27 LTE MEASUREMENT REPORT (CERTIFICATION)</b>		Reviewed by: Quality Manager
Test Report S/N: 0Y1404210803.ZNF	Test Dates: 04/23 - 05/05/14; 6/20/14	EUT Type: Portable Tablet	Page 9 of 76	

## 5.0 SAMPLE CALCULATIONS

### Emission Designator

#### QPSK Modulation

**Emission Designator = 8M62G7D**

LTE BW = 8.62 MHz  
 G = Phase Modulation  
 7 = Quantized/Digital Info  
 D = Amplitude/Angle Modulated

#### 16QAM Modulation

**Emission Designator = 8M45W7D**

LTE BW = 8.45 MHz  
 W = Amplitude/Angle Modulated  
 7 = Quantized/Digital Info  
 D = Combination (Audio/Data)

### Spurious Radiated Emission – LTE Band

#### **Example: Middle Channel LTE Mode 2<sup>nd</sup> Harmonic (1564 MHz)**

The average spectrum analyzer reading at 3 meters with the EUT on the turntable was -81.0 dBm. The gain of the substituted antenna is 8.1 dBi. The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of -81.0 dBm on the spectrum analyzer. The loss of the cable between the signal generator and the terminals of the substituted antenna is 2.0 dB at 1564 MHz. So 6.1 dB is added to the signal generator reading of -30.9 dBm yielding -24.80 dBm. The fundamental EIRP was 25.501 dBm so this harmonic was 25.501 dBm - (-24.80).

FCC ID: ZNFV410	 <b>FCC Pt. 22, 24, &amp; 27 LTE MEASUREMENT REPORT (CERTIFICATION)</b>			Reviewed by: Quality Manager
Test Report S/N: 0Y1404210803.ZNF	Test Dates: 04/23 - 05/05/14; 6/20/14	EUT Type: Portable Tablet	Page 10 of 76	

## 6.0 TEST RESULTS

### 6.1 Summary

Company Name: LG Electronics MobileComm U.S.A  
 FCC ID: ZNFV410  
 FCC Classification: PCS Licensed Transmitter (PCB)  
 Mode(s): LTE

FCC Part Section(s)	Test Description	Test Limit	Test Condition	Result	Reference
<b>TRANSMITTER MODE (TX)</b>					
2.1049	Occupied Bandwidth	N/A	CONDUCTED	PASS	Section 6.2
2.1051 22.917(a) 24.238(a) 27.53(f) 27.53(g) 27.53(h)	Band Edge / Conducted Spurious Emissions	> 43 + 10log <sub>10</sub> (P[Watts]) at Band Edge and for all out-of- band emissions		PASS	Section 6.3, 6.4
24.232(d) 27.50(d.5)	Peak-Average Ratio	< 13 dB		PASS	Section 6.5
2.1046	Transmitter Conducted Output Power	N/A		PASS	See RF Exposure Report
2.1055. 22.355 24.235 27.54	Frequency Stability	< 2.5 ppm (Part 22) and fundamental emissions stay within authorized frequency block (Part 24, 27)		PASS	Section 6.8
22.913(a.2)	Effective Radiated Power (Band 5.)	< 7 Watts max. ERP	RADIATED	PASS	Section 6.6
27.50(c.10)	Effective Radiated Power (Band 17)	< 3 Watts max. ERP		PASS	Section 6.6
24.232(c)	Equivalent Isotropic Radiated Power (Band 2)	< 2 Watts max. EIRP		PASS	Section 6.6
27.50(d.4)	Equivalent Isotropic Radiated Power (Band 4)	< 1 Watts max. EIRP		PASS	Section 6.6
2.1053 22.917(a) 24.238(a) 27.53(f) 27.53(g) 27.53(h)	Undesirable Emissions	> 43 + 10log <sub>10</sub> (P[Watts]) for all out-of-band emissions		PASS	Section 6.7

**Table 6-1. Summary of Test Results**

**Notes:**

- 1) All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots (Sections 6.2, 6.3, 6.4, 6.5) were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables, directional couplers, and attenuators used as part of the system to maintain a link between the call box and the EUT at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables, attenuators, and couplers.
- 4) For conducted spurious emissions, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is PCTEST "LTE Automation", Version 2.0.

FCC ID: ZNFV410	 <b>FCC Pt. 22, 24, &amp; 27 LTE MEASUREMENT REPORT (CERTIFICATION)</b>			Reviewed by: Quality Manager
Test Report S/N: 0Y1404210803.ZNF	Test Dates: 04/23 - 05/05/14; 6/20/14	EUT Type: Portable Tablet	Page 11 of 76	

## 6.2 Occupied Bandwidth

### §2.1049

#### Test Overview

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. All modes of operation were investigated and the worst case configuration results are reported in this section.

#### Test Procedure Used


KDB 971168 v02r01 – Section 4.2

#### Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5% of the expected OBW
3. VBW  $\geq$  3 x RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5% of the 99% occupied bandwidth observed in Step 7

#### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

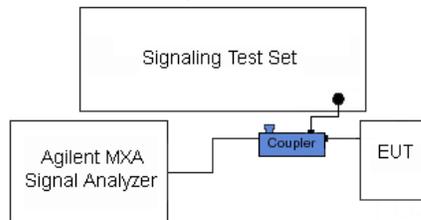

**Figure 6-1. Test Instrument & Measurement Setup**


#### Test Notes

None.

FCC ID: ZNFV410		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1404210803.ZNF	Test Dates: 04/23 - 05/05/14; 6/20/14	EUT Type: Portable Tablet	Page 12 of 76	



Plot 6-1. Occupied Bandwidth Plot (Band 17 – 5.0MHz QPSK – RB Size 25)

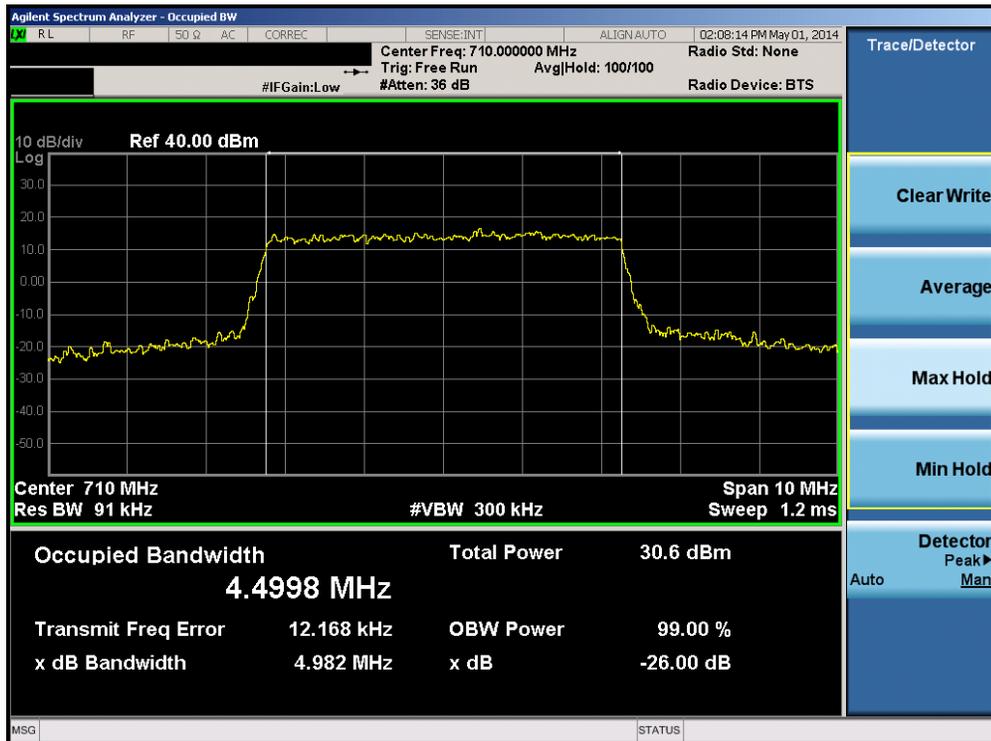


Plot 6-2. Occupied Bandwidth Plot (Band 17 – 5.0MHz 16-QAM – RB Size 25)

FCC ID: ZNFV410		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1404210803.ZNF	Test Dates: 04/23 - 05/05/14; 6/20/14	EUT Type: Portable Tablet		Page 13 of 76




Plot 6-3. Occupied Bandwidth Plot (Band 17 – 10.0MHz QPSK – RB Size 50)

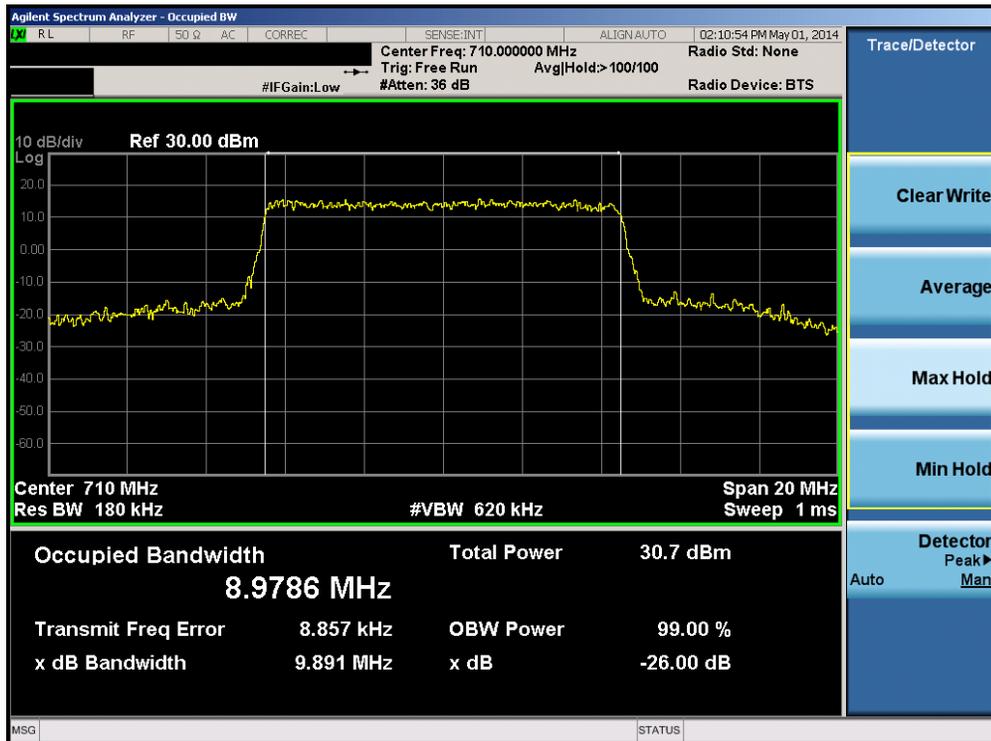


Plot 6-4. Occupied Bandwidth Plot (Band 17 – 10.0MHz 16-QAM – RB Size 50)

FCC ID: ZNFV410		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1404210803.ZNF	Test Dates: 04/23 - 05/05/14; 6/20/14	EUT Type: Portable Tablet		Page 14 of 76

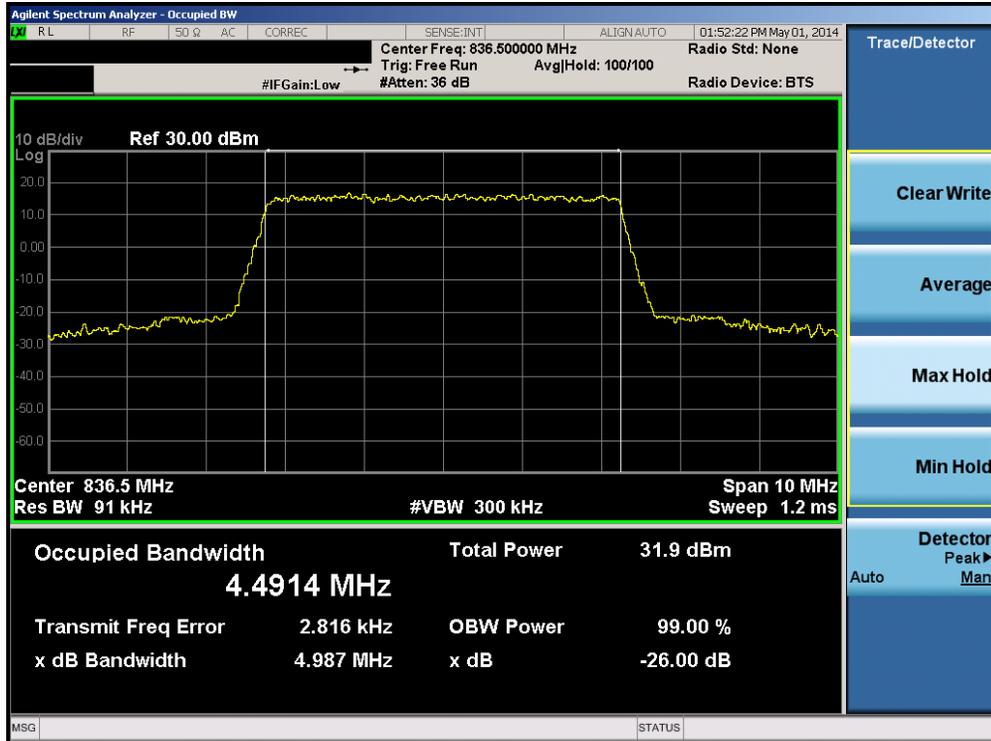


Plot 6-5. Occupied Bandwidth Plot (Band 5 – 5.0MHz QPSK – RB Size 25)

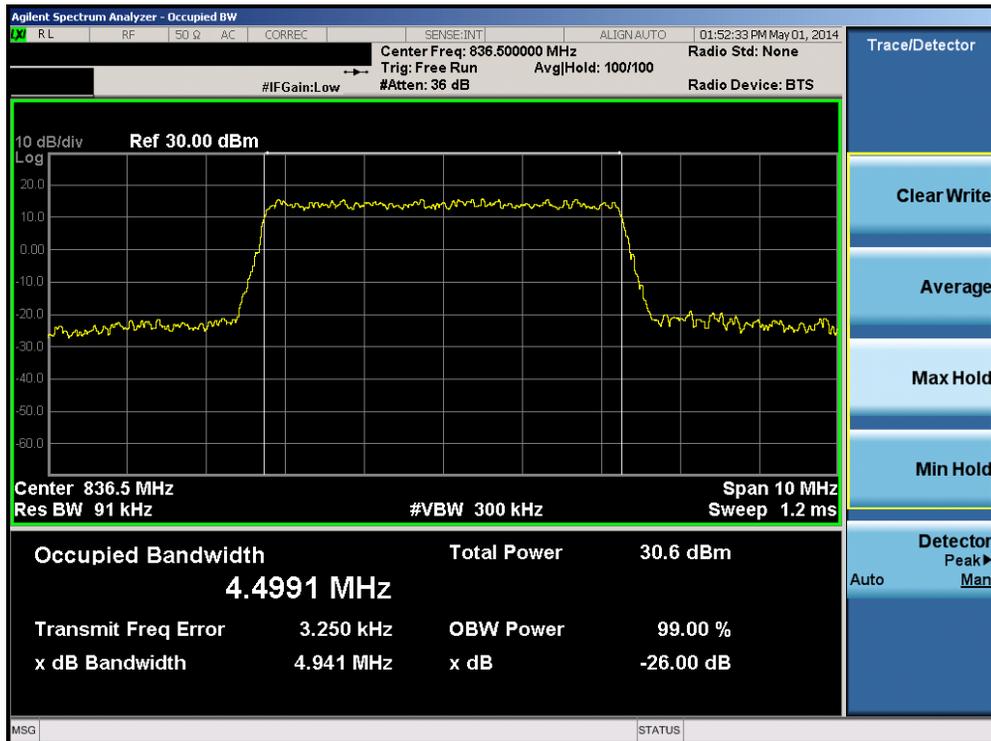

Plot 6-6. Occupied Bandwidth Plot (Band 5 – 5.0MHz 16-QAM – RB Size 25)

FCC ID: ZNFV410		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1404210803.ZNF	Test Dates: 04/23 - 05/05/14; 6/20/14	EUT Type: Portable Tablet		Page 15 of 76

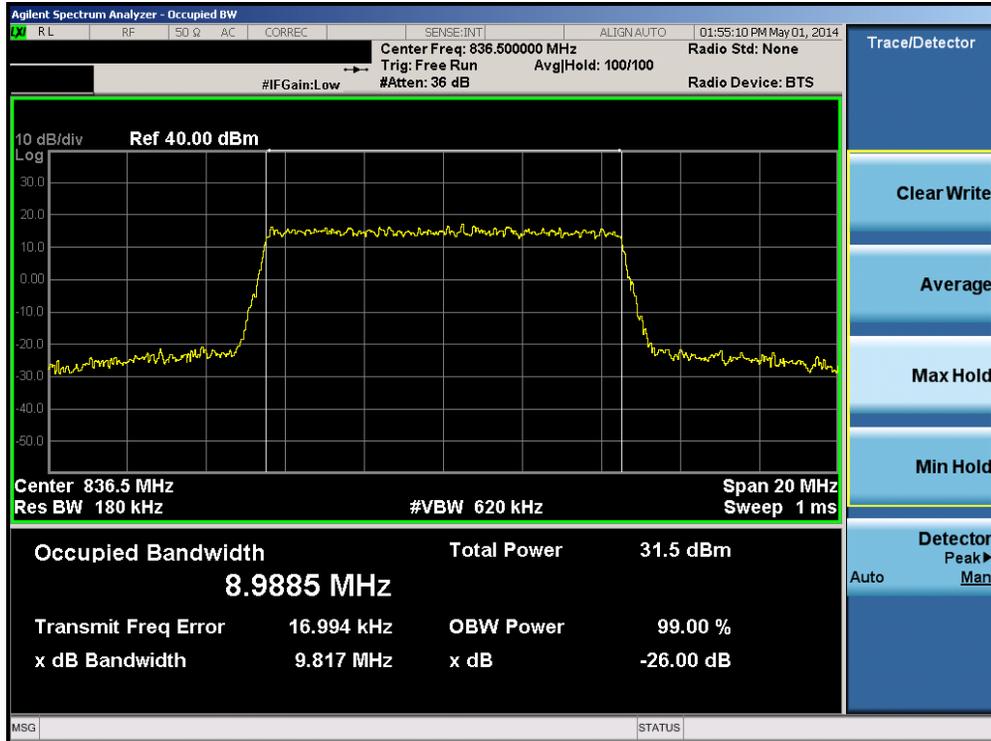

Plot 6-7. Occupied Bandwidth Plot (Band 5 – 10.0MHz QPSK – RB Size 50)




Plot 6-8. Occupied Bandwidth Plot (Band 5 – 10.0MHz 16-QAM – RB Size 50)

FCC ID: ZNFV410		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1404210803.ZNF	Test Dates: 04/23 - 05/05/14; 6/20/14	EUT Type: Portable Tablet		Page 16 of 76



Plot 6-9. Occupied Bandwidth Plot (Band 4 – 5.0MHz QPSK – RB Size 25)

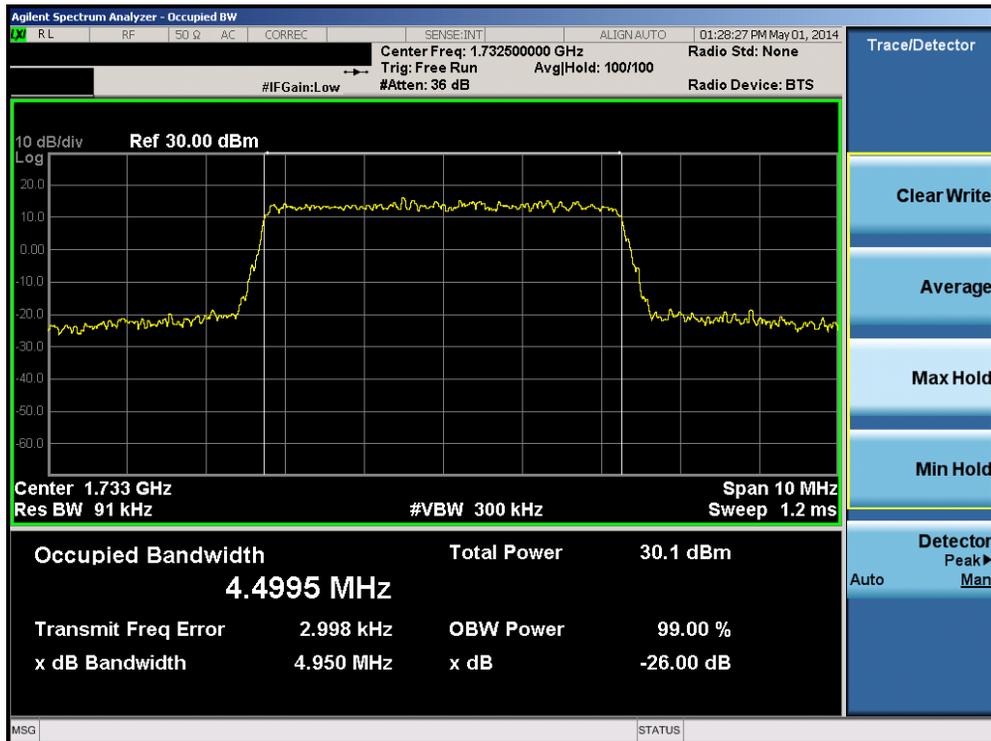


Plot 6-10. Occupied Bandwidth Plot (Band 4 – 5.0MHz 16-QAM – RB Size 25)

FCC ID: ZNFV410		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1404210803.ZNF	Test Dates: 04/23 - 05/05/14; 6/20/14	EUT Type: Portable Tablet		Page 17 of 76



Plot 6-11. Occupied Bandwidth Plot (Band 4 – 10.0MHz QPSK – RB Size 50)

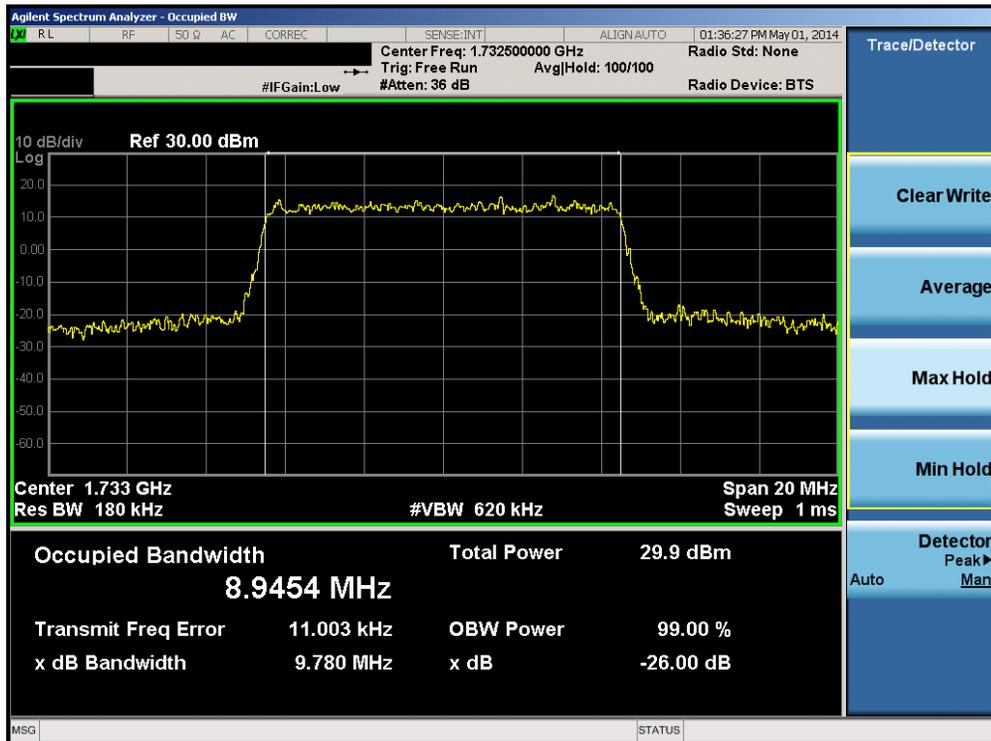


Plot 6-12. Occupied Bandwidth Plot (Band 4 – 10.0MHz 16-QAM – RB Size 50)

FCC ID: ZNFV410		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1404210803.ZNF	Test Dates: 04/23 - 05/05/14; 6/20/14	EUT Type: Portable Tablet		Page 18 of 76




Plot 6-13. Occupied Bandwidth Plot (Band 2 – 5.0MHz QPSK – RB Size 25)

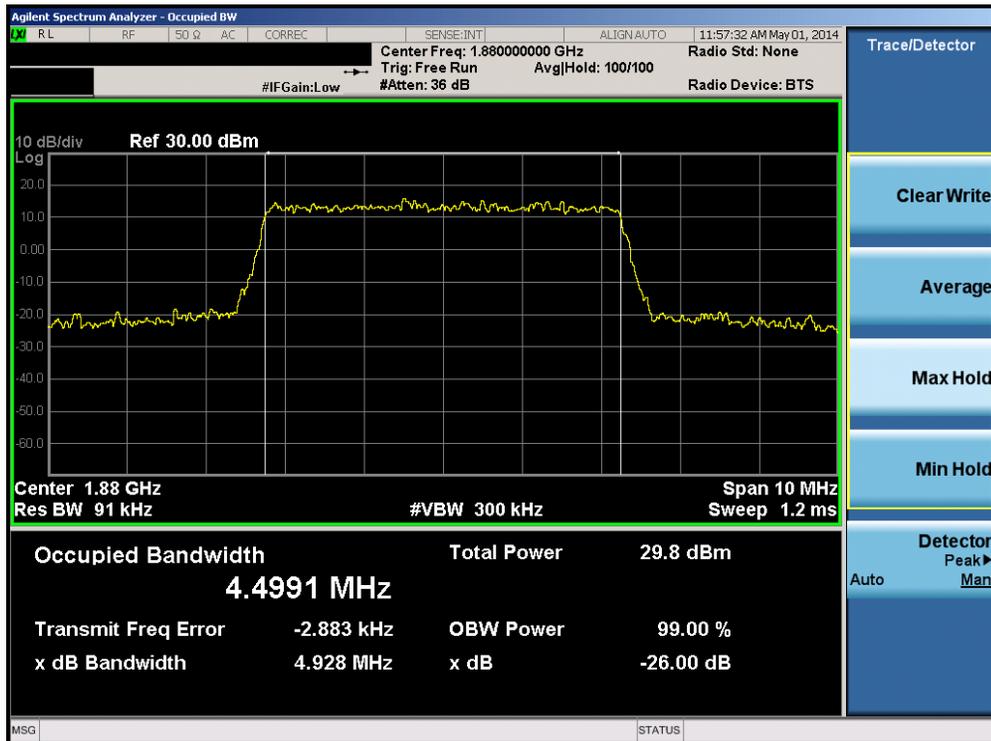


Plot 6-14. Occupied Bandwidth Plot (Band 2 – 5.0MHz 16-QAM – RB Size 25)

FCC ID: ZNFV410		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1404210803.ZNF	Test Dates: 04/23 - 05/05/14; 6/20/14	EUT Type: Portable Tablet		Page 19 of 76

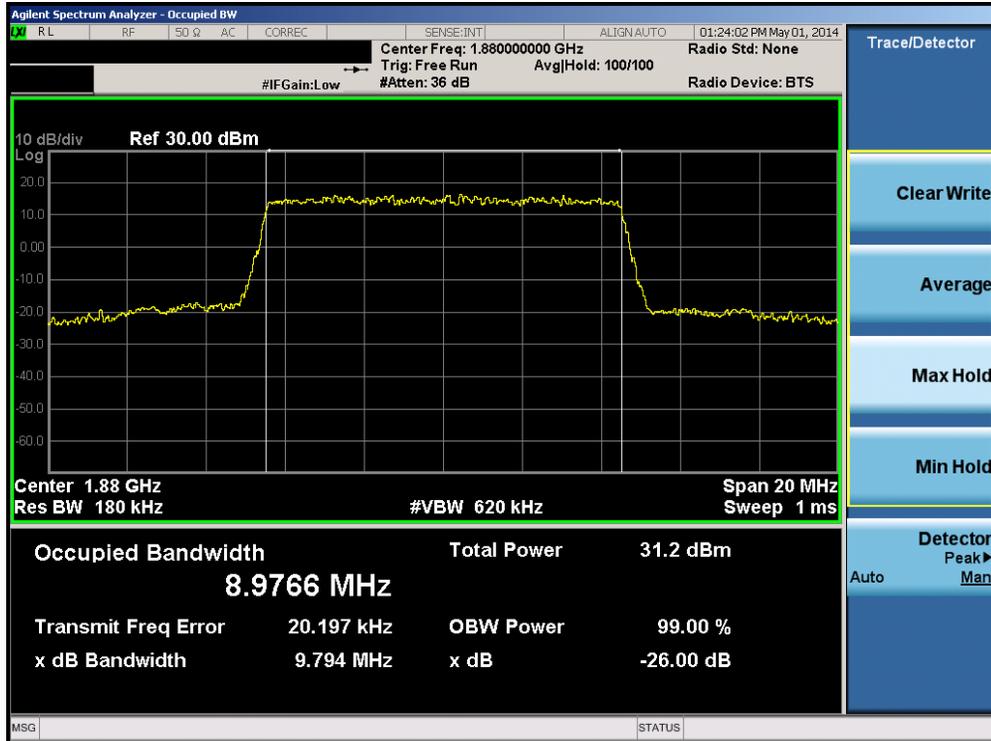

Plot 6-15. Occupied Bandwidth Plot (Band 2 – 10.0MHz QPSK – RB Size 50)

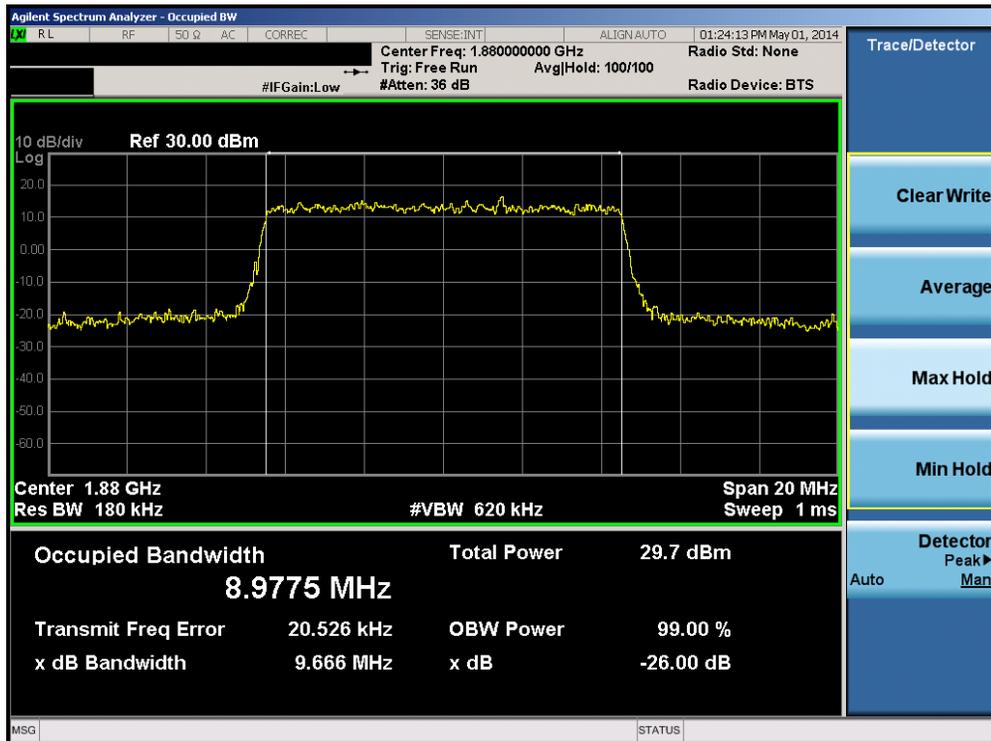

Plot 6-16. Occupied Bandwidth Plot (Band 2 – 10.0MHz 16-QAM – RB Size 50)

FCC ID: ZNFV410		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1404210803.ZNF	Test Dates: 04/23 - 05/05/14; 6/20/14	EUT Type: Portable Tablet		Page 20 of 76

### 6.3 Spurious and Harmonic Emissions at Antenna Terminal

§2.1051 §22.917(a) §24.238(a) §27.53(f) §27.53(g) §27.53(h)

#### Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10<sup>th</sup> harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

***The minimum permissible attenuation level of any spurious emission is  $43 + \log_{10}(P_{[Watts]})$ , where P is the transmitter power in Watts.***

#### Test Procedure Used


KDB 971168 v02r01 – Section 6.0

#### Test Settings

1. Start frequency was set to 30MHz and stop frequency was set to at least 10 \* the fundamental frequency (separated into at least two plots per channel)
2. Detector = RMS
3. Trace mode = max hold
4. Sweep time = auto couple
5. The trace was allowed to stabilize
6. Please see test notes below for RBW and VBW settings

#### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

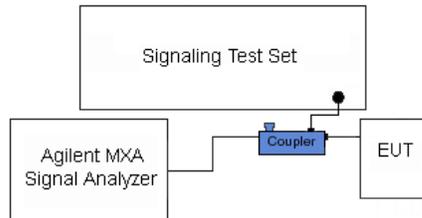


**Figure 6-2. Test Instrument & Measurement Setup**


#### Test Notes

Compliance with the applicable limits is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater for Part 22 and 1 MHz or greater for Part 24, Part 27. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power. For B17, a resolution bandwidth of at least 30kHz may be employed in the 100 kilohertz bands immediately outside and adjacent to a licensee's frequency block.

FCC ID: ZNFV410		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1404210803.ZNF	Test Dates: 04/23 - 05/05/14; 6/20/14	EUT Type: Portable Tablet		Page 21 of 76

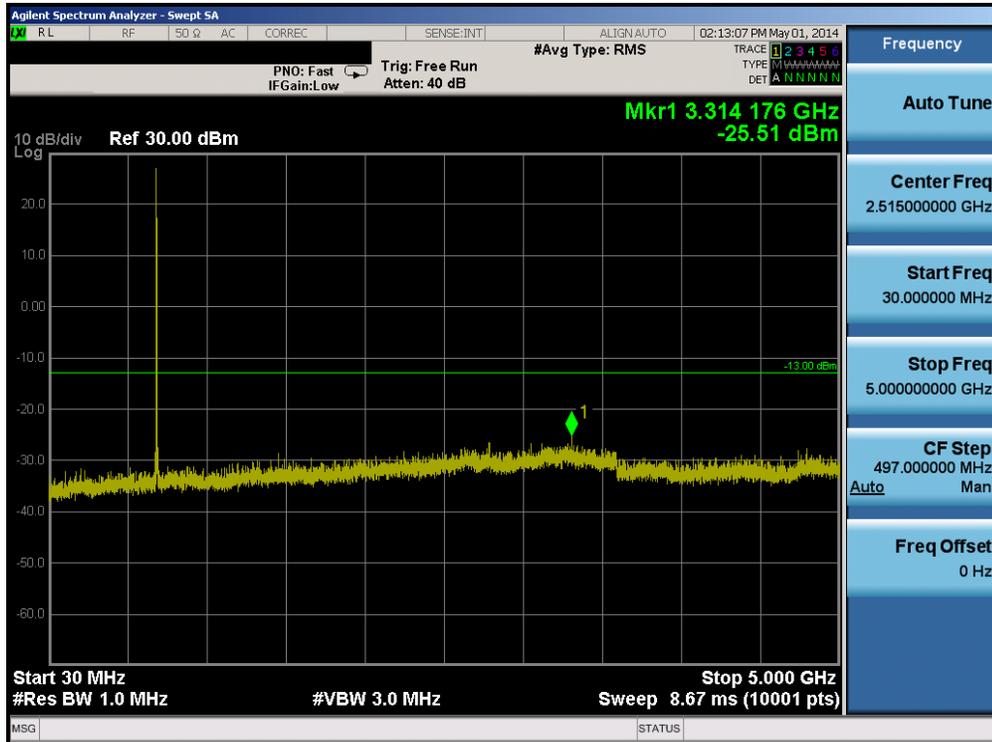


Plot 6-17. Conducted Spurious Plot (Band 17 – 10.0MHz QPSK – RB Size 1, RB Offset 0– Low Channel)

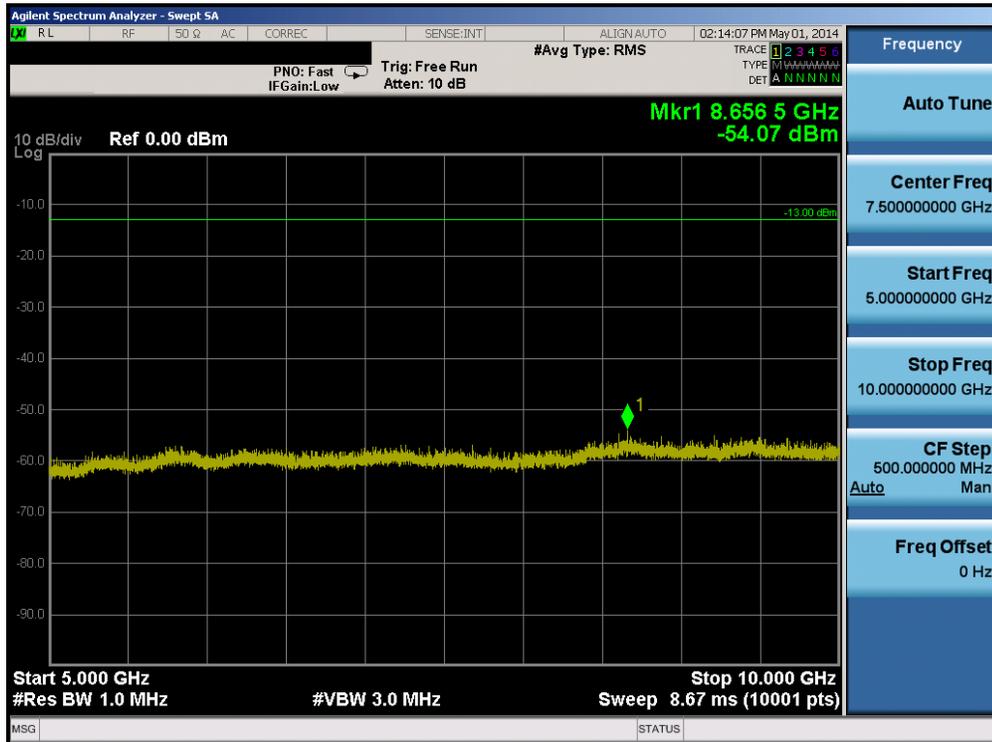


Plot 6-18. Conducted Spurious Plot (Band 17 – 10.0MHz QPSK – RB Size 1, RB Offset 0 – Low Channel)

FCC ID: ZNFV410		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1404210803.ZNF	Test Dates: 04/23 - 05/05/14; 6/20/14	EUT Type: Portable Tablet		Page 22 of 76

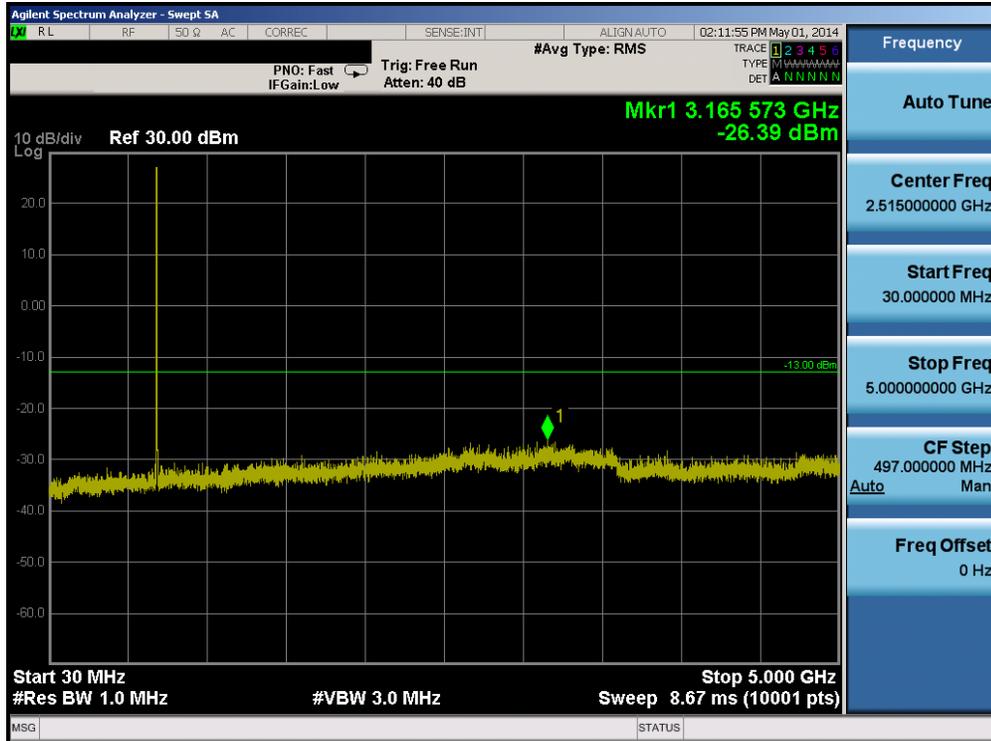


Plot 6-19. Conducted Spurious Plot (Band 17 – 10.0MHz QPSK – RB Size 1, RB Offset 0 – Mid Channel)

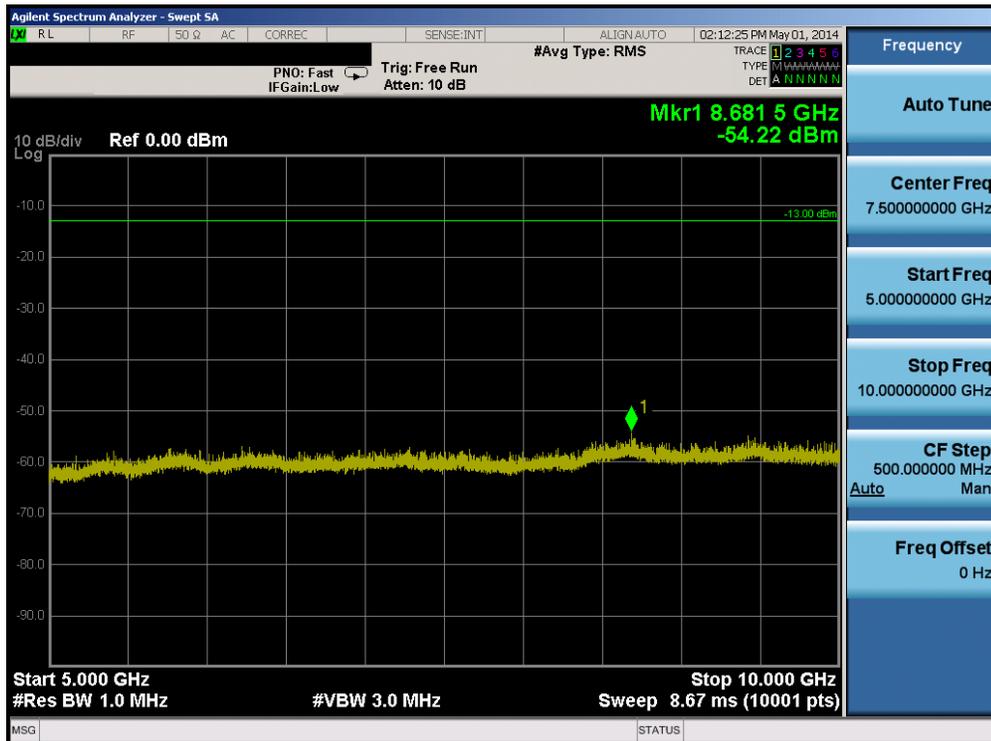


Plot 6-20. Conducted Spurious Plot (Band 17 – 10.0MHz QPSK – RB Size 1, RB Offset 0 – Mid Channel)

FCC ID: ZNFV410		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1404210803.ZNF	Test Dates: 04/23 - 05/05/14; 6/20/14	EUT Type: Portable Tablet		Page 23 of 76

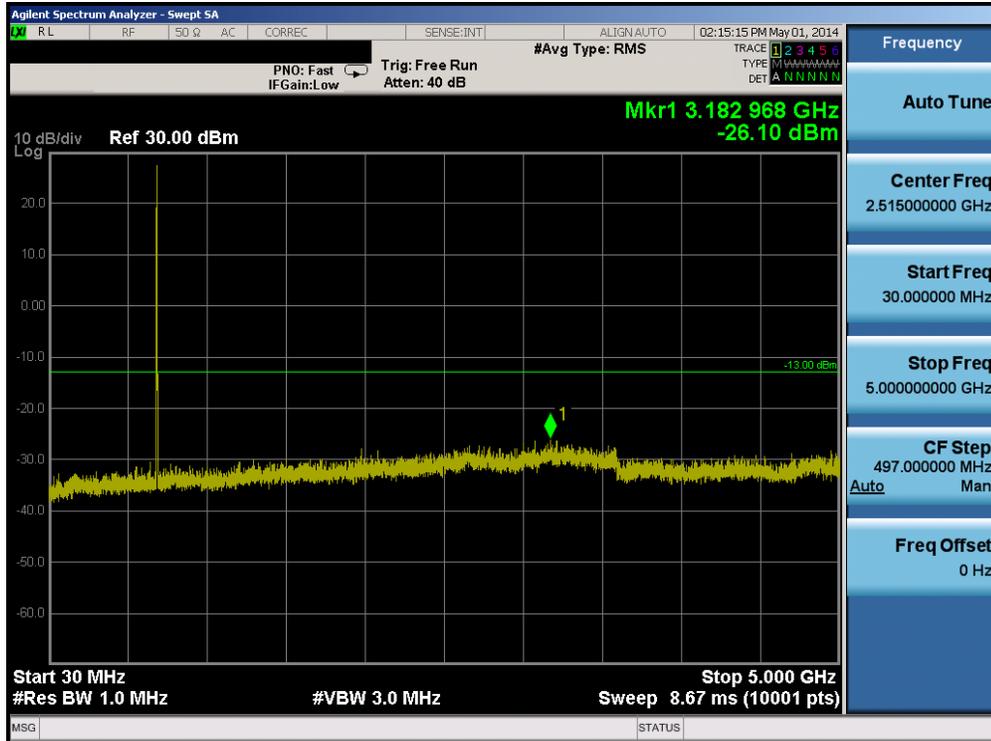


Plot 6-21. Conducted Spurious Plot (Band 17 – 10.0MHz QPSK – RB Size 1, RB Offset 0 – High Channel)

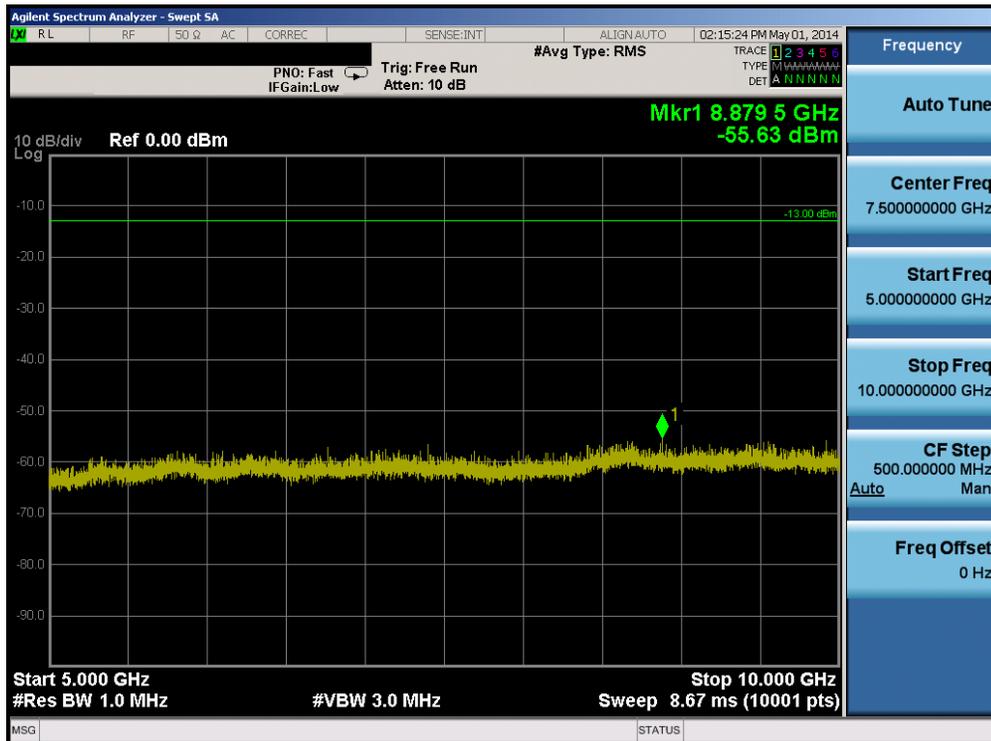


Plot 6-22. Conducted Spurious Plot (Band 17 – 10.0MHz QPSK – RB Size 1, RB Offset 0 – High Channel)

FCC ID: ZNFV410		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1404210803.ZNF	Test Dates: 04/23 - 05/05/14; 6/20/14	EUT Type: Portable Tablet		Page 24 of 76

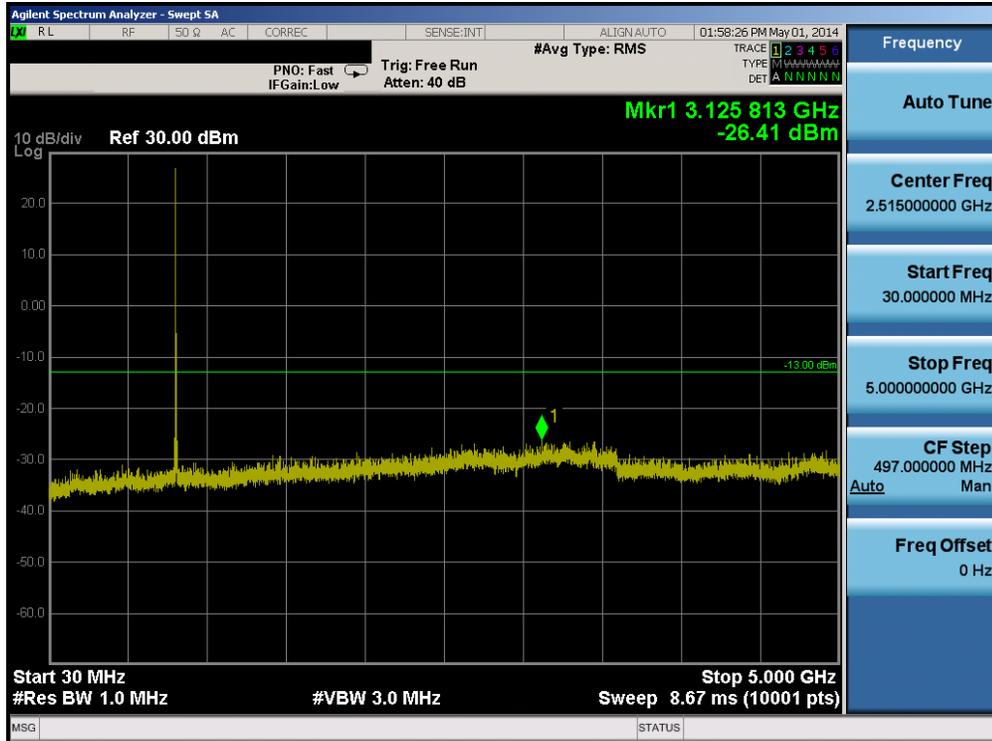


Plot 6-23. Conducted Spurious Plot (Band 5 – 10.0MHz QPSK – RB Size 1, RB Offset 0– Low Channel)

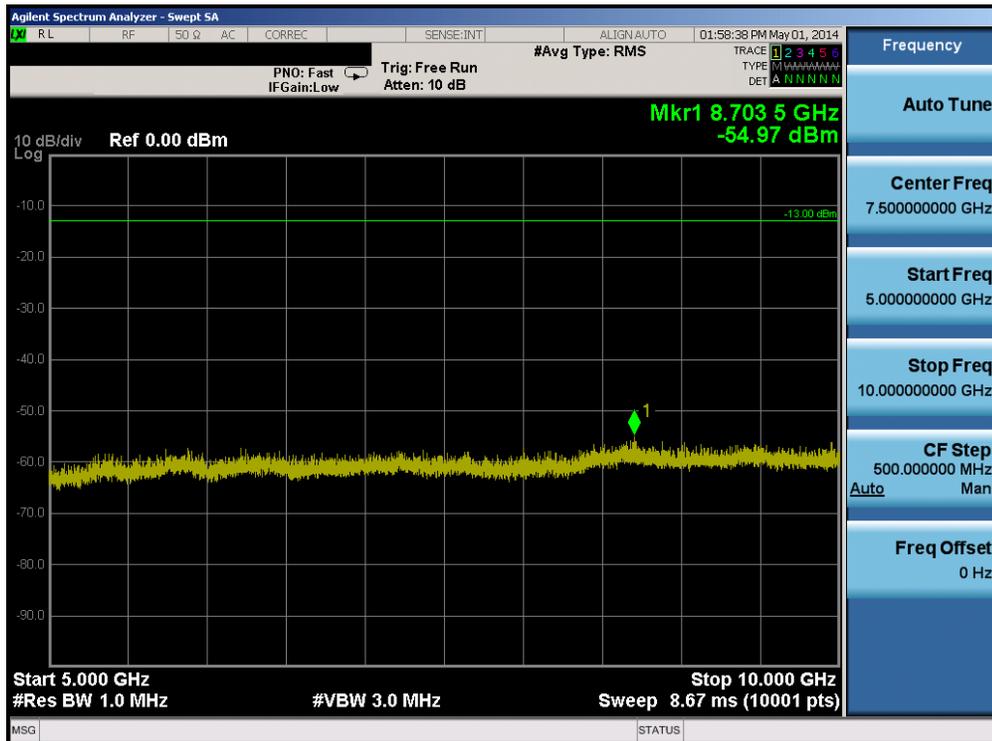


Plot 6-24. Conducted Spurious Plot (Band 5 – 10.0MHz QPSK – RB Size 1, RB Offset 0 – Low Channel)

FCC ID: ZNFV410		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1404210803.ZNF	Test Dates: 04/23 - 05/05/14; 6/20/14	EUT Type: Portable Tablet		Page 25 of 76

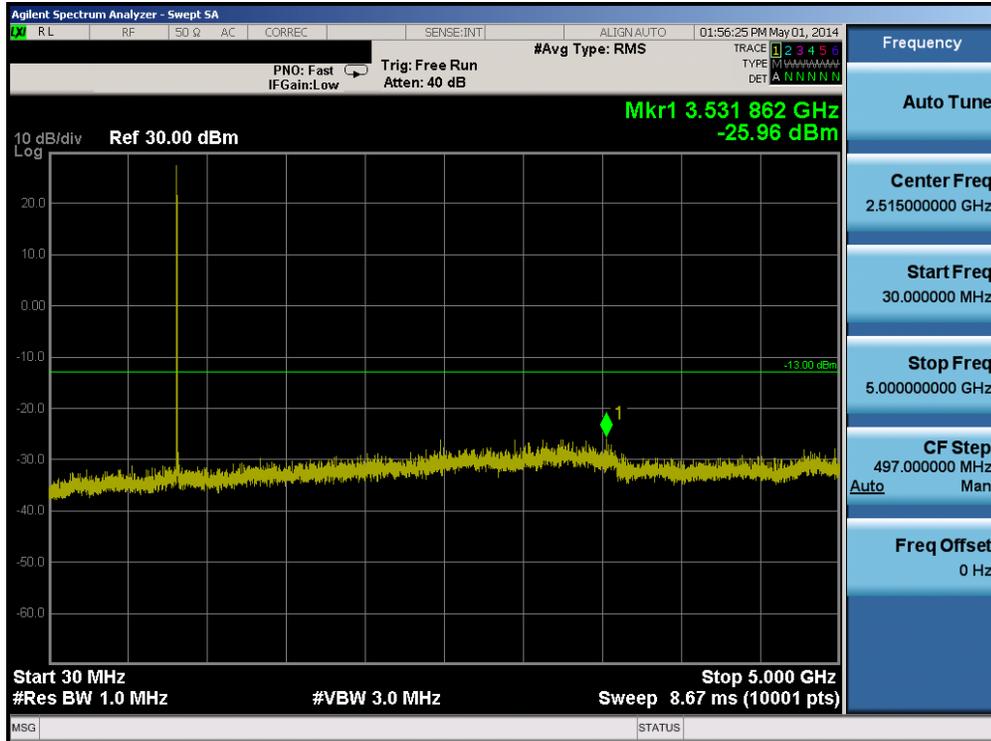


Plot 6-25. Conducted Spurious Plot (Band 5 – 10.0MHz QPSK – RB Size 1, RB Offset 0 – Mid Channel)

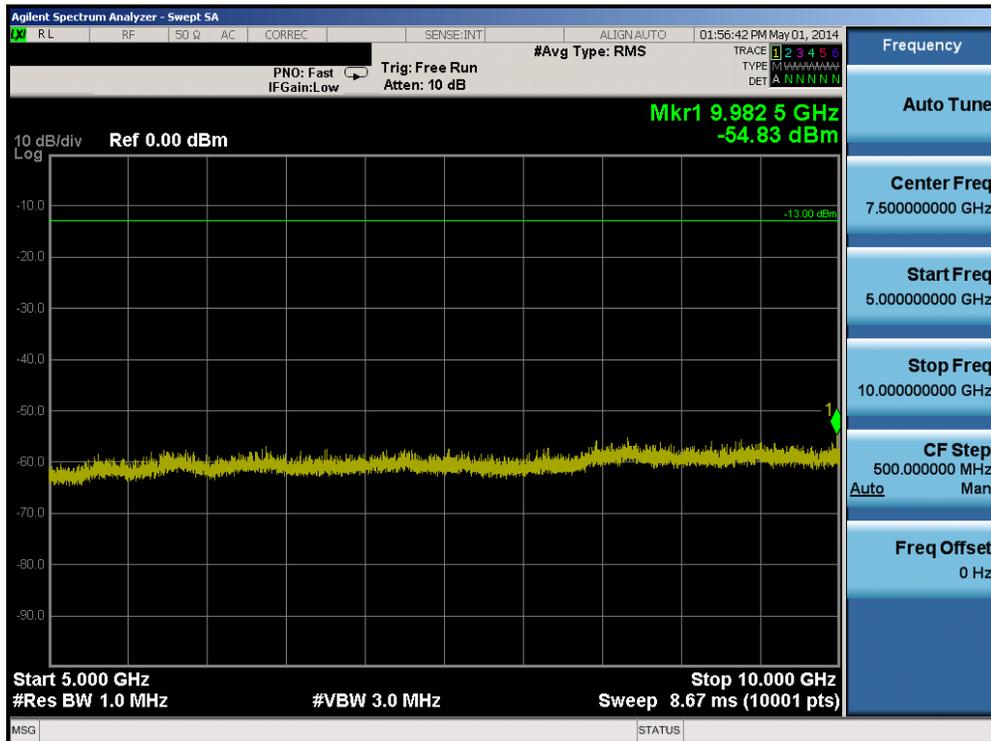


Plot 6-26. Conducted Spurious Plot (Band 5 – 10.0MHz QPSK – RB Size 1, RB Offset 0 – Mid Channel)

FCC ID: ZNFV410		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1404210803.ZNF	Test Dates: 04/23 - 05/05/14; 6/20/14	EUT Type: Portable Tablet		Page 26 of 76

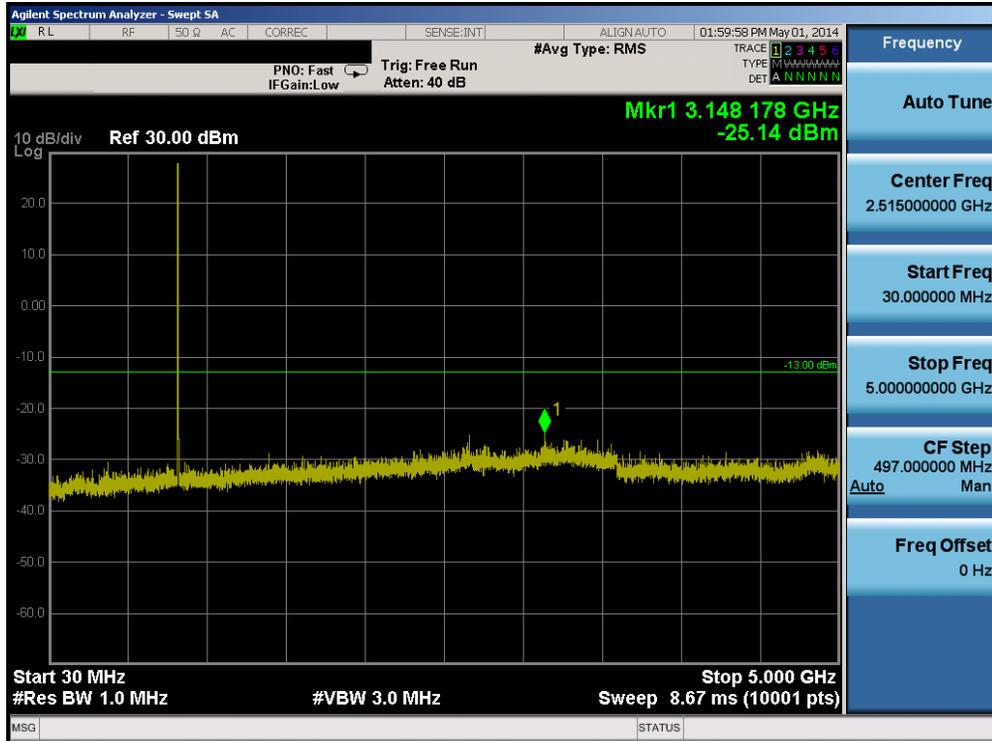


Plot 6-27. Conducted Spurious Plot (Band 5 – 10.0MHz QPSK – RB Size 1, RB Offset 0 – High Channel)

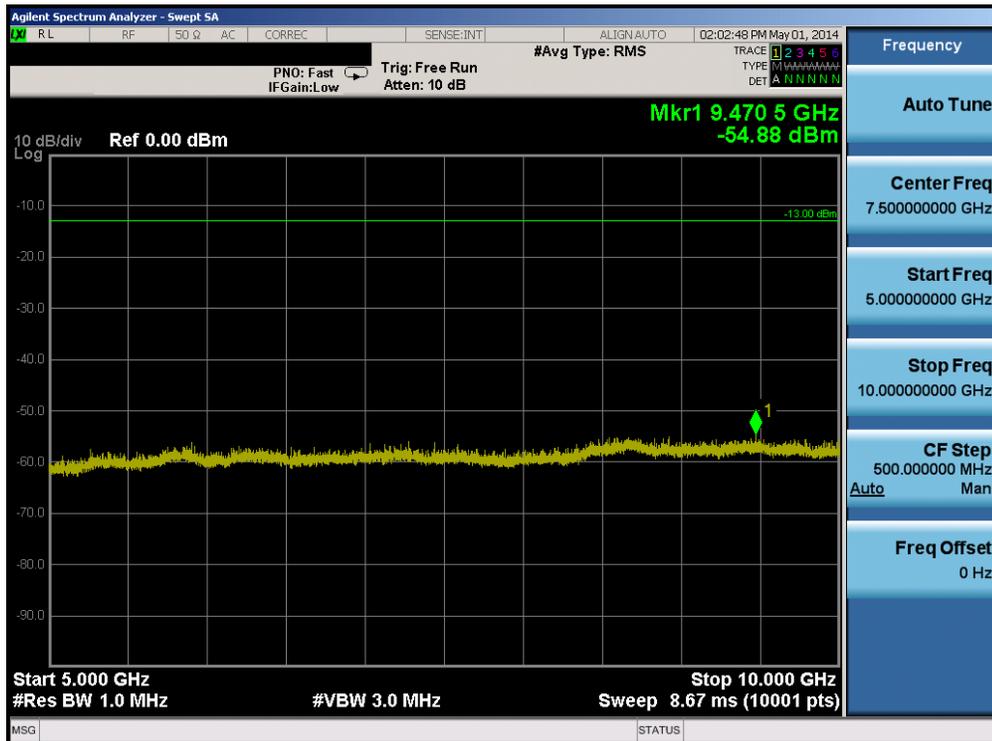


Plot 6-28. Conducted Spurious Plot (Band 5 – 10.0MHz QPSK – RB Size 1, RB Offset 0 – High Channel)

FCC ID: ZNFV410		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1404210803.ZNF	Test Dates: 04/23 - 05/05/14; 6/20/14	EUT Type: Portable Tablet		Page 27 of 76

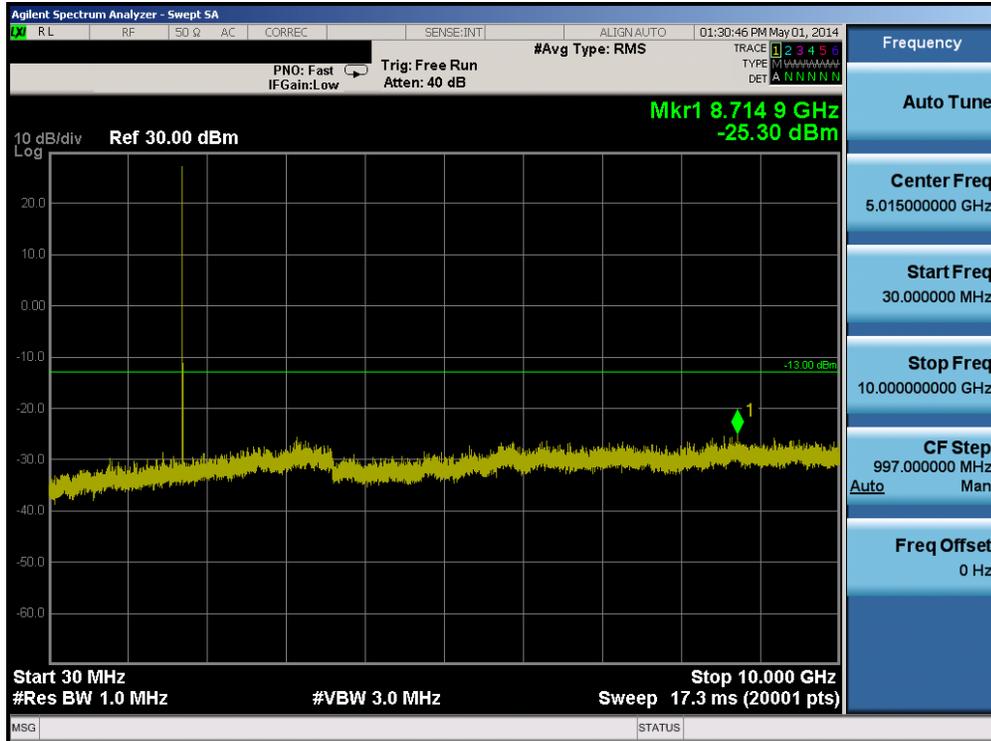


Plot 6-29. Conducted Spurious Plot (Band 4 – 5.0MHz QPSK – RB Size 1, RB Offset 0 – Low Channel)

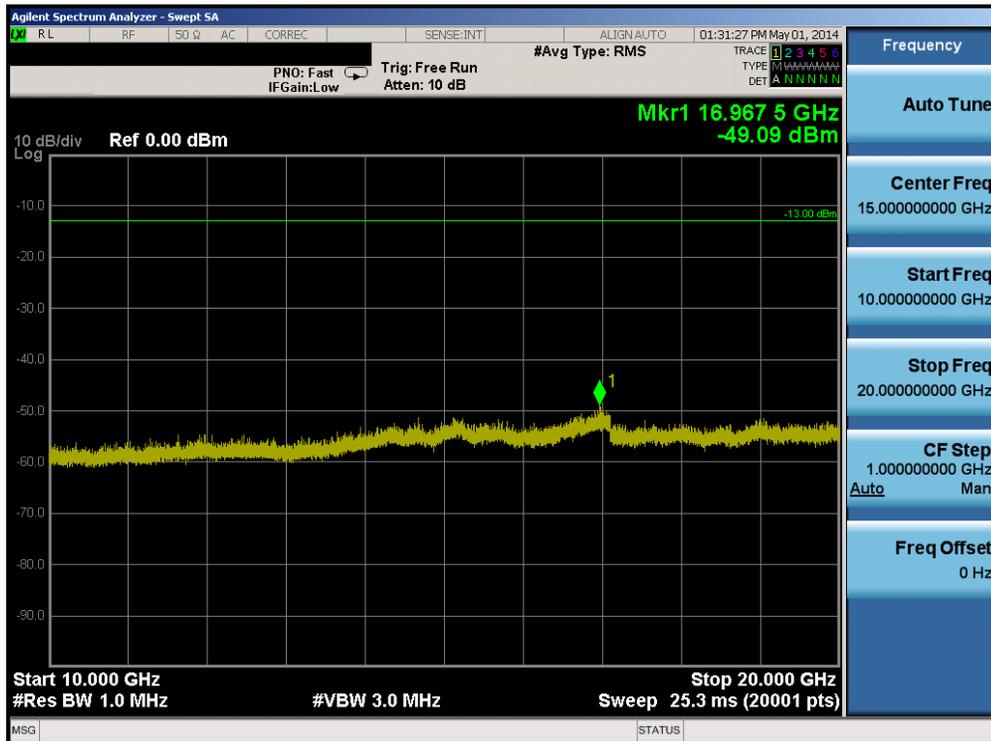


Plot 6-30. Conducted Spurious Plot (Band 4 – 5.0MHz QPSK – RB Size 1, RB Offset 0 – Low Channel)

FCC ID: ZNFV410		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1404210803.ZNF	Test Dates: 04/23 - 05/05/14; 6/20/14	EUT Type: Portable Tablet		Page 28 of 76

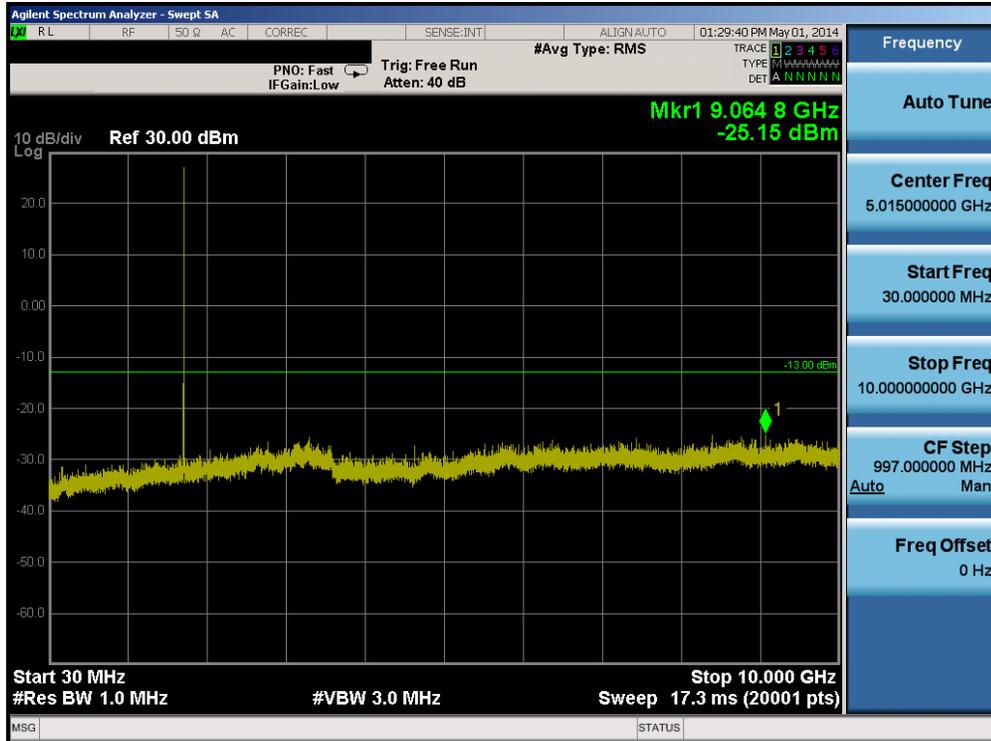


Plot 6-31. Conducted Spurious Plot (Band 4 – 5.0MHz QPSK – RB Size 1, RB Offset 0 – Mid Channel)

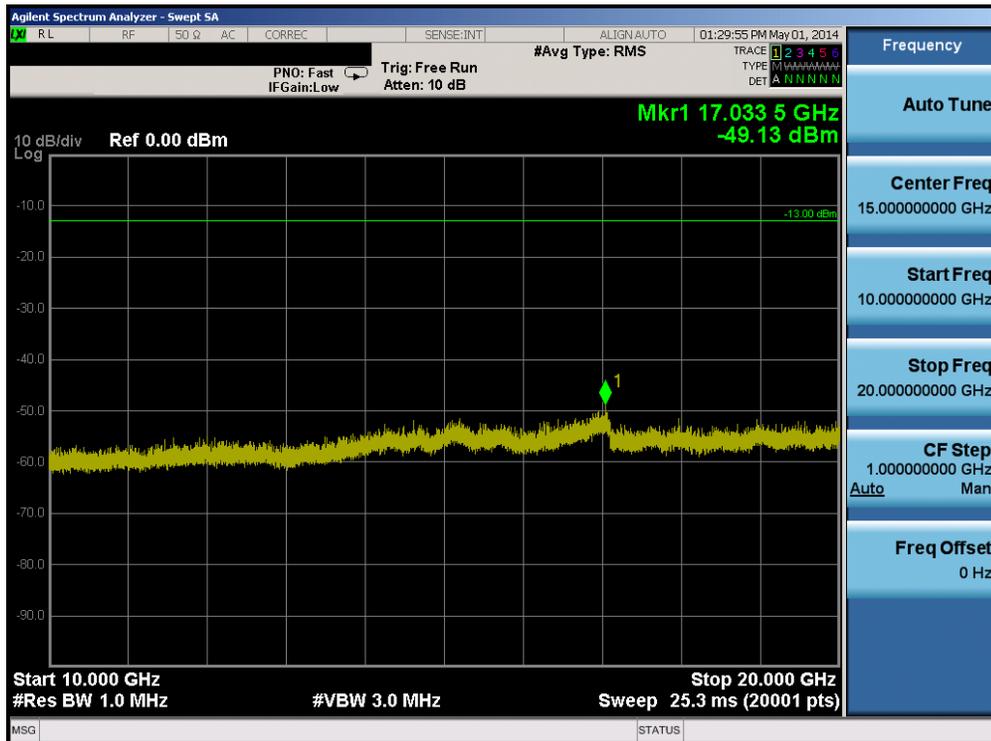


Plot 6-32. Conducted Spurious Plot (Band 4 – 5.0MHz QPSK – RB Size 1, RB Offset 0 – Mid Channel)

FCC ID: ZNFV410		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1404210803.ZNF	Test Dates: 04/23 - 05/05/14; 6/20/14	EUT Type: Portable Tablet		Page 29 of 76

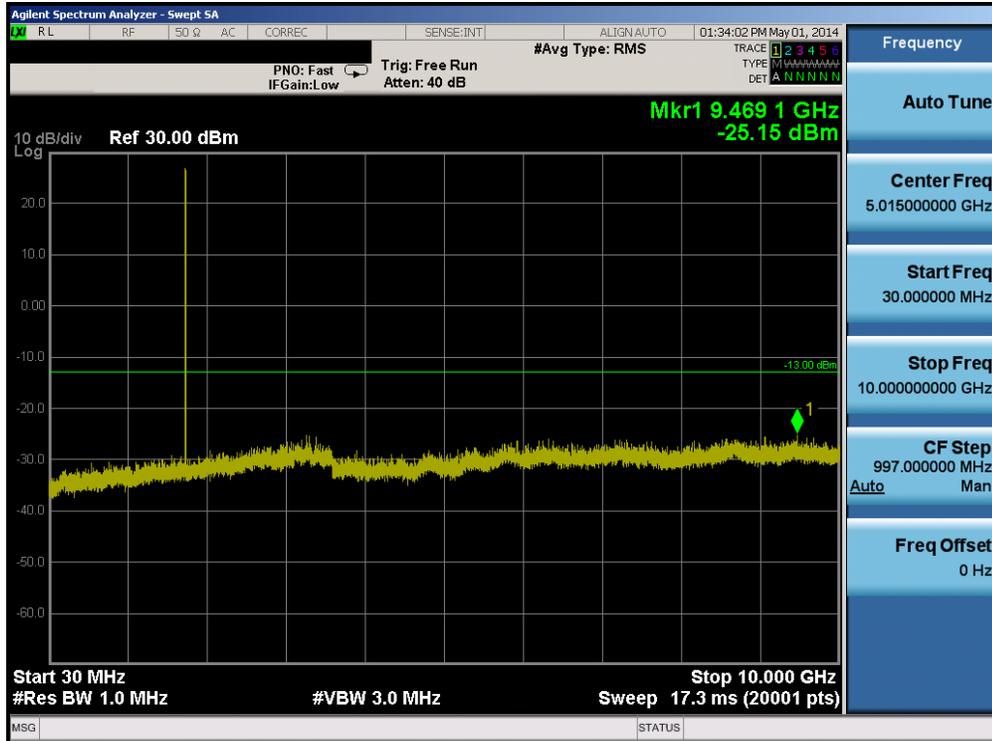


Plot 6-33. Conducted Spurious Plot (Band 4 – 5.0MHz QPSK – RB Size 1, RB Offset 0 – High Channel)

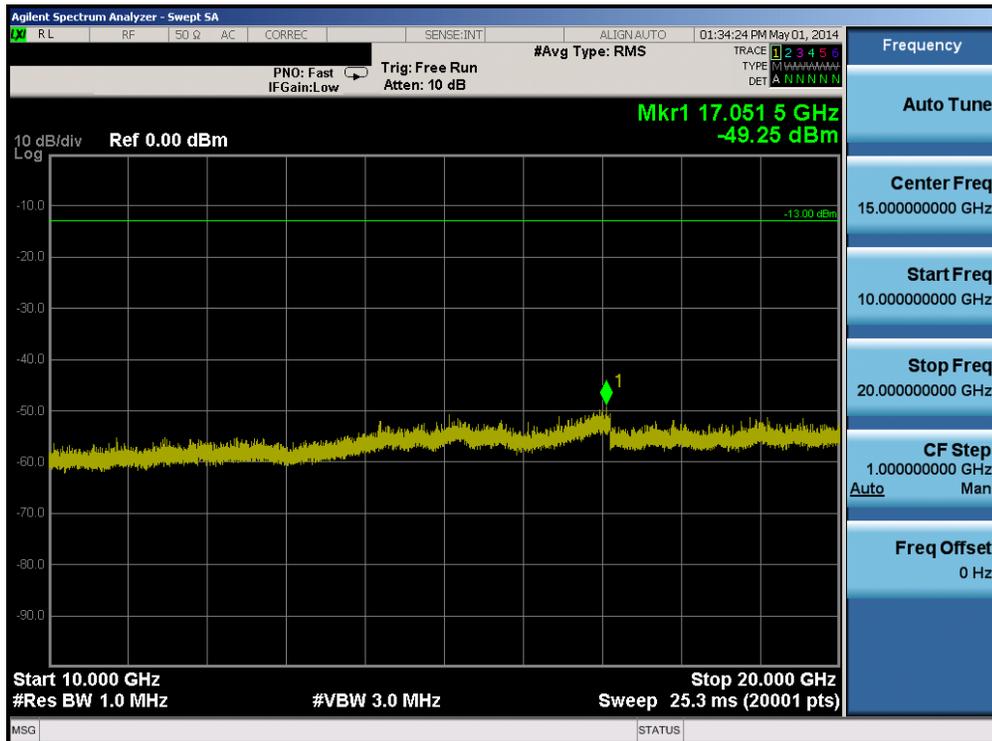


Plot 6-34. Conducted Spurious Plot (Band 4 – 5.0MHz QPSK – RB Size 1, RB Offset 0 – High Channel)

FCC ID: ZNFV410		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1404210803.ZNF	Test Dates: 04/23 - 05/05/14; 6/20/14	EUT Type: Portable Tablet		Page 30 of 76

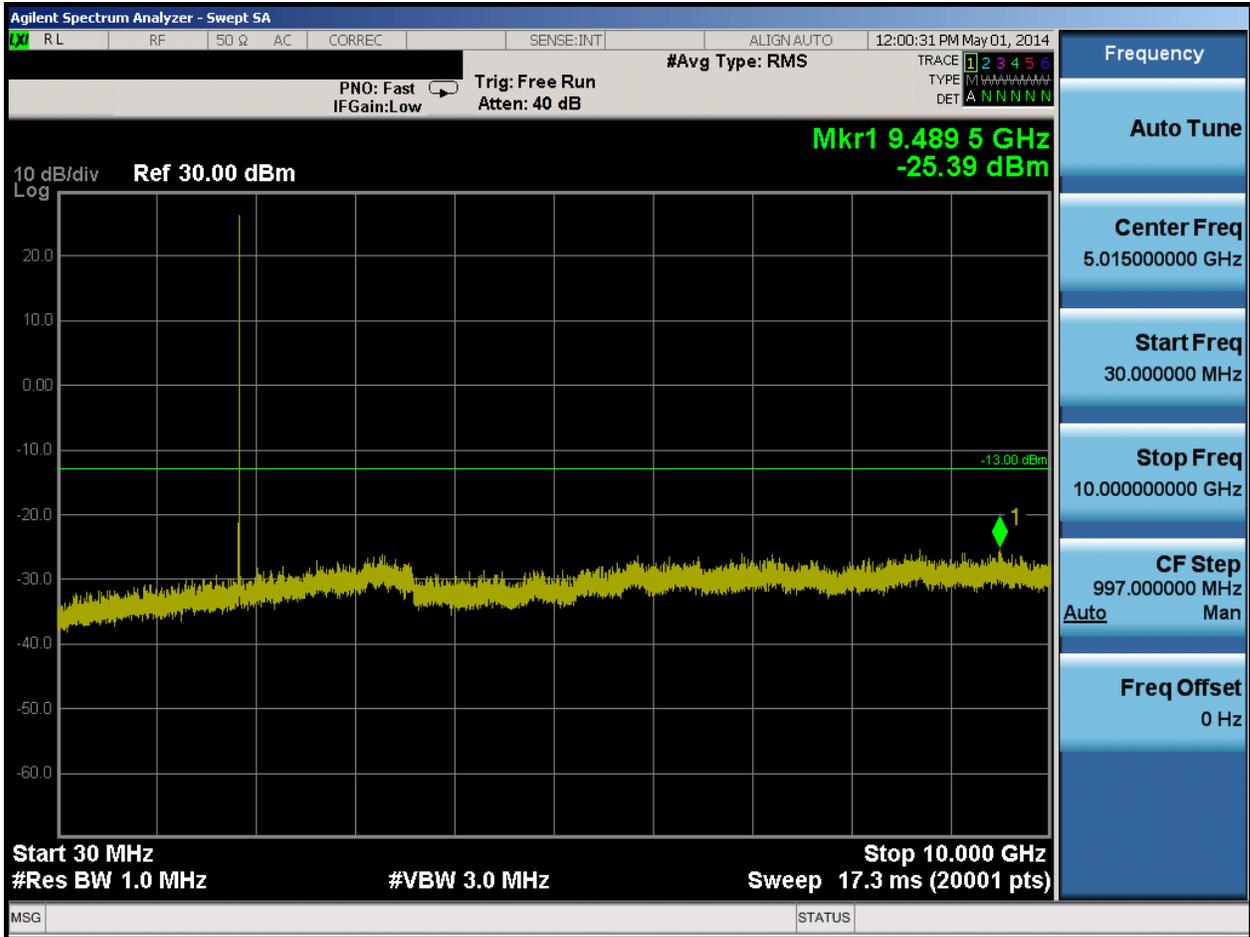


Plot 6-35. Conducted Spurious Plot (Band 2 – 5.0MHz QPSK – RB Size 1, RB Offset 0 – Low Channel)

FCC ID: ZNFV410		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1404210803.ZNF	Test Dates: 04/23 - 05/05/14; 6/20/14	EUT Type: Portable Tablet		Page 31 of 76

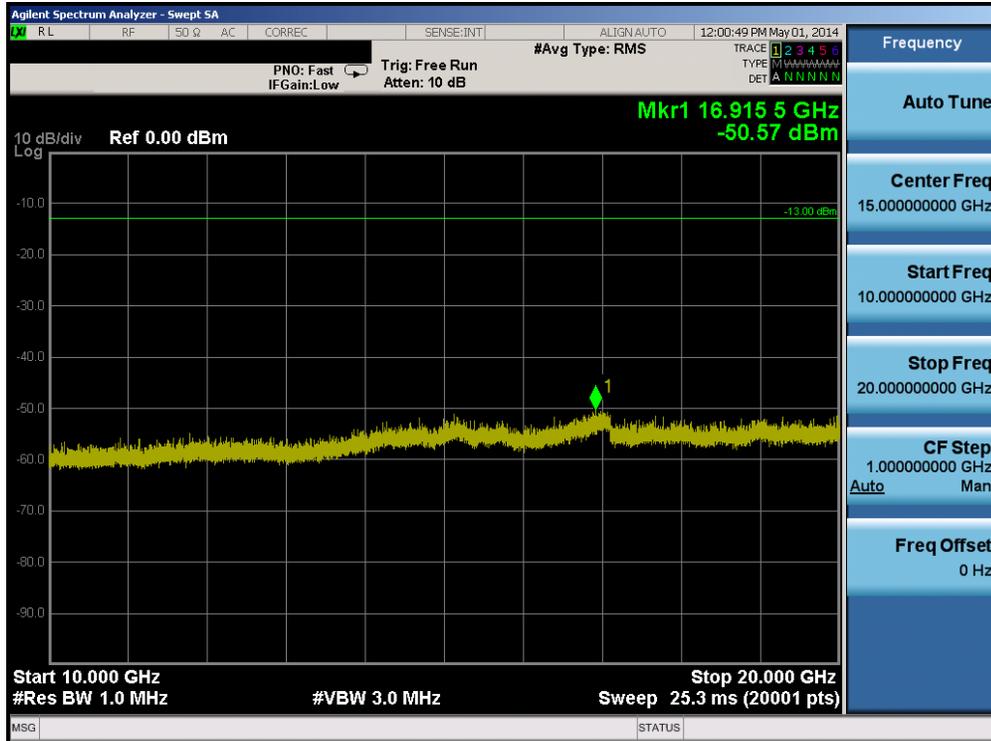


Plot 6-36. Conducted Spurious Plot (Band 2 – 5.0MHz QPSK – RB Size 1, RB Offset 0 – Low Channel)

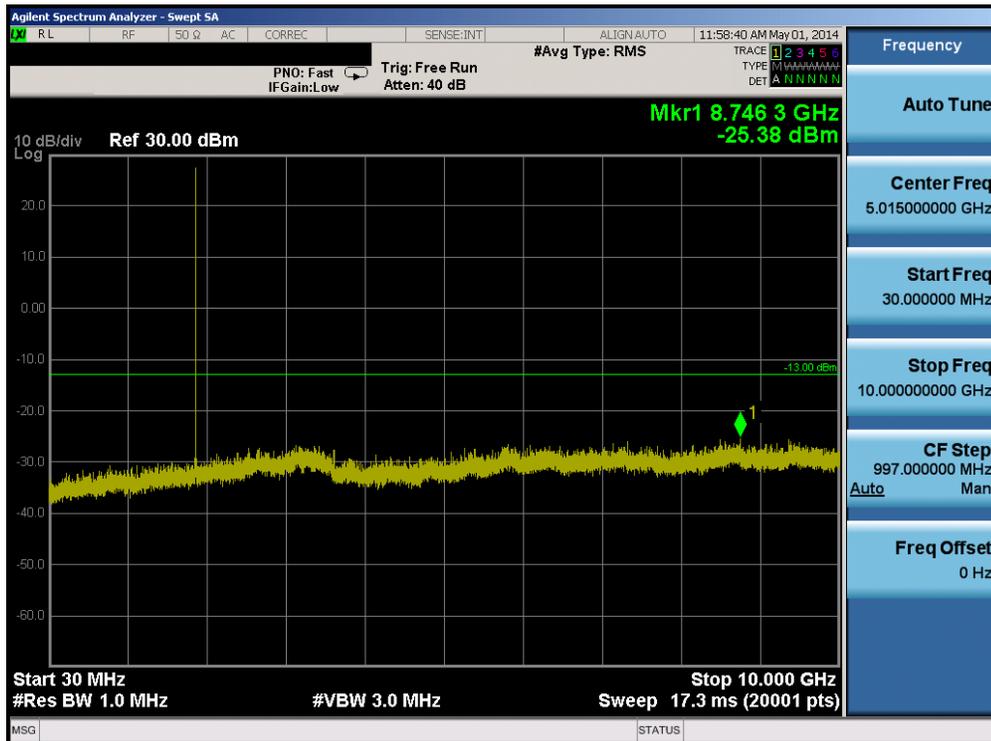


Plot 6-37. Conducted Spurious Plot (Band 2 – 5.0MHz QPSK – RB Size 1, RB Offset 0 – Mid Channel)

FCC ID: ZNFV410		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1404210803.ZNF	Test Dates: 04/23 - 05/05/14; 6/20/14	EUT Type: Portable Tablet		Page 32 of 76

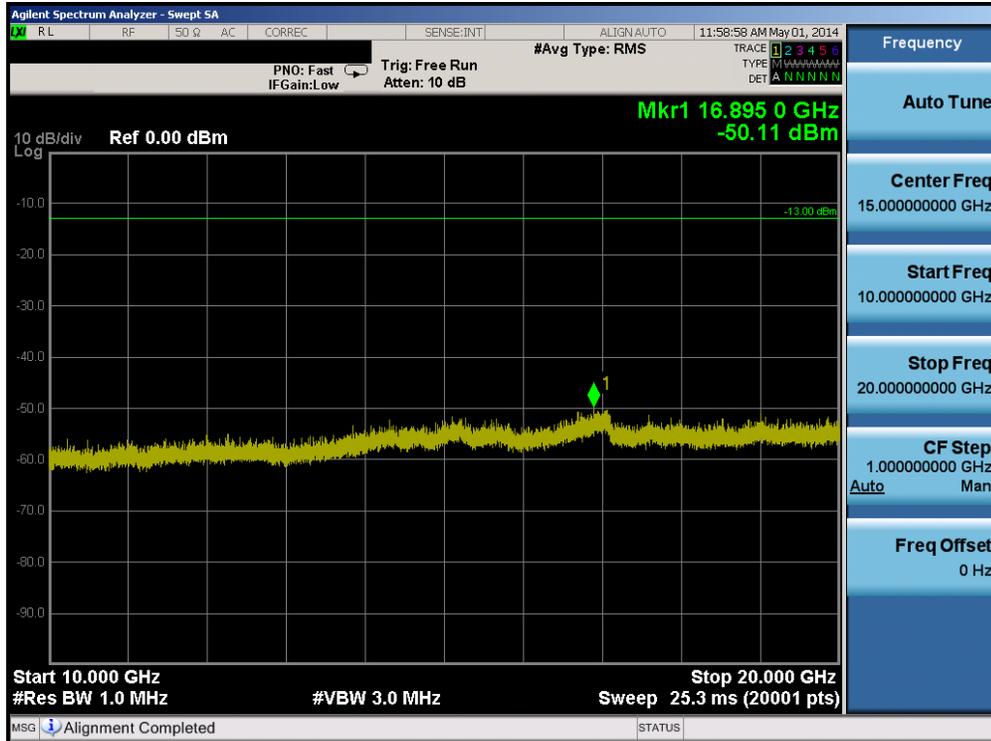

Plot 6-38. Conducted Spurious Plot (Band 2 – 5.0MHz QPSK – RB Size 1, RB Offset 0 – Mid Channel)

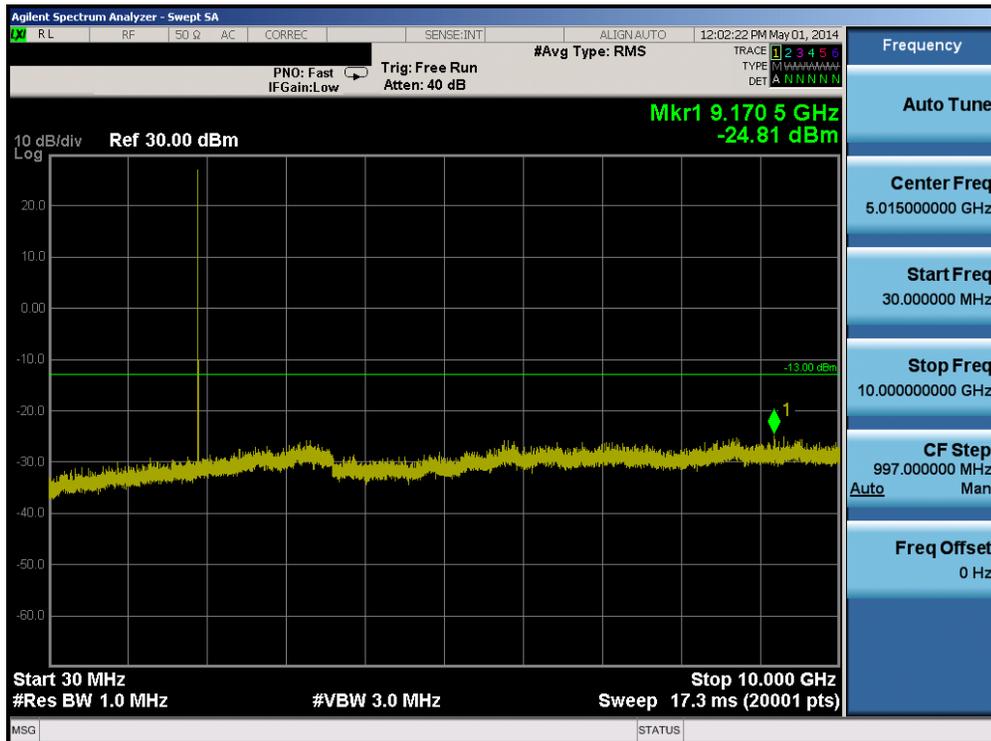

Plot 6-39. Conducted Spurious Plot (Band 2 – 5.0MHz QPSK – RB Size 1, RB Offset 0 – High Channel)

FCC ID: ZNFV410		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1404210803.ZNF	Test Dates: 04/23 - 05/05/14; 6/20/14	EUT Type: Portable Tablet		Page 33 of 76



## 6.4 Band Edge Emissions at Antenna Terminal

§2.1051 §22.917(a) §24.238(a) §27.53(f) §27.53(g) §27.53(h)

### Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

***The minimum permissible attenuation level of any spurious emission is  $43 + \log_{10}(P_{[Watts]})$ , where P is the transmitter power in Watts.***

### Test Procedure Used


KDB 971168 v02r01 – Section 6.0

### Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW  $\geq$  1% of the emission bandwidth
4. VBW  $\geq$  3 x RBW
5. Detector = RMS
6. Number of sweep points  $\geq$  2 x Span/RBW
7. Trace mode = max hold
8. Sweep time = auto couple
9. The trace was allowed to stabilize

### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

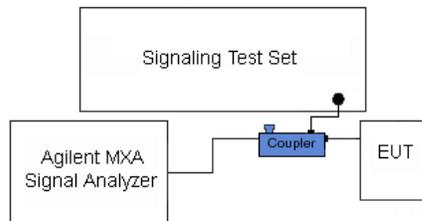


**Figure 6-3. Test Instrument & Measurement Setup**

### Test Notes

Per 22.917(b) 24.238(a) 27.53(h) in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed to demonstrate compliance with the out-of-band emissions limit. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power. Per 27.53(f) in the 100 kilohertz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed.

FCC ID: ZNFV410		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1404210803.ZNF	Test Dates: 04/23 - 05/05/14; 6/20/14	EUT Type: Portable Tablet		Page 35 of 76

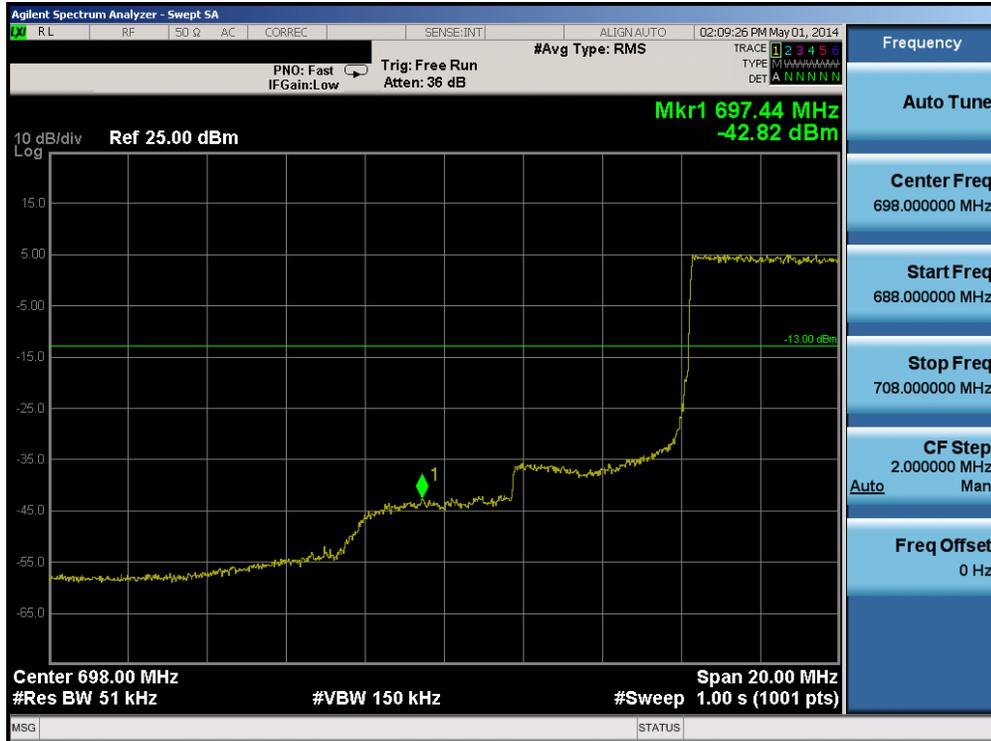

Plot 6-41. Lower Band Edge Plot (Band 17 – 5.0MHz QPSK – RB Size 25)



Plot 6-42. Lower Extended Band Edge Plot (Band 17 – 5.0MHz QPSK – RB Size 25)

FCC ID: ZNFV410		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1404210803.ZNF	Test Dates: 04/23 - 05/05/14; 6/20/14	EUT Type: Portable Tablet		Page 36 of 76



Plot 6-43. Upper Band Edge Plot (Band 17 – 5.0MHz QPSK – RB Size 25)



Plot 6-44. Upper Extended Band Edge Plot (Band 17 – 5.0MHz QPSK – RB Size 25)

FCC ID: ZNFV410		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1404210803.ZNF	Test Dates: 04/23 - 05/05/14; 6/20/14	EUT Type: Portable Tablet		Page 37 of 76




Plot 6-45. Lower Band Edge Plot (Band 17 – 10.0MHz QPSK – RB Size 50)



Plot 6-46. Upper Band Edge Plot (Band 17 – 10.0MHz QPSK – RB Size 50)

FCC ID: ZNFV410		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1404210803.ZNF	Test Dates: 04/23 - 05/05/14; 6/20/14	EUT Type: Portable Tablet		Page 38 of 76

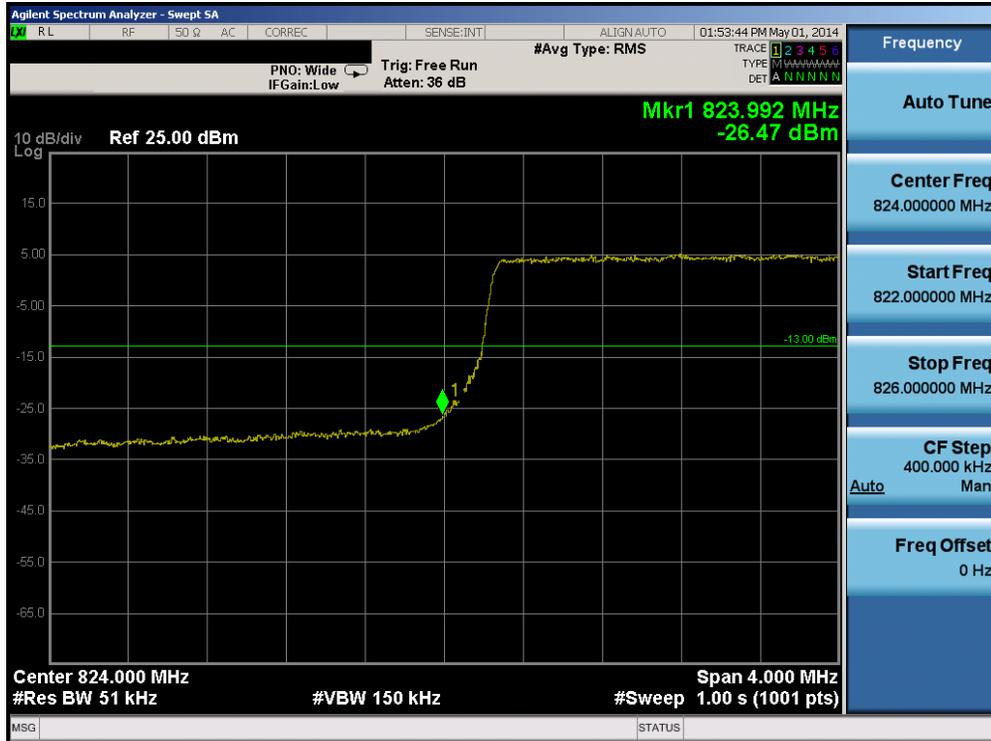


Plot 6-47. Lower Band Edge Plot (Band 5 – 5.0MHz QPSK – RB Size 25)




Plot 6-48. Lower Extended Band Edge Plot (Band 5 – 5.0MHz QPSK – RB Size 25)

FCC ID: ZNFV410		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1404210803.ZNF	Test Dates: 04/23 - 05/05/14; 6/20/14	EUT Type: Portable Tablet		Page 39 of 76

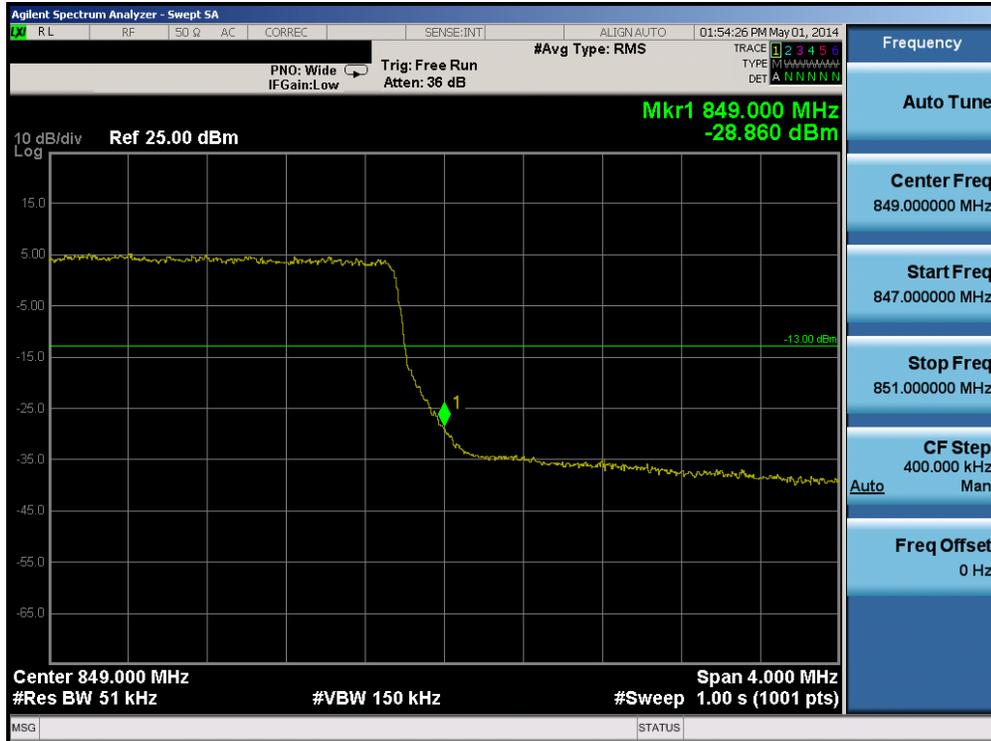


Plot 6-49. Upper Band Edge Plot (Band 5 – 5.0MHz QPSK – RB Size 25)

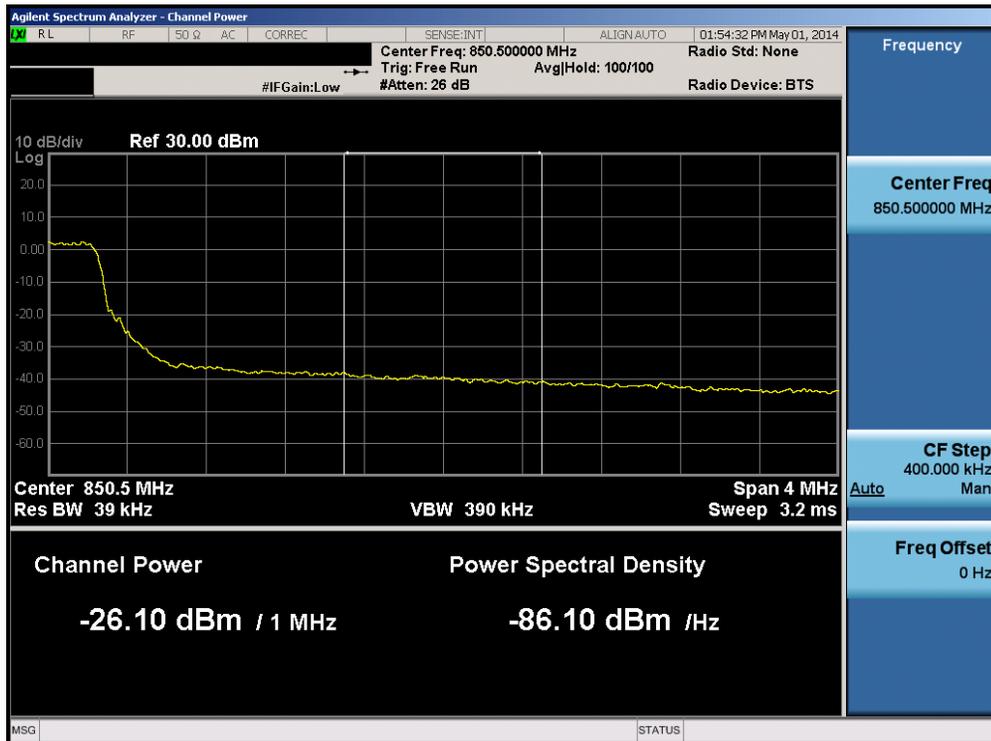

Plot 6-50. Upper Extended Band Edge Plot (Band 5 – 5.0MHz QPSK – RB Size 25)

FCC ID: ZNFV410		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1404210803.ZNF	Test Dates: 04/23 - 05/05/14; 6/20/14	EUT Type: Portable Tablet		Page 40 of 76

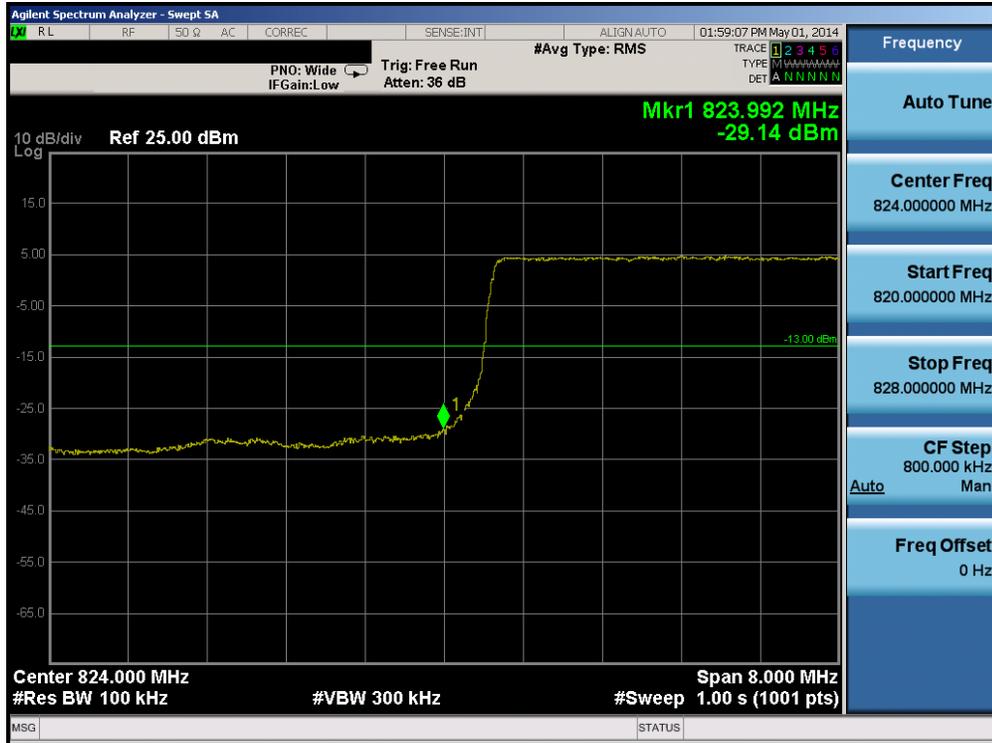


Plot 6-51. Lower Band Edge Plot (Band 5 – 10.0MHz QPSK – RB Size 50)




Plot 6-52. Upper Band Edge Plot (Band 5 – 10.0MHz QPSK – RB Size 50)

FCC ID: ZNFV410		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1404210803.ZNF	Test Dates: 04/23 - 05/05/14; 6/20/14	EUT Type: Portable Tablet		Page 41 of 76

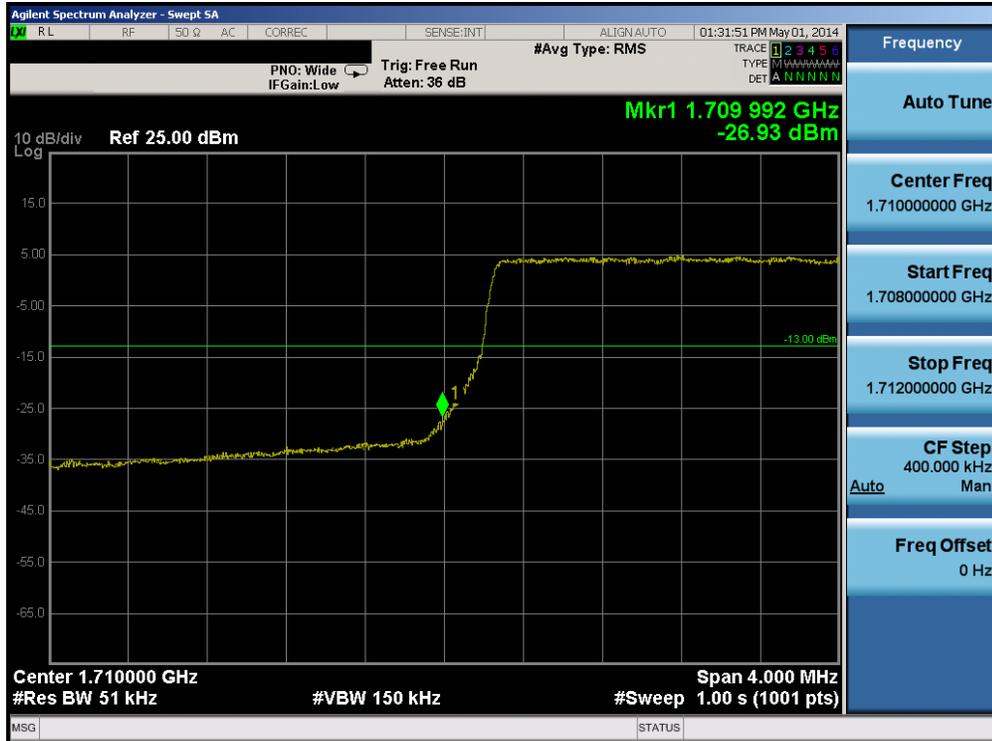

Plot 6-53. Lower Band Edge Plot (Band 4 – 5.0MHz QPSK – RB Size 25)

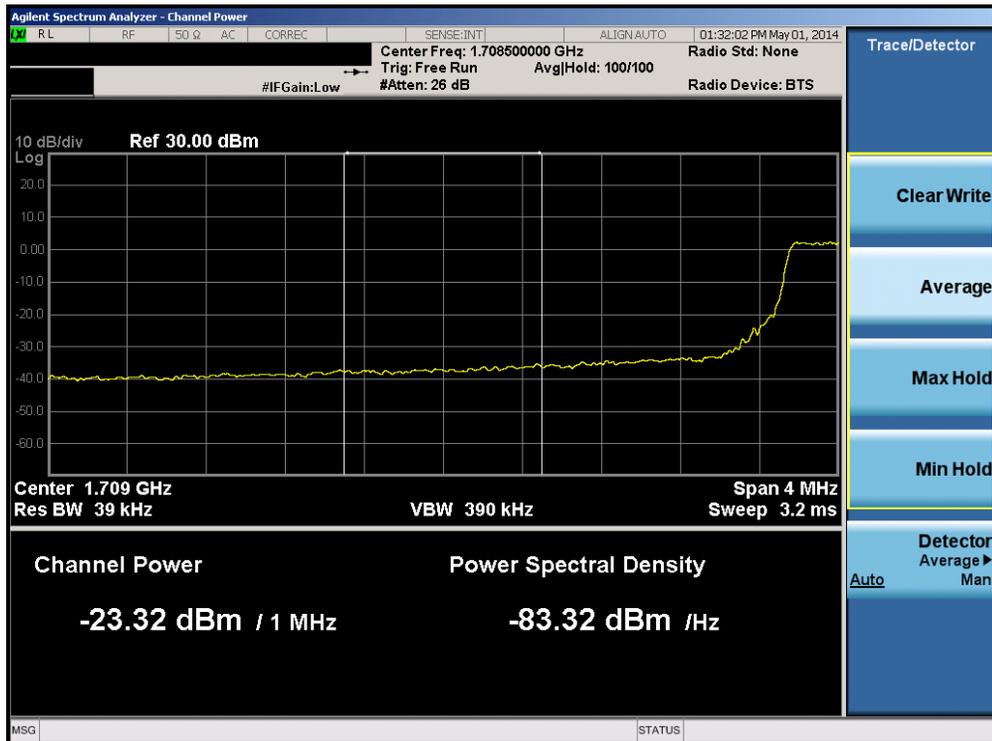


Plot 6-54. Lower Extended Band Edge Plot (Band 4 – 5.0MHz QPSK – RB Size 25)

FCC ID: ZNFV410		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1404210803.ZNF	Test Dates: 04/23 - 05/05/14; 6/20/14	EUT Type: Portable Tablet		Page 42 of 76




Plot 6-55. Upper Band Edge Plot (Band 4 – 5.0MHz QPSK – RB Size 25)

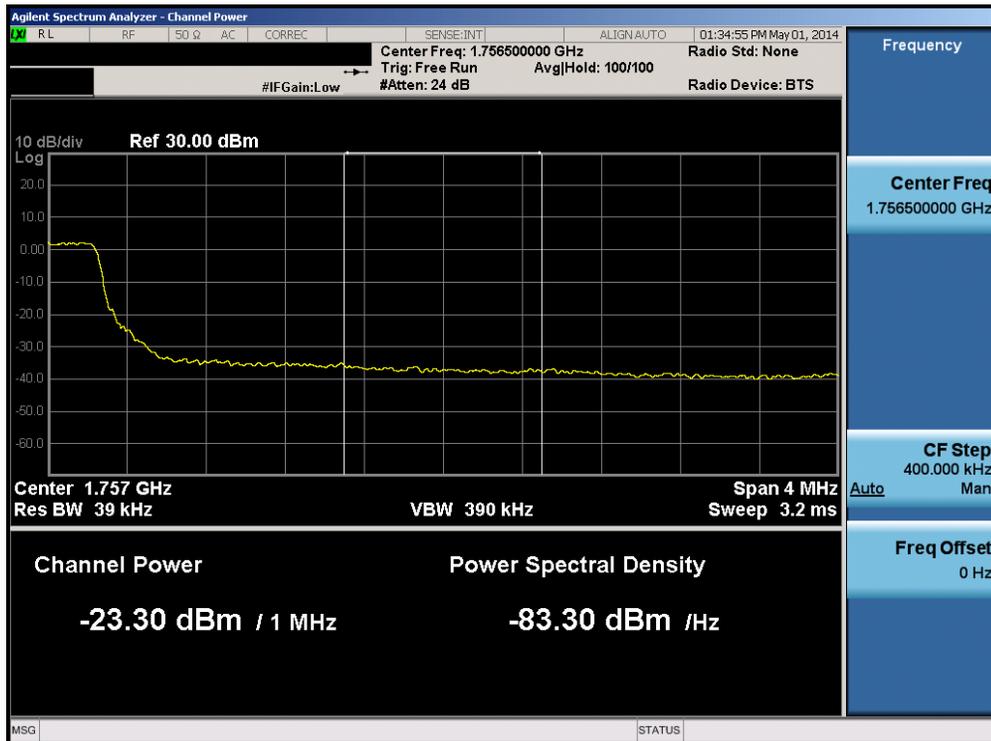

Plot 6-56. Upper Extended Band Edge Plot (Band 4 – 5.0MHz QPSK – RB Size 25)

FCC ID: ZNFV410		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1404210803.ZNF	Test Dates: 04/23 - 05/05/14; 6/20/14	EUT Type: Portable Tablet		Page 43 of 76

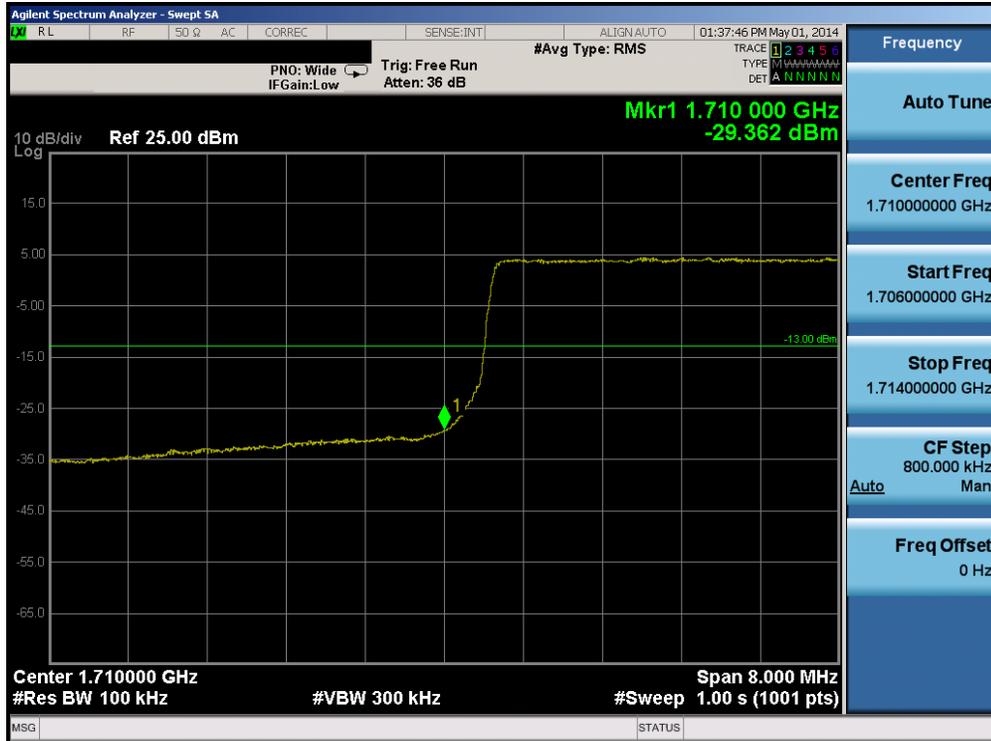

Plot 6-57. Lower Band Edge Plot (Band 4 – 10.0MHz QPSK – RB Size 50)




Plot 6-58. Lower Extended Band Edge Plot (Band 4 – 10.0MHz QPSK – RB Size 50)

FCC ID: ZNFV410		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1404210803.ZNF	Test Dates: 04/23 - 05/05/14; 6/20/14	EUT Type: Portable Tablet		Page 44 of 76




Plot 6-59. Upper Band Edge Plot (Band 4 – 10.0MHz QPSK – RB Size 50)

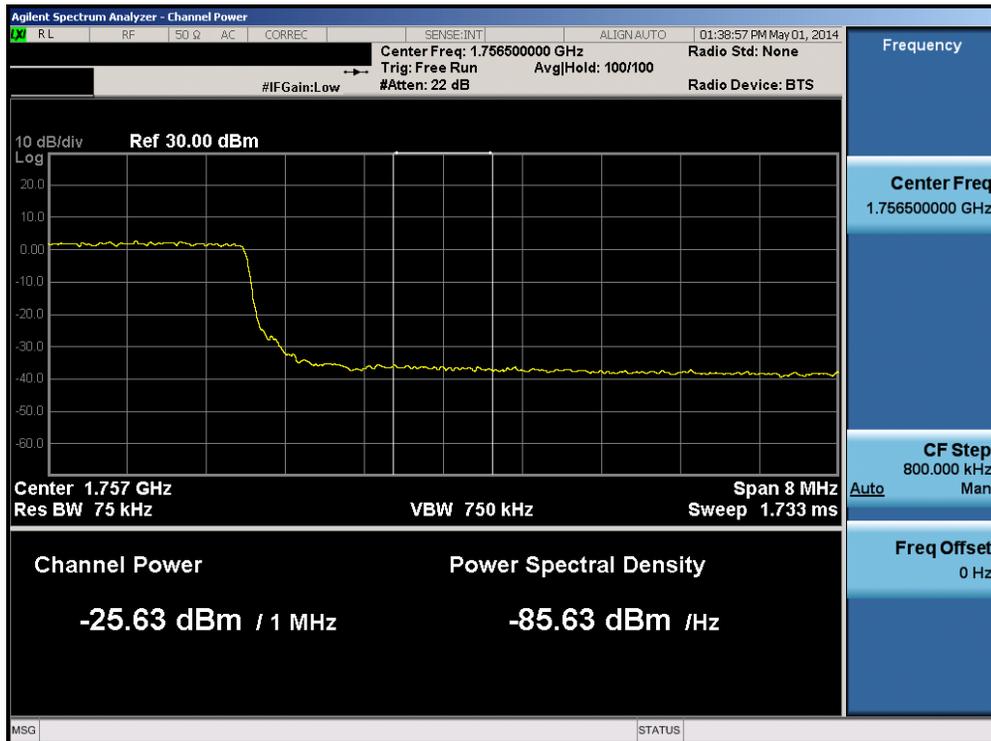

Plot 6-60. Upper Extended Band Edge Plot (Band 4 – 10.0MHz QPSK – RB Size 50)

FCC ID: ZNFV410		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1404210803.ZNF	Test Dates: 04/23 - 05/05/14; 6/20/14	EUT Type: Portable Tablet		Page 45 of 76

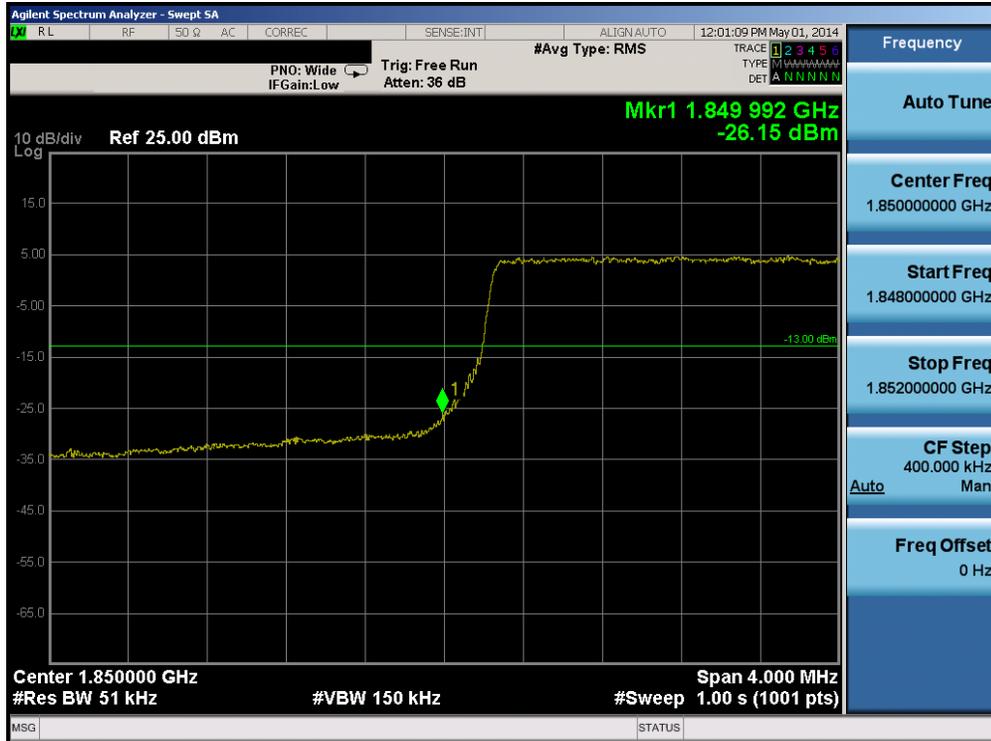

Plot 6-61. Lower Band Edge Plot (Band 2 – 5.0MHz QPSK – RB Size 25)



Plot 6-62. Lower Extended Band Edge Plot (Band 2 – 5.0MHz QPSK – RB Size 25)

FCC ID: ZNFV410		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1404210803.ZNF	Test Dates: 04/23 - 05/05/14; 6/20/14	EUT Type: Portable Tablet		Page 46 of 76




Plot 6-63. Upper Band Edge Plot (Band 2 – 5.0MHz QPSK – RB Size 25)




Plot 6-64. Upper Extended Band Edge Plot (Band 2 – 5.0MHz QPSK – RB Size 25)

FCC ID: ZNFV410		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1404210803.ZNF	Test Dates: 04/23 - 05/05/14; 6/20/14	EUT Type: Portable Tablet		Page 47 of 76

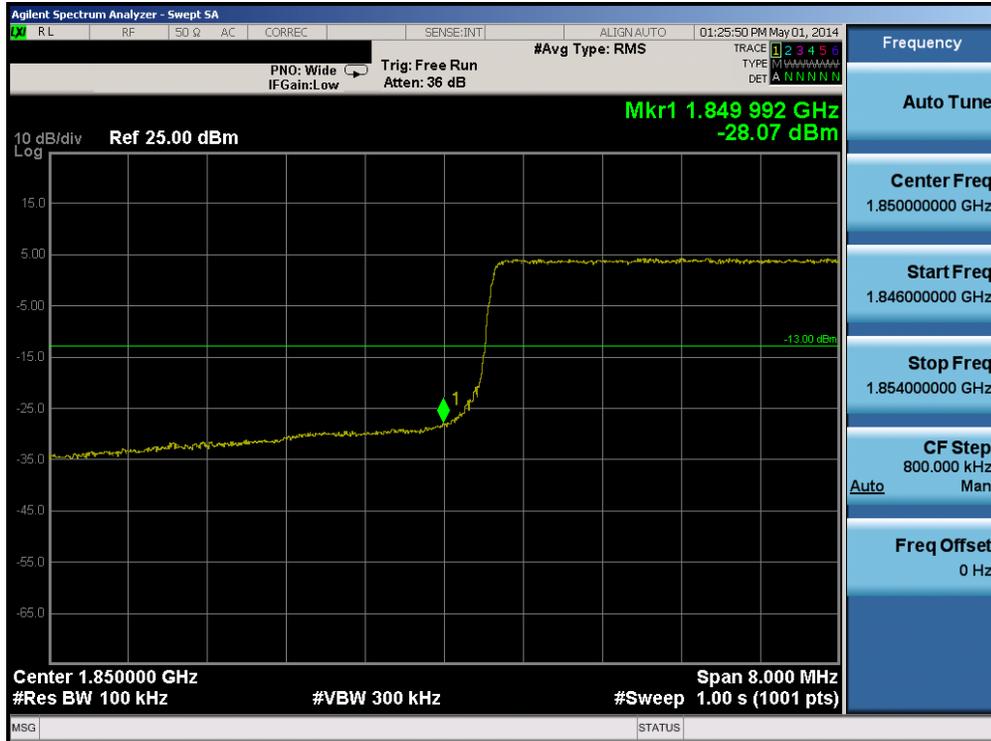

Plot 6-65. Lower Band Edge Plot (Band 2 – 10.0MHz QPSK – RB Size 50)

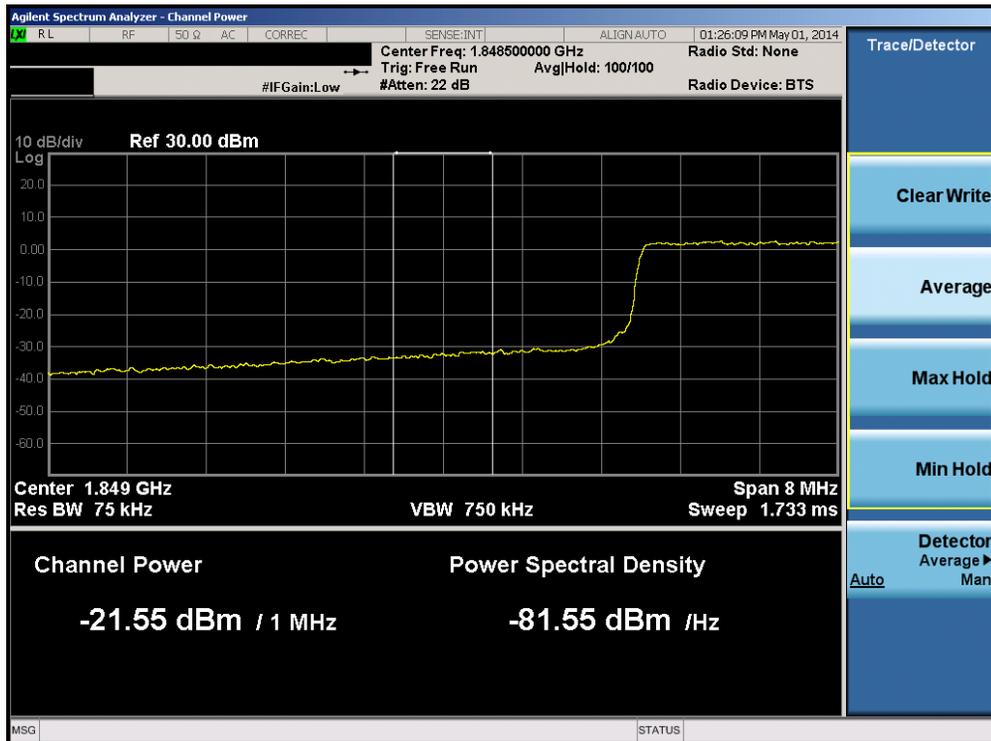


Plot 6-66. Lower Extended Band Edge Plot (Band 2 – 10.0MHz QPSK – RB Size 50)

FCC ID: ZNFV410		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1404210803.ZNF	Test Dates: 04/23 - 05/05/14; 6/20/14	EUT Type: Portable Tablet		Page 48 of 76



Plot 6-67. Upper Band Edge Plot (Band 2 – 10.0MHz QPSK – RB Size 50)

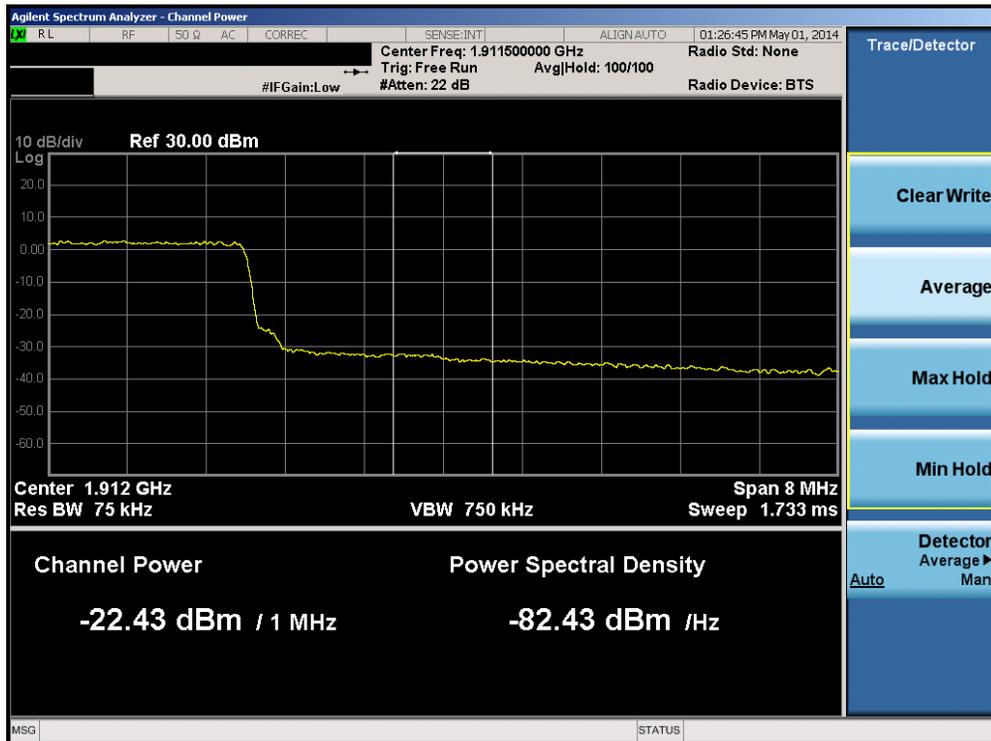

Plot 6-68. Upper Extended Band Edge Plot (Band 2 – 10.0MHz QPSK – RB Size 50)

FCC ID: ZNFV410		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1404210803.ZNF	Test Dates: 04/23 - 05/05/14; 6/20/14	EUT Type: Portable Tablet		Page 49 of 76

## 6.5 Peak-Average Ratio

§24.232(d) §27.50(d.5)

### Test Overview

A peak to average ratio measurement is performed at the conducted port of the EUT. The spectrum analyzers Complementary Cumulative Distribution Function (CCDF) measurement profile is used to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth. The CCDF curve shows how much time the peak waveform spends at or above a given average power level. The percent of time the signal spends at or above the level defines the probability for that particular power level.

### Test Procedure Used


KDB 971168 v02r01 – Section 5.7.1

### Test Settings

1. The signal analyzer's CCDF measurement profile is enabled
2. Frequency = carrier center frequency
3. Measurement BW > Emission bandwidth of signal
4. The signal analyzer was set to collect one million samples to generate the CCDF curve
5. The measurement interval was set depending on the type of signal analyzed. For continuous signals (>98% duty cycle), the measurement interval was set to 1ms. For burst transmissions, the spectrum analyzer is set to use an internal "RF Burst" trigger that is synced with an incoming pulse and the measurement interval is set to less than the duration of the "on time" of one burst to ensure that energy is only captured during a time in which the transmitter is operating at maximum power

### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

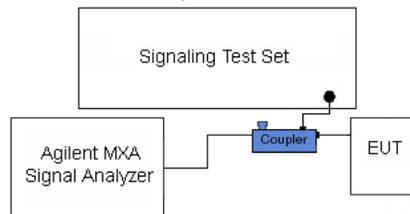


**Figure 6-4. Test Instrument & Measurement Setup**


### Test Notes

None.

FCC ID: ZNFV410	 <b>FCC Pt. 22, 24, &amp; 27 LTE MEASUREMENT REPORT (CERTIFICATION)</b> 		Reviewed by: Quality Manager
Test Report S/N: 0Y1404210803.ZNF	Test Dates: 04/23 - 05/05/14; 6/20/14	EUT Type: Portable Tablet	Page 50 of 76

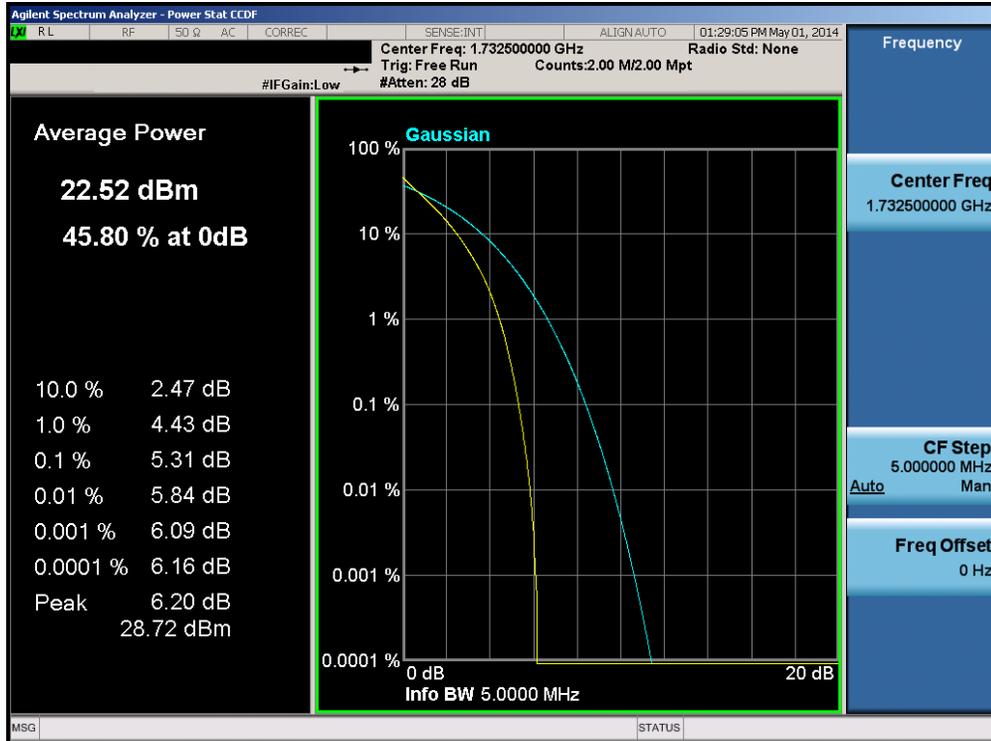


Plot 6-69. PAR Plot (Band 4 – 5.0MHz QPSK – RB Size 25)

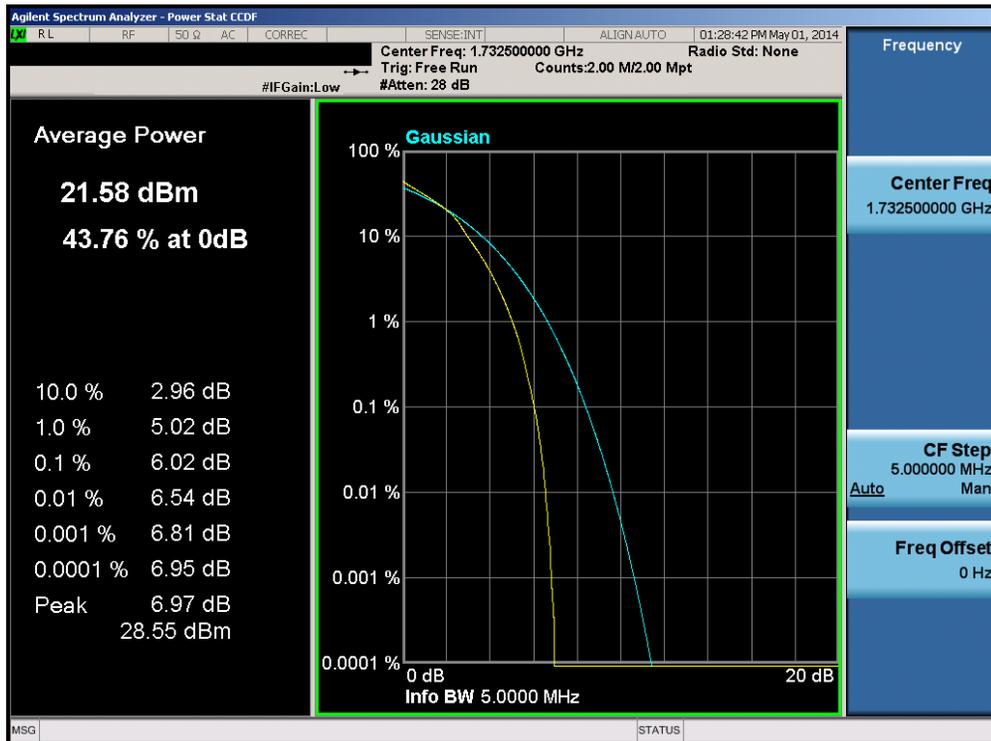


Plot 6-70. PAR Plot (Band 4 – 5.0MHz 16-QAM – RB Size 25)

FCC ID: ZNFV410	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1404210803.ZNF	Test Dates: 04/23 - 05/05/14; 6/20/14	EUT Type: Portable Tablet		Page 51 of 76

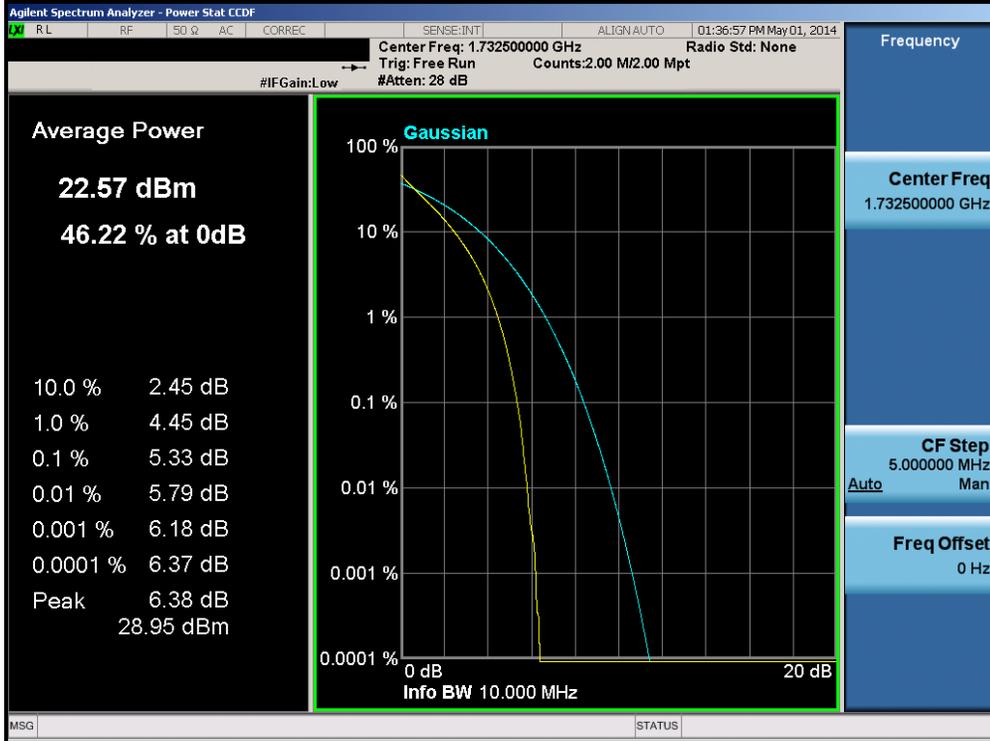


Plot 6-71. PAR Plot (Band 4 – 10.0MHz QPSK – RB Size 50)

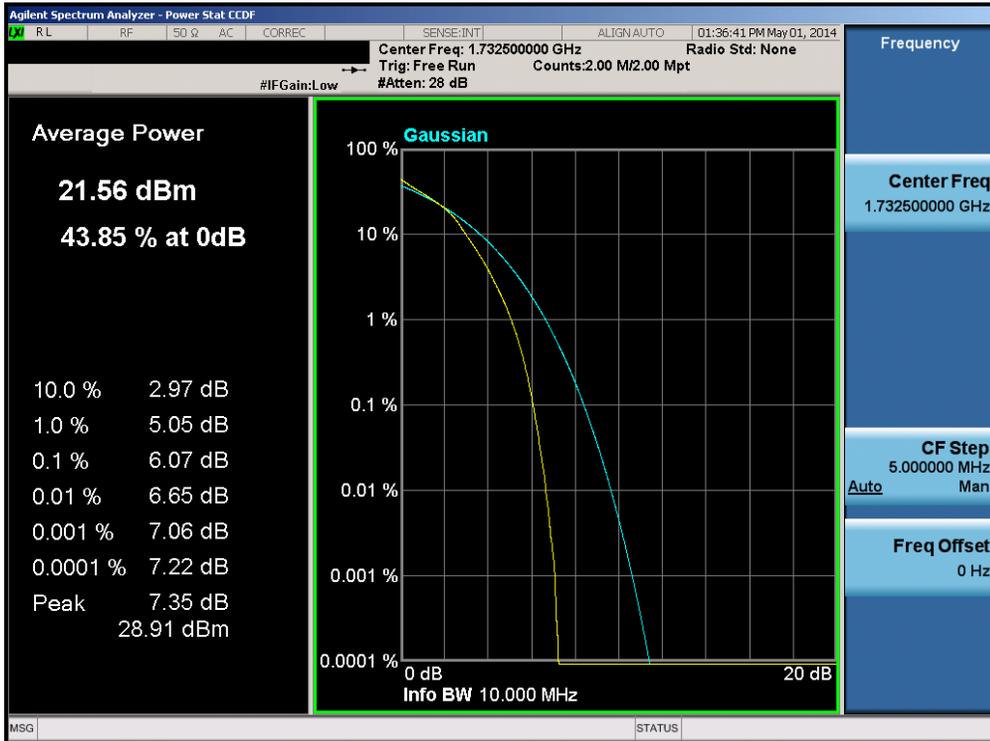


Plot 6-72. PAR Plot (Band 4 – 10.0MHz 16-QAM – RB Size 50)

FCC ID: ZNFV410		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1404210803.ZNF	Test Dates: 04/23 - 05/05/14; 6/20/14	EUT Type: Portable Tablet		Page 52 of 76

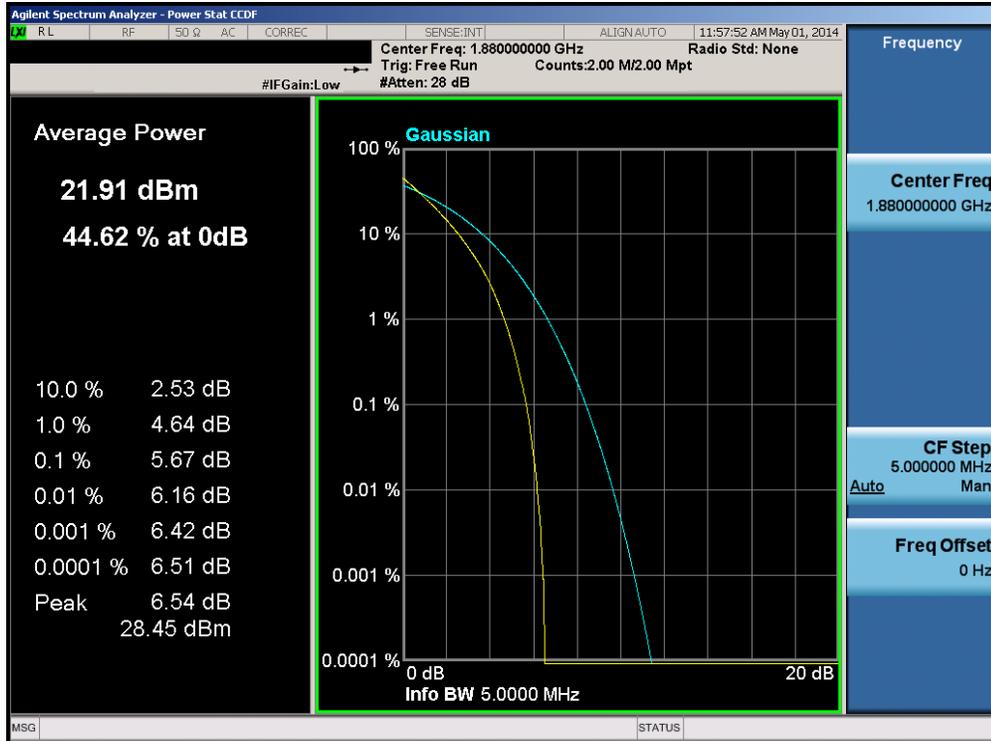


Plot 6-73. PAR Plot (Band 2 – 5.0MHz QPSK – RB Size 25)

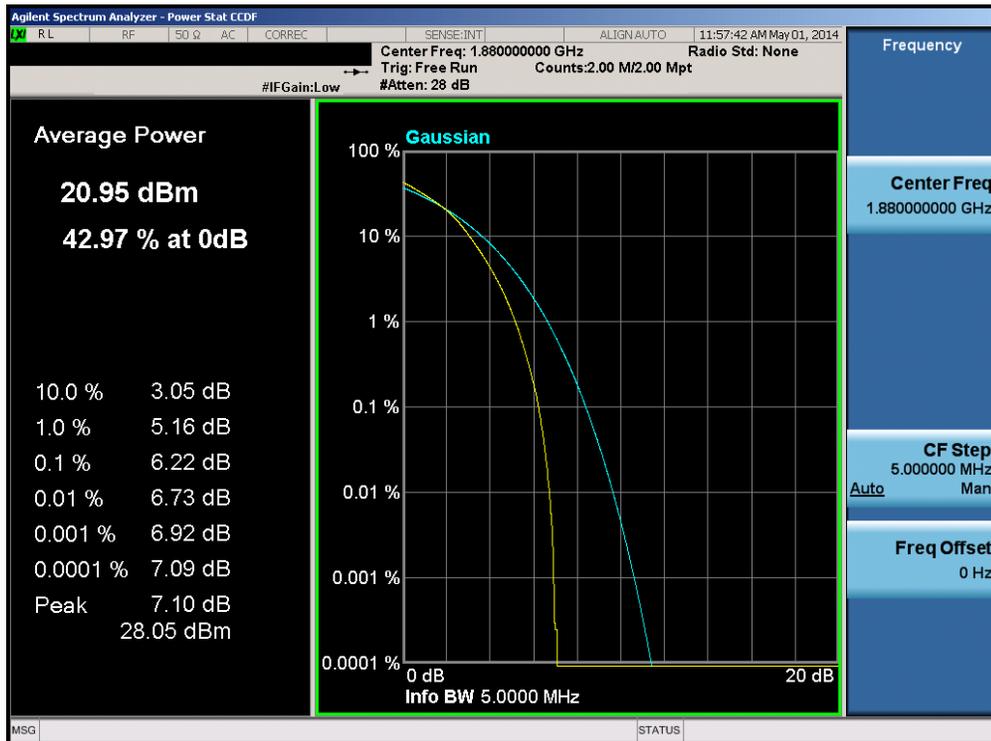


Plot 6-74. PAR Plot (Band 2 – 5.0MHz 16-QAM – RB Size 25)

FCC ID: ZNFV410		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1404210803.ZNF	Test Dates: 04/23 - 05/05/14; 6/20/14	EUT Type: Portable Tablet		Page 53 of 76

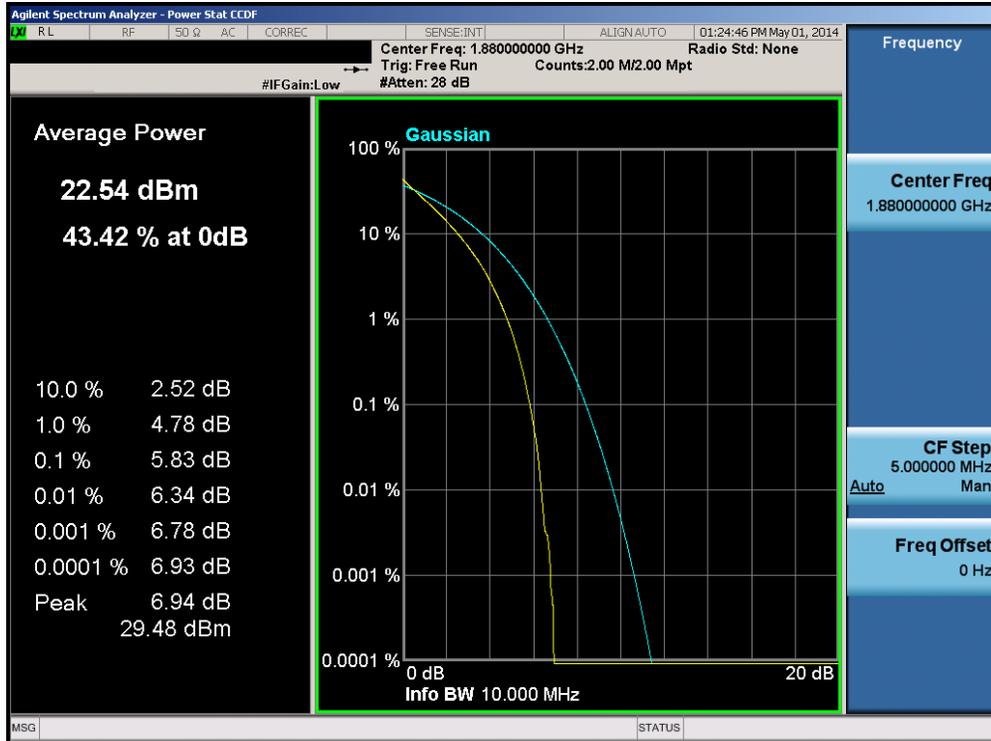

Plot 6-75. PAR Plot (Band 2 – 10.0MHz QPSK – RB Size 50)

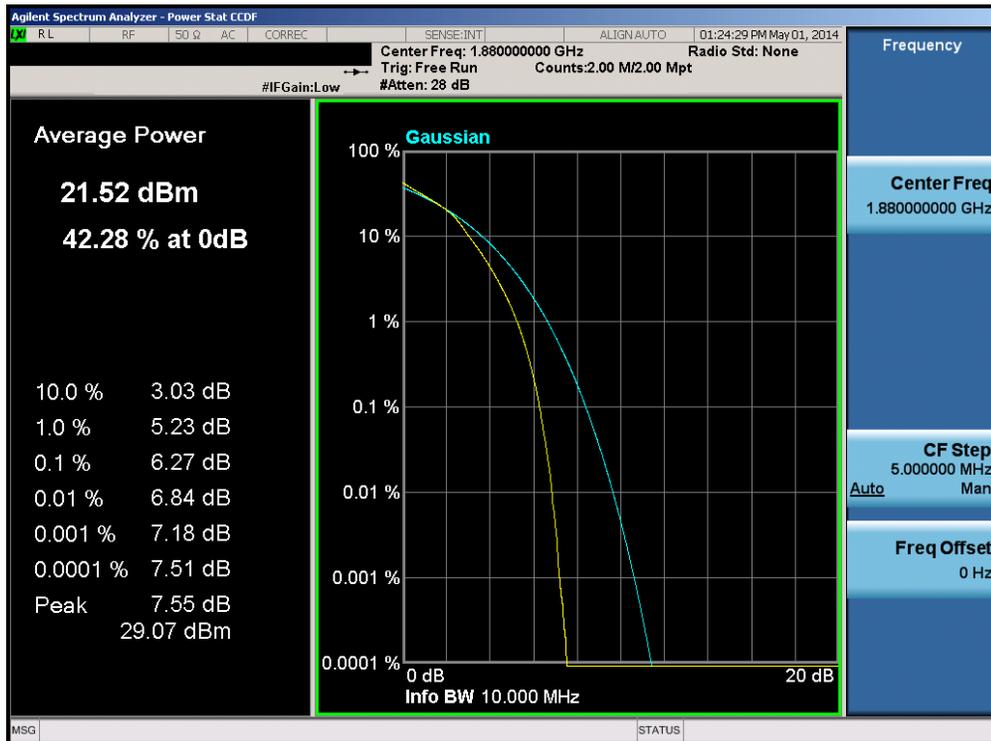

Plot 6-76. PAR Plot (Band 2 – 10.0MHz 16-QAM – RB Size 50)

FCC ID: ZNFV410		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1404210803.ZNF	Test Dates: 04/23 - 05/05/14; 6/20/14	EUT Type: Portable Tablet		Page 54 of 76

**6.6 Radiated Power (ERP/EIRP)**  
§22.913(a.2) §24.232(c) §27.50(c.10) §27.50(d.4)

**Test Overview**

Effective Radiated Power (ERP) and Equivalent Isotropic Radiated Power (EIRP) measurements are performed using the substitution method described in ANSI/TIA-603-C-2004 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using vertically polarized tuned dipole antennas. Measurements on signals operating above 1GHz are performed using vertically polarized broadband horn antennas. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

**Test Procedures Used**

KDB 971168 v02r01 – Section 5.2.1

ANSI/TIA-603-C-2004 – Section 2.2.17


**Test Settings**

1. Radiated power measurements are performed using the signal analyzer’s “channel power” measurement capability for signals with continuous operation. For signals with burst transmission, the signal analyzer’s “time domain power” measurement capability is used
2. RBW = 1 – 5% of the expected OBW, not to exceed 1MHz
3. VBW  $\geq$  3 x RBW
4. Span = 1.5 times the OBW
5. No. of sweep points  $\geq$  2 x span / RBW
6. Detector = RMS
7. Trigger is set to “free run” for signals with continuous operation with the sweep times set to “auto”. Trigger is set to enable triggering only on full power bursts with the sweep time set less than or equal to the transmission burst duration
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation. For signals with burst transmission, the “gating” function was enabled to ensure that measurements are performed during times in which the transmitter is operating at its maximum power
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize

FCC ID: ZNFV410	 <b>FCC Pt. 22, 24, &amp; 27 LTE MEASUREMENT REPORT (CERTIFICATION)</b> 		Reviewed by: Quality Manager
Test Report S/N: 0Y1404210803.ZNF	Test Dates: 04/23 - 05/05/14; 6/20/14	EUT Type: Portable Tablet	Page 55 of 76

### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

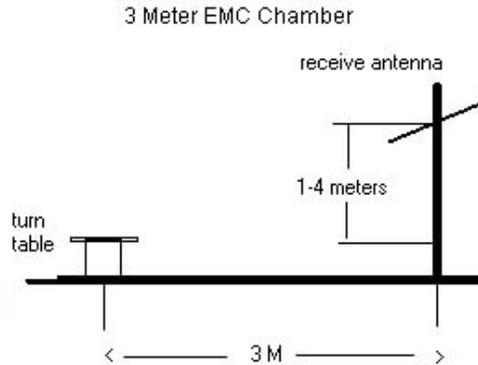

**Figure 6-5. Test Instrument & Measurement Setup**

### Test Notes

- 1) The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the tables below.
- 2) This unit was tested with its standard battery.

Frequency [MHz]	Channel Bandwidth [MHz]	Mod.	Battery	RB Size/Offset	Substitute Level [dBm]	Ant. Gain [dBd]	Ant. Pol. [H/V]	EUT Pol.	ERP [dBm]	ERP [Watts]	Margin [dB]
706.50	5	QPSK	Standard	1 / 24	12.60	2.35	V	H2	14.95	0.031	-19.82
710.00	5	QPSK	Standard	1 / 12	13.22	2.42	V	H2	15.64	0.037	-19.13
713.50	5	QPSK	Standard	1 / 0	12.94	2.49	V	H2	15.43	0.035	-19.34
706.50	5	16-QAM	Standard	1 / 24	11.41	2.35	V	H2	13.76	0.024	-21.01
710.00	5	16-QAM	Standard	1 / 12	12.03	2.42	V	H2	14.45	0.028	-20.32
713.50	5	16-QAM	Standard	1 / 0	11.78	2.49	V	H2	14.27	0.027	-20.50
709.00	10	QPSK	Standard	1 / 25	12.88	2.40	V	H2	15.28	0.034	-19.49
710.00	10	QPSK	Standard	1 / 25	13.29	2.42	V	H2	15.71	0.037	-19.06
711.00	10	QPSK	Standard	1 / 25	13.22	2.44	V	H2	15.66	0.037	-19.11
709.00	10	16-QAM	Standard	1 / 25	11.76	2.40	V	H2	14.16	0.026	-20.61
710.00	10	16-QAM	Standard	1 / 25	11.96	2.42	V	H2	14.38	0.027	-20.39
711.00	10	16-QAM	Standard	1 / 25	12.01	2.44	V	H2	14.45	0.028	-20.32

**Table 6-2. ERP Data (Band 17)**

FCC ID: ZNFV410	 <b>FCC Pt. 22, 24, &amp; 27 LTE MEASUREMENT REPORT (CERTIFICATION)</b>			Reviewed by: Quality Manager
Test Report S/N: 0Y1404210803.ZNF	Test Dates: 04/23 - 05/05/14; 6/20/14	EUT Type: Portable Tablet	Page 56 of 76	

Frequency [MHz]	Channel Bandwidth [MHz]	Mod.	Battery	RB Size/Offset	Substitute Level [dBm]	Ant. Gain [dBd]	Ant. Pol. [H/V]	EUT Pol.	ERP [dBm]	ERP [Watts]	Margin [dB]
826.50	5	QPSK	Standard	1 / 12	10.97	4.64	V	H2	15.61	0.036	-22.84
836.50	5	QPSK	Standard	1 / 24	11.80	4.82	V	H2	16.62	0.046	-21.83
846.50	5	QPSK	Standard	1 / 24	12.26	5.01	V	H2	17.27	0.053	-21.18
826.50	5	16-QAM	Standard	1 / 12	9.75	4.64	V	H2	14.39	0.027	-24.06
836.50	5	16-QAM	Standard	1 / 24	10.62	4.82	V	H2	15.44	0.035	-23.01
846.50	5	16-QAM	Standard	1 / 24	11.08	5.01	V	H2	16.09	0.041	-22.36
829.00	10	QPSK	Standard	1 / 49	12.13	4.68	V	H2	16.81	0.048	-21.64
836.50	10	QPSK	Standard	1 / 25	12.11	4.82	V	H2	16.93	0.049	-21.52
844.00	10	QPSK	Standard	1 / 25	12.02	4.96	V	H2	16.98	0.050	-21.47
829.00	10	16-QAM	Standard	1 / 49	11.07	4.68	V	H2	15.75	0.038	-22.70
836.50	10	16-QAM	Standard	1 / 25	10.96	4.82	V	H2	15.78	0.038	-22.67
844.00	10	16-QAM	Standard	1 / 25	10.99	4.96	V	H2	15.95	0.039	-22.50

**Table 6-3. ERP Data (Band 5)**

FCC ID: ZNFV410	 <b>FCC Pt. 22, 24, &amp; 27 LTE MEASUREMENT REPORT (CERTIFICATION)</b> 		Reviewed by: Quality Manager
Test Report S/N: 0Y1404210803.ZNF	Test Dates: 04/23 - 05/05/14; 6/20/14	EUT Type: Portable Tablet	Page 57 of 76

Frequency [MHz]	Channel Bandwidth [MHz]	Mod.	Battery	RB Size/Offset	Substitute Level [dBm]	Ant. Gain [dBi]	Ant. Pol. [H/V]	EUT Pol.	EIRP [dBm]	EIRP [Watts]	Margin [dB]
1712.50	5	QPSK	Standard	1 / 24	14.86	9.89	V	H2	24.75	0.298	-5.25
1732.50	5	QPSK	Standard	1 / 12	14.84	9.85	V	H2	24.69	0.294	-5.31
1752.50	5	QPSK	Standard	1 / 12	14.75	9.81	V	H2	24.56	0.286	-5.44
1712.50	5	16-QAM	Standard	1 / 24	13.82	9.89	V	H2	23.71	0.235	-6.29
1732.50	5	16-QAM	Standard	12 / 6	13.61	9.85	V	H2	23.46	0.222	-6.54
1752.50	5	16-QAM	Standard	1 / 12	13.41	9.81	V	H2	23.22	0.210	-6.78
1715.00	10	QPSK	Standard	1 / 25	15.23	9.88	V	H2	25.11	0.324	-4.89
1732.50	10	QPSK	Standard	1 / 49	14.87	9.85	V	H2	24.72	0.296	-5.28
1750.00	10	QPSK	Standard	1 / 0	14.56	9.81	V	H2	24.37	0.274	-5.63
1715.00	10	16-QAM	Standard	1 / 25	14.13	9.88	V	H2	24.01	0.252	-5.99
1732.50	10	16-QAM	Standard	1 / 49	13.69	9.85	V	H2	23.54	0.226	-6.46
1750.00	10	16-QAM	Standard	1 / 0	13.43	9.81	V	H2	23.24	0.211	-6.76

**Table 6-4. EIRP Data (Band 4)**

Frequency [MHz]	Channel Bandwidth [MHz]	Mod.	Battery	RB Size/Offset	Substitute Level [dBm]	Ant. Gain [dBi]	Ant. Pol. [H/V]	EUT Pol.	EIRP [dBm]	EIRP [Watts]	Margin [dB]
1852.50	5	QPSK	Standard	1 / 12	13.39	9.59	V	H2	22.98	0.199	-10.03
1880.00	5	QPSK	Standard	1 / 12	13.54	9.53	V	H2	23.07	0.203	-9.94
1907.50	5	QPSK	Standard	1 / 12	14.45	9.48	V	H2	23.93	0.247	-9.08
1852.50	5	16-QAM	Standard	1 / 12	12.25	9.59	V	H2	21.84	0.153	-11.17
1880.00	5	16-QAM	Standard	1 / 12	12.39	9.53	V	H2	21.92	0.156	-11.09
1907.50	5	16-QAM	Standard	1 / 12	13.24	9.48	V	H2	22.72	0.187	-10.29
1855.00	10	QPSK	Standard	1 / 25	13.51	9.59	V	H2	23.10	0.204	-9.91
1880.00	10	QPSK	Standard	1 / 25	13.56	9.53	V	H2	23.09	0.204	-9.92
1905.00	10	QPSK	Standard	1 / 0	14.66	9.48	V	H2	24.14	0.259	-8.87
1855.00	10	16-QAM	Standard	1 / 25	12.36	9.59	V	H2	21.95	0.157	-11.06
1880.00	10	16-QAM	Standard	1 / 25	11.53	9.53	V	H2	21.06	0.128	-11.95
1905.00	10	16-QAM	Standard	1 / 0	13.44	9.48	V	H2	22.92	0.196	-10.09

**Table 6-5. EIRP Data (Band 2)**

FCC ID: ZNFV410	 <b>FCC Pt. 22, 24, &amp; 27 LTE MEASUREMENT REPORT (CERTIFICATION)</b> 		Reviewed by: Quality Manager
Test Report S/N: 0Y1404210803.ZNF	Test Dates: 04/23 - 05/05/14; 6/20/14	EUT Type: Portable Tablet	Page 58 of 76

## 6.7 Radiated Spurious Emissions Measurements

§2.1053 §22.917(a) §24.238(a) §27.53(f) §27.53(g) §27.53(h)

### Test Overview

Radiated spurious emissions measurements are performed using the substitution method described in ANSI/TIA-603-C-2004 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using vertically and vertically polarized tuned dipole antennas. Measurements on signals operating above 1GHz are performed using vertically and horizontally polarized broadband horn antennas. All measurements are performed as peak measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

### Test Procedures Used

KDB 971168 v02r01 – Section 5.8


ANSI/TIA-603-C-2004 – Section 2.2.12

### Test Settings

1. RBW = 100kHz for emissions below 1GHz and 1MHz for emissions above 1GHz
2. VBW  $\geq 3 \times$  RBW
3. Span = 1.5 times the OBW
4. No. of sweep points  $\geq 2 \times$  span / RBW
5. Detector = Peak
6. Trace mode = max hold
7. The trace was allowed to stabilize

### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

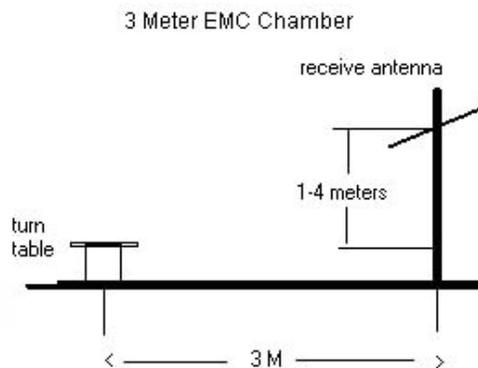

**Figure 6-6. Test Instrument & Measurement Setup**

FCC ID: ZNFV410		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1404210803.ZNF	Test Dates: 04/23 - 05/05/14; 6/20/14	EUT Type: Portable Tablet		Page 59 of 76

### Test Notes

- 1) The worst case emissions are reported with the EUT positioning, modulations, and channel bandwidth configurations shown in the tables below.
- 2) This unit was tested with its standard battery.
- 3) The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter using CISPR quasi peak detector below 1GHz. The worst-case emissions are reported however emissions whose levels were not within 20dB of the respective limits were not reported.
- 4) Emissions below 18GHz were measured at a 3 meter test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.

OPERATING FREQUENCY: 709.00 MHz  
 CHANNEL: 23780  
 MEASURED OUTPUT POWER: 15.28 dBm = 0.034 W  
 MODULATION SIGNAL: QPSK  
 BANDWIDTH: 10.0 MHz  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10}(W) =$  28.28 dBc

Frequency [MHz]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBd]	Spurious Emission Level [dBm]	Ant. Pol. [H/V]	EUT Pol. [H/H2/V]	[dBc]
1418.00	-61.10	5.75	-55.35	H	H	70.6
2127.00	-60.57	6.76	-53.82	H	H	69.1
2836.00	-60.14	7.79	-52.35	H	H	67.6
3545.00	-57.88	7.59	-50.29	H	H	65.6
4254.00	-58.03	8.44	-49.60	H	H	64.9
4963.00	-54.97	8.75	-46.22	H	H	61.5
5672.00	-55.06	8.99	-46.07	H	H	61.3
6381.00	-54.16	9.66	-44.50	H	H	59.8
7090.00	-52.08	9.59	-42.49	H	H	57.8

**Table 6-6. Radiated Spurious Data (Band 17 – Low Channel)**

FCC ID: ZNFV410	 <b>FCC Pt. 22, 24, &amp; 27 LTE MEASUREMENT REPORT (CERTIFICATION)</b> 		Reviewed by: Quality Manager
Test Report S/N: 0Y1404210803.ZNF	Test Dates: 04/23 - 05/05/14; 6/20/14	EUT Type: Portable Tablet	Page 60 of 76

OPERATING FREQUENCY: 710.00 MHz  
 CHANNEL: 23790  
 MEASURED OUTPUT POWER: 15.71 dBm = 0.037 W  
 MODULATION SIGNAL: QPSK  
 BANDWIDTH: 10  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10}(W) =$  28.71 dBc

Frequency [MHz]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBd]	Spurious Emission Level [dBm]	Ant. Pol. [H/V]	EUT Pol. [H/H2/V]	[dBc]
1420.00	-60.48	5.76	-54.72	H	H	70.4
2130.00	-60.66	6.77	-53.89	H	H	69.6
2840.00	-60.72	7.78	-52.94	H	H	68.6
3550.00	-58.92	7.59	-51.33	H	H	67.0
4260.00	-58.89	8.46	-50.43	H	H	66.1
4970.00	-53.67	8.76	-44.91	H	H	60.6
5680.00	-53.89	9.02	-44.87	H	H	60.6
6390.00	-53.11	9.69	-43.42	H	H	59.1
7100.00	-52.42	9.58	-42.84	H	H	58.5

**Table 6-7. Radiated Spurious Data (Band 17 – Mid Channel)**

OPERATING FREQUENCY: 711.00 MHz  
 CHANNEL: 23800  
 MEASURED OUTPUT POWER: 15.66 dBm = 0.037 W  
 MODULATION SIGNAL: QPSK  
 BANDWIDTH: 10  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10}(W) =$  28.66 dBc

Frequency [MHz]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBd]	Spurious Emission Level [dBm]	Ant. Pol. [H/V]	EUT Pol. [H/H2/V]	[dBc]
1422.00	-59.85	5.77	-54.08	H	H	69.7
2133.00	-60.85	6.79	-54.06	H	H	69.7
2844.00	-60.29	7.78	-52.51	H	H	68.2
3555.00	-56.99	7.59	-49.39	H	H	65.1
4266.00	-59.11	8.48	-50.64	H	H	66.3
4977.00	-55.04	8.76	-46.28	H	H	61.9
5688.00	-54.71	9.05	-45.66	H	H	61.3
6399.00	-54.00	9.72	-44.28	H	H	59.9
7110.00	-52.34	9.55	-42.80	H	H	58.5

**Table 6-8. Radiated Spurious Data (Band 17 – High Channel)**

FCC ID: ZNFV410			FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1404210803.ZNF	Test Dates: 04/23 - 05/05/14; 6/20/14	EUT Type: Portable Tablet	Page 61 of 76		

OPERATING FREQUENCY: 826.50 MHz  
 CHANNEL: 20425  
 MEASURED OUTPUT POWER: 15.61 dBm = 0.036 W  
 MODULATION SIGNAL: QPSK  
 BANDWIDTH: 5.0 MHz  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10}(W) =$  28.61 dBc

Frequency [MHz]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBd]	Spurious Emission Level [dBm]	Ant. Pol. [H/V]	EUT Pol. [H/H2/V]	[dBc]
1653.00	-46.26	6.56	-39.71	H	H	55.3
2479.50	-61.56	7.31	-54.25	H	H	69.9
3306.00	-59.41	7.38	-52.04	H	H	67.6
4132.50	-58.56	8.05	-50.51	H	H	66.1
4959.00	-54.69	8.75	-45.94	H	H	61.5
5785.50	-54.90	9.22	-45.68	H	H	61.3
6612.00	-52.39	9.84	-42.55	H	H	58.2
7438.50	-51.83	8.63	-43.20	H	H	58.8
8265.00	-48.27	9.03	-39.24	H	H	54.8

**Table 6-9. Radiated Spurious Data (Band 5 – Low Channel)**

OPERATING FREQUENCY: 836.50 MHz  
 CHANNEL: 20525  
 MEASURED OUTPUT POWER: 16.62 dBm = 0.046 W  
 MODULATION SIGNAL: QPSK  
 BANDWIDTH: 5  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10}(W) =$  29.62 dBc

Frequency [MHz]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBd]	Spurious Emission Level [dBm]	Ant. Pol. [H/V]	EUT Pol. [H/H2/V]	[dBc]
1673.00	-43.25	6.55	-36.70	H	H	53.3
2509.50	-61.25	7.34	-53.91	H	H	70.5
3346.00	-59.18	7.44	-51.74	H	H	68.4
4182.50	-58.13	8.20	-49.93	H	H	66.5
5019.00	-54.66	8.74	-45.92	H	H	62.5
5855.50	-54.77	9.29	-45.47	H	H	62.1
6692.00	-49.56	9.65	-39.91	H	H	56.5
7528.50	-49.07	8.84	-40.23	H	H	56.9
8365.00	-46.59	9.00	-37.58	H	H	54.2

**Table 6-10. Radiated Spurious Data (Band 5 – Mid Channel)**

FCC ID: ZNFV410	 <b>FCC Pt. 22, 24, &amp; 27 LTE MEASUREMENT REPORT (CERTIFICATION)</b> 		Reviewed by: Quality Manager
Test Report S/N: 0Y1404210803.ZNF	Test Dates: 04/23 - 05/05/14; 6/20/14	EUT Type: Portable Tablet	Page 62 of 76

OPERATING FREQUENCY: 846.50 MHz  
 CHANNEL: 20625  
 MEASURED OUTPUT POWER: 17.27 dBm = 0.053 W  
 MODULATION SIGNAL: QPSK  
 BANDWIDTH: 5  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10}(W) =$  30.27 dBc

Frequency [MHz]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBd]	Spurious Emission Level [dBm]	Ant. Pol. [H/V]	EUT Pol. [H/H2/V]	[dBc]
1693.00	-48.11	6.55	-41.56	H	H	58.8
2539.50	-61.95	7.36	-54.59	H	H	71.9
3386.00	-60.34	7.50	-52.84	H	H	70.1
4232.50	-59.53	8.36	-51.16	H	H	68.4
5079.00	-54.28	8.63	-45.65	H	H	62.9
5925.50	-55.50	9.28	-46.22	H	H	63.5
6772.00	-51.68	9.60	-42.09	H	H	59.4
7618.50	-50.46	9.01	-41.45	H	H	58.7
8465.00	-48.54	8.94	-39.61	H	H	56.9

**Table 6-11. Radiated Spurious Data (Band 5 – High Channel)**

OPERATING FREQUENCY: 1715.00 MHz  
 CHANNEL: 20000  
 MEASURED OUTPUT POWER: 25.11 dBm = 0.324 W  
 MODULATION SIGNAL: QPSK  
 BANDWIDTH: 10.0 MHz  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10}(W) =$  38.11 dBc

Frequency [MHz]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Ant. Pol. [H/V]	EUT Pol. [H/H2/V]	[dBc]
3430.00	-60.11	9.69	-50.42	H	H	75.5
5145.00	-54.42	10.67	-43.75	H	H	68.9
6860.00	-50.21	11.74	-38.47	H	H	63.6
8575.00	-47.48	11.05	-36.43	H	H	61.5
10290.00	-48.05	12.29	-35.77	H	H	60.9
12005.00	-46.22	12.51	-33.71	H	H	58.8
13720.00	-30.83	12.07	-18.76	H	H	43.9
15435.00	-44.97	15.74	-29.24	H	H	54.3
17150.00	-42.98	13.36	-29.62	H	H	54.7

**Table 6-12. Radiated Spurious Data (Band 4 – Low Channel)**

FCC ID: ZNFV410			FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1404210803.ZNF	Test Dates: 04/23 - 05/05/14; 6/20/14	EUT Type: Portable Tablet	Page 63 of 76		

OPERATING FREQUENCY: 1732.50 MHz  
 CHANNEL: 20175  
 MEASURED OUTPUT POWER: 24.72 dBm = 0.296 W  
 MODULATION SIGNAL: QPSK  
 BANDWIDTH: 10  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10}(W) =$  37.72 dBc

Frequency [MHz]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Ant. Pol. [H/V]	EUT Pol. [H/H2/V]	[dBc]
3465.00	-57.68	9.71	-47.97	H	H	72.7
5197.50	-53.80	10.59	-43.22	H	H	67.9
6930.00	-47.47	11.75	-35.72	H	H	60.4
8662.50	-50.32	11.06	-39.25	H	H	64.0
10395.00	-52.08	12.37	-39.71	H	H	64.4
12127.50	-48.82	12.83	-35.98	H	H	60.7
13860.00	-31.86	11.85	-20.02	H	H	44.7
15592.50	-45.41	16.27	-29.15	H	H	53.9
17325.00	-41.21	12.79	-28.43	H	H	53.1

**Table 6-13. Radiated Spurious Data (Band 4 – Mid Channel)**

OPERATING FREQUENCY: 1750.00 MHz  
 CHANNEL: 20350  
 MEASURED OUTPUT POWER: 24.37 dBm = 0.274 W  
 MODULATION SIGNAL: QPSK  
 BANDWIDTH: 10  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10}(W) =$  37.37 dBc

Frequency [MHz]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Ant. Pol. [H/V]	EUT Pol. [H/H2/V]	[dBc]
3500.00	-60.43	9.73	-50.71	H	H	75.1
5250.00	-56.30	10.63	-45.67	H	H	70.0
7000.00	-50.42	11.76	-38.67	H	H	63.0
8750.00	-46.84	11.02	-35.82	H	H	60.2
10500.00	-48.09	12.48	-35.61	H	H	60.0
12250.00	-48.01	13.04	-34.97	H	H	59.3
14000.00	-31.98	11.45	-20.53	H	H	44.9
15750.00	-47.94	16.65	-31.29	H	H	55.7
17500.00	-38.99	11.95	-27.04	H	H	51.4

**Table 6-14. Radiated Spurious Data (Band 4 – High Channel)**

FCC ID: ZNFV410			FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1404210803.ZNF	Test Dates: 04/23 - 05/05/14; 6/20/14	EUT Type: Portable Tablet	Page 64 of 76		

OPERATING FREQUENCY: 1855.00 MHz  
 CHANNEL: 18650  
 MEASURED OUTPUT POWER: 23.10 dBm = 0.204 W  
 MODULATION SIGNAL: QPSK  
 BANDWIDTH: 10.0 MHz  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10}(W) =$  36.10 dBc

Frequency [MHz]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Ant. Pol. [H/V]	EUT Pol. [H/H2/V]	[dBc]
3710.00	-53.75	9.41	-44.34	H	H	67.4
5565.00	-51.26	10.82	-40.44	H	H	63.5
7420.00	-49.74	10.74	-39.01	H	H	62.1
9275.00	-52.32	11.59	-40.74	H	H	63.8
11130.00	-47.66	12.78	-34.88	H	H	58.0
12985.00	-36.96	13.12	-23.84	H	H	46.9
14840.00	-36.79	12.32	-24.47	H	H	47.6
16695.00	-47.79	15.10	-32.69	H	H	55.8
18550.00	-65.63	15.44	-50.19	H	H	73.3

**Table 6-15. Radiated Spurious Data (Band 2 – Low Channel)**

OPERATING FREQUENCY: 1880.00 MHz  
 CHANNEL: 18900  
 MEASURED OUTPUT POWER: 23.09 dBm = 0.204 W  
 MODULATION SIGNAL: QPSK  
 BANDWIDTH: 10  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10}(W) =$  36.09 dBc

Frequency [MHz]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Ant. Pol. [H/V]	EUT Pol. [H/H2/V]	[dBc]
3760.00	-58.66	9.28	-49.38	H	H	72.5
5640.00	-52.07	11.03	-41.04	H	H	64.1
7520.00	-52.59	10.97	-41.61	H	H	64.7
9400.00	-51.26	11.53	-39.72	H	H	62.8
11280.00	-46.18	12.71	-33.47	H	H	56.6
13160.00	-30.45	12.74	-17.71	H	H	40.8
15040.00	-40.03	13.50	-26.53	H	H	49.6
16920.00	-46.26	14.06	-32.20	H	H	55.3
18800.00	-66.00	15.50	-50.50	H	H	73.6

**Table 6-16. Radiated Spurious Data (Band 2 – Mid Channel)**

FCC ID: ZNFV410	 FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)			Reviewed by: Quality Manager
Test Report S/N: 0Y1404210803.ZNF	Test Dates: 04/23 - 05/05/14; 6/20/14	EUT Type: Portable Tablet	Page 65 of 76	

OPERATING FREQUENCY: 1905.00 MHz  
 CHANNEL: 19150  
 MEASURED OUTPUT POWER: 24.14 dBm = 0.259 W  
 MODULATION SIGNAL: QPSK  
 BANDWIDTH: 10  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10}(W) =$  37.14 dBc

Frequency [MHz]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Ant. Pol. [H/V]	EUT Pol. [H/H2/V]	[dBc]
3810.00	-56.39	9.19	-47.20	H	H	71.3
5715.00	-54.52	11.26	-43.26	H	H	67.4
7620.00	-52.92	11.16	-41.76	H	H	65.9
9525.00	-48.94	11.76	-37.18	H	H	61.3
11430.00	-43.64	12.73	-30.91	H	H	55.1
13335.00	-26.91	12.51	-14.40	H	H	38.5
15240.00	-41.99	14.63	-27.36	H	H	51.5
17145.00	-43.16	13.38	-29.78	H	H	53.9
19050.00	-65.31	15.51	-49.80	H	H	73.9

**Table 6-17. Radiated Spurious Data (Band 2 – High Channel)**

FCC ID: ZNFV410	 <b>FCC Pt. 22, 24, &amp; 27 LTE MEASUREMENT REPORT (CERTIFICATION)</b> 		Reviewed by: Quality Manager
Test Report S/N: 0Y1404210803.ZNF	Test Dates: 04/23 - 05/05/14; 6/20/14	EUT Type: Portable Tablet	Page 66 of 76

## 6.8 Frequency Stability / Temperature Variation

§2.1055 §22.355 §24.235 §27.54

### Test Overview and Limit

Frequency stability testing is performed in accordance with the guidelines of ANSI/TIA-603-C-2004. The frequency stability of the transmitter is measured by:

- a.) **Temperature:** The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
- b.) **Primary Supply Voltage:** The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

***For Part 22, the frequency stability of the transmitter shall be maintained within  $\pm 0.00025\%$  ( $\pm 2.5$  ppm) of the center frequency. For Part 24 and Part 27, the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.***

### Test Procedure Used

ANSI/TIA-603-C-2004

### Test Settings

1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
2. The equipment is turned on in a “standby” condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

### Test Setup

The EUT was connected via an RF cable to a spectrum analyzer with the EUT placed inside an environmental chamber.

### Test Notes

None

FCC ID: ZNFV410	 <b>FCC Pt. 22, 24, &amp; 27 LTE MEASUREMENT REPORT (CERTIFICATION)</b> 		Reviewed by: Quality Manager
Test Report S/N: 0Y1404210803.ZNF	Test Dates: 04/23 - 05/05/14; 6/20/14	EUT Type: Portable Tablet	Page 67 of 76

## Band 17 Frequency Stability Measurements

§2.1055 §27.54

OPERATING FREQUENCY: 710,000,000 Hz  
 CHANNEL: 23090  
 REFERENCE VOLTAGE: 3.80 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.80	+ 20 (Ref)	710,000,015	15	0.0000021
100 %		- 30	710,000,023	23	0.0000032
100 %		- 20	710,000,025	25	0.0000035
100 %		- 10	710,000,010	10	0.0000014
100 %		0	710,000,019	19	0.0000027
100 %		+ 10	709,999,977	-23	-0.0000032
100 %		+ 20	710,000,015	15	0.0000021
100 %		+ 30	710,000,003	3	0.0000004
100 %		+ 40	710,000,006	6	0.0000008
100 %		+ 50	710,000,002	2	0.0000003
115 %	4.37	+ 20	709,999,979	-21	-0.0000030
BATT. ENDPOINT	3.40	+ 20	709,999,989	-11	-0.0000015


Table 6-18. Frequency Stability Data (Band 17)

**Note:**

Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

FCC ID: ZNFV410	 <b>FCC Pt. 22, 24, &amp; 27 LTE MEASUREMENT REPORT (CERTIFICATION)</b> 		Reviewed by: Quality Manager
Test Report S/N: 0Y1404210803.ZNF	Test Dates: 04/23 - 05/05/14; 6/20/14	EUT Type: Portable Tablet	Page 68 of 76

**Band 17 Frequency Stability Measurements**  
**§2.1055 §27.54**

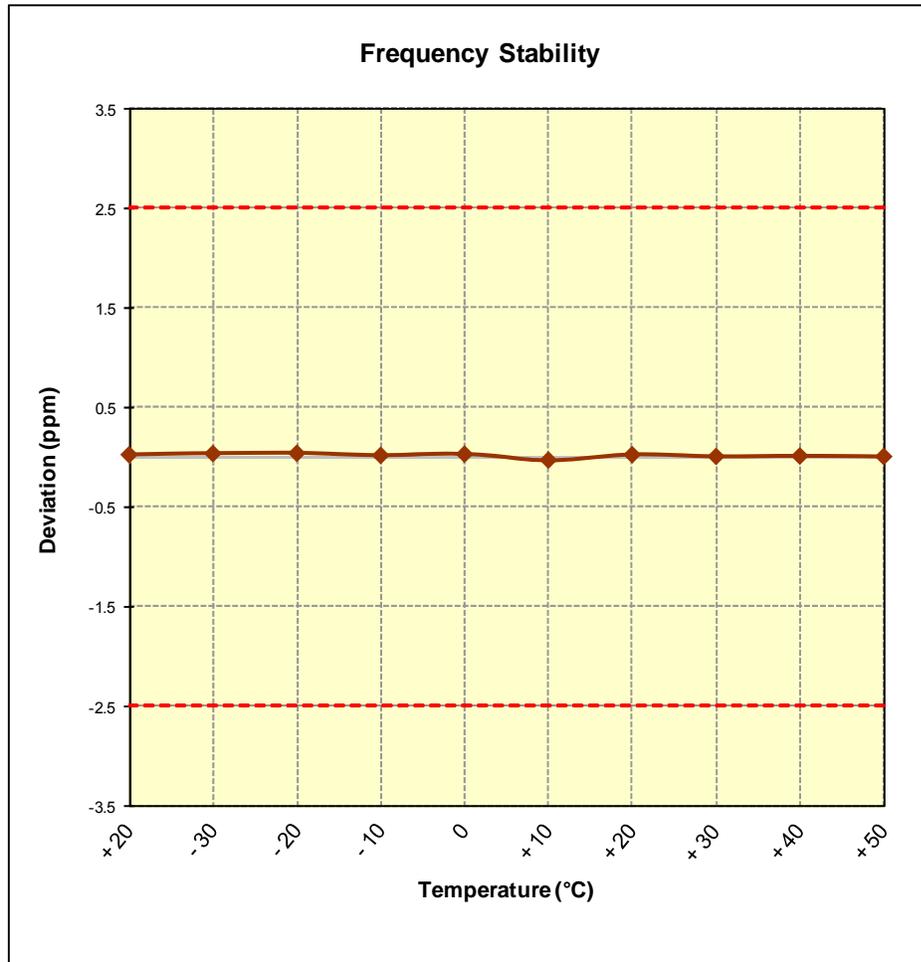

**Figure 6-7. Frequency Stability Graph (Band 17)**

FCC ID: ZNFV410		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1404210803.ZNF	Test Dates: 04/23 - 05/05/14; 6/20/14	EUT Type: Portable Tablet		Page 69 of 76

## Band 5 Frequency Stability Measurements

§2.1055 §22.355


OPERATING FREQUENCY: 836,500,000 Hz  
 CHANNEL: 20525  
 REFERENCE VOLTAGE: 3.80 VDC  
 DEVIATION LIMIT: ± 0.00025 % or 2.5 ppm

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.80	+ 20 (Ref)	836,500,019	19	0.0000023
100 %		- 30	836,500,013	13	0.0000016
100 %		- 20	836,499,990	-10	-0.0000012
100 %		- 10	836,499,984	-16	-0.0000019
100 %		0	836,499,978	-22	-0.0000026
100 %		+ 10	836,499,997	-3	-0.0000004
100 %		+ 20	836,499,987	-13	-0.0000016
100 %		+ 30	836,500,000	0	0.0000000
100 %		+ 40	836,499,973	-27	-0.0000032
100 %		+ 50	836,500,020	20	0.0000024
115 %		4.37	+ 20	836,500,011	11
BATT. ENDPOINT	3.40	+ 20	836,500,014	14	0.0000017

**Table 6-19. Frequency Stability Data (Band 5)**

FCC ID: ZNFV410	 <b>FCC Pt. 22, 24, &amp; 27 LTE MEASUREMENT REPORT (CERTIFICATION)</b>			Reviewed by: Quality Manager
Test Report S/N: 0Y1404210803.ZNF	Test Dates: 04/23 - 05/05/14; 6/20/14	EUT Type: Portable Tablet	Page 70 of 76	

**Band 5 Frequency Stability Measurements**  
§2.1055 §22.355

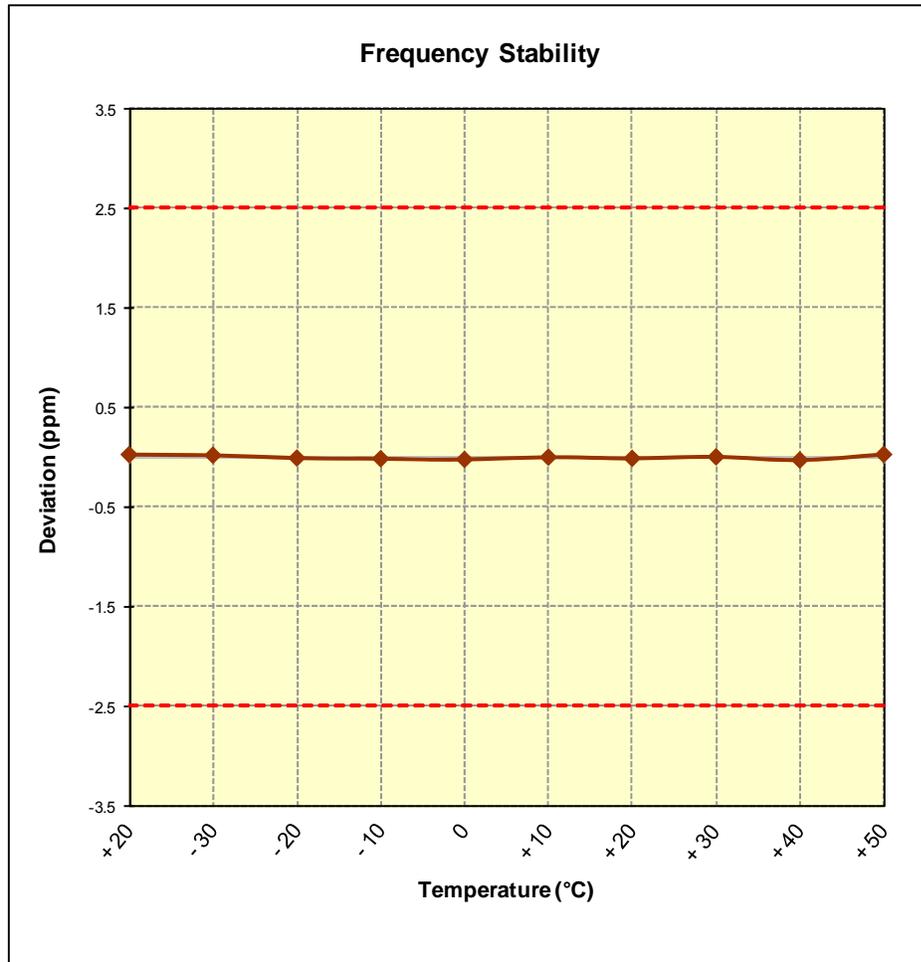

**Figure 6-8. Frequency Stability Graph (Band 5)**

FCC ID: ZNFV410		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1404210803.ZNF	Test Dates: 04/23 - 05/05/14; 6/20/14	EUT Type: Portable Tablet		Page 71 of 76

## Band 4 Frequency Stability Measurements

§2.1055 §§27.54

OPERATING FREQUENCY: 1,732,500,000 Hz  
 CHANNEL: 20175  
 REFERENCE VOLTAGE: 3.80 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.80	+ 20 (Ref)	1,732,499,996	-4	-0.0000002
100 %		- 30	1,732,499,970	-30	-0.0000017
100 %		- 20	1,732,500,016	16	0.0000009
100 %		- 10	1,732,499,999	-1	-0.0000001
100 %		0	1,732,499,973	-27	-0.0000016
100 %		+ 10	1,732,499,995	-5	-0.0000003
100 %		+ 20	1,732,500,001	1	0.0000001
100 %		+ 30	1,732,499,998	-2	-0.0000001
100 %		+ 40	1,732,499,972	-28	-0.0000016
100 %		+ 50	1,732,500,029	29	0.0000017
115 %	4.37	+ 20	1,732,500,002	2	0.0000001
BATT. ENDPOINT	3.40	+ 20	1,732,499,975	-25	-0.0000014


Table 6-20. Frequency Stability Data (Band 4)

**Note:**

Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

FCC ID: ZNFV410	 <b>FCC Pt. 22, 24, &amp; 27 LTE MEASUREMENT REPORT (CERTIFICATION)</b> 		Reviewed by: Quality Manager
Test Report S/N: 0Y1404210803.ZNF	Test Dates: 04/23 - 05/05/14; 6/20/14	EUT Type: Portable Tablet	Page 72 of 76

**Band 4 Frequency Stability Measurements**  
**§2.1055 §§27.54**

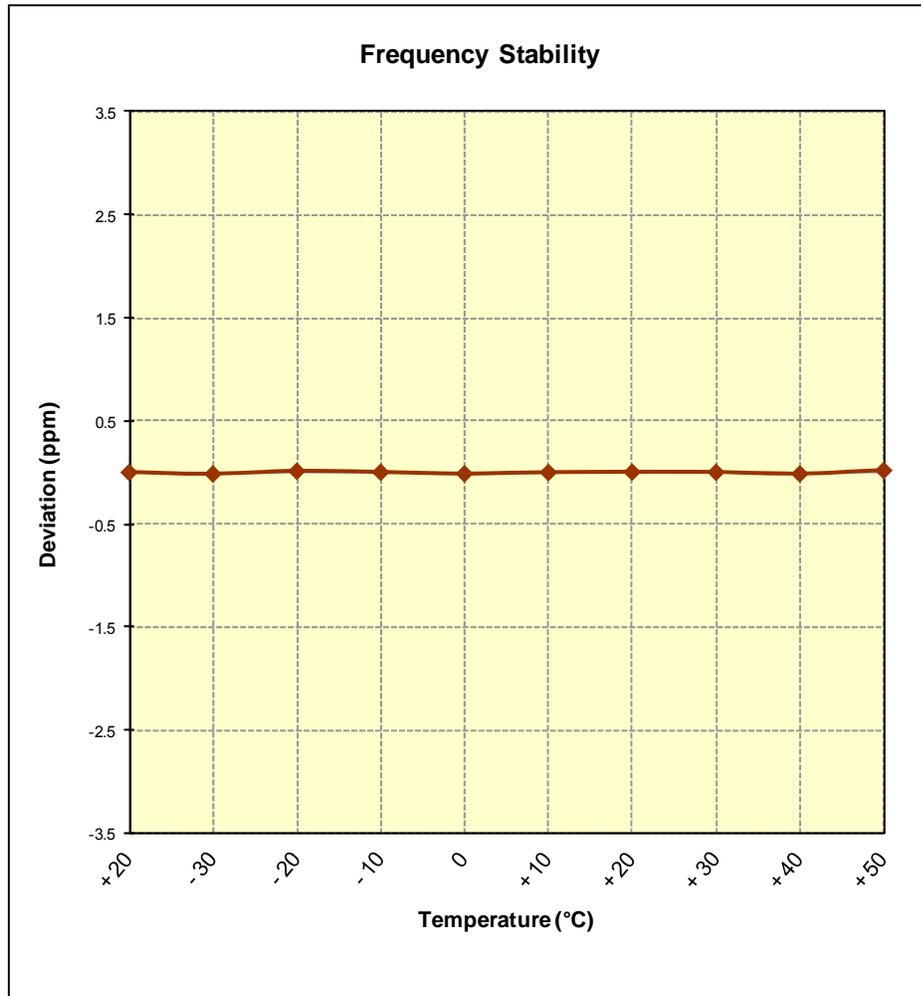

**Figure 6-9. Frequency Stability Graph (Band 4)**

FCC ID: ZNFV410		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1404210803.ZNF	Test Dates: 04/23 - 05/05/14; 6/20/14	EUT Type: Portable Tablet		Page 73 of 76

## Band 2 Frequency Stability Measurements

§2.1055 §24.235

OPERATING FREQUENCY: 1,880,000,000 Hz  
 CHANNEL: 18900  
 REFERENCE VOLTAGE: 3.80 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.80	+ 20 (Ref)	1,879,999,995	-5	-0.0000003
100 %		- 30	1,879,999,977	-23	-0.0000012
100 %		- 20	1,880,000,022	22	0.0000012
100 %		- 10	1,879,999,998	-2	-0.0000001
100 %		0	1,880,000,019	19	0.0000010
100 %		+ 10	1,880,000,010	10	0.0000005
100 %		+ 20	1,879,999,992	-8	-0.0000004
100 %		+ 30	1,880,000,007	7	0.0000004
100 %		+ 40	1,880,000,015	15	0.0000008
100 %		+ 50	1,880,000,023	23	0.0000012
115 %	4.37	+ 20	1,879,999,990	-10	-0.0000005
BATT. ENDPOINT	3.40	+ 20	1,879,999,977	-23	-0.0000012


Table 6-21. Frequency Stability Data (Band 2)

**Note:**

Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

FCC ID: ZNFV410	 <b>FCC Pt. 22, 24, &amp; 27 LTE MEASUREMENT REPORT (CERTIFICATION)</b> 		Reviewed by: Quality Manager
Test Report S/N: 0Y1404210803.ZNF	Test Dates: 04/23 - 05/05/14; 6/20/14	EUT Type: Portable Tablet	Page 74 of 76

**Band 2 Frequency Stability Measurements**  
**§2.1055 §24.235**

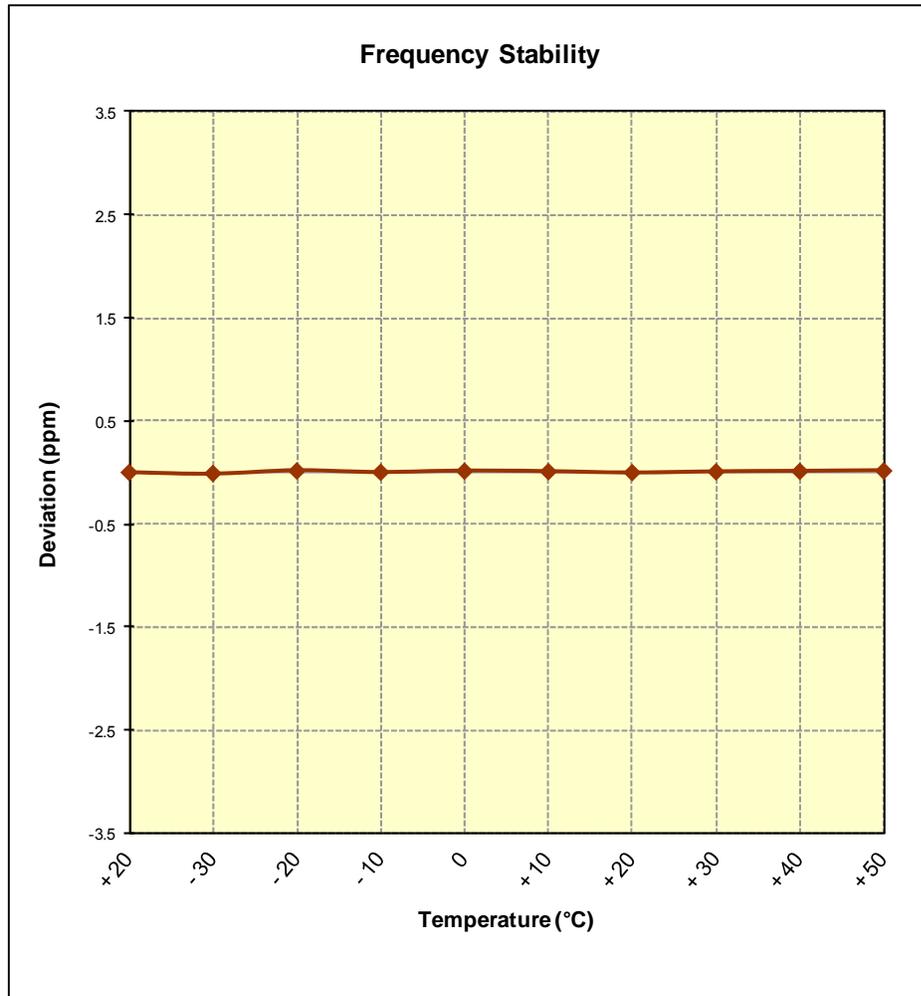

**Figure 6-10. Frequency Stability Graph (Band 2)**

FCC ID: ZNFV410		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1404210803.ZNF	Test Dates: 04/23 - 05/05/14; 6/20/14	EUT Type: Portable Tablet		Page 75 of 76

## 7.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the **LG Portable Tablet FCC ID: ZNFV410** complies with all the requirements of Parts 2, 22, 24, 27 of the FCC rules for LTE operation only.

<b>FCC ID:</b> ZNFV410		<b>FCC Pt. 22, 24, &amp; 27 LTE MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1404210803.ZNF	<b>Test Dates:</b> 04/23 - 05/05/14; 6/20/14	<b>EUT Type:</b> Portable Tablet	Page 76 of 76	