

6.5 Peak-Average Ratio

§24.232(d)

Test Overview

A peak to average ratio measurement is performed at the conducted port of the EUT. The spectrum analyzers Complementary Cumulative Distribution Function (CCDF) measurement profile is used to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth. The CCDF curve shows how much time the peak waveform spends at or above a given average power level. The percent of time the signal spends at or above the level defines the probability for that particular power level.

Test Procedure Used

KDB 971168 v02r02 – Section 5.7.1

Test Settings

1. The signal analyzer's CCDF measurement profile is enabled
2. Frequency = carrier center frequency
3. Measurement BW > Emission bandwidth of signal
4. The signal analyzer was set to collect one million samples to generate the CCDF curve
5. The measurement interval was set depending on the type of signal analyzed. For continuous signals (>98% duty cycle), the measurement interval was set to 1ms.

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.


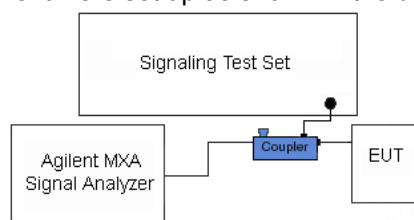


Figure 6-4. Test Instrument & Measurement Setup


Test Notes

None.

FCC ID: ZNFV496		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1503160575.ZNF	Test Dates: 3/16 - 4/1/2015	EUT Type: Portable Tablet Computer		Page 77 of 102

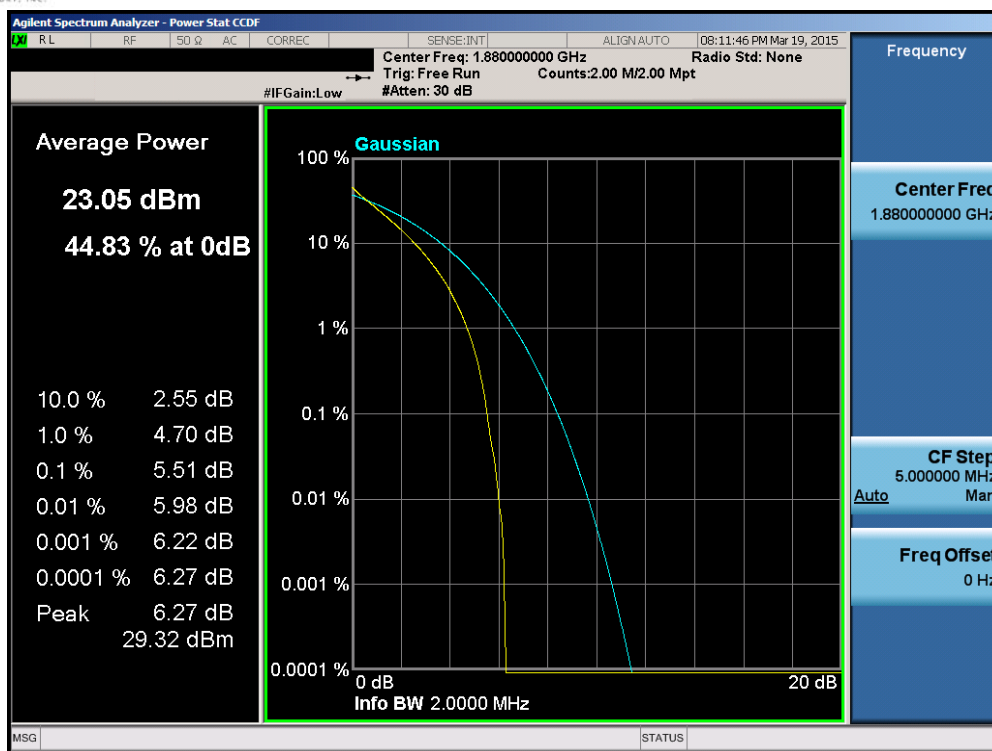


Plot 6-124. PAR Plot (Band 2 – 1.4MHz QPSK – RB Size 6)

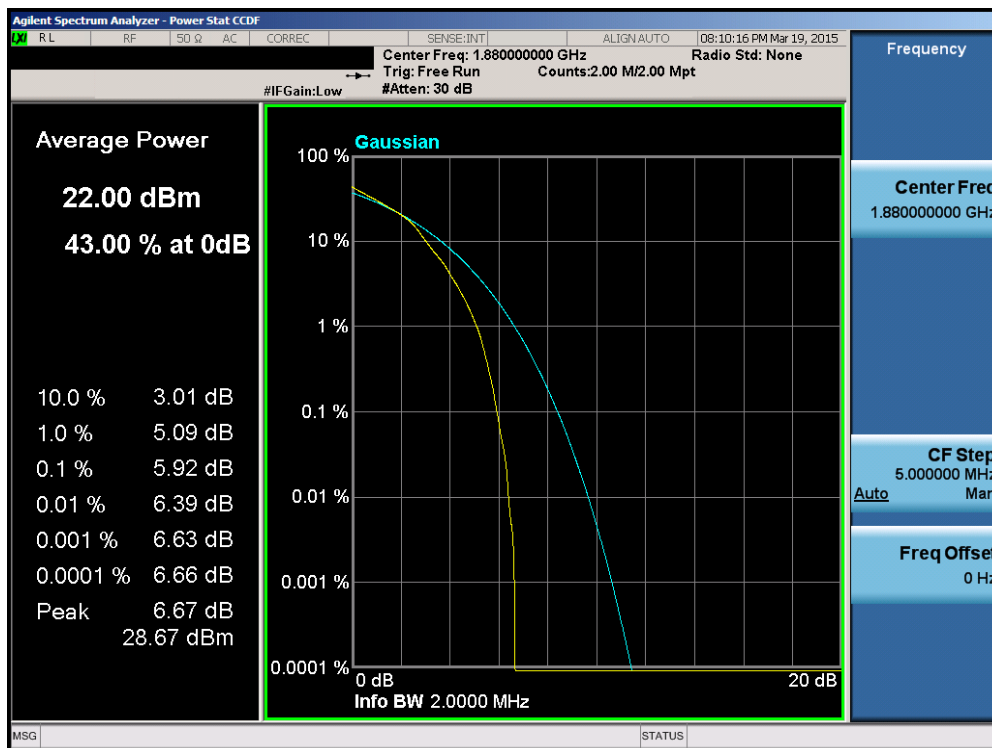


Plot 6-125. PAR Plot (Band 2 – 1.4MHz 16-QAM – RB Size 6)

FCC ID: ZNFV496	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1503160575.ZNF	Test Dates: 3/16 - 4/1/2015	EUT Type: Portable Tablet Computer		Page 78 of 102

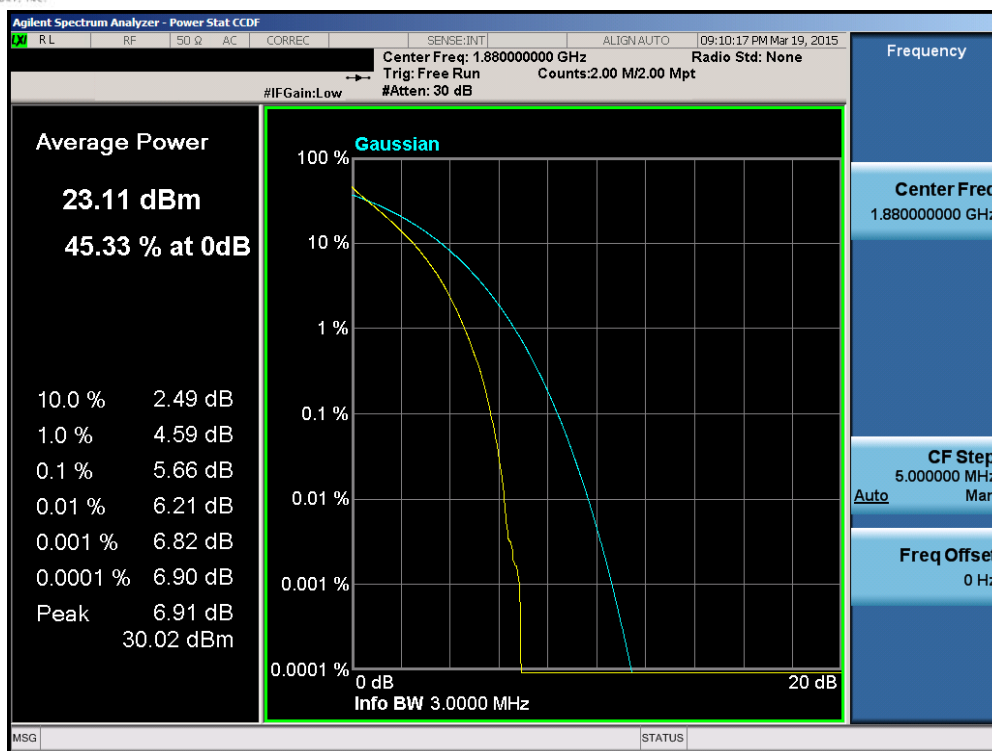


Plot 6-126. PAR Plot (Band 2 – 3.0MHz QPSK – RB Size 15)

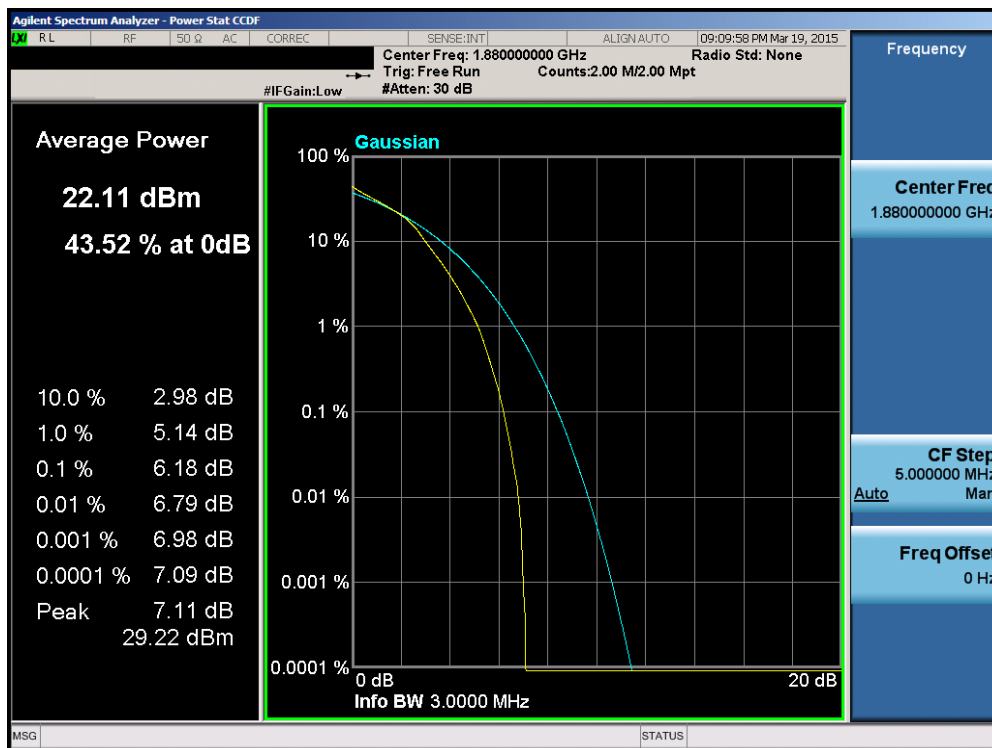


Plot 6-127. PAR Plot (Band 2 – 3.0MHz 16-QAM – RB Size 15)

FCC ID: ZNFV496	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1503160575.ZNF	Test Dates: 3/16 - 4/1/2015	EUT Type: Portable Tablet Computer		Page 79 of 102

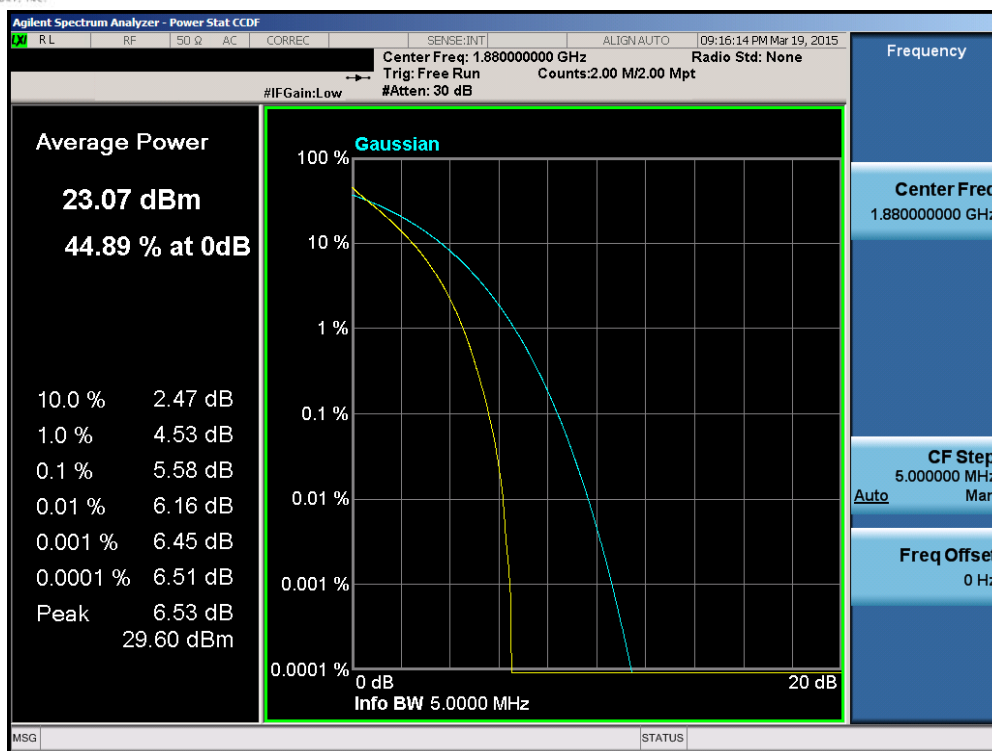


Plot 6-128. PAR Plot (Band 2 – 5.0MHz QPSK – RB Size 25)

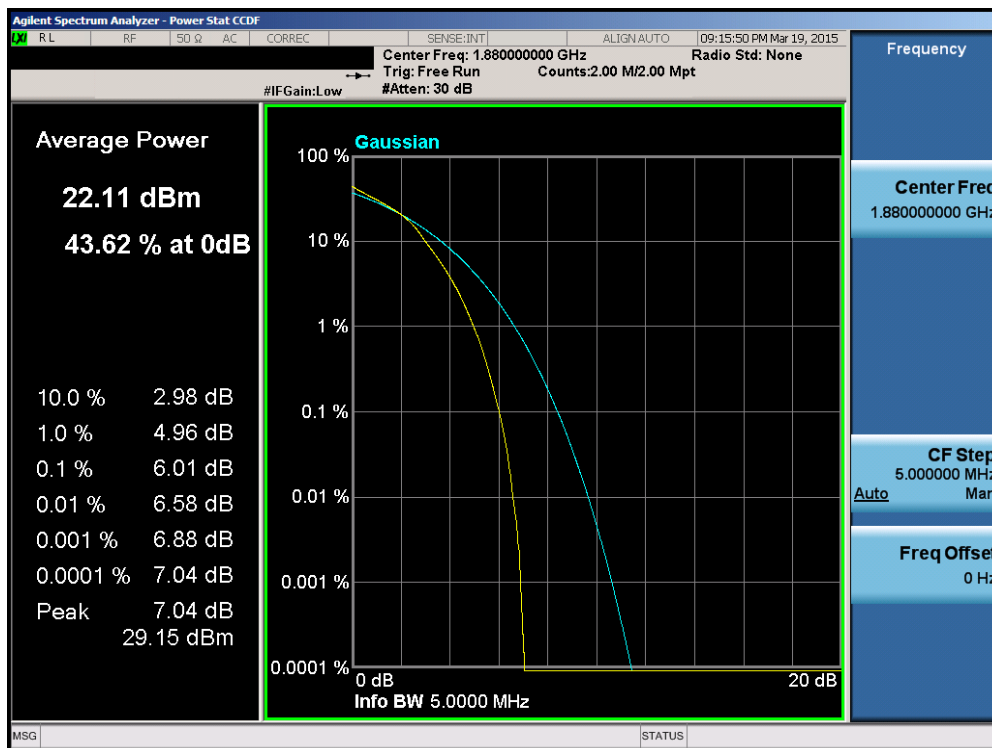


Plot 6-129. PAR Plot (Band 2 – 5.0MHz 16-QAM – RB Size 25)

FCC ID: ZNFV496	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1503160575.ZNF	Test Dates: 3/16 - 4/1/2015	EUT Type: Portable Tablet Computer		Page 80 of 102

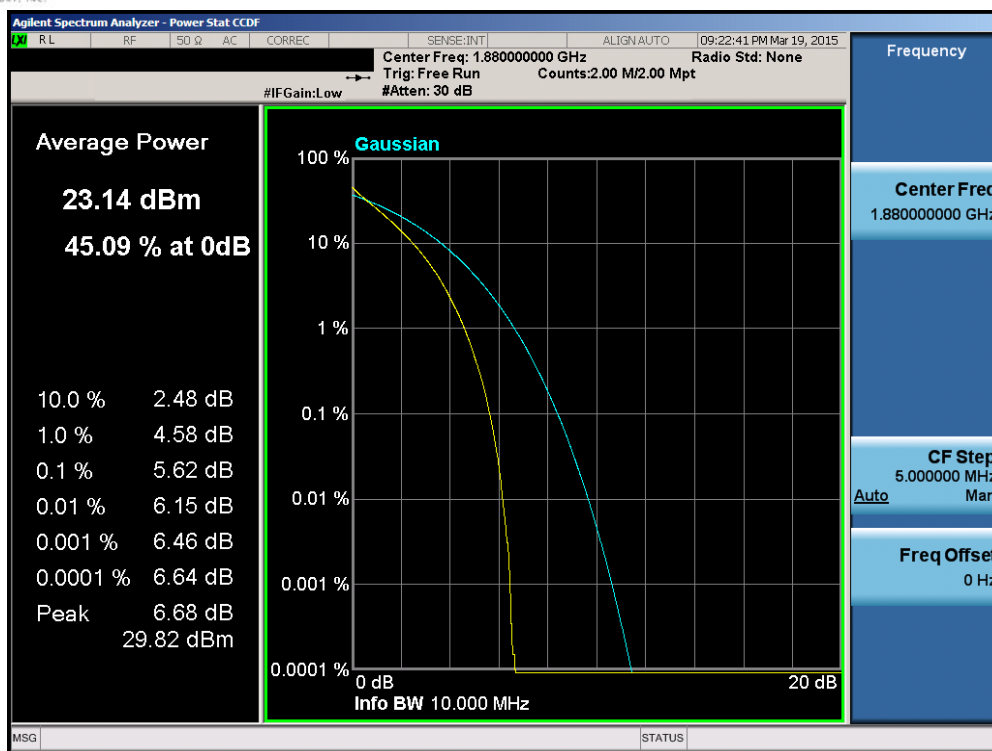


Plot 6-130. PAR Plot (Band 2 – 10.0MHz QPSK – RB Size 50)

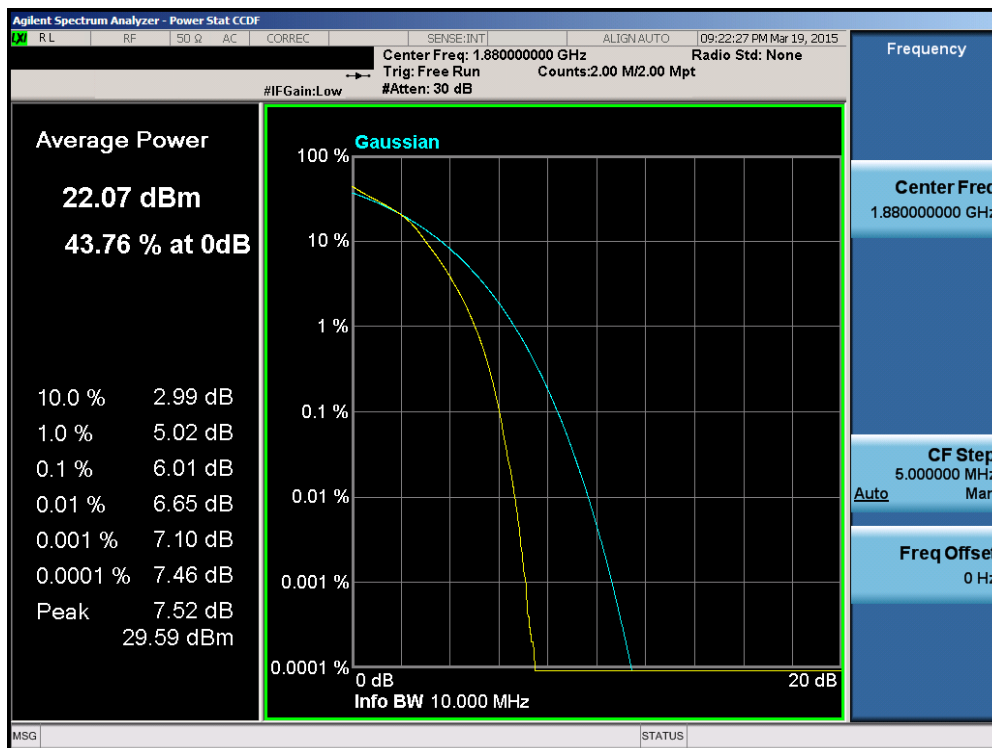


Plot 6-131. PAR Plot (Band 2 – 10.0MHz 16-QAM – RB Size 50)

FCC ID: ZNFV496	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1503160575.ZNF	Test Dates: 3/16 - 4/1/2015	EUT Type: Portable Tablet Computer		Page 81 of 102

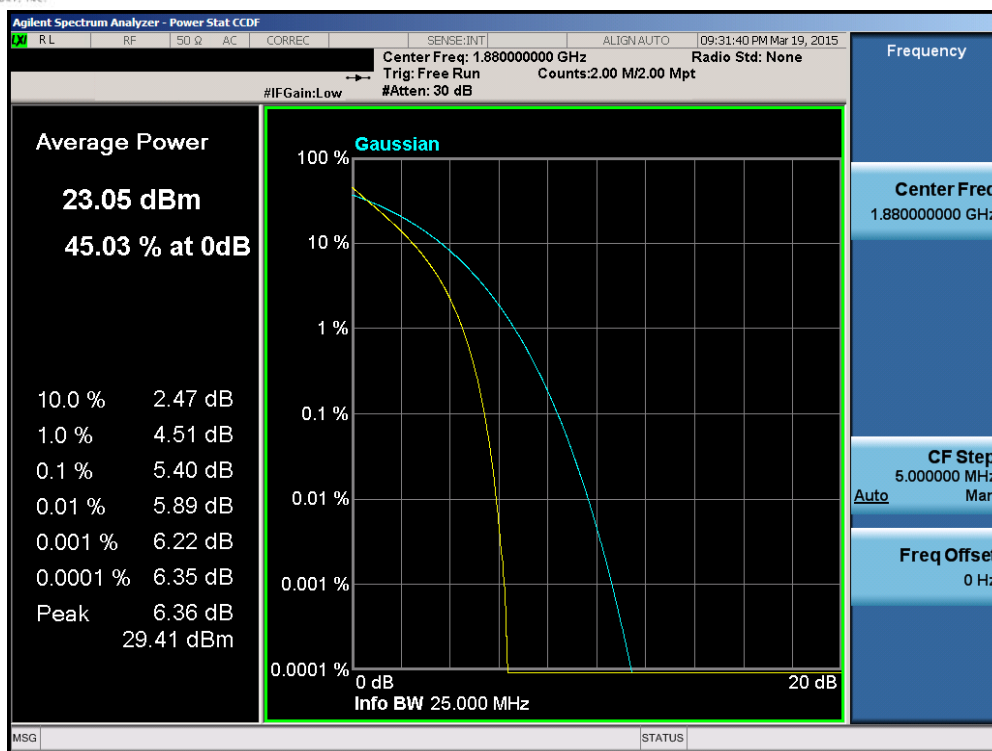


Plot 6-132. PAR Plot (Band 2 – 15.0MHz QPSK – RB Size 75)

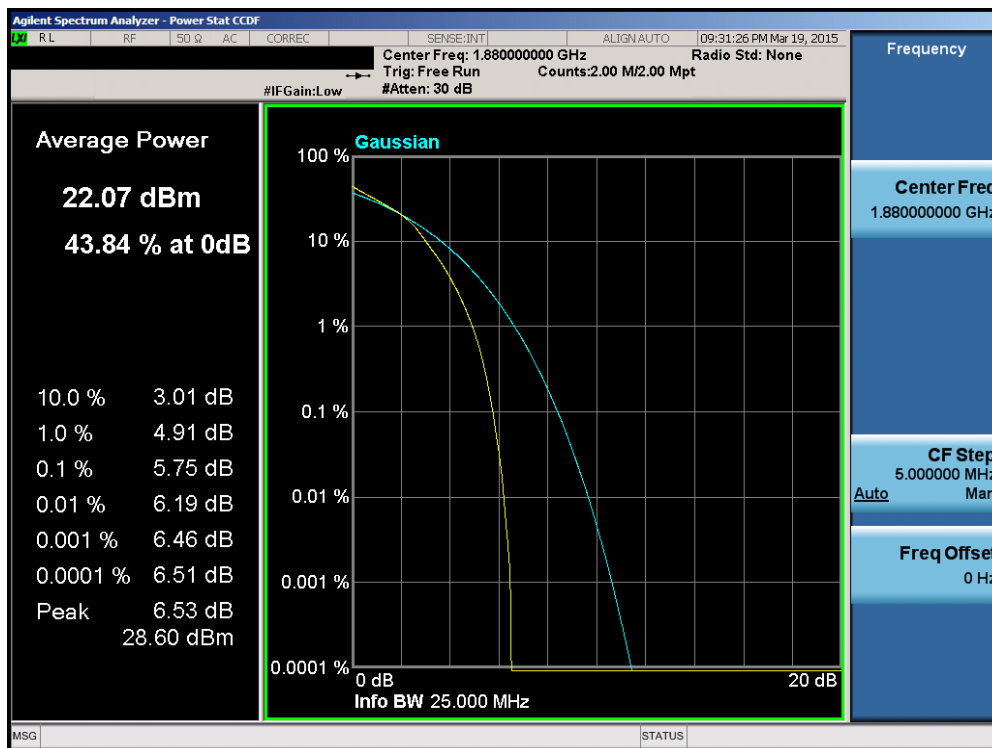


Plot 6-133. PAR Plot (Band 2 – 15.0MHz 16-QAM – RB Size 75)

FCC ID: ZNFV496	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1503160575.ZNF	Test Dates: 3/16 - 4/1/2015	EUT Type: Portable Tablet Computer		Page 82 of 102

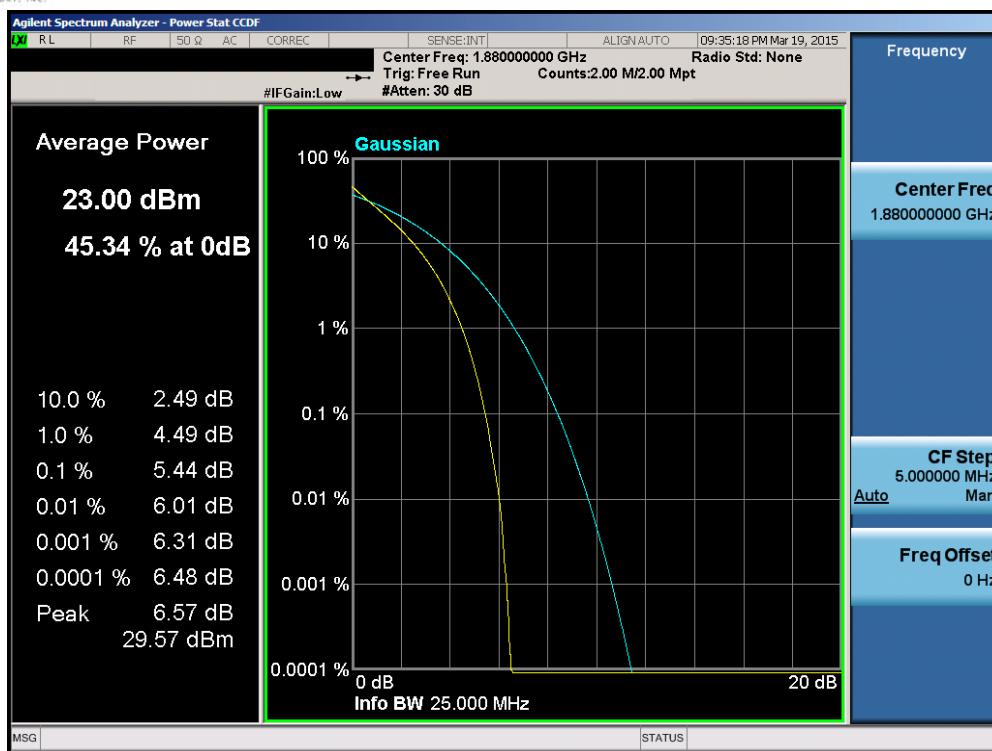

Plot 6-134. PAR Plot (Band 2 – 20.0MHz QPSK – RB Size 100)

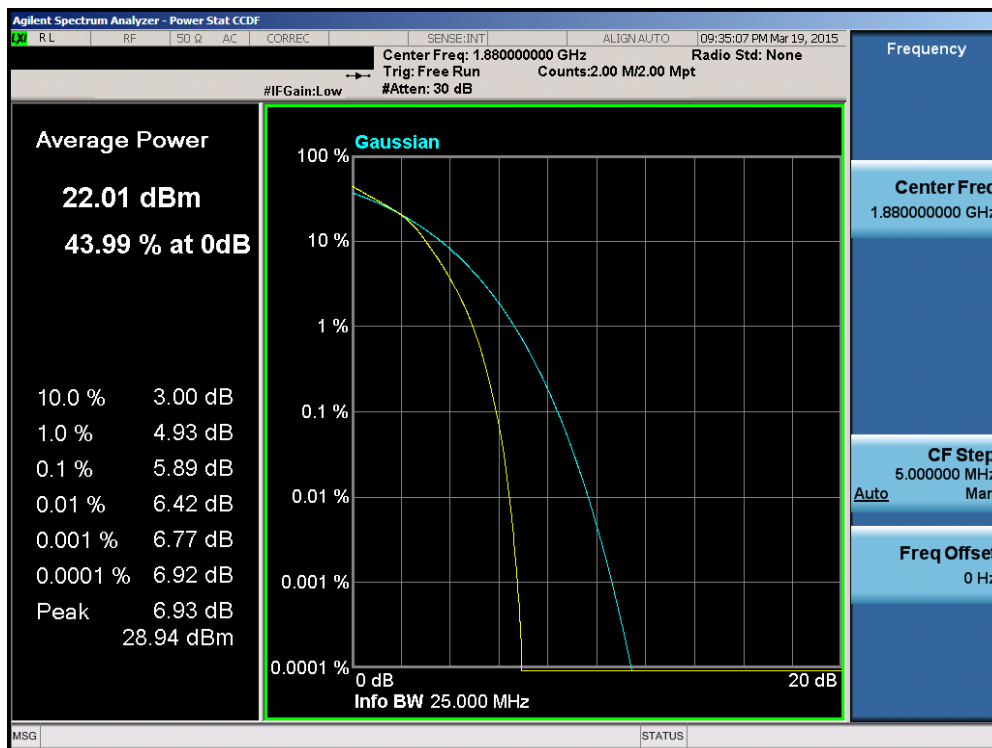

Plot 6-135. PAR Plot (Band 2 – 20.0MHz 16-QAM – RB Size 100)

FCC ID: ZNFV496	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1503160575.ZNF	Test Dates: 3/16 - 4/1/2015	EUT Type: Portable Tablet Computer		Page 83 of 102

6.6 Radiated Power (ERP/EIRP)

§24.232(c.2) §27.50(c.10) §27.50(d.4)

Test Overview

Effective Radiated Power (ERP) and Equivalent Isotropic Radiated Power (EIRP) measurements are performed using the substitution method described in ANSI/TIA-603-C-2004 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using vertically polarized tuned dipole antennas. Measurements on signals operating above 1GHz are performed using vertically polarized broadband horn antennas. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

Test Procedures Used

KDB 971168 v02r02 – Section 5.2.1

ANSI/TIA-603-C-2004 – Section 2.2.17

Test Settings

1. Radiated power measurements are performed using the signal analyzer's "channel power" measurement capability for signals with continuous operation.
2. RBW = 1 – 5% of the expected OBW, not to exceed 1MHz
3. VBW $\geq 3 \times$ RBW
4. Span = 1.5 times the OBW
5. No. of sweep points $\geq 2 \times$ span / RBW
6. Detector = RMS
7. Trigger is set to "free run" for signals with continuous operation with the sweep times set to "auto".
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation.
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize

FCC ID: ZNFV496		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1503160575.ZNF	Test Dates: 3/16 - 4/1/2015	EUT Type: Portable Tablet Computer		Page 84 of 102

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

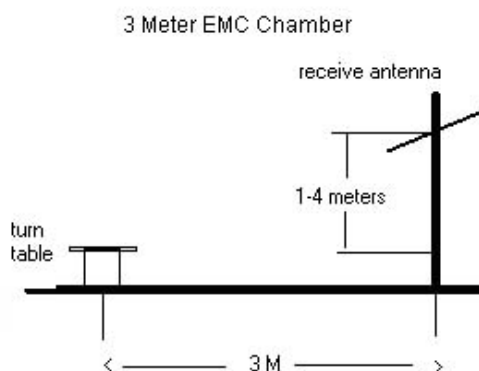


Figure 6-5. Test Instrument & Measurement Setup

Test Notes

- 1) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the tables below.
- 2) This unit was tested with its standard battery.

FCC ID: ZNFV496	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1503160575.ZNF	Test Dates: 3/16 - 4/1/2015	EUT Type: Portable Tablet Computer		Page 85 of 102

Frequency [MHz]	Channel Bandwidth [MHz]	Mod.	Battery	RB Size/Offset	Substitute Level [dBm]	Ant. Gain [dBd]	Ant. Pol. [H/V]	ERP [dBm]	ERP Limit [dBm]	Margin [dB]
699.70	1.4	QPSK	Standard	3 / 2	13.65	2.71	V	16.36	34.771	-18.41
707.50	1.4	QPSK	Standard	3 / 2	14.19	2.71	V	16.90	34.771	-17.87
715.30	1.4	QPSK	Standard	3 / 2	14.43	2.71	V	17.14	34.771	-17.63
699.70	1.4	16-QAM	Standard	3 / 2	13.64	2.71	V	16.35	34.771	-18.42
707.50	1.4	16-QAM	Standard	3 / 2	13.22	2.71	V	15.93	34.771	-18.84
715.30	1.4	16-QAM	Standard	3 / 2	13.44	2.71	V	16.15	34.771	-18.62
700.50	3	QPSK	Standard	1 / 14	12.97	2.71	V	15.68	34.771	-19.09
707.50	3	QPSK	Standard	1 / 14	13.68	2.71	V	16.39	34.771	-18.38
714.50	3	QPSK	Standard	1 / 0	14.10	2.71	V	16.81	34.771	-17.96
700.50	3	16-QAM	Standard	1 / 14	11.96	2.71	V	14.67	34.771	-20.10
707.50	3	16-QAM	Standard	1 / 14	12.67	2.71	V	15.38	34.771	-19.39
714.50	3	16-QAM	Standard	1 / 0	13.05	2.71	V	15.76	34.771	-19.01
701.50	5	QPSK	Standard	1 / 24	13.14	2.71	V	15.85	34.771	-18.92
707.50	5	QPSK	Standard	1 / 24	14.09	2.71	V	16.80	34.771	-17.97
713.50	5	QPSK	Standard	1 / 24	14.32	2.71	V	17.03	34.771	-17.74
701.50	5	16-QAM	Standard	1 / 24	12.06	2.71	V	14.77	34.771	-20.00
707.50	5	16-QAM	Standard	1 / 24	13.03	2.71	V	15.74	34.771	-19.03
713.50	5	16-QAM	Standard	1 / 24	13.31	2.71	V	16.02	34.771	-18.75
704.00	10	QPSK	Standard	1 / 49	14.16	2.71	V	16.87	34.771	-17.90
707.50	10	QPSK	Standard	1 / 49	14.41	2.71	V	17.12	34.771	-17.65
711.00	10	QPSK	Standard	1 / 49	14.54	2.71	V	17.25	34.771	-17.52
704.00	10	16-QAM	Standard	1 / 49	13.13	2.71	V	15.84	34.771	-18.93
707.50	10	16-QAM	Standard	1 / 49	13.46	2.71	V	16.17	34.771	-18.60
711.00	10	16-QAM	Standard	1 / 49	13.82	2.71	V	16.53	34.771	-18.24

Table 6-2. ERP Data (Band 12)

FCC ID: ZNFV496	 FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)			Reviewed by: Quality Manager
Test Report S/N: 0Y1503160575.ZNF	Test Dates: 3/16 - 4/1/2015	EUT Type: Portable Tablet Computer		Page 86 of 102

Frequency [MHz]	Channel Bandwidth [MHz]	Mod.	Battery	RB Size/Offset	Substitute Level [dBm]	Ant. Gain [dBi]	Ant. Pol. [H/V]	EIRP [dBm]	EIRP Limit [dBm]	Margin [dB]
1710.70	1.4	QPSK	Standard	1 / 0	14.50	9.29	V	23.79	30.000	-6.21
1732.50	1.4	QPSK	Standard	1 / 0	14.28	9.34	V	23.62	30.000	-6.38
1754.30	1.4	QPSK	Standard	1 / 0	12.96	9.38	V	22.34	30.000	-7.66
1710.70	1.4	16-QAM	Standard	1 / 0	13.39	9.29	V	22.68	30.000	-7.32
1732.50	1.4	16-QAM	Standard	1 / 0	12.99	9.34	V	22.33	30.000	-7.67
1754.30	1.4	16-QAM	Standard	1 / 0	11.90	9.38	V	21.28	30.000	-8.72
1711.50	3	QPSK	Standard	1 / 14	15.05	9.30	V	24.35	30.000	-5.65
1732.50	3	QPSK	Standard	1 / 0	15.99	9.34	V	25.33	30.000	-4.67
1753.50	3	QPSK	Standard	8 / 4	12.73	9.38	V	22.11	30.000	-7.89
1711.50	3	16-QAM	Standard	1 / 14	12.93	9.30	V	22.23	30.000	-7.77
1732.50	3	16-QAM	Standard	1 / 0	14.95	9.34	V	24.29	30.000	-5.71
1753.50	3	16-QAM	Standard	1 / 0	11.76	9.38	V	21.14	30.000	-8.86
1712.50	5	QPSK	Standard	12 / 6	13.92	9.30	V	23.22	30.000	-6.78
1732.50	5	QPSK	Standard	12 / 6	14.81	9.34	V	24.15	30.000	-5.85
1752.50	5	QPSK	Standard	12 / 6	12.96	9.38	V	22.34	30.000	-7.66
1712.50	5	16-QAM	Standard	12 / 6	12.90	9.30	V	22.20	30.000	-7.80
1732.50	5	16-QAM	Standard	12 / 6	13.79	9.34	V	23.13	30.000	-6.87
1752.50	5	16-QAM	Standard	12 / 6	11.97	9.38	V	21.35	30.000	-8.65
1715.00	10	QPSK	Standard	1 / 49	14.15	9.30	V	23.45	30.000	-6.55
1732.50	10	QPSK	Standard	1 / 0	15.23	9.34	V	24.57	30.000	-5.43
1750.00	10	QPSK	Standard	1 / 0	13.43	9.37	V	22.80	30.000	-7.20
1715.00	10	16-QAM	Standard	1 / 49	13.14	9.30	V	22.44	30.000	-7.56
1732.50	10	16-QAM	Standard	1 / 0	14.18	9.34	V	23.52	30.000	-6.48
1750.00	10	16-QAM	Standard	1 / 0	12.31	9.37	V	21.68	30.000	-8.32
1717.50	15	QPSK	Standard	1 / 74	14.48	9.31	V	23.79	30.000	-6.21
1732.50	15	QPSK	Standard	1 / 0	15.78	9.34	V	25.12	30.000	-4.88
1747.50	15	QPSK	Standard	1 / 0	14.33	9.37	V	23.70	30.000	-6.30
1717.50	15	16-QAM	Standard	1 / 74	13.35	9.31	V	22.66	30.000	-7.34
1732.50	15	16-QAM	Standard	1 / 0	14.57	9.34	V	23.91	30.000	-6.09
1747.50	15	16-QAM	Standard	1 / 0	13.21	9.37	V	22.58	30.000	-7.42
1720.00	20	QPSK	Standard	1 / 99	14.60	9.31	V	23.91	30.000	-6.09
1732.50	20	QPSK	Standard	1 / 0	15.88	9.34	V	25.22	30.000	-4.78
1745.00	20	QPSK	Standard	1 / 0	14.53	9.36	V	23.89	30.000	-6.11
1720.00	20	16-QAM	Standard	1 / 99	13.56	9.31	V	22.87	30.000	-7.13
1732.50	20	16-QAM	Standard	1 / 0	14.79	9.34	V	24.13	30.000	-5.87
1745.00	20	16-QAM	Standard	1 / 0	13.36	9.36	V	22.72	30.000	-7.28

Table 6-3. EIRP Data (Band 4)

FCC ID: ZNFV496		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1503160575.ZNF	Test Dates: 3/16 - 4/1/2015	EUT Type: Portable Tablet Computer		Page 87 of 102

Frequency [MHz]	Channel Bandwidth [MHz]	Mod.	Battery	RB Size/Offset	Substitute Level [dBm]	Ant. Gain [dBi]	Ant. Pol. [H/V]	EIRP [dBm]	EIRP Limit [dBm]	Margin [dB]
1850.70	1.4	QPSK	Standard	1 / 0	14.26	9.38	V	23.64	33.010	-9.37
1880.00	1.4	QPSK	Standard	3 / 2	15.96	9.33	V	25.29	33.010	-7.72
1909.30	1.4	QPSK	Standard	3 / 2	16.14	9.29	V	25.43	33.010	-7.58
1850.70	1.4	16-QAM	Standard	1 / 0	13.16	9.38	V	22.54	33.010	-10.47
1880.00	1.4	16-QAM	Standard	1 / 0	14.74	9.33	V	24.07	33.010	-8.94
1909.30	1.4	16-QAM	Standard	3 / 2	16.13	9.29	V	25.42	33.010	-7.59
1851.50	3	QPSK	Standard	1 / 0	15.51	9.38	V	24.89	33.010	-8.12
1880.00	3	QPSK	Standard	1 / 14	13.90	9.33	V	23.23	33.010	-9.78
1908.50	3	QPSK	Standard	1 / 14	14.03	9.29	V	23.32	33.010	-9.69
1851.50	3	16-QAM	Standard	1 / 0	14.42	9.38	V	23.80	33.010	-9.21
1880.00	3	16-QAM	Standard	1 / 14	12.83	9.33	V	22.16	33.010	-10.85
1908.50	3	16-QAM	Standard	1 / 14	12.98	9.29	V	22.27	33.010	-10.74
1852.50	5	QPSK	Standard	12 / 6	14.42	9.38	V	23.80	33.010	-9.21
1880.00	5	QPSK	Standard	12 / 6	12.96	9.33	V	22.29	33.010	-10.72
1907.50	5	QPSK	Standard	1 / 24	12.91	9.29	V	22.20	33.010	-10.81
1852.50	5	16-QAM	Standard	12 / 6	13.41	9.38	V	22.79	33.010	-10.22
1880.00	5	16-QAM	Standard	12 / 6	11.97	9.33	V	21.30	33.010	-11.71
1907.50	5	16-QAM	Standard	1 / 24	11.81	9.29	V	21.10	33.010	-11.91
1855.00	10	QPSK	Standard	1 / 0	15.47	9.37	V	24.84	33.010	-8.17
1880.00	10	QPSK	Standard	1 / 49	13.91	9.33	V	23.24	33.010	-9.77
1905.00	10	QPSK	Standard	1 / 0	14.34	9.29	V	23.63	33.010	-9.38
1855.00	10	16-QAM	Standard	1 / 0	14.48	9.37	V	23.85	33.010	-9.16
1880.00	10	16-QAM	Standard	1 / 49	12.92	9.33	V	22.25	33.010	-10.76
1905.00	10	16-QAM	Standard	1 / 0	13.38	9.29	V	22.67	33.010	-10.34
1857.50	15	QPSK	Standard	1 / 0	15.59	9.37	V	24.96	33.010	-8.05
1880.00	15	QPSK	Standard	1 / 0	14.24	9.33	V	23.57	33.010	-9.44
1902.50	15	QPSK	Standard	1 / 0	15.18	9.30	V	24.48	33.010	-8.53
1857.50	15	16-QAM	Standard	1 / 0	14.64	9.37	V	24.01	33.010	-9.00
1880.00	15	16-QAM	Standard	1 / 0	13.21	9.33	V	22.54	33.010	-10.47
1902.50	15	16-QAM	Standard	1 / 0	14.09	9.30	V	23.39	33.010	-9.62
1860.00	20	QPSK	Standard	1 / 0	15.45	9.37	V	24.82	33.010	-8.19
1880.00	20	QPSK	Standard	1 / 0	14.58	9.33	V	23.91	33.010	-9.10
1900.00	20	QPSK	Standard	1 / 0	15.11	9.30	V	24.41	33.010	-8.60
1860.00	20	16-QAM	Standard	1 / 0	14.34	9.37	V	23.71	33.010	-9.30
1880.00	20	16-QAM	Standard	1 / 0	13.56	9.33	V	22.89	33.010	-10.12
1900.00	20	16-QAM	Standard	1 / 0	14.01	9.30	V	23.31	33.010	-9.70

Table 6-4. EIRP Data (Band 2)

FCC ID: ZNFV496		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1503160575.ZNF	Test Dates: 3/16 - 4/1/2015	EUT Type: Portable Tablet Computer		Page 88 of 102

6.7 Radiated Spurious Emissions Measurements

§2.1053 §24.238(a) §27.53(g) §27.53(h)

Test Overview

Radiated spurious emissions measurements are performed using the substitution method described in ANSI/TIA-603-C-2004 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using vertically and horizontally polarized tuned dipole antennas. Measurements on signals operating above 1GHz are performed using vertically and horizontally polarized broadband horn antennas. All measurements are performed as peak measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

Test Procedures Used

KDB 971168 v02r02 – Section 5.8

ANSI/TIA-603-C-2004 – Section 2.2.12

Test Settings

1. RBW = 100kHz for emissions below 1GHz and 1MHz for emissions above 1GHz
2. VBW $\geq 3 \times$ RBW
3. Span = 1.5 times the OBW
4. No. of sweep points $\geq 2 \times$ span / RBW
5. Detector = Peak
6. Trace mode = max hold
7. The trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

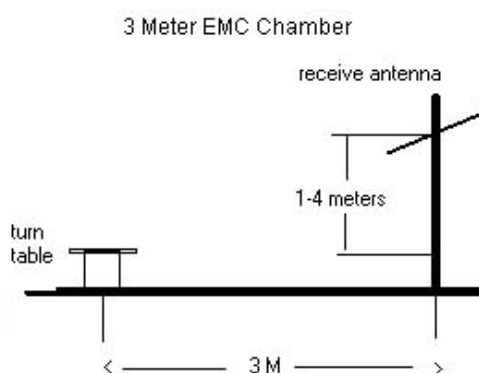


Figure 6-6. Test Instrument & Measurement Setup

FCC ID: ZNFV496	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1503160575.ZNF	Test Dates: 3/16 - 4/1/2015	EUT Type: Portable Tablet Computer		Page 89 of 102

Test Notes

- 1) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the tables below.
- 2) This unit was tested with its standard battery.
- 3) The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter. The worst-case emissions are reported.
- 4) Emissions below 18GHz were measured at a 3 meter test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.

OPERATING FREQUENCY: 704.00 MHz
 CHANNEL: 23060
 MEASURED OUTPUT POWER: 16.87 dBm = 0.049 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 10.0 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10}(W) =$ 29.87 dBc

Frequency [MHz]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBd]	Spurious Emission Level [dBm]	Ant. Pol. [H/V]	[dBc]
1408.00	-58.39	5.69	-52.70	H	69.6
2112.00	-58.11	6.67	-51.43	H	68.3
2816.00	-64.36	7.82	-56.54	H	73.4

Table 6-5. Radiated Spurious Data (Band 12 – Low Channel)

FCC ID: ZNFV496		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1503160575.ZNF	Test Dates: 3/16 - 4/1/2015	EUT Type: Portable Tablet Computer		Page 90 of 102

OPERATING FREQUENCY: 707.50 MHz
 CHANNEL: 23095
 MEASURED OUTPUT POWER: 17.12 dBm = 0.052 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 10.0 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 30.12 dBc

Frequency [MHz]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBd]	Spurious Emission Level [dBm]	Ant. Pol. [H/V]	[dBc]
1415.00	-58.38	5.73	-52.65	H	69.8
2122.50	-60.10	6.73	-53.37	H	70.5
2830.00	-64.47	7.80	-56.67	H	73.8
3537.50	-61.76	7.59	-54.17	H	71.3

Table 6-6. Radiated Spurious Data (Band 12 – Mid Channel)

OPERATING FREQUENCY: 711.00 MHz
 CHANNEL: 23130
 MEASURED OUTPUT POWER: 17.25 dBm = 0.053 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 10.0 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 30.25 dBc

Frequency [MHz]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBd]	Spurious Emission Level [dBm]	Ant. Pol. [H/V]	[dBc]
1422.00	-60.24	5.77	-54.47	H	71.7
2133.00	-57.35	6.79	-50.56	H	67.8
2844.00	-64.76	7.78	-56.98	H	74.2

Table 6-7. Radiated Spurious Data (Band 12 – High Channel)

OPERATING FREQUENCY: 1711.50 MHz
 CHANNEL: 19965
 MEASURED OUTPUT POWER: 24.35 dBm = 0.272 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 3.0 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10}(W) =$ 37.35 dBc

Frequency [MHz]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Ant. Pol. [H/V]	[dBc]
3423.00	-50.30	9.68	-40.62	H	65.0
5134.50	-41.02	10.68	-30.34	H	54.7
6846.00	-62.20	11.74	-50.46	H	74.8
8557.50	-50.46	11.05	-39.41	H	63.8
10269.00	-56.36	12.26	-44.10	H	68.5
11980.50	-56.35	12.47	-43.88	H	68.2
13692.00	-55.59	12.11	-43.48	H	67.8
15403.50	-61.94	15.63	-46.31	H	70.7

Table 6-8. Radiated Spurious Data (Band 4 – Low Channel)

OPERATING FREQUENCY: 1732.50 MHz
 CHANNEL: 20175
 MEASURED OUTPUT POWER: 25.33 dBm = 0.341 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 3.0 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10}(W) =$ 38.33 dBc

Frequency [MHz]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Ant. Pol. [H/V]	[dBc]
3465.00	-47.18	9.71	-37.47	H	62.8
5197.50	-43.52	10.59	-32.93	H	58.3
6930.00	-46.96	11.75	-35.21	H	60.5
8662.50	-46.99	11.06	-35.93	H	61.3
10395.00	-50.45	12.37	-38.07	H	63.4
12127.50	-59.31	12.83	-46.48	H	71.8
13860.00	-54.08	11.85	-42.23	H	67.6

Table 6-9. Radiated Spurious Data (Band 4 – Mid Channel)

FCC ID: ZNFV496		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1503160575.ZNF	Test Dates: 3/16 - 4/1/2015	EUT Type: Portable Tablet Computer		Page 92 of 102

OPERATING FREQUENCY: 1753.50 MHz
 CHANNEL: 20385
 MEASURED OUTPUT POWER: 22.11 dBm = 0.163 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 3.0 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 35.11 dBc

Frequency [MHz]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Ant. Pol. [H/V]	[dBc]
3507.00	-53.72	9.73	-43.99	H	66.1
5260.50	-45.58	10.64	-34.94	H	57.1
7014.00	-49.73	11.75	-37.97	H	60.1
8767.50	-46.42	11.00	-35.43	H	57.5
10521.00	-54.25	12.48	-41.77	H	63.9
12274.50	-58.64	13.06	-45.58	H	67.7

Table 6-10. Radiated Spurious Data (Band 4 – High Channel)

OPERATING FREQUENCY: 1850.70 MHz
 CHANNEL: 18607
 MEASURED OUTPUT POWER: 23.64 dBm = 0.231 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 1.4 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 36.64 dBc

Frequency [MHz]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Ant. Pol. [H/V]	[dBc]
3701.40	-53.18	9.44	-43.74	H	67.4
5552.10	-46.07	10.79	-35.28	H	58.9
7402.80	-46.02	10.69	-35.32	H	59.0
9253.50	-40.82	11.58	-29.24	H	52.9
11104.20	-50.36	12.79	-37.56	H	61.2
12954.90	-58.10	13.18	-44.91	H	68.6

Table 6-11. Radiated Spurious Data (Band 2 – Low Channel)

FCC ID: ZNFV496		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1503160575.ZNF	Test Dates: 3/16 - 4/1/2015	EUT Type: Portable Tablet Computer		Page 93 of 102

OPERATING FREQUENCY: 1880.00 MHz
 CHANNEL: 18900
 MEASURED OUTPUT POWER: 25.29 dBm = 0.338 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 1.4 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10}(W) =$ 38.29 dBc

Frequency [MHz]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Ant. Pol. [H/V]	[dBc]
3760.00	-49.03	9.28	-39.75	H	65.0
5640.00	-44.40	11.03	-33.36	H	58.7
7520.00	-40.17	10.97	-29.20	H	54.5
9400.00	-37.98	11.53	-26.45	H	51.7
11280.00	-46.33	12.71	-33.62	H	58.9
13160.00	-53.22	12.74	-40.48	H	65.8
15040.00	-52.16	13.50	-38.66	H	63.9
16920.00	-53.58	14.06	-39.53	H	64.8

Table 6-12. Radiated Spurious Data (Band 2 – Mid Channel)

OPERATING FREQUENCY: 1909.30 MHz
 CHANNEL: 19193
 MEASURED OUTPUT POWER: 25.43 dBm = 0.349 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 1.4 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10}(W) =$ 38.43 dBc

Frequency [MHz]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Ant. Pol. [H/V]	[dBc]
3818.60	-46.30	9.19	-37.11	H	62.5
5727.90	-47.36	11.28	-36.08	H	61.5
7637.20	-43.08	11.17	-31.91	H	57.3
9546.50	-42.73	11.82	-30.90	H	56.3
11455.80	-45.16	12.71	-32.44	H	57.9
13365.10	-55.34	12.47	-42.87	H	68.3

Table 6-13. Radiated Spurious Data (Band 2 – High Channel)

FCC ID: ZNFV496		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1503160575.ZNF	Test Dates: 3/16 - 4/1/2015	EUT Type: Portable Tablet Computer		Page 94 of 102

6.8 Frequency Stability / Temperature Variation

\$2.1055 \$24.235 \$27.54

Test Overview and Limit

Frequency stability testing is performed in accordance with the guidelines of ANSI/TIA-603-C-2004. The frequency stability of the transmitter is measured by:

- a.) **Temperature:** The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
- b.) **Primary Supply Voltage:** The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

For Part 22, the frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ (± 2.5 ppm) of the center frequency. For Part 24 and Part 27, the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

Test Procedure Used

ANSI/TIA-603-C-2004

Test Settings

1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
2. The equipment is turned on in a "standby" condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

Test Setup

The EUT was connected via an RF cable to a spectrum analyzer with the EUT placed inside an environmental chamber.

Test Notes

None

FCC ID: ZNFV496		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1503160575.ZNF	Test Dates: 3/16 - 4/1/2015	EUT Type: Portable Tablet Computer		Page 95 of 102

Band 12 Frequency Stability Measurements

§2.1055 §27.54

OPERATING FREQUENCY: 707,500,000 Hz

CHANNEL: 23790

REFERENCE VOLTAGE: 3.80 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.80	+ 20 (Ref)	707,499,832	-168	-0.0000238
100 %		- 30	707,499,861	-139	-0.0000197
100 %		- 20	707,499,868	-132	-0.0000187
100 %		- 10	707,499,845	-155	-0.0000220
100 %		0	707,499,974	-26	-0.0000037
100 %		+ 10	707,499,945	-55	-0.0000078
100 %		+ 20	707,499,999	-1	-0.0000002
100 %		+ 30	707,499,960	-40	-0.0000056
100 %		+ 40	707,499,974	-26	-0.0000037
100 %		+ 50	707,499,842	-158	-0.0000224
BATT. ENDPOINT	3.40	+ 20	707,499,803	-197	-0.0000279

Table 6-14. Frequency Stability Data (Band 12)

Note:

Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

FCC ID: ZNFV496		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1503160575.ZNF	Test Dates: 3/16 - 4/1/2015	EUT Type: Portable Tablet Computer		Page 96 of 102

Band 12 Frequency Stability Measurements

§2.1055 §27.54

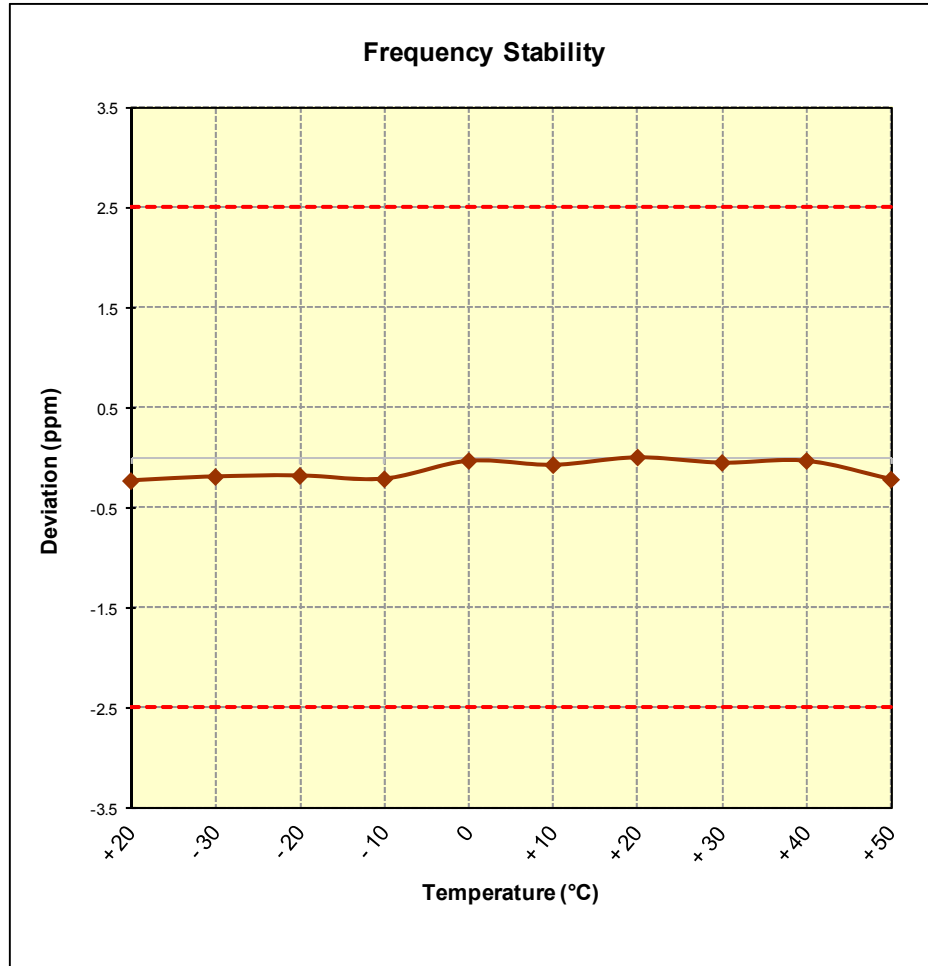


Figure 6-7. Frequency Stability Graph (Band 12)

FCC ID: ZNFV496	 FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		 Reviewed by: Quality Manager
Test Report S/N: 0Y1503160575.ZNF	Test Dates: 3/16 - 4/1/2015	EUT Type: Portable Tablet Computer	Page 97 of 102

Band 4 Frequency Stability Measurements

§2.1055 §§27.54

OPERATING FREQUENCY: 1,732,500,000 Hz

CHANNEL: 20175

REFERENCE VOLTAGE: 3.80 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.80	+ 20 (Ref)	1,732,499,853	-147	-0.0000085
100 %		- 30	1,732,499,930	-70	-0.0000040
100 %		- 20	1,732,499,995	-5	-0.0000003
100 %		- 10	1,732,499,867	-133	-0.0000077
100 %		0	1,732,499,912	-88	-0.0000051
100 %		+ 10	1,732,499,956	-44	-0.0000025
100 %		+ 20	1,732,499,886	-114	-0.0000066
100 %		+ 30	1,732,499,826	-174	-0.0000100
100 %		+ 40	1,732,499,910	-90	-0.0000052
100 %		+ 50	1,732,499,836	-164	-0.0000095
BATT. ENDPOINT	3.40	+ 20	1,732,499,874	-126	-0.0000073

Table 6-15. Frequency Stability Data (Band 4)

Note:

Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

FCC ID: ZNFV496	 FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)			Reviewed by: Quality Manager
Test Report S/N: 0Y1503160575.ZNF	Test Dates: 3/16 - 4/1/2015	EUT Type: Portable Tablet Computer		Page 98 of 102

Band 4 Frequency Stability Measurements

§2.1055 §27.54

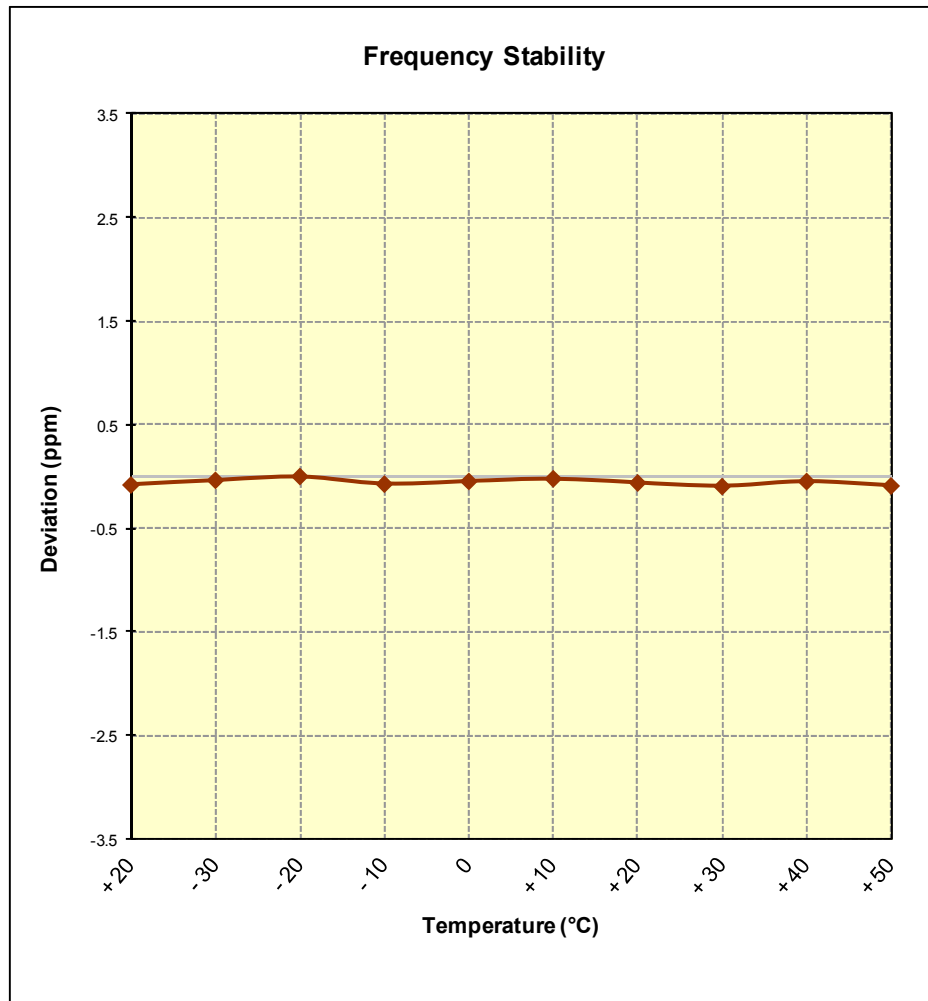


Figure 6-8. Frequency Stability Graph (Band 4)

FCC ID: ZNFV496		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1503160575.ZNF	Test Dates: 3/16 - 4/1/2015	EUT Type: Portable Tablet Computer		Page 99 of 102

Band 2 Frequency Stability Measurements

§2.1055 §24.235

OPERATING FREQUENCY: 1,880,000,000 Hz

CHANNEL: 18900

REFERENCE VOLTAGE: 3.80 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.80	+ 20 (Ref)	1,879,999,859	-141	-0.0000075
100 %		- 30	1,879,999,830	-170	-0.0000090
100 %		- 20	1,879,999,990	-10	-0.0000005
100 %		- 10	1,879,999,893	-107	-0.0000057
100 %		0	1,879,999,882	-118	-0.0000063
100 %		+ 10	1,879,999,986	-14	-0.0000008
100 %		+ 20	1,879,999,816	-184	-0.0000098
100 %		+ 30	1,879,999,889	-111	-0.0000059
100 %		+ 40	1,879,999,998	-2	-0.0000001
100 %		+ 50	1,879,999,883	-117	-0.0000062
BATT. ENDPOINT	3.40	+ 20	1,879,999,874	-126	-0.0000067

Table 6-16. Frequency Stability Data (Band 2)

Note:

Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

FCC ID: ZNFV496		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1503160575.ZNF	Test Dates: 3/16 - 4/1/2015	EUT Type: Portable Tablet Computer	Page 100 of 102	

Band 2 Frequency Stability Measurements

§2.1055 §24.235

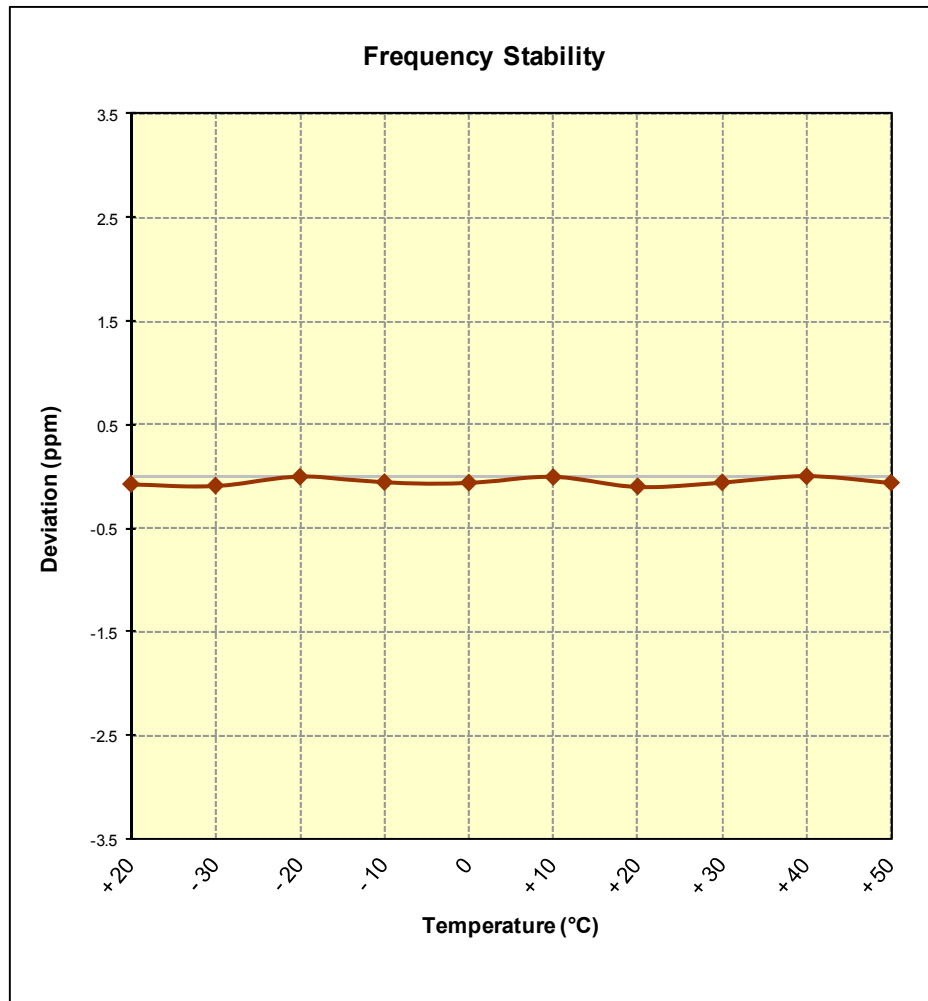


Figure 6-9. Frequency Stability Graph (Band 2)

FCC ID: ZNFV496		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1503160575.ZNF	Test Dates: 3/16 - 4/1/2015	EUT Type: Portable Tablet Computer		Page 101 of 102

7.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the **LGE Portable Tablet Computer FCC ID: ZNFV496** complies with all the requirements of Parts 24 & 27 of the FCC rules for LTE operation only.

FCC ID: ZNFV496		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1503160575.ZNF	Test Dates: 3/16 - 4/1/2015	EUT Type: Portable Tablet Computer		Page 102 of 102