



HCT CO., LTD.

CERTIFICATE OF COMPLIANCE FCC Certification

Applicant Name: LG Electronics MobileComm U.S.A., Inc.	Date of Issue: August 06, 2013
Address: 1000 Sylvan Avenue, Englewood Cliffs NJ 07632	Test Site/Location: HCT CO., LTD., 105-1, Jangam-ri, Majang-Myeon, Icheon-si, Kyunggi-Do, Korea
	Report No.: HCTR1308FR14
	HCT FRN: 0005866421
	IC Recognition No.: 5944A-3

FCC ID	: ZNFV500
IC	: 2703C-V500
APPLICANT	: LG Electronics MobileComm U.S.A., Inc.

FCC/ IC Model(s):	LG-V500
Additional FCC/ IC Model(s):	LGV500, V500
EUT Type:	2.4G/5G Dual WIFI Tablet
Max. RF Output Power:	Wi-Fi 802.11b (20.23 dBm) / Wi-Fi 802.11g (19.23 dBm)/ Wi-Fi 802.11n (2.4 GHz) (18.32 dBm) / Wi-Fi 802.11a (5.8 GHz) (19.19 dBm)/ Wi-Fi 802.11n_20 MHz BW (5.8 GHz) (18.09 dBm) / Wi-Fi 802.11n_40 MHz BW (5.8 GHz) (18.20 dBm)
Frequency Range:	2412 MHz - 2462 MHz (2.4 GHz Band) 5745 MHz - 5825 MHz (5.8 GHz Band)_20 MHz BW, 5755 MHz - 5795 MHz (5.8 GHz Band)_40 MHz BW
Modulation type	CCK/DSSS/OFDM
FCC Classification:	Digital Transmission System(DTS)
FCC Rule Part(s):	Part 15.247
IC Rule :	RSS-210 , RSS-GEN

Engineering Statement:

The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998,21 U.S. C.853(a)

Report prepared by
: Kwang Il Yoon
Test engineer of RF Team

Approved by
: Kyung Hoon Seo
Manager of RF Team

This report only responds to the tested sample and may not be reproduced, except in full, without written approval of the HCT Co., Ltd.

FCC PT.15.247 TEST REPORT	FCC & IC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1308FR14	Date of Issue: August 06, 2013	EUT Type: 2.4G/5G Dual WIFI Tablet	FCC ID: ZNFV500	IC: 2703C-V500

Version

TEST REPORT NO.	DATE	DESCRIPTION
HCTR1308FR14	August 06, 2013	- First Approval Report

Table of Contents

1. GENERAL INFORMATION	4
2. EUT DESCRIPTION	4
3. TEST METHODOLOGY	5
3.1 EUT CONFIGURATION	5
3.2 EUT EXERCISE	5
3.3 GENERAL TEST PROCEDURES	5
3.4 DESCRIPTION OF TEST MODES	5
4. INSTRUMENT CALIBRATION.....	6
5. FACILITIES AND ACCREDITATIONS	6
5.1 FACILITIES	6
5.2 EQUIPMENT	6
6. ANTENNA REQUIREMENTS	6
7. SUMMARY TEST OF RESULTS	7
8. TEST RESULT	8
8.1 DUTY CYCLE(802.11a/b/g/n)	8
8.2 6dB BANDWIDTH (802.11a/b/g/n)	1 0
8.3 OUTPUT POWER (802.11a/b/g/n).....	2 3
8.4 POWER SPECTRAL DENSITY (802.11a/b/g/n).....	8 1
8.5 OUT OF BAND EMISSIONS AT THE BAND EDGE/ CONDUCTED SPURIOUS EMISSIONS ...	8 7
8.6 RADIATED MEASUREMENT.....	1 3 1
8.6.1 RADIATED SPURIOUS EMISSIONS.....	1 3 1
8.6.2 RECEIVER SPURIOUS EMISSIONS	1 5 2
8.6.3 RADIATED RESTRICTED BAND EDGES	1 5 3
8.7 POWERLINE CONDUCTED EMISSIONS	1 5 5
9. LIST OF TEST EQUIPMENT	1 6 0

FCC PT.15.247 TEST REPORT	FCC & IC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1308FR14	Date of Issue: August 06, 2013	EUT Type:2.4G/5G Dual WIFI Tablet	FCC ID: ZNFV500	IC: 2703C-V500



1. GENERAL INFORMATION

Applicant: LG Electronics MobileComm U.S.A., Inc.
Address: 1000 Sylvan Avenue, Englewood Cliffs NJ 07632
FCC ID: ZNFV500
IC: 2703C-V500
EUT Type: 2.4G/5G Dual WIFI Tablet
FCC/ IC Model name(s): LG-V500
Additional FCC/ IC Model name(s): LGV500, V500
Date(s) of Tests: July 25, 2013 ~ July 31, 2013
Place of Tests: HCT Co., Ltd.
 105-1, Jangam-ri , Majang-Myeon, Icheon-si, Kyunggi-Do, 467-811, KOREA.
 (IC Recognition No. : 5944A-3)

2. EUT DESCRIPTION

EUT Type	2.4G/5G Dual WIFI Tablet	
FCC Model Name	LG-V500	
Additional FCC Model Name	LGV500, V500	
Power Supply	DC 4.3 V	
Battery type	Li-ion Battery(Standard)	
Frequency Range	TX	: 2412 MHz~2462 MHz, 5745 MHz~5825 MHz_20 MHz, 5755 MHz~5795 MHz_40 MHz
	RX	: 2412 MHz~2462 MHz, 5745 MHz~5825 MHz_20 MHz, 5755 MHz~5795 MHz_40 MHz
Max. RF Output Power	Peak	Wi-Fi 802.11b (20.23 dBm) / Wi-Fi 802.11g (19.23 dBm)/ Wi-Fi 802.11n (2.4 GHz) (18.32 dBm) / Wi-Fi 802.11a (5.8 GHz) (19.19 dBm)/ Wi-Fi 802.11n_20 MHz BW (5.8 GHz) (18.09 dBm) / Wi-Fi 802.11n_40 MHz BW (5.8 GHz) (18.20 dBm)
	Average	Wi-Fi 802.11b (14.24 dBm) / Wi-Fi 802.11g (10.96 dBm)/ Wi-Fi 802.11n (2.4 GHz) (10.11 dBm) / Wi-Fi 802.11a (5.8 GHz) (11.90 dBm)/ Wi-Fi 802.11n_20 MHz BW (5.8 GHz) (11.14 dBm) / Wi-Fi 802.11n_40 MHz BW (5.8 GHz) (10.63 dBm)
Modulation Type	DSSS/CCK(802.11b), OFDM(802.11a, 802.11g, 802.11n)	
Antenna Specification	Manufacturer: LS Mtron Co. Ltd. Antenna type: PIFA Antenna Peak Gain : 4.64 dBi (2.4 GHz Band), -2.66 dBi (5.8 GHz Band)	

FCC PT.15.247 TEST REPORT	FCC & IC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1308FR14	Date of Issue: August 06, 2013	EUT Type: 2.4G/5G Dual WIFI Tablet	FCC ID: ZNFV500	IC: 2703C-V500



3. TEST METHODOLOGY

FCC KDB 558074 D01 DTS Meas Guidance v03r01 dated April 09, 2013 entitled “Guidance for Performing Compliance Measurements on Digital Transmission Systems(DTS) and the measurement procedure described in the American National Standard for Testing Unlicensed Wireless Devices(ANSI C63.4-2003) Operating Under §15.247” were used in the measurement.

3.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

3.2 EUT EXERCISE

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

3.3 GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4. (Version :2003) Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 13.1.4.1 of ANSI C63.4. (Version: 2003)

Conducted Antenna Terminal

See Section from 9.1 to 9.2.(KDB 558074)

3.4 DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

Channel low, mid and high with highest data rate (worst case) is chosen for full testing.

FCC PT.15.247 TEST REPORT		FCC & IC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1308FR14	Date of Issue: August 06, 2013	EUT Type:2.4G/5G Dual WIFI Tablet	FCC ID: ZNFV500	IC: 2703C-V500



4. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipments, which is traceable to recognized national standards.

5. FACILITIES AND ACCREDITATIONS

5.1 FACILITIES

The SAC(Semi-Anechoic Chamber) and conducted measurement facility used to collect the radiated data are located at the 105-1, Jangam-ri, Majang-Myeon, Icheon-si, Kyunggi-Do, 467-811, Korea. The site is constructed in conformance with the requirements of ANSI C63.4. (Version :2003) and CISPR Publication 22. Detailed description of test facility was submitted to the Commission and accepted dated June 21, 2011 (Registration Number: 90661)

5.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of Linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements. Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers. Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

6. ANTENNA REQUIREMENTS

According to FCC 47 CFR §15.203:

"An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section."

* The antennas of this E.U.T are permanently attached.

*The E.U.T Complies with the requirement of §15.203

FCC PT.15.247 TEST REPORT		FCC & IC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1308FR14	Date of Issue: August 06, 2013	EUT Type:2.4G/5G Dual WIFI Tablet	FCC ID: ZNFV500	IC: 2703C-V500

7. SUMMARY TEST OF RESULTS


Test Description	IC Part Section(s)	FCC Part Section(s)	Test Limit	Test Condition	Test Result
6 dB Bandwidth	RSS-210 [A8.2]	§15.247(a)(2)	> 500 kHz	CONDUCTED	PASS
Conducted Maximum Peak Output Power	RSS-210 [A8.4]	§15.247(b)(3)	< 1 Watt		PASS
Power Spectral Density	RSS-210 [A8.2]	§15.247(e)	< 8 dBm / 3 kHz Band		PASS
Band Edge(Out of Band Emissions)	RSS-210 [A8.5]	§15.247(d)	Conducted < 30 dBc		PASS
AC Power line Conducted Emissions	RSS-GEN [7.2.2]	§15.207	cf. Section 8.7		NA
Radiated Spurious Emissions	RSS-210 [A8.5]	§15.205, 15.209	cf. Section 8.6.1	RADIATED	PASS
Receiver Spurious Emissions	RSS-GEN, Section 7.2.3	§15.109	cf. Section 8.6.2		PASS
Radiated Restricted Band Edge	RSS-210 [A8.5]	§15.247(d), 15.205, 15.209	cf. Section 8.6.3		PASS

8. TEST RESULT

8.1 DUTY CYCLE(802.11a/b/g/n)

The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the on and off times of the transmitted signal. Set the center frequency of the instrument to the center frequency of the transmission. Set $RBW \geq OBW$ if possible; otherwise, set RBW to the largest available value. Set $VBW \geq RBW$. Set detector = peak or average. The zero-span measurement method shall not be used unless both RBW and VBW are $> 50/T$ and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring duty cycle shall not be used if $T \leq 16.7$ microseconds.)

TEST CONFIGURATION

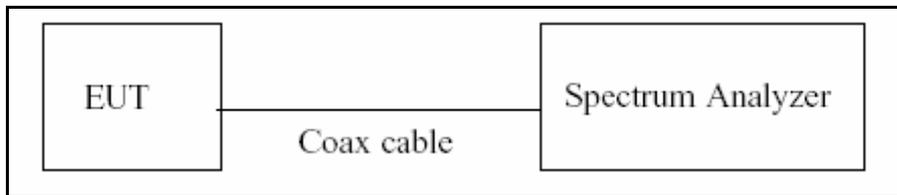

TEST PROCEDURE

The transmitter output is connected to the Spectrum Analyzer. We tested according to the zero-span measurement method, 6.0)b) in KDB 558074(issued 04/09/2013)

The largest available value of RBW is 8 MHz and VBW is 50 MHz. The zero-span method of measuring duty cycle shall not be used if $T \leq 6.25$ microseconds. ($50/6.25 = 8$)

The zero-span method was used because all measured T data are > 6.25 microseconds and both RBW and VBW are $> 50/T$.

1. RBW = 8 MHz (the largest available value)
2. VBW = 8 MHz (\geq RBW)
3. SPAN = 0 Hz
4. Detector = Peak
5. Number of points in sweep > 100
6. Trace mode = Clear write
7. Measure T_{total} and T_{on}
8. Calculate Duty Cycle = T_{on}/T_{total} and Duty Cycle Factor = $10 \cdot \log(1/\text{Duty Cycle})$

FCC PT.15.247 TEST REPORT		FCC & IC CERTIFICATION REPORT		www.hct.co.kr	
Test Report No. HCTR1308FR14	Date of Issue: August 06, 2013	EUT Type:2.4G/5G Dual WIFI Tablet		FCC ID: ZNFV500	IC: 2703C-V500

Duty Cycle Factor

Mode	Data Rate	T _{on} (ms)	T _{total} (ms)	Duty Cycle	Duty Cycle Factor (dB)
2.4 GHz Band 802.11b	1	12.230	12.350	0.99028340	0.042
	2	6.210	6.330	0.98104265	0.083
	5.5	2.380	2.500	0.95200000	0.214
	11	1.284	1.404	0.91452991	0.388
2.4 GHz Band 802.11g and 5.8 GHz Band 802.11a	6	2.034	2.154	0.94428969	0.249
	9	1.359	1.479	0.91886410	0.367
	12	1.026	1.146	0.89528796	0.480
	18	0.692	0.812	0.85221675	0.694
	24	0.524	0.644	0.81366460	0.896
	36	0.356	0.475	0.74836945	1.259
	48	0.272	0.391	0.69565217	1.576
	54	0.244	0.364	0.67032967	1.737
2.4 GHz Band 802.11n_20 MHz BW and 5.8 GHz Band 802.11n_20 MHz BW	6.5	1.890	2.010	0.94029851	0.267
	13	0.966	1.086	0.88950276	0.509
	19.5	0.656	0.776	0.84536082	0.730
	26	0.500	0.620	0.80645161	0.934
	39	0.348	0.468	0.74358974	1.287
	52	0.268	0.388	0.69072165	1.607
	58.5	0.244	0.364	0.67032967	1.737
	65	0.224	0.344	0.65116279	1.863
5.8 GHz Band 802.11n_40 MHz BW	13.5	0.932	0.992	0.93951613	0.271
	27	0.483	0.544	0.88737828	0.519
	40.5	0.335	0.396	0.84595960	0.727
	54	0.259	0.320	0.80937500	0.919
	81	0.188	0.249	0.75653924	1.212
	108	0.148	0.209	0.70983213	1.488
	121.5	0.136	0.197	0.69211196	1.598
	135	0.128	0.189	0.67904509	1.681


8.2 6dB BANDWIDTH (802.11a/b/g/n)

Test Requirements and limit, §15.247(a)(2)

The bandwidth at 6dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the receive antenna while the EUT is operating in transmission mode at the appropriate frequencies.

The minimum permissible 6dB bandwidth is 500 kHz.

TEST CONFIGURATION

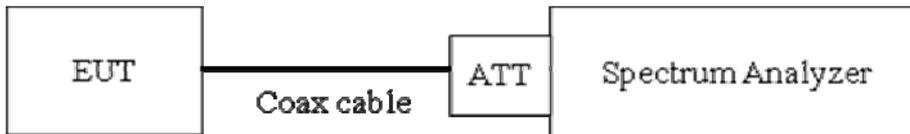

TEST PROCEDURE

The transmitter output is connected to the Spectrum Analyzer.

The Spectrum Analyzer is set to (Page 5 in KDB 558074, issued 04/09/2013)

RBW = 100 kHz

VBW \geq 3 x RBW

Detector = Peak

Trace mode = max hold

Sweep = auto couple

Allow the trace to stabilize

Note : We tested 6 dB bandwidth using the automatic bandwidth measurement capability of a spectrum analyzer. X dB is set 6 dB.

FCC PT.15.247 TEST REPORT		FCC & IC CERTIFICATION REPORT		www.hct.co.kr	
Test Report No. HCTR1308FR14	Date of Issue: August 06, 2013	EUT Type:2.4G/5G Dual WIFI Tablet		FCC ID: ZNFV500	IC: 2703C-V500

TEST RESULTS

Conducted 6dB Bandwidth Measurements for 802.11b

802.11b Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
2412	1	9.015	0.500	Pass
2437	6	8.121	0.500	Pass
2462	11	8.121	0.500	Pass

Conducted 6dB Bandwidth Measurements for 802.11g

802.11g Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
2412	1	16.44	0.500	Pass
2437	6	16.41	0.500	Pass
2462	11	16.42	0.500	Pass

Conducted 6dB Bandwidth Measurements for 802.11n_20 MHz BW(2.4 GHz Band)

802.11n Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
2412	1	17.63	0.500	Pass
2437	6	17.63	0.500	Pass
2462	11	17.65	0.500	Pass

Conducted 6 dB Bandwidth Measurements for 802.11a

802.11a Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Frequency [MHz]			
5745	149	16.42	0.500	Pass
5785	157	16.44	0.500	Pass
5825	165	16.43	0.500	Pass

Conducted 6 dB Bandwidth Measurements for 802.11n_20 MHz BW (5.8 GHz Band)

802.11n Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5745	149	17.62	0.500	Pass
5785	157	17.67	0.500	Pass
5825	165	17.63	0.500	Pass


Conducted 6 dB Bandwidth Measurements for 802.11n_40 MHz BW(5.8 GHz Band)

802.11n Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5755	151	35.22	0.500	Pass
5795	159	35.18	0.500	Pass


RESULT PLOTS

2.4 GHz Band

6dB Bandwidth plot (802.11b-CH 1)

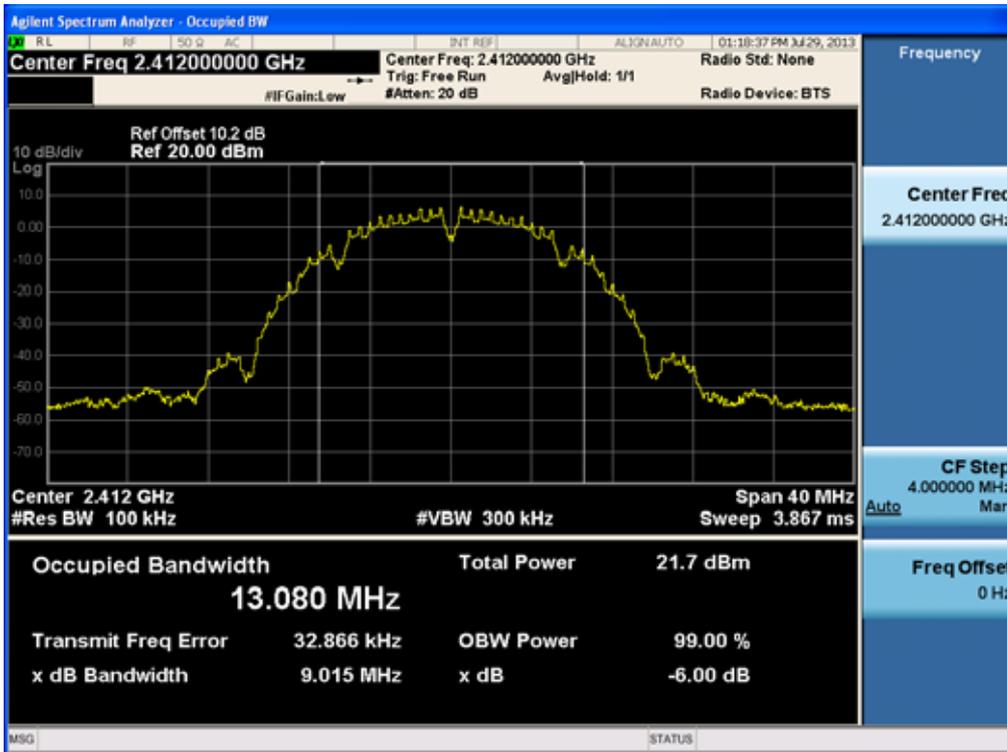


6dB Bandwidth plot (802.11b-CH 6)

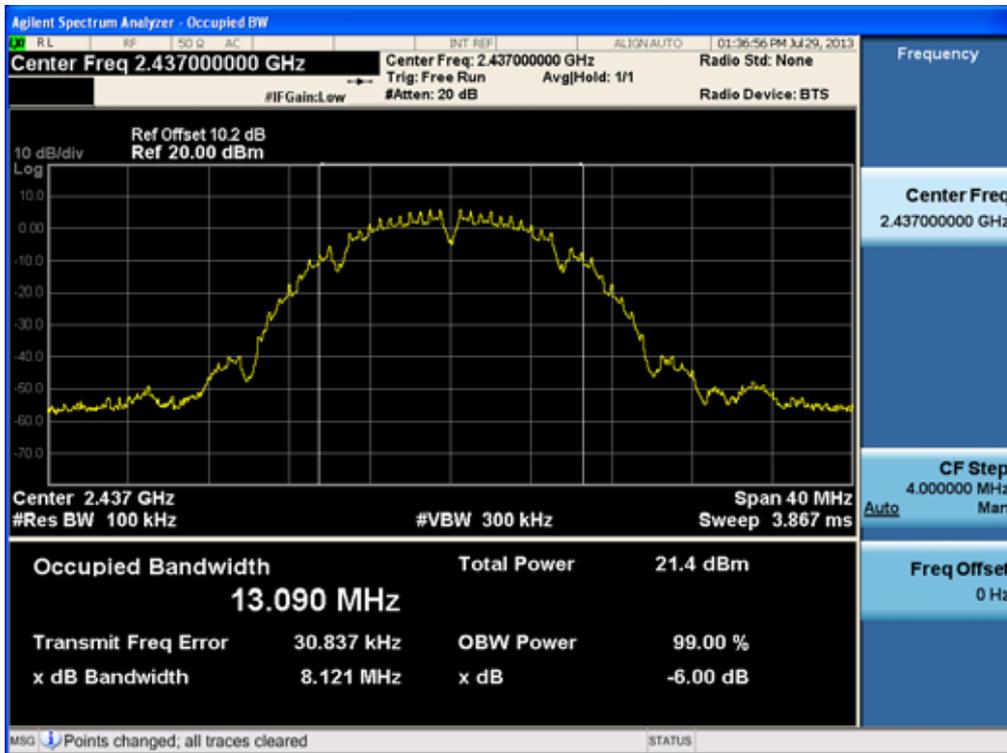


FCC PT.15.247 TEST REPORT	FCC & IC CERTIFICATION REPORT			www.hct.co.kr	
Test Report No. HCTR1308FR14	Date of Issue: August 06, 2013	EUT Type:2.4G/5G Dual WIFI Tablet		FCC ID: ZNFV500	IC: 2703C-V500

6dB Bandwidth plot (802.11b-CH 11)

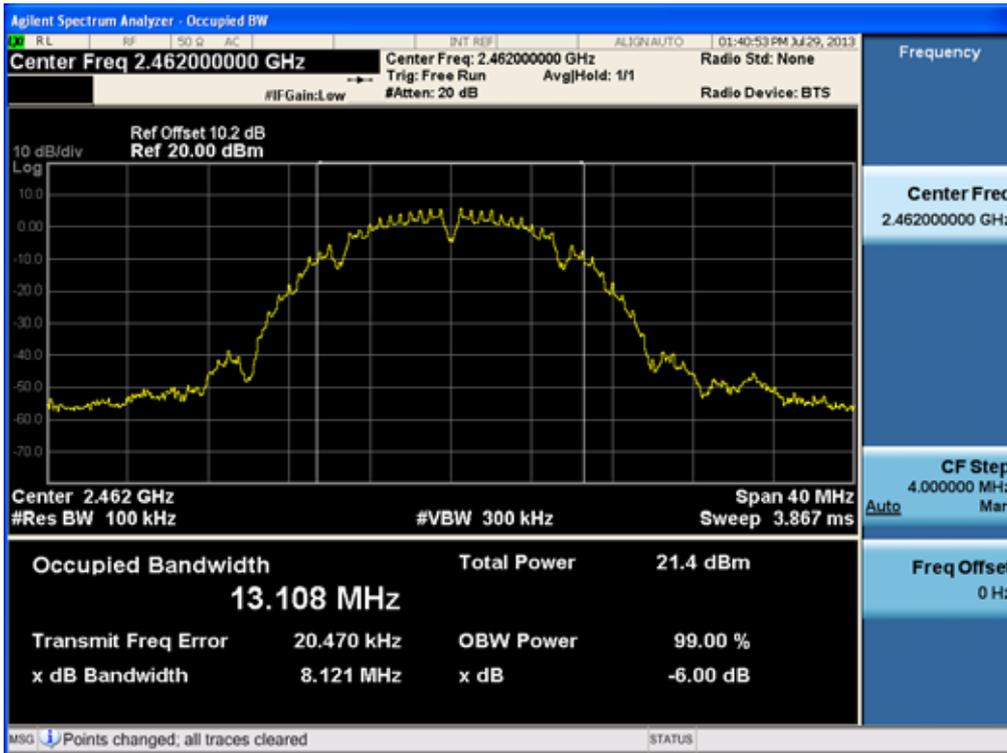


6dB Bandwidth plot (802.11g-CH 1)

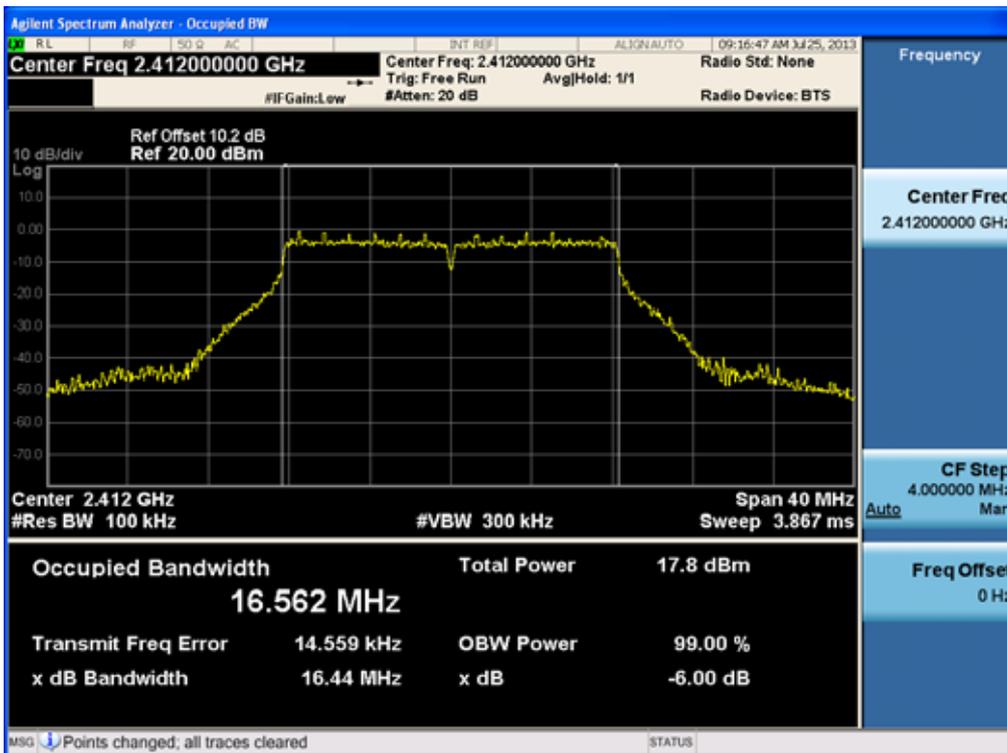


FCC PT.15.247 TEST REPORT	FCC & IC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1308FR14	Date of Issue: August 06, 2013	EUT Type:2.4G/5G Dual WIFI Tablet	FCC ID: ZNFV500	IC: 2703C-V500


6dB Bandwidth plot (802.11g-CH 6)

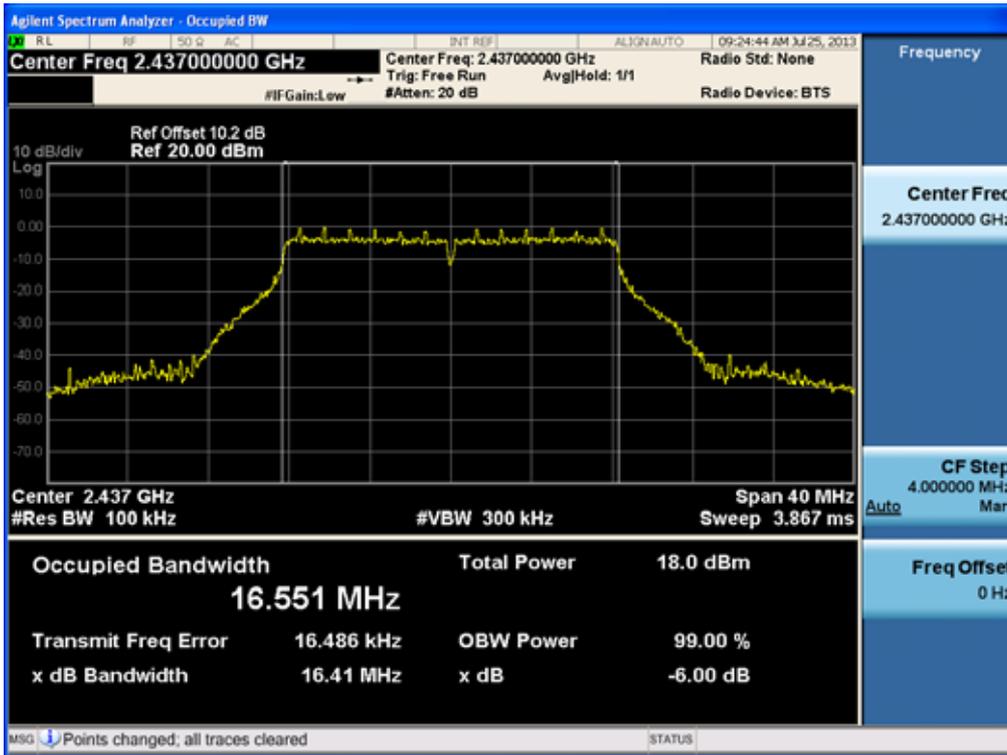


6dB Bandwidth plot (802.11g-CH 11)

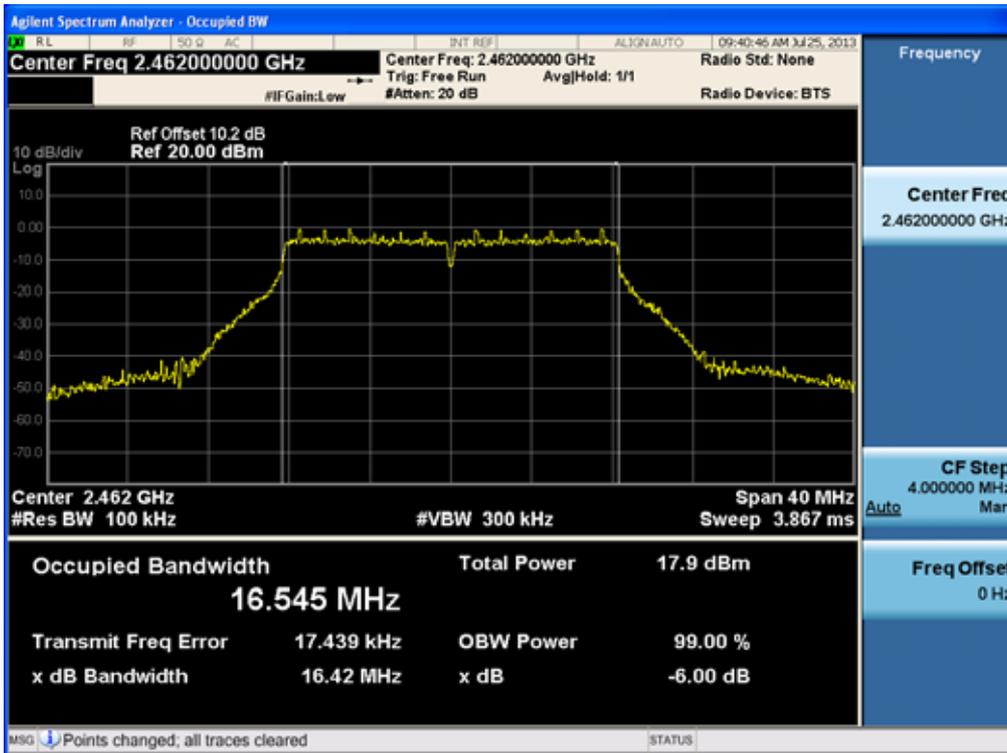

6dB Bandwidth plot (802.11n-CH 1)

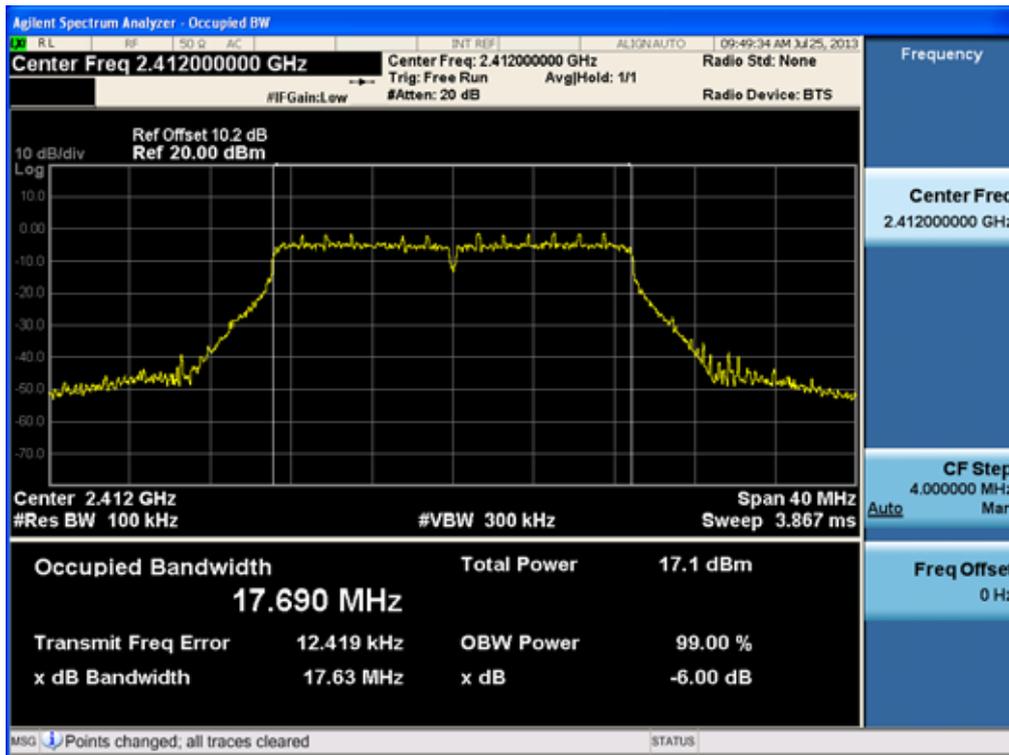


6dB Bandwidth plot (802.11n-CH 6)

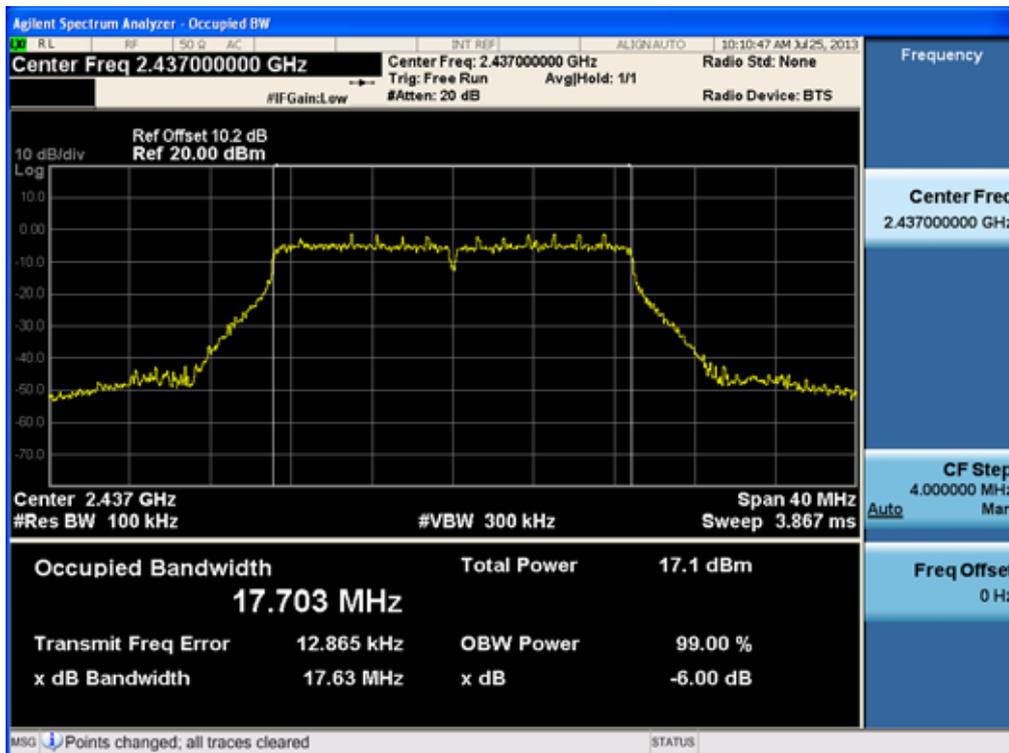

FCC PT.15.247 TEST REPORT	FCC & IC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1308FR14	Date of Issue: August 06, 2013	EUT Type:2.4G/5G Dual WIFI Tablet	FCC ID: ZNFV500	IC: 2703C-V500


6dB Bandwidth plot (802.11n-CH 11)

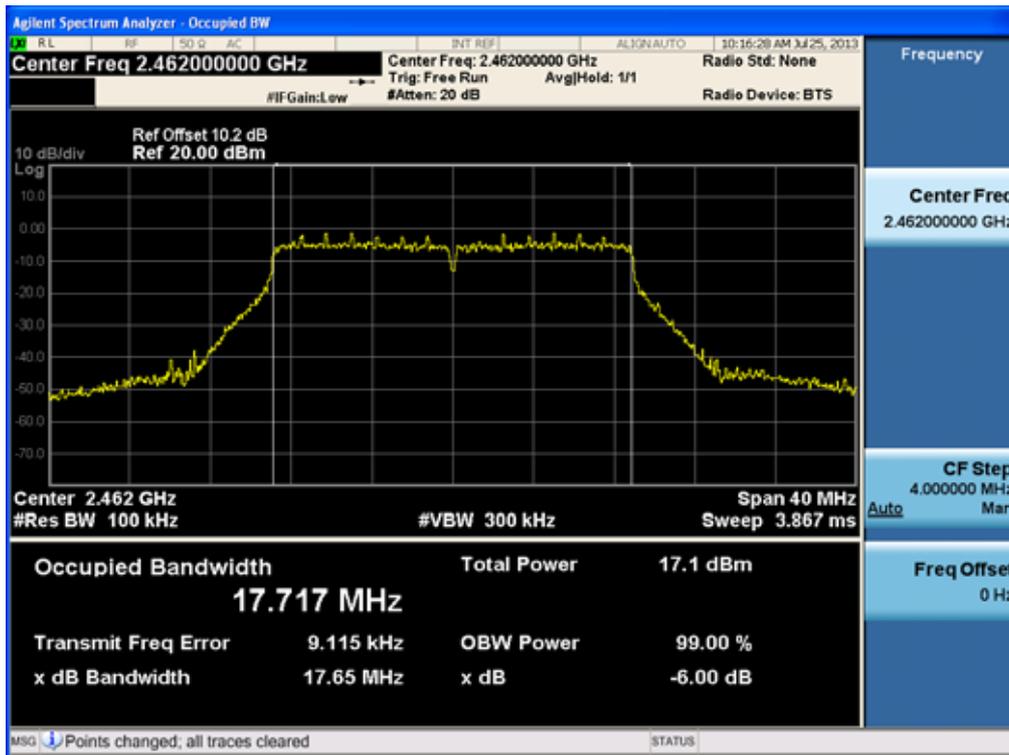


FCC PT.15.247 TEST REPORT	FCC & IC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1308FR14	Date of Issue: August 06, 2013	EUT Type: 2.4G/5G Dual WIFI Tablet	FCC ID: ZNFV500	IC: 2703C-V500

5.8 GHz Band


6dB Bandwidth plot (802.11a-CH 149)

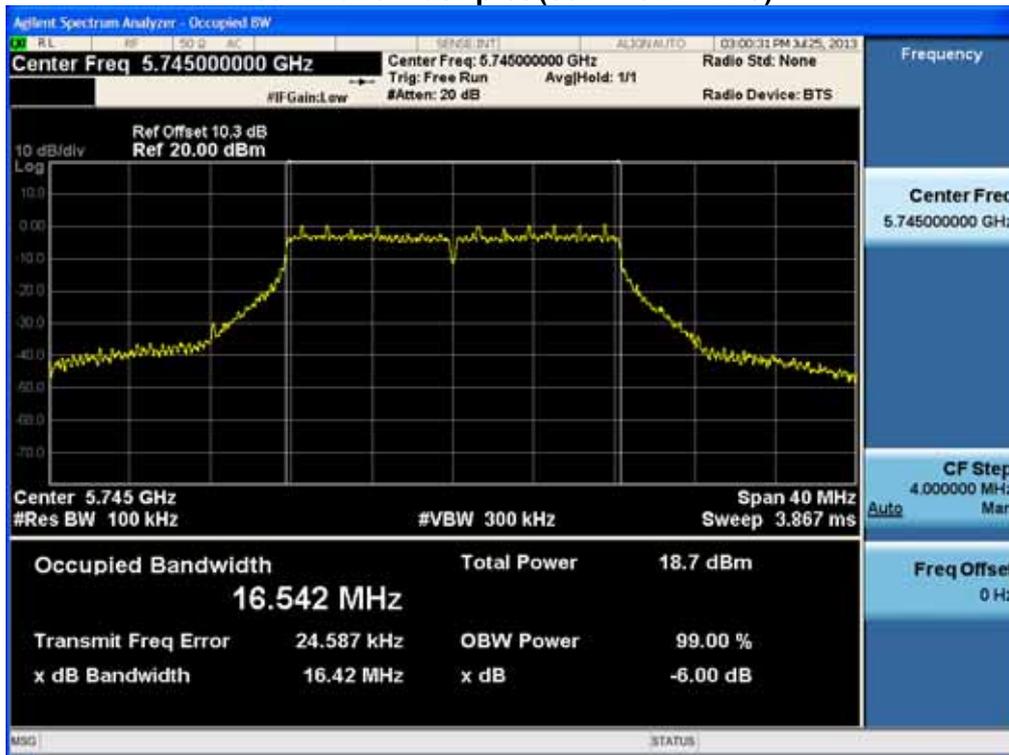

6dB Bandwidth plot (802.11a-CH 157)

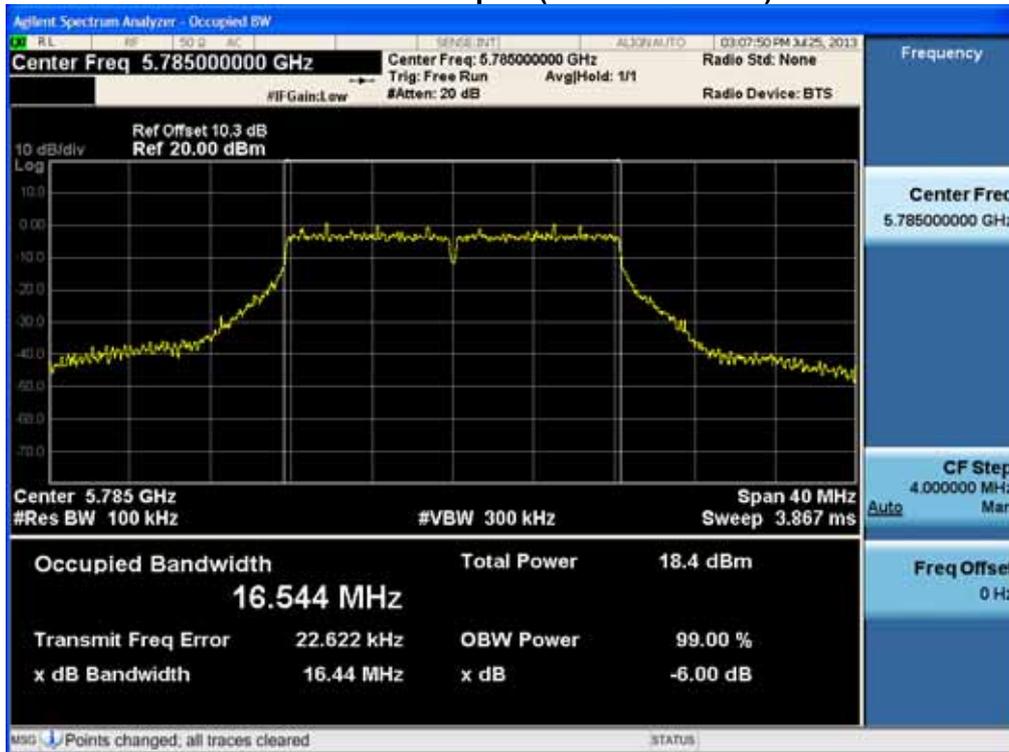


6dB Bandwidth plot (802.11a-CH 165)

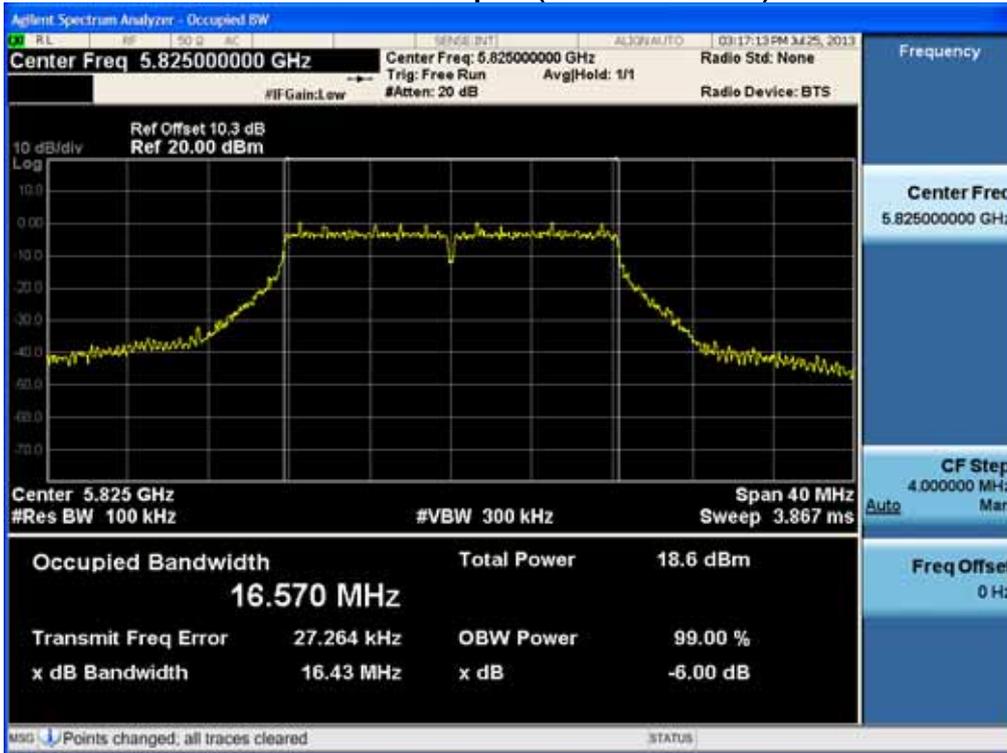


FCC PT.15.247 TEST REPORT	FCC & IC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1308FR14	Date of Issue: August 06, 2013	EUT Type:2.4G/5G Dual WIFI Tablet	FCC ID: ZNFV500	IC: 2703C-V500

6dB Bandwidth plot (802.11n_20 MHz BW-CH 149)

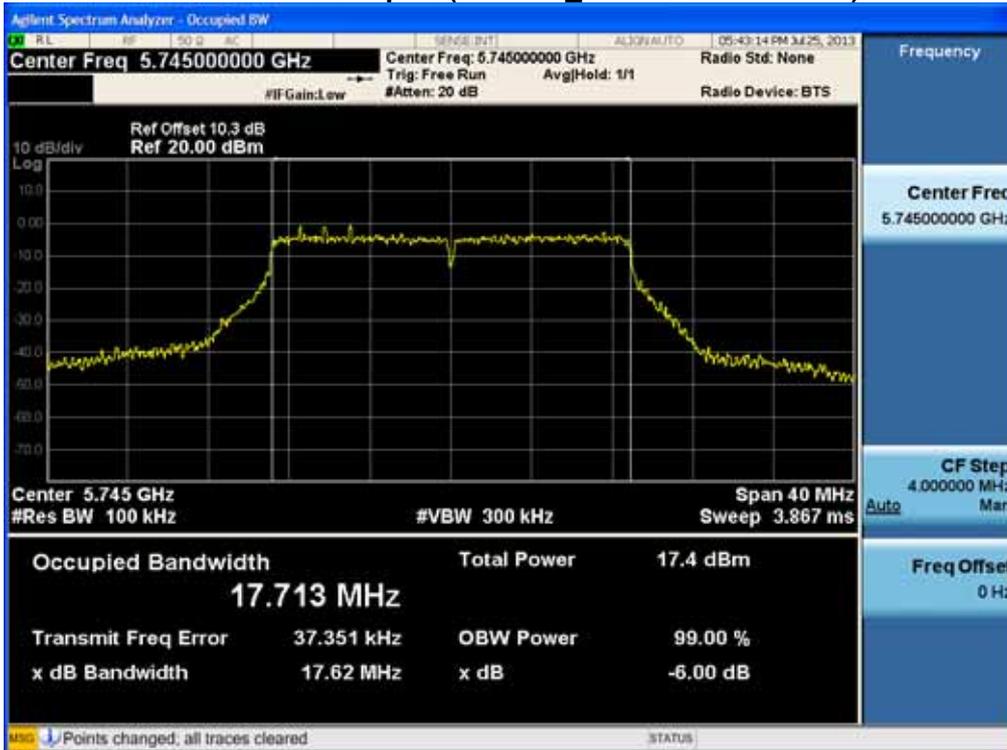


6dB Bandwidth plot (802.11n_20 MHz BW-CH 157)

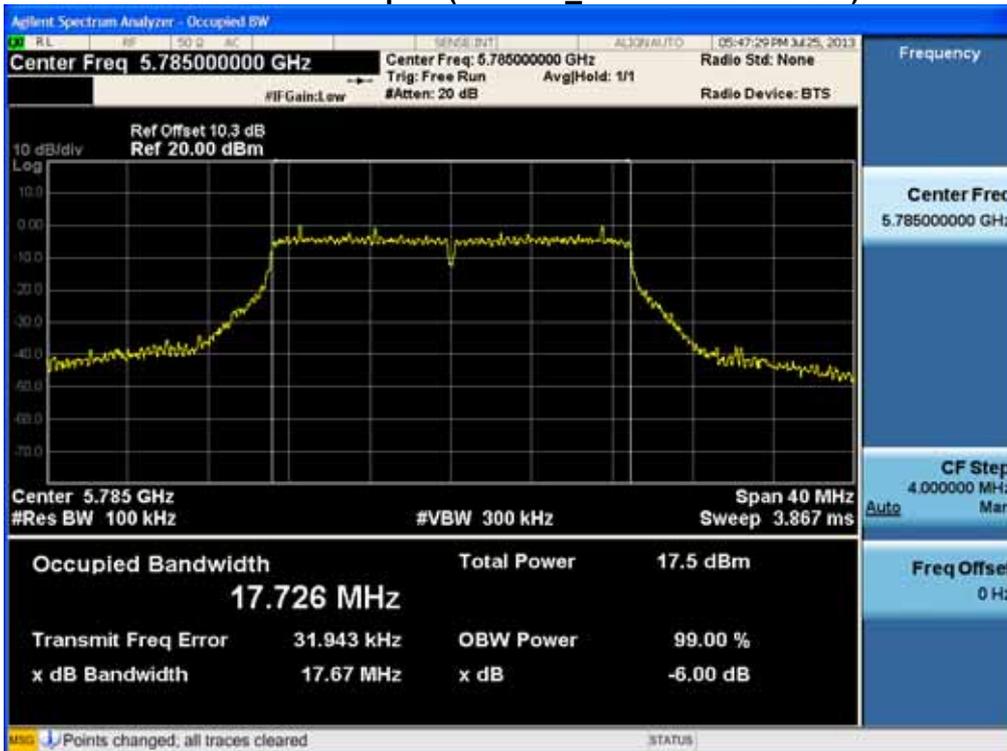


FCC PT.15.247 TEST REPORT	FCC & IC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1308FR14	Date of Issue: August 06, 2013	EUT Type:2.4G/5G Dual WIFI Tablet	FCC ID: ZNFV500	IC: 2703C-V500

6dB Bandwidth plot (802.11n_20 MHz BW-CH 165)

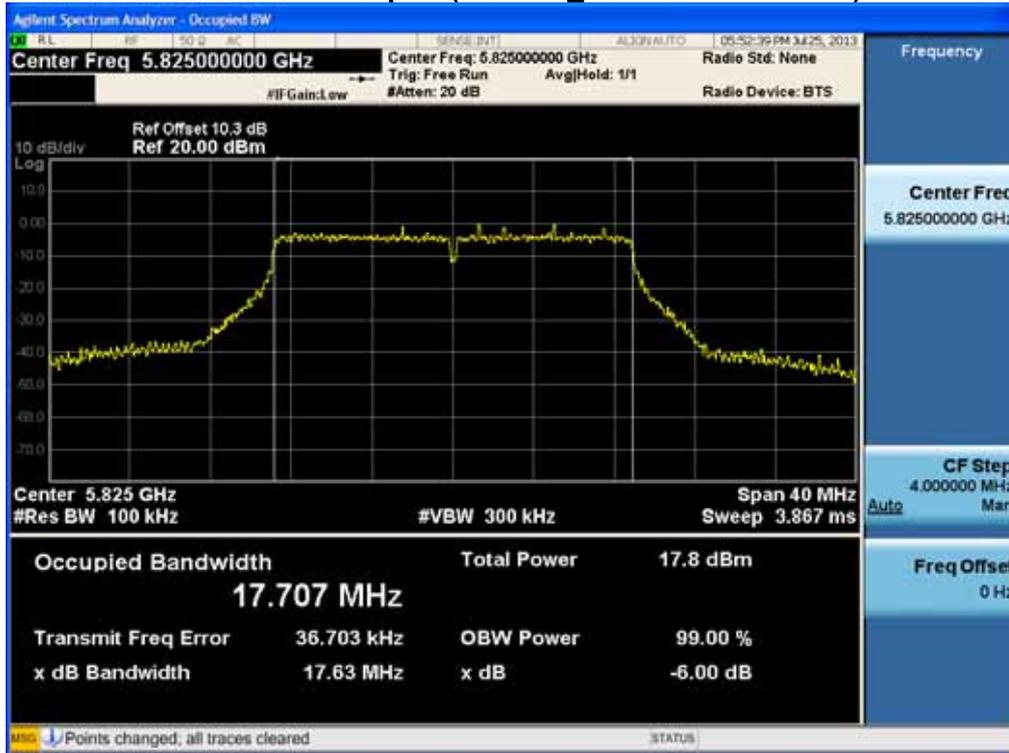


FCC PT.15.247 TEST REPORT	FCC & IC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1308FR14	Date of Issue: August 06, 2013	EUT Type: 2.4G/5G Dual WIFI Tablet	FCC ID: ZNFV500	IC: 2703C-V500

6dB Bandwidth plot (802.11n_40 MHz BW-CH 151)

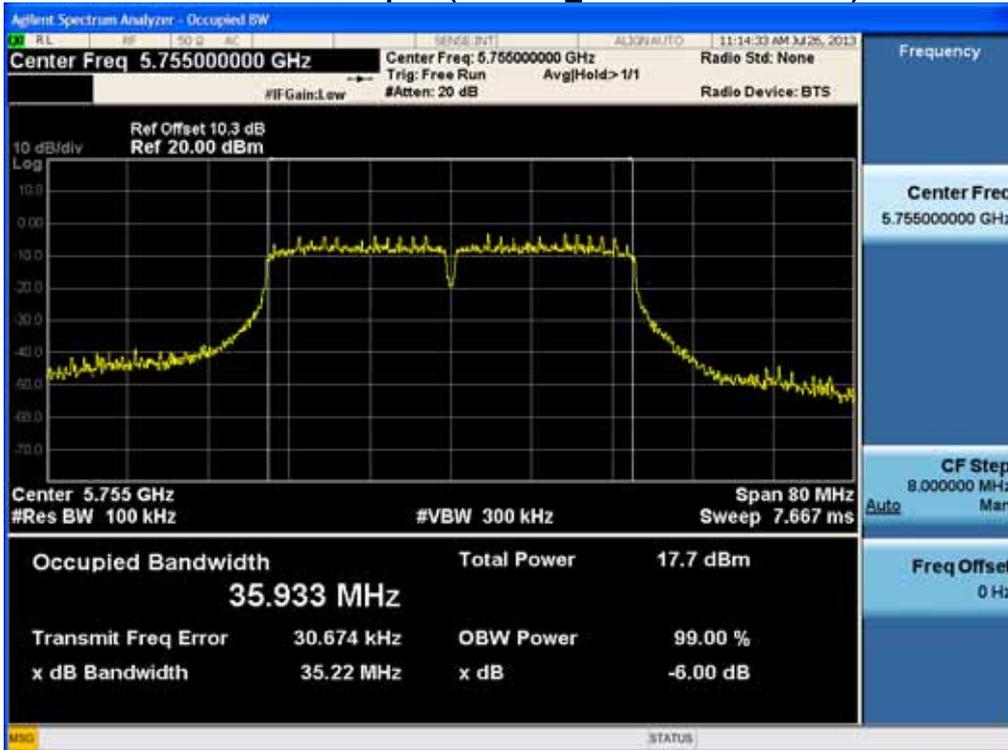

6dB Bandwidth plot (802.11n_40 MHz BW-CH 159)

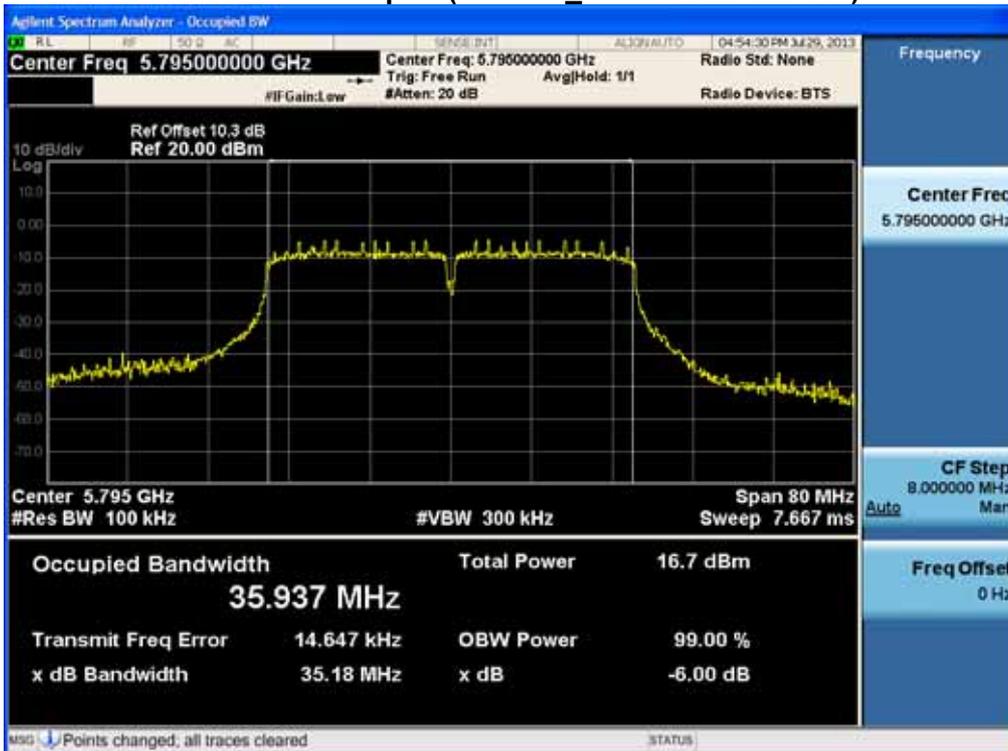

FCC PT.15.247 TEST REPORT	FCC & IC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1308FR14	Date of Issue: August 06, 2013	EUT Type:2.4G/5G Dual WIFI Tablet	FCC ID: ZNFV500	IC: 2703C-V500


8.3 OUTPUT POWER (802.11a/b/g/n)

Test Requirements and limit, §15.247(b)(3)

A transmitter antenna terminal of EUT is connected to the input of a Spectrum Analyzer. Measurement is made while the EUT is operating in transmission mode at the appropriate frequencies.

The maximum permissible conducted output power is 1 Watt.

TEST CONFIGURATION

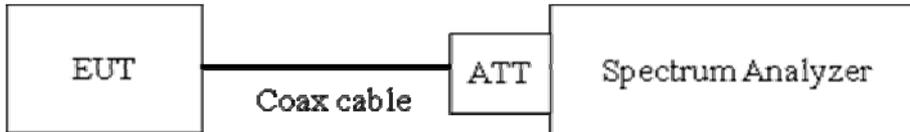

TEST PROCEDURE

The transmitter output is connected to the Spectrum Analyzer. We use the spectrum analyzer's integrated band power measurement function.

The Spectrum Analyzer is set to

- Peak Power (Procedure 9.1.2 in KDB 558074, issued 04/09/2013)

RBW = 1 MHz

VBW $\geq 3 \times$ RBW

SPAN $\geq 1.5 \times$ DTS bandwidth

Detector Mode = Peak

Sweep = auto couple

Trace Mode = max hold

Allow trace to fully stabilize.

Use the instrument's band/channel power measurement function with the band limits set equal to the DTS bandwidth edges (for some instruments, this may require a manual override to select peak detector).

- Average Power (Procedure 9.2.2.4 in KDB 558074, issued 04/09/2013)

Measure the duty cycle

Set span to at least 1.5 times the OBW

RBW = 1-5 % of the OBW, not to exceed 1 MHz.

VBW $\geq 3 \times$ RBW.

Number of points in sweep $\geq 2 \times$ span / RBW. (This gives bin-to-bin spacing \leq RBW/2, so that narrowband signals are not lost between frequency bins.)

Sweep time = auto.

Detector = RMS(i.e., power averaging)

Do not use sweep triggering. Allow the sweep to "free run".

Trace average at least 100 traces in power averaging(RMS) mode.

Compute power by integrating the spectrum across the OBW of the signal using the instrument's band

FCC PT.15.247 TEST REPORT	FCC & IC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1308FR14	Date of Issue: August 06, 2013	EUT Type:2.4G/5G Dual WIFI Tablet	FCC ID: ZNFV500	IC: 2703C-V500



power measurement function with band limits set equal to the OBW band edges.

Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times.

Sample Calculation

Output Power = Reading Value + ATT loss + Cable loss(1 ea) + Duty Cycle Factor

Output Power = 10 dBm + 10 dB + 0.8 dB + 0.2 dB = 21.0 dBm

Note :

1. Spectrum reading values are not plot data. The power results in plot is already including the actual values of loss for the attenuator and cable combination.
2. Spectrum offset = Attenuator loss + Cable loss
3. We apply to the offset in the 2.4 GHz and 5.8 GHz range that was rounded off to the closest tenth dB. So, 10.2 dB is offset for 2.4 GHz Band and 10.3 dB is offset for 5.8 GHz Band.
Actual value of loss for the attenuator and cable combination is below table.

Band	Frequency(MHz)	Loss(dB)
2.4 GHz	2412	10.21
	2437	10.24
	2462	10.24
5.8 GHz	5745	10.31
	5755	10.30
	5785	10.29
	5795	10.26
	5825	10.28

(Actual value of loss for the attenuator and cable combination)

FCC PT.15.247 TEST REPORT		FCC & IC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1308FR14	Date of Issue: August 06, 2013	EUT Type:2.4G/5G Dual WIFI Tablet		FCC ID: ZNFV500 IC: 2703C-V500



TEST RESULTS-Peak

Conducted Output Power Measurements (802.11b Mode)

802.11b Mode		Rate (Mbps)	Measured Power(dBm)	Limit (dBm)
Frequency[MHz]	Channel No.			
2412	1	1 Mbps	16.85	30
		2 Mbps	17.02	30
		5.5 Mbps	18.51	30
		11 Mbps	20.23	30
2437	6	1 Mbps	16.31	30
		2 Mbps	16.53	30
		5.5 Mbps	18.06	30
		11 Mbps	19.83	30
2462	11	1 Mbps	16.28	30
		2 Mbps	16.53	30
		5.5 Mbps	18.07	30
		11 Mbps	19.80	30

Conducted Output Power Measurements (802.11g Mode)

802.11g Mode		Rate (Mbps)	Measured Power(dBm)	Limit (dBm)
Frequency[MHz]	Channel No.			
2412	1	6 Mbps	18.69	30
		9 Mbps	18.72	30
		12 Mbps	18.56	30
		18 Mbps	18.57	30
		24 Mbps	19.10	30
		36 Mbps	19.11	30
		48 Mbps	19.11	30
		54 Mbps	19.23	30
2437	6	6 Mbps	18.71	30
		9 Mbps	18.69	30
		12 Mbps	18.55	30
		18 Mbps	18.60	30
		24 Mbps	19.10	30
		36 Mbps	19.11	30
		48 Mbps	19.19	30
		54 Mbps	19.22	30
2462	11	6 Mbps	18.66	30
		9 Mbps	18.71	30
		12 Mbps	18.64	30
		18 Mbps	18.57	30
		24 Mbps	19.12	30
		36 Mbps	19.08	30
		48 Mbps	19.17	30
		54 Mbps	19.16	30

Conducted Output Power Measurements (802.11n Mode)

802.11n Mode		Rate (Mbps)	Measured Power(dBm)	Limit (dBm)
Frequency[MHz]	Channel No.			
2412	1	6.5 Mbps	17.87	30
		13 Mbps	17.44	30
		19.5 Mbps	17.65	30
		26 Mbps	18.19	30
		39 Mbps	18.19	30
		52 Mbps	18.27	30
		58.5 Mbps	18.32	30
		65 Mbps	18.25	30
2437	6	6.5 Mbps	17.88	30
		13 Mbps	17.75	30
		19.5 Mbps	17.87	30
		26 Mbps	18.29	30
		39 Mbps	18.24	30
		52 Mbps	18.30	30
		58.5 Mbps	18.32	30
		65 Mbps	18.28	30
2462	11	6.5 Mbps	17.86	30
		13 Mbps	17.70	30
		19.5 Mbps	17.71	30
		26 Mbps	18.21	30
		39 Mbps	18.15	30
		52 Mbps	18.30	30
		58.5 Mbps	18.20	30
		65 Mbps	18.18	30

Conducted Output Power Measurements (802.11a Mode: 5745~5825)

802.11a Mode		Rate (Mbps)	Measured Power(dBm)	Limit (dBm)
Frequency[MHz]	Channel No.			
5745	149	6 Mbps	19.03	30
		9 Mbps	19.05	30
		12 Mbps	18.79	30
		18 Mbps	18.72	30
		24 Mbps	19.12	30
		36 Mbps	19.13	30
		48 Mbps	19.05	30
		54 Mbps	18.90	30
5785	157	6 Mbps	18.89	30
		9 Mbps	18.91	30
		12 Mbps	18.55	30
		18 Mbps	18.58	30
		24 Mbps	19.04	30
		36 Mbps	18.89	30
		48 Mbps	18.92	30
		54 Mbps	18.93	30
5825	165	6 Mbps	19.07	30
		9 Mbps	18.97	30
		12 Mbps	18.70	30
		18 Mbps	18.69	30
		24 Mbps	19.19	30
		36 Mbps	18.93	30
		48 Mbps	18.97	30
		54 Mbps	19.04	30

Conducted Output Power Measurements (802.11n_20 MHz BW Mode: 5745~5825)

802.11n Mode		Rate (Mbps)	Measured Power(dBm)	Limit (dBm)
Frequency[MHz]	Channel No.			
5745	149	6.5 Mbps	17.97	30
		13 Mbps	17.63	30
		19.5 Mbps	17.64	30
		26 Mbps	18.09	30
		39 Mbps	17.96	30
		52 Mbps	18.01	30
		58.5 Mbps	17.90	30
		65 Mbps	17.85	30
5785	157	6.5 Mbps	17.96	30
		13 Mbps	17.60	30
		19.5 Mbps	17.63	30
		26 Mbps	18.05	30
		39 Mbps	17.88	30
		52 Mbps	17.86	30
		58.5 Mbps	17.87	30
		65 Mbps	17.85	30
5825	165	6.5 Mbps	18.02	30
		13 Mbps	17.70	30
		19.5 Mbps	17.70	30
		26 Mbps	18.05	30
		39 Mbps	18.07	30
		52 Mbps	17.93	30
		58.5 Mbps	17.92	30
		65 Mbps	17.97	30

Conducted Output Power Measurements (802.11n_40 MHz BW Mode: 5755~5795)

802.11n Mode		Rate (Mbps)	Measured Power(dBm)	Limit (dBm)
Frequency[MHz]	Channel No.			
5755	151	13.5 Mbps	18.20	30
		27 Mbps	17.82	30
		40.5 Mbps	17.82	30
		54 Mbps	18.18	30
		81 Mbps	18.03	30
		108 Mbps	17.92	30
		121.5 Mbps	17.95	30
		135 Mbps	18.01	30
5795	159	13.5 Mbps	17.18	30
		27 Mbps	16.79	30
		40.5 Mbps	16.74	30
		54 Mbps	17.12	30
		81 Mbps	16.97	30
		108 Mbps	16.84	30
		121.5 Mbps	16.94	30
		135 Mbps	16.78	30



TEST RESULTS-Average

Conducted Output Power Measurements (802.11b Mode)

802.11b Mode		Rate (Mbps)	Measured Power(dBm)	Duty Cycle Factor	Measured Power(dBm) + Duty Cycle Factor	Limit (dBm)
Frequency [MHz]	Channel No.					
2412	1	1 Mbps	14.18	0.042	14.22	30
		2 Mbps	14.06	0.083	14.14	30
		5.5 Mbps	14.03	0.214	14.24	30
		11 Mbps	13.74	0.388	14.13	30
2437	6	1 Mbps	13.88	0.042	13.93	30
		2 Mbps	13.83	0.083	13.92	30
		5.5 Mbps	13.75	0.214	13.96	30
		11 Mbps	13.61	0.388	13.99	30
2462	11	1 Mbps	13.78	0.042	13.83	30
		2 Mbps	13.83	0.083	13.92	30
		5.5 Mbps	13.82	0.214	14.04	30
		11 Mbps	13.61	0.388	14.00	30

Conducted Output Power Measurements (802.11g Mode)

802.11g Mode		Rate (Mbps)	Measured Power(dBm)	Duty Cycle Factor	Measured Power(dBm) + Duty Cycle Factor	Limit (dBm)
Frequency [MHz]	Channel No.					
2412	1	6 Mbps	10.59	0.249	10.84	30
		9 Mbps	10.46	0.367	10.82	30
		12 Mbps	10.34	0.480	10.82	30
		18 Mbps	9.97	0.694	10.67	30
		24 Mbps	9.95	0.896	10.84	30
		36 Mbps	9.58	1.259	10.84	30
		48 Mbps	9.28	1.576	10.85	30
		54 Mbps	9.23	1.737	10.96	30
2437	6	6 Mbps	10.56	0.249	10.81	30
		9 Mbps	10.48	0.367	10.85	30
		12 Mbps	10.31	0.480	10.79	30
		18 Mbps	9.70	0.694	10.39	30
		24 Mbps	9.91	0.896	10.80	30
		36 Mbps	9.63	1.259	10.89	30
		48 Mbps	9.30	1.576	10.88	30
		54 Mbps	9.21	1.737	10.95	30
2462	11	6 Mbps	10.55	0.249	10.80	30
		9 Mbps	10.45	0.367	10.82	30
		12 Mbps	10.36	0.480	10.84	30
		18 Mbps	10.08	0.694	10.78	30
		24 Mbps	9.91	0.896	10.81	30
		36 Mbps	9.60	1.259	10.86	30
		48 Mbps	9.25	1.576	10.82	30
		54 Mbps	9.11	1.737	10.85	30

Conducted Output Power Measurements (802.11n Mode)

802.11n Mode		Rate (Mbps)	Measured Power(dBm)	Duty Cycle Factor	Measured Power(dBm) + Duty Cycle Factor	Limit (dBm)
Frequency [MHz]	Channel No.					
2412	1	6.5 Mbps	9.70	0.267	9.97	30
		13 Mbps	9.35	0.509	9.85	30
		19.5 Mbps	9.17	0.730	9.90	30
		26 Mbps	8.97	0.934	9.90	30
		39 Mbps	8.65	1.287	9.94	30
		52 Mbps	8.40	1.607	10.01	30
		58.5 Mbps	8.23	1.737	9.96	30
		65 Mbps	8.17	1.863	10.03	30
2437	6	6.5 Mbps	9.66	0.267	9.92	30
		13 Mbps	9.48	0.509	9.99	30
		19.5 Mbps	9.29	0.730	10.01	30
		26 Mbps	9.06	0.934	10.00	30
		39 Mbps	8.72	1.287	10.00	30
		52 Mbps	8.38	1.607	9.99	30
		58.5 Mbps	8.34	1.737	10.08	30
		65 Mbps	8.25	1.863	10.11	30
2462	11	6.5 Mbps	9.66	0.267	9.93	30
		13 Mbps	9.39	0.509	9.90	30
		19.5 Mbps	9.20	0.730	9.93	30
		26 Mbps	8.97	0.934	9.91	30
		39 Mbps	8.67	1.287	9.96	30
		52 Mbps	8.31	1.607	9.92	30
		58.5 Mbps	8.19	1.737	9.93	30
		65 Mbps	7.95	1.863	9.82	30

Conducted Output Power Measurements (802.11a Mode: 5745~5825)

802.11a Mode		Rate (Mbps)	Measured Power(dBm)	Duty Cycle Factor	Measured Power(dBm) + Duty Cycle Factor	Limit (dBm)
Frequency [MHz]	Channel No.					
5745	149	6 Mbps	11.56	0.249	11.81	30
		9 Mbps	11.50	0.367	11.87	30
		12 Mbps	11.41	0.480	11.89	30
		18 Mbps	11.20	0.694	11.90	30
		24 Mbps	10.83	0.896	11.73	30
		36 Mbps	10.49	1.259	11.75	30
		48 Mbps	10.16	1.576	11.74	30
		54 Mbps	9.85	1.737	11.58	30
5785	157	6 Mbps	11.63	0.249	11.87	30
		9 Mbps	11.38	0.367	11.74	30
		12 Mbps	11.21	0.480	11.69	30
		18 Mbps	11.08	0.694	11.78	30
		24 Mbps	10.87	0.896	11.76	30
		36 Mbps	10.23	1.259	11.49	30
		48 Mbps	9.96	1.576	11.54	30
		54 Mbps	9.84	1.737	11.58	30
5825	165	6 Mbps	11.58	0.249	11.83	30
		9 Mbps	11.46	0.367	11.83	30
		12 Mbps	11.39	0.480	11.87	30
		18 Mbps	11.10	0.694	11.79	30
		24 Mbps	10.82	0.896	11.72	30
		36 Mbps	10.53	1.259	11.79	30
		48 Mbps	10.01	1.576	11.59	30
		54 Mbps	9.91	1.737	11.65	30

Conducted Output Power Measurements (802.11n_20 MHz BW Mode: 5745~5825)

802.11n Mode		Rate (Mbps)	Measured Power(dBm)	Duty Cycle Factor	Measured Power(dBm) + Duty Cycle Factor	Limit (dBm)
Frequency [MHz]	Channel No.					
5745	149	6.5 Mbps	10.64	0.267	10.91	30
		13 Mbps	10.30	0.509	10.80	30
		19.5 Mbps	10.17	0.730	10.90	30
		26 Mbps	9.89	0.934	10.82	30
		39 Mbps	9.36	1.287	10.65	30
		52 Mbps	9.06	1.607	10.66	30
		58.5 Mbps	9.04	1.737	10.78	30
		65 Mbps	8.93	1.863	10.80	30
5785	157	6.5 Mbps	10.66	0.267	10.93	30
		13 Mbps	10.41	0.509	10.92	30
		19.5 Mbps	10.13	0.730	10.86	30
		26 Mbps	9.85	0.934	10.79	30
		39 Mbps	9.52	1.287	10.80	30
		52 Mbps	9.30	1.607	10.91	30
		58.5 Mbps	9.06	1.737	10.80	30
		65 Mbps	8.99	1.863	10.86	30
5825	165	6.5 Mbps	10.87	0.267	11.14	30
		13 Mbps	10.61	0.509	11.12	30
		19.5 Mbps	10.30	0.730	11.03	30
		26 Mbps	10.12	0.934	11.06	30
		39 Mbps	9.59	1.287	10.87	30
		52 Mbps	9.37	1.607	10.98	30
		58.5 Mbps	9.19	1.737	10.93	30
		65 Mbps	9.11	1.863	10.97	30


Conducted Output Power Measurements (802.11n_40 MHz BW Mode: 5755~5795)

802.11n Mode		Rate (Mbps)	Measured Power(dBm)	Duty Cycle Factor	Measured Power(dBm) + Duty Cycle Factor	Limit (dBm)
Frequency [MHz]	Channel No.					
5755	151	13.5 Mbps	10.32	0.271	10.59	30
		27 Mbps	10.11	0.519	10.63	30
		40.5 Mbps	9.81	0.727	10.53	30
		54 Mbps	9.61	0.919	10.53	30
		81 Mbps	9.21	1.212	10.42	30
		108 Mbps	8.86	1.488	10.35	30
		121.5 Mbps	8.80	1.598	10.39	30
		135 Mbps	8.73	1.681	10.41	30
5795	159	13.5 Mbps	9.36	0.271	9.63	30
		27 Mbps	9.02	0.519	9.54	30
		40.5 Mbps	8.81	0.727	9.53	30
		54 Mbps	8.52	0.919	9.44	30
		81 Mbps	8.21	1.212	9.42	30
		108 Mbps	7.78	1.488	9.26	30
		121.5 Mbps	7.68	1.598	9.27	30
		135 Mbps	6.76	1.681	8.44	30


Note : In order to simplify the report, attached plots were only the highest conducted power channel.

RESULT PLOTS-Peak

Conducted Output Power (802.11b-CH 1) 1Mbps

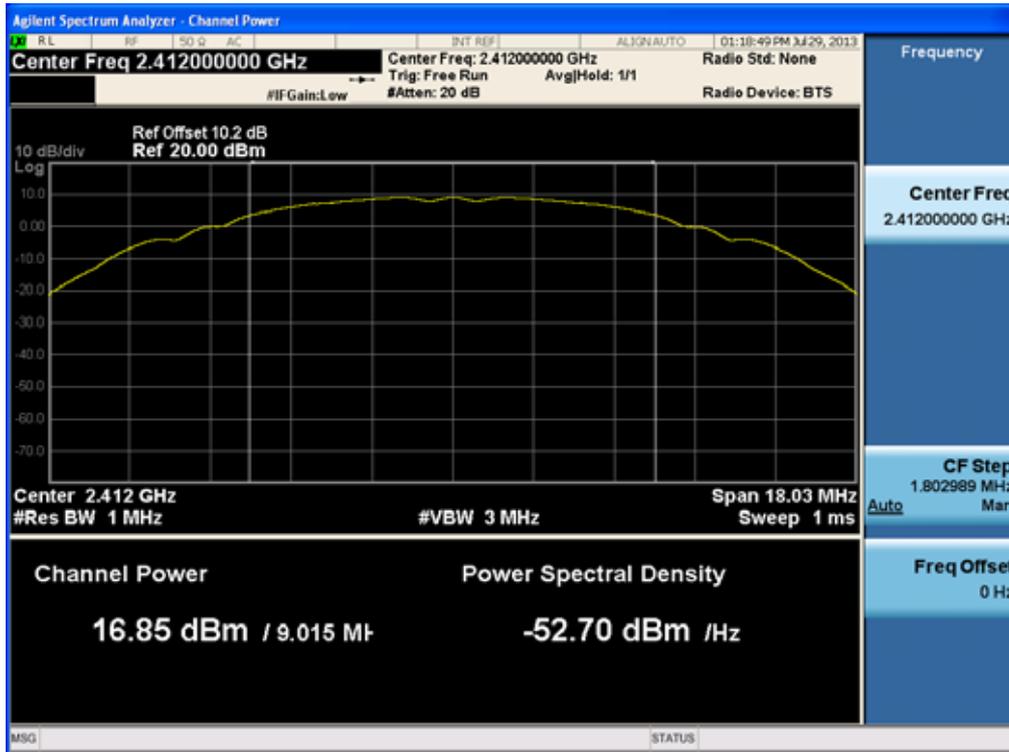


Conducted Output Power (802.11b-CH 1) 2Mbps

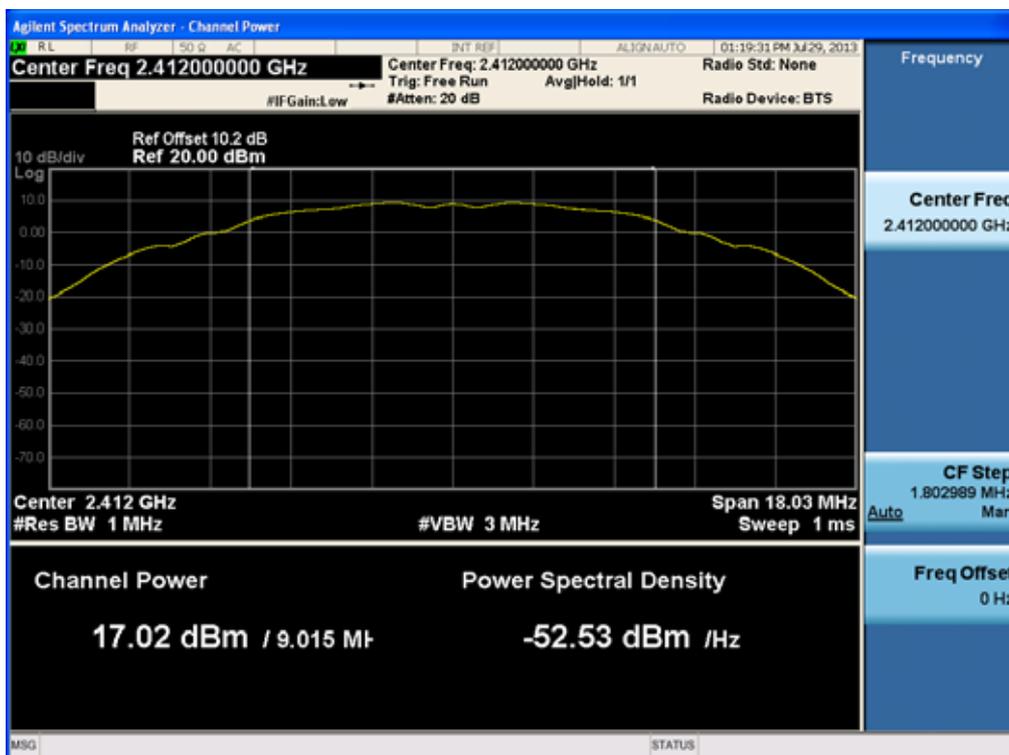


FCC PT.15.247 TEST REPORT	FCC & IC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1308FR14	Date of Issue: August 06, 2013	EUT Type:2.4G/5G Dual WIFI Tablet	FCC ID: ZNFV500	IC: 2703C-V500

Conducted Output Power (802.11b-CH 1) 5.5Mbps

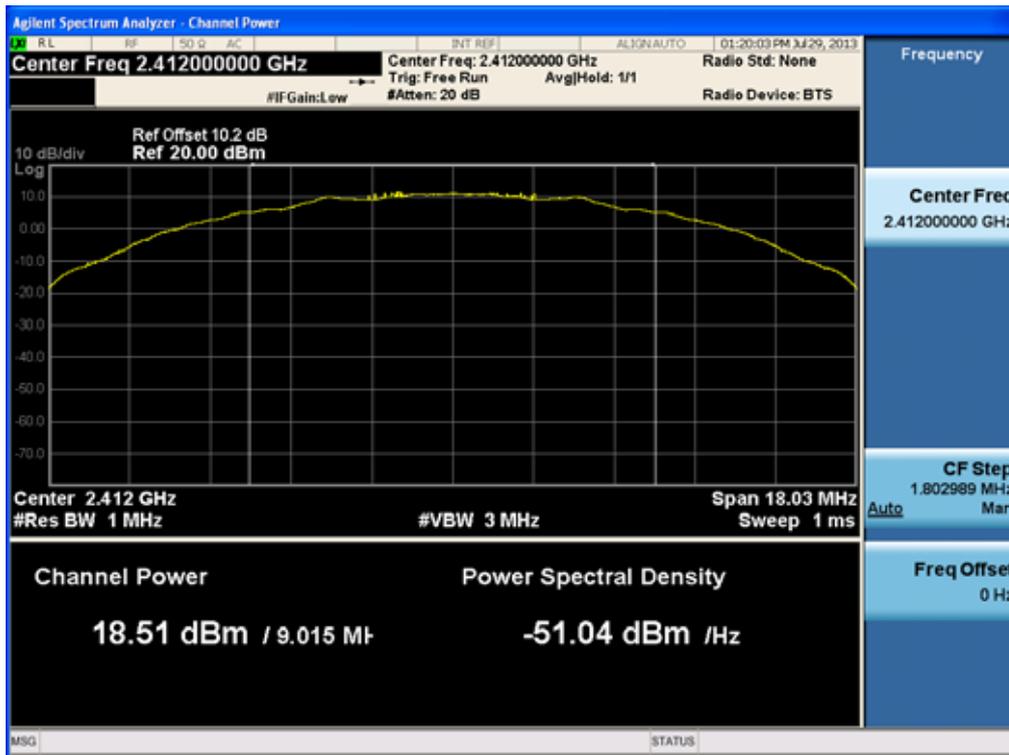


Conducted Output Power (802.11b-CH 1) 11Mbps

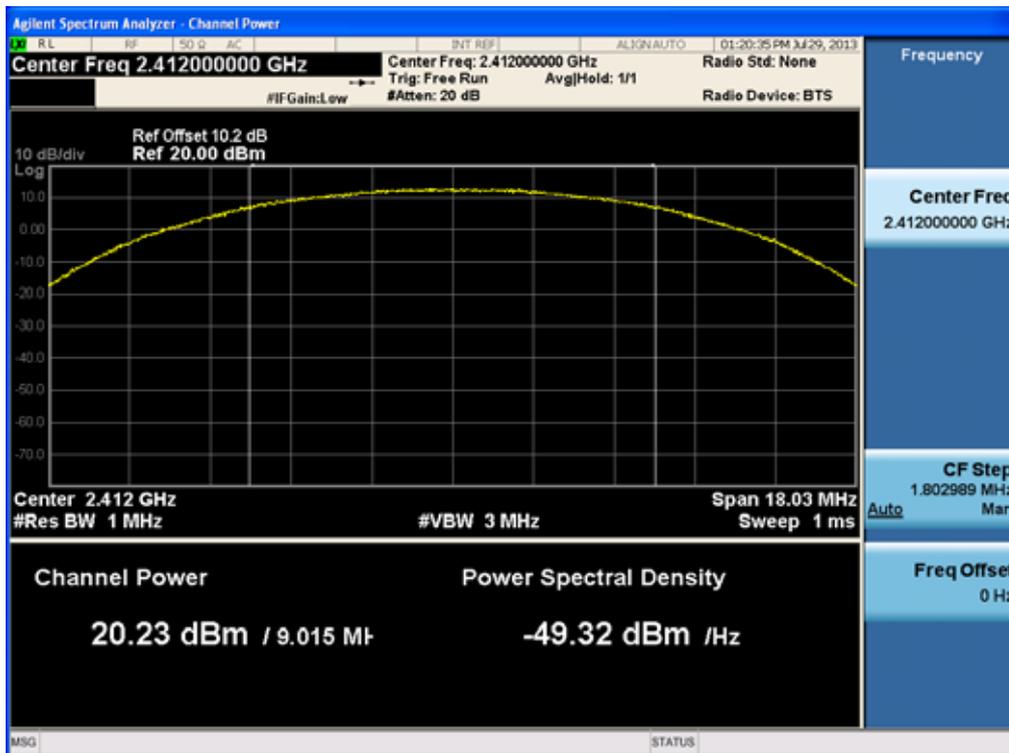


FCC PT.15.247 TEST REPORT	FCC & IC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1308FR14	Date of Issue: August 06, 2013	EUT Type: 2.4G/5G Dual WIFI Tablet	FCC ID: ZNFV500	IC: 2703C-V500

Conducted Output Power (802.11g-CH 1) 6Mbps

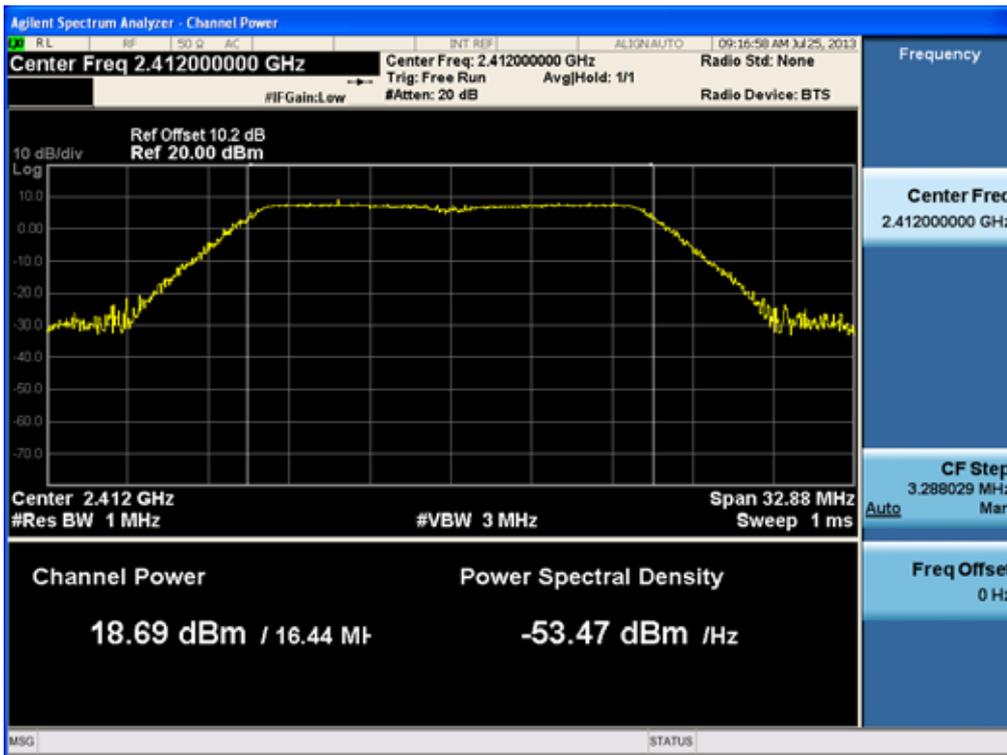


Conducted Output Power (802.11g-CH 1) 9Mbps

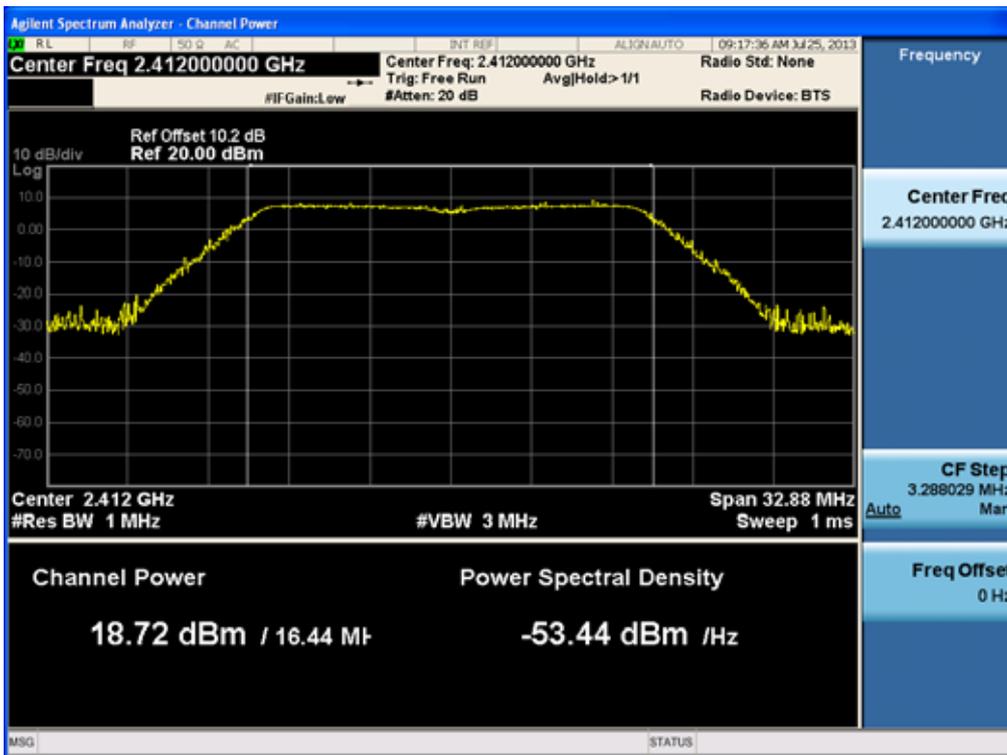


FCC PT.15.247 TEST REPORT	FCC & IC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1308FR14	Date of Issue: August 06, 2013	EUT Type:2.4G/5G Dual WIFI Tablet	FCC ID: ZNFV500	IC: 2703C-V500

Conducted Output Power (802.11g-CH 1) 12Mbps

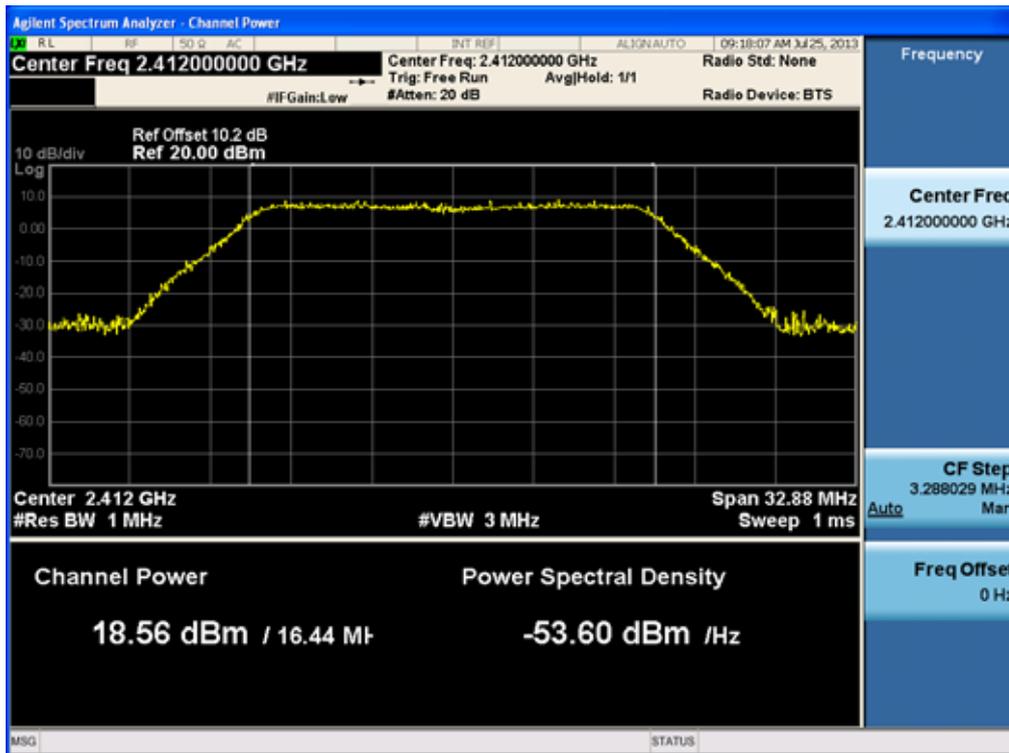


Conducted Output Power (802.11g-CH 1) 18Mbps

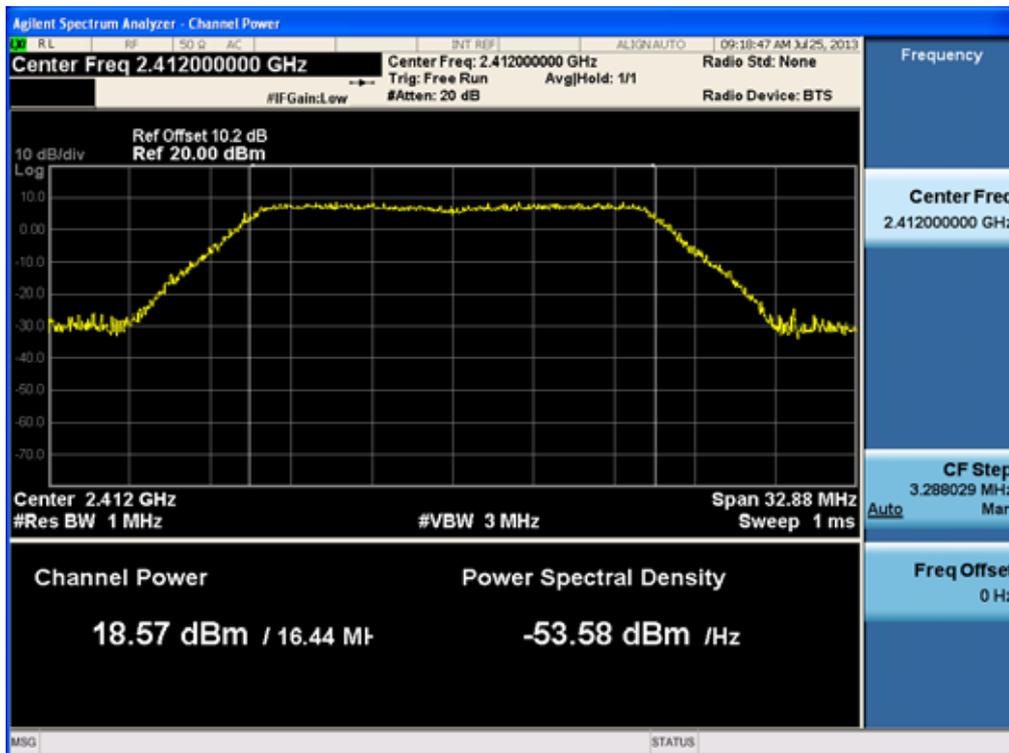


FCC PT.15.247 TEST REPORT	FCC & IC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1308FR14	Date of Issue: August 06, 2013	EUT Type:2.4G/5G Dual WIFI Tablet	FCC ID: ZNFV500	IC: 2703C-V500

Conducted Output Power (802.11g-CH 1) 24Mbps

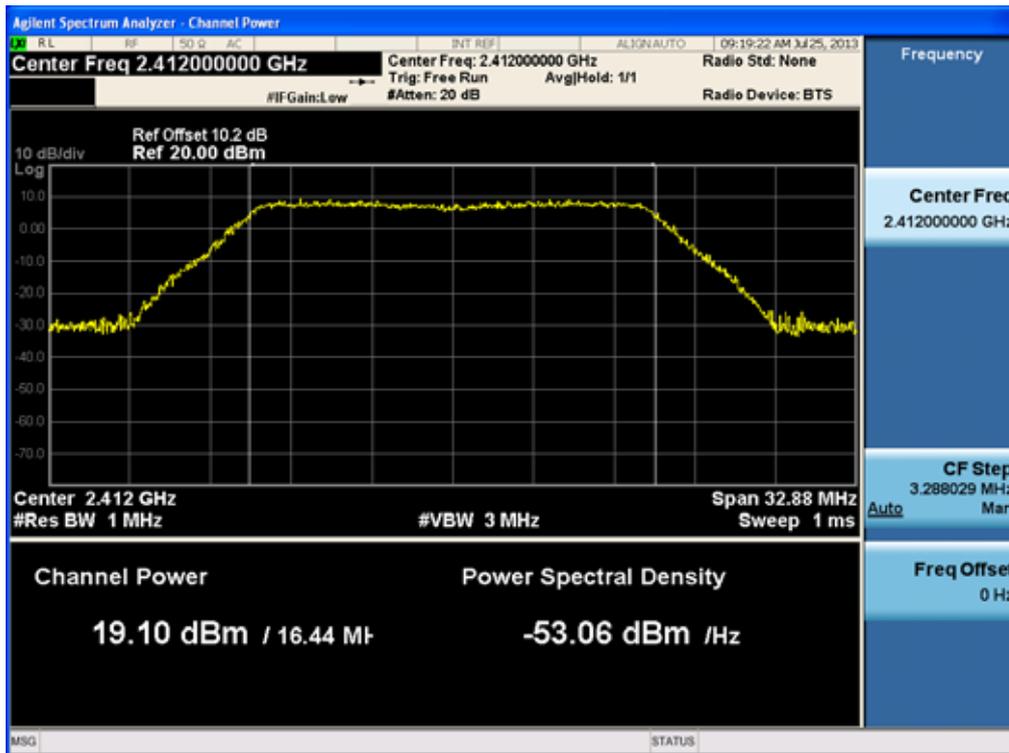


Conducted Output Power (802.11g-CH 1) 36Mbps

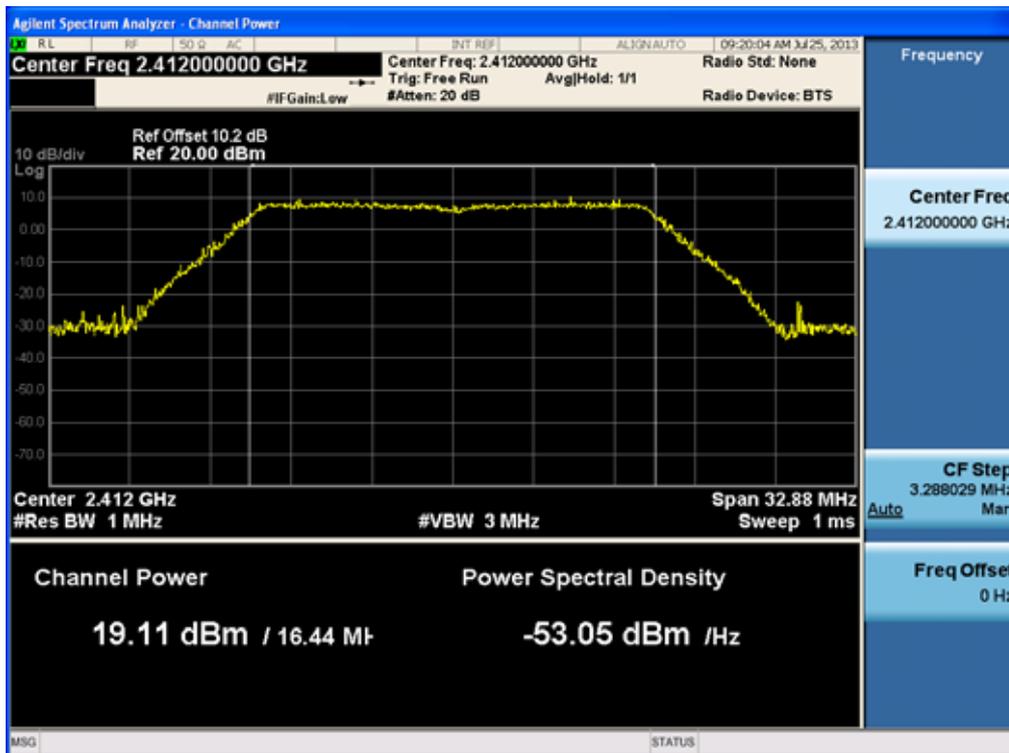


FCC PT.15.247 TEST REPORT	FCC & IC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1308FR14	Date of Issue: August 06, 2013	EUT Type: 2.4G/5G Dual WIFI Tablet	FCC ID: ZNFV500	IC: 2703C-V500

Conducted Output Power (802.11g-CH 1) 48Mbps

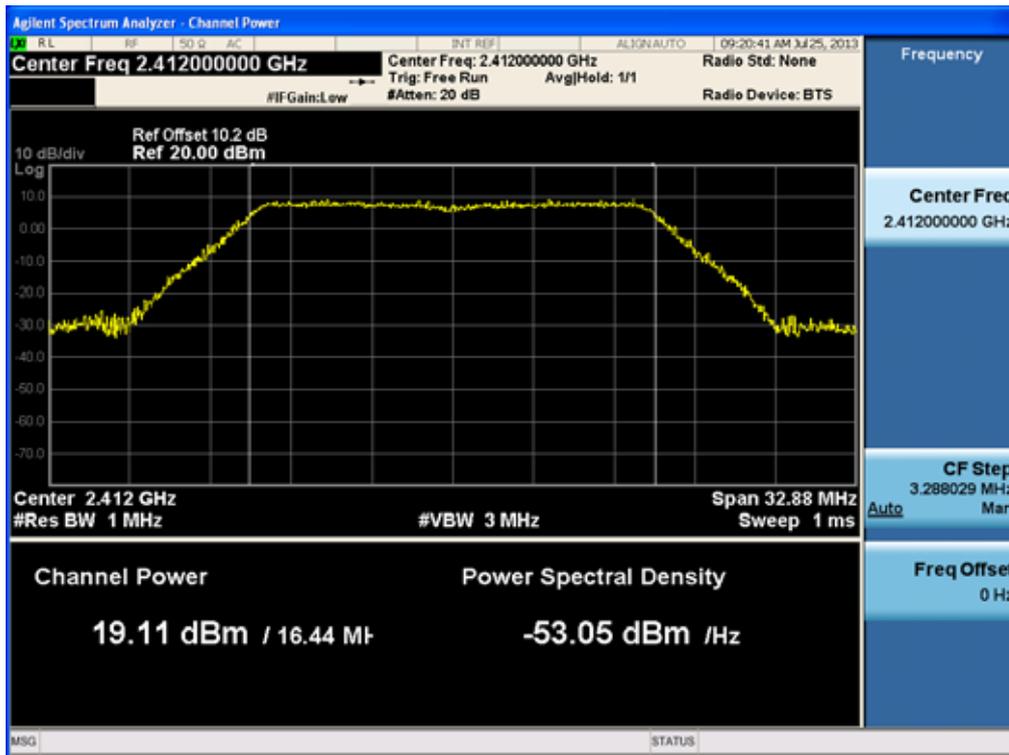


Conducted Output Power (802.11g-CH 1) 54Mbps

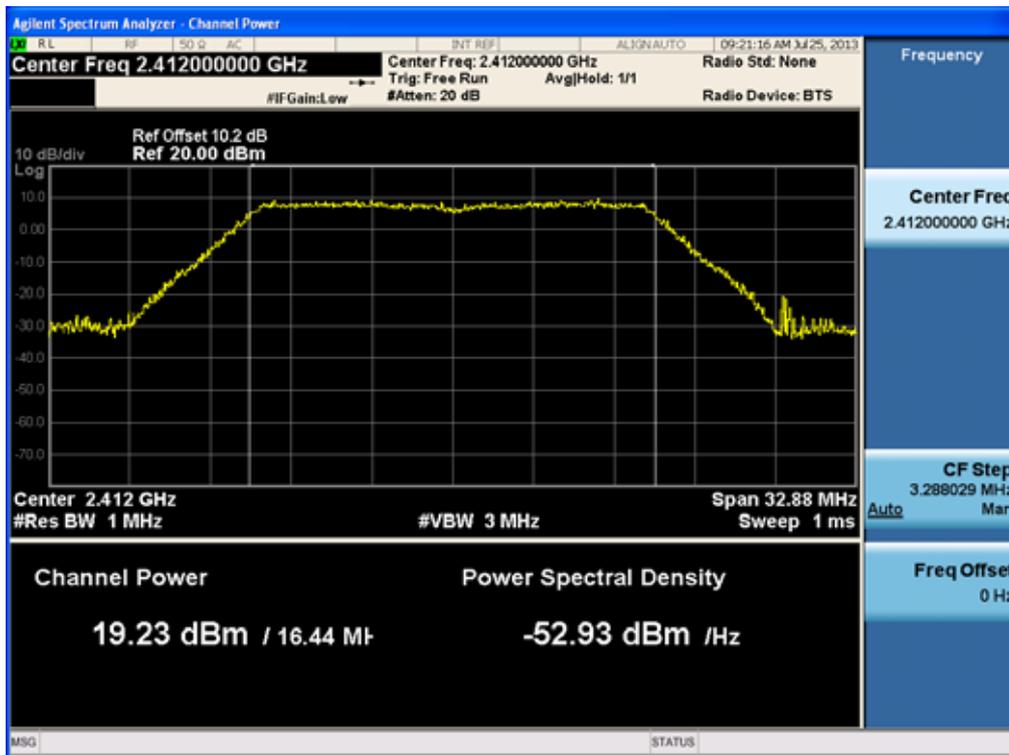


FCC PT.15.247 TEST REPORT	FCC & IC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1308FR14	Date of Issue: August 06, 2013	EUT Type:2.4G/5G Dual WIFI Tablet	FCC ID: ZNFV500	IC: 2703C-V500

Conducted Output Power (802.11n-CH 1) 6.5Mbps

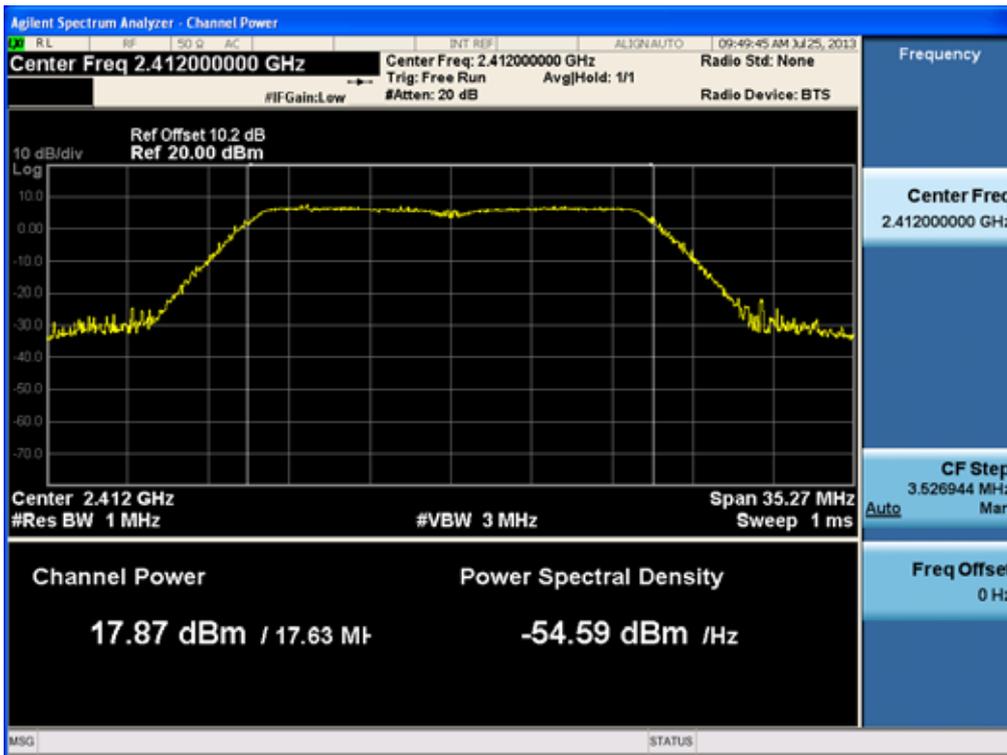


Conducted Output Power (802.11n-CH 1) 13Mbps

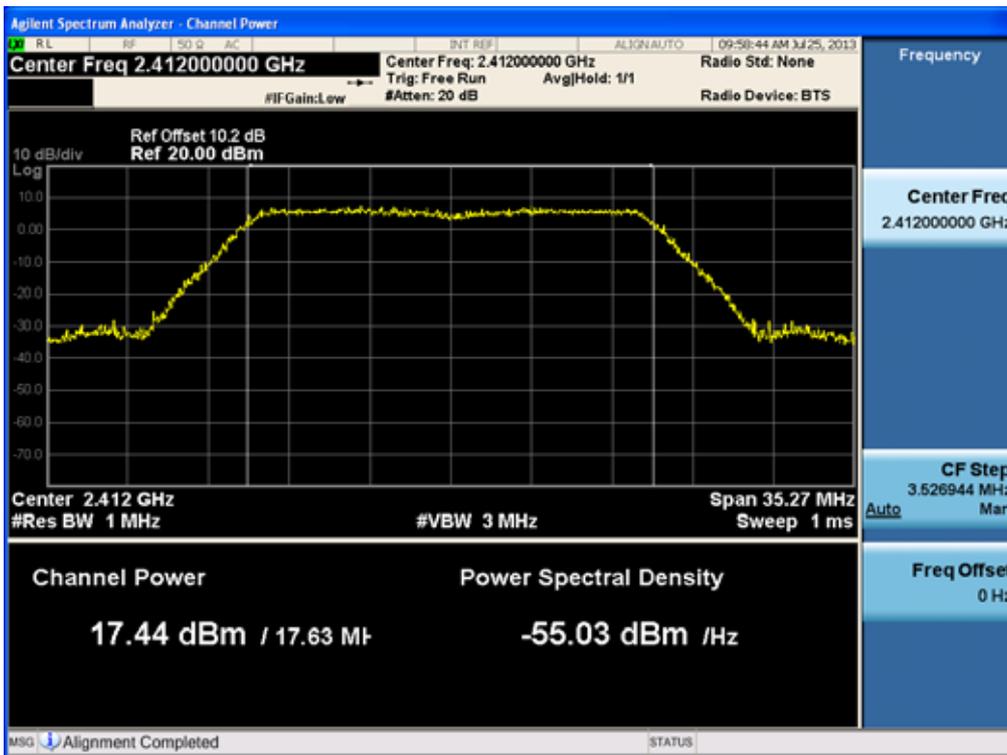


FCC PT.15.247 TEST REPORT	FCC & IC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1308FR14	Date of Issue: August 06, 2013	EUT Type:2.4G/5G Dual WIFI Tablet	FCC ID: ZNFV500	IC: 2703C-V500

Conducted Output Power (802.11n-CH 1) 19.5Mbps

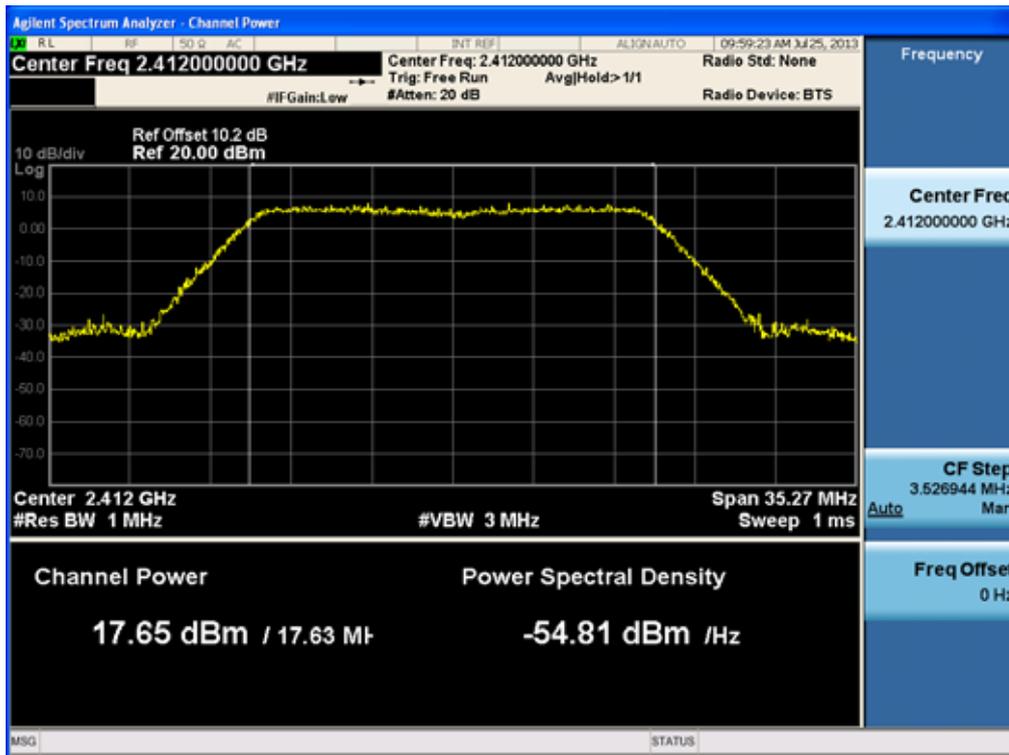


Conducted Output Power (802.11n-CH 1) 26Mbps

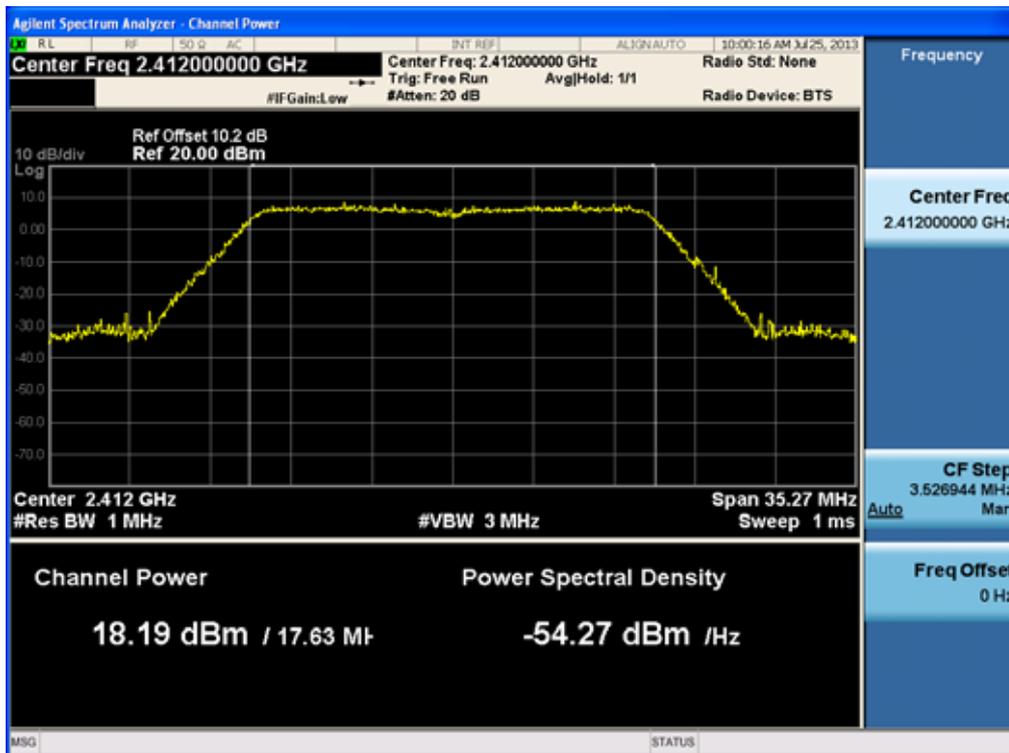


FCC PT.15.247 TEST REPORT	FCC & IC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1308FR14	Date of Issue: August 06, 2013	EUT Type: 2.4G/5G Dual WIFI Tablet	FCC ID: ZNFV500	IC: 2703C-V500

Conducted Output Power (802.11n-CH 1) 39Mbps

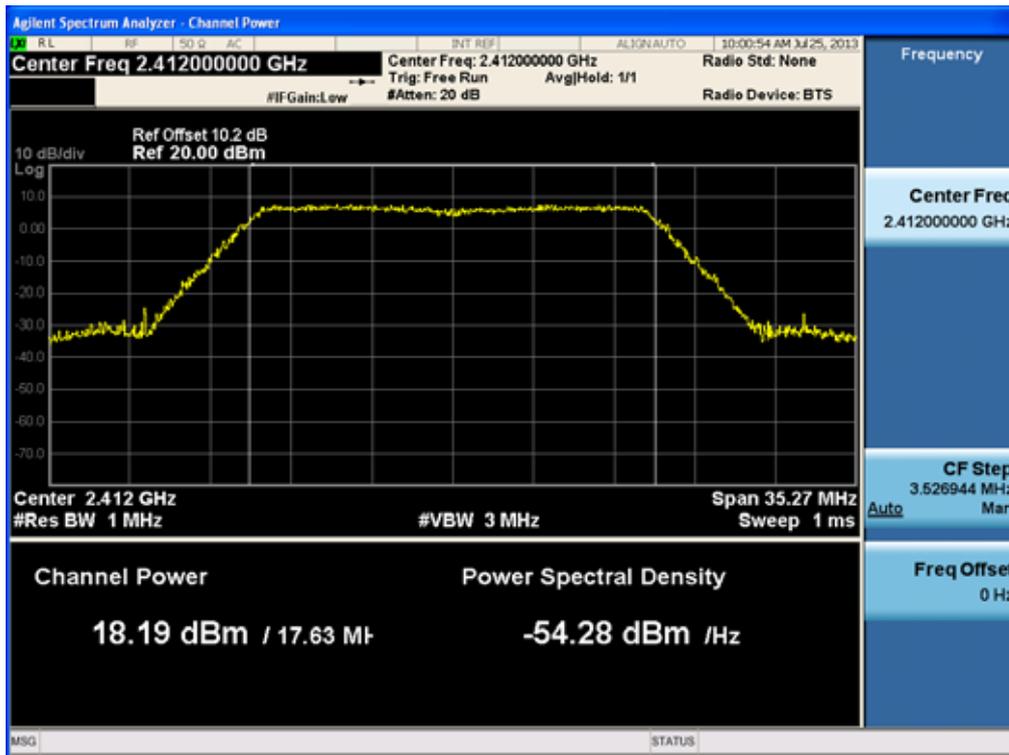

Conducted Output Power (802.11n-CH 1) 52Mbps

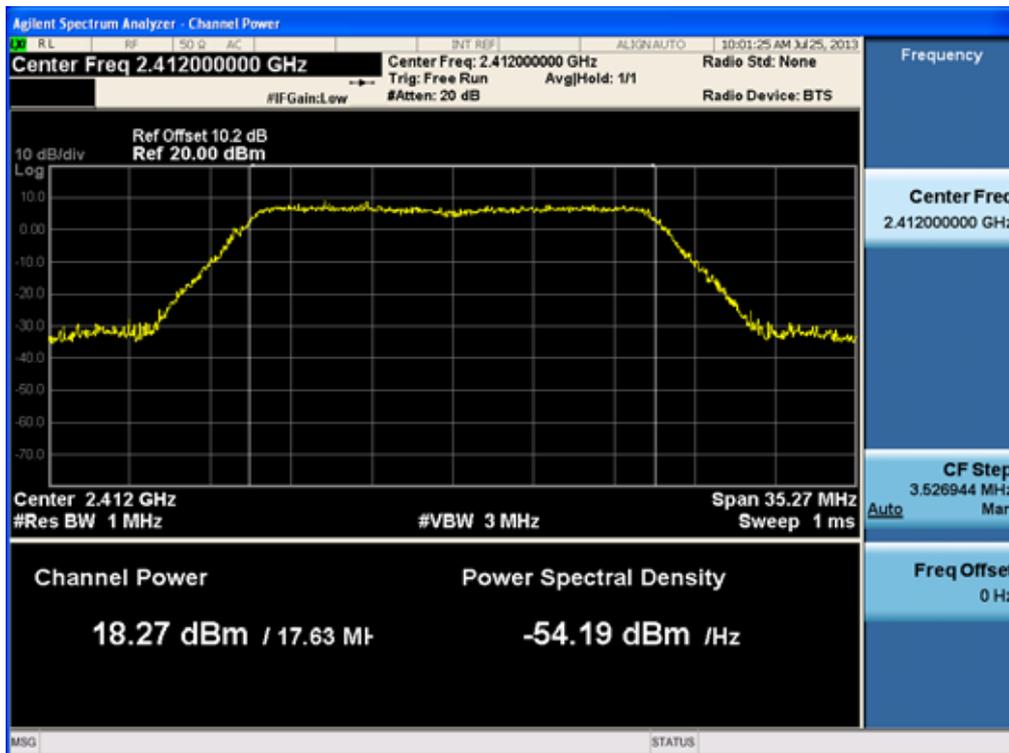

FCC PT.15.247 TEST REPORT	FCC & IC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1308FR14	Date of Issue: August 06, 2013	EUT Type:2.4G/5G Dual WIFI Tablet	FCC ID: ZNFV500	IC: 2703C-V500