

7.4 Band Edge Emissions at Antenna Terminal

§2.1051 §24.238(a) §27.53(g) §27.53(h)

Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

The minimum permissible attenuation level of any spurious emission is $43 + \log_{10}(P_{[Watts]})$, where P is the transmitter power in Watts.

Test Procedure Used

KDB 971168 D01 v02r02 – Section 6.0

Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. $RBW \geq 1\%$ of the emission bandwidth
4. $VBW \geq 3 \times RBW$
5. Detector = RMS
6. Number of sweep points $\geq 2 \times \text{Span}/RBW$
7. Trace mode = trace average
8. Sweep time = auto couple
9. The trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

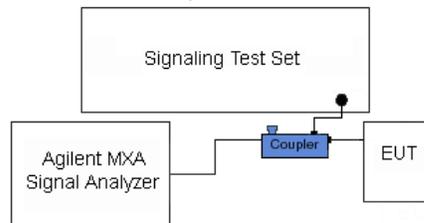



Figure 7-3. Test Instrument & Measurement Setup

Test Notes

Per 22.917(b) 24.238(a) 27.53(h) in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed to demonstrate compliance with the out-of-band emissions limit. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.

Per 27.53(g) for operations in the 698-746 MHz band, in the 100 kHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least 30 kHz may be employed to demonstrate compliance with the out-of-band emissions limit.

FCC ID: ZNFV521		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1601280175.ZNF	Test Dates: 1/28-2/12/2016	EUT Type: Portable Tablet		Page 45 of 100

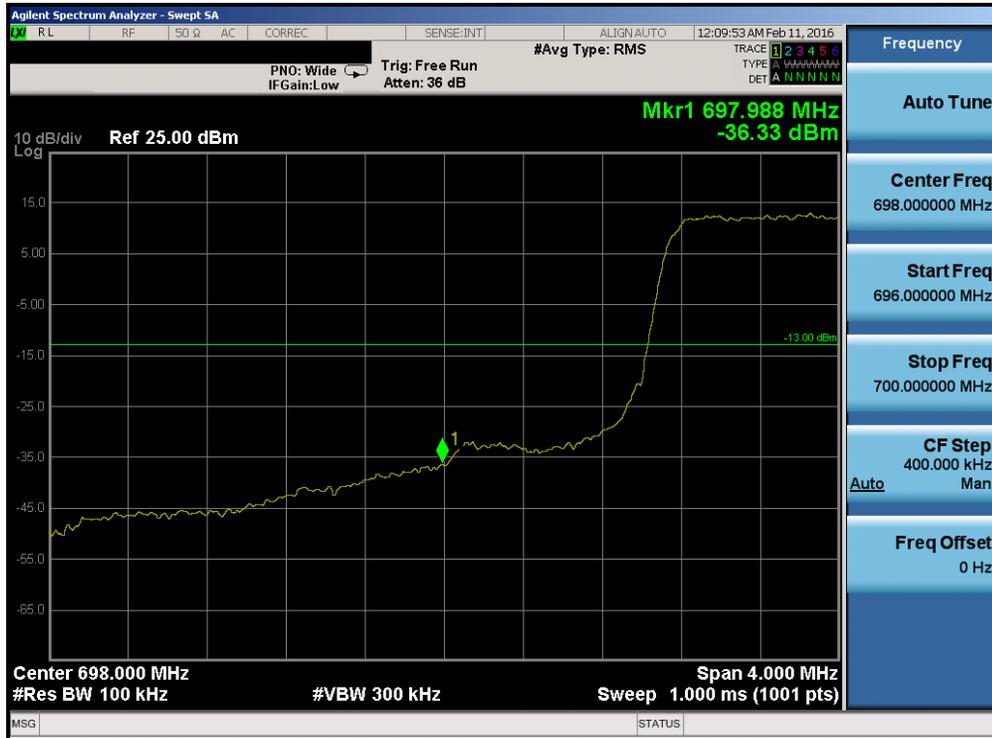

Plot 7-60. Lower Band Edge Plot (Band 12 – 1.4MHz QPSK – RB Size 6)




Plot 7-61. Upper Band Edge Plot (Band 12 – 1.4MHz QPSK – RB Size 6)

Plot 7-62. Upper Extended Band Edge Plot (Band 12 – 1.4MHz QPSK – RB Size 6)

FCC ID: ZNFV521		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1601280175.ZNF	Test Dates: 1/28-2/12/2016	EUT Type: Portable Tablet		Page 46 of 100




Plot 7-63. Lower Band Edge Plot (Band 12 – 3.0MHz QPSK – RB Size 15)

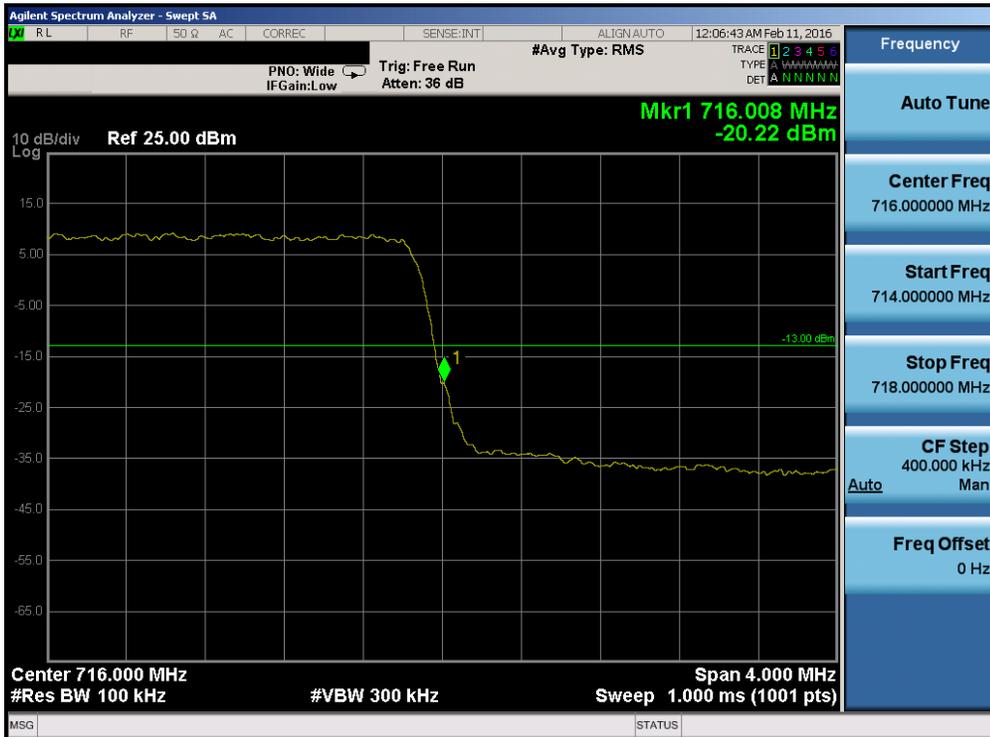

Plot 7-64. Upper Band Edge Plot (Band 12 – 3.0MHz QPSK – RB Size 15)

FCC ID: ZNFV521		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1601280175.ZNF	Test Dates: 1/28-2/12/2016	EUT Type: Portable Tablet		Page 47 of 100

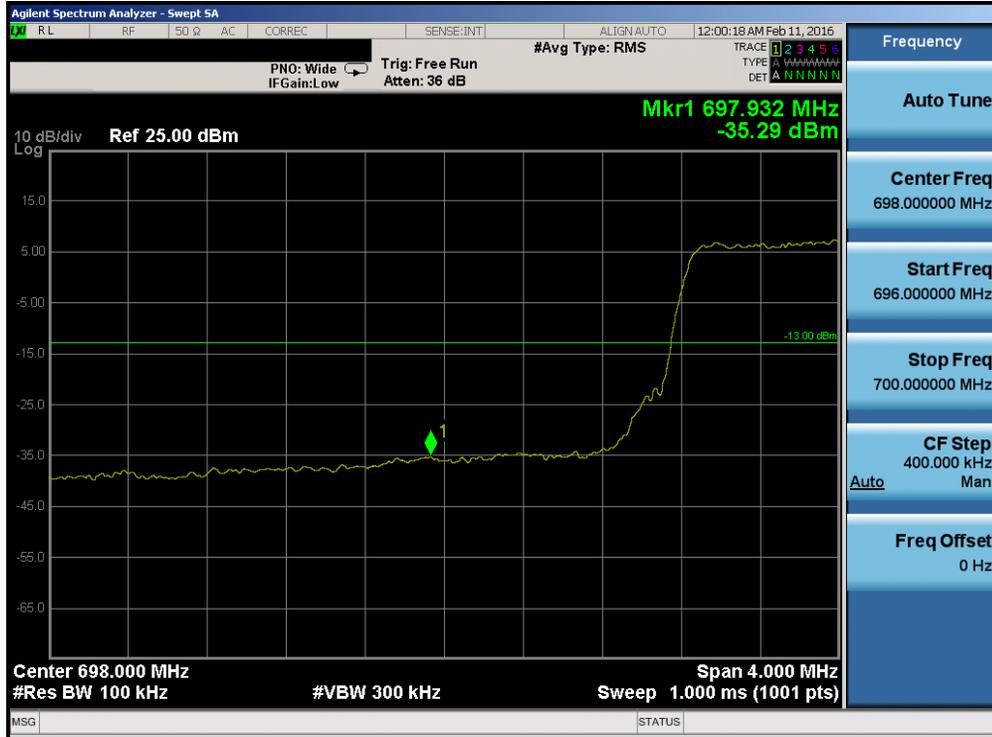


Plot 7-65. Lower Band Edge Plot (Band 12 – 5.0MHz QPSK – RB Size 25)



Plot 7-66. Upper Band Edge Plot (Band 12 – 5.0MHz QPSK – RB Size 25)

FCC ID: ZNFV521		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1601280175.ZNF	Test Dates: 1/28-2/12/2016	EUT Type: Portable Tablet		Page 48 of 100

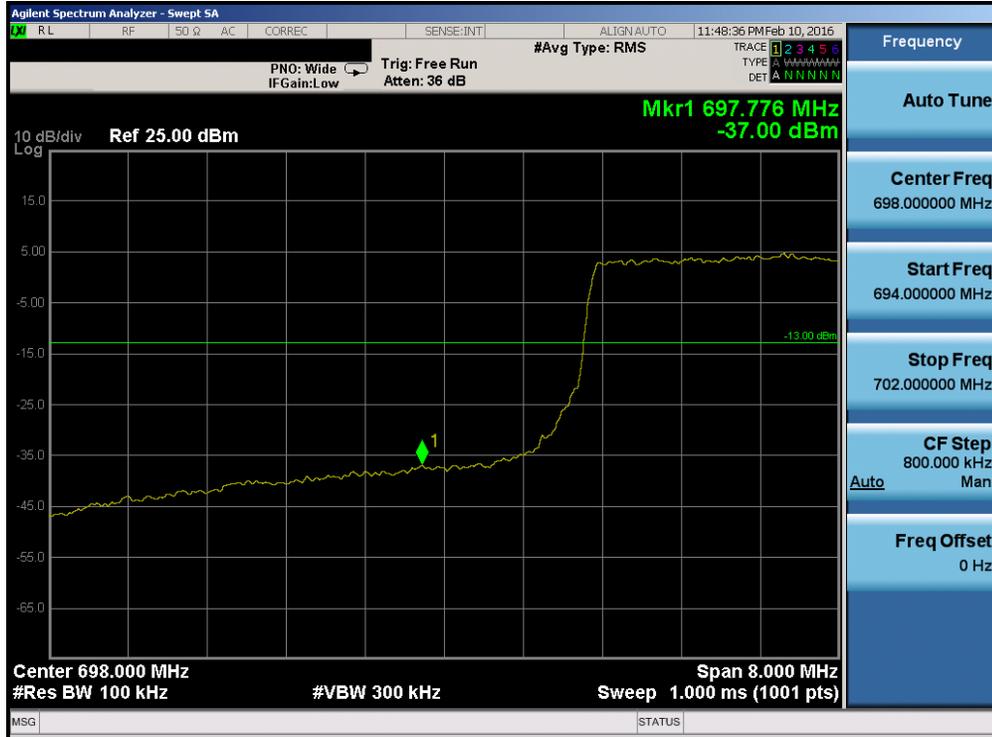

Plot 7-67. Lower Band Edge Plot (Band 12 – 10.0MHz QPSK – RB Size 50)




Plot 7-68. Upper Band Edge Plot (Band 12 – 10.0MHz QPSK – RB Size 50)

FCC ID: ZNFV521		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1601280175.ZNF	Test Dates: 1/28-2/12/2016	EUT Type: Portable Tablet		Page 49 of 100



Plot 7-69. Lower Band Edge Plot (Band 4 – 1.4MHz QPSK – RB Size 6)

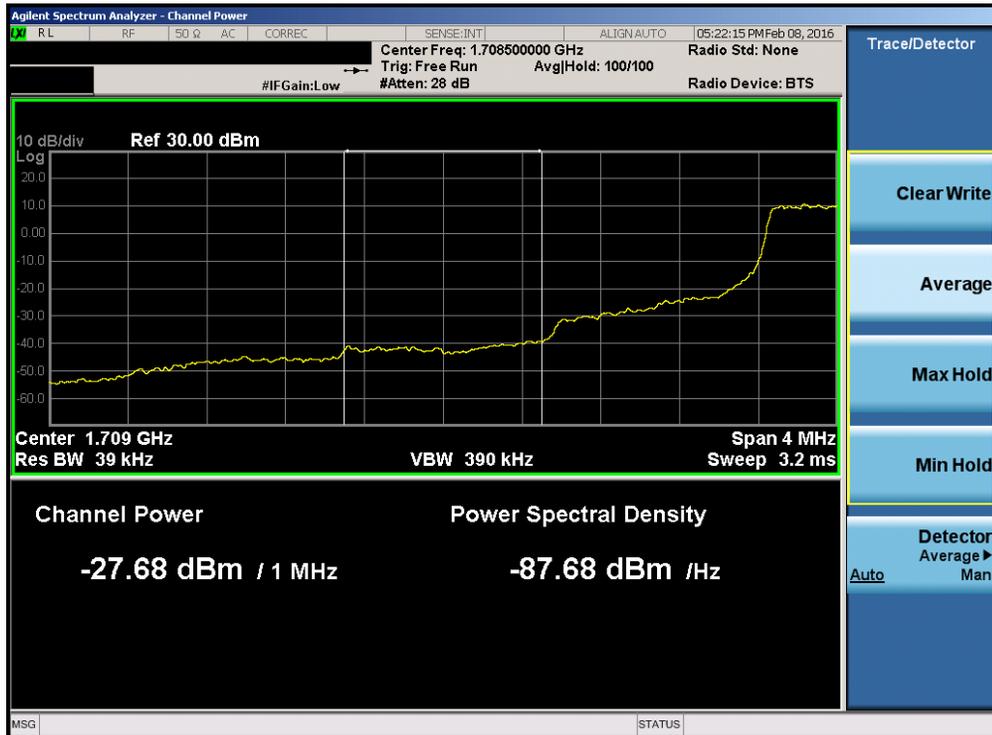


Plot 7-70. Lower Extended Band Edge Plot (Band 4 – 1.4MHz QPSK – RB Size 6)

FCC ID: ZNFV521		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1601280175.ZNF	Test Dates: 1/28-2/12/2016	EUT Type: Portable Tablet		Page 50 of 100




Plot 7-71. Upper Band Edge Plot (Band 4 – 1.4MHz QPSK – RB Size 6)

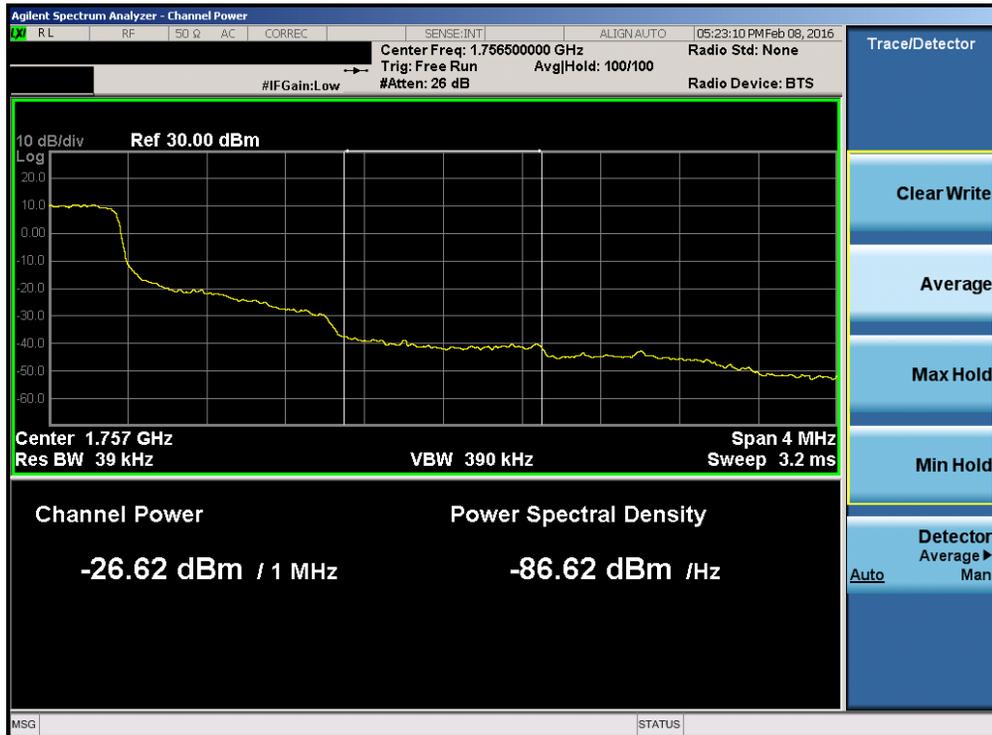


Plot 7-72. Upper Extended Band Edge Plot (Band 4 – 1.4MHz QPSK – RB Size 6)

FCC ID: ZNFV521		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1601280175.ZNF	Test Dates: 1/28-2/12/2016	EUT Type: Portable Tablet		Page 51 of 100

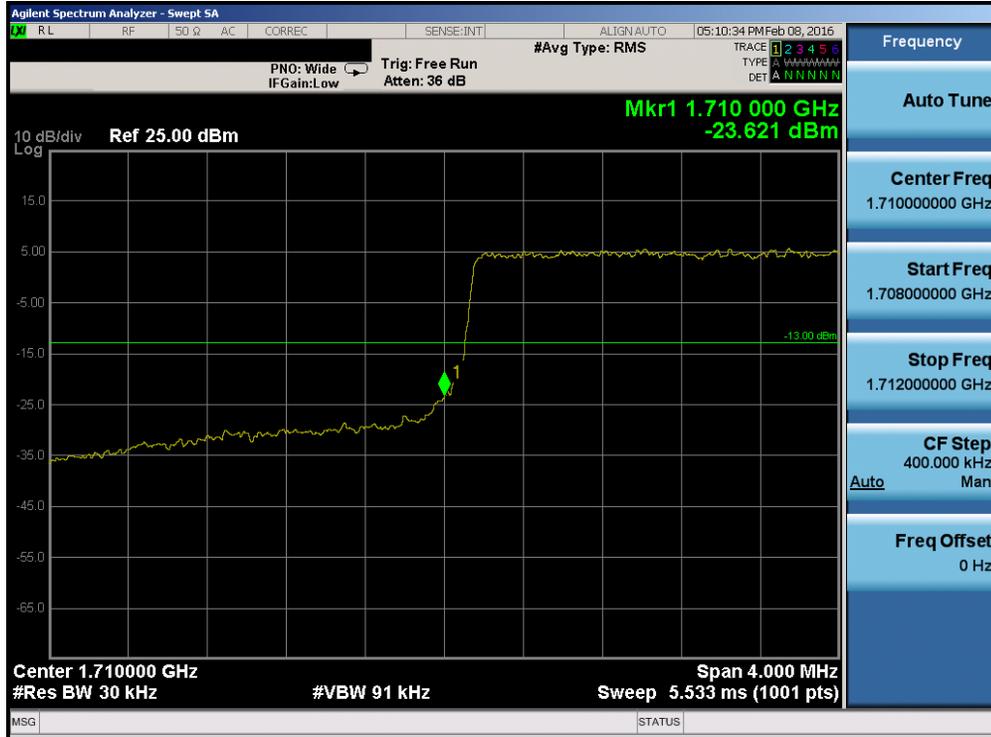


Plot 7-73. Lower Band Edge Plot (Band 4 – 3.0MHz QPSK – RB Size 15)

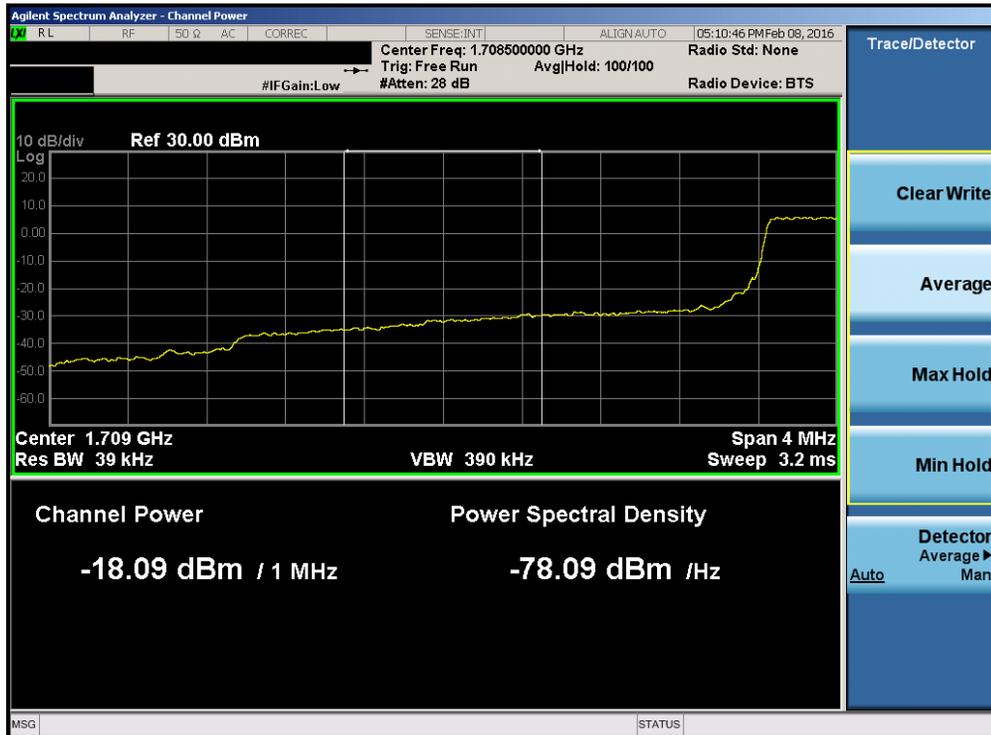


Plot 7-74. Lower Extended Band Edge Plot (Band 4 – 3.0MHz QPSK – RB Size 15)

FCC ID: ZNFV521		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1601280175.ZNF	Test Dates: 1/28-2/12/2016	EUT Type: Portable Tablet		Page 52 of 100

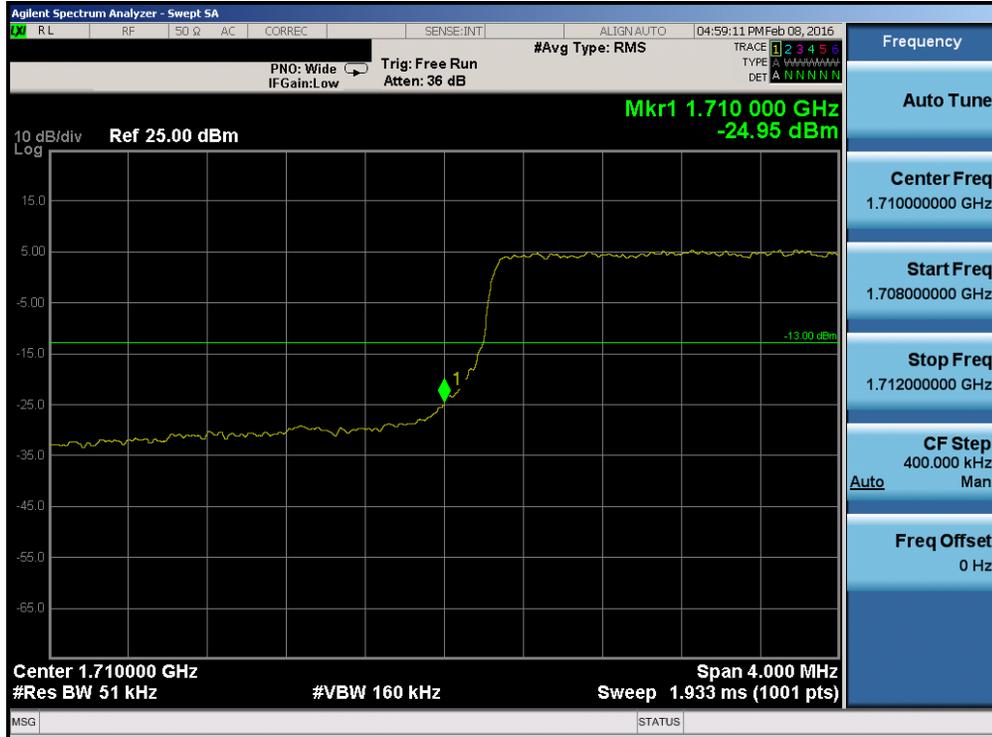

Plot 7-77. Lower Band Edge Plot (Band 4 – 5.0MHz QPSK – RB Size 25)

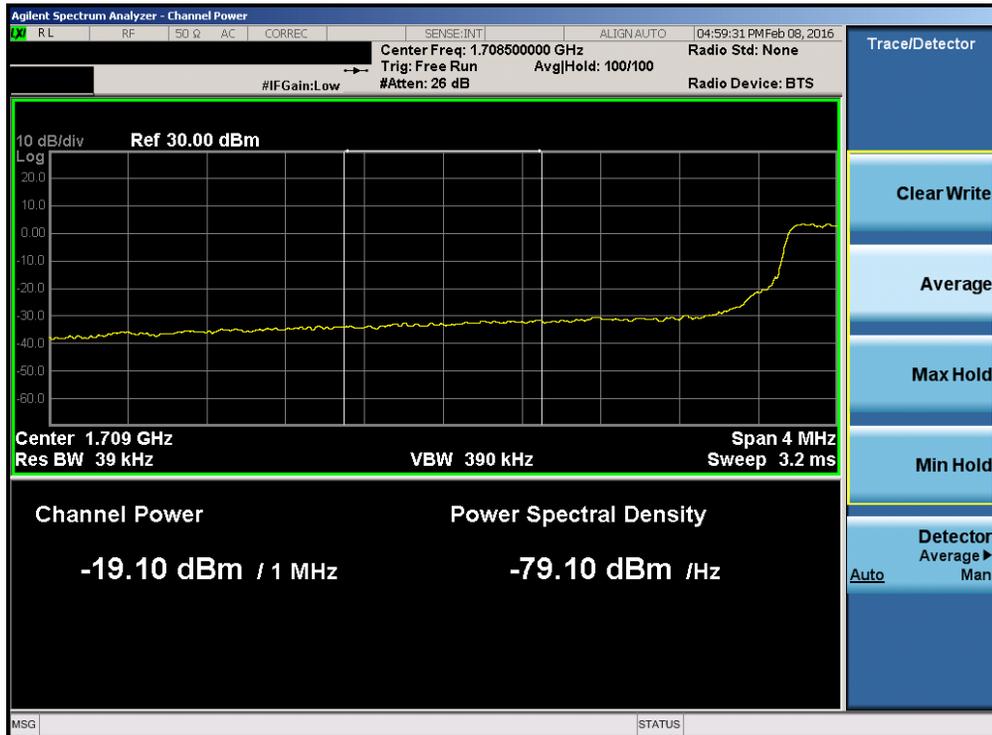


Plot 7-78. Lower Extended Band Edge Plot (Band 4 – 5.0MHz QPSK – RB Size 25)

FCC ID: ZNFV521		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1601280175.ZNF	Test Dates: 1/28-2/12/2016	EUT Type: Portable Tablet		Page 54 of 100




Plot 7-79. Upper Band Edge Plot (Band 4 – 5.0MHz QPSK – RB Size 25)

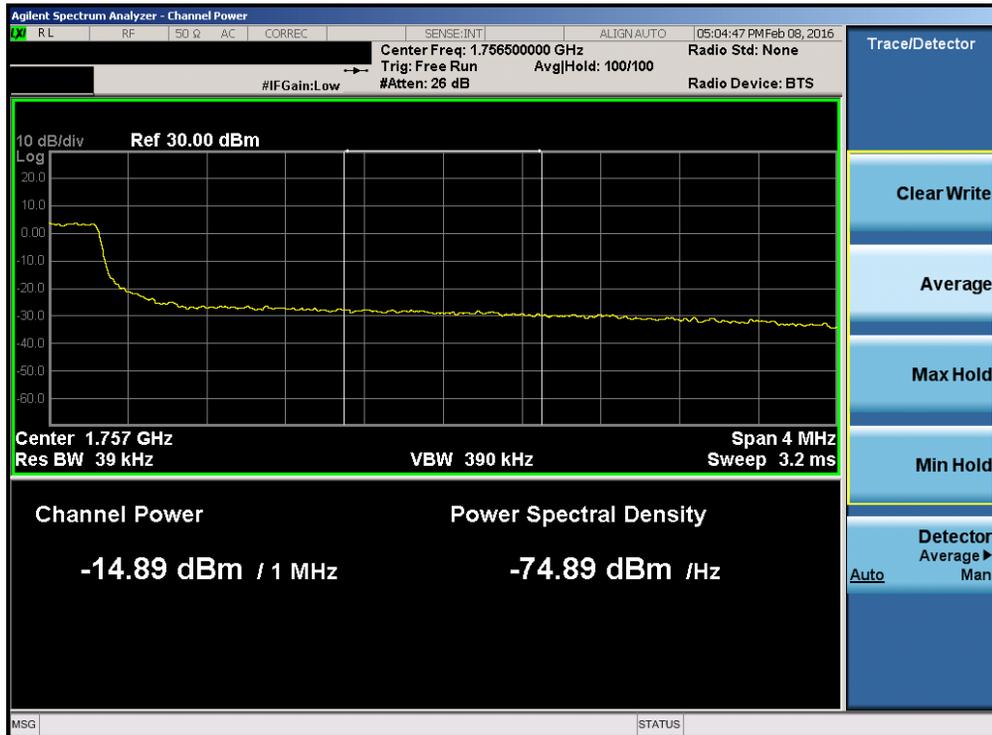


Plot 7-80. Upper Extended Band Edge Plot (Band 4 – 5.0MHz QPSK – RB Size 25)

FCC ID: ZNFV521		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1601280175.ZNF	Test Dates: 1/28-2/12/2016	EUT Type: Portable Tablet		Page 55 of 100

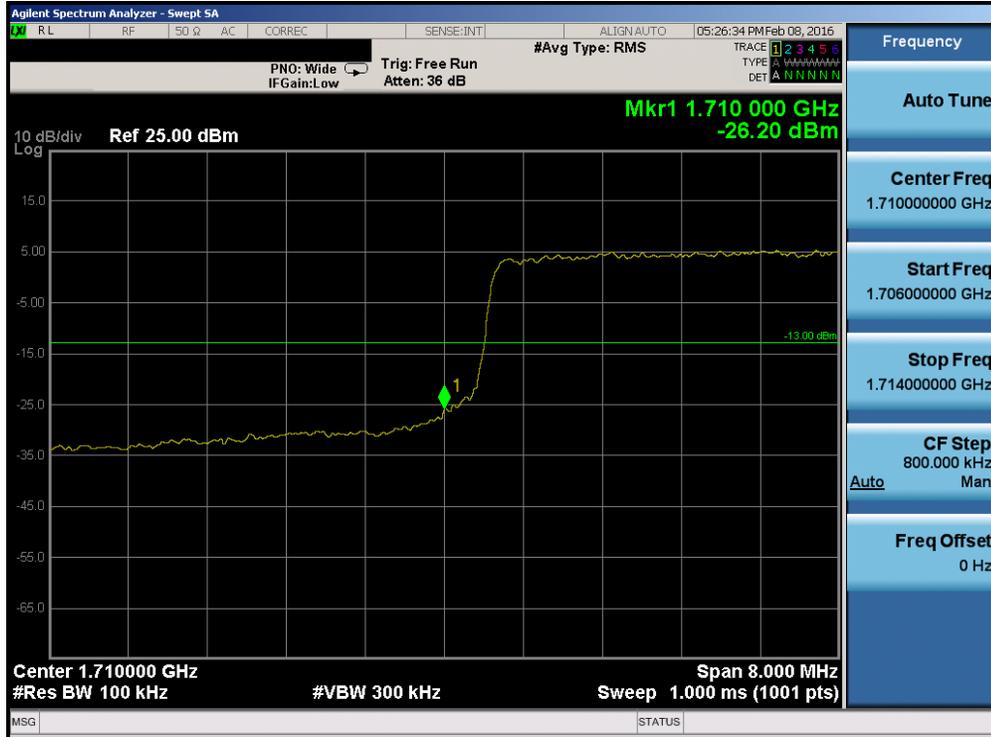

Plot 7-81. Lower Band Edge Plot (Band 4 – 10.0MHz QPSK – RB Size 50)

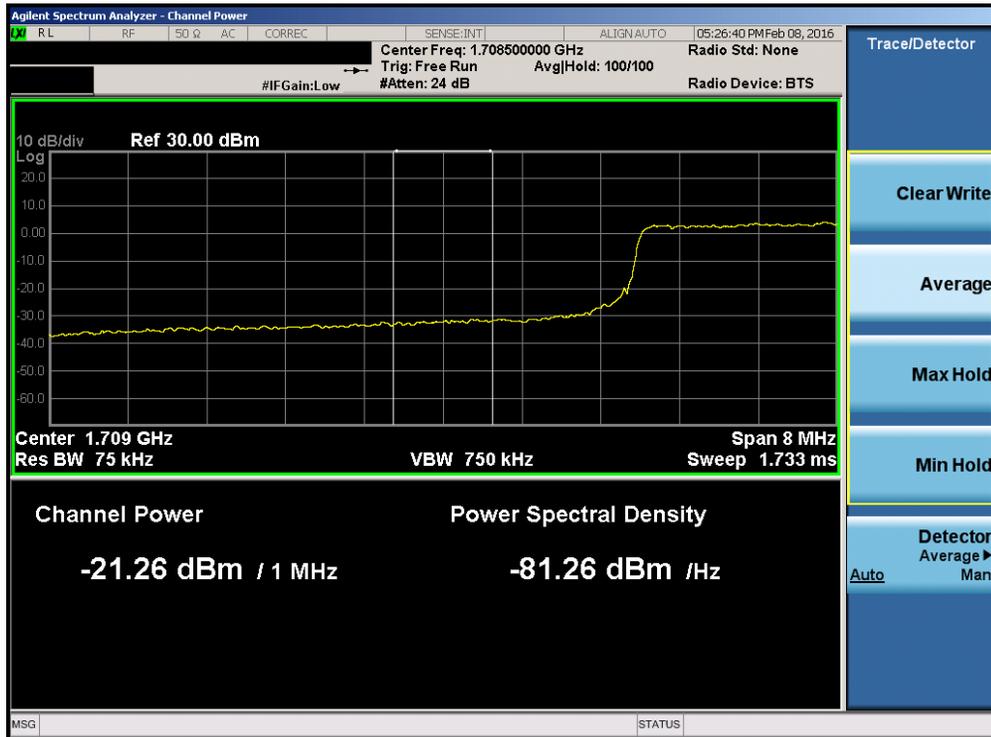


Plot 7-82. Lower Extended Band Edge Plot (Band 4 – 10.0MHz QPSK – RB Size 50)

FCC ID: ZNFV521		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1601280175.ZNF	Test Dates: 1/28-2/12/2016	EUT Type: Portable Tablet		Page 56 of 100




Plot 7-83. Upper Band Edge Plot (Band 4 – 10.0MHz QPSK – RB Size 50)

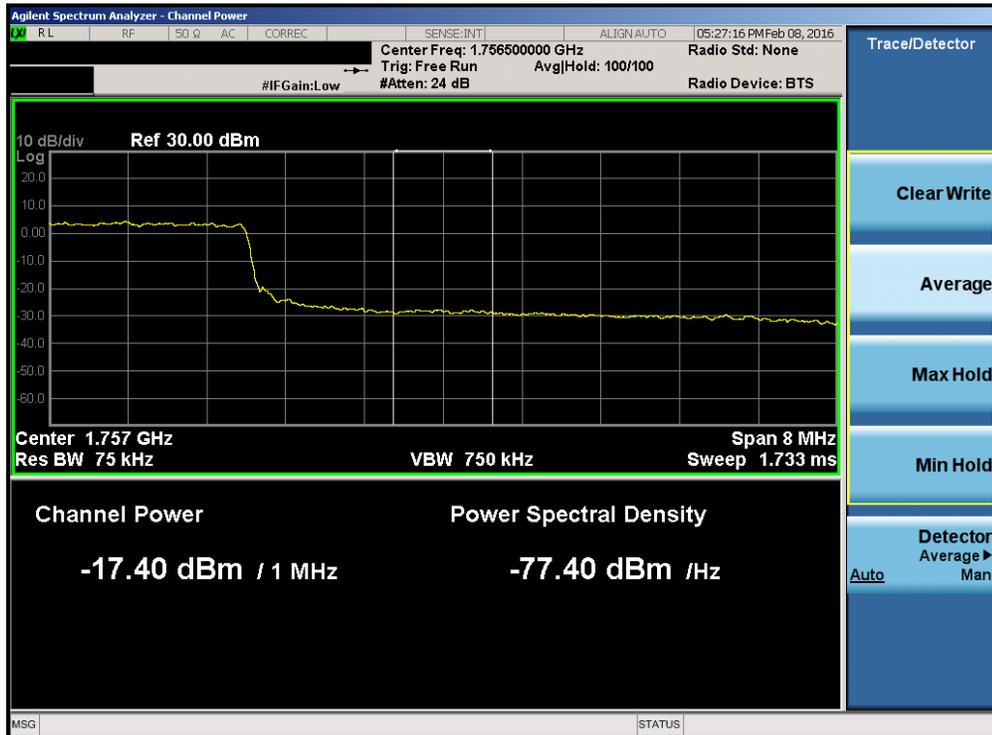


Plot 7-84. Upper Extended Band Edge Plot (Band 4 – 10.0MHz QPSK – RB Size 50)

FCC ID: ZNFV521		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1601280175.ZNF	Test Dates: 1/28-2/12/2016	EUT Type: Portable Tablet		Page 57 of 100

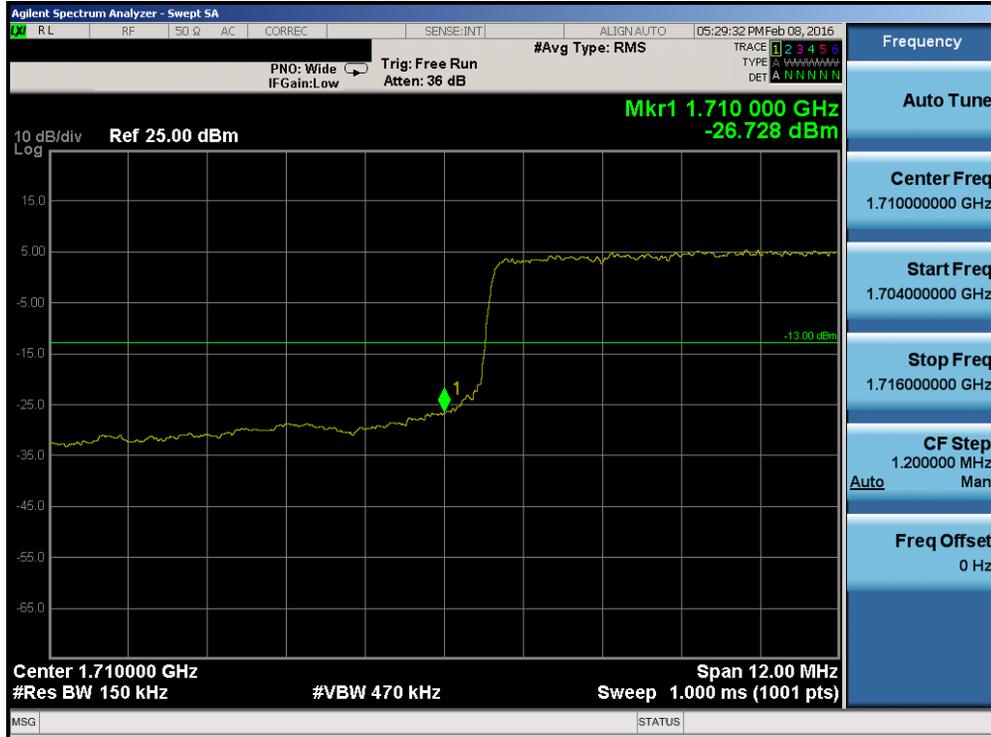


Plot 7-85. Lower Band Edge Plot (Band 4 – 15.0MHz QPSK – RB Size 75)

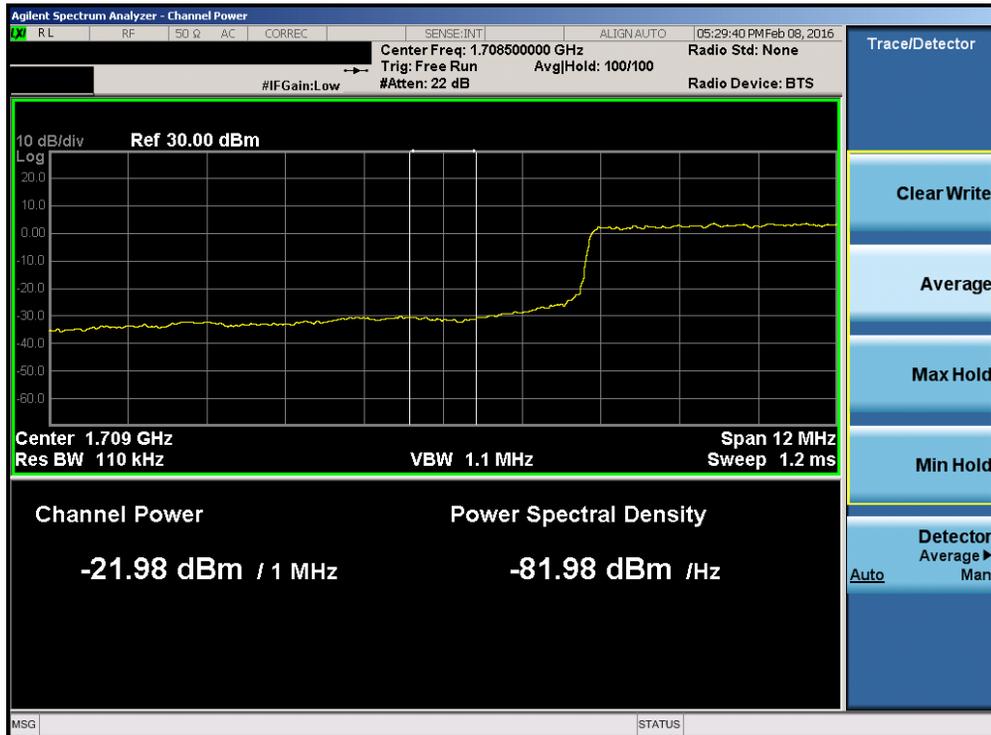


Plot 7-86. Lower Extended Band Edge Plot (Band 4 – 15.0MHz QPSK – RB Size 75)

FCC ID: ZNFV521		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1601280175.ZNF	Test Dates: 1/28-2/12/2016	EUT Type: Portable Tablet		Page 58 of 100

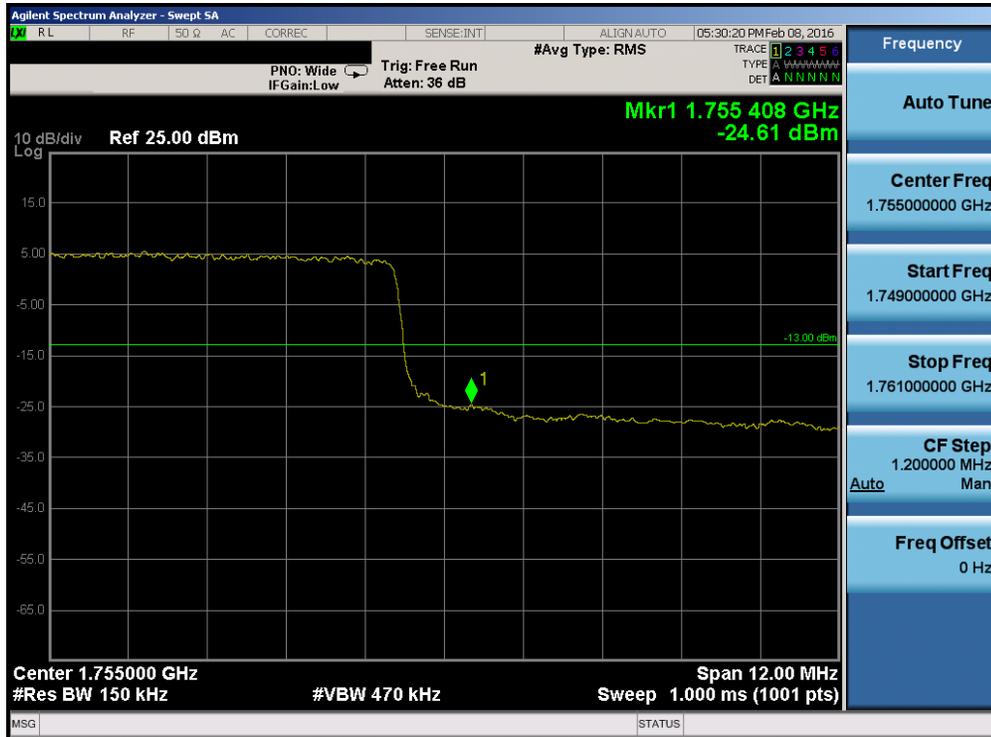


Plot 7-87. Upper Band Edge Plot (Band 4 – 15.0MHz QPSK – RB Size 75)

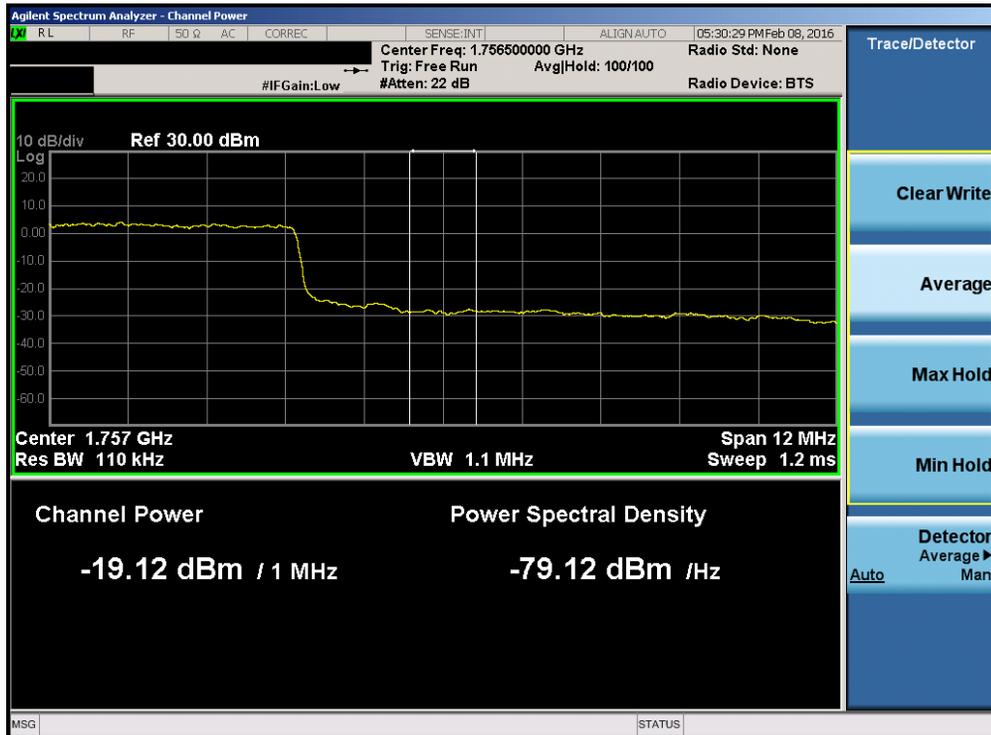


Plot 7-88. Upper Extended Band Edge Plot (Band 4 – 15.0MHz QPSK – RB Size 75)

FCC ID: ZNFV521		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1601280175.ZNF	Test Dates: 1/28-2/12/2016	EUT Type: Portable Tablet		Page 59 of 100

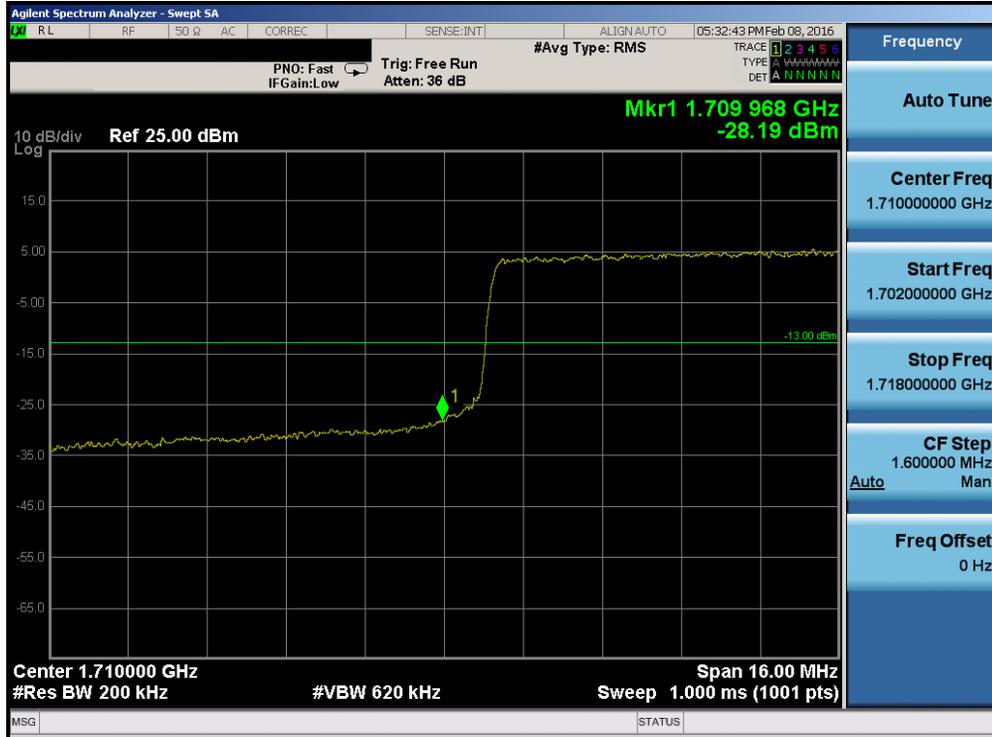


Plot 7-89. Lower Band Edge Plot (Band 4 – 20.0MHz QPSK – RB Size 100)

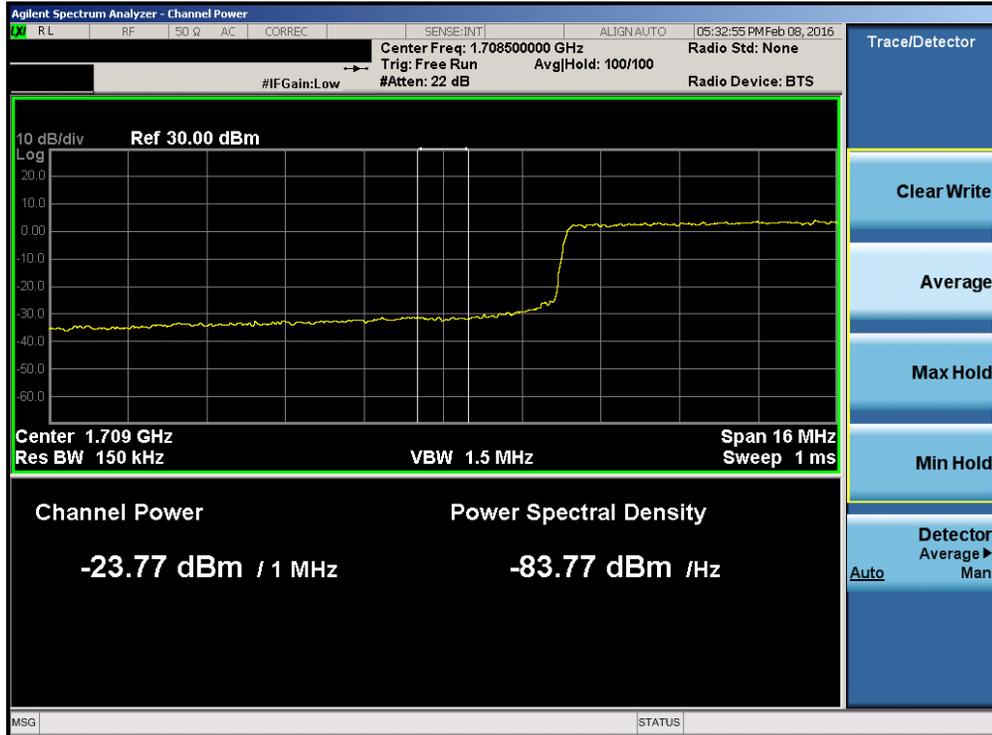


Plot 7-90. Lower Extended Band Edge Plot (Band 4 – 20.0MHz QPSK – RB Size 100)

FCC ID: ZNFV521		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1601280175.ZNF	Test Dates: 1/28-2/12/2016	EUT Type: Portable Tablet		Page 60 of 100

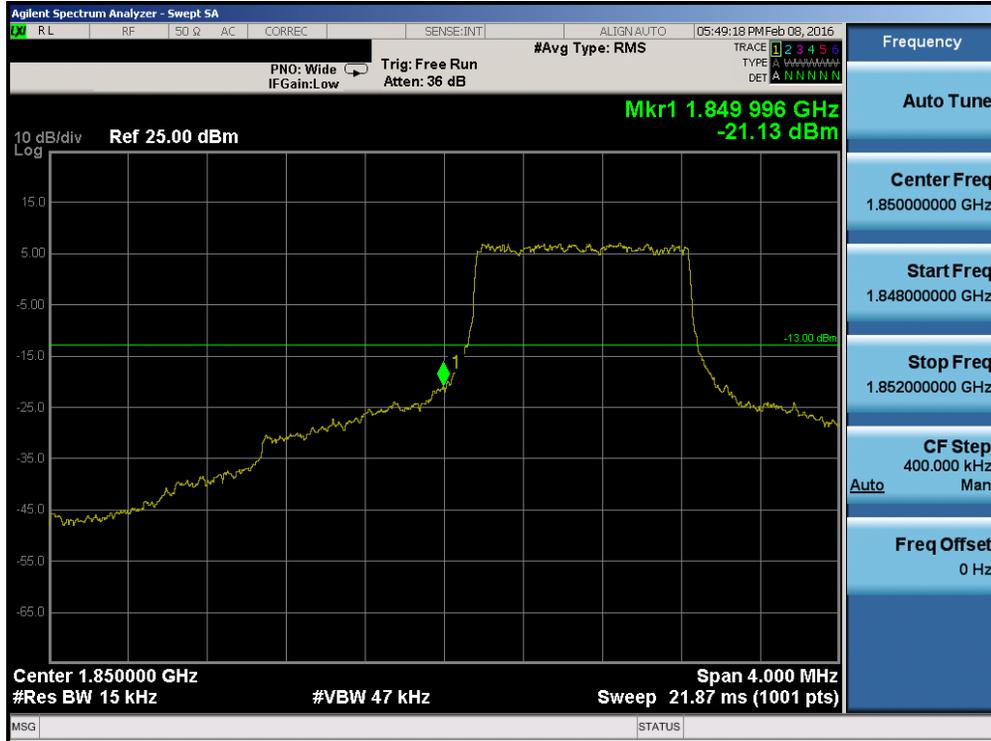

Plot 7-93. Lower Band Edge Plot (Band 2 – 1.4MHz QPSK – RB Size 6)

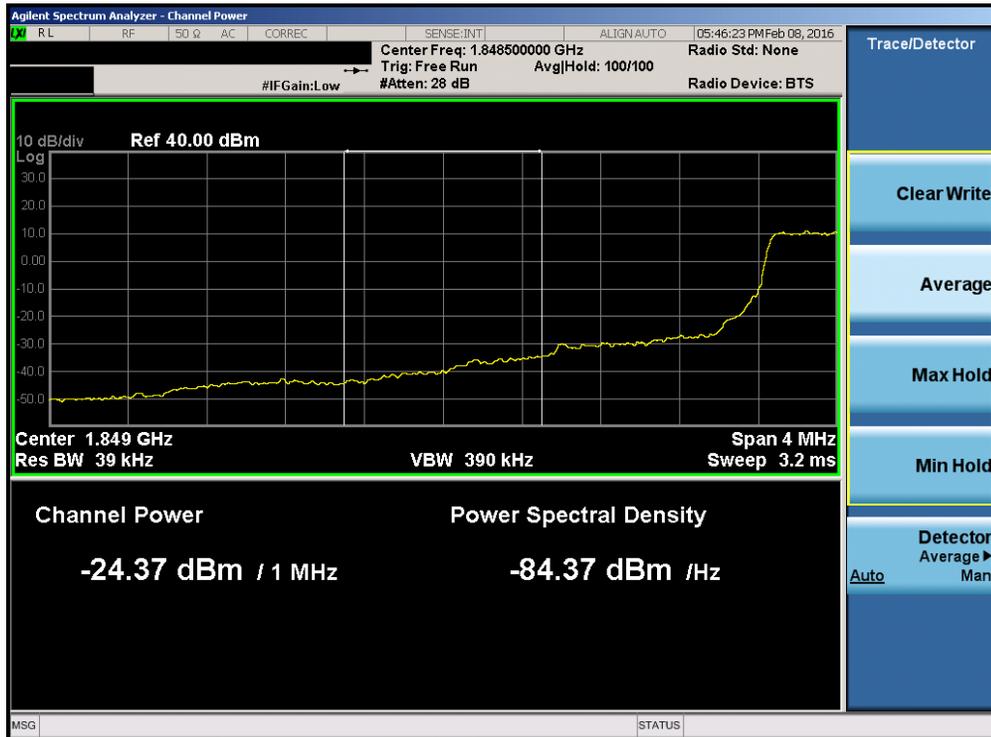


Plot 7-94. Lower Extended Band Edge Plot (Band 2 – 1.4MHz QPSK – RB Size 6)

FCC ID: ZNFV521		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1601280175.ZNF	Test Dates: 1/28-2/12/2016	EUT Type: Portable Tablet		Page 62 of 100




Plot 7-95. Upper Band Edge Plot (Band 2 – 1.4MHz QPSK – RB Size 6)

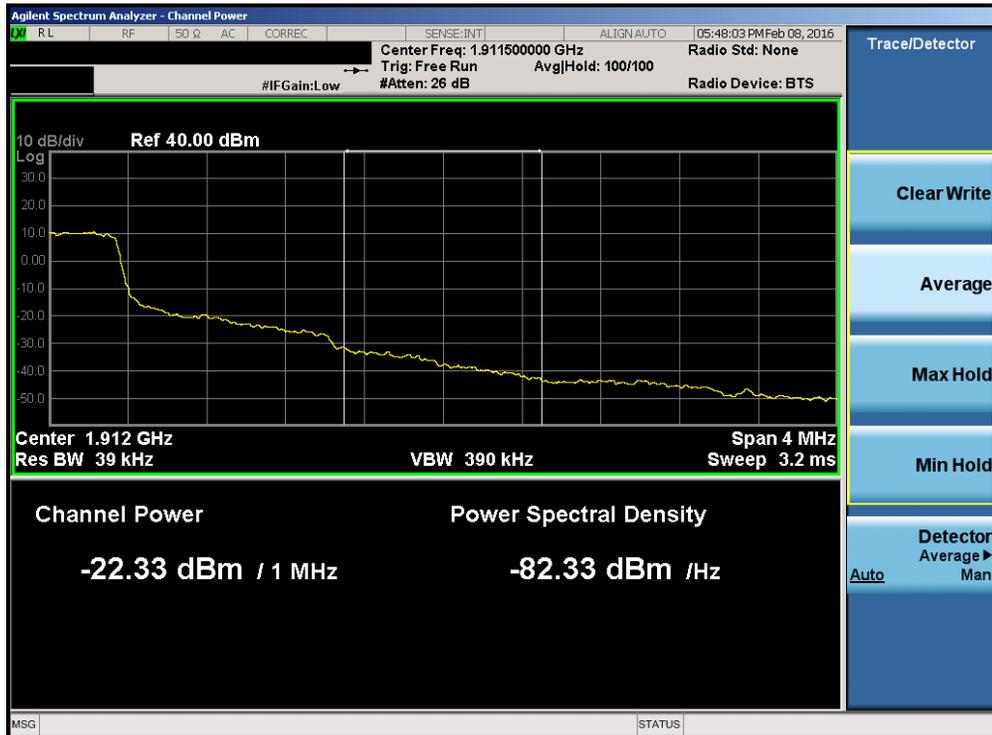


Plot 7-96. Upper Extended Band Edge Plot (Band 2 – 1.4MHz QPSK – RB Size 6)

FCC ID: ZNFV521		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1601280175.ZNF	Test Dates: 1/28-2/12/2016	EUT Type: Portable Tablet		Page 63 of 100

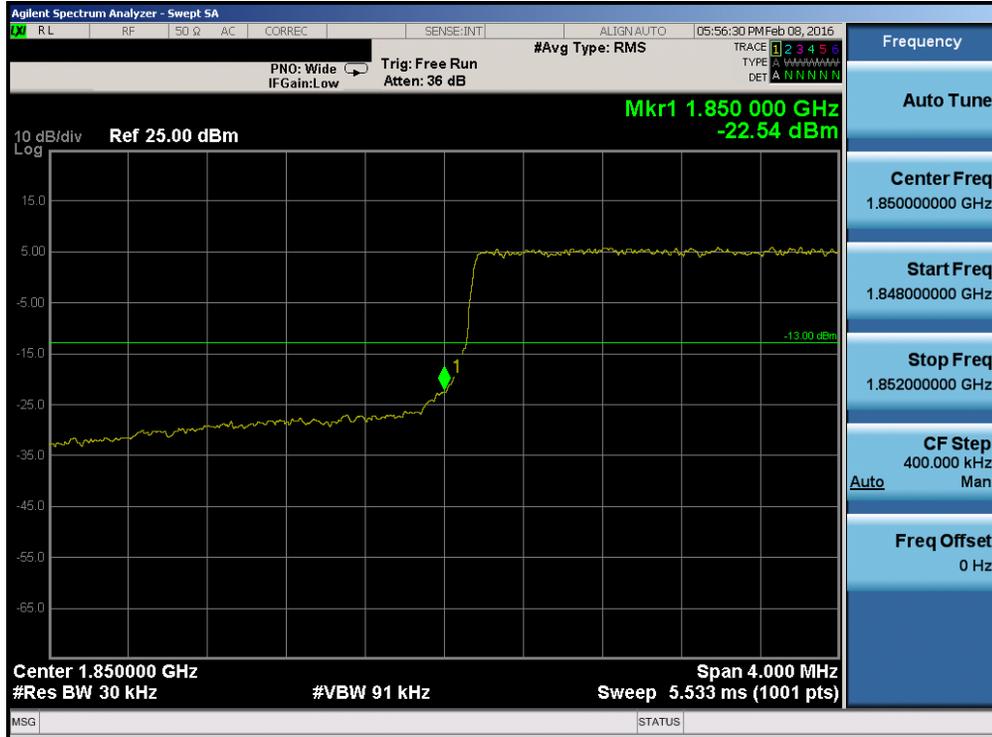

Plot 7-97. Lower Band Edge Plot (Band 2 – 3.0MHz QPSK – RB Size 15)

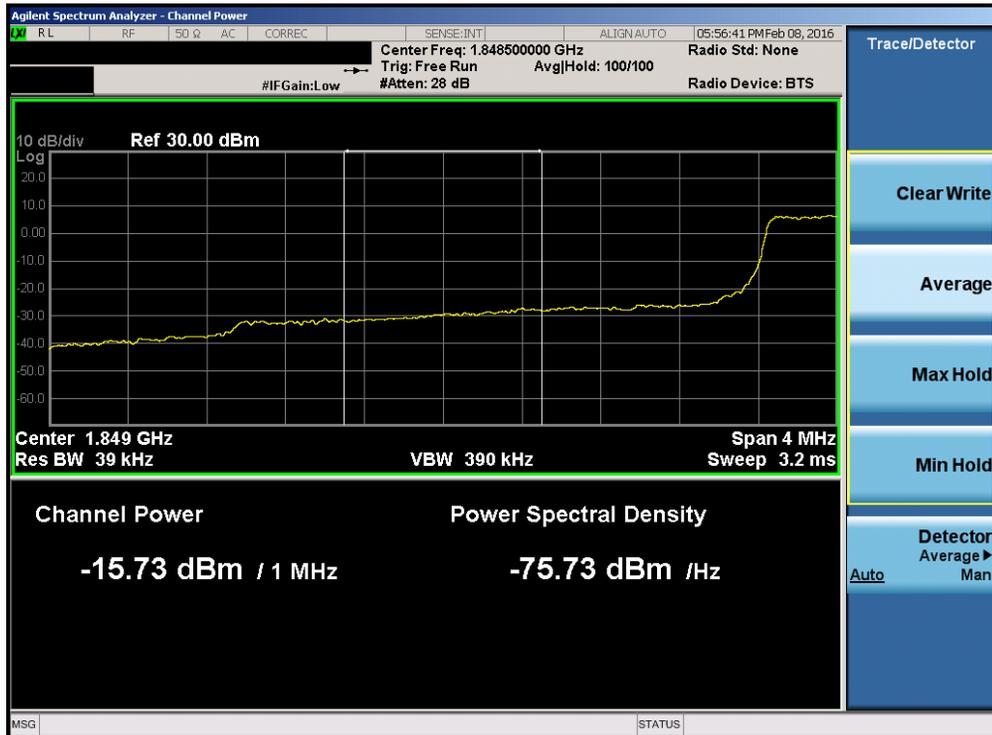


Plot 7-98. Lower Extended Band Edge Plot (Band 2 – 3.0MHz QPSK – RB Size 15)

FCC ID: ZNFV521		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1601280175.ZNF	Test Dates: 1/28-2/12/2016	EUT Type: Portable Tablet		Page 64 of 100



Plot 7-99. Upper Band Edge Plot (Band 2 – 3.0MHz QPSK – RB Size 15)

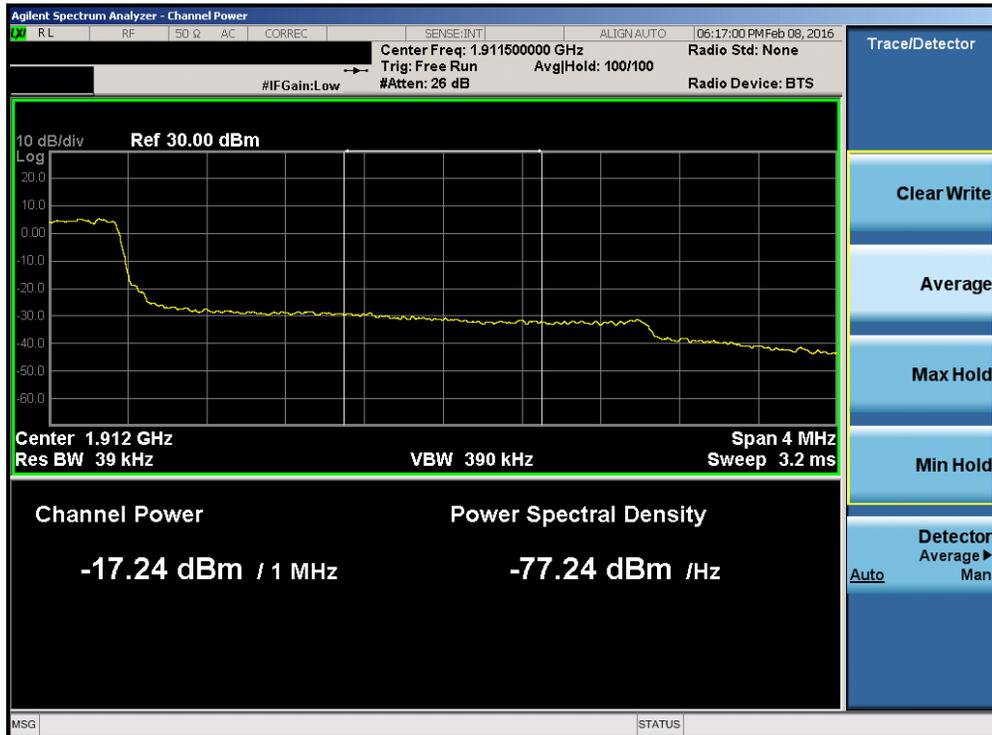


Plot 7-100. Upper Extended Band Edge Plot (Band 2 – 3.0MHz QPSK – RB Size 15)

FCC ID: ZNFV521		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1601280175.ZNF	Test Dates: 1/28-2/12/2016	EUT Type: Portable Tablet		Page 65 of 100



Plot 7-103. Upper Band Edge Plot (Band 2 – 5.0MHz QPSK – RB Size 25)

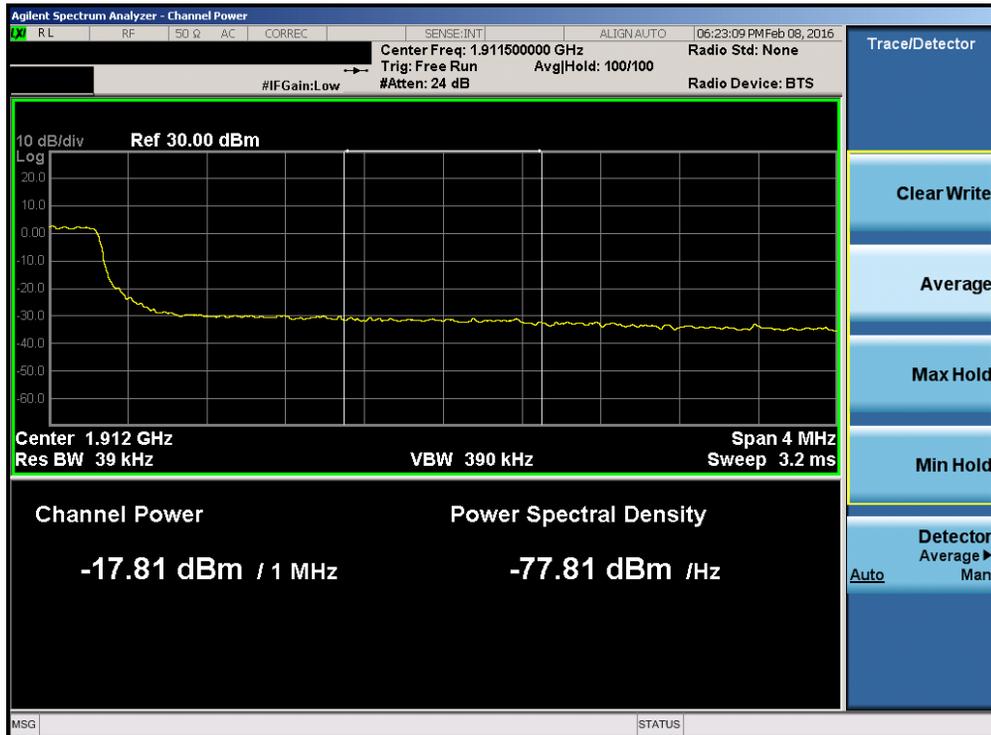


Plot 7-104. Upper Extended Band Edge Plot (Band 2 – 5.0MHz QPSK – RB Size 25)

FCC ID: ZNFV521		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1601280175.ZNF	Test Dates: 1/28-2/12/2016	EUT Type: Portable Tablet		Page 67 of 100




Plot 7-105. Lower Band Edge Plot (Band 2 – 10.0MHz QPSK – RB Size 50)

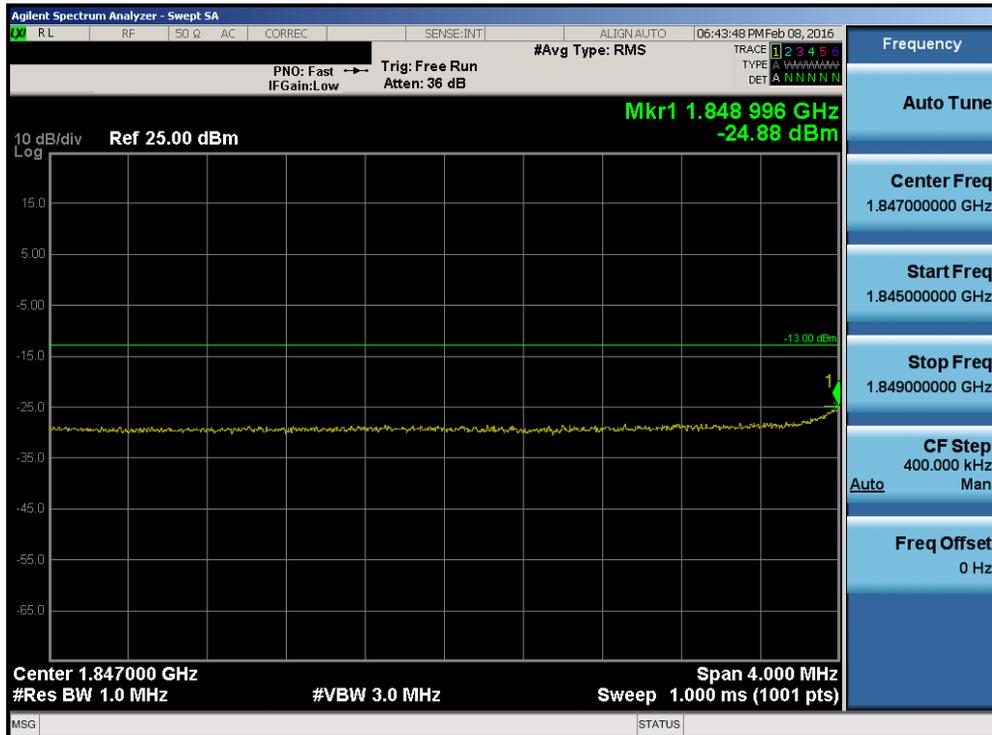


Plot 7-106. Lower Extended Band Edge Plot (Band 2 – 10.0MHz QPSK – RB Size 50)

FCC ID: ZNFV521	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1601280175.ZNF	Test Dates: 1/28-2/12/2016	EUT Type: Portable Tablet		Page 68 of 100

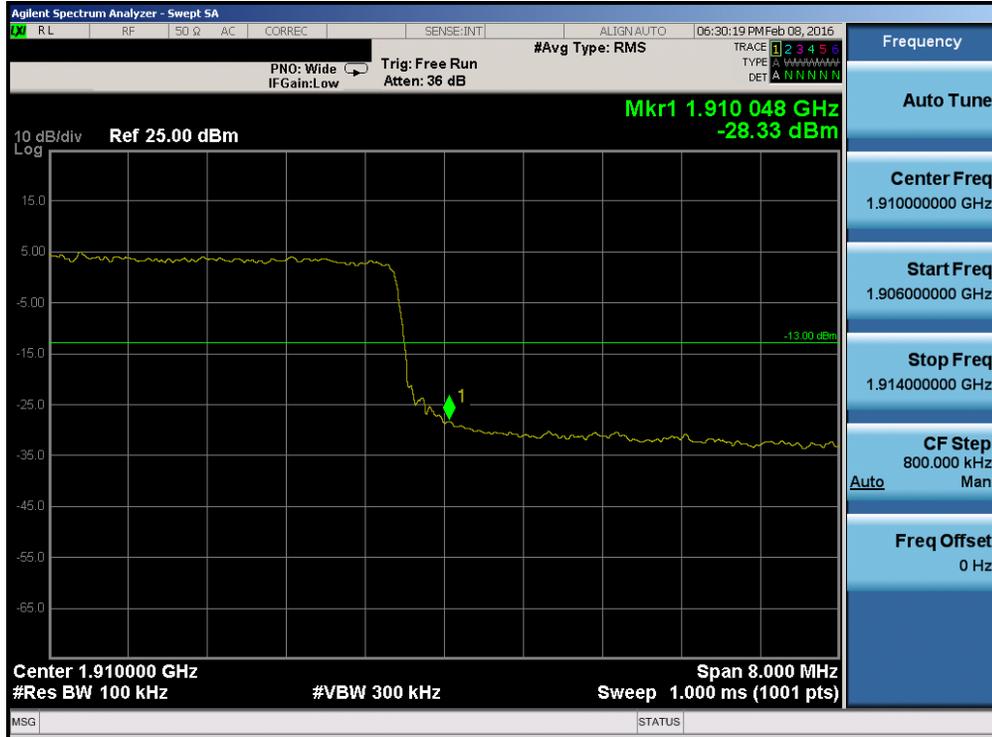


Plot 7-107. Upper Band Edge Plot (Band 2 – 10.0MHz QPSK – RB Size 50)

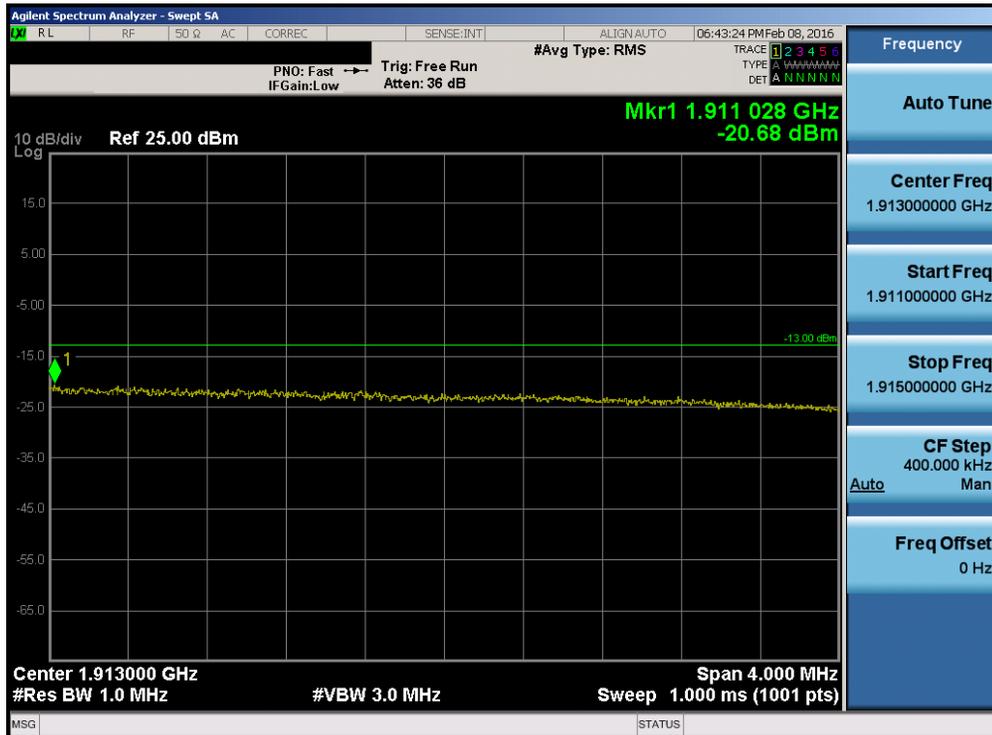


Plot 7-108. Upper Extended Band Edge Plot (Band 2 – 10.0MHz QPSK – RB Size 50)

FCC ID: ZNFV521	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1601280175.ZNF	Test Dates: 1/28-2/12/2016	EUT Type: Portable Tablet		Page 69 of 100

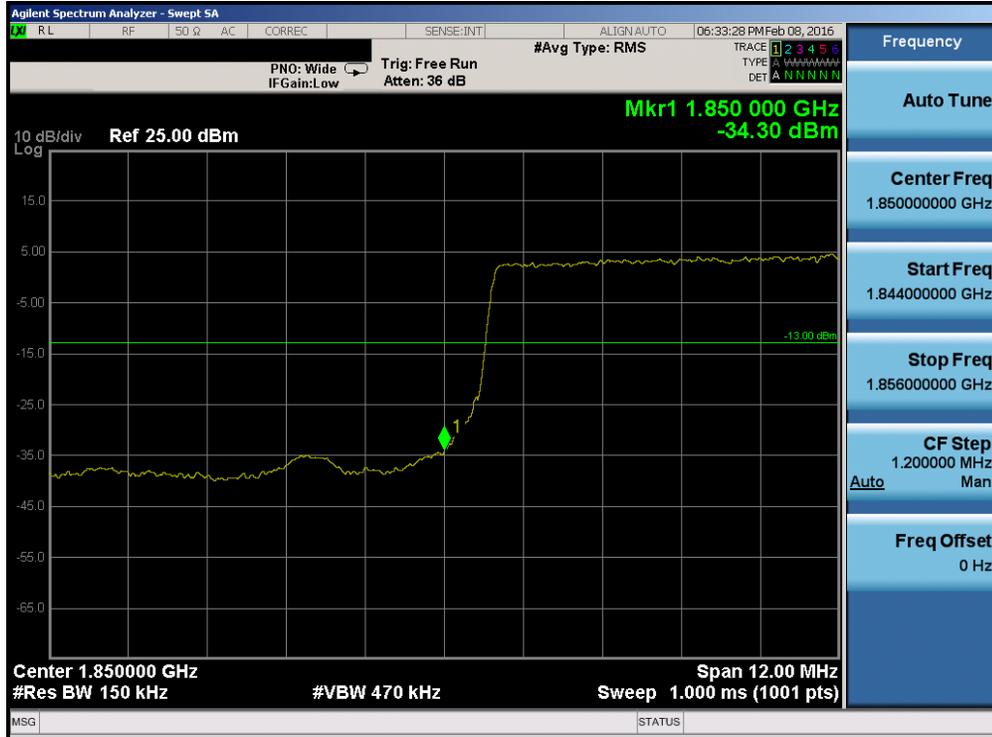


Plot 7-109. Lower Band Edge Plot (Band 2 – 15.0MHz QPSK – RB Size 75)

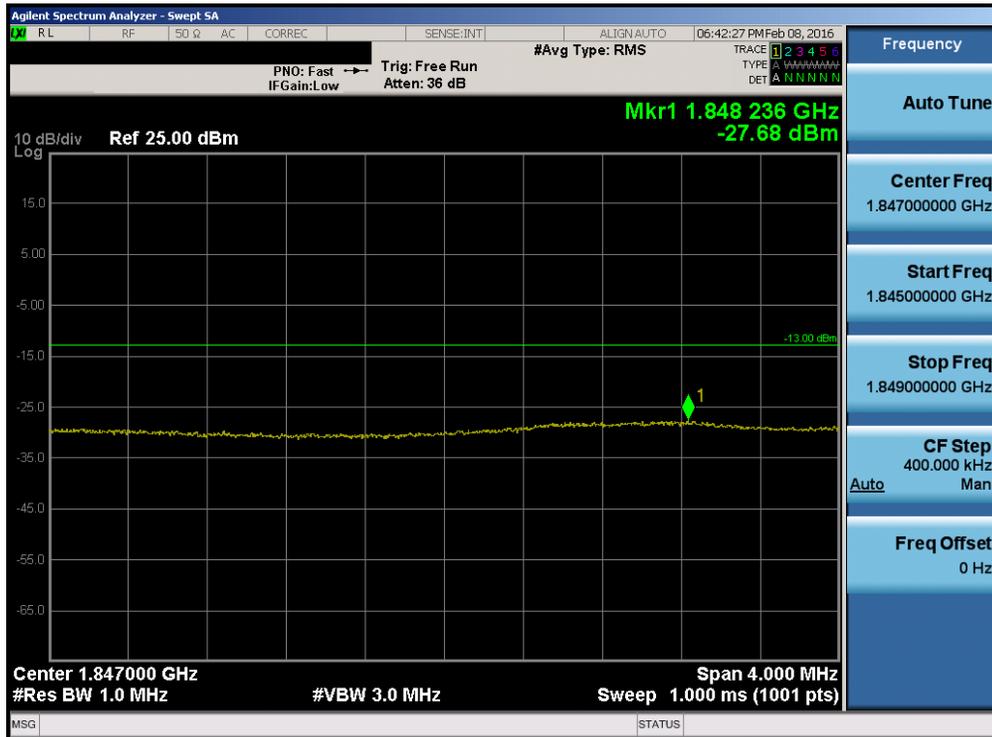

Plot 7-110. Lower Extended Band Edge Plot (Band 2 – 15.0MHz QPSK – RB Size 75)

FCC ID: ZNFV521		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1601280175.ZNF	Test Dates: 1/28-2/12/2016	EUT Type: Portable Tablet		Page 70 of 100

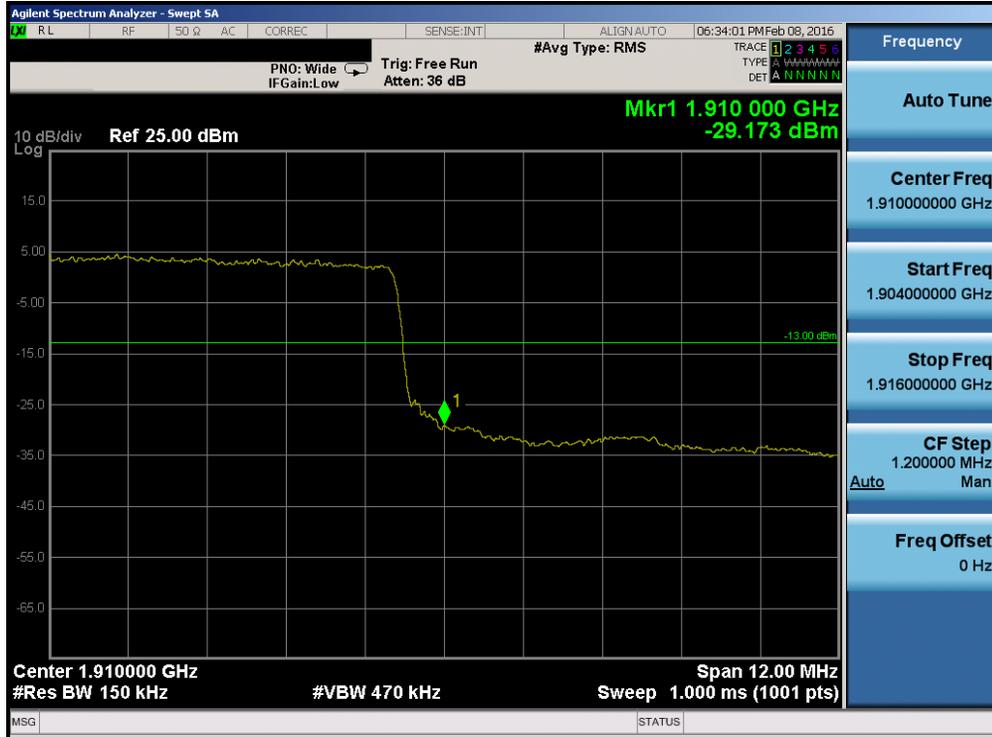


Plot 7-111. Upper Band Edge Plot (Band 2 – 15.0MHz QPSK – RB Size 75)




Plot 7-112. Upper Extended Band Edge Plot (Band 2 – 15.0MHz QPSK – RB Size 75)

FCC ID: ZNFV521		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1601280175.ZNF	Test Dates: 1/28-2/12/2016	EUT Type: Portable Tablet		Page 71 of 100

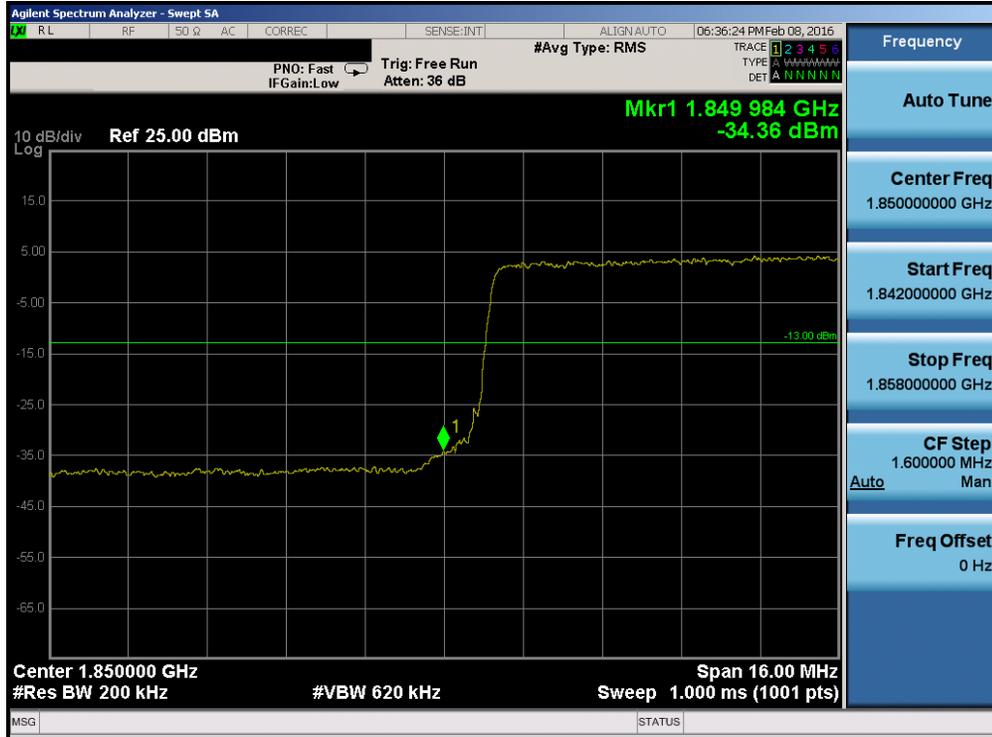


Plot 7-113. Lower Band Edge Plot (Band 2 – 20.0MHz QPSK – RB Size 100)

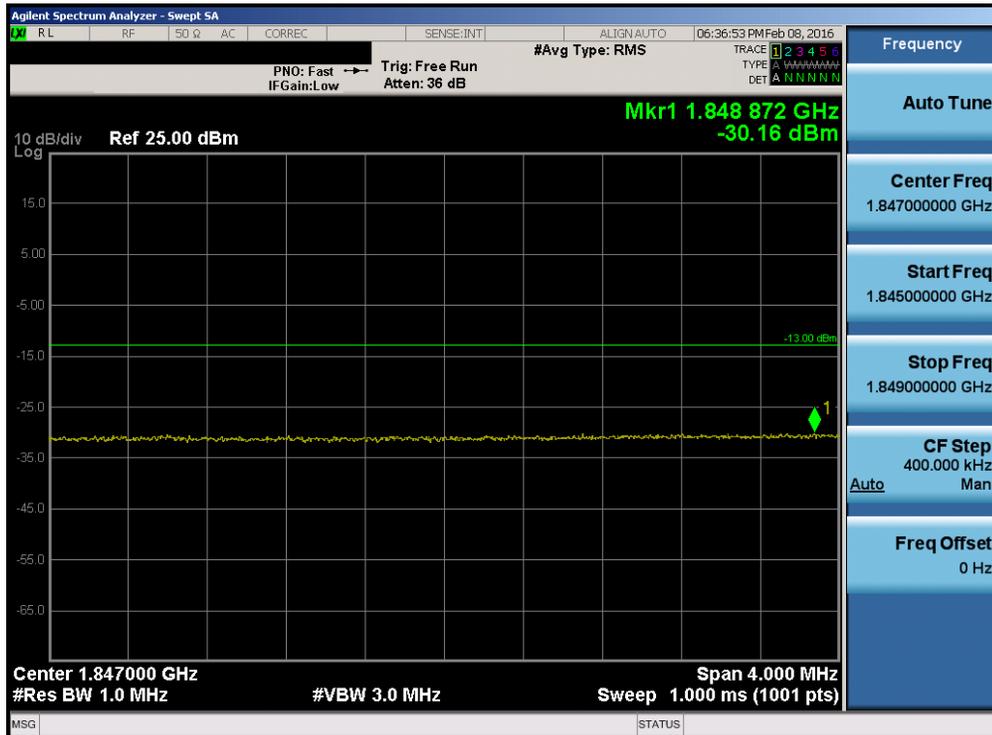


Plot 7-114. Lower Extended Band Edge Plot (Band 2 – 20.0MHz QPSK – RB Size 100)

FCC ID: ZNFV521		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1601280175.ZNF	Test Dates: 1/28-2/12/2016	EUT Type: Portable Tablet		Page 72 of 100

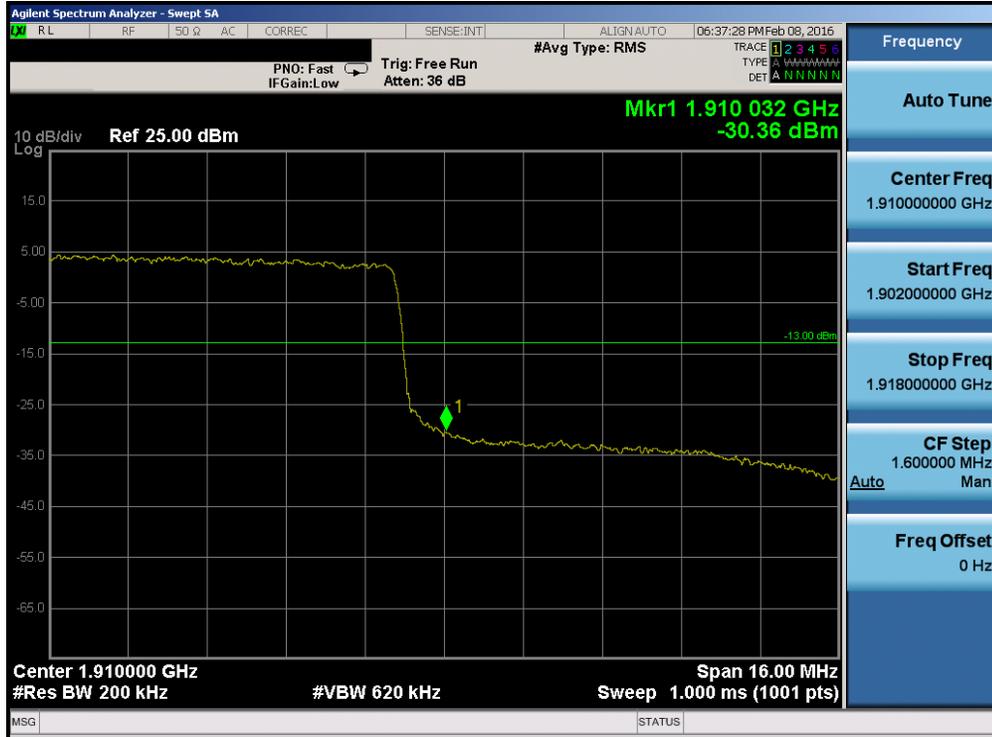

Plot 7-115. Upper Band Edge Plot (Band 2 – 20.0MHz QPSK – RB Size 100)

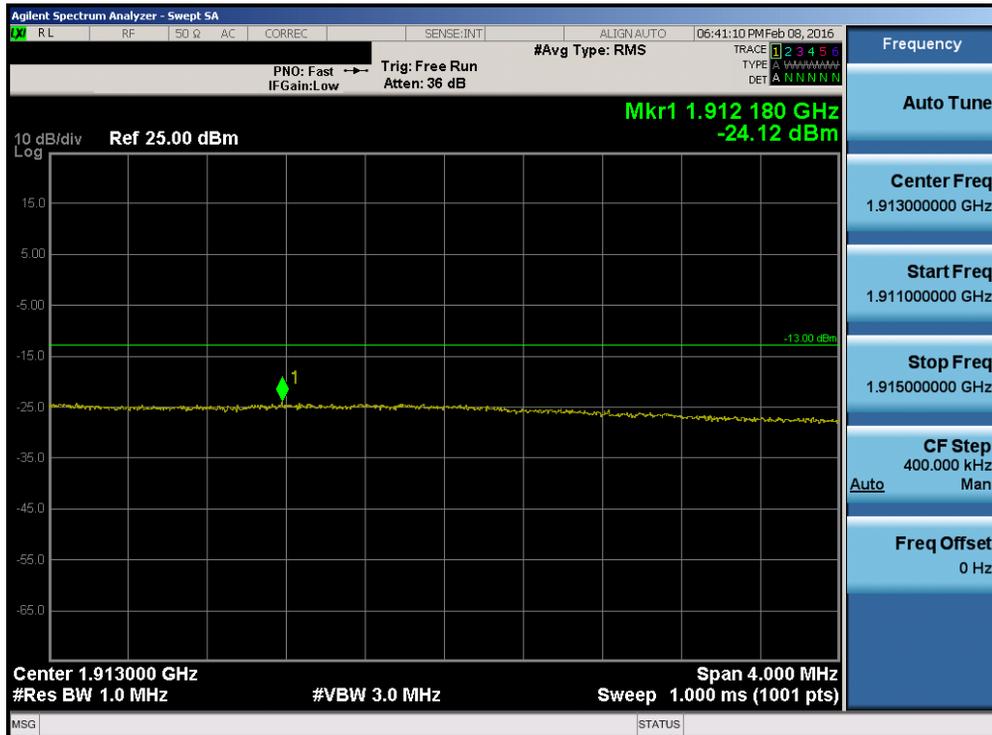

Plot 7-116. Upper Extended Band Edge Plot (Band 2 – 20.0MHz QPSK – RB Size 100)

FCC ID: ZNFV521	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1601280175.ZNF	Test Dates: 1/28-2/12/2016	EUT Type: Portable Tablet		Page 73 of 100

7.5 Peak-Average Ratio

§24.232(d)

Test Overview

A peak to average ratio measurement is performed at the conducted port of the EUT. The spectrum analyzers Complementary Cumulative Distribution Function (CCDF) measurement profile is used to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth. The CCDF curve shows how much time the peak waveform spends at or above a given average power level. The percent of time the signal spends at or above the level defines the probability for that particular power level.

Test Procedure Used

KDB 971168 D01 v02r02 – Section 5.7.1

Test Settings

1. The signal analyzer's CCDF measurement profile is enabled
2. Frequency = carrier center frequency
3. Measurement BW > Emission bandwidth of signal
4. The signal analyzer was set to collect one million samples to generate the CCDF curve
5. The measurement interval was set depending on the type of signal analyzed. For continuous signals (>98% duty cycle), the measurement interval was set to 1ms.

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.


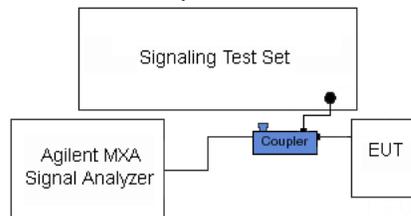


Figure 7-4. Test Instrument & Measurement Setup


Test Notes

None.

FCC ID: ZNFV521		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1601280175.ZNF	Test Dates: 1/28-2/12/2016	EUT Type: Portable Tablet		Page 74 of 100

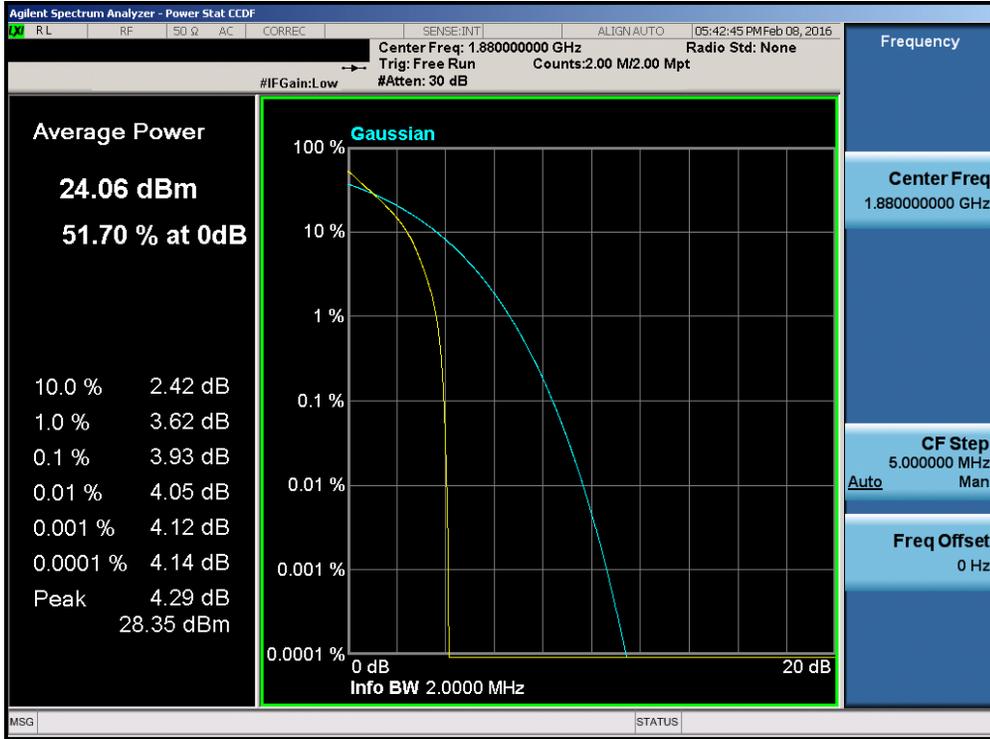


Plot 7-117. PAR Plot (Band 2 – 1.4MHz QPSK – RB Size 6)

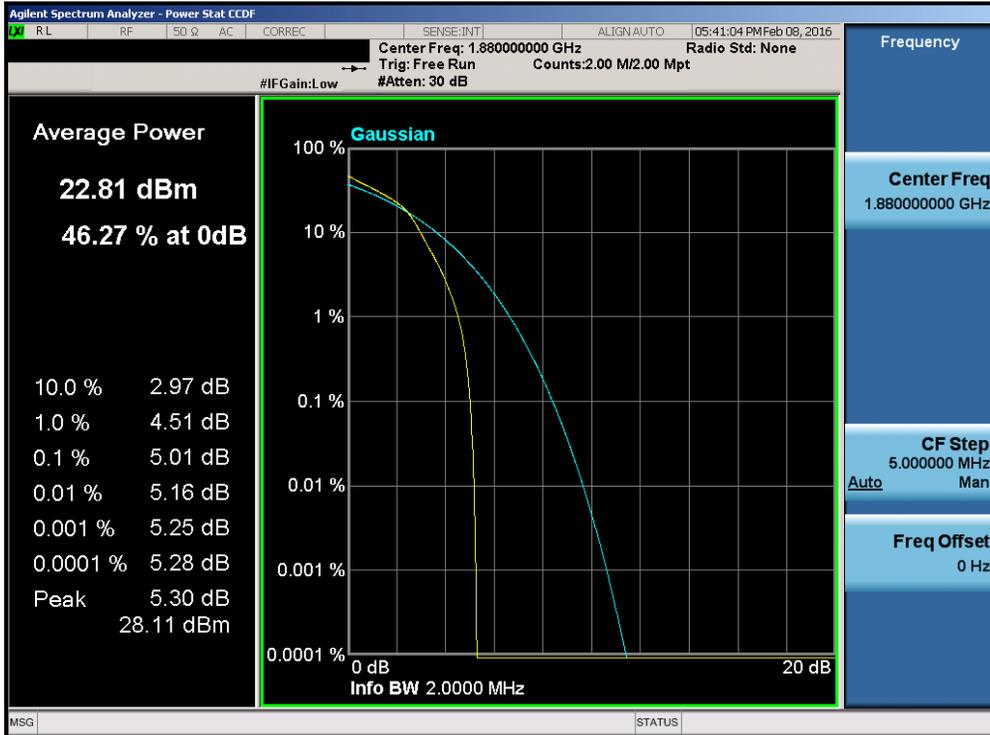


Plot 7-118. PAR Plot (Band 2 – 1.4MHz 16-QAM – RB Size 6)

FCC ID: ZNFV521	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1601280175.ZNF	Test Dates: 1/28-2/12/2016	EUT Type: Portable Tablet		Page 75 of 100

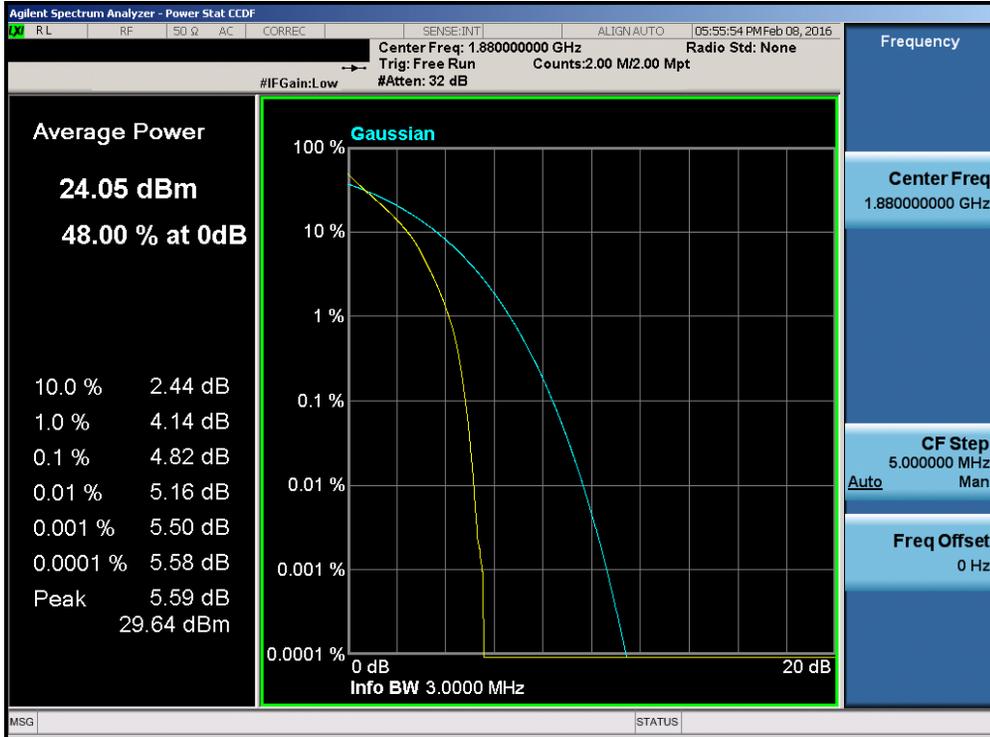


Plot 7-119. PAR Plot (Band 2 – 3.0MHz QPSK – RB Size 15)

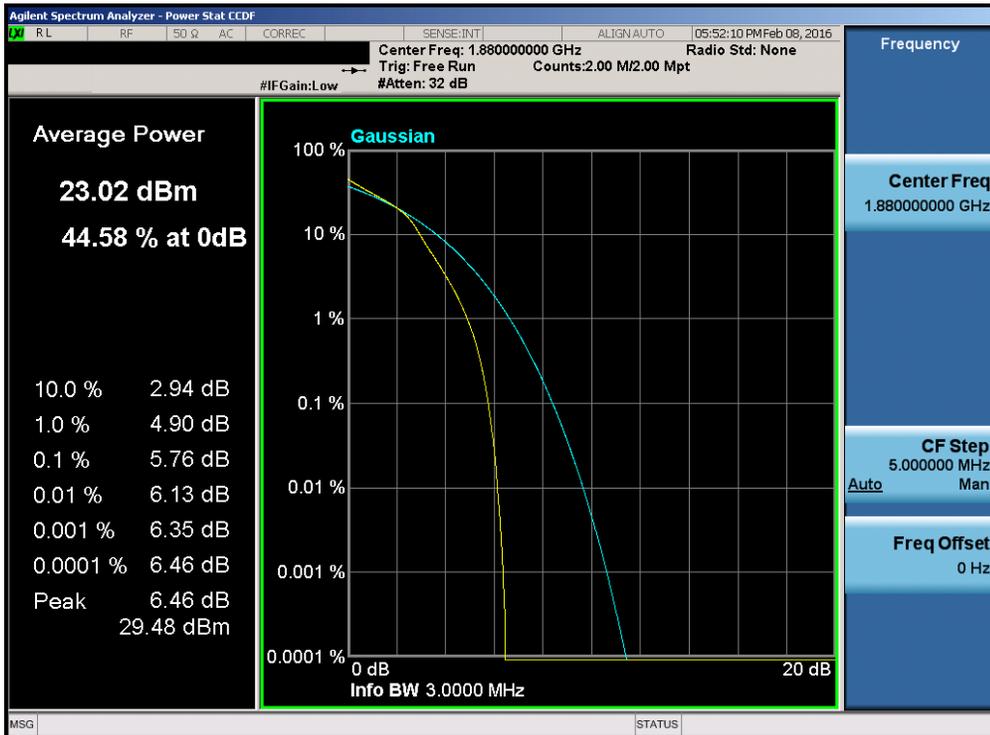


Plot 7-120. PAR Plot (Band 2 – 3.0MHz 16-QAM – RB Size 15)

FCC ID: ZNFV521		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1601280175.ZNF	Test Dates: 1/28-2/12/2016	EUT Type: Portable Tablet		Page 76 of 100

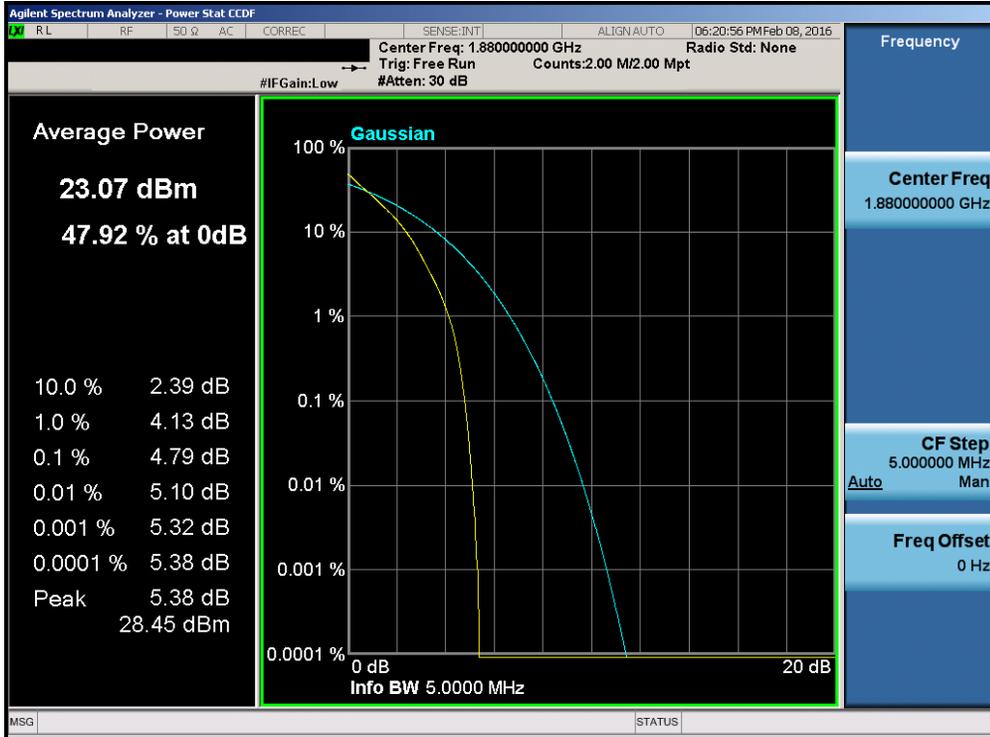


Plot 7-121. PAR Plot (Band 2 – 5.0MHz QPSK – RB Size 25)

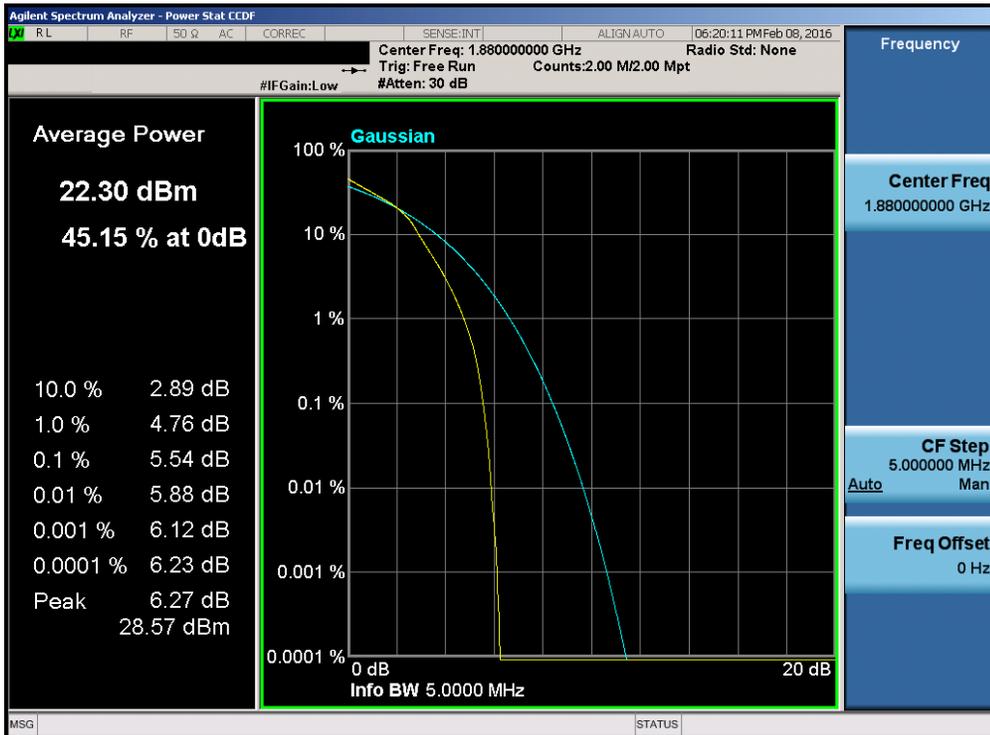


Plot 7-122. PAR Plot (Band 2 – 5.0MHz 16-QAM – RB Size 25)

FCC ID: ZNFV521		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1601280175.ZNF	Test Dates: 1/28-2/12/2016	EUT Type: Portable Tablet		Page 77 of 100

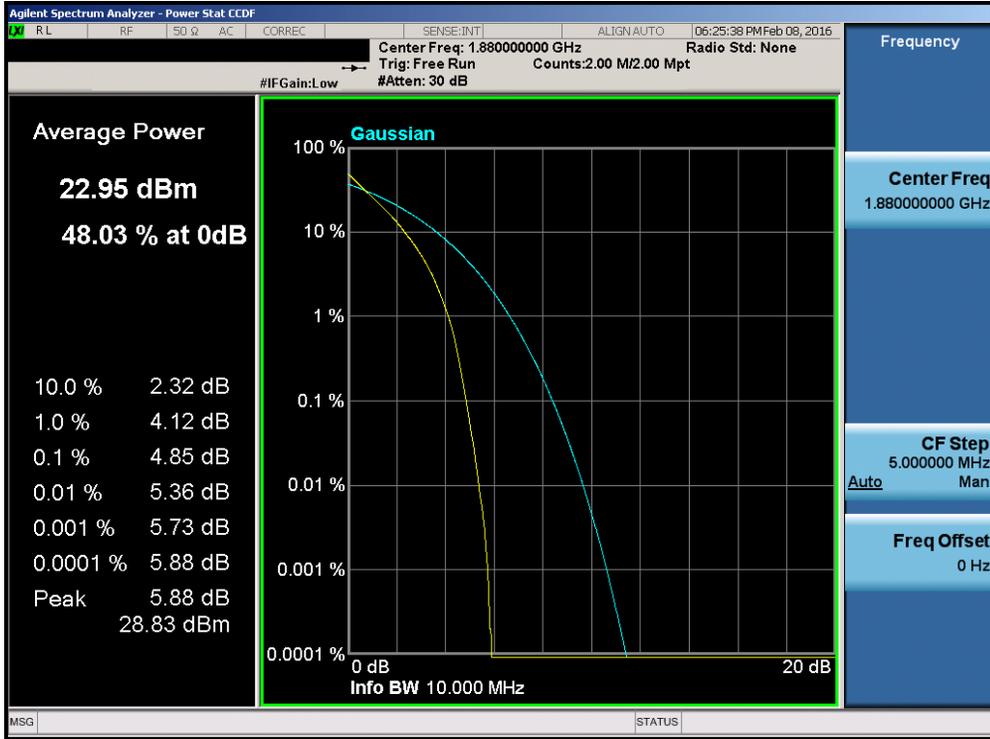


Plot 7-123. PAR Plot (Band 2 – 10.0MHz QPSK – RB Size 50)

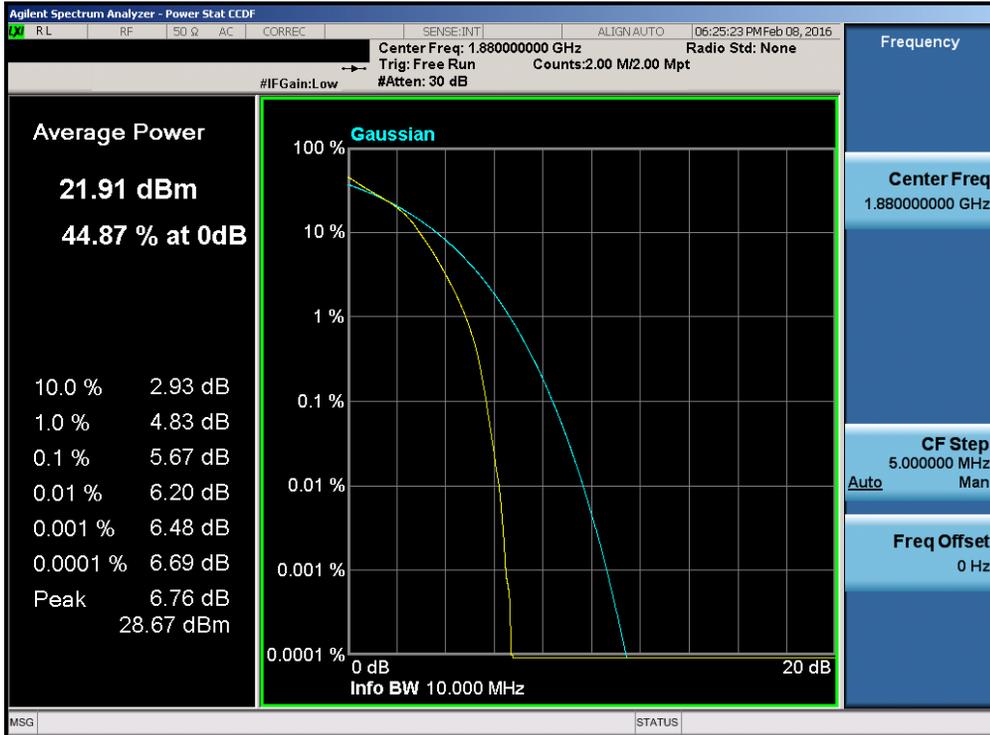


Plot 7-124. PAR Plot (Band 2 – 10.0MHz 16-QAM – RB Size 50)

FCC ID: ZNFV521		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1601280175.ZNF	Test Dates: 1/28-2/12/2016	EUT Type: Portable Tablet		Page 78 of 100

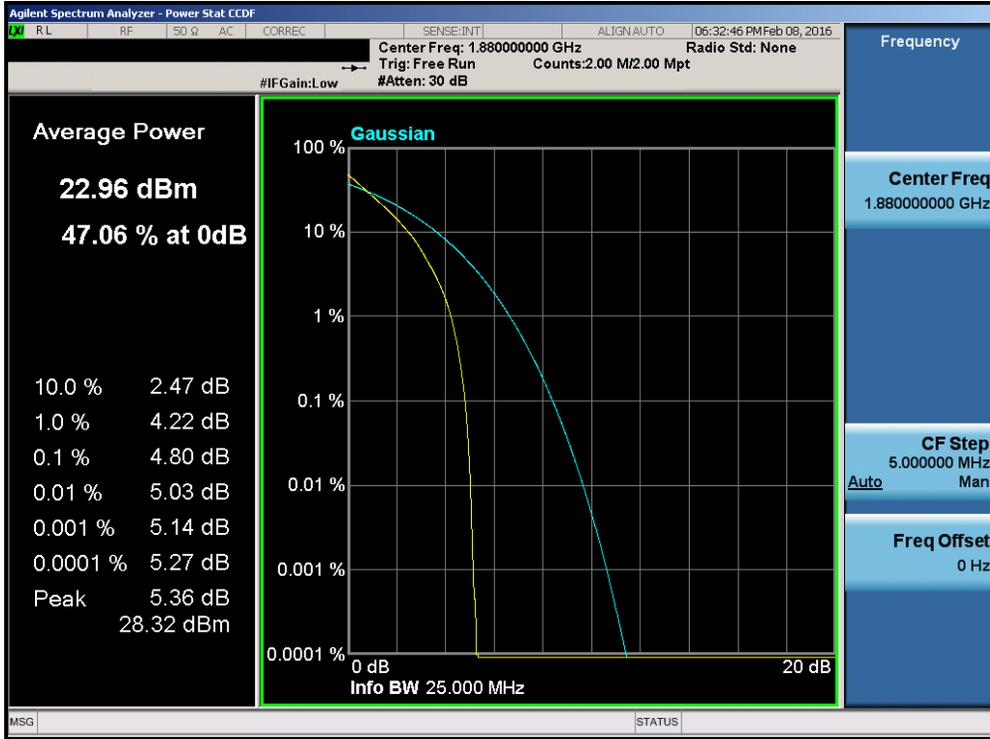


Plot 7-125. PAR Plot (Band 2 – 15.0MHz QPSK – RB Size 75)

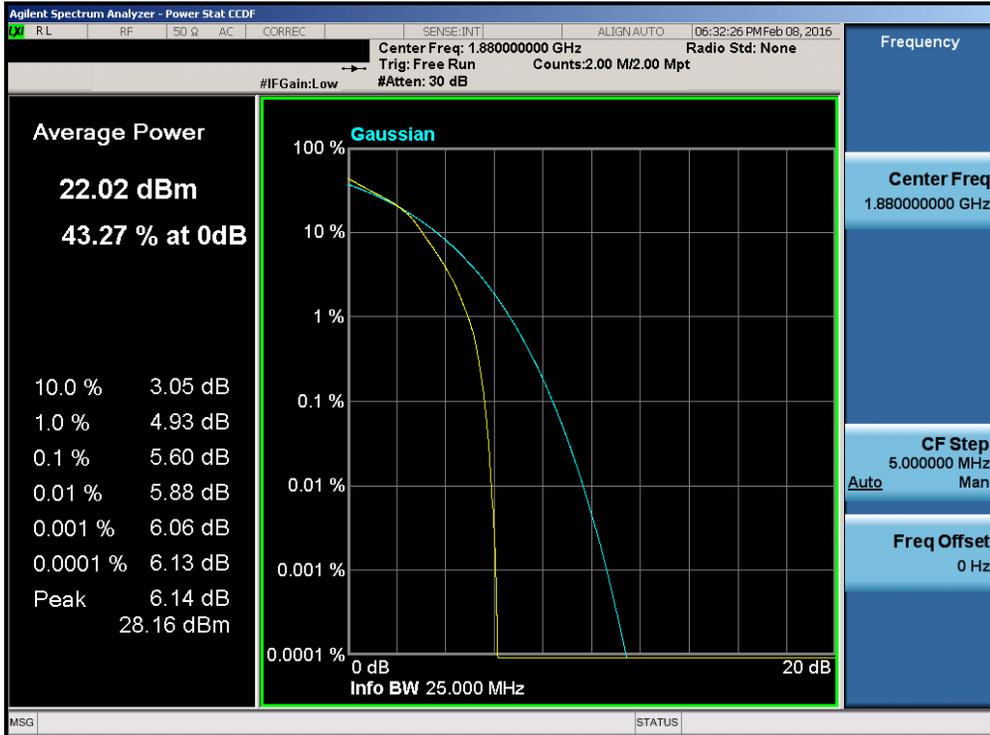


Plot 7-126. PAR Plot (Band 2 – 15.0MHz 16-QAM – RB Size 75)

FCC ID: ZNFV521		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1601280175.ZNF	Test Dates: 1/28-2/12/2016	EUT Type: Portable Tablet		Page 79 of 100

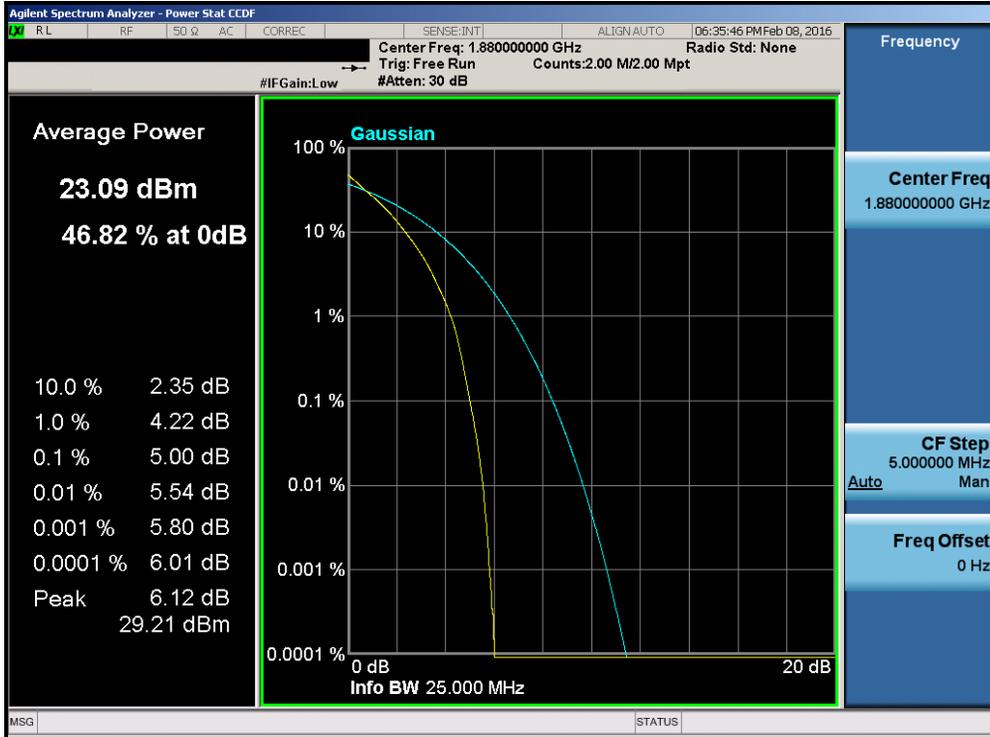

Plot 7-127. PAR Plot (Band 2 – 20.0MHz QPSK – RB Size 100)

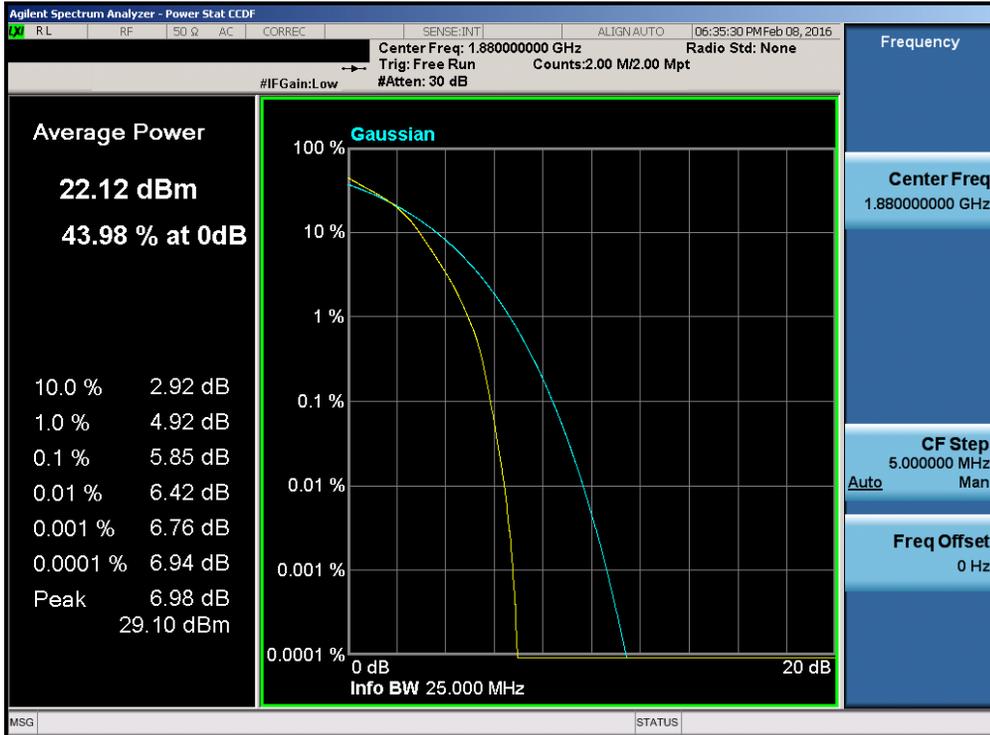

Plot 7-128. PAR Plot (Band 2 – 20.0MHz 16-QAM – RB Size 100)

FCC ID: ZNFV521		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1601280175.ZNF	Test Dates: 1/28-2/12/2016	EUT Type: Portable Tablet		Page 80 of 100

7.6 Radiated Power (ERP/EIRP)

§24.232(c.2) §27.50(c.10) §27.50(d.4)

Test Overview

Effective Radiated Power (ERP) and Equivalent Isotropic Radiated Power (EIRP) measurements are performed using the substitution method described in ANSI/TIA-603-C-2004 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using vertically and horizontally polarized tuned dipole antennas. Measurements on signals operating above 1GHz are performed using vertically polarized broadband horn antennas. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

Test Procedures Used

KDB 971168 D01 v02r02 – Section 5.2.1

ANSI/TIA-603-C-2004 – Section 2.2.17

Test Settings

1. Radiated power measurements are performed using the signal analyzer's "channel power" measurement capability for signals with continuous operation.
2. RBW = 1 – 5% of the expected OBW, not to exceed 1MHz
3. VBW \geq 3 x RBW
4. Span = 1.5 times the OBW
5. No. of sweep points \geq 2 x span / RBW
6. Detector = RMS
7. Trigger is set to "free run" for signals with continuous operation with the sweep times set to "auto".
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation.
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize

FCC ID: ZNFV521			FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1601280175.ZNF	Test Dates: 1/28-2/12/2016	EUT Type: Portable Tablet			Page 81 of 100

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

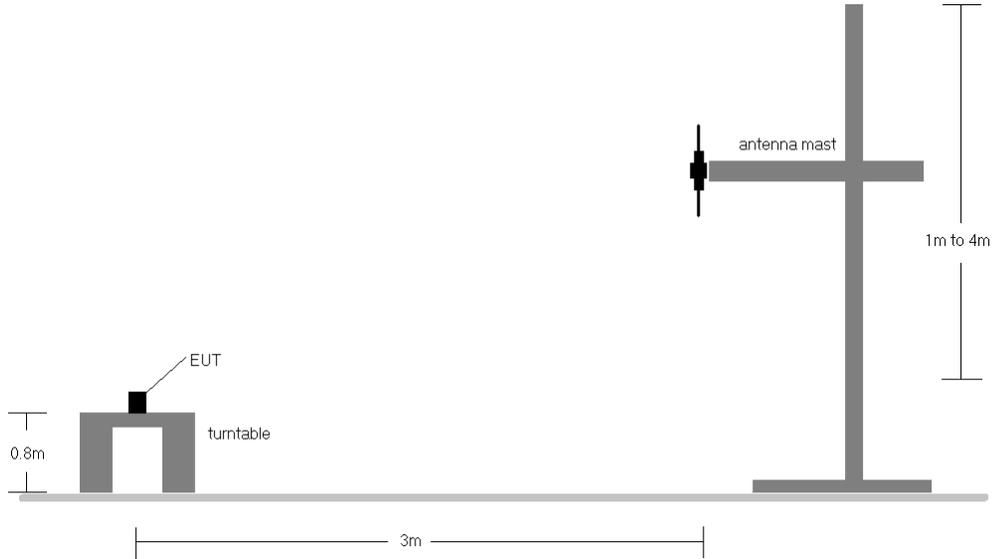


Figure 7-5. Radiated Test Setup <1GHz

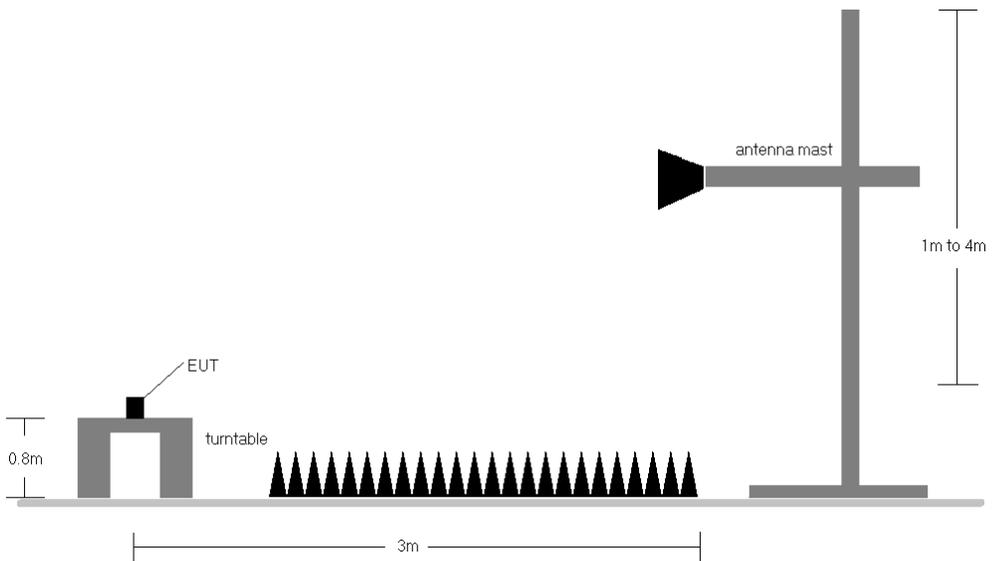


Figure 7-6. Radiated Test Setup >1GHz

Test Notes

- 1) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the tables below.
- 2) This unit was tested with its standard battery.

FCC ID: ZNFV521		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1601280175.ZNF	Test Dates: 1/28-2/12/2016	EUT Type: Portable Tablet		Page 82 of 100

Frequency [MHz]	Channel Bandwidth [MHz]	Mod.	Ant. Pol. [H/V]	Antenna Height [m]	Turntable Azimuth [degree]	RB Size/Offset	Substitute Level [dBm]	Ant. Gain [dBd]	ERP [dBm]	ERP Limit [dBm]	Margin [dB]
699.70	1.4	QPSK	H	2.88	60	3 / 2	22.48	2.72	25.20	34.77	-9.57
707.50	1.4	QPSK	H	2.62	60	1 / 0	24.24	2.88	27.12	34.77	-7.65
715.30	1.4	QPSK	H	2.40	71	3 / 2	24.09	3.06	27.15	34.77	-7.62
699.70	1.4	16-QAM	H	2.88	60	3 / 2	21.49	2.72	24.21	34.77	-10.56
707.50	1.4	16-QAM	H	2.62	60	1 / 0	23.11	2.88	25.99	34.77	-8.78
715.30	1.4	16-QAM	H	2.40	71	3 / 2	23.05	3.06	26.11	34.77	-8.66
700.50	3	QPSK	H	2.85	69	1 / 0	22.79	2.72	25.51	34.77	-9.26
707.50	3	QPSK	H	2.90	58	1 / 14	24.13	2.88	27.01	34.77	-7.76
714.50	3	QPSK	H	2.42	69	1 / 14	24.53	3.04	27.57	34.77	-7.20
700.50	3	16-QAM	H	2.85	69	1 / 0	21.61	2.72	24.33	34.77	-10.44
707.50	3	16-QAM	H	2.90	58	1 / 14	22.61	2.88	25.49	34.77	-9.28
714.50	3	16-QAM	H	2.42	69	1 / 14	23.21	3.04	26.25	34.77	-8.52
701.50	5	QPSK	H	2.90	58	1 / 24	23.17	2.75	25.92	34.77	-8.85
707.50	5	QPSK	H	1.00	69	1 / 0	23.43	2.88	26.31	34.77	-8.46
713.50	5	QPSK	H	2.65	62	1 / 24	24.61	3.02	27.63	34.77	-7.14
701.50	5	16-QAM	H	2.90	58	1 / 24	21.75	2.75	24.50	34.77	-10.27
707.50	5	16-QAM	H	1.00	69	1 / 0	22.30	2.88	25.18	34.77	-9.59
713.50	5	16-QAM	H	2.65	62	1 / 24	23.36	3.02	26.38	34.77	-8.39
704.00	10	QPSK	H	2.61	71	1 / 49	23.47	2.80	26.27	34.77	-8.50
707.50	10	QPSK	H	2.62	60	1 / 49	23.59	2.88	26.47	34.77	-8.30
711.00	10	QPSK	H	2.62	69	1 / 49	23.70	2.96	26.66	34.77	-8.11
704.00	10	16-QAM	H	2.61	71	1 / 49	22.44	2.80	25.24	34.77	-9.53
707.50	10	16-QAM	H	2.62	60	1 / 49	22.47	2.88	25.35	34.77	-9.42
711.00	10	16-QAM	H	2.62	69	1 / 49	22.38	2.96	25.34	34.77	-9.43

Table 7-2. ERP Data (Band 12)

FCC ID: ZNFV521	 FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)			Reviewed by: Quality Manager
Test Report S/N: 0Y1601280175.ZNF	Test Dates: 1/28-2/12/2016	EUT Type: Portable Tablet	Page 83 of 100	

Frequency [MHz]	Channel Bandwidth [MHz]	Mod.	Ant. Pol. [H/V]	Antenna Height [m]	Turntable Azimuth [degree]	RB Size/Offset	Substitute Level [dBm]	Ant. Gain [dBi]	EIRP [dBm]	EIRP Limit [dBm]	Margin [dB]
1710.70	1.4	QPSK	H	1.13	222	3 / 2	14.29	9.67	23.96	30.00	-6.04
1732.50	1.4	QPSK	H	1.18	218	1 / 0	14.49	9.53	24.02	30.00	-5.98
1754.30	1.4	QPSK	H	1.15	212	3 / 2	13.65	9.39	23.04	30.00	-6.96
1710.70	1.4	16-QAM	H	1.13	222	3 / 2	13.56	9.67	23.23	30.00	-6.77
1732.50	1.4	16-QAM	H	1.18	218	1 / 0	13.76	9.53	23.29	30.00	-6.71
1754.30	1.4	16-QAM	H	1.15	212	3 / 2	13.31	9.39	22.70	30.00	-7.30
1711.50	3	QPSK	H	1.07	218	1 / 0	14.31	9.67	23.98	30.00	-6.02
1732.50	3	QPSK	H	1.13	217	1 / 14	14.73	9.53	24.26	30.00	-5.74
1753.50	3	QPSK	H	1.16	254	1 / 0	15.42	9.40	24.82	30.00	-5.18
1711.50	3	16-QAM	H	1.07	218	1 / 0	13.62	9.67	23.29	30.00	-6.71
1732.50	3	16-QAM	H	1.13	217	1 / 14	14.39	9.53	23.92	30.00	-6.08
1753.50	3	16-QAM	H	1.16	254	1 / 0	14.53	9.40	23.93	30.00	-6.07
1712.50	5	QPSK	H	1.04	224	1 / 0	14.23	9.66	23.89	30.00	-6.11
1732.50	5	QPSK	H	1.17	216	1 / 24	14.82	9.53	24.35	30.00	-5.65
1752.50	5	QPSK	H	1.22	258	1 / 0	15.39	9.40	24.79	30.00	-5.21
1712.50	5	16-QAM	H	1.04	224	1 / 0	13.56	9.66	23.22	30.00	-6.78
1732.50	5	16-QAM	H	1.17	216	1 / 24	14.11	9.53	23.64	30.00	-6.36
1752.50	5	16-QAM	H	1.22	258	1 / 0	14.62	9.40	24.02	30.00	-5.98
1715.00	10	QPSK	H	1.05	220	25 / 12	13.96	9.64	23.60	30.00	-6.40
1732.50	10	QPSK	H	1.16	215	1 / 49	14.92	9.53	24.45	30.00	-5.55
1750.00	10	QPSK	H	1.20	257	1 / 0	15.12	9.42	24.54	30.00	-5.46
1715.00	10	16-QAM	H	1.05	220	25 / 12	12.89	9.64	22.53	30.00	-7.47
1732.50	10	16-QAM	H	1.16	215	1 / 49	14.43	9.53	23.96	30.00	-6.04
1750.00	10	16-QAM	H	1.20	257	1 / 0	14.79	9.42	24.21	30.00	-5.79
1717.50	15	QPSK	H	1.23	217	36 / 18	14.11	9.63	23.74	30.00	-6.26
1732.50	15	QPSK	H	1.21	263	1 / 74	15.03	9.53	24.56	30.00	-5.44
1747.50	15	QPSK	H	1.12	249	1 / 0	14.90	9.43	24.33	30.00	-5.67
1717.50	15	16-QAM	H	1.23	217	36 / 18	13.11	9.63	22.74	30.00	-7.26
1732.50	15	16-QAM	H	1.21	263	1 / 74	14.41	9.53	23.94	30.00	-6.06
1747.50	15	16-QAM	H	1.12	249	1 / 0	14.54	9.43	23.97	30.00	-6.03
1720.00	20	QPSK	H	1.05	253	1 / 99	13.09	9.61	22.70	30.00	-7.30
1732.50	20	QPSK	H	1.01	49	1 / 99	14.23	9.53	23.76	30.00	-6.24
1745.00	20	QPSK	H	1.24	256	1 / 99	14.78	9.45	24.23	30.00	-5.77
1720.00	20	16-QAM	H	1.05	253	1 / 99	12.31	9.61	21.92	30.00	-8.08
1732.50	20	16-QAM	H	1.01	49	1 / 99	13.25	9.53	22.78	30.00	-7.22
1745.00	20	16-QAM	H	1.24	256	1 / 99	13.96	9.45	23.41	30.00	-6.59

Table 7-3. EIRP Data (Band 4)

FCC ID: ZNFV521	 FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)			Reviewed by: Quality Manager
Test Report S/N: 0Y1601280175.ZNF	Test Dates: 1/28-2/12/2016	EUT Type: Portable Tablet	Page 84 of 100	

Frequency [MHz]	Channel Bandwidth [MHz]	Mod.	Ant. Pol. [H/V]	Antenna Height [m]	Turntable Azimuth [degree]	RB Size/Offset	Substitute Level [dBm]	Ant. Gain [dBi]	EIRP [dBm]	EIRP Limit [dBm]	Margin [dB]
1850.70	1.4	QPSK	H	1.11	250	3 / 2	16.63	9.21	25.84	33.01	-7.17
1880.00	1.4	QPSK	H	1.08	245	3 / 2	16.82	9.27	26.09	33.01	-6.92
1909.30	1.4	QPSK	H	1.11	243	3 / 2	15.31	9.36	24.67	33.01	-8.34
1850.70	1.4	16-QAM	H	1.11	250	3 / 2	15.24	9.21	24.45	33.01	-8.56
1880.00	1.4	16-QAM	H	1.08	245	3 / 2	15.84	9.27	25.11	33.01	-7.90
1909.30	1.4	16-QAM	H	1.11	243	3 / 2	14.37	9.36	23.73	33.01	-9.28
1851.50	3	QPSK	H	1.13	250	1 / 0	16.90	9.21	26.11	33.01	-6.90
1880.00	3	QPSK	H	1.11	246	1 / 0	17.25	9.27	26.52	33.01	-6.49
1908.50	3	QPSK	H	1.06	241	1 / 0	15.85	9.36	25.21	33.01	-7.80
1851.50	3	16-QAM	H	1.13	250	1 / 0	16.11	9.21	25.32	33.01	-7.69
1880.00	3	16-QAM	H	1.11	246	1 / 0	16.34	9.27	25.61	33.01	-7.40
1908.50	3	16-QAM	H	1.06	241	1 / 0	15.07	9.36	24.43	33.01	-8.58
1852.50	5	QPSK	H	1.15	249	1 / 0	16.52	9.22	25.74	33.01	-7.27
1880.00	5	QPSK	H	1.10	248	1 / 0	17.49	9.27	26.76	33.01	-6.25
1907.50	5	QPSK	H	1.09	243	1 / 0	15.96	9.35	25.31	33.01	-7.70
1852.50	5	16-QAM	H	1.15	249	1 / 0	15.66	9.22	24.88	33.01	-8.13
1880.00	5	16-QAM	H	1.10	248	1 / 0	16.19	9.27	25.46	33.01	-7.55
1907.50	5	16-QAM	H	1.09	243	1 / 0	15.41	9.35	24.76	33.01	-8.25
1855.00	10	QPSK	H	1.12	250	1 / 49	16.54	9.22	25.76	33.01	-7.25
1880.00	10	QPSK	H	1.11	247	1 / 49	16.71	9.27	25.98	33.01	-7.03
1905.00	10	QPSK	H	1.07	242	1 / 0	15.69	9.34	25.03	33.01	-7.98
1855.00	10	16-QAM	H	1.12	250	1 / 49	15.43	9.22	24.65	33.01	-8.36
1880.00	10	16-QAM	H	1.11	247	1 / 49	15.89	9.27	25.16	33.01	-7.85
1905.00	10	16-QAM	H	1.07	242	1 / 0	14.90	9.34	24.24	33.01	-8.77
1857.50	15	QPSK	H	1.14	250	1 / 0	16.18	9.23	25.41	33.01	-7.60
1880.00	15	QPSK	H	1.10	246	1 / 74	16.44	9.27	25.71	33.01	-7.30
1902.50	15	QPSK	H	1.08	242	1 / 0	16.18	9.33	25.51	33.01	-7.50
1857.50	15	16-QAM	H	1.14	250	1 / 0	15.60	9.23	24.83	33.01	-8.18
1880.00	15	16-QAM	H	1.10	246	1 / 74	15.80	9.27	25.07	33.01	-7.94
1902.50	15	16-QAM	H	1.08	242	1 / 0	15.10	9.33	24.43	33.01	-8.58
1860.00	20	QPSK	H	1.13	250	1 / 99	16.61	9.23	25.84	33.01	-7.17
1880.00	20	QPSK	H	1.10	249	1 / 0	16.34	9.27	25.61	33.01	-7.40
1900.00	20	QPSK	H	1.07	242	1 / 0	15.77	9.31	25.08	33.01	-7.93
1860.00	20	16-QAM	H	1.13	250	1 / 99	15.17	9.23	24.40	33.01	-8.61
1880.00	20	16-QAM	H	1.10	249	1 / 0	15.31	9.27	24.58	33.01	-8.43
1900.00	20	16-QAM	H	1.07	242	1 / 0	14.91	9.31	24.22	33.01	-8.79

Table 7-4. EIRP Data (Band 2)

FCC ID: ZNFV521		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1601280175.ZNF	Test Dates: 1/28-2/12/2016	EUT Type: Portable Tablet	Page 85 of 100	

7.7 Radiated Spurious Emissions Measurements

§2.1053 §24.238(a) §27.53(g) §27.53(h)

Test Overview

Radiated spurious emissions measurements are performed using the substitution method described in ANSI/TIA-603-C-2004 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using vertically and horizontally polarized tuned dipole antennas. Measurements on signals operating above 1GHz are performed using vertically and horizontally polarized broadband horn antennas. All measurements are performed as peak measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

Test Procedures Used

KDB 971168 D01 v02r02 – Section 5.8

ANSI/TIA-603-C-2004 – Section 2.2.12

Test Settings

1. RBW = 100kHz for emissions below 1GHz and 1MHz for emissions above 1GHz
2. VBW $\geq 3 \times$ RBW
3. Span = 1.5 times the OBW
4. No. of sweep points $\geq 2 \times$ span / RBW
5. Detector = Peak
6. Trace mode = max hold
7. The trace was allowed to stabilize

FCC ID: ZNFV521	 FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)			Reviewed by: Quality Manager
Test Report S/N: 0Y1601280175.ZNF	Test Dates: 1/28-2/12/2016	EUT Type: Portable Tablet		Page 86 of 100

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

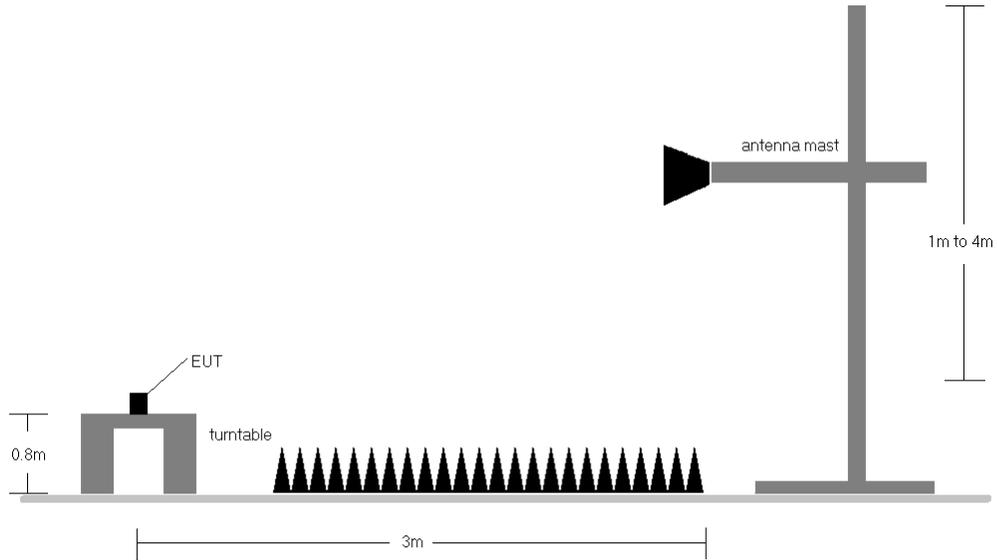


Figure 7-7. Test Instrument & Measurement Setup

Test Notes

- 1) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the tables below.
- 2) This unit was tested with its standard battery.
- 3) The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter. The worst-case emissions are reported.
- 4) Emissions below 18GHz were measured at a 3 meter test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.
- 5) The "-" shown in the following RSE tables are used to denote a noise floor measurement.

FCC ID: ZNFV521	 FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION) 		Reviewed by: Quality Manager
Test Report S/N: 0Y1601280175.ZNF	Test Dates: 1/28-2/12/2016	EUT Type: Portable Tablet	Page 87 of 100

OPERATING FREQUENCY: 701.50 MHz
 CHANNEL: 23035
 MEASURED OUTPUT POWER: 25.92 dBm = 0.391 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 5.0 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10}(W) =$ 38.92 dBc

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [m]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBd]	Spurious Emission Level [dBm]	[dBc]
1403.00	H	1.47	69	-47.64	2.45	-45.18	71.1
2104.50	H	-	-	-57.37	2.96	-54.41	80.3

Table 7-5. Radiated Spurious Data (Band 12 – Low Channel)

OPERATING FREQUENCY: 707.50 MHz
 CHANNEL: 23095
 MEASURED OUTPUT POWER: 26.31 dBm = 0.428 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 5.0 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10}(W) =$ 39.31 dBc

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [m]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBd]	Spurious Emission Level [dBm]	[dBc]
1415.00	H	2.15	73	-50.74	2.59	-48.16	74.5
2122.50	H	2.15	80	-56.53	3.02	-53.52	79.8
2830.00	H	-	-	-57.26	4.74	-52.52	78.8

Table 7-6. Radiated Spurious Data (Band 12 – Mid Channel)

FCC ID: ZNFV521	 PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)	 LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1601280175.ZNF	Test Dates: 1/28-2/12/2016	EUT Type: Portable Tablet	Page 88 of 100	

OPERATING FREQUENCY: 713.50 MHz
 CHANNEL: 23155
 MEASURED OUTPUT POWER: 27.63 dBm = 0.579 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 5.0 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10}(W) =$ 40.63 dBc

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [m]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBd]	Spurious Emission Level [dBm]	[dBc]
1427.00	H	1.00	82	-49.11	2.72	-46.39	74.0
2140.50	H	1.00	46	-56.33	3.07	-53.26	80.9
2854.00	H	-	-	-57.61	4.73	-52.89	80.5

Table 7-7. Radiated Spurious Data (Band 12 – High Channel)

OPERATING FREQUENCY: 1711.50 MHz
 CHANNEL: 19965
 MEASURED OUTPUT POWER: 23.98 dBm = 0.250 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 3.0 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10}(W) =$ 36.98 dBc

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [m]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	[dBc]
3423.00	H	1.01	195	-39.37	9.68	-29.69	53.7
5134.50	H	1.01	256	-53.22	10.68	-42.53	66.5
6846.00	H	-	-	-46.74	11.74	-34.99	59.0

Table 7-8. Radiated Spurious Data (Band 4 – Low Channel)

FCC ID: ZNFV521			FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1601280175.ZNF	Test Dates: 1/28-2/12/2016	EUT Type: Portable Tablet		Page 89 of 100	

OPERATING FREQUENCY: 1732.50 MHz
 CHANNEL: 20175
 MEASURED OUTPUT POWER: 24.26 dBm = 0.267 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 3.0 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10}(W) =$ 37.26 dBc

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [m]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	[dBc]
3465.00	H	1.01	190	-46.96	9.71	-37.26	61.5
5197.50	H	1.08	260	-50.47	10.59	-39.89	64.1
6930.00	H	-	-	-50.53	11.75	-38.77	63.0

Table 7-9. Radiated Spurious Data (Band 4 – Mid Channel)

OPERATING FREQUENCY: 1753.50 MHz
 CHANNEL: 20385
 MEASURED OUTPUT POWER: 24.82 dBm = 0.303 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 3.0 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10}(W) =$ 37.82 dBc

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [m]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	[dBc]
3507.00	H	1.17	180	-47.47	9.73	-37.74	62.6
5260.50	H	1.17	271	-50.73	10.64	-40.09	64.9
7014.00	H	-	-	-54.70	11.75	-42.95	67.8

Table 7-10. Radiated Spurious Data (Band 4 – High Channel)

FCC ID: ZNFV521		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1601280175.ZNF	Test Dates: 1/28-2/12/2016	EUT Type: Portable Tablet	Page 90 of 100	

OPERATING FREQUENCY: 1852.50 MHz
 CHANNEL: 18625
 MEASURED OUTPUT POWER: 25.74 dBm = 0.375 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 5.0 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10}(W) =$ 38.74 dBc

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [m]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	[dBc]
3705.00	H	1.01	26	-51.86	8.40	-43.47	69.2
5557.50	H	1.00	37	-51.48	10.57	-40.91	66.6
7410.00	H	-	-	-54.80	12.06	-42.74	68.5

Table 7-11. Radiated Spurious Data (Band 2 – Low Channel)

OPERATING FREQUENCY: 1880.00 MHz
 CHANNEL: 18900
 MEASURED OUTPUT POWER: 26.76 dBm = 0.474 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 5.0 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10}(W) =$ 39.76 dBc

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [m]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	[dBc]
3760.00	H	1.00	30	-53.86	8.38	-45.47	72.2
5640.00	H	1.00	51	-50.88	10.70	-40.18	66.9
7520.00	H	-	-	-55.50	12.10	-43.39	70.2

Table 7-12. Radiated Spurious Data (Band 2 – Mid Channel)

FCC ID: ZNFV521		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1601280175.ZNF	Test Dates: 1/28-2/12/2016	EUT Type: Portable Tablet	Page 91 of 100	

OPERATING FREQUENCY: 1907.50 MHz
 CHANNEL: 19175
 MEASURED OUTPUT POWER: 25.31 dBm = 0.340 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 5.0 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10}(W) =$ 38.31 dBc

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [m]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	[dBc]
3815.00	H	1.51	33	-54.02	8.40	-45.63	70.9
5722.50	H	1.50	69	-48.95	10.76	-38.19	63.5
7630.00	H	-	-	-56.07	12.21	-43.86	69.2

Table 7-13. Radiated Spurious Data (Band 2 – High Channel)

FCC ID: ZNFV521			FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1601280175.ZNF	Test Dates: 1/28-2/12/2016	EUT Type: Portable Tablet		Page 92 of 100	

7.8 Frequency Stability / Temperature Variation

§2.1055 §24.235 §27.54

Test Overview and Limit

Frequency stability testing is performed in accordance with the guidelines of ANSI/TIA-603-C-2004. The frequency stability of the transmitter is measured by:

- a.) **Temperature:** The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
- b.) **Primary Supply Voltage:** The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

For Part 22, the frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ (± 2.5 ppm) of the center frequency. For Part 24 and Part 27, the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

Test Procedure Used

ANSI/TIA-603-C-2004

Test Settings

1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
2. The equipment is turned on in a “standby” condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

Test Setup

The EUT was connected via an RF cable to a spectrum analyzer with the EUT placed inside an environmental chamber.

Test Notes

None

FCC ID: ZNFV521		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1601280175.ZNF	Test Dates: 1/28-2/12/2016	EUT Type: Portable Tablet	Page 93 of 100	

Band 12 Frequency Stability Measurements

§2.1055 §27.54

OPERATING FREQUENCY: 707,500,000 Hz
 CHANNEL: 23790
 REFERENCE VOLTAGE: 3.80 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.80	+ 20 (Ref)	707,500,095	95	0.0000134
100 %		- 30	707,500,107	107	0.0000151
100 %		- 20	707,499,742	-258	-0.0000365
100 %		- 10	707,499,825	-175	-0.0000247
100 %		0	707,500,052	52	0.0000073
100 %		+ 10	707,500,134	134	0.0000189
100 %		+ 20	707,500,040	40	0.0000057
100 %		+ 30	707,499,905	-95	-0.0000134
100 %		+ 40	707,499,875	-125	-0.0000177
100 %		+ 50	707,500,022	22	0.0000031
BATT. ENDPOINT	3.40	+ 20	707,500,267	267	0.0000377

Table 7-14. Frequency Stability Data (Band 12)

Note:

Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

FCC ID: ZNFV521			FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1601280175.ZNF	Test Dates: 1/28-2/12/2016	EUT Type: Portable Tablet			Page 94 of 100

Band 12 Frequency Stability Measurements
§2.1055 §27.54

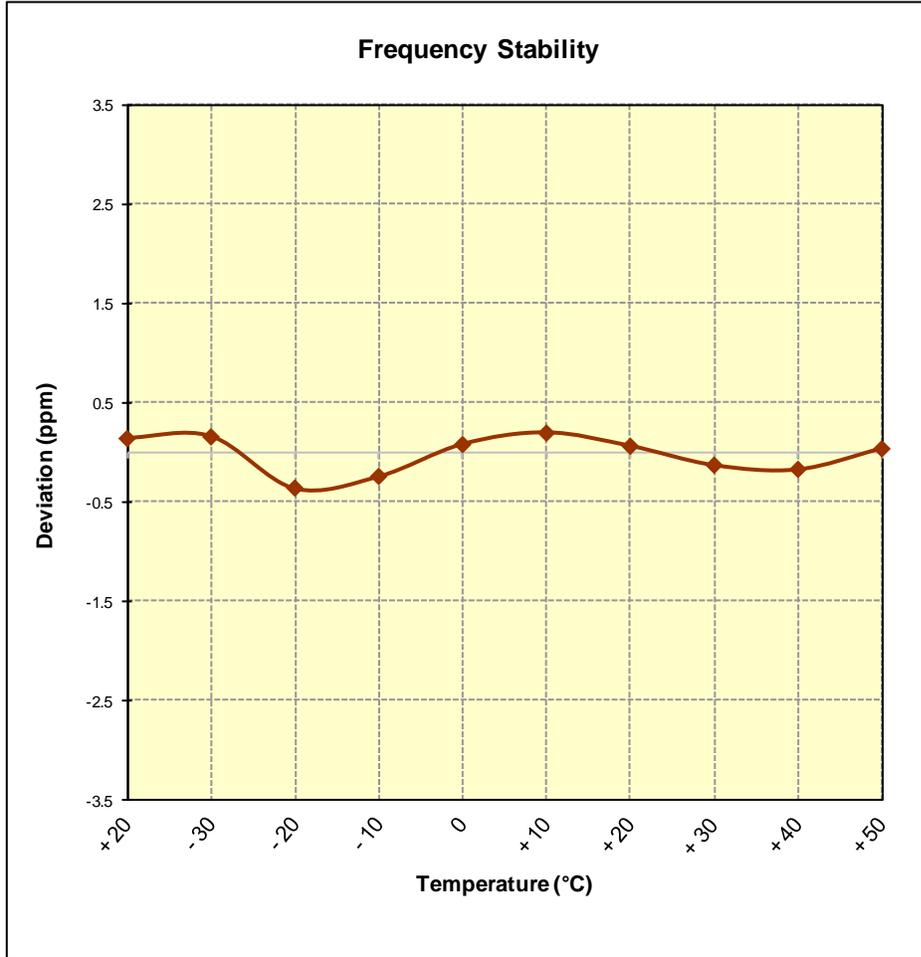


Figure 7-8. Frequency Stability Graph (Band 12)

FCC ID: ZNFV521		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1601280175.ZNF	Test Dates: 1/28-2/12/2016	EUT Type: Portable Tablet	Page 95 of 100	

Band 4 Frequency Stability Measurements

§2.1055 §§27.54

OPERATING FREQUENCY: 1,732,500,000 Hz
 CHANNEL: 20175
 REFERENCE VOLTAGE: 3.80 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.80	+ 20 (Ref)	1,732,500,235	235	0.0000136
100 %		- 30	1,732,499,928	-72	-0.0000042
100 %		- 20	1,732,499,773	-227	-0.0000131
100 %		- 10	1,732,499,992	-8	-0.0000005
100 %		0	1,732,499,894	-106	-0.0000061
100 %		+ 10	1,732,500,058	58	0.0000033
100 %		+ 20	1,732,500,371	371	0.0000214
100 %		+ 30	1,732,499,837	-163	-0.0000094
100 %		+ 40	1,732,500,126	126	0.0000073
100 %		+ 50	1,732,500,071	71	0.0000041
BATT. ENDPOINT		3.40	+ 20	1,732,500,325	325

Table 7-15. Frequency Stability Data (Band 4)

Note:

Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

FCC ID: ZNFV521	 FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)			Reviewed by: Quality Manager
Test Report S/N: 0Y1601280175.ZNF	Test Dates: 1/28-2/12/2016	EUT Type: Portable Tablet	Page 96 of 100	

Band 4 Frequency Stability Measurements
§2.1055 §§27.54

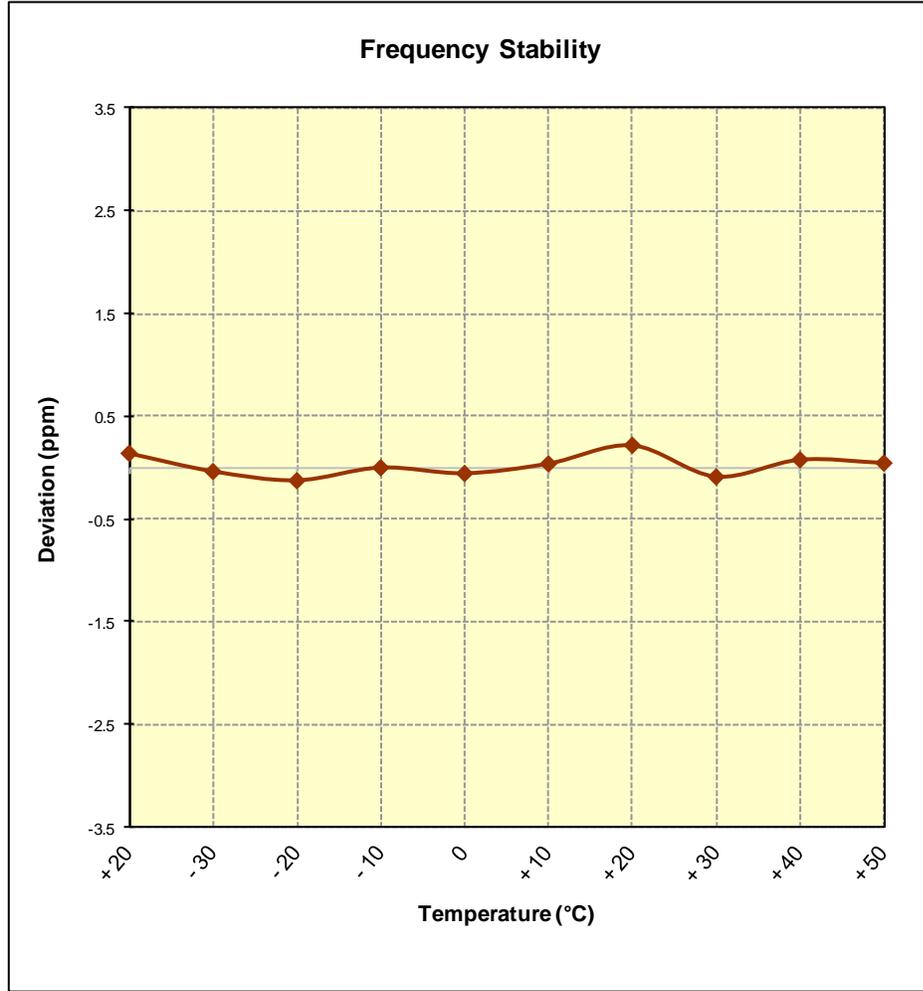


Figure 7-9. Frequency Stability Graph (Band 4)

FCC ID: ZNFV521		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1601280175.ZNF	Test Dates: 1/28-2/12/2016	EUT Type: Portable Tablet	Page 97 of 100	

Band 2 Frequency Stability Measurements

§2.1055 §24.235

OPERATING FREQUENCY: 1,880,000,000 Hz
 CHANNEL: 18900
 REFERENCE VOLTAGE: 3.80 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.80	+ 20 (Ref)	1,879,999,628	-372	-0.0000198
100 %		- 30	1,879,999,684	-316	-0.0000168
100 %		- 20	1,880,000,092	92	0.0000049
100 %		- 10	1,880,000,026	26	0.0000014
100 %		0	1,880,000,049	49	0.0000026
100 %		+ 10	1,880,000,068	68	0.0000036
100 %		+ 20	1,879,999,571	-429	-0.0000228
100 %		+ 30	1,880,000,007	7	0.0000004
100 %		+ 40	1,880,000,008	8	0.0000004
100 %		+ 50	1,879,999,790	-210	-0.0000112
BATT. ENDPOINT		3.40	+ 20	1,879,999,992	-8

Table 7-16. Frequency Stability Data (Band 2)

Note:

Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

FCC ID: ZNFV521	 FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)			Reviewed by: Quality Manager
Test Report S/N: 0Y1601280175.ZNF	Test Dates: 1/28-2/12/2016	EUT Type: Portable Tablet	Page 98 of 100	

Band 2 Frequency Stability Measurements
§2.1055 §24.235

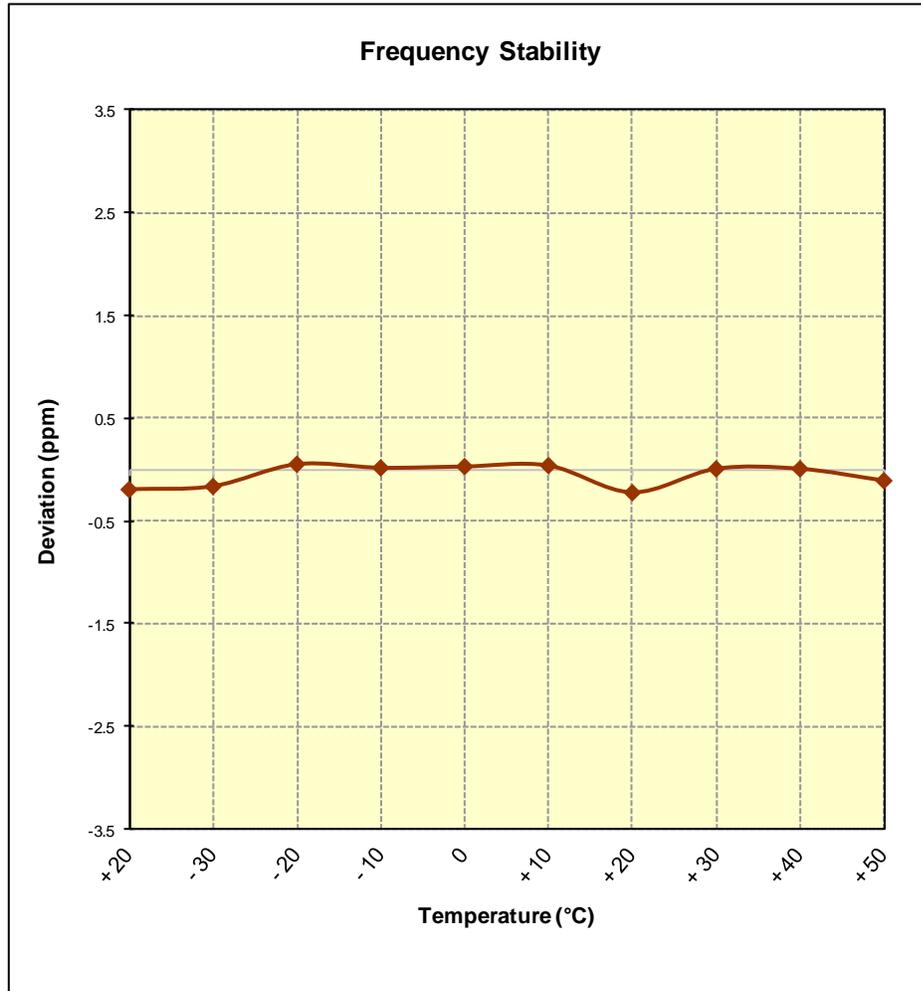


Figure 7-10. Frequency Stability Graph (Band 2)

FCC ID: ZNFV521		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1601280175.ZNF	Test Dates: 1/28-2/12/2016	EUT Type: Portable Tablet	Page 99 of 100	

8.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the **LG Portable Tablet FCC ID: ZNFV521** complies with all the requirements of Parts 24 & 27 of the FCC rules for LTE operation only.

FCC ID: ZNFV521	 FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)			Reviewed by: Quality Manager
Test Report S/N: 0Y1601280175.ZNF	Test Dates: 1/28-2/12/2016	EUT Type: Portable Tablet		Page 100 of 100