



**FCC CFR47 PART 22 SUBPART H
FCC CFR47 PART 24 SUBPART E**

C2PC CERTIFICATION TEST REPORT

FOR

CDMA WATCH + Bluetooth, DTS b/g

MODEL NUMBER: LG-VC110, LGVC110, VC110, LG-VC110B, LGVC110B, VC110B

FCC ID: ZNFVC110

REPORT NUMBER: 15I21553-E1V1

ISSUE DATE: SEPTEMBER 28, 2015

Prepared for

**LG ELECTRONICS MOBILECOMM U.S.A., INC
1000 SYLVAN AVENUE
ENGLEWOOD CLIFFS,
NEW JERSEY, 07632, U.S.A**

Prepared by

**UL VERIFICATION SERVICES INC.
47173 BENICIA STREET
FREMONT, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888**



NVLAP LAB CODE 200065-0

Revision History

<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
V1	9/28/15	Initial Issue	

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS 4

2. TEST METHODOLOGY 6

3. FACILITIES AND ACCREDITATION 6

4. CALIBRATION AND UNCERTAINTY 6

 4.1. *MEASURING INSTRUMENT CALIBRATION* 6

 4.2. *SAMPLE CALCULATION* 6

 4.3. *MEASUREMENT UNCERTAINTY* 7

5. EQUIPMENT UNDER TEST 8

 5.1. *DESCRIPTION OF EUT* 8

 5.2. *MAXIMUM OUTPUT POWER* 8

 5.3. *DESCRIPTION OF AVAILABLE ANTENNAS* 9

 5.4. *DESCRIPTION OF TEST SETUP* 10

6. TEST AND MEASUREMENT EQUIPMENT 12

7. SUMMARY TABLE 13

 7.1. *CDMA2000* 14

 7.1.1. *1xRTT* 14

 7.1. *RADIATED POWER (ERP & EIRP)* 15

 7.1.1. *ERP/EIRP RESULTS* 16

 7.1.2. *ERP/EIRP PLOTS* 17

 7.2. *FIELD STRENGTH OF SPURIOUS RADIATION* 19

 7.2.1. *SPURIOUS RADIATION PLOTS* 20

8. SETUP PHOTOS 22

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: LG ELECTRONICS MOBILECOMM U.S.A., INC.
EUT DESCRIPTION: CDMA WATCH + Bluetooth, DTS b/g
MODEL: LG-VC110, LGVC110, VC110, LG-VC110B, LGVC110B, VC110B
SERIAL NUMBER: 20KFN (Conducted), 23F9J (Radiated)
DATE TESTED: SEPTEMBER 16, 2015

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC PART 22H and 24E	PASS

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For
UL Verification Services Inc. By:

Tested By:

Huda Mustapha



HUDA MUSTAPHA
CONSUMER TECHNOLOGY DIVISION
WISE PROJECT LEAD
UL VERIFICATION SERVICES INC

OREN STOELTING
CONSUMER TECHNOLOGY DIVISION
WISE LAB ENGINEER
UL VERIFICATION SERVICES INC



DAN CORONIA
CONSUMER TECHNOLOGY DIVISION
WISE PROJECT LEAD
UL VERIFICATION SERVICES INC

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with TIA-603-C, FCC CFR 47 Part 22, and FCC CFR Part 24.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 and 47266 Benicia Street, Fremont, California, USA. Line conducted emissions are measured only at the 47173 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

47173 Benicia Street	47266 Benicia Street
<input type="checkbox"/> Chamber A(IC: 2324B-1)	<input type="checkbox"/> Chamber D(IC: 2324B-4)
<input type="checkbox"/> Chamber B(IC: 2324B-2)	<input type="checkbox"/> Chamber E(IC: 2324B-5)
<input checked="" type="checkbox"/> Chamber C(IC: 2324B-3)	<input type="checkbox"/> Chamber F(IC: 2324B-6)
	<input type="checkbox"/> Chamber G(IC: 2324B-7)
	<input type="checkbox"/> Chamber H(IC: 2324B-8)

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://ts.nist.gov/standards/scopes/2000650.htm>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$EIRP = PSA \text{ reading with EUT worst orientation (dBm)} + Path \text{ loss (dB)} - \text{cable loss(between the SG and substitution antenna)} + Substitution \text{ Antenna Factor (dBi)}$

$ERP = PSA \text{ reading with EUT worst orientation (dBm)} + Path \text{ loss (dB)} - \text{cable loss(between the SG and substitution antenna)}$

(Path loss = Signal generator output – PSA reading with substitution antenna)

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	3.52 dB
Radiated Disturbance, 30 to 1000 MHz	4.94 dB
Radiated Disturbance, 1GHz to 40GHz	4.94 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is CDMA WATCH + Bluetooth, DTS b/g

5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum peak conducted and radiated ERP / EIRP output powers as follows:

FCC Part 22/24						
Band	Frequency Range(MHz)	Modulation	Conducted		Radiated	
			AVG(dBm)	AVG(mW)	AVG(dBm)	AVG(mW)
BC0	824~849	1xRTT	24.2	263.03	23.86	243.22
BC1	1850~1910		21.7	147.91	24.01	251.77

5.3. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes a LMA antenna for the [List the bands supported] with a maximum peak gain as follow:

Frequency (MHz)	Peak Gain (dBi)
BC0, 824~849MHz	-3.58
BC1, 1850~1910MHz	-1.50

5.4. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
AC Adapter	LG	MCS-02WD	DZ480000582	N/A


I/O CABLES (RADIATED SETUP)

I/O CABLE LIST						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length	Remarks
1	USB	1	AC Adapter	Un-shielded	1.2m	NA
2	Jack	1	Headset	Shielded	1m	NA
3	RF In/out	1	Communication Test Set	Un-shielded	2m	NA

TEST SETUP

The EUT is continuously communicated to the call box during the tests.

SETUP DIAGRAM FOR TESTS (RADIATED TEST SETUP)

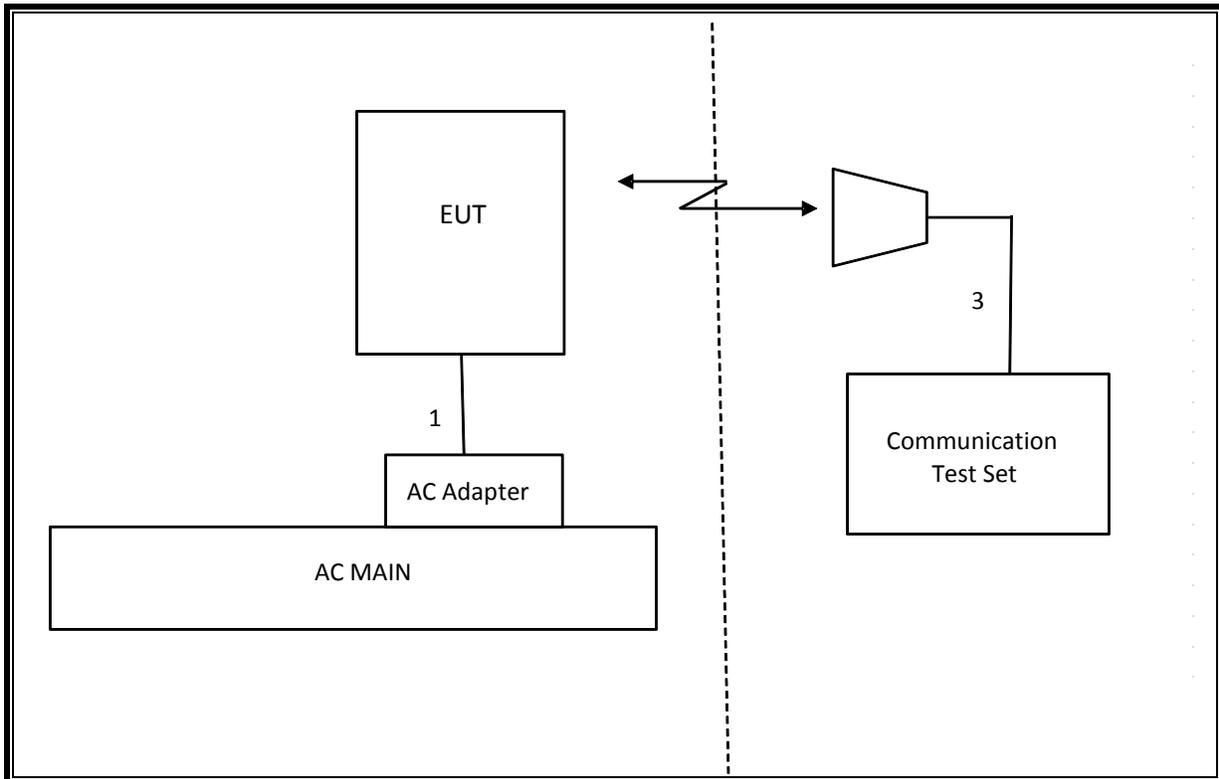

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST				
Description	Manufacturer	Model	Asset	Cal Due
Spectrum Analyzer, 44 GHz	Agilent / HP	E4446A	C01179	02/26/16
Antenna, Bilog, 2 GHz	Sunol Sciences	JB1	130	09/01/16
Antenna, Horn, 18 GHz	EMCO	3115	C00783	10/25/15
Antenna, Horn, 18 GHz	EMCO	3115	C00784	10/25/15
Highpass Filter, 2.7 GHz	Micro-Tronics	HPM13194	N02687	CNR
Highpass Filter, 1.5 GHz	Micro-Tronics	HPM13193	N02688	CNR
Temperature / Humidity Chamber	Thermotron	SE 600-10-10	C00930	01/09/16
Communications Test Set	R&S	CMW500	T159	07/02/16
DC power supply, 8 V @ 3 A or 15 V	Agilent / HP	E3610A	None	CNR
Vector signal generator, 6 GHz	Agilent / HP	E4438C	None	07/06/16
Antenna, Tuned Dipole 400~1000	ETS	3121C DB4	C00993	02/14/16
Directional Coupler	RF-Lambda	RFDC5M06G15	None	CNR
Antenna, Horn, 26.5 GHz	ARA	MWH-1826/B	C00589	12/17/15
Multimeter	Fluke	26111	74320701	4/15/2016

7. SUMMARY TABLE

FCC Part Section	RSS Section(s)	Test Description	Test Limit	Test Condition	Test Result	Note
2.1049	N/A	Occupied Band width (99%)	N/A	Conducted	Pass	refer to original
22.917(a) 24.238(a)	RSS-132(4.5.1) RSS-133(6.5.1)	Band Edge / Conducted Spurious Emission	-13dBm		Pass	refer to original
2.1046	N/A	Conducted output power	N/A		Pass	24.2dBm
22.355 24.235	RSS-132(4.3) RSS-133(6.3)	Frequency Stability	2.5PPM		Pass	refer to original
22.913(a)(2)	RSS-132(4.4)	Effective Radiated Power	38 dBm	Radiated	Pass	23.86dBm
24.232(c)	RSS-133(6.4)	Equivalent Isotropic Radiated Power	33dBm		Pass	24.01dBm
22.917(a) 24.238(a)	RSS-132(4.5.1) RSS-133(6.5.1)	Radiated Spurious Emission	-13dBm		Pass	-38.9dBm

7.1. CDMA2000

7.1.1. 1xRTT

TEST PROCEDURE

This procedure assumes the Agilent 8960 Test Set has the following applications installed and with valid license.

<u>Application</u>	<u>Rev, License</u>
CDMA2000 Mobile Test	B.13.08, L

- Call Setup > Shift & Preset
- Cell Info > Cell Parameters > System ID (SID) > 7
 > Network ID (NID) > 1
- Protocol Rev > 6 (IS-2000-0)
- Radio Config (RC) > Please see following table or details
- FCH Service Option (SO) Setup > Please see following table or details
- Traffic Data Rate > Full
- TDSO SCH Info > F-SCH Parameters > F-SCH Data Rate > 153.6 kbps
 > R-SCH Parameters > R-SCH Data Rate > 153.6 kbps
- Rvs Power Ctrl > Active bits
 - Rvs Power Ctrl > All Up bits (Maximum TxPout)

7.1. RADIATED POWER (ERP & EIRP)

RULE PART(S)

FCC: §2.1046, §22.913, §24.232

LIMITS

22.913(a) - The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts.

24.232(c) - Mobile/portable stations are limited to 2 watts e.i.r.p. peak power and the equipment must employ means to limit the power to the minimum necessary for successful communications.

In addition, when the transmitter power is measured in terms of average value, the peak-to-average ratio of the power shall not exceed 13dB.

TEST PROCEDURE

ANSI / TIA / EIA 603C Clause 2.2.17; PSA setting reference to 971168 D01 v02r02

For peak power measurement with a PSA:

a) Set the RBW \geq OBW; b) Set VBW $\geq 3 \times$ RBW; c) Set span $\geq 2 \times$ RBW; d) Sweep time = auto couple; e) Detector = peak; f) Ensure that the number of measurement points \geq span/RBW; g) Trace mode = max hold;

For average power measurement with a PSA:

a) Set span to at least 1.5 times the OBW; b) Set RBW = 1-5% of the OBW, not to exceed 1 MHz; c) Set VBW $\geq 3 \times$ RBW; d) Set number of points in sweep $\geq 2 \times$ span / RBW; e) Sweep time = auto-couple; f) Detector = RMS (power averaging); g) Use free run trigger If burst duty cycle ≥ 98 ; h) Use trigger to capture bursts If burst duty cycle < 98 ; i) Trace average at least 100 traces in power averaging (*i.e.*, RMS) mode. j) Compute the power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function.

TEST RESULTS

7.1.1. ERP/EIRP RESULTS

Band	Mode	Channel	f(MHz)	ERP / EIRP	
				dBm	mW
BC1	1xRTT	25	1851.25	23.53	225.4
		600	1880	24.01	251.8
		1175	1908.75	23.20	208.9
BC0	1xRTT	1013	824.7	23.86	243.2
		384	836.52	22.94	196.8
		777	848.31	22.66	184.5

7.1.2. ERP/EIRP PLOTS

Band BC1 1xRTT	High Frequency Fundamental Measurement UL Verification Services Chamber C								
	Company:		LG Electronics						
	Project #:		15I21553						
	Date:		09/16/15						
	Test Engineer:		R. Alegre						
	Configuration:		EUT only						
	Mode:		CDMA RTT BC1						
	Test Equipment:		Receiving: Horn T119, and Chamber C SMA Cables Substitution: Horn T60 Substitution, 4ft SMA Cable Warehouse						
	f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
	Low Ch								
	1.85125	14.1	V	0.85	9.20	22.44	33.0	-10.6	
	1.85125	15.2	H	0.85	9.20	23.53	33.0	-9.5	
Mid Ch									
1.880	11.4	V	0.85	9.10	19.66	33.0	-13.3		
1.880	15.8	H	0.85	9.10	24.01	33.0	-9.0		
High Ch									
1.90875	13.1	V	0.85	9.00	21.28	33.0	-11.7		
1.90875	15.1	H	0.85	9.00	23.20	33.0	-9.8		
Rev. 3.17.11									

Band BC0 1xRTT	High Frequency Substitution Measurement UL Verification Services, Inc. Chamber C								
	Company:		LG Electronics						
	Project #:		15I21553						
	Date:		09/16/15						
	Test Engineer:		R. Alegre						
	Configuration:		EUT Only						
	Mode:		CDMA BC0 RTT FUND						
	Test Equipment:		Receiving: Sunol T185, and 5m Chamber C N-type Cable Substitution: Dipole T273, 4ft SMA Cable Warehouse.						
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)	Notes
	Low Ch								
824.70	14.76	V	0.9	0.0	13.86	38.5	-24.6		
824.70	24.76	H	0.9	0.0	23.86	38.5	-14.6		
Mid Ch									
836.52	15.10	V	0.9	0.0	14.20	38.5	-24.2		
836.52	23.84	H	0.9	0.0	22.94	38.5	-15.5		
High Ch									
848.31	12.78	V	0.9	0.0	11.88	38.5	-26.6		
848.31	23.56	H	0.9	0.0	22.66	38.5	-15.8		
Rev. 3.17.11 Note: For Band 13/17 ERP limit is 34.77dBm; For Band 26 limit is 50dBm									

7.2. FIELD STRENGTH OF SPURIOUS RADIATION

RULE PART(S)

FCC: §2.1053, §22.917, §24.238

LIMIT

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

TEST PROCEDURE

For Cellular equipment - Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 100 kHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

For PCS equipment - Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 1 MHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

RESULTS

7.2.1. SPURIOUS RADIATION PLOTS

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement									
Company:		LG Electronics							
Project #:		15I21553							
Date:		9/16/2015							
Test Engineer:		R. Alegre							
Configuration:		EUT + AC Adapter							
Location:		Chamber C							
Mode:		CDMA 1xRTT BC1 Harmonics							
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 1851.25									
3702.50	-15.0	V	3.0	35.9	1.0	-49.9	-13.0	-36.9	
5553.75	-11.4	V	3.0	35.5	1.0	-45.9	-13.0	-32.9	
7405.00	-5.9	V	3.0	35.7	1.0	-40.6	-13.0	-27.6	
BC1									
3702.50	-15.5	H	3.0	35.9	1.0	-50.3	-13.0	-37.3	
5553.75	-10.8	H	3.0	35.5	1.0	-45.3	-13.0	-32.3	
7405.00	-7.1	H	3.0	35.7	1.0	-41.9	-13.0	-28.9	
1xRTT									
Mid Ch, 1880									
3760.00	-14.9	V	3.0	35.8	1.0	-49.7	-13.0	-36.7	
5640.00	-10.7	V	3.0	35.5	1.0	-45.2	-13.0	-32.2	
7520.00	-6.2	V	3.0	35.7	1.0	-41.0	-13.0	-28.0	
3760.00	-14.9	H	3.0	35.8	1.0	-49.7	-13.0	-36.7	
5640.00	-9.6	H	3.0	35.5	1.0	-44.1	-13.0	-31.1	
7520.00	-5.3	H	3.0	35.7	1.0	-40.0	-13.0	-27.0	
High Ch, 1908.75									
3817.50	-14.0	V	3.0	35.8	1.0	-48.8	-13.0	-35.8	
5726.25	-11.2	V	3.0	35.5	1.0	-45.7	-13.0	-32.7	
7635.00	-5.1	V	3.0	35.8	1.0	-39.8	-13.0	-26.8	
3817.50	-13.5	H	3.0	35.8	1.0	-48.3	-13.0	-35.3	
5726.25	-9.9	H	3.0	35.5	1.0	-44.4	-13.0	-31.4	
7635.00	-4.1	H	3.0	35.8	1.0	-38.9	-13.0	-25.9	

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement									
Company:		LG Electronics							
Project #:		15I21553							
Date:		9/16/2015							
Test Engineer:		R. Alegre							
Configuration:		EUT + AC Adapter							
Location:		Chamber C							
Mode:		CDMA 1xRTT BC0 Harmonics							
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 824.7									
1649.40	-8.3	V	3.0	37.4	1.0	-44.7	-13.0	-31.7	
2474.10	-20.7	V	3.0	36.4	1.0	-56.1	-13.0	-43.1	
BC0									
3298.80	-16.6	V	3.0	35.8	1.0	-51.4	-13.0	-38.4	
1649.40	-24.9	H	3.0	37.4	1.0	-61.3	-13.0	-48.3	
2474.10	-19.6	H	3.0	36.4	1.0	-55.0	-13.0	-42.0	
1xRTT									
3298.80	-17.6	H	3.0	35.8	1.0	-52.4	-13.0	-39.4	
Mid Ch, 836.52									
1673.04	-11.0	V	3.0	37.3	1.0	-47.3	-13.0	-34.3	
2509.56	-20.2	V	3.0	36.4	1.0	-55.6	-13.0	-42.6	
3346.08	-16.1	V	3.0	35.8	1.0	-50.9	-13.0	-37.9	
1673.04	-22.4	H	3.0	37.3	1.0	-58.7	-13.0	-45.7	
2509.56	-19.7	H	3.0	36.4	1.0	-55.1	-13.0	-42.1	
3346.08	-16.4	H	3.0	35.8	1.0	-51.2	-13.0	-38.2	
High Ch, 848.31									
1696.62	-13.1	V	3.0	37.3	1.0	-49.4	-13.0	-36.4	
2544.93	-27.1	V	3.0	36.3	1.0	-62.4	-13.0	-49.4	
3393.24	-23.7	V	3.0	35.7	1.0	-58.4	-13.0	-45.4	
1696.62	-17.9	H	3.0	37.3	1.0	-54.2	-13.0	-41.2	
2544.93	-24.5	H	3.0	36.3	1.0	-59.8	-13.0	-46.8	
3393.24	-23.0	H	3.0	35.7	1.0	-57.7	-13.0	-44.7	