



# PCTEST ENGINEERING LABORATORY, INC.

7185 Oakland Mills Road, Columbia, MD 21046 USA  
Tel. 410.290.6652 / Fax 410.290.6654  
http://www.pctestlab.com



## MEASUREMENT REPORT FCC Part 15.407 UNII 802.11

**Applicant Name:**  
LG Electronics MobileComm U.S.A  
1000 Sylvan Avenue  
Englewood Cliffs, NJ 07632  
United States

**Date of Testing:**  
03/17 - 03/31/2015  
**Test Site/Location:**  
PCTEST Lab, Columbia, MD, USA  
**Test Report Serial No.:**  
0Y1503160569.ZNF

<b>FCC ID:</b>	<b>ZNFVK815</b>
<b>APPLICANT:</b>	<b>LG Electronics MobileComm U.S.A</b>

**Application Type:** Class II Permissive Change

**Model(s):** LG-VK815, LGVK815, VK815, LG-AK815, LGAK815, AK815

**EUT Type:** Portable Tablet

**FCC Classification:** Unlicensed National Information Infrastructure (UNII)

**FCC Rule Part(s):** Part 15.407

**Test Procedure(s):** KDB 789033 D02 v01

**Class II Permissive Change:** Please see FCC change document

**Original Grant Date:** 03/24/2015

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in KDB 789033 D02 v01. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

  
Randy Ortanez  
President




<b>FCC ID:</b> ZNFVK815		<b>FCC Pt. 15.407 802.11 UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)</b>		<b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1503160569.ZNF	<b>Test Dates:</b> 03/17 - 03/31/2015	<b>EUT Type:</b> Portable Tablet	Page 1 of 44	

# TABLE OF CONTENTS


FCC PART 15.407 MEASUREMENT REPORT .....		3
1.0 INTRODUCTION .....		4
1.1 SCOPE .....		4
1.2 PCTEST TEST LOCATION .....		4
2.0 PRODUCT INFORMATION .....		5
2.1 EQUIPMENT DESCRIPTION .....		5
2.2 DEVICE CAPABILITIES .....		5
2.3 TEST CONFIGURATION.....		5
2.4 EMI SUPPRESSION DEVICE(S)/MODIFICATIONS.....		5
3.0 DESCRIPTION OF TEST .....		6
3.1 EVALUATION PROCEDURE .....		6
3.2 RADIATED EMISSIONS.....		6
3.3 ENVIRONMENTAL CONDITIONS .....		6
4.0 ANTENNA REQUIREMENTS .....		7
5.0 TEST EQUIPMENT CALIBRATION DATA.....		8
6.0 TEST RESULTS .....		9
6.1 SUMMARY.....		9
6.2 RADIATED SPURIOUS EMISSION MEASUREMENTS – ABOVE 1GHZ.....		10
6.7.1 RADIATED SPURIOUS EMISSION MEASUREMENTS .....		13
6.7.2 RADIATED BAND EDGE MEASUREMENTS (20MHZ BW) .....		23
6.3 RADIATED SPURIOUS EMISSIONS MEASUREMENTS – BELOW 1GHZ.....		41
7.0 CONCLUSION .....		44

<b>FCC ID:</b> ZNFVK815		<b>FCC Pt. 15.407 802.11 UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)</b>		<b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1503160569.ZNF	<b>Test Dates:</b> 03/17 - 03/31/2015	<b>EUT Type:</b> Portable Tablet	Page 2 of 44	



# MEASUREMENT REPORT

## FCC Part 15.407



### § 2.1033 General Information

**APPLICANT:** LG Electronics MobileComm U.S.A

**APPLICANT ADDRESS:** 1000 Sylvan Avenue  
Englewood Cliffs, NJ 07632, United States

**TEST SITE:** PCTEST ENGINEERING LABORATORY, INC.

**TEST SITE ADDRESS:** 7185 Oakland Mills Road, Columbia, MD 21046 USA

**FCC RULE PART(S):** Part 15.407

**BASE MODEL:** LG-VK815

**FCC ID:** ZNFVK815

**FCC CLASSIFICATION:** Unlicensed National Information Infrastructure (UNII)

**Test Device Serial No.:** WLAN RAD#2       Production     Pre-Production     Engineering


**DATE(S) OF TEST:** 03/17 - 03/31/2015

**TEST REPORT S/N:** 0Y1503160569.ZNF

### Test Facility / Accreditations

Measurements were performed at PCTEST Engineering Lab located in Columbia, MD 21046, U.S.A.

- PCTEST facility is an FCC registered (PCTEST Reg. No. 159966) test facility with the site description report on file and has met all the requirements specified in Section 2.948 of the FCC Rules and Industry Canada (2451B-1).
- PCTEST Lab is accredited to ISO 17025 by U.S. National Institute of Standards and Technology (NIST) under the National Voluntary Laboratory Accreditation Program (NVLAP Lab code: 100431-0) in EMC, FCC and Telecommunications.
- PCTEST Lab is accredited to ISO 17025-2005 by the American Association for Laboratory Accreditation (A2LA) in Specific Absorption Rate (SAR) testing, Hearing Aid Compatibility (HAC) testing, CTIA Test Plans, and wireless testing for FCC and Industry Canada Rules.
- PCTEST Lab is a recognized U.S. Conformity Assessment Body (CAB) in EMC and R&TTE (n.b. 0982) under the U.S.-EU Mutual Recognition Agreement (MRA).
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC Guide 65 by the American National Standards Institute (ANSI) in all scopes of FCC Rules and Industry Canada Standards (RSS).
- PCTEST facility is an IC registered (2451B-1) test laboratory with the site description on file at Industry Canada.
- PCTEST is a CTIA Authorized Test Laboratory (CATL) for AMPS, CDMA, and EvDO wireless devices and for Over-the-Air (OTA) Antenna Performance testing for AMPS, CDMA, GSM, GPRS, EGPRS, UMTS (W-CDMA), CDMA 1xEVDO, and CDMA 1xRTT.



<b>FCC ID:</b> ZNFVK815		FCC Pt. 15.407 802.11 UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		<b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1503160569.ZNF	<b>Test Dates:</b> 03/17 - 03/31/2015	<b>EUT Type:</b> Portable Tablet	Page 3 of 44	

# 1.0 INTRODUCTION


## 1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Industry Canada Certification and Engineering Bureau.

## 1.2 PCTEST Test Location

The map below shows the location of the PCTEST LABORATORY, its proximity to the FCC Laboratory, the Columbia vicinity, the Baltimore-Washington Intern'l (BWI) airport, the city of Baltimore and the Washington, DC area. (See Figure 1-1).

These measurement tests were conducted at the PCTEST Engineering Laboratory, Inc. facility located at 7185 Oakland Mills Road, Columbia, MD 21046. The site coordinates are 39° 10'23" N latitude and 76° 49'50" W longitude. The facility is 0.4 miles North of the FCC laboratory, and the ambient signal and ambient signal strength are approximately equal to those of the FCC laboratory. The detailed description of the measurement facility was found to be in compliance with the requirements of § 2.948 according to ANSI C63.4-2009 on February 15, 2012.

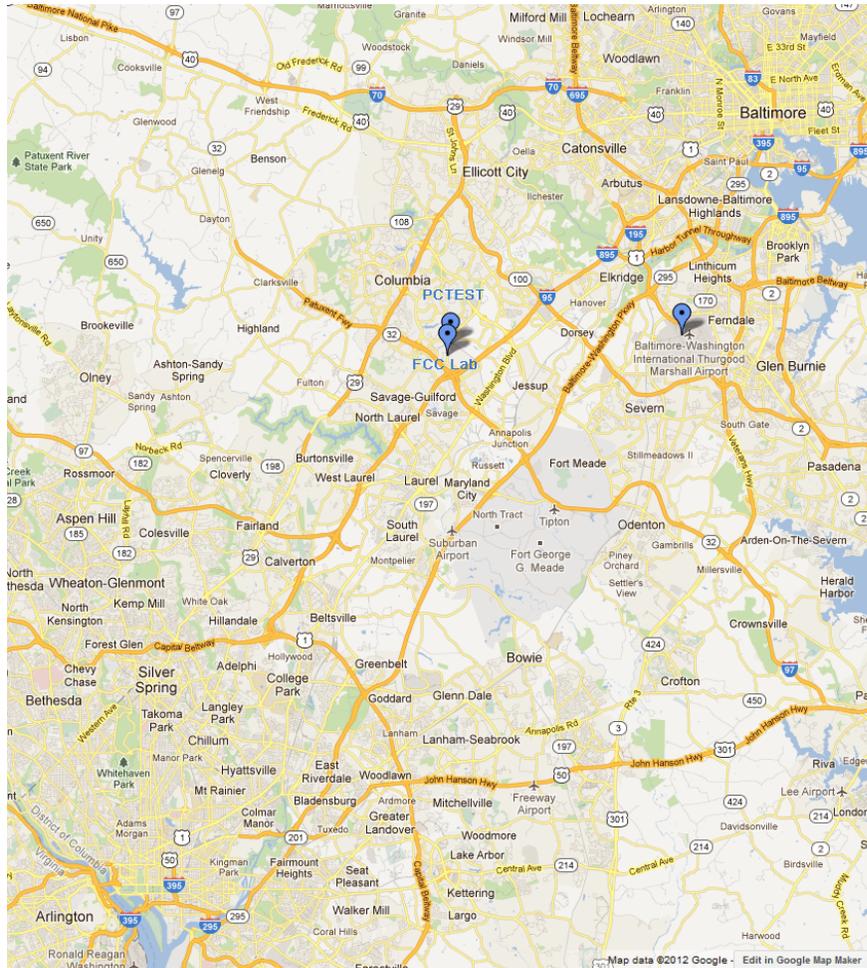

**Figure 1-1. Map of the Greater Baltimore and Metropolitan Washington, D.C. area**

<b>FCC ID:</b> ZNFVK815		<b>FCC Pt. 15.407 802.11 UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)</b>		<b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1503160569.ZNF	<b>Test Dates:</b> 03/17 - 03/31/2015	<b>EUT Type:</b> Portable Tablet	Page 4 of 44	

## 2.0 PRODUCT INFORMATION

### 2.1 Equipment Description

The Equipment Under Test (EUT) is the **LG Portable Tablet FCC ID: ZNFVK815**. The test data contained in this report pertains only to the emissions due to the EUT's UNII transmitter.

### 2.2 Device Capabilities

This device contains the following capabilities:

Multi-band LTE, 802.11b/g/n WLAN, 802.11a/n UNII, Bluetooth (1x, EDR, LE)

**Note:** 5GHz NII operation is possible in 20MHz channel bandwidth. The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz, and detector = peak per the guidance of Section B)2)b) of KDB 789033. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

Maximum Achievable Duty Cycles		
802.11 Mode/Band		Duty Cycle
		ANT1
5GHz	a	96.2
	n (HT20)	95.6
	n (HT40)	90.5

Data Rate(s) Tested: 6, 9, 12, 18, 24, 36, 48, 54Mbps (802.11a)  
6.5/7.2, 13/14.4, 19.5/21.7, 26/28.9, 39/43.3, 52/57.8, 58.5/65, 65/72.2 (n – 20MHz)

### 2.3 Test Configuration

The LG Portable Tablet FCC ID: ZNFVK815 was tested per the guidance of KDB 789033 D02 v01. ANSI C63.10-2009 was used to reference the appropriate EUT setup for radiated spurious emissions testing. See Section 3.2 for radiated emissions test setups

### 2.4 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

FCC ID: ZNFVK815		FCC Pt. 15.407 802.11 UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1503160569.ZNF	Test Dates: 03/17 - 03/31/2015	EUT Type: Portable Tablet	Page 5 of 44	

## 3.0 DESCRIPTION OF TEST

### 3.1 Evaluation Procedure

The measurement procedures described in the American National Standard for Testing Unlicensed Wireless Devices (ANSI C63.10-2009) and the guidance provided in KDB 789033 D02 v01 were used in the measurement of **LG Portable Tablet FCC ID: ZNFVK815**.

Deviation from measurement procedure.....None

### 3.2 Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Clause 5, Figure 5.7 of ANSI C63.4-2009. For measurements above 1GHz absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections. For measurements below 1GHz, the absorbers are removed. An ETS Lindgren Model 2188 raised turntable is used for radiated measurement. It is a continuously rotatable, remote-controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. A 78cm high PVC support structure is placed on top of the turntable. A ¾" (~1.9cm) sheet of high density polyethylene is used as the table top and is placed on top of the PVC supports to bring the total height of the table to 80cm.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33(b)(1) depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up was placed on top of the 0.8 meter high, 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, clock speed, mode of operation or video resolution, if applicable, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions.

### 3.3 Environmental Conditions

The temperature is controlled within range of 15°C to 35°C. The relative humidity is controlled within range of 10% to 75%. The atmospheric pressure is monitored within the range 86-106kPa (860-1060mbar).

<b>FCC ID:</b> ZNFVK815		FCC Pt. 15.407 802.11 UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		<b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1503160569.ZNF	<b>Test Dates:</b> 03/17 - 03/31/2015	<b>EUT Type:</b> Portable Tablet	Page 6 of 44	

## 4.0 ANTENNA REQUIREMENTS

**Excerpt from §15.203 of the FCC Rules/Regulations:**

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antennas of the Portable Tablet are **permanently attached**.
- There are no provisions for connection to an external antenna.

**Conclusion:**

The **LG Portable Tablet FCC ID: ZNFVK815** unit complies with the requirement of §15.203.

Band 1		Band 2A		Band 2C		Band 3	
Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
36	5180	52	5260	100	5500	149	5745
:	:	:	:	:	:	:	:
42	5210	56	5280	116	5580	157	5785
:	:	:	:	:	:	:	:
48	5240	64	5320	140	5700	165	5825

**Table 4-1. 802.11a/n (20MHz) Frequency / Channel Operations**

Band 1		Band 2A		Band 2C		Band 3	
Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
38	5190	54	5270	102	5510	151	5755
:	:	:	:	:	:	:	:
46	5230	62	5310	110	5550		
				:	:		
				134	5670	159	5795

**Table 4-2. 802.11n (40MHz BW) Frequency / Channel Operations**

<b>FCC ID:</b> ZNFVK815		FCC Pt. 15.407 802.11 UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		<b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1503160569.ZNF	<b>Test Dates:</b> 03/17 - 03/31/2015	<b>EUT Type:</b> Portable Tablet		Page 7 of 44

## 5.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST).

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
-	RE1	Radiated Emissions Cable Set (UHF/EHF)	10/24/2014	Annual	10/24/2015	N/A
Agilent	8447D	Broadband Amplifier	5/30/2014	Annual	5/30/2015	2443A01900
Agilent	N9020A	MXA Signal Analyzer	10/27/2014	Annual	10/27/2015	US46470561
Emco	3115	Horn Antenna (1-18GHz)	1/30/2014	Biennial	1/30/2016	9704-5182
ETS Lindgren	3117	1-18 GHz DRG Horn (Medium)	4/8/2014	Biennial	4/8/2016	125518
ETS Lindgren	3160-09	18-26.5 GHz Standard Gain Horn	6/17/2014	Biennial	6/17/2016	135427
ETS Lindgren	3160-10	26.5-40 GHz Standard Gain Horn	6/17/2014	Biennial	6/17/2016	130993
Huber+Suhner	Sucoflex 102A	40GHz Radiated Cable	10/15/2014	Annual	10/15/2015	251425001
K & L	11SH10-3075/U18000	High Pass Filter	12/1/2014	Annual	12/1/2015	2
Rhode & Schwarz	TS-PR18	Pre-Amplifier	3/5/2015	Annual	3/5/2016	101622
Rohde & Schwarz	TS-PR18	1-18 GHz Pre-Amplifier	3/5/2015	Annual	3/5/2016	100071
Rohde & Schwarz	TS-PR26	18-26.5 GHz Pre-Amplifier	3/3/2015	Annual	3/3/2016	100040
Rohde & Schwarz	ESU26	EMI Test Receiver (26.5GHz)	3/12/2015	Annual	3/12/2016	100342
Rohde & Schwarz	TS-PR40	26.5-40 GHz Pre-Amplifier	3/3/2015	Annual	3/3/2016	100037
Rohde & Schwarz	ESU40	EMI Test Receiver (40GHz)	5/21/2014	Annual	5/21/2015	100348
Seekonk	NC-100	Torque Wrench 5/16", 8" lbs	3/18/2014	Biennial	3/18/2016	N/A
Sunol	JB5	Bi-Log Antenna (30M - 5GHz)	1/28/2014	Biennial	1/28/2016	A051107
VWR	62344-734	Thermometer with Clock	2/20/2014	Biennial	2/20/2016	140140336

**Table 5-1. Annual Test Equipment Calibration Schedule**

<b>FCC ID:</b> ZNFVK815		FCC Pt. 15.407 802.11 UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		<b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1503160569.ZNF	<b>Test Dates:</b> 03/17 - 03/31/2015	<b>EUT Type:</b> Portable Tablet	Page 8 of 44	

## 6.0 TEST RESULTS

### 6.1 Summary

Company Name: LG Electronics MobileComm U.S.A  
 FCC ID: ZNFVK815  
 Method/System: Unlicensed National Information Infrastructure (UNII)

FCC Part Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
<b><u>TRANSMITTER MODE (TX)</u></b>					
15.407(b.1), (2),(3)	Undesirable Emissions	< -27 dBm/MHz EIRP (outside 5150-5350MHz, 5470-5725MHz, 5715-5860MHz) < -17 dBm/MHz EIRP (within 5715-5725MHz and 5850-5860MHz)	RADIATED	PASS	Section 6.2
15.205, 15.407(b.1), (5), (6)	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Emissions in restricted bands must meet the radiated limits detailed in 15.209 (RSS-210 table 3 limits)		PASS	Section 6.2, 6.3

**Table 6-1. Summary of Test Results**

**Note:**

- 1) All channels, modes, and modulations/data rates were investigated among all UNII bands. The test results shown in the following sections represent the worst case emissions.

<b>FCC ID:</b> ZNFVK815		FCC Pt. 15.407 802.11 UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		<b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1503160569.ZNF	<b>Test Dates:</b> 03/17 - 03/31/2015	<b>EUT Type:</b> Portable Tablet	Page 9 of 44	

## 6.2 Radiated Spurious Emission Measurements – Above 1GHz

§15.407(b.1)(b.6) §15.205 §15.209

### Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in KDB 789033 D02 v01, and at the appropriate frequencies. All channels, modes (e.g. 802.11a, 802.11n (20MHz BW), 802.11n (40MHz BW), and 802.11ac (80MHz)), and modulations/data rates were investigated among all UNII bands. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

***All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table 6-2 per Section 15.209.***

Frequency	Field Strength [ $\mu\text{V/m}$ ]	Measured Distance [Meters]
Above 960.0 MHz	500	3

**Table 6-2. Radiated Limits**

### Test Procedures Used

KDB 789033 D02 v01 – Section G

### Test Settings

#### Average Measurements above 1GHz (Method AD)

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = power average (RMS)
5. Number of measurement points = 1001 (Number of points must be  $\geq 2 \times \text{span/RBW}$ )
6. Averaging type = power (RMS)
7. Sweep time = auto couple
8. Trace was averaged over 100 sweeps

#### Peak Measurements above 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize


FCC ID: ZNFVK815		FCC Pt. 15.407 802.11 UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1503160569.ZNF	Test Dates: 03/17 - 03/31/2015	EUT Type: Portable Tablet	Page 10 of 44	

### Peak Measurements below 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. Span was set greater than 1MHz
3. RBW = 120kHz
4. Detector = CISPR quasi-peak
5. Sweep time = auto couple
6. Trace was allowed to stabilize

### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

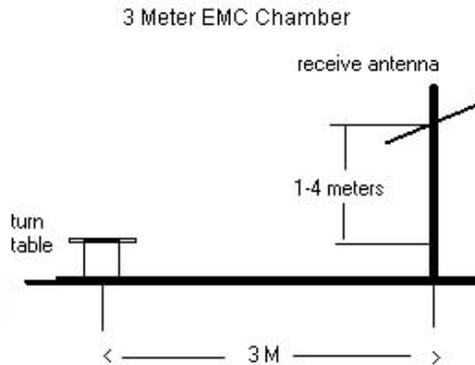

**Figure 6-1. Test Instrument & Measurement Setup**

### Test Notes

1. All radiated spurious emissions levels were measured in a radiated test setup per the guidance of KDB 789033 D02 v01 Section H.
2. All emissions that lie in the restricted bands (denoted by a \* next to the frequency) specified in §15.205 are below the limit shown in Table 6-2.
3. All spurious emissions lying in restricted bands specified in §15.205 are below the limit shown in Table 6-11. All spurious emissions that do not lie in a restricted band are subject to a peak limit of -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions of 68.2dB $\mu$ V/m.
4. The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
5. This unit was tested with its standard battery.

FCC ID: ZNFVK815		FCC Pt. 15.407 802.11 UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1503160569.ZNF	Test Dates: 03/17 - 03/31/2015	EUT Type: Portable Tablet	Page 11 of 44	

6. The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter using CISPR quasi peak detector below 1GHz. Above 1 GHz, average and peak measurements were taken using linearly polarized horn antennas. The worst-case emissions are reported however emissions whose levels were not within 20dB of the respective limits were not reported.
7. Emissions below 18GHz were measured at a 3 meter test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.
8. The wide spectrum spurious emissions plots shown on the following pages are used only for the purpose of emission identification. Any emissions found to be within 20dB of the limit are fully investigated and the results are shown in this section. Rohde & Schwarz EMC32, Version 9.15.00 automated test software was used to perform the Radiated Spurious Emissions Pre-Scan testing.

### **Sample Calculations**

#### **Determining Spurious Emissions Levels**


- Field Strength Level  $_{[dB_{\mu V/m}]}$  = Analyzer Level  $_{[dBm]}$  + 107 + AFCL  $_{[dB/m]}$
- AFCL  $_{[dB/m]}$  = Antenna Factor  $_{[dB/m]}$  + Cable Loss  $_{[dB]}$
- Margin  $_{[dB]}$  = Field Strength Level  $_{[dB_{\mu V/m}]}$  – Limit  $_{[dB_{\mu V/m}]}$

#### **Radiated Band Edge Measurement Offset**


- The amplitude offset shown in the radiated restricted band edge plots in Section 6.8 was calculated using the formula:  
Offset (dB) = (Antenna Factor + Cable Loss + 10 dB Attenuator) – Pre-amplifier Gain

FCC ID: ZNFVK815		FCC Pt. 15.407 802.11 UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1503160569.ZNF	Test Dates: 03/17 - 03/31/2015	EUT Type: Portable Tablet	Page 12 of 44	


### 6.7.1 Radiated Spurious Emission Measurements

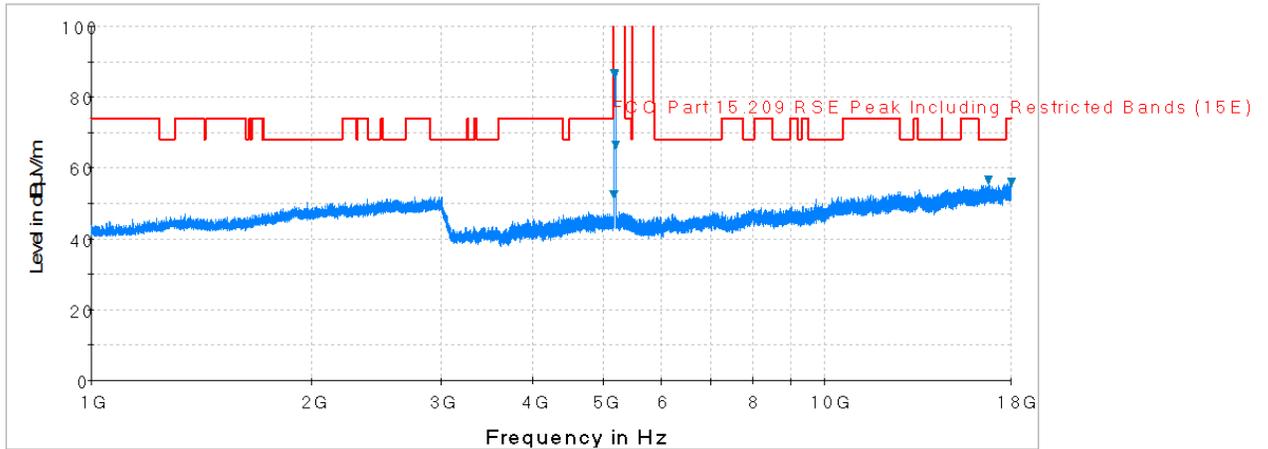

**Plot 6-1. Radiated Spurious Plot above 1GHz (802.11a – U1 Ch. 40, Ant. Pol. H)**

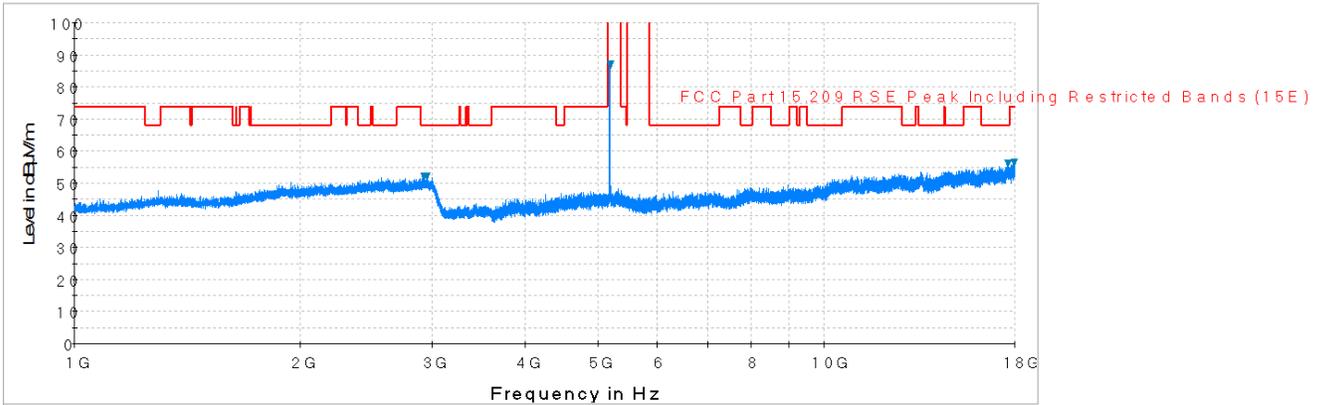


**Plot 6-2. Radiated Spurious Plot above 1GHz (802.11a – U1 Ch. 40, Ant. Pol. V)**

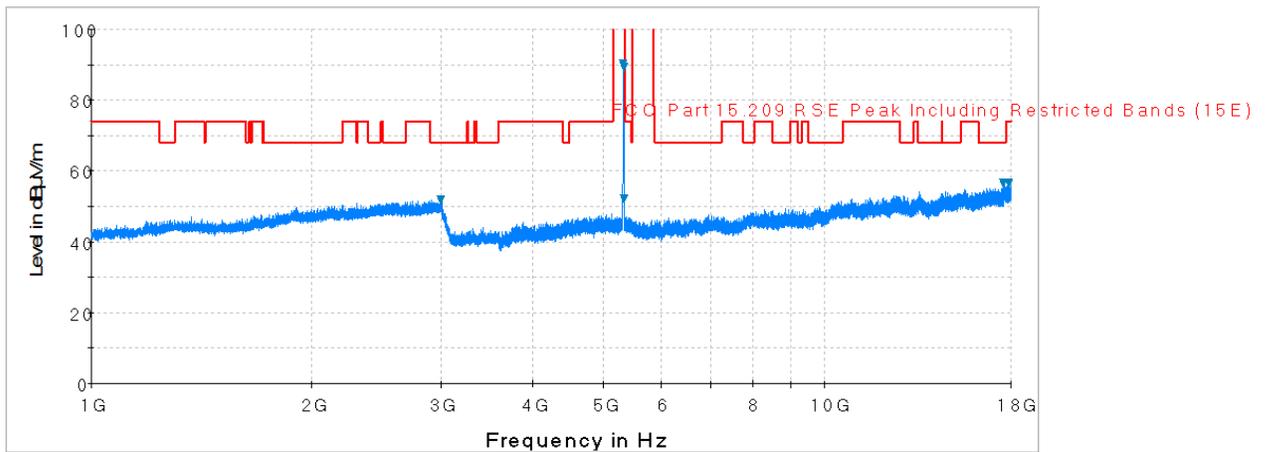


**Plot 6-3. Radiated Spurious Plot above 1GHz (802.11a – U2A Ch. 56, Ant. Pol. H)**


FCC ID: ZNFVK815		FCC Pt. 15.407 802.11 UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1503160569.ZNF	Test Dates: 03/17 - 03/31/2015	EUT Type: Portable Tablet		Page 13 of 44

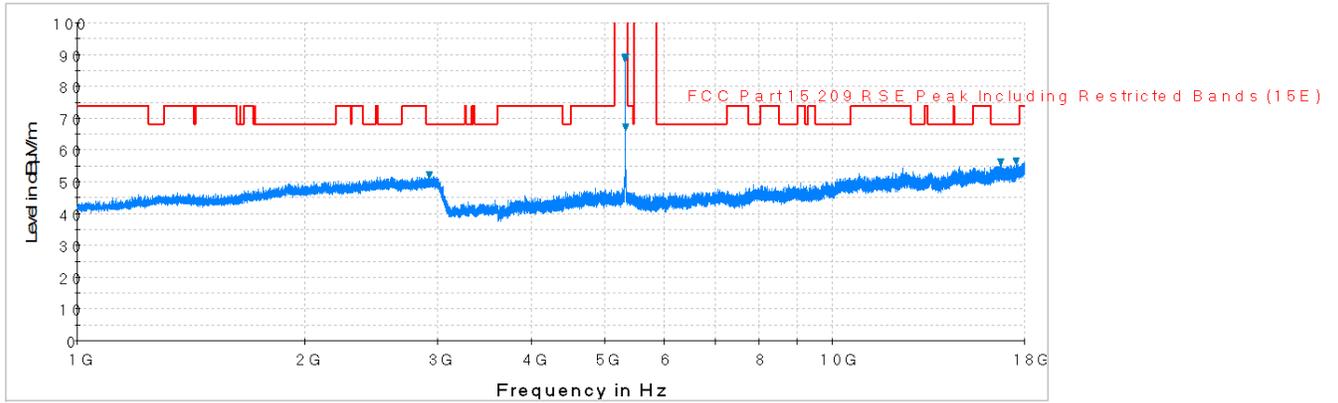

**Plot 6-4. Radiated Spurious Plot above 1GHz (802.11a – U2A Ch. 56, Ant. Pol. V)**

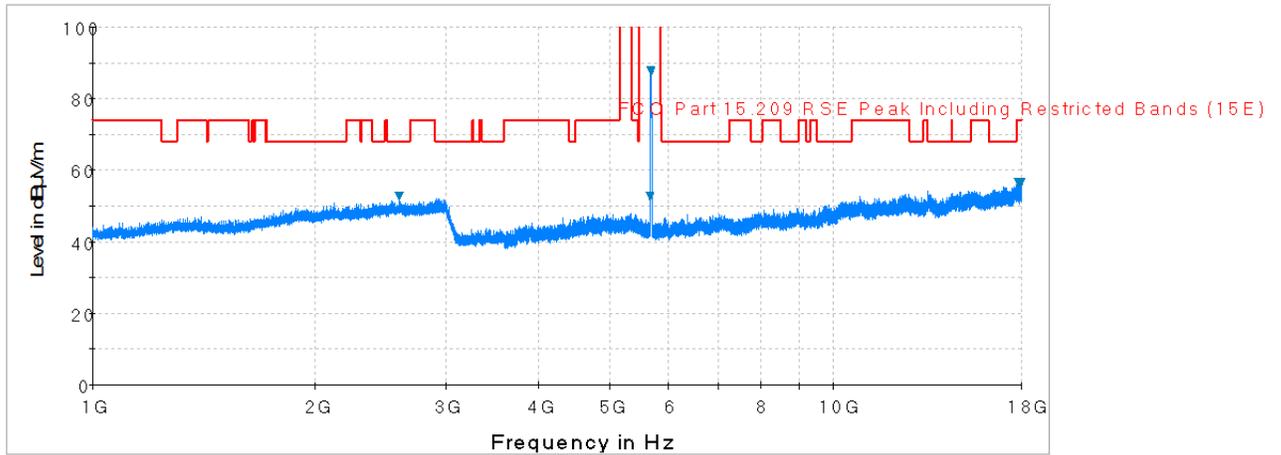


**Plot 6-5. Radiated Spurious Plot above 1GHz (802.11a – U2C Ch. 116, Ant. Pol. H)**

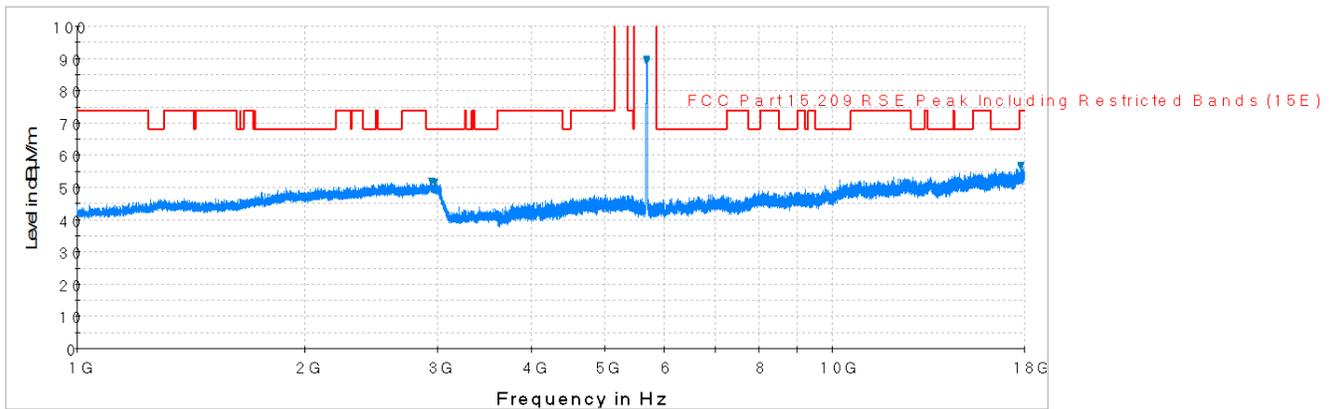


**Plot 6-6. Radiated Spurious Plot above 1GHz (802.11a – U2C Ch. 116, Ant. Pol. V)**

<b>FCC ID:</b> ZNFVK815		<b>FCC Pt. 15.407 802.11 UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)</b>		<b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1503160569.ZNF	<b>Test Dates:</b> 03/17 - 03/31/2015	<b>EUT Type:</b> Portable Tablet	Page 14 of 44	

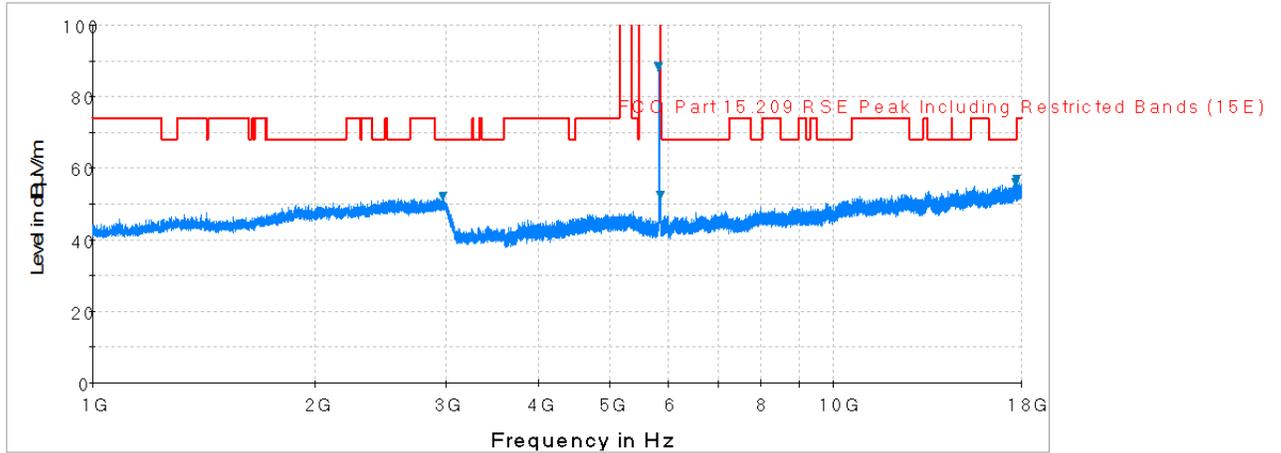

**Plot 6-7. Radiated Spurious Plot above 1GHz (802.11a – U3 Ch. 157, Ant. Pol. H)**

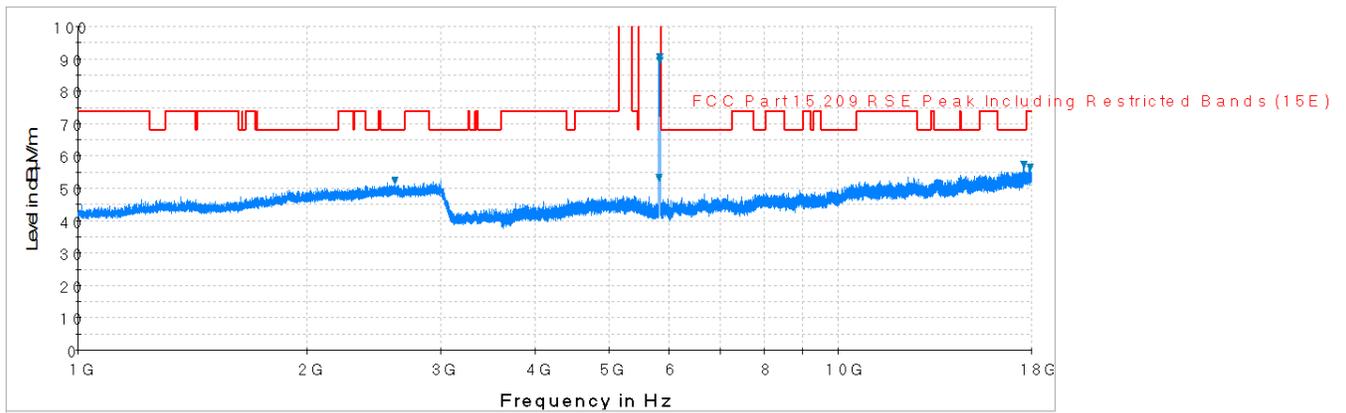

**Plot 6-8. Radiated Spurious Plot above 1GHz (802.11a – U3 Ch. 157, Ant. Pol. V)**

<b>FCC ID:</b> ZNFVK815		<b>FCC Pt. 15.407 802.11 UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)</b>		<b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1503160569.ZNF	<b>Test Dates:</b> 03/17 - 03/31/2015	<b>EUT Type:</b> Portable Tablet	Page 15 of 44	

## Radiated Spurious Emission Measurements

§15.247(d) §15.205 & §15.209

Worst Case Mode: 802.11a  
 Worst Case Transfer Rate: 6 Mbps  
 Distance of Measurements: 1 & 3 Meters  
 Operating Frequency: 5180MHz  
 Channel: 36

Frequency [MHz]	Analyzer Level [dBm]	Detector	Ant. Pol. [H/V]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10360.00	-99.70	Peak	H	44.79	0.00	52.08	68.20	-16.12
* 15540.00	-112.34	Average	H	49.29	0.00	43.95	53.98	-10.02
* 15540.00	-100.63	Peak	H	49.29	0.00	55.66	73.98	-18.31
* 20720.00	-105.67	Average	V	48.73	-9.54	40.52	53.98	-13.46
* 20720.00	-97.21	Peak	V	48.73	-9.54	48.98	73.98	-25.00
25900.00	-104.50	Peak	V	51.07	-9.54	44.03	68.20	-24.17

Table 6-3. Radiated Measurements

Worst Case Mode: 802.11a  
 Worst Case Transfer Rate: 6 Mbps  
 Distance of Measurements: 1 & 3 Meters  
 Operating Frequency: 5200MHz  
 Channel: 40

Frequency [MHz]	Analyzer Level [dBm]	Detector	Ant. Pol. [H/V]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10400.00	-98.95	Peak	H	44.87	0.00	52.92	68.20	-15.28
* 15600.00	-112.67	Average	H	49.31	0.00	43.64	53.98	-10.34
* 15600.00	-100.27	Peak	H	49.31	0.00	56.04	73.98	-17.94
* 20800.00	-106.73	Average	V	48.83	-9.54	39.56	53.98	-14.42
* 20800.00	-96.92	Peak	V	48.83	-9.54	49.37	73.98	-24.61
26000.00	-105.57	Peak	V	51.15	-9.54	43.04	68.20	-25.16

Table 6-4. Radiated Measurements

FCC ID: ZNFVK815		FCC Pt. 15.407 802.11 UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1503160569.ZNF	Test Dates: 03/17 - 03/31/2015	EUT Type: Portable Tablet	Page 16 of 44	

Worst Case Mode: 802.11a  
 Worst Case Transfer Rate: 6 Mbps  
 Distance of Measurements: 1 & 3 Meters  
 Operating Frequency: 5240MHz  
 Channel: 48

Frequency [MHz]	Analyzer Level [dBm]	Detector	Ant. Pol. [H/V]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10480.00	-99.80	Peak	H	45.08	0.00	52.28	68.20	-15.92
* 15720.00	-111.85	Average	H	49.40	0.00	44.56	53.98	-9.42
* 15720.00	-100.82	Peak	H	49.40	0.00	55.58	73.98	-18.40
* 20960.00	-105.87	Average	V	48.98	-9.54	40.56	53.98	-13.42
* 20960.00	-95.79	Peak	V	48.98	-9.54	50.64	73.98	-23.34
26200.00	-103.53	Peak	V	51.17	-9.54	45.10	68.20	-23.10

**Table 6-5. Radiated Measurements**

Worst Case Mode: 802.11a  
 Worst Case Transfer Rate: 6 Mbps  
 Distance of Measurements: 1 & 3 Meters  
 Operating Frequency: 5260MHz  
 Channel: 52

Frequency [MHz]	Analyzer Level [dBm]	Detector	Ant. Pol. [H/V]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10520.00	-100.14	Peak	H	45.13	0.00	51.99	68.20	-16.21
* 15780.00	-112.92	Average	H	49.46	0.00	43.54	53.98	-10.44
* 15780.00	-100.29	Peak	H	49.46	0.00	56.17	73.98	-17.81
* 21040.00	-107.31	Average	H	49.04	-9.54	39.18	53.98	-14.80
* 21040.00	-100.80	Peak	H	49.04	-9.54	45.69	73.98	-28.29
26300.00	-102.06	Peak	H	51.24	-9.54	46.63	68.20	-21.57

**Table 6-6. Radiated Measurements**

FCC ID: ZNFVK815		FCC Pt. 15.407 802.11 UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1503160569.ZNF	Test Dates: 03/17 - 03/31/2015	EUT Type: Portable Tablet	Page 17 of 44	

Worst Case Mode: 802.11a  
 Worst Case Transfer Rate: 6 Mbps  
 Distance of Measurements: 1 & 3 Meters  
 Operating Frequency: 5280MHz  
 Channel: 56

Frequency [MHz]	Analyzer Level [dBm]	Detector	Ant. Pol. [H/V]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10560.00	-99.95	Peak	H	45.13	0.00	52.18	68.20	-16.02
* 15840.00	-112.63	Average	H	49.54	0.00	43.92	53.98	-10.06
* 15840.00	-100.56	Peak	H	49.54	0.00	55.99	73.98	-17.99
* 21120.00	-106.99	Average	H	49.07	-9.54	39.54	53.98	-14.44
* 21120.00	-102.82	Peak	H	49.07	-9.54	43.71	73.98	-30.27
26400.00	-100.17	Peak	H	51.37	-9.54	48.66	68.20	-19.54

**Table 6-7. Radiated Measurements**

Worst Case Mode: 802.11a  
 Worst Case Transfer Rate: 6 Mbps  
 Distance of Measurements: 1 & 3 Meters  
 Operating Frequency: 5320MHz  
 Channel: 64

Frequency [MHz]	Analyzer Level [dBm]	Detector	Ant. Pol. [H/V]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 10640.00	-111.22	Average	H	45.16	0.00	40.94	53.98	-13.04
* 10640.00	-99.31	Peak	H	45.16	0.00	52.85	73.98	-21.13
* 15960.00	-112.49	Average	H	49.75	0.00	44.27	53.98	-9.71
* 15960.00	-100.24	Peak	H	49.75	0.00	56.52	73.98	-17.46
* 21280.00	-108.10	Average	H	49.15	-9.54	38.50	53.98	-15.47
* 21280.00	-102.66	Peak	H	49.15	-9.54	43.94	73.98	-30.03
26600.00	-122.38	Peak	H	47.61	-9.54	22.69	68.20	-45.51

**Table 6-8. Radiated Measurements**

FCC ID: ZNFVK815		FCC Pt. 15.407 802.11 UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1503160569.ZNF	Test Dates: 03/17 - 03/31/2015	EUT Type: Portable Tablet	Page 18 of 44	

Worst Case Mode: 802.11a  
 Worst Case Transfer Rate: 6 Mbps  
 Distance of Measurements: 1 & 3 Meters  
 Operating Frequency: 5500MHz  
 Channel: 100

Frequency [MHz]	Analyzer Level [dBm]	Detector	Ant. Pol. [H/V]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
* 11000.00	-111.12	Average	H	45.24	0.00	41.12	53.98	-12.86
* 11000.00	-98.53	Peak	H	45.24	0.00	53.71	73.98	-20.27
16500.00	-100.20	Peak	H	50.35	0.00	57.15	68.20	-11.05
22000.00	-100.39	Peak	H	49.46	-9.54	46.53	68.20	-21.67
27500.00	-127.69	Peak	H	47.92	-9.54	17.69	68.20	-50.51

**Table 6-9. Radiated Measurements**

Worst Case Mode: 802.11a  
 Worst Case Transfer Rate: 6 Mbps  
 Distance of Measurements: 1 & 3 Meters  
 Operating Frequency: 5580MHz  
 Channel: 116

Frequency [MHz]	Analyzer Level [dBm]	Detector	Ant. Pol. [H/V]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
* 11160.00	-111.82	Average	H	45.23	0.00	40.41	53.98	-13.57
* 11160.00	-99.55	Peak	H	45.23	0.00	52.68	73.98	-21.30
16740.00	-100.16	Peak	H	50.51	0.00	57.35	68.20	-10.85
* 22320.00	-104.60	Average	H	49.87	-9.54	42.73	53.98	-11.25
* 22320.00	-100.36	Peak	H	49.87	-9.54	46.97	73.98	-27.01
27900.00	-127.74	Peak	H	48.09	-9.54	17.81	68.20	-50.39

**Table 6-10. Radiated Measurements**

FCC ID: ZNFVK815		FCC Pt. 15.407 802.11 UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1503160569.ZNF	Test Dates: 03/17 - 03/31/2015	EUT Type: Portable Tablet	Page 19 of 44	

Worst Case Mode: 802.11a  
 Worst Case Transfer Rate: 6 Mbps  
 Distance of Measurements: 1 & 3 Meters  
 Operating Frequency: 5700z  
 Channel: 140

Frequency [MHz]	Analyzer Level [dBm]	Detector	Ant. Pol. [H/V]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11400.00	-111.37	Average	H	45.38	0.00	41.02	53.98	-12.96
* 11400.00	-99.43	Peak	H	45.38	0.00	52.96	73.98	-21.02
17100.00	-100.24	Peak	H	50.43	0.00	57.20	68.20	-11.00
* 22800.00	-103.38	Average	H	49.98	-9.54	44.06	53.98	-9.92
* 22800.00	-101.35	Peak	H	49.98	-9.54	46.09	73.98	-27.89
28500.00	-129.46	Peak	H	48.35	-9.54	16.35	68.20	-51.85

**Table 6-11. Radiated Measurements**

Worst Case Mode: 802.11a  
 Worst Case Transfer Rate: 6 Mbps  
 Distance of Measurements: 1 & 3 Meters  
 Operating Frequency: 5745MHz  
 Channel: 149

Frequency [MHz]	Analyzer Level [dBm]	Detector	Ant. Pol. [H/V]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11490.00	-111.14	Average	H	45.43	0.00	41.29	53.98	-12.69
* 11490.00	-99.85	Peak	H	45.43	0.00	52.58	73.98	-21.40
17235.00	-100.07	Peak	H	50.61	0.00	57.54	68.20	-10.66
* 22980.00	-102.91	Average	H	49.94	-9.54	44.49	53.98	-9.49
* 22980.00	-99.57	Peak	H	49.94	-9.54	47.83	73.98	-26.15
28725.00	-131.82	Peak	H	48.26	-9.54	13.90	68.20	-54.30

**Table 6-12. Radiated Measurements**

FCC ID: ZNFVK815		FCC Pt. 15.407 802.11 UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1503160569.ZNF	Test Dates: 03/17 - 03/31/2015	EUT Type: Portable Tablet	Page 20 of 44	

Worst Case Mode: 802.11a  
 Worst Case Transfer Rate: 6 Mbps  
 Distance of Measurements: 1 & 3 Meters  
 Operating Frequency: 5785MHz  
 Channel: 157

Frequency [MHz]	Analyzer Level [dBm]	Detector	Ant. Pol. [H/V]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11570.00	-109.17	Average	H	45.55	0.00	43.38	53.98	-10.60
* 11570.00	-99.09	Peak	H	45.55	0.00	53.46	73.98	-20.52
17355.00	-100.70	Peak	H	51.00	0.00	57.30	68.20	-10.90
23140.00	-100.82	Peak	H	50.05	-9.54	46.69	68.20	-21.51
28925.00	-131.31	Peak	H	48.28	-9.54	14.42	68.20	-53.78


**Table 6-13. Radiated Measurements**

Worst Case Mode: 802.11a  
 Worst Case Transfer Rate: 6 Mbps  
 Distance of Measurements: 1 & 3 Meters  
 Operating Frequency: 5825MHz  
 Channel: 165


Frequency [MHz]	Analyzer Level [dBm]	Detector	Ant. Pol. [H/V]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11650.00	-109.42	Average	H	45.67	0.00	43.25	53.98	-10.73
* 11650.00	-98.85	Peak	H	45.67	0.00	53.82	73.98	-20.16
17475.00	-100.30	Peak	H	51.30	0.00	58.00	68.20	-10.20
23300.00	-100.44	Peak	H	50.10	-9.54	47.11	68.20	-21.09
29125.00	-131.89	Peak	H	48.24	-9.54	13.81	68.20	-54.39

**Table 6-14. Radiated Measurements**

## Radiated Spurious Emissions Measurements (Above 18GHz) §15.209

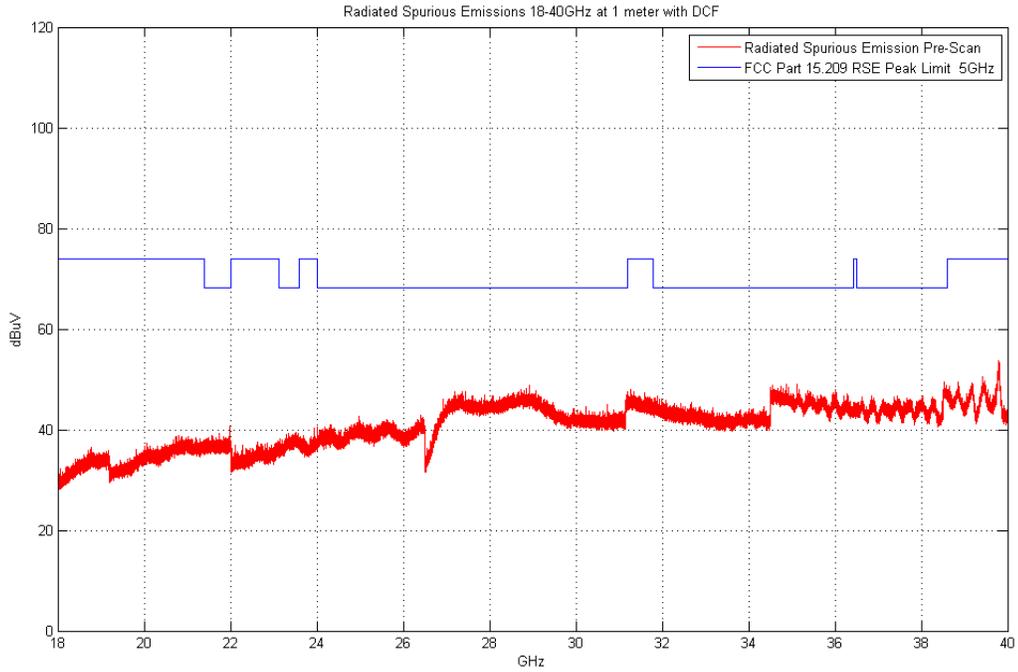

**Plot 6-9. Radiated Spurious Plot above 18GHz (802.11a – Ant. Pol. H)**

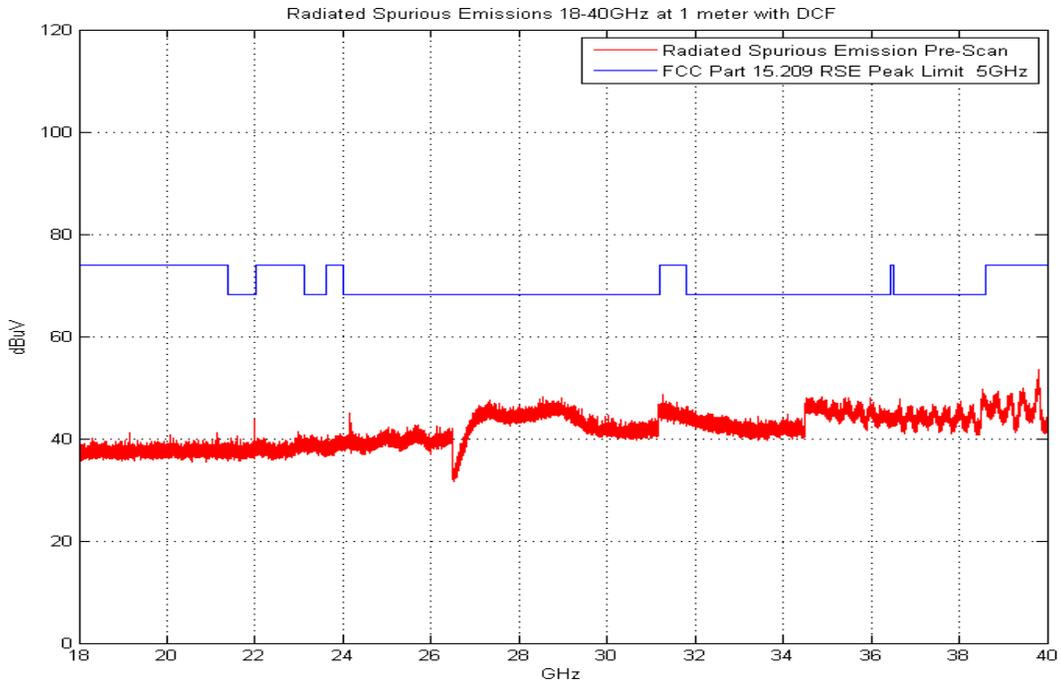

**Plot 6-10. Radiated Spurious Plot above 18GHz (802.11a – Ant. Pol. V)**

FCC ID: ZNFVK815		FCC Pt. 15.407 802.11 UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1503160569.ZNF	Test Dates: 03/17 - 03/31/2015	EUT Type: Portable Tablet		Page 22 of 44

## 6.7.2 Radiated Band Edge Measurements (20MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209


Worst Case Mode: 802.11a

Worst Case Transfer Rate: 6 Mbps

Distance of Measurements: 3 Meters

Operating Frequency: 5180MHz

Channel: 36

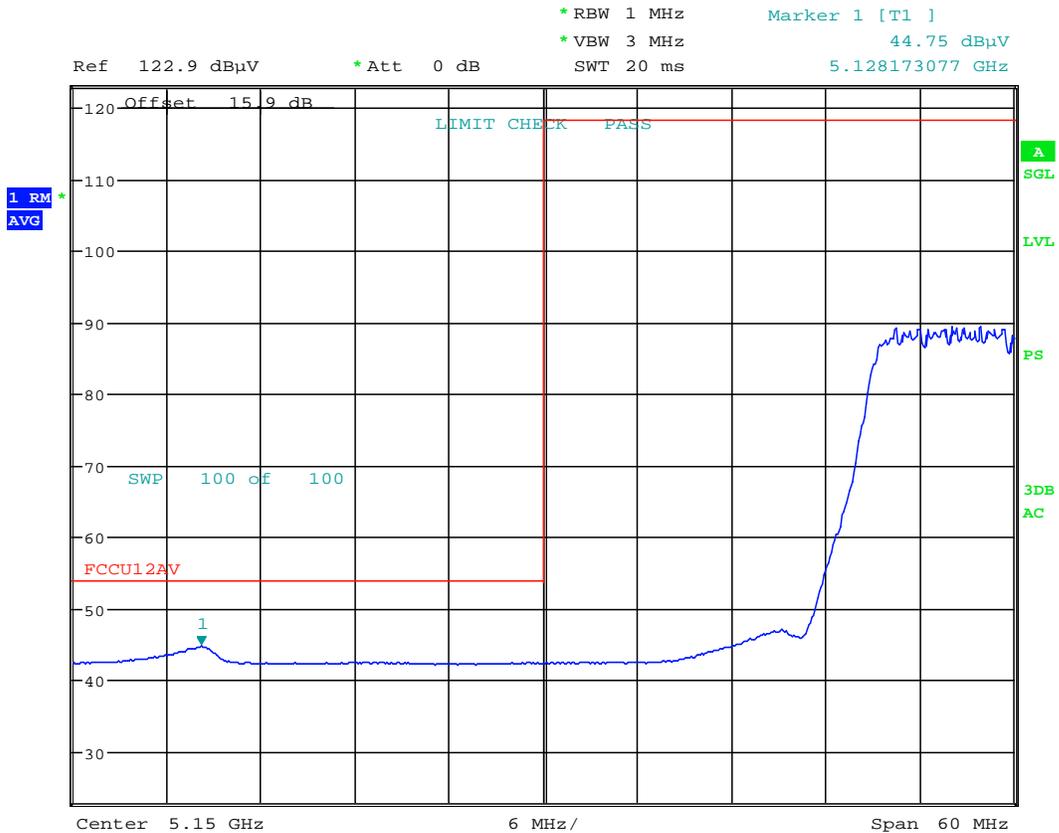


Date: 18.MAR.2015 12:36:12

**Plot 6-11. Radiated Restricted Lower Band Edge Plot (Average – UNII Band 1)**

FCC ID: ZNFVK815		FCC Pt. 15.407 802.11 UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1503160569.ZNF	Test Dates: 03/17 - 03/31/2015	EUT Type: Portable Tablet	Page 23 of 44	

# Radiated Band Edge Measurements (20MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209

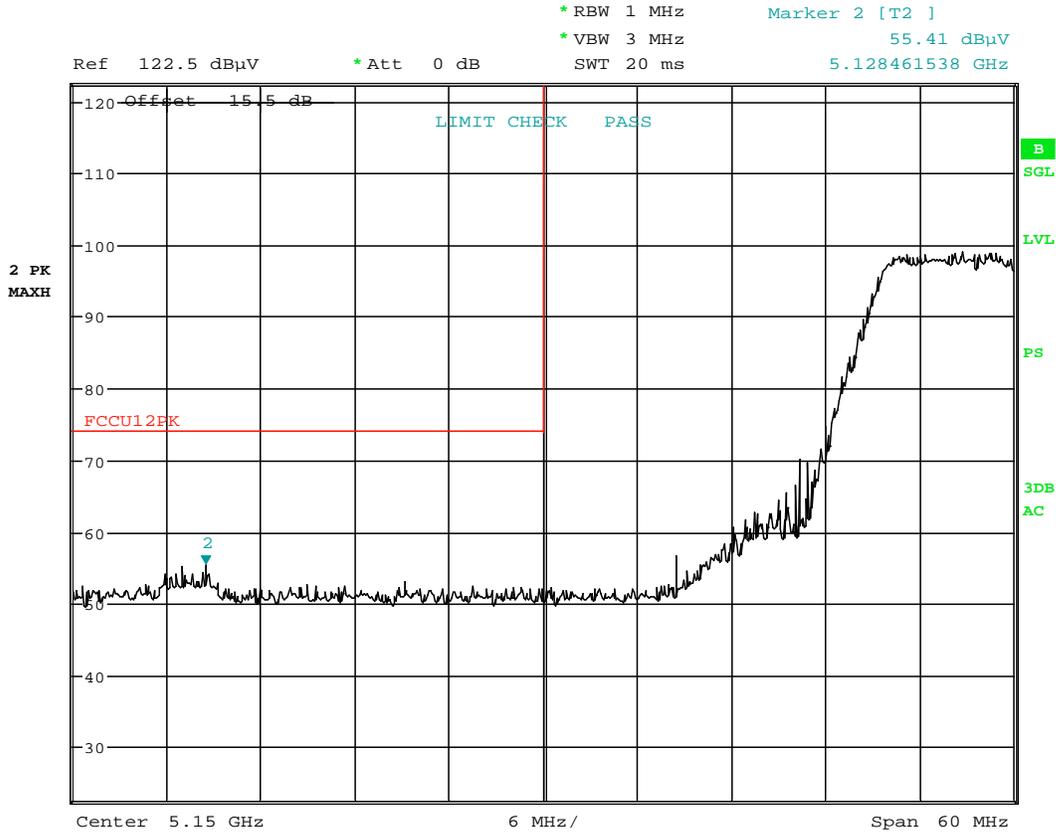

Date: 18.MAR.2015 12:36:22

**Plot 6-12. Radiated Restricted Lower Band Edge Plot (Peak – UNII Band 1)**

FCC ID: ZNFVK815		FCC Pt. 15.407 802.11 UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1503160569.ZNF	Test Dates: 03/17 - 03/31/2015	EUT Type: Portable Tablet	Page 24 of 44	

# Radiated Band Edge Measurements (20MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209


Worst Case Mode: 802.11a

Worst Case Transfer Rate: 6 Mbps

Distance of Measurements: 3 Meters

Operating Frequency: 5320MHz

Channel: 64

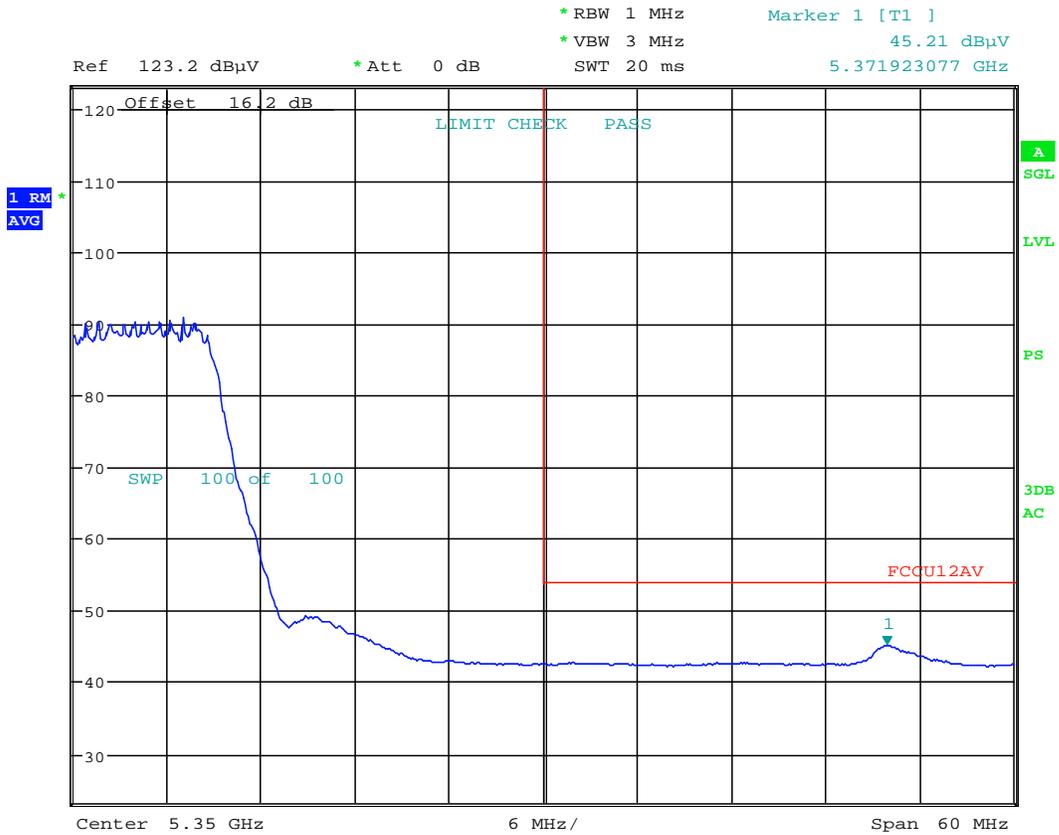


Date: 18.MAR.2015 12:45:56

**Plot 6-13. Radiated Restricted Upper Band Edge Plot (Average – UNII Band 2A)**

FCC ID: ZNFVK815		FCC Pt. 15.407 802.11 UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1503160569.ZNF	Test Dates: 03/17 - 03/31/2015	EUT Type: Portable Tablet		Page 25 of 44

**Radiated Band Edge Measurements (20MHz BW)**  
**§15.407(b.1)(b.2) §15.205 §15.209**

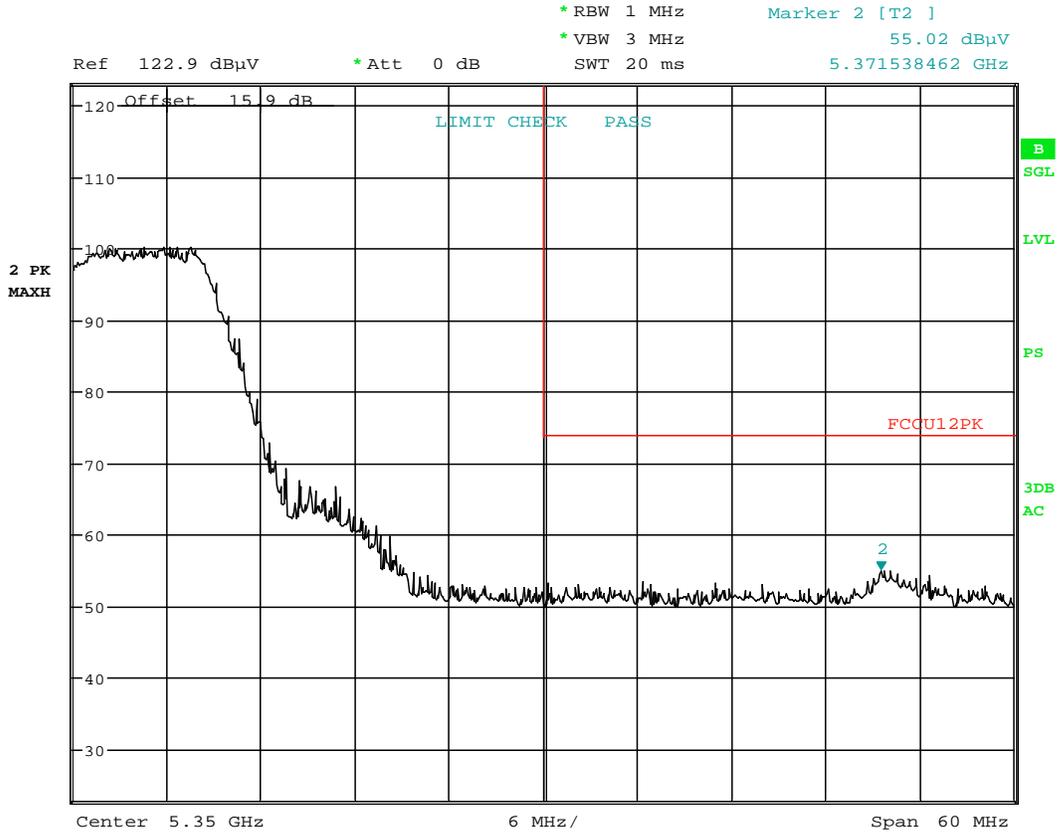

Date: 18.MAR.2015 12:46:06


**Plot 6-14. Radiated Restricted Upper Band Edge Plot (Peak – UNII Band 2A)**

FCC ID: ZNFVK815		FCC Pt. 15.407 802.11 UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1503160569.ZNF	Test Dates: 03/17 - 03/31/2015	EUT Type: Portable Tablet		Page 26 of 44

# Radiated Band Edge Measurements (20MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209

Worst Case Mode: 802.11a  
 Worst Case Transfer Rate: 6 Mbps  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 5500MHz  
 Channel: 100

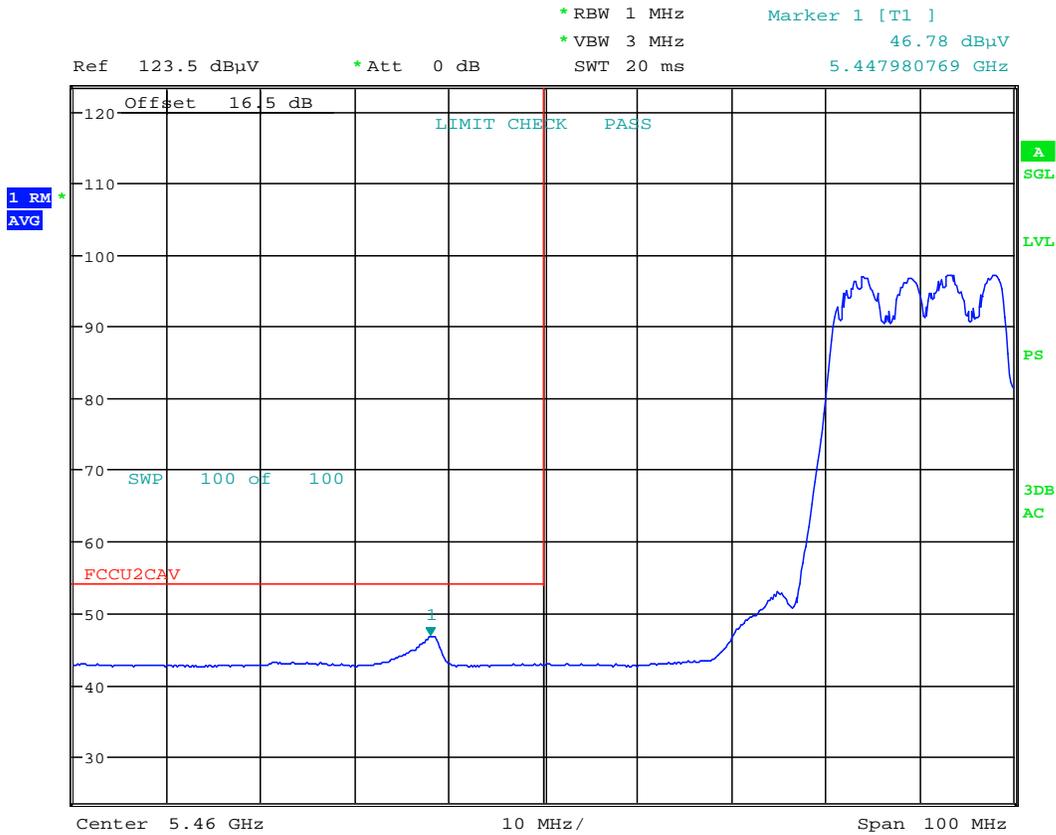


Date: 18.MAR.2015 12:53:14

**Plot 6-15. Radiated Restricted Lower Band Edge Plot (Average – UNII Band 2C)**

FCC ID: ZNFVK815		FCC Pt. 15.407 802.11 UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1503160569.ZNF	Test Dates: 03/17 - 03/31/2015	EUT Type: Portable Tablet		Page 27 of 44

**Radiated Band Edge Measurements (20MHz BW)**  
**§15.407(b.1)(b.2) §15.205 §15.209**

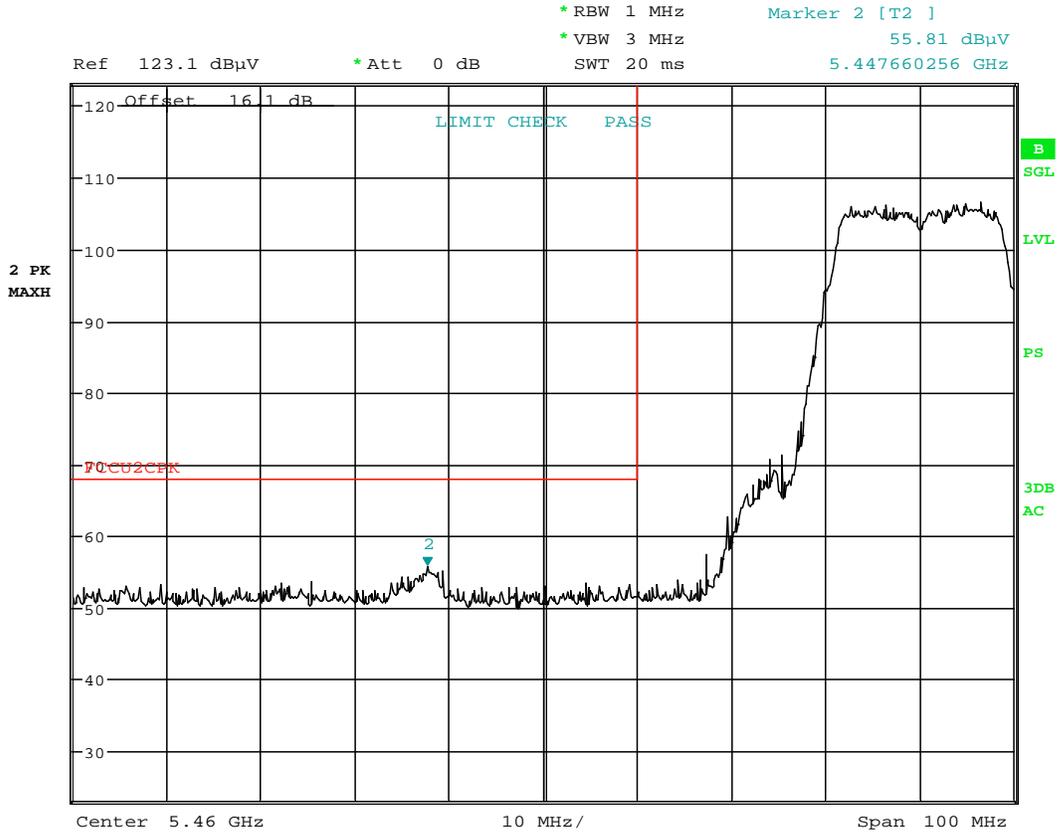

Date: 18.MAR.2015 12:53:31

**Plot 6-16. Radiated Restricted Lower Band Edge Plot (Peak – UNII Band 2C)**

<b>FCC ID:</b> ZNFVK815		FCC Pt. 15.407 802.11 UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		<b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1503160569.ZNF	<b>Test Dates:</b> 03/17 - 03/31/2015	<b>EUT Type:</b> Portable Tablet	Page 28 of 44	

# Radiated Band Edge Measurements (20MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209


Worst Case Mode: 802.11a

Worst Case Transfer Rate: 6 Mbps

Distance of Measurements: 3 Meters

Operating Frequency: 5700MHz

Channel: 140

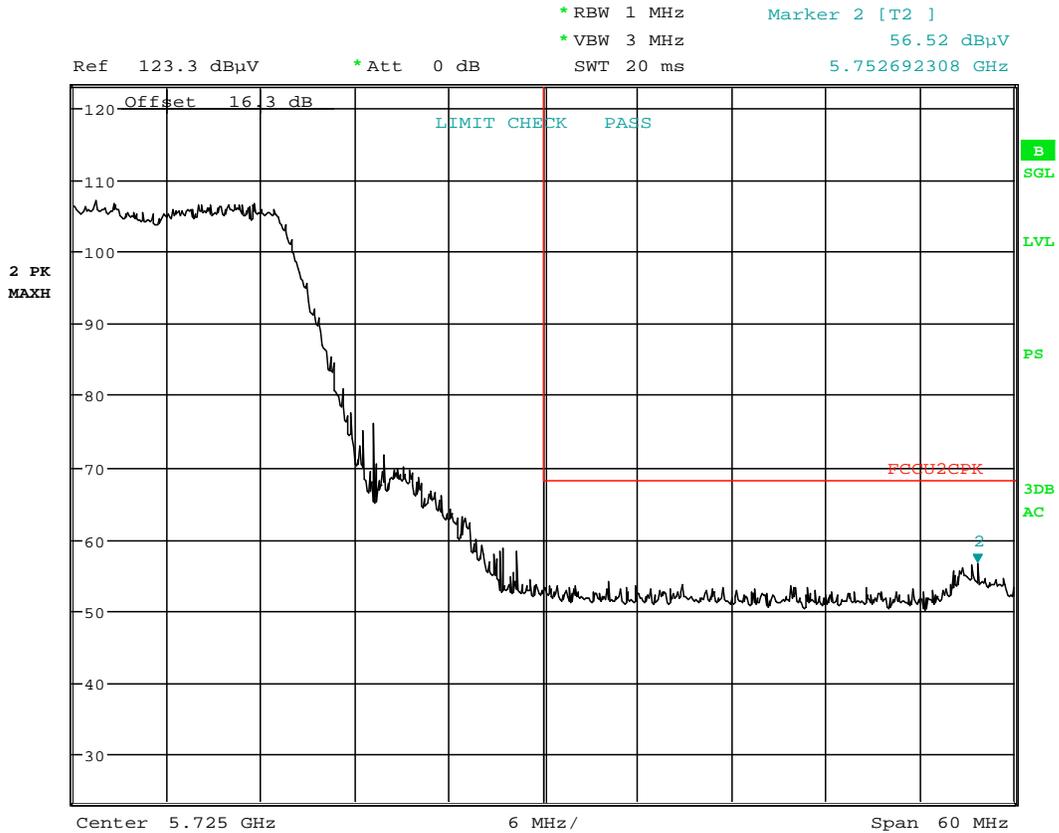

Date: 18.MAR.2015 13:03:37

**Plot 6-17. Radiated Upper Band Edge Plot (Peak – UNII Band 2C)**

FCC ID: ZNFVK815		FCC Pt. 15.407 802.11 UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1503160569.ZNF	Test Dates: 03/17 - 03/31/2015	EUT Type: Portable Tablet		Page 29 of 44

# Radiated Band Edge Measurements (20MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209


Worst Case Mode: 802.11a

Worst Case Transfer Rate: 6 Mbps

Distance of Measurements: 3 Meters

Operating Frequency: 5745MHz

Channel: 149

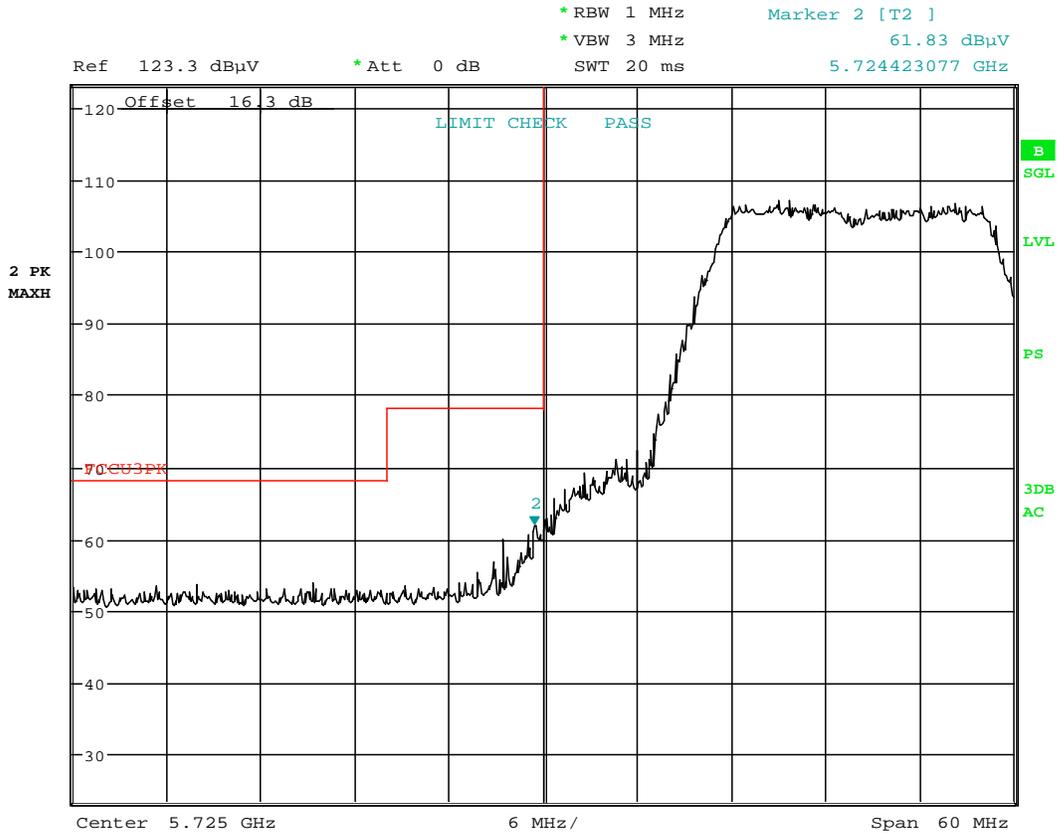

Date: 18.MAR.2015 13:09:18

**Plot 6-18. Radiated Lower Band Edge Plot (Peak – UNII Band 3)**

FCC ID: ZNFVK815		FCC Pt. 15.407 802.11 UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1503160569.ZNF	Test Dates: 03/17 - 03/31/2015	EUT Type: Portable Tablet		Page 30 of 44

# Radiated Band Edge Measurements (20MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209


Worst Case Mode: 802.11a

Worst Case Transfer Rate: 6 Mbps

Distance of Measurements: 3 Meters

Operating Frequency: 5825MHz

Channel: 165

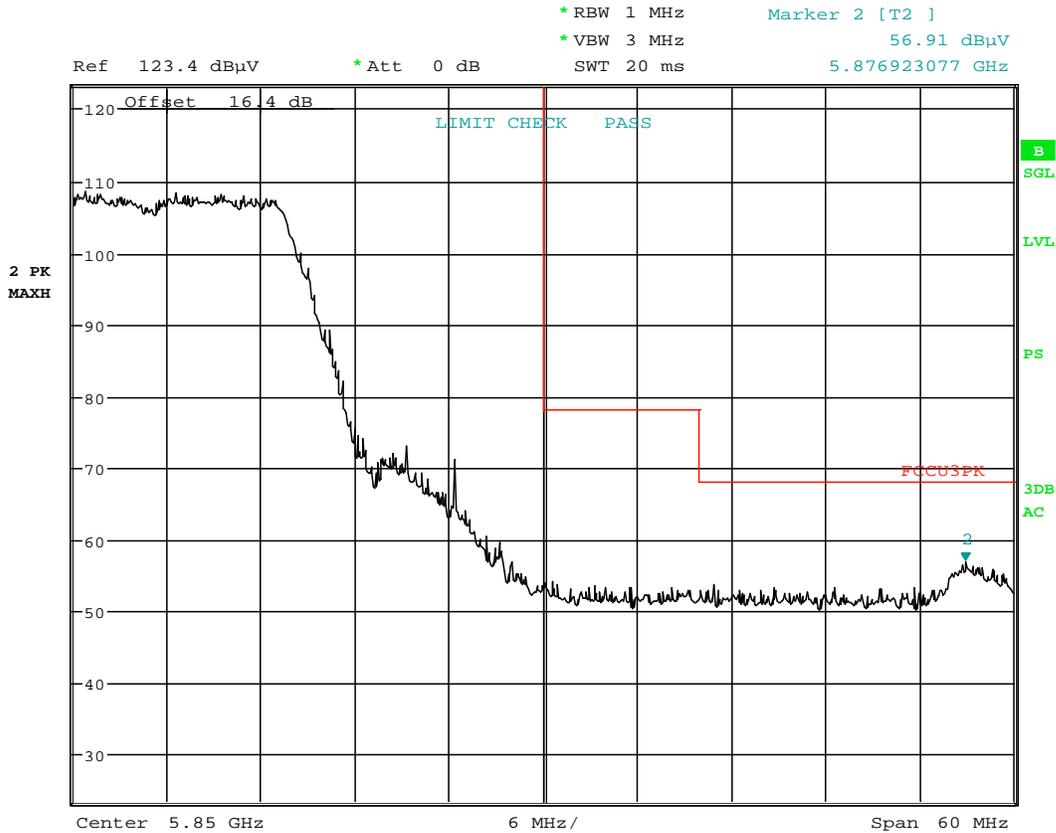

Date: 18.MAR.2015 13:14:32

**Plot 6-19. Radiated Upper Band Edge Plot (Peak – UNII Band 3)**

FCC ID: ZNFVK815		FCC Pt. 15.407 802.11 UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1503160569.ZNF	Test Dates: 03/17 - 03/31/2015	EUT Type: Portable Tablet		Page 31 of 44

### 6.7.3 Radiated Band Edge Measurements (40MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209


Worst Case Mode: 802.11n (40MHz)

Worst Case Transfer Rate: MCS0

Distance of Measurements: 3 Meters

Operating Frequency: 5190MHz

Channel: 38

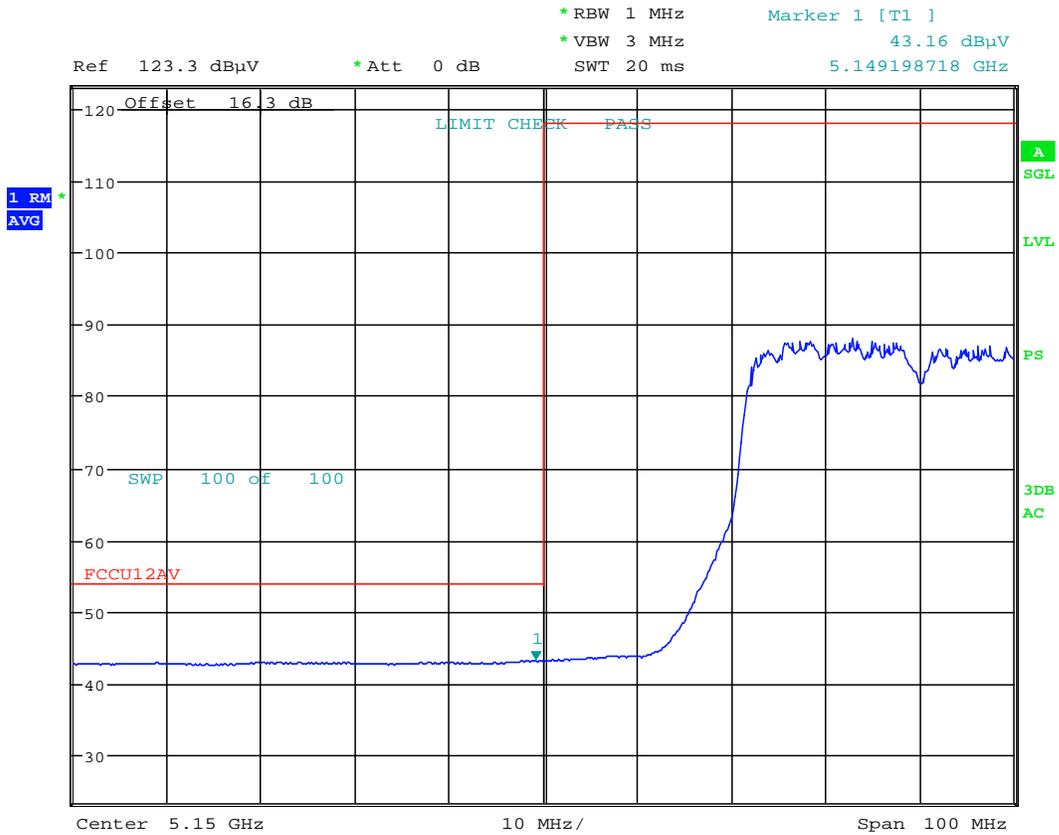


Date: 18.MAR.2015 12:41:22

**Plot 6-20. Radiated Restricted Lower Band Edge Plot (Average – UNII Band 1)**

FCC ID: ZNFVK815		FCC Pt. 15.407 802.11 UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1503160569.ZNF	Test Dates: 03/17 - 03/31/2015	EUT Type: Portable Tablet		Page 32 of 44

# Radiated Band Edge Measurements (40MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209

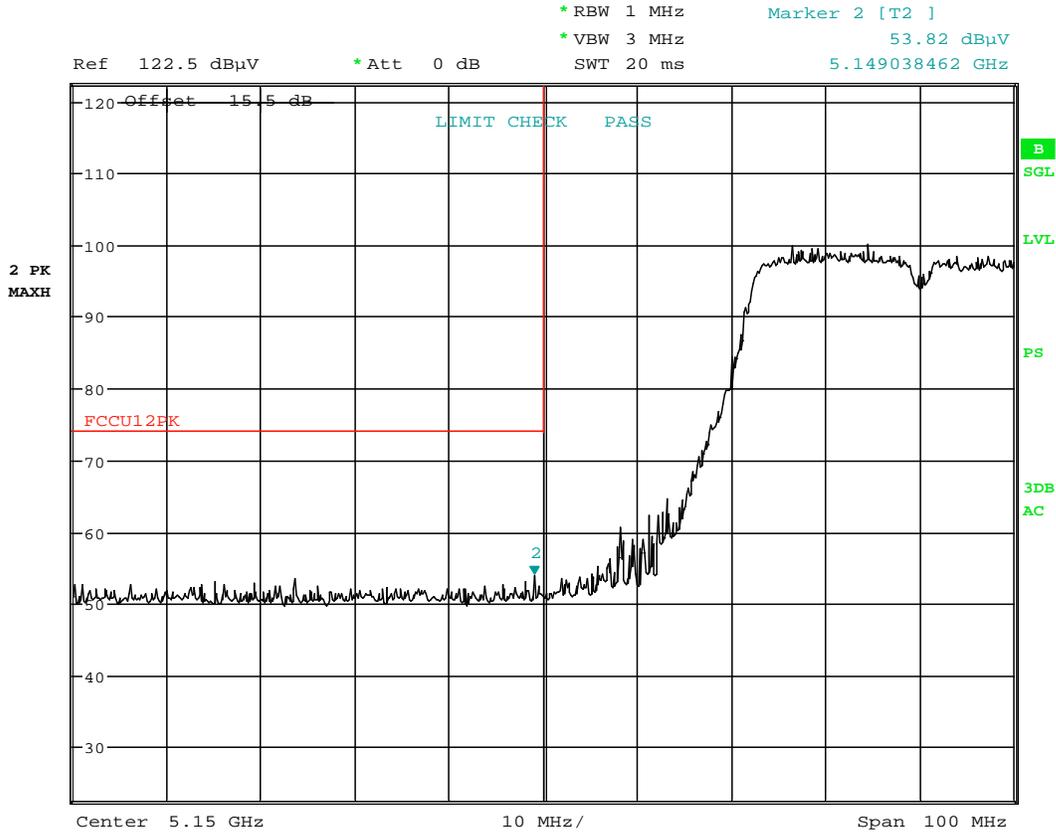

Date: 18.MAR.2015 12:41:36


**Plot 6-21. Radiated Restricted Lower Band Edge Plot (Peak – UNII Band 1)**

FCC ID: ZNFVK815		FCC Pt. 15.407 802.11 UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1503160569.ZNF	Test Dates: 03/17 - 03/31/2015	EUT Type: Portable Tablet	Page 33 of 44	

# Radiated Band Edge Measurements (40MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209

Worst Case Mode: 802.11n (40MHz)  
 Worst Case Transfer Rate: MCS0  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 5310MHz  
 Channel: 62

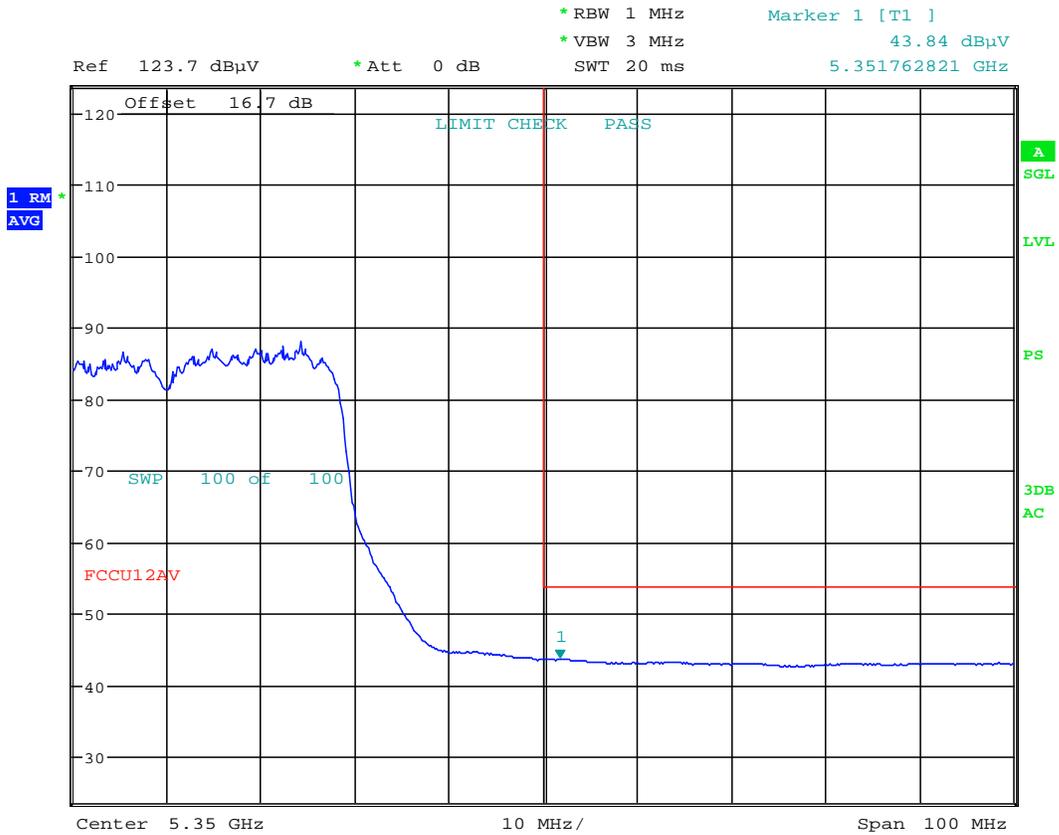


Date: 18.MAR.2015 12:47:43

**Plot 6-22. Radiated Restricted Upper Band Edge Plot (Average – UNII Band 2A)**

FCC ID: ZNFVK815		FCC Pt. 15.407 802.11 UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1503160569.ZNF	Test Dates: 03/17 - 03/31/2015	EUT Type: Portable Tablet		Page 34 of 44

# Radiated Band Edge Measurements (40MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209

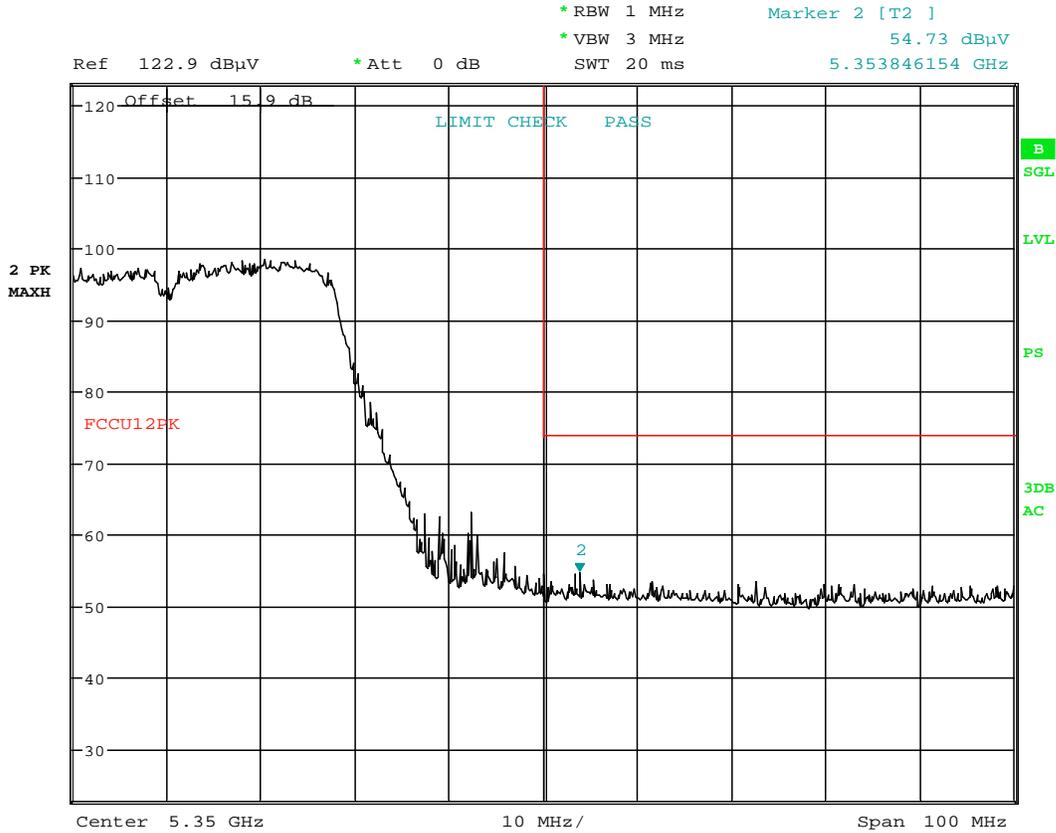

Date: 18.MAR.2015 12:48:11


**Plot 6-23. Radiated Restricted Upper Band Edge Plot (Peak – UNII Band 2A)**

<b>FCC ID:</b> ZNFVK815		<b>FCC Pt. 15.407 802.11 UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)</b>		<b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1503160569.ZNF	<b>Test Dates:</b> 03/17 - 03/31/2015	<b>EUT Type:</b> Portable Tablet	Page 35 of 44	

# Radiated Band Edge Measurements (40MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209

Worst Case Mode: 802.11n (40MHz)  
 Worst Case Transfer Rate: MCS0  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 5510MHz  
 Channel: 102

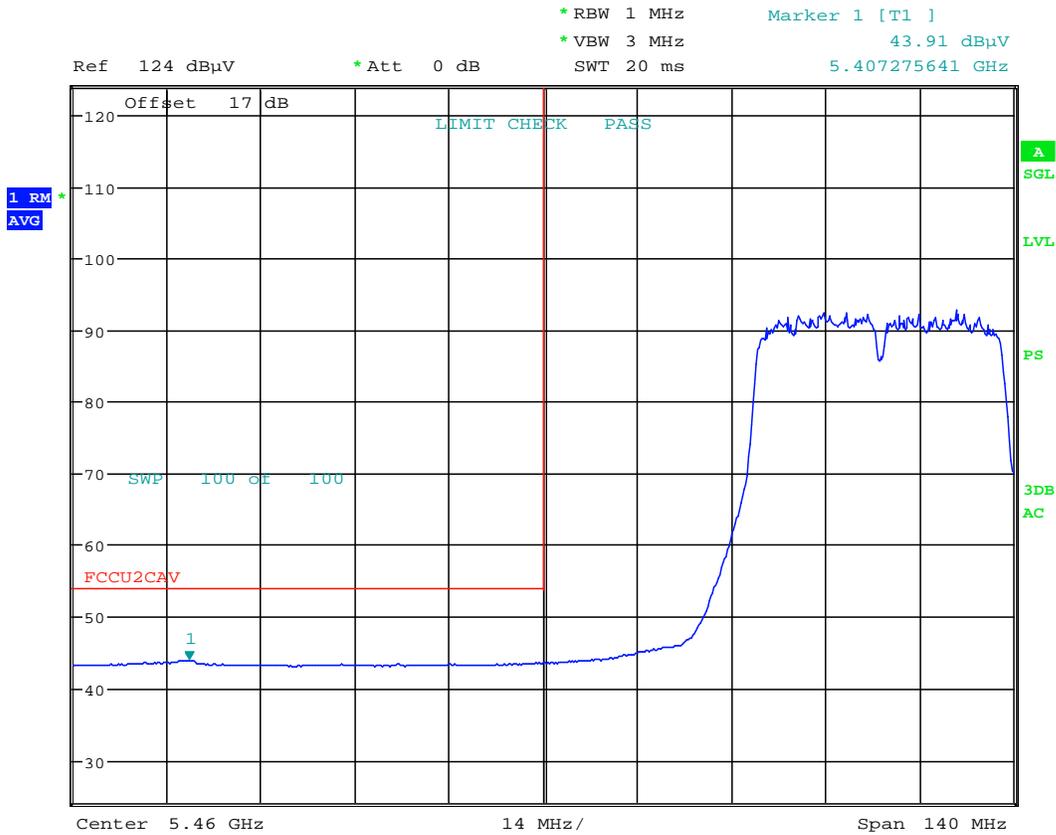


Date: 18.MAR.2015 12:54:28

**Plot 6-24. Radiated Restricted Lower Band Edge Plot (Average – UNII Band 2C)**

FCC ID: ZNFVK815		FCC Pt. 15.407 802.11 UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1503160569.ZNF	Test Dates: 03/17 - 03/31/2015	EUT Type: Portable Tablet		Page 36 of 44

# Radiated Band Edge Measurements (40MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209

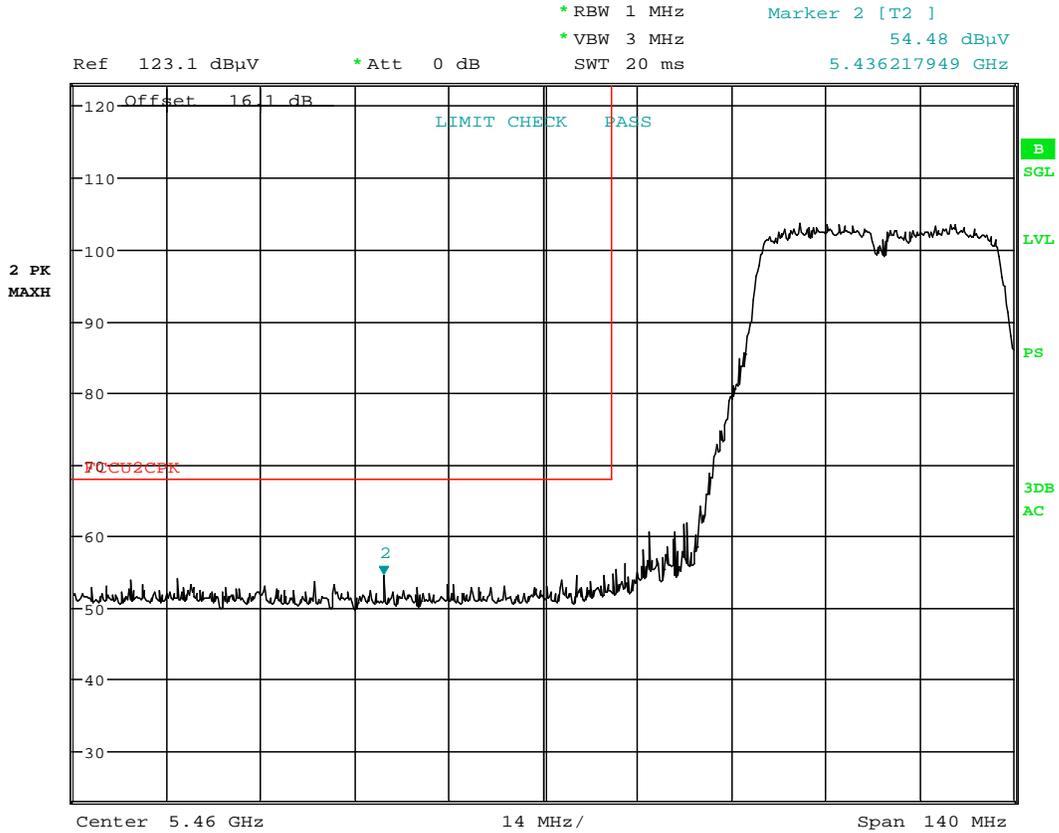

Date: 18.MAR.2015 12:54:15

**Plot 6-25. Radiated Restricted Lower Band Edge Plot (Peak – UNII Band 2C)**

<b>FCC ID:</b> ZNFVK815		<b>FCC Pt. 15.407 802.11 UNII MEASUREMENT REPORT</b> (CLASS II PERMISSIVE CHANGE)		<b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1503160569.ZNF	<b>Test Dates:</b> 03/17 - 03/31/2015	<b>EUT Type:</b> Portable Tablet	Page 37 of 44	

# Radiated Band Edge Measurements (40MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209


Worst Case Mode: 802.11n (40MHz)

Worst Case Transfer Rate: MCS0

Distance of Measurements: 3 Meters

Operating Frequency: 5670MHz

Channel: 134

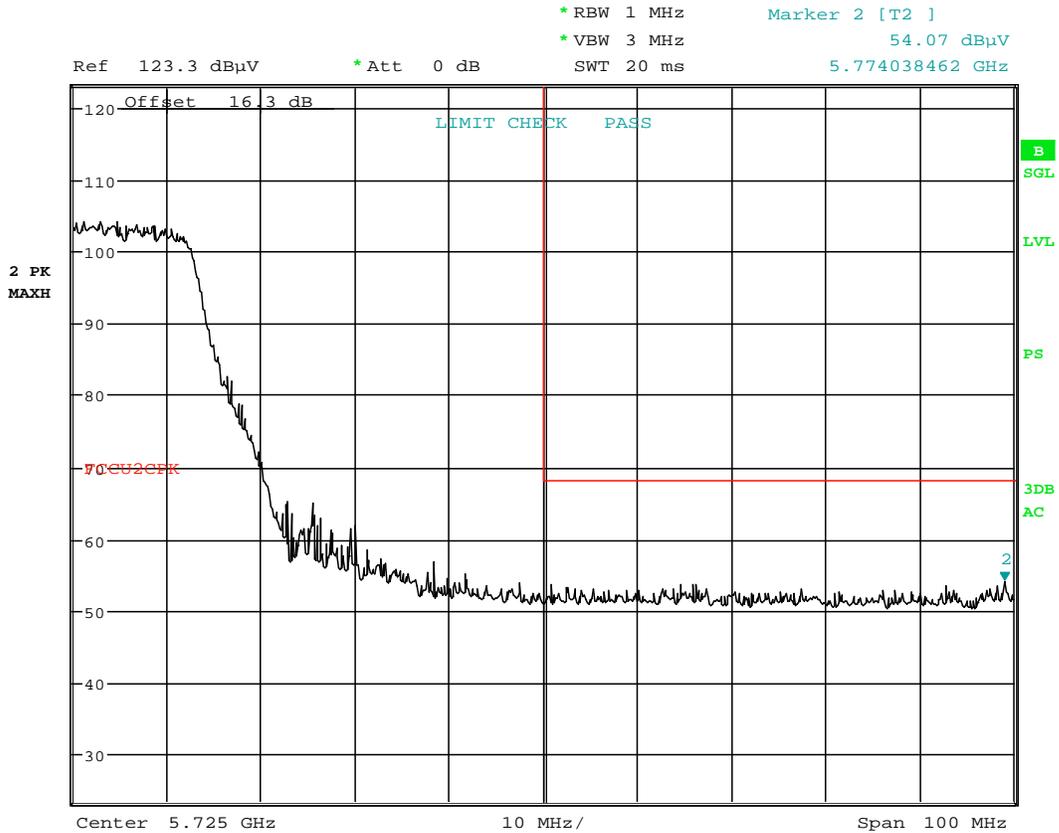

Date: 18.MAR.2015 13:04:21

**Plot 6-26. Radiated Upper Band Edge Plot (Peak – UNII Band 2C)**

FCC ID: ZNFVK815		FCC Pt. 15.407 802.11 UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1503160569.ZNF	Test Dates: 03/17 - 03/31/2015	EUT Type: Portable Tablet	Page 38 of 44	

# Radiated Band Edge Measurements (40MHz BW)

\$15.407(b.1)(b.2) \$15.205 \$15.209


Worst Case Mode: 802.11n (40MHz)

Worst Case Transfer Rate: MCS0

Distance of Measurements: 3 Meters

Operating Frequency: 5755MHz

Channel: 151

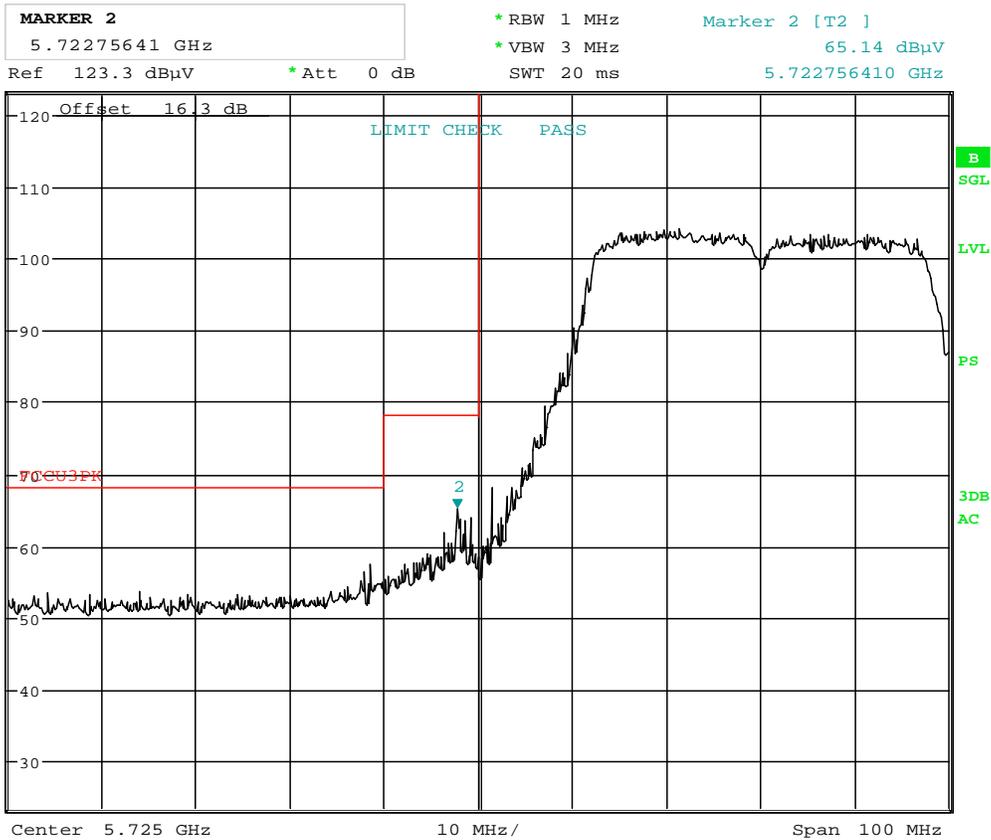

Date: 18.MAR.2015 13:11:00

**Plot 6-27. Radiated Lower Band Edge Plot (Peak – UNII Band 3)**

FCC ID: ZNFVK815		FCC Pt. 15.407 802.11 UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1503160569.ZNF	Test Dates: 03/17 - 03/31/2015	EUT Type: Portable Tablet		Page 39 of 44

# Radiated Band Edge Measurements (40MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209


Worst Case Mode: 802.11n (40MHz)

Worst Case Transfer Rate: MCS0

Distance of Measurements: 3 Meters

Operating Frequency: 5795MHz

Channel: 159

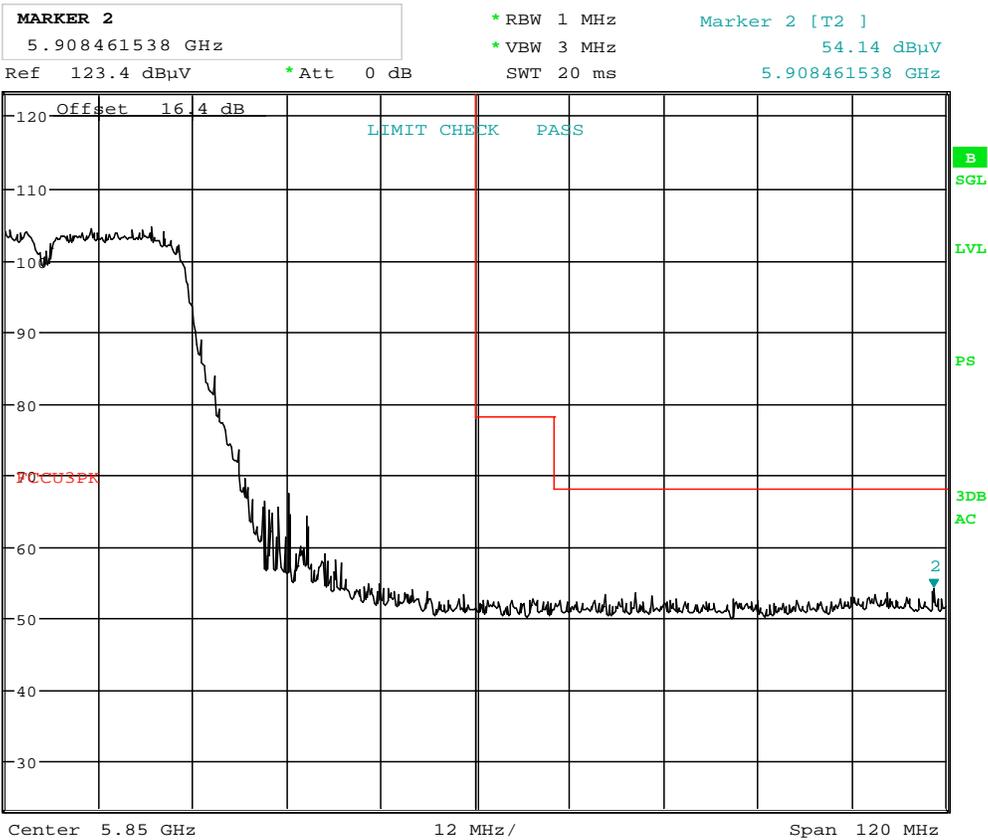

Date: 18.MAR.2015 13:15:47

**Plot 6-28. Radiated Upper Band Edge Plot (Peak – UNII Band 3)**

FCC ID: ZNFVK815		FCC Pt. 15.407 802.11 UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1503160569.ZNF	Test Dates: 03/17 - 03/31/2015	EUT Type: Portable Tablet		Page 40 of 44

## 6.3 Radiated Spurious Emissions Measurements – Below 1GHz

### §15.209

#### Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for radiated spurious emissions. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

***All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table 6-15 per Section 15.209.***

Frequency	Field Strength [ $\mu\text{V/m}$ ]	Measured Distance [Meters]
0.009 – 0.490 MHz	2400/F (kHz)	300
0.490 – 1.705 MHz	24000/F (kHz)	30
1.705 – 30.00 MHz	30	30
30.00 – 88.00 MHz	100	3
88.00 – 216.0 MHz	150	3
216.0 – 960.0 MHz	200	3
Above 960.0 MHz	500	3

**Table 6-15. Radiated Limits**

#### Test Procedures Used

ANSI C63.4-2009

#### Test Settings


##### Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

FCC ID: ZNFVK815		FCC Pt. 15.407 802.11 UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1503160569.ZNF	Test Dates: 03/17 - 03/31/2015	EUT Type: Portable Tablet	Page 41 of 44	

## Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

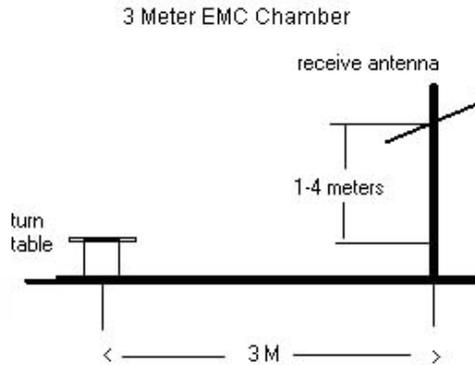

**Figure 6-2. Test Instrument & Measurement Setup**


## Test Notes

1. All emissions lying in restricted bands specified in §15.205 are below the limit shown in Table 6-10.
2. The broadband receive antenna is manipulated through vertical and horizontal polarizations during the tests. The EUT is manipulated through three orthogonal planes.
3. This unit was tested with its standard battery.
4. The spectrum is investigated using a peak detector and final measurements are recorded using CISPR quasi peak detector. The worst-case emissions are reported however emissions whose levels were not within 20dB of the respective limits were not reported.
5. Emissions were measured at a 3 meter test distance.
6. Emissions are investigated while operating on the center channel of the mode, band, and modulation that produced the worst case results during the transmitter spurious emissions testing.
7. No spurious emissions were detected within 20dB of the limit below 30MHz.
8. The results recorded using the broadband antenna is known to correlate with the results obtained by using a tuned dipole with an acceptable degree of accuracy. The VSWR for the measurement antenna was found to be less than 2:1.
9. The wide spectrum spurious emissions plots shown on the following pages are used only for the purpose of emission identification. There were no emissions detected in the 30MHz – 1GHz frequency range, as shown in the subsequent plots.


FCC ID: ZNFVK815		FCC Pt. 15.407 802.11 UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1503160569.ZNF	Test Dates: 03/17 - 03/31/2015	EUT Type: Portable Tablet	Page 42 of 44	

## Radiated Spurious Emissions Measurements (Below 1GHz)

### §15.209

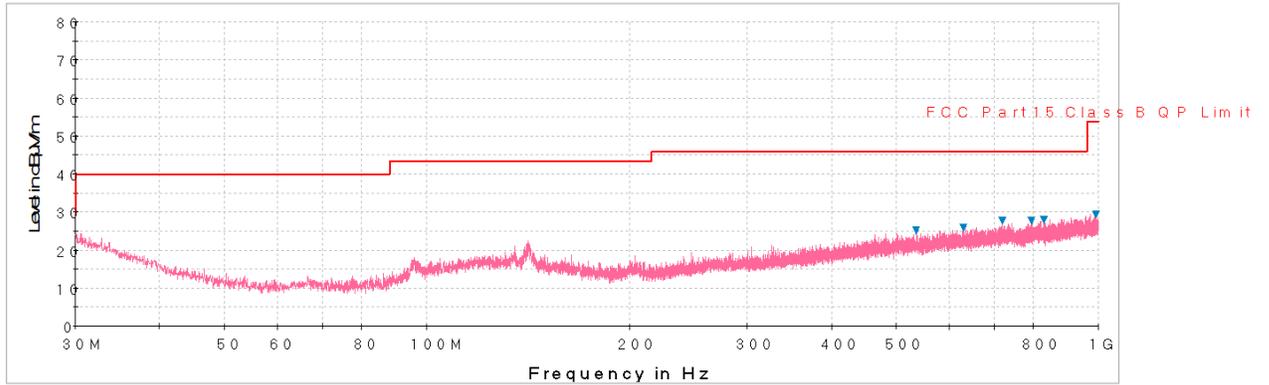

**Plot 6-29. Radiated Spurious Plot below 1GHz (802.11a – U3 Ch. 157, Ant. Pol. H)**

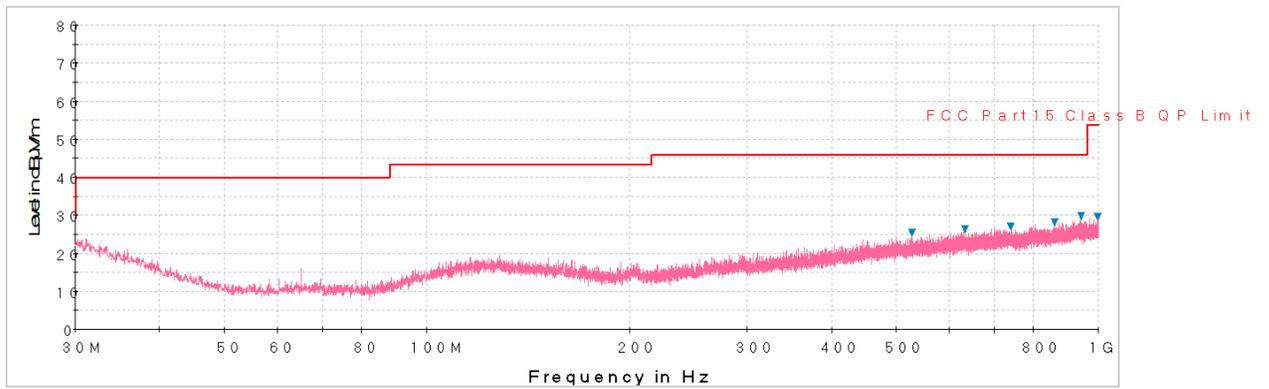

**Plot 6-30. Radiated Spurious Plot below 1GHz (802.11a – U3 Ch. 157, Ant. Pol. V)**

<b>FCC ID:</b> ZNFVK815		<b>FCC Pt. 15.407 802.11 UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)</b>		<b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1503160569.ZNF	<b>Test Dates:</b> 03/17 - 03/31/2015	<b>EUT Type:</b> Portable Tablet	Page 43 of 44	

## 7.0 CONCLUSION

The data collected relate only the item(s) tested and show that the **LG Portable Tablet FCC ID: ZNFVK815** is in compliance with Part 15E of the FCC Rules.

<b>FCC ID:</b> ZNFVK815		<b>FCC Pt. 15.407 802.11 UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)</b>		<b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1503160569.ZNF	<b>Test Dates:</b> 03/17 - 03/31/2015	<b>EUT Type:</b> Portable Tablet	Page 44 of 44	