



FCC 47 CFR PART 15 SUBPART C

**CERTIFICATION TEST REPORT
FOR**

CDMA/ LTE Phone + Bluetooth, and DTS b/g/n

MODEL NUMBER: LG-VS810PP, VS810PP, LGVS810PP

FCC ID: ZNFVS810PP

REPORT NUMBER: 14U18508-E2

ISSUE DATE: AUGUST 25, 2014

Prepared for
LG ELECTRONICS MOBILECOMM U.S.A., INC
1000 SYLVAN AVENUE
ENGLEWOOD CLIFFS,
NEW JERSEY, 07632, U.S.A.

Prepared by
UL VERIFICATION SERVICES INC.
47173 BENICIA STREET
FREMONT, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888



NVLAP LAB CODE 200065-0

Revision History

<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
--	08/25/14	Initial Issue	D. Corona

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	5
2. TEST METHODOLOGY	6
3. FACILITIES AND ACCREDITATION	6
4. CALIBRATION AND UNCERTAINTY	6
4.1. <i>MEASURING INSTRUMENT CALIBRATION</i>	<i>6</i>
4.2. <i>SAMPLE CALCULATION</i>	<i>6</i>
4.3. <i>MEASUREMENT UNCERTAINTY.....</i>	<i>6</i>
5. EQUIPMENT UNDER TEST	7
5.1. <i>DESCRIPTION OF EUT</i>	<i>7</i>
5.2. <i>MAXIMUM OUTPUT POWER.....</i>	<i>7</i>
5.3. <i>DESCRIPTION OF AVAILABLE ANTENNAS</i>	<i>7</i>
5.4. <i>WORST-CASE CONFIGURATION AND MODE.....</i>	<i>8</i>
5.5. <i>DESCRIPTION OF TEST SETUP.....</i>	<i>9</i>
6. TEST AND MEASUREMENT EQUIPMENT	11
7. SUMMARY TABLE	12
8. ANTENNA PORT TEST RESULTS	13
8.1. <i>20 dB AND 99% BANDWIDTH</i>	<i>13</i>
8.1.1. <i>BASIC DATA RATE GFSK MODULATION</i>	<i>13</i>
8.1.1. <i>ENHANCED DATA RATE 8PSK MODULATION</i>	<i>13</i>
8.2. <i>HOPPING FREQUENCY SEPARATION</i>	<i>22</i>
8.3. <i>NUMBER OF HOPPING CHANNELS.....</i>	<i>24</i>
8.4. <i>AVERAGE TIME OF OCCUPANCY.....</i>	<i>28</i>
8.5. <i>OUTPUT POWER.....</i>	<i>35</i>
8.5.1. <i>BASIC DATA RATE GFSK MODULATION</i>	<i>35</i>
8.5.2. <i>ENHANCED DATA RATE 8PSK MODULATION</i>	<i>35</i>
8.6. <i>AVERAGE POWER.....</i>	<i>40</i>
8.6.1. <i>BASIC DATA RATE GFSK MODULATION</i>	<i>40</i>
8.6.2. <i>DATA RATE PI/4-DQPSK MODULATION</i>	<i>40</i>
8.6.3. <i>ENHANCED DATA RATE 8PSK MODULATION</i>	<i>40</i>
8.7. <i>CONDUCTED SPURIOUS EMISSIONS.....</i>	<i>41</i>
8.7.1. <i>BASIC DATA RATE GFSK MODULATION</i>	<i>42</i>
8.7.1. <i>ENHANCED DATA RATE 8PSK MODULATION</i>	<i>49</i>

9. RADIATED TEST RESULTS.....56
9.1. *LIMITS AND PROCEDURE.....56*
9.2. *TRANSMITTER ABOVE 1 GHz.....57*
9.2.1. BASIC DATA RATE GFSK MODULATION.....57
9.2.2. ENHANCED DATA RATE 8PSK MODULATION70
9.3. *WORST-CASE BELOW 1 GHz.....83*
10. AC POWER LINE CONDUCTED EMISSIONS86
11. SETUP PHOTOS89

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: LG ELECTRONICS MOBILECOMM U.S.A., INC.
EUT DESCRIPTION: CDMA/LTE Phone + Bluetooth, and DTS b/g/n.
MODEL: LG-VS810PP, VS810PP, LGVS810PP
SERIAL NUMBER: 18 (Conducted), 22 (Radiated)
DATE TESTED: AUGUST 11 - 13, 2014

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C	Pass

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For
UL Verification Services Inc. By:



DAN CORONIA
CONSUMER TECHNOLOGY DIVISION
PROJECT LEAD
UL Verification Services Inc.

Tested By:



STEVEN TRAN
CONSUMER TECHNOLOGY DIVISION
LAB ENGINEER
UL Verification Services Inc.

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4-2009, FCC CFR 47 Part 2, and FCC CFR 47 Part 15.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 and 47266 Benicia Street, Fremont, California, USA. Line conducted emissions are measured only at the 47173 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

47173 Benicia Street	47266 Benicia Street
<input checked="" type="checkbox"/> Chamber A	<input type="checkbox"/> Chamber D
<input type="checkbox"/> Chamber B	<input type="checkbox"/> Chamber E
<input type="checkbox"/> Chamber C	<input type="checkbox"/> Chamber F
	<input type="checkbox"/> Chamber G
	<input checked="" type="checkbox"/> Chamber H

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://ts.nist.gov/standards/scopes/2000650.htm>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamp Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	3.52 dB
Radiated Disturbance, 30 to 18000 MHz	4.94 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is a CDMA/LTE Phone + Bluetooth, DTS b/g/n.

5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum peak conducted output power as follows:

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
2402 - 2480	Basic GFSK	10.24	10.57
2402 - 2480	Enhanced 8PSK	10.38	10.91

Note: GFSK, Pi/4-DQPSK, 8PSK average Power are all investigated, The GFSK & 8PSK Power are the worst case. Testing is based on this mode to showing compliance. For average power data please refer to section 8.6.

5.3. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes PIFA antenna, with a maximum gain of 0.12 dBi.

5.4. WORST-CASE CONFIGURATION AND MODE

Radiated emission and power line conducted emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario.

The fundamental of the EUT was investigated in three orthogonal orientations X, Y, and Z it was determined that Y orientation was worst-case orientation; therefore, all final radiated testing was performed with the EUT in Y orientation.

5.5. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
AC Adapter	LG	VS-810PP	RA481001374	N/A
Headset	LG	VS-810PP	N/A	N/A


I/O CABLES

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	DC Power	1	Mini-USB	Shielded	1.2m	N/A
2	Audio	1	Mini-Jack	Unshielded	1m	N/A

TEST SETUP

The EUT is continuously communicating to the Bluetooth tester during the tests.

SETUP DIAGRAM FOR TESTS

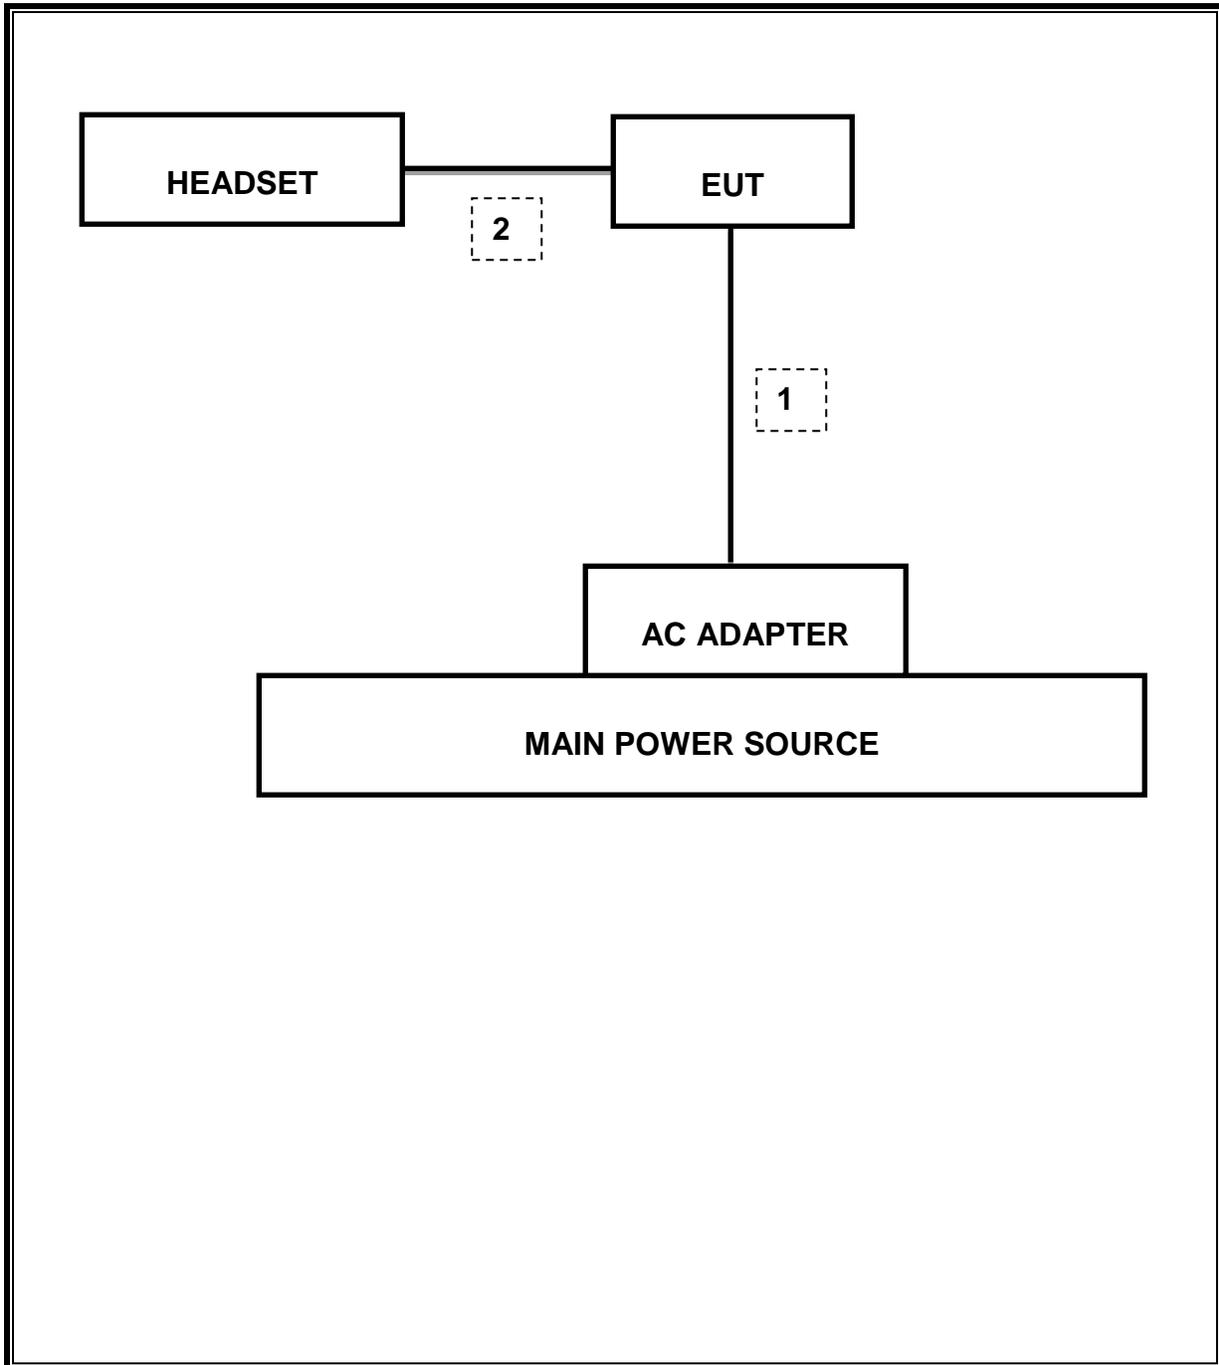

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Test Equipment List				
Description	Manufacturer	Model	Asset	Cal Due
Antenna, Biconolog, 30MHz-1 GHz	Sunol Sciences	JB1	C01171	02/13/15
Antenna, Horn, 18GHz	EMCO	3115	C00783	10/25/14
Antenna, Horn, 26.5 GHz	ARA	MWH-1826/B	C00980	11/14/14
Preamplifier, 1300 MHz	Agilent / HP	8447D	C00580	01/28/15
Preamplifier, 26.5 GHz	Agilent / HP	8449B	C01052	10/22/14
Spectrum Analyzer, 44 GHz	Agilent / HP	E4446A	C01069	12/20/14
CBT Bluetooth Tester	R & S	CBT	None	04/21/15
Peak Power Meter	Agilent / HP	E4416A	C00963	12/13/14
Peak / Average Power Sensor	Agilent / HP	E9327A	C00964	12/13/14
LISN, 30 MHz	FCC	50/250-25-2	C00626	01/14/15
Reject Filter, 2.4GHz	Micro-Tronics	BRM50702	N02684	CNR
Peak Power Meter	Agilent / HP	E4416A	C00963	12/13/14
Peak / Average Power Sensor	Agilent / HP	E9327A	C00964	12/13/14

7. SUMMARY TABLE

FCC Part Section	RSS Section(s)	Test Description	Test Limit	Test Condition	Test Result	Worst Case
2.1049	RSS-GEN 4.6	Occupied Band width (99%)	N/A	Conducted	Pass	1.1880MHz
2.1051, 15.247 (d)	RSS-210 A8.5	Band Edge / Conducted Spurious Emission	-20dBc		Pass	-46.03dBm
15.247 (b)(1)	RSS-210 A8.4	TX conducted output power	<21dBm		Pass	10.38dBm
15.247 (a)(1)	RSS-210 A8.1(b)	Hopping frequency separation	> 25KHz		Pass	1.000 MHz
15.247 (a)(1)(iii)	RSS-210 A8.1(d)	Number of Hopping channels	More than 15 non-overlapping channels		Pass	79 Channel
15.247 (a)(1)(iii)	RSS-210 A8.1(d)	Avg Time of Occupancy	< 0.4sec		Pass	0.314sec
15.207 (a)	RSS-GEN 7.2.2	AC Power Line conducted emissions	Section 10		Radiated	Pass
15.205, 15.209	RSS-210 Clause 2.6, RSS-210 Clause 6	Radiated Spurious Emission	< 54dBuV/m	Pass		40.67dBuV/m

8. ANTENNA PORT TEST RESULTS

8.1. 20 dB AND 99% BANDWIDTH

LIMIT

None; for reporting purposes only.

TEST PROCEDURE

DA 00-705: The transmitter output is connected to a spectrum analyzer. The RBW is set to \geq 1% of the 20 dB bandwidth. The VBW is set to \geq RBW. The sweep time is coupled.

RESULTS



8.1.1. BASIC DATA RATE GFSK MODULATION


Channel	Frequency (MHz)	20 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	2402	0.9297	0.8868
Middle	2441	0.9296	0.9048
High	2480	0.9284	0.8574
Worst		0.9297	0.9048

8.1.1. ENHANCED DATA RATE 8PSK MODULATION



Channel	Frequency (MHz)	20 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	2402	1.268	1.1880
Middle	2441	1.266	1.1692
High	2480	1.268	1.1411
Worst		1.268	1.1880


GFSK 20 dB BANDWIDTH

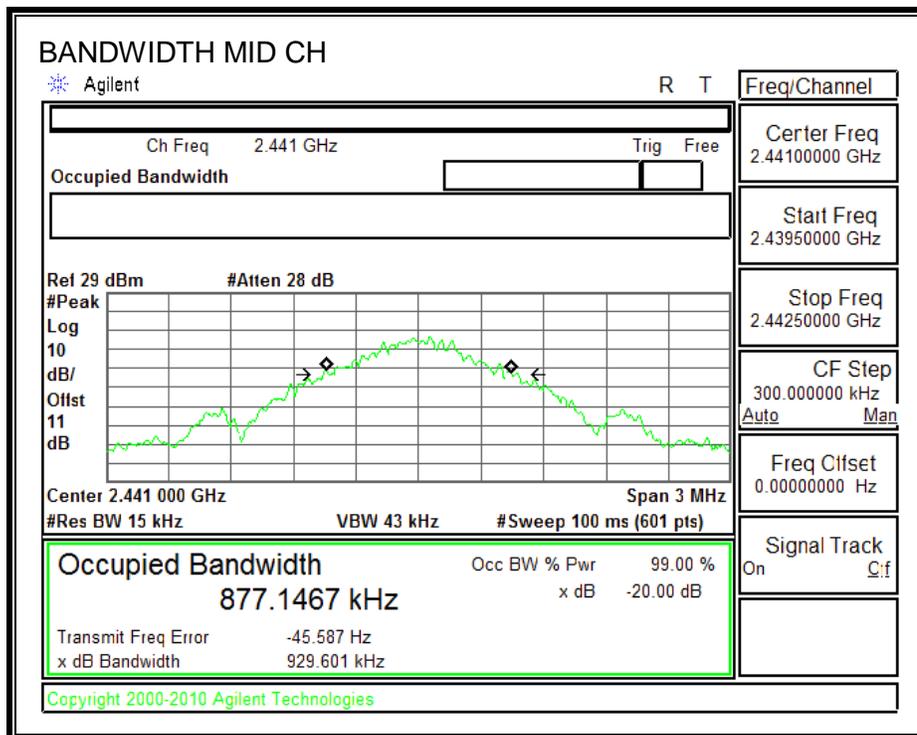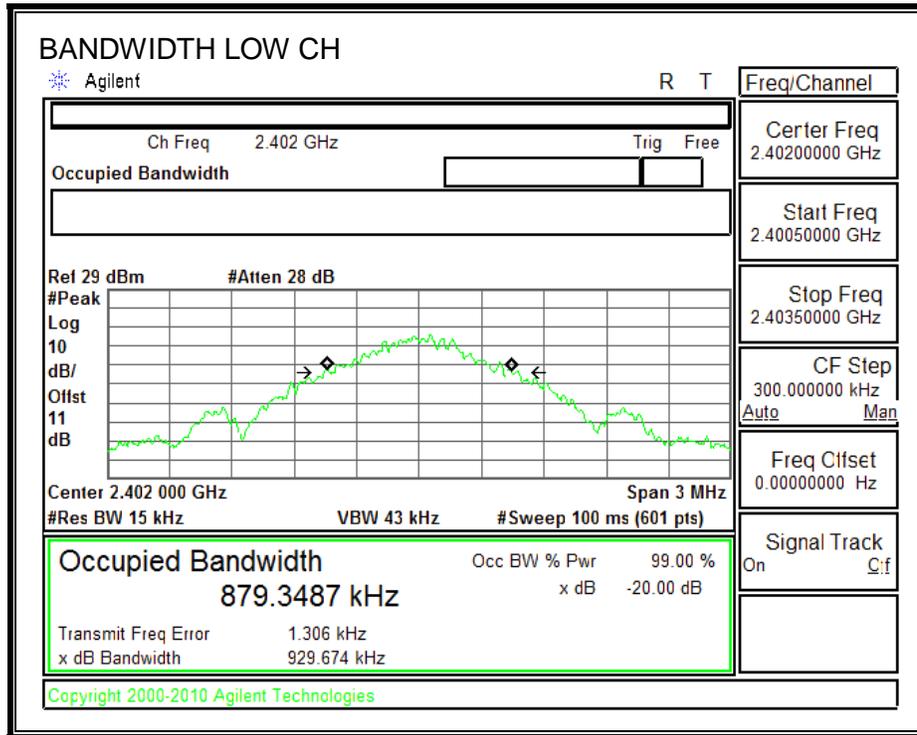


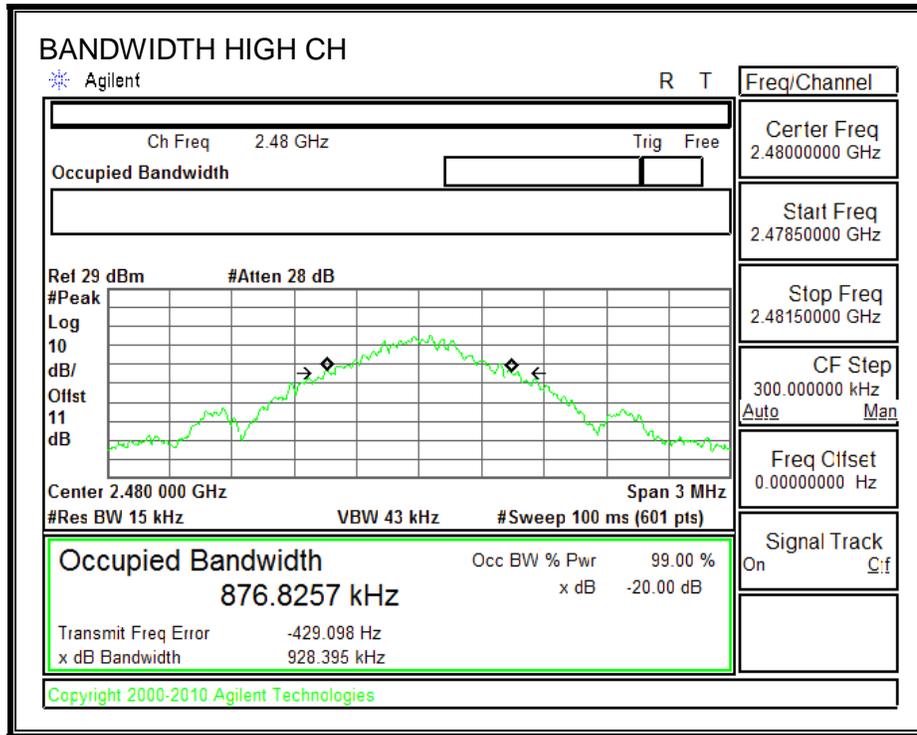



GFSK 99% BANDWIDTH

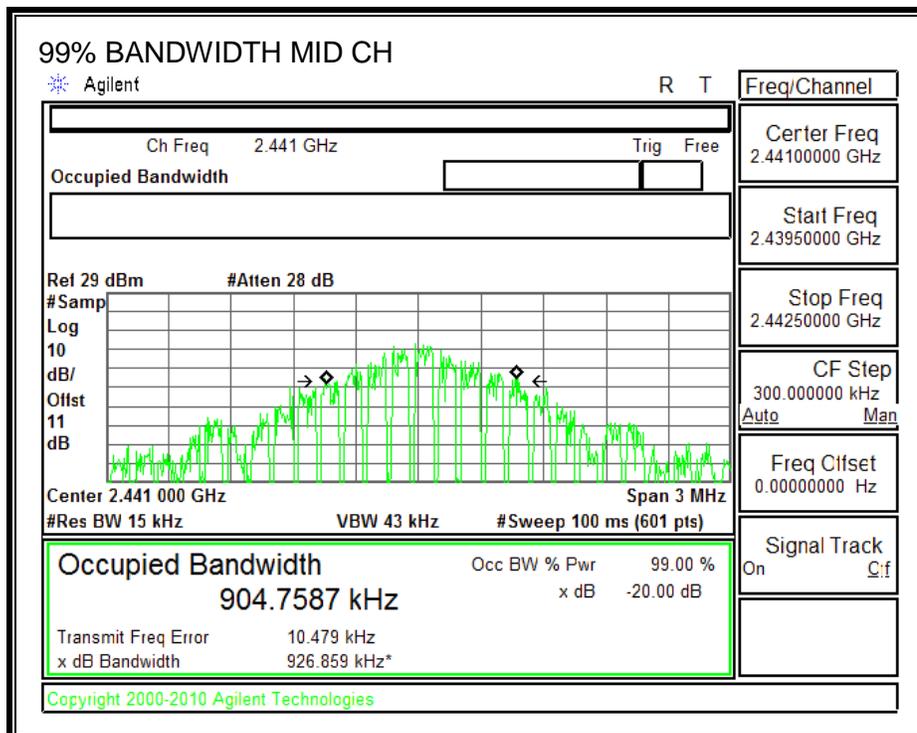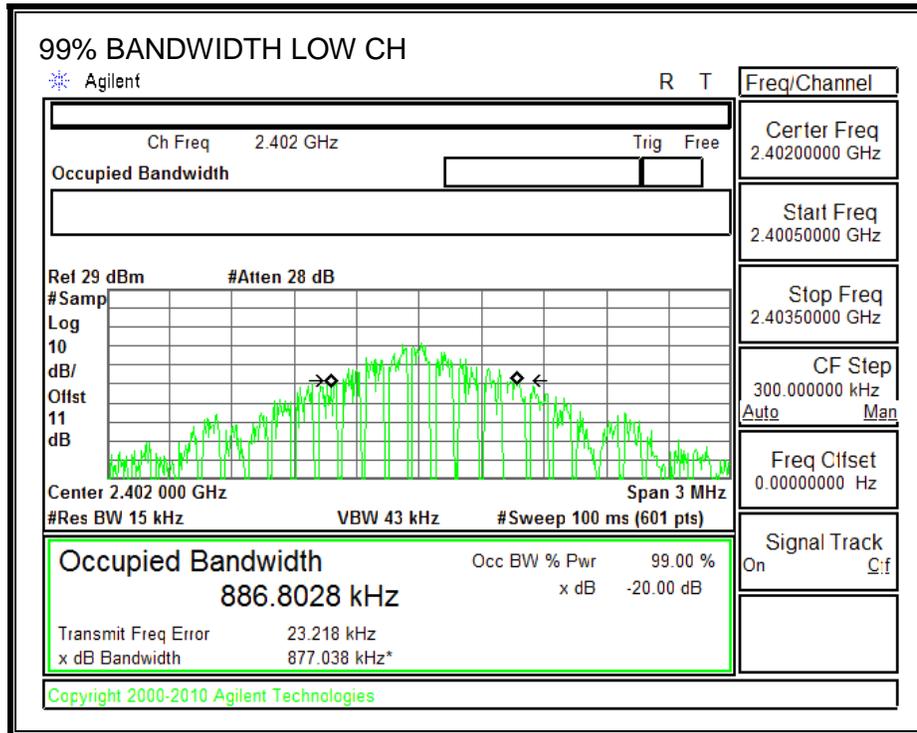


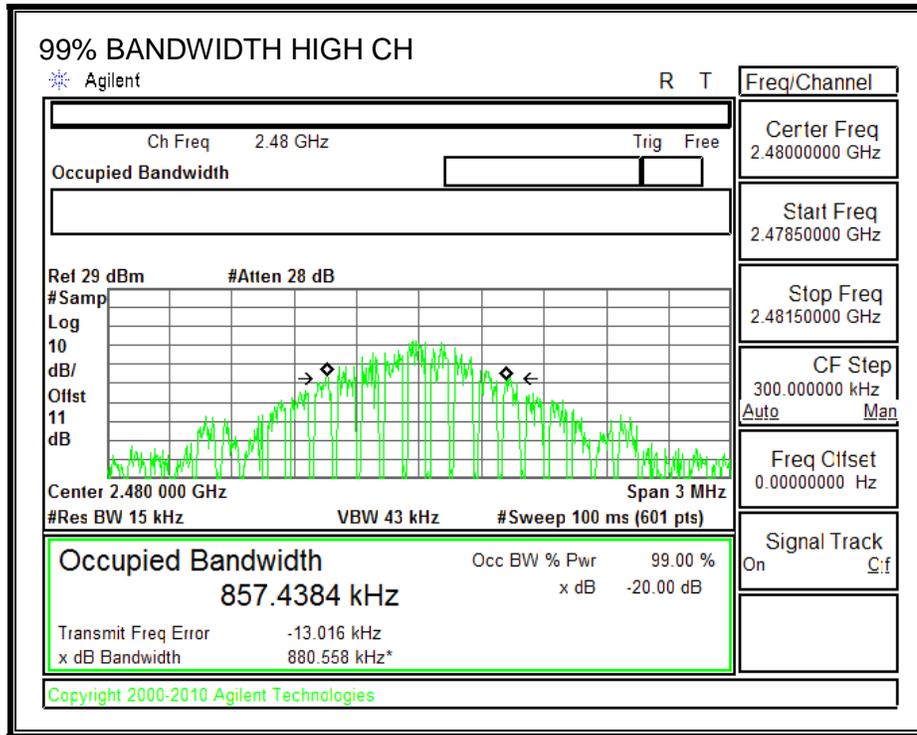



8PSK 20 dB BANDWIDTH

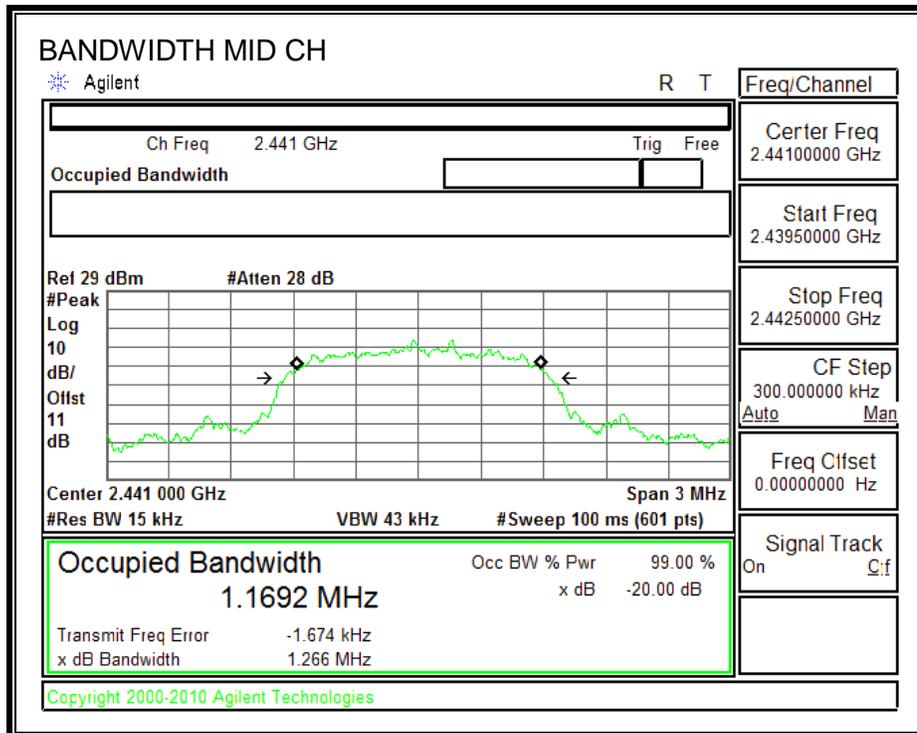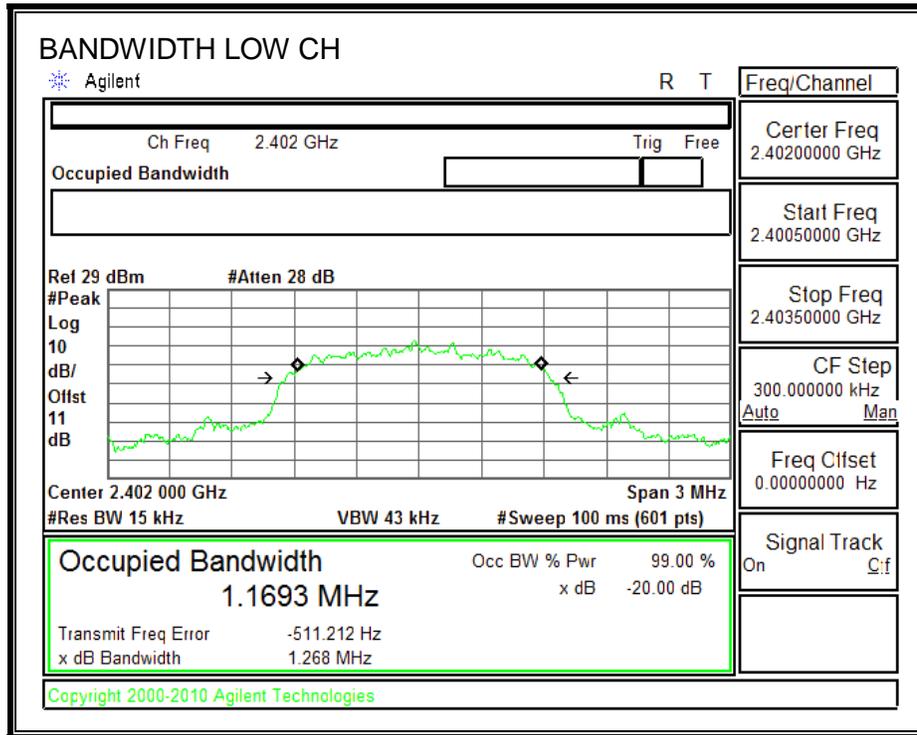

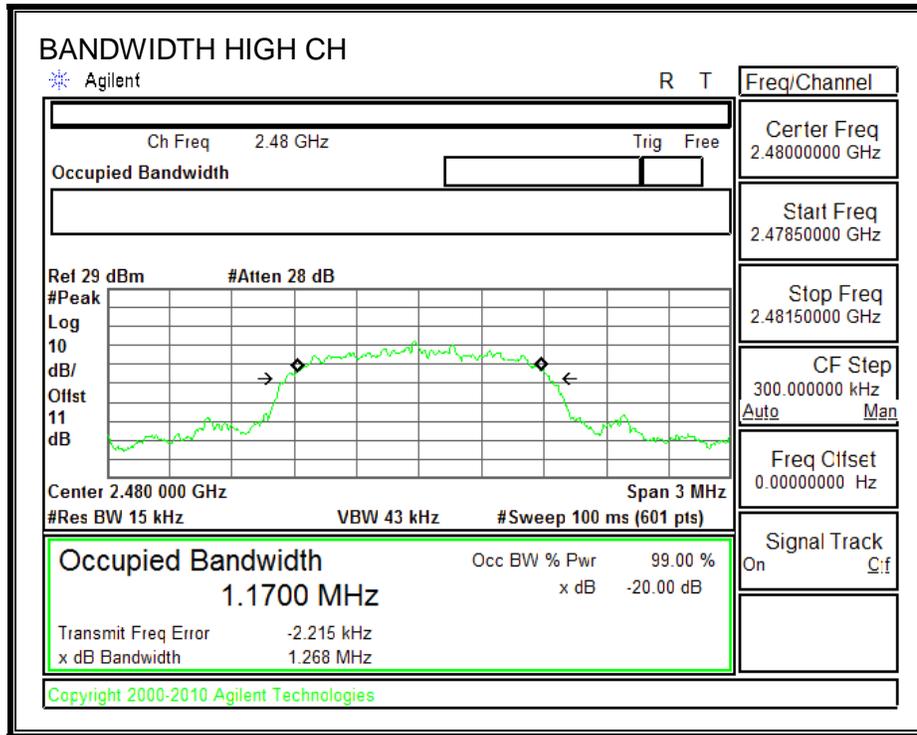

8PSK 99% BANDWIDTH

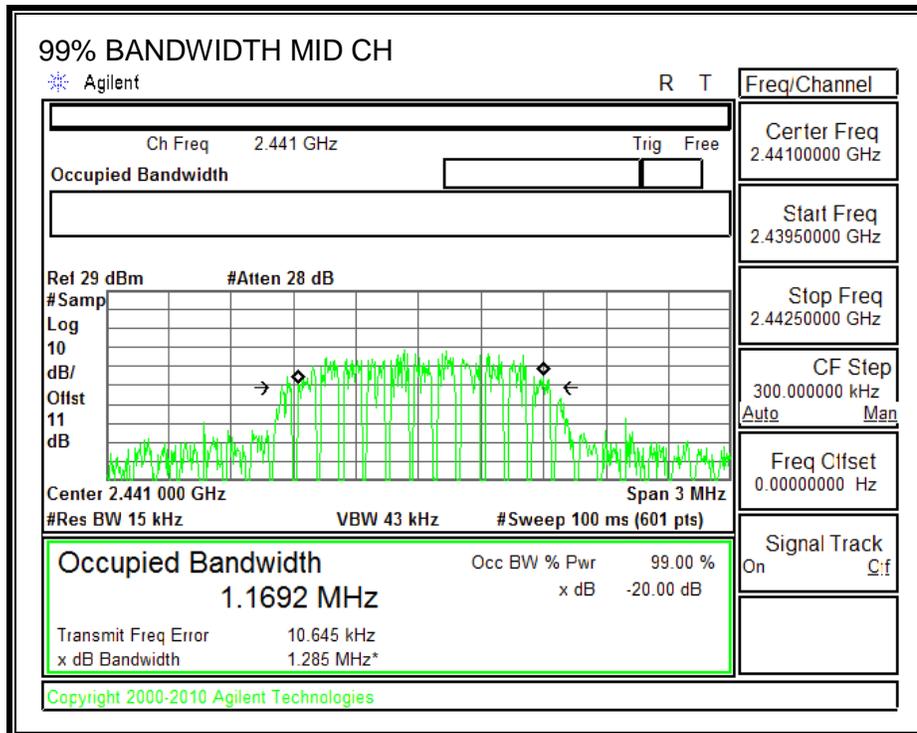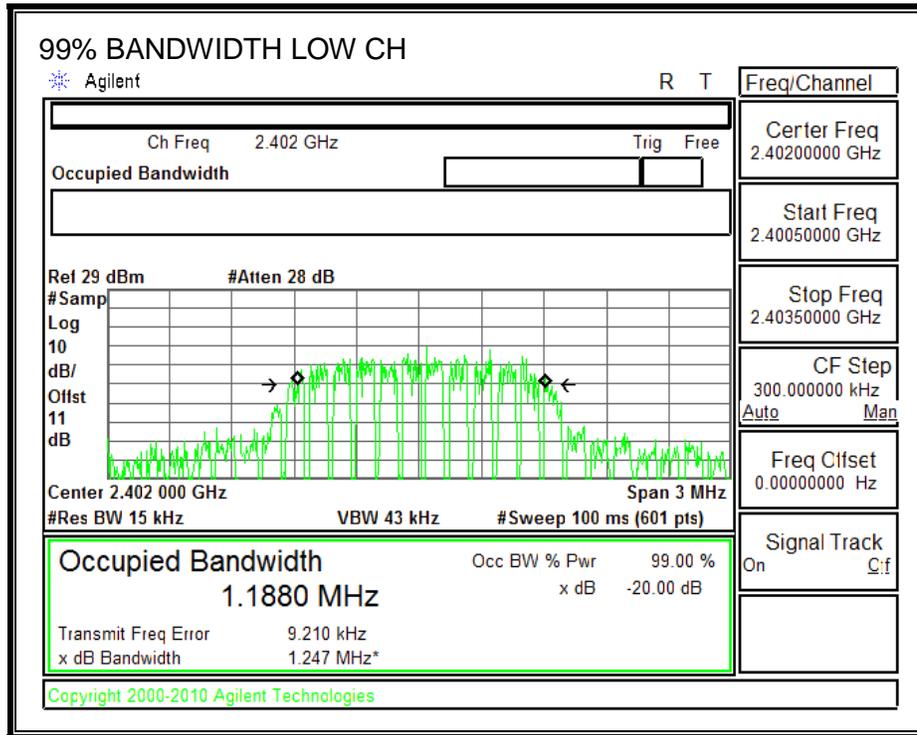

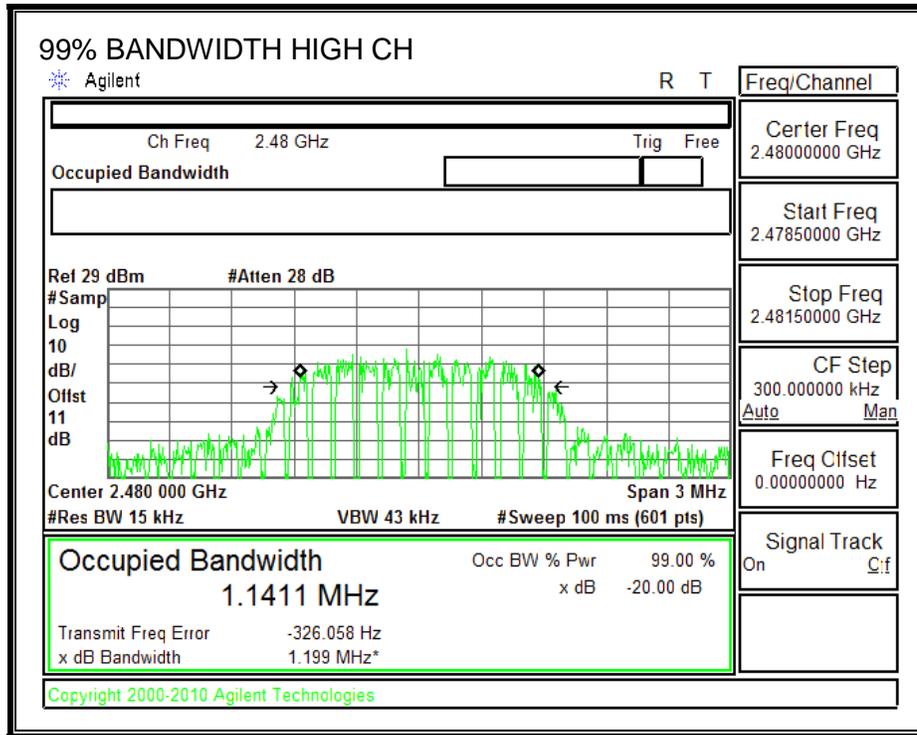

8.2. HOPPING FREQUENCY SEPARATION

LIMIT

FCC §15.247 (a) (1)

IC RSS-210 A8.1 (b)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.


Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

TEST PROCEDURE

DA 00-705: The transmitter output is connected to a spectrum analyzer. The RBW is set to 300 kHz and the VBW is set to 300 kHz. The sweep time is coupled.

RESULTS

HOPPING FREQUENCY SEPARATION

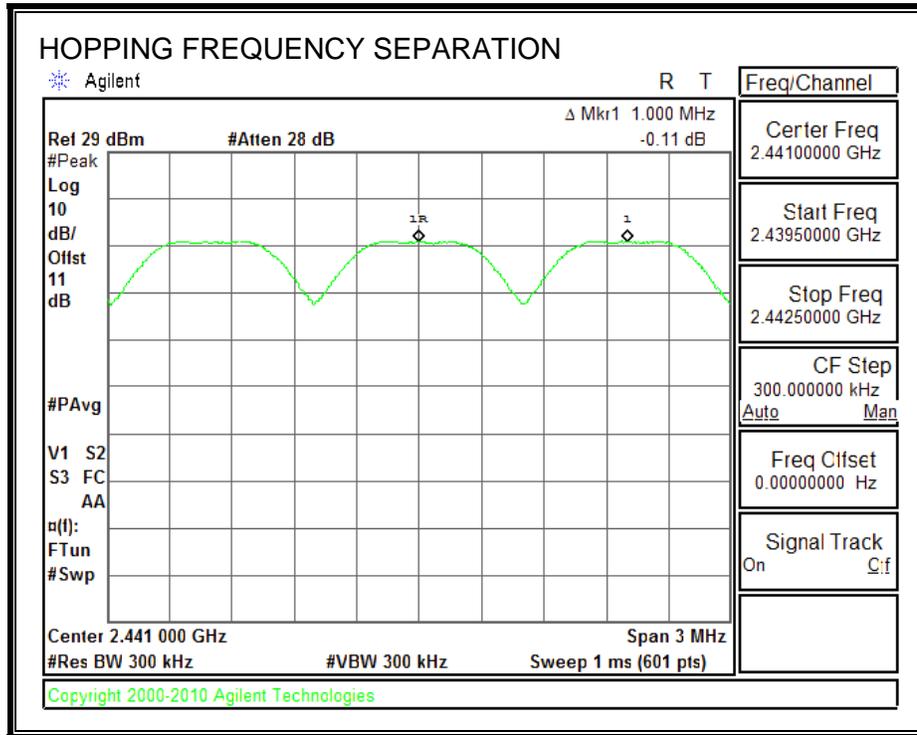

8.3. NUMBER OF HOPPING CHANNELS

LIMIT

FCC §15.247 (a) (1) (iii)

IC RSS-210 A8.1 (d)

Frequency hopping systems in the 2400 – 2483.5 MHz band shall use at least 15 non-overlapping channels.


TEST PROCEDURE



DA 00-705: The transmitter output is connected to a spectrum analyzer. The span is set to cover the entire authorized band, in either a single sweep or in multiple contiguous sweeps. The RBW is set to a maximum of 1 % of the span. The analyzer is set to Max Hold.


RESULTS

Normal Mode: 79 Channels observed.

NUMBER OF HOPPING CHANNELS

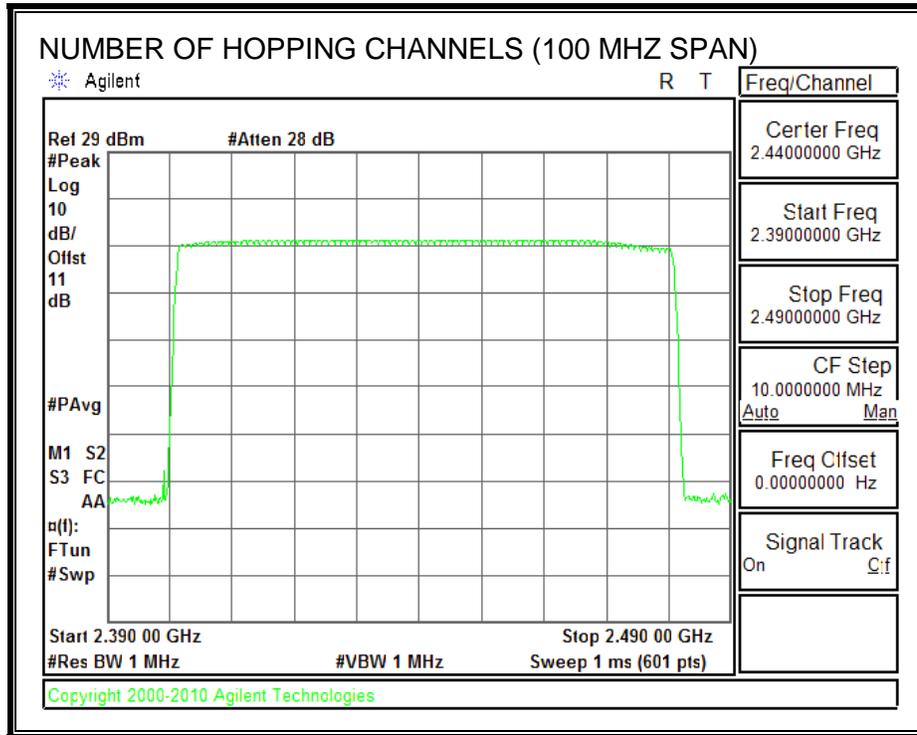

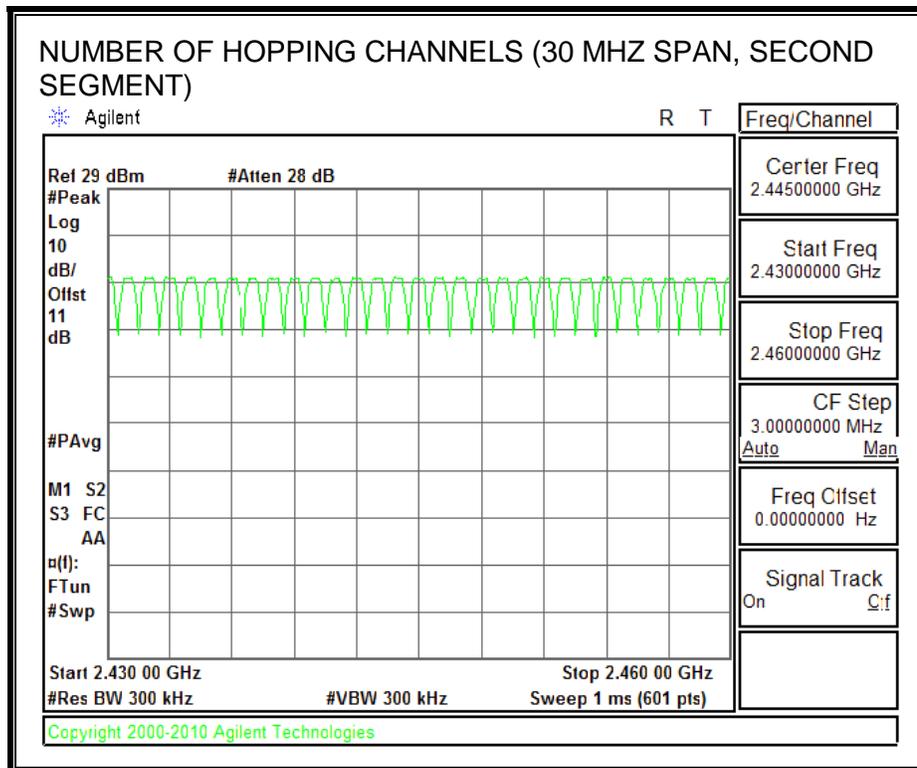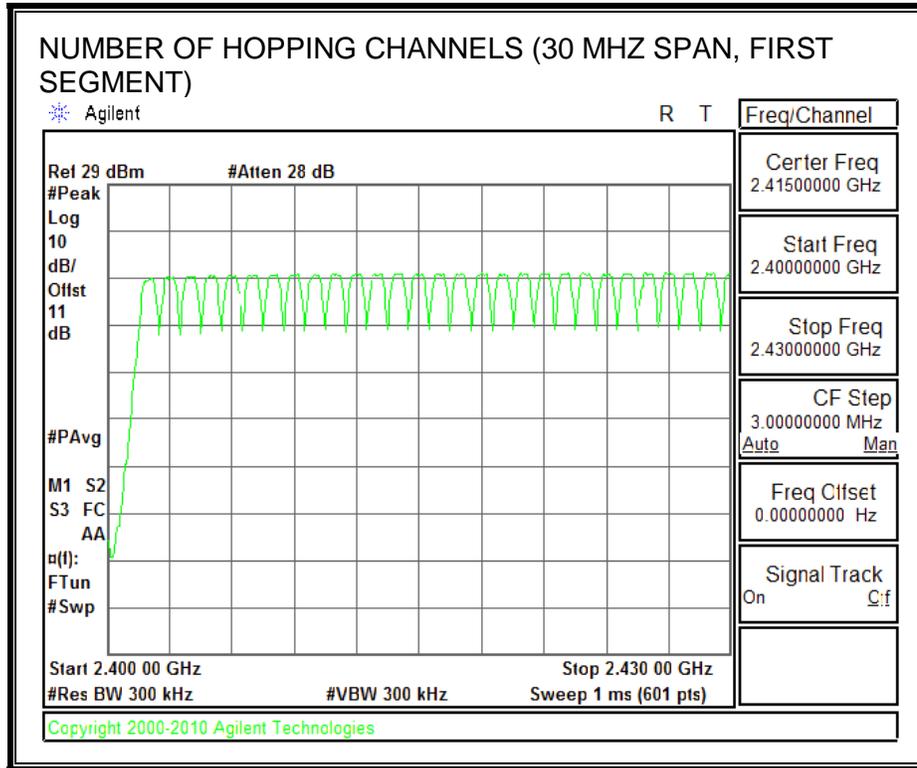

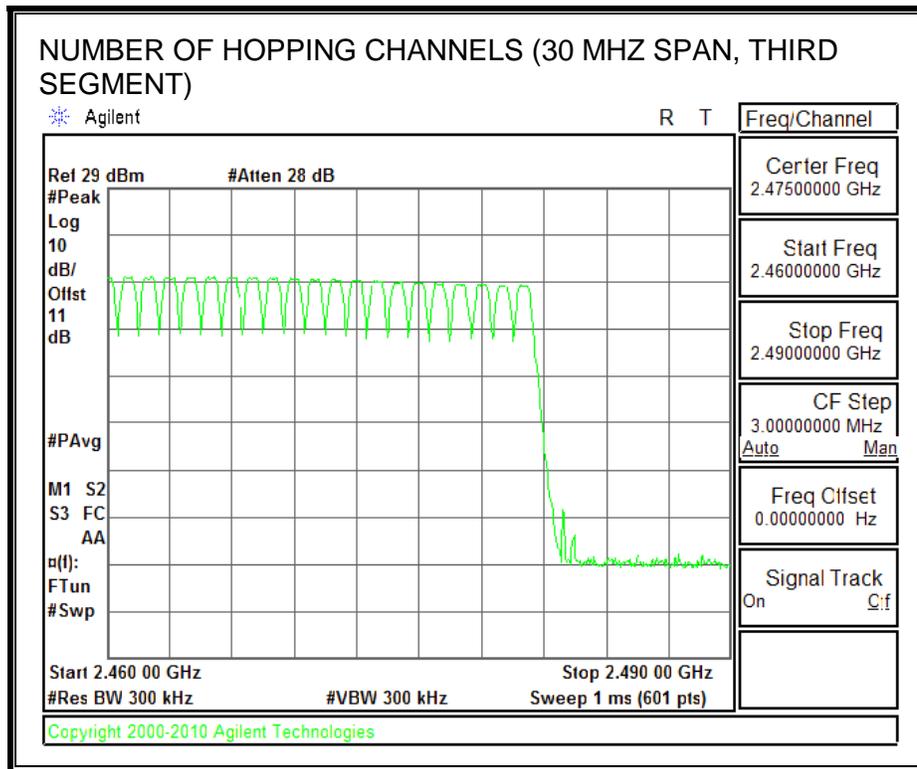

8.4. AVERAGE TIME OF OCCUPANCY

LIMIT

FCC §15.247 (a) (1) (iii)

IC RSS-210 A8.1 (d)

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The span is set to 0 Hz, centered on a single, selected hopping channel. The width of a single pulse is measured in a fast scan. The number of pulses is measured in a 3.16 second scan, to enable resolution of each occurrence.


The average time of occupancy in the specified 31.6 second period (79 channels * 0.4 s) is equal to $10 * (\# \text{ of pulses in } 3.16 \text{ s}) * \text{ pulse width}$.

For AFH mode, the average time of occupancy in the specified 8 second period (20 channels * 0.4 seconds) is equal to $10 * (\# \text{ of pulses in } 0.8 \text{ s}) * \text{ pulse width}$.


RESULTS

DH Packet	Pulse Width (msec)	Number of Pulses in 3.16 seconds	Average Time of Occupancy (sec)	Limit (sec)	Margin (sec)
GFSK Normal Mode					
DH1	0.383	32	0.123	0.4	-0.277
DH3	1.608	17	0.273	0.4	-0.127
DH5	2.858	11	0.314	0.4	-0.086
DH Packet	Pulse Width (msec)	Number of Pulses in 0.8 seconds	Average Time of Occupancy (sec)	Limit (sec)	Margin (sec)
GFSK AFH Mode					
DH1	0.383	8	0.031	0.4	-0.369
DH3	1.608	5	0.080	0.4	-0.320
DH5	2.858	3	0.086	0.4	-0.314


PULSE WIDTH - DH1

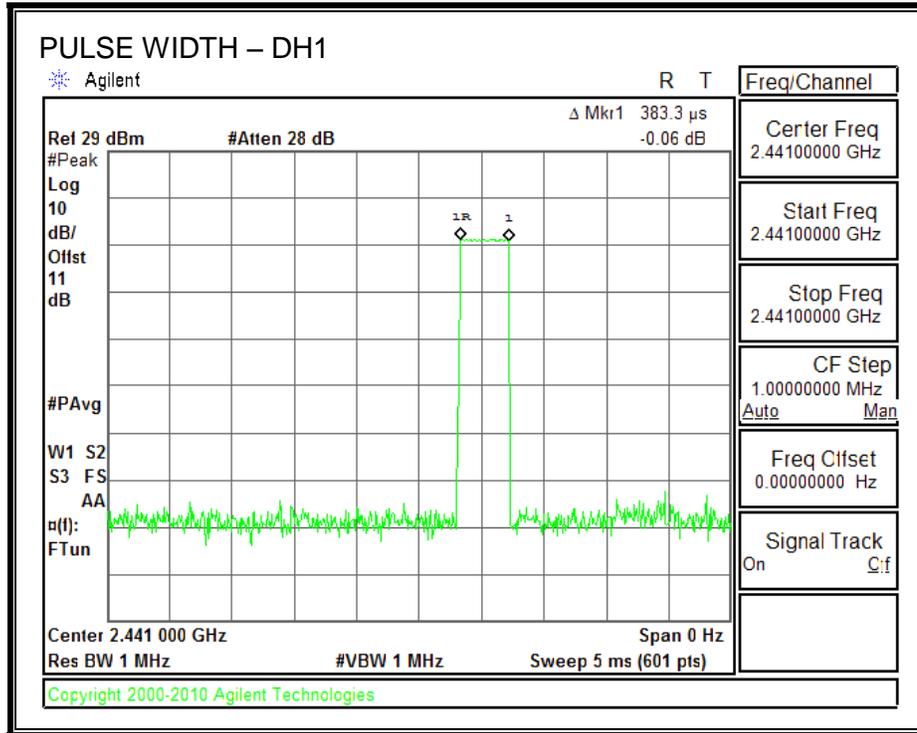


NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD – DH1

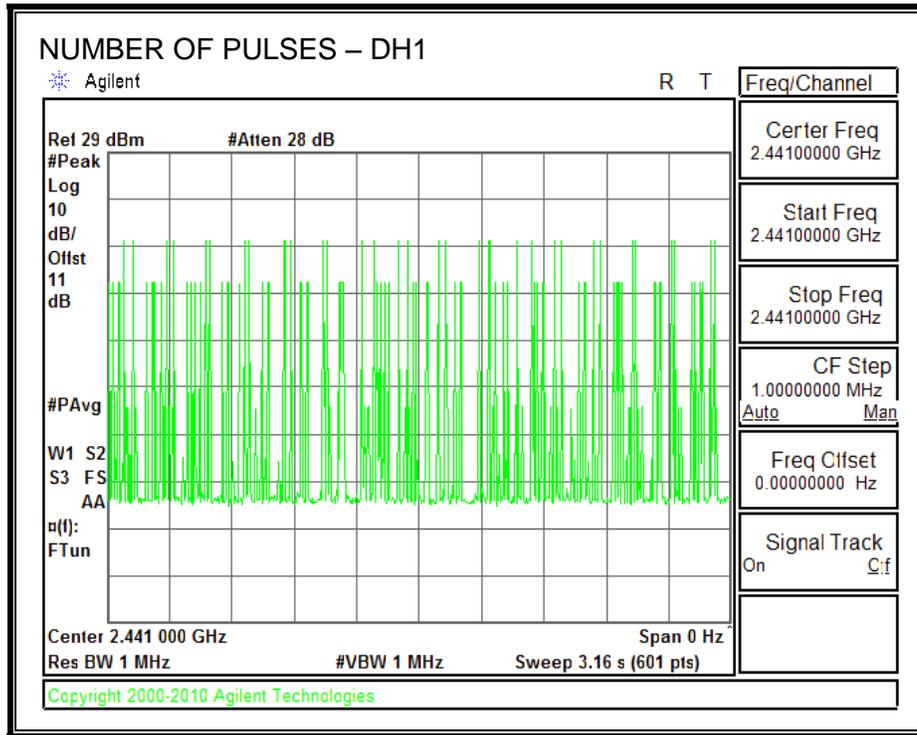


PULSE WIDTH – DH3

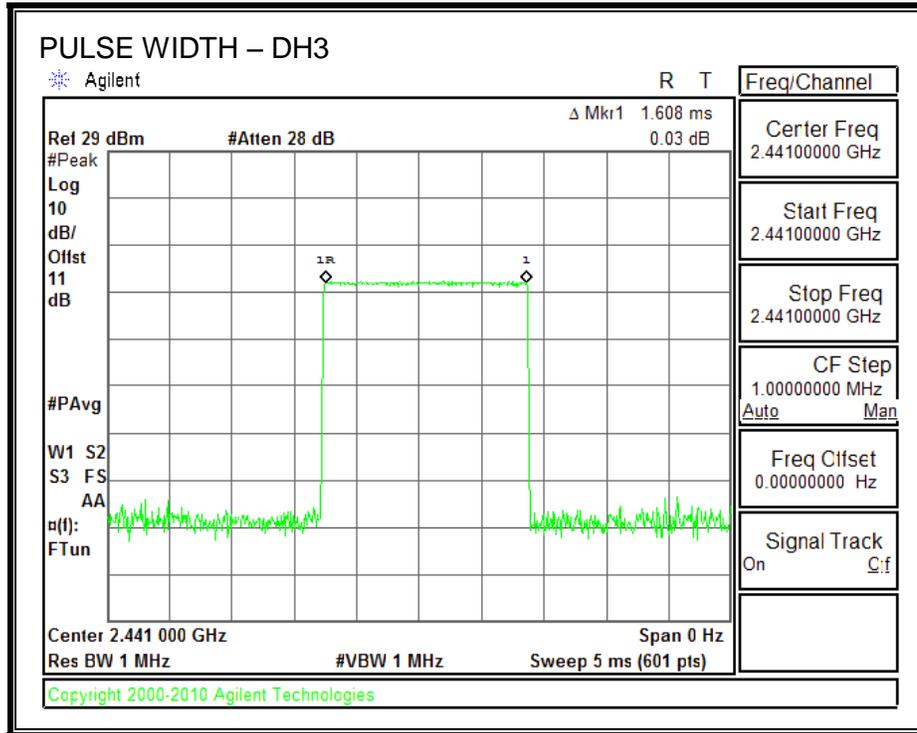


NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD – DH3

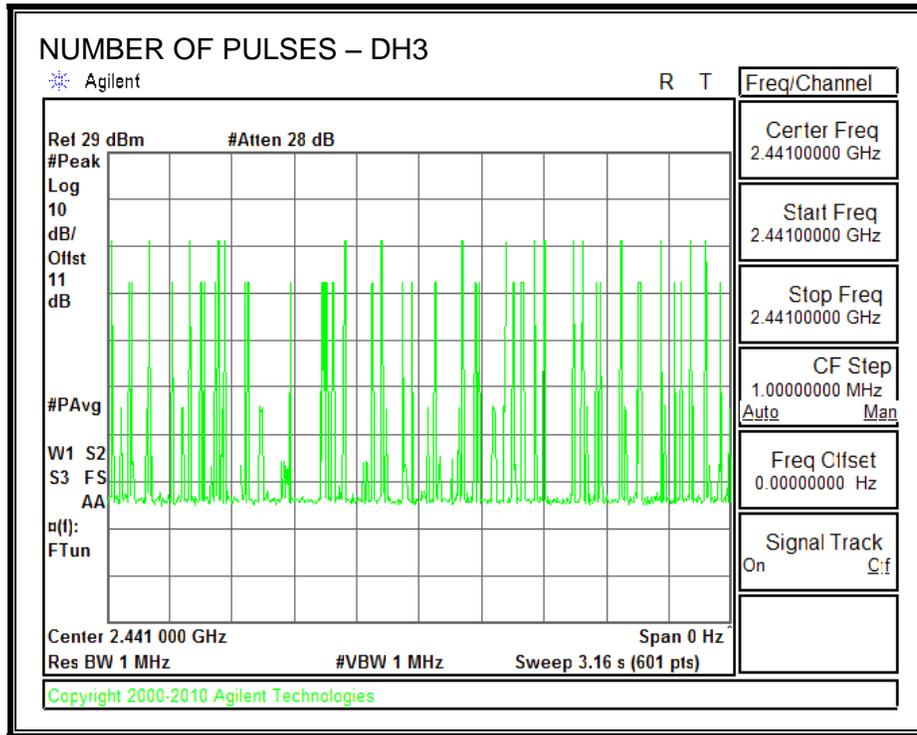

PULSE WIDTH – DH5

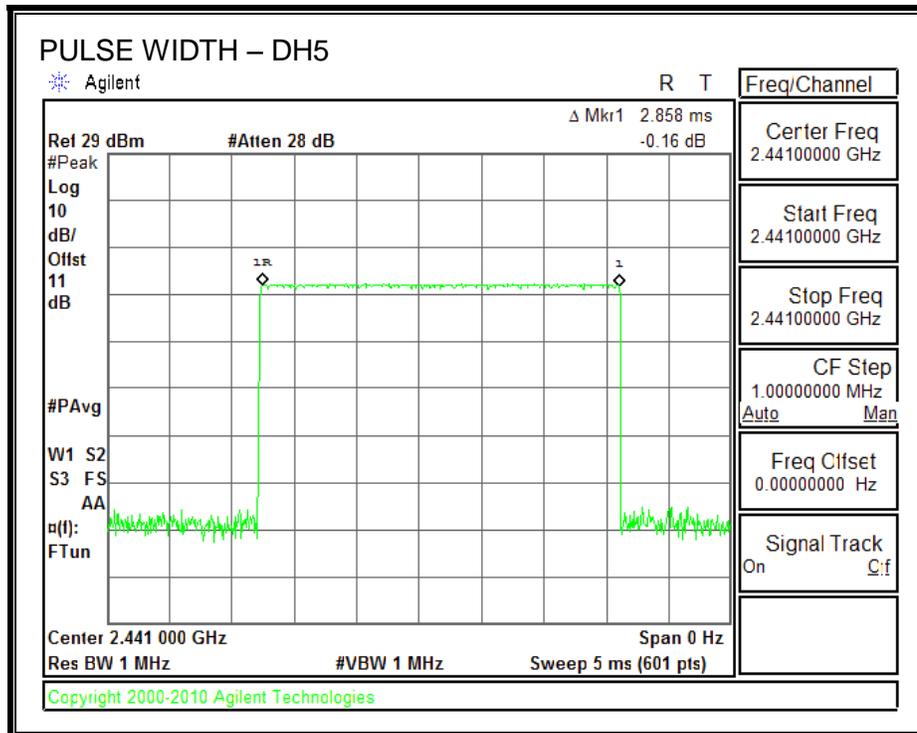

NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD – DH5

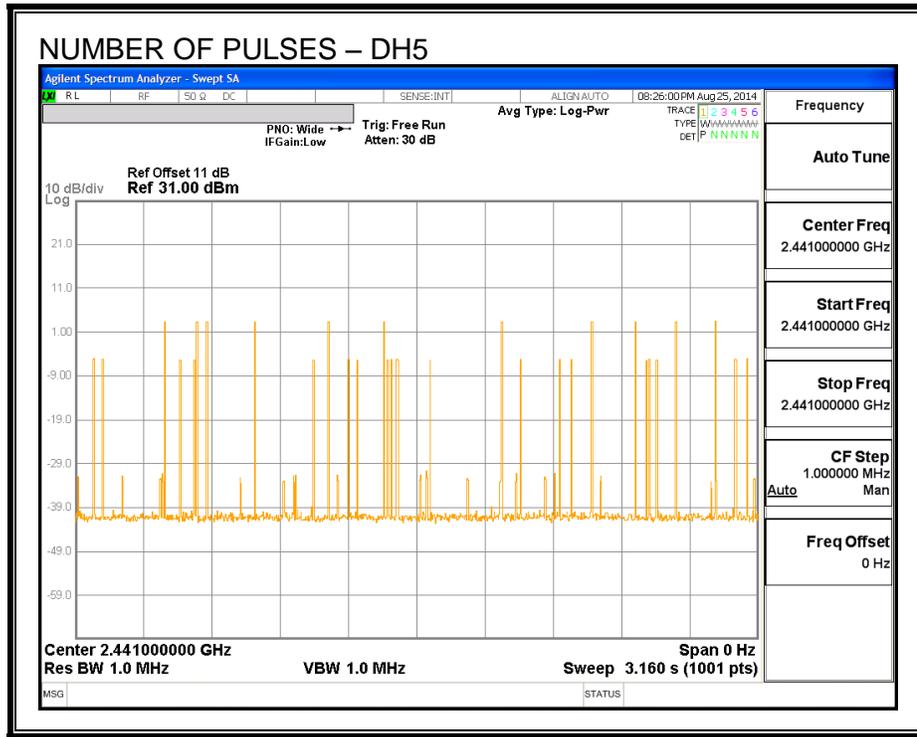

8.5. OUTPUT POWER

LIMIT

§15.247 (b) (1)

RSS-210 Issue 7 Clause A8.4

The maximum antenna gain is less than 6 dBi, therefore the limit is 21 dBm.

TEST PROCEDURE

DA 00-705: The transmitter output is connected to a spectrum analyzer the analyzer bandwidth is set to a value greater than the 20 dB bandwidth of the EUT.

RESULTS



8.5.1. BASIC DATA RATE GFSK MODULATION


Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	9.29	21	-11.71
Middle	2441	10.24	21	-10.76
High	2480	8.52	21	-12.48
Worst		10.24		-10.76

8.5.2. ENHANCED DATA RATE 8PSK MODULATION



Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	9.43	21	-11.57
Middle	2441	10.38	21	-10.62
High	2480	8.65	21	-12.35
Worst		10.38		-10.62


GFSK OUTPUT POWER

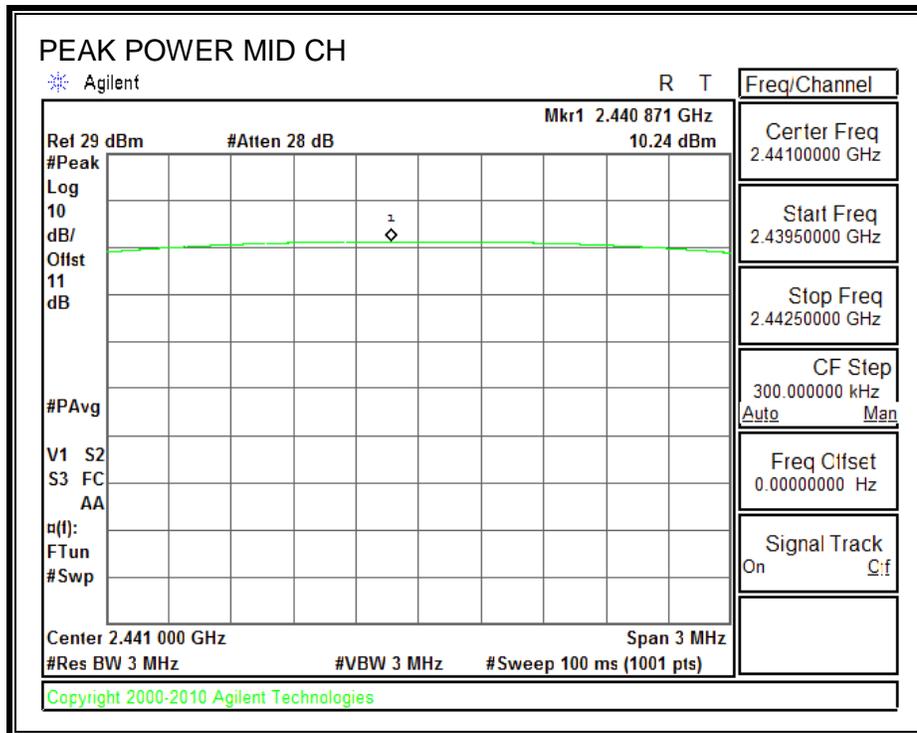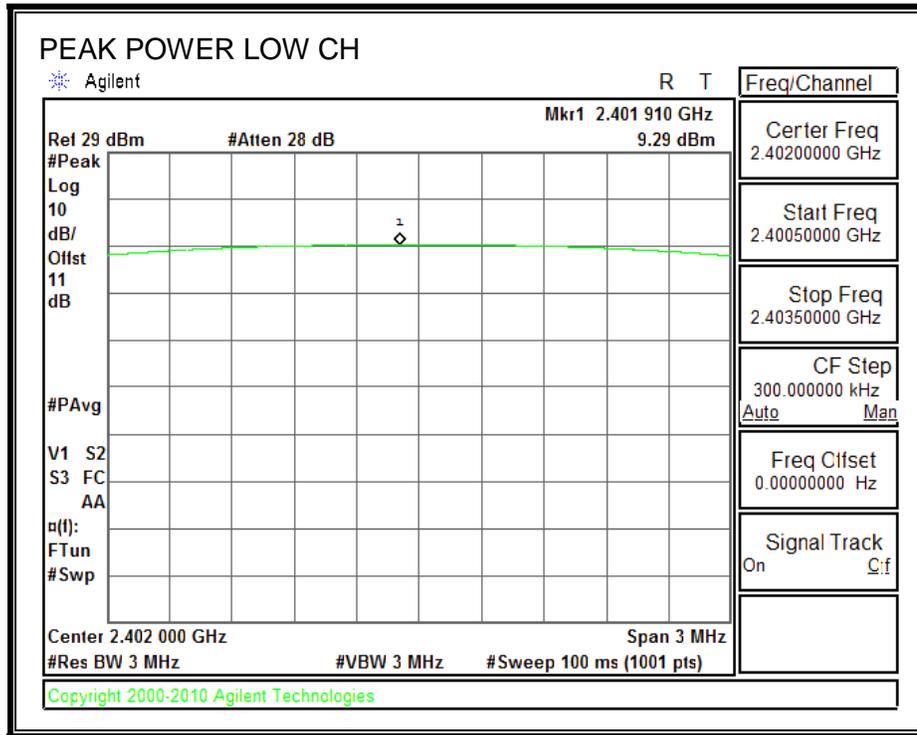

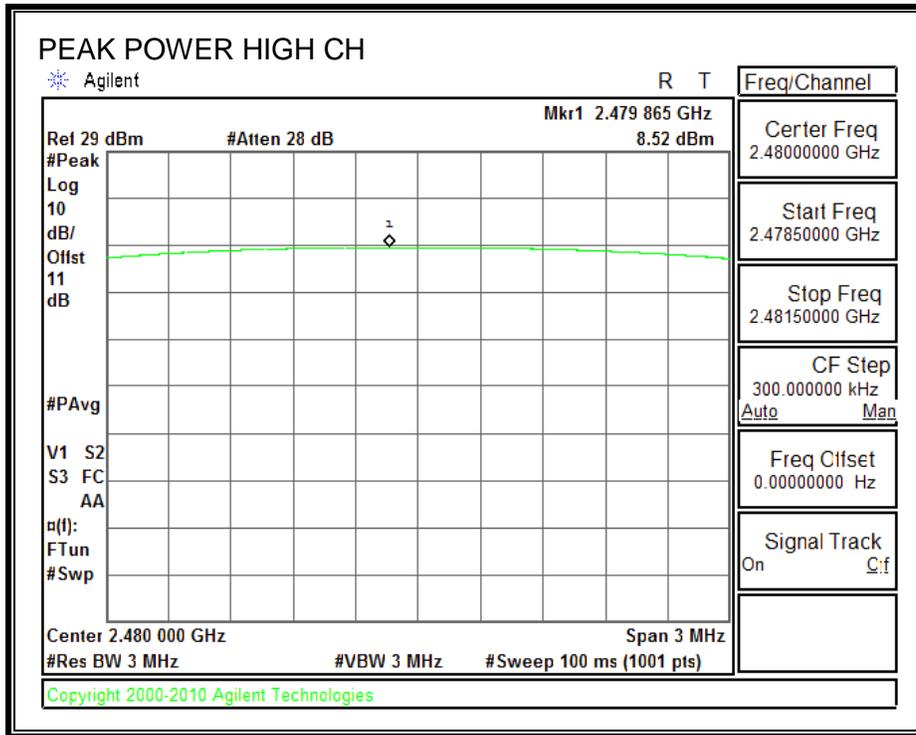

8PSK OUTPUT POWER

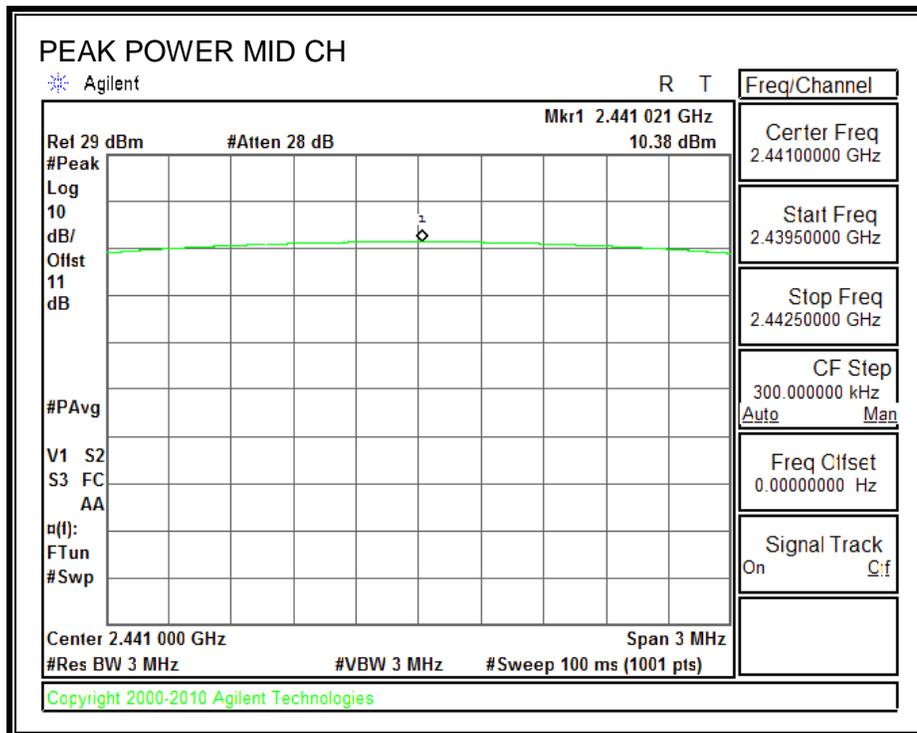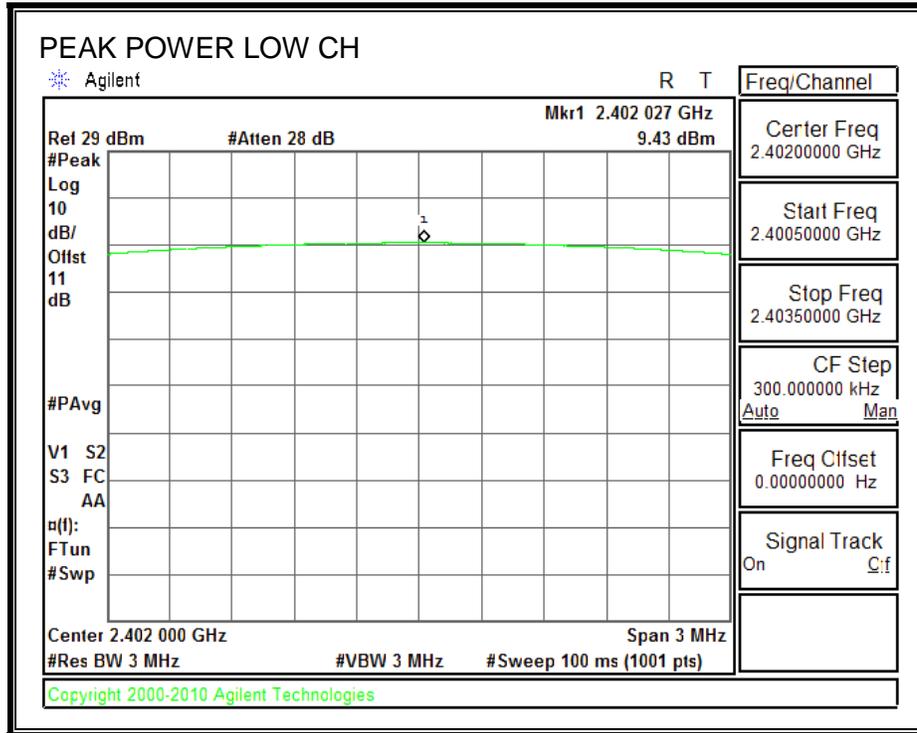

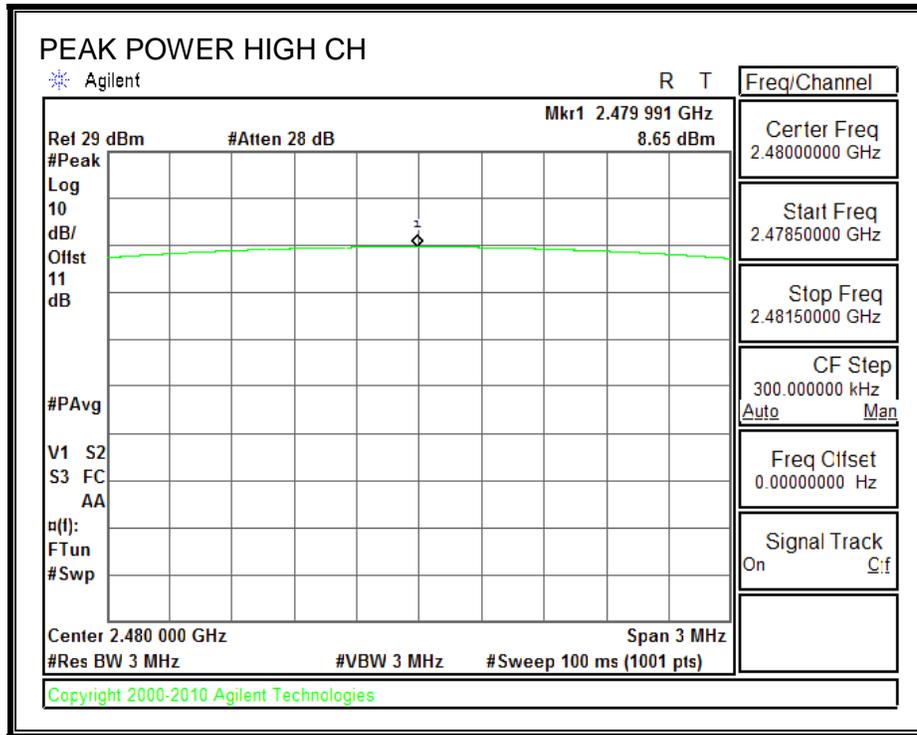

8.6. AVERAGE POWER

LIMIT

None; for reporting purposes only.

TEST PROCEDURE

DA 00-705: The transmitter output is connected to a power meter.

RESULTS

The cable assembly insertion loss of 10.7 dB (including 10 dB pad and 0.7 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

8.6.1. BASIC DATA RATE GFSK MODULATION

Channel	Frequency (MHz)	Average Power (dBm)
Low	2402	8.50
Middle	2441	9.40
High	2480	7.50
Worst		9.40

8.6.2. DATA RATE PI/4-DQPSK MODULATION

Channel	Frequency (MHz)	Average Power (dBm)
Low	2402	6.00
Middle	2441	6.90
High	2480	5.00
Worst		6.90

8.6.3. ENHANCED DATA RATE 8PSK MODULATION

Channel	Frequency (MHz)	Average Power (dBm)
Low	2402	6.00
Middle	2441	6.90
High	2480	5.00
Worst		6.90

8.7. CONDUCTED SPURIOUS EMISSIONS

LIMITS

FCC §15.247 (d)

IC RSS-210 A8.5

Limit = -20 dBc

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.


The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.


The bandedges at 2.4 and 2.4835 GHz are investigated with the transmitter set to the normal hopping mode.

RESULTS


8.7.1. BASIC DATA RATE GFSK MODULATION


SPURIOUS EMISSIONS, LOW CHANNEL

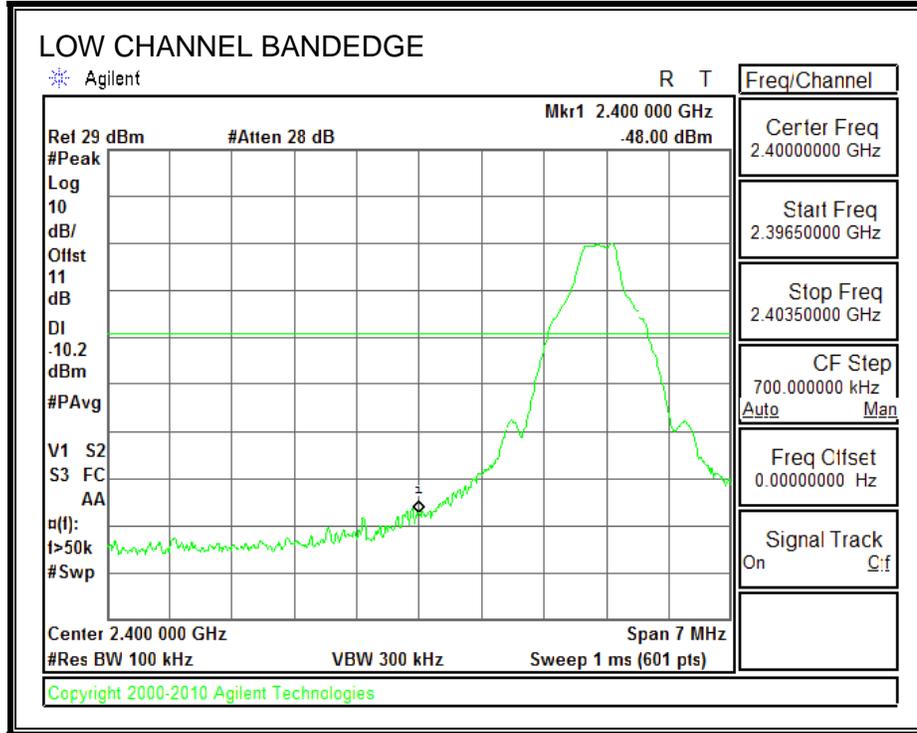

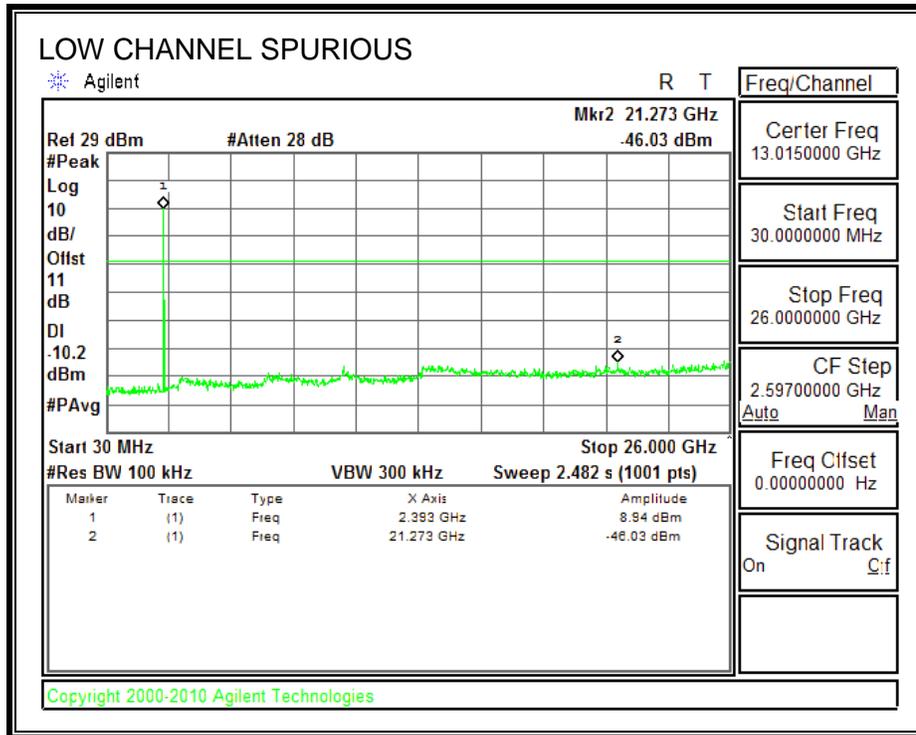



SPURIOUS EMISSIONS, MID CHANNEL

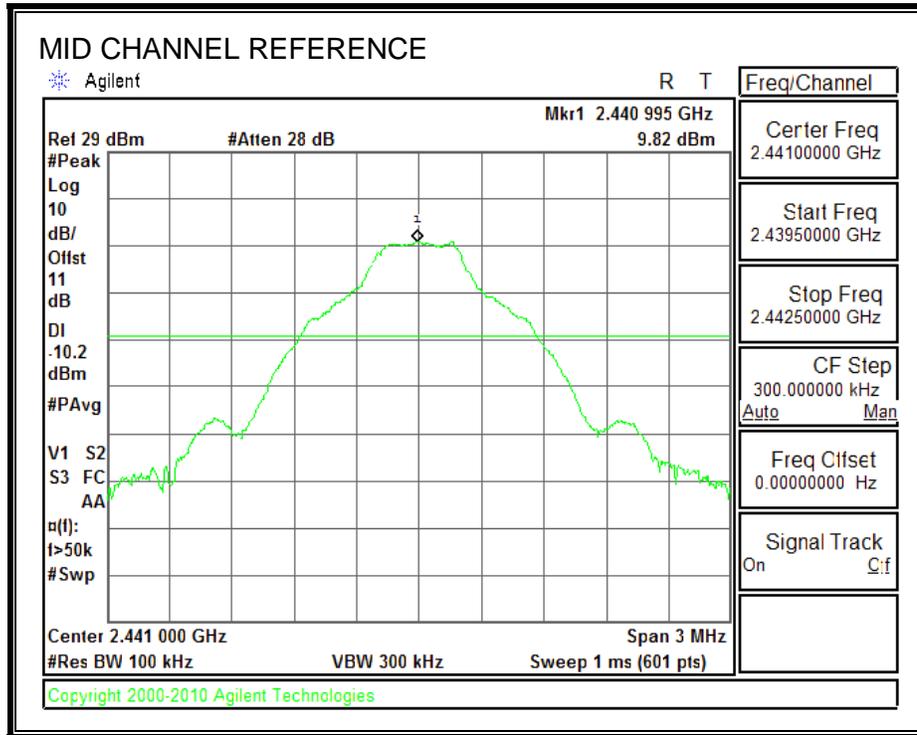


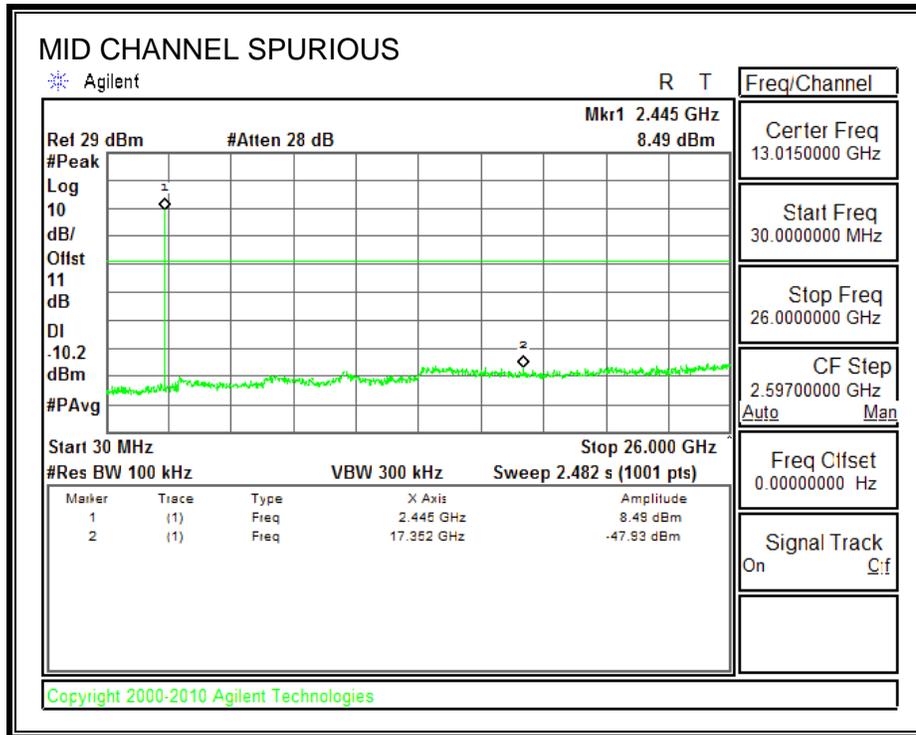


SPURIOUS EMISSIONS, HIGH CHANNEL

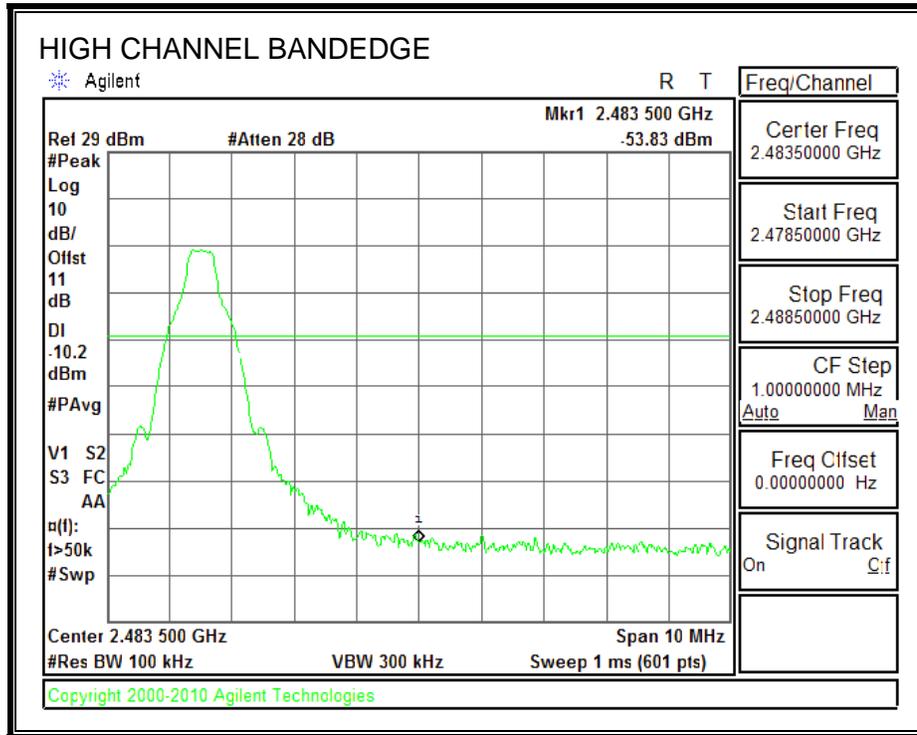

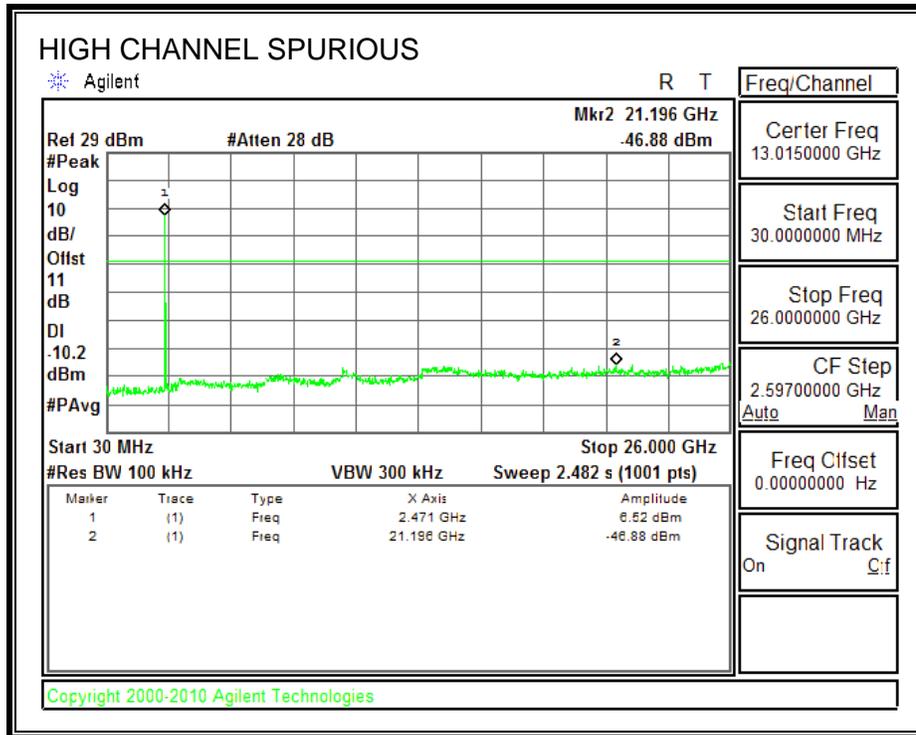



SPURIOUS BANDEDGE EMISSIONS WITH GFSK HOPPING ON

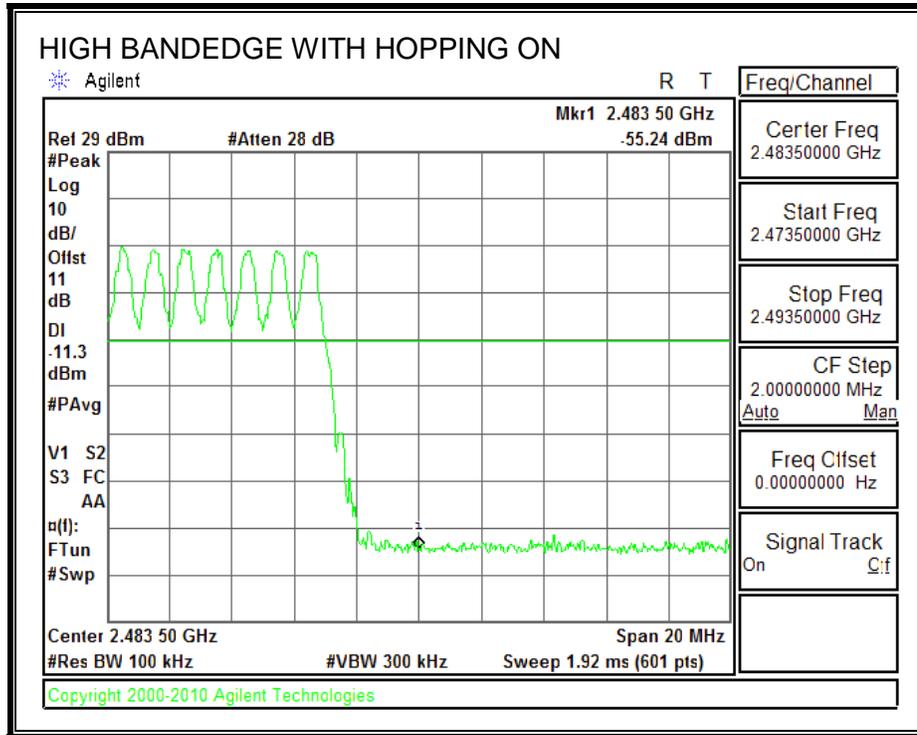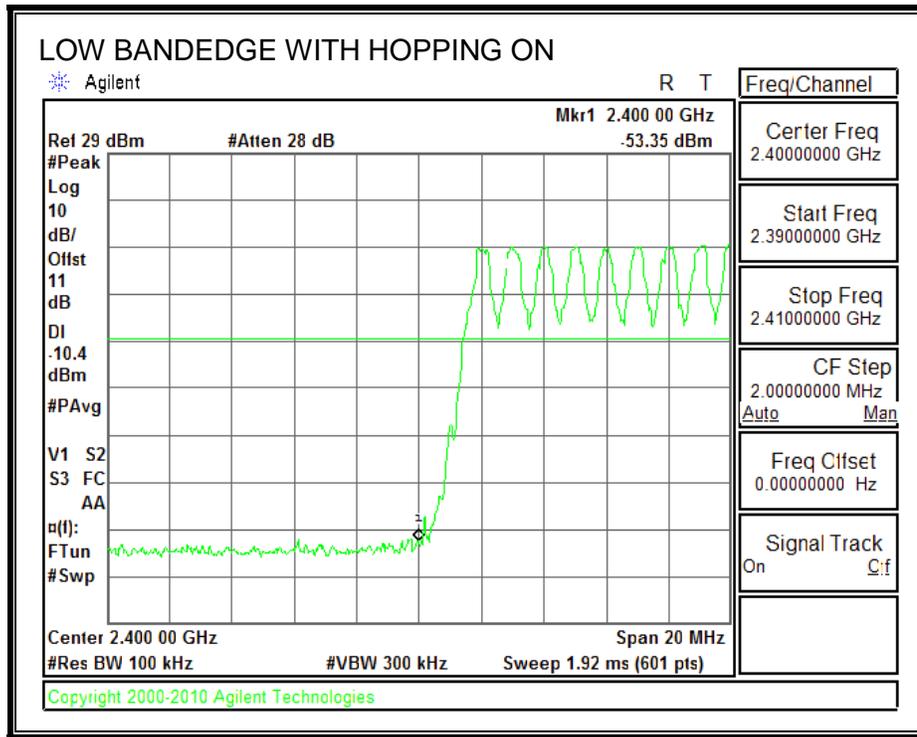


8.7.1. ENHANCED DATA RATE 8PSK MODULATION


SPURIOUS EMISSIONS, LOW CHANNEL

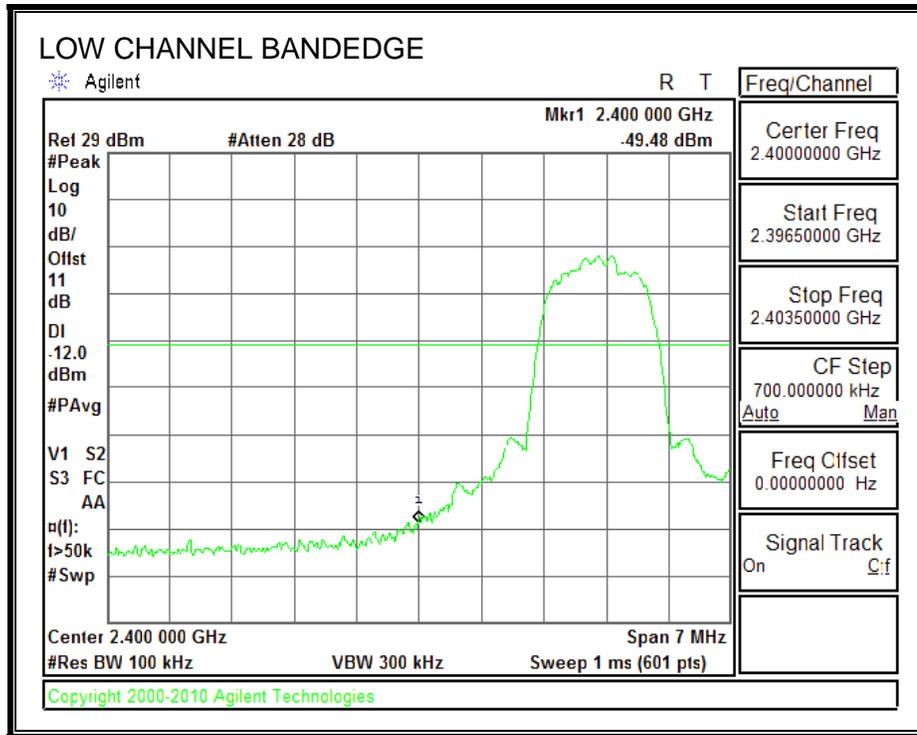

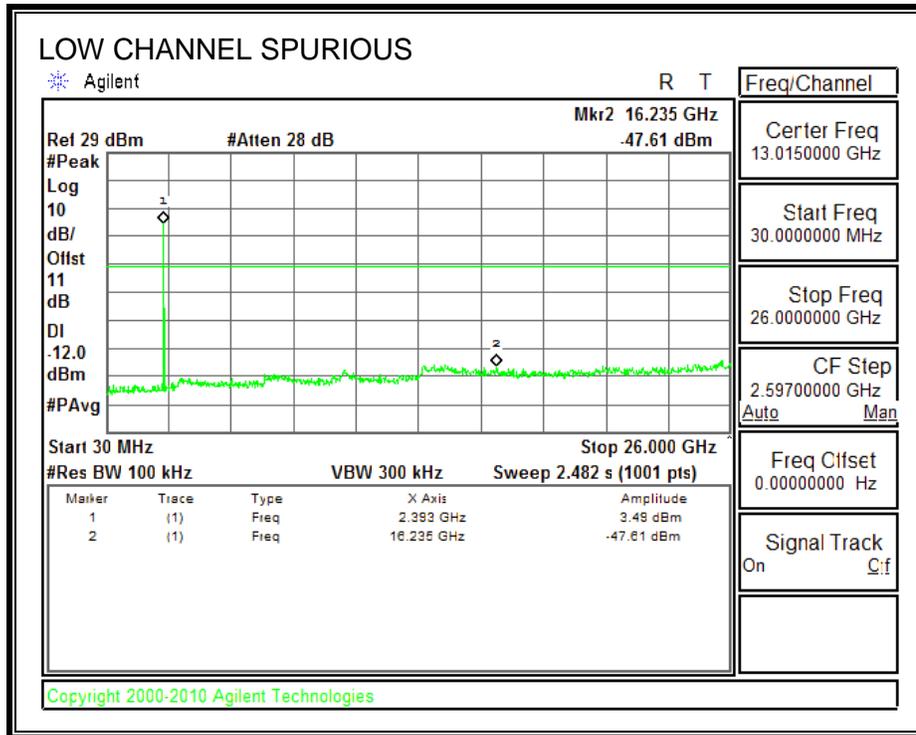



SPURIOUS EMISSIONS, MID CHANNEL

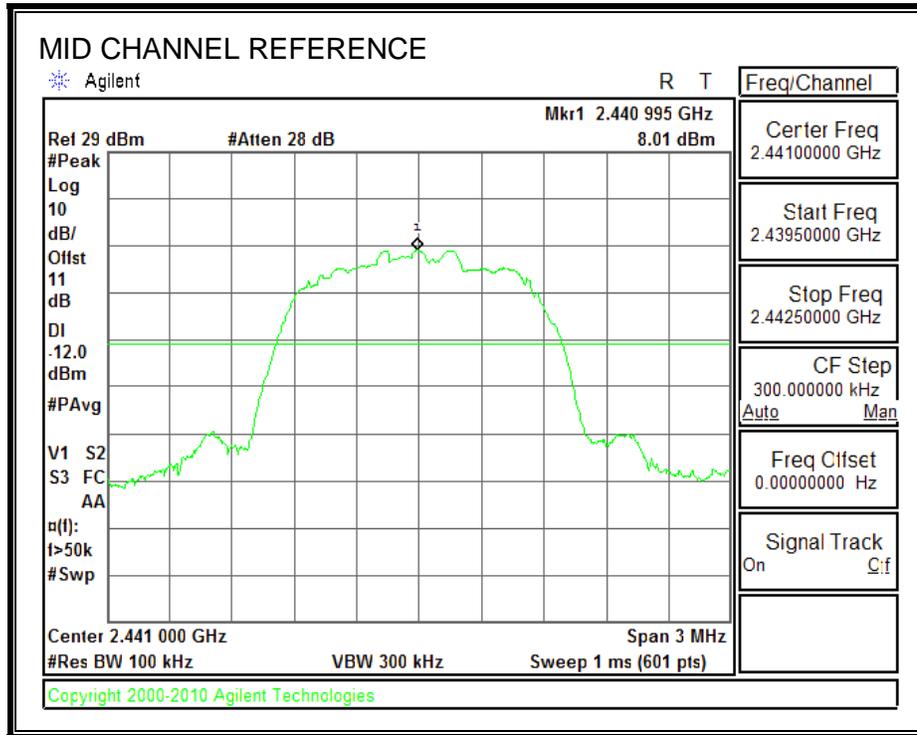


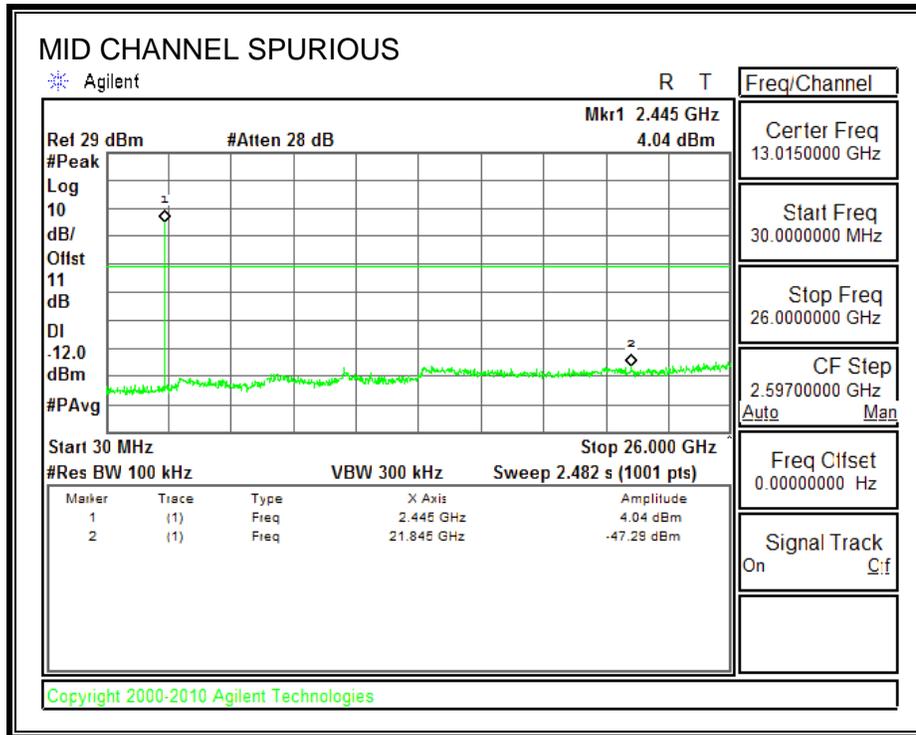


SPURIOUS EMISSIONS, HIGH CHANNEL

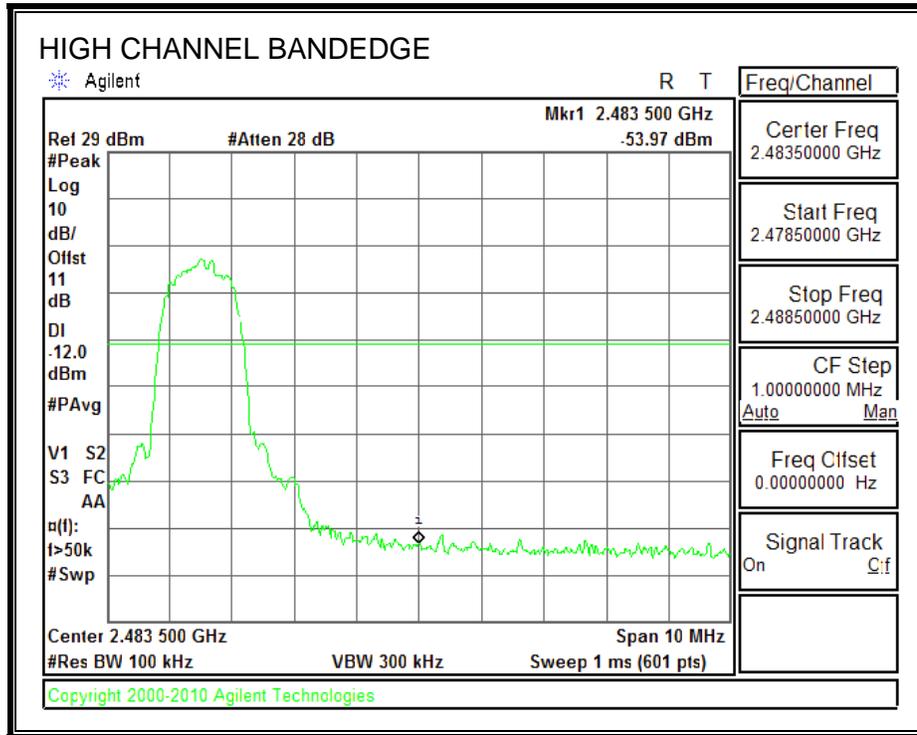

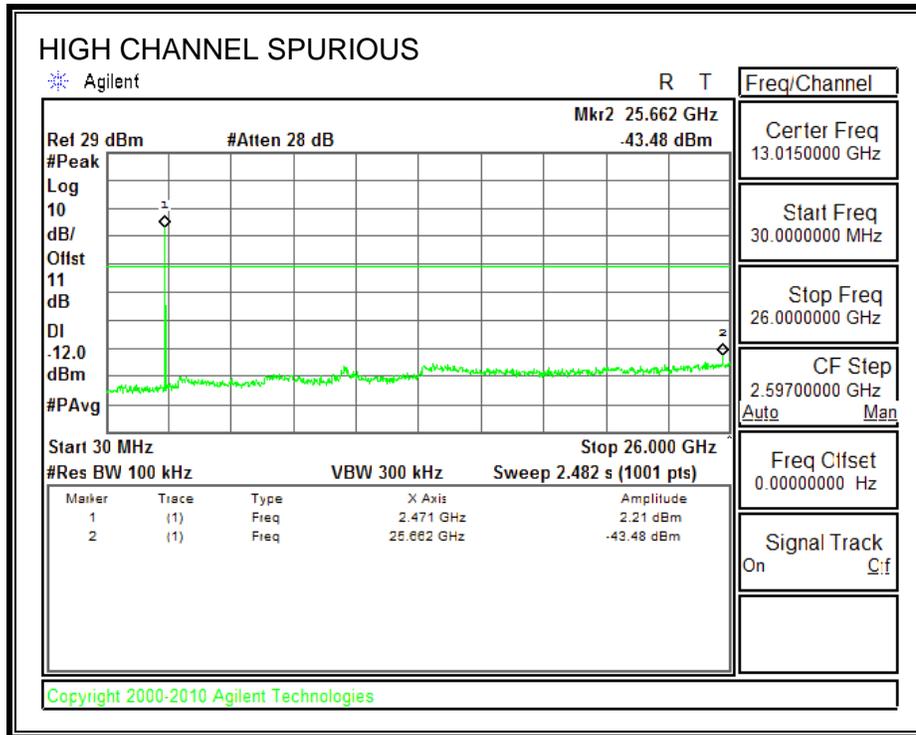

SPURIOUS BANDEDGE EMISSIONS WITH 8PSK HOPPING ON

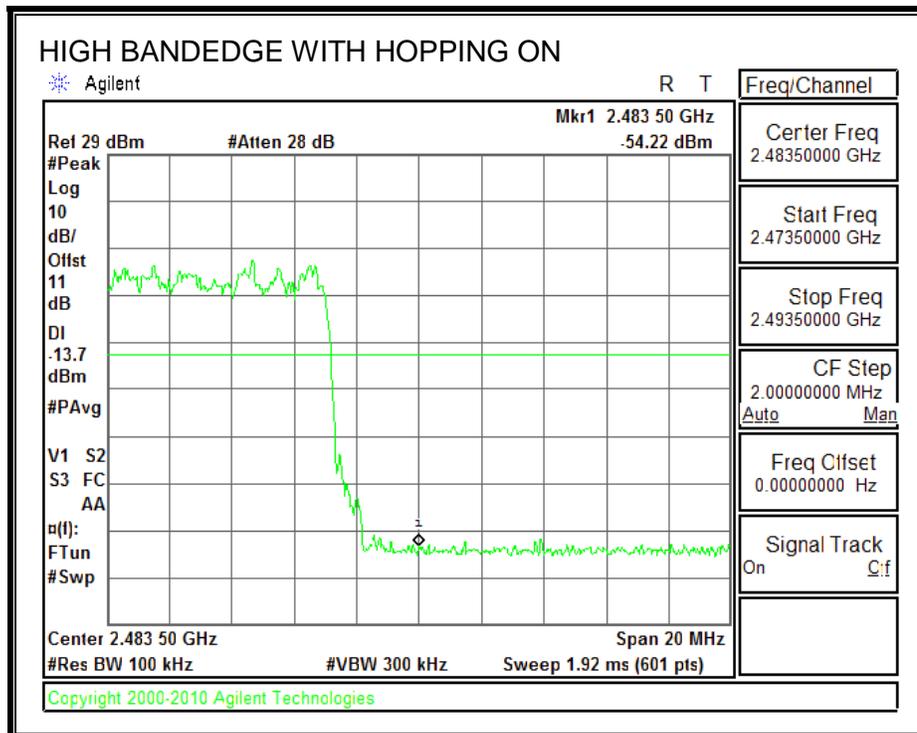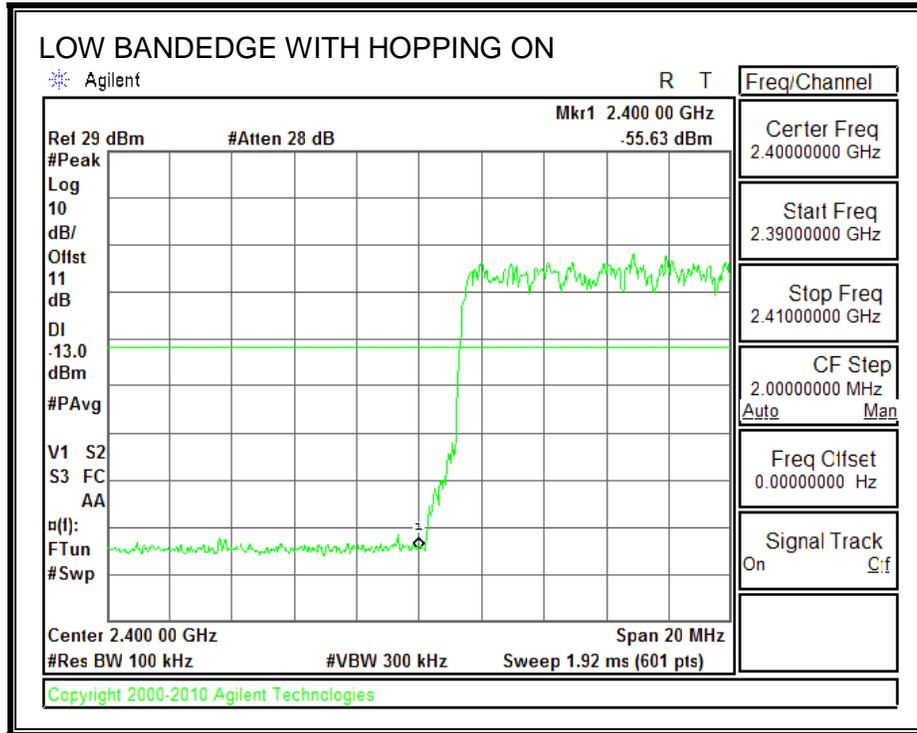

9. RADIATED TEST RESULTS

9.1. LIMITS AND PROCEDURE

LIMITS

FCC §15.205 and §15.209

IC RSS-210 Clause 2.6 (Transmitter)

IC RSS-GEN Clause 6 (Receiver)

Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m
30 - 88	100	40
88 - 216	150	43.5
216 - 960	200	46
Above 960	500	54

TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.4. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For band edge measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 1 MHz for peak measurements and 1/T (on time) for average measurement. GFSK = 1/T = 1 / 0.00288S = 360Hz.


The spectrum from 1GHzHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in the 2.4 GHz band.

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

9.2. TRANSMITTER ABOVE 1 GHz

9.2.1. BASIC DATA RATE GFSK MODULATION

RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

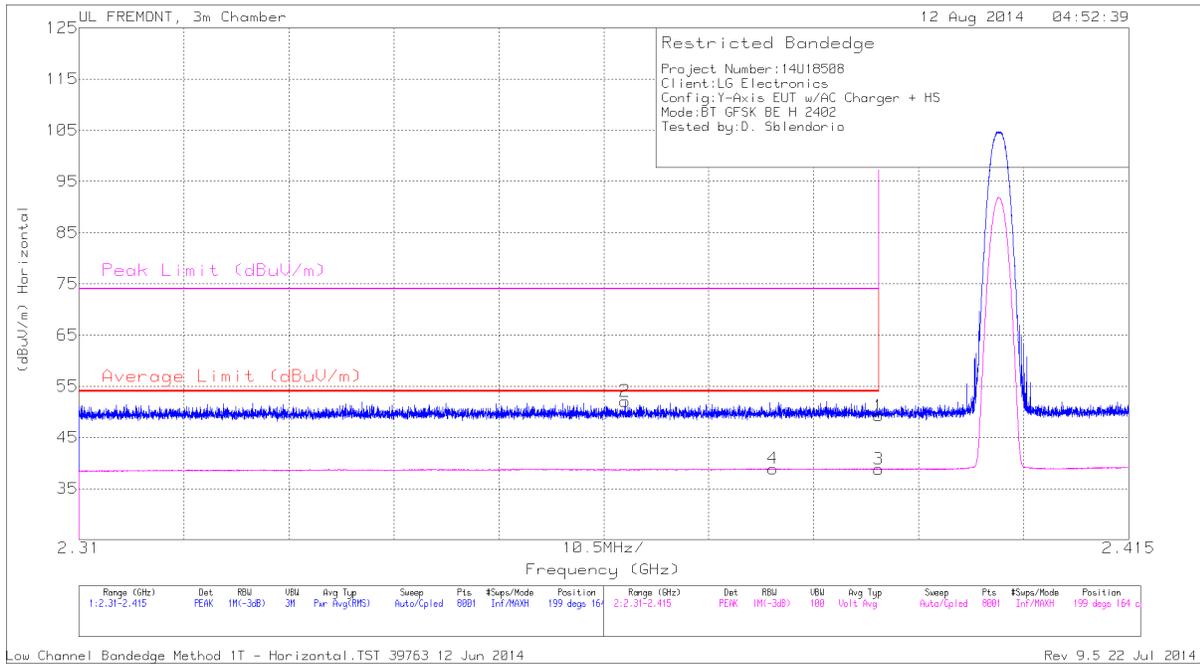


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl /Ftr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	2.365	43.18	PK	32	-23.1	52.08	-	-	74	-21.92	199	164	H
4	2.379	29.9	VB1T	32.1	-23.1	38.9	54	-15.1	-	-	199	164	H
1	2.39	40.24	PK	32.1	-23.1	49.24	-	-	74	-24.76	199	164	H
3	2.39	29.79	VB1T	32.1	-23.1	38.79	54	-15.21	-	-	199	164	H

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

VB1T - FHSS Method: VB=1/Ton, Voltage Averaging Max Hold where: Ton is the duration of the packet

RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)

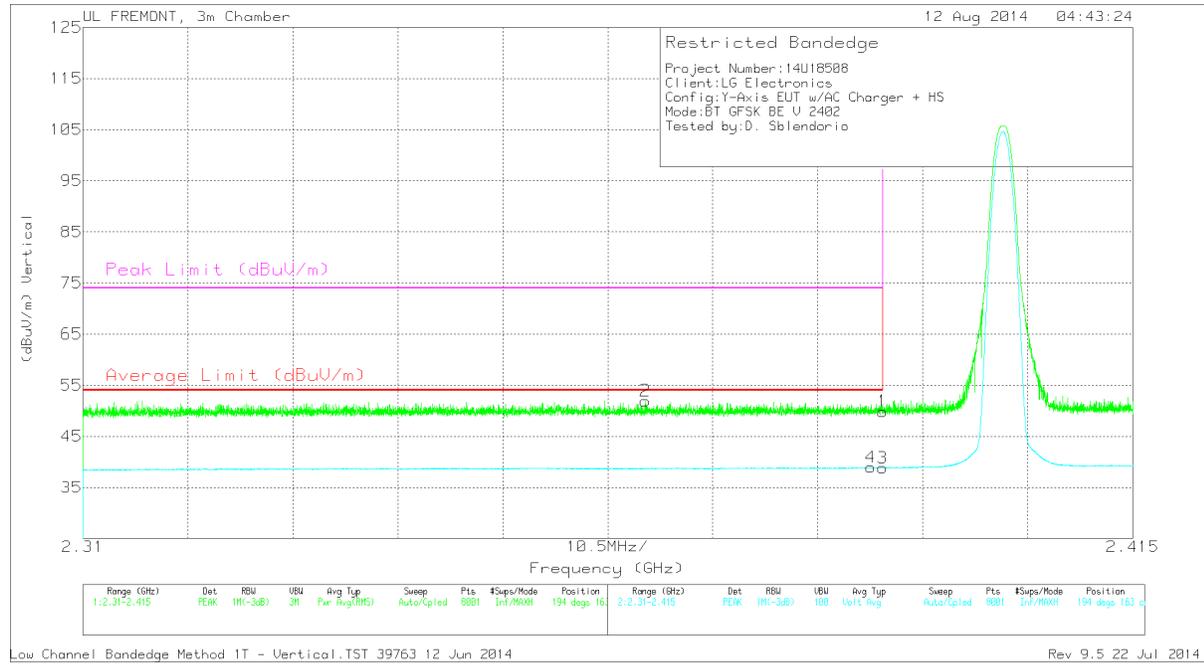


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cb/ Filt/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	2.366	43.04	PK	32	-23.1	51.94	-	-	74	-22.06	194	163	V
4	2.389	29.97	VB1T	32.1	-23.1	38.97	54	-15.03	-	-	194	163	V
1	2.39	40.9	PK	32.1	-23.1	49.9	-	-	74	-24.1	194	163	V
3	2.39	29.85	VB1T	32.1	-23.1	38.85	54	-15.15	-	-	194	163	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

VB1T - FHSS Method: VB=1/Ton, Voltage Averaging Max Hold where: Ton is the duration of the packet

RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)

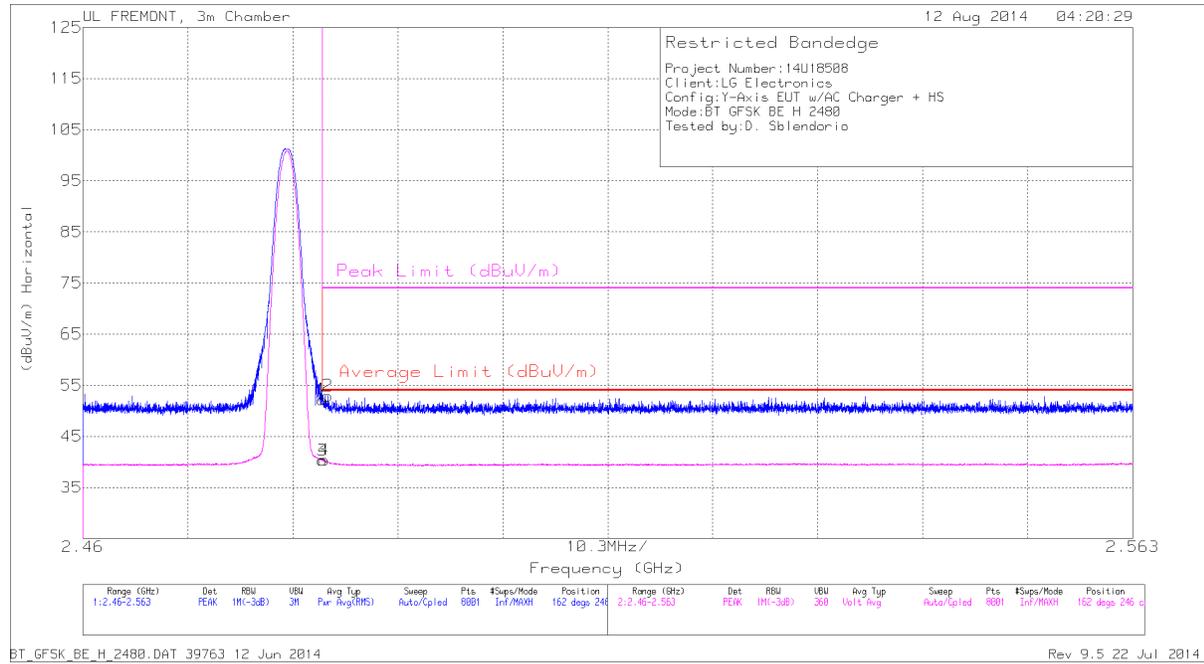


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cb/ Filt/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2.484	42.7	PK	32.3	-22.8	52.2	-	-	74	-21.8	162	246	H
2	2.484	43.41	PK	32.3	-22.8	52.91	-	-	74	-21.09	162	246	H
3	2.484	30.82	VB1T	32.3	-22.8	40.32	54	-13.68	-	-	162	246	H
4	2.484	30.89	VB1T	32.3	-22.8	40.39	54	-13.61	-	-	162	246	H

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

VB1T - FHSS Method: VB=1/Ton, Voltage Averaging Max Hold where: Ton is the duration of the packet

RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)

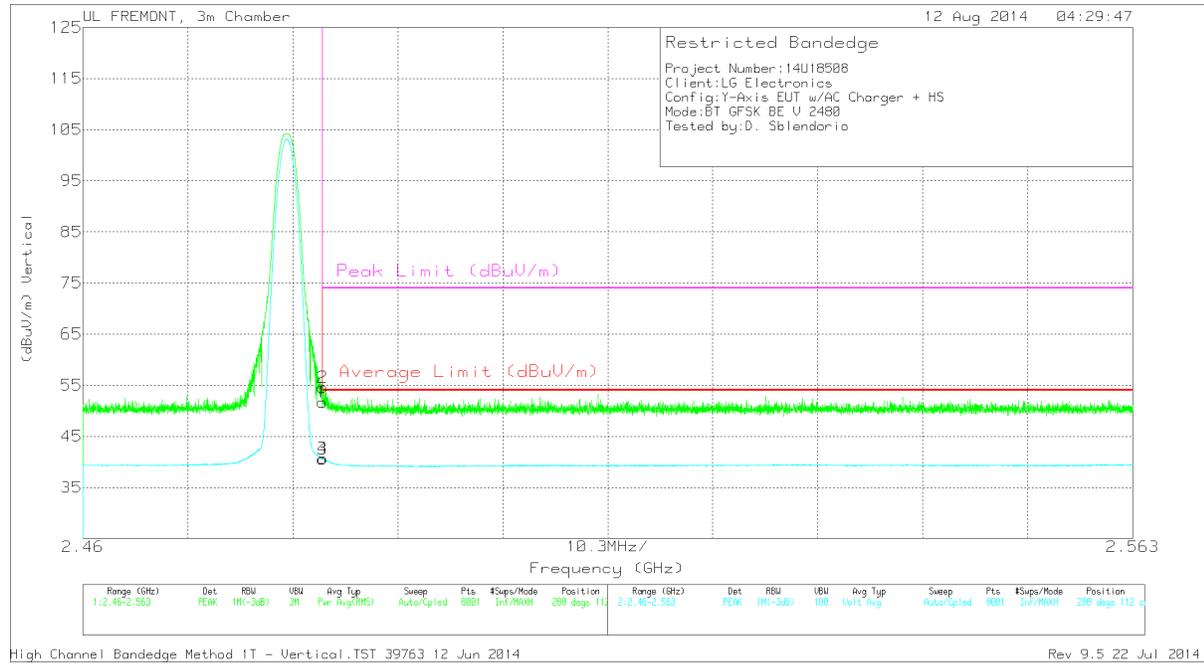

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cb/ Filt/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2.484	42.16	PK	32.3	-22.8	51.66	-	-	74	-22.34	288	112	V
2	2.484	45.07	PK	32.3	-22.8	54.57	-	-	74	-19.43	288	112	V
3	2.484	31.09	VB1T	32.3	-22.8	40.59	54	-13.41	-	-	288	112	V
4	2.484	31.17	VB1T	32.3	-22.8	40.67	54	-13.33	-	-	288	112	V


* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

VB1T - FHSS Method: VB=1/Ton, Voltage Averaging Max Hold where: Ton is the duration of the packet


HARMONICS AND SPURIOUS EMISSIONS

**LOW CHANNEL
 HORIZONTAL**

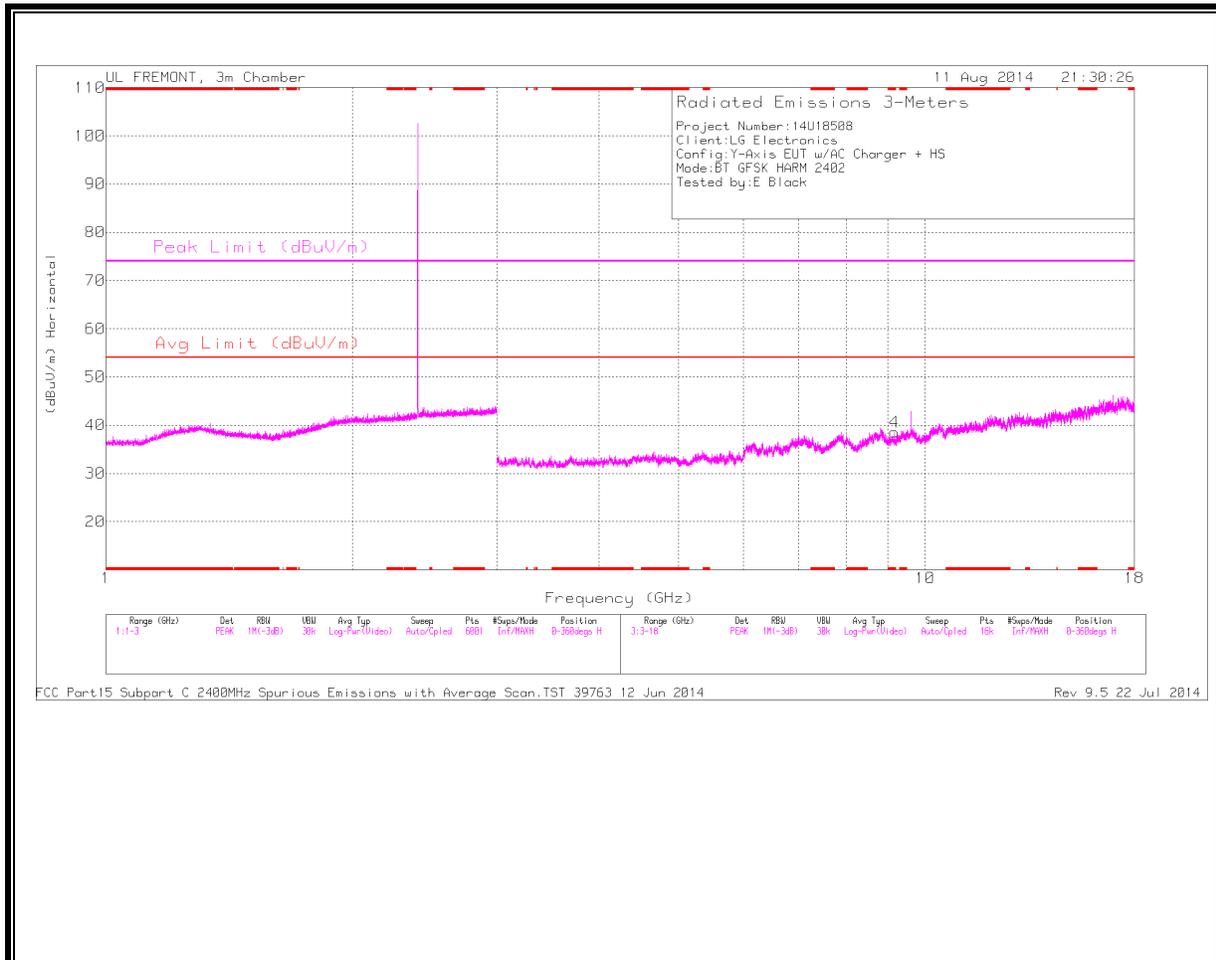

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

VERTICAL

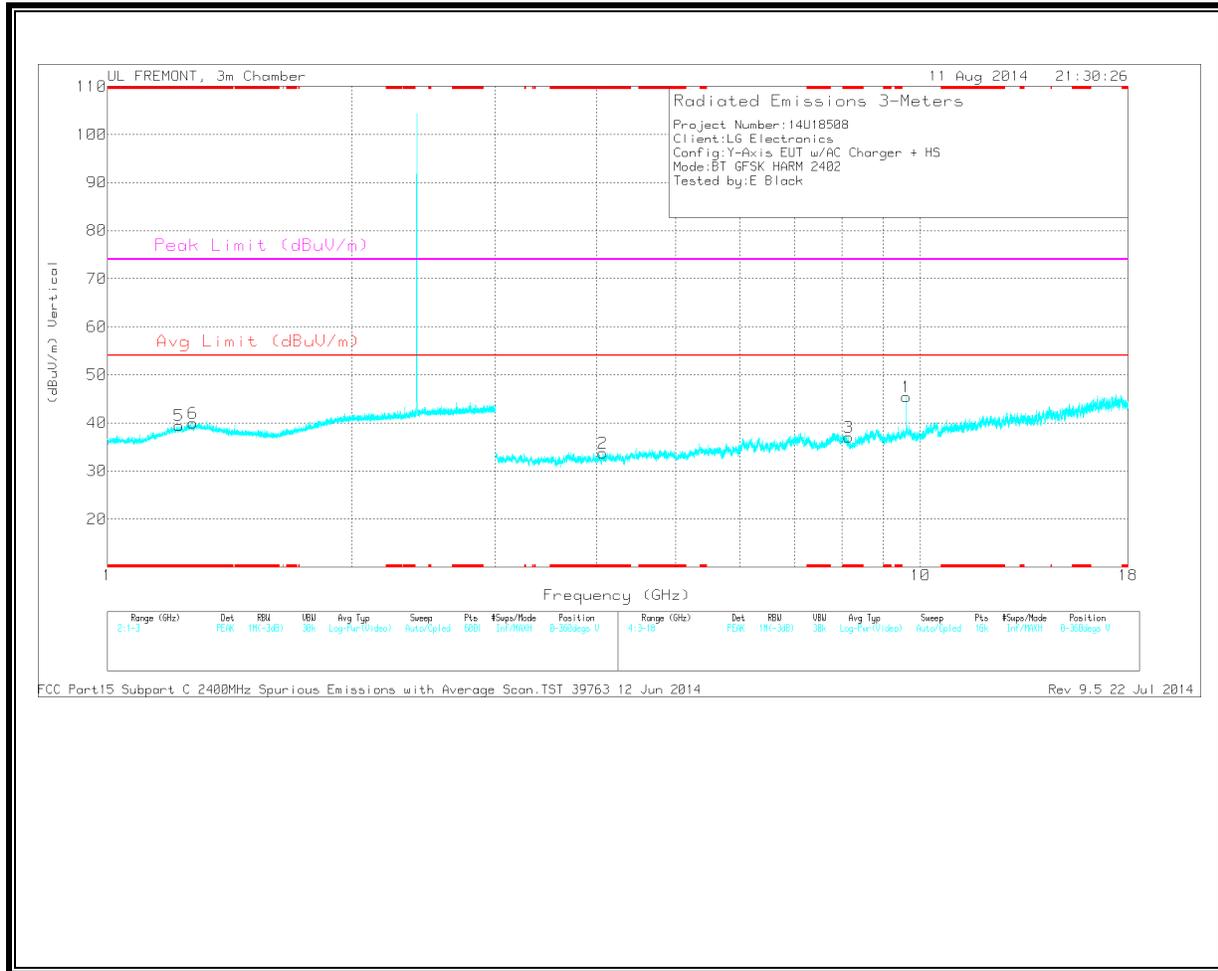

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

LOW CHANNEL DATA

TRACE MARKERS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
5	* 1.224	33.71	PK	29.5	-23.8	0	39.41	-	-	74	-34.59	0-360	200	V
6	* 1.275	33.79	PK	30	-23.8	0	39.99	-	-	74	-34.01	0-360	200	V
4	* 9.171	28.3	PK	36.2	-25.9	0	38.6	-	-	74	-35.4	0-360	200	H
2	* 4.067	31.95	PK	33.4	-31.6	0	33.75	-	-	74	-40.25	0-360	100	V
3	* 8.162	29.11	PK	35.8	-27.9	0	37.01	-	-	74	-36.99	0-360	200	V
1	9.607	33.97	PK	36.7	-25.2	0	45.47	-	-	-	-	0-360	200	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

Radiated Emissions


Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
9.608	39.62	PK3	36.7	-25.3	0	51.02	-	-	-	-	322	185	V
9.608	31.83	VB1T	36.7	-25.3	0	43.23	-	-	-	-	322	185	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK3 - FHSS Method: Maximum Peak


VB1T - FHSS Method: VB=1/Ton, Voltage Averaging Max Hold where: Ton is the duration of the packet

MID CHANNEL
 HORIZONTAL

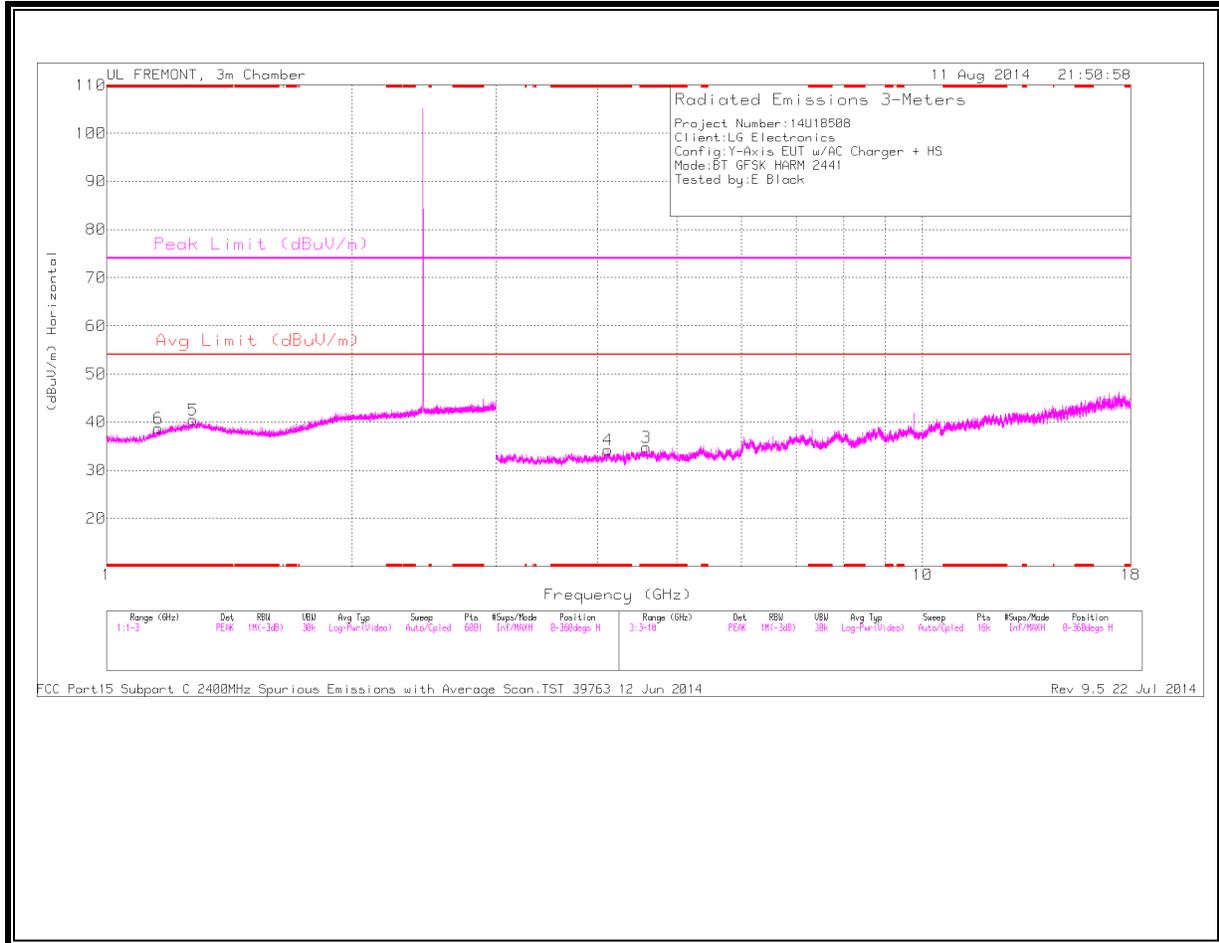

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

VERTICAL

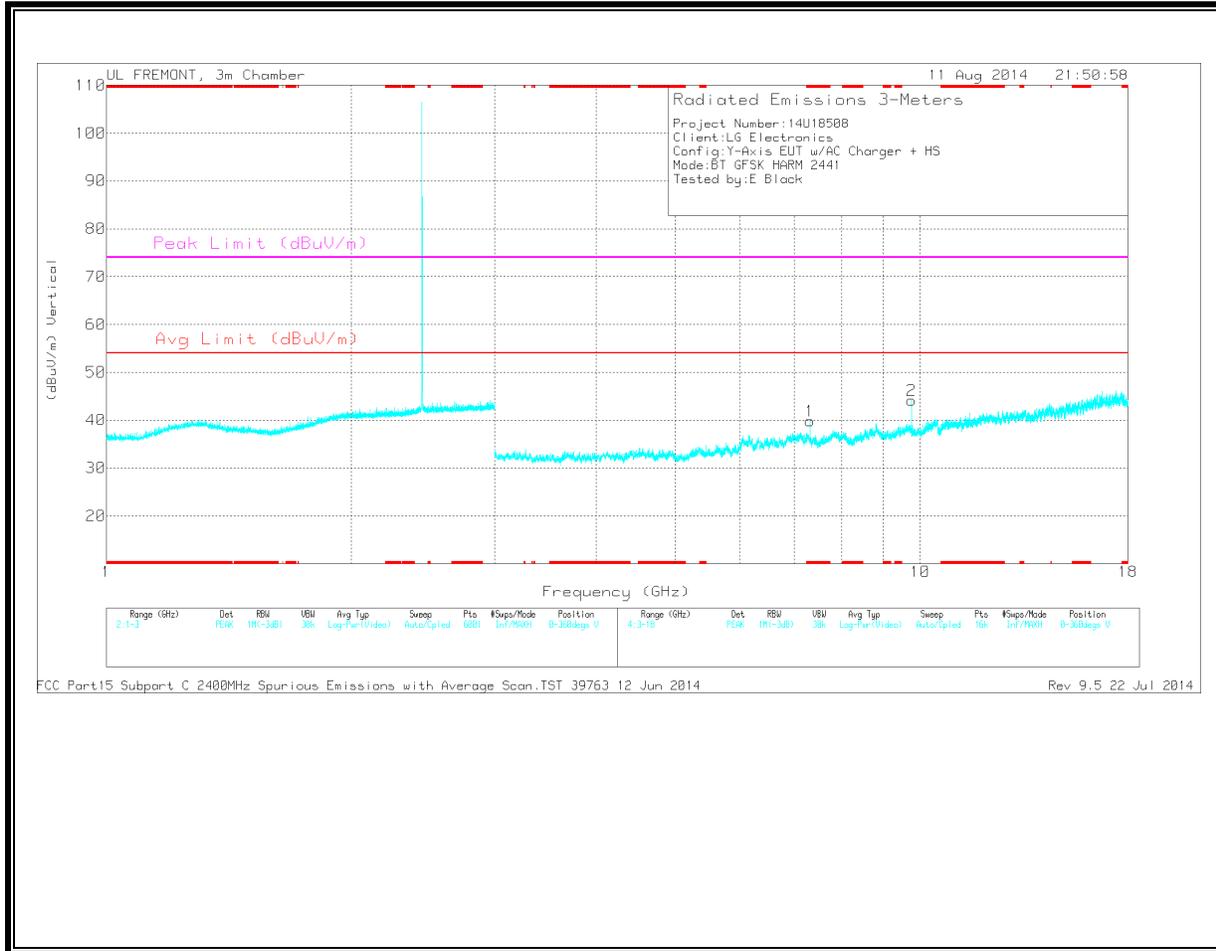

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

MID CHANNEL DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
5	* 1.276	34.31	PK	30	-23.8	0	40.51	-	-	74	-33.49	0-360	100	H
6	* 1.156	34.05	PK	28.4	-23.8	0	38.65	-	-	74	-35.35	0-360	200	H
3	* 4.585	31.68	PK	34	-30.9	0	34.78	-	-	74	-39.22	0-360	200	H
4	* 4.113	31.61	PK	33.5	-30.9	0	34.21	-	-	74	-39.79	0-360	100	H
1	* 7.323	32.64	PK	35.6	-28.4	0	39.84	-	-	74	-34.16	0-360	100	V
2	9.764	33.25	PK	36.9	-26	0	44.15	-	-	-	-	0-360	200	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

Radiated Emissions


Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 7.323	42.16	PK3	35.6	-28.4	0	49.36	-	-	74	-24.64	268	141	V
* 7.323	31.62	VB1T	35.6	-28.4	0	38.82	54	-15.18	-	-	268	141	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK3 - FHSS Method: Maximum Peak


VB1T - FHSS Method: VB=1/Ton, Voltage Averaging Max Hold where: Ton is the duration of the packet

HIGH CHANNEL
HORIZONTAL

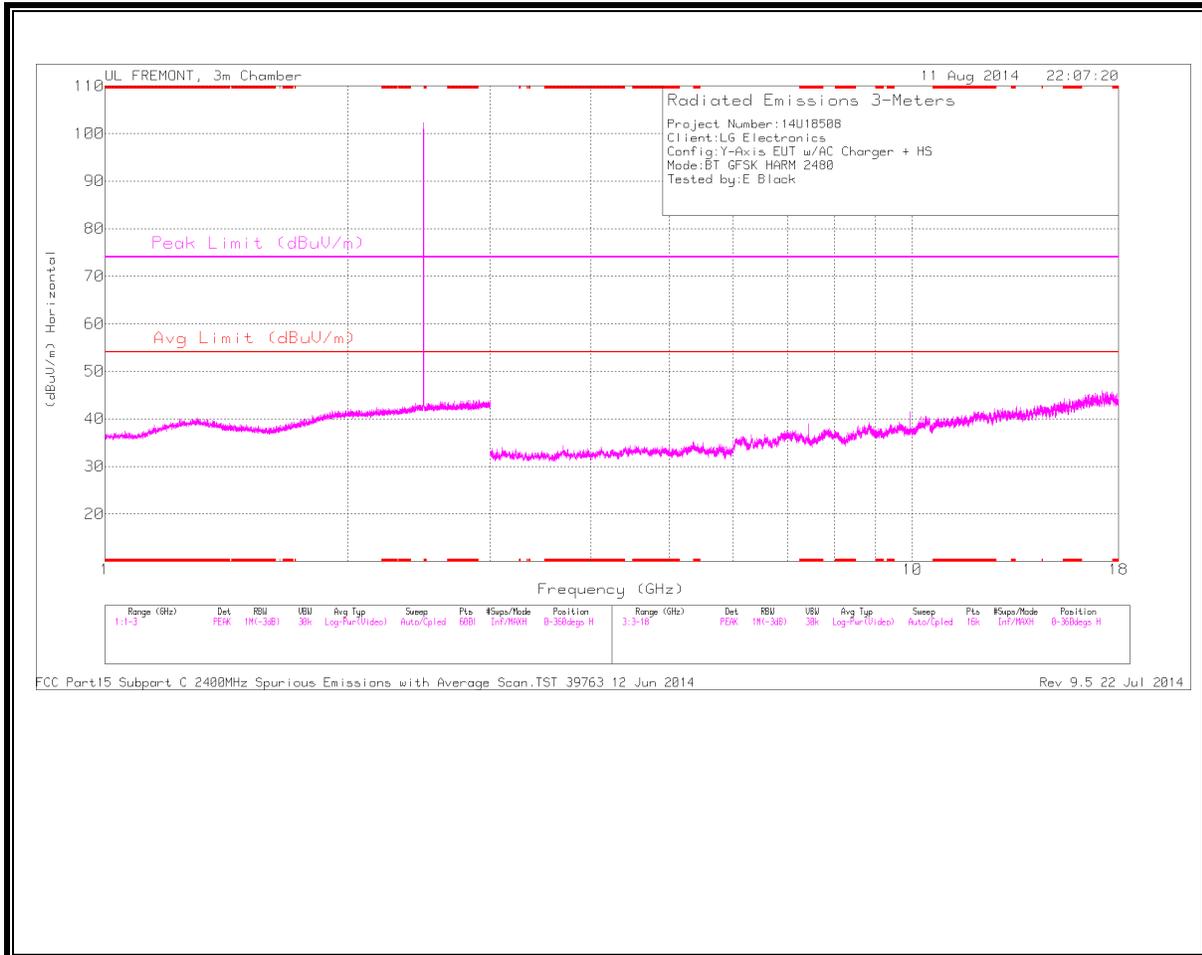

Note: Emission was scanned to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

VERTICAL

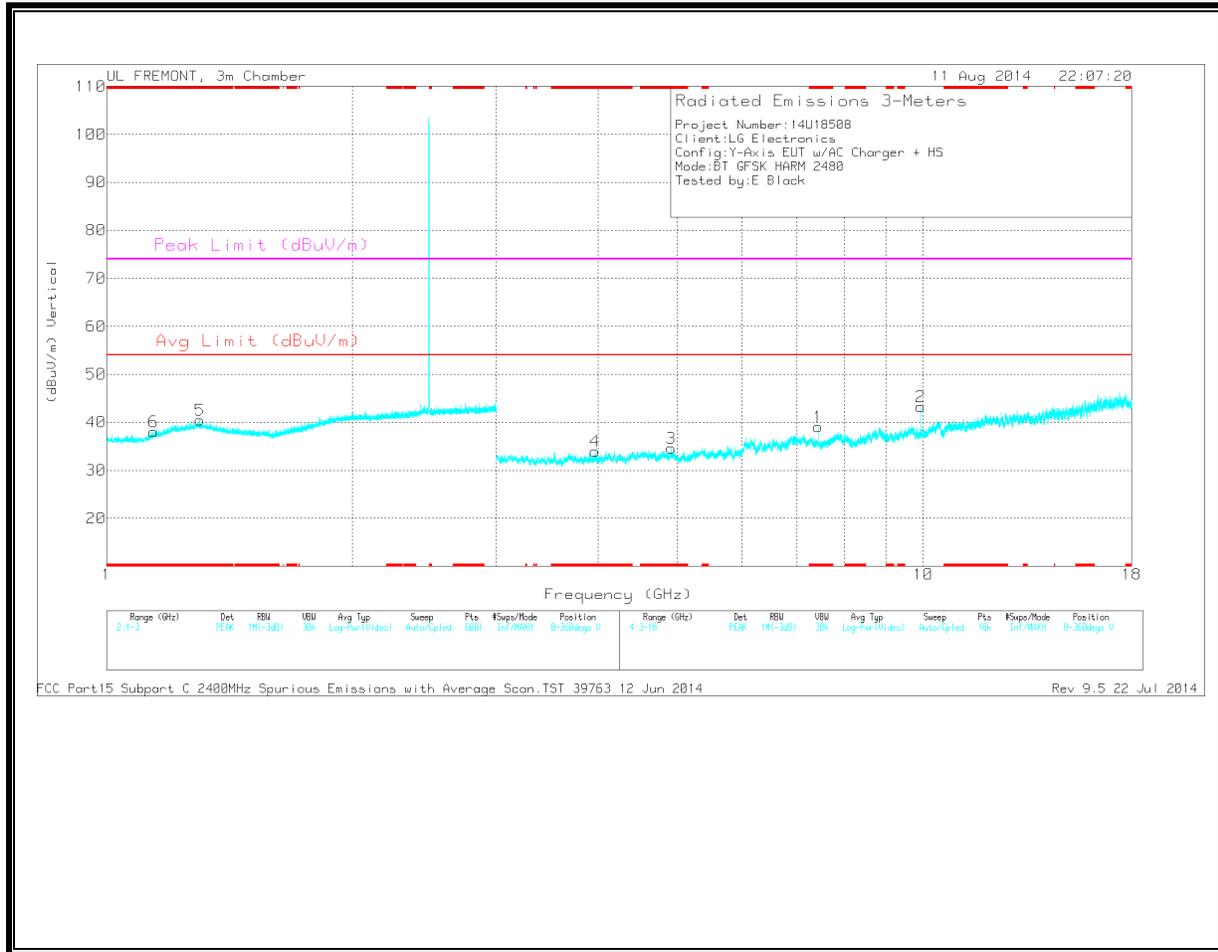

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

HIGH CHANNEL DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Fit/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
5	* 1.301	34.06	PK	30.2	-23.8	0	40.46	-	-	74	-33.54	0-360	200	V
6	* 1.142	33.81	PK	28.1	-23.9	0	38.01	-	-	74	-35.99	0-360	100	V
1	* 7.44	32.29	PK	35.7	-28.9	0	39.09	-	-	74	-34.91	0-360	100	V
3	* 4.911	30.79	PK	34	-30.1	0	34.69	-	-	74	-39.31	0-360	200	V
4	* 3.966	31.69	PK	33.3	-31	0	33.99	-	-	74	-40.01	0-360	100	V
2	9.919	31.98	PK	36.9	-25.6	0	43.28	-	-	-	-	0-360	200	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

Radiated Emissions

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Fit/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 7.44	41.98	PK3	35.7	-28.9	0	48.78	-	-	74	-25.22	358	113	V
* 7.44	31.97	VB1T	35.7	-28.9	0	38.77	54	-15.23	-	-	358	113	V


* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK3 - FHSS Method: Maximum Peak

VB1T - FHSS Method: VB=1/Ton, Voltage Averaging Max Hold where: Ton is the duration of the packet

9.2.2. ENHANCED DATA RATE 8PSK MODULATION

RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

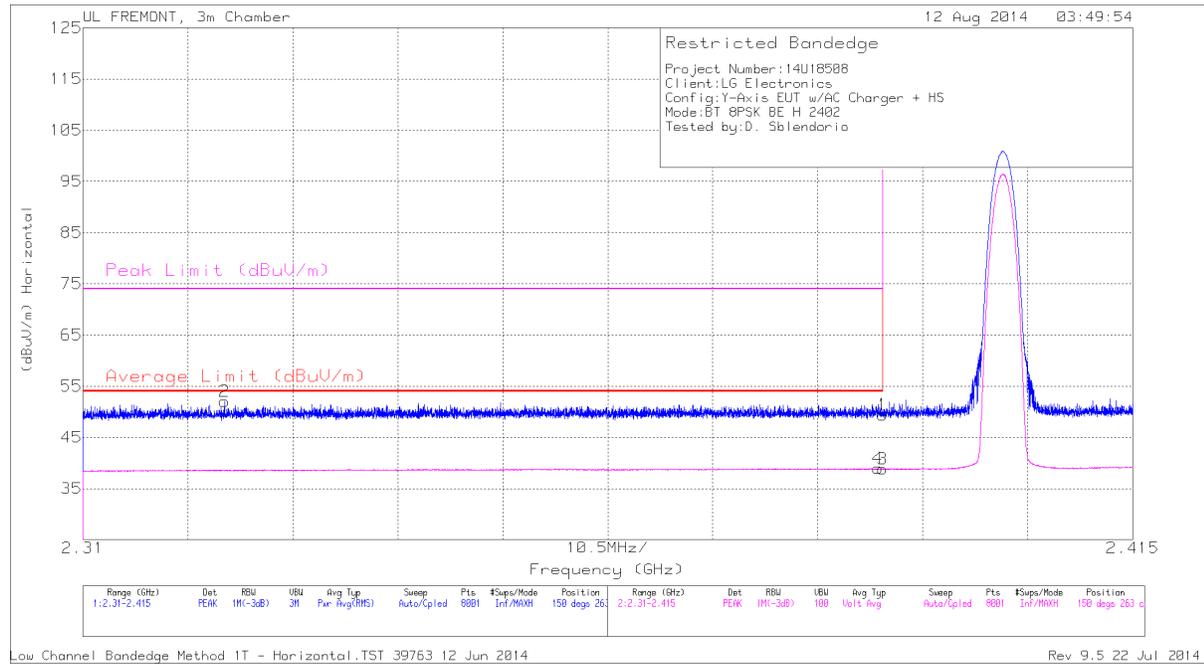


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cb/ Filt/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	2.324	43.21	PK	31.9	-23.1	52.01	-	-	74	-21.99	150	263	H
1	2.39	40.38	PK	32.1	-23.1	49.38	-	-	74	-24.62	150	263	H
3	2.39	29.81	VB1T	32.1	-23.1	38.81	54	-15.19	-	-	150	263	H
4	2.39	29.93	VB1T	32.1	-23.1	38.93	54	-15.07	-	-	150	263	H

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

VB1T - FHSS Method: VB=1/Ton, Voltage Averaging Max Hold where: Ton is the duration of the packet

RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)

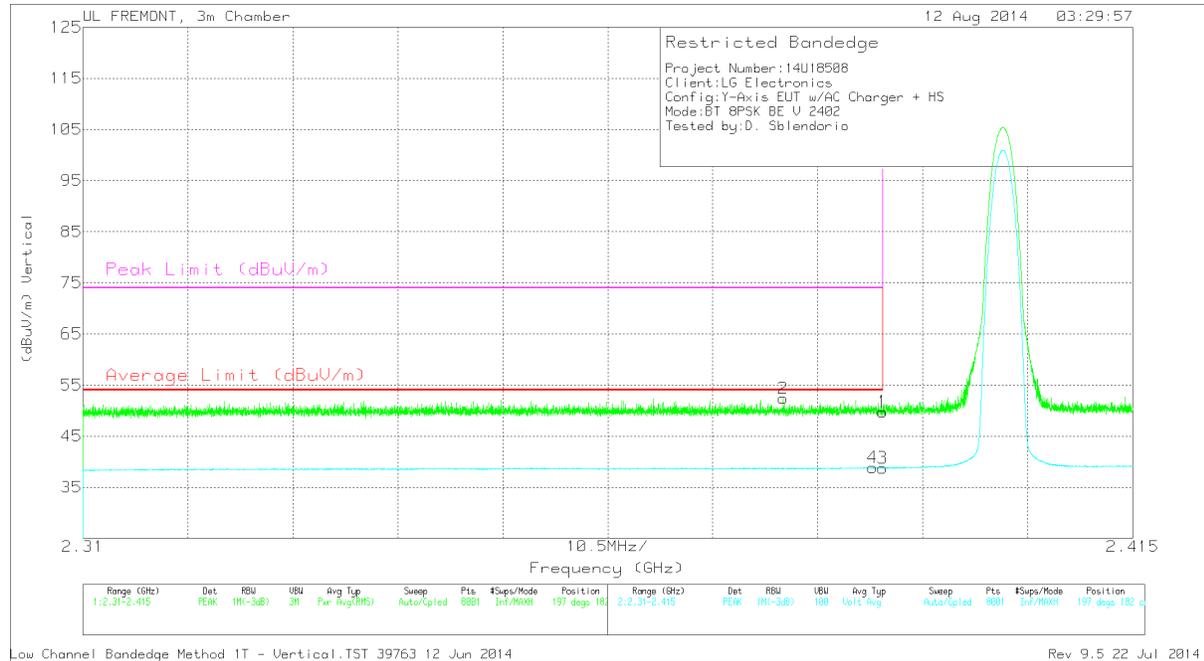


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/ Filt/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	2.38	43.41	PK	32.1	-23.1	52.41	-	-	74	-21.59	197	182	V
4	2.389	29.86	VB1T	32.1	-23.1	38.86	54	-15.14	-	-	197	182	V
1	2.39	40.76	PK	32.1	-23.1	49.76	-	-	74	-24.24	197	182	V
3	2.39	29.76	VB1T	32.1	-23.1	38.76	54	-15.24	-	-	197	182	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

VB1T - FHSS Method: VB=1/Ton, Voltage Averaging Max Hold where: Ton is the duration of the packet

RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)

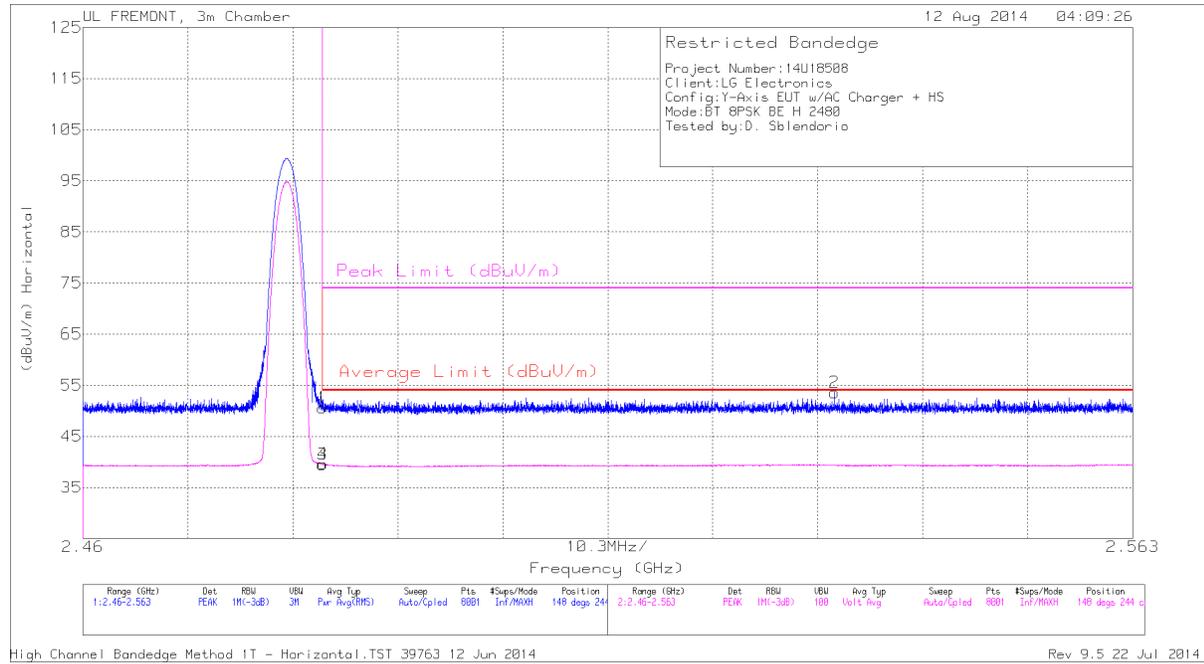


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cb/ Ftr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2.484	41.09	PK	32.3	-22.8	50.59	-	-	74	-23.41	148	244	H
3	2.484	30.03	VB1T	32.3	-22.8	39.53	54	-14.47	-	-	148	244	H
4	2.484	30.09	VB1T	32.3	-22.8	39.59	54	-14.41	-	-	148	244	H
2	2.534	43.88	PK	32.4	-22.7	53.58	-	-	74	-20.42	148	244	H

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

VB1T - FHSS Method: VB=1/Ton, Voltage Averaging Max Hold where: Ton is the duration of the packet

RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)

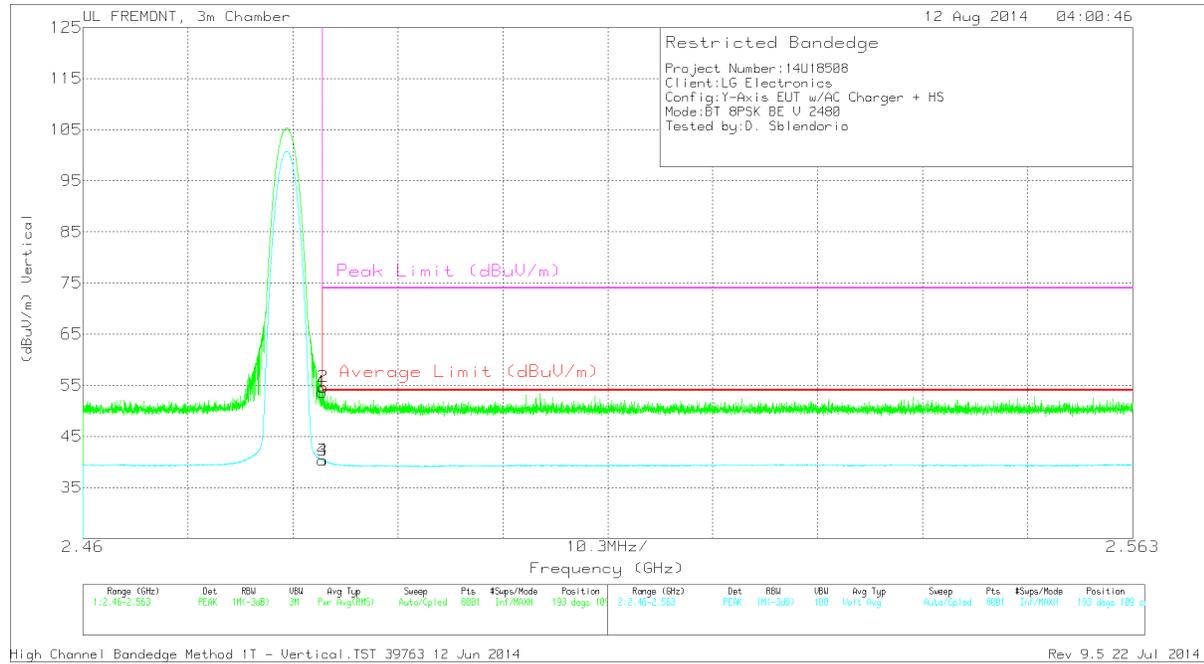

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cb/ Ftr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2.484	44.16	PK	32.3	-22.8	53.66	-	-	74	-20.34	193	109	V
2	2.484	45.16	PK	32.3	-22.8	54.66	-	-	74	-19.34	193	109	V
3	2.484	30.82	VB1T	32.3	-22.8	40.32	54	-13.68	-	-	193	109	V
4	2.484	30.85	VB1T	32.3	-22.8	40.35	54	-13.65	-	-	193	109	V


* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

VB1T - FHSS Method: VB=1/Ton, Voltage Averaging Max Hold where: Ton is the duration of the packet


HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL
 HORIZONTAL

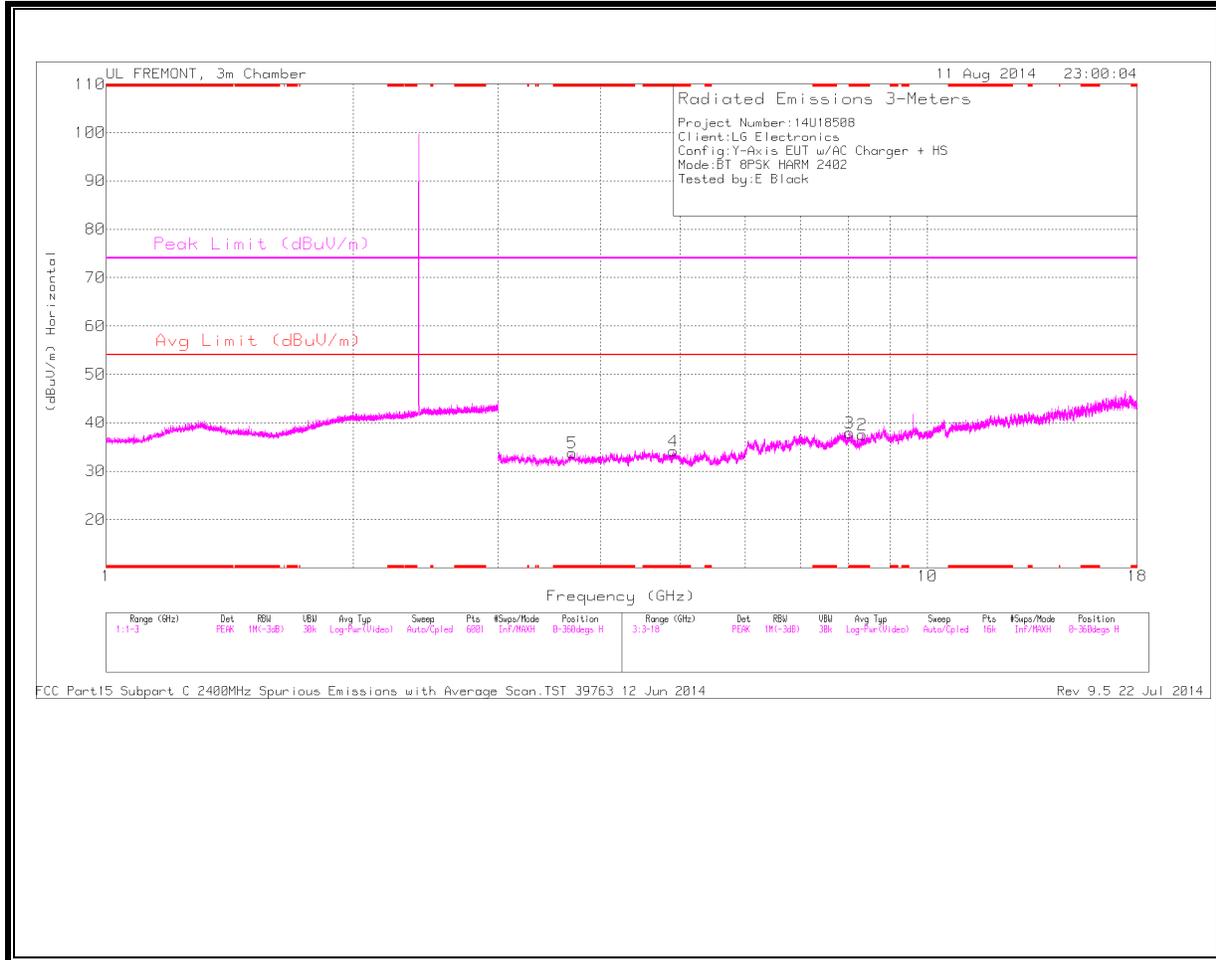

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

VERTICAL

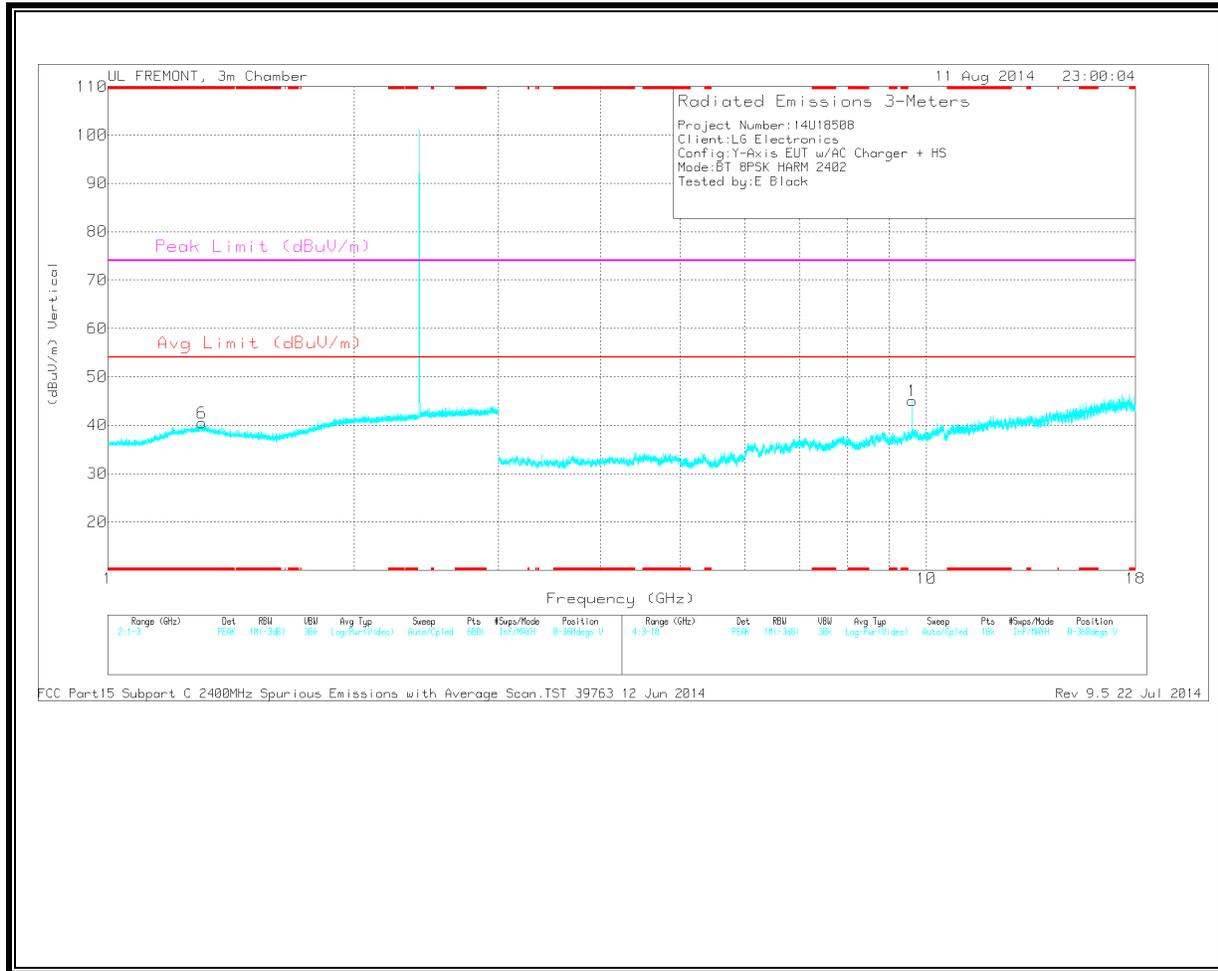

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

LOW CHANNEL DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
6	* 1.304	34.08	PK	30.2	-23.8	0	40.48	-	-	74	-33.52	0-360	200	V
5	* 3.695	31.38	PK	33.2	-30.8	0	33.78	-	-	74	-40.22	0-360	100	H
4	* 4.907	30.17	PK	34	-30	0	34.17	-	-	74	-39.83	0-360	100	H
3	* 8.032	30.38	PK	35.7	-28.2	0	37.88	-	-	74	-36.12	0-360	100	H
2	* 8.324	29.35	PK	35.8	-27.6	0	37.55	-	-	74	-36.45	0-360	200	H
1	9.608	33.67	PK	36.7	-25.3	0	45.07	-	-	-	-	0-360	200	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

Radiated Emissions


Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
9.61	36.62	PK3	36.7	-25.3	0	48.02	-	-	-	-	327	386	V
9.61	23.74	VB1T	36.7	-25.3	0	35.14	-	-	-	-	327	386	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK3 - FHSS Method: Maximum Peak


VB1T - FHSS Method: VB=1/Ton, Voltage Averaging Max Hold where: Ton is the duration of the packet

MID CHANNEL
 HORIZONTAL

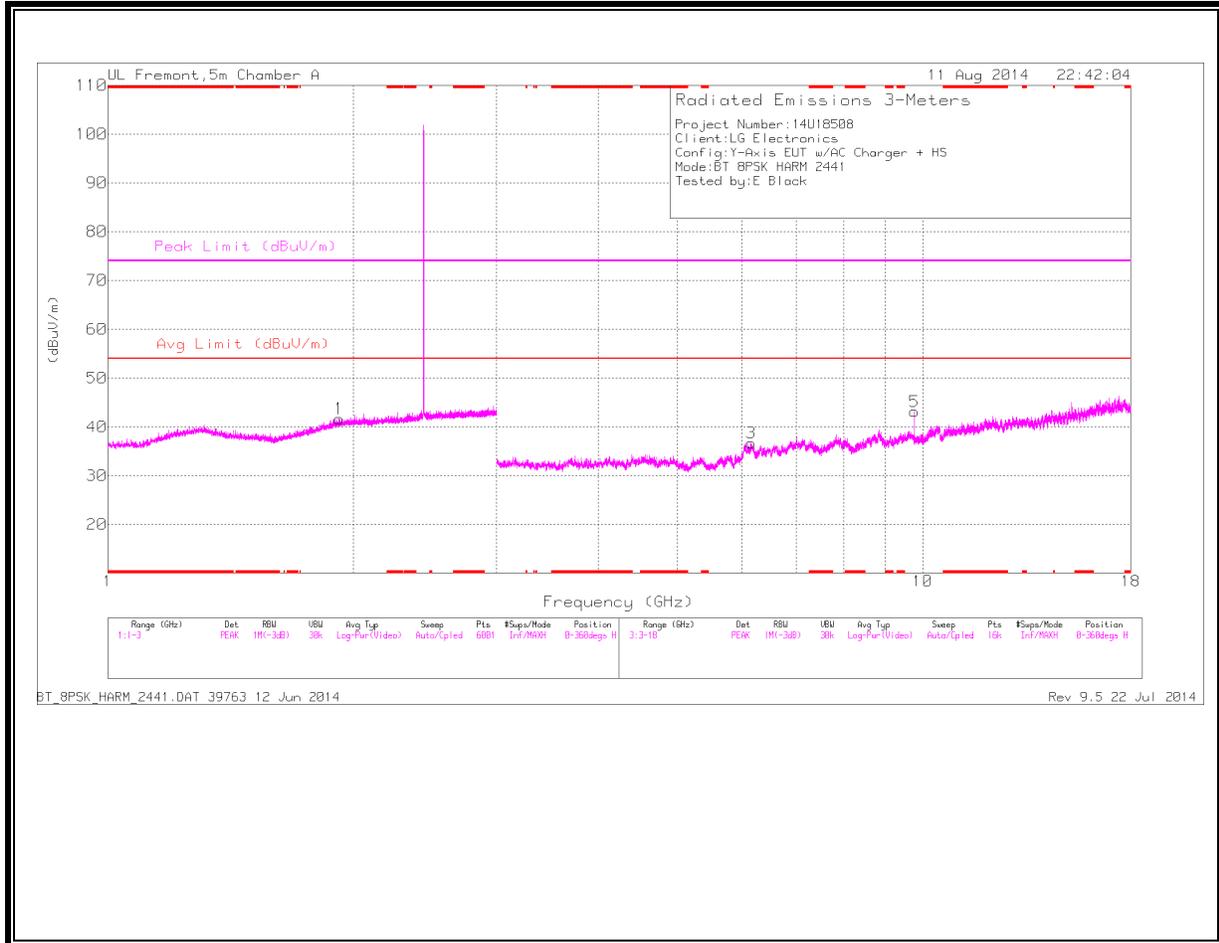

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

VERTICAL

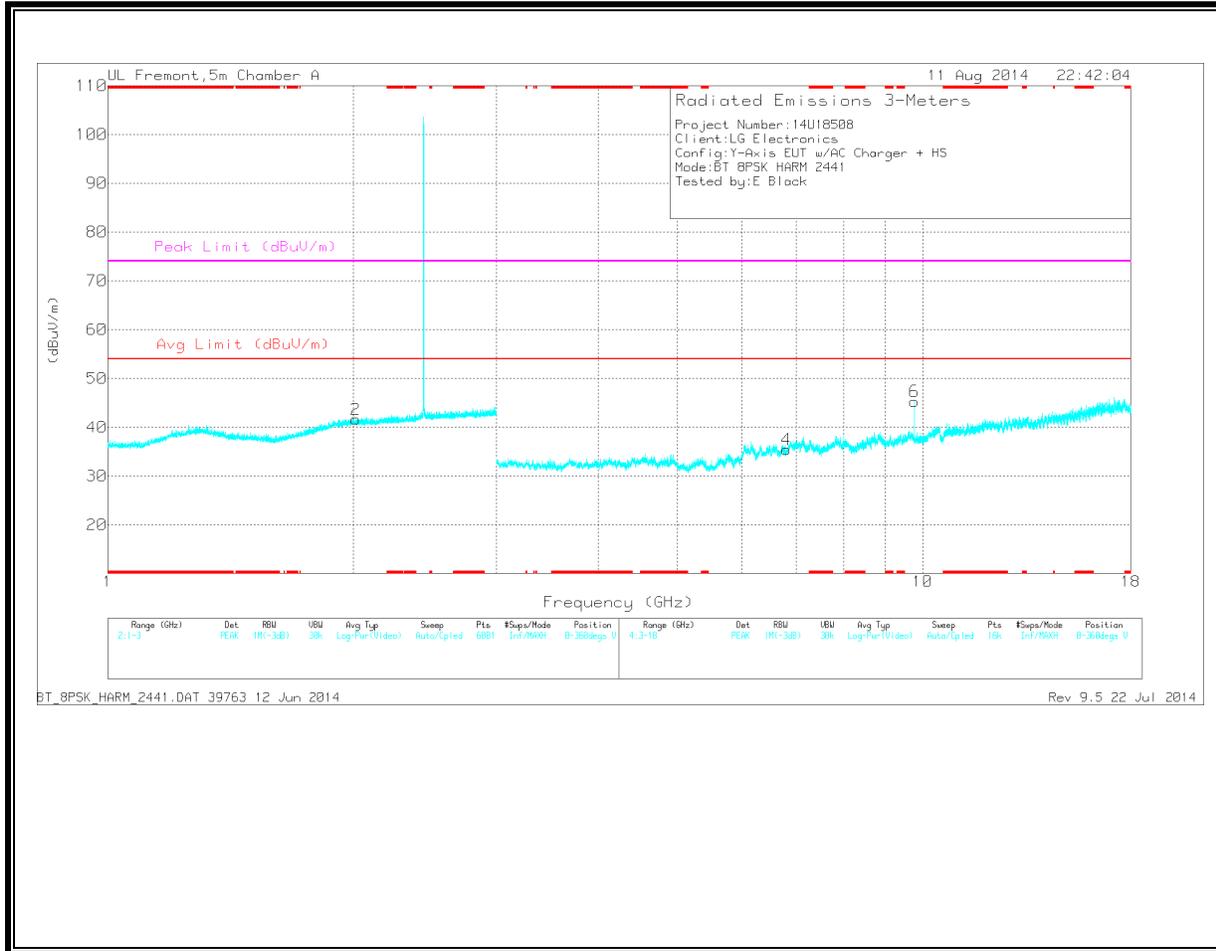

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

MID CHANNEL DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	1.925	33.6	PK	31.3	-23.2	0	41.7	-	-	-	-	0-360	200	H
2	2.015	33.22	PK	31.6	-23.2	0	41.62	-	-	-	-	0-360	100	V
3	6.159	31.12	PK	35.3	-29.7	0	36.72	-	-	-	-	0-360	100	H
4	6.809	29.02	PK	35.6	-29.2	0	35.42	-	-	-	-	0-360	100	V
5	9.764	32.22	PK	36.9	-26	0	43.12	-	-	-	-	0-360	100	H
6	9.764	34.39	PK	36.9	-26	0	45.29	-	-	-	-	0-360	200	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

Radiated Emissions


Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
9.764	37.49	PK3	36.9	-26	0	48.39	-	-	-	-	107	100	H
9.764	28.72	VB1 T	36.9	-26	0	39.62	-	-	-	-	107	100	H
9.764	37.74	PK3	36.9	-26	0	48.64	-	-	-	-	54	223	V
9.764	29.59	VB1 T	36.9	-26	0	40.49	-	-	-	-	54	223	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK3 - FHSS Method: Maximum Peak


VB1T - FHSS Method: VB=1/Ton, Voltage Averaging Max Hold where: Ton is the duration of the packet

HIGH CHANNEL
 HORIZONTAL

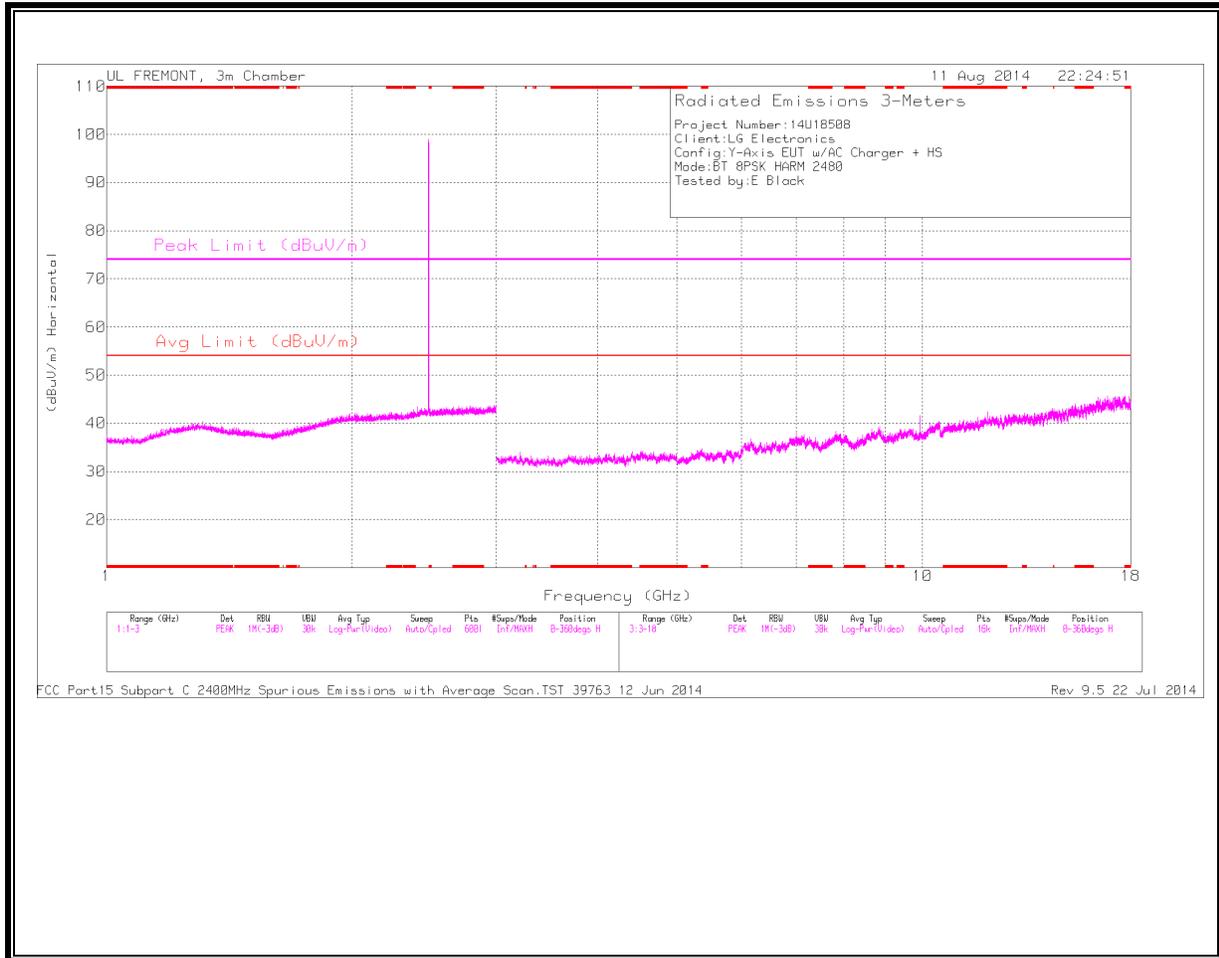

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

VERTICAL

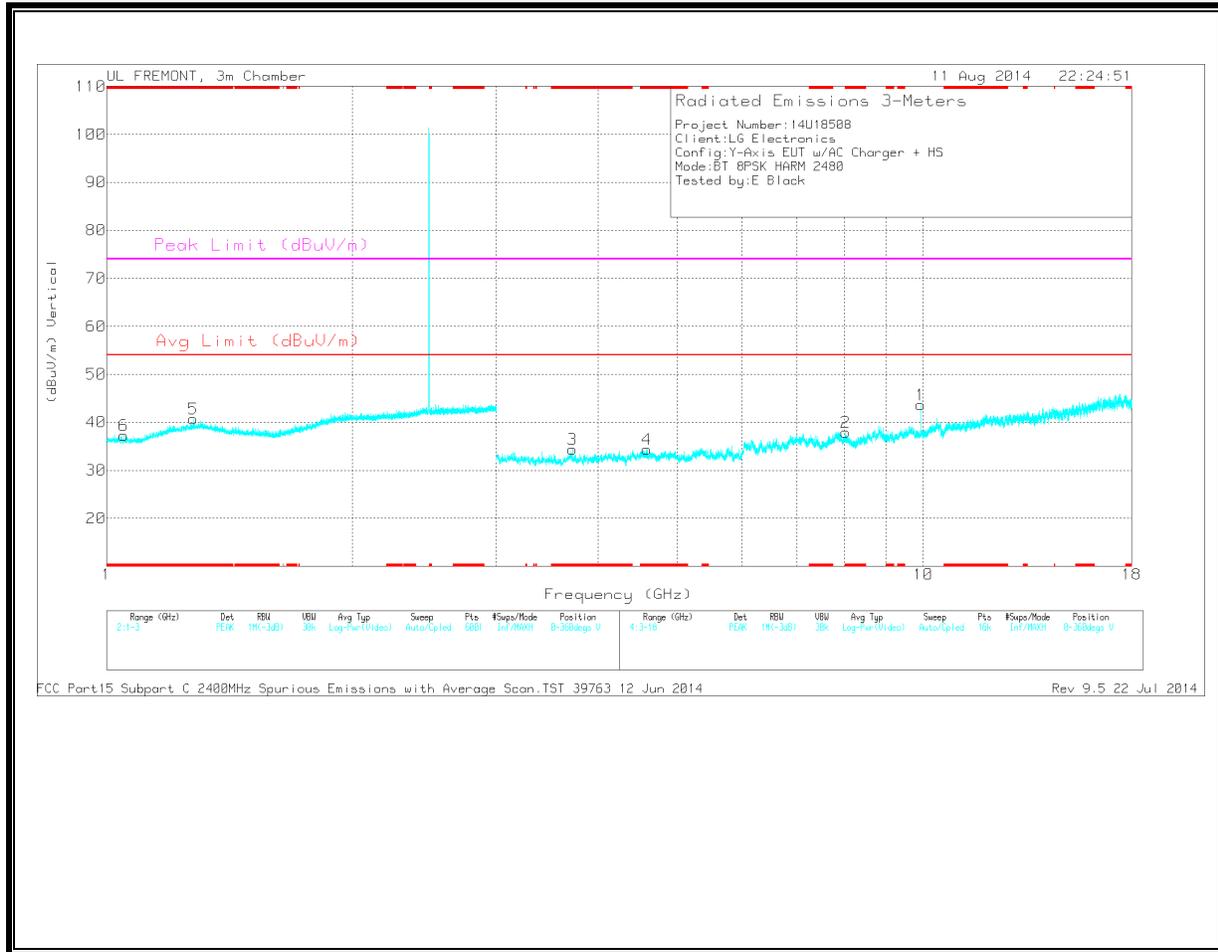

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

HIGH CHANNEL DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
5	* 1.276	34.58	PK	30	-23.8	0	40.78	-	-	74	-33.22	0-360	100	V
6	* 1.049	33.96	PK	27.2	-23.9	0	37.26	-	-	74	-36.74	0-360	100	V
2	* 8.031	30.28	PK	35.7	-28.1	0	37.88	-	-	74	-36.12	0-360	200	V
3	* 3.716	32.21	PK	33.2	-31	0	34.41	-	-	74	-39.59	0-360	200	V
4	* 4.586	31.13	PK	34	-30.8	0	34.33	-	-	74	-39.67	0-360	200	V
1	9.919	32.32	PK	36.9	-25.6	0	43.62	-	-	-	-	0-360	200	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

Radiated Emissions

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
9.92	40.74	PK3	36.9	-25.6	0	52.04	-	-	-	-	294	167	V
9.92	32.79	VB1 T	36.9	-25.6	0	44.09	-	-	-	-	294	167	V


* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band


PK3 - FHSS Method: Maximum Peak

VB1T - FHSS Method: VB=1/Ton, Voltage Averaging Max Hold where: Ton is the duration of the packet

9.3. WORST-CASE BELOW 1 GHz

GFSK SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, HORIZONTAL)

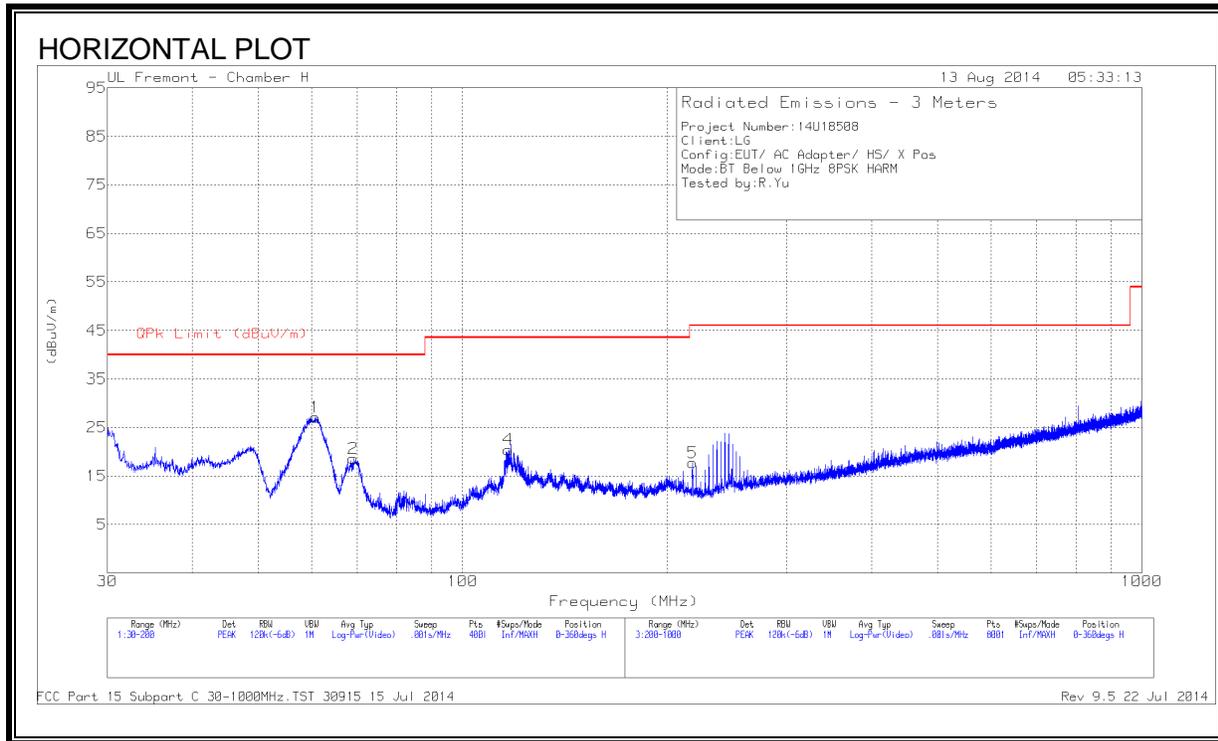

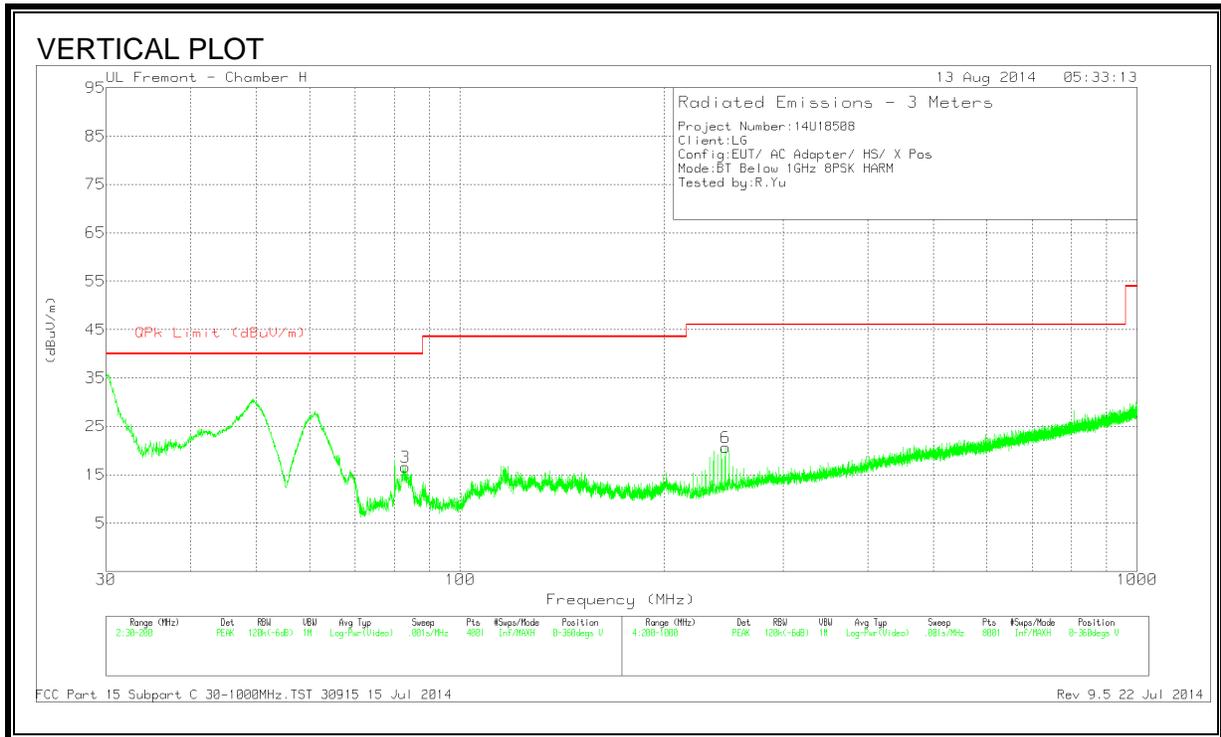

DATA

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	SS JB3 SN A051314-1	Amp/Cbl (dB)	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
4	* 116.7425	34.16	PK	16.2	-29.9	20.46	43.52	-23.06	0-360	201	H
6	* 246.4	34.81	PK	14.7	-28.9	20.61	46.02	-25.41	0-360	201	V
1	60.7063	47.02	PK	10.7	-30.6	27.12	40	-12.88	0-360	401	H
2	69.015	37.61	PK	11.3	-30.3	18.61	40	-21.39	0-360	201	H
3	83.0825	36.54	PK	10.3	-30.3	16.54	40	-23.46	0-360	100	V
5	218	33.04	PK	13.8	-29.1	17.74	46.02	-28.28	0-360	100	H

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

Radiated Emissions

Frequency (MHz)	Meter Reading (dBuV)	Det	SS JB3 SN A051314-1	Amp/Cbl (dB)	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
49.5958	46.93	QP	10.8	-30.7	27.03	40	-12.97	0	100	V
60.6001	43.66	QP	10.7	-30.6	23.76	40	-16.24	0	400	H

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

QP - Quasi-Peak detector

10. AC POWER LINE CONDUCTED EMISSIONS

LIMITS

FCC §15.207 (a)

RSS-Gen 7.2.2

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

TEST PROCEDURE


The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.4.

The receiver is set to a resolution bandwidth of 9 kHz. Peak detection is used unless otherwise noted as quasi-peak or average.

Line conducted data is recorded for both NEUTRAL and HOT lines.

RESULTS

6 WORST EMISSIONS WITH WORST CONFIGURATION U34WDI CHARGER

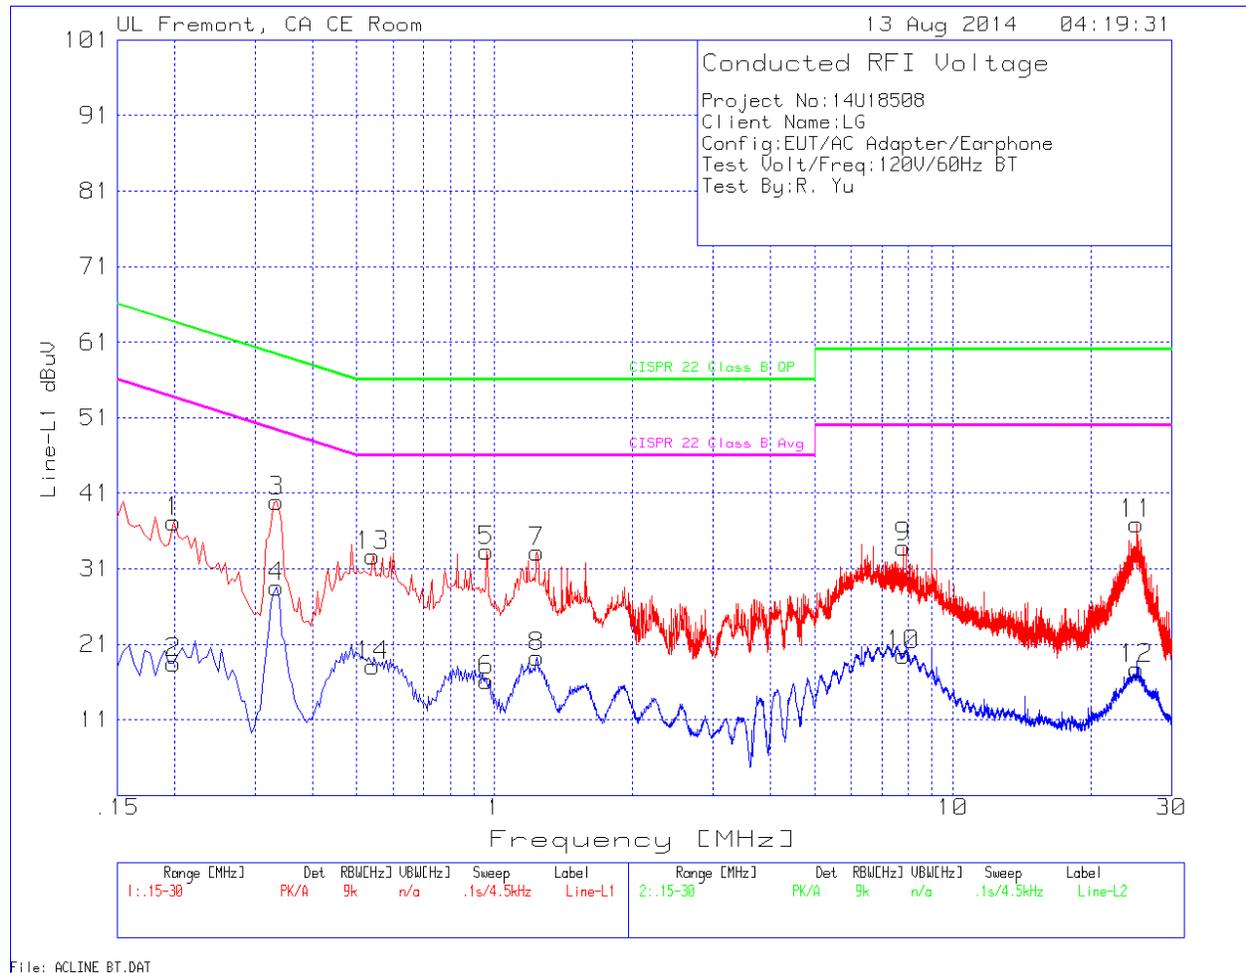


Line-L1 .15 - 30MHz

Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	T24 IL L1 (dB)	LC Cables 1&3 (dB)	Corrected Reading dBuV	CISPR 22 Class B QP	Margin to Limit (dB)	CISPR 22 Class B Avg	Margin to Limit (dB)
1	.1995	36.3	PK	.9	0	37.2	63.6	-26.4	-	-
2	.1995	17.54	Av	.9	0	18.44	-	-	53.6	-35.16
3	.3345	39.41	PK	.5	0	39.91	59.3	-19.39	-	-
4	.3345	28.03	Av	.5	0	28.53	-	-	49.3	-20.77
13	.5415	32.38	PK	.3	0	32.68	56	-23.32	-	-
14	.5415	17.83	Av	.3	0	18.13	-	-	46	-27.87
5	.96	33.07	PK	.3	0	33.37	56	-22.63	-	-
6	.96	15.87	Av	.3	0	16.17	-	-	46	-29.83
7	1.239	33.02	PK	.2	0	33.22	56	-22.78	-	-
8	1.239	19.01	Av	.2	0	19.21	-	-	46	-26.79
9	7.8	33.54	PK	.2	.1	33.84	60	-26.16	-	-
10	7.8	19.24	Av	.2	.1	19.54	-	-	50	-30.46
11	25.2105	36.35	PK	.3	.3	36.95	60	-23.05	-	-
12	25.2105	17.11	Av	.3	.3	17.71	-	-	50	-32.29

PK - Peak detector
 Av - average detection

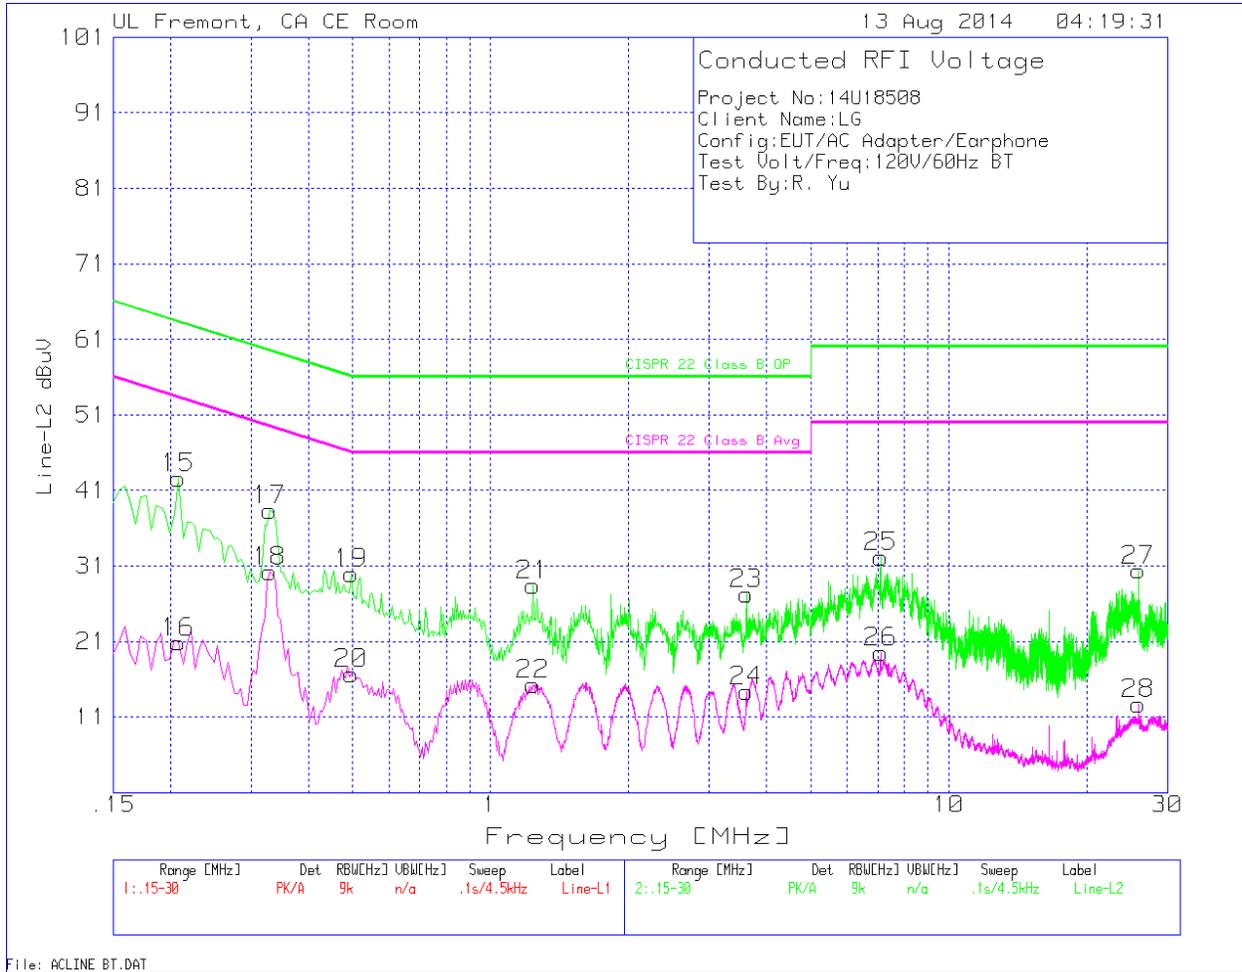

Line-L2 .15 - 30MHz

Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	T24 IL L2 (dB)	LC Cables 2&3 (dB)	Corrected Reading dBuV	CISPR 22 Class B QP	Margin to Limit (dB)	CISPR 22 Class B Avg	Margin to Limit (dB)
15	.2085	41.54	PK	1	0	42.54	63.3	-20.76	-	-
16	.2085	19.87	Av	1	0	20.87	-	-	53.3	-32.43
17	.33	37.8	PK	.5	0	38.3	59.5	-21.2	-	-
18	.33	29.69	Av	.5	0	30.19	-	-	49.5	-19.31
19	.4965	29.59	PK	.4	0	29.99	56.1	-26.11	-	-
20	.4965	16.31	Av	.4	0	16.71	-	-	46.1	-29.39
21	1.239	28.1	PK	.2	.1	28.4	56	-27.6	-	-
22	1.239	15.02	Av	.2	.1	15.32	-	-	46	-30.68
23	3.615	26.92	PK	.2	.1	27.22	56	-28.78	-	-
24	3.615	14.1	Av	.2	.1	14.4	-	-	46	-31.6
25	7.0935	31.83	PK	.2	.1	32.13	60	-27.87	-	-
26	7.0935	19.22	Av	.2	.1	19.52	-	-	50	-30.48
27	25.908	29.81	PK	.3	.3	30.41	60	-29.59	-	-
28	25.908	12.05	Av	.3	.3	12.65	-	-	50	-37.35

PK - Peak detector
 Av - average detection