



FCC CFR47 PART 22 SUBPART H
FCC CFR47 PART 24 SUBPART E
FCC CFR47 PART 27 SUBPART L
FCC CFR47 PART 27 SUBPART E

CERTIFICATION TEST REPORT

FOR

CDMA/LTE Phone + Bluetooth & DTS/UNII a/b/g/n + NFC

MODEL NUMBER: LG-VS876, VS876, LGVS876, LG-AS876, AS876 and LGAS876

FCC ID: ZNFVS876

REPORT NUMBER: 13U16594-1, Revision B

ISSUE DATE: January 24, 2014

Prepared for

**LG ELECTRONICS MOBILECOMM U.S.A., INC
100 SYLVAN AVENUE
ENGEWOOD CLIFFS,
NEW JERSEY, 07632, U.S.A.**

Prepared by

**UL VERIFICATION SERVICES INC.
47173 BENICIA STREET
FREMONT, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888**



NVLAP LAB CODE 200065-0

Revision History

Rev.	Date	Revisions	Revised By
--	1/10/14	Initial Issue	P. Kim
A	1/21/14	Add Models LG-AS876, AS876 and LGAS876	P. Kim
B	1/24/14	Updated data table on page 92.	P. Kim

TABLE OF CONTENTS

1.	ATTESTATION OF TEST RESULTS	5
2.	TEST METHODOLOGY	6
3.	FACILITIES AND ACCREDITATION	6
4.	CALIBRATION AND UNCERTAINTY	6
4.1.	MEASURING INSTRUMENT CALIBRATION	6
4.2.	SAMPLE CALCULATION	6
4.3.	MEASUREMENT UNCERTAINTY	6
5.	EQUIPMENT UNDER TEST	7
5.1.	DESCRIPTION OF EUT	7
5.2.	MAXIMUM OUTPUT POWER	7
5.3.	MAXIMUM OUTPUT POWER (LTE)	7
5.4.	DESCRIPTION OF AVAILABLE ANTENNAS	9
5.5.	DESCRIPTION OF TEST SETUP	10
6.	TEST AND MEASUREMENT EQUIPMENT	13
7.	Summary Table	14
8.1.	CDMA2000	15
8.1.1.	1xRTT	15
8.1.2.	CDMA2000 OUTPUT POWER RESULT	16
8.1.3.	1xEV-DO Release 0	17
8.1.4.	1XEVD0 REL 0 OUTPUT POWER RESULT	18
8.1.5.	1xEV-DO Rev. A	19
8.1.6.	1xEVD0 REV A OUTPUT RESULT	20
8.2.	LTE OUTPUT VERIFICATION	21
8.2.1.	LTE OUTPUT RESULT	21
9.	PEAK TO AVERAGE RATIO	24
9.1.	CONDUCTED PEAK TO AVERAGE RESULT	24
10.	LIMITS AND CONDUCTED RESULTS	29
10.1.	OCCUPIED BANDWIDTH	29
10.1.1.	OCCUPIED BANDWIDTH RESULTS	30
10.1.2.	LTE OCCUPIED BANDWIDTH RESULTS	31
10.1.1.	OCCUPIED BANDWIDTH PLOTS	33

10.2.	<i>BAND EDGE EMISSIONS</i>	37
10.2.1.	BAND EDGE PLOTS.....	38
10.3.	<i>OUT OF BAND EMISSIONS</i>	50
10.3.1.	OUT OF BAND EMISSIONS RESULT	51
10.3.2.	OUT OF BAND EMISSIONS PLOTS.....	53
10.4.	<i>FREQUENCY STABILITY</i>	57
10.4.1.	FREQUENCY STABILITY RESULTS.....	58
11.	RADIATED TEST RESULTS	60
11.1.	<i>RADIATED POWER (ERP & EIRP)</i>	60
11.1.1.	ERP/EIRP Results	61
11.1.2.	LTE ERP/EIRP Results	62
11.1.3.	ERP/EIRP PLOTS	64
11.2.	<i>FIELD STRENGTH OF SPURIOUS RADIATION</i>	78
11.2.1.	SPURIOUS RADIATION PLOTS.....	79
12.	SETUP PHOTOS	93

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: LG ELECTRONICS MOBILECOMM U.S.A., INC
EUT DESCRIPTION: CDMA/LTE Phone + Bluetooth & WLAN 2.4 & 5GHz and NFC
MODEL: LG-VS876, LGVS876, VS876, LG-AS876, AS876 and LGAS876
SERIAL NUMBER: 1792206-VS
DATE TESTED: DECEMBER13, 2013 – JANUARY 6, 2014

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC PART 22H, 24E, 27E and 27L	PASS

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released

For UL Verification Services Inc. By:

Tested By:



PHILIP KIM
WISE PROGRAM MANAGER
UL Verification Services Inc.

CHARLES VERGONIO
WISE LAB TECHNICIAN
UL Verification Services Inc.

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with TIA-603-C, FCC CFR 47 Part 22, FCC CFR Part 24, FCC CFR 47 Part 27.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 Benicia Street, Fremont, California, USA.

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://www.ccsemc.com>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$EIRP = \text{PSA reading with EUT worst orientation (dBm)} + \text{Path loss (dB)} - \text{cable loss (between the SG and substitution antenna)} + \text{Substitution Antenna Factor (dBi)}$

$ERP = \text{PSA reading with EUT worst orientation (dBm)} + \text{Path loss (dB)} - \text{cable loss (between the SG and substitution antenna)}$

(Path loss = Signal generator output – PSA reading with substitution antenna)

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	3.52 dB
Radiated Disturbance, 30 to 18000 MHz	4.94 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is a CDMA/LTE Phone + Bluetooth & DTS/UNII a/b/g/n + NFC

5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum peak conducted and radiated ERP / EIRP output powers as follows:

FCC Part 22/24						
Band	Frequency Range(MHz)	Modulation Peak	Conducted		Radiated	
			Peak (dBm)	Peak (mW)	Peak (dBm)	Peak (mW)
BC0	824~849	1xRTT	24.9	309	21.96	157.0
	824~849	EVDO REL. 0	25.0	316	23.39	218.3
	824~849	EVDO REV. A	24.9	309		
BC1	1850~1910	1xRTT	24.9	309	22.39	173.4
	1850~1910	EVDO REL. 0	24.9	309	23.48	222.84
	1850~1910	EVDO REV. A	24.9	309		

5.3. MAXIMUM OUTPUT POWER (LTE)

The transmitter has a maximum peak conducted and radiated ERP/EIRP output powers as follows:

FCC Part 27							
Band	Frequency Range(MHz)	BandWidth (MHz)	Modulation Peak	Conducted		Radiated	
				Peak (dBm)	Peak (mW)	Peak (dBm)	Peak (mW)
LTE13	777~787	10MHz	QPSK	24.1	257	18.30	68
			16QAM	23.2	209	18.05	64

FCC Part 27							
Band	Frequency Range(MHz)	BandWidth (MHz)	Modulation Peak	Conducted		Radiated	
				Peak (dBm)	Peak (mW)	Peak (dBm)	Peak (mW)
LTE4	1710~1755	20MHz	QPSK	24.0	251	24.28	267.92
			16QAM	22.9	195	23.29	213.3

FCC Part 27							
Band	Frequency Range(MHz)	BandWidth (MHz)	Modulation Peak	Conducted		Radiated	
				Peak (dBm)	Peak (mW)	Peak (dBm)	Peak (mW)
LTE4	1710~1755	15MHz	QPSK	24.0	251	24.63	290
			16QAM	23.0	200	23.938	247.63

FCC Part 27							
Band	Frequency Range(MHz)	BandWidth (MHz)	Modulation Peak	Conducted		Radiated	
				Peak (dBm)	Peak (mW)	Peak (dBm)	Peak (mW)
LTE4	1710~1755	10MHz	QPSK	24.0	251	24.38	274.16
			16QAM	22.93	196	24.41	276.06

FCC Part 27							
Band	Frequency Range(MHz)	BandWidth (MHz)	Modulation Peak	Conducted		Radiated	
				Peak (dBm)	Peak (mW)	Peak (dBm)	Peak (mW)
LTE4	1710~1755	5MHz	QPSK	24.0	251	24.65	292
			16QAM	22.7	186	23.94	248

5.4. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes a PIFA antenna for the [List the bands supported] with a maximum peak gain as follow:

Frequency (MHz)	Peak Gain (dBi)
BC0, 824~849MHz	-3.8
BC1, 1850~1910MHz	-1.36
LTE4, 1710~1755MHz	-1.6
LTE13, 777~787MHz	-6.1

5.5. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
AC Adapter	LG	MCS-02WD	DA3Y0035121	N/A
Earphone	LG	EAB62209201	N/A	N/A

I/O CABLES (CONDUCTED SETUP)

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	RF Out	1	Spectrum Analyzer	Shielded	None	NA
2	Antenna Port	1	EUT	Shielded	0.1m	NA
3	RF In/Out	1	Communication Test Set	Shielded	1m	NA


I/O CABLES (RADIATED SETUP)

I/O CABLE LIST						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length	Remarks
1	USB	1	AC Adapter	Un-shielded	1.2m	No
2	Jack	1	Headset	Shielded	1m	No
3	RF In/out	1	Communication Test Set	Un-shielded	2m	Yes


TEST SETUP

The EUT is continuously communicated to the call box during the tests.

SETUP DIAGRAM FOR TESTS (CONDUCTED TEST SETUP)

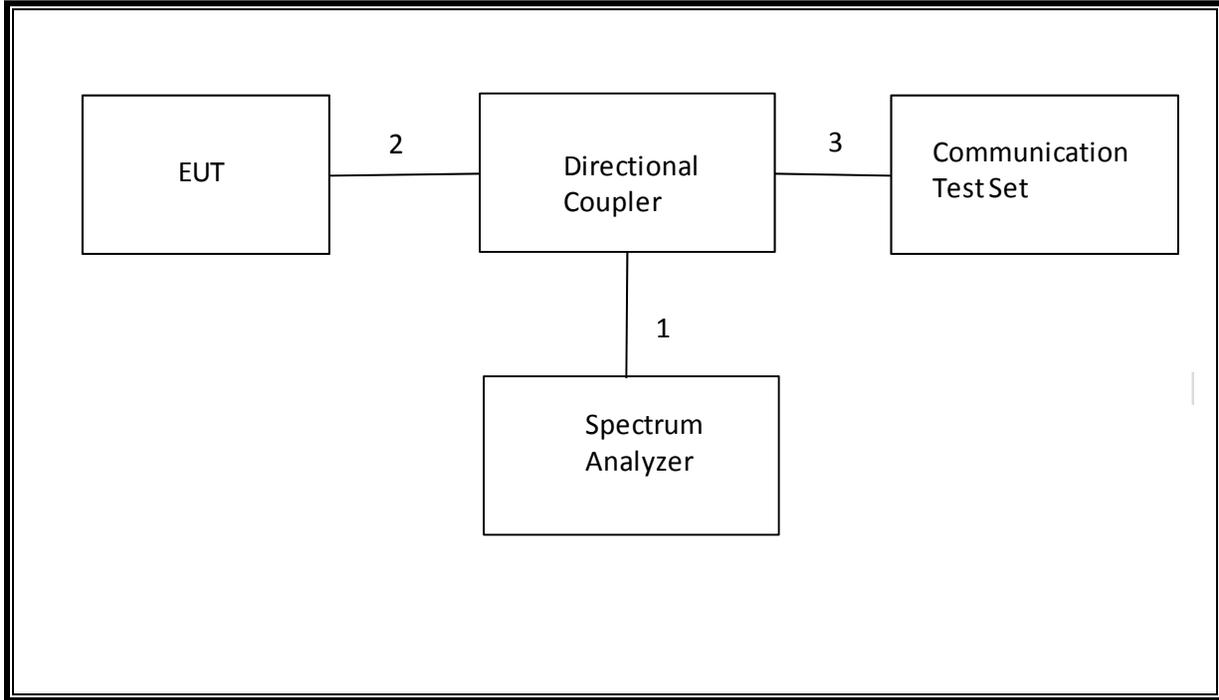

SETUP DIAGRAM FOR TESTS (RADIATED TEST SETUP)

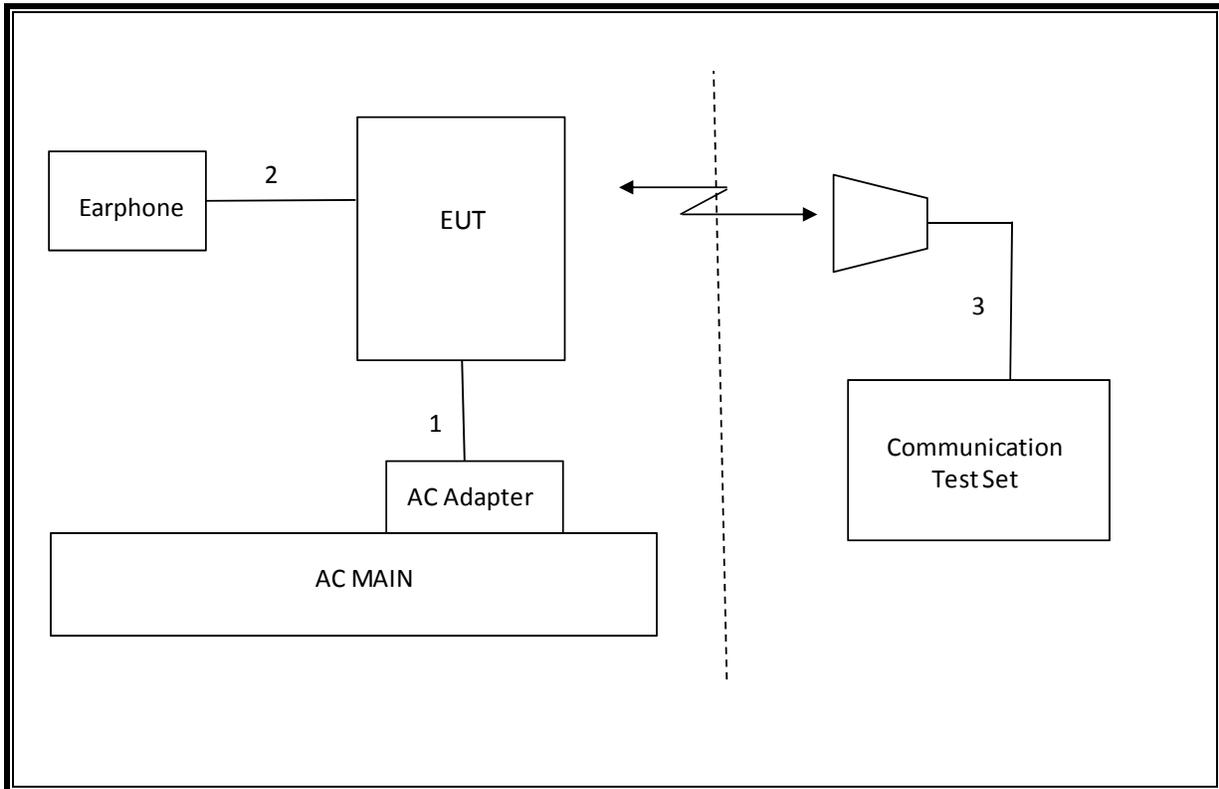

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST				
Description	Manufacturer	Model	Asset	Cal Due
Antenna, Horn, 18 GHz	EMCO	3115	C00872	10/25/14
Antenna, Horn, 18 GHz	EMCO	3115	C00783	10/25/14
Preamplifier, 1300 MHz	Agilent / HP	8447D	C00885	12/11/14
Spectrum Analyzer, 44 GHz	Agilent / HP	E4446A	C01179	02/26/14
Preamplifier, 26.5 GHz	Agilent / HP	8449B	C01063	10/22/14
Communication Test Set	Agilent / HP	E5515C	C01086	06/20/14
Temperature / Humidity Chamber	Thermotron	SE 600-10-10	C00930	01/09/14
Highpass Filter, 1.5 GHz	Micro-Tronics	HPM13193	N02689	CNR
Highpass Filter, 2.7 GHz	Micro-Tronics	HPM13194	N02687	CNR
Antenna, Biconolog, 30MHz-1 GHz	Sunol Sciences	JB1	C01016	08/14/14
Vector signal generator, 6 GHz	Agilent / HP	E4438C	None	07/06/14

7. Summary Table

FCC Part Section	RSS Section(s)	Test Description	Test Limit	Test Condition	Test Result	Worst Case	Note
2.1049	N/A	Occupied Band width (99%)	N/A	Conducted	Pass	17.85MHz	
22.917(a) 24.238(a) 27.53(g) 90.691	RSS-132(4.5.1) RSS-133(6.5.1) RSS-139(6.5.1)	Band Edge / Conducted Spurious Emission	-13dBm		Pass	13.207dBm	
2.1046	N/A	Conducted output power	N/A		Pass	25.0dBm	
22.355 24.235 27.54 90.213	RSS-132(4.3) RSS-133(6.3) RSS-139(6.3) RSS-199(4.3)	Frequency Stability	2.5PPM		Pass	0.0077PPM	
22.913(a)(2)	RSS-132(4.4)	Effective Radiated Power	38 dBm	Radiated	Pass	23.39dBm	Band 5
27.50(b)(10)	N/A		34.77 dBm		Pass		Band 13
24.232(c)	RSS-133(6.4)	Equivalent Isotropic Radiated Power	33dBm		Pass	24.65dBm	Band 2
27.50(d)(4)	RSS-139(6.4)		30dBm		Pass		Band 4
22.917(a) 24.238(a) 27.53(g)	RSS-132(4.5.1) RSS-133(6.5.1) RSS-139(6.5.1)		Radiated Spurious Emission		-13dBm		Pass

8.1. CDMA2000

8.1.1. 1xRTT

TEST PROCEDURE

This procedure assumes the Agilest 8960 Test Set has the following applications installed and with valid license.

<u>Application</u>	<u>Rev, License</u>
CDMA2000 Mobile Test	B.13.08, L

- Call Setup > Shift & Preset
- Cell Info > Cell Parameters > System ID (SID) > 7
 > Network ID (NID) > 1
- Protocol Rev > 6 (IS-2000-0)
- Radio Config (RC) > Please see following table or details
- FCH Service Option (SO) Setup > Please see following table or details
- Traffic Data Rate > Full
- TDSO SCH Info > F-SCH Parameters > F-SCH Data Rate > 153.6 kbps
 > R-SCH Parameters > R-SCH Data Rate > 153.6 kbps
- Rvs Power Ctrl > Active bits
 - Rvs Power Ctrl > All Up bits (Maximum TxPout)

8.1.2. CDMA2000 OUTPUT POWER RESULT

1xRTT

Full Power

Band	Mode	Ch	Freq. (MHz)	Avg Pwr (dBm)
BC 1	RC1 SO55 (Loopback)	25	1851.25	24.9
		600	1880.00	24.9
		1175	1908.75	24.8
	RC3 SO55 (Loopback)	25	1851.25	24.8
		600	1880.00	24.8
		1175	1908.75	24.8
	RC3 SO32 (+F-SCH)	25	1851.25	24.8
		600	1880.00	24.8
		1175	1908.75	24.8

1xRTT

Full Power

Band	Mode	Ch	Freq. (MHz)	Avg Pwr (dBm)
BC 0	RC1, SO55 (Loopback)	1013	824.70	24.8
		384	836.52	24.9
		777	848.31	24.8
	RC3, SO55 (Loopback)	1013	824.70	24.8
		384	836.52	24.9
		777	848.31	24.8
	RC3, SO32 (+F-SCH)	1013	824.70	24.8
		384	836.52	24.9
		777	848.31	24.8

8.1.3. 1xEV-DO Release 0

TEST PROCEDURE

This procedure assumes the Agilent 8960 Test Set has the following applications installed and with valid license.

<u>Application</u>	<u>Rev, License</u>
1xEV-DO Terminal Test	A.09.13

EVDO Release 0 - RTAP

- Call Setup > Shift & Preset
- Call Control:
 - Access Network Info > Cell Parameters > Sector ID > 00000000 > Subnet Mask > 0
 - Generator Info > Termination Parameters > Max Forward Packet Duration > 16 Slots
- Call Parm:
 - Cell Power > -105.5 dBm/1.23 MHz
 - Cell Band > (Select US Cellular or US PCS)
 - Channel > (Enter channel number)
 - Application Config > Enhanced Test Application Protocol > RTAP
 - RTAP Rate > 153.6 kbps
 - Rvs Power Ctrl > Active bits
 - Protocol Rel > 0 (1xEV-DO)
- Press "Start Data Connection" when "Session Open" appear in "Active Cell"
- Rvs Power Ctrl > All Up bits (Maximum TxPout)

EVDO Release 0 - FTAP

- Call Setup > Shift & Preset
- Call Control:
 - Access Network Info > Cell Parameters > Sector ID > 00000000 > Subnet Mask > 0
 - Generator Info > Termination Parameters > Max Forward Packet Duration > 16 Slots
- Call Parm:
 - Cell Power > -105.5 dBm/1.23 MHz
 - Cell Band > (Select US Cellular or US PCS)
 - Channel > (Enter channel number)
 - Application Config > Enhanced Test Application Protocol > FTAP (default)
 - FTAP Rate > 307.2 kbps (2 Slot, QPSK)
 - Rvs Power Ctrl > Active bits
 - Protocol Rel > 0 (1xEV-DO)
- Press "Start Data Connection" when "Session Open" appear in "Active Cell"
- Rvs Power Ctrl > All Up bits (Maximum TxPout)

8.1.4. 1XEVD0 REL 0 OUTPUT POWER RESULT

1xEv-Do Rel. 0

Band	FTAP Rate	Channel	f (MHz)	Avg Pwr (dBm)
BC0	307.2 kbps (2 slot, QPSK)	1013	824.70	24.9
		384	836.52	25.0
		777	848.31	24.9

1xEv-Do Rel. 0

Band	FTAP Rate	Channel	f (MHz)	Avg Pwr (dBm)
BC 1	307.2 kbps (2 slot, QPSK)	25	1851.25	24.9
		600	1880.00	24.9
		1175	1908.75	24.9

8.1.5. 1xEV-DO Rev. A

TEST PROCEDURE

This procedure assumes the Agilent 8960 Test Set has the following applications installed and with valid license.

<u>Application</u>	<u>Rev, License</u>
1xEV-DO Terminal Test	A.09.13

EVDO Release A – RETAP

- Call Setup > Shift & Preset
- Cell Power > -60 dBm/1.23 MHz
- Protocol Rev > A (1xEV-DO-A)
- Application Config > Enhanced Test Application Protocol > RETAP
- R-Data Pkt Size > 4096
- Protocol Subtype Config > Release A Physical Layer Subtype > Subtype 2
- > PL Subtype 2 Access Channel MAC Subtype > Default (Subtype 0)
- Access Network Info > Cell Parameters > Sector ID > 00000000 > Subnet Mask > 0
- Generator Info > Termination Parameters > Max Forward Packet Duration >16 Slots > ACK R-Data After > Subpacket 0 (All ACK)
- Rvs Power Ctrl > All Up bits (to get the maximum power)

EVDO Release A - FETAP

- Call Setup > Shift & Preset
- Cell Power > -60 dBm/1.23 MHz
- Protocol Rev > A (1xEV-DO-A)
- Application Config > Enhanced Test Application Protocol > FETAP
- F-Traffic Format > 4 (1024, 2,128) Canonical (307.2k, QPSK)
- Protocol Subtype Config > Release A Physical Layer Subtype > Subtype 2
- > PL Subtype 2 Access Channel MAC Subtype > Default (Subtype 0)
- Access Network Info > Cell Parameters > Sector ID > 00000000 > Subnet Mask > 0
- Generator Info > Termination Parameters > Max Forward Packet Duration >16 Slots > ACK R-Data After > Subpacket 0 (All ACK)
- Rvs Power Ctrl > All Up bits (to get the maximum power)

8.1.6. 1xEVDO REV A OUTPUT RESULT

1xEv-Do Rev. A

Band	FETAP Traffic Format	Channel	f (MHz)	Avg Pwr (dBm)
BC0	307.2k, QPSK/ ACK channel is transmitted at all the slots	1013	824.70	24.9
		384	836.52	24.9
		777	848.31	24.9

1xEv-Do Rev. A

Band	FETAP Traffic Format	Channel	f (MHz)	Avg Pwr (dBm)
BC 1	307.2k, QPSK/ ACK channel is transmitted at all the slots	25	1851.25	24.9
		600	1880	24.9
		1175	1908.75	24.8

8.2. LTE OUTPUT VERIFICATION

8.2.1. LTE OUTPUT RESULT

Band	BW (MHz)	Mode	RB Allocation	RB Size	Target MPR	Full Power Avg Pwr (dBm)		
						20050	20175	20300
						1720 MHz	1732.5 MHz	1745 MHz
LTE Band 4	20	QPSK	1	0	0	23.8	23.9	24.0
			1	49	0	23.7	23.8	23.8
			1	99	0	23.8	23.9	23.9
			50	0	1	22.7	22.9	23.0
			50	25	1	22.8	22.9	22.9
			50	50	1	22.9	22.9	22.8
			100	0	1	22.9	22.9	22.9
		16QAM	1	0	1	22.5	22.8	22.5
			1	49	1	22.2	22.8	22.4
			1	99	1	22.4	22.9	22.5
			50	0	2	21.8	21.9	22.0
			50	25	2	21.9	21.8	21.8
			50	50	2	21.9	21.9	21.8
			100	0	2	21.9	22.0	21.9
Band	BW (MHz)	Mode	RB Allocation	RB Size	Target MPR	Avg Pwr (dBm)		
						20025	20175	20325
						1717.5 MHz	1732.5 MHz	1747.5 MHz
LTE Band 4	15	QPSK	1	0	0	24.0	23.9	24.0
			1	36	0	23.8	23.9	23.8
			1	74	0	23.9	23.9	23.8
			36	0	1	22.8	22.9	22.8
			36	18	1	22.7	22.8	22.8
			36	37	1	22.8	22.9	22.9
			75	0	1	22.8	22.9	22.9
		16QAM	1	0	1	22.6	22.6	23.0
			1	36	1	22.5	22.6	22.8
			1	74	1	22.6	22.8	22.9
			36	0	2	21.8	21.9	21.9
			36	18	2	21.8	21.8	21.9
			36	37	2	21.8	21.9	21.9
			75	0	2	21.9	21.9	22.0
Band	BW (MHz)	Mode	RB Allocation	RB Size	Target MPR	Avg Pwr (dBm)		
						20000	20175	20350
						1715 MHz	1732.5 MHz	1750 MHz
LTE Band 4	10	QPSK	1	0	0	24.00	23.84	23.81
			1	25	0	23.87	23.90	23.86

			1	49	0	23.90	23.91	23.82
			25	0	1	22.83	22.79	22.82
			25	12	1	22.66	22.81	22.88
			25	25	1	22.71	22.90	22.85
			50	0	1	22.86	22.84	22.90
		16QAM	1	0	1	22.59	22.58	22.93
			1	25	1	22.46	22.63	22.93
			1	49	1	22.53	22.63	22.86
			25	0	2	21.90	21.88	21.83
			25	12	2	21.80	21.91	21.87
			25	25	2	21.81	21.99	21.91
			50	0	2	21.92	21.83	21.86
Band	BW (MHz)	Mode	RB Allocation	RB Size	Target MPR	Avg Pwr (dBm)		
						19975	20175	20375
						1712.5 MHz	1732.5 MHz	1752.5 MHz
LTE Band 4	5	QPSK	1	0	0	23.81	23.88	23.95
			1	12	0	23.73	24.00	23.92
			1	24	0	23.68	23.95	23.84
			12	0	1	22.82	22.91	22.96
			12	6	1	22.91	22.88	22.90
			12	13	1	22.89	23.00	22.87
		25	0	1	22.89	22.91	22.91	
		16QAM	1	0	1	22.69	22.45	22.66
			1	12	1	22.55	22.60	22.66
			1	24	1	22.50	22.70	22.52
			12	0	2	21.80	21.87	21.90
			12	6	2	21.81	21.92	21.86
			12	13	2	21.83	21.97	21.88
					25	0	2	21.93

Band	BW	Mode	RB	RB	Target	Avg Pwr (dBm)
------	----	------	----	----	--------	---------------

	(MHz)		Allocation	Size	MPR	23230
						782 MHz
LTE Band 13	10	QPSK	1	0	0	24.1
			1	25	0	24.1
			1	49	0	24.1
			25	0	1	23.0
			25	12	1	23.0
			25	25	1	23.0
		50	0	1	23.0	
		16QAM	1	0	1	23.0
			1	25	1	23.2
			1	49	1	23.1
			25	0	2	22.1
			25	12	2	22.0
			25	25	2	22.0
			50	0	2	22.0

9. PEAK TO AVERAGE RATIO


Test Procedure



Per KDB 971168 D01 Power Meas License Digital Systems v02r01


Test Spec



In addition, when the transmitter power is measured in terms of average value, the peak-to-average ratio of the power shall not exceed 13 dB.


9.1. CONDUCTED PEAK TO AVERAGE RESULT

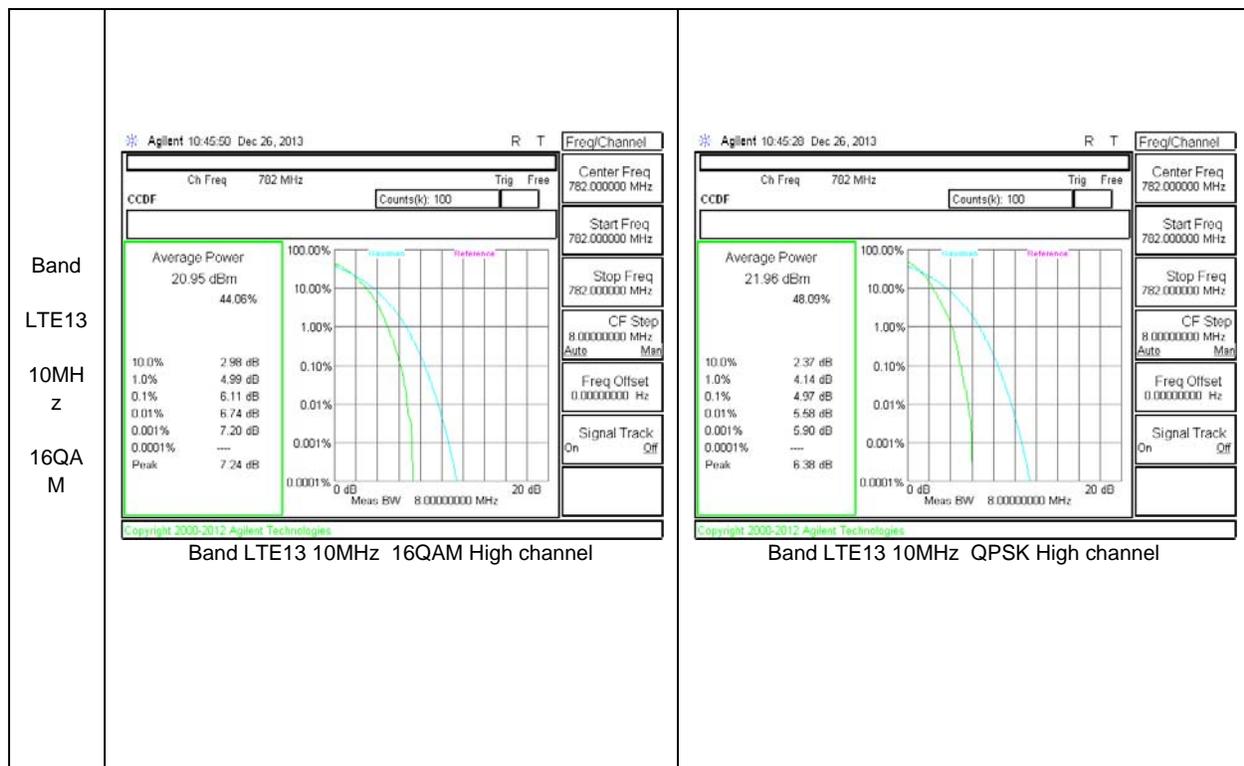

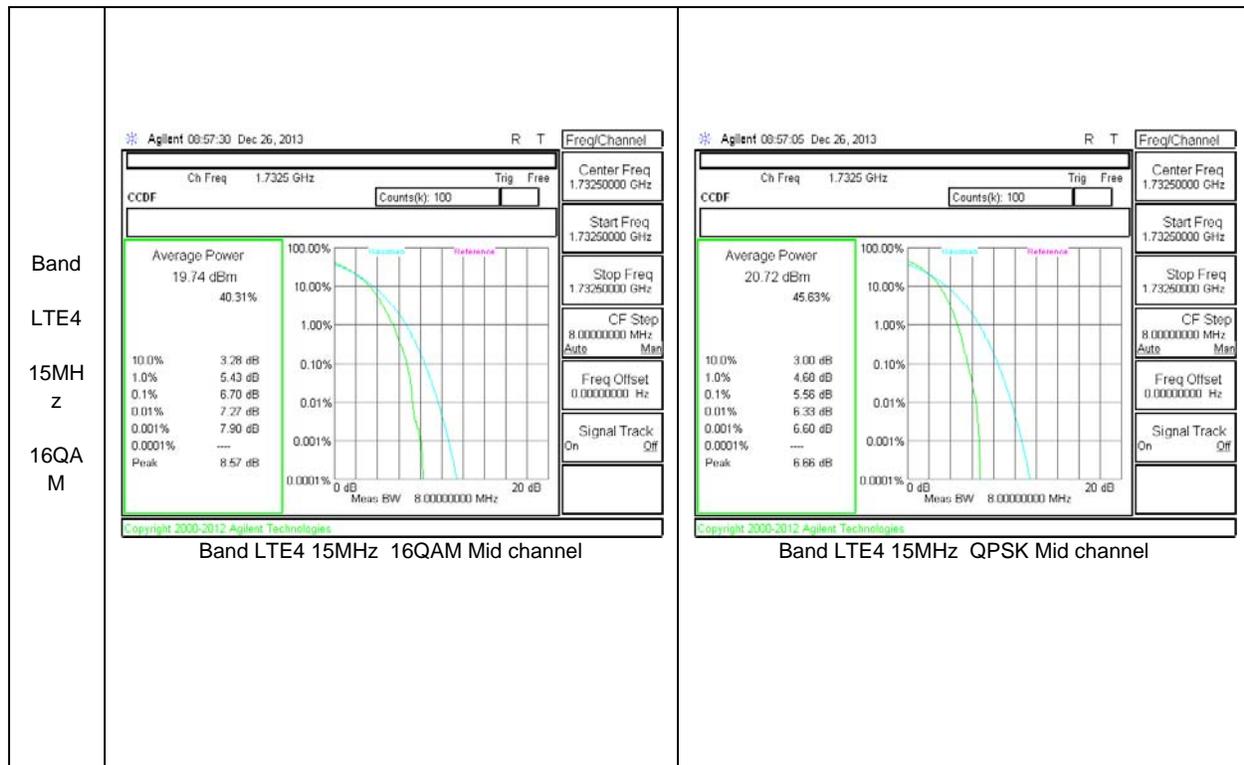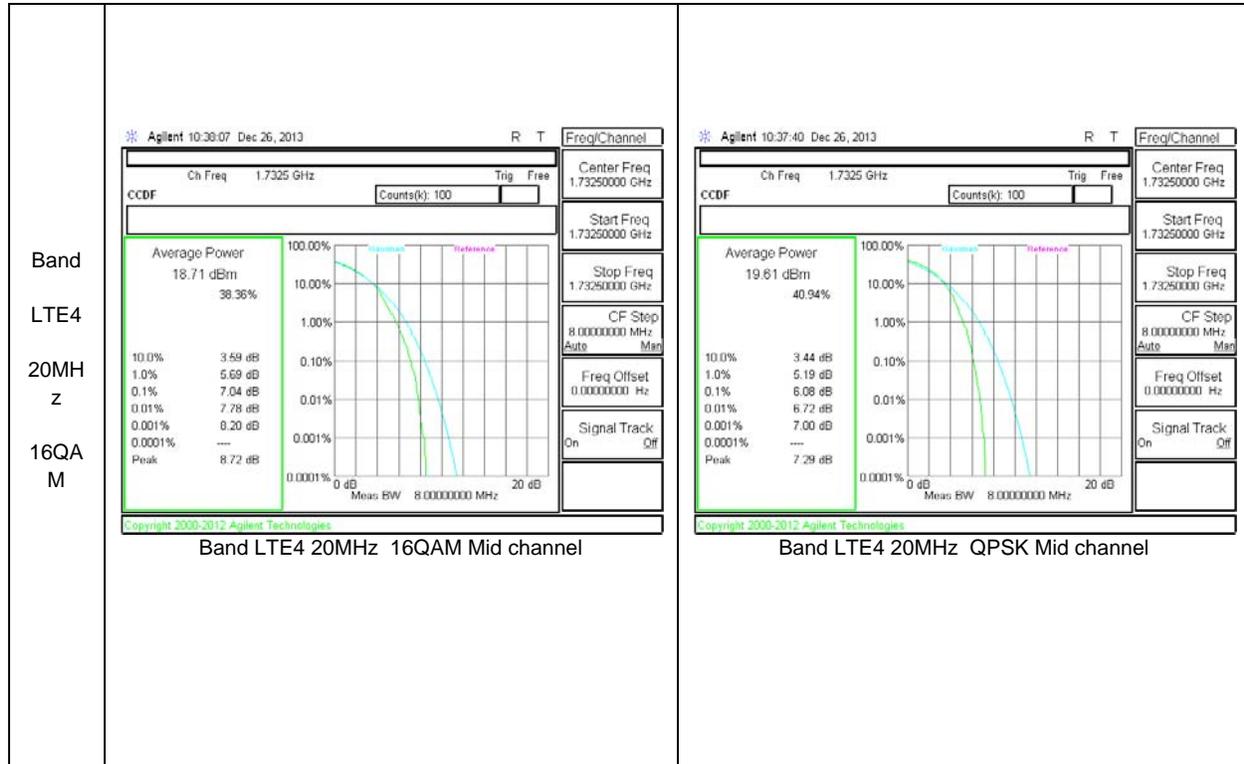

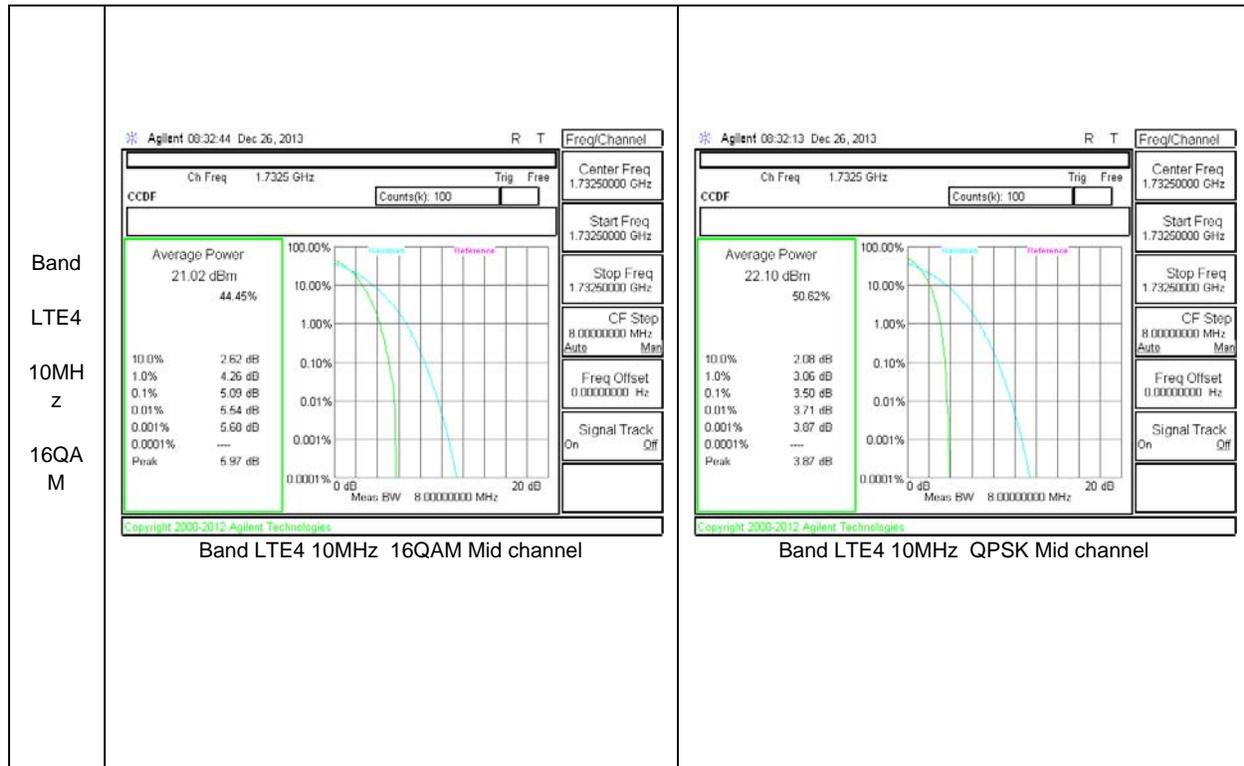

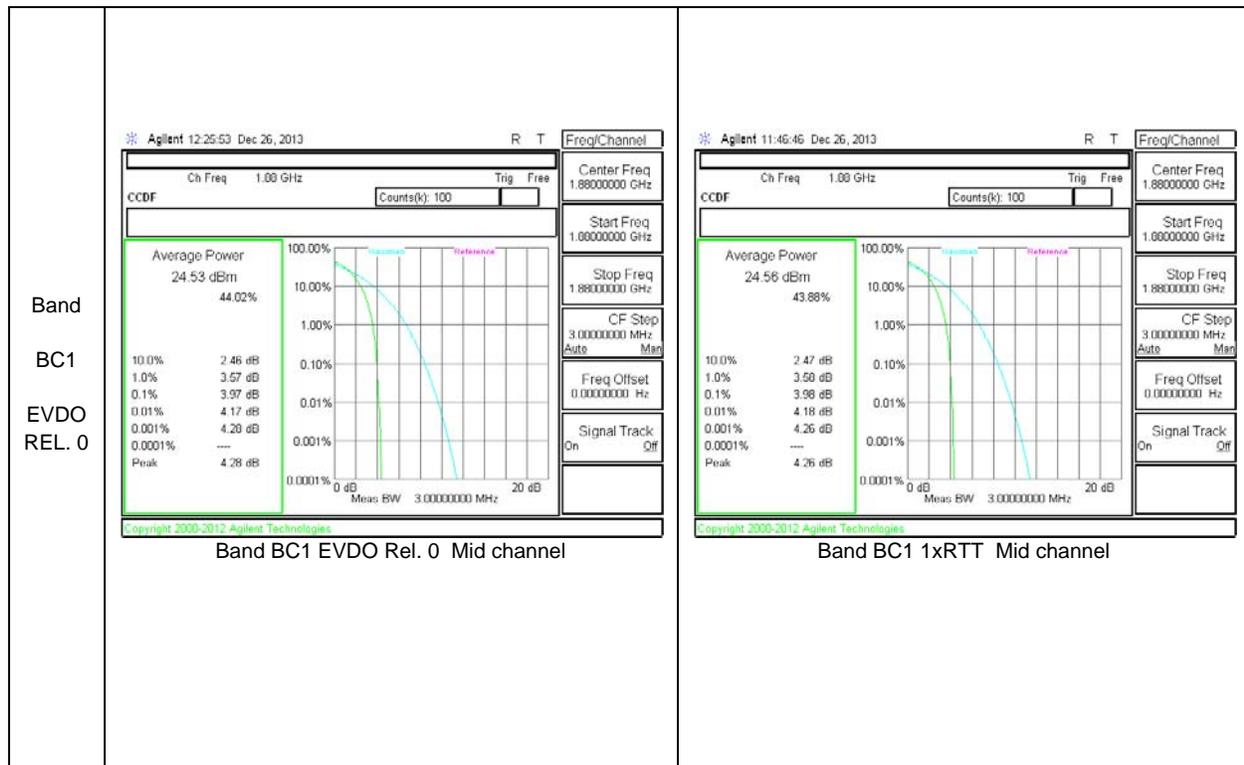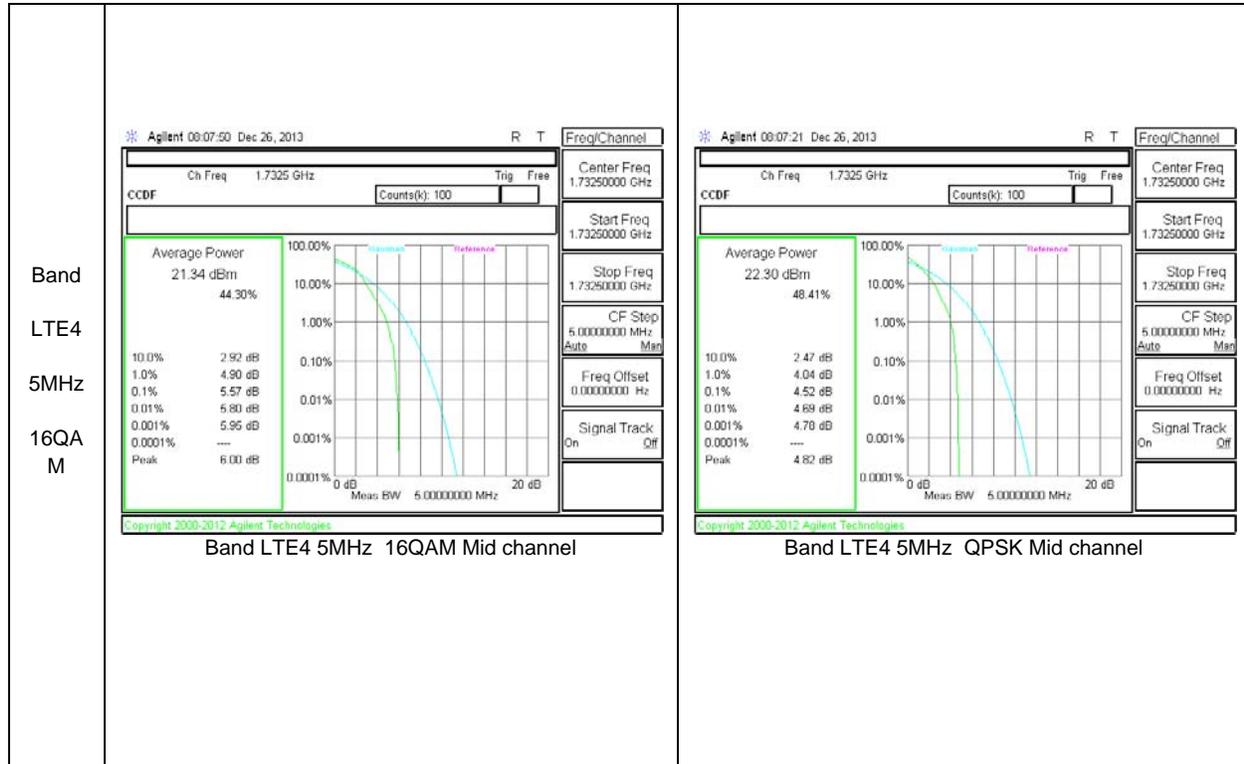

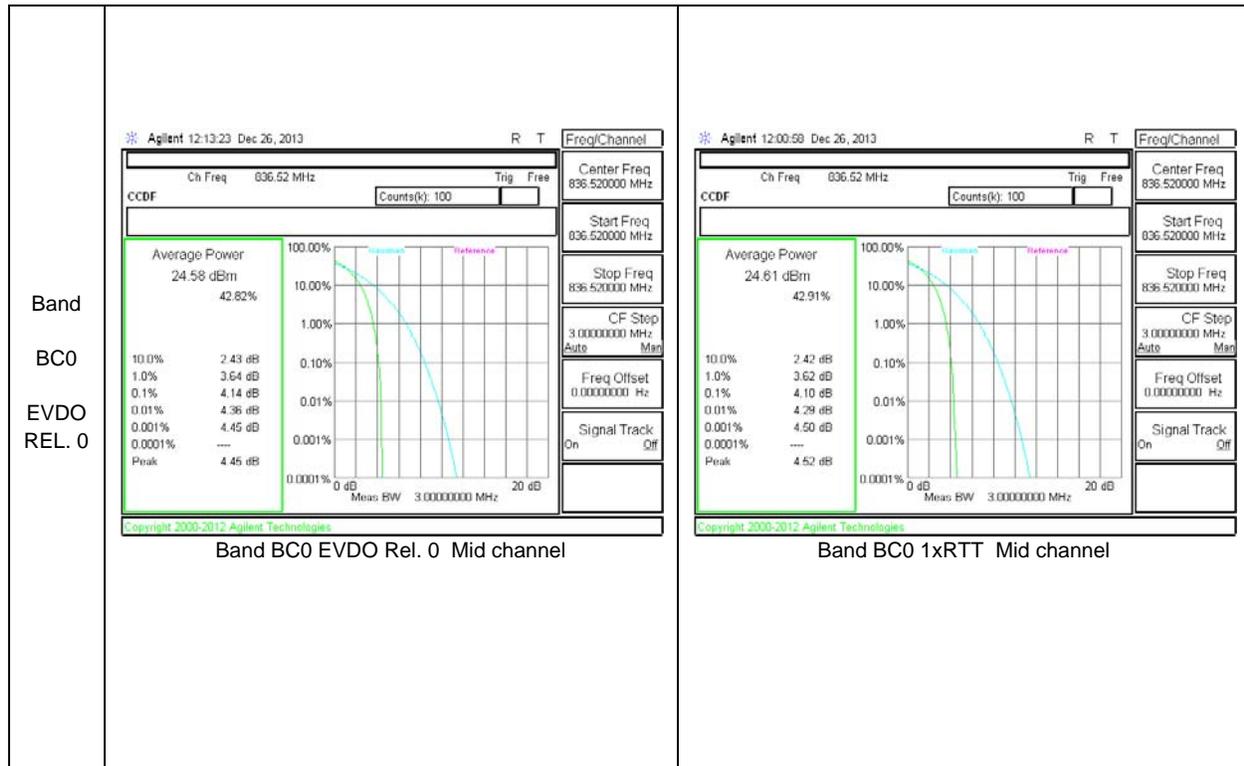

10. LIMITS AND CONDUCTED RESULTS

10.1. OCCUPIED BANDWIDTH

RULE PART(S)

FCC: §2.1049

IC: RSS-132, 4.5; RSS-133, 6.5

LIMITS

For reporting purposes only

TEST PROCEDURE

The transmitter output was connected to a calibrated coaxial cable and coupler, the other end of which was connected to a spectrum analyzer. The occupied bandwidth was measured with the spectrum analyzer at the low, middle and high channel in each band. The -26dB bandwidth was also measured and recorded.

(KDB 971168 D01 Power Meas License Digital Systems v02r01 - 06/07/2013)

10.1.1. OCCUPIED BANDWIDTH RESULTS

Band	Mode	Channel	f (MHz)	99% BW (MHz)	-26dB BW (MHz)
BC0	1xRTT	1013	824.7	1.281	1.436
		384	836.52	1.279	1.430
		777	848.31	1.265	1.429
	EVDO REL. 0	1013	824.7	1.275	1.432
		384	836.52	1.277	1.429
		777	848.31	1.266	1.427
BC1	1xRTT	25	1851.25	1.283	1.442
		600	1880	1.271	1.426
		1175	1908.75	1.291	1.447
	EVDO REL. 0	25	1851.25	1.277	1.435
		600	1880	1.278	1.433
		1175	1908.75	1.282	1.449

10.1.2. LTE OCCUPIED BANDWIDTH RESULTS

Band	BW(MHz)	Mode	RB/RB Size	f (MHz)	99% BW (MHz)	-26dB BW (MHz)
LTE13	10	QPSK	50/0	782	8.962	9.743
		16QAM	50/0	782	8.975	9.632

Band	BW(MHz)	Mode	RB/RB Size	f (MHz)	99% BW (MHz)	-26dB BW (MHz)
LTE4	20	QPSK	100/0	1720	17.821	18.900
			100/0	1732.5	17.850	19.142
			100/0	1745	17.778	18.819
		16QAM	100/0	1720	17.818	19.001
			100/0	1732.5	17.799	18.998
			100/0	1745	17.835	18.956

Band	BW(MHz)	Mode	RB/RB Size	f (MHz)	99% BW (MHz)	-26dB BW (MHz)
LTE4	15	QPSK	75/0	1717.5	13.368	14.444
			75/0	1732.5	13.378	14.545
			75/0	1747.5	13.418	14.446
		16QAM	75/0	1717.5	13.356	14.247
			75/0	1732.5	13.369	14.487
			75/0	1747.5	13.350	14.154

Band	BW(MHz)	Mode	RB/RB Size	f (MHz)	99% BW (MHz)	-26dB BW (MHz)
LTE4	10	QPSK	50/0	1715	8.950	9.509
			50/0	1732.5	8.938	9.680
			50/0	1750	8.948	9.624
		16QAM	50/0	1715	8.903	9.616
			50/0	1732.5	8.944	9.781
			50/0	1750	8.927	9.656

Band	BW(MHz)	Mode	RB/RB Size	f (MHz)	99% BW (MHz)	-26dB BW (MHz)
LTE4	5	QPSK	25/0	1712.5	4.461	4.872
			25/0	1732.5	4.464	4.902


			25/0	1752.5	4.462	4.881
		16QAM	25/0	1712.5	4.459	4.917
			25/0	1732.5	4.472	4.894
			25/0	1752.5	4.463	4.924

10.1.1. OCCUPIED BANDWIDTH PLOTS

<p>Band LTE13 10MHz z 16QAM</p>	<p>Agilent 10:41:01 Dec 26, 2013 R T Freq/Channel</p> <p>Ch Freq 782 MHz Trig Free Center Freq 782.000000 MHz</p> <p>Occupied Bandwidth Start Freq 772.000000 MHz</p> <p>Stop Freq 792.000000 MHz</p> <p>CF Step 2.00000000 MHz</p> <p>Freq Offset 0.00000000 Hz</p> <p>Center 782.00 MHz Span 20 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 1.92 ms (601 pts)</p> <p>Occupied Bandwidth 8.9751 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error -5.642 kHz</p> <p>x dB Bandwidth 9.632 MHz</p> <p>Copyright 2005-2012 Agilent Technologies</p> <p>Band LTE13 10MHz OBW 16QAM High Channel FRB.gif</p>	<p>Agilent 10:40:36 Dec 26, 2013 R T Freq/Channel</p> <p>Ch Freq 782 MHz Trig Free Center Freq 782.000000 MHz</p> <p>Occupied Bandwidth Start Freq 772.000000 MHz</p> <p>Stop Freq 792.000000 MHz</p> <p>CF Step 2.00000000 MHz</p> <p>Freq Offset 0.00000000 Hz</p> <p>Center 782.00 MHz Span 20 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 1.92 ms (601 pts)</p> <p>Occupied Bandwidth 8.9615 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error -6.930 kHz</p> <p>x dB Bandwidth 9.743 MHz</p> <p>Copyright 2005-2012 Agilent Technologies</p> <p>Band LTE13 10MHz OBW QPSK High Channel FRB.gif</p>
<p>Band LTE4 20MHz z 16QAM</p>	<p>Agilent 10:19:39 Dec 26, 2013 R T Freq/Channel</p> <p>Ch Freq 1.7325 GHz Trig Free Center Freq 1.73250000 GHz</p> <p>Occupied Bandwidth Start Freq 1.71750000 GHz</p> <p>Stop Freq 1.74750000 GHz</p> <p>CF Step 3.00000000 MHz</p> <p>Freq Offset 0.00000000 Hz</p> <p>Center 1.732 50 GHz Span 30 MHz</p> <p>#Res BW 200 kHz #VBW 620 kHz Sweep 1 ns (601 pts)</p> <p>Occupied Bandwidth 17.7991 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error 10.065 kHz</p> <p>x dB Bandwidth 18.998 MHz</p> <p>Copyright 2005-2012 Agilent Technologies</p> <p>Band LTE4 20MHz OBW 16QAM Mid Channel FRB.gif</p>	<p>Agilent 10:19:10 Dec 26, 2013 R T Freq/Channel</p> <p>Ch Freq 1.7325 GHz Trig Free Center Freq 1.73250000 GHz</p> <p>Occupied Bandwidth Start Freq 1.71750000 GHz</p> <p>Stop Freq 1.74750000 GHz</p> <p>CF Step 3.00000000 MHz</p> <p>Freq Offset 0.00000000 Hz</p> <p>Center 1.732 50 GHz Span 30 MHz</p> <p>#Res BW 200 kHz #VBW 620 kHz Sweep 1 ns (601 pts)</p> <p>Occupied Bandwidth 17.8501 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error 13.643 kHz</p> <p>x dB Bandwidth 19.142 MHz</p> <p>Copyright 2005-2012 Agilent Technologies</p> <p>Band LTE4 20MHz OBW QPSK Mid Channel FRB.gif</p>



<p>Band LTE4 5MHz 16QAM</p>	<p>Agilent 07:39:31 Dec 26, 2013</p> <p>Ch Freq 1.7325 GHz</p> <p>Center Freq 1.73250000 GHz</p> <p>Start Freq 1.72750000 GHz</p> <p>Stop Freq 1.73750000 GHz</p> <p>CF Step 1.00000000 MHz</p> <p>Span 10 MHz</p> <p>Occupied Bandwidth 4.4716 MHz</p> <p>Transmit Freq Error 5.457 kHz</p> <p>x dB Bandwidth 4.894 MHz</p> <p>Band LTE4 5MHz OBW 16QAM Mid Channel FRB.gif</p>	<p>Agilent 07:37:43 Dec 26, 2013</p> <p>Ch Freq 1.7325 GHz</p> <p>Center Freq 1.73250000 GHz</p> <p>Start Freq 1.72750000 GHz</p> <p>Stop Freq 1.73750000 GHz</p> <p>CF Step 1.00000000 MHz</p> <p>Span 10 MHz</p> <p>Occupied Bandwidth 4.4638 MHz</p> <p>Transmit Freq Error -3.160 kHz</p> <p>x dB Bandwidth 4.902 MHz</p> <p>Band LTE4 5MHz OBW QPSK Mid Channel FRB.gif</p>
<p>Band BC1</p>	<p>Agilent 12:19:03 Dec 26, 2013</p> <p>Ch Freq 1.88 GHz</p> <p>Center Freq 1.88000000 GHz</p> <p>Start Freq 1.87500000 GHz</p> <p>Stop Freq 1.88500000 GHz</p> <p>CF Step 300.000000 kHz</p> <p>Span 3 MHz</p> <p>Occupied Bandwidth 1.2779 MHz</p> <p>Transmit Freq Error -1.587 kHz</p> <p>x dB Bandwidth 1.433 MHz</p> <p>Band BC1 EVDO Rel. 0 OBW Mid channel</p>	<p>Agilent 11:36:39 Dec 26, 2013</p> <p>Ch Freq 1.88 GHz</p> <p>Center Freq 1.88000000 GHz</p> <p>Start Freq 1.87500000 GHz</p> <p>Stop Freq 1.88500000 GHz</p> <p>CF Step 300.000000 kHz</p> <p>Span 3 MHz</p> <p>Occupied Bandwidth 1.2709 MHz</p> <p>Transmit Freq Error -681.356 Hz</p> <p>x dB Bandwidth 1.426 MHz</p> <p>Band BC1 1xRTT OBW Mid channel</p>

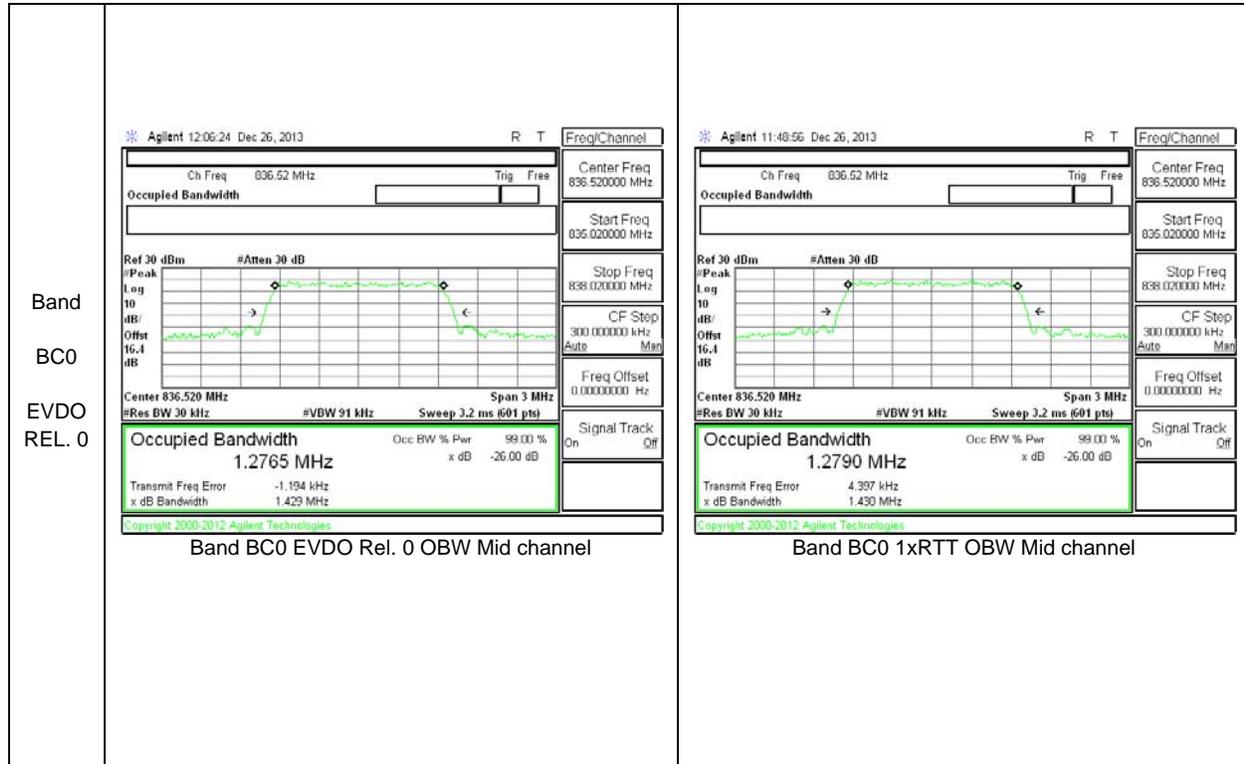

10.2. BAND EDGE EMISSIONS

RULE PART(S)

FCC: §22.359, §24.238, §27

LIMITS

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

TEST PROCEDURE

Per KDB 971168 D01 Power Meas License Digital Systems v02r01

The transmitter output was connected to an Agilent 8960 or a CMW500 Test Set and configured to operate at maximum power. The band edge emissions were measured at the required operating frequencies in each band on the Spectrum Analyzer.

For each band edge measurement:


- Set the spectrum analyzer span to include the block edge frequency (824, 849, 1850, 1910 and 1915MHz)
- Set a marker to point the corresponding band edge frequency in each test case.
- Set display line at -13 dBm.
- Set resolution bandwidth to at least 1% of emission bandwidth.
- (m)(6) Compliance with these rules is based on the user of measurement instrumentation employing a resolution bandwidth of 1MHz or greater. However, in the 1MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least 1 percent of the emission bandwidth may be employed.


MODES TESTED


CDMA BC0/BC1 & LTE B4/B13


RESULTS


10.2.1. BAND EDGE PLOTS

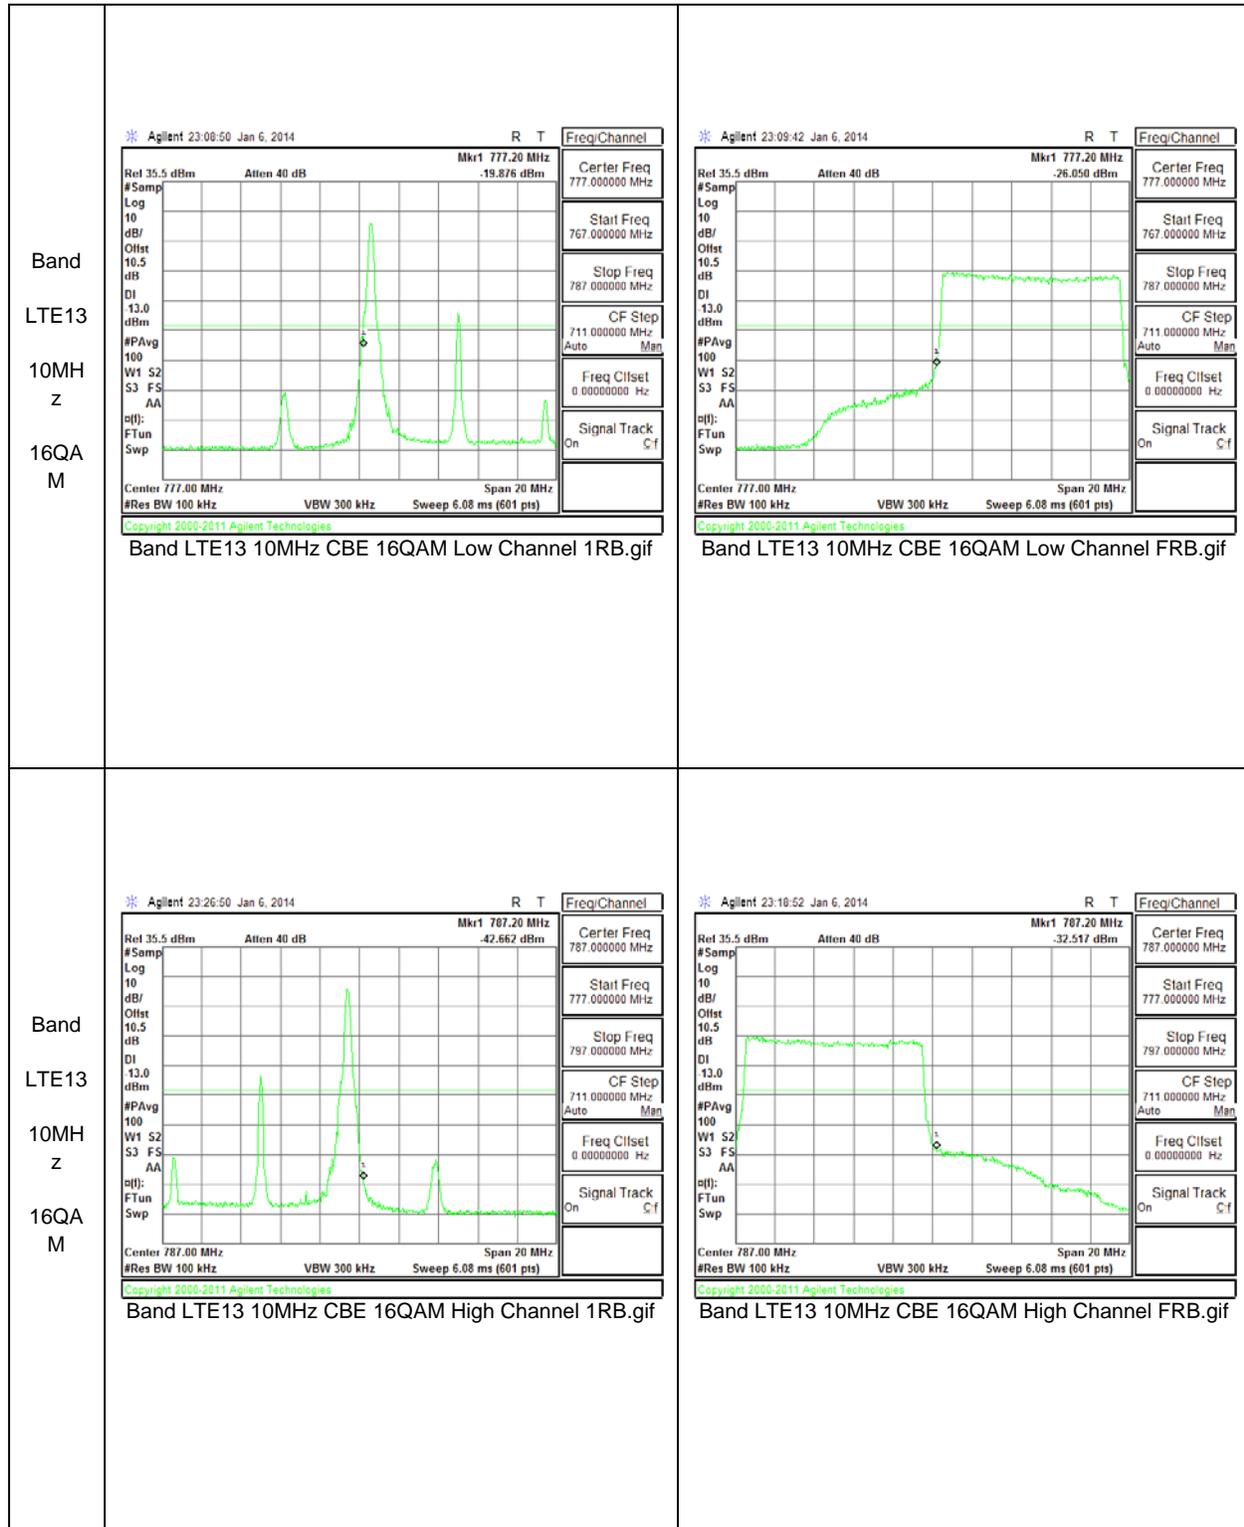


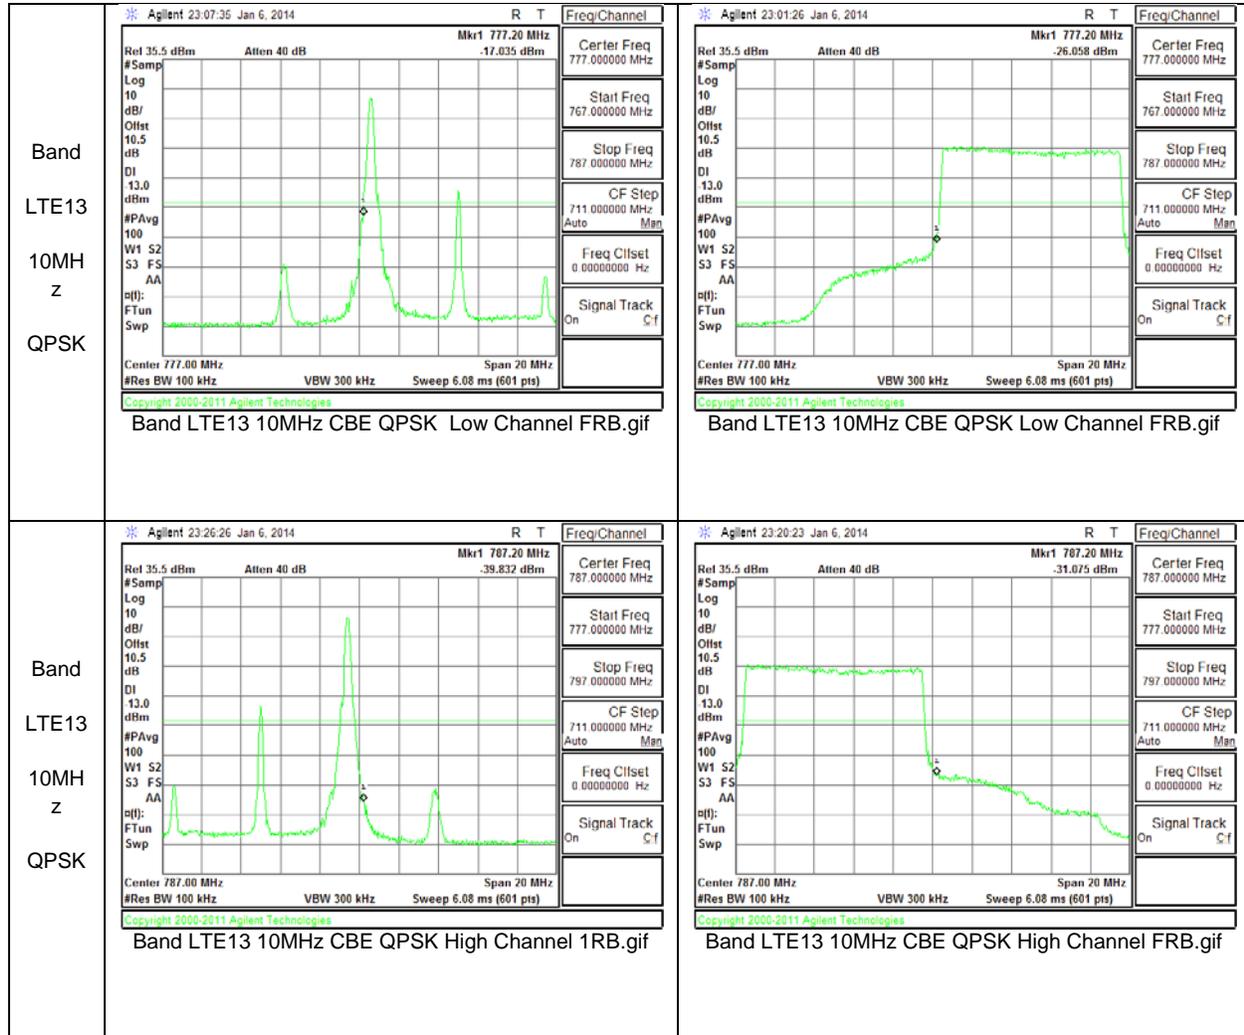


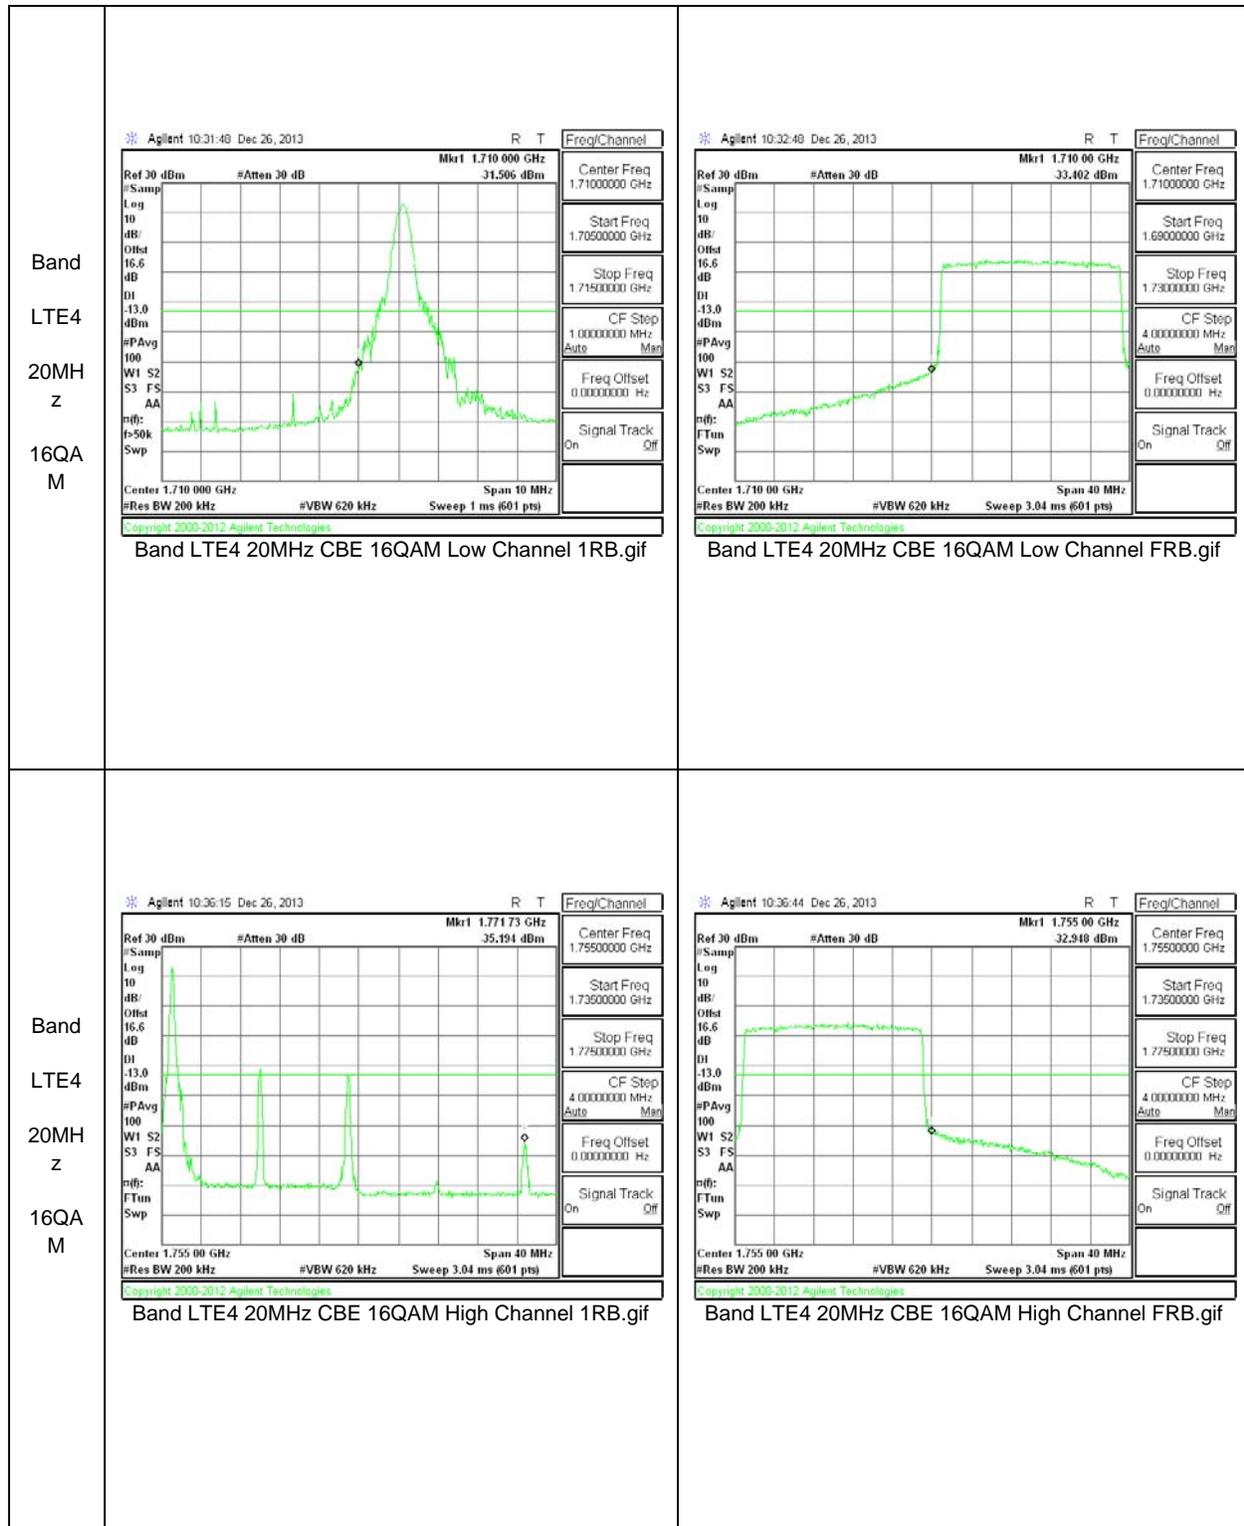


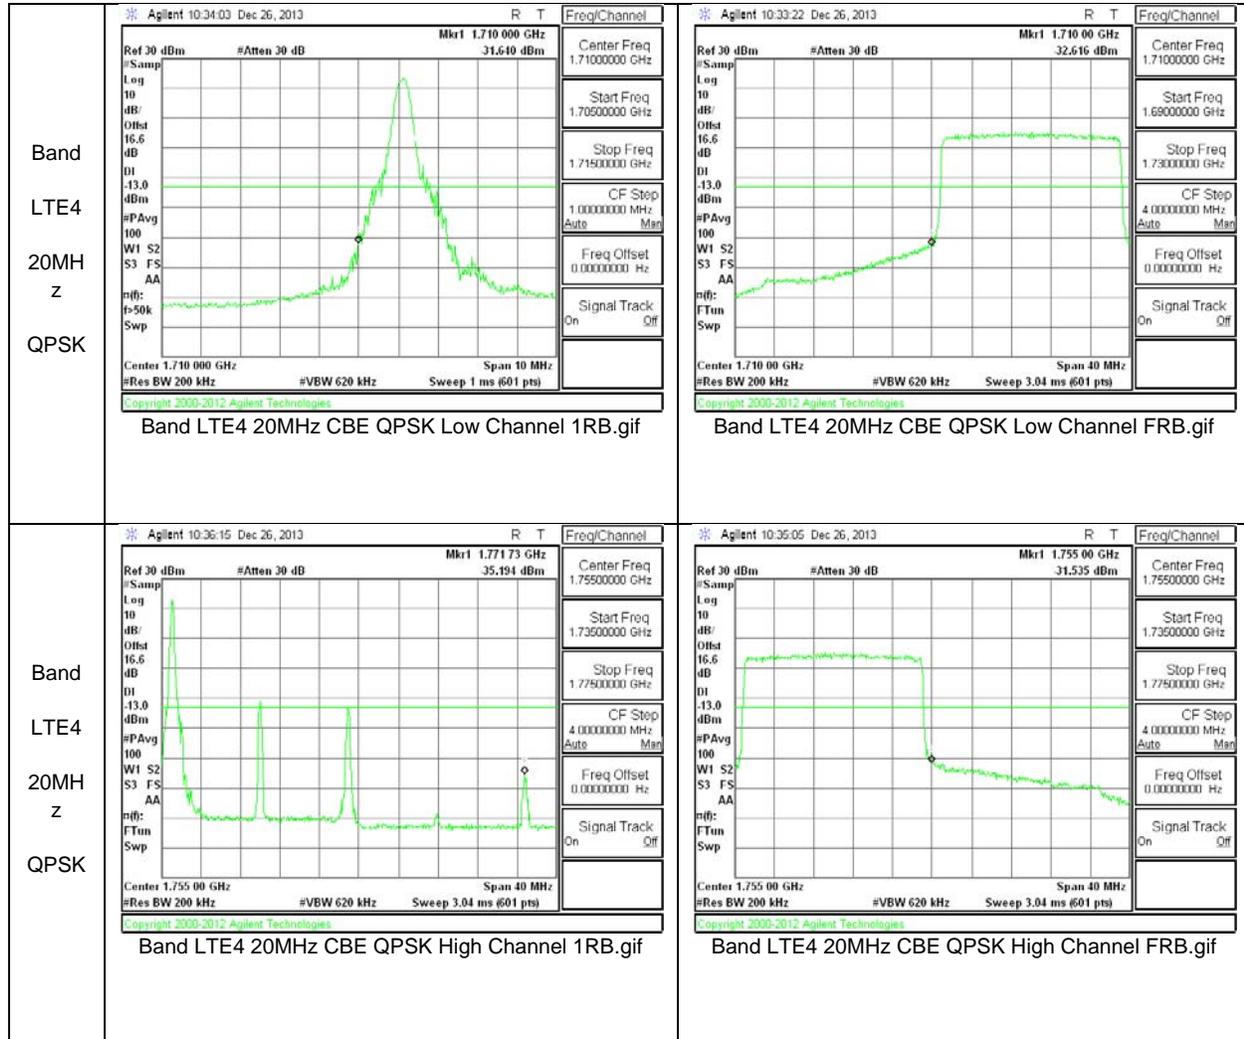


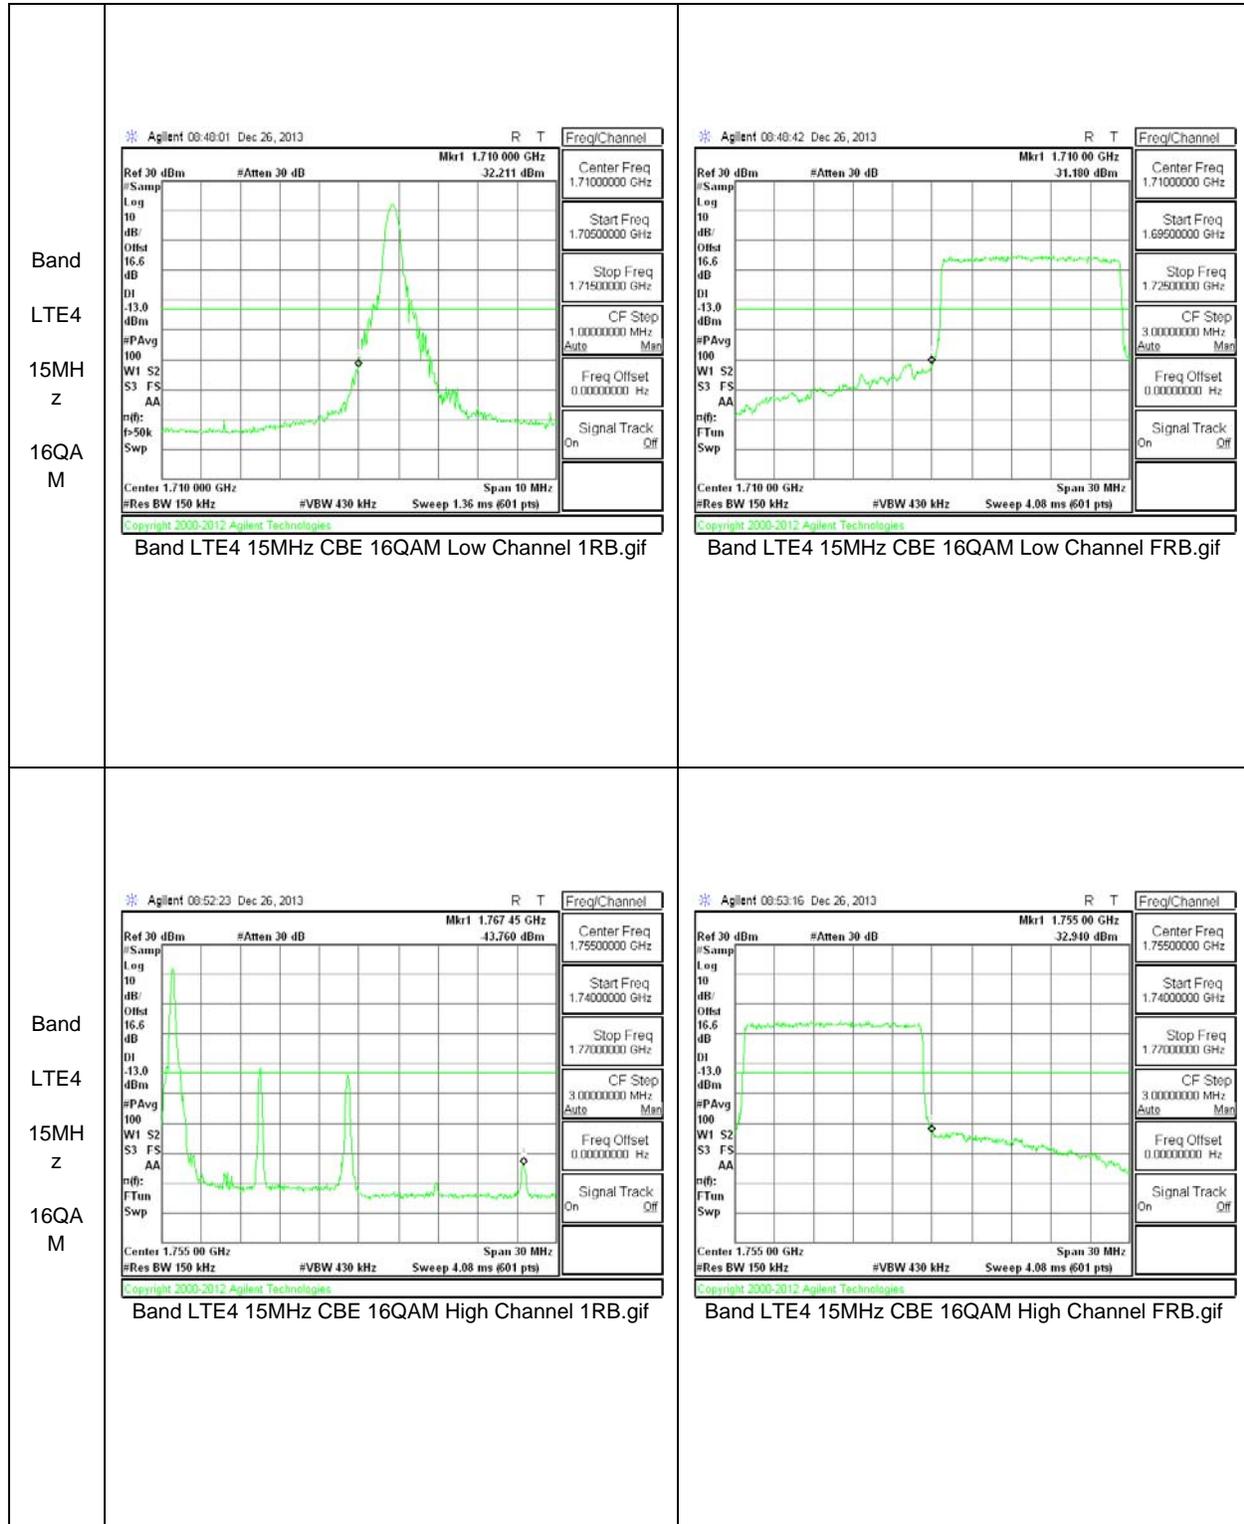


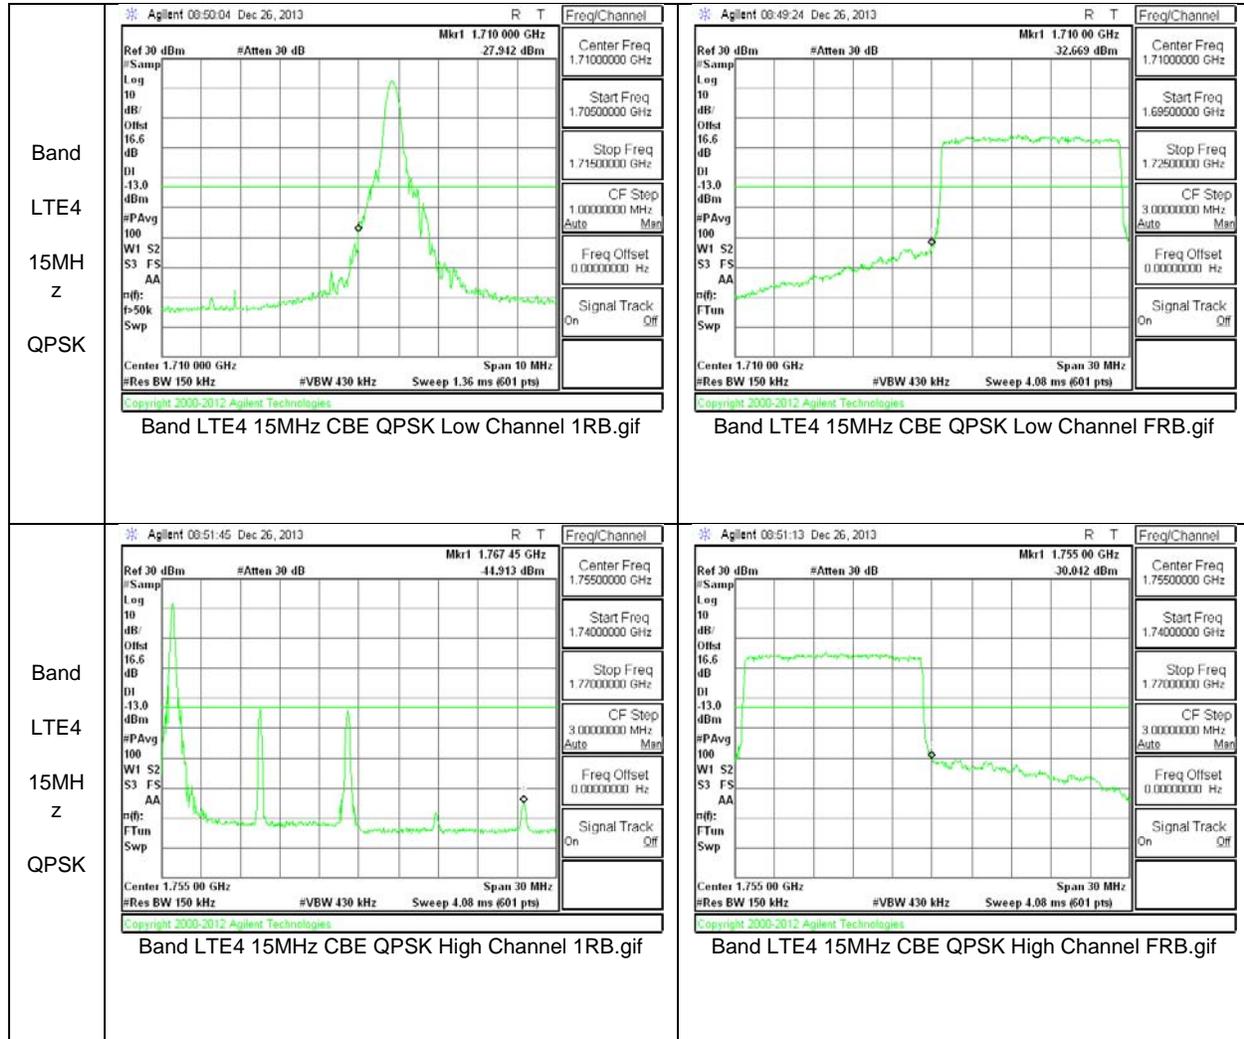


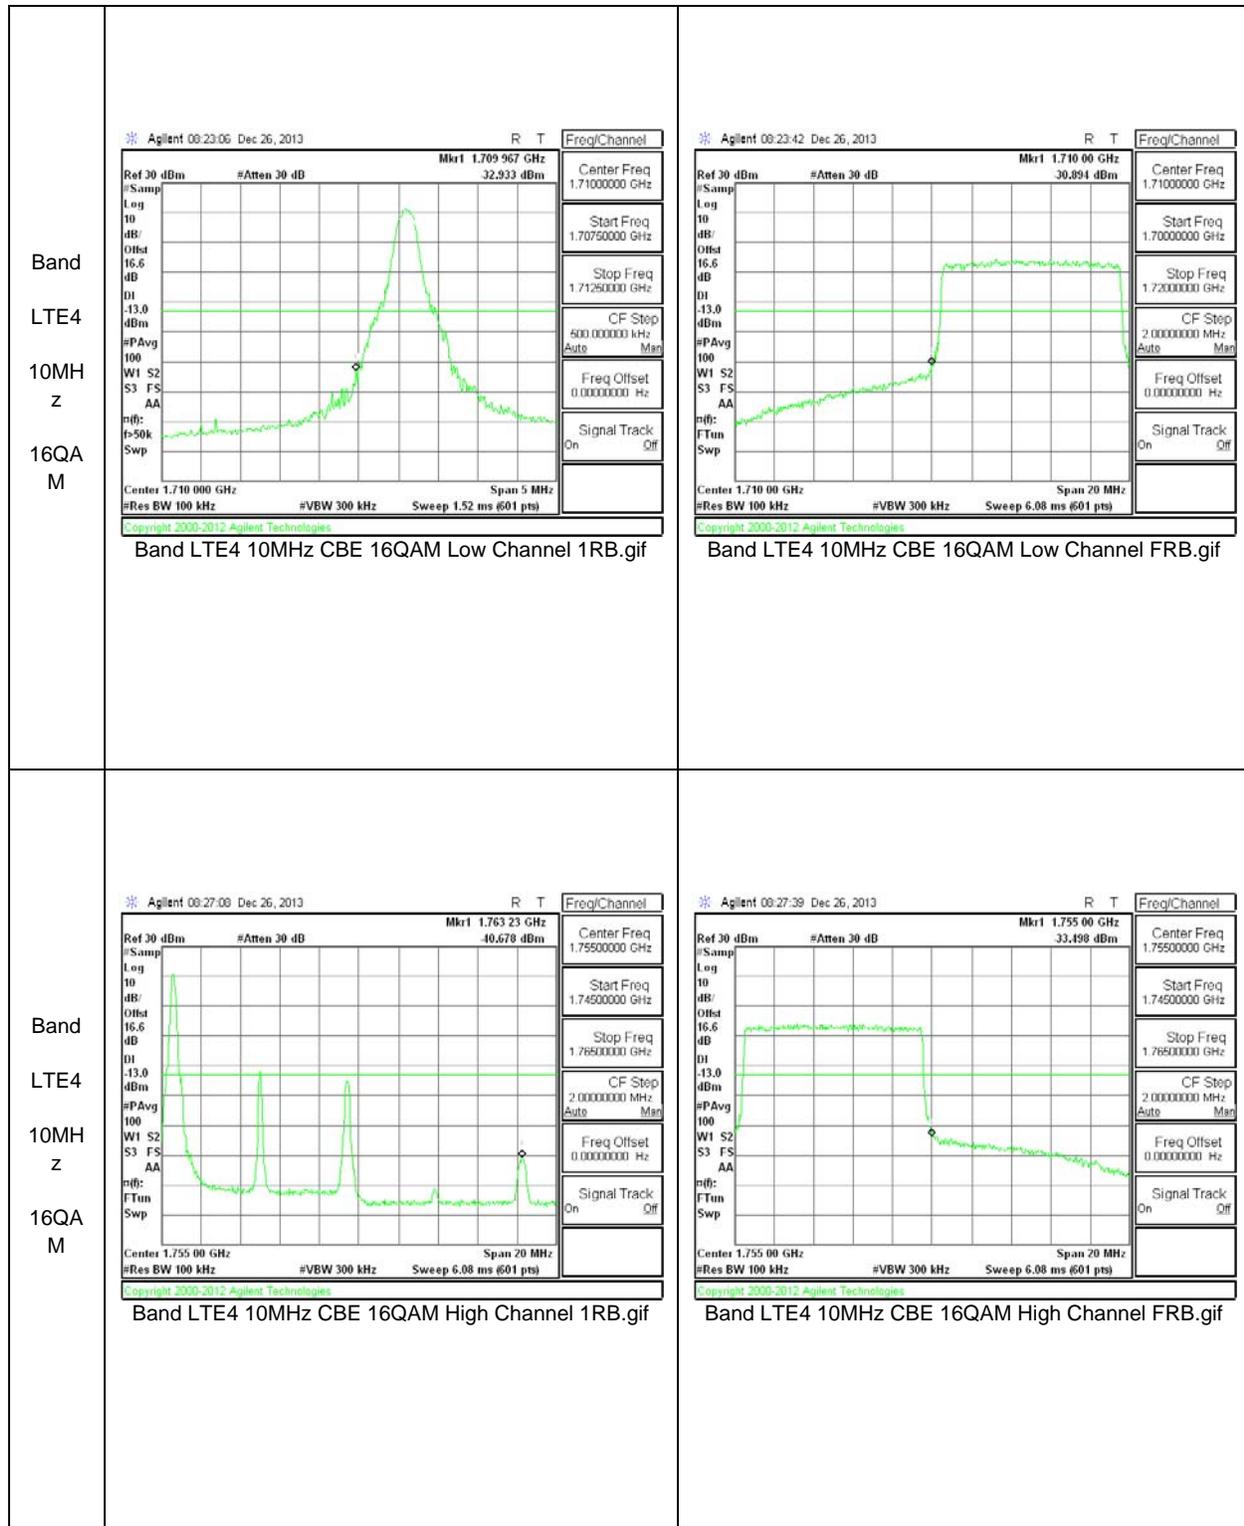


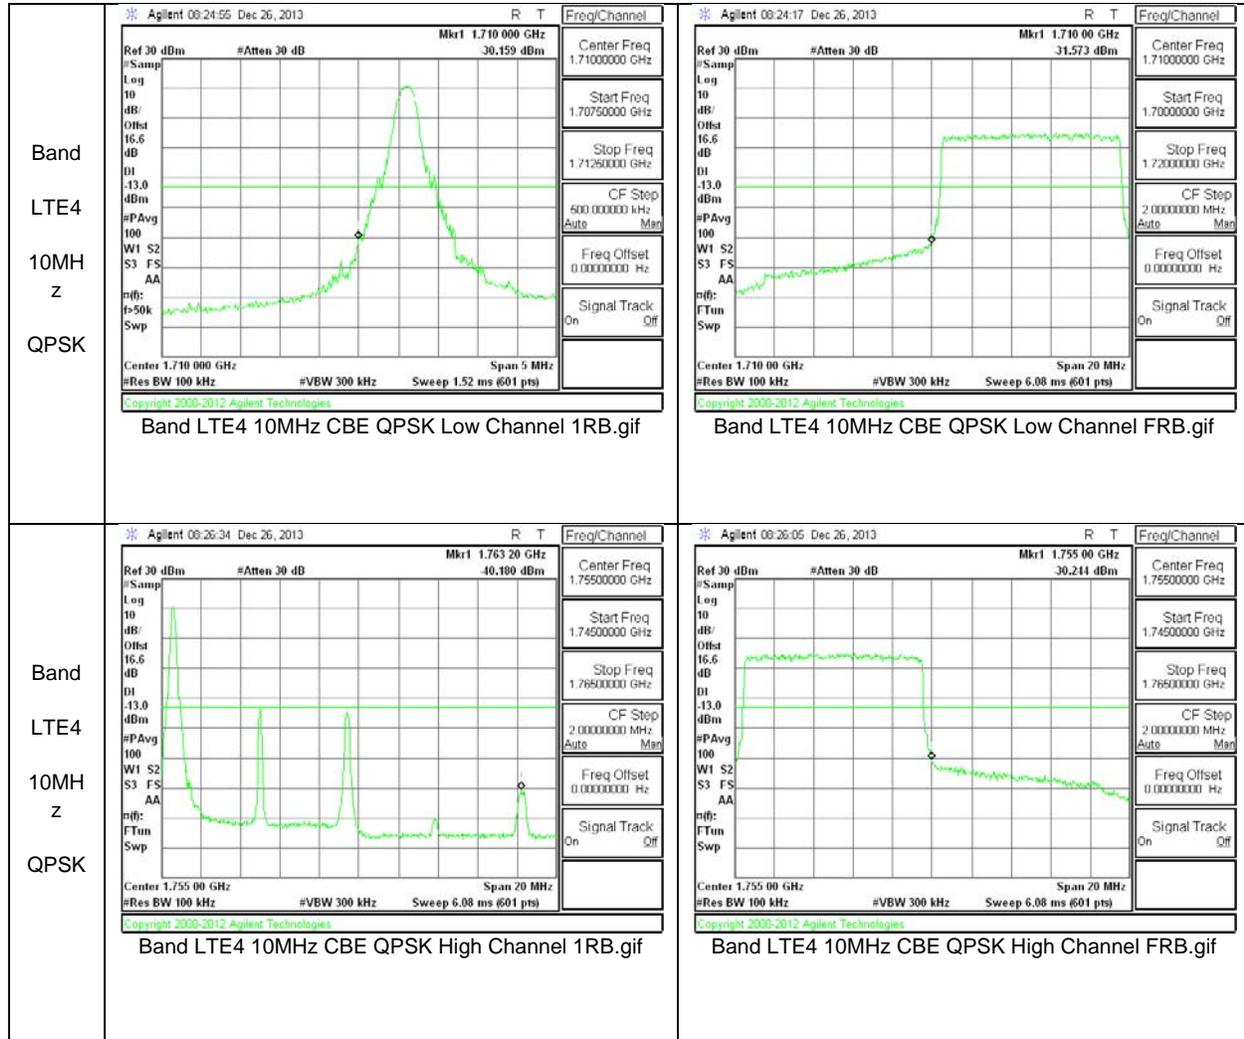

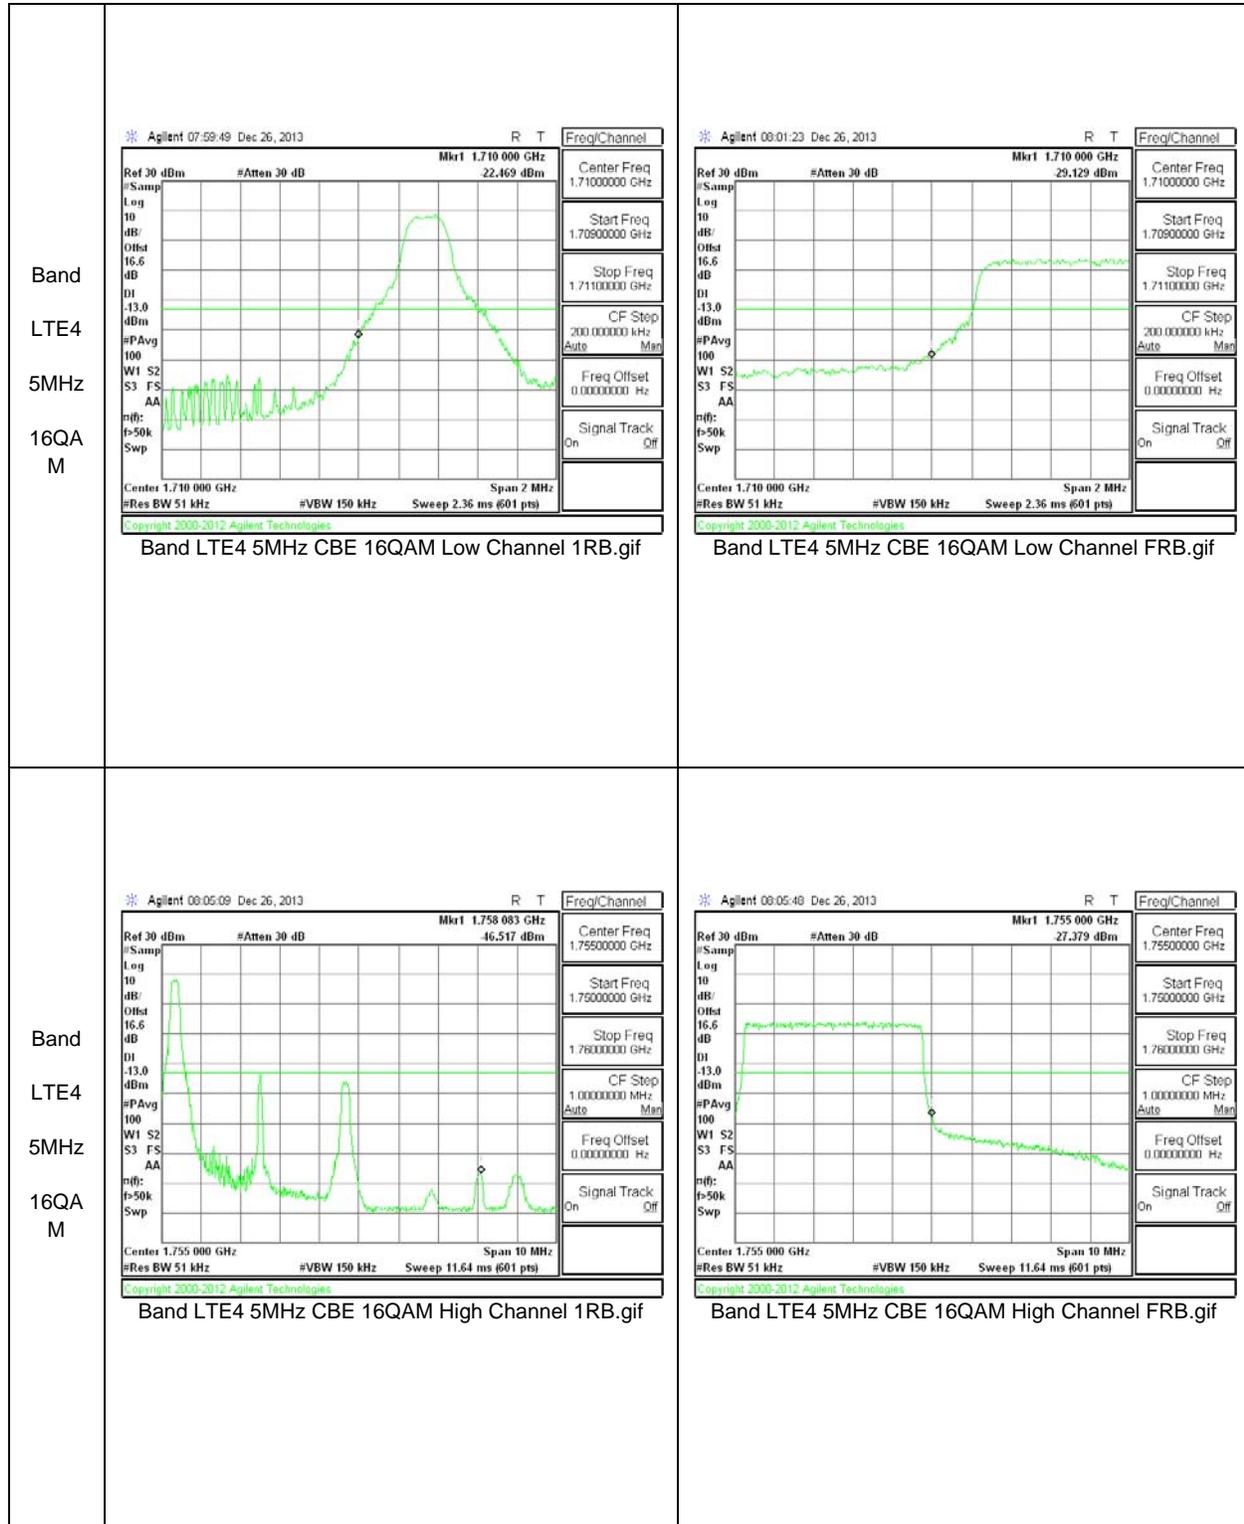

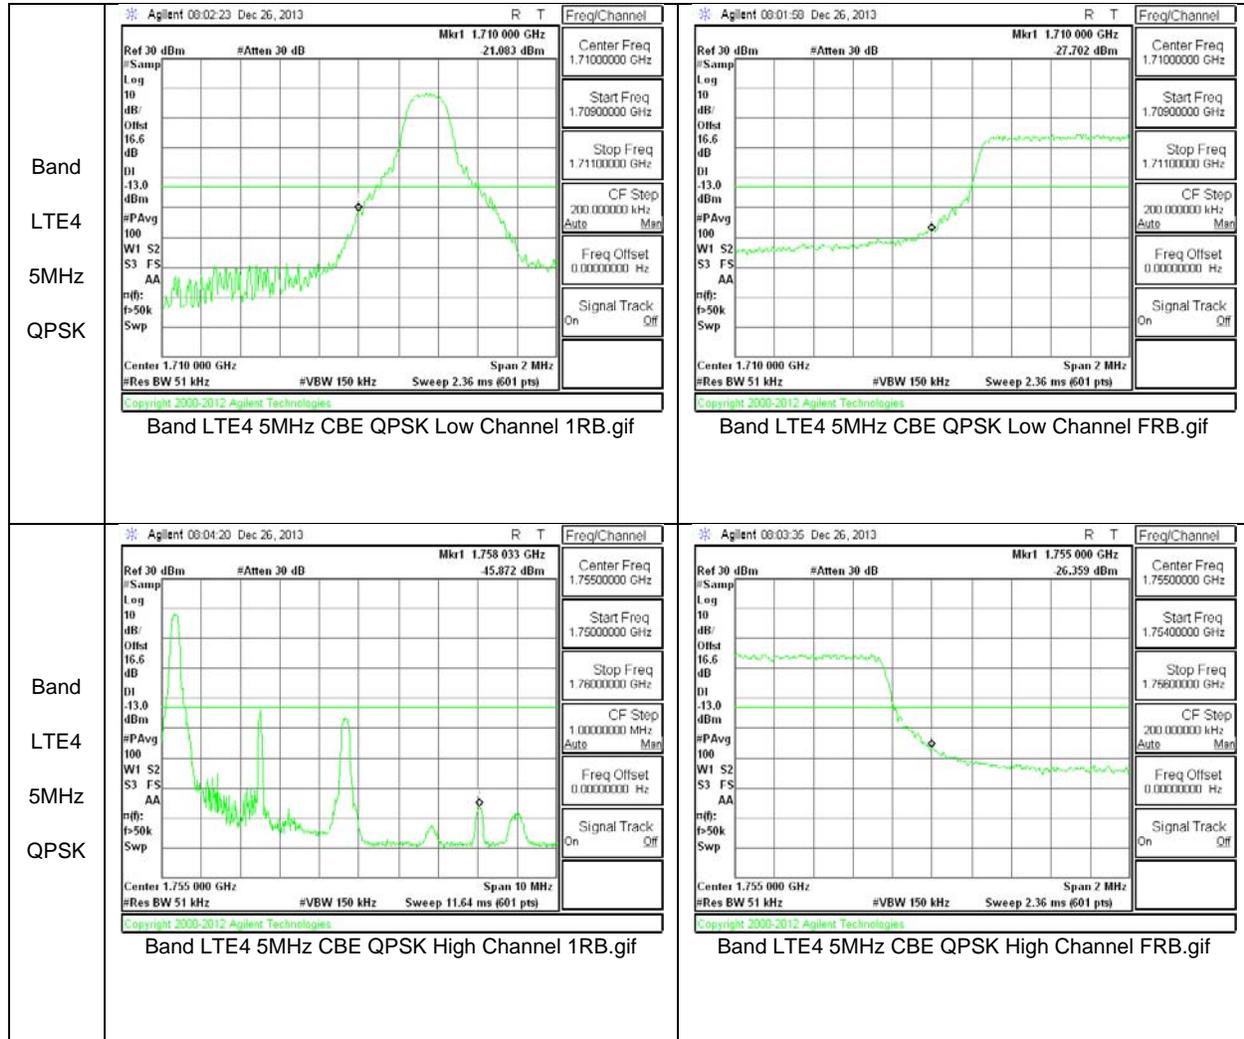

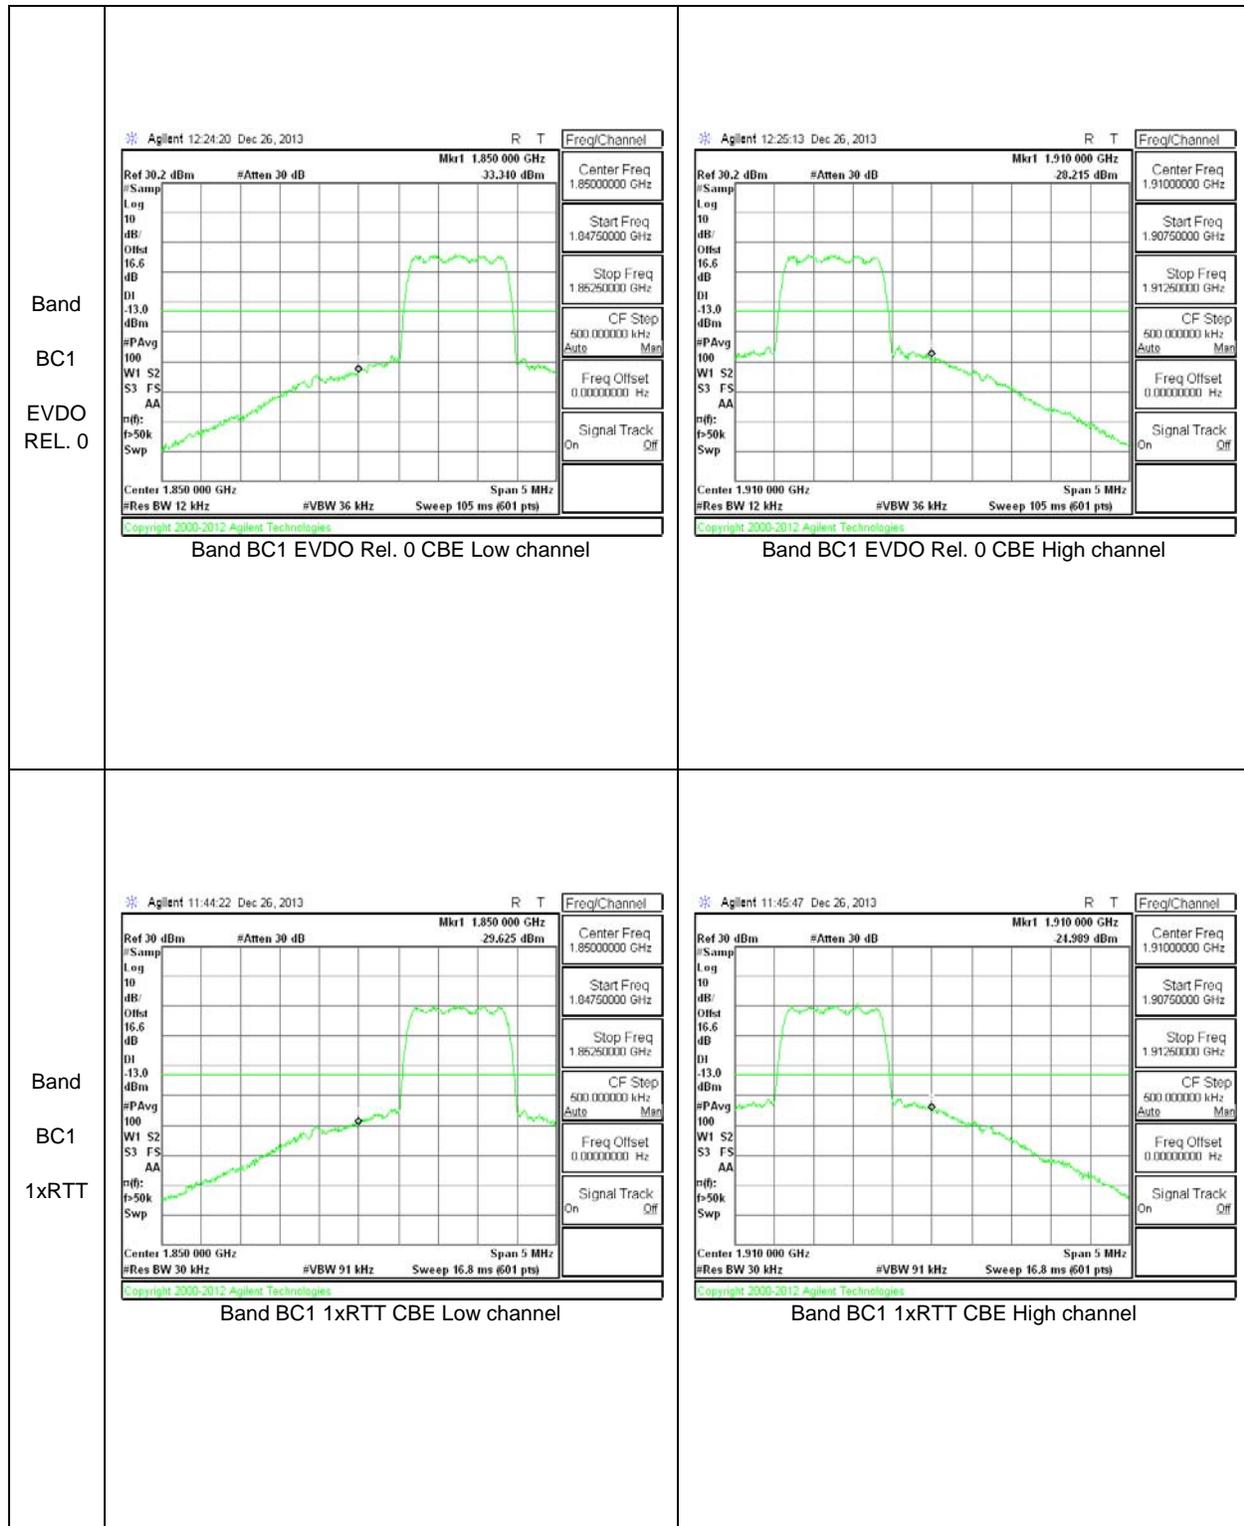

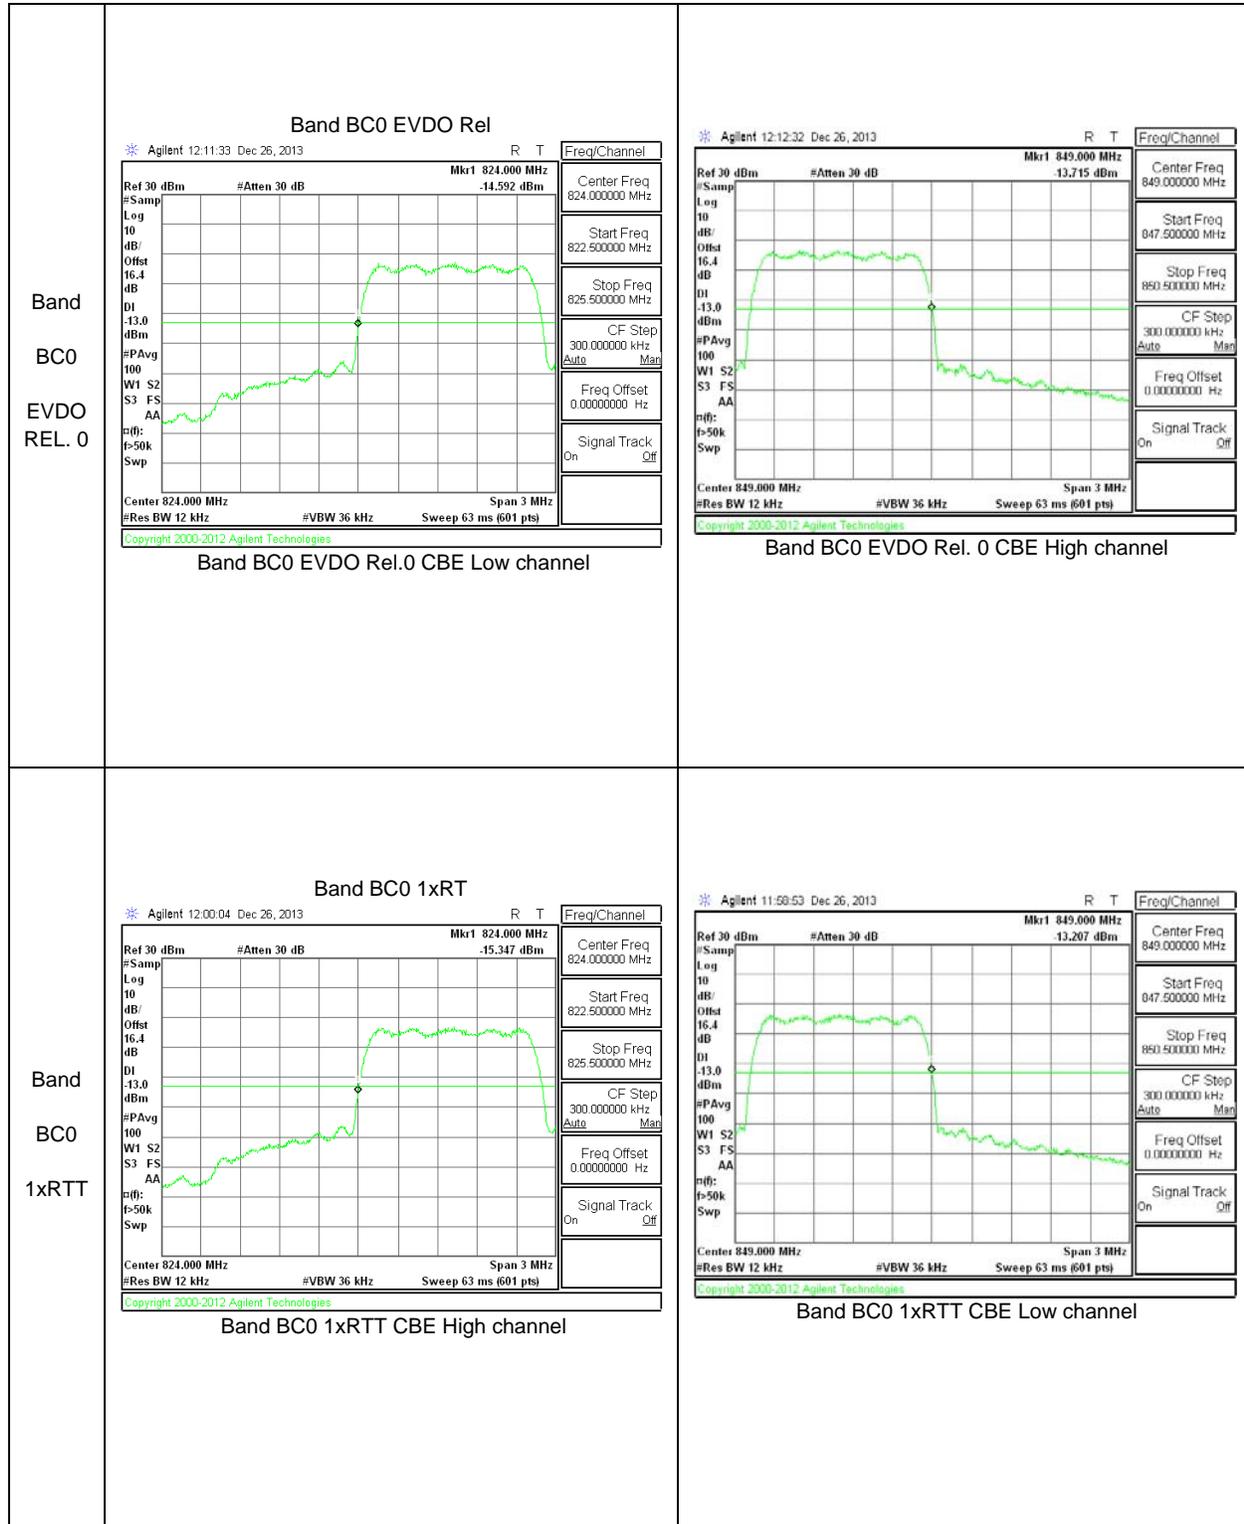

10.3. OUT OF BAND EMISSIONS

RULE PART(S)

FCC: §2.1051, §22.901, §22.917, §24.238

LIMITS

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

TEST PROCEDURE

Per KDB 971168 D01 Power Meas License Digital Systems v02r01

The RF output of the transmitter was connected to a spectrum analyzer through a calibrated coaxial cable. Sufficient scans were taken to show the out-of-band Emissions, if any, up to 10th harmonic. Multiple sweeps were recorded in maximum hold mode using a peak detector to ensure that the worst-case emissions were caught.

For each out of band emissions measurement:

- Set display line at -13 dBm
- Set RBW & VBW to 100 kHz for the measurement below 1 GHz, and 1 MHz for the measurement above 1 GHz.

MODES TESTED

CDMA BC0/BC1 & LTE B4/B13

RESULTS

10.3.1. OUT OF BAND EMISSIONS RESULT

Band	BW (MHz)	Mode	f (MHz)	Spur (dBm)	Spec (dBm)	Delta (dB)
LTE13	10	QPSK	782	-27.50	-13	-14.5
		16QAM	782	-26.95	-13	-13.95

Band	BW (MHz)	Mode	f (MHz)	Spur (dBm)	Spec (dBm)	Delta (dB)
LTE4	20	QPSK	1720	-26.43	-13	-13.43
			1732.5	-26.25	-13	-13.25
			1745	-27.15	-13	-14.15
		16QAM	1720	-27.57	-13	-14.57
			1732.5	-27.25	-13	-14.25
			1745	-27.25	-13	-14.25


Band	BW (MHz)	Mode	f (MHz)	Spur (dBm)	Spec (dBm)	Delta (dB)
LTE4	15	QPSK	1717.5	-27.03	-13	-14.03
			1732.5	-27.21	-13	-14.21
			1747.5	-27.21	-13	-14.21
		16QAM	1717.5	-28.30	-13	-15.3
			1732.5	-27.20	-13	-14.2
			1747.5	-26.22	-13	-13.22


Band	BW (MHz)	Mode	f (MHz)	Spur (dBm)	Spec (dBm)	Delta (dB)
LTE4	10	QPSK	1715	-26.23	-13	-13.23
			1732.5	-26.44	-13	-13.44
			1750	-27.56	-13	-14.56
		16QAM	1715	-26.88	-13	-13.88
			1732.5	-26.88	-13	-13.88
			1750	-27.48	-13	-14.48



Band	BW (MHz)	Mode	f (MHz)	Spur (dBm)	Spec (dBm)	Delta (dB)
LTE4	5	QPSK	1712.5	-26.06	-13	-13.06
			1732.5	-26.46	-13	-13.46
			1752.5	-26.51	-13	-13.51
		16QAM	1712.5	-27.23	-13	-14.23
			1732.5	-26.70	-13	-13.7
			1752.5	-25.97	-13	-12.97


Band	Mode	f (MHz)	Spur (dBm)	Spec (dBm)	Delta (dB)
BC0	1xRTT	824.7	-28.41	-13	-15.41
		836.52	-26.59	-13	-13.59
		848.31	-27.34	-13	-14.34
	EVDO	824.7	-26.48	-13	-13.48
		836.52	-27.32	-13	-14.32
		848.31	-27.32	-13	-14.32
BC1	1xRTT	1851.25	-23.06	-13	-10.06
		1880	-25.60	-13	-12.6
		1908.75	-25.48	-13	-12.48
	1xRTT	1851.25	-23.93	-13	-10.93
		1880	-26.62	-13	-13.62
		1908.75	-28.07	-13	-15.07

10.3.2. OUT OF BAND EMISSIONS PLOTS

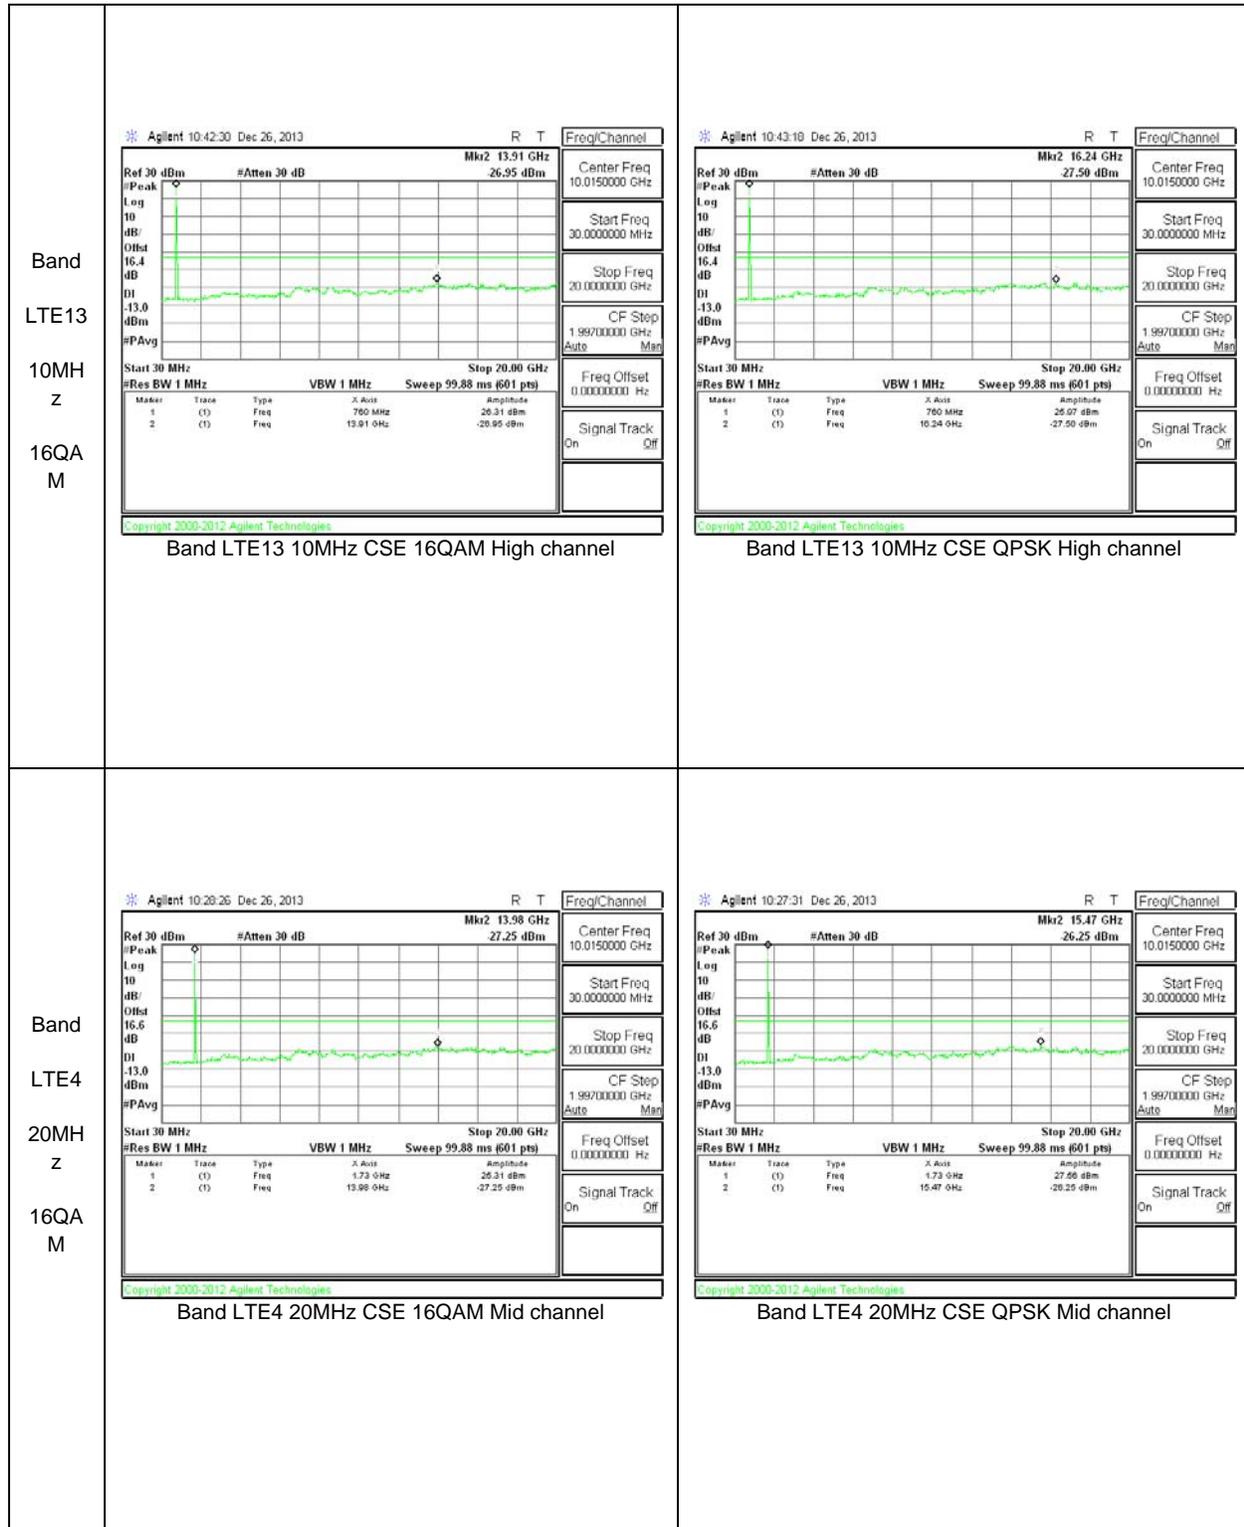

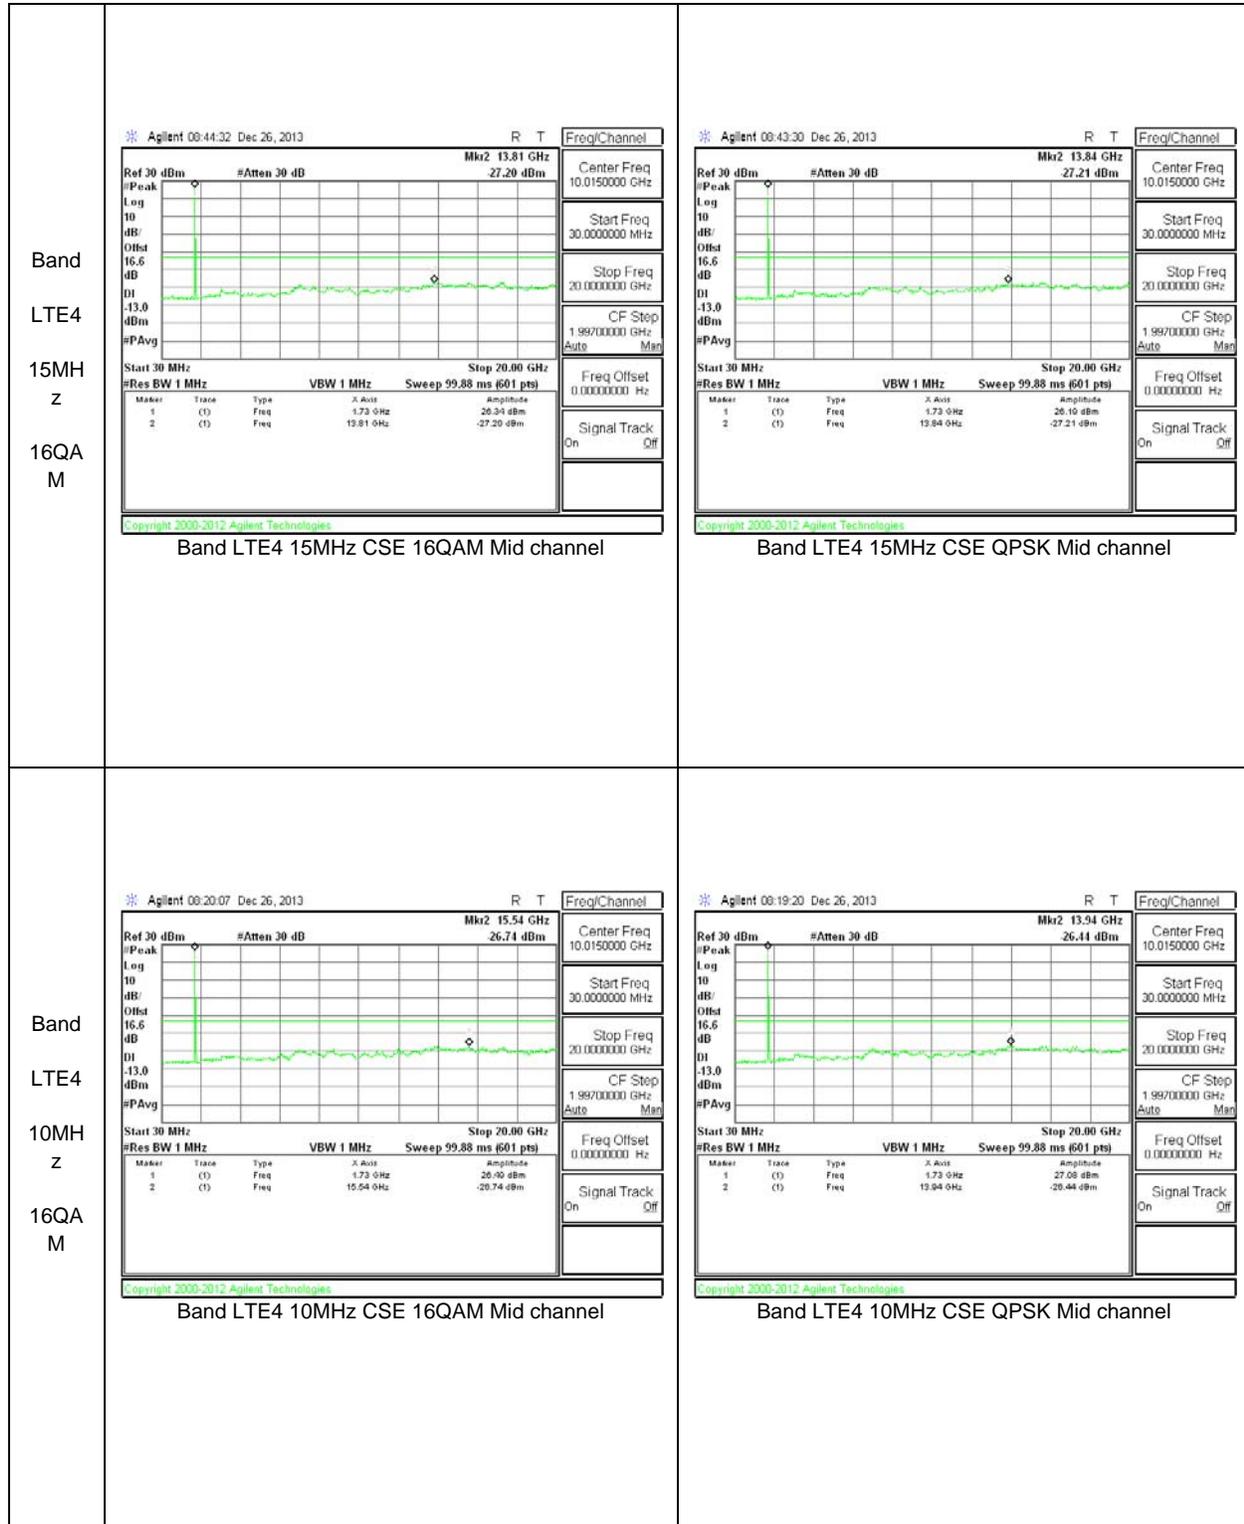

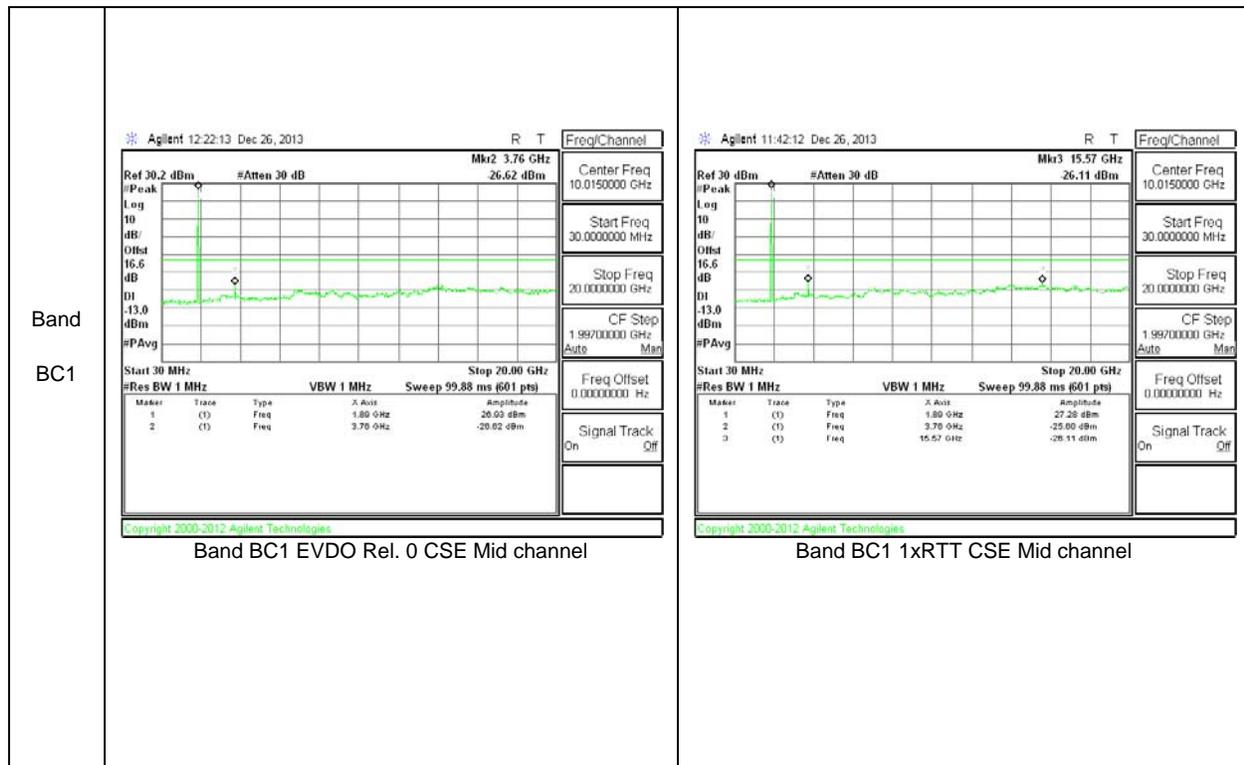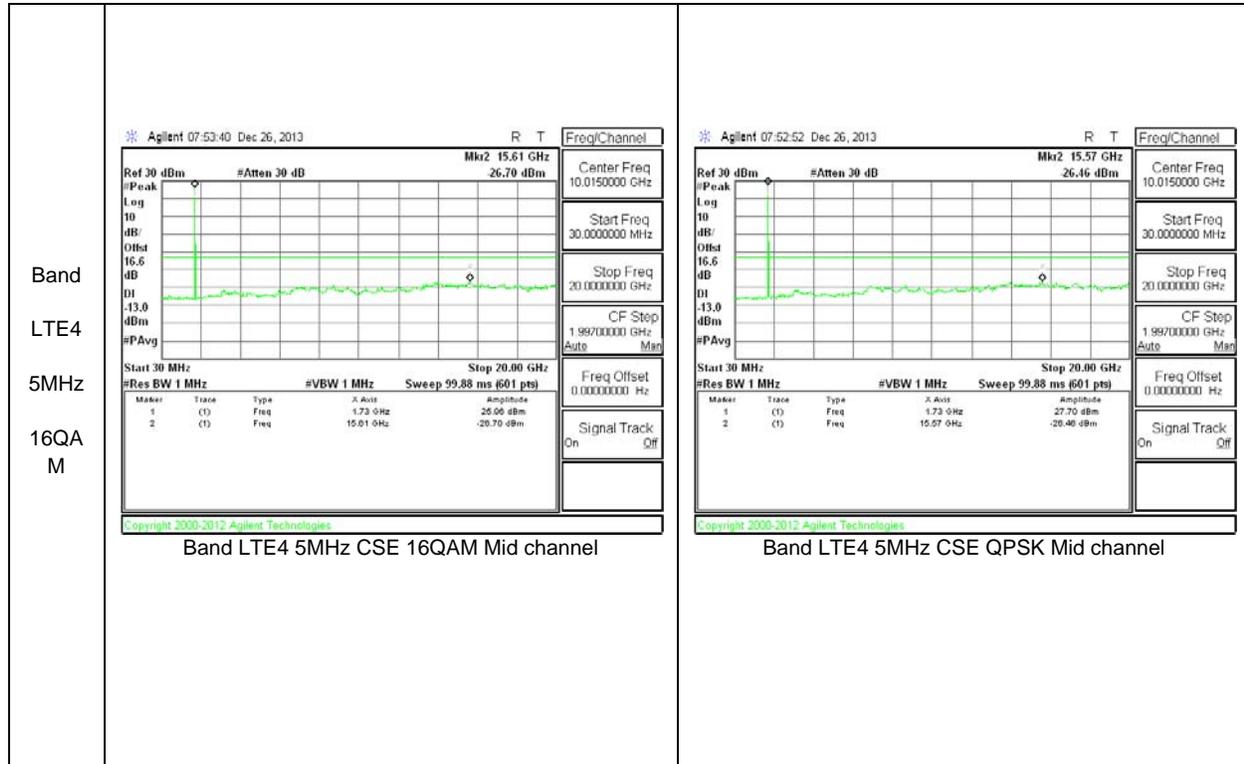

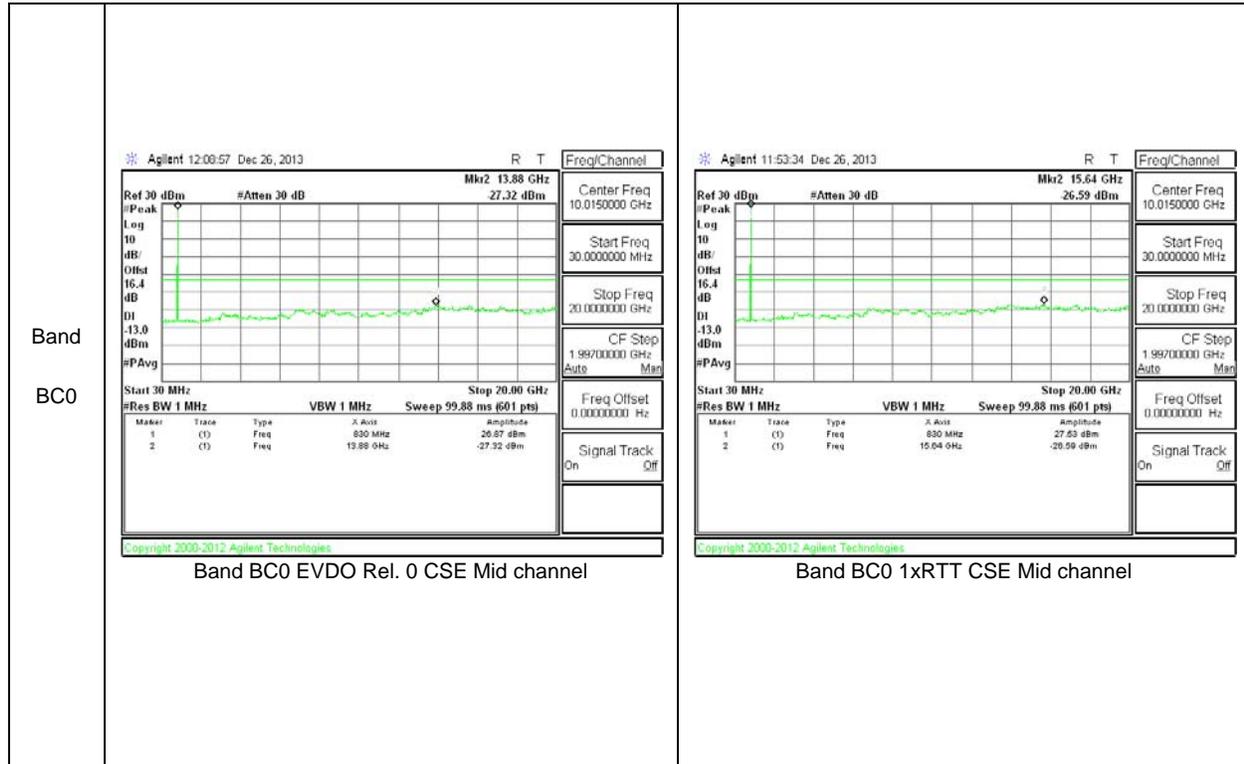

10.4. FREQUENCY STABILITY

RULE PART(S)

FCC: §2.1055, §22.355, §24.235, and §27.54

LIMITS

§22.355 - The carrier frequency shall not depart from the reference frequency in excess of ± 2.5 ppm for mobile stations.

§24.235 - The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

§27.54 - The frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

TEST PROCEDURE

Per KDB 971168 D01 Power Meas License Digital Systems v02r01

Frequency Stability vs Temperature:

The EUT is placed inside a temperature chamber. The temperature is set to 20°C and allowed to stabilize. After sufficient soak time, the transmitting frequency error is measured. The temperature is increased by 10 degrees, allowed to stabilize and soak, and then the measurement is repeated. This is repeated until +50°C is reached. Reference power supply voltage for these tests is 3.7Vdc.

Frequency Stability vs Voltage:

The peak frequency error is recorded (worst-case). The test voltage ranges from 3.50 to 4.26 VDC.

MODES TESTED

CDMA BC0/BC1 & LTE B4/B13

RESULTS

See the following pages.

10.4.1. FREQUENCY STABILITY RESULTS

LTE BAND 13 – MID CHANNEL

Reference Frequency: Mid Channel 781.999992 MHz @ 20°C				
Limit: within the authorized block or +/- 2.5 ppm = 1955.000 Hz				
Power Supply (Vdc)	Environment Temperature (*C)	Frequency Deviation Measured with Time Elapse		
		(MHz)	Delta (ppm)	Limit (ppm)
3.70	50	781.999993	-0.001	2.5
3.70	40	781.999994	-0.002	2.5
3.70	30	781.999993	-0.001	2.5
3.70	20	781.999992	0	2.5
3.70	10	781.999992	0.000	2.5
3.70	0	781.999995	-0.003	2.5
3.70	-10	781.999993	-0.001	2.5
3.70	-20	781.999994	-0.002	2.5
3.70	-30	781.999996	-0.005	2.5

Reference Frequency: Mid Channel 781.999992 MHz @ 20°C				
Limit: within the authorized block or +/- 2.5 ppm = 1955.000 Hz				
Power Supply (Vdc)	Environment Temperature (*C)	Frequency Deviation Measured with Time Elapse		
		(MHz)	Delta (ppm)	Limit (ppm)
3.70	20	781.999992	0.00000	2.5
4.20	20	781.999998	-0.00767	2.5
3.30	20	781.999994	-0.00256	2.5
End Volt(3.2)	20	781.999995	-0.00384	2.5

LTE BAND 4 – MID CHANNEL

Reference Frequency: PCS Mid Channel 1732.500003MHz @ 20°C				
Limit: within the authorized block or +/- 2.5 ppm = 4331.250 Hz				
Power Supply (Vdc)	Environment Temperature (*C)	Frequency Deviation Measured with Time Elapse		
		(MHz)	Delta (ppm)	Limit (ppm)
3.70	50	1732.500001	0.001	2.5
3.70	40	1732.500003	0.000	2.5
3.70	30	1732.500004	-0.001	2.5
3.70	20	1732.500003	0	2.5
3.70	10	1732.500002	0.001	2.5
3.70	0	1732.500003	0.000	2.5
3.70	-10	1732.500001	0.001	2.5
3.70	-20	1732.500002	0.001	2.5
3.70	-30	1732.500002	0.001	2.5

Reference Frequency: PCS Mid Channel 1732.500003 MHz @ 20°C				
Limit: within the authorized block or +/- 2.5 ppm = 4331.250 Hz				
Power Supply (Vdc)	Environment Temperature (*C)	Frequency Deviation Measured with Time Elapse		
		(MHz)	Delta (ppm)	Limit (ppm)
3.70	20	1732.500003	0.00000	2.5
4.20	20	1732.500005	-0.00115	2.5
3.30	20	1732.500002	0.00058	2.5
End Volt(3.2)	20	1732.500004	-0.00058	2.5

CDMA BC0 – MID CHANNEL

Reference Frequency: Mid Channel 836.520000 MHz @ 20°C				
Limit: within the authorized block or +/- 2.5 ppm = 2091.300 Hz				
Power Supply (Vdc)	Environment Temperature (*C)	Frequency Deviation Measured with Time Elapse		
		(MHz)	Delta (ppm)	Limit (ppm)
3.70	50	836.520001	0.000	2.5
3.70	40	836.520001	0.000	2.5
3.70	30	836.520001	0.000	2.5
3.70	20	836.520001	0	2.5
3.70	10	836.520001	0.000	2.5
3.70	0	836.520001	0.000	2.5
3.70	-10	836.520001	0.000	2.5
3.70	-20	836.520001	0.000	2.5
3.70	-30	836.520001	0.000	2.5

Reference Frequency: Mid Channel 836.520000 MHz @ 20°C				
Limit: within the authorized block or +/- 2.5 ppm = 2091.300 Hz				
Power Supply (Vdc)	Environment Temperature (*C)	Frequency Deviation Measured with Time Elapse		
		(MHz)	Delta (ppm)	Limit (ppm)
3.70	20	836.520001	0.00000	2.5
4.20	20	836.520001	0.00000	2.5
3.30	20	836.520001	0.00000	2.5
End Volt(3.2)	20	836.520001	0.00000	2.5

CDMA BC1 – MID CHANNEL

Reference Frequency: Mid Channel 1880.000010 MHz @ 20°C				
Limit: within the authorized block or +/- 2.5 ppm = 4700.000 Hz				
Power Supply (Vdc)	Environment Temperature (*C)	Frequency Deviation Measured with Time Elapse		
		(MHz)	Delta (ppm)	Limit (ppm)
3.70	50	1880.000001	0.000	2.5
3.70	40	1880.000001	0.000	2.5
3.70	30	1880.000001	0.000	2.5
3.70	20	1880.000001	0	2.5
3.70	10	1880.000001	0.000	2.5
3.70	0	1880.000001	0.000	2.5
3.70	-10	1880.000001	0.000	2.5
3.70	-20	1880.000001	0.000	2.5
3.70	-30	1880.000001	0.000	2.5

Reference Frequency: Mid Channel 836.600010 MHz @ 20°C				
Limit: within the authorized block or +/- 2.5 ppm = 4700.000 Hz				
Power Supply (Vdc)	Environment Temperature (*C)	Frequency Deviation Measured with Time Elapse		
		(MHz)	Delta (ppm)	Limit (ppm)
3.70	20	1880.000001	0.00000	2.5
4.20	20	1880.000001	0.00000	2.5
3.30	20	1880.000001	0.00000	2.5
End Volt(3.2)	20	1880.000001	0.00000	2.5

11. RADIATED TEST RESULTS

11.1. RADIATED POWER (ERP & EIRP)

RULE PART(S)

FCC: §2.1046, §22.913, §24.232, §27

LIMITS

22.913(a) - The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts.

24.232(c) - Mobile/portable stations are limited to 2 watts e.i.r.p. peak power and the equipment must employ means to limit the power to the minimum necessary for successful communications.

In addition, when the transmitter power is measured in terms of average value, the peak-to-average ratio of the power shall not exceed 13dB.

TEST PROCEDURE

ANSI / TIA / EIA 603C Clause 2.2.17

MODES TESTED

CDMA BC0/BC1 & LTE B4/B13

TEST RESULTS

11.1.1. ERP/EIRP Results

Band	Mode	Channel	f(MHz)	ERP / EIRP	
				dBm	mW
BC1	1xRTT	25	1851.25	19.63	92.0
		600	1880	21.27	133.97
		1175	1908.75	22.39	173.4
	EVDO REL. 0	25	1851.25	21.35	136.5
		600	1880	23.48	222.84
		1175	1908.75	22.00	158.5

Band	Mode	Channel	f(MHz)	ERP / EIRP	
				dBm	mW
BC0	1xRTT	1013	824.7	21.70	147.9
		384	836.52	21.70	147.9
		777	848.31	21.96	157.0
	EVDO REL. 0	1013	824.7	23.39	218.3
		384	836.52	23.05	201.8
		777	848.31	23.02	200.4

11.1.2. LTE ERP/EIRP Results

Band	BW (MHz)	Mode	RB/RB Size	f (MHz)	ERP / EIRP	
					dBm	mW
LTE13	10	QPSK	1/0	782	18.30	68
		16QAM	1/0	782	18.05	64

Band	BW (MHz)	Mode	RB/RB Size	f (MHz)	ERP / EIRP	
					dBm	mW
LTE4	20	QPSK	1/0	1720	24.28	267.92
			1/0	1732.5	23.25	211
			1/0	1745	23.76	238
		16QAM	1/0	1720	23.29	213.3
			1/0	1732.5	23.28	213
			1/0	1745	23.248	211.25

Band	BW (MHz)	Mode	RB/RB Size	f (MHz)	ERP / EIRP	
					dBm	mW
LTE4	15	QPSK	1/0	1717.5	23.18	208
			1/0	1732.5	24.44	278
			1/0	1747.5	24.63	290
		16QAM	1/0	1717.5	23.55	226.46
			1/0	1732.5	22.63	183
			1/0	1747.5	23.938	247.63

Band	BW (MHz)	Mode	RB/RB Size	f (MHz)	ERP / EIRP	
					dBm	mW
LTE4	10	QPSK	1/0	1715	24.38	274.16
			1/0	1732.5	23.92	247
			1/0	1750	23.758	237.57
		16QAM	1/0	1715	24.41	276.06
			1/0	1732.5	23.62	230
			1/0	1750	23.658	232.17

Band	BW (MHz)	Mode	RB/RB Size	f (MHz)	ERP / EIRP	
					dBm	mW
LTE4	5	QPSK	1/0	1712.5	23.18	208
			1/0	1732.5	23.25	211
			1/0	1752.5	24.65	292
		16QAM	1/0	1712.5	22.03	160
			1/0	1732.5	23.23	210
			1/0	1752.5	23.94	248

11.1.3. ERP/EIRP PLOTS

Band LTE13 10MHz z 16QAM	High Frequency Substitution Measurement Compliance Certification Services Chamber B																																																																					
	Company:		LG																																																																			
	Project #:		13U16594																																																																			
	Date:		12/20/13																																																																			
	Test Engineer:		Charles Vergonio																																																																			
	Configuration:		X position																																																																			
	Mode:		LTE_B13_10MHz_16QAM																																																																			
	Test Equipment:																																																																					
	Receiving: Sunol T1243, and Chamber B Cable (Setup this one for testing EUT)																																																																					
	Substitution: Dipole S/N: 00022117, 8ft SMA Cable (SN # 208955002) Warehouse.																																																																					
<table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBd)</th> <th>ERP (dBm)</th> <th>Limit (dBm)</th> <th>Margin (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td>Low Ch</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>Mid Ch</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>782.000</td> <td>17.80</td> <td>V</td> <td>0.9</td> <td>0.0</td> <td>16.90</td> <td>34.8</td> <td>-17.9</td> <td></td> </tr> <tr> <td>782.000</td> <td>18.95</td> <td>H</td> <td>0.9</td> <td>0.0</td> <td>18.05</td> <td>34.8</td> <td>-16.7</td> <td></td> </tr> <tr> <td>Mid Ch</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>NEW</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> </tbody> </table>								f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)	Notes	Low Ch									Mid Ch									782.000	17.80	V	0.9	0.0	16.90	34.8	-17.9		782.000	18.95	H	0.9	0.0	18.05	34.8	-16.7		Mid Ch									NEW								
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)	Notes																																																														
Low Ch																																																																						
Mid Ch																																																																						
782.000	17.80	V	0.9	0.0	16.90	34.8	-17.9																																																															
782.000	18.95	H	0.9	0.0	18.05	34.8	-16.7																																																															
Mid Ch																																																																						
NEW																																																																						
Rev. 3.17.11																																																																						

Band LTE13 10MHz z QPSK	High Frequency Substitution Measurement Compliance Certification Services Chamber C								
	Company: LG								
	Project #: 13U16594								
	Date: 12/20/13								
	Test Engineer: Charles Vergonio								
	Configuration: X position								
	Mode: LTE_B13_10MHz_QPSK								
	Test Equipment: Receiving: Sunol T243, and Chamber B Cable (Setup this one for testing EUT) Substitution: Dipole S/N: 00022117, 8ft SMA Cable (SN # 208955002) Warehouse.								
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)	Notes
	Low Ch								
Mid Ch									
782.000	18.00	V	0.9	0.0	17.10	34.8	-17.7		
782.000	19.20	H	0.9	0.0	18.30	34.8	-16.5		
Mid Ch									
NEW									
Rev. 3.17.11									

Band LTE4 20MHz z QPSK	High Frequency Fundamental Measurement Compliance Certification Services Chamber C																																																																																																	
	Company:		LG																																																																																															
	Project #:		13U16594																																																																																															
	Date:		12/19/13																																																																																															
	Test Engineer:		Charles Vergonio																																																																																															
	Configuration:		Y Position, EUT only																																																																																															
	Mode:		LTE_B4_20MHz_QPSK																																																																																															
	Test Equipment:																																																																																																	
	Receiving: Horn T119, and Chamber C SMA Cables																																																																																																	
	Substitution: Horn T711 Substitution, 4ft SMA Cable (244639001) Warehouse																																																																																																	
<table border="1"> <thead> <tr> <th>f GHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBi)</th> <th>EIRP (dBm)</th> <th>Limit (dBm)</th> <th>Delta (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="9">Low Ch</td> </tr> <tr> <td>1.720</td> <td>17.9</td> <td>V</td> <td>0.85</td> <td>5.58</td> <td>22.59</td> <td>33.0</td> <td>-10.4</td> <td></td> </tr> <tr> <td>1.720</td> <td>19.6</td> <td>H</td> <td>0.85</td> <td>5.58</td> <td>24.28</td> <td>33.0</td> <td>-8.7</td> <td></td> </tr> <tr> <td colspan="9">Mid Ch</td> </tr> <tr> <td>1.732</td> <td>18.0</td> <td>V</td> <td>0.85</td> <td>5.60</td> <td>22.74</td> <td>33.0</td> <td>-10.3</td> <td></td> </tr> <tr> <td>1.732</td> <td>18.5</td> <td>H</td> <td>0.85</td> <td>5.60</td> <td>23.25</td> <td>33.0</td> <td>-9.8</td> <td></td> </tr> <tr> <td colspan="9">High Ch</td> </tr> <tr> <td>1.745</td> <td>19.0</td> <td>V</td> <td>0.85</td> <td>5.63</td> <td>23.76</td> <td>33.0</td> <td>-9.2</td> <td></td> </tr> <tr> <td>1.745</td> <td>18.9</td> <td>H</td> <td>0.85</td> <td>5.63</td> <td>23.70</td> <td>33.0</td> <td>-9.3</td> <td></td> </tr> </tbody> </table>									f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									1.720	17.9	V	0.85	5.58	22.59	33.0	-10.4		1.720	19.6	H	0.85	5.58	24.28	33.0	-8.7		Mid Ch									1.732	18.0	V	0.85	5.60	22.74	33.0	-10.3		1.732	18.5	H	0.85	5.60	23.25	33.0	-9.8		High Ch									1.745	19.0	V	0.85	5.63	23.76	33.0	-9.2		1.745	18.9	H	0.85	5.63	23.70	33.0	-9.3	
f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																										
Low Ch																																																																																																		
1.720	17.9	V	0.85	5.58	22.59	33.0	-10.4																																																																																											
1.720	19.6	H	0.85	5.58	24.28	33.0	-8.7																																																																																											
Mid Ch																																																																																																		
1.732	18.0	V	0.85	5.60	22.74	33.0	-10.3																																																																																											
1.732	18.5	H	0.85	5.60	23.25	33.0	-9.8																																																																																											
High Ch																																																																																																		
1.745	19.0	V	0.85	5.63	23.76	33.0	-9.2																																																																																											
1.745	18.9	H	0.85	5.63	23.70	33.0	-9.3																																																																																											
Rev. 3.17.11																																																																																																		

Band LTE4 15MH z 16QA M	High Frequency Fundamental Measurement Compliance Certification Services Chamber C								
	Company:		LG						
	Project #:		13U16594						
	Date:		12/19/13						
	Test Engineer:		Charles Vergonio						
	Configuration:		Y Position, EUT only						
	Mode:		LTE_B4_15MHz_16QAM						
	Test Equipment:								
	Receiving: Horn T119, and Chamber C SMA Cables								
	Substitution: Horn T711 Substitution, 4ft SMA Cable (244639001) Warehouse								
	f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
	Low Ch								
	1.718	17.7	V	0.85	5.58	22.45	33.0	-10.6	
	1.718	18.8	H	0.85	5.58	23.55	33.0	-9.5	
	Mid Ch								
	1.732	17.9	V	0.85	5.60	22.63	33.0	-10.4	
	1.732	17.3	H	0.85	5.60	22.05	33.0	-11.0	
	High Ch								
	1.748	18.9	V	0.85	5.63	23.69	33.0	-9.3	
	1.748	19.2	H	0.85	5.63	23.94	33.0	-9.1	
	Rev. 3.17.11								

Band LTE4 15MHz z QPSK	High Frequency Fundamental Measurement Compliance Certification Services Chamber C																																																																																																	
	Company:		LG																																																																																															
	Project #:		13U16594																																																																																															
	Date:		12/19/13																																																																																															
	Test Engineer:		Charles Vergonio																																																																																															
	Configuration:		Y Position, EUT only																																																																																															
	Mode:		LTE_B4_15MHz_QPSK																																																																																															
	Test Equipment:																																																																																																	
	Receiving: Horn T119, and Chamber C SMA Cables																																																																																																	
	Substitution: Horn T711 Substitution, 4ft SMA Cable (244639001) Warehouse																																																																																																	
<table border="1"> <thead> <tr> <th>f GHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBi)</th> <th>EIRP (dBm)</th> <th>Limit (dBm)</th> <th>Delta (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="9">Low Ch</td> </tr> <tr> <td>1.718</td> <td>18.0</td> <td>V</td> <td>0.85</td> <td>5.58</td> <td>22.76</td> <td>33.0</td> <td>-10.2</td> <td></td> </tr> <tr> <td>1.718</td> <td>18.5</td> <td>H</td> <td>0.85</td> <td>5.58</td> <td>23.18</td> <td>33.0</td> <td>-9.8</td> <td></td> </tr> <tr> <td colspan="9">Mid Ch</td> </tr> <tr> <td>1.732</td> <td>17.5</td> <td>V</td> <td>0.85</td> <td>5.60</td> <td>22.22</td> <td>33.0</td> <td>-10.8</td> <td></td> </tr> <tr> <td>1.732</td> <td>19.7</td> <td>H</td> <td>0.85</td> <td>5.60</td> <td>24.44</td> <td>33.0</td> <td>-8.6</td> <td></td> </tr> <tr> <td colspan="9">High Ch</td> </tr> <tr> <td>1.748</td> <td>19.1</td> <td>V</td> <td>0.85</td> <td>5.63</td> <td>23.87</td> <td>33.0</td> <td>-9.1</td> <td></td> </tr> <tr> <td>1.748</td> <td>19.9</td> <td>H</td> <td>0.85</td> <td>5.63</td> <td>24.63</td> <td>33.0</td> <td>-8.4</td> <td></td> </tr> </tbody> </table>									f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									1.718	18.0	V	0.85	5.58	22.76	33.0	-10.2		1.718	18.5	H	0.85	5.58	23.18	33.0	-9.8		Mid Ch									1.732	17.5	V	0.85	5.60	22.22	33.0	-10.8		1.732	19.7	H	0.85	5.60	24.44	33.0	-8.6		High Ch									1.748	19.1	V	0.85	5.63	23.87	33.0	-9.1		1.748	19.9	H	0.85	5.63	24.63	33.0	-8.4	
f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																										
Low Ch																																																																																																		
1.718	18.0	V	0.85	5.58	22.76	33.0	-10.2																																																																																											
1.718	18.5	H	0.85	5.58	23.18	33.0	-9.8																																																																																											
Mid Ch																																																																																																		
1.732	17.5	V	0.85	5.60	22.22	33.0	-10.8																																																																																											
1.732	19.7	H	0.85	5.60	24.44	33.0	-8.6																																																																																											
High Ch																																																																																																		
1.748	19.1	V	0.85	5.63	23.87	33.0	-9.1																																																																																											
1.748	19.9	H	0.85	5.63	24.63	33.0	-8.4																																																																																											
Rev. 3.17.11																																																																																																		

Band LTE4 10MHz z 16QAM M	High Frequency Fundamental Measurement Compliance Certification Services Chamber C																																																																																																	
	Company: LG																																																																																																	
	Project #: 13U16594																																																																																																	
	Date: 12/19/13																																																																																																	
	Test Engineer: Charles Vergonio																																																																																																	
	Configuration: Y Position, EUT only																																																																																																	
	Mode: LTE_B4_10MHz_16QAM																																																																																																	
	Test Equipment: Receiving: Horn T119, and Chamber C SMA Cables Substitution: Horn T711 Substitution, 4ft SMA Cable (244639001) Warehouse																																																																																																	
	<table border="1"> <thead> <tr> <th>f GHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBi)</th> <th>EIRP (dBm)</th> <th>Limit (dBm)</th> <th>Delta (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="9">Low Ch</td> </tr> <tr> <td>1.715</td> <td>17.4</td> <td>V</td> <td>0.85</td> <td>5.58</td> <td>22.10</td> <td>33.0</td> <td>-10.9</td> <td></td> </tr> <tr> <td>1.715</td> <td>19.7</td> <td>H</td> <td>0.85</td> <td>5.58</td> <td>24.41</td> <td>33.0</td> <td>-8.6</td> <td></td> </tr> <tr> <td colspan="9">Mid Ch</td> </tr> <tr> <td>1.732</td> <td>18.9</td> <td>V</td> <td>0.85</td> <td>5.60</td> <td>23.62</td> <td>33.0</td> <td>-9.4</td> <td></td> </tr> <tr> <td>1.732</td> <td>18.7</td> <td>H</td> <td>0.85</td> <td>5.60</td> <td>23.43</td> <td>33.0</td> <td>-9.6</td> <td></td> </tr> <tr> <td colspan="9">High Ch</td> </tr> <tr> <td>1.750</td> <td>18.5</td> <td>V</td> <td>0.85</td> <td>5.63</td> <td>23.24</td> <td>33.0</td> <td>-9.8</td> <td></td> </tr> <tr> <td>1.750</td> <td>18.9</td> <td>H</td> <td>0.85</td> <td>5.63</td> <td>23.66</td> <td>33.0</td> <td>-9.3</td> <td></td> </tr> </tbody> </table>								f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									1.715	17.4	V	0.85	5.58	22.10	33.0	-10.9		1.715	19.7	H	0.85	5.58	24.41	33.0	-8.6		Mid Ch									1.732	18.9	V	0.85	5.60	23.62	33.0	-9.4		1.732	18.7	H	0.85	5.60	23.43	33.0	-9.6		High Ch									1.750	18.5	V	0.85	5.63	23.24	33.0	-9.8		1.750	18.9	H	0.85	5.63	23.66	33.0	-9.3	
	f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																									
Low Ch																																																																																																		
1.715	17.4	V	0.85	5.58	22.10	33.0	-10.9																																																																																											
1.715	19.7	H	0.85	5.58	24.41	33.0	-8.6																																																																																											
Mid Ch																																																																																																		
1.732	18.9	V	0.85	5.60	23.62	33.0	-9.4																																																																																											
1.732	18.7	H	0.85	5.60	23.43	33.0	-9.6																																																																																											
High Ch																																																																																																		
1.750	18.5	V	0.85	5.63	23.24	33.0	-9.8																																																																																											
1.750	18.9	H	0.85	5.63	23.66	33.0	-9.3																																																																																											
Rev. 3.17.11																																																																																																		

Band LTE4 10MHz z QPSK	High Frequency Fundamental Measurement Compliance Certification Services Chamber C																																																																																																	
	Company: LG																																																																																																	
	Project #: 13U16594																																																																																																	
	Date: 12/19/13																																																																																																	
	Test Engineer: Charles Vergonio																																																																																																	
	Configuration: Y Position, EUT only																																																																																																	
	Mode: LTE_B4_10MHz_QPSK																																																																																																	
	Test Equipment: Receiving: Horn T119, and Chamber C SMA Cables Substitution: Horn T711 Substitution, 4ft SMA Cable (244639001) Warehouse																																																																																																	
	<table border="1"> <thead> <tr> <th>f GHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBi)</th> <th>EIRP (dBm)</th> <th>Limit (dBm)</th> <th>Delta (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="9">Low Ch</td> </tr> <tr> <td>1.715</td> <td>17.9</td> <td>V</td> <td>0.85</td> <td>5.58</td> <td>22.60</td> <td>33.0</td> <td>-10.4</td> <td></td> </tr> <tr> <td>1.715</td> <td>19.7</td> <td>H</td> <td>0.85</td> <td>5.58</td> <td>24.38</td> <td>33.0</td> <td>-8.6</td> <td></td> </tr> <tr> <td colspan="9">Mid Ch</td> </tr> <tr> <td>1.732</td> <td>18.9</td> <td>V</td> <td>0.85</td> <td>5.60</td> <td>23.62</td> <td>33.0</td> <td>-9.4</td> <td></td> </tr> <tr> <td>1.732</td> <td>19.2</td> <td>H</td> <td>0.85</td> <td>5.60</td> <td>23.92</td> <td>33.0</td> <td>-9.1</td> <td></td> </tr> <tr> <td colspan="9">High Ch</td> </tr> <tr> <td>1.750</td> <td>19.0</td> <td>V</td> <td>0.85</td> <td>5.63</td> <td>23.76</td> <td>33.0</td> <td>-9.2</td> <td></td> </tr> <tr> <td>1.750</td> <td>19.0</td> <td>H</td> <td>0.85</td> <td>5.63</td> <td>23.76</td> <td>33.0</td> <td>-9.2</td> <td></td> </tr> </tbody> </table>								f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									1.715	17.9	V	0.85	5.58	22.60	33.0	-10.4		1.715	19.7	H	0.85	5.58	24.38	33.0	-8.6		Mid Ch									1.732	18.9	V	0.85	5.60	23.62	33.0	-9.4		1.732	19.2	H	0.85	5.60	23.92	33.0	-9.1		High Ch									1.750	19.0	V	0.85	5.63	23.76	33.0	-9.2		1.750	19.0	H	0.85	5.63	23.76	33.0	-9.2	
	f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																									
Low Ch																																																																																																		
1.715	17.9	V	0.85	5.58	22.60	33.0	-10.4																																																																																											
1.715	19.7	H	0.85	5.58	24.38	33.0	-8.6																																																																																											
Mid Ch																																																																																																		
1.732	18.9	V	0.85	5.60	23.62	33.0	-9.4																																																																																											
1.732	19.2	H	0.85	5.60	23.92	33.0	-9.1																																																																																											
High Ch																																																																																																		
1.750	19.0	V	0.85	5.63	23.76	33.0	-9.2																																																																																											
1.750	19.0	H	0.85	5.63	23.76	33.0	-9.2																																																																																											
Rev. 3.17.11																																																																																																		

Band LTE4 5MHz 16QA M	High Frequency Fundamental Measurement Compliance Certification Services Chamber C																																																																																																	
	Company:		LG																																																																																															
	Project #:		13U16594																																																																																															
	Date:		12/19/13																																																																																															
	Test Engineer:		Charles Vergonio																																																																																															
	Configuration:		Y Position, EUT only																																																																																															
	Mode:		LTE_B4_5MHz_16QAM																																																																																															
	Test Equipment:																																																																																																	
	Receiving: Horn T119, and Chamber C SMA Cables																																																																																																	
	Substitution: Horn T711 Substitution, 4ft SMA Cable (244639001) Warehouse																																																																																																	
<table border="1"> <thead> <tr> <th>f GHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBi)</th> <th>EIRP (dBm)</th> <th>Limit (dBm)</th> <th>Delta (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="9">Low Ch</td> </tr> <tr> <td>1.712</td> <td>16.6</td> <td>V</td> <td>0.85</td> <td>5.58</td> <td>21.36</td> <td>33.0</td> <td>-11.6</td> <td></td> </tr> <tr> <td>1.712</td> <td>17.3</td> <td>H</td> <td>0.85</td> <td>5.58</td> <td>22.03</td> <td>33.0</td> <td>-11.0</td> <td></td> </tr> <tr> <td colspan="9">Mid Ch</td> </tr> <tr> <td>1.732</td> <td>17.7</td> <td>V</td> <td>0.85</td> <td>5.60</td> <td>22.45</td> <td>33.0</td> <td>-10.6</td> <td></td> </tr> <tr> <td>1.732</td> <td>18.5</td> <td>H</td> <td>0.85</td> <td>5.60</td> <td>23.23</td> <td>33.0</td> <td>-9.8</td> <td></td> </tr> <tr> <td colspan="9">High Ch</td> </tr> <tr> <td>1.752</td> <td>19.0</td> <td>V</td> <td>0.85</td> <td>5.63</td> <td>23.78</td> <td>33.0</td> <td>-9.2</td> <td></td> </tr> <tr> <td>1.752</td> <td>19.2</td> <td>H</td> <td>0.85</td> <td>5.63</td> <td>23.94</td> <td>33.0</td> <td>-9.1</td> <td></td> </tr> </tbody> </table>									f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									1.712	16.6	V	0.85	5.58	21.36	33.0	-11.6		1.712	17.3	H	0.85	5.58	22.03	33.0	-11.0		Mid Ch									1.732	17.7	V	0.85	5.60	22.45	33.0	-10.6		1.732	18.5	H	0.85	5.60	23.23	33.0	-9.8		High Ch									1.752	19.0	V	0.85	5.63	23.78	33.0	-9.2		1.752	19.2	H	0.85	5.63	23.94	33.0	-9.1	
f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																										
Low Ch																																																																																																		
1.712	16.6	V	0.85	5.58	21.36	33.0	-11.6																																																																																											
1.712	17.3	H	0.85	5.58	22.03	33.0	-11.0																																																																																											
Mid Ch																																																																																																		
1.732	17.7	V	0.85	5.60	22.45	33.0	-10.6																																																																																											
1.732	18.5	H	0.85	5.60	23.23	33.0	-9.8																																																																																											
High Ch																																																																																																		
1.752	19.0	V	0.85	5.63	23.78	33.0	-9.2																																																																																											
1.752	19.2	H	0.85	5.63	23.94	33.0	-9.1																																																																																											
Rev. 3.17.11																																																																																																		

Band LTE4 5MHz QPSK	High Frequency Fundamental Measurement Compliance Certification Services Chamber C																																																																																																	
	Company: LG																																																																																																	
	Project #: 13U16594																																																																																																	
	Date: 12/19/13																																																																																																	
	Test Engineer: Charles Vergonio																																																																																																	
	Configuration: Y Position, EUT only																																																																																																	
	Mode: LTE_B4_5MHz_QPSK																																																																																																	
	Test Equipment: Receiving: Horn T119, and Chamber C SMA Cables Substitution: Horn T711 Substitution, 4ft SMA Cable (244639001) Warehouse																																																																																																	
	<table border="1"> <thead> <tr> <th>f GHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBi)</th> <th>EIRP (dBm)</th> <th>Limit (dBm)</th> <th>Delta (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="9">Low Ch</td> </tr> <tr> <td>1.712</td> <td>18.0</td> <td>V</td> <td>0.85</td> <td>5.58</td> <td>22.73</td> <td>33.0</td> <td>-10.3</td> <td></td> </tr> <tr> <td>1.712</td> <td>18.5</td> <td>H</td> <td>0.85</td> <td>5.58</td> <td>23.18</td> <td>33.0</td> <td>-9.8</td> <td></td> </tr> <tr> <td colspan="9">Mid Ch</td> </tr> <tr> <td>1.732</td> <td>18.5</td> <td>V</td> <td>0.85</td> <td>5.60</td> <td>23.25</td> <td>33.0</td> <td>-9.8</td> <td></td> </tr> <tr> <td>1.732</td> <td>18.1</td> <td>H</td> <td>0.85</td> <td>5.60</td> <td>22.86</td> <td>33.0</td> <td>-10.1</td> <td></td> </tr> <tr> <td colspan="9">High Ch</td> </tr> <tr> <td>1.752</td> <td>19.2</td> <td>V</td> <td>0.85</td> <td>5.63</td> <td>24.01</td> <td>33.0</td> <td>-9.0</td> <td></td> </tr> <tr> <td>1.752</td> <td>19.9</td> <td>H</td> <td>0.85</td> <td>5.63</td> <td>24.65</td> <td>33.0</td> <td>-8.4</td> <td></td> </tr> </tbody> </table>								f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									1.712	18.0	V	0.85	5.58	22.73	33.0	-10.3		1.712	18.5	H	0.85	5.58	23.18	33.0	-9.8		Mid Ch									1.732	18.5	V	0.85	5.60	23.25	33.0	-9.8		1.732	18.1	H	0.85	5.60	22.86	33.0	-10.1		High Ch									1.752	19.2	V	0.85	5.63	24.01	33.0	-9.0		1.752	19.9	H	0.85	5.63	24.65	33.0	-8.4	
	f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																									
Low Ch																																																																																																		
1.712	18.0	V	0.85	5.58	22.73	33.0	-10.3																																																																																											
1.712	18.5	H	0.85	5.58	23.18	33.0	-9.8																																																																																											
Mid Ch																																																																																																		
1.732	18.5	V	0.85	5.60	23.25	33.0	-9.8																																																																																											
1.732	18.1	H	0.85	5.60	22.86	33.0	-10.1																																																																																											
High Ch																																																																																																		
1.752	19.2	V	0.85	5.63	24.01	33.0	-9.0																																																																																											
1.752	19.9	H	0.85	5.63	24.65	33.0	-8.4																																																																																											
Rev. 3.17.11																																																																																																		

Band BC1 EVDO REL. 0	High Frequency Fundamental Measurement Compliance Certification Services Chamber C								
	Company:		LG						
	Project #:		13U16594						
	Date:		12/16/13						
	Test Engineer:		Steven Tran						
	Configuration:		EUT, X Position W/ Charger						
	Mode:		CDMA EVDOR0 1900MHz						
	Test Equipment:								
	Receiving: T120, and Chamber D SMA Cables								
	Substitution: Horn T712 Substitution, 4ft SMA Cable (244639001) Warehouse								
	f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
	Low Ch								
	1.851	12.6	V	0.85	5.10	16.82	33.0	-16.2	
	1.851	17.1	H	0.85	5.10	21.35	33.0	-11.7	
	Mid Ch								
	1.880	12.5	V	0.85	5.10	16.71	33.0	-16.3	
	1.880	19.2	H	0.85	5.10	23.48	33.0	-9.5	
	High Ch								
	1.909	15.5	V	0.85	5.10	19.75	33.0	-13.3	
	1.909	17.8	H	0.85	5.10	22.00	33.0	-11.0	
	Rev. 3.17.11								

Band BC1 1xRTT	High Frequency Fundamental Measurement Compliance Certification Services Chamber C								
	Company:		LG						
	Project #:		13U16594						
	Date:		12/16/13						
	Test Engineer:		Steven						
	Configuration:		EUT, X Position & charger						
	Mode:		CDMA 1900MHz						
	Test Equipment:								
	Receiving: T120, and Chamber D SMA Cables								
	Substitution: Horn T711 Substitution, 4ft SMA Cable (244639001) Warehouse								
	f	SG reading	Ant. Pol.	Cable Loss	Antenna Gain	EIRP	Limit	Delta	Notes
	GHz	(dBm)	(H/V)	(dB)	(dBi)	(dBm)	(dBm)	(dB)	
	Low Ch								
	1.851	12.3	V	0.85	4.90	16.37	33.0	-16.6	
	1.851	15.6	H	0.85	4.90	19.63	33.0	-13.4	
	Mid Ch								
	1.880	11.2	V	0.85	4.90	15.27	33.0	-17.7	
	1.880	17.2	H	0.85	4.90	21.27	33.0	-11.7	
	High Ch								
	1.909	14.8	V	0.85	4.90	18.84	33.0	-14.2	
	1.909	18.3	H	0.85	4.90	22.39	33.0	-10.6	
	Rev. 3.17.11								

Band BC0 EVDO REL. 0	High Frequency Substitution Measurement Compliance Certification Services Chamber C																																																																																																
	Company:		LG																																																																																														
	Project #:		13U16594																																																																																														
	Date:		12/16/13																																																																																														
	Test Engineer:		STEVEN TRAN																																																																																														
	Configuration:		EUT, Z POSITION																																																																																														
	Mode:		CDMA EVDO R0 BC0																																																																																														
	Test Equipment:																																																																																																
	Receiving: Sunol T185, and Chamber C Cable (Setup this one for testing EUT)																																																																																																
	Substitution: Dipole S/N: 00022117, 8ft SMA Cable (SN # 208955002) Warehouse.																																																																																																
<table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBd)</th> <th>ERP (dBm)</th> <th>Limit (dBm)</th> <th>Margin (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="9">Low Ch</td> </tr> <tr> <td>824.70</td> <td>24.29</td> <td>V</td> <td>0.9</td> <td>0.0</td> <td>23.39</td> <td>38.5</td> <td>-15.1</td> <td></td> </tr> <tr> <td>824.70</td> <td>10.88</td> <td>H</td> <td>0.9</td> <td>0.0</td> <td>9.98</td> <td>38.5</td> <td>-28.5</td> <td></td> </tr> <tr> <td colspan="9">Mid Ch</td> </tr> <tr> <td>836.52</td> <td>23.95</td> <td>V</td> <td>0.9</td> <td>0.0</td> <td>23.05</td> <td>38.5</td> <td>-15.4</td> <td></td> </tr> <tr> <td>836.52</td> <td>11.95</td> <td>H</td> <td>0.9</td> <td>0.0</td> <td>11.05</td> <td>38.5</td> <td>-27.4</td> <td></td> </tr> <tr> <td colspan="9">High Ch</td> </tr> <tr> <td>848.31</td> <td>23.92</td> <td>V</td> <td>0.9</td> <td>0.0</td> <td>23.02</td> <td>38.5</td> <td>-15.4</td> <td></td> </tr> <tr> <td>848.31</td> <td>11.79</td> <td>H</td> <td>0.9</td> <td>0.0</td> <td>10.89</td> <td>38.5</td> <td>-27.6</td> <td></td> </tr> </tbody> </table>								f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)	Notes	Low Ch									824.70	24.29	V	0.9	0.0	23.39	38.5	-15.1		824.70	10.88	H	0.9	0.0	9.98	38.5	-28.5		Mid Ch									836.52	23.95	V	0.9	0.0	23.05	38.5	-15.4		836.52	11.95	H	0.9	0.0	11.05	38.5	-27.4		High Ch									848.31	23.92	V	0.9	0.0	23.02	38.5	-15.4		848.31	11.79	H	0.9	0.0	10.89	38.5	-27.6	
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)	Notes																																																																																									
Low Ch																																																																																																	
824.70	24.29	V	0.9	0.0	23.39	38.5	-15.1																																																																																										
824.70	10.88	H	0.9	0.0	9.98	38.5	-28.5																																																																																										
Mid Ch																																																																																																	
836.52	23.95	V	0.9	0.0	23.05	38.5	-15.4																																																																																										
836.52	11.95	H	0.9	0.0	11.05	38.5	-27.4																																																																																										
High Ch																																																																																																	
848.31	23.92	V	0.9	0.0	23.02	38.5	-15.4																																																																																										
848.31	11.79	H	0.9	0.0	10.89	38.5	-27.6																																																																																										
Rev. 3.17.11																																																																																																	

Band BC0 1xRTT	High Frequency Substitution Measurement Compliance Certification Services Chamber C																																																																																																
	Company:		LG																																																																																														
	Project #:		13U16594																																																																																														
	Date:		12/16/13																																																																																														
	Test Engineer:		STEVEN TRAN																																																																																														
	Configuration:		EUT, Z POSITION																																																																																														
	Mode:		CDMA RTT BC0																																																																																														
	Test Equipment:																																																																																																
	Receiving: Sunol T185, and Chamber C Cable (Setup this one for testing EUT)																																																																																																
	Substitution: Dipole S/N: 00022117, 8ft SMA Cable (SN # 208955002) Warehouse.																																																																																																
<table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBd)</th> <th>ERP (dBm)</th> <th>Limit (dBm)</th> <th>Margin (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="9">Low Ch</td> </tr> <tr> <td>824.70</td> <td>22.60</td> <td>V</td> <td>0.9</td> <td>0.0</td> <td>21.70</td> <td>38.5</td> <td>-16.7</td> <td></td> </tr> <tr> <td>824.70</td> <td>9.53</td> <td>H</td> <td>0.9</td> <td>0.0</td> <td>8.63</td> <td>38.5</td> <td>-29.8</td> <td></td> </tr> <tr> <td colspan="9">Mid Ch</td> </tr> <tr> <td>836.52</td> <td>22.60</td> <td>V</td> <td>0.9</td> <td>0.0</td> <td>21.70</td> <td>38.5</td> <td>-16.7</td> <td></td> </tr> <tr> <td>836.52</td> <td>10.78</td> <td>H</td> <td>0.9</td> <td>0.0</td> <td>9.88</td> <td>38.5</td> <td>-28.6</td> <td></td> </tr> <tr> <td colspan="9">High Ch</td> </tr> <tr> <td>848.31</td> <td>22.86</td> <td>V</td> <td>0.9</td> <td>0.0</td> <td>21.96</td> <td>38.5</td> <td>-16.5</td> <td></td> </tr> <tr> <td>848.31</td> <td>11.32</td> <td>H</td> <td>0.9</td> <td>0.0</td> <td>10.42</td> <td>38.5</td> <td>-28.0</td> <td></td> </tr> </tbody> </table>								f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)	Notes	Low Ch									824.70	22.60	V	0.9	0.0	21.70	38.5	-16.7		824.70	9.53	H	0.9	0.0	8.63	38.5	-29.8		Mid Ch									836.52	22.60	V	0.9	0.0	21.70	38.5	-16.7		836.52	10.78	H	0.9	0.0	9.88	38.5	-28.6		High Ch									848.31	22.86	V	0.9	0.0	21.96	38.5	-16.5		848.31	11.32	H	0.9	0.0	10.42	38.5	-28.0	
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)	Notes																																																																																									
Low Ch																																																																																																	
824.70	22.60	V	0.9	0.0	21.70	38.5	-16.7																																																																																										
824.70	9.53	H	0.9	0.0	8.63	38.5	-29.8																																																																																										
Mid Ch																																																																																																	
836.52	22.60	V	0.9	0.0	21.70	38.5	-16.7																																																																																										
836.52	10.78	H	0.9	0.0	9.88	38.5	-28.6																																																																																										
High Ch																																																																																																	
848.31	22.86	V	0.9	0.0	21.96	38.5	-16.5																																																																																										
848.31	11.32	H	0.9	0.0	10.42	38.5	-28.0																																																																																										
Rev. 3.17.11																																																																																																	

11.2. FIELD STRENGTH OF SPURIOUS RADIATION

RULE PART(S)

FCC: §2.1053, §22.917, §24.238, §27

LIMIT

§22.917 (e) and §24.238 (a): Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB

TEST PROCEDURE

For Cellular equipment - Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 100 kHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

For PCS equipment - Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 1 MHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

MODES TESTED

CDMA BC0/BC1 & LTE B4/B13

RESULTS

11.2.1. SPURIOUS RADIATION PLOTS

Compliance Certification Services Above 1GHz High Frequency Substitution Measurement										
Company:		LG								
Project #:		13U16594								
Date:		12/19/13								
Test Engineer:		Steven Tran								
Configuration:		X position								
Mode:		TX, LTE band 13, 10MHz, 16QAM								
Chamber		Pre-amplifier			Filter		Limit			
3m Chamber		T145 8449B			Filter 1		Part 27			
Band	f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes
LTE13	16QAM									
	Mid Ch. (782 MHz)									
10MHz	1.564	-28.5	V	3.0	30.7	1.0	-58.2	-13.0	-45.2	
z	2.346	-25.4	V	3.0	28.9	1.0	-53.3	-13.0	-40.3	
	3.128	-22.4	V	3.0	26.8	1.0	-48.2	-13.0	-35.2	
16QAM	1.564	-22.5	H	3.0	30.7	1.0	-52.2	-13.0	-39.2	
M	2.346	-27.0	H	3.0	28.9	1.0	-54.8	-13.0	-41.8	
	3.128	-22.6	H	3.0	26.8	1.0	-48.5	-13.0	-35.5	
Rev. 03.03.09										
Note: No other emissions were detected above the system noise floor.										

Compliance Certification Services Above 1GHz High Frequency Substitution Measurement											
Company: LG Project #: 13U16594 Date: 12/19/13 Test Engineer: Steven Tran Configuration: X position Mode: TX, LTE band 13, 10MHz, QPSK											
		Chamber	Pre-amplifer		Filter		Limit				
		5m Chamber B	T145 8449B		Filter 1		Part 27				
Band	f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes	
LTE13 10MH z QPSK	QPSK										
	Mid Ch, (782 MHz)										
		1.564	-28.4	V	3.0	30.7	1.0	-58.1	-13.0	-45.1	
		2.346	-24.7	V	3.0	28.9	1.0	-52.6	-13.0	-39.6	
		3.128	-21.3	V	3.0	26.8	1.0	-47.1	-13.0	-34.1	
		1.564	-21.5	H	3.0	30.7	1.0	-51.2	-13.0	-38.2	
		2.346	-26.3	H	3.0	28.9	1.0	-54.2	-13.0	-41.2	
	3.128	-21.7	H	3.0	26.8	1.0	-47.6	-13.0	-34.6		
Rev. 03.03.09 Note: No other emissions were detected above the system noise floor.											

Compliance Certification Services Above 1GHz High Frequency Substitution Measurement										
Company:		LG								
Project #:		13U16594								
Date:		12/20/13								
Test Engineer:		Steven Tran								
Configuration:		Y Position								
Mode:		TX, LTE band 4, 20MHz BW 16QAM								
Chamber		Pre-amplifier			Filter		Limit			
5m Chamber B		T145 8449B			Filter 1		Part 24			
Band	f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes
LTE4 20MHz z 16QAM M	Low Ch, (1720 MHz)									
	3.440	-12.8	V	3.0	30.4	1.0	-42.2	-13.0	-29.2	
	5.160	-19.7	V	3.0	28.7	1.0	-47.4	-13.0	-34.4	
	6.880	-1.3	V	3.0	27.1	1.0	-27.4	-13.0	-14.4	
	3.440	-13.9	H	3.0	30.4	1.0	-43.3	-13.0	-30.3	
	5.160	-11.3	H	3.0	28.7	1.0	-39.1	-13.0	-26.1	
	6.880	-7.7	H	3.0	27.1	1.0	-33.8	-13.0	-20.8	
	Mid Ch, (1732.5 MHz)									
	3.465	-12.6	V	3.0	30.4	1.0	-42.0	-13.0	-29.0	
	5.198	-10.1	V	3.0	28.7	1.0	-37.8	-13.0	-24.8	
	6.930	-0.5	V	3.0	27.1	1.0	-26.6	-13.0	-13.6	
	3.465	-13.2	H	3.0	30.4	1.0	-42.6	-13.0	-29.6	
	5.198	-6.9	H	3.0	28.7	1.0	-34.6	-13.0	-21.6	
	6.930	-7.3	H	3.0	27.1	1.0	-33.3	-13.0	-20.3	
	High Ch, (1745 MHz)									
	3.490	-13.6	V	3.0	30.4	1.0	-43.0	-13.0	-30.0	
	5.235	-18.2	V	3.0	28.7	1.0	-45.9	-13.0	-32.9	
	6.980	0.8	V	3.0	27.0	1.0	-25.2	-13.0	-12.2	
3.490	-12.1	H	3.0	30.4	1.0	-41.5	-13.0	-28.5		
5.235	-18.9	H	3.0	28.7	1.0	-46.6	-13.0	-33.6		
6.980	-5.2	H	3.0	27.0	1.0	-31.2	-13.0	-18.2		
Rev. 03.03.09										

Compliance Certification Services Above 1GHz High Frequency Substitution Measurement										
Company:		LG								
Project #:		13U16594								
Date:		12/20/13								
Test Engineer:		Steven Tran								
Configuration:		Y Position								
Mode:		TX, LTE band 4, 20MHz BW, QPSK								
Chamber		Pre-amplifer			Filter		Limit			
5m Chamber B		T145 8449B			Filter 1		Part 24			
Band	f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes
LTE4 20MH z QPSK	Low Ch, (1720 MHz)									
	3.440	-12.4	V	3.0	30.4	1.0	-41.8	-13.0	-28.8	
	5.160	-19.3	V	3.0	28.7	1.0	-47.0	-13.0	-34.0	
	6.880	-0.9	V	3.0	27.1	1.0	-27.0	-13.0	-14.0	
	3.440	-13.5	H	3.0	30.4	1.0	-42.9	-13.0	-29.9	
	5.160	-10.9	H	3.0	28.7	1.0	-38.6	-13.0	-25.6	
	6.880	-7.3	H	3.0	27.1	1.0	-33.4	-13.0	-20.4	
	Mid Ch, (1732.5 MHz)									
	3.465	-12.1	V	3.0	30.4	1.0	-41.6	-13.0	-28.6	
	5.198	-9.6	V	3.0	28.7	1.0	-37.3	-13.0	-24.3	
	6.930	-0.1	V	3.0	27.1	1.0	-26.1	-13.0	-13.1	
	3.465	-12.8	H	3.0	30.4	1.0	-42.2	-13.0	-29.2	
	5.198	-6.4	H	3.0	28.7	1.0	-34.1	-13.0	-21.1	
	6.930	-6.8	H	3.0	27.1	1.0	-32.9	-13.0	-19.9	
	High Ch, (1745 MHz)									
	3.490	-13.1	V	3.0	30.4	1.0	-42.5	-13.0	-29.5	
	5.235	-17.8	V	3.0	28.7	1.0	-45.5	-13.0	-32.5	
	6.980	1.3	V	3.0	27.0	1.0	-24.8	-13.0	-11.8	
3.490	-11.7	H	3.0	30.4	1.0	-41.1	-13.0	-28.1		
5.235	-18.4	H	3.0	28.7	1.0	-46.1	-13.0	-33.1		
6.980	-4.7	H	3.0	27.0	1.0	-30.8	-13.0	-17.8		
Rev. 03.03.09										

Compliance Certification Services										
Above 1GHz High Frequency Substitution Measurement										
Company:		LG								
Project #:		13U16594								
Date:		12/20/13								
Test Engineer:		Steven Tran								
Configuration:		Y Position								
Mode:		TX, LTE band 4, 15MHz BW, 16QAM								
Chamber		Pre-amplifer			Filter		Limit			
5m Chamber B		T145 8449B			Filter 1		Part 24			
Band	f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes
LTE4	Low Ch, (1718 MHz)									
	3.436	-14.0	V	3.0	30.4	1.0	-43.4	-13.0	-30.4	
15MHz	5.154	-13.5	V	3.0	28.7	1.0	-41.3	-13.0	-28.3	
z	6.872	-12.5	V	3.0	27.1	1.0	-38.6	-13.0	-25.6	
	3.436	-13.3	H	3.0	30.4	1.0	-42.7	-13.0	-29.7	
16QAM	5.154	-9.4	H	3.0	28.7	1.0	-37.1	-13.0	-24.1	
M	6.872	-14.5	H	3.0	27.1	1.0	-40.6	-13.0	-27.6	
	Mid Ch, (1732.5 MHz)									
	3.465	-13.6	V	3.0	30.4	1.0	-43.0	-13.0	-30.0	
	5.198	-16.0	V	3.0	28.7	1.0	-43.7	-13.0	-30.7	
	6.930	-15.9	V	3.0	27.1	1.0	-42.0	-13.0	-29.0	
	3.465	-13.4	H	3.0	30.4	1.0	-42.8	-13.0	-29.8	
	5.198	-15.5	H	3.0	28.7	1.0	-43.2	-13.0	-30.2	
	6.930	-13.9	H	3.0	27.1	1.0	-40.0	-13.0	-27.0	
	High Ch, (1748 MHz)									
	3.496	-19.8	V	3.0	30.4	1.0	-49.2	-13.0	-36.2	
	5.244	-17.0	V	3.0	28.7	1.0	-44.6	-13.0	-31.6	
	6.992	-15.7	V	3.0	27.0	1.0	-41.7	-13.0	-28.7	
	3.496	-20.4	H	3.0	30.4	1.0	-49.7	-13.0	-36.7	
	5.244	-16.2	H	3.0	28.7	1.0	-43.9	-13.0	-30.9	
	6.992	-14.0	H	3.0	27.0	1.0	-40.0	-13.0	-27.0	
Rev. 03.03.09										

Compliance Certification Services Above 1GHz High Frequency Substitution Measurement										
Company:		LG								
Project #:		13U16594								
Date:		12/20/13								
Test Engineer:		Steven Tran								
Configuration:		Y Position								
Mode:		TX, LTE band 4, 15MHz BW, QPSK								
Chamber		Pre-amplifier			Filter		Limit			
5m Chamber B		T145 8449B			Filter 1		Part 24			
Band	f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes
LTE4	Low Ch, (1718 MHz)									
	3.436	-13.6	V	3.0	30.4	1.0	-43.0	-13.0	-30.0	
15MH	5.154	-13.1	V	3.0	28.7	1.0	-40.8	-13.0	-27.8	
	6.872	-12.1	V	3.0	27.1	1.0	-38.2	-13.0	-25.2	
z	3.436	-12.9	H	3.0	30.4	1.0	-42.3	-13.0	-29.3	
	5.154	-8.9	H	3.0	28.7	1.0	-36.7	-13.0	-23.7	
QPSK	6.872	-14.0	H	3.0	27.1	1.0	-40.1	-13.0	-27.1	
	Mid Ch, (1732.5 MHz)									
	3.465	-13.1	V	3.0	30.4	1.0	-42.5	-13.0	-29.5	
	5.198	-15.5	V	3.0	28.7	1.0	-43.2	-13.0	-30.2	
	6.930	-15.4	V	3.0	27.1	1.0	-41.5	-13.0	-28.5	
	3.465	-12.9	H	3.0	30.4	1.0	-42.3	-13.0	-29.3	
	5.198	-15.1	H	3.0	28.7	1.0	-42.8	-13.0	-29.8	
	6.930	-13.5	H	3.0	27.1	1.0	-39.5	-13.0	-26.5	
High Ch, (1748 MHz)										
	3.496	-19.4	V	3.0	30.4	1.0	-48.7	-13.0	-35.7	
	5.244	-16.5	V	3.0	28.7	1.0	-44.2	-13.0	-31.2	
	6.992	-15.3	V	3.0	27.0	1.0	-41.3	-13.0	-28.3	
	3.496	-19.9	H	3.0	30.4	1.0	-49.3	-13.0	-36.3	
	5.244	-15.8	H	3.0	28.7	1.0	-43.4	-13.0	-30.4	
	6.992	-13.5	H	3.0	27.0	1.0	-39.5	-13.0	-26.5	
Rev. 03.03.09										

Compliance Certification Services Above 1GHz High Frequency Substitution Measurement										
Company:		LG								
Project #:		13U16594								
Date:		12/20/13								
Test Engineer:		Steven Tran								
Configuration:		Y Position								
Mode:		TX, LTE band 4, 10MHz BW, 16QAM								
Chamber		Pre-amplifer		Filter		Limit				
5m Chamber B		T145 8449B		Filter 1		Part 24				
Band	f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes
LTE4	Low Ch, (1715 MHz)									
	3.430	-13.2	V	3.0	30.4	1.0	-42.6	-13.0	-29.6	
10MH	5.145	-16.7	V	3.0	28.8	1.0	-44.4	-13.0	-31.4	
z	6.860	-1.8	V	3.0	27.1	1.0	-28.0	-13.0	-15.0	
	3.430	-13.5	H	3.0	30.4	1.0	-42.9	-13.0	-29.9	
16QA	5.145	-10.0	H	3.0	28.8	1.0	-37.8	-13.0	-24.8	
M	6.860	-7.0	H	3.0	27.1	1.0	-33.2	-13.0	-20.2	
	Mid Ch, (1732.5 MHz)									
	3.465	-12.7	V	3.0	30.4	1.0	-42.1	-13.0	-29.1	
	5.198	-10.4	V	3.0	28.7	1.0	-38.1	-13.0	-25.1	
	6.930	0.7	V	3.0	27.1	1.0	-25.4	-13.0	-12.4	
	3.465	-13.0	H	3.0	30.4	1.0	-42.4	-13.0	-29.4	
	5.198	-10.0	H	3.0	28.7	1.0	-37.7	-13.0	-24.7	
	6.930	-5.6	H	3.0	27.1	1.0	-31.6	-13.0	-18.6	
	High Ch, (1750 MHz)									
	3.500	-12.8	V	3.0	30.4	1.0	-42.1	-13.0	-29.1	
	5.250	-15.5	V	3.0	28.7	1.0	-43.2	-13.0	-30.2	
	7.000	1.2	V	3.0	27.0	1.0	-24.8	-13.0	-11.8	
	3.500	-13.0	H	3.0	30.4	1.0	-42.3	-13.0	-29.3	
	5.250	-7.4	H	3.0	28.7	1.0	-35.1	-13.0	-22.1	
	7.000	-3.7	H	3.0	27.0	1.0	-29.7	-13.0	-16.7	
Rev. 03.03.09										

Compliance Certification Services										
Above 1GHz High Frequency Substitution Measurement										
Company:		LG								
Project #:		13U16594								
Date:		12/20/13								
Test Engineer:		Steven Tran								
Configuration:		Y Position								
Mode:		TX, LTE band 4, 10MHz BW, QPSK								
Chamber		Pre-amplifier			Filter		Limit			
5m Chamber B		T145 8449B			Filter 1		Part 24			
Band	f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes
LTE4 10MH z QPSK	Low Ch, (1715 MHz)									
	3.430	-12.7	V	3.0	30.4	1.0	-42.2	-13.0	-29.2	
	5.145	-16.2	V	3.0	28.8	1.0	-44.0	-13.0	-31.0	
	6.860	-1.4	V	3.0	27.1	1.0	-27.5	-13.0	-14.5	
	3.430	-13.0	H	3.0	30.4	1.0	-42.4	-13.0	-29.4	
	5.145	-9.6	H	3.0	28.8	1.0	-37.3	-13.0	-24.3	
6.860	-6.6	H	3.0	27.1	1.0	-32.7	-13.0	-19.7		
Mid Ch, (1732.5 MHz)										
3.465	-12.3	V	3.0	30.4	1.0	-41.7	-13.0	-28.7		
5.198	-10.0	V	3.0	28.7	1.0	-37.7	-13.0	-24.7		
6.930	1.1	V	3.0	27.1	1.0	-24.9	-13.0	-11.9		
3.465	-12.6	H	3.0	30.4	1.0	-42.0	-13.0	-29.0		
5.198	-9.5	H	3.0	28.7	1.0	-37.2	-13.0	-24.2		
6.930	-5.1	H	3.0	27.1	1.0	-31.2	-13.0	-18.2		
High Ch, (1750 MHz)										
3.500	-12.3	V	3.0	30.4	1.0	-41.7	-13.0	-28.7		
5.250	-15.1	V	3.0	28.7	1.0	-42.7	-13.0	-29.7		
7.000	1.7	V	3.0	27.0	1.0	-24.3	-13.0	-11.3		
3.500	-12.5	H	3.0	30.4	1.0	-41.9	-13.0	-28.9		
5.250	-6.9	H	3.0	28.7	1.0	-34.6	-13.0	-21.6		
7.000	-3.3	H	3.0	27.0	1.0	-29.3	-13.0	-16.3		
Rev. 03.03.09										

Compliance Certification Services Above 1GHz High Frequency Substitution Measurement										
Company:		LG								
Project #:		13U16594								
Date:		12/20/13								
Test Engineer:		Steven Tran								
Configuration:		Y Position								
Mode:		TX, LTE band 4, 5MHz BW, 16 QAM								
Chamber		Pre-amplifier		Filter		Limit				
5m Chamber B		T145 8449B		Filter 1		Part 24				
Band	f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes
LTE4 5MHz 16QAM	Low Ch, (1712.5 MHz)									
	3.420	-13.1	V	3.0	30.4	1.0	-42.6	-13.0	-29.6	
	5.131	-16.9	V	3.0	28.8	1.0	-44.6	-13.0	-31.6	
	6.841	-5.4	V	3.0	27.2	1.0	-31.6	-13.0	-18.6	
	3.420	-13.3	H	3.0	30.4	1.0	-42.8	-13.0	-29.8	
	5.131	-14.5	H	3.0	28.8	1.0	-42.3	-13.0	-29.3	
	6.921	-8.3	H	3.0	27.1	1.0	-34.4	-13.0	-21.4	
	Mid Ch, (1732.5 MHz)									
	3.460	-13.2	V	3.0	30.4	1.0	-42.6	-13.0	-29.6	
	5.190	-9.0	V	3.0	28.7	1.0	-36.7	-13.0	-23.7	
	6.920	0.9	V	3.0	27.1	1.0	-25.2	-13.0	-12.2	
	3.460	-13.0	H	3.0	30.4	1.0	-42.4	-13.0	-29.4	
	5.000	-4.7	H	3.0	28.9	1.0	-32.6	-13.0	-19.6	
	5.191	-8.4	H	3.0	28.7	1.0	-36.1	-13.0	-23.1	
	High Ch, (1752.5 MHz)									
	3.500	-13.6	V	3.0	30.4	1.0	-43.0	-13.0	-30.0	
	5.520	-14.4	V	3.0	28.4	1.0	-41.8	-13.0	-28.8	
	7.001	-0.1	V	3.0	27.0	1.0	-26.1	-13.0	-13.1	
3.501	-12.5	H	3.0	30.4	1.0	-41.8	-13.0	-28.8		
5.250	-8.5	H	3.0	28.7	1.0	-36.1	-13.0	-23.1		
7.001	-4.3	H	3.0	27.0	1.0	-30.3	-13.0	-17.3		
Rev. 03.03.09										

Compliance Certification Services Above 1GHz High Frequency Substitution Measurement										
Company:		LG								
Project #:		13U16594								
Date:		12/20/13								
Test Engineer:		Steven Tran								
Configuration:		Y Position								
Mode:		TX, LTE band 4, 5MHz BW, QPSK								
Chamber		Pre-amplifier		Filter		Limit				
5m Chamber B		T145 8449B		Filter 1		Part 24				
Band	f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, (1712.5 MHz)										
LTE4	3.425	-12.7	V	3.0	30.4	1.0	-42.1	-13.0	-29.1	
	5.139	-16.4	V	3.0	28.8	1.0	-44.2	-13.0	-31.2	
5MHz	6.850	-5.0	V	3.0	27.1	1.0	-31.1	-13.0	-18.1	
	3.427	-12.8	H	3.0	30.4	1.0	-42.3	-13.0	-29.3	
QPSK	5.134	-14.1	H	3.0	28.8	1.0	-41.8	-13.0	-28.8	
	6.849	-8.0	H	3.0	27.1	1.0	-34.1	-13.0	-21.1	
Mid Ch, (1732.5 MHz)										
	3.460	-12.8	V	3.0	30.4	1.0	-42.2	-13.0	-29.2	
	5.190	-8.5	V	3.0	28.7	1.0	-36.2	-13.0	-23.2	
	6.921	1.3	V	3.0	27.1	1.0	-24.7	-13.0	-11.7	
	3.460	-12.6	H	3.0	30.4	1.0	-42.0	-13.0	-29.0	
	5.191	-3.8	H	3.0	28.7	1.0	-31.5	-13.0	-18.5	
	6.921	-5.0	H	3.0	27.1	1.0	-31.1	-13.0	-18.1	
High Ch, (1752.5 MHz)										
	3.500	-13.2	V	3.0	30.4	1.0	-42.6	-13.0	-29.6	
	5.251	-14.3	V	3.0	28.7	1.0	-41.9	-13.0	-28.9	
	7.001	0.3	V	3.0	27.0	1.0	-25.7	-13.0	-12.7	
	3.500	-12.0	H	3.0	30.4	1.0	-41.4	-13.0	-28.4	
	5.264	-8.0	H	3.0	28.6	1.0	-35.7	-13.0	-22.7	
	7.000	-3.8	H	3.0	27.0	1.0	-29.8	-13.0	-16.8	
Rev. 03.03.09										

Compliance Certification Services Above 1GHz High Frequency Substitution Measurement										
Company:		LG								
Project #:		13U16594								
Date:		01/06/13								
Test Engineer:		KIYA KEDIDA								
Configuration:		EUT, Z POSITION								
Mode:		EVDO BC01 HARM								
Chamber		Pre-amplifer			Filter		Limit			
5m Chamber C		T343 8449B			Filter 1		Part 24			
Band	f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
EVDO BC1	Low Ch, 1850MHz									
	3.700	0.5	V	3.0	35.4	1.0	-33.9	-13.0	-20.9	
	5.550	-13.3	V	3.0	34.7	1.0	-47.0	-13.0	-34.0	
	7.400	-11.7	V	3.0	34.9	1.0	-45.7	-13.0	-32.7	
	3.700	-1.4	H	3.0	35.4	1.0	-35.8	-13.0	-22.8	
	5.550	-13.0	H	3.0	34.7	1.0	-46.7	-13.0	-33.7	
	7.400	-10.1	H	3.0	34.9	1.0	-44.1	-13.0	-31.1	
	Mid Ch, 1880.0MHz									
	3.760	-3.0	V	3.0	35.3	1.0	-37.3	-13.0	-24.3	
	5.640	-13.3	V	3.0	34.7	1.0	-47.0	-13.0	-34.0	
	7.520	-16.0	V	3.0	34.9	1.0	-49.9	-13.0	-36.9	
	3.760	-5.9	H	3.0	35.3	1.0	-40.3	-13.0	-27.3	
	5.640	-12.9	H	3.0	34.7	1.0	-46.7	-13.0	-33.7	
	7.520	-9.8	H	3.0	34.9	1.0	-43.8	-13.0	-30.8	
	High Ch, 1909.8 MHz									
	3.820	3.2	V	3.0	35.3	1.0	-31.1	-13.0	-18.1	
	5.729	-10.0	V	3.0	34.7	1.0	-43.7	-13.0	-30.7	
	7.640	-10.9	V	3.0	35.0	1.0	-44.8	-13.0	-31.8	
	3.820	-7.7	H	3.0	35.3	1.0	-42.0	-13.0	-29.0	
	5.729	-12.5	H	3.0	34.7	1.0	-46.2	-13.0	-33.2	
	7.640	-9.2	H	3.0	35.0	1.0	-43.2	-13.0	-30.2	
Rev. 03.03.09										
Note: No other emissions were detected above the system noise floor.										

Compliance Certification Services
Above 1GHz High Frequency Substitution Measurement

Company: LG
Project #: 13U16594
Date: 12/20/13
Test Engineer: STEVEN TRAN
Configuration: EUT, Z POSITION
Mode: CDMA 1900

Chamber	Pre-amplifer	Filter	Limit
5m Chamber B	T343 8449B	Filter 1	Part 24

	f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Band BC1 1xRTT	Low Ch, 1850MHz									
	3.700	3.8	V	3.0	35.4	1.0	-30.6	-13.0	-17.6	
	5.550	-13.4	V	3.0	34.7	1.0	-47.1	-13.0	-34.1	
	7.400	-15.4	V	3.0	34.9	1.0	-49.3	-13.0	-36.3	
	3.700	7.3	H	3.0	35.4	1.0	-27.1	-13.0	-14.1	
	5.550	-15.4	H	3.0	34.7	1.0	-49.1	-13.0	-36.1	
	7.400	-13.2	H	3.0	34.9	1.0	-47.1	-13.0	-34.1	
	Mid Ch, 1880.0MHz									
	3.760	-3.0	V	3.0	35.3	1.0	-37.3	-13.0	-24.3	
	5.640	-13.3	V	3.0	34.7	1.0	-47.0	-13.0	-34.0	
	7.520	-16.0	V	3.0	34.9	1.0	-49.9	-13.0	-36.9	
	3.760	3.3	H	3.0	35.3	1.0	-31.1	-13.0	-18.1	
	5.640	-14.5	H	3.0	34.7	1.0	-48.2	-13.0	-35.2	
	7.520	-14.0	H	3.0	34.9	1.0	-47.9	-13.0	-34.9	
	High Ch, 1909.8 MHz									
	3.820	-10.8	V	3.0	35.3	1.0	-45.1	-13.0	-32.1	
	5.729	-11.2	V	3.0	34.7	1.0	-45.0	-13.0	-32.0	
	7.640	-15.7	V	3.0	35.0	1.0	-49.6	-13.0	-36.6	
	3.820	-3.1	H	3.0	35.3	1.0	-37.4	-13.0	-24.4	
	5.729	-7.3	H	3.0	34.7	1.0	-41.0	-13.0	-28.0	
	7.640	-14.2	H	3.0	35.0	1.0	-48.1	-13.0	-35.1	
Rev. 03.03.09										
Note: No other emissions were detected above the system noise floor.										

Compliance Certification Services Above 1GHz High Frequency Substitution Measurement											
Company: LG Project #: 13U16594 Date: 12/19/13 Test Engineer: STEVEN TRAN Configuration: EUT, Z POSITION Mode: EVDOR0 BC0 HARM											
<div style="border: 1px solid black; padding: 2px; display: inline-block; background-color: #e0f0ff;">Chamber</div> <div style="border: 1px solid black; padding: 2px; display: inline-block; background-color: #e0f0ff;">3m Chamber</div>		<div style="border: 1px solid black; padding: 2px; display: inline-block; background-color: #e0f0ff;">Pre-amplifier</div> <div style="border: 1px solid black; padding: 2px; display: inline-block; background-color: #e0f0ff;">T343 8449B</div>		<div style="border: 1px solid black; padding: 2px; display: inline-block; background-color: #e0f0ff;">Filter</div> <div style="border: 1px solid black; padding: 2px; display: inline-block; background-color: #e0f0ff;">Filter 1</div>		<div style="border: 1px solid black; padding: 2px; display: inline-block; background-color: #e0f0ff;">Limit</div> <div style="border: 1px solid black; padding: 2px; display: inline-block; background-color: #e0f0ff;">Part 24</div>					
Band	f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	
BC0 EVDO REL. 0	Low Ch, 824.7MHz										
		1.650	-28.7	V	3.0	37.4	1.0	-65.1	-13.0	-52.1	
		2.474	-24.2	V	3.0	36.4	1.0	-59.6	-13.0	-46.6	
		3.298	-23.1	V	3.0	35.8	1.0	-57.9	-13.0	-44.9	
		1.650	-28.2	H	3.0	37.4	1.0	-64.5	-13.0	-51.5	
		2.474	-25.8	H	3.0	36.4	1.0	-61.1	-13.0	-48.1	
		3.298	-22.9	H	3.0	35.8	1.0	-57.7	-13.0	-44.7	
	Mid Ch, 836.52MHz										
		1.673	-27.0	V	3.0	37.3	1.0	-63.4	-13.0	-50.4	
		2.509	-23.6	V	3.0	36.4	1.0	-59.0	-13.0	-46.0	
		3.346	-21.7	V	3.0	35.8	1.0	-56.4	-13.0	-43.4	
		1.673	-28.2	H	3.0	37.3	1.0	-64.6	-13.0	-51.6	
		2.509	-25.9	H	3.0	36.4	1.0	-61.3	-13.0	-48.3	
		3.346	-22.8	H	3.0	35.8	1.0	-57.6	-13.0	-44.6	
	High Ch, 848.31 MHz										
		1.696	-28.0	V	3.0	37.3	1.0	-64.3	-13.0	-51.3	
		2.544	-23.7	V	3.0	36.3	1.0	-59.0	-13.0	-46.0	
		3.393	-22.6	V	3.0	35.7	1.0	-57.3	-13.0	-44.3	
	1.696	-28.2	H	3.0	37.3	1.0	-64.5	-13.0	-51.5		
	2.544	-26.1	H	3.0	36.3	1.0	-61.4	-13.0	-48.4		
	3.393	-22.4	H	3.0	35.7	1.0	-57.1	-13.0	-44.1		
Rev. 03.03.09											
Note: No other emissions were detected above the system noise floor.											

Compliance Certification Services
Above 1GHz High Frequency Substitution Measurement

Company: LG
Project #: 13U16594
Date: 12/19/13
Test Engineer: STEVEN TRAN
Configuration: EUT, Z POSITION
Mode: RTT BC0 HARM

Chamber
 3m Chamber

Pre-amplifer
 T343 8449B

Filter
 Filter 1

Limit
 Part 24

Band	f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	
BC0 1xRTT	Low Ch, 824.7MHz										
		1.650	-27.7	V	3.0	37.4	1.0	-64.1	-13.0	-51.1	
		2.474	-20.7	V	3.0	36.4	1.0	-56.1	-13.0	-43.1	
		3.298	-22.3	V	3.0	35.8	1.0	-57.1	-13.0	-44.1	
		1.650	-29.1	H	3.0	37.4	1.0	-65.5	-13.0	-52.5	
		2.474	-26.0	H	3.0	36.4	1.0	-61.4	-13.0	-48.4	
		3.298	-22.9	H	3.0	35.8	1.0	-57.7	-13.0	-44.7	
		Mid Ch, 836.52MHz									
		1.673	-26.9	V	3.0	37.3	1.0	-63.2	-13.0	-50.2	
		2.509	-24.0	V	3.0	36.4	1.0	-59.4	-13.0	-46.4	
		3.346	-22.1	V	3.0	35.8	1.0	-56.8	-13.0	-43.8	
		1.673	-28.9	H	3.0	37.3	1.0	-65.3	-13.0	-52.3	
		2.509	-25.8	H	3.0	36.4	1.0	-61.2	-13.0	-48.2	
		3.346	-22.7	H	3.0	35.8	1.0	-57.5	-13.0	-44.5	
		High Ch, 848.31 MHz									
		1.696	-23.9	V	3.0	37.3	1.0	-60.2	-13.0	-47.2	
		2.544	-24.2	V	3.0	36.3	1.0	-59.5	-13.0	-46.5	
		3.393	-22.4	V	3.0	35.7	1.0	-57.1	-13.0	-44.1	
	1.696	-27.3	H	3.0	37.3	1.0	-63.6	-13.0	-50.6		
	2.544	-26.2	H	3.0	36.3	1.0	-61.5	-13.0	-48.5		
	3.393	-22.9	H	3.0	35.7	1.0	-57.6	-13.0	-44.6		

Rev. 03.03.09
 Note: No other emissions were detected above the system noise floor.