

WCDMA Band II

Frequency: 1880 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.397$ mho/m; $\epsilon_r = 40.357$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE4 Sn1259; Calibrated: 2/13/2012
- Probe: EX3DV4 - SN3686; ConvF(7.51, 7.51, 7.51); Calibrated: 2/16/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: SAM; Type: QD000P40CD; Serial: 1629

Left/Touch_R99 RMC_Ch 9400/Area Scan (9x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.447 mW/g

Left/Touch_R99 RMC_Ch 9400/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm,


dz=5mm

Reference Value = 18.055 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.5640

SAR(1 g) = 0.365 mW/g; SAR(10 g) = 0.227 mW/g

Maximum value of SAR (measured) = 0.450 mW/g

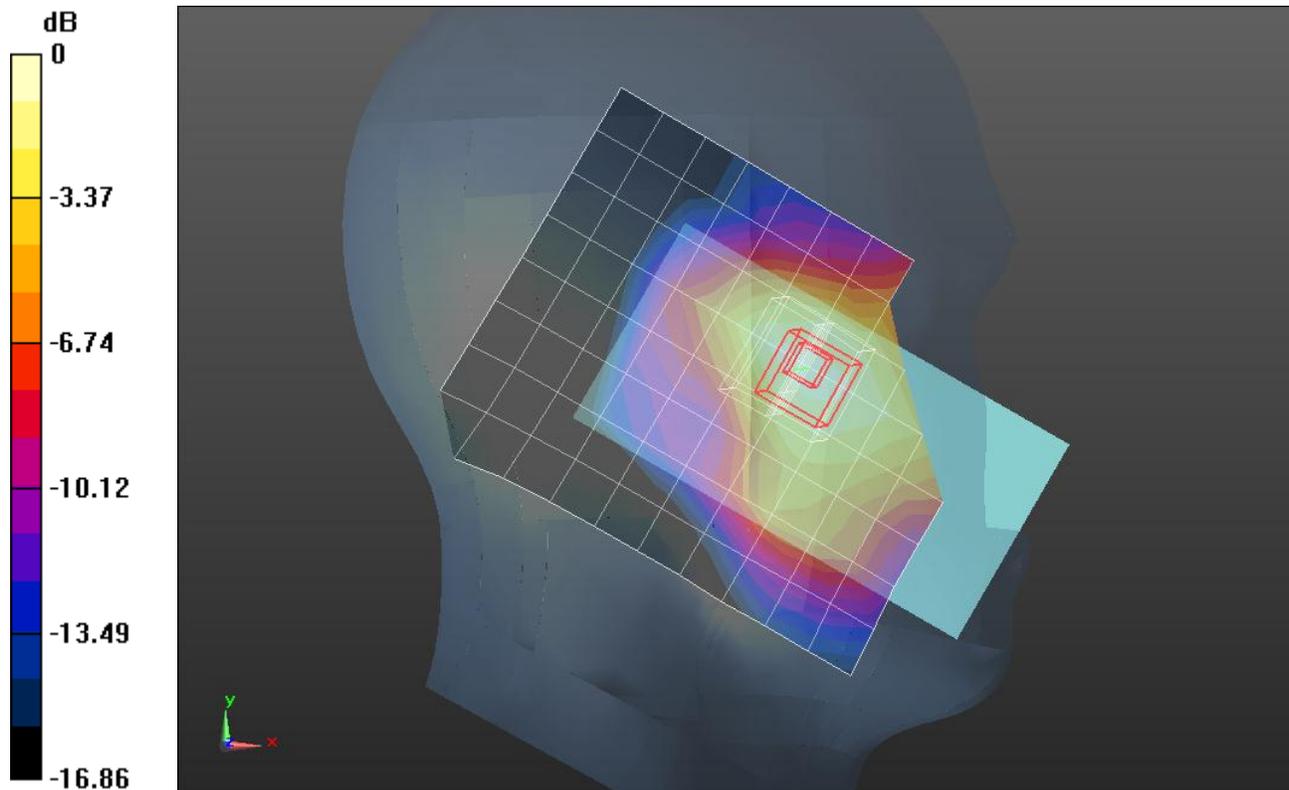

0 dB = 0.450mW/g = -6.94 dB mW/g

WCDMA Band II

Frequency: 1880 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.397$ mho/m; $\epsilon_r = 40.357$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE4 Sn1259; Calibrated: 2/13/2012
- Probe: EX3DV4 - SN3686; ConvF(7.51, 7.51, 7.51); Calibrated: 2/16/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: SAM; Type: QD000P40CD; Serial: 1629

Left/Touch_R99 RMC_Ch 9400_w/Wireless Charging Cover/Area Scan (9x11x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.442 mW/g

Left/Touch_R99 RMC_Ch 9400_w/Wireless Charging Cover/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.071 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.5750

SAR(1 g) = 0.374 mW/g; SAR(10 g) = 0.233 mW/g

Maximum value of SAR (measured) = 0.449 mW/g

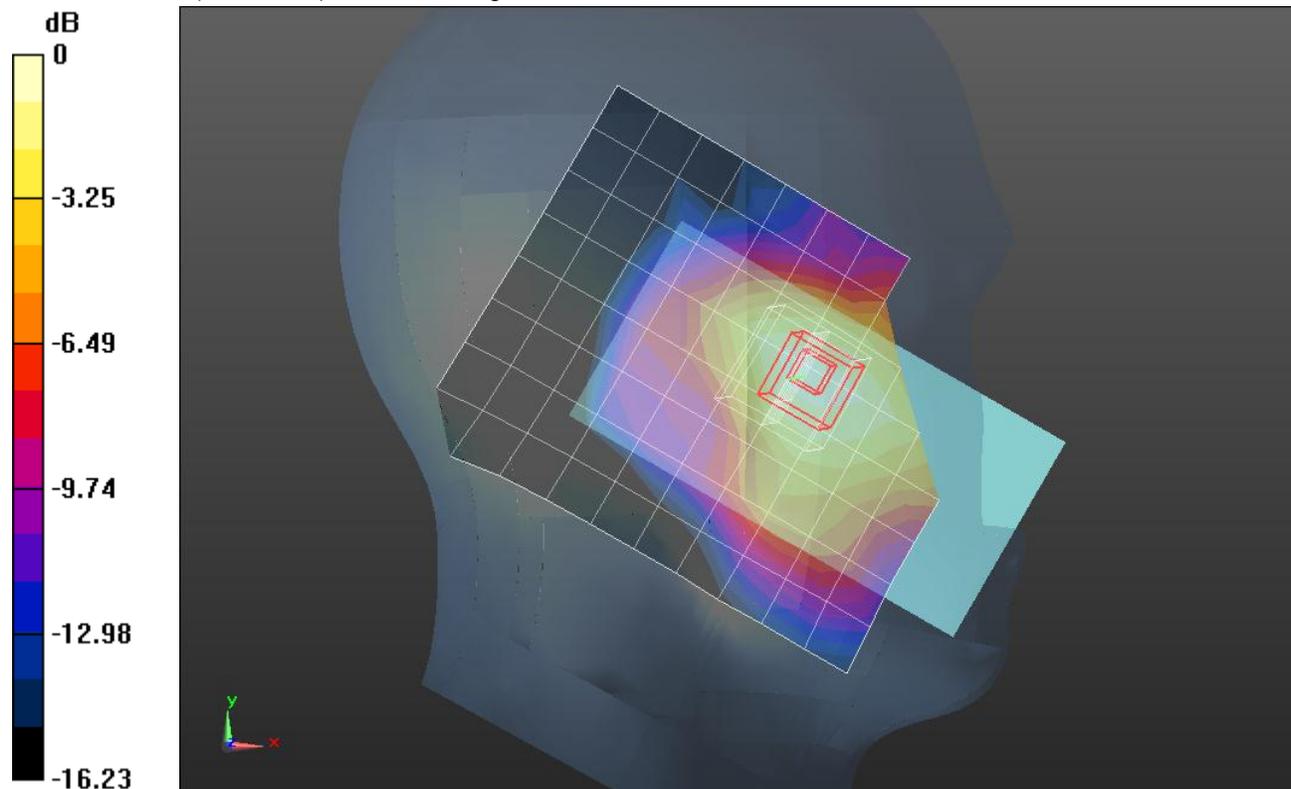

0 dB = 0.450mW/g = -6.94 dB mW/g


WCDMA Band II

Frequency: 1880 MHz; Duty Cycle: 1:1

Left/Touch_R99 RMC_Ch 9400_w/Wireless Charging Cover/Z Scan (1x1x21): Measurement

grid: dx=20mm, dy=20mm, dz=5mm

Maximum value of SAR (measured) = 0.431 mW/g

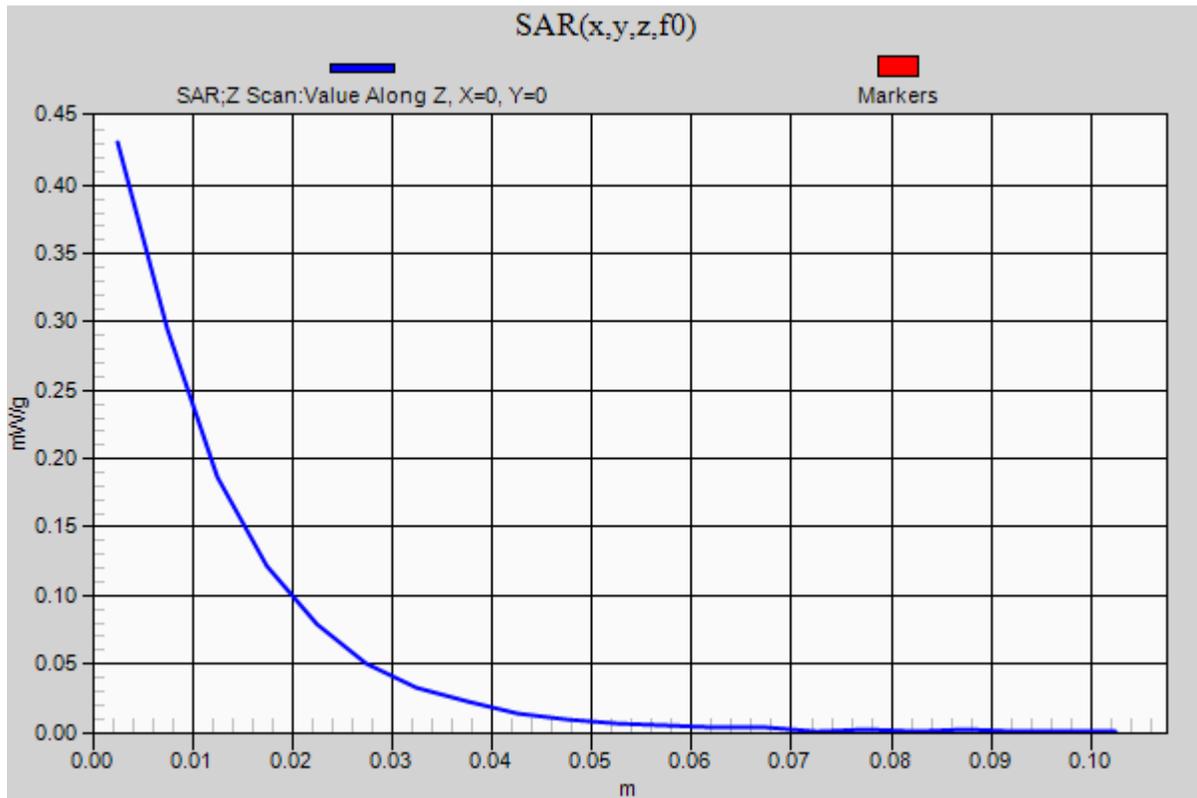

WCDMA Band II

Frequency: 1880 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.397$ mho/m; $\epsilon_r = 40.357$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE4 Sn1259; Calibrated: 2/13/2012
- Probe: EX3DV4 - SN3686; ConvF(7.51, 7.51, 7.51); Calibrated: 2/16/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: SAM; Type: QD000P40CD; Serial: 1629

Left/Tilt_R99 RMC_ Ch 9400/Area Scan (9x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.171 mW/g


Left/Tilt_R99 RMC_ Ch 9400/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.045 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.2320

SAR(1 g) = 0.154 mW/g; SAR(10 g) = 0.084 mW/g

Maximum value of SAR (measured) = 0.190 mW/g

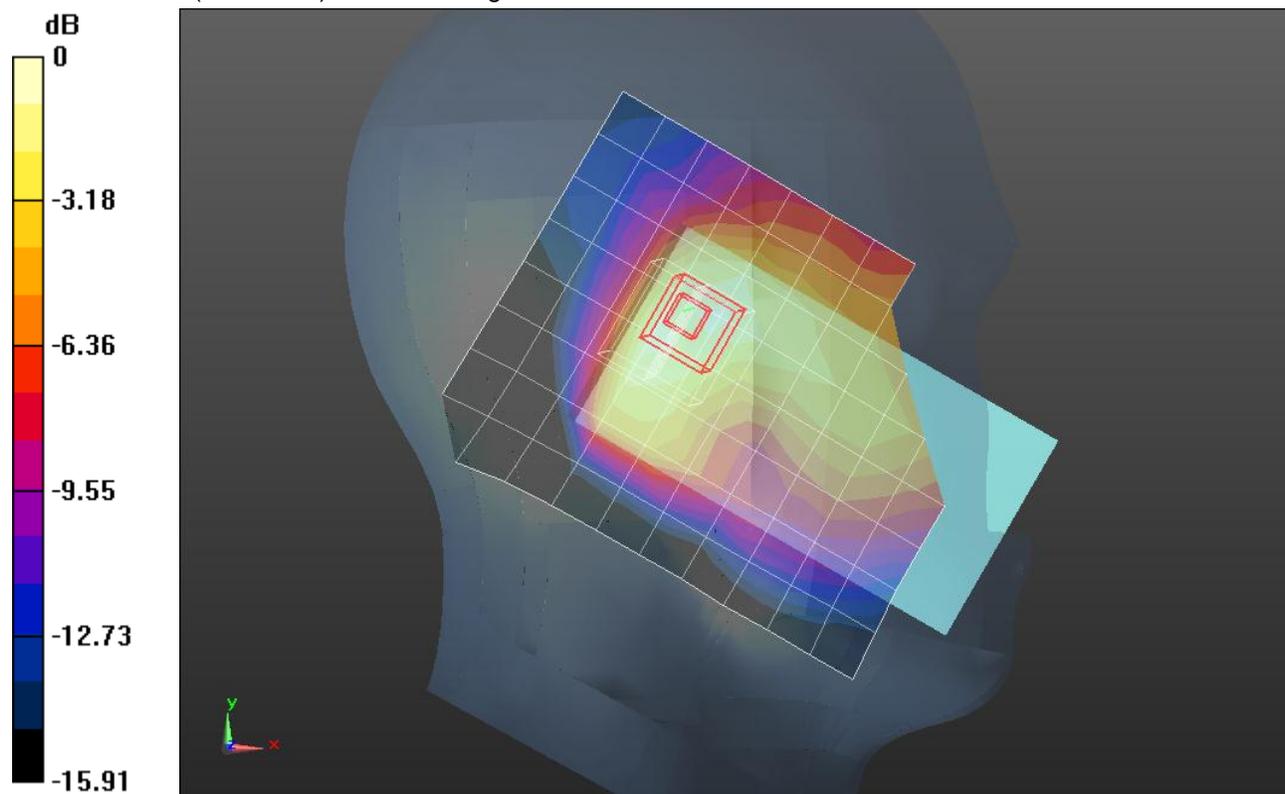

0 dB = 0.190mW/g = -14.42 dB mW/g

WCDMA Band II

Frequency: 1880 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.397$ mho/m; $\epsilon_r = 40.357$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE4 Sn1259; Calibrated: 2/13/2012
- Probe: EX3DV4 - SN3686; ConvF(7.51, 7.51, 7.51); Calibrated: 2/16/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: SAM; Type: QD000P40CD; Serial: 1629

Right/Touch_R99 RMC_Ch 9400/Area Scan (9x11x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.277 mW/g


Right/Touch_R99 RMC_Ch 9400/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.684 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.2860

SAR(1 g) = 0.191 mW/g; SAR(10 g) = 0.126 mW/g

Maximum value of SAR (measured) = 0.232 mW/g

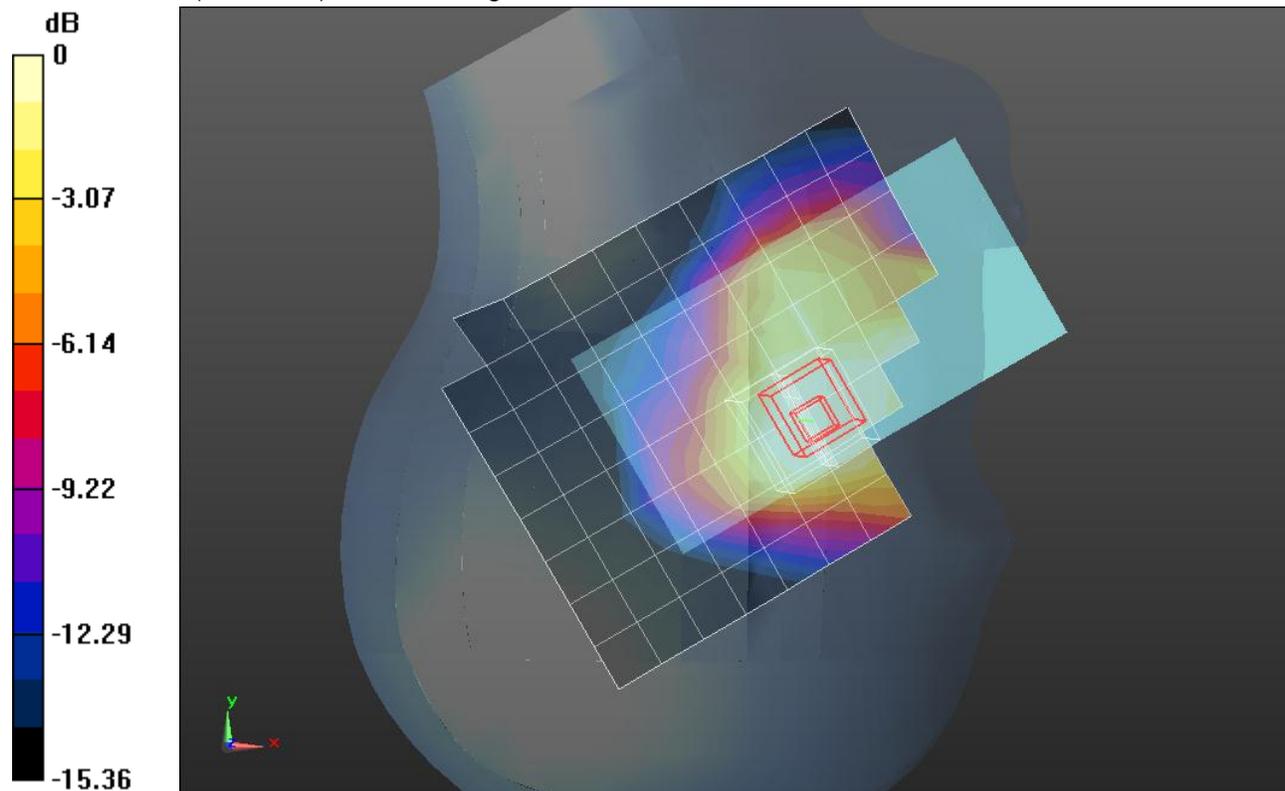

0 dB = 0.230mW/g = -12.77 dB mW/g

WCDMA Band II

Frequency: 1880 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.397$ mho/m; $\epsilon_r = 40.357$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE4 Sn1259; Calibrated: 2/13/2012

- Probe: EX3DV4 - SN3686; ConvF(7.51, 7.51, 7.51); Calibrated: 2/16/2012

- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)

- Phantom: SAM; Type: QD000P40CD; Serial: 1629

Right/Tilt_R99 RMC_Ch 9400/Area Scan (9x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.204 mW/g


Right/Tilt_R99 RMC_Ch 9400/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.366 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.2680

SAR(1 g) = 0.174 mW/g; SAR(10 g) = 0.107 mW/g

Maximum value of SAR (measured) = 0.207 mW/g

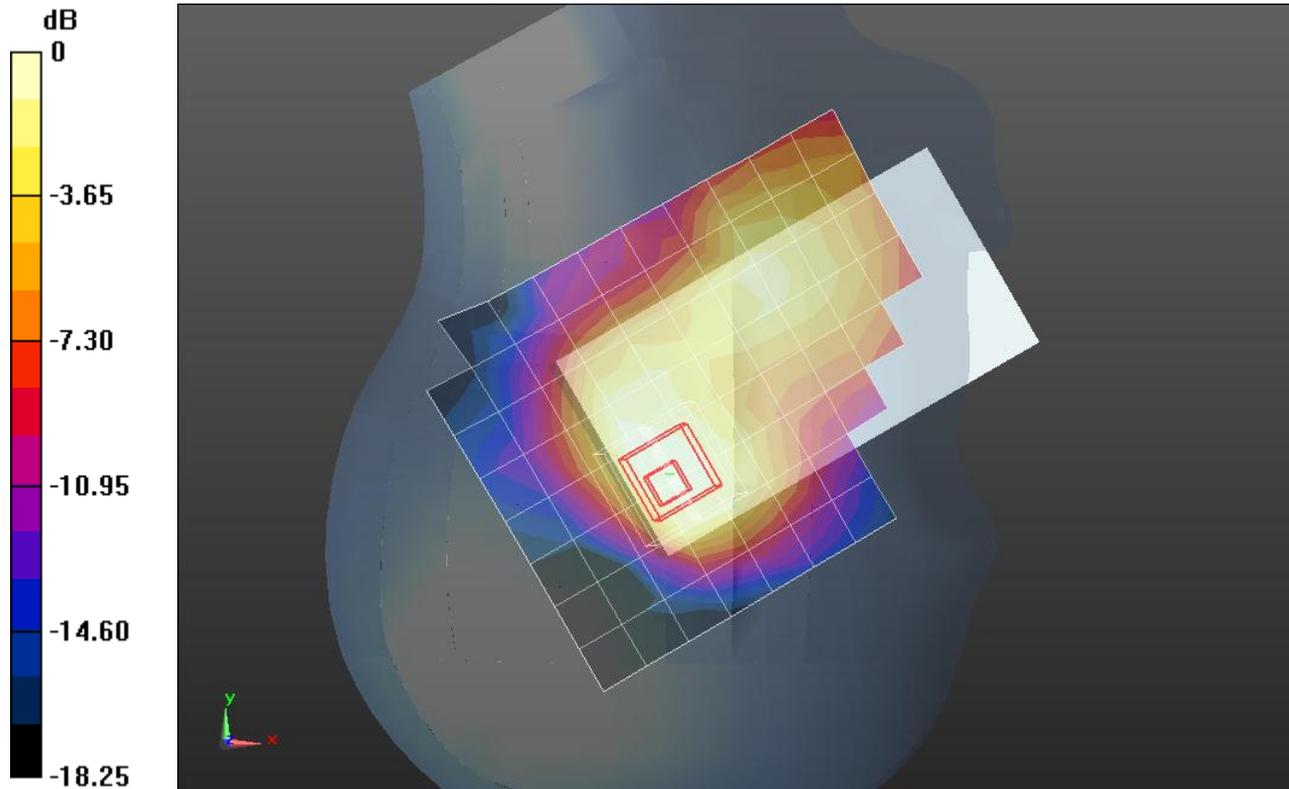

0 dB = 0.210mW/g = -13.56 dB mW/g

WCDMA Band II


Frequency: 1880 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.478$ mho/m; $\epsilon_r = 52.711$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE4 Sn1259; Calibrated: 2/13/2012
- Probe: EX3DV4 - SN3686; ConvF(7.04, 7.04, 7.04); Calibrated: 2/16/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (A); Type: QDOVA001BB; Serial: 1120

Rear/R99 RMC_Ch 9400/Area Scan (10x14x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.785 mW/g

Rear/R99 RMC_Ch 9400/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 23.336 V/m; Power Drift = 0.12 dB
Peak SAR (extrapolated) = 1.0270
SAR(1 g) = 0.630 mW/g; SAR(10 g) = 0.398 mW/g
Maximum value of SAR (measured) = 0.775 mW/g

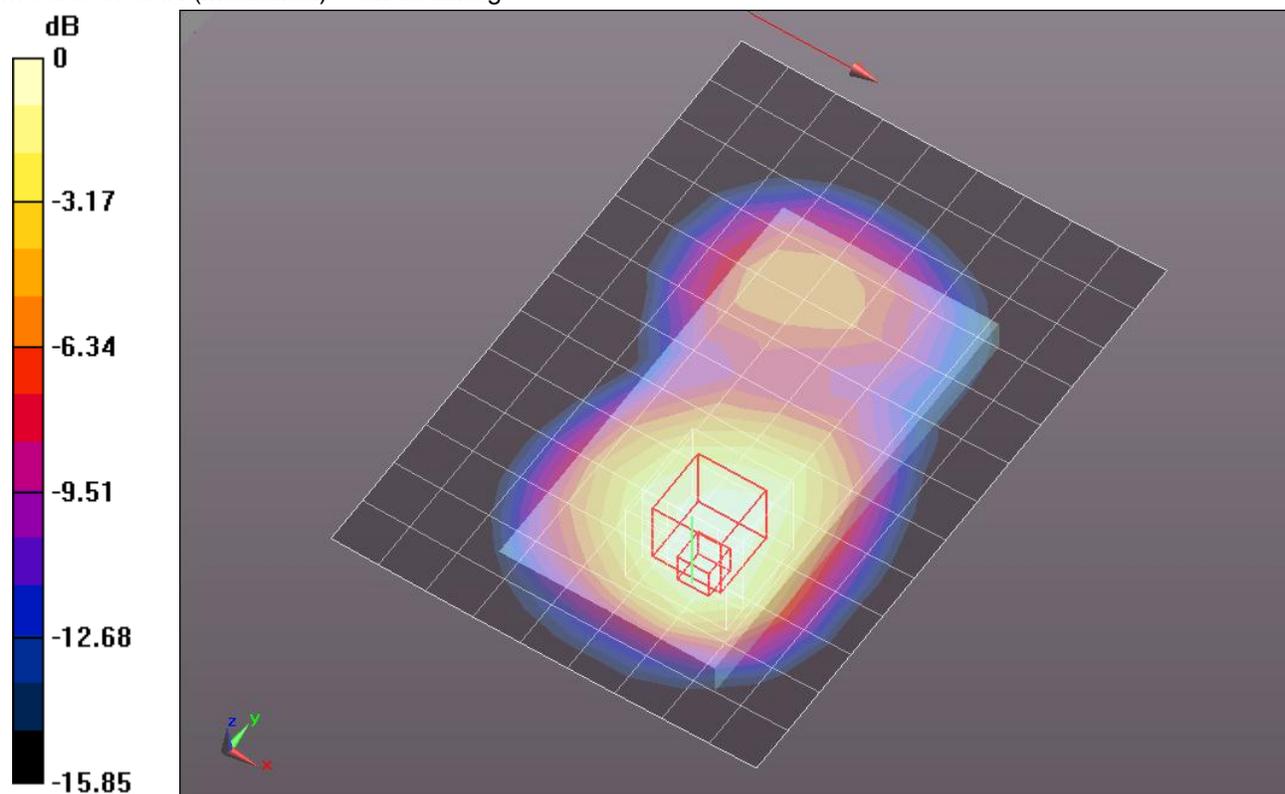

0 dB = 0.780mW/g = -2.16 dB mW/g

WCDMA Band II

Frequency: 1880 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.478$ mho/m; $\epsilon_r = 52.711$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE4 Sn1259; Calibrated: 2/13/2012

- Probe: EX3DV4 - SN3686; ConvF(7.04, 7.04, 7.04); Calibrated: 2/16/2012

- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)

- Phantom: ELI v5.0 (A); Type: QDOVA001BB; Serial: 1120

Rear/R99 RMC_Ch 9400_w/Headset/Area Scan (10x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.844 mW/g


Rear/R99 RMC_Ch 9400_w/Headset/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 24.252 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 1.1100

SAR(1 g) = 0.681 mW/g; SAR(10 g) = 0.427 mW/g

Maximum value of SAR (measured) = 0.830 mW/g

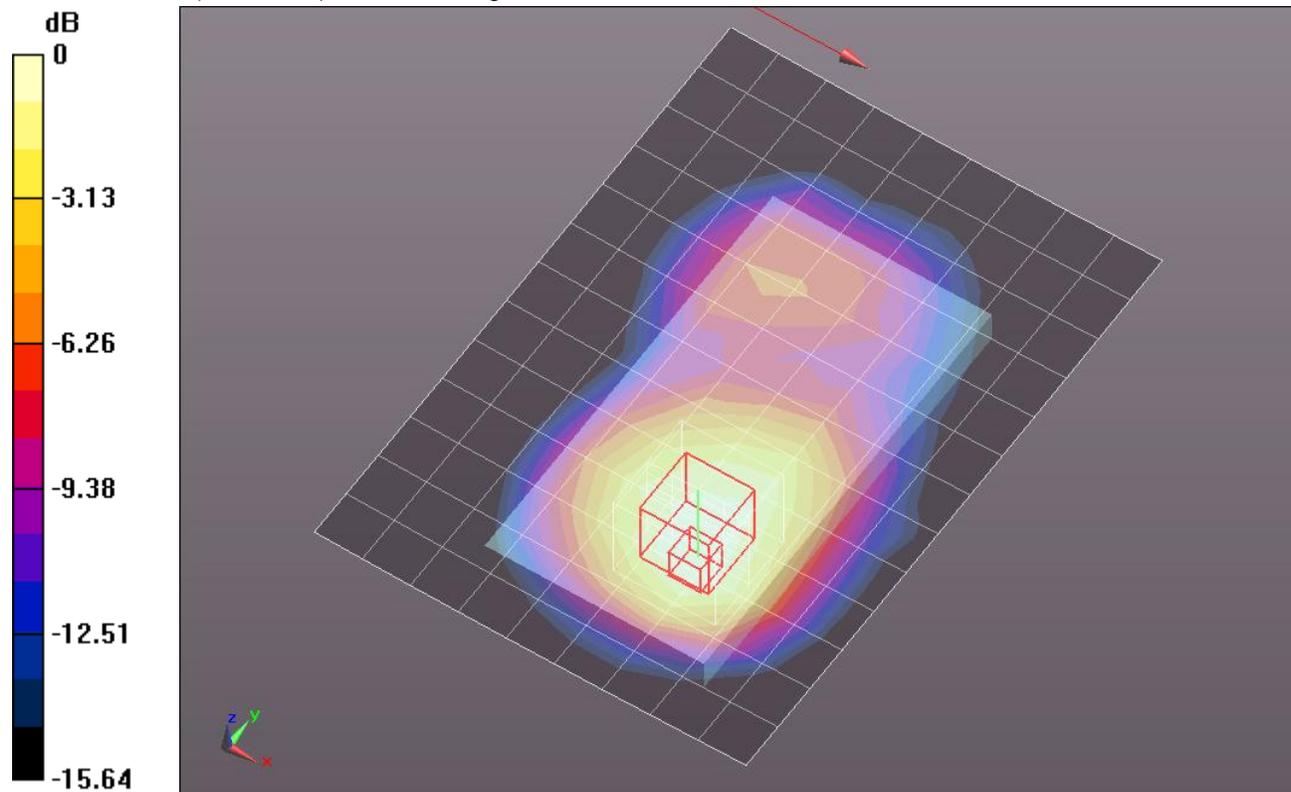


0 dB = 0.830mW/g = -1.62 dB mW/g

WCDMA Band II

Frequency: 1880 MHz; Duty Cycle: 1:1

Rear/R99 RMC_Ch 9400_w/Headset/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm

Maximum value of SAR (measured) = 0.852 mW/g

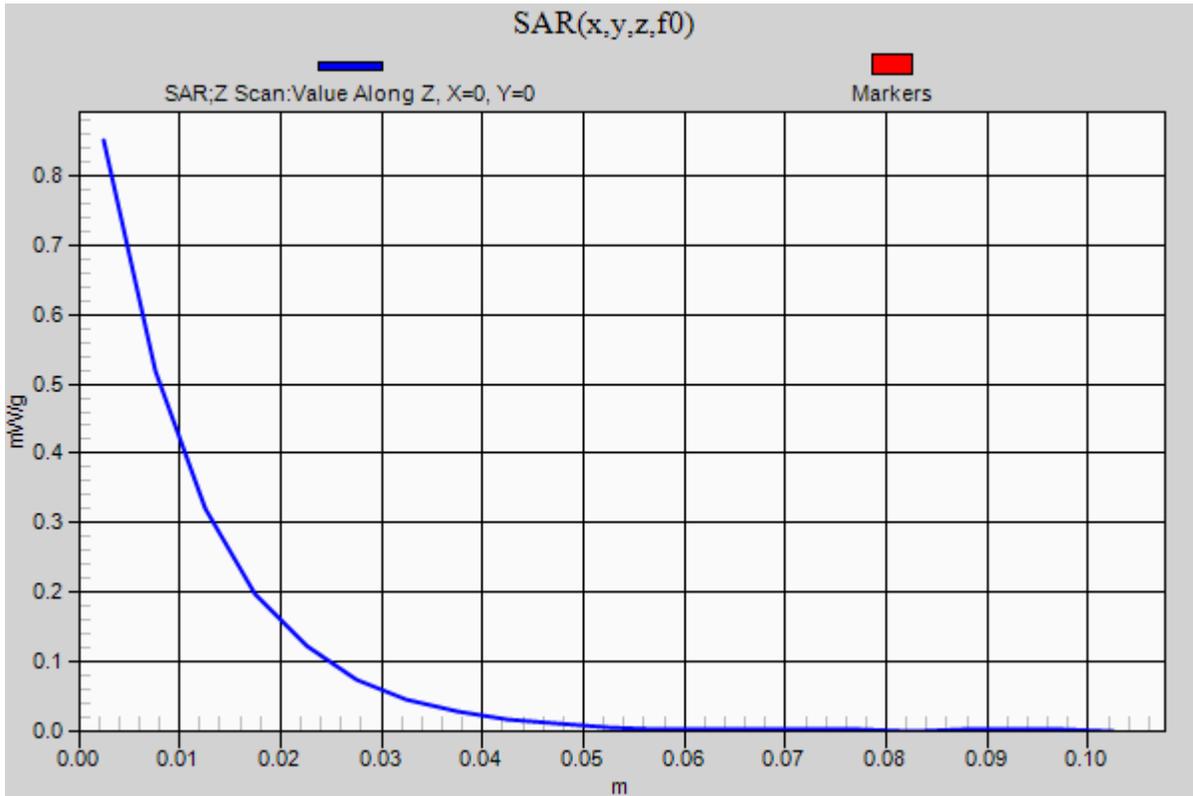

WCDMA Band II


Frequency: 1880 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.478$ mho/m; $\epsilon_r = 52.711$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE4 Sn1259; Calibrated: 2/13/2012
- Probe: EX3DV4 - SN3686; ConvF(7.04, 7.04, 7.04); Calibrated: 2/16/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (A); Type: QDOVA001BB; Serial: 1120

Front/R99 RMC_Ch 9400/Area Scan (10x14x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.417 mW/g

Front/R99 RMC_Ch 9400/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 17.293 V/m; Power Drift = -0.0015 dB
Peak SAR (extrapolated) = 0.6820
SAR(1 g) = 0.396 mW/g; SAR(10 g) = 0.243 mW/g
Maximum value of SAR (measured) = 0.499 mW/g

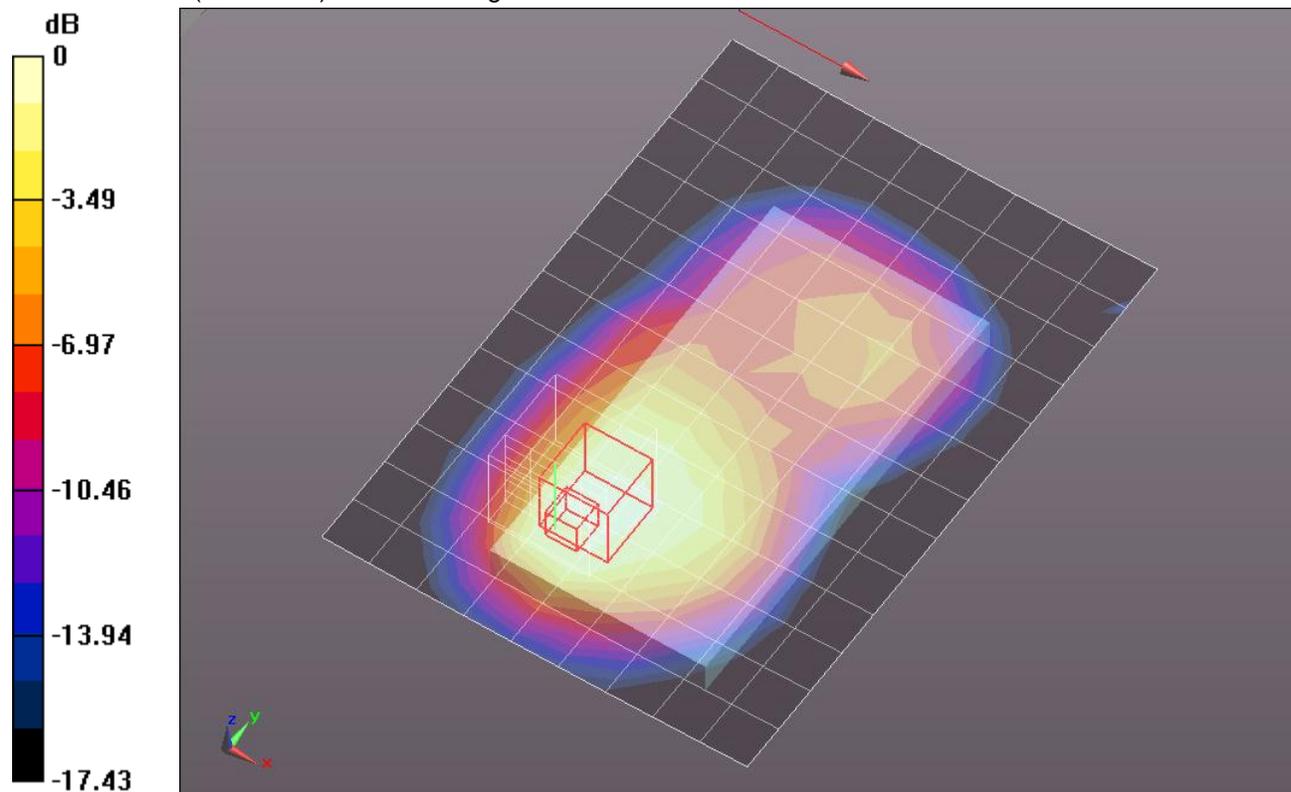

0 dB = 0.500mW/g = -6.02 dB mW/g

WCDMA Band II

Frequency: 1880 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.478$ mho/m; $\epsilon_r = 52.711$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE4 Sn1259; Calibrated: 2/13/2012
- Probe: EX3DV4 - SN3686; ConvF(7.04, 7.04, 7.04); Calibrated: 2/16/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (A); Type: QDOVA001BB; Serial: 1120

Edge 3/R99 RMC_Ch 9400/Area Scan (9x11x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.393 mW/g


Edge 3/R99 RMC_Ch 9400/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.372 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.5040

SAR(1 g) = 0.301 mW/g; SAR(10 g) = 0.168 mW/g

Maximum value of SAR (measured) = 0.391 mW/g

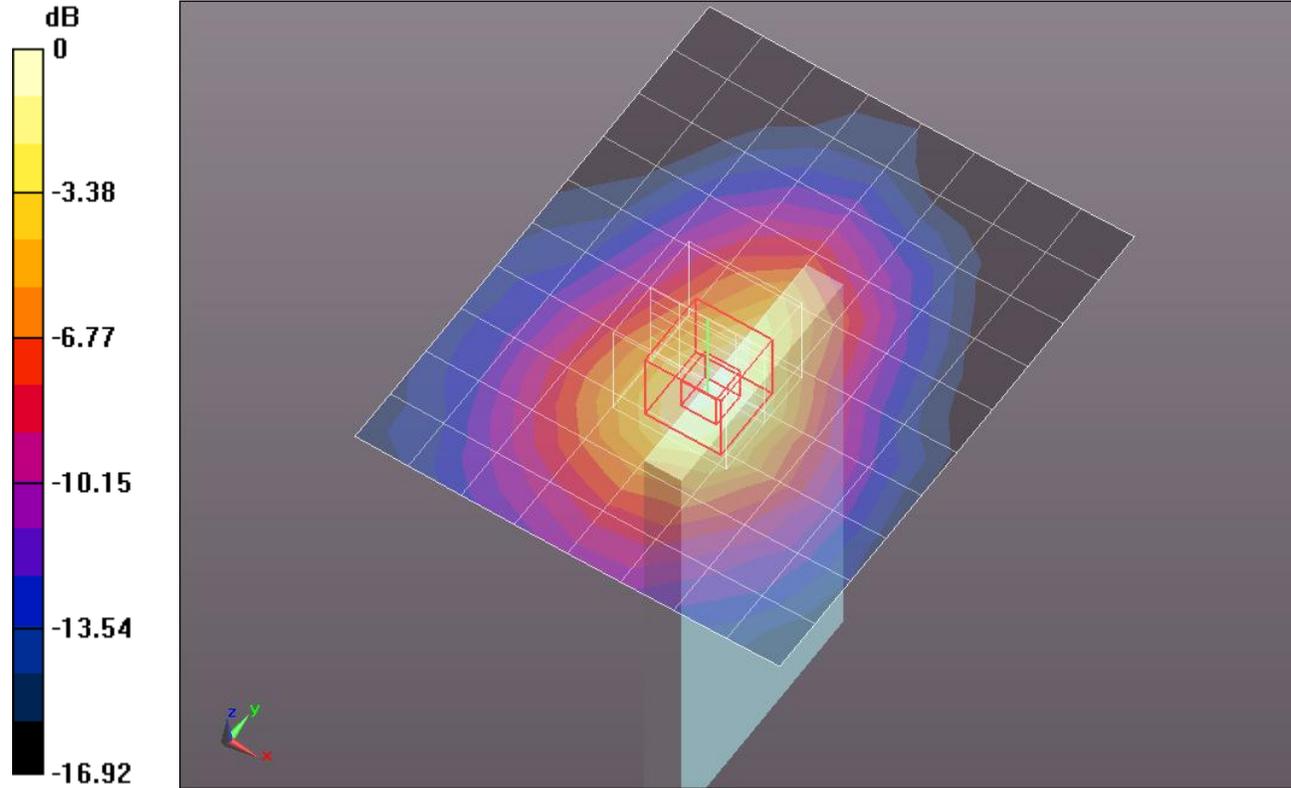

0 dB = 0.390mW/g = -8.18 dB mW/g

WCDMA Band II

Frequency: 1880 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.478$ mho/m; $\epsilon_r = 52.711$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE4 Sn1259; Calibrated: 2/13/2012
- Probe: EX3DV4 - SN3686; ConvF(7.04, 7.04, 7.04); Calibrated: 2/16/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (A); Type: QDOVA001BB; Serial: 1120

Edge 4/R99 RMC_Ch 9400/Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.376 mW/g


Edge 4/R99 RMC_Ch 9400/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.203 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.5000

SAR(1 g) = 0.315 mW/g; SAR(10 g) = 0.191 mW/g

Maximum value of SAR (measured) = 0.396 mW/g

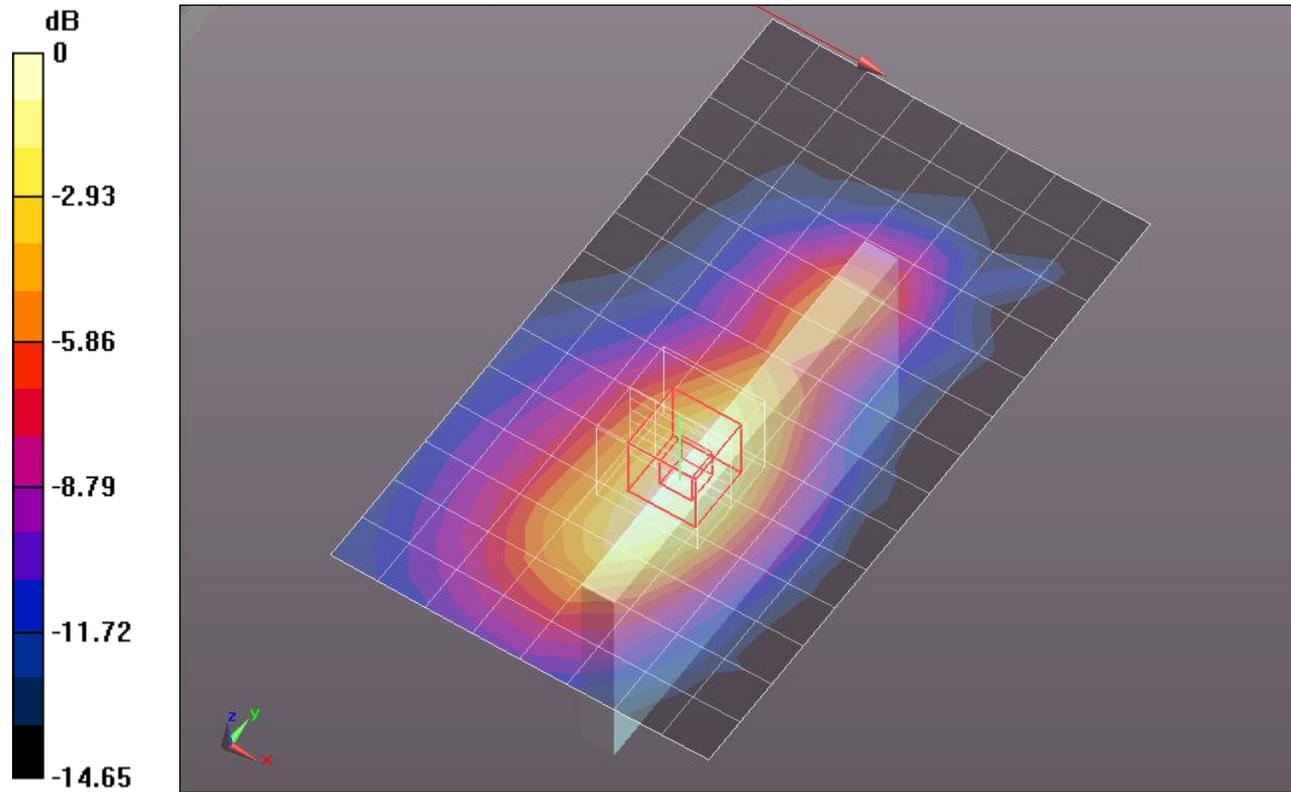

0 dB = 0.400mW/g = -7.96 dB mW/g