



FCC 47 CFR PART 15 SUBPART C

CERTIFICATION TEST REPORT

FOR

GSM/WCDMA/CDMA/LTE Phone + Bluetooth, DTS/UNII a/b/g/n/ac & NFC

MODEL NUMBER: LG-VS986, VS986, LGVS986, LG-AS986, AS986, LGAS986

FCC ID: ZNFVS986

IC: 2703C-VS986

REPORT NUMBER: 15I20402-E8

ISSUE DATE: April 16, 2015

Prepared for

**LG ELECTRONICS MOBILECOMM U.S.A., INC
1000 SYLVAN AVENUE
ENGLEWOOD CLIFFS,
NEW JERSEY, 07632, U.S.A**

Prepared by

**UL VERIFICATION SERVICES INC.
47173 BENICIA STREET
FREMONT, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888**



NVLAP LAB CODE 200065-0

Revision History

Rev.	Issue Date	Revisions	Revised By
--	04/16/15	Initial Issue	P. Zhang

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	4
2. TEST METHODOLOGY	5
3. FACILITIES AND ACCREDITATION	5
4. CALIBRATION AND UNCERTAINTY	5
4.1. MEASURING INSTRUMENT CALIBRATION	5
4.2. SAMPLE CALCULATION	5
4.3. MEASUREMENT UNCERTAINTY	5
5. EQUIPMENT UNDER TEST	6
5.1. DESCRIPTION OF EUT	6
5.2. MAXIMUM OUTPUT POWER.....	6
5.3. WORST-CASE CONFIGURATION AND MODE.....	6
5.4. MODIFICATIONS	6
5.5. DESCRIPTION OF TEST SETUP.....	7
6. TEST AND MEASUREMENT EQUIPMENT	10
7. OCCUPIED BANDWIDTH	11
8. RADIATED EMISSION TEST RESULTS.....	13
8.1. LIMITS AND PROCEDURE	13
8.1.1. FUNDAMENTAL AND SPURIOUS EMISSIONS (0.15 – 30 MHz)	15
8.1.2. FUNDAMENTAL AND SPURIOUS EMISSIONS (0.15 – 30 MHz)	16
8.2. TX SPURIOUS EMISSION 30 TO 1000 MHz	17
9. AC MAINS LINE CONDUCTED EMISSIONS.....	19
10. FREQUENCY STABILITY.....	23
11. SETUP PHOTOS	24

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: LG ELECTRONICS MOBILECOMM U.S.A., INC.
EUT DESCRIPTION: GSM/WCDMA/CDMA/LTE Phone + Bluetooth, DTS/UNII a/b/g/n/ac & NFC
MODEL: LG-VS986, VS986, LGVS986, LG-AS986, AS986, LGAS986
SERIAL NUMBER: 0298-0469 (Conducted), 0298-0459 (Radiated)
DATE TESTED: MAR 25 – APR 16, 2015


APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC PART 15 SUBPART C	Pass
INDUSTRY CANADA RSS-210 ISSUE 8	Pass
INDUSTRY CANADA RSS-GEN Issue 4	Pass

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For
UL Verification Services Inc. By:

Tested By:



PENG ZHANG
CONSUMER TECHNOLOGY DIVISION
PROJECT LEAD
UL VERIFICATION SERVICES INC

OREN STOELTING
CONSUMER TECHNOLOGY DIVISION
LAB ENGINEER
UL VERIFICATION SERVICES INC

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.10-2013, FCC CFR 47 Part 2 and FCC CFR 47 Part 15C.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 and 47266 Benicia Street, Fremont, California, USA. Line conducted emissions are measured only at the 47173 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

47173 Benicia Street	47266 Benicia Street
☒ Chamber A(IC: 2324B-1)	☐ Chamber D(IC: 2324B-4)
☒ Chamber B(IC: 2324B-2)	☐ Chamber E(IC: 2324B-5)
☒ Chamber C(IC: 2324B-3)	☐ Chamber F(IC: 2324B-6)
	☐ Chamber G(IC: 2324B-7)
	☐ Chamber H(IC: 2324B-8)

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://ts.nist.gov/standards/scopes/2000650.htm>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned}\text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \text{Cable} \\ &\text{Loss (dB)} - \text{Preamp Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m}\end{aligned}$$

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	3.52 dB
Radiated Disturbance, 30 to 1000 MHz	4.94 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is a GSM/WCDMA/CDMA/LTE Phone + Bluetooth, DTS/UNII a/b/g/n/ac & NFC

5.2. MAXIMUM OUTPUT POWER

The testing was performed at 1meter. The transmitter maximum E-field at 30m distance is 14.50 dBuV/m which convert from the 1 meters data.

5.3. WORST-CASE CONFIGURATION AND MODE

The NFC function was tested at its' fundamental and only operational frequency of 13.56MHz. The fundamental of the EUT was investigated in three orthogonal orientations X, Y and Z. It was determined that the Z-orientation with cover opened was the worst-case orientation; therefore all final radiated testing was performed with the EUT in the Z-orientation with cover opened while generating continuous emissions.

5.4. MODIFICATIONS

No modifications were made during testing.

5.5. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
AC Adapter	LG	MCS-04WD2	EAY62991904	N/A
Smart Case Cover	LG	LG-P1	DK0227	N/A
Wireless Charger	LG	WCD-110	LF1212625283010049	N/A
Earphone	LG	N/A	N/A	N/A

I/O CABLES

Radiated Emissions above 30 MHz, AC Line Conducted Emissions:

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	DC Power	1	Micro-USB	Shielded	1 m	None
2	Audio	1	Mini-Jack	Un-Shielded	1 m	None


TEST SETUP

The EUT is a stand-alone device configured and tested in a worst-case setup.


Note: worst case is using worst case orientation with AC charger and headset attached to the EUT with NFC signal continuously transmitting.

SETUP DIAGRAM FOR TESTS

Radiated Emissions Below 30 MHz:

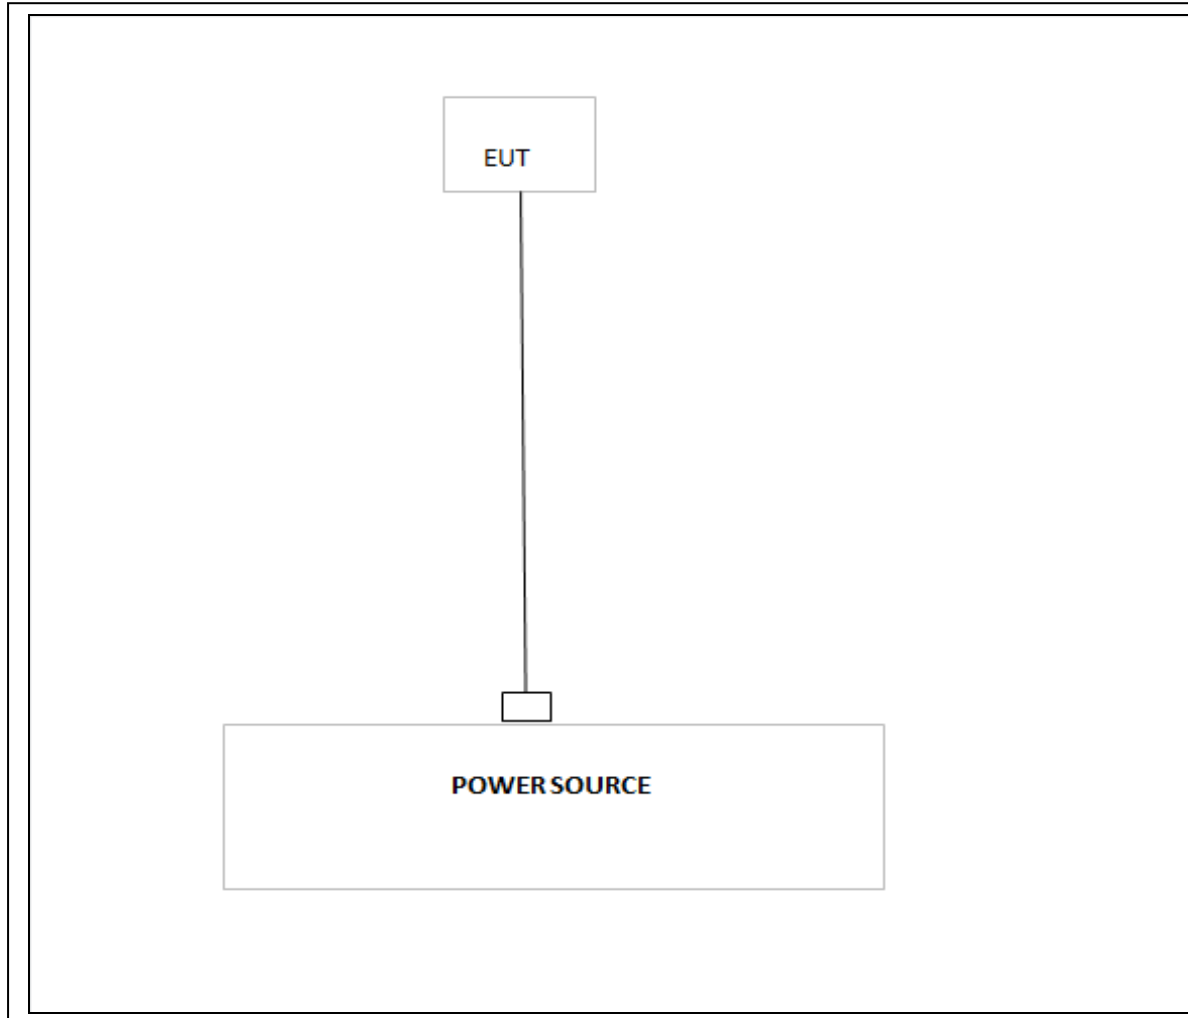

Radiated Emissions above 30 MHz, AC Line Conducted Emissions:

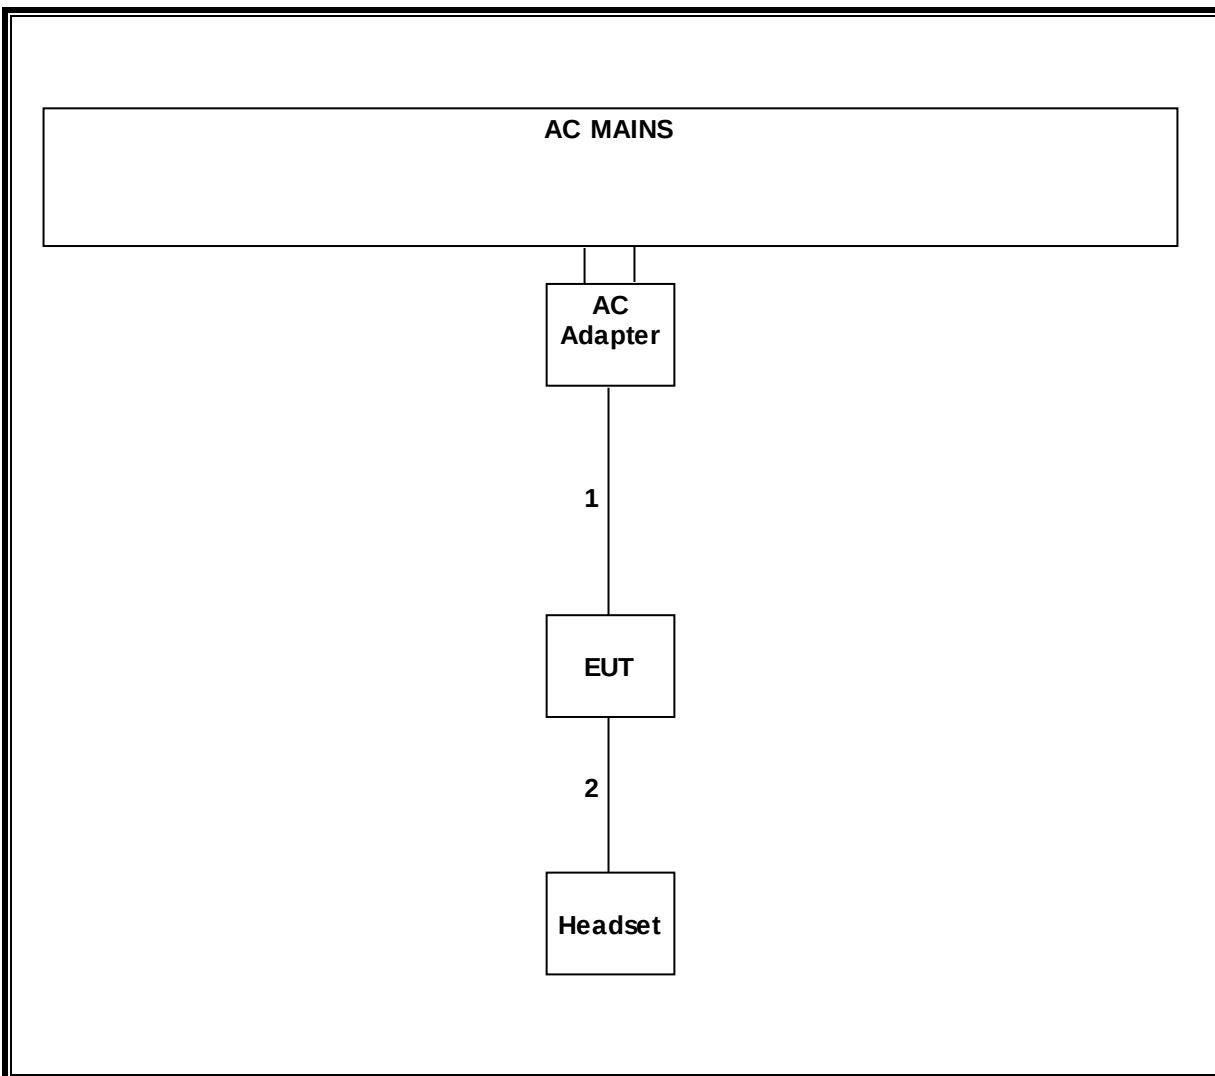

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Test Equipment List				
Description	Manufacturer	Model	Asset	Cal Due
ESA-E Spectrum Analyzer, 9kHz-26.5 GHz	Agilent / HP	E4407B	C01098	04/04/16
Antenna, Loop, 30 MHz	EMCO	6502	C00593	02/20/16
Antenna, Bilog, 30MHz-1 GHz	Sunol Sciences	JB1	C01011	03/23/16
Preamplifier, 1300 MHz	Agilent / HP	8447D	C00580	04/03/16
EMI Test Receiver, 30 MHz	R & S	ESHS 20	N02396	08/08/15
LISN, 30 MHz	FCC	50/250-25-2	C00626	01/16/16
DMM	Fluke	77-11	N02303	10/31/15
Temperature Chamber	CSZ	2PHS-8-3	T267	03/04/16

7. OCCUPIED BANDWIDTH

RULE PART(S)


IC RSS 210 Issue 8

LIMITS

For reporting purposes only

RESULTS

Channel	Frequency (KHz)	99% Bandwidth (KHz)
Low	13.56	502.250

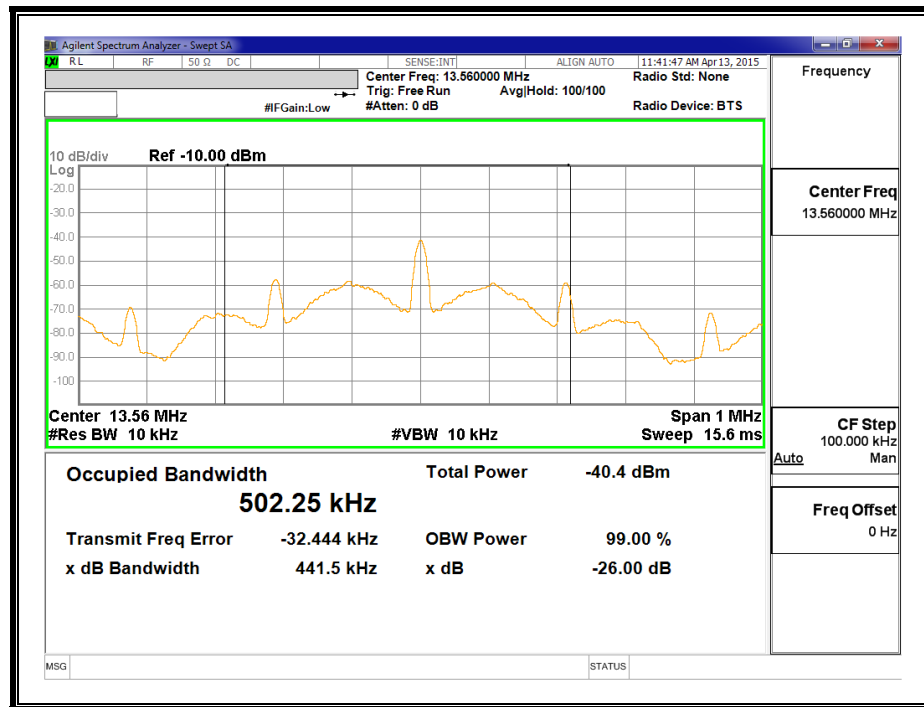

8. RADIATED EMISSION TEST RESULTS

8.1. LIMITS AND PROCEDURE

LIMIT

§15.225

IC RSS-210, Annex 2, Section A2.6 (Transmitter)

IC RSS-GEN, Section 6 (Receiver)

(a) The field strength of any emissions within the band 13.553–13.567 MHz shall not exceed 15,848 microvolts/ meter at 30 meters.

(b) Within the bands 13.410–13.553 MHz and 13.567–13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter at 30 meters.

(c) Within the bands 13.110–13.410 MHz and 13.710–14.010 MHz the field strength of any emissions shall not exceed 106 microvolts/meter at 30 meters.

(d) The field strength of any emissions appearing outside of the 13.110– 14.010 MHz and shall not exceed the general radiated emission limits in § 15.209 as follows:

§15.209 (a) Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Limits for radiated disturbance of an intentional radiator		
Frequency range (MHz)	Limits (µV/m)	Measurement Distance (m)
0.009 – 0.490	2400 / F (kHz)	300
0.490 – 1.705	24000 / F (kHz)	30
1.705 – 30.0	30	30
30 – 88	100**	3
88 - 216	150**	3
216 – 960	200**	3
Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g. §§ 15.231 and 15.241.

§15.209 (b) In the emission table above, the tighter limit applies at the band edges.

Formula for converting the filed strength from uV/m to dBuV/m is:

Limit (dBuV/m) = 20 log limit (uV/m)

In addition:

§15.209 (d) The emission limits shown the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emissions limits in these three bands are based on measurements employing an average detector.

§15.209 (d) The provisions in §§ 15.225, measuring emissions at distances other than the distances specified in the above table, determining the frequency range over which radiated emissions are to be measured, and limiting peak emissions apply to all devices operated under this part.

TEST PROCEDURE

ANSI C63.10-2013

The EUT is an intentional radiator that incorporates a digital device. The highest fundamental frequency generated or used in the device is 13.56 MHz. The frequency range was investigated from 0.15 MHz to the 10th harmonic of the highest fundamental frequency, or 1000 MHz, whichever is greater (1000MHz)

RESULTS

No non-compliance noted:

8.1.1. FUNDAMENTAL AND SPURIOUS EMISSIONS (0.15 – 30 MHz) (Normal Battery Cover)



FCC Part 15, Subpart B & C 1 Meter Distance Measurement At Emissions Chamber											
Company: LG											
Project #: 15I20402											
Model #: (X72)_LG-VS986											
Tester: Jude Semana											
Date: 4/13/2015											
Frequency (MHz)	PK (dBuV)	QP (dBuV)	AV (dBuV)	AF (dBm)	Distance (m)	Distance Correction (dB)	PK Corrected Reading (dBuV/m)	AV Corrected Reading (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Notes
Loop Antenna Face On: Z Position											
Fundamental Field Strength & Within Bands:											
13.56	63.03	--	--	10.56	1	-59.08	14.50	--	84.00	--	Fundamental @ 30m Dist
13.454	50.9	--	--	10.55	1	-59.08	2.30	--	50.48	--	13.41-13.553MHz Spurious @ 30m
13.553	53.05	--	--	10.56	1	-59.08	4.55	--	50.48	--	13.41-13.553MHz Spurious @ 30m
13.567	55.52	--	--	10.56	1	-59.08	6.99	--	50.48	--	13.567-13.710MHz Spurious @ 30m
13.665	50.33	--	--	10.57	1	-59.08	1.81	--	40.51	--	13.567-13.710MHz Spurious @ 30m
13.137	35.84	--	--	10.51	1	-59.08	-12.73	--	40.51	--	13.110-13.410MHz Spurious @ 30m
13.348	39.03	--	--	10.53	1	-59.08	-9.52	--	40.51	--	13.110-13.410MHz Spurious @ 30m
13.772	45.81	--	--	10.58	1	-59.08	-2.90	--	40.51	--	13.710-14.010MHz Spurious @ 30m
13.984	33.82	--	--	10.6	1	-59.08	-14.67	--	29.54	--	13.710-14.010MHz Spurious @ 30m
Loop Antenna Face Off: Z Position											
Fundamental Field Strength & Within Bands:											
13.56	61.77	--	--	10.56	1	-59.08	13.24	--	84.00	--	Fundamental @ 30m Dist
13.454	50.2	--	--	10.55	1	-59.08	1.66	--	50.48	--	13.41-13.553MHz Spurious @ 30m
13.553	51.44	--	--	10.56	1	-59.08	2.91	--	50.48	--	13.41-13.553MHz Spurious @ 30m
13.567	54.81	--	--	10.56	1	-59.08	6.28	--	50.48	--	13.567-13.710MHz Spurious @ 30m
13.665	48.23	--	--	10.57	1	-59.08	-0.29	--	40.51	--	13.567-13.710MHz Spurious @ 30m
13.138	34.99	--	--	10.51	1	-59.08	-13.58	--	40.51	--	13.110-13.410MHz Spurious @ 30m
13.348	36.98	--	--	10.53	1	-59.08	-11.57	--	40.51	--	13.110-13.410MHz Spurious @ 30m
13.772	44.81	--	--	10.58	1	-59.08	-3.90	--	40.51	--	13.710-14.010MHz Spurious @ 30m
13.983	31.28	--	--	10.6	1	-59.08	-17.21	--	29.54	--	13.710-14.010MHz Spurious @ 30m
Loop Antenna Face On: Z Position											
Spurious Emissions 9kHz - 490kHz:											
0.01	63.7	--	--	18.7	1	-99.08	-16.68	-16.68	67.60	47.60	9kHz-10kHz Spurious @ 30m
0.1	50.95	--	--	10.5	1	-99.08	-37.63	-37.63	47.60	27.60	10kHz-100kHz Spurious @ 30m
0.109	49.67	--	--	10.49	1	-99.08	-38.92	-38.92	46.86	26.86	100kHz-489kHz Spurious @ 30m
Spurious Emissions 490kHz - 30MHz:											
0.49	37.365	--	--	10.21	1	-59.08	-11.51	--	33.80	--	489kHz-490kHz Spurious @ 30m
1	28.5	--	--	10.3	1	-59.08	-20.28	--	27.60	--	490kHz-1MHz Spurious @ 30m
1.366	28.132	--	--	10.28	1	-59.08	-20.67	--	24.90	--	1MHz-1.705MHz Spurious @ 30m
4.133	19.442	--	--	10.2	1	-59.08	-29.44	--	29.54	--	1.705MHz-5MHz Spurious @ 30m
6.27	24.41	--	--	10.2	1	-59.08	-24.47	--	29.54	--	5-10MHz Spurious @ 30m
24.05	28.99	--	--	9.49	1	-59.08	-20.60	--	29.54	--	20-30MHz Spurious @ 30m
* No more emissions were found up to 30MHz											
Note: The emission limits are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 10000Mhz. Radiated emission limits in these three bands are based on measurements employing an average detector.											
P.K. = Peak											
Q.P. = Quasi Peak Readings											
A.F. = Antenna factor											
Rev. 11.21.14											

8.1.2. FUNDAMENTAL AND SPURIOUS EMISSIONS (0.15 – 30 MHz) (Smart Cover)

FCC Part 15, Subpart B & C 1 Meter Distance Measurement At Emissions Chamber													
Company:		LG											
Project #:		15I20402											
Model #:		(X72)_LG-VS986 (with Smart Cover)											
Tester:		Jude Semana											
Date:		4/13/2015											
Frequency (MHz)	PK (dBuV)	QP (dBuV)	AV (dBuV)	AF (dB/m)	Distance (m)	Distance Correction (dB)	PK Corrected Reading (dBuV/m)	AV Corrected Reading (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	PK Margin (dB)	AV Margin (dB)	Notes
Loop Antenna Face On: Z Position													
Fundamental Field Strength & Within Bands:													
13.56	65.24	--	--	10.56	1	-59.08	16.71	--	84.00	--	-67.3	--	Fundamental @ 30m Dist
13.454	48.03	--	--	10.55	1	-59.08	-0.51	--	50.48	--	-51.0	--	13.41-13.553MHz Spurious @ 30m
13.553	55.02	--	--	10.56	1	-59.08	6.49	--	50.48	--	-44.0	--	13.41-13.553MHz Spurious @ 30m
13.567	56.81	--	--	10.56	1	-59.08	8.28	--	50.48	--	-42.2	--	13.567-13.710MHz Spurious @ 30m
13.666	50.52	--	--	10.57	1	-59.08	2.00	--	40.51	--	-38.5	--	13.567-13.710MHz Spurious @ 30m
13.137	36.41	--	--	10.51	1	-59.08	-12.16	--	40.51	--	-52.7	--	13.110-13.410MHz Spurious @ 30m
13.348	47.57	--	--	10.53	1	-59.08	-0.98	--	40.51	--	-41.5	--	13.110-13.410MHz Spurious @ 30m
13.772	44.62	--	--	10.58	1	-59.08	-3.89	--	40.51	--	-44.4	--	13.710-14.010MHz Spurious @ 30m
13.984	32.34	--	--	10.6	1	-59.08	-16.15	--	29.54	--	-45.7	--	13.710-14.010MHz Spurious @ 30m
Loop Antenna Face Off: Z Position													
Fundamental Field Strength & Within Bands:													
13.56	61.67	--	--	10.56	1	-59.08	13.14	--	84.00	--	-70.9	--	Fundamental @ 30m Dist
13.454	31.92	--	--	10.55	1	-59.08	-16.62	--	50.48	--	-67.1	--	13.41-13.553MHz Spurious @ 30m
13.553	35.41	--	--	10.56	1	-59.08	-13.12	--	50.48	--	-63.6	--	13.41-13.553MHz Spurious @ 30m
13.567	37.41	--	--	10.56	1	-59.08	-11.12	--	50.48	--	-61.6	--	13.567-13.710MHz Spurious @ 30m
13.665	30.24	--	--	10.57	1	-59.08	-18.28	--	40.51	--	-58.8	--	13.567-13.710MHz Spurious @ 30m
13.138	20.3	--	--	10.51	1	-59.08	-28.27	--	40.51	--	-68.8	--	13.110-13.410MHz Spurious @ 30m
13.348	28.17	--	--	10.53	1	-59.08	-20.38	--	40.51	--	-60.9	--	13.110-13.410MHz Spurious @ 30m
13.772	25.88	--	--	10.58	1	-59.08	-22.63	--	40.51	--	-63.1	--	13.710-14.010MHz Spurious @ 30m
13.983	19.79	--	--	10.6	1	-59.08	-28.70	--	29.54	--	-58.2	--	13.710-14.010MHz Spurious @ 30m
Loop Antenna Face On: Z Position													
Spurious Emissions 9kHz - 490kHz:													
0.01	61.56	--	--	18.7	1	-99.08	-18.82	-18.82	67.60	47.60	-86.4	-66.4	9kHz-10kHz Spurious @ 30m
0.1	50.8	--	--	10.5	1	-99.08	-37.78	-37.78	47.60	27.60	-85.4	-65.4	10kHz-100kHz Spurious @ 30m
0.109	50.291	--	--	10.49	1	-99.08	-38.30	-38.30	46.86	26.86	-85.2	-65.2	100kHz-489kHz Spurious @ 30m
Spurious Emissions 490kHz - 30MHz:													
0.49	36.06	--	--	10.21	1	-59.08	-12.82	--	33.80	--	-46.6	--	489kHz-490kHz Spurious @ 30m
1	29.11	--	--	10.3	1	-59.08	-19.67	--	27.60	--	-47.3	--	490kHz-1MHz Spurious @ 30m
1.366	27.91	--	--	10.28	1	-59.08	-20.89	--	24.90	--	-45.8	--	1MHz-1.705MHz Spurious @ 30 m
4.133	25.06	--	--	10.2	1	-59.08	-23.82	--	29.54	--	-53.4	--	1.705MHz-5MHz Spurious @ 30m
6.27	17.796	--	--	10.2	1	-59.08	-31.09	--	29.54	--	-60.6	--	5-10MHz Spurious @ 30m
24.05	32	--	--	9.49	1	-59.08	-17.59	--	29.54	--	-47.1	--	20-30MHz Spurious @ 30m
* No more emissions were found up to 30MHz													
Note: The emission limits are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 10000Mhz. Radiated emission limits in these three bands are based on measurements employing an average detector.													
P.K. = Peak													
Q.P. = Quasi Peak Readings													
A.F. = Antenna factor													
Rev. 11.21.14													

8.2. TX SPURIOUS EMISSION 30 TO 1000 MHz

EMI PLOT

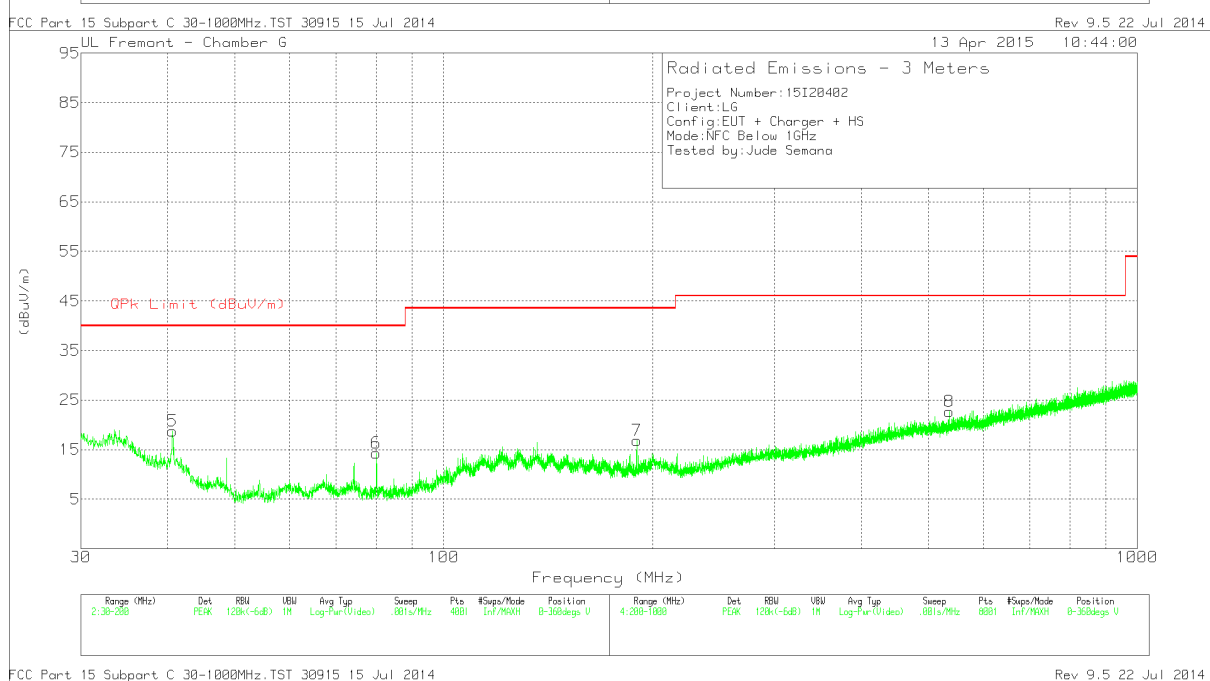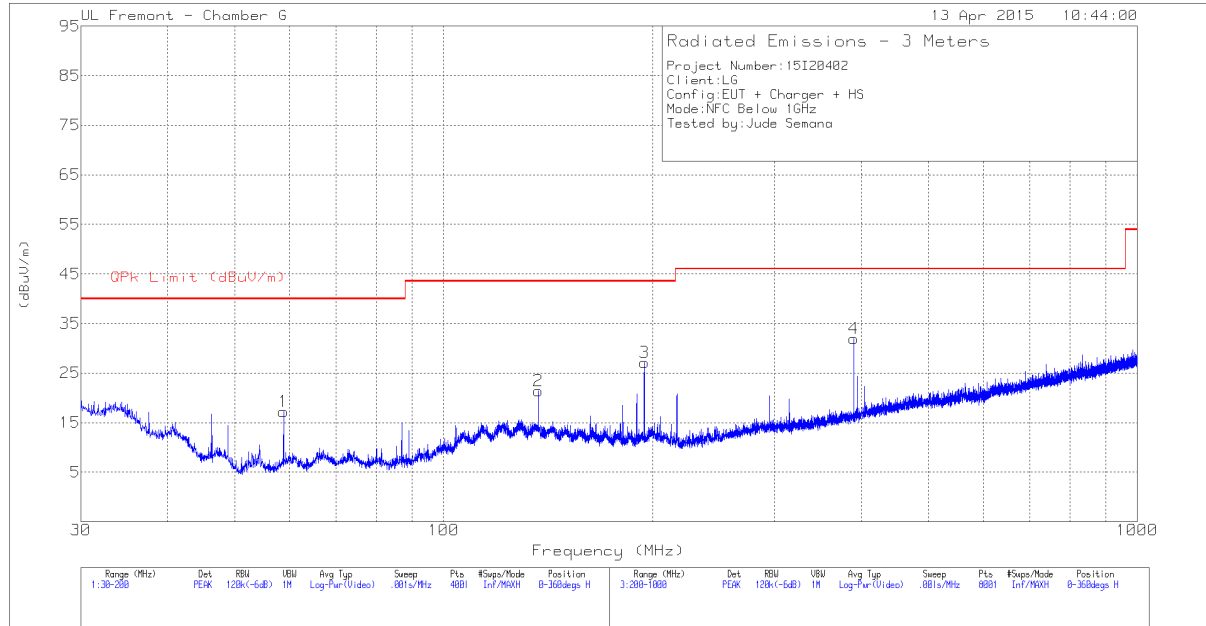

Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF T899 (dB/m)	Amp Cbl (dB)	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 136.845	35.07	PK	16.5	-30.1	21.47	43.52	-22.05	0-360	201	H
5	40.6675	33.1	PK	16.8	-31.1	18.8	40	-21.2	0-360	100	V
1	58.7725	37.59	PK	10.5	-30.9	17.19	40	-22.81	0-360	201	H
6	79.98	34.71	PK	10.3	-30.7	14.31	40	-25.69	0-360	100	V
7	189.8425	32.4	PK	14.3	-29.8	16.9	43.52	-26.62	0-360	100	V
3	194.645	42.04	PK	14.7	-29.6	27.14	43.52	-16.38	0-360	98	H
4	390.3	42.09	PK	18.2	-28.4	31.89	46.02	-14.13	0-360	301	H
8	536.1	29.62	PK	20.9	-27.8	22.72	46.02	-23.3	0-360	301	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

9. AC MAINS LINE CONDUCTED EMISSIONS

LIMITS

§15.207

IC RSS-GEN, Section 8.8

(a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the band edges.

Frequency range (MHz)	Limits (dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

Notes:

1. The lower limit shall apply at the transition frequencies
2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

TEST PROCEDURE

ANSI C63.10-2013

RESULTS

No non-compliance noted:


6 WORST EMISSIONS

Range 1: Line-L1 .15 - 30MHz										
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	T24 IL L1	LC Cables 1&3	Corrected Reading dBuV	runPR 22 Class B QP	Margin (dB)	CISPR 22 Class B Avg	Margin (dB)
1	.447	43.11	Pk	.4	0	43.51	56.93	-13.42	-	-
2	.447	34.02	Av	.4	0	34.42	-	-	46.93	-12.51
3	1.167	43.13	Pk	.2	.1	43.43	56	-12.57	-	-
4	1.167	30.83	Av	.2	.1	31.13	-	-	46	-14.87
5	1.9995	48.4	Pk	.2	.1	48.7	56	-7.3	-	-
6	1.9995	34.41	Av	.2	.1	34.71	-	-	46	-11.29
7	2.1345	50.98	Pk	.2	.1	51.28	56	-4.72	-	-
8	2.112	39.06	Av	.2	.1	39.36	-	-	46	-6.64
9	2.202	48.14	Pk	.2	.1	48.44	56	-7.56	-	-
10	2.202	34.16	Av	.2	.1	34.46	-	-	46	-11.54
11	15.2205	45.22	Pk	.3	.2	45.72	60	-14.28	-	-
12	15.189	30.31	Av	.3	.2	30.81	-	-	50	-19.19
Range 2: Line-L2 .15 - 30MHz										
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	T24 IL L2	LC Cables 2&3	Corrected Reading dBuV	runPR 22 Class B QP	Margin (dB)	CISPR 22 Class B Avg	Margin (dB)
13	.4515	38.82	Pk	.4	0	39.22	56.85	-17.63	-	-
14	.4515	27.68	Av	.4	0	28.08	-	-	46.85	-18.77
15	1.1265	40.42	Pk	.3	.1	40.82	56	-15.18	-	-
16	1.1265	24.64	Av	.3	.1	25.04	-	-	46	-20.96
17	2.022	43.28	Pk	.2	.1	43.58	56	-12.42	-	-
18	1.986	27.76	Av	.2	.1	28.06	-	-	46	-17.94
19	2.0805	39.22	Pk	.2	.1	39.52	56	-16.48	-	-
20	2.0895	23.85	Av	.2	.1	24.15	-	-	46	-21.85
21	2.247	39.47	Pk	.2	.1	39.77	56	-16.23	-	-
22	2.2425	23.19	Av	.2	.1	23.49	-	-	46	-22.51
23	14.856	38.67	Pk	.2	.2	39.07	60	-20.93	-	-
24	14.8515	22.35	Av	.2	.2	22.75	-	-	50	-27.25


Pk - Peak detector

Av - Average detection

LINE 1 RESULTS

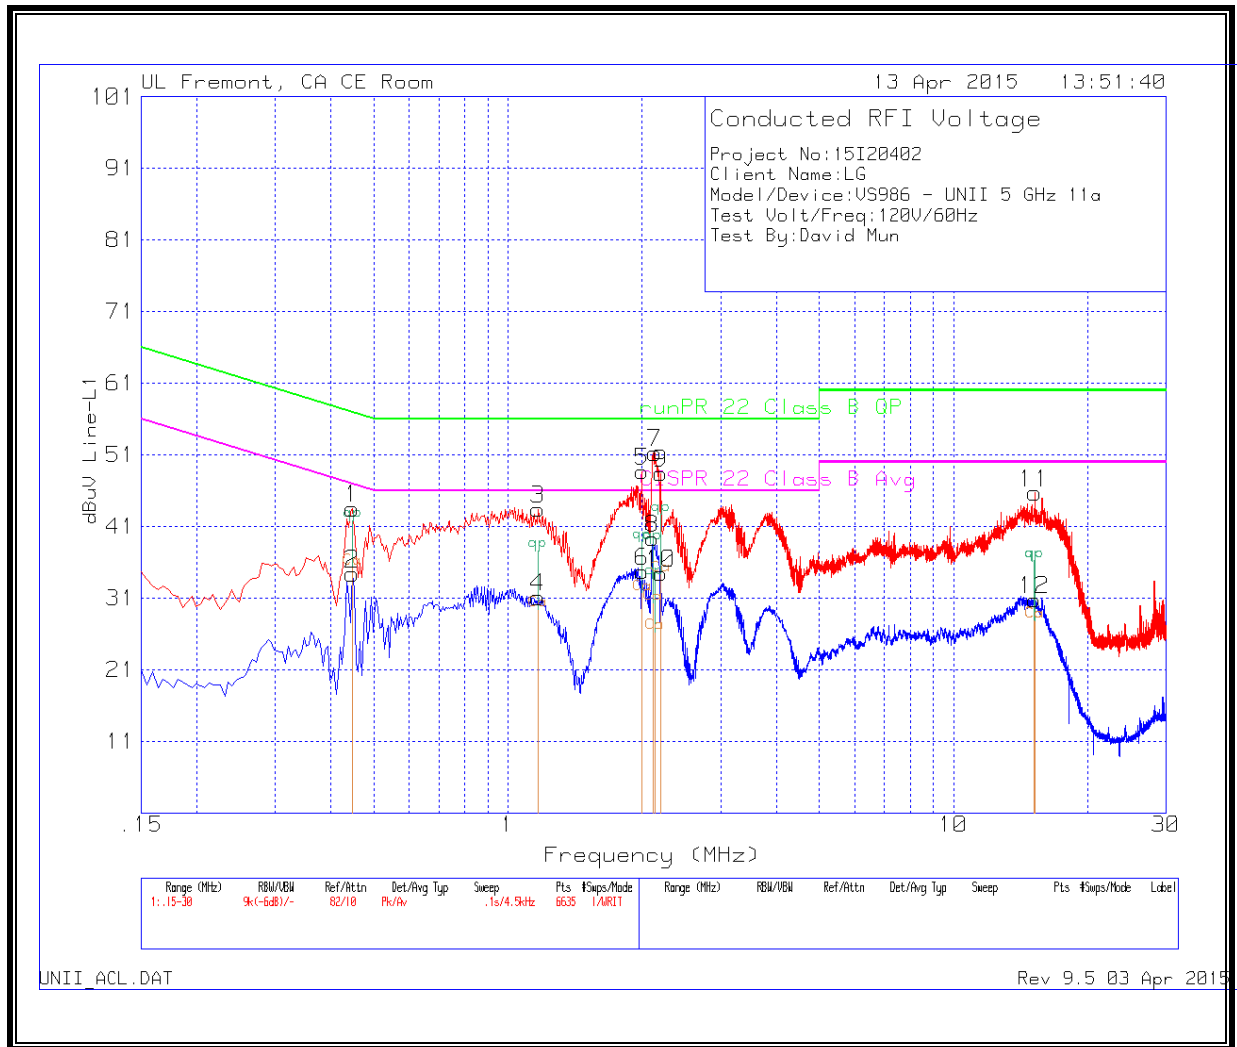

LINE 2 RESULTS

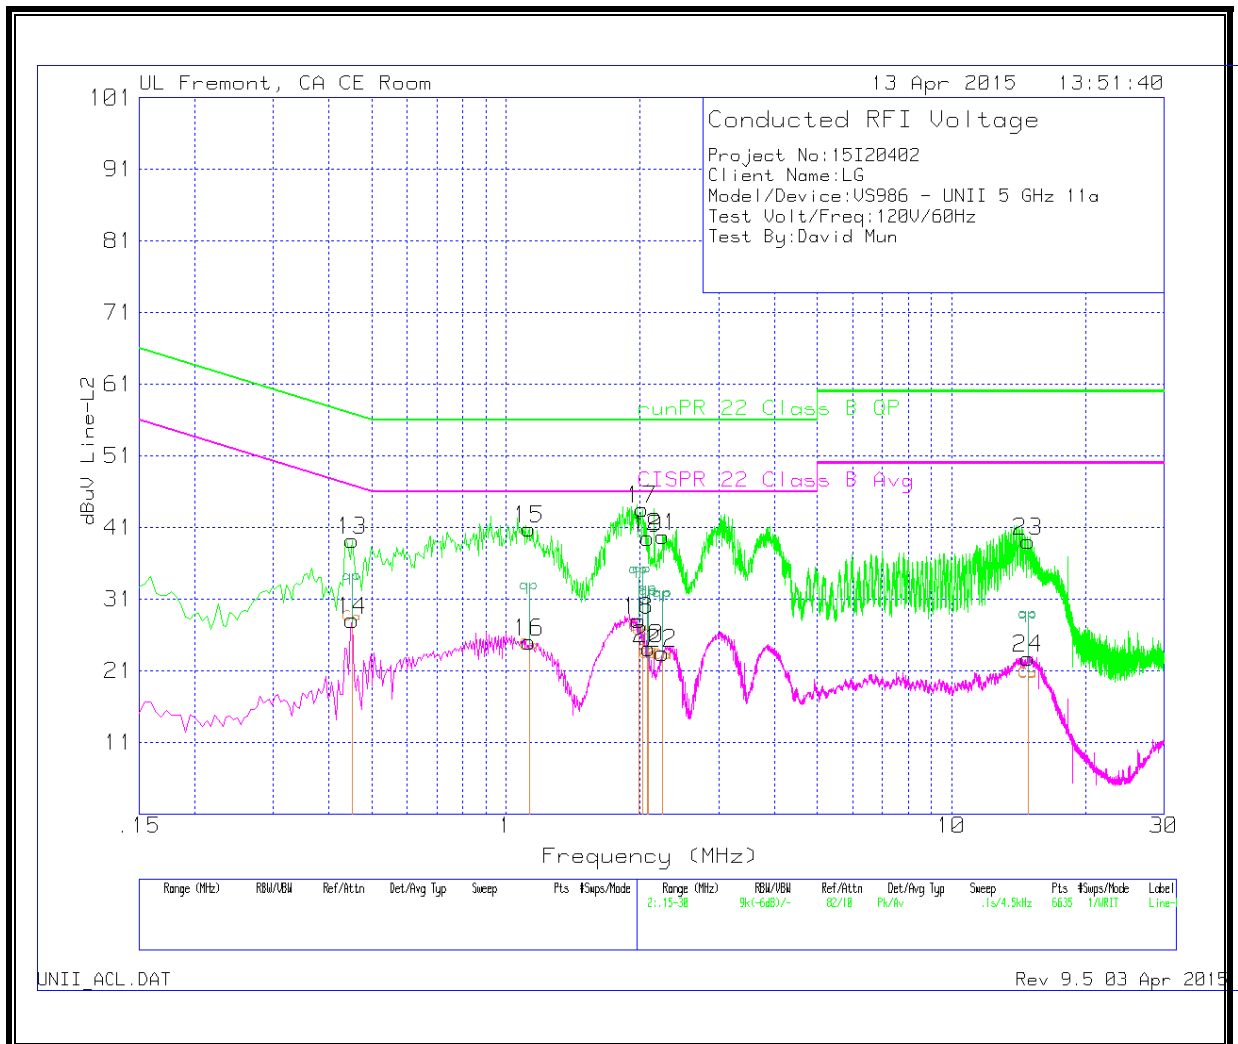

10. FREQUENCY STABILITY

LIMIT

§15.225 (e) The frequency tolerance of the carrier signal shall be maintained within $\pm 0.01\%$ of the operating frequency, over a temperature variation of -20 degrees to +50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.

TEST PROCEDURE

ANSI C63.4 Section 13

RESULTS

No non-compliance noted.

Reference Frequency: EUT Channel 13.560000 MHz @ 20°C				
Limit: ± 100 ppm = 1.356 kHz				
Power Supply (Vdc)	Environment Temperature (°C)	Frequency Deviation Measured with Time Elapse		
		(MHz)	Delta (ppm)	Limit (ppm)
3.80	50	13.5601000	-7.375	± 100
3.80	40	13.5602000	-14.749	± 100
3.80	30	13.5601200	-8.850	± 100
3.80	20	13.5600000	0.000	± 100
3.80	10	13.5601000	-7.375	± 100
3.80	0	13.5602000	-14.749	± 100
3.80	-10	13.5601000	-7.375	± 100
3.80	-20	13.5604000	-29.499	± 100
3.80	-30	13.5602000	-14.749	± 100
End of volt 3.3	20	13.5599000	7.375	± 100
4.37	20	13.5598000	14.749	± 100