



PCTEST ENGINEERING LABORATORY, INC.

7185 Oakland Mills Road, Columbia, MD 21046 USA
Tel. 410.290.6652 / Fax 410.290.6654
http://www.pctestlab.com



MEASUREMENT REPORT FCC Part 22, 24, & 27

Applicant Name:
LG Electronics MobileComm U.S.A
1000 Sylvan Avenue
Englewood Cliffs, NJ 07632
United States

Date of Testing:
12/27/2016-2/16/2017
Test Site/Location:
PCTEST Lab., Columbia, MD, USA
Test Report Serial No.:
1M1701180035-02-R3.ZNF

FCC ID:	ZNFVS988
APPLICANT:	LG ELECTRONICS MOBILECOMM U.S.A

Application Type: Certification
Model: LG-VS988
Additional Model(s): LGVS988, VS988, LG-US997, LGUS997, US997, LG-VS988P, LG-VS988T, LG-VS988B, LG-VS988W, LG-VS988G
EUT Type: Portable Handset
FCC Classification: PCS Licensed Transmitter Held to Ear (PCE)
FCC Rule Part(s): §2 §22(H) §24(E) §27(L)
Test Procedure(s): ANSI/TIA-603-D-2010, KDB 971168 D01 v02r02, KDB 648474 D03 v01r04
Test Device Serial No.: *identical prototype* [S/N: 06277, 06921, 06913, 06905]

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in §2.947. Test results reported herein relate only to the item(s) tested.

This revised Test Report (S/N: 1M1701180035-02-R3.ZNF) supersedes and replaces the previously issued test report on the same subject device for the same type of testing as indicated. Please discard or destroy the previously issued test report(s) and dispose of it accordingly.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.


 Randy Ortanez
 President




FCC ID: ZNFVS988	 FCC Pt. 22, 24, & 27 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M1701180035-02-R3.ZNF	Test Dates: 12/27/2016-2/16/2017	EUT Type: Portable Handset		Page 1 of 107

T A B L E O F C O N T E N T S


FCC PART 22, 24, & 27 MEASUREMENT REPORT		3
1.0 INTRODUCTION		5
1.1 Scope.....		5
1.2 Testing Facility		5
2.0 PRODUCT INFORMATION.....		6
2.1 Equipment Description		6
2.2 Device Capabilities		6
2.3 Test Configuration.....		6
2.4 EMI Suppression Device(s)/Modifications.....		6
3.0 DESCRIPTION OF TESTS		7
3.1 Evaluation Procedure.....		7
3.2 Cellular - Base Frequency Blocks		7
3.3 Cellular - Mobile Frequency Blocks.....		7
3.4 PCS - Base Frequency Blocks.....		7
3.5 PCS - Mobile Frequency Blocks		8
3.6 AWS - Base Frequency Blocks		8
3.7 AWS - Mobile Frequency Blocks.....		8
3.8 Radiated Measurements.....		9
4.0 MEASUREMENT UNCERTAINTY		10
5.0 TEST EQUIPMENT CALIBRATION DATA		11
6.0 SAMPLE CALCULATIONS		12
7.0 TEST RESULTS.....		13
7.1 Summary.....		13
7.2 Occupied Bandwidth		14
7.3 Spurious and Harmonic Emissions at Antenna Terminal.....		20
7.4 Band Edge Emissions at Antenna Terminal.....		53
7.5 Peak-Average Ratio.....		66
7.6 Radiated Power (ERP/EIRP)		69
7.7 Radiated Spurious Emissions Measurements.....		74
7.8 Frequency Stability / Temperature Variation		92
8.0 CONCLUSION.....		107

FCC ID: ZNFVS988	 FCC Pt. 22, 24, & 27 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1701180035-02-R3.ZNF	Test Dates: 12/27/2016-2/16/2017	EUT Type: Portable Handset	
			Page 2 of 107



MEASUREMENT REPORT

FCC Part 22, 24, & 27




§2.1033 General Information

APPLICANT: LG Electronics MobileComm U.S.A
APPLICANT ADDRESS: 1000 Sylvan Avenue
 Englewood Cliffs, NJ 07632, United States
TEST SITE: PCTEST ENGINEERING LABORATORY, INC.
TEST SITE ADDRESS: 7185 Oakland Mills Road, Columbia, MD 21046 USA
FCC RULE PART(S): §2 §22(H) §24(E) §27(L)
BASE MODEL: LG-VS988
FCC ID: ZNFVS988
FCC CLASSIFICATION: PCS Licensed Transmitter Held to Ear (PCE)
MODE: GSM / GPRS / EDGE / CDMA / WCDMA
FREQUENCY TOLERANCE: ±0.00025 % (2.5 ppm)
Test Device Serial No.: 06277, 06921, 06913, 06905 Production Pre-Production Engineering
DATE(S) OF TEST: 12/27/2016-2/16/2017
TEST REPORT S/N: 1M1701180035-02-R3.ZNF


Test Facility / Accreditations

Measurements were performed at PCTEST Engineering Lab located in Columbia, MD 21046, U.S.A.

- PCTEST facility is an FCC registered (PCTEST Reg. No. 159966) test facility with the site description report on file and has met all the requirements specified in Section 2.948 of the FCC Rules and Industry Canada (2451B-1).
- PCTEST Lab is accredited to ISO 17025 by U.S. National Institute of Standards and Technology (NIST) under the National Voluntary Laboratory Accreditation Program (NVLAP Lab code: 100431-0) in EMC, FCC and Telecommunications.
- PCTEST Lab is accredited to ISO 17025-2005 by the American Association for Laboratory Accreditation (A2LA) in Specific Absorption Rate (SAR) testing, Hearing Aid Compatibility (HAC) testing, CTIA Test Plans, and wireless testing for FCC and Industry Canada Rules.
- PCTEST Lab is a recognized U.S. Conformity Assessment Body (CAB) in EMC and R&TTE (n.b. 0982) under the U.S.-EU Mutual Recognition Agreement (MRA).
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC Guide 65 by the American National Standards Institute (ANSI) in all scopes of FCC Rules and Industry Canada Standards (RSS).
- PCTEST facility is an IC registered (2451B-1) test laboratory with the site description on file at Industry Canada.
- PCTEST is a CTIA Authorized Test Laboratory (CATL) for AMPS, CDMA, and EvDO wireless devices and for Over-the-Air (OTA) Antenna Performance testing for AMPS, CDMA, GSM, GPRS, EGPRS, UMTS (W-CDMA), CDMA 1xEVDO, and CDMA 1xRTT.




FCC ID: ZNFVS988	 FCC Pt. 22, 24, & 27 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1701180035-02-R3.ZNF	Test Dates: 12/27/2016-2/16/2017	EUT Type: Portable Handset	
			Page 3 of 107



MEASUREMENT REPORT

FCC Part 22, 24, & 27



Mode	FCC Rule Part	Tx Frequency (MHz)	ERP/EIRP		Emission Designator
			Max. Power (W)	Max. Power (dBm)	
GPRS850	22H	824.2 - 848.8	0.509	27.06	242KGXW
EDGE850	22H	824.2 - 848.8	0.222	23.46	239KG7W
WCDMA850	22H	826.4 - 846.6	0.081	19.10	4M14F9W
CDMA850	22H	824.70 - 848.31	0.060	17.76	1M28F9W
WCDMA1700	27	1712.4 - 1752.6	0.175	22.44	4M14F9W
GPRS1900	24E	1850.2 - 1909.8	0.721	28.58	244KGXW
EDGE1900	24E	1850.2 - 1909.8	0.129	21.12	246KG7W
WCDMA1900	24E	1852.4 - 1907.6	0.204	23.09	4M15F9W
CDMA1900	24E	1851.25 - 1908.75	0.121	20.84	1M27F9W

EUT Overview

FCC ID: ZNFVS988	 FCC Pt. 22, 24, & 27 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M1701180035-02-R3.ZNF	Test Dates: 12/27/2016-2/16/2017	EUT Type: Portable Handset		Page 4 of 107

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EME) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Industry Canada Certification and Engineering Bureau.

1.2 Testing Facility

The map below shows the location of the PCTEST LABORATORY, its proximity to the FCC Laboratory, the Columbia vicinity, the Baltimore-Washington Intern't'l (BWI) airport, the city of Baltimore and the Washington, DC area. (See Figure 1-1).

These measurement tests were conducted at the PCTEST Engineering Laboratory, Inc. facility located at 7185 Oakland Mills Road, Columbia, MD 21046. The site coordinates are 39° 10'23" N latitude and 76° 49'50" W longitude. The facility is 0.4 miles North of the FCC laboratory, and the ambient signal and ambient signal strength are approximately equal to those of the FCC laboratory. The detailed description of the measurement facility was found to be in compliance with the requirements of § 2.948 according to ANSI C63.4-2014 on January 22, 2015.

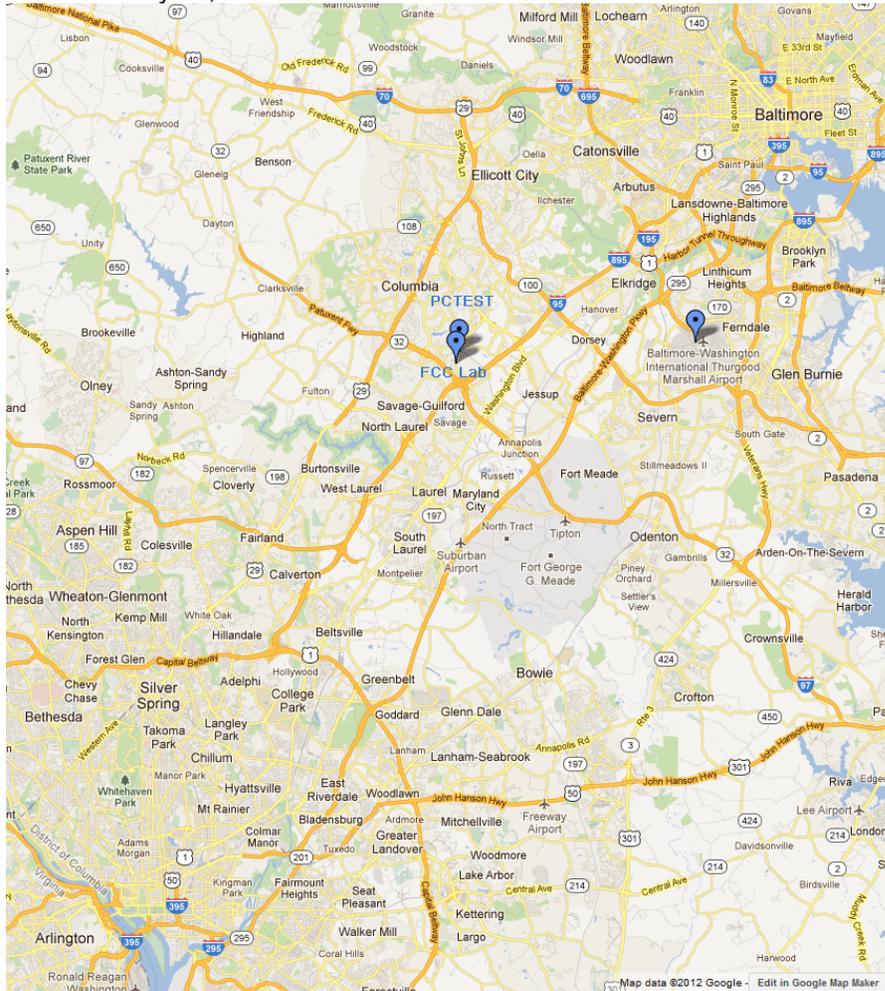


Figure 1-1. Map of the Greater Baltimore and Metropolitan Washington, D.C. area

FCC ID: ZNFVS988		FCC Pt. 22, 24, & 27 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1701180035-02-R3.ZNF	Test Dates: 12/27/2016-2/16/2017	EUT Type: Portable Handset	Page 5 of 107	

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **LG Portable Handset FCC ID: ZNFVS988**. The test data contained in this report pertains only to the emissions due to the EUT's 2G/3G licensed transmitters.

2.2 Device Capabilities

This device contains the following capabilities:

850/1900 CDMA (BC0, BC1), 850/1900 GSM/GPRS/EDGE, 850/1700/1900 WCDMA/HSPA, Multi-band LTE, 802.11b/g/n WLAN, 802.11a/n/ac UNII, Bluetooth (1x, EDR, LE), NFC

2.3 Test Configuration

The EUT was tested per the guidance of ANSI/TIA-603-D-2010 and KDB 971168 D01 v02r02. See Section 7.0 of this test report for a description of the radiated and antenna port conducted emissions tests.

This device supports wireless charging capability and, thus, is subject to the test requirements of KDB 648474 D03 v01r04. Additional radiated spurious emission measurements were performed with the EUT lying flat on a certified wireless charging pad (WCP) while operating under normal conditions in a simulated call or data transmission configuration. The worst case radiated emissions data is shown in this report.

2.4 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

FCC ID: ZNFVS988		FCC Pt. 22, 24, & 27 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1701180035-02-R3.ZNF	Test Dates: 12/27/2016-2/16/2017	EUT Type: Portable Handset	Page 6 of 107	

3.0 DESCRIPTION OF TESTS

3.1 Evaluation Procedure

The measurement procedures described in the “Land Mobile FM or PM – Communications Equipment – Measurements and Performance Standards” (ANSI/TIA-603-D-2010) and “Measurement Guidance for Certification of Licensed Digital Transmitters” (KDB 971168 D01 v02r02) were used in the measurement of the EUT.

Deviation from Measurement Procedure.....None

3.2 Cellular - Base Frequency Blocks

§22.905



BLOCK 1: 869 – 880 MHz (A* Low + A)


BLOCK 3: 890 – 891.5 MHz (A* High)

BLOCK 2: 880 – 890 MHz (B)

BLOCK 4: 891.5 – 894 MHz (B*)

3.3 Cellular - Mobile Frequency Blocks

§22.905

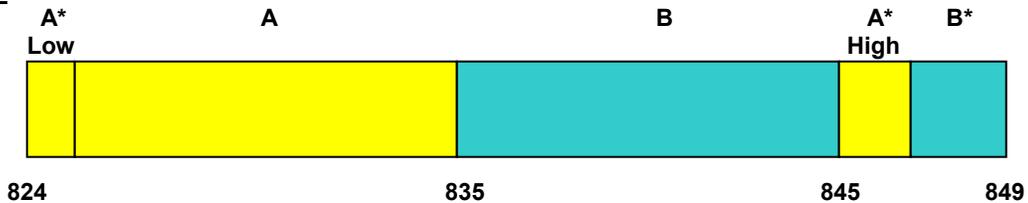

BLOCK 1: 824 – 835 MHz (A* Low + A)


BLOCK 3: 845 – 846.5 MHz (A* High)

BLOCK 2: 835 – 845 MHz (B)

BLOCK 4: 846.5 – 849 MHz (B*)

3.4 PCS - Base Frequency Blocks

§24.229

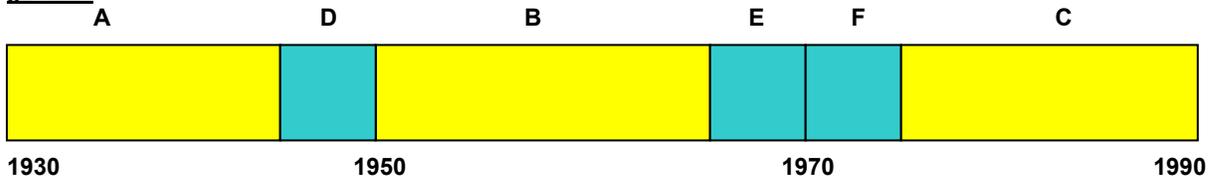

BLOCK 1: 1930 – 1945 MHz (A)

BLOCK 4: 1965 – 1970 MHz (E)

BLOCK 2: 1945 – 1950 MHz (D)

BLOCK 5: 1970 – 1975 MHz (F)


BLOCK 3: 1950 – 1965 MHz (B)

BLOCK 6: 1975 – 1990 MHz (C)

FCC ID: ZNFVS988	 FCC Pt. 22, 24, & 27 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M1701180035-02-R3.ZNF	Test Dates: 12/27/2016-2/16/2017	EUT Type: Portable Handset	Page 7 of 107	

3.5 PCS - Mobile Frequency Blocks

§24.229

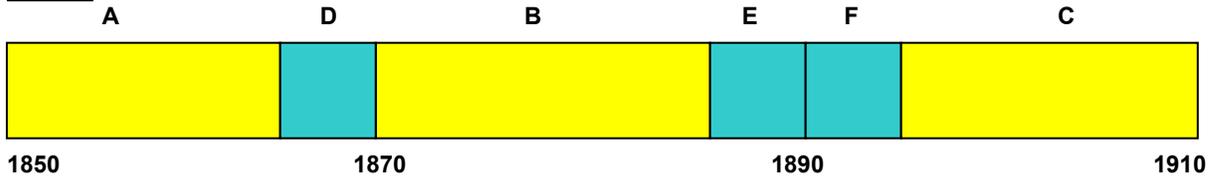

BLOCK 1: 1850 – 1865 MHz (A)

BLOCK 4: 1885 – 1890 MHz (E)

BLOCK 2: 1865 – 1870 MHz (D)


BLOCK 5: 1890 – 1895 MHz (F)

BLOCK 3: 1870 – 1885 MHz (B)

BLOCK 6: 1895 – 1910 MHz (C)

3.6 AWS - Base Frequency Blocks

§27.5(h)

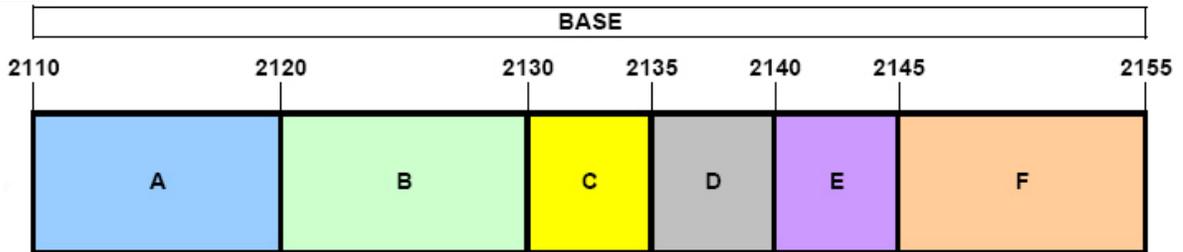

BLOCK 1: 2110 – 2120 MHz (A)

BLOCK 4: 2135 – 2140 MHz (D)

BLOCK 2: 2120 – 2130 MHz (B)


BLOCK 5: 2140 – 2145 MHz (E)

BLOCK 3: 2130 – 2135 MHz (C)

BLOCK 6: 2145 – 2155 MHz (F)

3.7 AWS - Mobile Frequency Blocks

§27.5(h)

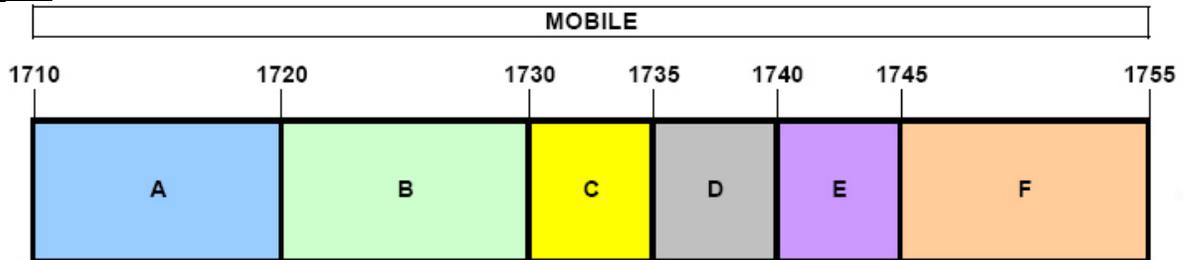

BLOCK 1: 1710 – 1720 MHz (A)

BLOCK 4: 1735 – 1740 MHz (D)

BLOCK 2: 1720 – 1730 MHz (B)

BLOCK 5: 1740 – 1745 MHz (E)

BLOCK 3: 1730 – 1735 MHz (C)

BLOCK 6: 1745 – 1755 MHz (F)

FCC ID: ZNFVS988		FCC Pt. 22, 24, & 27 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1701180035-02-R3.ZNF	Test Dates: 12/27/2016-2/16/2017	EUT Type: Portable Handset	Page 8 of 107	

3.8 Radiated Measurements

§2.1053 §22.913(a.2) §22.917(a) §24.232(c) §24.238(a) §27.50(d)(10) §27.53(h)

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. For measurements below 1GHz, the absorbers are removed. A raised turntable is used for radiated measurement. The turn table is a continuously rotatable, remote-controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. A 72.4cm high PVC support structure is placed on top of the turntable. A 3" (~7.6cm) sheet of high density polystyrene is used as the table top and is placed on top of the PVC supports to bring the total height of the table to 80cm.

The equipment under test was transmitting while connected to its integral antenna and is placed on a turntable 3 meters from the receive antenna. The receive antenna height is adjusted between 1 and 4 meter height, the turntable is rotated through 360 degrees, and the EUT is manipulated through all orthogonal planes representative of its typical use to achieve the highest reading on the receive spectrum analyzer.

Per the guidance of ANSI/TIA-603-D-2010, a half-wave dipole is then substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator with the level of the signal generator being adjusted to obtain the same receive spectrum analyzer level previously recorded from the spurious emission from the EUT. The power of the emission is calculated using the following formula:

$$P_d \text{ [dBm]} = P_g \text{ [dBm]} - \text{cable loss [dB]} + \text{antenna gain [dBd/dBi]}$$

Where, P_d is the dipole equivalent power, P_g is the generator output into the substitution antenna, and the antenna gain is the gain of the substitute antenna used relative to either a half-wave dipole (dBd) or an isotropic source (dBi). The substitute level is equal to $P_g \text{ [dBm]} - \text{cable loss [dB]}$.

Radiated power and radiated spurious emission levels are investigated with the receive antenna horizontally and vertically polarized per ANSI/ITA-603-D-2010.

FCC ID: ZNFVS988	 FCC Pt. 22, 24, & 27 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION) 		Approved by: Quality Manager
Test Report S/N: 1M1701180035-02-R3.ZNF	Test Dates: 12/27/2016-2/16/2017	EUT Type: Portable Handset	Page 9 of 107

4.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4-2014. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95% level of confidence. The measurement data shown meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2.

Contribution	Expanded Uncertainty (\pm dB)
Conducted Bench Top Measurements	1.13
Radiated Disturbance (<1GHz)	4.98
Radiated Disturbance (>1GHz)	5.07
Radiated Disturbance (>18GHz)	5.09

FCC ID: ZNFVS988	 FCC Pt. 22, 24, & 27 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION) 		Approved by: Quality Manager
Test Report S/N: 1M1701180035-02-R3.ZNF	Test Dates: 12/27/2016-2/16/2017	EUT Type: Portable Handset	Page 10 of 107

5.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2006.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
-	LTx3	Licensed Transmitter Cable Set	7/12/2016	Annual	7/12/2017	N/A
Agilent	N9030A	PXA Signal Analyzer (44GHz)	3/1/2016	Annual	3/1/2017	MY52350166
Com-Power	PAM-103	Pre-Amplifier (1-1000MHz)	2/26/2016	Biennial	2/26/2018	441128
Emco	3115	Horn Antenna (1-18GHz)	3/10/2016	Biennial	3/10/2018	9704-5182
Espec	ESX-2CA	Environmental Chamber	3/4/2016	Annual	3/4/2017	17620
ETS Lindgren	3117	1-18 GHz DRG Horn (Medium)	4/26/2016	Biennial	4/26/2018	125518
ETS Lindgren	3160-09	18-26.5 GHz Standard Gain Horn	8/28/2016	Biennial	8/28/2018	135427
ETS Lindgren	3164-08	Quad Ridge Horn Antenna	4/26/2016	Biennial	4/26/2018	128338
K & L	11SH10-3075/U18000	High Pass Filter	7/11/2016	Annual	7/11/2017	11SH10-3075/U18000-2
K & L	13SH10-1000/U1000	N Type High Pass Filter	7/6/2016	Annual	7/6/2017	13SH10-1000/U1000-1
Mini-Circuits	PWR-SENS-4RMS	USB Power Sensor	3/4/2016	Annual	3/7/2017	11210140001
Mini-Circuits	SSG-4000HP	USB Synthesized Signal Generator	N/A			11208010032
Mini-Circuits	TVA-11-422	RF Power Amp	N/A			QA1303002
PCTEST	-	EMC Switch System	7/11/2016	Annual	7/11/2017	NM1
PCTEST	-	EMC Switch System	7/6/2016	Annual	7/6/2017	NM2
Rohde & Schwarz	CMU200	Base Station Simulator	6/2/2016	Annual	6/2/2017	109892
Rohde & Schwarz	ESU40	EMI Test Receiver (40GHz)	7/15/2016	Annual	7/15/2017	100348
Rohde & Schwarz	TS-PR18	1-18 GHz Pre-Amplifier	3/7/2016	Annual	3/7/2017	100071
Rohde & Schwarz	TS-PR26	18-26.5 GHz Pre-Amplifier	3/7/2016	Annual	3/7/2017	100040
Schwarzbeck	UHA 9105	Dipole Antenna (400 - 1GHz) Rx	3/30/2016	Biennial	3/30/2018	9105-2404
Schwarzbeck	VULB-9161SE	Trilog Super Broadband Test Antenna	11/13/2015	Biennial	11/13/2017	9161-4075
Sunol	JB5	Bi-Log Antenna (30M - 5GHz)	3/14/2016	Biennial	3/14/2018	A051107

Table 5-1. Test Equipment

Notes:

Equipment with a calibration date of "N/A" shown in this list was not used to make direct calibrated measurements.

FCC ID: ZNFVS988	 FCC Pt. 22, 24, & 27 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M1701180035-02-R3.ZNF	Test Dates: 12/27/2016-2/16/2017	EUT Type: Portable Handset	Page 11 of 107	

6.0 SAMPLE CALCULATIONS

GPRS Emission Designator

Emission Designator = 250KGXW

GPRS BW = 250 kHz
 G = Phase Modulation
 X = Cases not otherwise covered
 W = Combination (Audio/Data)

EDGE Emission Designator

Emission Designator = 250KG7W

EDGE BW = 250 kHz
 G = Phase Modulation
 7 = Quantized/Digital Info
 W = Combination (Audio/Data)

CDMA Emission Designator

Emission Designator = 1M25F9W

CDMA BW = 1.25 MHz
 F = Frequency Modulation
 9 = Composite Digital Info
 W = Combination (Audio/Data)

WCDMA Emission Designator

Emission Designator = 4M16F9W

WCDMA BW = 4.16 MHz
 F = Frequency Modulation
 9 = Composite Digital Info
 W = Combination (Audio/Data)

Spurious Radiated Emission

Example: Spurious emission at 3700.40 MHz

The receive spectrum analyzer reading at 3 meters with the EUT on the turntable was -81.0 dBm. The gain of the substituted antenna is 8.1 dBi. The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of -81.0 dBm on the spectrum analyzer. The loss of the cable between the signal generator and the terminals of the substituted antenna is 2.0 dB at 3700.40 MHz. So 6.1 dB is added to the signal generator reading of -30.9 dBm yielding -24.80 dBm. The fundamental EIRP was 25.50 dBm so this harmonic was 25.50 dBm $- (-24.80) = 50.3$ dBc.

FCC ID: ZNFVS988		FCC Pt. 22, 24, & 27 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1701180035-02-R3.ZNF	Test Dates: 12/27/2016-2/16/2017	EUT Type: Portable Handset	Page 12 of 107	

7.0 TEST RESULTS

7.1 Summary

Company Name: LG Electronics MobileComm U.S.A
 FCC ID: ZNFVS988
 FCC Classification: PCS Licensed Transmitter Held to Ear (PCE)
 Mode(s): GSM / GPRS / EDGE / CDMA / WCDMA

FCC Part Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
2.1049	Occupied Bandwidth	N/A	CONDUCTED	PASS	Section 7.2
2.1051 22.917(a) 24.238(a) 27.53(h)	Conducted Band Edge / Spurious Emissions	> 43 + log ₁₀ (P[Watts]) at Band Edge and for all out-of-band emissions		PASS	Sections 7.3, 7.4
24.232(d)	Peak-Average Ratio	< 13 dB		PASS	Section 7.5
2.1046	Transmitter Conducted Output Power	N/A		PASS	RF Exposure Report
2.1055 22.355 24.235 27.54	Frequency Stability	< 2.5 ppm (Part 22) Emission must remain in band (Part 24, 27)		PASS	Section 7.8
22.913(a.2)	Effective Radiated Power	< 7 Watts max. ERP	RADIATED	PASS	Section 7.6
24.232(c)	Equivalent Isotropic Radiated Power	< 2 Watts max. EIRP		PASS	Section 7.6
27.50(d.4)	Equivalent Isotropic Radiated Power	< 1 Watts max. EIRP		PASS	Section 7.6
2.1053 22.917(a) 24.238(a) 27.53(h)	Radiated Spurious Emissions	> 43 + log ₁₀ (P[Watts]) for all out-of-band emissions		PASS	Section 7.7

Table 7-1. Summary of Test Results

Notes:

- 1) All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables, directional couplers, and attenuators used as part of the system to maintain a link between the call box and the EUT at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables, attenuators, and couplers.
- 4) For conducted spurious emissions, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is PCTEST "2G/3G Automation," Version 3.7.

FCC ID: ZNFVS988	 FCC Pt. 22, 24, & 27 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M1701180035-02-R3.ZNF	Test Dates: 12/27/2016-2/16/2017	EUT Type: Portable Handset	Page 13 of 107	

7.2 Occupied Bandwidth

§2.1049

Test Overview

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Procedure Used

KDB 971168 D01 v02r02 – Section 4.2

Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5% of the expected OBW
3. VBW \geq 3 x RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5% of the 99% occupied bandwidth observed in Step 7

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.


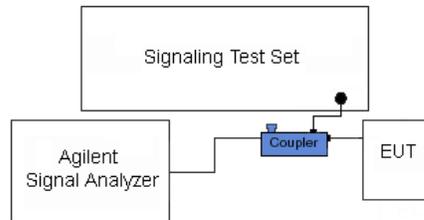


Figure 7-1. Test Instrument & Measurement Setup


Test Notes

None.

FCC ID: ZNFVS988		FCC Pt. 22, 24, & 27 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1701180035-02-R3.ZNF	Test Dates: 12/27/2016-2/16/2017	EUT Type: Portable Handset	Page 14 of 107	

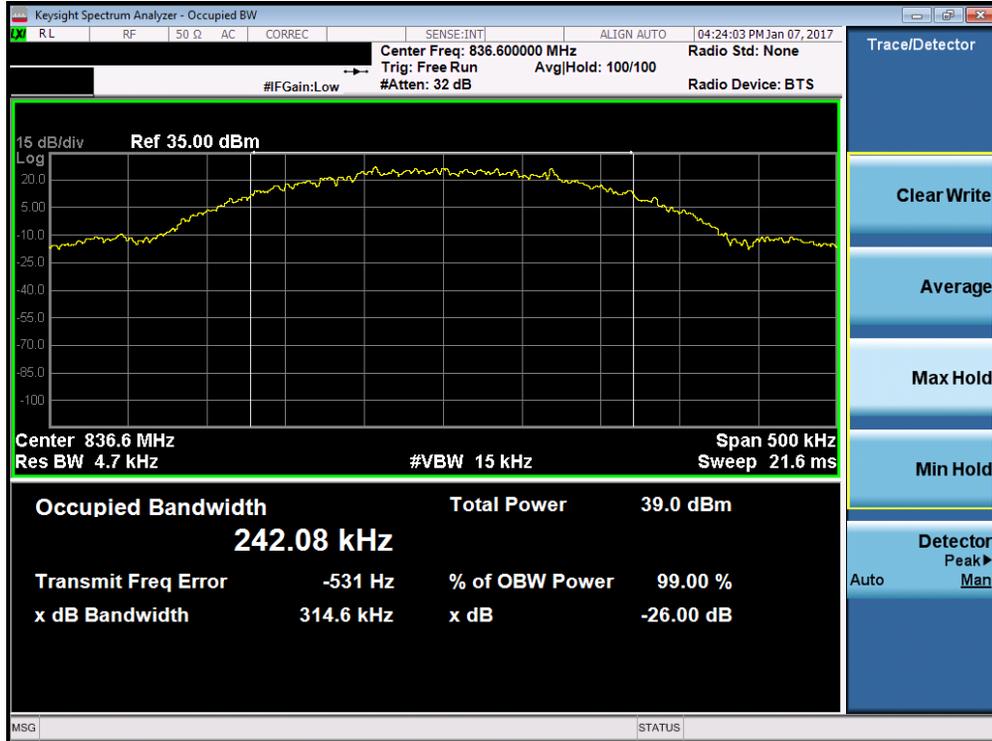


Plot 7-1. Occupied Bandwidth Plot (Cellular GPRS Mode – Ch. 190)

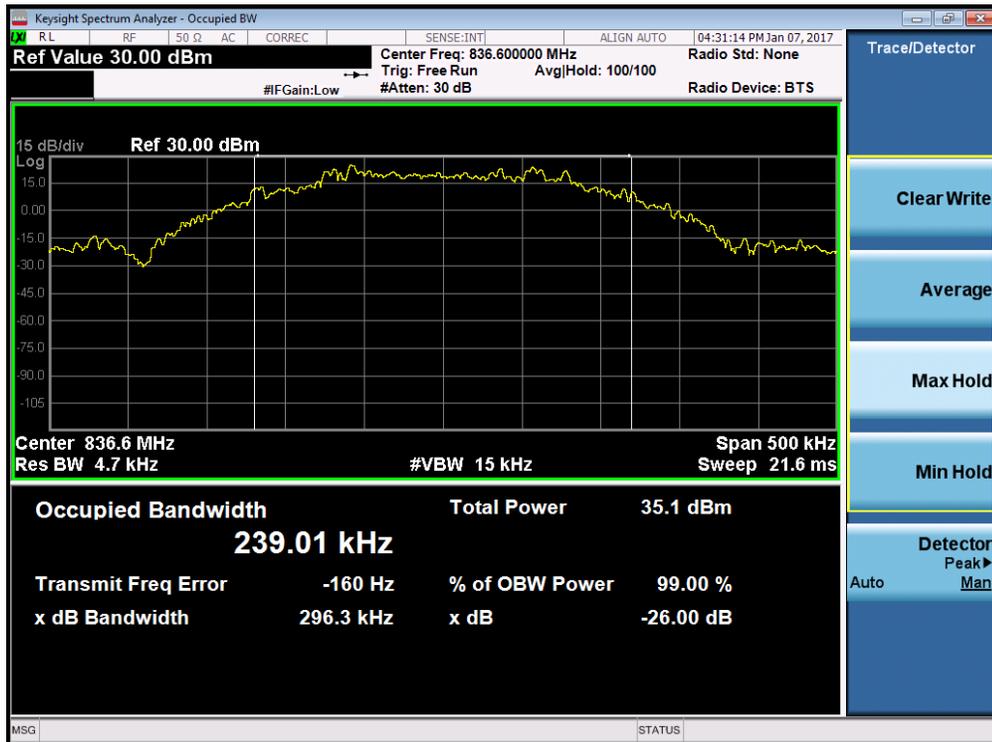


Plot 7-2. Occupied Bandwidth Plot (EDGE850 Mode – Ch. 190)

FCC ID: ZNFV988	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1701180035-02-R3.ZNF	Test Dates: 12/27/2016-2/16/2017	EUT Type: Portable Handset		Page 15 of 107

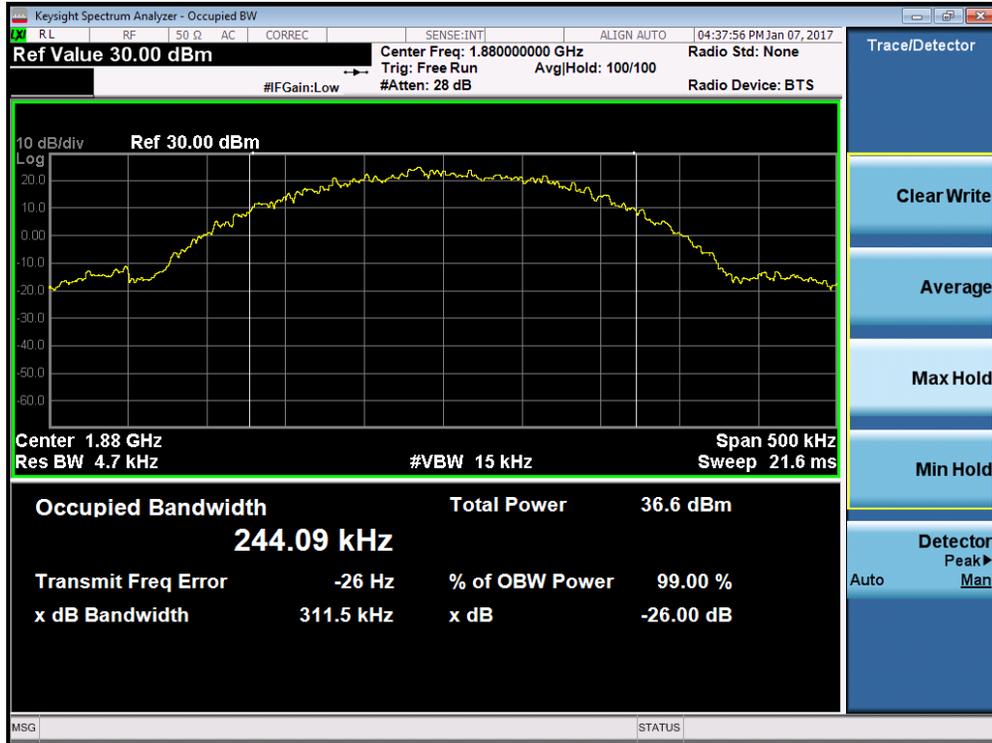


Plot 7-3. Occupied Bandwidth Plot (PCS GPRS Mode – Ch. 661)

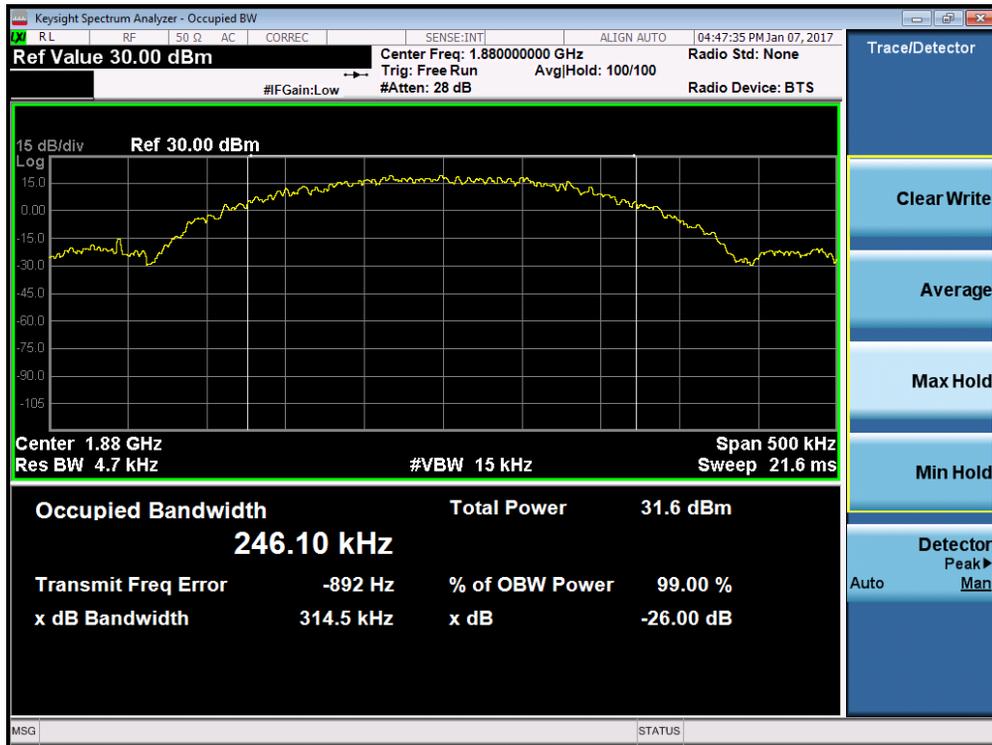


Plot 7-4. Occupied Bandwidth Plot (EDGE1900 Mode – Ch. 661)

FCC ID: ZNFV988			FCC Pt. 22, 24, & 27 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1701180035-02-R3.ZNF	Test Dates: 12/27/2016-2/16/2017	EUT Type: Portable Handset	Page 16 of 107		

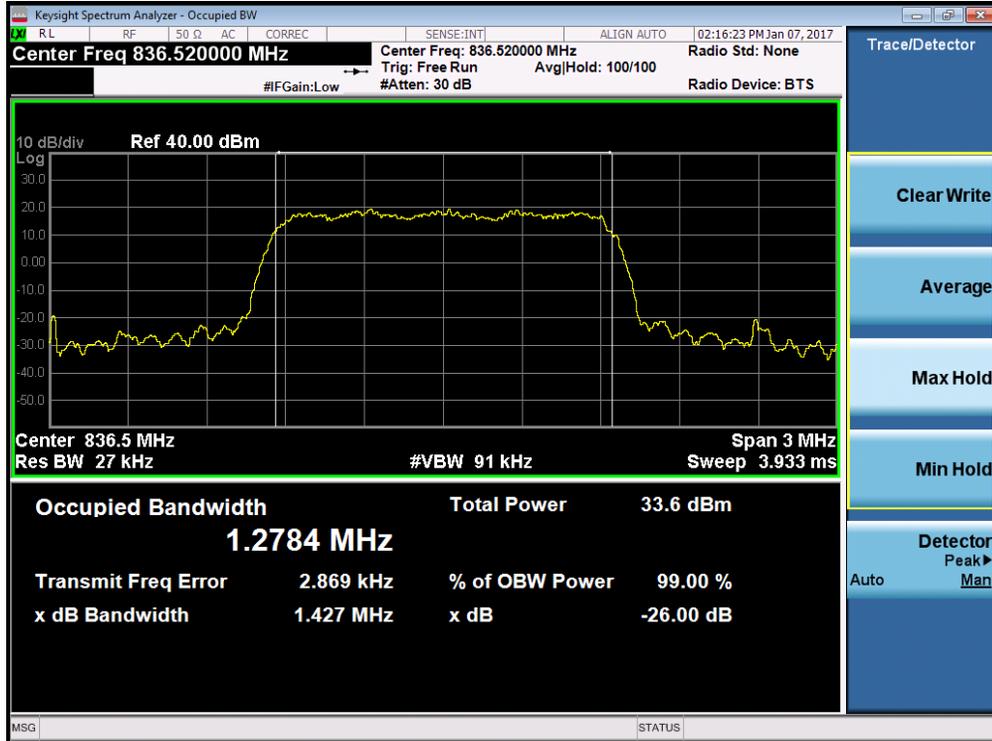


Plot 7-5. Occupied Bandwidth Plot (Cellular CDMA Mode – Ch. 384)

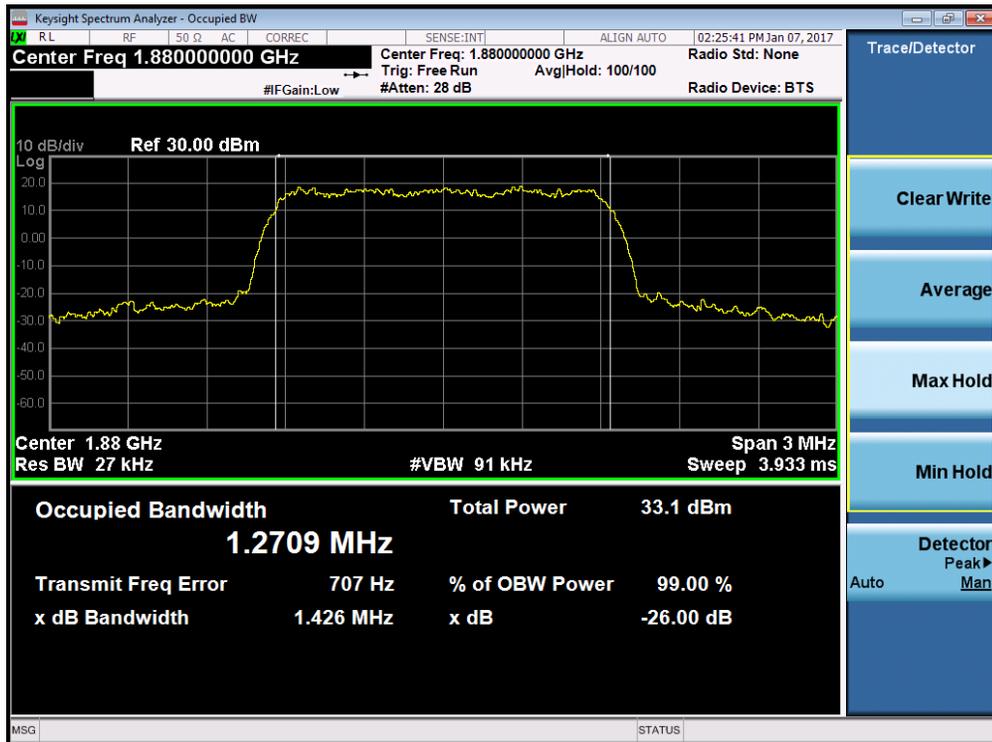


Plot 7-6. Occupied Bandwidth Plot (PCS CDMA Mode – Ch. 600)

FCC ID: ZNFV988	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1701180035-02-R3.ZNF	Test Dates: 12/27/2016-2/16/2017	EUT Type: Portable Handset		Page 17 of 107

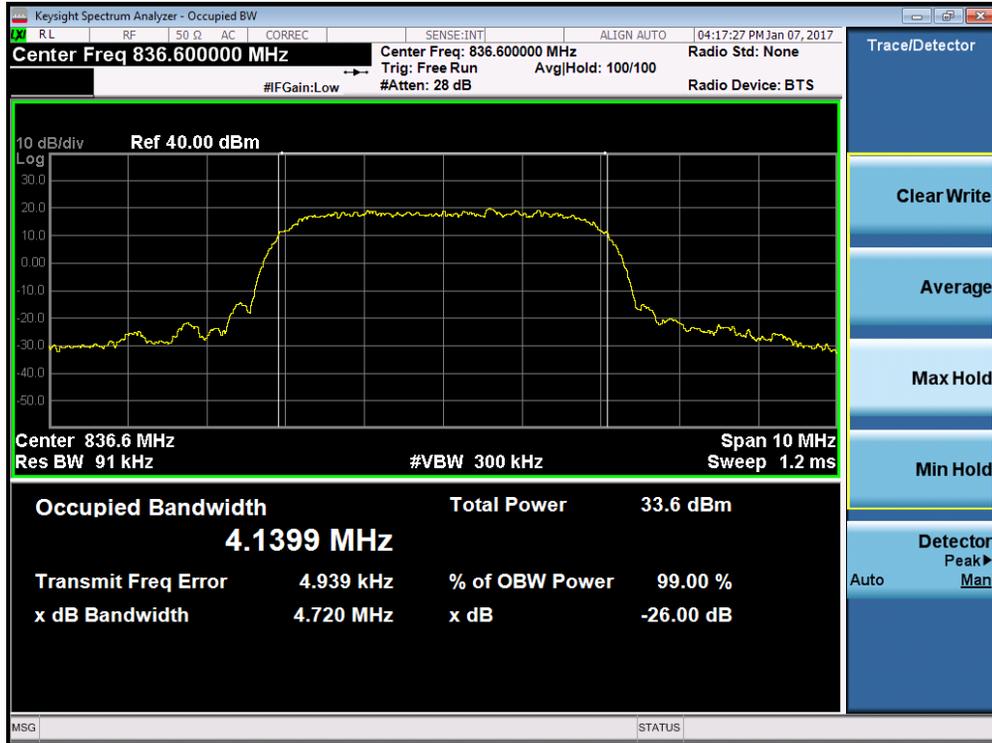


Plot 7-7. Occupied Bandwidth Plot (Cellular WCDMA Mode – Ch. 4183)

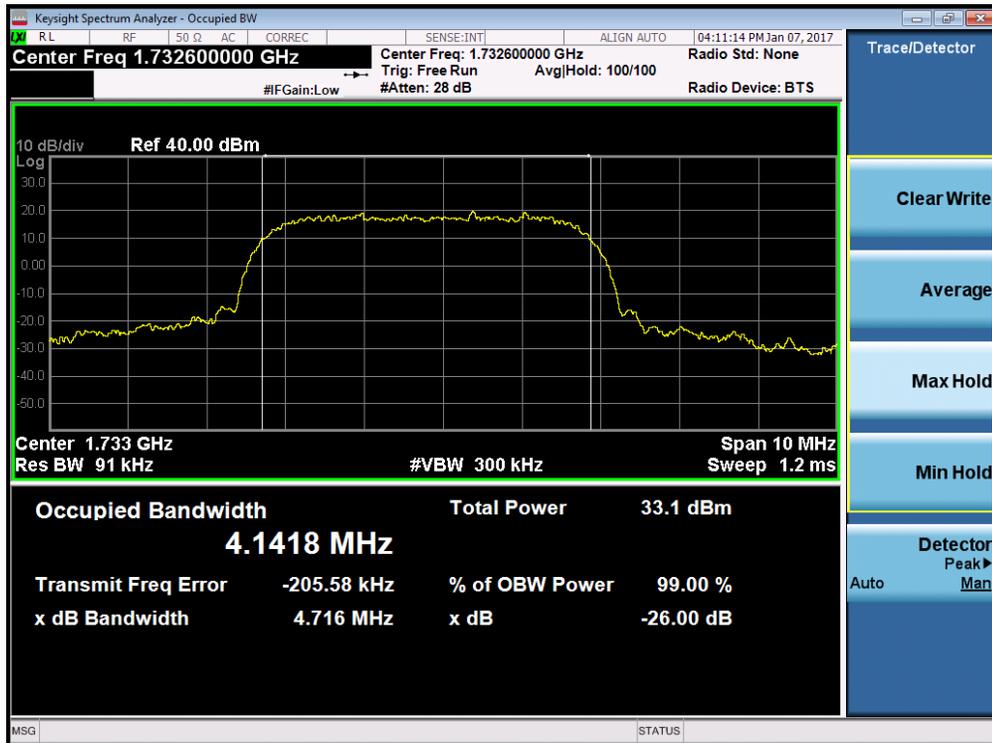

Plot 7-8. Occupied Bandwidth Plot (AWS WCDMA Mode – Ch. 1413)

FCC ID: ZNFV988	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1701180035-02-R3.ZNF	Test Dates: 12/27/2016-2/16/2017	EUT Type: Portable Handset		Page 18 of 107

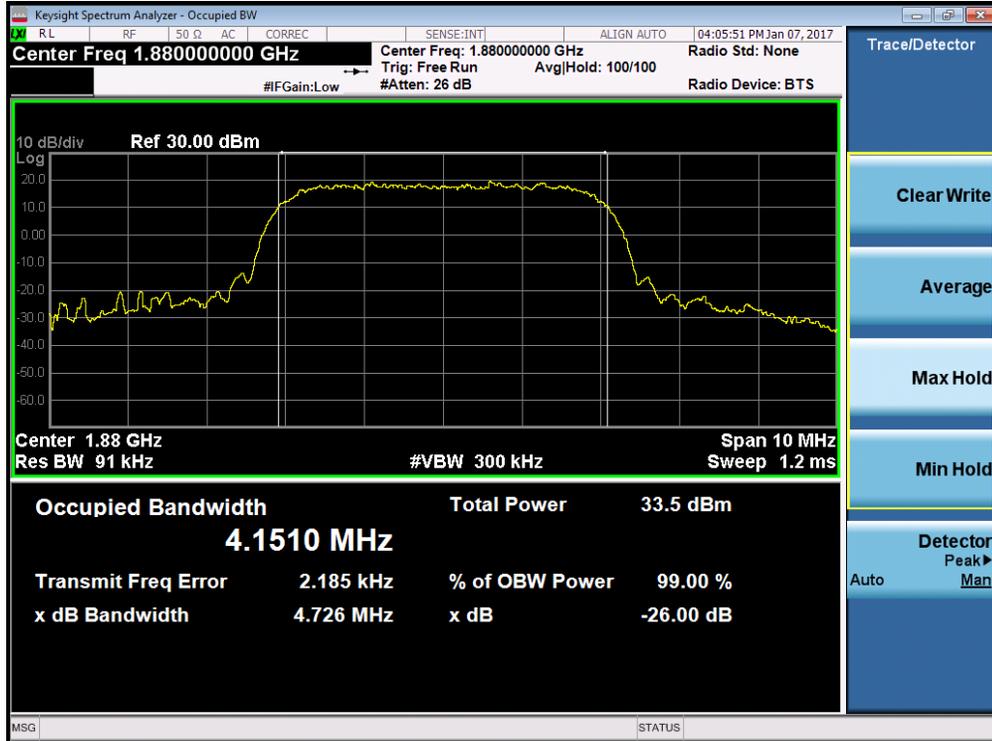

Plot 7-9. Occupied Bandwidth Plot (PCS WCDMA Mode – Ch. 9400)

FCC ID: ZNFVS988		FCC Pt. 22, 24, & 27 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1701180035-02-R3.ZNF	Test Dates: 12/27/2016-2/16/2017	EUT Type: Portable Handset		Page 19 of 107

7.3 Spurious and Harmonic Emissions at Antenna Terminal

§2.1051 §22.917(a) §24.238(a) §27.53(h)

Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

The minimum permissible attenuation level of any spurious emission is $43 + \log_{10}(P_{[Watts]})$, where P is the transmitter power in Watts.

Test Procedure Used

KDB 971168 D01 v02r02 – Section 6.0

Test Settings

1. Start frequency was set to 30MHz and stop frequency was set to 10GHz for Cell, 20GHz for AWS, 20GHz for PCS (separated into at least two plots per channel)
2. Detector = RMS
3. Trace mode = trace average for continuous emissions, max hold for pulse emissions
4. Sweep time = auto couple
5. The trace was allowed to stabilize
6. Please see test notes below for RBW and VBW settings

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.


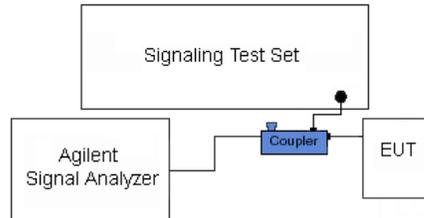


Figure 7-2. Test Instrument & Measurement Setup


Test Notes

Compliance with the applicable limits is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater for Part 22 and 1 MHz or greater for Part 24, Part 27. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.

FCC ID: ZNFVS988		FCC Pt. 22, 24, & 27 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1701180035-02-R3.ZNF	Test Dates: 12/27/2016-2/16/2017	EUT Type: Portable Handset		Page 20 of 107

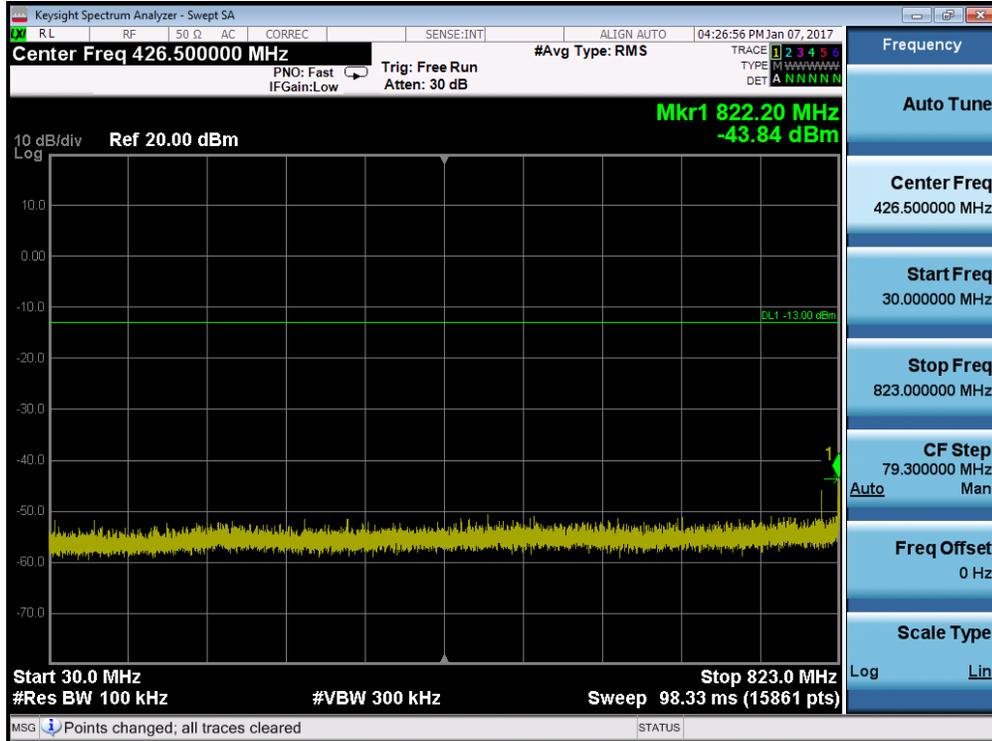


Plot 7-10. Conducted Spurious Plot (Cellular GPRS Mode – Ch. 128)

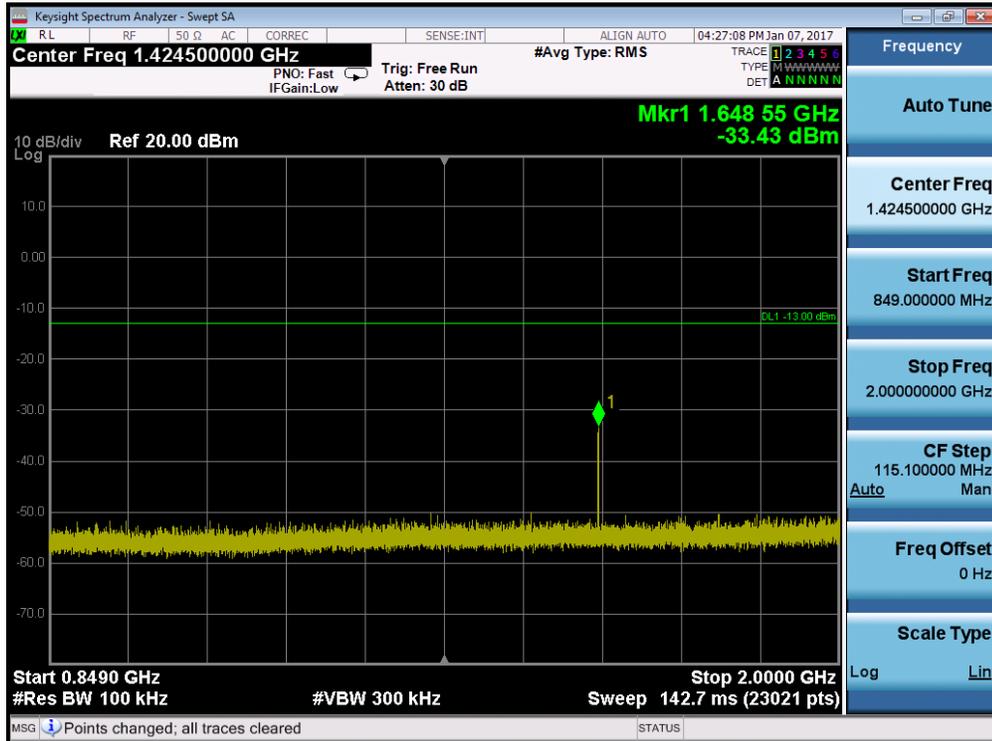


Plot 7-11. Conducted Spurious Plot (Cellular GPRS Mode – Ch. 128)

FCC ID: ZNFVS988	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1701180035-02-R3.ZNF	Test Dates: 12/27/2016-2/16/2017	EUT Type: Portable Handset		Page 21 of 107

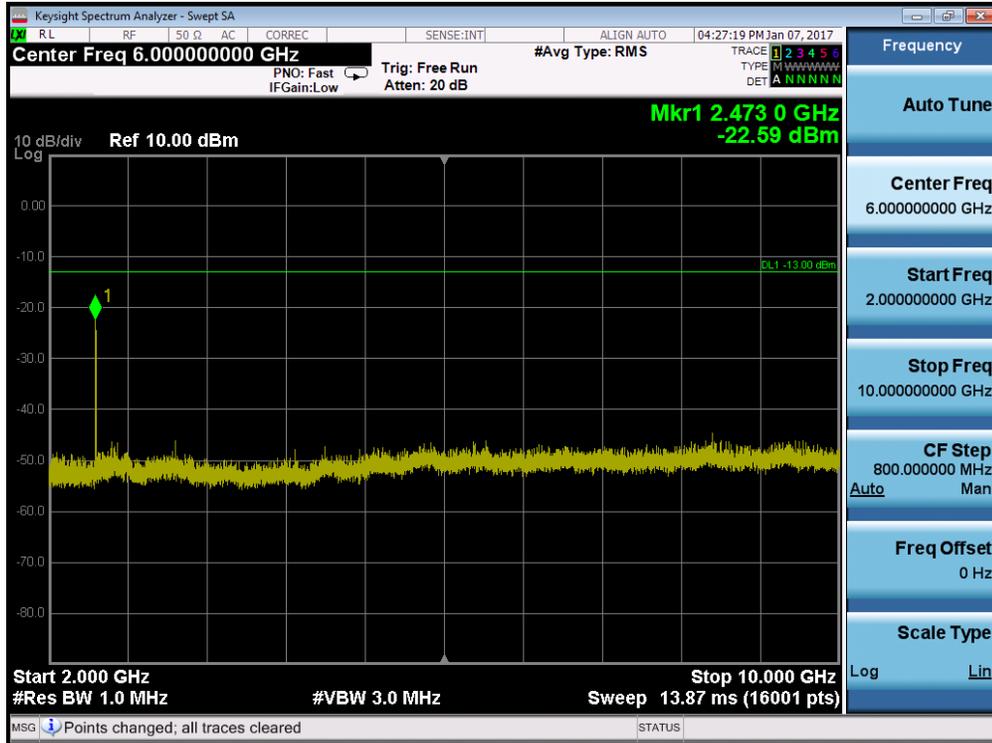


Plot 7-12. Conducted Spurious Plot (Cellular GPRS Mode – Ch. 128)

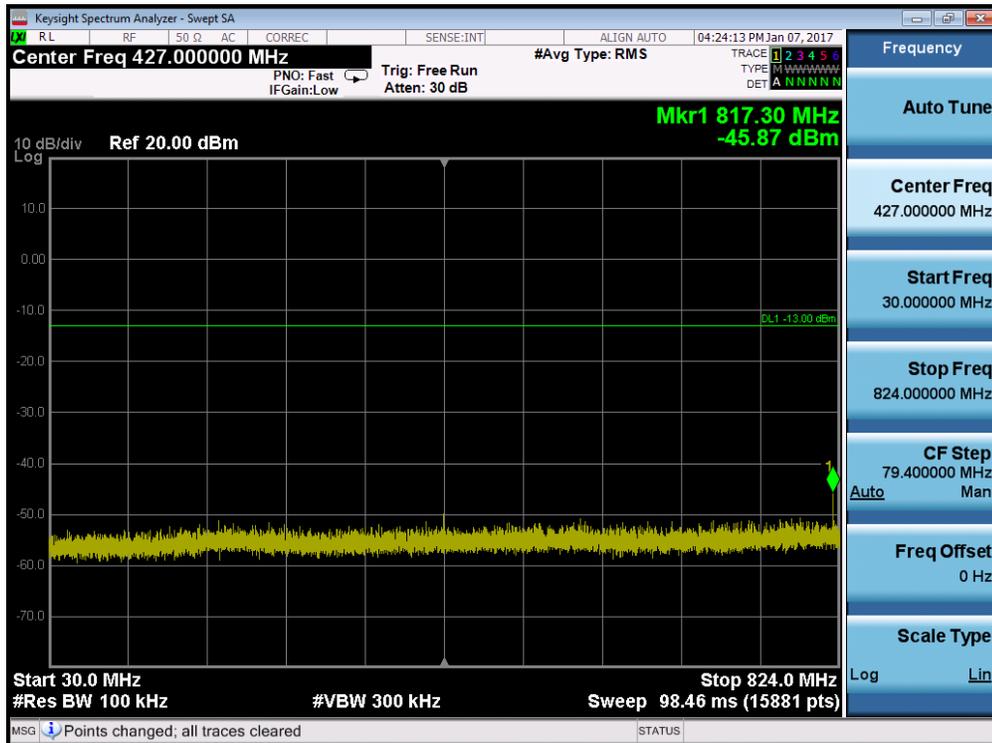


Plot 7-13. Conducted Spurious Plot (Cellular GPRS Mode – Ch. 190)

FCC ID: ZNFVS988	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1701180035-02-R3.ZNF	Test Dates: 12/27/2016-2/16/2017	EUT Type: Portable Handset		Page 22 of 107

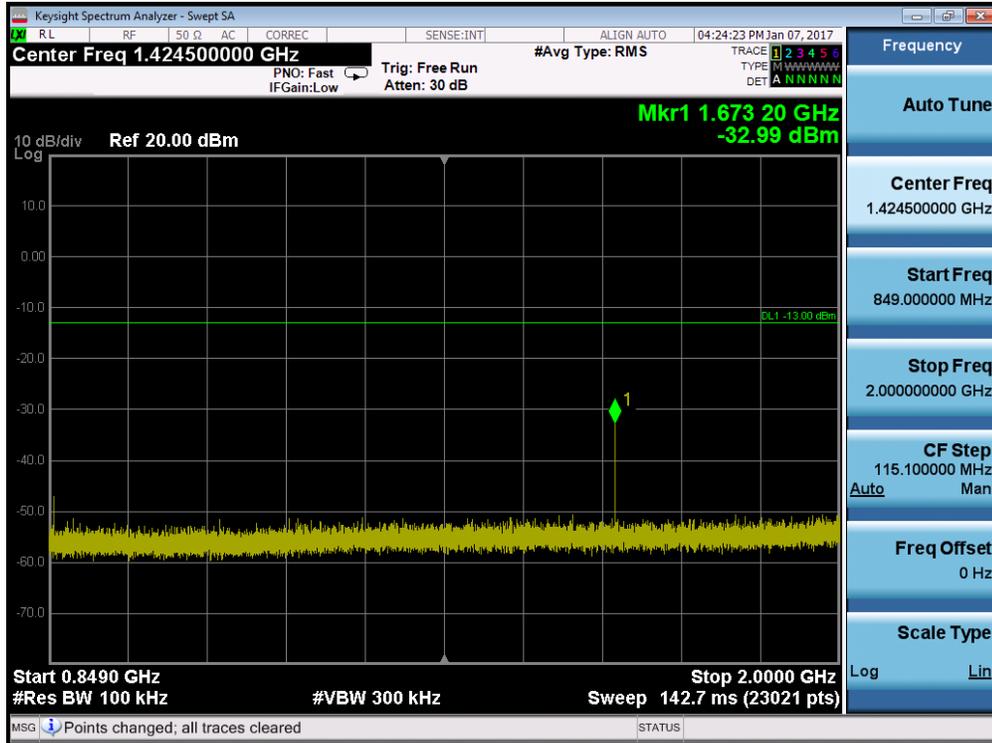


Plot 7-14. Conducted Spurious Plot (Cellular GPRS Mode – Ch. 190)

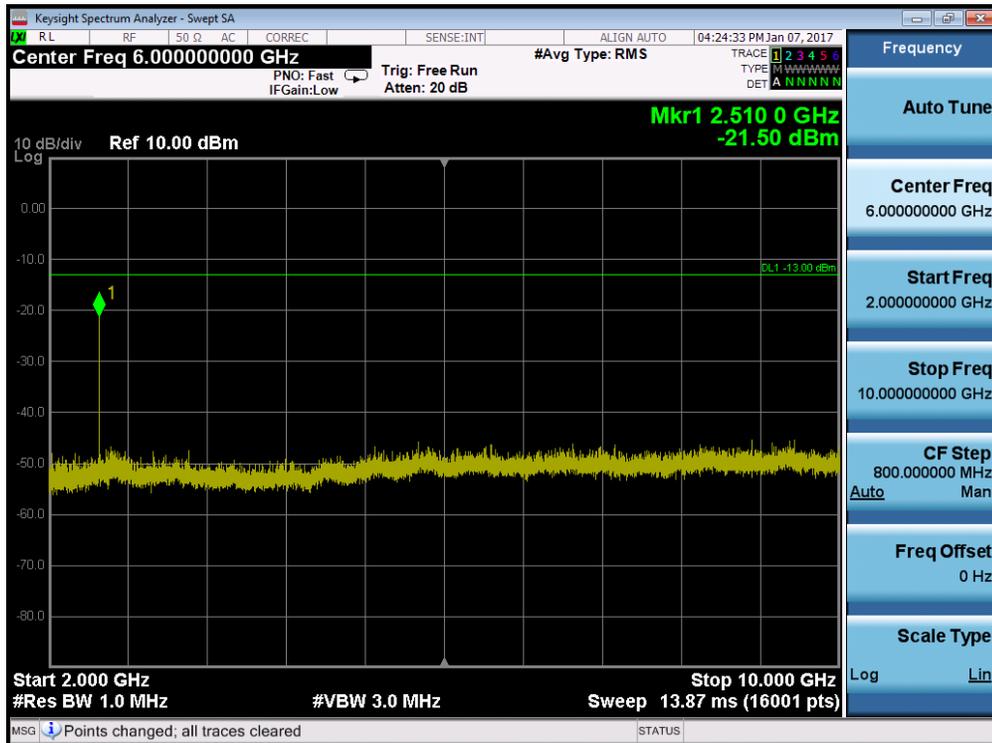


Plot 7-15. Conducted Spurious Plot (Cellular GPRS Mode – Ch. 190)

FCC ID: ZNFV9888	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1701180035-02-R3.ZNF	Test Dates: 12/27/2016-2/16/2017	EUT Type: Portable Handset		Page 23 of 107

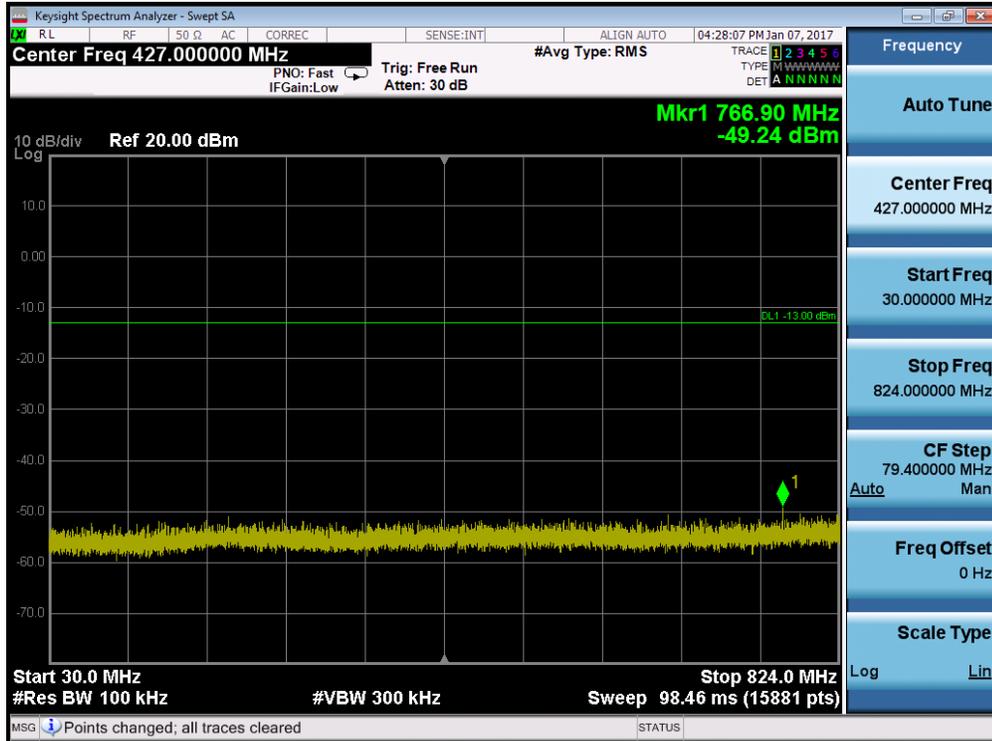


Plot 7-16. Conducted Spurious Plot (Cellular GPRS Mode – Ch. 251)

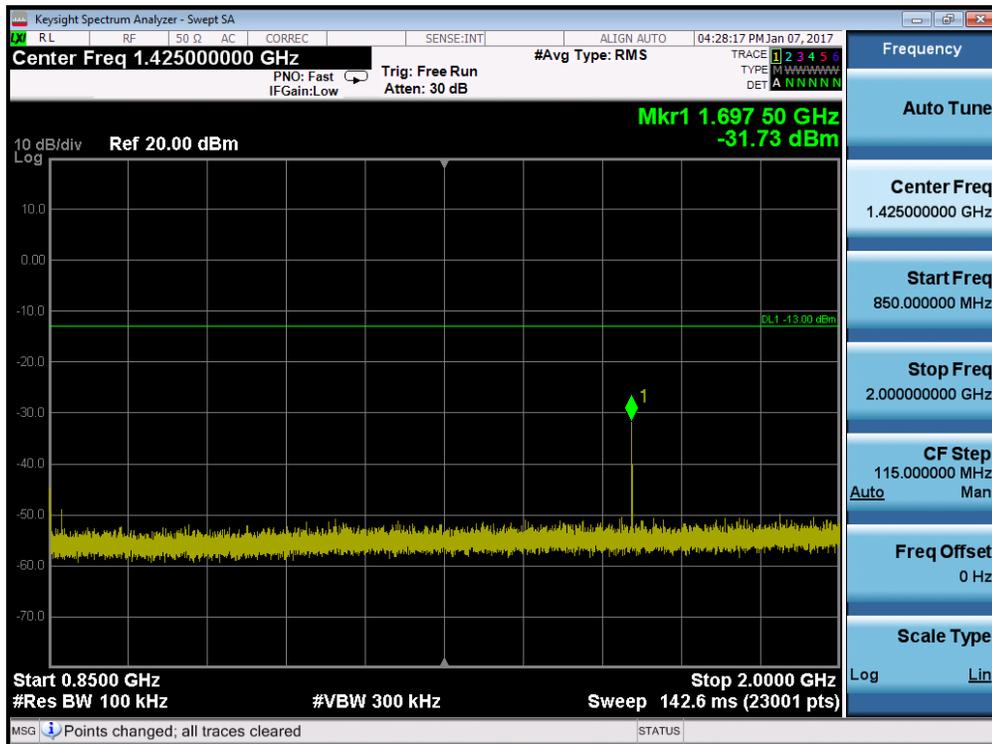


Plot 7-17. Conducted Spurious Plot (Cellular GPRS Mode – Ch. 251)

FCC ID: ZNFVS988		FCC Pt. 22, 24, & 27 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1701180035-02-R3.ZNF	Test Dates: 12/27/2016-2/16/2017	EUT Type: Portable Handset		Page 24 of 107

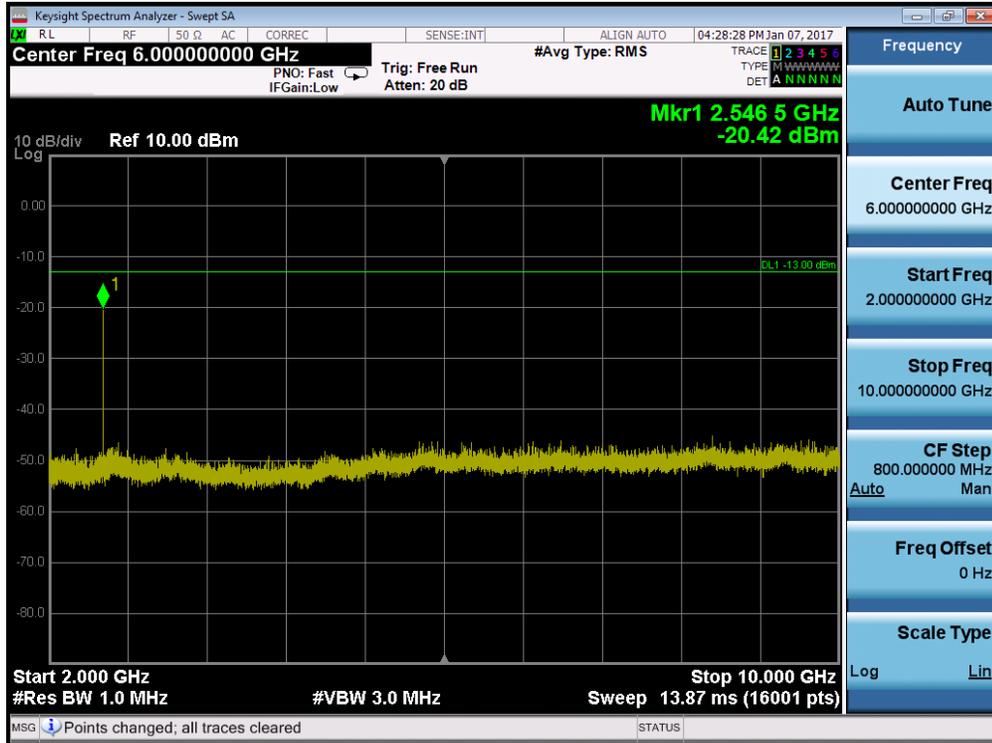


Plot 7-18. Conducted Spurious Plot (Cellular GPRS Mode – Ch. 251)

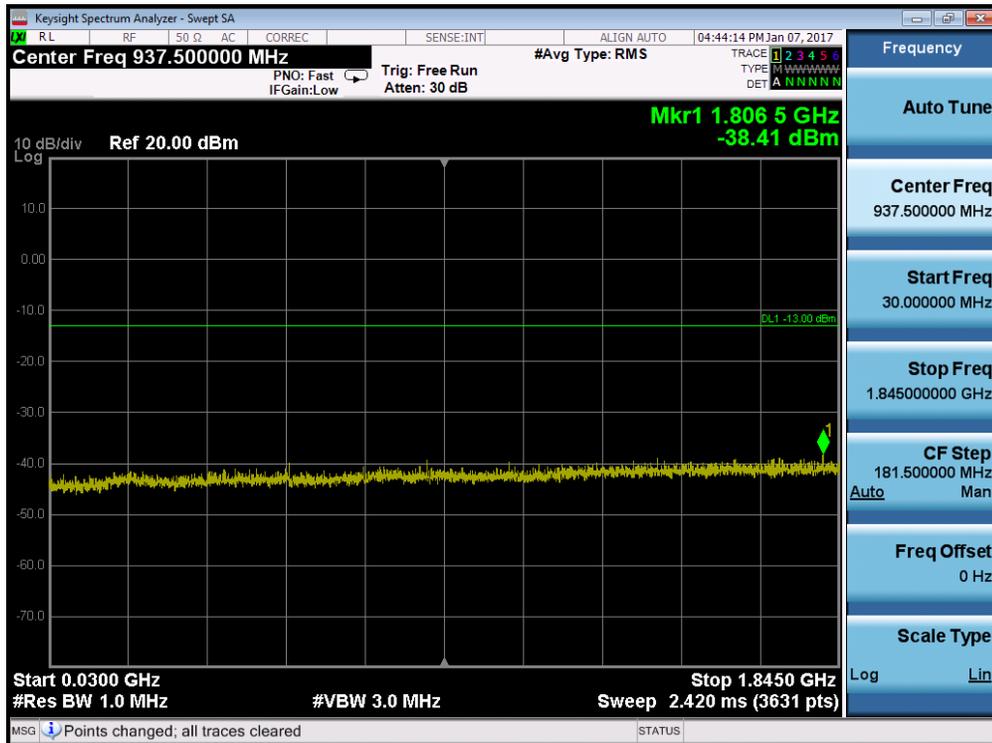


Plot 7-19. Conducted Spurious Plot (PCS GPRS Mode – Ch. 512)

FCC ID: ZNFVS988	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1701180035-02-R3.ZNF	Test Dates: 12/27/2016-2/16/2017	EUT Type: Portable Handset		Page 25 of 107

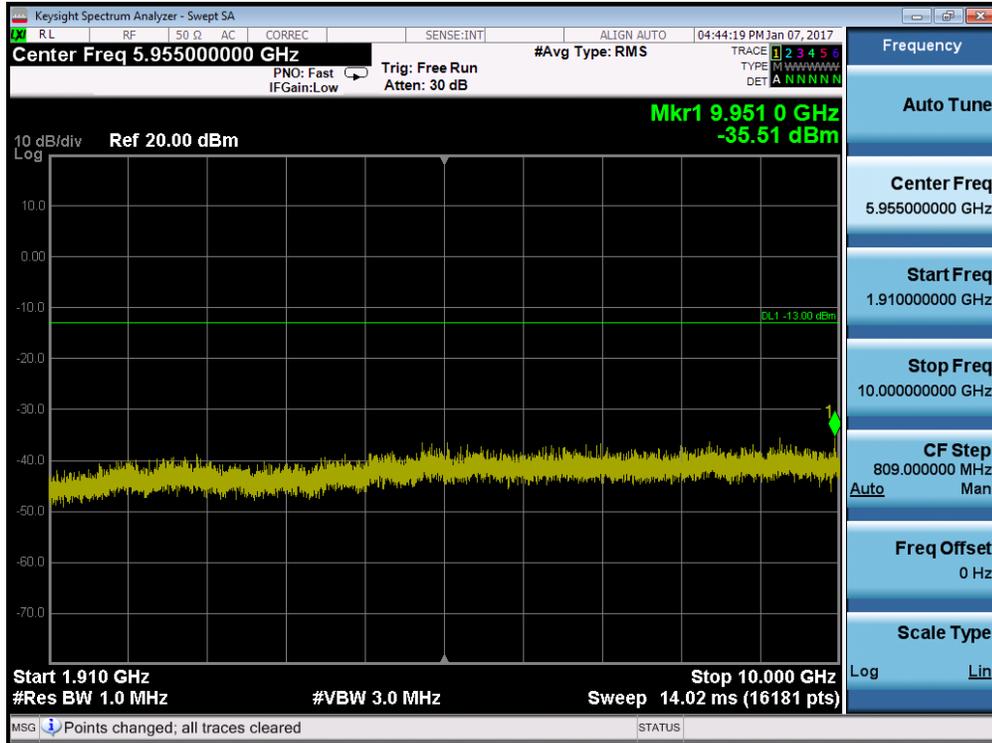


Plot 7-20. Conducted Spurious Plot (PCS GPRS Mode – Ch. 512)

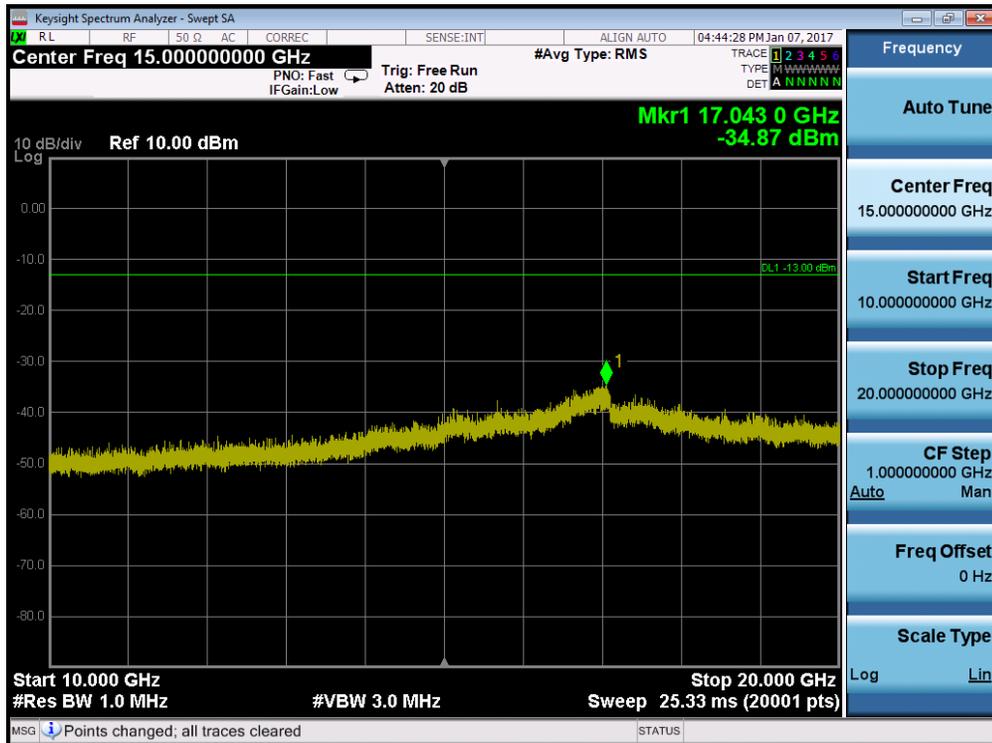


Plot 7-21. Conducted Spurious Plot (PCS GPRS Mode – Ch. 512)

FCC ID: ZNFV9888	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1701180035-02-R3.ZNF	Test Dates: 12/27/2016-2/16/2017	EUT Type: Portable Handset		Page 26 of 107

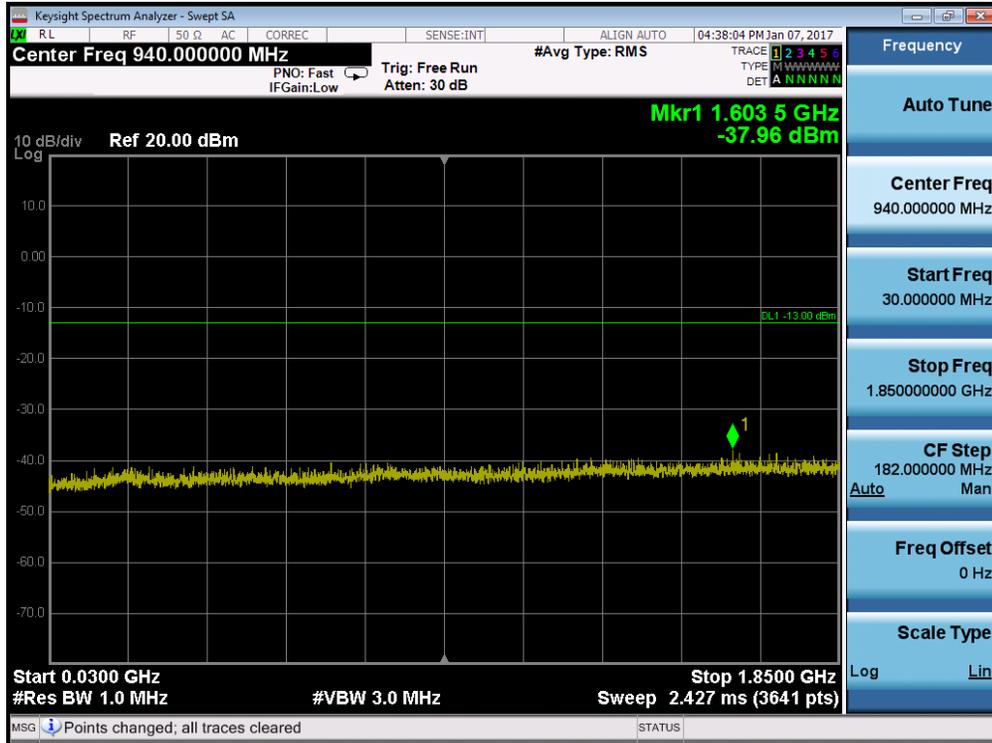


Plot 7-22. Conducted Spurious Plot (PCS GPRS Mode – Ch. 661)

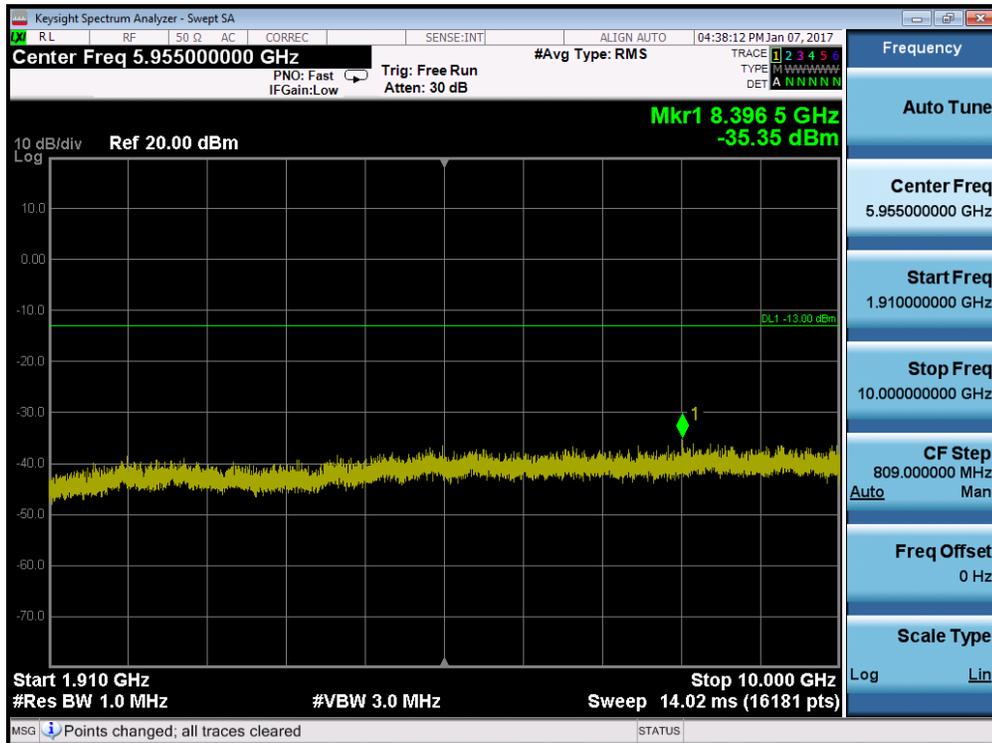


Plot 7-23. Conducted Spurious Plot (PCS GPRS Mode – Ch. 661)

FCC ID: ZNFVS988	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1701180035-02-R3.ZNF	Test Dates: 12/27/2016-2/16/2017	EUT Type: Portable Handset		Page 27 of 107

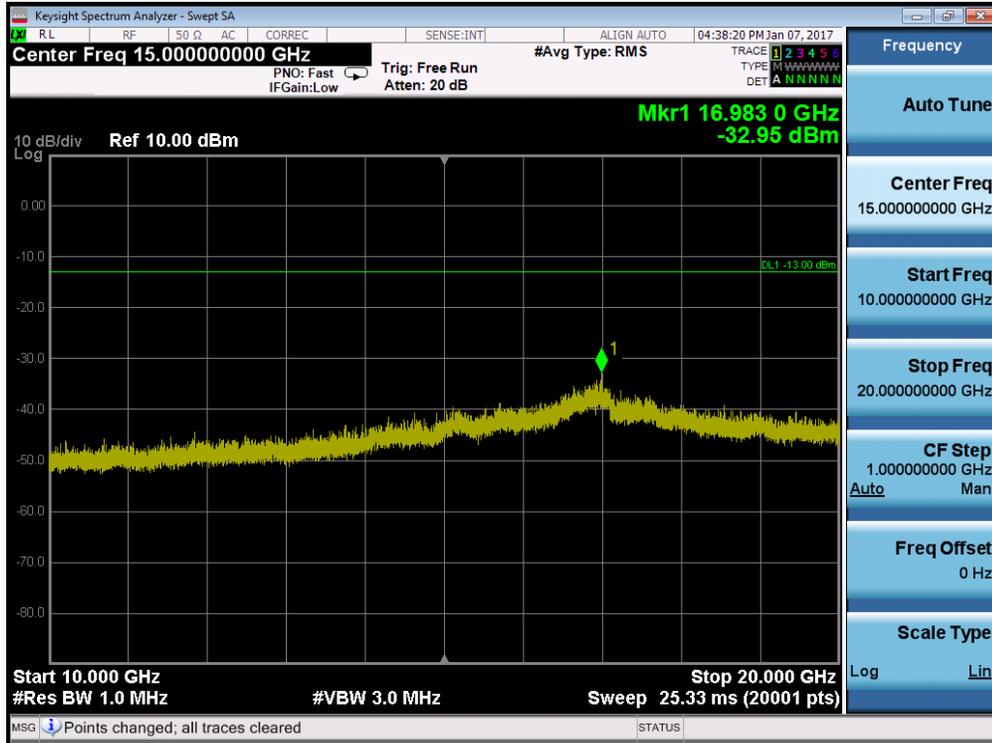


Plot 7-24. Conducted Spurious Plot (PCS GPRS Mode – Ch. 661)

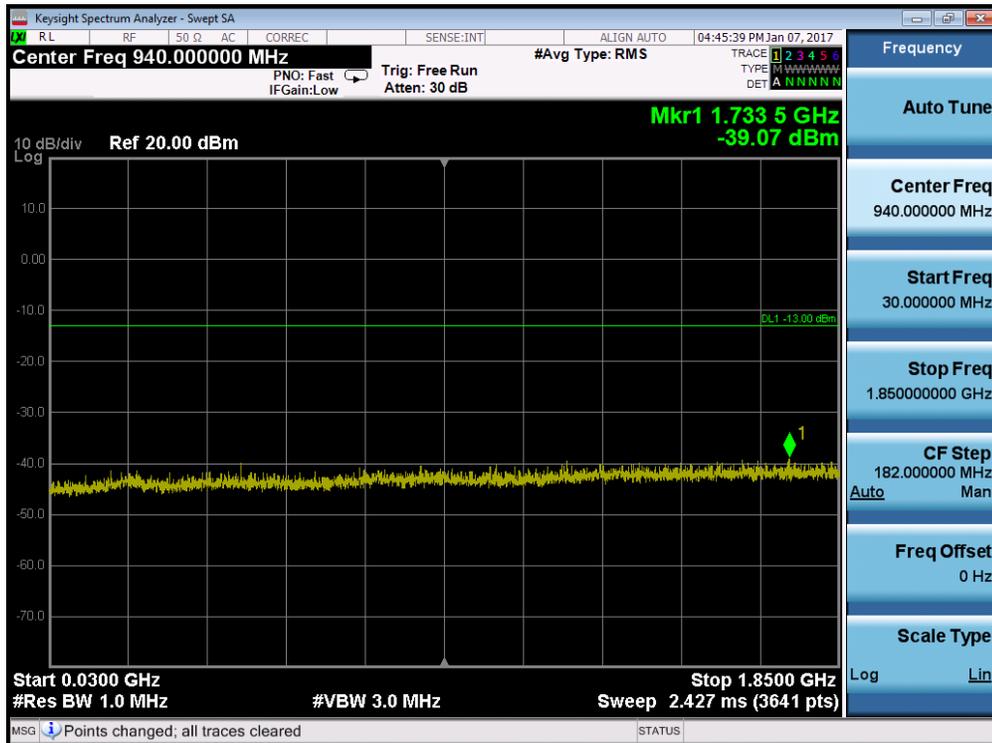


Plot 7-25. Conducted Spurious Plot (PCS GPRS Mode – Ch. 810)

FCC ID: ZNFVS988	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1701180035-02-R3.ZNF	Test Dates: 12/27/2016-2/16/2017	EUT Type: Portable Handset		Page 28 of 107

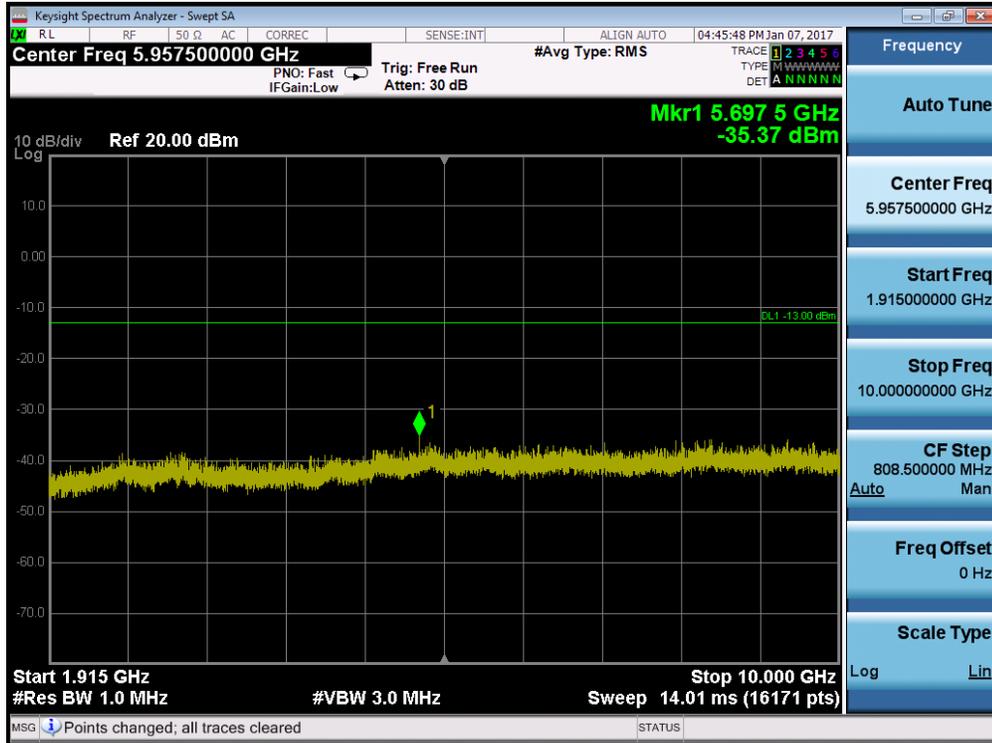


Plot 7-26. Conducted Spurious Plot (PCS GPRS Mode – Ch. 810)

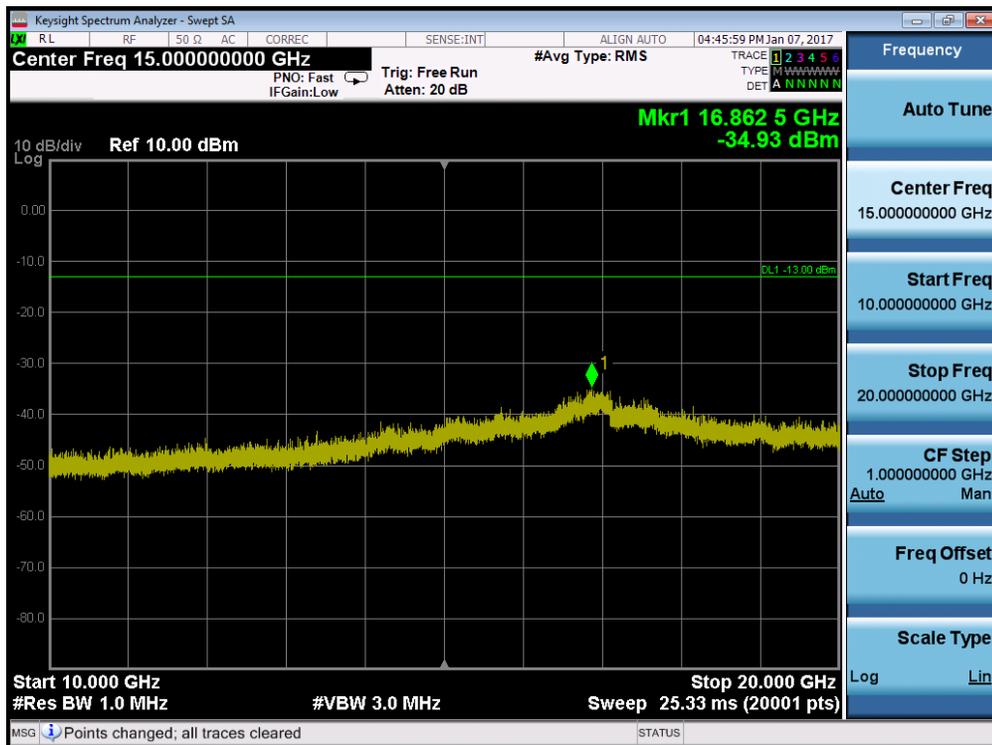


Plot 7-27. Conducted Spurious Plot (PCS GPRS Mode – Ch. 810)

FCC ID: ZNFVS988	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1701180035-02-R3.ZNF	Test Dates: 12/27/2016-2/16/2017	EUT Type: Portable Handset		Page 29 of 107

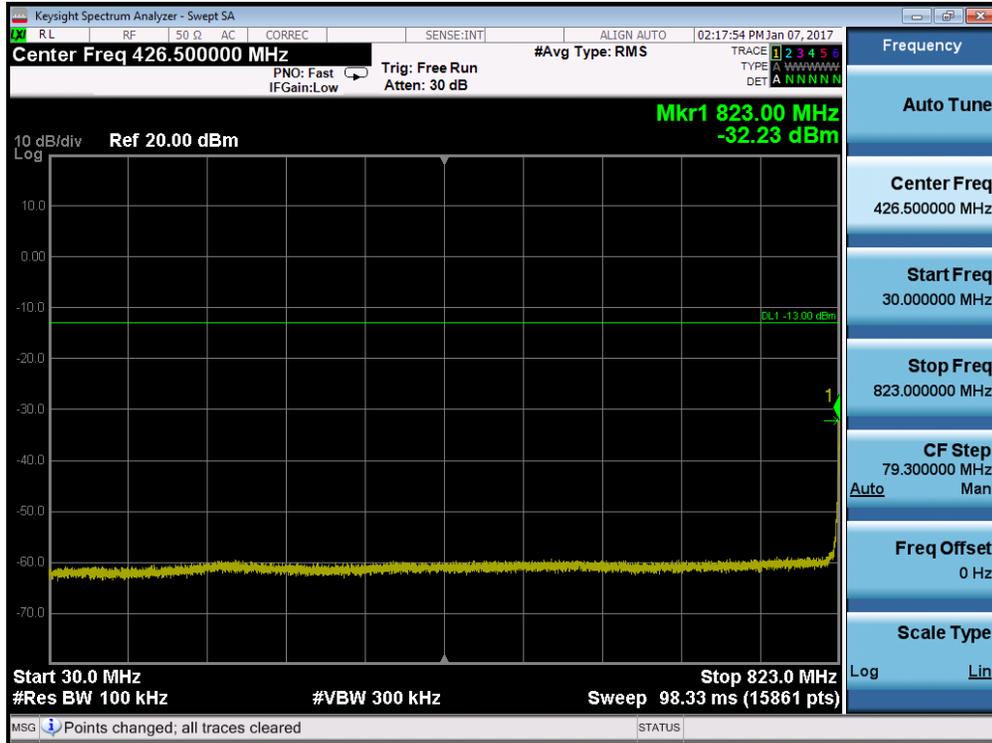


Plot 7-28. Conducted Spurious Plot (Cellular CDMA Mode – Ch. 1013)

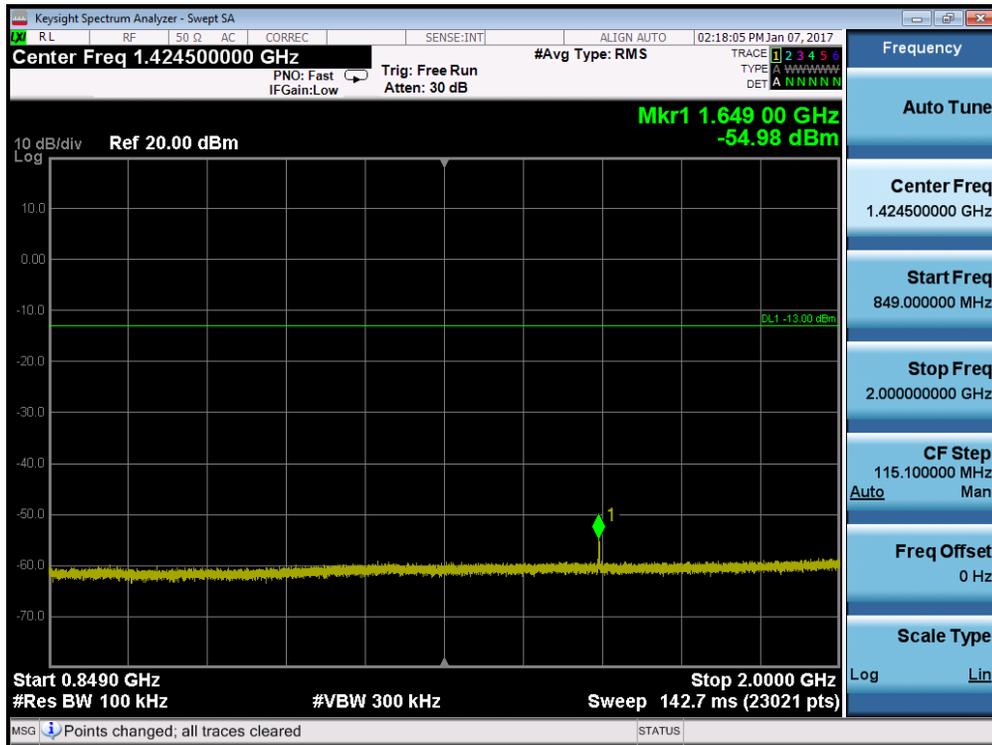


Plot 7-29. Conducted Spurious Plot (Cellular CDMA Mode – Ch. 1013)

FCC ID: ZNFVS988	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1701180035-02-R3.ZNF	Test Dates: 12/27/2016-2/16/2017	EUT Type: Portable Handset		Page 30 of 107

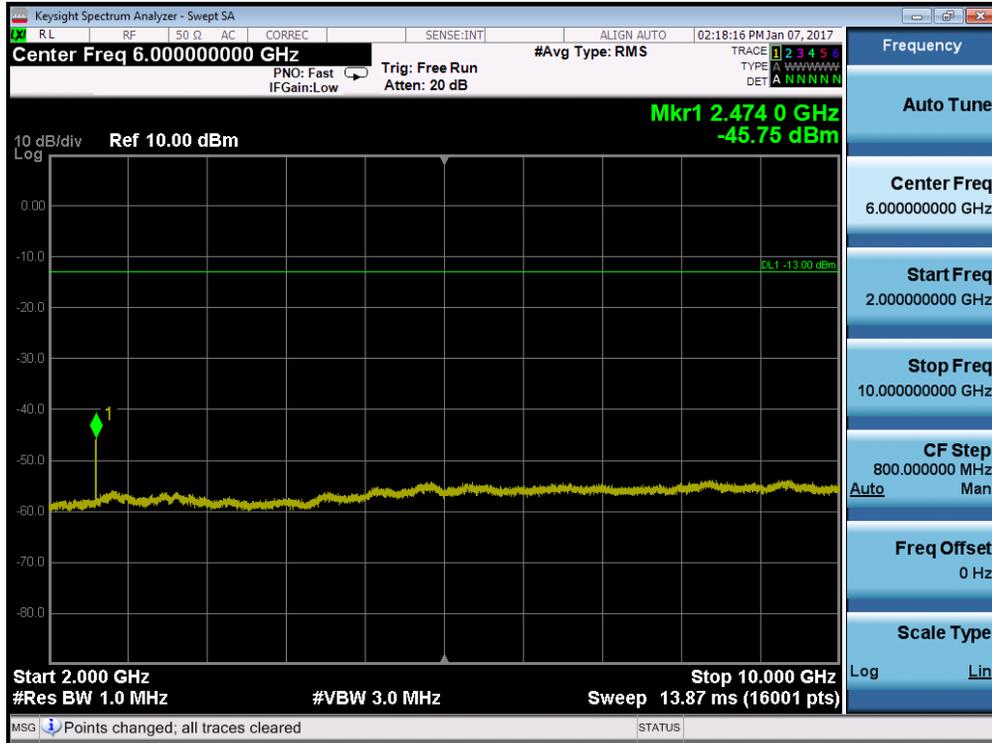


Plot 7-30. Conducted Spurious Plot (Cellular CDMA Mode – Ch. 1013)

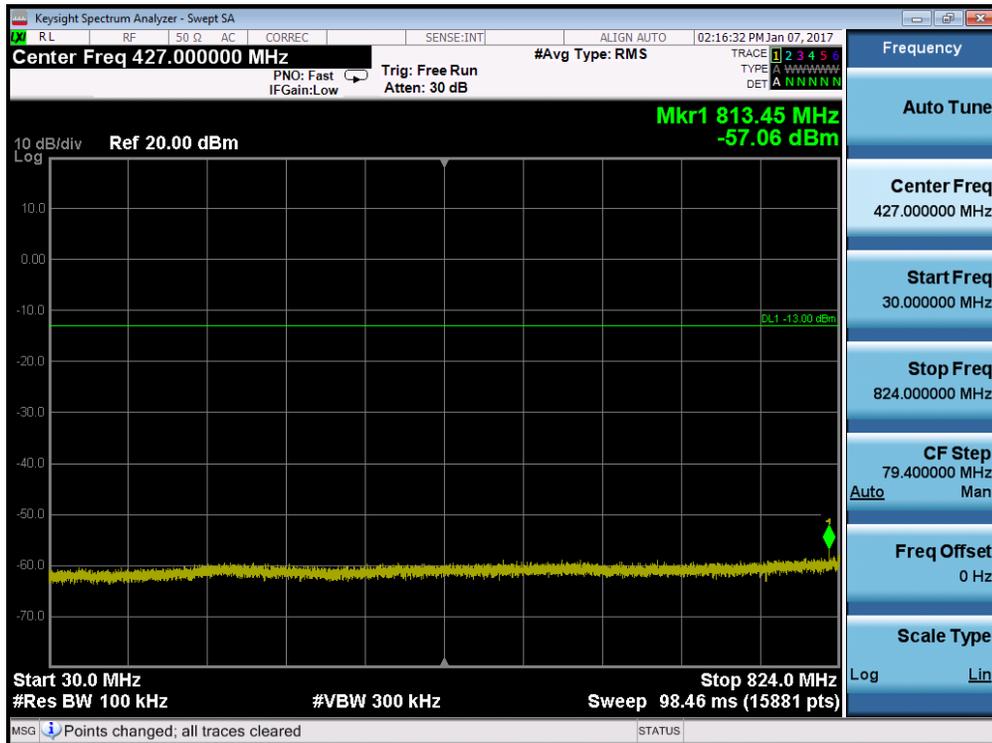


Plot 7-31. Conducted Spurious Plot (Cellular CDMA Mode – Ch. 384)

FCC ID: ZNFVS988	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1701180035-02-R3.ZNF	Test Dates: 12/27/2016-2/16/2017	EUT Type: Portable Handset		Page 31 of 107

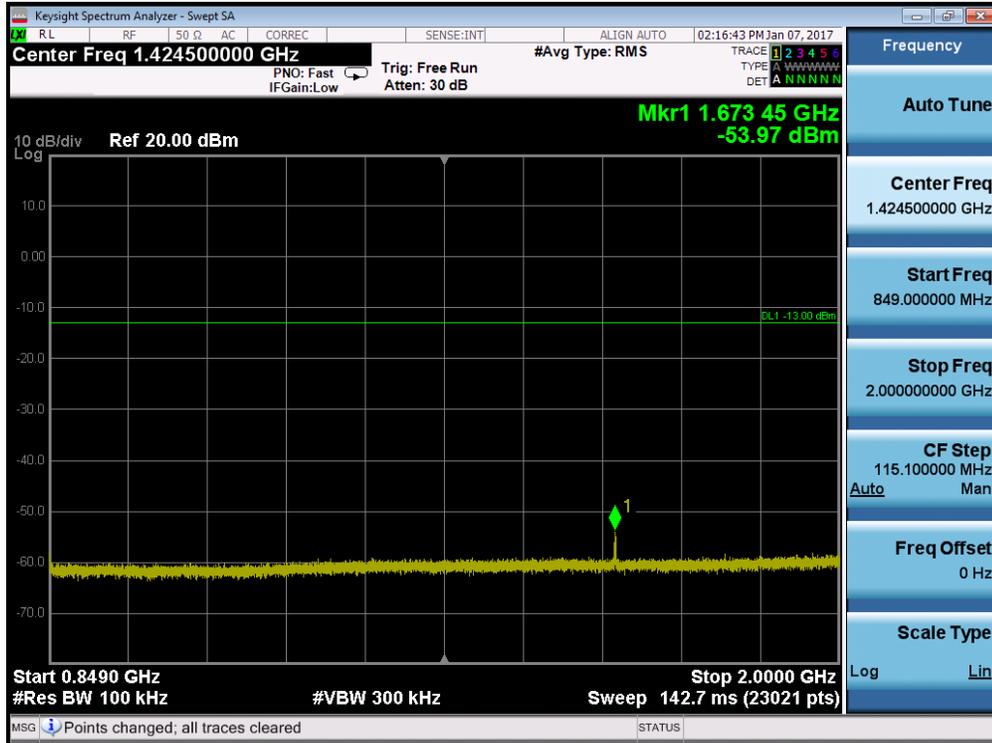


Plot 7-32. Conducted Spurious Plot (Cellular CDMA Mode – Ch. 384)

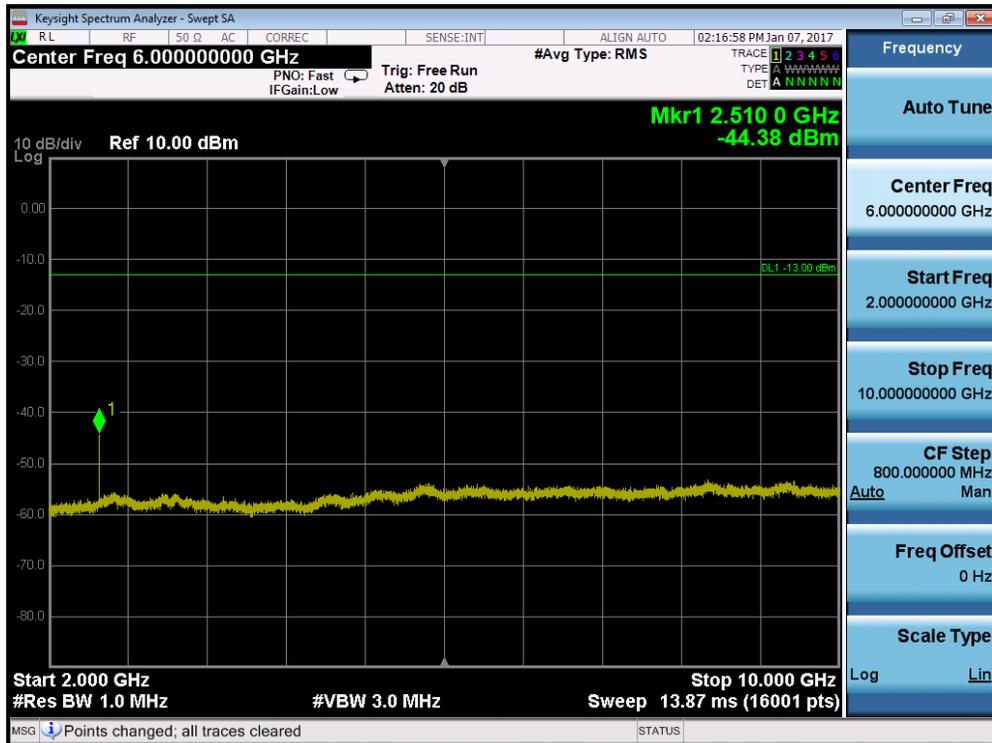


Plot 7-33. Conducted Spurious Plot (Cellular CDMA Mode – Ch. 384)

FCC ID: ZNFVS988	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1701180035-02-R3.ZNF	Test Dates: 12/27/2016-2/16/2017	EUT Type: Portable Handset		Page 32 of 107

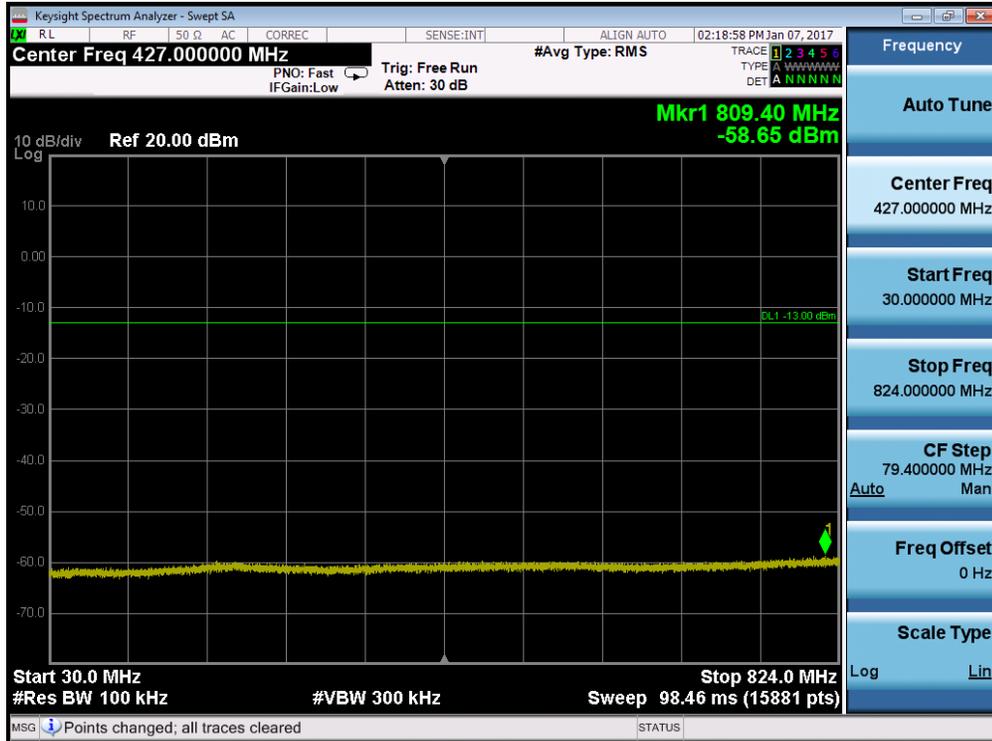


Plot 7-34. Conducted Spurious Plot (Cellular CDMA Mode – Ch. 777)

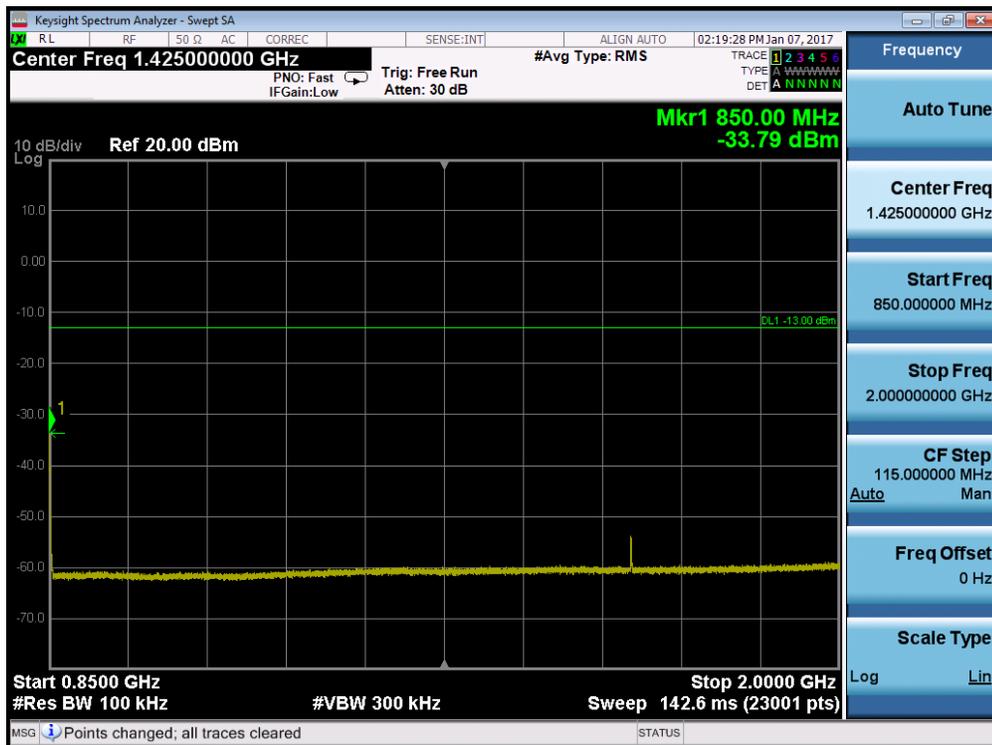


Plot 7-35. Conducted Spurious Plot (Cellular CDMA Mode – Ch. 777)

FCC ID: ZNFVS988	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1701180035-02-R3.ZNF	Test Dates: 12/27/2016-2/16/2017	EUT Type: Portable Handset		Page 33 of 107

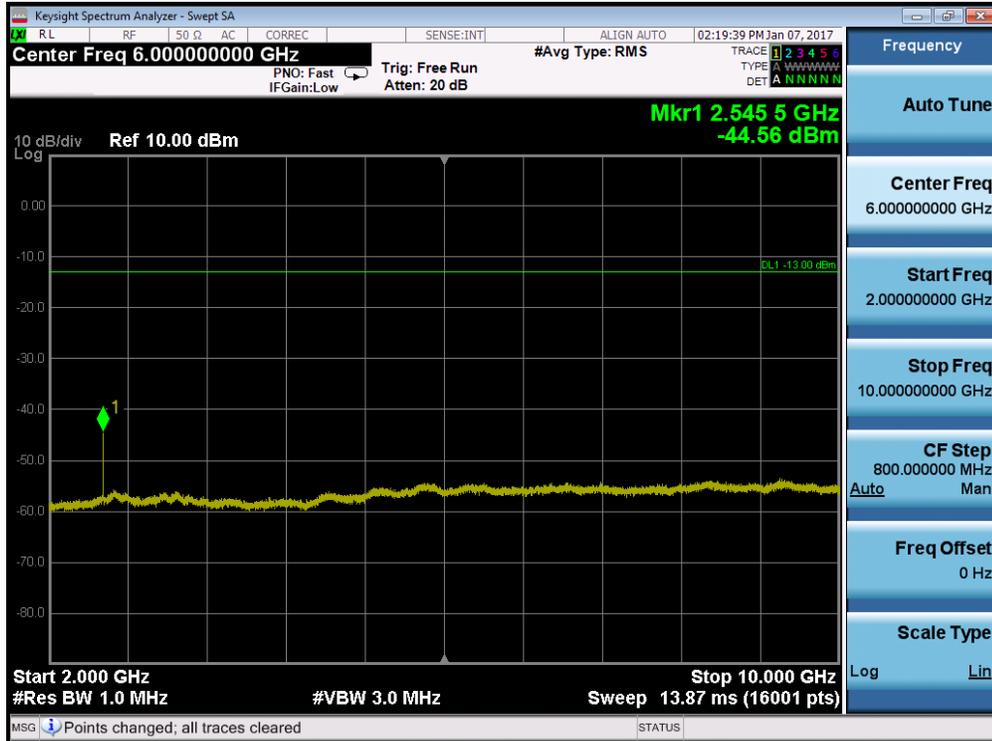


Plot 7-36. Conducted Spurious Plot (Cellular CDMA Mode – Ch. 777)

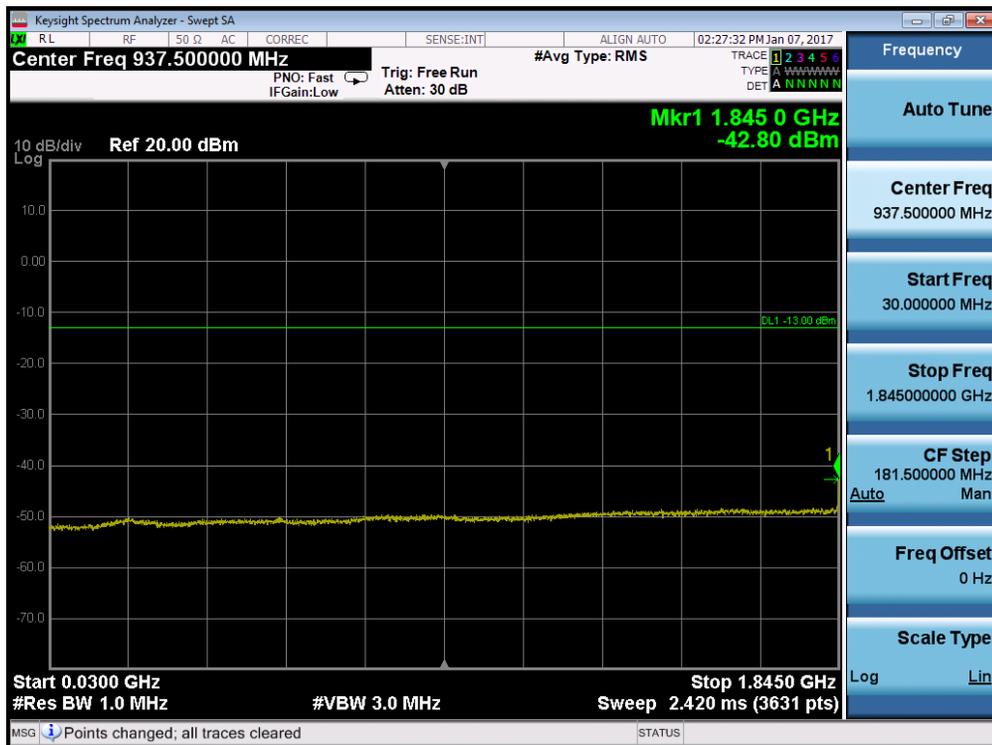


Plot 7-37. Conducted Spurious Plot (PCS CDMA Mode – Ch. 25)

FCC ID: ZNFVS988	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1701180035-02-R3.ZNF	Test Dates: 12/27/2016-2/16/2017	EUT Type: Portable Handset		Page 34 of 107

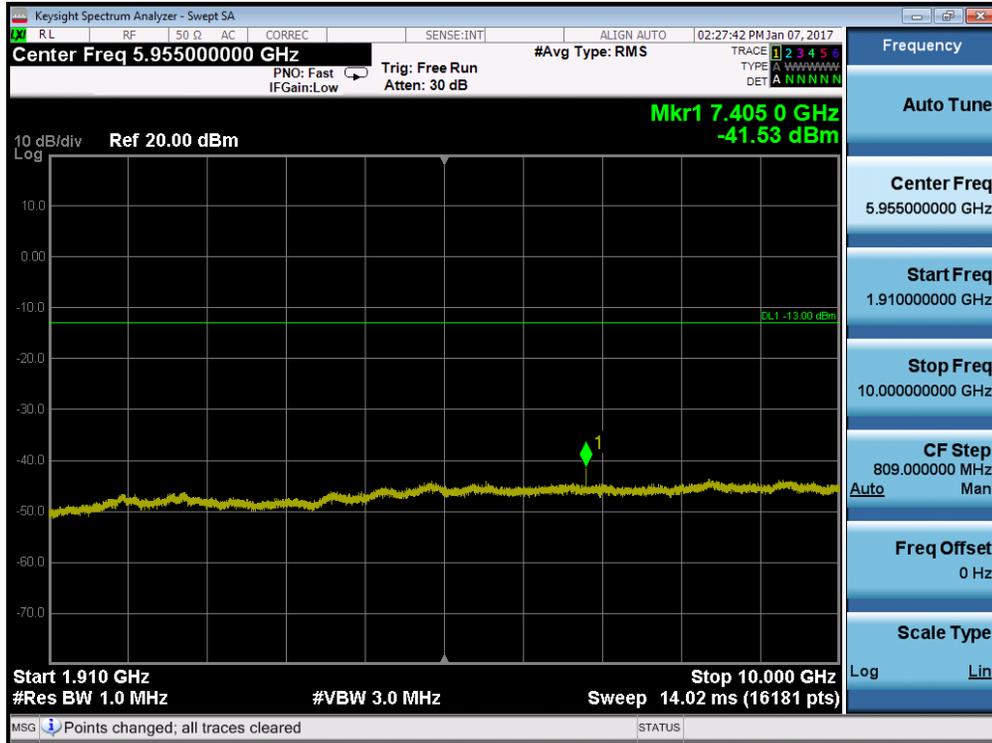


Plot 7-38. Conducted Spurious Plot (PCS CDMA Mode – Ch. 25)

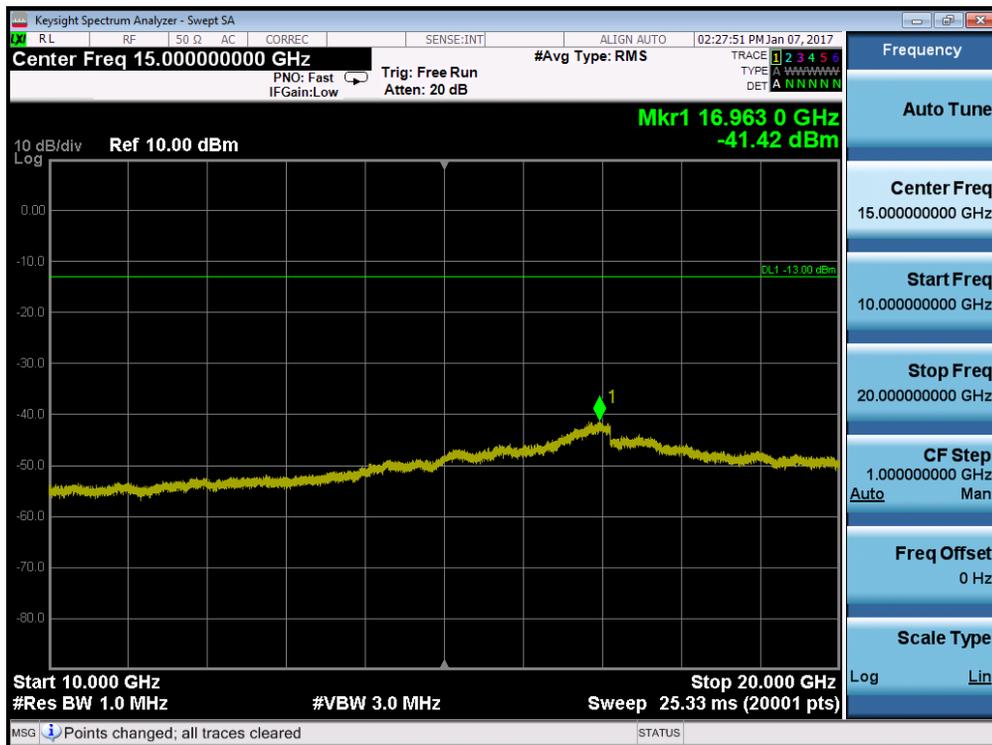


Plot 7-39. Conducted Spurious Plot (PCS CDMA Mode – Ch. 25)

FCC ID: ZNFVS988	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1701180035-02-R3.ZNF	Test Dates: 12/27/2016-2/16/2017	EUT Type: Portable Handset		Page 35 of 107

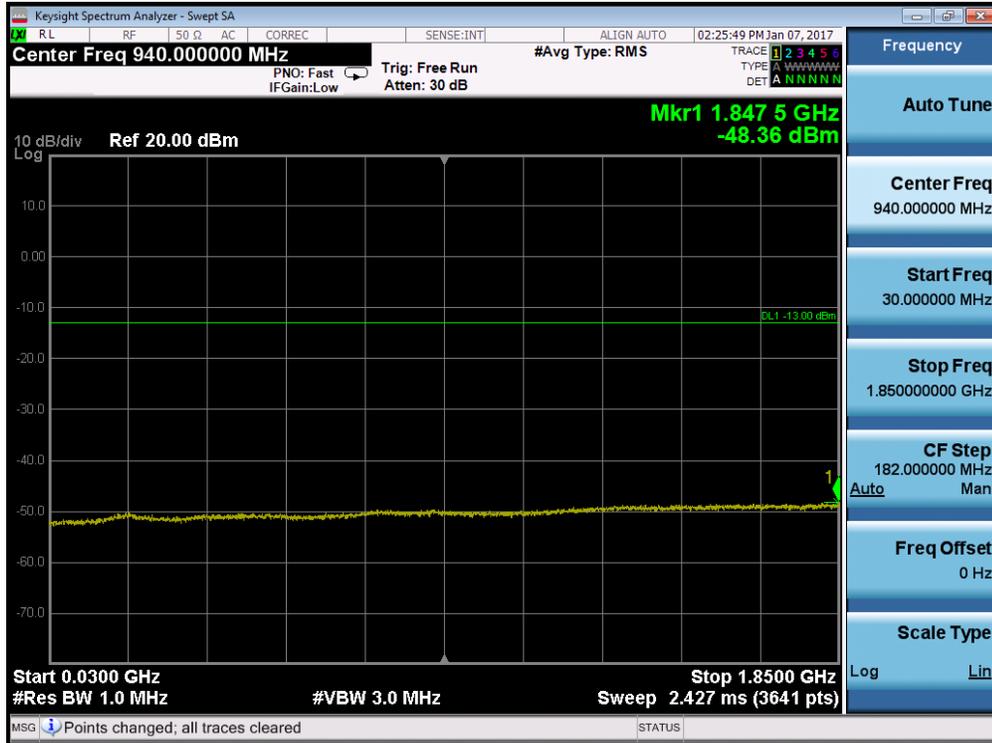


Plot 7-40. Conducted Spurious Plot (PCS CDMA Mode – Ch. 600)

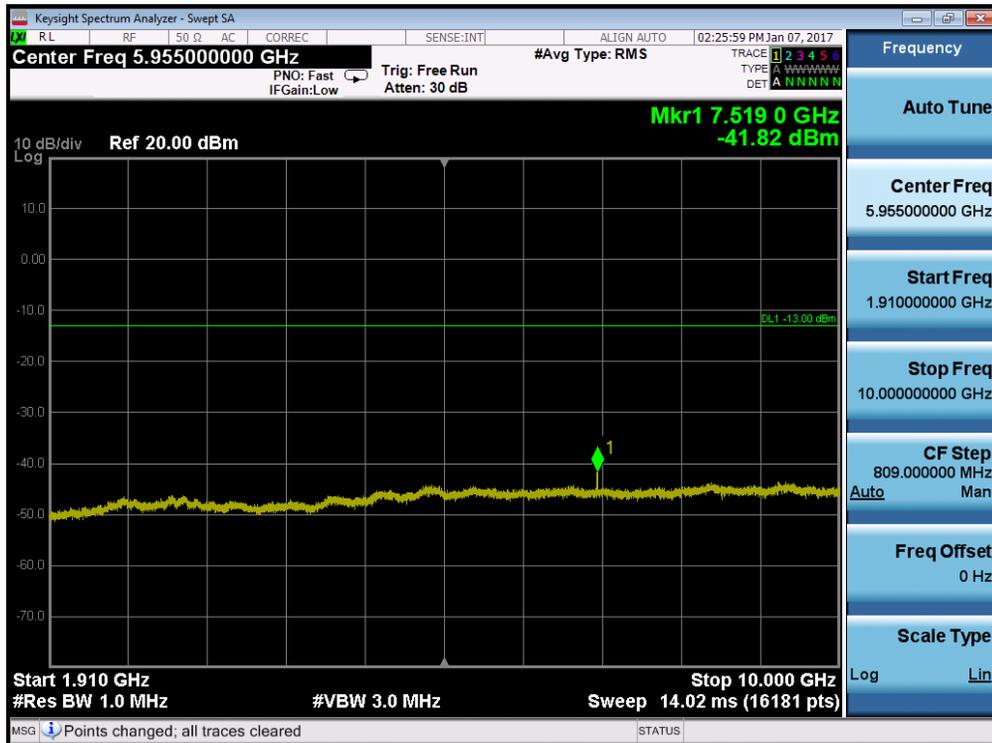


Plot 7-41. Conducted Spurious Plot (PCS CDMA Mode – Ch. 600)

FCC ID: ZNFVS988	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1701180035-02-R3.ZNF	Test Dates: 12/27/2016-2/16/2017	EUT Type: Portable Handset		Page 36 of 107

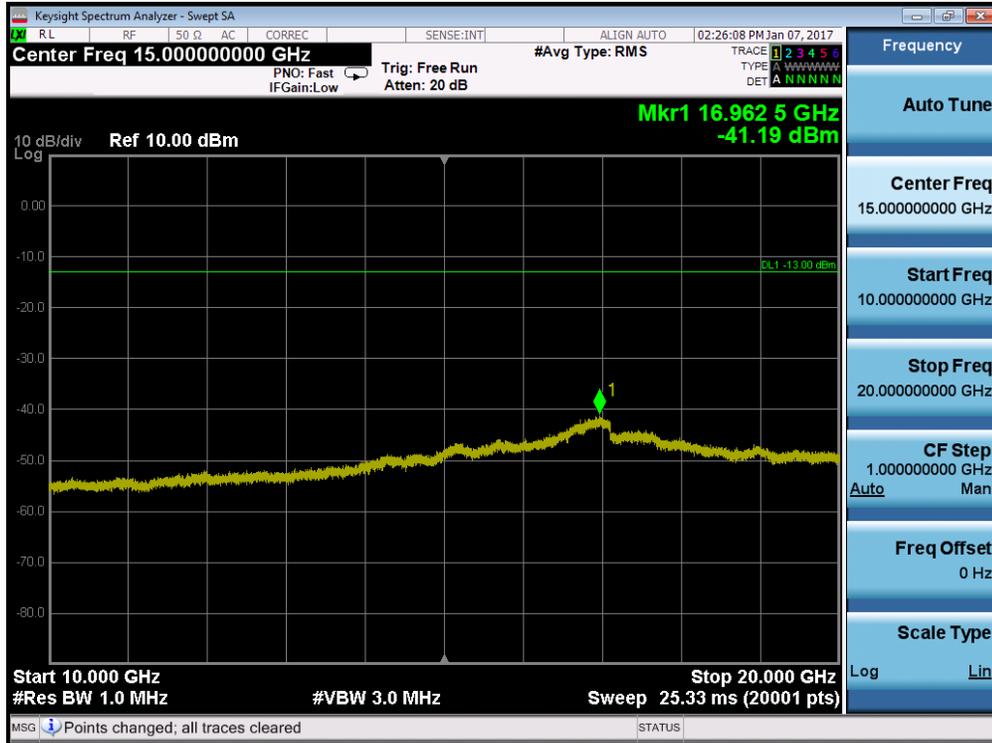


Plot 7-42. Conducted Spurious Plot (PCS CDMA Mode – Ch. 600)

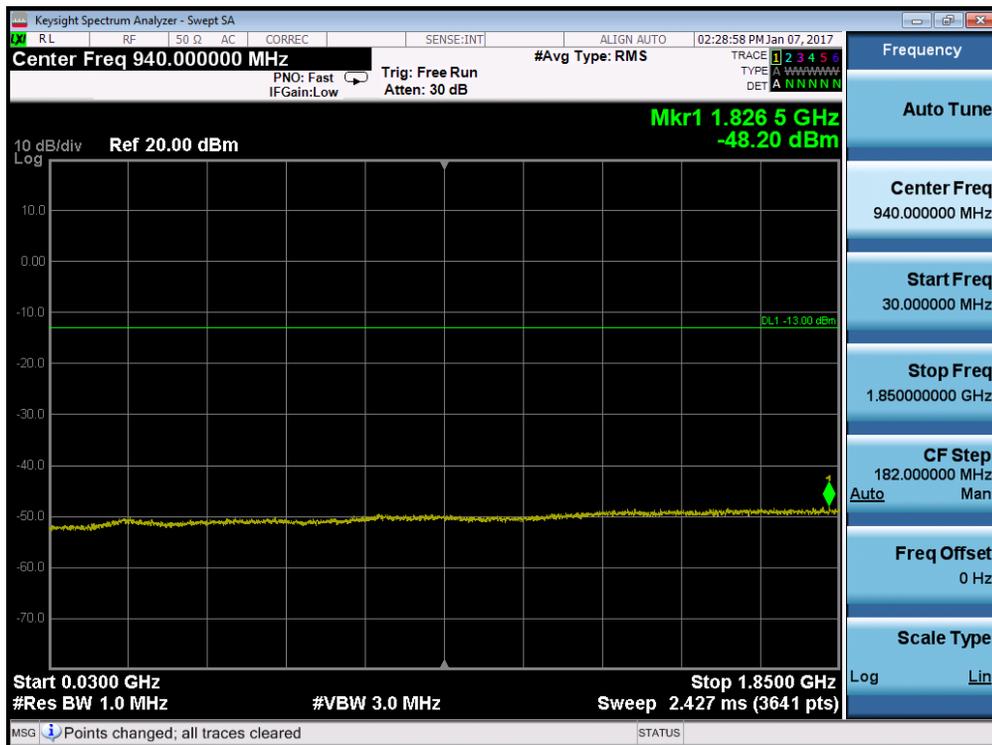


Plot 7-43. Conducted Spurious Plot (PCS CDMA Mode – Ch. 1175)

FCC ID: ZNFVS988	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1701180035-02-R3.ZNF	Test Dates: 12/27/2016-2/16/2017	EUT Type: Portable Handset		Page 37 of 107

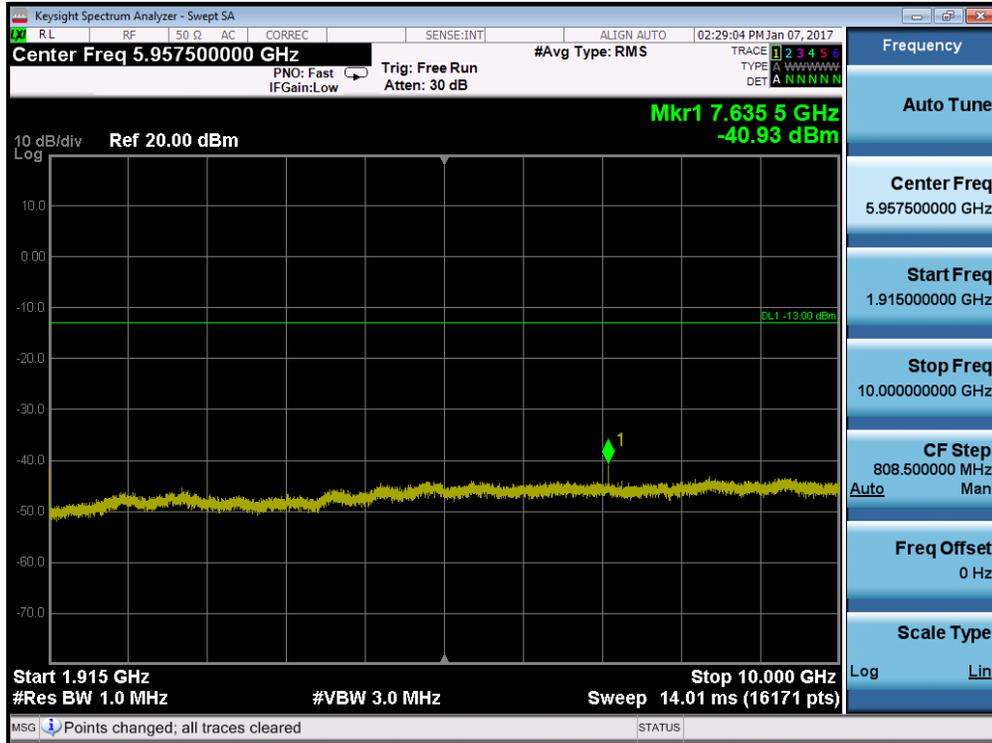


Plot 7-44. Conducted Spurious Plot (PCS CDMA Mode – Ch. 1175)

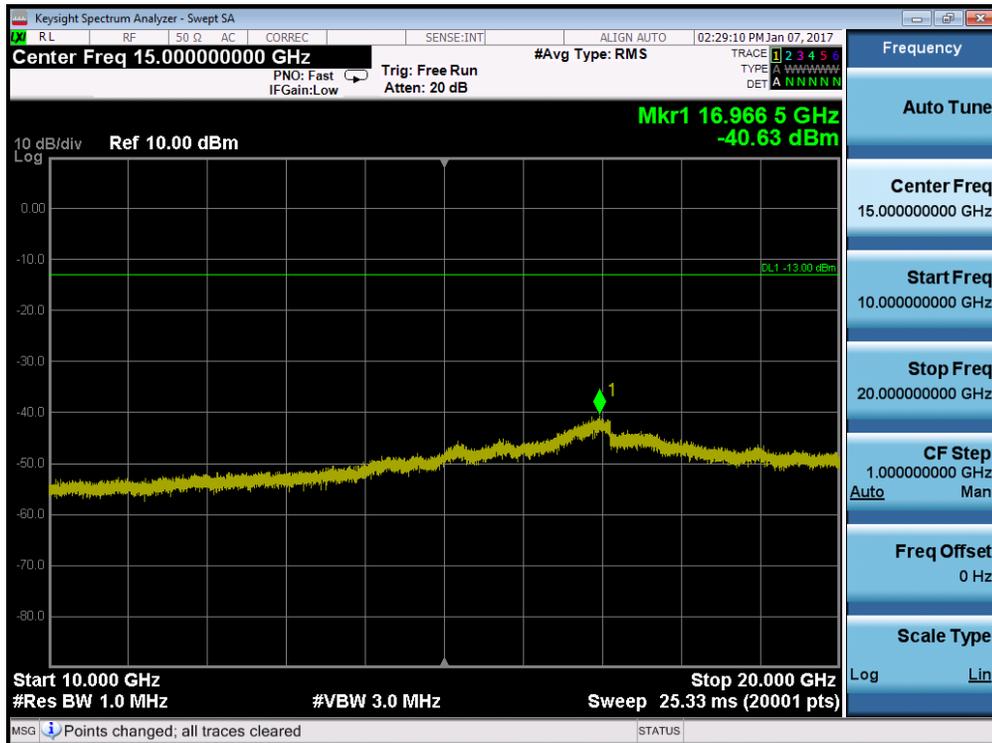


Plot 7-45. Conducted Spurious Plot (PCS CDMA Mode – Ch. 1175)

FCC ID: ZNFVS988	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1701180035-02-R3.ZNF	Test Dates: 12/27/2016-2/16/2017	EUT Type: Portable Handset		Page 38 of 107

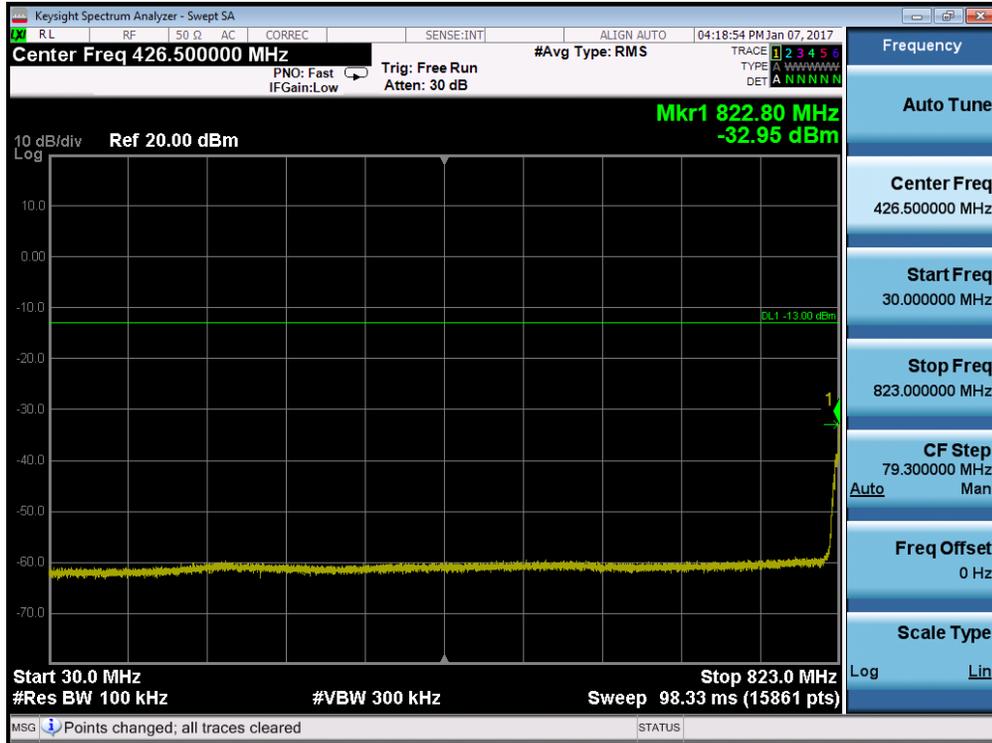


Plot 7-46. Conducted Spurious Plot (Cellular WCDMA Mode – Ch. 4132)

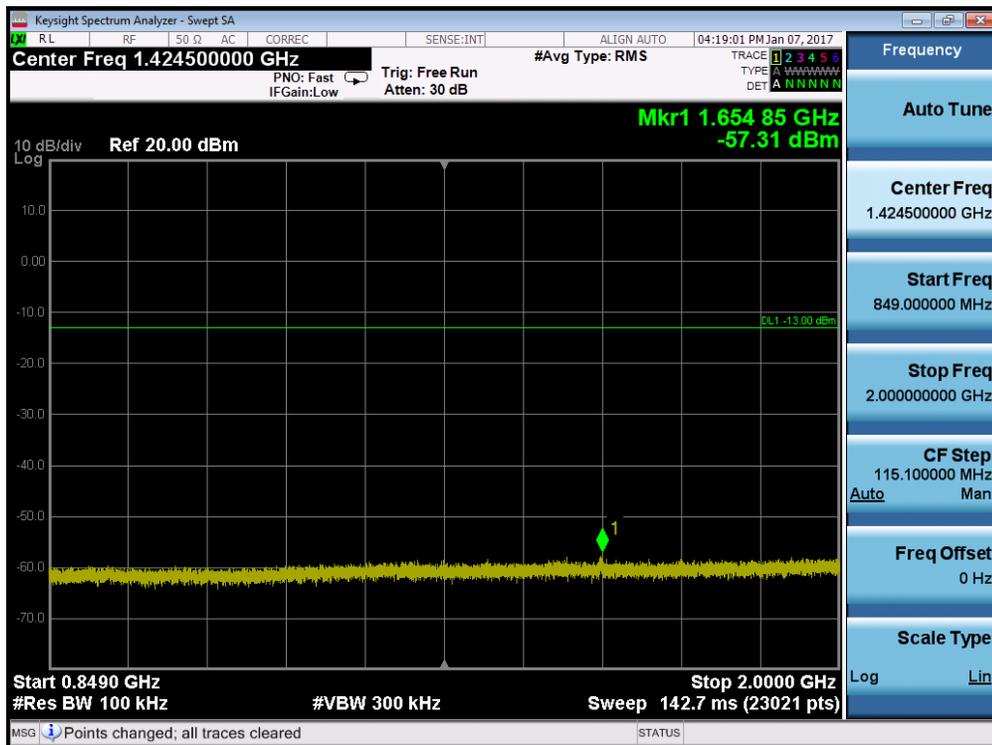


Plot 7-47. Conducted Spurious Plot (Cellular WCDMA Mode – Ch. 4132)

FCC ID: ZNFVS988	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1701180035-02-R3.ZNF	Test Dates: 12/27/2016-2/16/2017	EUT Type: Portable Handset		Page 39 of 107

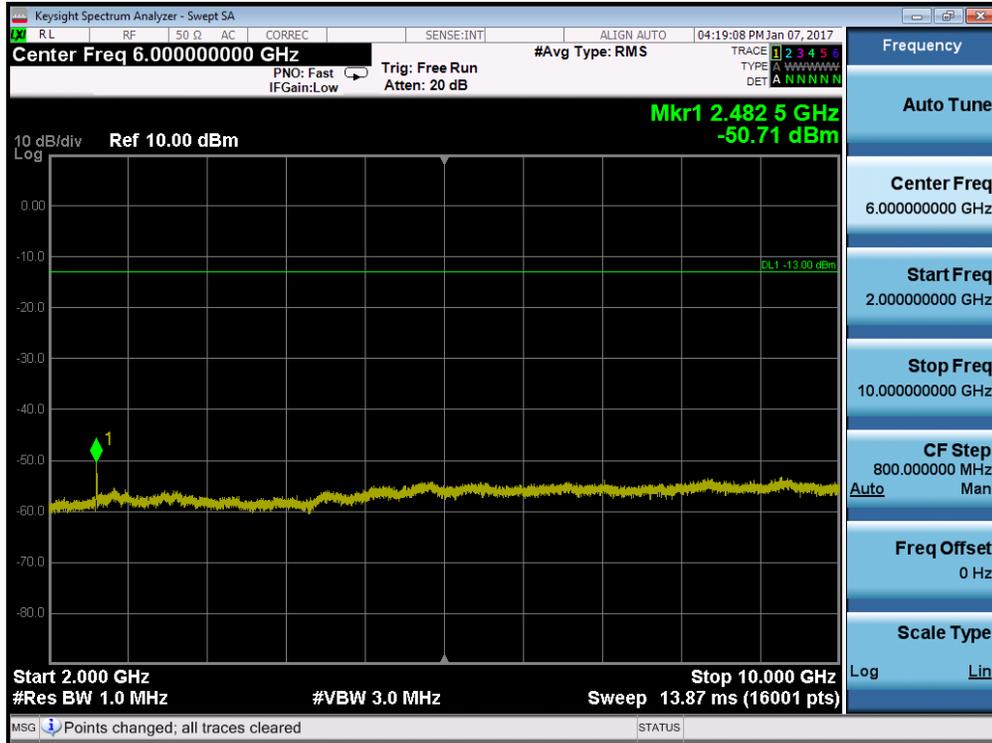


Plot 7-48. Conducted Spurious Plot (Cellular WCDMA Mode – Ch. 4132)

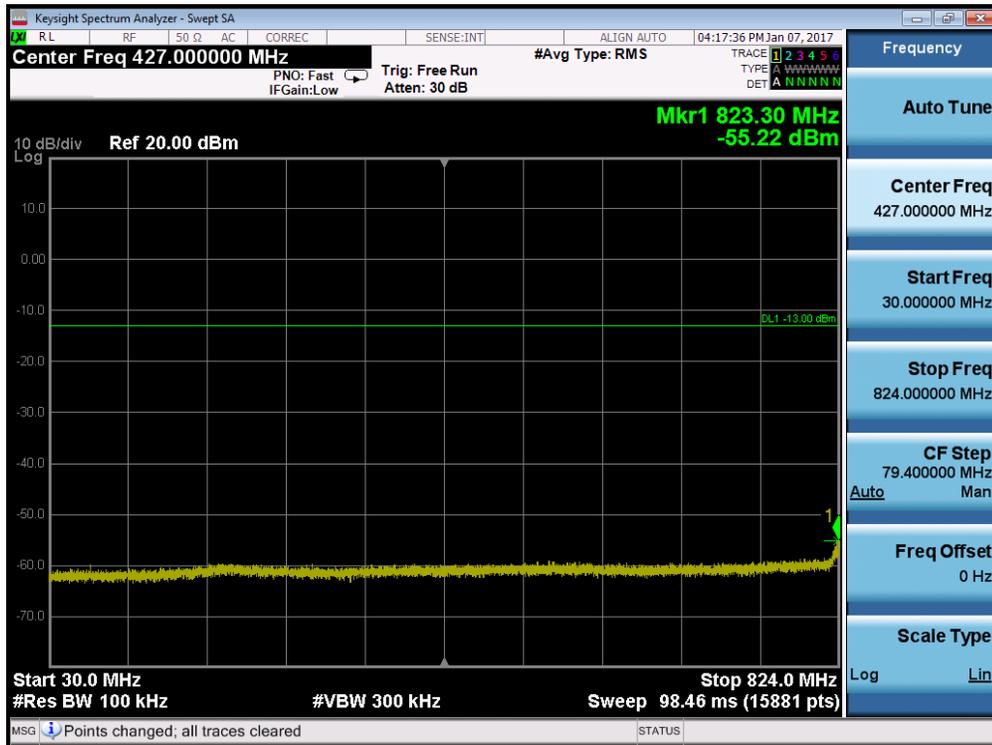


Plot 7-49. Conducted Spurious Plot (Cellular WCDMA Mode – Ch. 4183)

FCC ID: ZNFVS988	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1701180035-02-R3.ZNF	Test Dates: 12/27/2016-2/16/2017	EUT Type: Portable Handset		Page 40 of 107

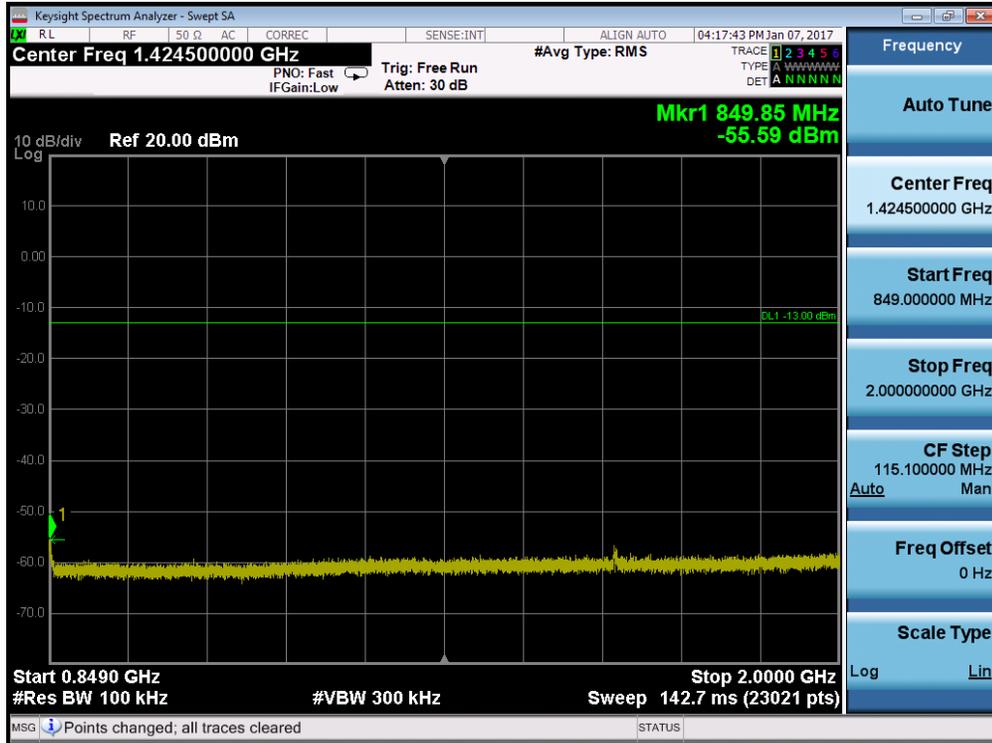


Plot 7-50. Conducted Spurious Plot (Cellular WCDMA Mode – Ch. 4183)

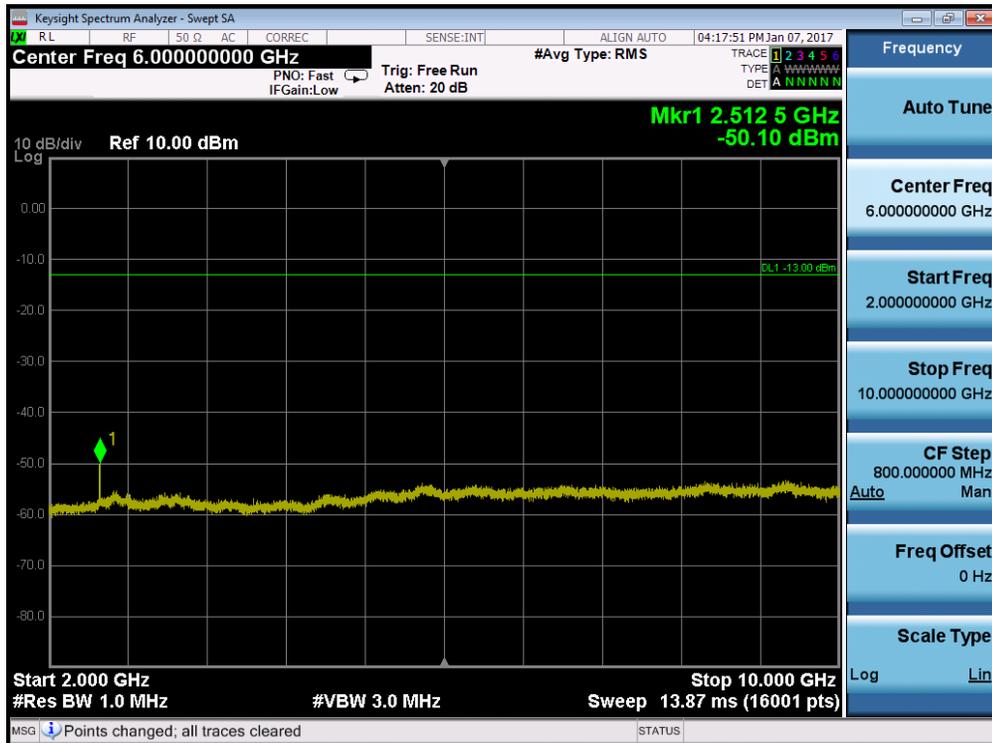


Plot 7-51. Conducted Spurious Plot (Cellular WCDMA Mode – Ch. 4183)

FCC ID: ZNFVS988	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1701180035-02-R3.ZNF	Test Dates: 12/27/2016-2/16/2017	EUT Type: Portable Handset		Page 41 of 107

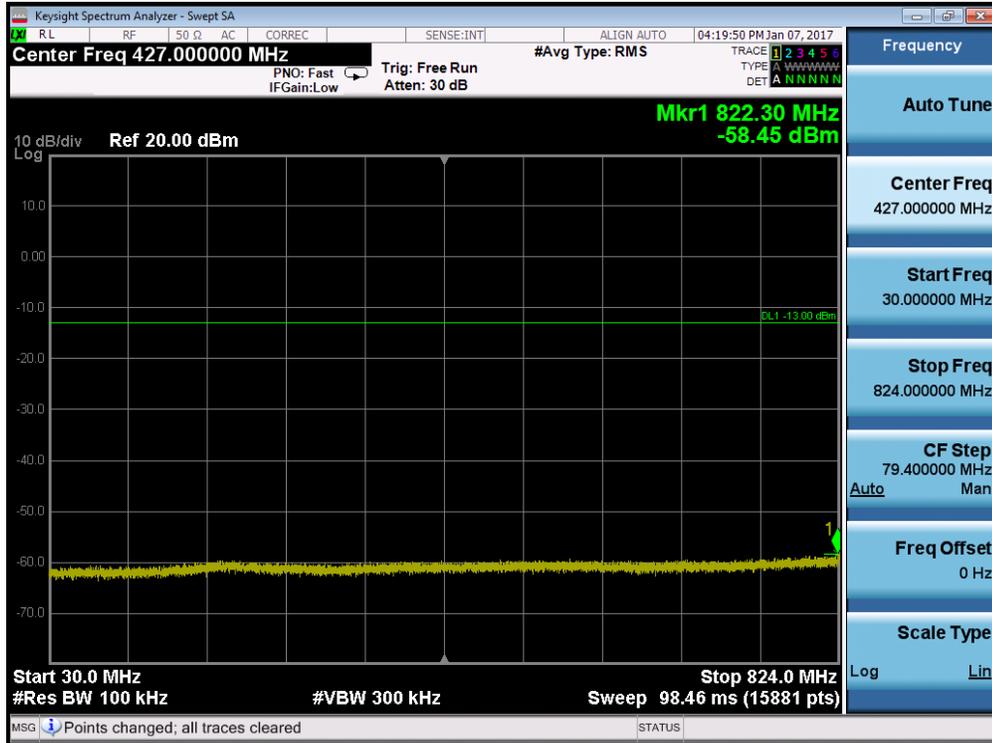


Plot 7-52. Conducted Spurious Plot (Cellular WCDMA Mode – Ch. 4233)

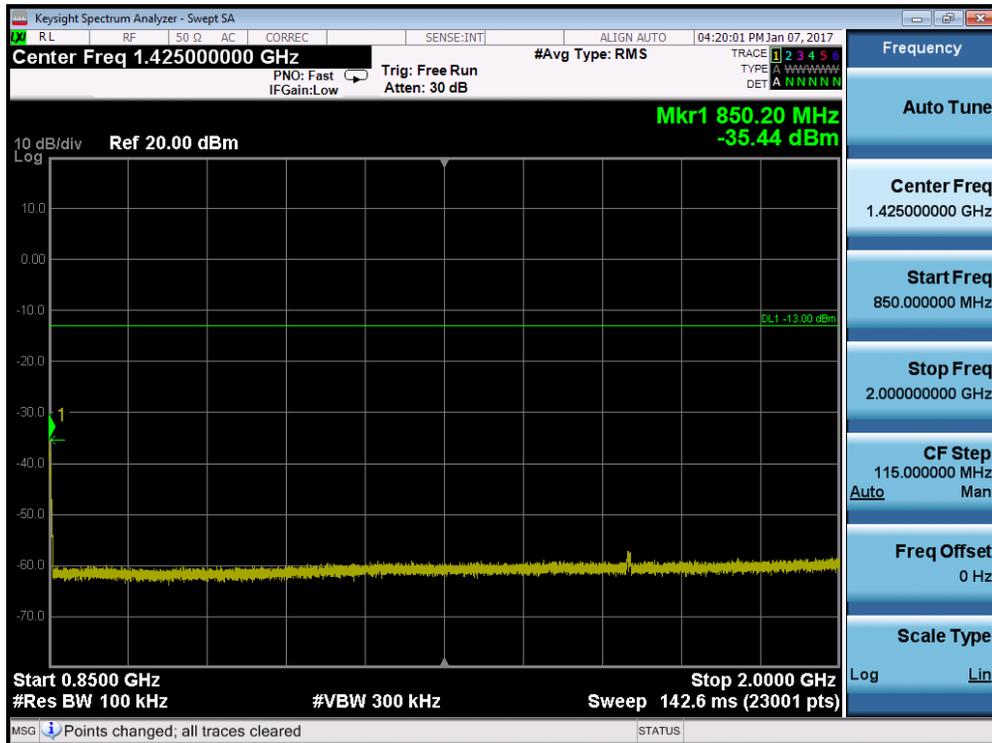


Plot 7-53. Conducted Spurious Plot (Cellular WCDMA Mode – Ch. 4233)

FCC ID: ZNFVS988	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1701180035-02-R3.ZNF	Test Dates: 12/27/2016-2/16/2017	EUT Type: Portable Handset		Page 42 of 107

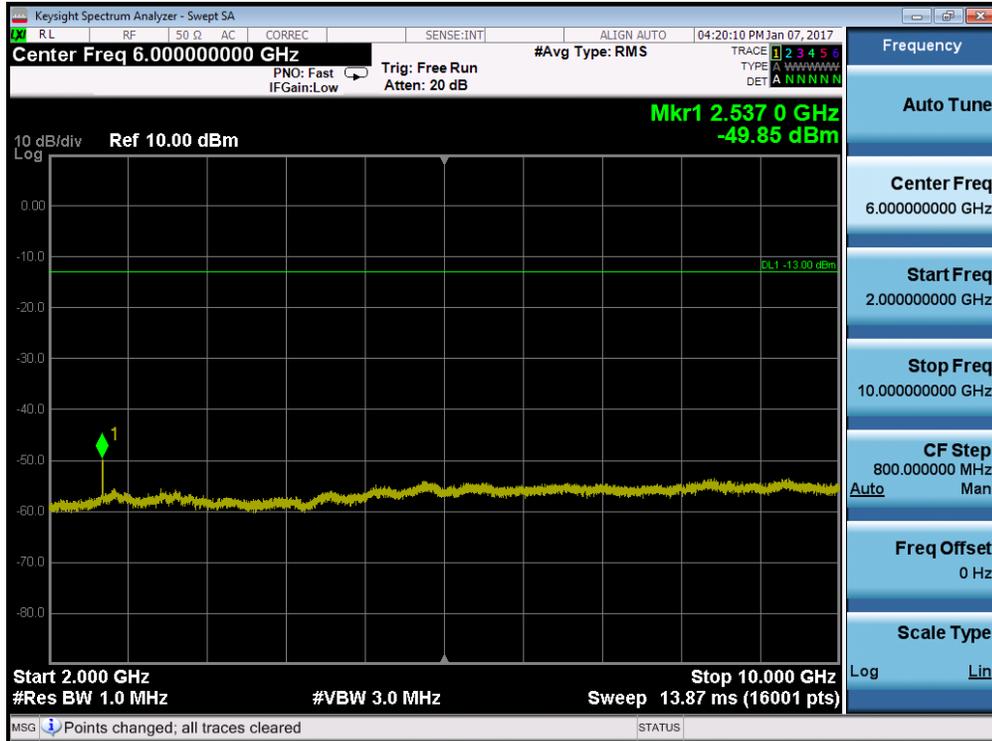


Plot 7-54. Conducted Spurious Plot (Cellular WCDMA Mode – Ch. 4233)

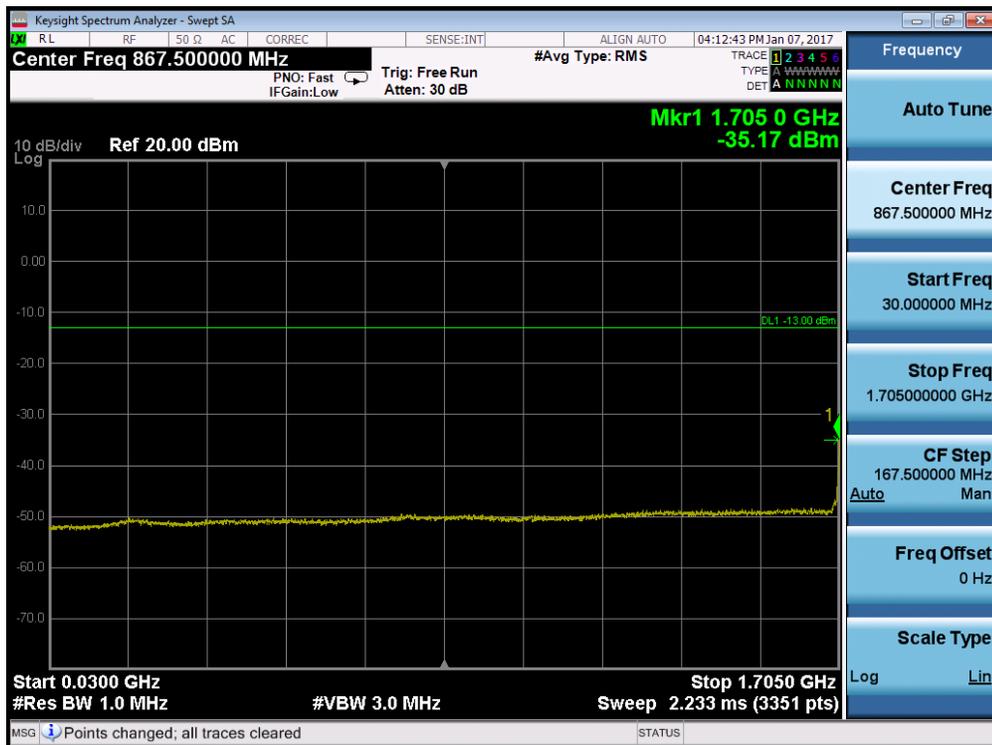


Plot 7-55. Conducted Spurious Plot (AWS WCDMA Mode – Ch. 1312)

FCC ID: ZNFVS988	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1701180035-02-R3.ZNF	Test Dates: 12/27/2016-2/16/2017	EUT Type: Portable Handset		Page 43 of 107

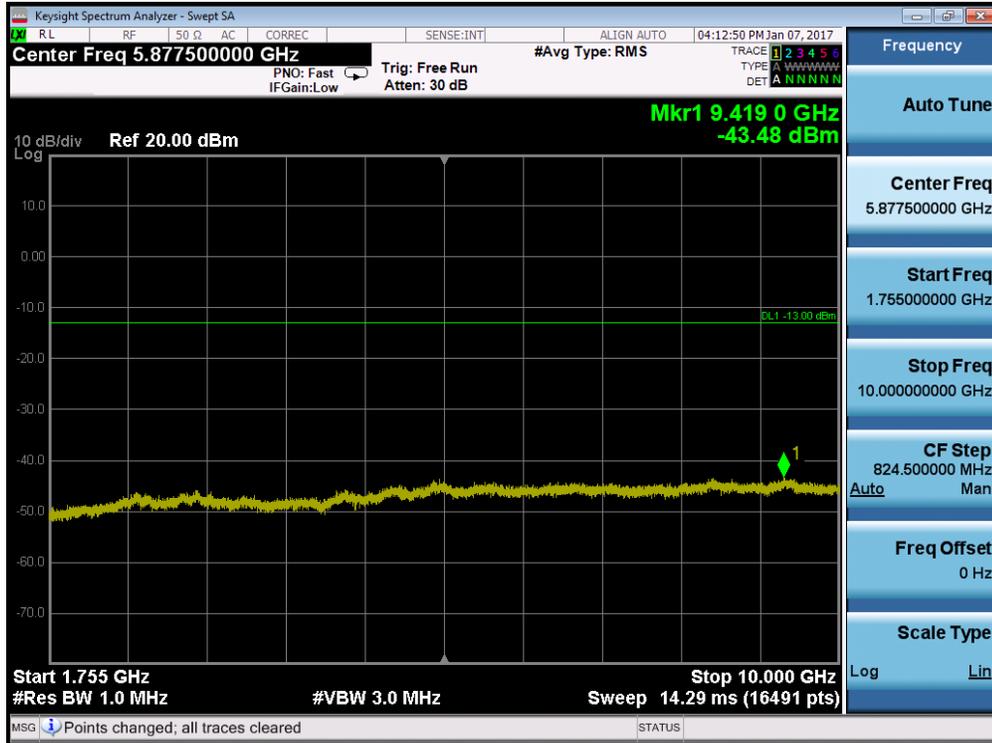


Plot 7-56. Conducted Spurious Plot (AWS WCDMA Mode – Ch. 1312)

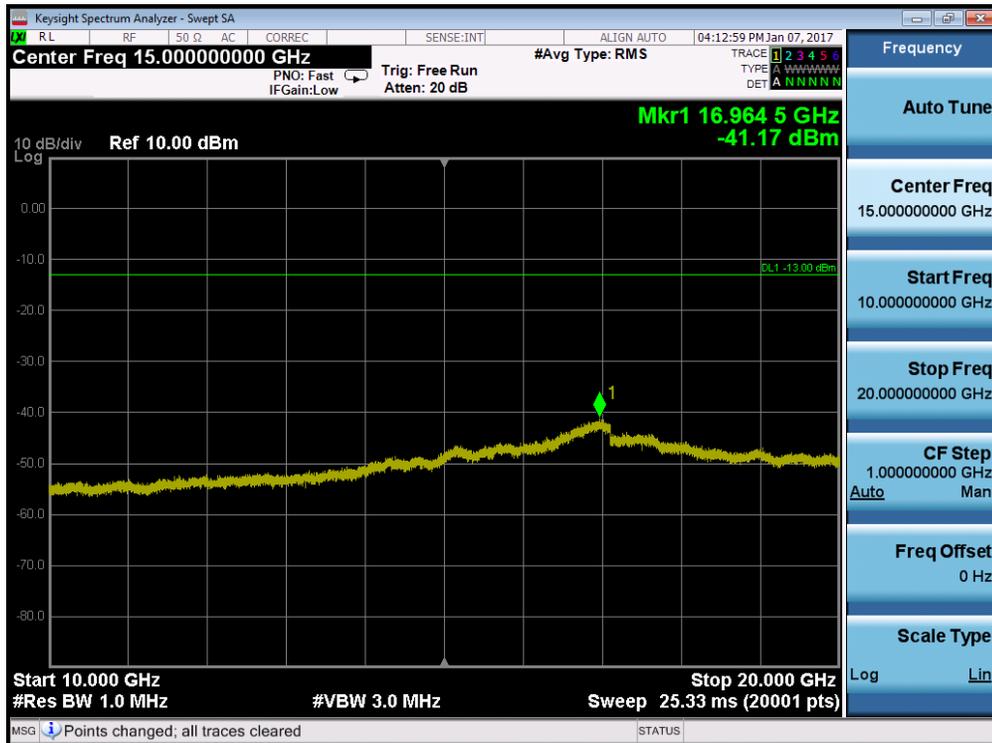


Plot 7-57. Conducted Spurious Plot (AWS WCDMA Mode – Ch. 1312)

FCC ID: ZNFV9888	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1701180035-02-R3.ZNF	Test Dates: 12/27/2016-2/16/2017	EUT Type: Portable Handset		Page 44 of 107

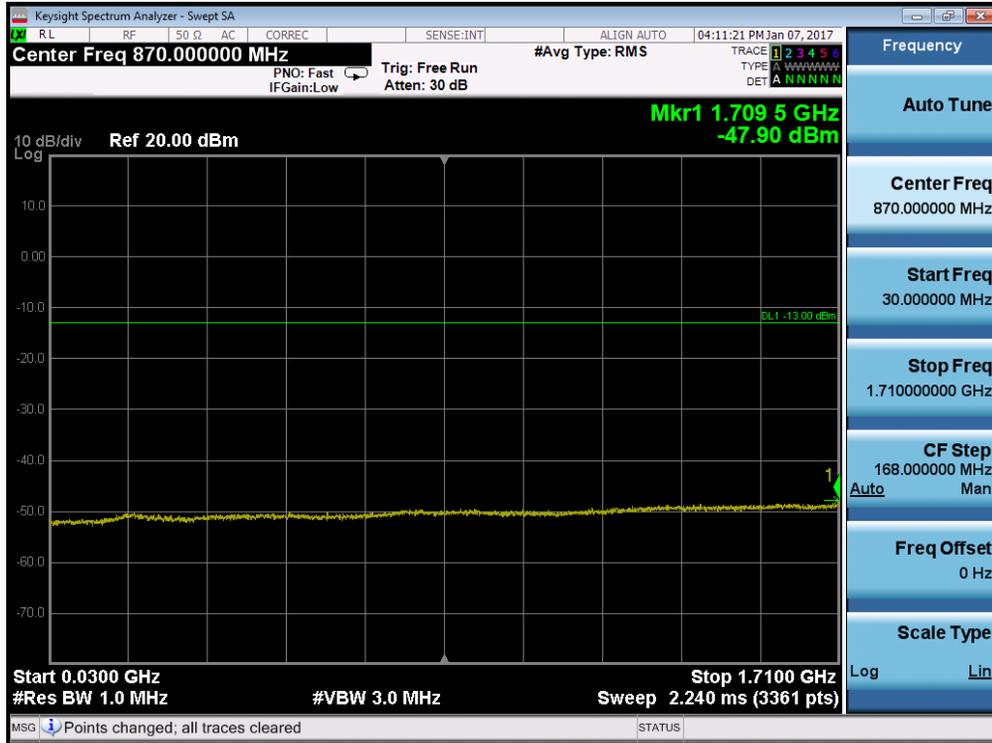


Plot 7-58. Conducted Spurious Plot (AWS WCDMA Mode – Ch. 1413)

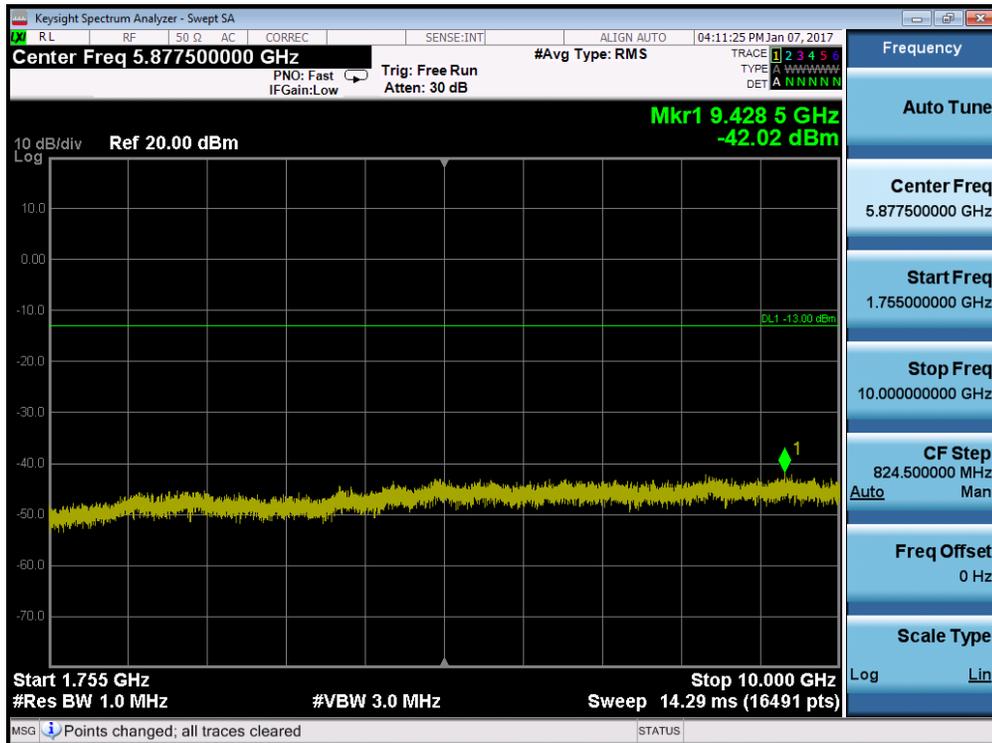


Plot 7-59. Conducted Spurious Plot (AWS WCDMA Mode – Ch. 1413)

FCC ID: ZNFVS988	FCC Pt. 22, 24, & 27 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M1701180035-02-R3.ZNF	Test Dates: 12/27/2016-2/16/2017	EUT Type: Portable Handset	Page 45 of 107	

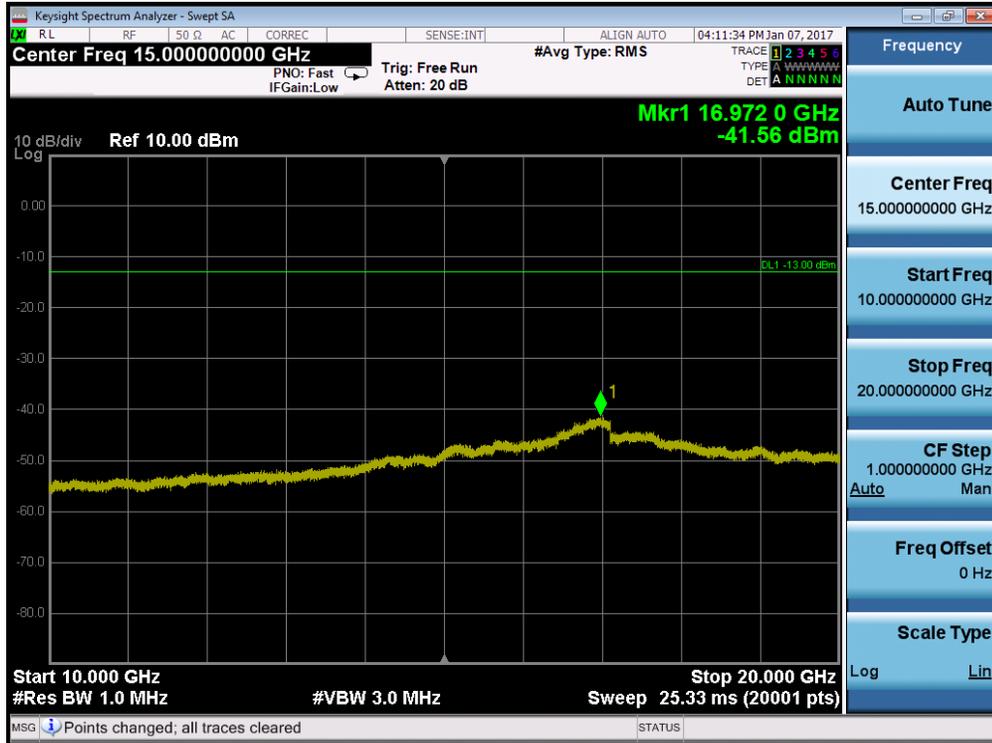


Plot 7-60. Conducted Spurious Plot (AWS WCDMA Mode – Ch. 1413)

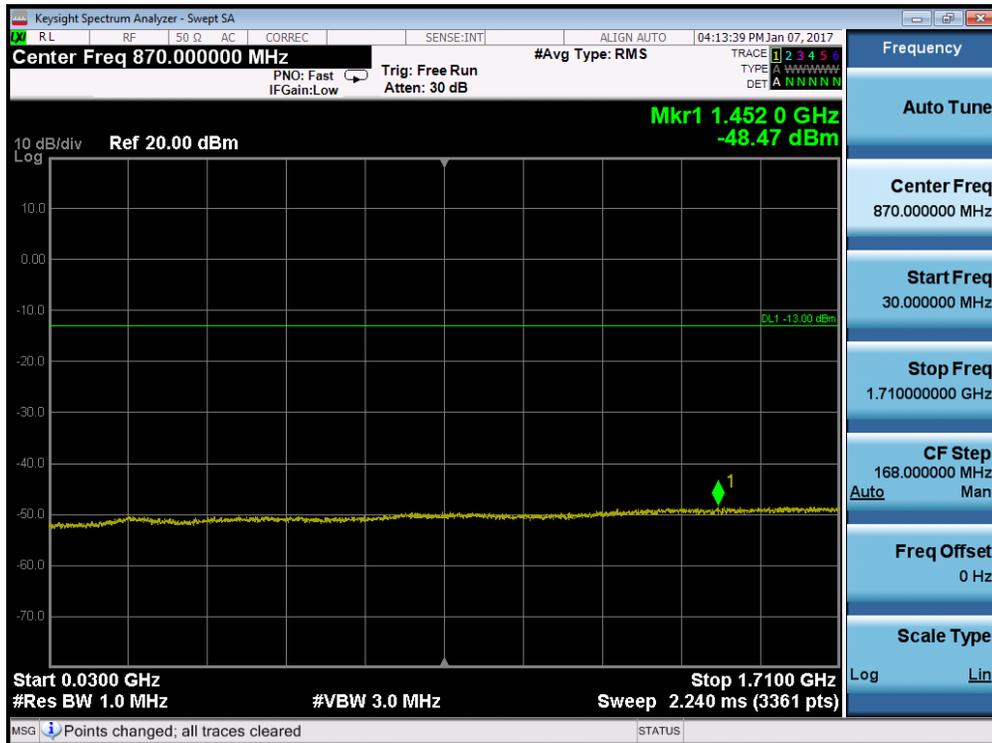


Plot 7-61. Conducted Spurious Plot (AWS WCDMA Mode – Ch. 1513)

FCC ID: ZNFVS988	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1701180035-02-R3.ZNF	Test Dates: 12/27/2016-2/16/2017	EUT Type: Portable Handset		Page 46 of 107

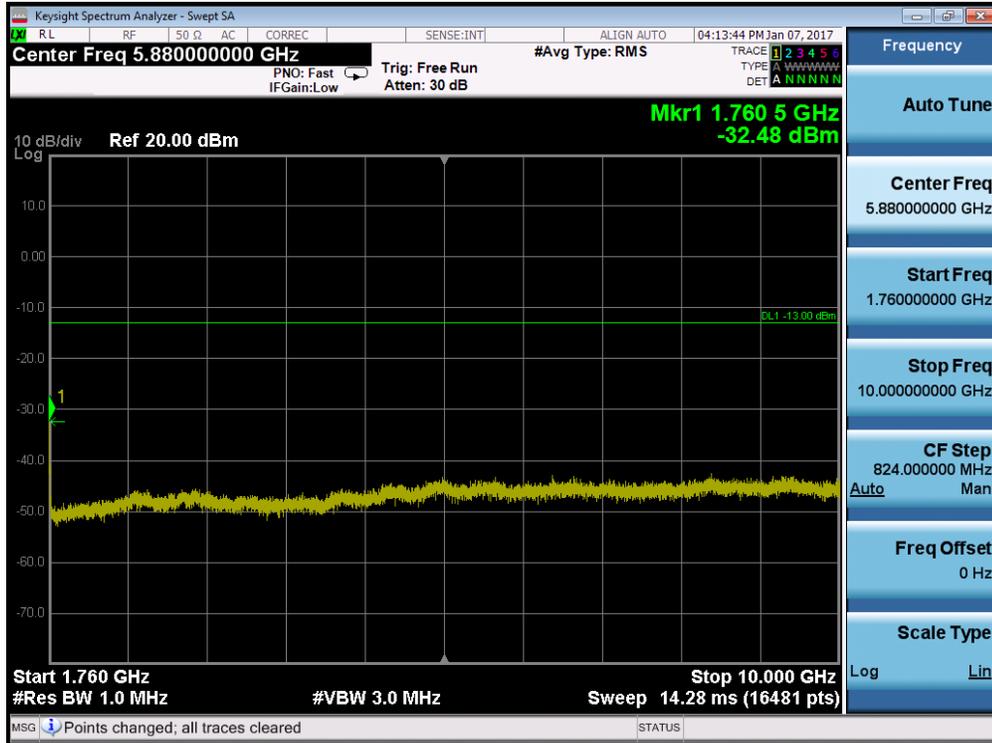

Plot 7-62. Conducted Spurious Plot (AWS WCDMA Mode – Ch. 1513)

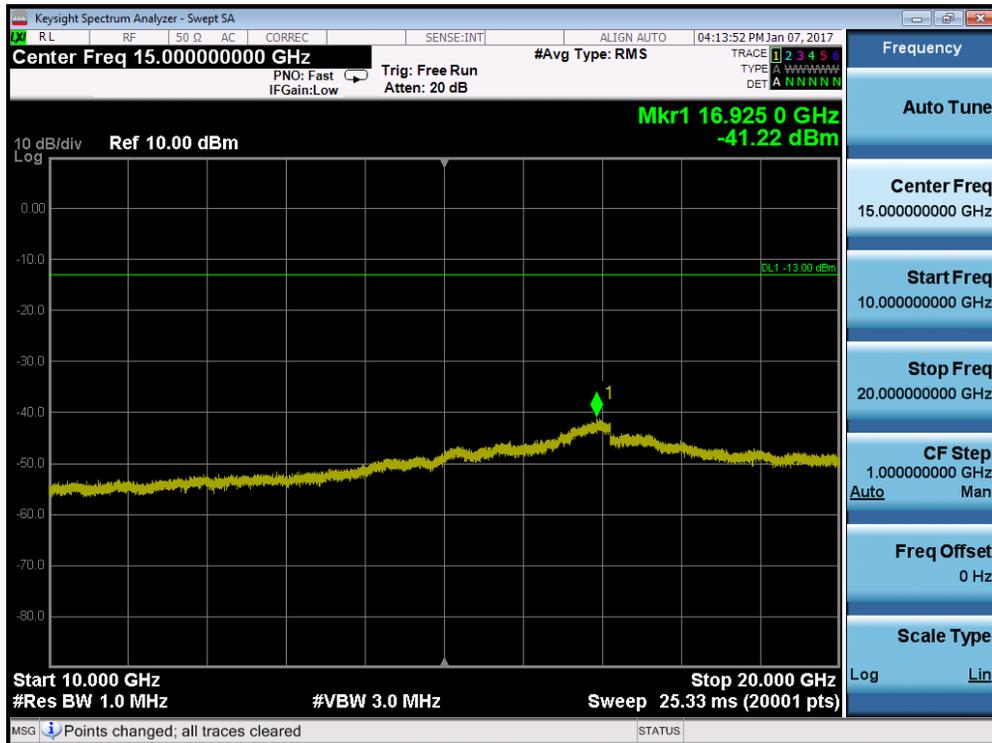


Plot 7-63. Conducted Spurious Plot (AWS WCDMA Mode – Ch. 1513)

FCC ID: ZNFV9888	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1701180035-02-R3.ZNF	Test Dates: 12/27/2016-2/16/2017	EUT Type: Portable Handset		Page 47 of 107




Plot 7-64. Conducted Spurious Plot (PCS WCDMA Mode – Ch. 9262)

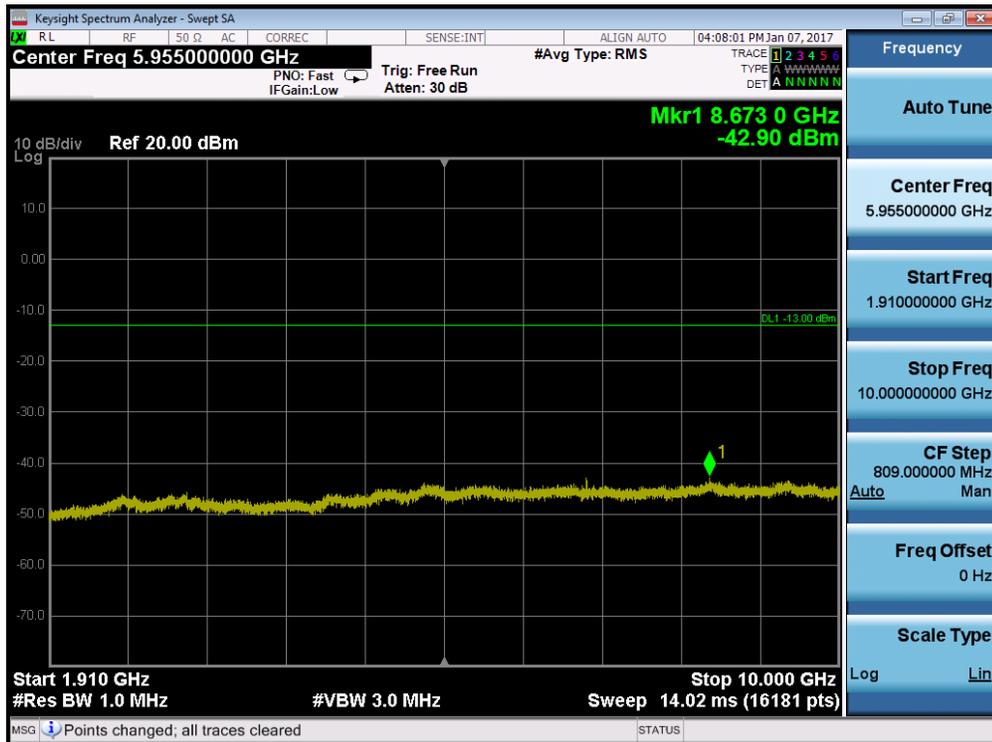


Plot 7-65. Conducted Spurious Plot (PCS WCDMA Mode – Ch. 9262)

FCC ID: ZNFVS988	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1701180035-02-R3.ZNF	Test Dates: 12/27/2016-2/16/2017	EUT Type: Portable Handset		Page 48 of 107

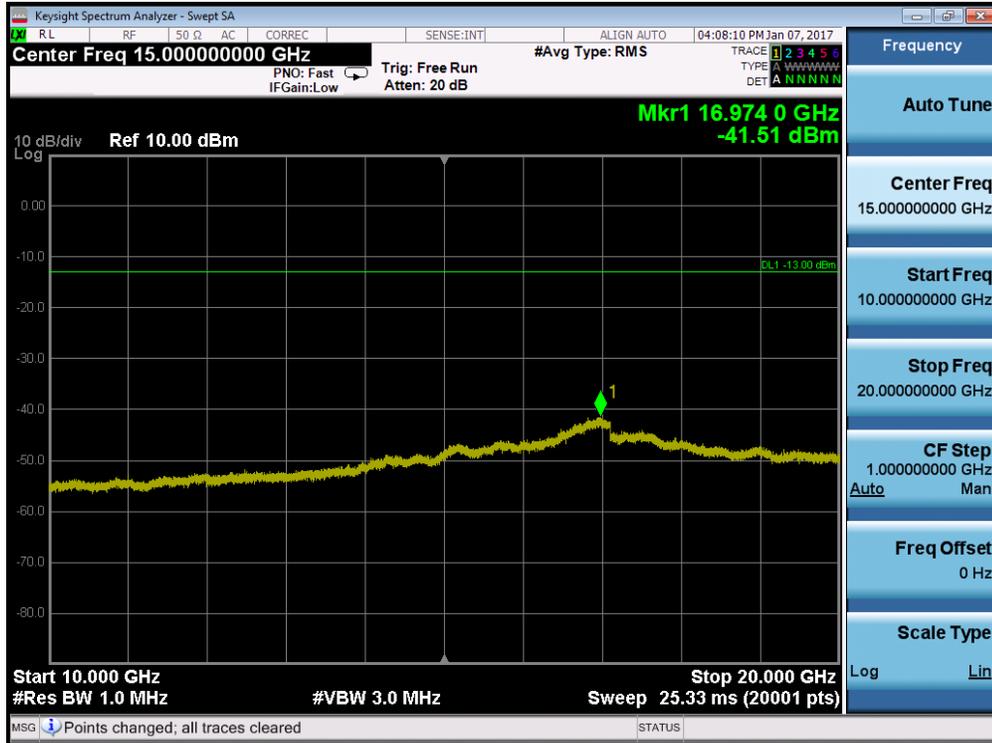


Plot 7-66. Conducted Spurious Plot (PCS WCDMA Mode – Ch. 9262)

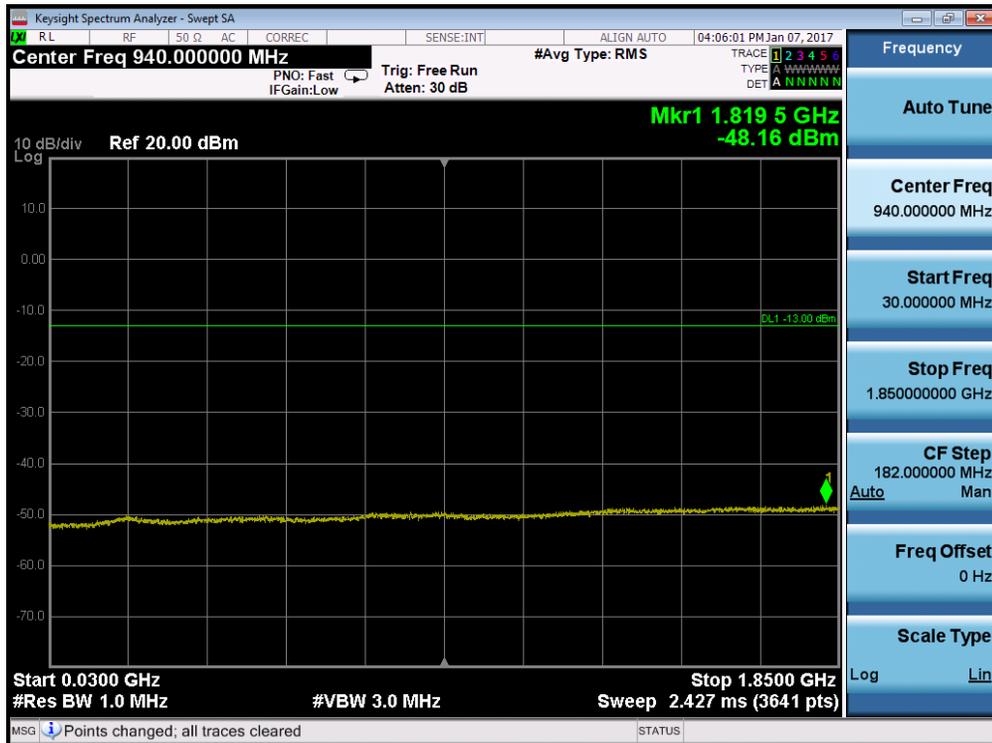


Plot 7-67. Conducted Spurious Plot (PCS WCDMA Mode – Ch. 9400)

FCC ID: ZNFVS988	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1701180035-02-R3.ZNF	Test Dates: 12/27/2016-2/16/2017	EUT Type: Portable Handset		Page 49 of 107

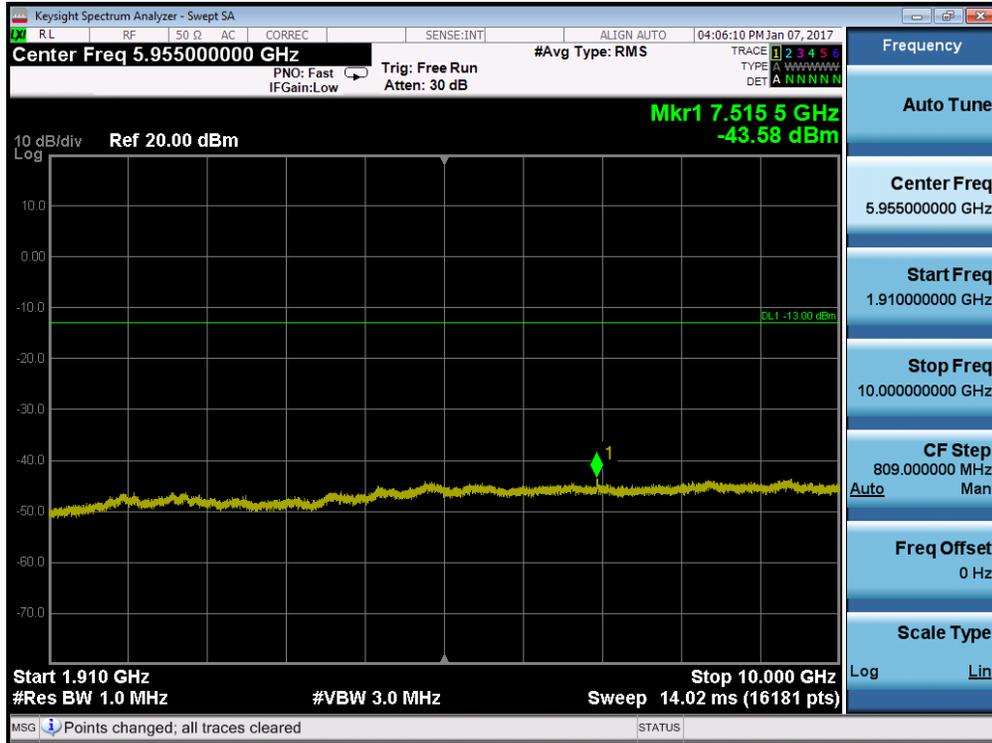

Plot 7-68. Conducted Spurious Plot (PCS WCDMA Mode – Ch. 9400)

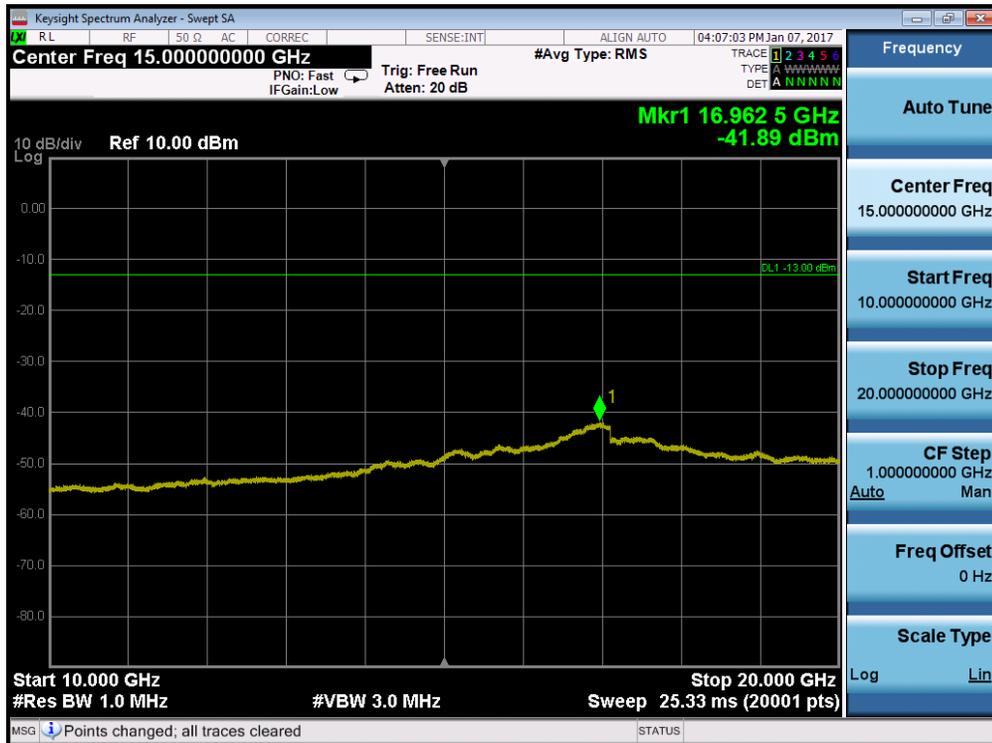


Plot 7-69. Conducted Spurious Plot (PCS WCDMA Mode – Ch. 9400)

FCC ID: ZNFVS988	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1701180035-02-R3.ZNF	Test Dates: 12/27/2016-2/16/2017	EUT Type: Portable Handset		Page 50 of 107




Plot 7-70. Conducted Spurious Plot (PCS WCDMA Mode – Ch. 9538)

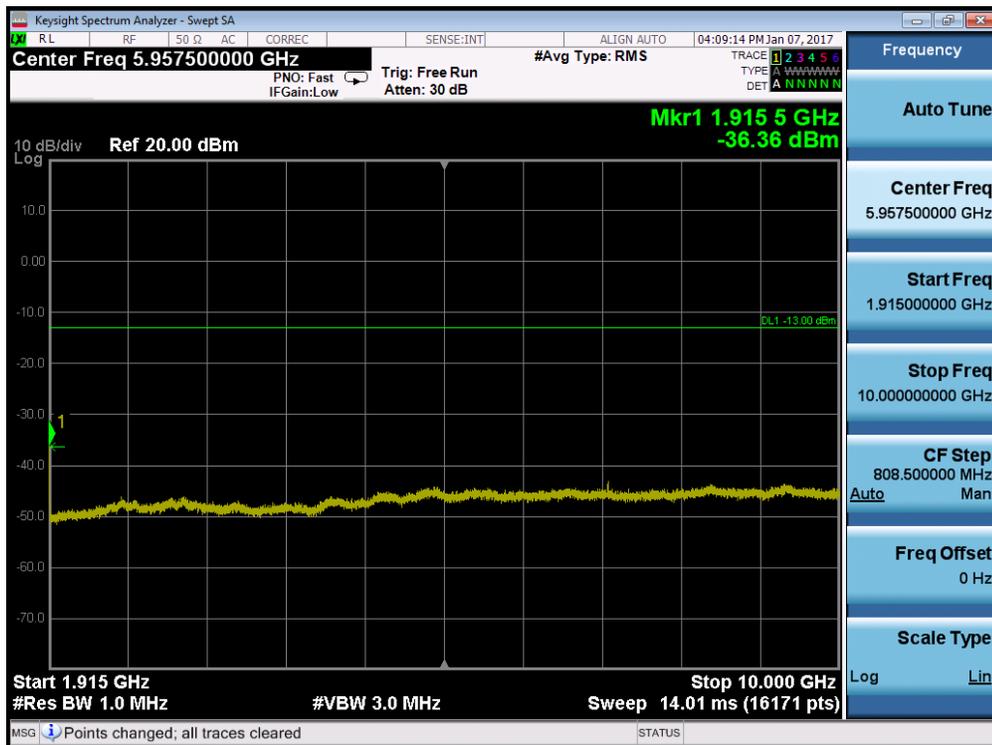

Plot 7-71. Conducted Spurious Plot (PCS WCDMA Mode – Ch. 9538)

FCC ID: ZNFVS988	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1701180035-02-R3.ZNF	Test Dates: 12/27/2016-2/16/2017	EUT Type: Portable Handset		Page 51 of 107

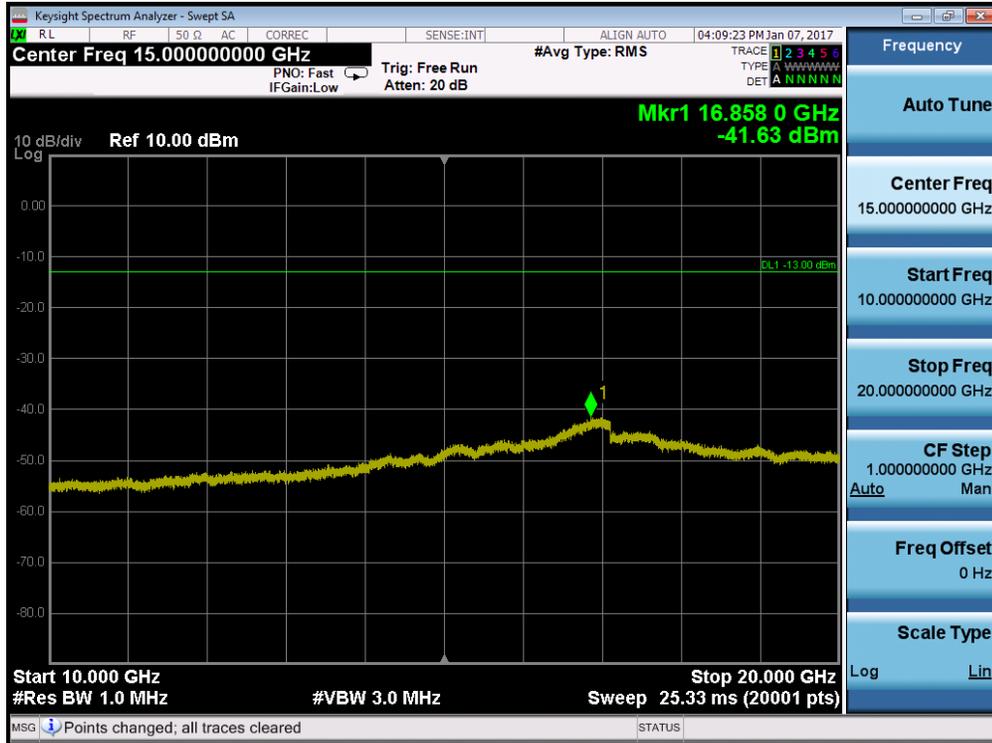

Plot 7-72. Conducted Spurious Plot (PCS WCDMA Mode – Ch. 9538)

FCC ID: ZNFVS988		FCC Pt. 22, 24, & 27 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1701180035-02-R3.ZNF	Test Dates: 12/27/2016-2/16/2017	EUT Type: Portable Handset		Page 52 of 107

7.4 Band Edge Emissions at Antenna Terminal

§2.1051 §22.917(a) §24.238(a) §27.53(h)

Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

The minimum permissible attenuation level of any spurious emission is $43 + \log_{10}(P_{[Watts]})$, where P is the transmitter power in Watts.

Test Procedure Used

KDB 971168 D01 v02r02 – Section 6.0

Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW \geq 1% of the emission bandwidth
4. VBW \geq 3 x RBW
5. Detector = RMS
6. Number of sweep points \geq 2 x Span/RBW
7. Trace mode = trace average for continuous emissions, max hold for pulse emissions
8. Sweep time = auto couple
9. The trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.


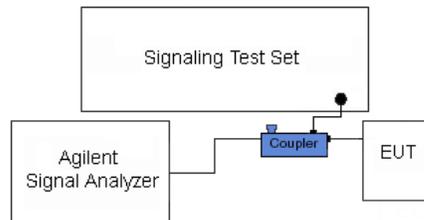


Figure 7-3. Test Instrument & Measurement Setup


Test Notes

Per 22.917(b), 24.238(b), 27.53(h)(3), in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed to demonstrate compliance with the out-of-band emissions limit. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.

FCC ID: ZNFVS988		FCC Pt. 22, 24, & 27 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1701180035-02-R3.ZNF	Test Dates: 12/27/2016-2/16/2017	EUT Type: Portable Handset		Page 53 of 107

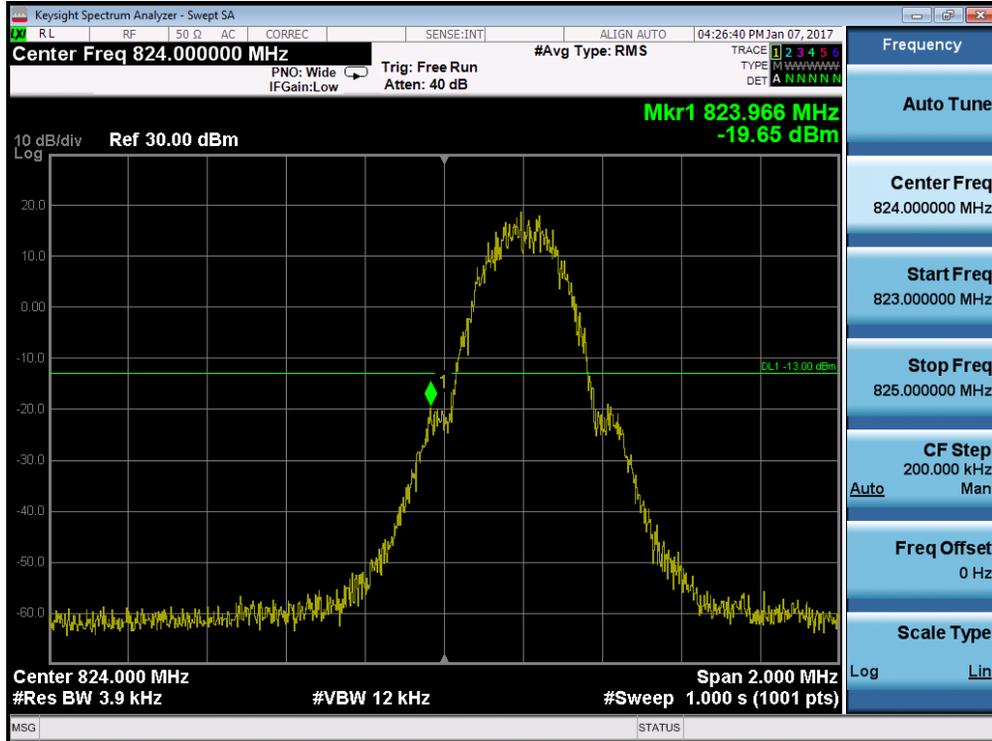


Plot 7-73. Band Edge Plot (Cellular GPRS Mode – Ch. 128)

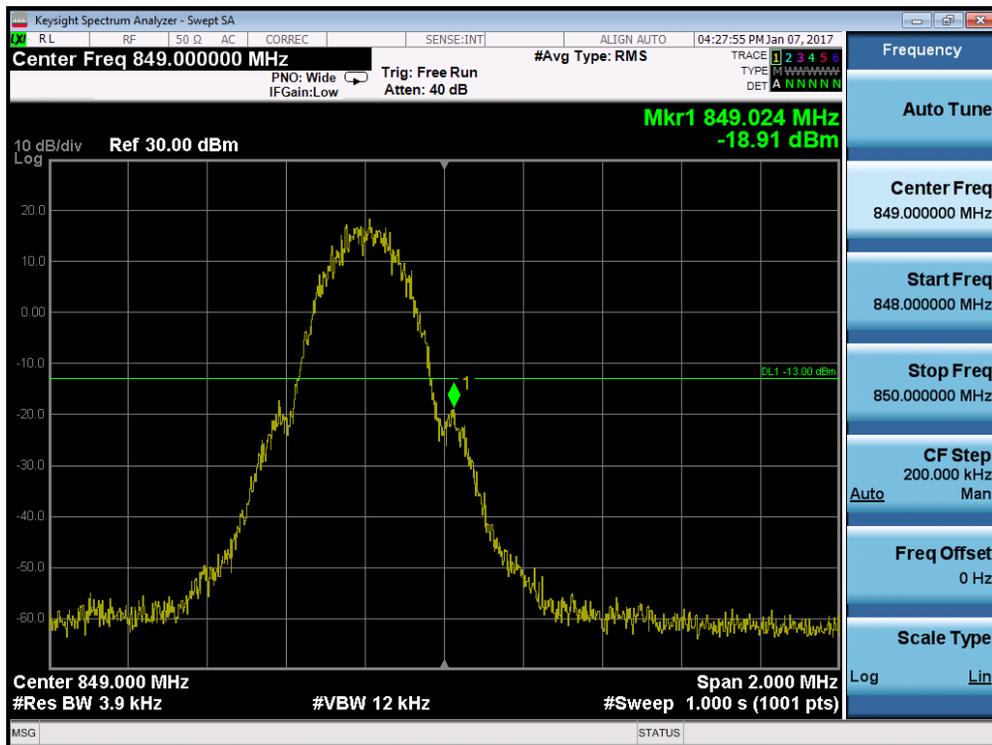


Plot 7-74. Band Edge Plot (Cellular GPRS Mode – Ch. 251)

FCC ID: ZNFVS988	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1701180035-02-R3.ZNF	Test Dates: 12/27/2016-2/16/2017	EUT Type: Portable Handset		Page 54 of 107

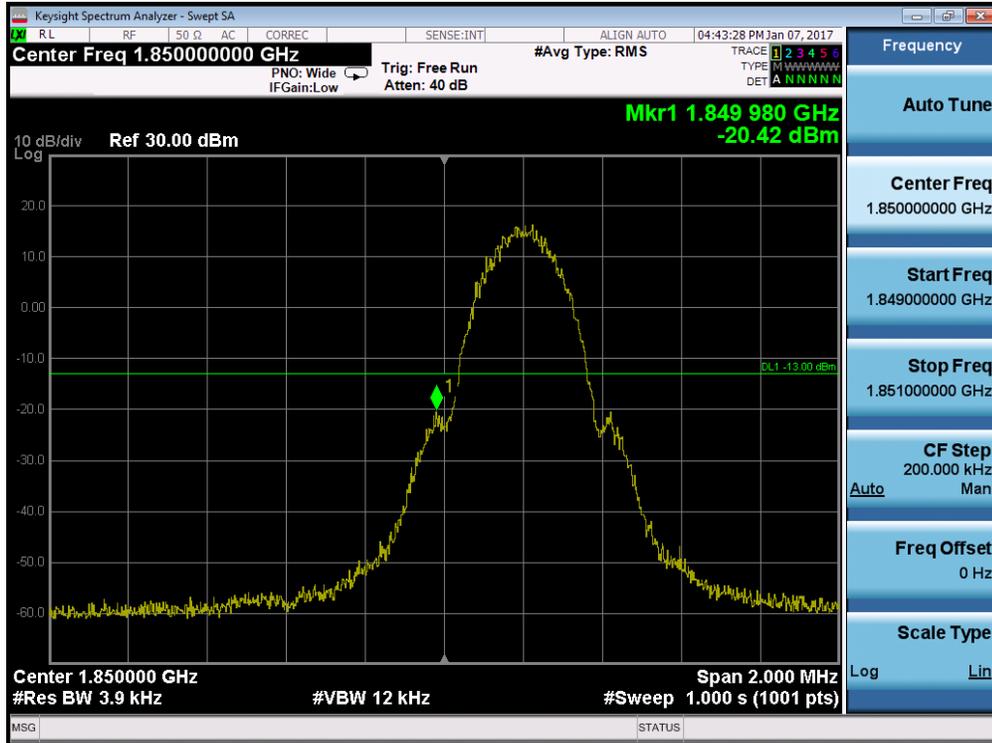


Plot 7-75. Band Edge Plot (PCS GPRS Mode – Ch. 512)

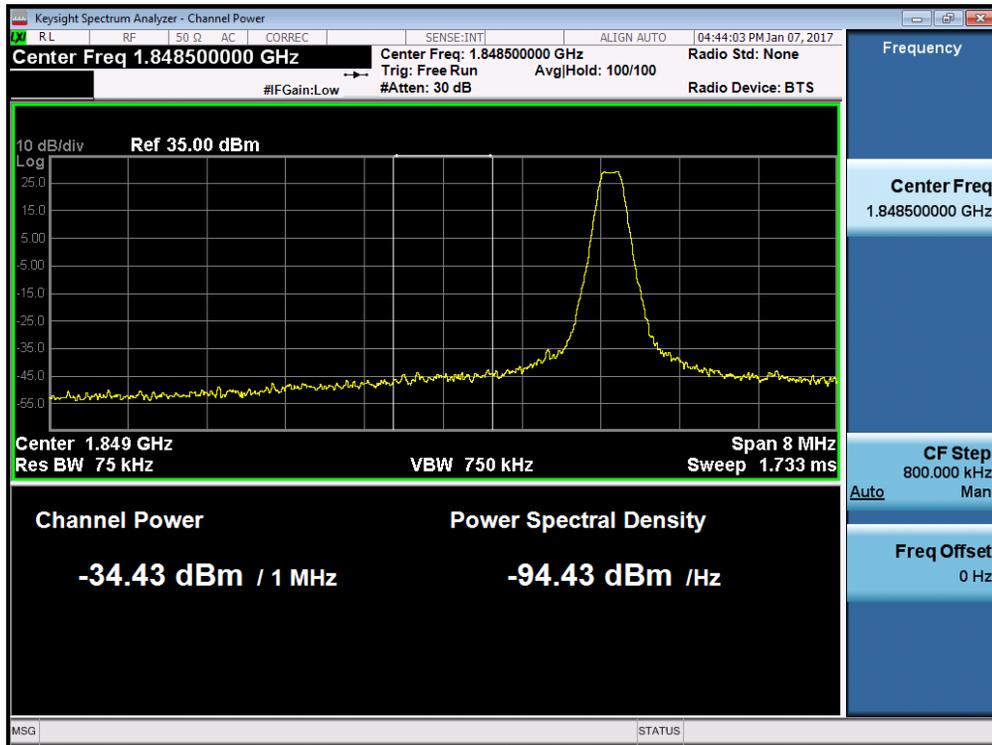


Plot 7-76. 4MHz Span Plot (PCS GPRS Mode – Ch. 512)

FCC ID: ZNFVS988	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1701180035-02-R3.ZNF	Test Dates: 12/27/2016-2/16/2017	EUT Type: Portable Handset		Page 55 of 107

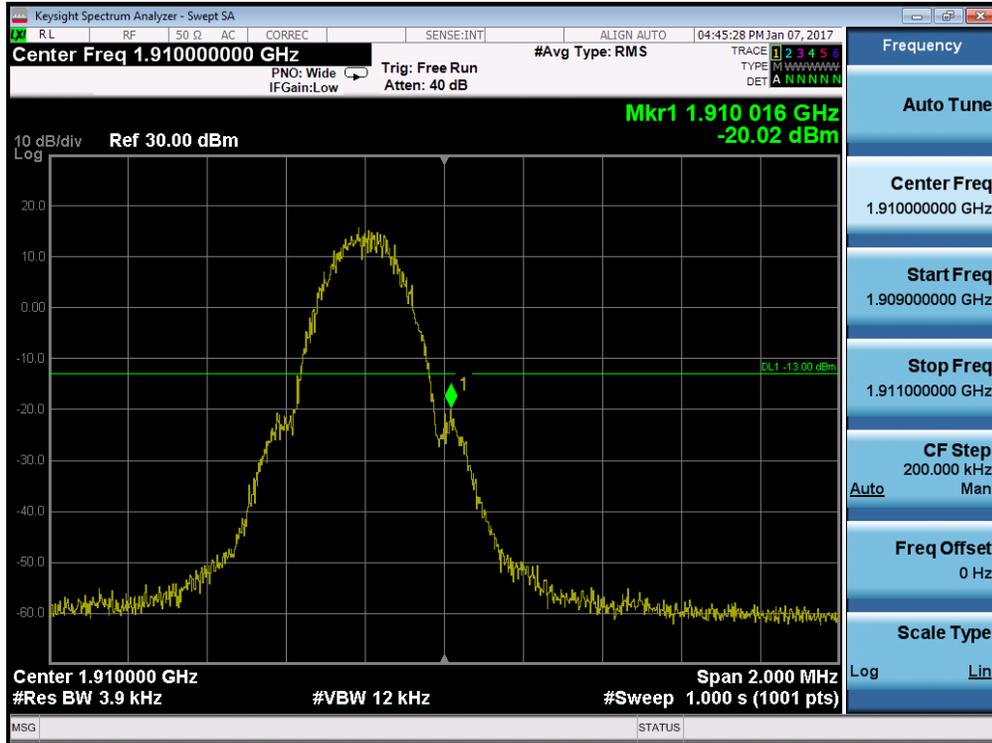


Plot 7-77. Band Edge Plot (PCS GPRS Mode – Ch. 810)

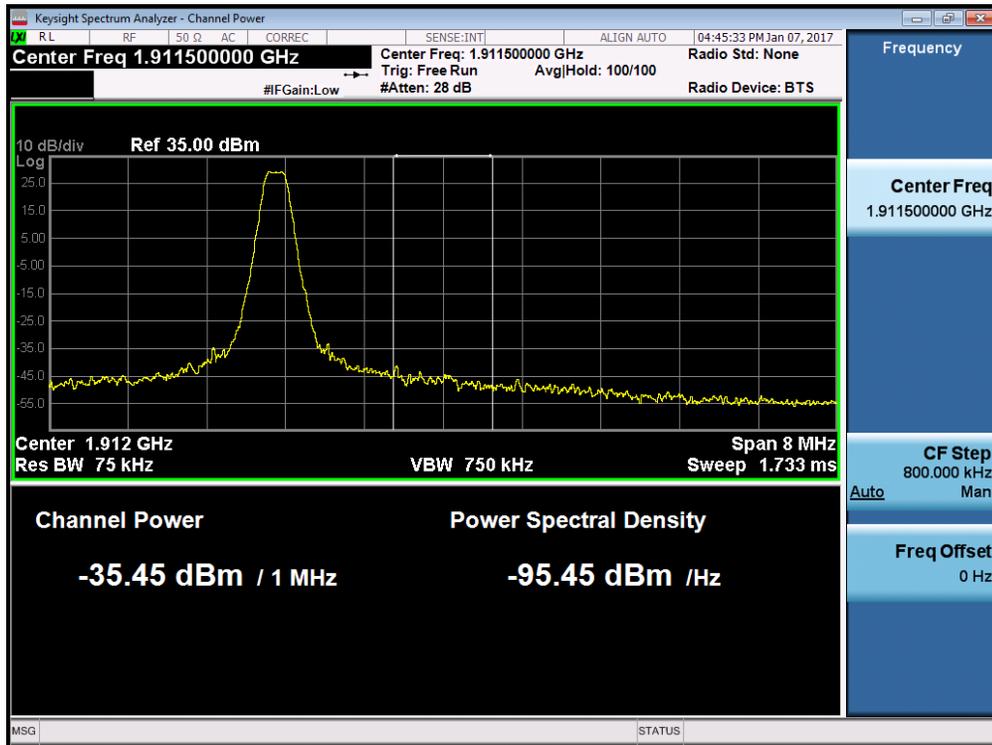

Plot 7-78. 4MHz Span Plot (PCS GPRS Mode – Ch. 810)

FCC ID: ZNFVS988	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1701180035-02-R3.ZNF	Test Dates: 12/27/2016-2/16/2017	EUT Type: Portable Handset		Page 56 of 107

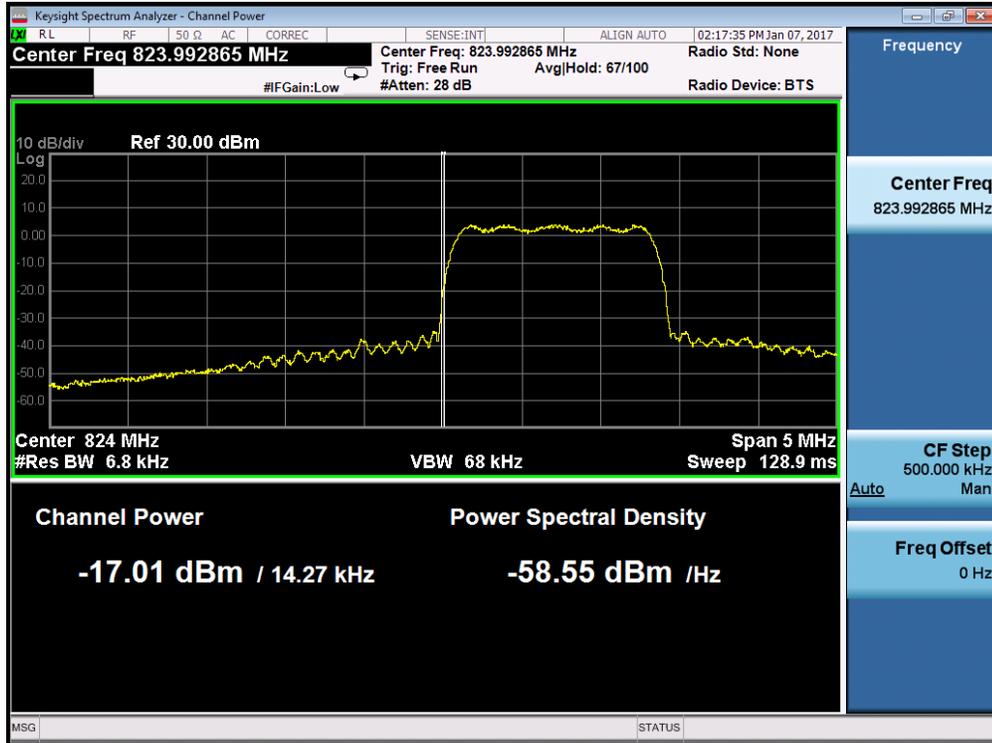


Plot 7-79. Band Edge Plot (Cellular CDMA Mode – Ch. 1013)



Plot 7-80. 4MHz Span Plot (Cellular CDMA Mode – Ch. 1013)

FCC ID: ZNFVS988	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1701180035-02-R3.ZNF	Test Dates: 12/27/2016-2/16/2017	EUT Type: Portable Handset		Page 57 of 107

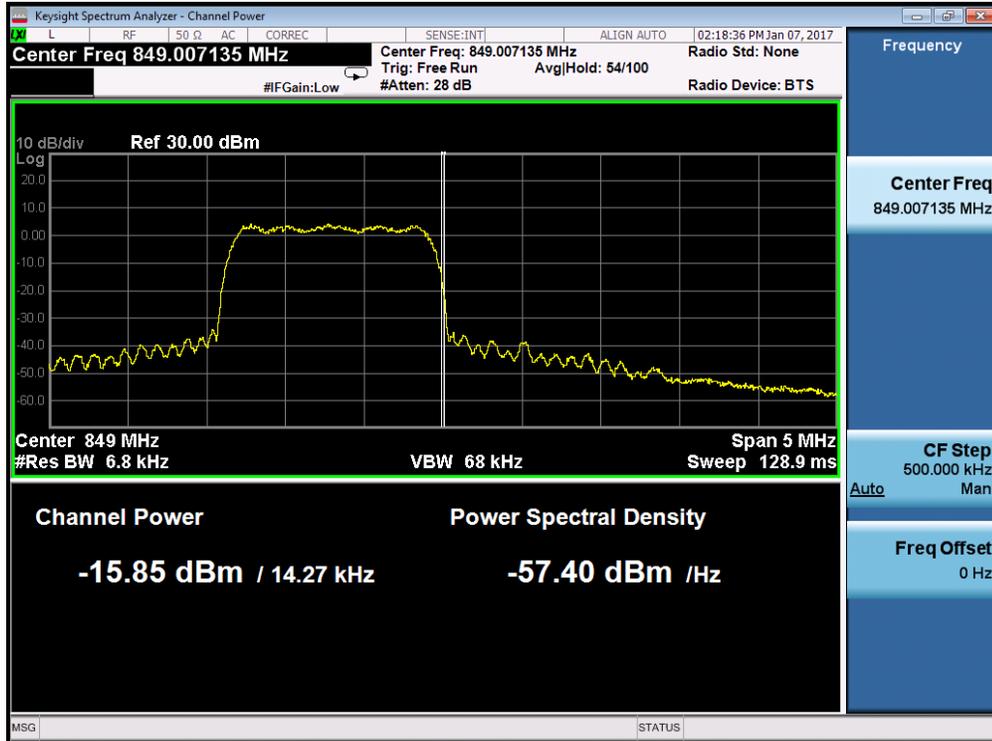


Plot 7-81. Band Edge Plot (Cellular CDMA Mode – Ch. 777)




Plot 7-82. 4MHz Span Plot (Cellular CDMA Mode – Ch. 777)

FCC ID: ZNFVS988	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1701180035-02-R3.ZNF	Test Dates: 12/27/2016-2/16/2017	EUT Type: Portable Handset		Page 58 of 107

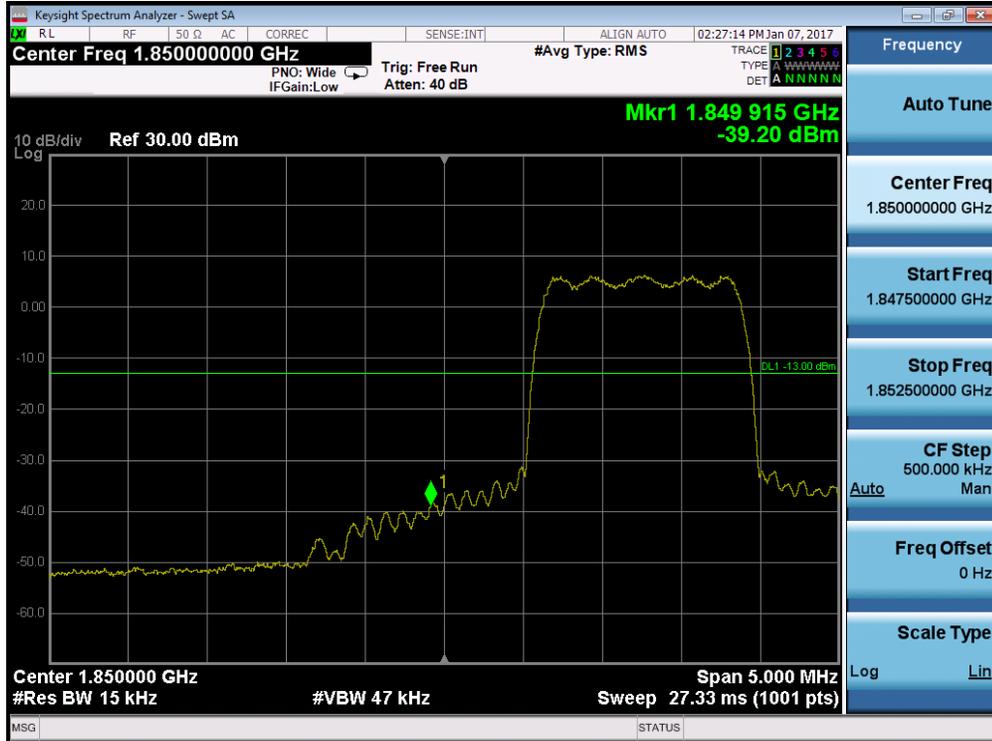


Plot 7-83. Band Edge Plot (PCS CDMA Mode – Ch. 25)

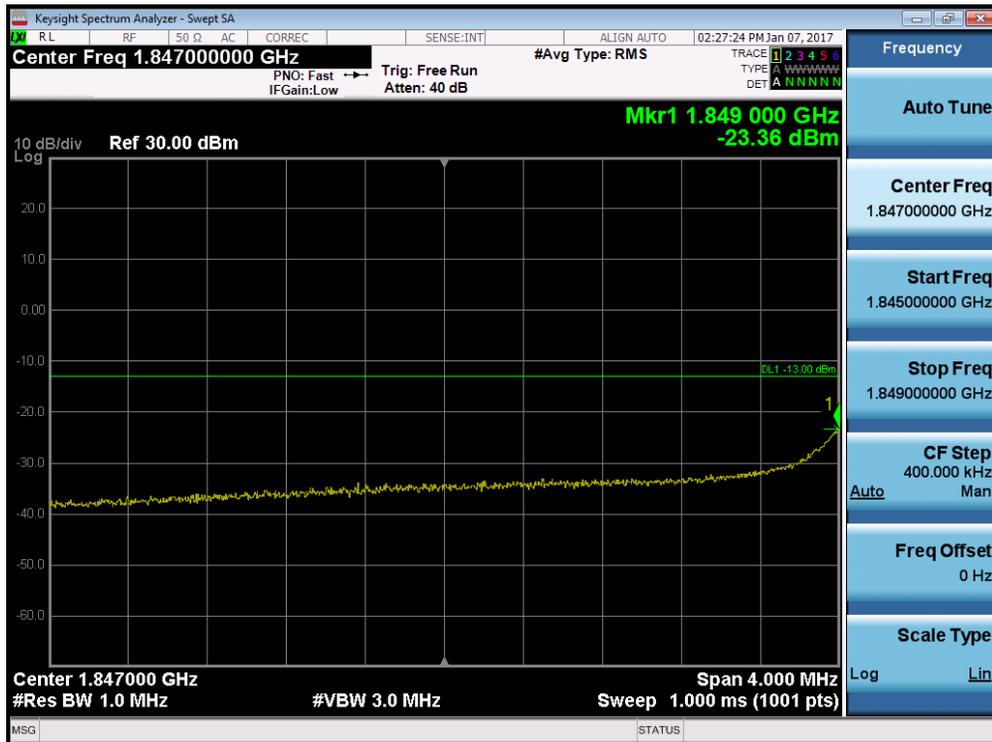


Plot 7-84. 4MHz Span Plot (PCS CDMA Mode – Ch. 25)

FCC ID: ZNFVS988	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1701180035-02-R3.ZNF	Test Dates: 12/27/2016-2/16/2017	EUT Type: Portable Handset		Page 59 of 107

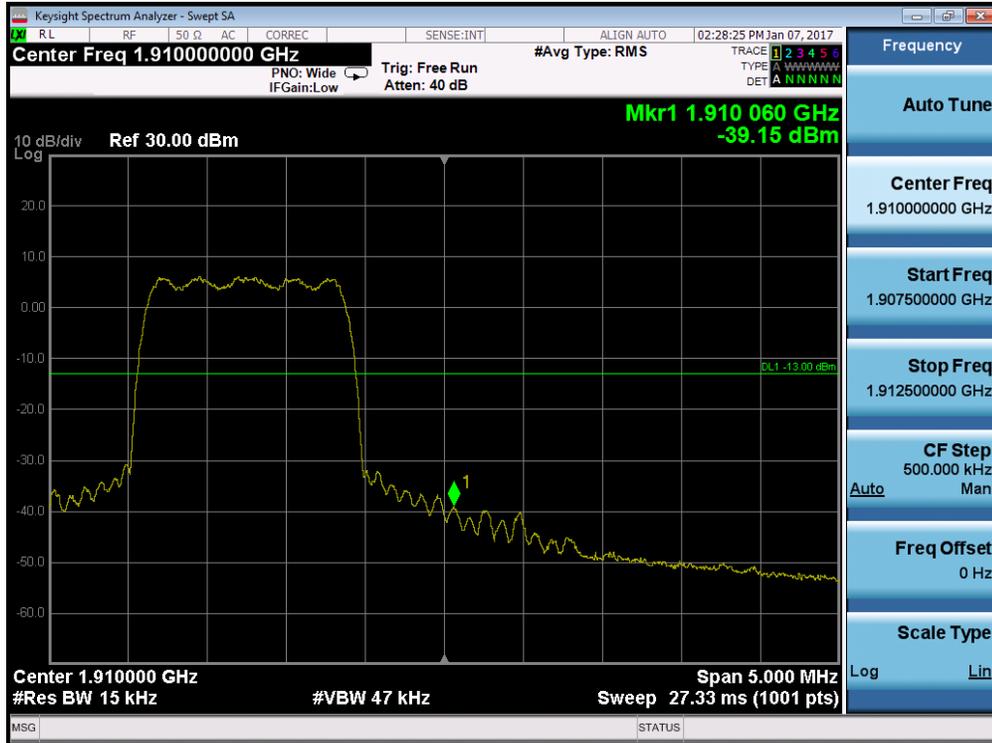


Plot 7-85. Band Edge Plot (PCS CDMA Mode – Ch. 1175)

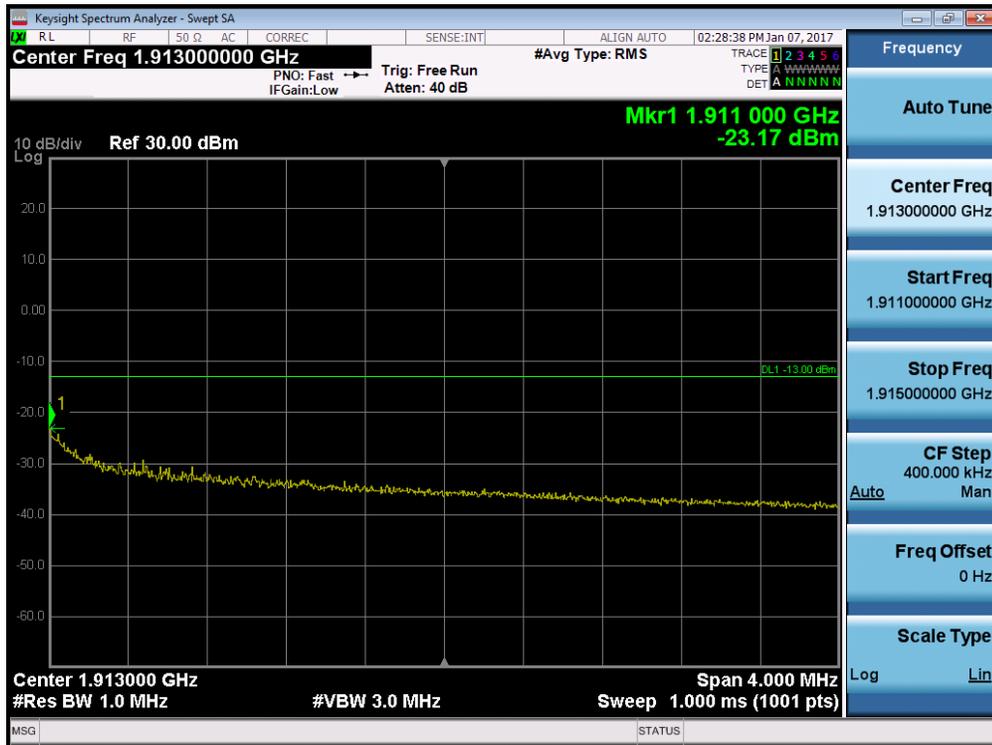

Plot 7-86. 4MHz Span Plot (PCS CDMA Mode – Ch. 1175)

FCC ID: ZNFVS988	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1701180035-02-R3.ZNF	Test Dates: 12/27/2016-2/16/2017	EUT Type: Portable Handset		Page 60 of 107

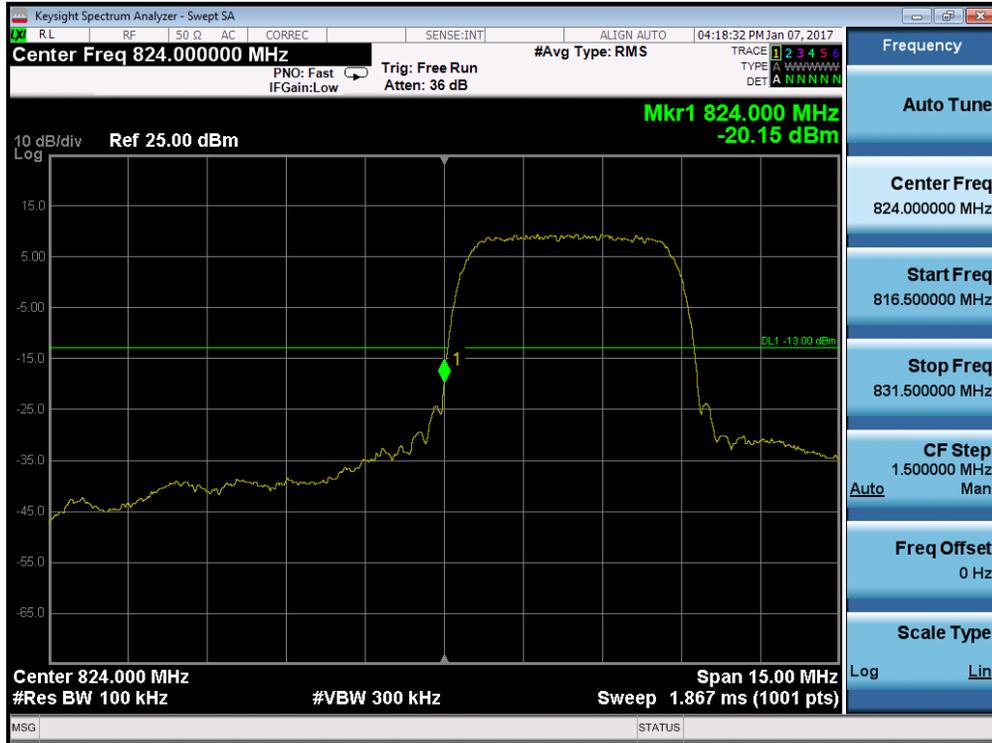


Plot 7-87. Band Edge Plot (Cellular WCDMA Mode – Ch. 4132)




Plot 7-88. Band Edge Plot (Cellular WCDMA Mode – Ch. 4233)

FCC ID: ZNFVS988	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1701180035-02-R3.ZNF	Test Dates: 12/27/2016-2/16/2017	EUT Type: Portable Handset		Page 61 of 107

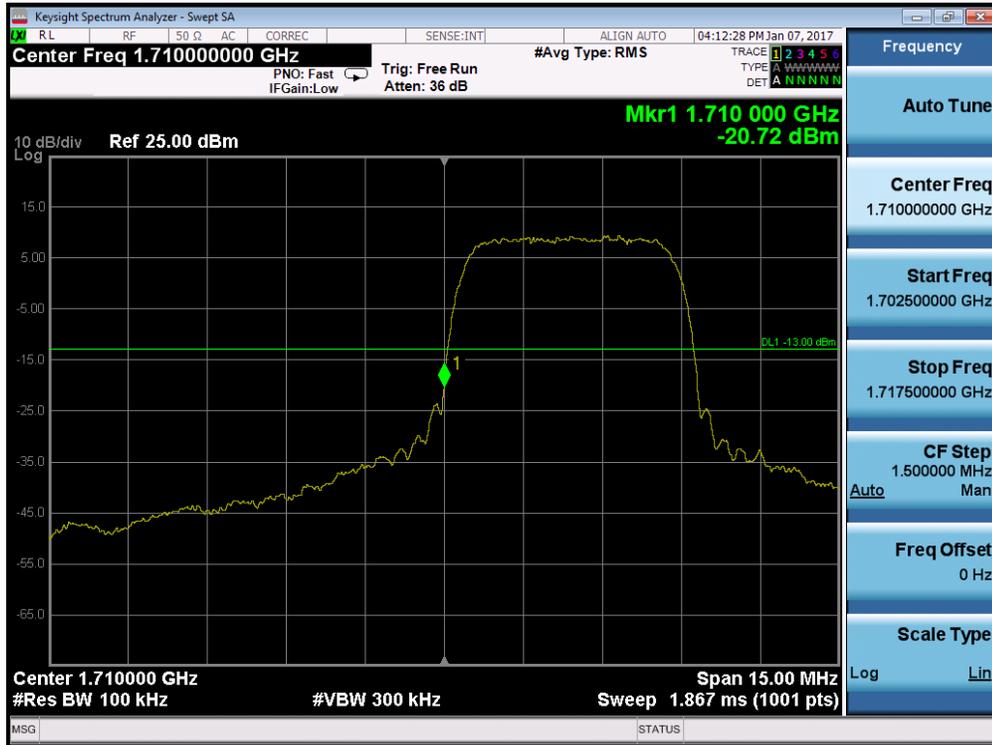

Plot 7-89. Band Edge Plot (AWS WCDMA Mode – Ch. 1312)

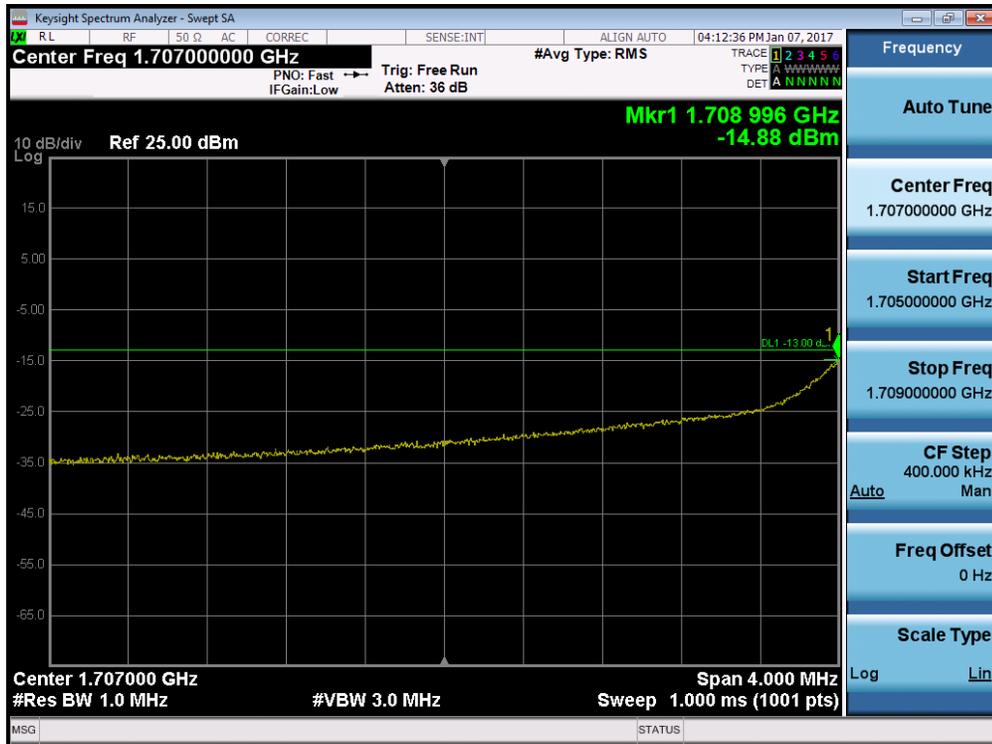


Plot 7-90. 4MHz Span Plot (AWS WCDMA Mode – Ch. 1312)

FCC ID: ZNFVS988	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1701180035-02-R3.ZNF	Test Dates: 12/27/2016-2/16/2017	EUT Type: Portable Handset		Page 62 of 107




Plot 7-91. Band Edge Plot (AWS WCDMA Mode – Ch. 1513)

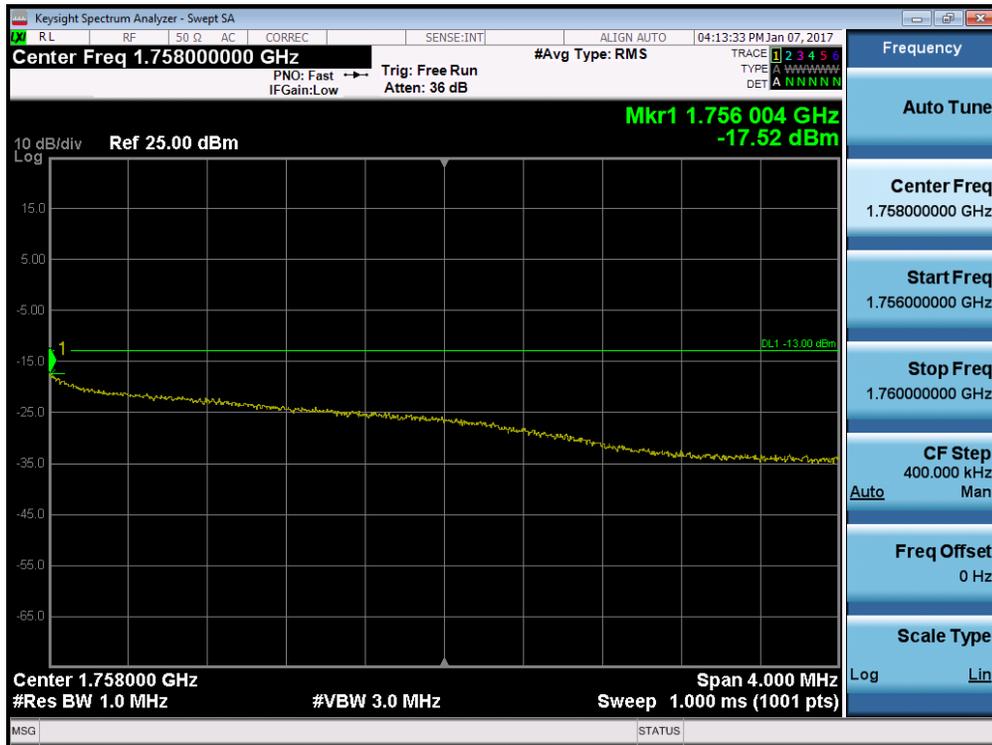


Plot 7-92. 4MHz Span Plot (AWS WCDMA Mode – Ch. 1513)

FCC ID: ZNFVS988	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1701180035-02-R3.ZNF	Test Dates: 12/27/2016-2/16/2017	EUT Type: Portable Handset		Page 63 of 107

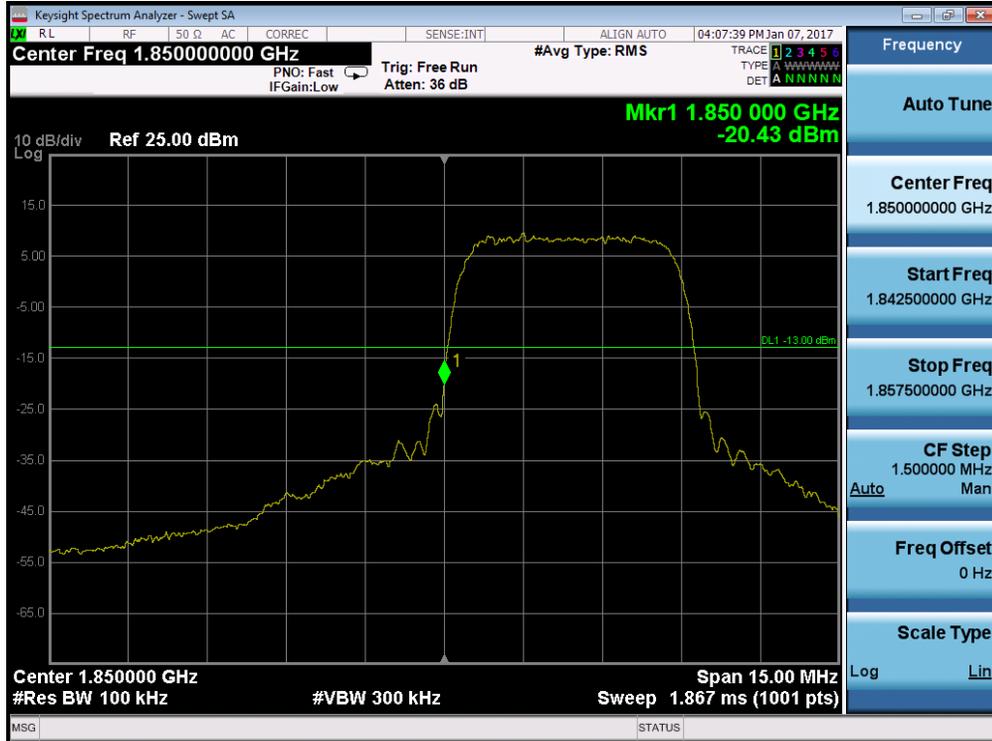

Plot 7-93. Band Edge Plot (PCS WCDMA Mode – Ch. 9262)

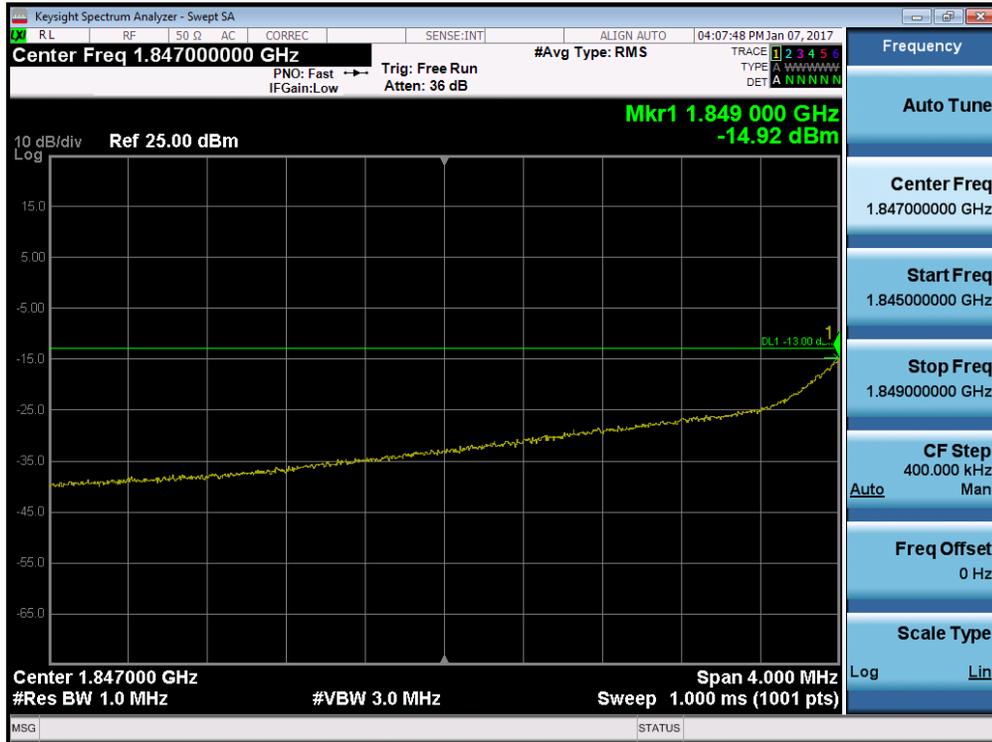


Plot 7-94. 4MHz Span Plot (PCS WCDMA Mode – Ch. 9262)

FCC ID: ZNFVS988	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1701180035-02-R3.ZNF	Test Dates: 12/27/2016-2/16/2017	EUT Type: Portable Handset		Page 64 of 107



Plot 7-95. Band Edge Plot (PCS WCDMA Mode – Ch. 9538)

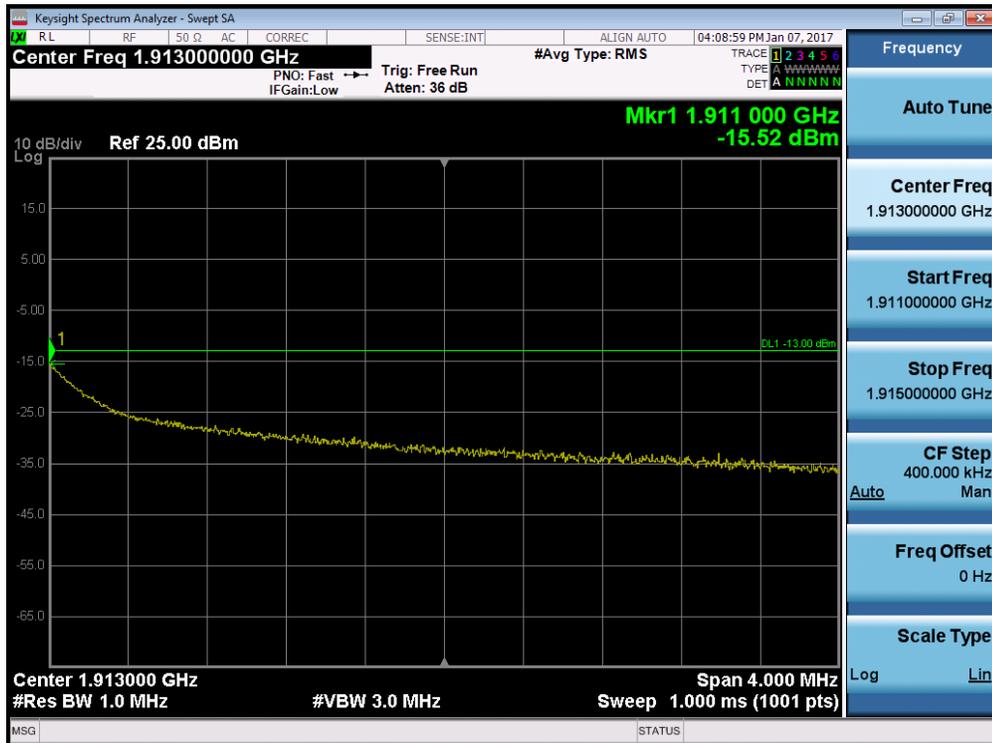

Plot 7-96. 4MHz Span Plot (PCS WCDMA Mode – Ch. 9538)

FCC ID: ZNFVS988	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1701180035-02-R3.ZNF	Test Dates: 12/27/2016-2/16/2017	EUT Type: Portable Handset		Page 65 of 107

7.5 Peak-Average Ratio

§24.232(d)

Test Overview

A peak to average ratio measurement is performed at the conducted port of the EUT. The spectrum analyzers Complementary Cumulative Distribution Function (CCDF) measurement profile is used to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth. The CCDF curve shows how much time the peak waveform spends at or above a given average power level. The percent of time the signal spends at or above the level defines the probability for that particular power level.

Test Procedure Used

KDB 971168 D01 v02r02 – Section 5.7.1

Test Settings

1. The signal analyzer's CCDF measurement profile is enabled
2. Frequency = carrier center frequency
3. Measurement BW > Emission bandwidth of signal
4. The signal analyzer was set to collect one million samples to generate the CCDF curve
5. The measurement interval was set depending on the type of signal analyzed. For continuous signals (>98% duty cycle), the measurement interval was set to 1ms. For burst transmissions, the spectrum analyzer is set to use an internal "RF Burst" trigger that is synced with an incoming pulse and the measurement interval is set to less than the duration of the "on time" of one burst to ensure that energy is only captured during a time in which the transmitter is operating at maximum power

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.


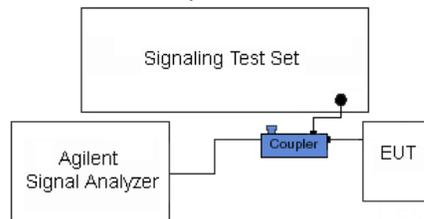


Figure 7-4. Test Instrument & Measurement Setup


Test Notes

None

FCC ID: ZNFVS988		FCC Pt. 22, 24, & 27 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1701180035-02-R3.ZNF	Test Dates: 12/27/2016-2/16/2017	EUT Type: Portable Handset	Page 66 of 107	

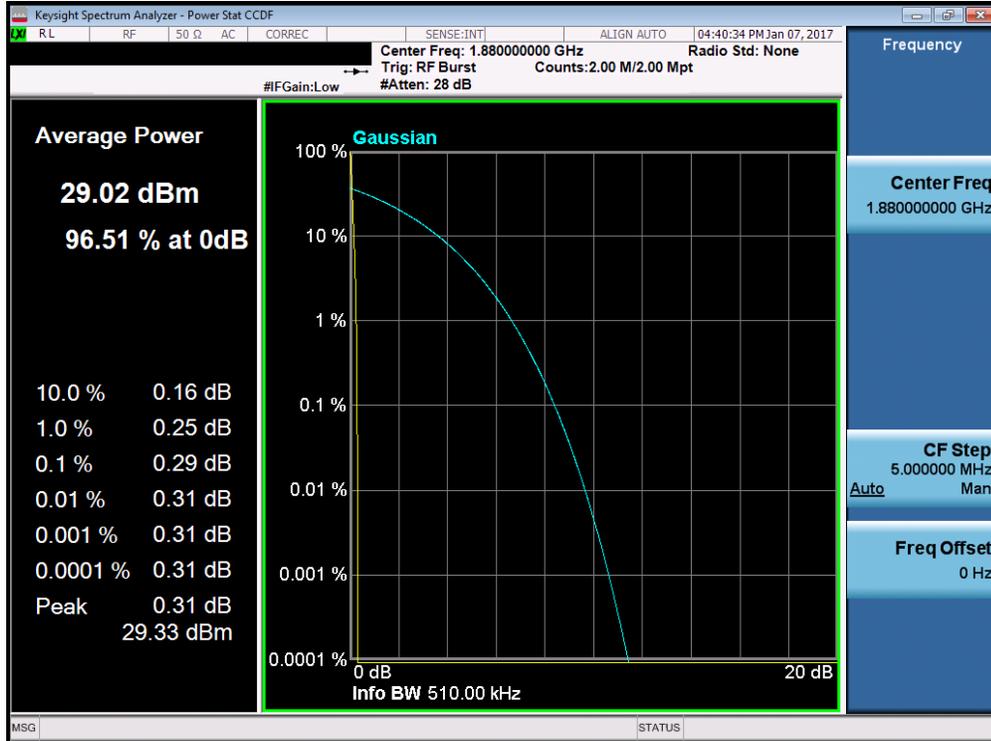


Plot 7-97. Peak-Average Ratio Plot (PCS GPRS Mode – Ch. 661)

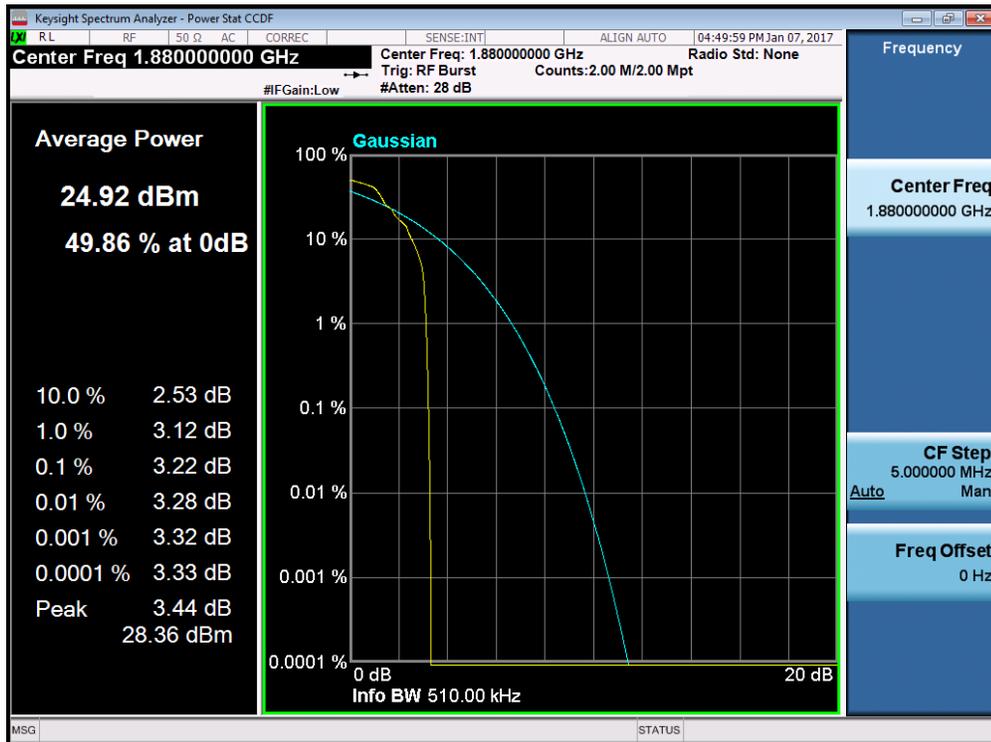


Plot 7-98. Peak-Average Ratio Plot (EDGE1900 Mode – Ch. 661)

FCC ID: ZNFVS988	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1701180035-02-R3.ZNF	Test Dates: 12/27/2016-2/16/2017	EUT Type: Portable Handset		Page 67 of 107

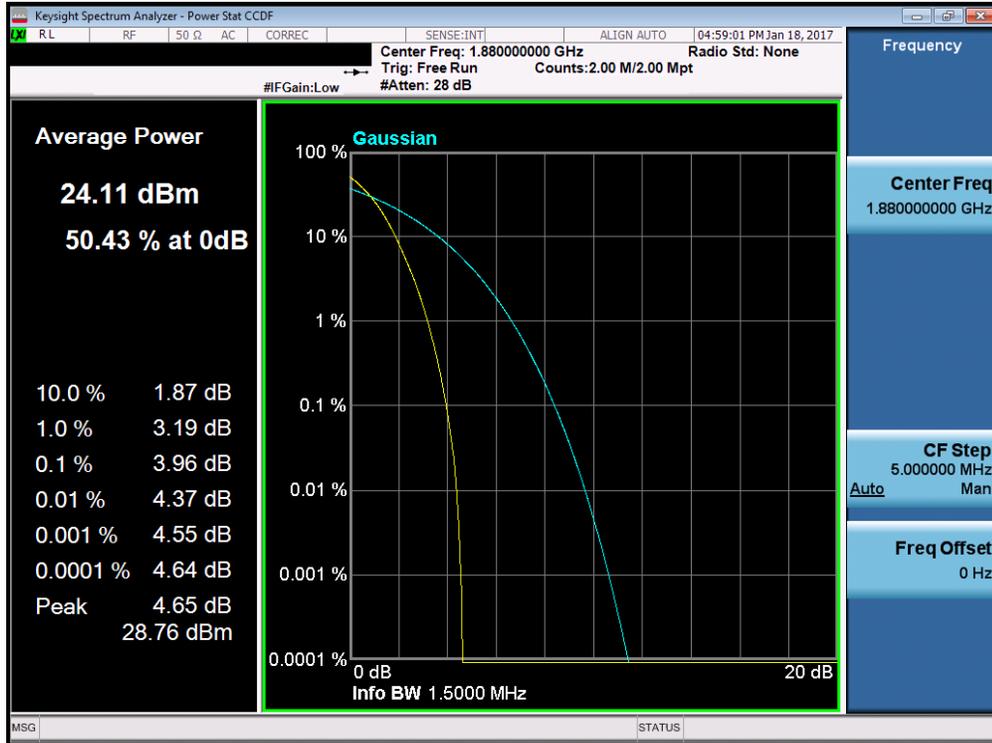

Plot 7-99. Peak-Average Ratio Plot (PCS CDMA Mode – Ch. 600)

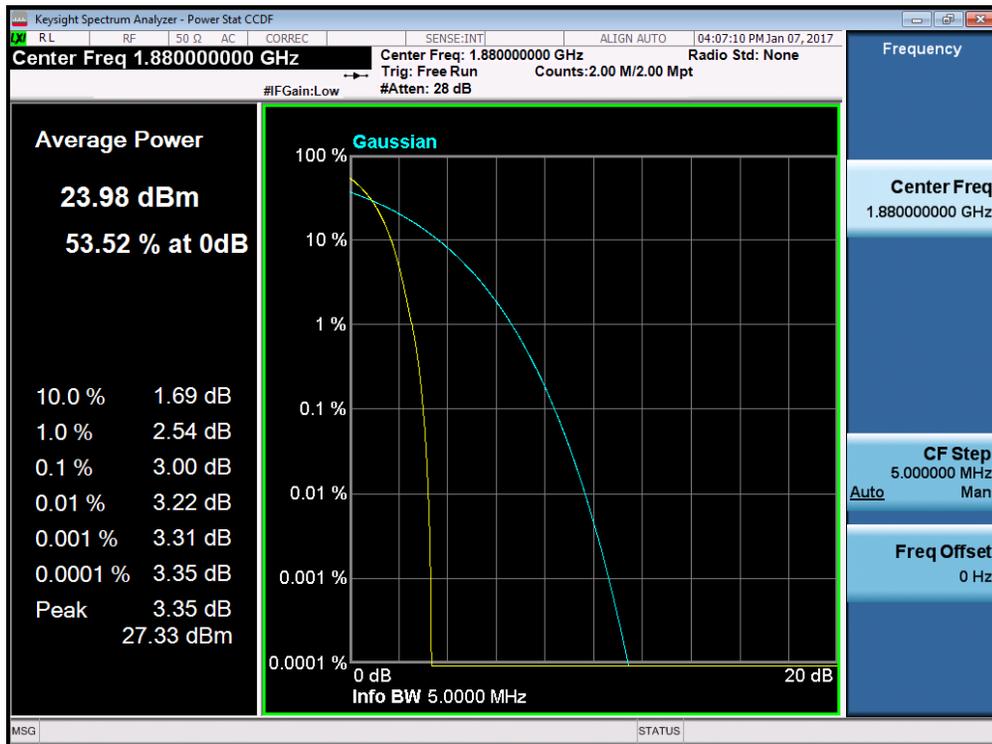

Plot 7-100. Peak-Average Ratio Plot (PCS WCDMA Mode – Ch. 9400)

FCC ID: ZNFVS988	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1701180035-02-R3.ZNF	Test Dates: 12/27/2016-2/16/2017	EUT Type: Portable Handset		Page 68 of 107

7.6 Radiated Power (ERP/EIRP)

§22.913(a)(2) 24.232(c) 27.50(d.4)

Test Overview

Effective Radiated Power (ERP) and Equivalent Isotropic Radiated Power (EIRP) measurements are performed using the substitution method described in ANSI/TIA-603-D-2010 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using vertically and horizontally polarized tuned dipole antennas. Measurements on signals operating above 1GHz are performed using vertically and horizontally polarized broadband horn antennas. All measurements are performed as RMS average measurements while the EUT is operating at maximum power, and at the appropriate frequencies.

Test Procedures Used

KDB 971168 D01 v02r02 – Section 5.2.1

ANSI/TIA-603-D-2010 – Section 2.2.17

Test Settings

1. Radiated power measurements are performed using the signal analyzer's "channel power" measurement capability for signals with continuous operation. For signals with burst transmission, the signal analyzer's "time domain power" measurement capability is used
2. RBW = 1 – 5% of the expected OBW, not to exceed 1MHz
3. VBW \geq 3 x RBW
4. Span = 1.5 times the OBW
5. No. of sweep points \geq 2 x span / RBW
6. Detector = RMS
7. Trigger is set to "free run" for signals with continuous operation with the sweep times set to "auto".
Trigger is set to enable triggering only on full power bursts with the sweep time set less than or equal to the transmission burst duration
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation. For signals with burst transmission, the "gating" function was enabled to ensure that measurements are performed during times in which the transmitter is operating at its maximum power
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize

FCC ID: ZNFVS988		FCC Pt. 22, 24, & 27 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1701180035-02-R3.ZNF	Test Dates: 12/27/2016-2/16/2017	EUT Type: Portable Handset	Page 69 of 107	

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

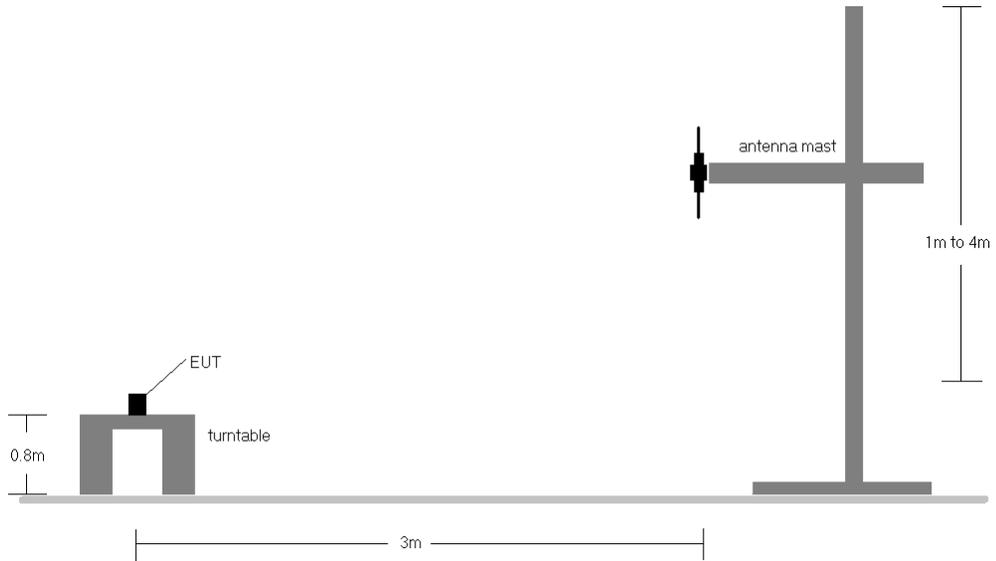


Figure 7-5. Radiated Test Setup <1GHz

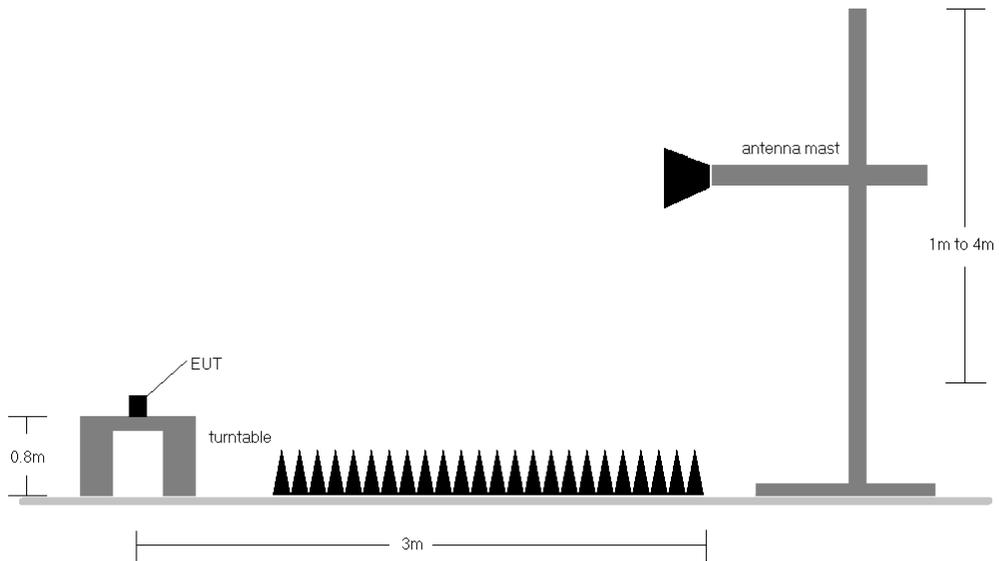


Figure 7-6. Radiated Test Setup >1GHz

FCC ID: ZNFVS988		FCC Pt. 22, 24, & 27 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1701180035-02-R3.ZNF	Test Dates: 12/27/2016-2/16/2017	EUT Type: Portable Handset		Page 70 of 107

Test Notes

- 1) This device employs GSM, GPRS, and EDGE capabilities. The EUT was tested under all configurations and the highest power is reported in GPRS mode while transmitting with one slot active.
- 2) This device employs UMTS technology with WCDMA (AMR/RMC), HSDPA, and HSUPA capabilities. For WCDMA and HSUPA transmission, all configurations were investigated and the worst case UMTS emissions were found in RMC WCDMA mode at 12.2kbps with HSDPA inactive and TPC bits all set to "1."
- 3) This device was tested under all RC and SO combinations and the worst case is reported with RC3/SO55 with "All Up" power control bits.
- 4) This unit was tested with its standard battery.
- 5) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case setup is reported in the tables below.

Frequency [MHz]	Mode	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Substitute Level [dBm]	Ant. Gain [dBd]	ERP [dBm]	ERP [Watts]	ERP Limit [dBm]	Margin [dB]
824.20	GPRS850	V	132	254	21.38	5.36	26.74	0.472	38.45	-11.71
836.60	GPRS850	V	150	285	21.73	5.15	26.88	0.487	38.45	-11.57
848.80	GPRS850	V	141	297	21.90	5.16	27.06	0.509	38.45	-11.39
848.80	GPRS850	H	209	307	20.30	5.13	25.43	0.349	38.45	-13.02
848.80	EDGE850	V	141	297	18.30	5.16	23.46	0.222	38.45	-14.99
848.80	GPRS850 (WCP)	H	355	33	19.81	5.13	24.94	0.312	38.45	-13.51

Table 7-2. ERP (Cellular GPRS)

FCC ID: ZNFVS988	 FCC Pt. 22, 24, & 27 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M1701180035-02-R3.ZNF	Test Dates: 12/27/2016-2/16/2017	EUT Type: Portable Handset		Page 71 of 107

Frequency [MHz]	Mode	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Substitute Level [dBm]	Ant. Gain [dBd]	ERP [dBm]	ERP [Watts]	ERP Limit [dBm]	Margin [dB]
824.70	CDMA850	V	132	241	12.40	5.36	17.76	0.060	38.45	-20.69
836.52	CDMA850	V	123	59	11.23	5.15	16.38	0.043	38.45	-22.07
848.31	CDMA850	V	110	230	10.16	5.16	15.32	0.034	38.45	-23.13
824.70	CDMA850	H	110	163	10.86	5.51	16.37	0.043	38.45	-22.08
824.70	CDMA850 (WCP)	H	388	345	8.95	5.51	14.46	0.028	38.45	-23.99

Table 7-3. ERP (Cellular CDMA)

Frequency [MHz]	Mode	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Substitute Level [dBm]	Ant. Gain [dBd]	ERP [dBm]	ERP [Watts]	ERP Limit [dBm]	Margin [dB]
826.40	WCDMA850	V	127	109	13.76	5.34	19.10	0.081	38.45	-19.35
836.60	WCDMA850	V	152	90	12.90	5.15	18.05	0.064	38.45	-20.40
846.60	WCDMA850	V	151	72	12.11	5.13	17.24	0.053	38.45	-21.21
826.40	WCDMA850	H	219	356	11.99	5.51	17.50	0.056	38.45	-20.95
826.40	WCDMA850 (WCP)	H	199	352	11.86	5.51	17.37	0.055	38.45	-21.08

Table 7-4. ERP (Cellular WCDMA)

Frequency [MHz]	Mode	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Substitute Level [dBm]	Ant. Gain [dBi]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
1712.40	WCDMA1700	H	112	297	12.25	9.61	21.86	0.153	30.00	-8.14
1732.60	WCDMA1700	H	108	306	12.94	9.50	22.44	0.175	30.00	-7.56
1752.60	WCDMA1700	H	114	310	12.44	9.39	21.83	0.152	30.00	-8.17
1732.60	WCDMA1700	V	124	316	12.30	9.32	21.62	0.145	30.00	-8.38
1732.60	WCDMA1700 (WCP)	H	109	289	12.43	9.50	21.93	0.156	30.00	-8.07

Table 7-5. EIRP (AWS WCDMA)

FCC ID: ZNFVS988	 FCC Pt. 22, 24, & 27 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION) 		Approved by: Quality Manager
Test Report S/N: 1M1701180035-02-R3.ZNF	Test Dates: 12/27/2016-2/16/2017	EUT Type: Portable Handset	Page 72 of 107

Frequency [MHz]	Mode	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Substitute Level [dBm]	Ant. Gain [dBi]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
1850.20	GPRS1900	H	100	132	19.12	9.12	28.24	0.667	33.01	-4.77
1880.00	GPRS1900	H	140	142	19.48	9.10	28.58	0.721	33.01	-4.43
1909.80	GPRS1900	H	100	143	19.41	9.16	28.57	0.719	33.01	-4.44
1880.00	GPRS1900	V	129	275	18.78	8.99	27.77	0.598	33.01	-5.24
1880.00	EDGE1900	H	140	142	12.02	9.10	21.12	0.129	33.01	-11.89
1880.00	GPRS1900 (WCP)	H	152	328	18.42	9.10	27.52	0.565	33.01	-5.49

Table 7-6. EIRP (PCS GPRS)

Frequency [MHz]	Mode	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Substitute Level [dBm]	Ant. Gain [dBi]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
1851.25	CDMA1900	V	123	364	11.87	8.97	20.84	0.121	33.01	-12.17
1880.00	CDMA1900	V	116	368	11.82	8.99	20.81	0.120	33.01	-12.20
1908.75	CDMA1900	V	100	337	10.54	8.98	19.52	0.090	33.01	-13.49
1851.25	CDMA1900	H	100	335	11.49	9.12	20.61	0.115	33.01	-12.40
1851.25	CDMA1900 (WCP)	H	100	331	11.37	9.12	20.49	0.112	33.01	-12.52

Table 7-7. EIRP (PCS CDMA)

Frequency [MHz]	Mode	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Substitute Level [dBm]	Ant. Gain [dBi]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
1852.40	WCDMA1900	V	100	126	13.85	8.97	22.82	0.191	33.01	-10.19
1880.00	WCDMA1900	V	100	127	14.10	8.99	23.09	0.204	33.01	-9.92
1907.60	WCDMA1900	V	100	131	14.03	8.99	23.02	0.200	33.01	-9.99
1880.00	WCDMA1900	H	113	341	12.46	9.10	21.56	0.143	33.01	-11.45
1880.00	WCDMA1900 (WCP)	H	100	129	12.28	9.10	21.38	0.137	33.01	-11.63

Table 7-8. EIRP (PCS WCDMA)

FCC ID: ZNFVS988	 FCC Pt. 22, 24, & 27 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION) 		Approved by: Quality Manager
Test Report S/N: 1M1701180035-02-R3.ZNF	Test Dates: 12/27/2016-2/16/2017	EUT Type: Portable Handset	Page 73 of 107

7.7 Radiated Spurious Emissions Measurements

§2.1053 §22.917(a) 24.238(a) 27.53(h)

Test Overview

Radiated spurious emissions measurements are performed using the substitution method described in ANSI/TIA-603-D-2010 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using horizontally and vertically polarized tuned dipole antennas. Measurements on signals operating above 1GHz are performed using vertically and horizontally polarized broadband horn antennas. All measurements are performed as peak measurements while the EUT is operating at maximum power, and at the appropriate frequencies.

Test Procedures Used

KDB 971168 D01 v02r02 – Section 5.8

ANSI/TIA-603-D-2010 – Section 2.2.12

Test Settings

1. RBW = 100kHz for emissions below 1GHz and 1MHz for emissions above 1GHz
2. VBW $\geq 3 \times$ RBW
3. Span = 1.5 times the OBW
4. No. of sweep points $\geq 2 \times$ span / RBW
5. Detector = RMS
6. Trace mode = Average (Max Hold for pulsed emissions)
7. The trace was allowed to stabilize

FCC ID: ZNFVS988	 FCC Pt. 22, 24, & 27 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION) 		Approved by: Quality Manager
Test Report S/N: 1M1701180035-02-R3.ZNF	Test Dates: 12/27/2016-2/16/2017	EUT Type: Portable Handset	Page 74 of 107

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

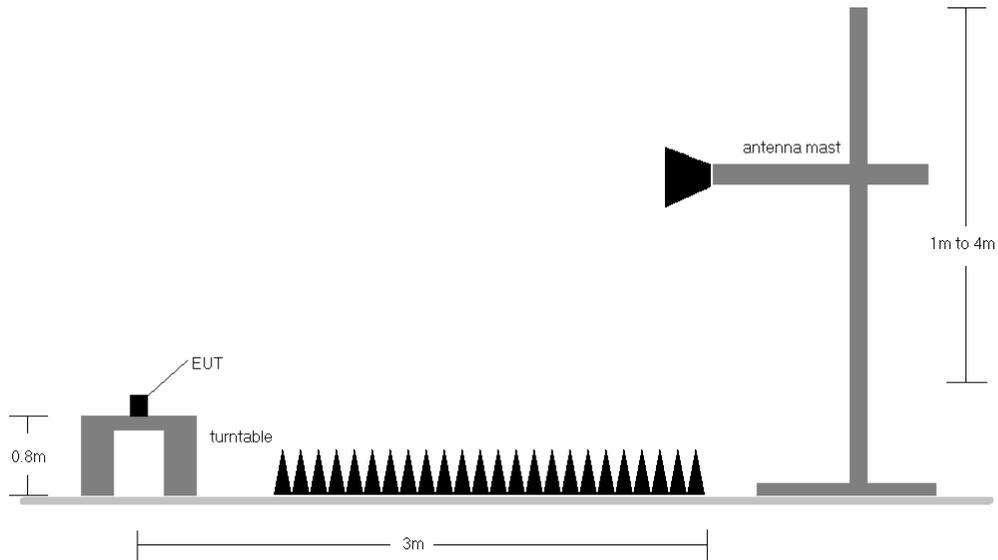


Figure 7-7. Test Instrument & Measurement Setup

Test Notes

- 1) This device employs GSM, GPRS, and EDGE capabilities. The EUT was tested under all configurations and the highest power is reported in GPRS mode while transmitting with one slot active.
- 2) This device employs UMTS technology with WCDMA (AMR/RMC), HSDPA, and HSUPA capabilities. For WCDMA and HSUPA transmission, all configurations were investigated and the worst case UMTS emissions were found in RMC WCDMA mode at 12.2kbps with HSDPA inactive and TPC bits all set to "1."
- 3) This device was tested under all RC and SO combinations and the worst case is reported with RC3/SO55 with "All Up" power control bits.
- 4) This unit was tested with its standard battery.
- 5) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case setup is reported in the tables below.
- 6) The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter. The worst-case emissions are reported.
- 7) Emissions below 18GHz were measured at a 3 meter test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.
- 8) The "-" shown in the following RSE tables are used to denote a noise floor measurement.

FCC ID: ZNFVS988	 FCC Pt. 22, 24, & 27 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M1701180035-02-R3.ZNF	Test Dates: 12/27/2016-2/16/2017	EUT Type: Portable Handset	Page 75 of 107	

OPERATING FREQUENCY: 824.20 MHz
 CHANNEL: 128
 MEASURED OUTPUT POWER: 26.74 dBm = 0.472 W
 MODULATION SIGNAL: GPRS (GMSK)
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 39.74 dBc

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBd]	Spurious Emission Level [dBm]	[dBc]
1648.40	V	110	98	-55.50	6.73	-48.77	75.5
2472.60	V	127	72	-51.34	7.50	-43.84	70.6
3296.80	V	114	180	-63.30	7.49	-55.81	82.5
4121.00	V	120	154	-65.18	8.04	-57.14	83.9
4945.20	V	100	178	-64.24	8.66	-55.58	82.3
5769.40	V	-	-	-63.12	9.28	-53.84	80.6
6593.60	V	-	-	-60.13	9.84	-50.29	77.0
7417.80	V	120	198	-53.44	8.80	-44.64	71.4
8242.00	V	103	166	-49.21	9.05	-40.17	66.9

Table 7-9. Radiated Spurious Data (Cellular GPRS Mode – Ch. 128)

FCC ID: ZNFVS988	 FCC Pt. 22, 24, & 27 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M1701180035-02-R3.ZNF	Test Dates: 12/27/2016-2/16/2017	EUT Type: Portable Handset	Page 76 of 107	

OPERATING FREQUENCY: 836.60 MHz
 CHANNEL: 190
 MEASURED OUTPUT POWER: 26.88 dBm = 0.487 W
 MODULATION SIGNAL: GPRS (GMSK)
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 39.88 dBc

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBd]	Spurious Emission Level [dBm]	[dBc]
1673.20	V	100	93	-52.88	6.77	-46.11	73.0
2509.80	V	100	8	-50.29	7.65	-42.64	69.5
3346.40	V	123	217	-60.57	7.53	-53.04	79.9
4183.00	V	100	183	-62.23	8.23	-54.00	80.9
5019.60	V	100	191	-64.86	8.72	-56.14	83.0
5856.20	V	-	-	-65.38	9.36	-56.02	82.9
6692.80	V	100	138	-57.39	9.60	-47.79	74.7
7529.40	V	115	197	-52.54	8.98	-43.55	70.4
8366.00	V	117	161	-52.20	9.00	-43.20	70.1

Table 7-10. Radiated Spurious Data (Cellular GPRS Mode – Ch. 190)

FCC ID: ZNFVS988	 FCC Pt. 22, 24, & 27 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M1701180035-02-R3.ZNF	Test Dates: 12/27/2016-2/16/2017	EUT Type: Portable Handset	Page 77 of 107	

OPERATING FREQUENCY: 848.80 MHz
 CHANNEL: 251
 MEASURED OUTPUT POWER: 27.06 dBm = 0.509 W
 MODULATION SIGNAL: GPRS (GMSK)
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 40.06 dBc

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBd]	Spurious Emission Level [dBm]	[dBc]
1697.60	V	100	95	-50.58	6.80	-43.78	70.8
2546.40	V	100	351	-51.56	7.61	-43.94	71.0
3395.20	V	100	8	-58.44	7.56	-50.88	77.9
4244.00	V	100	273	-60.06	8.41	-51.65	78.7
5092.80	V	-	-	-65.57	8.66	-56.92	84.0
5941.60	V	-	-	-64.94	9.31	-55.64	82.7
6790.40	V	113	131	-53.90	9.45	-44.45	71.5
7639.20	V	100	151	-54.14	9.17	-44.97	72.0
8488.00	V	-	-	-56.88	8.94	-47.94	75.0

Table 7-11. Radiated Spurious Data (Cellular GPRS Mode – Ch. 251)

FCC ID: ZNFVS988	 FCC Pt. 22, 24, & 27 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M1701180035-02-R3.ZNF	Test Dates: 12/27/2016-2/16/2017	EUT Type: Portable Handset	Page 78 of 107	

OPERATING FREQUENCY: 848.80 MHz
 CHANNEL: 251
 MEASURED OUTPUT POWER: 24.94 dBm = 0.312 W
 MODULATION SIGNAL: GPRS (GMSK)
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 37.94 dBc

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBd]	Spurious Emission Level [dBm]	[dBc]
1697.60	V	176	42	-55.65	6.80	-48.85	73.8
2546.40	V	100	122	-49.69	7.61	-42.07	67.0
3395.20	V	100	275	-59.91	7.56	-52.35	77.3
4244.00	V	100	93	-62.16	8.41	-53.75	78.7
5092.80	V	-	-	-65.86	8.66	-57.21	82.1
5941.60	V	-	-	-54.57	9.31	-45.27	70.2
6790.40	V	100	49	-51.95	9.45	-42.50	67.4
7639.20	V	100	47	-53.26	9.17	-44.09	69.0
8488.00	V	-	-	-56.98	8.94	-48.04	73.0

Table 7-12. Radiated Spurious Data with WCP (Cellular GPRS Mode – Ch.251)

OPERATING FREQUENCY: 824.70 MHz
 CHANNEL: 1013
 MEASURED OUTPUT POWER: 17.76 dBm = 0.060 W
 MODULATION SIGNAL: CDMA
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 30.76 dBc

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBd]	Spurious Emission Level [dBm]	[dBc]
1649.40	V	100	113	-64.27	6.28	-57.99	75.8
2474.10	V	100	118	-64.76	6.89	-57.87	75.6
3298.80	V	-	-	-67.64	7.09	-60.55	78.3
4123.50	V	-	-	-67.40	7.73	-59.67	77.4

Table 7-13. Radiated Spurious Data (Cellular CDMA Mode – Ch. 1013)

FCC ID: ZNFVS988		FCC Pt. 22, 24, & 27 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1701180035-02-R3.ZNF	Test Dates: 12/27/2016-2/16/2017	EUT Type: Portable Handset	Page 79 of 107	

OPERATING FREQUENCY: 836.52 MHz
 CHANNEL: 384
 MEASURED OUTPUT POWER: 16.38 dBm = 0.043 W
 MODULATION SIGNAL: CDMA
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10}(W) =$ 29.38 dBc

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBd]	Spurious Emission Level [dBm]	[dBc]
1673.04	V	141	247	-64.19	6.21	-57.98	74.4
2509.56	V	-	-	-64.49	6.90	-57.59	74.0
3346.08	V	-	-	-67.87	7.26	-60.61	77.0

Table 7-14. Radiated Spurious Data (Cellular CDMA Mode – Ch. 384)

OPERATING FREQUENCY: 848.31 MHz
 CHANNEL: 777
 MEASURED OUTPUT POWER: 15.32 dBm = 0.034 W
 MODULATION SIGNAL: CDMA
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10}(W) =$ 28.32 dBc

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBd]	Spurious Emission Level [dBm]	[dBc]
1696.62	V	129	250	-62.23	6.14	-56.08	71.4
2544.93	V	100	233	-63.50	7.02	-56.48	71.8
3393.24	V	-	-	-68.13	7.43	-60.70	76.0
4241.55	V	-	-	-68.40	8.40	-60.00	75.3

Table 7-15. Radiated Spurious Data (Cellular CDMA Mode – Ch. 777)

FCC ID: ZNFVS988		FCC Pt. 22, 24, & 27 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1701180035-02-R3.ZNF	Test Dates: 12/27/2016-2/16/2017	EUT Type: Portable Handset	Page 80 of 107	

OPERATING FREQUENCY: 824.70 MHz
 CHANNEL: 1013
 MEASURED OUTPUT POWER: 14.46 dBm = 0.028 W
 MODULATION SIGNAL: CDMA
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10}(W) =$ 27.46 dBc

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBd]	Spurious Emission Level [dBm]	[dBc]
1649.40	H	100	161	-70.43	6.30	-64.13	78.6
2474.10	H	-	-	-70.87	6.85	-64.02	78.5
3298.80	H	-	-	-67.62	7.12	-60.50	75.0

Table 7-16. Radiated Spurious Data with WCP (Cellular CDMA Mode – Ch. 1013)

OPERATING FREQUENCY: 826.40 MHz
 CHANNEL: 4132
 MEASURED OUTPUT POWER: 19.10 dBm = 0.081 W
 MODULATION SIGNAL: WCDMA
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10}(W) =$ 32.10 dBc

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBd]	Spurious Emission Level [dBm]	[dBc]
1652.80	V	100	131	-61.76	6.27	-55.49	74.6
2479.20	V	100	328	-59.49	6.88	-52.61	71.7
3305.60	V	-	-	-61.52	7.11	-54.40	73.5
4132.00	V	-	-	-65.00	7.78	-57.22	76.3

Table 7-17. Radiated Spurious Data (Cellular WCDMA Mode – Ch. 4132)

FCC ID: ZNFVS988			FCC Pt. 22, 24, & 27 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1701180035-02-R3.ZNF	Test Dates: 12/27/2016-2/16/2017	EUT Type: Portable Handset		Page 81 of 107	

OPERATING FREQUENCY: 836.60 MHz
 CHANNEL: 4183
 MEASURED OUTPUT POWER: 18.05 dBm = 0.064 W
 MODULATION SIGNAL: WCDMA
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 31.05 dBc

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBd]	Spurious Emission Level [dBm]	[dBc]
1673.20	V	100	121	-60.30	6.21	-54.09	72.1
2509.80	V	100	173	-57.02	6.90	-50.12	68.2
3346.40	V	-	-	-62.41	7.26	-55.14	73.2
4183.00	V	-	-	-65.43	8.11	-57.32	75.4

Table 7-18. Radiated Spurious Data (Cellular WCDMA Mode – Ch. 4183)

OPERATING FREQUENCY: 846.60 MHz
 CHANNEL: 4233
 MEASURED OUTPUT POWER: 17.24 dBm = 0.053 W
 MODULATION SIGNAL: WCDMA
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 30.24 dBc

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBd]	Spurious Emission Level [dBm]	[dBc]
1693.20	V	137	100	-58.03	6.15	-51.88	69.1
2539.80	V	100	195	-58.89	7.00	-51.88	69.1
3386.40	V	-	-	-62.41	7.40	-55.01	72.2
4233.00	V	-	-	-65.85	8.37	-57.48	74.7

Table 7-19. Radiated Spurious Data (Cellular WCDMA Mode – Ch. 4233)

FCC ID: ZNFVS988		FCC Pt. 22, 24, & 27 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1701180035-02-R3.ZNF	Test Dates: 12/27/2016-2/16/2017	EUT Type: Portable Handset	Page 82 of 107	

OPERATING FREQUENCY: 826.40 MHz
 CHANNEL: 4132
 MEASURED OUTPUT POWER: 17.37 dBm = 0.055 W
 MODULATION SIGNAL: WCDMA
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10}(W) =$ 30.37 dBc

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBd]	Spurious Emission Level [dBm]	[dBc]
1652.80	H	100	281	-64.77	6.28	-58.48	75.9
2479.20	H	100	35	-63.67	6.84	-56.83	74.2
3305.60	H	-	-	-62.72	7.14	-55.58	72.9
4132.00	H	-	-	-64.91	7.74	-57.17	74.5

Table 7-20. Radiated Spurious Data with WCP (Cellular WCDMA Mode – Ch. 4132)

OPERATING FREQUENCY: 1712.40 MHz
 CHANNEL: 1312
 MEASURED OUTPUT POWER: 21.86 dBm = 0.153 W
 MODULATION SIGNAL: WCDMA
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10}(W) =$ 34.86 dBc

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	[dBc]
3424.80	H	-	-	-63.88	9.65	-54.23	76.1
5137.20	H	100	157	-59.84	10.91	-48.93	70.8
6849.60	H	-	-	-58.23	10.78	-47.45	69.3

Table 7-21. Radiated Spurious Data (AWS WCDMA Mode – Ch. 1312)

FCC ID: ZNFVS988			FCC Pt. 22, 24, & 27 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1701180035-02-R3.ZNF	Test Dates: 12/27/2016-2/16/2017	EUT Type: Portable Handset		Page 83 of 107	

OPERATING FREQUENCY: 1732.60 MHz
 CHANNEL: 1413
 MEASURED OUTPUT POWER: 22.44 dBm = 0.175 W
 MODULATION SIGNAL: WCDMA
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10}(W) =$ 35.44 dBc

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	[dBc]
3465.20	H	-	-	-64.41	9.77	-54.64	77.1
5197.80	H	100	59	-58.83	10.81	-48.01	70.5
6930.40	H	-	-	-57.89	10.89	-47.00	69.4

Table 7-22. Radiated Spurious Data (AWS WCDMA Mode – Ch. 1413)

OPERATING FREQUENCY: 1752.60 MHz
 CHANNEL: 1513
 MEASURED OUTPUT POWER: 21.83 dBm = 0.152 W
 MODULATION SIGNAL: WCDMA
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10}(W) =$ 34.83 dBc

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	[dBc]
3505.20	H	100	321	-63.23	9.89	-53.34	75.2
5257.80	H	100	59	-55.82	10.92	-44.90	66.7
7010.40	H	-	-	-55.65	11.06	-44.59	66.4

Table 7-23. Radiated Spurious Data (AWS WCDMA Mode – Ch. 1513)

FCC ID: ZNFVS988		FCC Pt. 22, 24, & 27 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1701180035-02-R3.ZNF	Test Dates: 12/27/2016-2/16/2017	EUT Type: Portable Handset	Page 84 of 107	

OPERATING FREQUENCY: 1732.60 MHz
 CHANNEL: 1413
 MEASURED OUTPUT POWER: 21.93 dBm = 0.156 W
 MODULATION SIGNAL: WCDMA
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10}(W) =$ 34.93 dBc

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	[dBc]
3465.20	H	100	316	-62.97	9.77	-53.20	75.1
5197.80	H	100	152	-58.50	10.81	-47.68	69.6
6930.40	H	-	-	-57.86	10.89	-46.97	68.9

Table 7-24. Radiated Spurious Data with WCP (AWS WCDMA Mode – Ch. 1413)

OPERATING FREQUENCY: 1850.20 MHz
 CHANNEL: 512
 MEASURED OUTPUT POWER: 28.24 dBm = 0.667 W
 MODULATION SIGNAL: GPRS (GMSK)
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10}(W) =$ 41.24 dBc

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	[dBc]
3700.40	H	163	305	-56.82	10.03	-46.78	75.0
5550.60	H	103	100	-49.18	11.18	-38.00	66.2
7400.80	H	-	-	-55.64	10.85	-44.79	73.0
9251.00	H	-	-	-56.30	12.37	-43.93	72.2

Table 7-25. Radiated Spurious Data (PCS GPRS Mode – Ch. 512)

FCC ID: ZNFVS988			FCC Pt. 22, 24, & 27 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1701180035-02-R3.ZNF	Test Dates: 12/27/2016-2/16/2017	EUT Type: Portable Handset	Page 85 of 107		

OPERATING FREQUENCY: 1880.00 MHz
 CHANNEL: 661
 MEASURED OUTPUT POWER: 28.58 dBm = 0.721 W
 MODULATION SIGNAL: GPRS (GMSK)
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 41.58 dBc

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	[dBc]
3760.00	H	100	134	-52.86	9.79	-43.08	71.7
5640.00	H	100	297	-47.23	11.35	-35.88	64.5
7520.00	H	-	-	-56.85	11.22	-45.64	74.2
9400.00	H	-	-	-55.61	12.30	-43.31	71.9

Table 7-26. Radiated Spurious Data (PCS GPRS Mode – Ch. 661)

OPERATING FREQUENCY: 1909.80 MHz
 CHANNEL: 810
 MEASURED OUTPUT POWER: 28.57 dBm = 0.719 W
 MODULATION SIGNAL: GPRS (GMSK)
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 41.57 dBc

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	[dBc]
3819.60	H	100	41	-49.61	9.56	-40.05	68.6
5729.40	H	100	106	-49.65	11.43	-38.21	66.8
7639.20	H	-	-	-56.76	11.50	-45.26	73.8
9549.00	H	-	-	-55.67	12.39	-43.29	71.9

Table 7-27. Radiated Spurious Data (PCS GPRS Mode – Ch. 810)

FCC ID: ZNFVS988		FCC Pt. 22, 24, & 27 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1701180035-02-R3.ZNF	Test Dates: 12/27/2016-2/16/2017	EUT Type: Portable Handset	Page 86 of 107	

OPERATING FREQUENCY: 1880.00 MHz
 CHANNEL: 661
 MEASURED OUTPUT POWER: 27.52 dBm = 0.565 W
 MODULATION SIGNAL: GPRS (GMSK)
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 40.52 dBc

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	[dBc]
3760.00	H	100	43	-50.39	9.79	-40.61	68.1
5640.00	H	100	310	-48.21	11.35	-36.86	64.4
7520.00	H	-	-	-57.01	11.22	-45.80	73.3
9400.00	H	-	-	-55.84	12.30	-43.54	71.1

Table 7-28. Radiated Spurious Data with WCP (PCS GPRS Mode – Ch. 661)

OPERATING FREQUENCY: 1851.25 MHz
 CHANNEL: 25
 MEASURED OUTPUT POWER: 20.84 dBm = 0.121 W
 MODULATION SIGNAL: CDMA
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 33.84 dBc

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	[dBc]
3702.50	V	100	102	-64.75	10.08	-54.67	75.5
5553.75	V	100	359	-60.40	11.21	-49.19	70.0
7405.00	V	-	-	-57.06	10.87	-46.19	67.0

Table 7-29. Radiated Spurious Data (PCS CDMA Mode – Ch. 25)

FCC ID: ZNFVS988			FCC Pt. 22, 24, & 27 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1701180035-02-R3.ZNF	Test Dates: 12/27/2016-2/16/2017	EUT Type: Portable Handset		Page 87 of 107	

OPERATING FREQUENCY: 1880.00 MHz
 CHANNEL: 600
 MEASURED OUTPUT POWER: 20.81 dBm = 0.120 W
 MODULATION SIGNAL: CDMA
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 33.81 dBc

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	[dBc]
3760.00	V	100	288	-62.86	9.80	-53.06	73.9
5640.00	V	100	8	-58.51	11.37	-47.14	67.9
7520.00	V	-	-	-58.34	11.24	-47.10	67.9
9400.00	V	-	-	-56.39	12.35	-44.05	64.9

Table 7-30. Radiated Spurious Data (PCS CDMA Mode – Ch. 600)

OPERATING FREQUENCY: 1908.75 MHz
 CHANNEL: 1175
 MEASURED OUTPUT POWER: 19.52 dBm = 0.090 W
 MODULATION SIGNAL: CDMA
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 32.52 dBc

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	[dBc]
3817.50	V	100	74	-61.14	9.56	-51.58	71.1
5726.25	V	100	5	-58.98	11.46	-47.53	67.1
7635.00	V	-	-	-58.16	11.51	-46.65	66.2
9543.75	V	-	-	-56.39	12.40	-43.99	63.5

Table 7-31. Radiated Spurious Data (PCS CDMA Mode – Ch. 1175)

FCC ID: ZNFVS988			FCC Pt. 22, 24, & 27 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1701180035-02-R3.ZNF	Test Dates: 12/27/2016-2/16/2017	EUT Type: Portable Handset			Page 88 of 107

OPERATING FREQUENCY: 1851.25 MHz
 CHANNEL: 25
 MEASURED OUTPUT POWER: 20.49 dBm = 0.112 W
 MODULATION SIGNAL: CDMA
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 33.49 dBc

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	[dBc]
3702.50	H	100	259	-63.51	10.02	-53.48	74.0
5553.75	H	100	153	-61.95	11.19	-50.76	71.3
7405.00	H	-	-	-56.99	10.87	-46.12	66.6
9256.25	H	-	-	-56.62	12.37	-44.26	64.7

Table 7-32. Radiated Spurious Data with WCP (PCS CDMA Mode – Ch. 25)

OPERATING FREQUENCY: 1852.40 MHz
 CHANNEL: 9262
 MEASURED OUTPUT POWER: 22.82 dBm = 0.191 W
 MODULATION SIGNAL: WCDMA
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 35.82 dBc

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	[dBc]
3704.80	V	100	98	-62.70	10.07	-52.63	75.4
5557.20	V	100	257	-58.11	11.21	-46.89	69.7
7409.60	V	-	-	-56.58	10.89	-45.69	68.5
9262.00	V	-	-	-56.41	12.37	-44.04	66.9

Table 7-33. Radiated Spurious Data (PCS WCDMA Mode – Ch. 9262)

FCC ID: ZNFVS988		FCC Pt. 22, 24, & 27 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1701180035-02-R3.ZNF	Test Dates: 12/27/2016-2/16/2017	EUT Type: Portable Handset	Page 89 of 107	

OPERATING FREQUENCY: 1880.00 MHz
 CHANNEL: 9400
 MEASURED OUTPUT POWER: 23.09 dBm = 0.204 W
 MODULATION SIGNAL: WCDMA
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10}(W) =$ 36.09 dBc

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	[dBc]
3760.00	V	100	260	-62.84	9.80	-53.04	76.1
5640.00	V	100	192	-57.88	11.37	-46.51	69.6
7520.00	V	-	-	-57.91	11.24	-46.67	69.8
9400.00	V	-	-	-56.29	12.35	-43.95	67.0

Table 7-34. Radiated Spurious Data (PCS WCDMA Mode – Ch. 9400)

OPERATING FREQUENCY: 1907.60 MHz
 CHANNEL: 9538
 MEASURED OUTPUT POWER: 23.02 dBm = 0.200 W
 MODULATION SIGNAL: WCDMA
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10}(W) =$ 36.02 dBc

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	[dBc]
3815.20	V	100	285	-62.10	9.56	-52.54	75.6
5722.80	V	100	203	-57.94	11.45	-46.48	69.5
7630.40	V	-	-	-58.66	11.50	-47.16	70.2
9538.00	V	-	-	-56.47	12.39	-44.08	67.1

Table 7-35. Radiated Spurious Data (PCS WCDMA Mode – Ch. 9538)

FCC ID: ZNFVS988	 FCC Pt. 22, 24, & 27 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M1701180035-02-R3.ZNF	Test Dates: 12/27/2016-2/16/2017	EUT Type: Portable Handset		Page 90 of 107

OPERATING FREQUENCY: 1880.00 MHz
 CHANNEL: 9400
 MEASURED OUTPUT POWER: 21.38 dBm = 0.137 W
 MODULATION SIGNAL: WCDMA
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 34.38 dBc

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	[dBc]
3760.00	H	100	102	-63.14	9.79	-53.36	74.7
5640.00	H	100	281	-55.68	11.35	-44.33	65.7
7520.00	H	-	-	-58.41	11.22	-47.19	68.6
9400.00	H	-	-	-56.19	12.30	-43.89	65.3

Table 7-36. Radiated Spurious Data with WCP (PCS WCDMA Mode – Ch. 9400)

FCC ID: ZNFVS988	 FCC Pt. 22, 24, & 27 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M1701180035-02-R3.ZNF	Test Dates: 12/27/2016-2/16/2017	EUT Type: Portable Handset		Page 91 of 107

7.8 Frequency Stability / Temperature Variation

\$2.1055 \$22.355 \$24.235 \$27.54

Test Overview and Limit

Frequency stability testing is performed in accordance with the guidelines of ANSI/TIA-603-D-2010. The frequency stability of the transmitter is measured by:

- a.) **Temperature:** The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
- b.) **Primary Supply Voltage:** The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

For Part 22, the frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ (± 2.5 ppm) of the center frequency. For Part 24 and Part 27, the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

Test Procedure Used

ANSI/TIA-603-D-2010

Test Settings

1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
2. The equipment is turned on in a “standby” condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

Test Setup

The EUT was connected via an RF cable to a spectrum analyzer with the EUT placed inside an environmental chamber.

Test Notes

None

FCC ID: ZNFVS988	 FCC Pt. 22, 24, & 27 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M1701180035-02-R3.ZNF	Test Dates: 12/27/2016-2/16/2017	EUT Type: Portable Handset	Page 92 of 107	

Frequency Stability / Temperature Variation

§2.1055 §22.355

OPERATING FREQUENCY:	836,600,000	Hz
CHANNEL:	190	
REFERENCE VOLTAGE:	3.80	VDC
DEVIATION LIMIT:	± 0.00025 % or 2.5 ppm	

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.80	+ 20 (Ref)	836,599,715	-285	-0.0000341
100 %		- 30	836,599,956	-44	-0.0000053
100 %		- 20	836,600,011	11	0.0000013
100 %		- 10	836,600,021	21	0.0000025
100 %		0	836,600,028	28	0.0000033
100 %		+ 10	836,600,418	418	0.0000500
100 %		+ 20	836,599,857	-143	-0.0000171
100 %		+ 30	836,599,871	-129	-0.0000154
100 %		+ 40	836,600,047	47	0.0000056
100 %		+ 50	836,599,839	-161	-0.0000192
BATT. ENDPOINT		3.40	+ 20	836,599,913	-87

Table 7-37. Frequency Stability Data (Cellular GPRS Mode – Ch. 190)

FCC ID: ZNFVS988	 FCC Pt. 22, 24, & 27 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M1701180035-02-R3.ZNF	Test Dates: 12/27/2016-2/16/2017	EUT Type: Portable Handset	Page 93 of 107	

Frequency Stability / Temperature Variation

§2.1055 §22.355

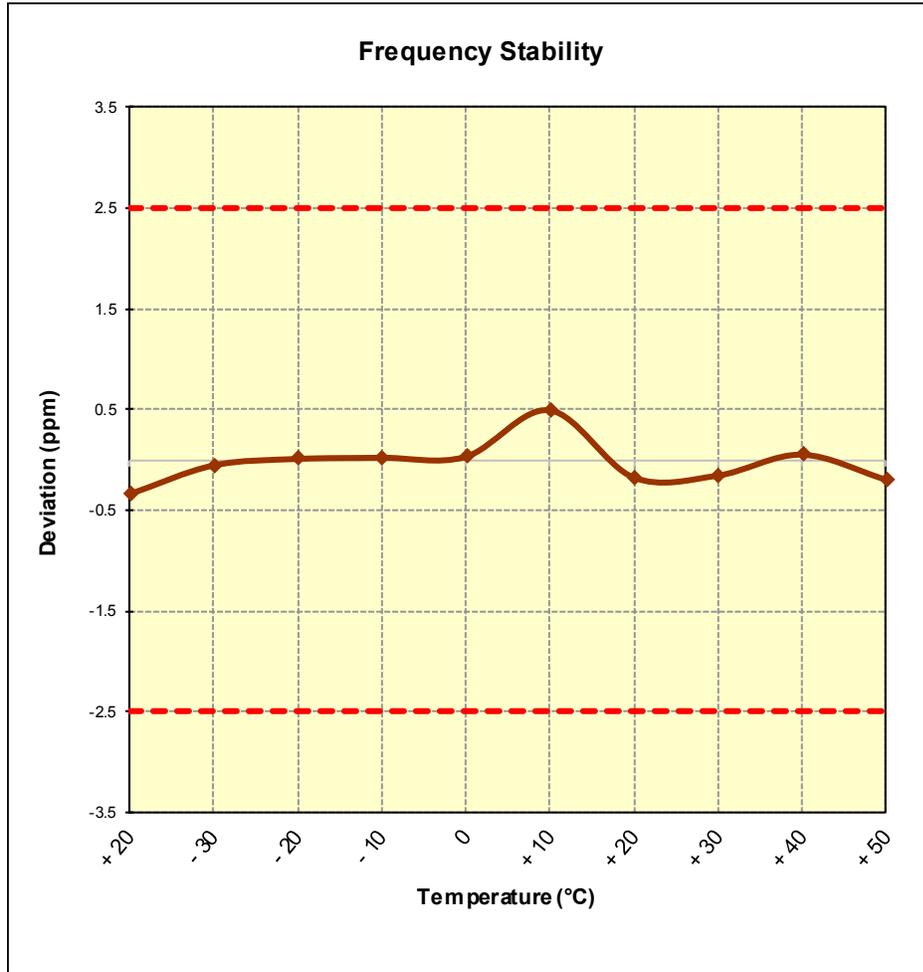


Figure 7-8. Frequency Stability Graph (Cellular GPRS Mode – Ch. 190)

FCC ID: ZNFVS988	 FCC Pt. 22, 24, & 27 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M1701180035-02-R3.ZNF	Test Dates: 12/27/2016-2/16/2017	EUT Type: Portable Handset	Page 94 of 107	

Frequency Stability / Temperature Variation

§2.1055 §22.355

OPERATING FREQUENCY: 836,520,000 Hz
 CHANNEL: 384
 REFERENCE VOLTAGE: 3.80 VDC
 DEVIATION LIMIT: ± 0.00025 % or 2.5 ppm

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.80	+ 20 (Ref)	836,520,301	301	0.0000360
100 %		- 30	836,519,685	-315	-0.0000377
100 %		- 20	836,520,045	45	0.0000054
100 %		- 10	836,520,185	185	0.0000221
100 %		0	836,519,944	-56	-0.0000067
100 %		+ 10	836,519,683	-317	-0.0000379
100 %		+ 20	836,520,084	84	0.0000100
100 %		+ 30	836,520,311	311	0.0000372
100 %		+ 40	836,520,265	265	0.0000317
100 %		+ 50	836,519,704	-296	-0.0000354
BATT. ENDPOINT	3.40	+ 20	836,519,879	-121	-0.0000145

Table 7-38. Frequency Stability Data (Cellular CDMA Mode – Ch. 384)

FCC ID: ZNFVS988	 FCC Pt. 22, 24, & 27 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M1701180035-02-R3.ZNF	Test Dates: 12/27/2016-2/16/2017	EUT Type: Portable Handset	Page 95 of 107	

Frequency Stability / Temperature Variation

§2.1055 §22.355

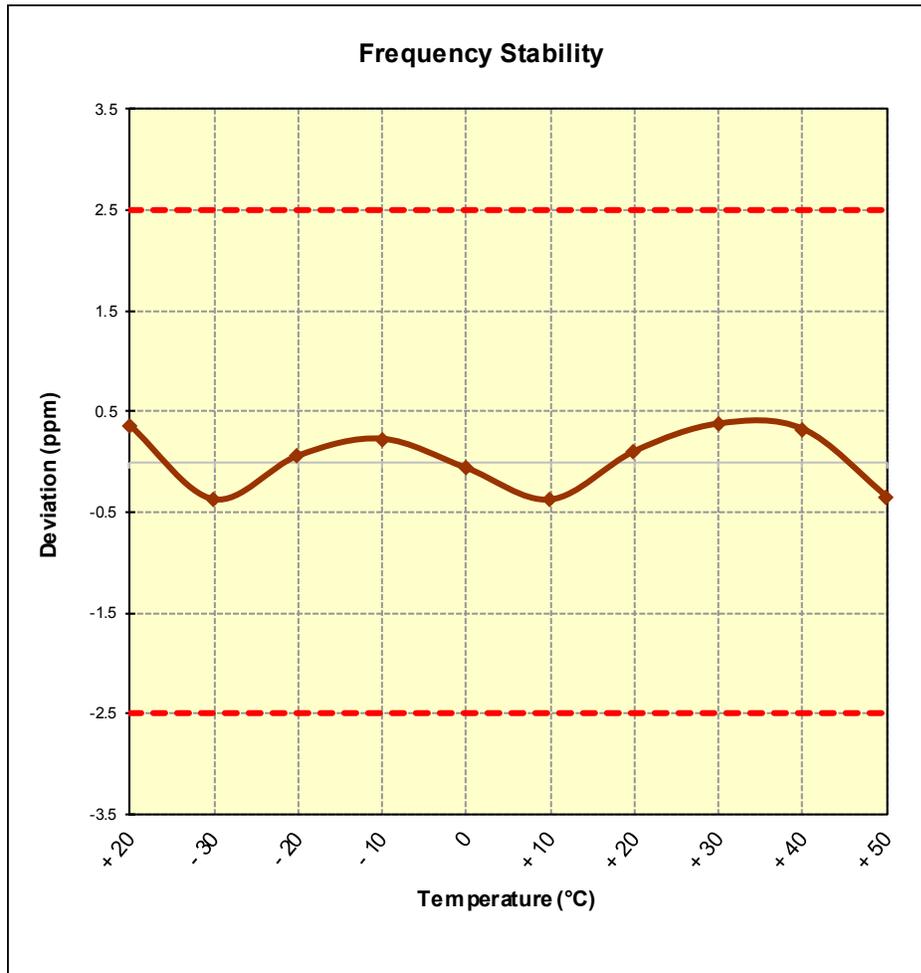


Figure 7-9. Frequency Stability Graph (Cellular CDMA Mode – Ch. 384)

FCC ID: ZNFVS988	 FCC Pt. 22, 24, & 27 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION) 		Approved by: Quality Manager
Test Report S/N: 1M1701180035-02-R3.ZNF	Test Dates: 12/27/2016-2/16/2017	EUT Type: Portable Handset	Page 96 of 107

Frequency Stability / Temperature Variation

§2.1055 §22.355

OPERATING FREQUENCY: 836,600,000 Hz
 CHANNEL: 4183
 REFERENCE VOLTAGE: 3.80 VDC
 DEVIATION LIMIT: ± 0.00025 % or 2.5 ppm

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.80	+ 20 (Ref)	836,599,999	-1	-0.0000001
100 %		- 30	836,600,009	9	0.0000011
100 %		- 20	836,600,024	24	0.0000029
100 %		- 10	836,600,223	223	0.0000267
100 %		0	836,600,424	424	0.0000507
100 %		+ 10	836,599,819	-181	-0.0000216
100 %		+ 20	836,600,151	151	0.0000180
100 %		+ 30	836,599,777	-223	-0.0000267
100 %		+ 40	836,600,015	15	0.0000018
100 %		+ 50	836,599,692	-308	-0.0000368
BATT. ENDPOINT		3.40	+ 20	836,600,161	161

Table 7-39. Frequency Stability Data (Cellular WCDMA Mode – Ch. 4183)

FCC ID: ZNFVS988	 FCC Pt. 22, 24, & 27 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M1701180035-02-R3.ZNF	Test Dates: 12/27/2016-2/16/2017	EUT Type: Portable Handset	Page 97 of 107	

Frequency Stability / Temperature Variation

§2.1055 §22.355

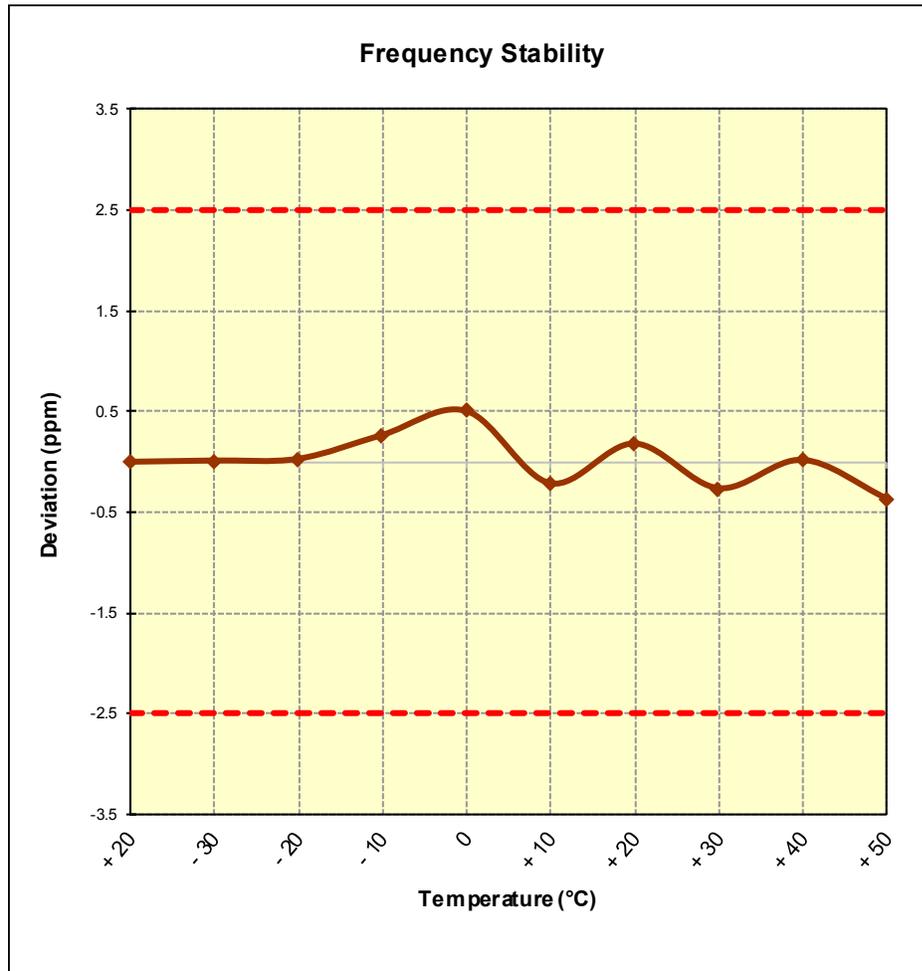


Figure 7-10. Frequency Stability Graph (Cellular WCDMA Mode – Ch. 4183)

FCC ID: ZNFVS988	 FCC Pt. 22, 24, & 27 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION) 		Approved by: Quality Manager
Test Report S/N: 1M1701180035-02-R3.ZNF	Test Dates: 12/27/2016-2/16/2017	EUT Type: Portable Handset	Page 98 of 107

Frequency Stability / Temperature Variation

§2.1055 §27.54

OPERATING FREQUENCY:	1,732,600,000	Hz
CHANNEL:	1413	
REFERENCE VOLTAGE:	3.80	VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.80	+ 20 (Ref)	1,732,599,913	-87	-0.0000050
100 %		- 30	1,732,600,346	346	0.0000200
100 %		- 20	1,732,599,892	-108	-0.0000062
100 %		- 10	1,732,600,145	145	0.0000084
100 %		0	1,732,600,028	28	0.0000016
100 %		+ 10	1,732,600,231	231	0.0000133
100 %		+ 20	1,732,599,962	-38	-0.0000022
100 %		+ 30	1,732,599,595	-405	-0.0000234
100 %		+ 40	1,732,599,833	-167	-0.0000096
100 %		+ 50	1,732,599,992	-8	-0.0000005
BATT. ENDPOINT	3.40	+ 20	1,732,599,889	-111	-0.0000064

Table 7-40. Frequency Stability Data (AWS WCDMA Mode – Ch. 1413)

Note:

Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

FCC ID: ZNFVS988		FCC Pt. 22, 24, & 27 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1701180035-02-R3.ZNF	Test Dates: 12/27/2016-2/16/2017	EUT Type: Portable Handset	Page 99 of 107	

Frequency Stability / Temperature Variation

§2.1055 §27.54

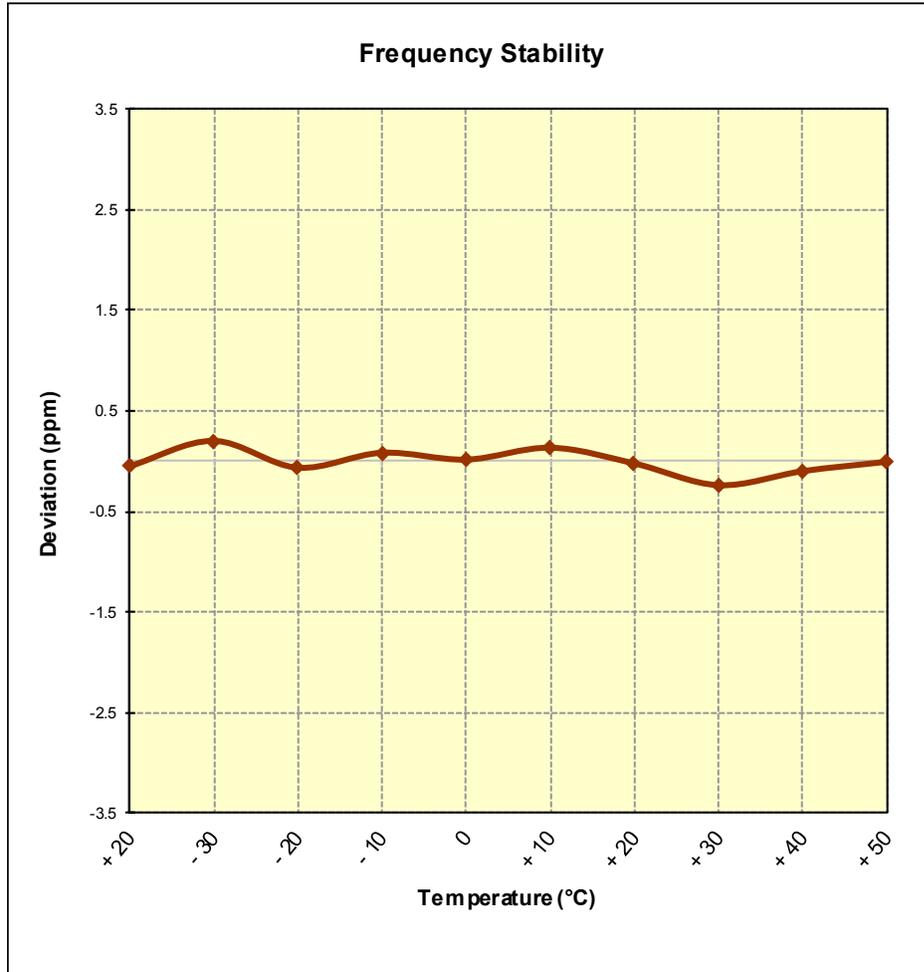


Figure 7-11. Frequency Stability Graph (AWS WCDMA Mode – Ch. 1413)

FCC ID: ZNFVS988	 FCC Pt. 22, 24, & 27 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M1701180035-02-R3.ZNF	Test Dates: 12/27/2016-2/16/2017	EUT Type: Portable Handset	Page 100 of 107	

Frequency Stability / Temperature Variation

§2.1055 §24.235

OPERATING FREQUENCY: 1,880,000,000 Hz
 CHANNEL: 661
 REFERENCE VOLTAGE: 3.80 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.80	+ 20 (Ref)	1,879,999,926	-74	-0.0000039
100 %		- 30	1,880,000,041	41	0.0000022
100 %		- 20	1,879,999,955	-45	-0.0000024
100 %		- 10	1,880,000,028	28	0.0000015
100 %		0	1,880,000,062	62	0.0000033
100 %		+ 10	1,879,999,767	-233	-0.0000124
100 %		+ 20	1,879,999,855	-145	-0.0000077
100 %		+ 30	1,879,999,818	-182	-0.0000097
100 %		+ 40	1,879,999,963	-37	-0.0000020
100 %		+ 50	1,879,999,672	-328	-0.0000174
BATT. ENDPOINT	3.40	+ 20	1,880,000,120	120	0.0000064

Table 7-41. Frequency Stability Data (PCS GPRS Mode – Ch. 661)

Note:

Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

FCC ID: ZNFVS988		FCC Pt. 22, 24, & 27 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1701180035-02-R3.ZNF	Test Dates: 12/27/2016-2/16/2017	EUT Type: Portable Handset	Page 101 of 107	

Frequency Stability / Temperature Variation

§2.1055 §24.235

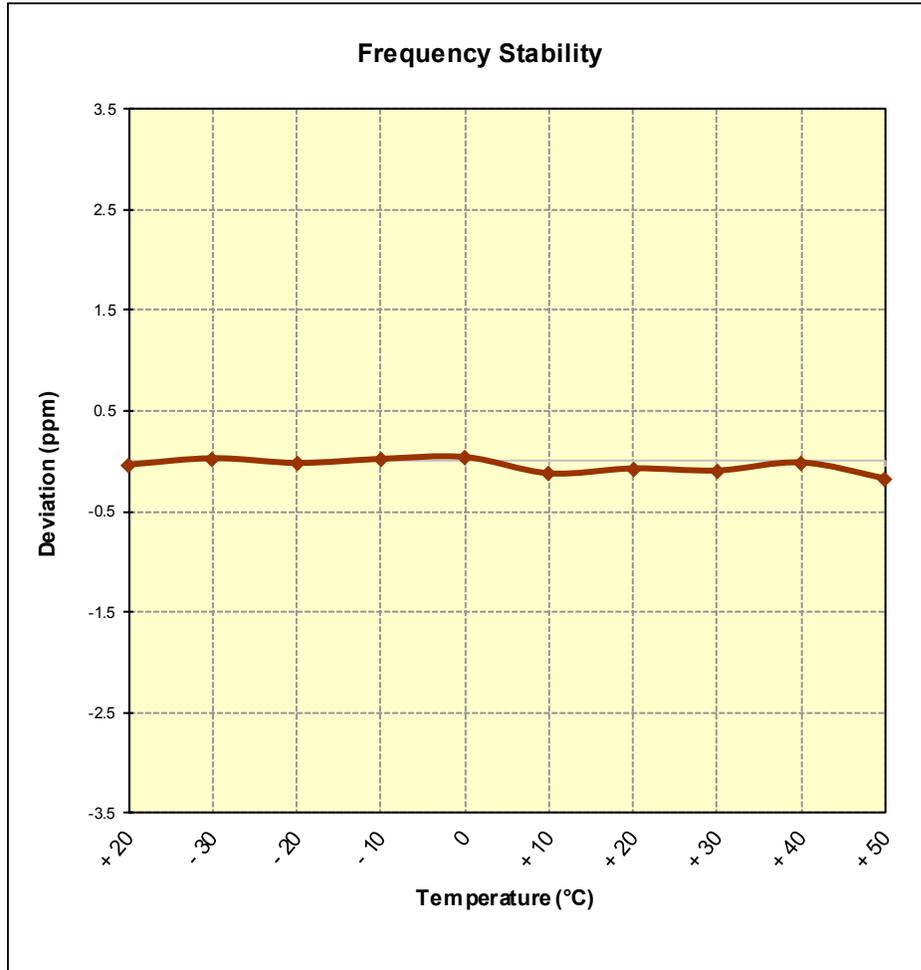


Figure 7-12. Frequency Stability Graph (PCS GPRS Mode – Ch. 661)

FCC ID: ZNFVS988	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1701180035-02-R3.ZNF	Test Dates: 12/27/2016-2/16/2017	EUT Type: Portable Handset		Page 102 of 107

Frequency Stability / Temperature Variation

§2.1055 §24.235

OPERATING FREQUENCY:	1,880,000,000	Hz
CHANNEL:	600	
REFERENCE VOLTAGE:	3.80	VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.80	+ 20 (Ref)	1,880,000,318	318	0.0000169
100 %		- 30	1,880,000,300	300	0.0000160
100 %		- 20	1,879,999,998	-2	-0.0000001
100 %		- 10	1,880,000,036	36	0.0000019
100 %		0	1,880,000,097	97	0.0000052
100 %		+ 10	1,880,000,065	65	0.0000035
100 %		+ 20	1,879,999,733	-267	-0.0000142
100 %		+ 30	1,879,999,739	-261	-0.0000139
100 %		+ 40	1,880,000,005	5	0.0000003
100 %		+ 50	1,879,999,915	-85	-0.0000045
BATT. ENDPOINT	3.40	+ 20	1,879,999,953	-47	-0.0000025

Table 7-42. Frequency Stability Data (PCS CDMA Mode – Ch. 600)

Note:

Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

FCC ID: ZNFVS988	 FCC Pt. 22, 24, & 27 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M1701180035-02-R3.ZNF	Test Dates: 12/27/2016-2/16/2017	EUT Type: Portable Handset	Page 103 of 107	

Frequency Stability / Temperature Variation

§2.1055 §24.235

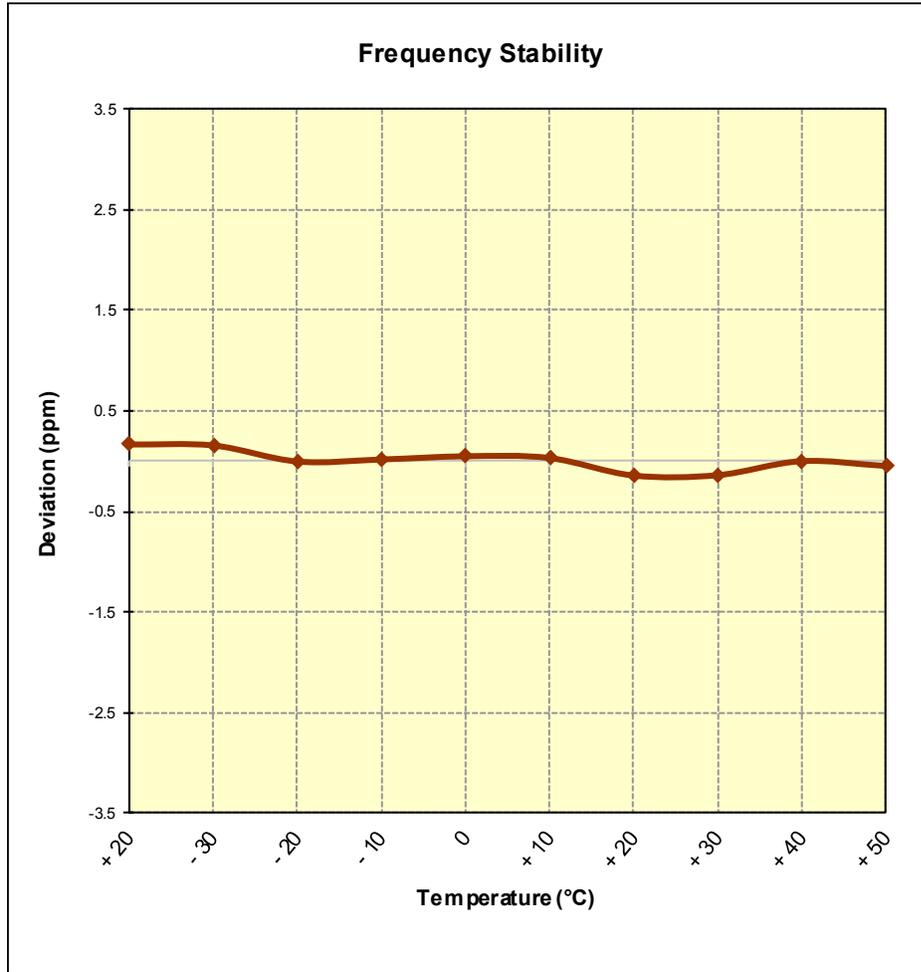


Figure 7-13. Frequency Stability Graph (PCS CDMA Mode – Ch. 600)

FCC ID: ZNFVS988	 FCC Pt. 22, 24, & 27 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION) 		Approved by: Quality Manager
Test Report S/N: 1M1701180035-02-R3.ZNF	Test Dates: 12/27/2016-2/16/2017	EUT Type: Portable Handset	Page 104 of 107

Frequency Stability / Temperature Variation

§2.1055 §24.235

OPERATING FREQUENCY:	1,880,000,000	Hz
CHANNEL:	9400	
REFERENCE VOLTAGE:	3.80	VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.80	+ 20 (Ref)	1,879,999,745	-255	-0.0000136
100 %		- 30	1,879,999,596	-404	-0.0000215
100 %		- 20	1,880,000,203	203	0.0000108
100 %		- 10	1,879,999,999	-1	-0.0000001
100 %		0	1,880,000,084	84	0.0000045
100 %		+ 10	1,880,000,084	84	0.0000045
100 %		+ 20	1,879,999,854	-146	-0.0000078
100 %		+ 30	1,879,999,695	-305	-0.0000162
100 %		+ 40	1,879,999,834	-166	-0.0000088
100 %		+ 50	1,880,000,027	27	0.0000014
BATT. ENDPOINT	3.40	+ 20	1,880,000,171	171	0.0000091

Table 7-43. Frequency Stability Data (PCS WCDMA Mode – Ch. 9400)

Note:

Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

FCC ID: ZNFVS988	 FCC Pt. 22, 24, & 27 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M1701180035-02-R3.ZNF	Test Dates: 12/27/2016-2/16/2017	EUT Type: Portable Handset	Page 105 of 107	

Frequency Stability / Temperature Variation

§2.1055 §24.235

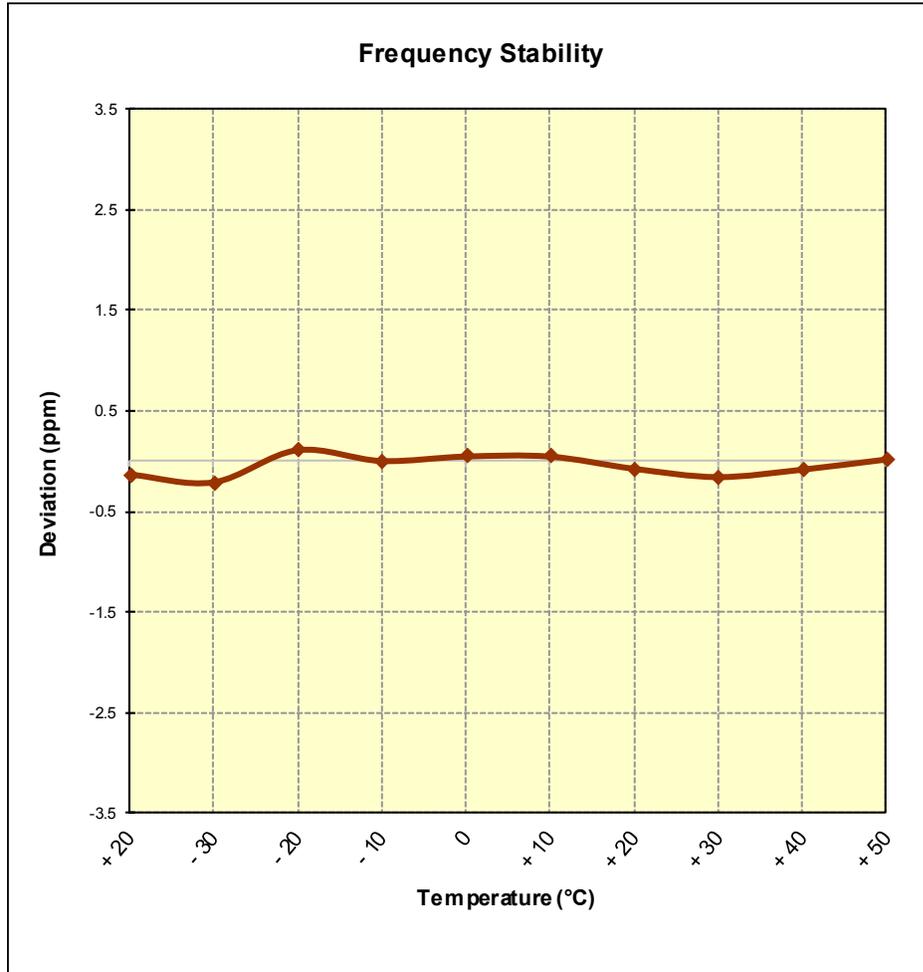


Figure 7-14. Frequency Stability Graph (PCS WCDMA Mode – Ch. 9400)

FCC ID: ZNFVS988		FCC Pt. 22, 24, & 27 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1701180035-02-R3.ZNF	Test Dates: 12/27/2016-2/16/2017	EUT Type: Portable Handset		Page 106 of 107

8.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the **LG Portable Handset FCC ID: ZNFVS988** complies with all the requirements of Parts 22, 24, & 27 of the FCC rules.

FCC ID: ZNFVS988		FCC Pt. 22, 24, & 27 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1701180035-02-R3.ZNF	Test Dates: 12/27/2016-2/16/2017	EUT Type: Portable Handset	Page 107 of 107	