



SAR EVALUATION REPORT

**FCC 47 CFR § 2.1093
IEEE Std 1528-2013**

For

CDMA/LTE PHONE + BLUETOOTH, & 2.4GHz DTS b/g/n

**FCC ID: ZNFVW820
Model Name: LG-VW820, VW820, LGVW820**

**Report Number: 15I19783-S1A
Issue Date: 2/20/2015**

Prepared for

**LG ELECTRONICS MOBILECOMM U.S.A., INC.
1000 SYLVAN AVE.
ENGLEWOOD CLIFFS, NJ 07632**

Prepared by

**UL VERIFICATION SERVICES INC.
47173 BENICIA STREET
FREMONT, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888**



NVLAP LAB CODE 200065-0

Revision History

Rev.	Date	Revisions	Revised By
--	2/17/2015	Initial Issue	--
A	2/20/2015	Section 6.1: Updated Battery Back Cover Information	Coltyce Sanders

Table of Contents

1. Attestation of Test Results 5

2. Test Specification, Methods and Procedures..... 6

3. Facilities and Accreditation 6

4. SAR Measurement System & Test Equipment 7

 4.1. SAR Measurement System..... 7

 4.2. SAR Scan Procedures..... 8

 4.3. Test Equipment..... 10

5. Measurement Uncertainty..... 10

6. Device Under Test (DUT) Information 11

 6.1. DUT Description 11

 6.2. Wireless Technologies..... 11

 6.3. Nominal and Maximum Output Power..... 12

 6.4. General LTE SAR Test and Reporting Considerations..... 13

7. RF Exposure Conditions (Test Configurations)..... 14

8. Dielectric Property Measurements & System Check 15

 8.1. Dielectric Property Measurements 15

 8.2. System Check..... 18

9. Conducted Output Power Measurements..... 20

 9.1. CDMA..... 20

 9.2. LTE..... 21

 9.3. Wi-Fi DTS (2.4 GHz) Band..... 28

 9.4. Bluetooth 28

10. Measured and Reported (Scaled) SAR Results..... 29

 10.1. CDMA BC0..... 31

 10.2. CDMA BC1..... 31

 10.3. LTE Band 2 (20MHz Bandwidth) 32

 10.4. LTE Band 4 (20MHz Bandwidth) 33

 10.5. LTE Band 5 (10MHz Bandwidth) 34

 10.6. LTE Band 13 (10MHz Bandwidth) 34

 10.7. Wi-Fi (DTS Band)..... 35

 10.8. Bluetooth..... 35

11. SAR Measurement Variability..... 36

12. Simultaneous Transmission SAR Analysis 37

 12.1. *Sum of the SAR for WWAN & Wi-Fi & BT..... 37*

Appendixes 38

 A_15119783v0 SAR Photos & Ant. Locations 38

 B_15119783v0 SAR Highest Test Plots 38

 C_15119783v0 SAR System Check Plots 38

 D_15119783v0 SAR Tissue Ingredients..... 38

 E_15119783v0 SAR Probe Cal. Certificates..... 38

 F_15119783v0 SAR Dipole Cal. Certificates 38

1. Attestation of Test Results

Applicant Name	LG ELECTRONICS MOBILECOMM U.S.A., INC.			
FCC ID	ZNFVW820			
Model Name	LG-VW820, VW820, LGVW820			
Applicable Standards	FCC 47 CFR § 2.1093 Published RF exposure KDB procedures IEEE Std 1528-2013			
SAR Limits (W/Kg)				
Exposure Category	Peak spatial-average(1g of tissue)			
General population / Uncontrolled exposure	1.6			
The Highest Reported SAR (W/kg)				
RF Exposure Conditions	Equipment Class			
	Licensed	DTS	U-NII	DSS
Head	1.147	0.444	N/A	N/A
Body-worn*	1.277	0.091		
Hotspot/Wi-Fi Direct				
Simultaneous Tx	1.439			
Date Tested	1/12/2015 to 1/20/2015			
Test Results	Pass			
<p>UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.</p> <p>Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government (NIST Handbook 150, Annex A). This report is written to support regulatory compliance of the applicable standards stated above.</p>				
Approved & Released By:			Prepared By:	
				
Devin Chang Senior Engineer UL Verification Services Inc.			Coltyce Sanders Laboratory Engineer UL Verification Services Inc.	

2. Test Specification, Methods and Procedures

The tests documented in this report were performed in accordance with FCC 47 CFR § 2.1093, IEEE STD 1528-2013, the following FCC Published RF exposure [KDB](#) procedures:

- 248227 D01 SAR meas for 802.11 v02
- 447498 D01 General RF Exposure Guidance v05r02
- 648474 D04 Handset SAR v01r02
- 648474 D03 Handset Wireless Chargers Battery Covers v01r02
- 690783 D01 SAR Listings on Grants v01r03
- 865664 D01 SAR measurement 100 MHz to 6 GHz v01r03
- 865664 D02 RF Exposure Reporting v01r01
- 941225 D01 3G SAR Procedures v03
- 941225 D05 SAR for LTE Devices v02r03
- 941225 D06 Hotspot Mode v02

3. Facilities and Accreditation

The test sites and measurement facilities used to collect data are located at


47173 Benicia Street	47266 Benicia Street
SAR Lab A	SAR Lab 1
SAR Lab B	SAR Lab 2
SAR Lab C	SAR Lab 3
SAR Lab D	SAR Lab 4
SAR Lab E	SAR Lab 5
SAR Lab F	
SAR Lab G	
SAR Lab H	

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0.

4. SAR Measurement System & Test Equipment

4.1. SAR Measurement System

The DASY5 system used for performing compliance tests consists of the following items:

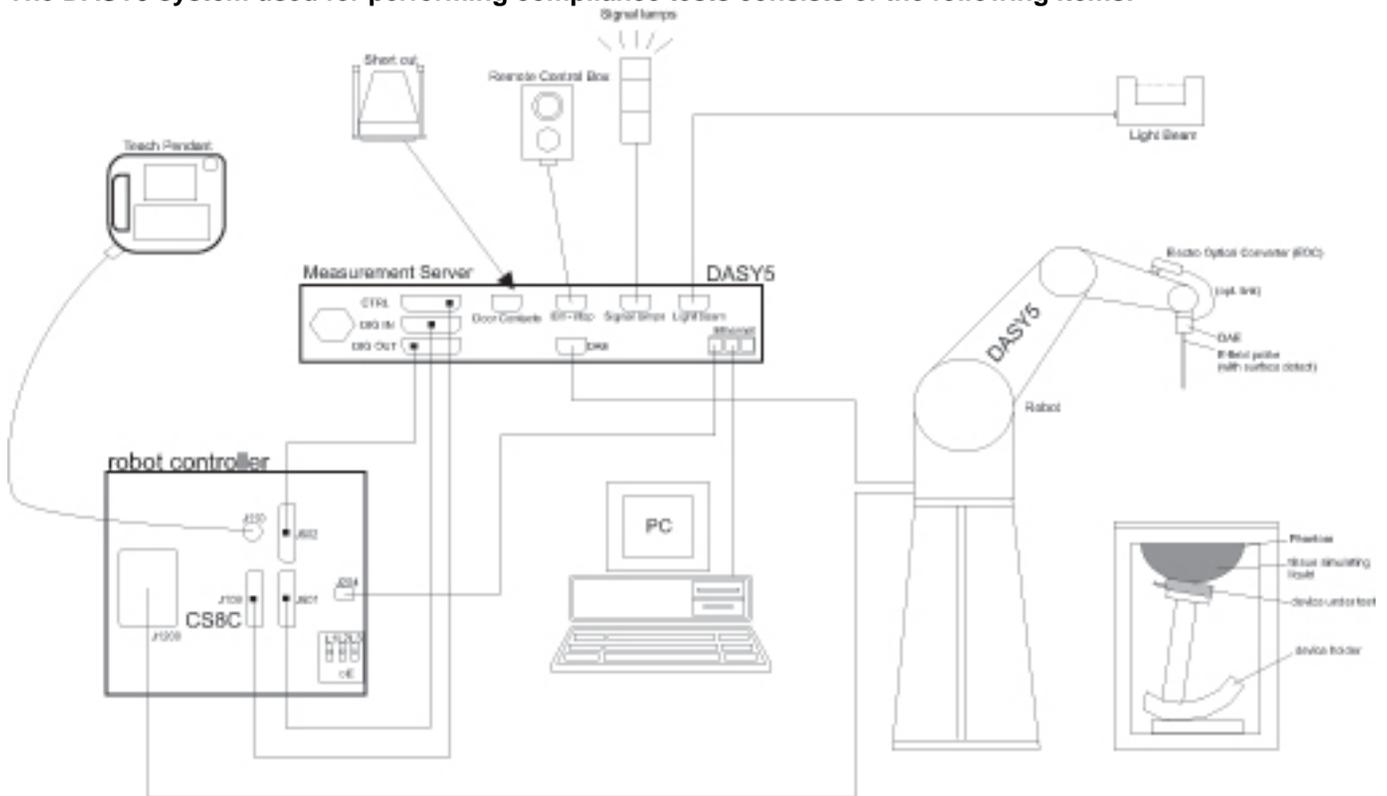

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP or Win7 and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

4.2. SAR Scan Procedures

Step 1: Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. The minimum distance of probe sensors to surface is 2.1 mm. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

Step 2: Area Scan

The Area Scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum locations even in relatively coarse grids. When an Area Scan has measured all reachable points, it computes the field maximal found in the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE Standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan). If only one Zoom Scan follows the Area Scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of Zoom Scans has to be increased accordingly.

Area Scan Parameters extracted from KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: Δx_{Area} , Δy_{Area}	≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be \leq the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

Step 3: Zoom Scan

Zoom Scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 g and 10 g of simulated tissue. The Zoom Scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the Zoom Scan evaluates the averaged SAR for 1 g and 10 g and displays these values next to the job's label.

Zoom Scan Parameters extracted from KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

		≤ 3 GHz	> 3 GHz
Maximum zoom scan spatial resolution: $\Delta x_{Zoom}, \Delta y_{Zoom}$		≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm *	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$	≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	graded grid	$\Delta z_{Zoom}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm
		$\Delta z_{Zoom}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$
Minimum zoom scan volume	x, y, z	≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details. * When zoom scan is required and the <i>reported</i> SAR from the area scan based <i>1-g SAR estimation</i> procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.			

Step 4: Power drift measurement

The Power Drift Measurement measures the field at the same location as the most recent power reference measurement within the same procedure, and with the same settings. The Power Drift Measurement gives the field difference in dB from the reading conducted within the last Power Reference Measurement. This allows a user to monitor the power drift of the device under test within a batch process. The measurement procedure is the same as Step 1.

Step 5: Z-Scan (FCC only)

The Z Scan measures points along a vertical straight line. The line runs along the Z-axis of a one-dimensional grid. In order to get a reasonable extrapolation the extrapolated distance should not be larger than the step size in Z-direction.

4.3. Test Equipment

The measuring equipment used to perform the tests documented in this report has been calibrated in accordance with the manufacturers' recommendations, and is traceable to recognized national standards.

Dielectric Property Measurements

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
Network Analyzer	Agilent	E753ES	MY40000980	4/7/2015
Dielectronic Probe kit	SPEAG	DAK-3.5	1082	9/16/2015
Dielectronic Probe kit	SPEAG	DAK-3.5 Short	SM DAK 200 BA	N/A
Thermometer	Control Company	Traceable	122529163	10/8/2015

System Check

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
HP Signal Generator	HP	8665B	3546A00784	6/23/2015
Power Meter	HP	437B	3125U09516	10/6/2015
Power Meter	Agilent	N1911A	MY53060016	8/7/2015
Power Sensor	Agilent	E9323A	MY53070003	5/1/2015
Power Sensor	Agilent	8481A	3318A95392	10/6/2015
Amplifier	MITEQ	AMF-4D-00400600-50-30P	1622052	N/A
Bi-directional coupler	Werlatone, Inc.	C8060-102	2711	N/A
DC Power Supply	Sorensen Ametek	XT20-3	1318A00530	N/A
Synthesized Signal Generator	Agilent	8665B	3438A00633	7/10/2015
Power Meter	HP	437B	3125U11347	8/27/2015
Power Meter	HP	437B	3125U16345	6/16/2015
Power Sensor	HP	8481A	2702A60780	6/16/2015
Power Sensor	HP	8481A	1926A16917	10/10/2015
Amplifier	MITEQ	AMF-4D-00400600-50-30P	1808938	N/A
Bi-directional coupler	Werlatone, Inc.	C8060-102	2710	N/A
DC Power Supply	HP	6296A	2841A-05955	N/A
E-Field Probe (SAR 1)	SPEAG	EX3DV4	3902	5/19/2015
E-Field Probe (SAR 3)	SPEAG	EX3DV4	3773	4/22/2015
E-Field Probe (SAR 4)	SPEAG	EX3DV4	3929	5/9/2015
Data Acquisition Electronics (SAR 1)	SPEAG	DAE4	1352	11/7/2015
Data Acquisition Electronics (SAR 3)	SPEAG	DAE4	1380	7/23/2015
Data Acquisition Electronics (SAR 4)	SPEAG	DAE4	1377	8/27/2015
System Validation Dipole	SPEAG	D750V3	1019	3/17/2015
System Validation Dipole	SPEAG	D835V2	4d142	9/9/2015
System Validation Dipole	SPEAG	D1750V2	1050	4/22/2015
System Validation Dipole	SPEAG	D1900V2	5d163	9/11/2015
System Validation Dipole	SPEAG	D2450V2	748	2/18/2015
Thermometer (SAR Lab 1)	EXTECH	445703	CCS-205	3/24/2015
Thermometer (SAR Lab 3)	EXTECH	445703	CCS-237	6/3/2015
Thermometer (SAR Lab 4)	EXTECH	445703	CCS-238	6/3/2015

Others

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
Power Meter	Agilent	N1912A	MY53040015	7/10/2015
Power Sensor	Agilent	N1921A	MY52020011	5/6/2015
Base Station Simulator	R & S	CMW500	135385	7/10/2015

5. Measurement Uncertainty

Per KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg, the extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval.

6. Device Under Test (DUT) Information

6.1. DUT Description

Device Dimension	Overall (Length x Width): 129.8 mm x 64.6 mm Overall Diagonal: 138 mm Display Diagonal: 115 mm
Battery Back Cover	<input checked="" type="checkbox"/> Normal Battery Cover <input type="checkbox"/> Normal Battery Cover with NFC <input type="checkbox"/> Wireless Charger Battery Cover <input type="checkbox"/> Wireless Charger Battery Cover with NFC <input type="checkbox"/> The rechargeable battery is not user accessible.
Battery Options	<input checked="" type="checkbox"/> Standard – Lithium-ion battery, Rating 3.8Vdc, 8.0Wh <input type="checkbox"/> Extended (large capacity) <input type="checkbox"/> The rechargeable battery is not user accessible.
Accessory	Headset
Wireless Router (Hotspot)	Wi-Fi Hotspot mode permits the device to share its cellular data connection with other Wi-Fi-enabled devices. <input checked="" type="checkbox"/> Mobile Hotspot (Wi-Fi 2.4 GHz) <input type="checkbox"/> Mobile Hotspot (Wi-Fi 5 GHz)
Wi-Fi Direct	Wi-Fi Direct enabled devices transfer data directly between each other <input checked="" type="checkbox"/> Wi-Fi Direct (Wi-Fi 2.4 GHz) <input type="checkbox"/> Wi-Fi Direct (Wi-Fi 5 GHz)

6.2. Wireless Technologies

Wireless technologies	Frequency bands	Operating mode	Duty Cycle used for SAR testing
CDMA2000	BC0 BC1	1xRTT (Voice & Data) 1xEV-DO Rel. 0 1xEV-DO Rev. A	100%
	Does this device SV-DO (1xRTT-1xEVDO)? <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No		
LTE (FDD)	Band 2 Band 4 Band 5 Band 13	QPSK 16QAM	100%
	Does this device SV-LTE (1xRTT-LTE)? <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No		
Wi-Fi	2.4 GHz	802.11b 802.11g 802.11n (HT20)	100%
Bluetooth	2.4 GHz	Version 4.0 LE	77.5% (DH5)

6.3. Nominal and Maximum Output Power

KDB 447498 sec.4.1.(3) at the maximum rated output power and within the tune-up tolerance range specified for the product, but not more than 2 dB lower than the maximum tune-up tolerance limit

Upper limit (dB): -1.5 ~ 0.5		RF Output Power (dBm)	
RF Air interface	Mode	Target	Max. tune-up tolerance limit
CDMA BC0	1xRTT	23.7	24.2
	1xEVDO Rel. 0	23.7	24.2
	1xEVDO Rev. A	23.7	24.2
CDMA BC1	1xRTT	23.7	24.2
	1xEVDO Rel. 0	23.7	24.2
	1xEVDO Rev. A	23.7	24.2
LTE Band 2	QPSK	22.2	22.7
LTE Band 4	QPSK	23.2	23.7
LTE Band 5	QPSK	23.2	23.7
LTE Band 13	QPSK	23.2	23.7

Upper limit (dB): 1.0		RF Output Power (dBm)	
RF Air interface	Mode	Target	Max. tune-up tolerance limit
WiFi 2.4 GHz	802.11b	13.5	14.5
	802.11g	9.0	10.0
	802.11n HT20	8.0	9.0
Bluetooth		6.5	7.5
Bluetooth LE		-2.5	-1.5

6.4. General LTE SAR Test and Reporting Considerations

Item	Description																																																																																																																																																																																																														
Frequency range, Channel Bandwidth, Numbers and Frequencies	<table border="1"> <tr> <td rowspan="3">Band 2</td> <td colspan="6">Frequency range: 1850 - 1910 MHz</td> </tr> <tr> <td colspan="6">Channel Bandwidth</td> </tr> <tr> <td>20 MHz</td> <td>15 MHz</td> <td>10 MHz</td> <td>5 MHz</td> <td>3 MHz</td> <td>1.4 MHz</td> </tr> <tr> <td>Low</td> <td>18700/1860</td> <td>18675/1857.5</td> <td>18650/1855</td> <td>18625/1852.5</td> <td>18615/1851.5</td> <td>18607/1850.7</td> </tr> <tr> <td>Mid</td> <td>18900/1880</td> <td>18900/1880</td> <td>18900/1880</td> <td>18900/1880</td> <td>18900/1880</td> <td>18900/1880</td> </tr> <tr> <td>High</td> <td>19100/1900</td> <td>19125/1902.5</td> <td>19150/1905</td> <td>19175/1907.5</td> <td>19185/1908.5</td> <td>19193/1909.3</td> </tr> <tr> <td rowspan="3">Band 4</td> <td colspan="6">Frequency range: 1710 - 1755 MHz</td> </tr> <tr> <td colspan="6">Channel Bandwidth</td> </tr> <tr> <td>20 MHz</td> <td>15 MHz</td> <td>10 MHz</td> <td>5 MHz</td> <td>3 MHz</td> <td>1.4 MHz</td> </tr> <tr> <td>Low</td> <td>20050/1720</td> <td>20025/1717.5</td> <td>20000/1715</td> <td>19975/1712.5</td> <td>19965/1711.5</td> <td>19957/1710.7</td> </tr> <tr> <td>Mid</td> <td>20175/1732.5</td> <td>20175/1732.5</td> <td>20175/1732.5</td> <td>20175/1732.5</td> <td>20175/1732.5</td> <td>20175/1732.5</td> </tr> <tr> <td>High</td> <td>20300/1745</td> <td>20325/1747.5</td> <td>20350/1750</td> <td>20375/1752.5</td> <td>20385/1753.5</td> <td>20393/1754.3</td> </tr> <tr> <td rowspan="3">Band 5</td> <td colspan="6">Frequency range: 824 - 849 MHz</td> </tr> <tr> <td colspan="6">Channel Bandwidth</td> </tr> <tr> <td>20 MHz</td> <td>15 MHz</td> <td>10 MHz</td> <td>5 MHz</td> <td>3 MHz</td> <td>1.4 MHz</td> </tr> <tr> <td>Low</td> <td></td> <td></td> <td>20450/829</td> <td>20425/826.5</td> <td>20415/825.5</td> <td>20407/824.7</td> </tr> <tr> <td>Mid</td> <td></td> <td></td> <td>20525/836.5</td> <td>20525/836.5</td> <td>20525/836.5</td> <td>20525/836.5</td> </tr> <tr> <td>High</td> <td></td> <td></td> <td>20600/844</td> <td>20625/846.5</td> <td>20635/847.5</td> <td>20643/848.3</td> </tr> <tr> <td rowspan="3">Band 13</td> <td colspan="6">Frequency range: 777 - 787 MHz</td> </tr> <tr> <td colspan="6">Channel Bandwidth</td> </tr> <tr> <td>20 MHz</td> <td>15 MHz</td> <td>10 MHz</td> <td>5 MHz</td> <td>3 MHz</td> <td>1.4 MHz</td> </tr> <tr> <td>Low</td> <td></td> <td></td> <td></td> <td>23205/779.5</td> <td></td> <td></td> </tr> <tr> <td>Mid</td> <td></td> <td></td> <td>23230/782</td> <td>23230/782</td> <td></td> <td></td> </tr> <tr> <td>High</td> <td></td> <td></td> <td></td> <td>23255/784.5</td> <td></td> <td></td> </tr> <tr> <td>LTE transmitter and antenna implementation</td> <td>LTE has one (1) Tx/Rx antenna for LTE Bands 5/13, one (1) Tx/Rx antenna for LTE Bands 2/4, one (1) Rx antenna for LTE Bands 2/4 and one (1) Rx antenna for LTE Bands 5/13. Refer to Appendix A.</td> </tr> <tr> <td>Maximum power reduction (MPR)</td> <td> <p>Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3</p> <table border="1"> <thead> <tr> <th rowspan="2">Modulation</th> <th colspan="6">Channel bandwidth / Transmission bandwidth (RB)</th> <th rowspan="2">MPR (dB)</th> </tr> <tr> <th>1.4 MHz</th> <th>3.0 MHz</th> <th>5 MHz</th> <th>10 MHz</th> <th>15 MHz</th> <th>20 MHz</th> </tr> </thead> <tbody> <tr> <td>QPSK</td> <td>> 5</td> <td>> 4</td> <td>> 8</td> <td>> 12</td> <td>> 16</td> <td>> 18</td> <td>≤ 1</td> </tr> <tr> <td>16 QAM</td> <td>≤ 5</td> <td>≤ 4</td> <td>≤ 8</td> <td>≤ 12</td> <td>≤ 16</td> <td>≤ 18</td> <td>≤ 1</td> </tr> <tr> <td>16 QAM</td> <td>> 5</td> <td>> 4</td> <td>> 8</td> <td>> 12</td> <td>> 16</td> <td>> 18</td> <td>≤ 2</td> </tr> </tbody> </table> <p>MPR Built-in by design A-MPR (additional MPR) was disabled during SAR testing</p> </td> </tr> <tr> <td>Power reduction</td> <td>No</td> </tr> <tr> <td>Spectrum plots for RB configurations</td> <td>A properly configured base station simulator was used for the SAR and power measurements; therefore, spectrum plots for each RB allocation and offset configuration are not included in the SAR report.</td> </tr> </table>	Band 2	Frequency range: 1850 - 1910 MHz						Channel Bandwidth						20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz	Low	18700/1860	18675/1857.5	18650/1855	18625/1852.5	18615/1851.5	18607/1850.7	Mid	18900/1880	18900/1880	18900/1880	18900/1880	18900/1880	18900/1880	High	19100/1900	19125/1902.5	19150/1905	19175/1907.5	19185/1908.5	19193/1909.3	Band 4	Frequency range: 1710 - 1755 MHz						Channel Bandwidth						20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz	Low	20050/1720	20025/1717.5	20000/1715	19975/1712.5	19965/1711.5	19957/1710.7	Mid	20175/1732.5	20175/1732.5	20175/1732.5	20175/1732.5	20175/1732.5	20175/1732.5	High	20300/1745	20325/1747.5	20350/1750	20375/1752.5	20385/1753.5	20393/1754.3	Band 5	Frequency range: 824 - 849 MHz						Channel Bandwidth						20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz	Low			20450/829	20425/826.5	20415/825.5	20407/824.7	Mid			20525/836.5	20525/836.5	20525/836.5	20525/836.5	High			20600/844	20625/846.5	20635/847.5	20643/848.3	Band 13	Frequency range: 777 - 787 MHz						Channel Bandwidth						20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz	Low				23205/779.5			Mid			23230/782	23230/782			High				23255/784.5			LTE transmitter and antenna implementation	LTE has one (1) Tx/Rx antenna for LTE Bands 5/13, one (1) Tx/Rx antenna for LTE Bands 2/4, one (1) Rx antenna for LTE Bands 2/4 and one (1) Rx antenna for LTE Bands 5/13. Refer to Appendix A.	Maximum power reduction (MPR)	<p>Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3</p> <table border="1"> <thead> <tr> <th rowspan="2">Modulation</th> <th colspan="6">Channel bandwidth / Transmission bandwidth (RB)</th> <th rowspan="2">MPR (dB)</th> </tr> <tr> <th>1.4 MHz</th> <th>3.0 MHz</th> <th>5 MHz</th> <th>10 MHz</th> <th>15 MHz</th> <th>20 MHz</th> </tr> </thead> <tbody> <tr> <td>QPSK</td> <td>> 5</td> <td>> 4</td> <td>> 8</td> <td>> 12</td> <td>> 16</td> <td>> 18</td> <td>≤ 1</td> </tr> <tr> <td>16 QAM</td> <td>≤ 5</td> <td>≤ 4</td> <td>≤ 8</td> <td>≤ 12</td> <td>≤ 16</td> <td>≤ 18</td> <td>≤ 1</td> </tr> <tr> <td>16 QAM</td> <td>> 5</td> <td>> 4</td> <td>> 8</td> <td>> 12</td> <td>> 16</td> <td>> 18</td> <td>≤ 2</td> </tr> </tbody> </table> <p>MPR Built-in by design A-MPR (additional MPR) was disabled during SAR testing</p>	Modulation	Channel bandwidth / Transmission bandwidth (RB)						MPR (dB)	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1	16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1	16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2	Power reduction	No	Spectrum plots for RB configurations	A properly configured base station simulator was used for the SAR and power measurements; therefore, spectrum plots for each RB allocation and offset configuration are not included in the SAR report.
	Band 2		Frequency range: 1850 - 1910 MHz																																																																																																																																																																																																												
			Channel Bandwidth																																																																																																																																																																																																												
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz																																																																																																																																																																																																								
	Low	18700/1860	18675/1857.5	18650/1855	18625/1852.5	18615/1851.5	18607/1850.7																																																																																																																																																																																																								
	Mid	18900/1880	18900/1880	18900/1880	18900/1880	18900/1880	18900/1880																																																																																																																																																																																																								
	High	19100/1900	19125/1902.5	19150/1905	19175/1907.5	19185/1908.5	19193/1909.3																																																																																																																																																																																																								
	Band 4	Frequency range: 1710 - 1755 MHz																																																																																																																																																																																																													
		Channel Bandwidth																																																																																																																																																																																																													
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz																																																																																																																																																																																																								
	Low	20050/1720	20025/1717.5	20000/1715	19975/1712.5	19965/1711.5	19957/1710.7																																																																																																																																																																																																								
	Mid	20175/1732.5	20175/1732.5	20175/1732.5	20175/1732.5	20175/1732.5	20175/1732.5																																																																																																																																																																																																								
	High	20300/1745	20325/1747.5	20350/1750	20375/1752.5	20385/1753.5	20393/1754.3																																																																																																																																																																																																								
	Band 5	Frequency range: 824 - 849 MHz																																																																																																																																																																																																													
		Channel Bandwidth																																																																																																																																																																																																													
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz																																																																																																																																																																																																								
	Low			20450/829	20425/826.5	20415/825.5	20407/824.7																																																																																																																																																																																																								
	Mid			20525/836.5	20525/836.5	20525/836.5	20525/836.5																																																																																																																																																																																																								
	High			20600/844	20625/846.5	20635/847.5	20643/848.3																																																																																																																																																																																																								
	Band 13	Frequency range: 777 - 787 MHz																																																																																																																																																																																																													
		Channel Bandwidth																																																																																																																																																																																																													
20 MHz		15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz																																																																																																																																																																																																									
Low				23205/779.5																																																																																																																																																																																																											
Mid			23230/782	23230/782																																																																																																																																																																																																											
High				23255/784.5																																																																																																																																																																																																											
LTE transmitter and antenna implementation	LTE has one (1) Tx/Rx antenna for LTE Bands 5/13, one (1) Tx/Rx antenna for LTE Bands 2/4, one (1) Rx antenna for LTE Bands 2/4 and one (1) Rx antenna for LTE Bands 5/13. Refer to Appendix A.																																																																																																																																																																																																														
Maximum power reduction (MPR)	<p>Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3</p> <table border="1"> <thead> <tr> <th rowspan="2">Modulation</th> <th colspan="6">Channel bandwidth / Transmission bandwidth (RB)</th> <th rowspan="2">MPR (dB)</th> </tr> <tr> <th>1.4 MHz</th> <th>3.0 MHz</th> <th>5 MHz</th> <th>10 MHz</th> <th>15 MHz</th> <th>20 MHz</th> </tr> </thead> <tbody> <tr> <td>QPSK</td> <td>> 5</td> <td>> 4</td> <td>> 8</td> <td>> 12</td> <td>> 16</td> <td>> 18</td> <td>≤ 1</td> </tr> <tr> <td>16 QAM</td> <td>≤ 5</td> <td>≤ 4</td> <td>≤ 8</td> <td>≤ 12</td> <td>≤ 16</td> <td>≤ 18</td> <td>≤ 1</td> </tr> <tr> <td>16 QAM</td> <td>> 5</td> <td>> 4</td> <td>> 8</td> <td>> 12</td> <td>> 16</td> <td>> 18</td> <td>≤ 2</td> </tr> </tbody> </table> <p>MPR Built-in by design A-MPR (additional MPR) was disabled during SAR testing</p>	Modulation	Channel bandwidth / Transmission bandwidth (RB)						MPR (dB)	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1	16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1	16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2																																																																																																																																																																								
Modulation	Channel bandwidth / Transmission bandwidth (RB)						MPR (dB)																																																																																																																																																																																																								
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz																																																																																																																																																																																																									
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1																																																																																																																																																																																																								
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1																																																																																																																																																																																																								
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2																																																																																																																																																																																																								
Power reduction	No																																																																																																																																																																																																														
Spectrum plots for RB configurations	A properly configured base station simulator was used for the SAR and power measurements; therefore, spectrum plots for each RB allocation and offset configuration are not included in the SAR report.																																																																																																																																																																																																														

7. RF Exposure Conditions (Test Configurations)

Refer to “SAR Photos and Ant locations” Appendix for the specific details of the antenna-to-antenna and antenna-to-edge(s) distances.

Wireless technologies	RF Exposure Conditions	DUT-to-User Separation	Test Position	Antenna-to-edge/surface	SAR Required	Note
WWAN (Antenna 1)	Head	0 mm	Left Touch	N/A	Yes	
			Left Tilt (15°)	N/A	Yes	
			Right Touch	N/A	Yes	
			Right Tilt (15°)	N/A	Yes	
	Body	10 mm	Rear	N/A	Yes	
			Front	N/A	Yes	
	Hotspot	10 mm	Rear	< 25 mm	Yes	
			Front	< 25 mm	Yes	
			Edge 1 (Top)	> 25 mm	No	1
			Edge 2 (Right)	< 25 mm	Yes	
			Edge 3 (Bottom)	< 25 mm	Yes	
			Edge 4 (Left)	> 25 mm	No	1
WWAN (Antenna 2)	Head	0 mm	Left Touch	N/A	Yes	
			Left Tilt (15°)	N/A	Yes	
			Right Touch	N/A	Yes	
			Right Tilt (15°)	N/A	Yes	
	Body	10 mm	Rear	N/A	Yes	
			Front	N/A	Yes	
	Hotspot	10 mm	Rear	< 25 mm	Yes	
			Front	< 25 mm	Yes	
			Edge 1 (Top)	> 25 mm	No	1
			Edge 2 (Right)	> 25 mm	No	1
			Edge 3 (Bottom)	< 25 mm	Yes	
			Edge 4 (Left)	< 25 mm	Yes	
WLAN (Antenna 4)	Head	0 mm	Left Touch	N/A	Yes	
			Left Tilt (15°)	N/A	Yes	
			Right Touch	N/A	Yes	
			Right Tilt (15°)	N/A	Yes	
	Body	10 mm	Rear	N/A	Yes	
			Front	N/A	Yes	
	Hotspot / Wi-Fi Direct	10 mm	Rear	< 25 mm	Yes	
			Front	< 25 mm	Yes	
			Edge 1 (Top)	< 25 mm	Yes	
			Edge 2 (Right)	< 25 mm	Yes	
			Edge 3 (Bottom)	> 25 mm	No	1
			Edge 4 (Left)	> 25 mm	No	1

Notes:

- SAR is not required because the distance from the antenna to the edge is > 25 mm as per KDB 941225 D06 Hot Spot SAR.

8. Dielectric Property Measurements & System Check

8.1. Dielectric Property Measurements

The temperature of the tissue-equivalent medium used during measurement must also be within 18°C to 25°C and within $\pm 2^\circ\text{C}$ of the temperature when the tissue parameters are characterized.

The dielectric parameters must be measured before the tissue-equivalent medium is used in a series of SAR measurements. The parameters should be re-measured after each 3 – 4 days of use; or earlier if the dielectric parameters can become out of tolerance; for example, when the parameters are marginal at the beginning of the measurement series.

Tissue dielectric parameters were measured at the low, middle and high frequency of each operating frequency range of the test device.

Tissue Dielectric Parameters

FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

Target Frequency (MHz)	Head		Body	
	ϵ_r	σ (S/m)	ϵ_r	σ (S/m)
150	52.3	0.76	61.9	0.80
300	45.3	0.87	58.2	0.92
450	43.5	0.87	56.7	0.94
835	41.5	0.90	55.2	0.97
900	41.5	0.97	55.0	1.05
915	41.5	0.98	55.0	1.06
1450	40.5	1.20	54.0	1.30
1610	40.3	1.29	53.8	1.40
1800 – 2000	40.0	1.40	53.3	1.52
2450	39.2	1.80	52.7	1.95
3000	38.5	2.40	52.0	2.73
5000	36.2	4.45	49.3	5.07
5100	36.1	4.55	49.1	5.18
5200	36.0	4.66	49.0	5.30
5300	35.9	4.76	48.9	5.42
5400	35.8	4.86	48.7	5.53
5500	35.6	4.96	48.6	5.65
5600	35.5	5.07	48.5	5.77
5700	35.4	5.17	48.3	5.88
5800	35.3	5.27	48.2	6.00

IEEE Standard 1528-2013

Refer to Table 3 within the IEEE Standard 1528-2013

Dielectric Property Measurements Results:

SAR Lab 1

Date	Freq. (MHz)	Liquid Parameters		Measured	Target	Delta (%)	Limit ±(%)	
1/12/2015	Body 750	e'	54.7300	Relative Permittivity (ϵ_r):	54.73	55.55	-1.47	5
		e"	23.0700	Conductivity (σ):	0.96	0.96	-0.10	5
	Body 700	e'	55.1800	Relative Permittivity (ϵ_r):	55.18	55.74	-1.00	5
		e"	23.6700	Conductivity (σ):	0.92	0.96	-3.96	5
	Body 790	e'	54.3100	Relative Permittivity (ϵ_r):	54.31	55.39	-1.95	5
		e"	22.8500	Conductivity (σ):	1.00	0.97	3.89	5
1/13/2015	Head 750	e'	40.4800	Relative Permittivity (ϵ_r):	40.48	41.96	-3.53	5
		e"	21.8300	Conductivity (σ):	0.91	0.89	1.94	5
	Head 700	e'	41.2700	Relative Permittivity (ϵ_r):	41.27	42.22	-2.25	5
		e"	21.8300	Conductivity (σ):	0.85	0.89	-4.45	5
	Head 790	e'	39.8100	Relative Permittivity (ϵ_r):	39.81	41.76	-4.66	5
		e"	21.2400	Conductivity (σ):	0.93	0.90	4.11	5
1/12/2015	Head 2450	e'	37.5800	Relative Permittivity (ϵ_r):	37.58	39.20	-4.13	5
		e"	13.5300	Conductivity (σ):	1.84	1.80	2.40	5
	Head 2410	e'	37.7200	Relative Permittivity (ϵ_r):	37.72	39.28	-3.97	5
		e"	13.3900	Conductivity (σ):	1.79	1.76	1.92	5
	Head 2475	e'	37.4800	Relative Permittivity (ϵ_r):	37.48	39.17	-4.31	5
		e"	13.5900	Conductivity (σ):	1.87	1.83	2.36	5
1/12/2015	Body 2450	e'	51.3800	Relative Permittivity (ϵ_r):	51.38	52.70	-2.50	5
		e"	14.8200	Conductivity (σ):	2.02	1.95	3.53	5
	Body 2410	e'	51.5100	Relative Permittivity (ϵ_r):	51.51	52.76	-2.37	5
		e"	14.6900	Conductivity (σ):	1.97	1.91	3.20	5
	Body 2475	e'	51.2600	Relative Permittivity (ϵ_r):	51.26	52.67	-2.67	5
		e"	14.9500	Conductivity (σ):	2.06	1.99	3.64	5
1/20/2015	Head 2450	e'	38.3100	Relative Permittivity (ϵ_r):	38.31	39.20	-2.27	5
		e"	13.8100	Conductivity (σ):	1.88	1.80	4.52	5
	Head 2410	e'	38.5200	Relative Permittivity (ϵ_r):	38.52	39.28	-1.93	5
		e"	13.7200	Conductivity (σ):	1.84	1.76	4.44	5
	Head 2475	e'	38.2200	Relative Permittivity (ϵ_r):	38.22	39.17	-2.42	5
		e"	13.9000	Conductivity (σ):	1.91	1.83	4.70	5

SAR Lab 3

Date	Freq. (MHz)	Liquid Parameters		Measured	Target	Delta (%)	Limit ±(%)	
1/12/2015	Head 835	e'	43.1400	Relative Permittivity (ϵ_r):	43.14	41.50	3.95	5
		e"	19.5000	Conductivity (σ):	0.91	0.90	0.60	5
	Head 820	e'	43.3200	Relative Permittivity (ϵ_r):	43.32	41.60	4.13	5
		e"	20.0300	Conductivity (σ):	0.91	0.90	1.65	5
	Head 850	e'	42.9000	Relative Permittivity (ϵ_r):	42.90	41.50	3.37	5
		e"	19.8400	Conductivity (σ):	0.94	0.92	2.48	5
1/12/2015	Body 835	e'	53.6700	Relative Permittivity (ϵ_r):	53.67	55.20	-2.77	5
		e"	21.5300	Conductivity (σ):	1.00	0.97	3.05	5
	Body 820	e'	53.9700	Relative Permittivity (ϵ_r):	53.97	55.28	-2.36	5
		e"	21.5800	Conductivity (σ):	0.98	0.97	1.60	5
	Body 850	e'	53.5500	Relative Permittivity (ϵ_r):	53.55	55.16	-2.91	5
		e"	21.4100	Conductivity (σ):	1.01	0.99	2.51	5

SAR Lab 4

Date	Freq. (MHz)	Liquid Parameters		Measured	Target	Delta (%)	Limit ±(%)	
1/12/2015	Body 1750	e'	51.2200	Relative Permittivity (ϵ_r):	51.22	53.44	-4.16	5
		e"	15.0800	Conductivity (σ):	1.47	1.49	-1.26	5
	Body 1710	e'	51.3800	Relative Permittivity (ϵ_r):	51.38	53.54	-4.04	5
		e"	14.9100	Conductivity (σ):	1.42	1.46	-3.00	5
	Body 1755	e'	51.2400	Relative Permittivity (ϵ_r):	51.24	53.43	-4.10	5
		e"	15.1400	Conductivity (σ):	1.48	1.49	-0.79	5
1/15/2015	Head 1750	e'	39.2200	Relative Permittivity (ϵ_r):	39.22	40.08	-2.16	5
		e"	13.7500	Conductivity (σ):	1.34	1.37	-2.27	5
	Head 1710	e'	39.3600	Relative Permittivity (ϵ_r):	39.36	40.15	-1.96	5
		e"	13.6100	Conductivity (σ):	1.29	1.35	-3.89	5
	Head 1755	e'	39.1900	Relative Permittivity (ϵ_r):	39.19	40.08	-2.21	5
		e"	13.7600	Conductivity (σ):	1.34	1.37	-2.12	5
1/12/2014	Head 1900	e'	39.1000	Relative Permittivity (ϵ_r):	39.10	40.00	-2.25	5
		e"	13.2800	Conductivity (σ):	1.40	1.40	0.21	5
	Head 1850	e'	39.3100	Relative Permittivity (ϵ_r):	39.31	40.00	-1.72	5
		e"	13.1700	Conductivity (σ):	1.35	1.40	-3.23	5
	Head 1910	e'	39.0400	Relative Permittivity (ϵ_r):	39.04	40.00	-2.40	5
		e"	13.3200	Conductivity (σ):	1.41	1.40	1.04	5
1/12/2015	Body 1900	e'	50.9000	Relative Permittivity (ϵ_r):	50.90	53.30	-4.50	5
		e"	14.4100	Conductivity (σ):	1.52	1.52	0.16	5
	Body 1850	e'	51.0300	Relative Permittivity (ϵ_r):	51.03	53.30	-4.26	5
		e"	14.2800	Conductivity (σ):	1.47	1.52	-3.36	5
	Body 1910	e'	50.7400	Relative Permittivity (ϵ_r):	50.74	53.30	-4.80	5
		e"	14.5400	Conductivity (σ):	1.54	1.52	1.59	5

8.2. System Check

SAR system verification is required to confirm measurement accuracy, according to the tissue dielectric media, probe calibration points and other system operating parameters required for measuring the SAR of a test device. The system verification must be performed for each frequency band and within the valid range of each probe calibration point required for testing the device. The same SAR probe(s) and tissue-equivalent media combinations used with each specific SAR system for system verification must be used for device testing. When multiple probe calibration points are required to cover substantially large transmission bands, independent system verifications are required for each probe calibration point. A system verification must be performed before each series of SAR measurements using the same probe calibration point and tissue-equivalent medium. Additional system verification should be considered according to the conditions of the tissue-equivalent medium and measured tissue dielectric parameters, typically every three to four days when the liquid parameters are re-measured or sooner when marginal liquid parameters are used at the beginning of a series of measurements.

System Performance Check Measurement Conditions:

- The measurements were performed in the flat section of the TWIN SAM or ELI phantom, shell thickness: 2.0 ±0.2 mm (bottom plate) filled with Body or Head simulating liquid of the following parameters.
- The depth of tissue-equivalent liquid in a phantom must be ≥ 15.0 cm for SAR measurements ≤ 3 GHz and ≥ 10.0 cm for measurements > 3 GHz.
- The DASY system with an E-Field Probe was used for the measurements.
- The dipole was mounted on the small tripod so that the dipole feed point was positioned below the center marking of the flat phantom section and the dipole was oriented parallel to the body axis (the long side of the phantom). The standard measuring distance was 10 mm (above 1 GHz) and 15 mm (below 1 GHz) from dipole center to the simulating liquid surface.
- The coarse grid with a grid spacing of 15 mm was aligned with the dipole.
For 5 GHz band - The coarse grid with a grid spacing of 10 mm was aligned with the dipole.
- Special 7x7x7 (below 3 GHz) and/or 8x8x7 (above 3 GHz) fine cube was chosen for the cube.
- Distance between probe sensors and phantom surface was set to 3 mm.
For 5 GHz band - Distance between probe sensors and phantom surface was set to 2.5 mm
- The dipole input power (forward power) was 100 mW.
- The results are normalized to 1 W input power.

Reference Target SAR Values

The reference SAR values can be obtained from the calibration certificate of system validation dipoles

System Dipole	Serial No.	Cal. Date	Freq. (MHz)	Target SAR Values (W/kg)		
				1g/10g	Head	Body
D750V3	1019	3/17/2014	750	1g	8.21	8.64
				10g	5.38	5.69
D835V2	4d142	9/9/2014	835	1g	8.91	9.22
				10g	5.77	6.05
D1750V2	1050	4/22/2014	1750	1g	36.6	37.2
				10g	19.4	20.0
D1900V2	5d163	9/11/2014	1900	1g	40.8	40.6
				10g	21.2	21.4
D2450V2	748	2/18/2014	2450	1g	51.6	50.7
				10g	24.0	23.7

System Check Results

The 1-g and 10-g SAR measured with a reference dipole, using the required tissue-equivalent medium at the test frequency, must be within 10% of the manufacturer calibrated dipole SAR target.

SAR Lab 1

Date Tested	System Dipole		T.S. Liquid	Measured Results		Target (Ref. Value)	Delta ±10 %	Plot No.	
	Type	Serial #		Zoom Scan to 100 mW	Normalize to 1 W				
1/12/2015	D750V3	1019	Body	1g	0.86	8.6	8.64	-0.35	
				10g	0.57	5.7	5.69	0.70	
1/13/2015	D750V3	1019	Head	1g	0.79	7.9	8.21	-3.29	1,2
				10g	0.52	5.2	5.38	-3.72	
1/12/2015	D2450V2	748	Head	1g	5.48	54.8	51.6	6.20	
				10g	2.47	24.7	24	2.92	
1/12/2015	D2450V2	748	Body	1g	5.40	54.0	50.70	6.51	3,4
				10g	2.48	24.8	23.7	4.64	
1/20/2015	D2450V2	748	Head	1g	5.27	52.70	51.6	2.13	
				10g	2.38	23.80	24.0	-0.83	

SAR Lab 3

Date Tested	System Dipole		T.S. Liquid	Measured Results		Target (Ref. Value)	Delta ±10 %	Plot No.	
	Type	Serial #		Zoom Scan to 100 mW	Normalize to 1 W				
1/14/2015	D835V2	4d142	Head	1g	0.93	9.3	8.91	4.26	
				10g	0.61	6.1	5.77	5.55	
1/14/2015	D835V2	4d142	Body	1g	0.98	9.8	9.22	6.72	5,6
				10g	0.65	6.5	6.05	6.94	

SAR Lab 4

Date Tested	System Dipole		T.S. Liquid	Measured Results		Target (Ref. Value)	Delta ±10 %	Plot No.	
	Type	Serial #		Zoom Scan to 100 mW	Normalize to 1 W				
1/12/2015	1750	1050	Body	1g	3.47	34.7	37.20	-6.72	7,8
				10g	1.84	18.4	20.00	-8.00	
1/15/2015	1750	1050	Head	1g	3.60	36.0	36.60	-1.64	
				10g	1.91	19.1	19.40	-1.55	
1/12/2015	1900	5d163	Head	1g	4.22	42.2	40.80	3.43	9,10
				10g	2.18	21.8	21.20	2.83	
1/12/2015	1900	5d163	Body	1g	4.01	40.1	40.60	-1.23	
				10g	2.08	20.8	21.40	-2.80	

9. Conducted Output Power Measurements

9.1. CDMA

Measured Results

Band	Mode		Ch No.	Freq. (MHz)	Avg Pwr (dBm)
BC 0	1xRTT	RC1 SO55 (Loopback)	1013	824.70	24.0
			384	836.52	24.0
			777	848.31	23.9
		RC3 SO55 (Loopback)	1013	824.70	24.0
			384	836.52	24.0
			777	848.31	23.9
		RC3 SO32 (+F-SCH)	1013	824.70	24.0
			384	836.52	24.0
			777	848.31	23.9
	1xEVDO Rel. 0	FTAP Rate: 307.2 kbps(2 slot, QPSK) RTAP Rate: 153.6 kbps	1013	824.70	24.0
			384	836.52	24.0
			777	848.31	23.9
	1xEVDO Rev. A	FETAP: 307.2k, QPSK/ ACK RETAP: 4096	1013	824.70	23.9
			384	836.52	23.9
			777	848.31	23.9

Band	Mode		Ch No.	Freq. (MHz)	Avg Pwr (dBm)
BC 1	1xRTT	RC1 SO55 (Loopback)	25	1851.25	23.8
			600	1880.00	23.9
			1175	1908.75	24.1
		RC3 SO55 (Loopback)	25	1851.25	23.8
			600	1880.00	23.8
			1175	1908.75	24.1
		RC3 SO32 (+F-SCH)	25	1851.25	23.8
			600	1880.00	23.9
			1175	1908.75	24.1
	1xEVDO Rel. 0	FTAP Rate: 307.2 kbps(2 slot, QPSK) RTAP Rate: 153.6 kbps	25	1851.25	23.8
			600	1880.00	23.9
			1175	1908.75	24.1
	1xEVDO Rev. A	FETAP: 307.2k, QPSK/ ACK RETAP: 4096	25	1851.25	23.9
			600	1880.00	23.9
			1175	1908.75	24.0

9.2. LTE

The following tests were conducted according to the test requirements outlined in section 6.2 of the 3GPP TS36.101 specification.

UE Power Class: 3 (23 +/- 2dBm). The allowed Maximum Power Reduction (MPR) for the maximum output power due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3-1 of the 3GPP TS36.101.

Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3

Modulation	Channel bandwidth / Transmission bandwidth (RB)						MPR (dB)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2

The allowed A-MPR values specified below in Table 6.2.4.-1 of 3GPP TS36.101 are in addition to the allowed MPR requirements. All the measurements below were performed with A-MPR disabled, by using Network Signaling Value of "NS_01".

Table 6.2.4-1: Additional Maximum Power Reduction (A-MPR)

Network Signalling value	Requirements (sub-clause)	E-UTRA Band	Channel bandwidth (MHz)	Resources Blocks (N_{RB})	A-MPR (dB)
NS_01	6.6.2.1.1	Table 5.5-1	1.4, 3, 5, 10, 15, 20	Table 5.6-1	NA
NS_03	6.6.2.2.1	2, 4, 10, 23, 25, 35, 36	3	>5	≤ 1
			5	>6	≤ 1
			10	>6	≤ 1
			15	>8	≤ 1
			20	>10	≤ 1
NS_04	6.6.2.2.2	41	5	>6	≤ 1
			10, 15, 20	See Table 6.2.4-4	
NS_05	6.6.3.3.1	1	10,15,20	≥ 50	≤ 1
NS_06	6.6.2.2.3	12, 13, 14, 17	1.4, 3, 5, 10	Table 5.6-1	n/a
NS_07	6.6.2.2.3	13	10	Table 6.2.4-2	Table 6.2.4-2
	6.6.3.3.2				
NS_08	6.6.3.3.3	19	10, 15	> 44	≤ 3
				> 40	≤ 1
NS_09	6.6.3.3.4	21	10, 15	> 55	≤ 2
NS_10		20	15, 20	Table 6.2.4-3	Table 6.2.4-3
NS_11	6.6.2.2.1	23 ¹	1.4, 3, 5, 10	Table 6.2.4-5	Table 6.2.4-5
..					
NS_32	-	-	-	-	-

Note 1: Applies to the lower block of Band 23, i.e. a carrier placed in the 2000-2010 MHz region.

LTE Band 2 Measured Results

Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Meas. MPR	Avg Pwr (dBm)		
							1860 MHz	1880 MHz	1900 MHz
LTE Band 2	20	QPSK	1	0	0	0	22.5	22.7	22.7
			1	50	0	0	22.6	22.7	22.5
			1	99	0	0	22.4	22.7	22.5
			50	0	1	1	21.6	21.5	21.6
			50	25	1	1	21.4	21.5	21.5
			50	50	1	1	21.5	21.4	21.3
			100	0	1	1	21.4	21.5	21.5
		16QAM	1	0	1	1	21.1	21.3	21.7
			1	50	1	1	21.1	21.4	21.5
			1	99	1	1	21.1	21.5	21.5
			50	0	2	2	20.6	20.6	20.6
			50	25	2	2	20.5	20.6	20.4
			50	50	2	2	20.5	20.5	20.4
			100	0	2	2	20.5	20.5	20.6
Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Meas. MPR	Avg Pwr (dBm)		
							1857.5 MHz	1880 MHz	1902.5 MHz
LTE Band 2	15	QPSK	1	0	0	0	22.3	22.3	22.6
			1	36	0	0	22.7	22.7	22.4
			1	74	0	0	22.4	22.4	22.6
			36	0	1	1	21.4	21.5	21.5
			36	18	1	1	21.4	21.4	21.4
			36	37	1	1	21.4	21.4	21.4
			75	0	1	1	21.4	21.4	21.4
		16QAM	1	0	1	1	21.4	21.6	21.5
			1	36	1	1	21.4	21.6	21.1
			1	74	1	1	21.2	21.7	21.3
			36	0	2	2	20.4	20.5	20.5
			36	18	2	2	20.3	20.4	20.4
			36	37	2	2	20.4	20.4	20.4
			75	0	2	2	20.4	20.4	20.4
Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Meas. MPR	Avg Pwr (dBm)		
							1855 MHz	1880 MHz	1905 MHz
LTE Band 2	10	QPSK	1	0	0	0	22.4	22.6	22.7
			1	25	0	0	22.3	22.6	22.4
			1	49	0	0	22.3	22.5	22.6
			25	0	1	1	21.4	21.5	21.4
			25	12	1	1	21.4	21.4	21.5
			25	25	1	1	21.4	21.5	21.5
			50	0	1	1	21.5	21.5	21.5
		16QAM	1	0	1	1	21.4	21.6	21.6
			1	25	1	1	21.5	21.6	21.6
			1	49	1	1	21.4	21.3	21.4
			25	0	2	2	20.4	20.6	20.5
			25	12	2	2	20.4	20.5	20.5
			25	25	2	2	20.4	20.6	20.5
			50	0	2	2	20.4	20.5	20.4

LTE Band 2 Measured Results (continued)

Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Meas. MPR	Avg Pwr (dBm)		
							1852.5 MHz	1880 MHz	1907.5 MHz
LTE Band 2	5	QPSK	1	0	0	0	22.1	22.6	22.1
			1	12	0	0	22.6	22.6	22.4
			1	24	0	0	22.2	22.5	22.4
			12	0	1	1	21.3	21.5	21.4
			12	6	1	1	21.4	21.5	21.5
			12	11	1	1	21.4	21.5	21.5
			25	0	1	1	21.3	21.5	21.5
		16QAM	1	0	1	1	20.7	21.1	21.2
			1	12	1	1	20.8	21.0	21.1
			1	24	1	1	20.8	21.2	21.0
			12	0	2	2	20.4	20.5	20.6
			12	6	2	2	20.4	20.5	20.6
			12	11	2	2	20.4	20.6	20.6
			25	0	2	2	20.6	20.5	20.6
Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Meas. MPR	Avg Pwr (dBm)		
							1851.5 MHz	1880 MHz	1908.5 MHz
LTE Band 2	3	QPSK	1	0	0	0	22.2	22.4	22.3
			1	7	0	0	22.2	22.7	22.5
			1	14	0	0	22.2	22.2	22.5
			6	0	1	1	21.2	21.3	21.4
			6	3	1	1	21.3	21.4	21.4
			6	5	1	1	21.2	21.3	21.4
			15	0	1	1	21.2	21.4	21.4
		16QAM	1	0	1	1	21.3	21.4	21.4
			1	7	1	1	21.3	21.4	21.7
			1	14	1	1	21.4	21.7	21.6
			6	0	2	2	20.4	20.2	20.4
			6	3	2	2	20.3	20.0	20.6
			6	5	2	2	20.3	20.3	20.5
			15	0	2	2	20.2	20.3	20.4
Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Meas. MPR	Avg Pwr (dBm)		
							1850.7 MHz	1880 MHz	1909.3 MHz
LTE Band 2	1.4	QPSK	1	0	0	0	22.1	22.2	22.4
			1	2	0	0	22.2	22.3	22.4
			1	5	0	0	22.3	22.2	22.6
			3	0	0	0	22.1	22.4	22.4
			3	1	0	0	22.2	22.4	22.5
			3	2	0	0	22.2	22.4	22.5
			6	0	1	1	21.2	21.3	21.4
		16QAM	1	0	1	1	21.7	20.7	21.7
			1	2	1	1	21.7	21.7	21.7
			1	5	1	1	21.7	21.3	21.7
			3	0	1	1	20.9	21.0	20.9
			3	1	1	1	20.8	21.5	21.2
			3	2	1	1	20.7	21.2	21.3
			6	0	2	2	20.1	20.4	20.4

LTE Band 4 Measured Results

Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Meas. MPR	Avg Pwr (dBm)		
							1720 MHz	1732.5 MHz	1745 MHz
LTE Band 4	20	QPSK	1	0	0	0	23.5	23.3	23.4
			1	50	0	0	23.5	23.4	23.2
			1	99	0	0	23.3	23.5	23.2
			50	0	1	1	22.4	22.6	22.4
			50	25	1	1	22.4	22.4	22.3
			50	50	1	1	22.3	22.4	22.2
			100	0	1	1	22.4	22.5	22.4
		16QAM	1	0	1	1	22.6	22.6	22.6
			1	50	1	1	22.6	22.7	22.7
			1	99	1	1	22.4	22.6	22.4
			50	0	2	2	21.4	21.6	21.4
			50	25	2	2	21.4	21.4	21.2
			50	50	2	2	21.4	21.5	21.2
			100	0	2	2	21.4	21.6	21.3
Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Meas. MPR	Avg Pwr (dBm)		
							1717.5 MHz	1732.5 MHz	1747.5 MHz
LTE Band 4	15	QPSK	1	0	0	0	23.4	23.4	23.5
			1	36	0	0	23.3	23.7	23.2
			1	74	0	0	23.2	23.4	23.1
			36	0	1	1	22.3	22.5	22.4
			36	18	1	1	22.3	22.4	22.2
			36	37	1	1	22.3	22.2	22.2
			75	0	1	1	22.3	22.3	22.3
		16QAM	1	0	1	1	22.7	22.7	22.6
			1	36	1	1	22.7	22.6	22.6
			1	74	1	1	22.7	22.2	22.2
			36	0	2	2	21.2	21.6	21.2
			36	18	2	2	21.3	21.5	21.1
			36	37	2	2	21.3	21.2	21.2
			75	0	2	2	21.3	21.4	21.3
Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Meas. MPR	Avg Pwr (dBm)		
							1715 MHz	1732.5 MHz	1750 MHz
LTE Band 4	10	QPSK	1	0	0	0	23.4	23.5	23.2
			1	25	0	0	23.2	23.4	23.3
			1	49	0	0	23.3	23.1	23.2
			25	0	1	1	22.4	22.5	22.2
			25	12	1	1	22.3	22.4	22.2
			25	25	1	1	22.3	22.3	22.3
			50	0	1	1	22.3	22.4	22.3
		16QAM	1	0	1	1	22.7	22.1	22.3
			1	25	1	1	22.7	22.1	22.7
			1	49	1	1	22.5	22.4	22.7
			25	0	2	2	21.3	21.4	21.2
			25	12	2	2	21.3	21.3	21.2
			25	25	2	2	21.3	21.3	21.1
			50	0	2	2	21.2	21.3	21.1

LTE Band 4 Measured Results (continued)

Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Meas. MPR	Avg Pwr (dBm)		
							1712.5 MHz	1732.5 MHz	1752.5 MHz
LTE Band 4	5	QPSK	1	0	0	0	23.1	23.2	23.0
			1	12	0	0	23.3	23.7	23.5
			1	24	0	0	23.0	23.1	22.9
			12	0	1	1	22.3	22.4	22.4
			12	6	1	1	22.3	22.5	22.3
			12	11	1	1	22.3	22.3	22.2
			25	0	1	1	22.3	22.5	22.3
		16QAM	1	0	1	1	22.0	22.5	22.7
			1	12	1	1	22.6	22.4	22.7
			1	24	1	1	21.8	22.7	22.7
			12	0	2	2	21.4	21.5	21.4
			12	6	2	2	21.4	21.3	21.4
			12	11	2	2	21.2	21.2	21.4
			25	0	2	2	21.5	21.5	21.4
Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Meas. MPR	Avg Pwr (dBm)		
							1711.5 MHz	1732.5 MHz	1753.5 MHz
LTE Band 4	3	QPSK	1	0	0	0	23.1	23.4	23.4
			1	7	0	0	23.2	23.7	23.3
			1	14	0	0	23.1	23.3	23.1
			6	0	1	1	22.3	22.4	22.5
			6	3	1	1	22.3	22.4	22.4
			6	5	1	1	22.3	22.4	22.3
			15	0	1	1	22.4	22.4	22.3
		16QAM	1	0	1	1	22.7	22.7	22.6
			1	7	1	1	22.1	22.5	22.5
			1	14	1	1	22.3	22.6	22.7
			6	0	2	2	21.3	20.9	21.6
			6	3	2	2	21.0	21.2	21.4
			6	5	2	2	21.1	21.3	21.5
			15	0	2	2	21.2	21.3	21.4
Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Meas. MPR	Avg Pwr (dBm)		
							1710.7 MHz	1732.5 MHz	1754.3 MHz
LTE Band 4	1.4	QPSK	1	0	0	0	23.2	23.1	23.0
			1	2	0	0	23.3	23.3	23.3
			1	5	0	0	23.2	23.2	23.4
			3	0	0	0	23.3	23.3	23.2
			3	1	0	0	23.4	23.5	23.3
			3	2	0	0	23.3	23.4	23.3
			6	0	1	1	22.3	22.3	22.3
		16QAM	1	0	1	1	22.7	22.7	22.7
			1	2	1	1	22.7	22.0	22.5
			1	5	1	1	22.7	22.1	22.6
			3	0	1	1	22.2	22.4	22.0
			3	1	1	1	22.2	22.5	22.2
			3	2	1	1	22.2	22.1	22.0
			6	0	2	2	21.5	21.6	21.7

LTE Band 5 Measured Results

Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Meas. MPR	Avg Pwr (dBm)		
							829 MHz	836.5 MHz	844 MHz
LTE Band 5	10	QPSK	1	0	0	0	23.3	23.2	23.2
			1	25	0	0	23.3	22.9	23.4
			1	49	0	0	23.3	23.4	23.3
			25	0	1	1	22.3	22.3	22.4
			25	12	1	1	22.3	22.2	22.4
			25	25	1	1	22.4	22.3	22.4
			50	0	1	1	22.3	22.3	22.4
		16QAM	1	0	1	1	22.7	22.7	22.7
			1	25	1	1	21.9	21.9	22.3
			1	49	1	1	22.4	22.5	22.5
			25	0	2	2	21.2	21.3	21.3
			25	12	2	2	21.2	21.1	21.3
			25	25	2	2	21.1	21.1	21.3
			50	0	2	2	21.2	21.1	21.2
Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Meas. MPR	Avg Pwr (dBm)		
							826.5 MHz	836.5 MHz	846.5 MHz
LTE Band 5	5	QPSK	1	0	0	0	23.1	23.6	23.3
			1	12	0	0	23.6	23.7	23.2
			1	24	0	0	23.0	23.3	23.0
			12	0	1	1	22.3	22.3	22.4
			12	6	1	1	22.3	22.0	22.2
			12	11	1	1	22.5	22.0	22.3
			25	0	1	1	22.3	22.2	22.3
		16QAM	1	0	1	1	22.0	22.7	22.5
			1	12	1	1	22.0	22.7	22.3
			1	24	1	1	22.7	22.7	22.7
			12	0	2	2	21.2	21.2	21.2
			12	6	2	2	21.3	21.2	21.1
			12	11	2	2	21.0	21.1	21.2
			25	0	2	2	21.2	21.2	21.3
Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Meas. MPR	Avg Pwr (dBm)		
							825.5 MHz	836.5 MHz	847.5 MHz
LTE Band 5	3	QPSK	1	0	0	0	23.2	23.3	23.2
			1	7	0	0	23.4	23.3	23.2
			1	14	0	0	23.2	23.2	23.1
			6	0	1	1	22.3	22.2	22.5
			6	3	1	1	22.4	22.3	22.3
			6	5	1	1	22.4	22.3	22.2
			15	0	1	1	22.3	22.3	22.3
		16QAM	1	0	1	1	22.3	22.4	22.4
			1	7	1	1	22.6	22.7	22.2
			1	14	1	1	22.5	22.6	22.3
			6	0	2	2	21.4	21.0	21.6
			6	3	2	2	21.6	21.1	21.5
			6	5	2	2	21.4	21.0	21.4
			15	0	2	2	21.4	21.3	21.3

LTE Band 5 Measured Results (continued)

Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Meas. MPR	Avg Pwr (dBm)		
							824.7 MHz	836.5 MHz	848.3 MHz
LTE Band 5	1.4	QPSK	1	0	0	0	23.1	23.1	23.1
			1	2	0	0	23.2	23.2	23.2
			1	5	0	0	23.1	23.2	23.2
			3	0	0	0	23.2	23.3	23.1
			3	1	0	0	23.2	23.3	23.2
			3	2	0	0	23.2	23.3	23.2
		16QAM	6	0	1	1	22.2	22.2	22.2
			1	0	1	1	22.7	22.7	22.1
			1	2	1	1	22.7	22.7	22.4
			1	5	1	1	22.7	22.0	22.7
			3	0	1	1	21.8	22.1	22.1
			3	1	1	1	21.8	22.1	22.2
			3	2	1	1	22.1	21.9	22.2
			6	0	2	2	21.0	21.4	21.1

LTE Band 13 Measured Results

Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Meas. MPR	Avg Pwr (dBm)
							782 MHz
LTE Band 13	10	QPSK	1	0	0	0	23.3
			1	25	0	0	23.4
			1	49	0	0	23.2
			25	0	1	1	22.4
			25	12	1	1	22.4
			25	25	1	1	22.4
			50	0	1	1	22.3
		16QAM	1	0	1	1	22.4
			1	25	1	1	22.4
			1	49	1	1	22.3
			25	0	2	2	21.4
			25	12	2	2	21.2
			25	25	2	2	21.3
			50	0	2	2	21.3
Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Meas. MPR	Avg Pwr (dBm)
LTE Band 13	5	QPSK	1	0	0	0	23.6
			1	12	0	0	23.7
			1	24	0	0	23.5
			12	0	1	1	22.4
			12	6	1	1	22.5
			12	11	1	1	22.5
			25	0	1	1	22.4
			25	0	1	1	22.3
		16QAM	1	12	1	1	22.2
			1	24	1	1	22.3
			12	0	2	2	21.5
			12	6	2	2	21.3
			12	11	2	2	21.5
			25	0	2	2	21.4

Note(s):

10/5 MHz Bandwidths does not support at least three non-overlapping channels in certain channel bandwidths. When a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing per KDB 941225 D05 SAR for LTE Devices

9.3. Wi-Fi DTS (2.4 GHz) Band

Measured Results

Band (GHz)	Mode	Data Rate	Ch #	Freq. (MHz)	Max Output Power (dBm)	Avg Pwr (dBm)	SAR Test (Yes/No)
2.4	802.11b	1 Mbps	1	2412	14.5	13.4	Yes
			6	2437		13.9	
			11	2462		13.9	
	802.11g	6 Mbps	1	2412	10.0	Not Required	No
			6	2437			
			11	2462			
	802.11n (HT20)	MCS0	1	2412	9.0	Not Required	No
			6	2437			
			11	2462			

Note(s):

Per KDB 248227 D01 v02:

- Output Power and SAR measurement is not required for 802.11g/n HT20 channels when the specified tune-up tolerances for 802.11g/n HT20 are lower than 802.11b by more than 1 dB and the measured SAR is ≤ 1.2 W/Kg.
- A second channel is tested because the reported SAR is > 0.8 W/kg. A third channel is tested because the reported SAR is > 1.2 W/kg.

9.4. Bluetooth

Maximum tune-up tolerance limit is 7.50 dBm. This power level qualifies for exclusion of SAR testing. Refer to Standalone SAR Test Exclusion Considerations Section.

10. Measured and Reported (Scaled) SAR Results

SAR Test Reduction criteria are as follows:

KDB 447498 D01 General RF Exposure Guidance:

Testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:

- ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
- ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
- ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz

KDB 648474 D04 Handset SAR:

With headset attached, when the reported SAR for body-worn accessory, measured without a headset connected to the handset, is > 1.2 W/kg, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.

KDB 941225 D01 SAR test for 3G devices:

When the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq \frac{1}{4}$ dB higher than the primary mode or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the secondary mode

KDB 941225 D05 SAR for LTE Devices:

SAR test reduction is applied using the following criteria:

- Start with the largest channel bandwidth and measure SAR for QPSK with 1 RB, and 50% RB allocation, using the RB offset and required test channel combination with the highest maximum output power among RB offsets at the upper edge, middle and lower edge of each required test channel.
- When the reported SAR is > 0.8 W/kg, testing for other Channels is performed at the highest output power level for 1RB, and 50% RB configuration for that channel.
- Testing for 100% RB configuration is performed at the highest output power level for 100% RB configuration across the Low, Mid and High Channel when the highest reported SAR for 1 RB and 50% RB are > 0.8 W/kg. Testing for the remaining required channels is not needed because the reported SAR for 100% RB Allocation < 1.45 W/kg.
- Testing for 16-QAM modulation is not required because the reported SAR for QPSK is < 1.45 W/Kg and its output power is not more than 0.5 dB higher than that of QPSK.
- Testing for the other channel bandwidths is not required because the reported SAR for the highest channel bandwidth is < 1.45 W/Kg and its output power is not more than 0.5 dB higher than that of the highest channel bandwidth.

KDB 248227 D01 SAR meas for 802.11 v02:

SAR test reduction for 802.11 Wi-Fi transmission mode configurations are considered separately for DSSS and OFDM. An initial test position is determined to reduce the number of tests required for certain exposure configurations with multiple test positions. An initial test configuration is determined for each frequency band and aggregated band according to maximum output power, channel bandwidth, wireless mode configurations and other operating parameters to streamline the measurement requirements. For 2.4 GHz DSSS, either the initial test position or DSSS procedure is applied to reduce the number of SAR tests; these are mutually exclusive. For OFDM, an initial test position is only applicable to next to the ear, UMPC mini-tablet and hotspot mode configurations, which is tested using the initial test configuration to facilitate test reduction. For other exposure conditions with a fixed test position, SAR test reduction is determined using only the initial test configuration.

The multiple test positions require SAR measurements in head, hotspot mode or UMPC mini-tablet configurations may be reduced according to the highest reported SAR determined using the initial test position(s) by applying the DSSS or OFDM SAR measurement procedures in the required wireless mode test configuration(s). The initial test position(s) is measured using the highest measured maximum output power channel in the required wireless mode test configuration(s). When the reported SAR for the initial test position is:

- ≤ 0.4 W/kg, further SAR measurement is not required for the other test positions in that exposure configuration and wireless mode combination within the frequency band or aggregated band. DSSS and OFDM configurations are considered separately according to the required SAR procedures.
- > 0.4 W/kg, SAR is repeated using the same wireless mode test configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position, on the highest maximum output power channel, until the reported SAR is ≤ 0.8 W/kg or all required test positions are tested.
 - For subsequent test positions with equivalent test separation distance or when exposure is dominated by coupling conditions, the position for maximum coupling condition should be tested.
 - When it is unclear, all equivalent conditions must be tested.
- For all positions/configurations tested using the initial test position and subsequent test positions, when the reported SAR is > 0.8 W/kg, measure the SAR for these positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required test channels are considered.
 - The additional power measurements required for this step should be limited to those necessary for identifying subsequent highest output power channels to apply the test reduction.
- When the specified maximum output power is the same for both UNII 1 and UNII 2A, begin SAR measurements in UNII 2A with the channel with the highest measured output power. If the reported SAR for UNII 2A is ≤ 1.2 W/kg, SAR is not required for UNII 1; otherwise treat the remaining bands separately and test them independently for SAR.
- When the specified maximum output power is different between UNII 1 and UNII 2A, begin SAR with the band that has the higher specified maximum output. If the highest reported SAR for the band with the highest specified power is ≤ 1.2 W/kg, testing for the band with the lower specified output power is not required; otherwise test the remaining bands independently for SAR.

To determine the initial test position, Area Scans were performed to determine the position with the *Maximum Value of SAR (measured)*. The position that produced the highest *Maximum Value of SAR* is considered the worst case position; thus used as the initial test position.

10.1. CDMA BC0

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
						Tune-up limit	Meas.	Meas.	Scaled	
Head	1xRTT (RC3 SO55)	0	Left Touch	384	836.5	24.2	24.0	0.614	0.643	1
			Left Tilt	384	836.5	24.2	24.0	0.395	0.414	
			Right Touch	384	836.5	24.2	24.0	0.724	0.758	
			Right Tilt	384	836.5	24.2	24.0	0.369	0.386	
	1xEVDO (Rel. 0)	0	Left Touch	384	836.5	24.2	24.0	0.461	0.483	
			Left Tilt	384	836.5	24.2	24.0	0.250	0.262	
			Right Touch	384	836.5	24.2	24.0	0.527	0.552	
			Right Tilt	384	836.5	24.2	24.0	0.249	0.261	
Body-worn & Hotspot	1xRTT (RC3 SO32)	10	Rear	384	836.5	24.2	24.0	0.744	0.779	2
			Front	384	836.5	24.2	24.0	0.606	0.635	
Hotspot	1xRTT (RC3 SO32)	10	Edge 2	384	836.5	24.2	24.0	0.384	0.402	
			Edge 3	384	836.5	24.2	24.0	0.241	0.252	

10.2. CDMA BC1

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
						Tune-up limit	Meas.	Meas.	Scaled	
Head	1xRTT (RC3 SO55)	0	Left Touch	600	1880.0	24.2	23.8	0.712	0.781	
			Left Tilt	600	1880.0	24.2	23.8	0.289	0.317	
			Right Touch	600	1880.0	24.2	23.8	0.675	0.740	
			Right Tilt	600	1880.0	24.2	23.8	0.252	0.276	
	1xEVDO (Rel. 0)	0	Left Touch	25	1851.3	24.2	23.8	0.722	0.792	3
				600	1880.0	24.2	23.9	0.795	0.852	
			1175	1908.8	24.2	24.1	0.845	0.865		
			Left Tilt	600	1880.0	24.2	23.9	0.350	0.375	
Right Touch	600	1880.0	24.2	23.9	0.609	0.653				
								Right Tilt	600	1880.0
Body-worn & Hotspot	1xRTT (RC3 SO32)	10	Rear	25	1851.3	24.2	23.8	0.976	1.070	4
				600	1880.0	24.2	23.8	1.050	1.151	
				1175	1908.8	24.2	24.1	1.050	1.074	
			Front	25	1851.3	24.2	23.8	0.815	0.894	
				600	1880.0	24.2	23.8	0.895	0.981	
Hotspot	1xRTT (RC3 SO32)	10	Edge 3	600	1880.0	24.2	23.9	0.554	0.594	
			Edge 4	600	1880.0	24.2	23.9	0.520	0.557	

10.3. LTE Band 2 (20MHz Bandwidth)

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		Plot No.		
								Tune-up limit	Meas.	Meas.	Scaled			
Head	QPSK	0	Left Touch	18900	1880.0	1	0	22.7	22.7	0.700	0.700			
						50	0	21.7	21.5	0.526	0.551			
			Left Tilt	18900	1880.0	1	0	22.7	22.7	0.365	0.365			
						50	0	21.7	21.5	0.273	0.286			
			Right Touch	18900	1880.0	1	0	22.7	22.7	0.710	0.710	5		
						50	0	21.7	21.5	0.523	0.548			
		Right Tilt	18900	1880.0	1	0	22.7	22.7	0.242	0.242				
					50	0	21.7	21.5	0.185	0.194				
		Body-worn & Hotspot	QPSK	10	Rear	18700	1860.0	1	49	22.7	22.6	0.943	0.965	6
						18900	1880.0	1	0	22.7	22.7	0.892	0.892	
						50	0	21.7	21.5	0.673	0.705			
					Front	19100	1900.0	1	0	22.7	22.7	0.812	0.812	
18700	1860.0					1	49	22.7	22.6	0.906	0.927			
18900	1880.0					1	0	22.7	22.7	0.902	0.902			
50	0				21.7	21.5	0.658	0.689						
19100	1900.0				1	0	22.7	22.7	0.607	0.607				
Hotspot	QPSK				10	Edge 3	18900	1880.0	1	0	22.7	22.7	0.482	0.482
		50	0	21.7					21.5	0.359	0.376			
		Edge 4	18900	1880.0		1	0	22.7	22.7	0.448	0.448			
						50	0	21.7	21.5	0.328	0.343			

10.4. LTE Band 4 (20MHz Bandwidth)

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		Plot No.
								Tune-up limit	Meas.	Meas.	Scaled	
Head	QPSK	0	Left Touch	20175	1732.5	1	99	23.7	23.5	0.601	0.629	
						50	0	22.7	22.6	0.488	0.499	
			Left Tilt	20175	1732.5	1	99	23.7	23.5	0.298	0.312	
						50	0	22.7	22.6	0.247	0.253	
			Right Touch	20050	1720.0	1	0	23.7	23.5	0.988	1.035	
						50	0	22.7	22.4	0.772	0.827	
				20175	1732.5	1	99	23.7	23.5	0.905	0.948	
						50	0	22.7	22.6	0.790	0.808	
				20300	1745.0	1	0	23.7	23.4	1.070	1.147	7
						50	0	22.7	22.4	0.779	0.835	
			Right Tilt	20175	1732.5	1	99	23.7	23.5	0.201	0.210	
						50	0	22.7	22.6	0.162	0.166	
Body-worn & Hotspot	QPSK	10	Rear	20050	1720.0	1	0	23.7	23.5	1.220	1.277	8
						50	0	22.7	22.4	0.885	0.948	
				20175	1732.5	1	99	23.7	23.5	1.040	1.089	
						50	0	22.7	22.6	0.851	0.871	
				20300	1745.0	1	0	23.7	23.4	1.110	1.189	
						50	0	22.7	22.4	0.905	0.970	
			Front	20050	1720.0	1	0	23.7	23.5	1.150	1.204	
						50	0	22.7	22.4	0.090	0.096	
				20175	1732.5	1	99	23.7	23.5	1.070	1.120	
						50	0	22.7	22.6	0.874	0.894	
				20300	1745.0	1	0	23.7	23.4	1.120	1.200	
						50	0	22.7	22.4	0.891	0.955	
Hotspot	QPSK	10	Edge 3	20175	1732.5	1	99	23.7	23.5	0.638	0.668	
						50	0	22.7	22.6	0.532	0.544	
			Edge 4	20175	1732.5	1	99	23.7	23.5	0.353	0.370	
						50	0	22.7	22.6	0.331	0.339	

10.5. LTE Band 5 (10MHz Bandwidth)

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		Plot No.				
								Tune-up limit	Meas.	Meas.	Scaled					
Head	QPSK	0	Left Touch	20525	836.5	1	49	23.7	23.4	0.463	0.496	9				
						25	0	22.7	22.4	0.325	0.348					
			Left Tilt	20525	836.5	1	49	23.7	23.4	0.232	0.249					
						25	0	22.7	22.4	0.169	0.181					
			Right Touch	20525	836.5	1	49	23.7	23.4	0.560	0.600					
						25	0	22.7	22.4	0.363	0.389					
			Right Tilt	20525	836.5	1	49	23.7	23.4	0.252	0.270					
						25	0	22.7	22.4	0.170	0.182					
			Body-worn & Hotspot	QPSK	10	Rear	20525	836.5	1	49	23.7		23.4	0.676	0.724	10
									25	0	22.7		22.4	0.503	0.539	
Front	20525	836.5				1	49	23.7	23.4	0.555	0.595					
						25	0	22.7	22.4	0.402	0.431					
Hotspot	QPSK	10	Edge 2	20525	836.5	1	49	23.7	23.4	0.320	0.343					
						25	0	22.7	22.4	0.270	0.289					
			Edge 3	20525	836.5	1	49	23.7	23.4	0.253	0.271					
						25	0	22.7	22.4	0.174	0.186					

10.6. LTE Band 13 (10MHz Bandwidth)

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		Plot No.				
								Tune-up limit	Meas.	Meas.	Scaled					
Head	QPSK	0	Left Touch	23230	782.0	1	25	23.7	23.4	0.470	0.504	11				
						25	12	22.7	22.4	0.330	0.354					
			Left Tilt	23230	782.0	1	25	23.7	23.4	0.332	0.356					
						25	12	22.7	22.4	0.228	0.244					
			Right Touch	23230	782.0	1	25	23.7	23.4	0.556	0.596					
						25	12	22.7	22.4	0.405	0.434					
			Right Tilt	23230	782.0	1	25	23.7	23.4	0.371	0.398					
						25	12	22.7	22.4	0.261	0.280					
			Body-worn & Hotspot	QPSK	10	Rear	23230	782.0	1	25	23.7		23.4	0.828	0.887	12
									25	12	22.7		22.4	0.587	0.629	
Front	23230	782.0				1	25	23.7	23.4	0.546	0.585					
						25	12	22.7	22.4	0.408	0.437					
Hotspot	QPSK	10	Edge 2	23230	782.0	1	25	23.7	23.4	0.592	0.634					
						25	12	22.7	22.4	0.434	0.465					
			Edge 3	23230	782.0	1	25	23.7	23.4	0.224	0.240					
						25	12	22.7	22.4	0.181	0.194					

10.7. Wi-Fi (DTS Band)

Frequency Band	Mode	RF Exposure Conditions	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Area Scan Max. SAR (W/kg)	Power (dBm)		1-g SAR (W/kg)		Plot No.	Notes
								Tune-up limit	Meas.	Meas.	Scaled		
2.4GHz	802.11b 1 Mbps	Head	0	Left Touch	6	2437.0	0.500	14.5	13.9	0.387	0.444	13	2
				Left Tilt	6	2437.0	0.390	14.5	13.9	0.349	0.401		2
				Right Touch	6	2437.0	0.369	14.5	13.9	0.254	0.292		1
				Right Tilt	6	2437.0	0.342						
		Body-worn & Hotspot & Wi-Fi Direct	10	Rear	6	2437.0	0.101	14.5	13.9	0.079	0.091	14	1
				Front	6	2437.0	0.091						
				Edge 1	6	2437.0	0.079						
				Edge 2	6	2437.0	0.052						

Note(s):

- Highest reported SAR is ≤ 0.4 W/kg. Therefore, further SAR measurements within this exposure condition are not required.
- Highest reported SAR is > 0.4 W/kg. Due to the highest reported SAR for this test position, other test positions in Head exposure condition were evaluated until a SAR ≤ 0.8 W/kg was reported.

10.8. Bluetooth

Standalone SAR Test Exclusion Considerations & Estimated SAR

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$, for 1-g SAR and ≤ 7.5 for 10-g extremity SAR, where

- $f_{(\text{GHz})}$ is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison

The test exclusions are applicable only when the minimum test separation distance is ≤ 50 mm and for transmission frequencies between 100 MHz and 6 GHz. When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion.

When the standalone SAR test exclusion is applied to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:

- $(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm}) \cdot [\sqrt{f_{(\text{GHz})}/x}] \text{ W/kg}$ for test separation distances ≤ 50 mm; where $x = 7.5$ for 1-g SAR, and $x = 18.75$ for 10-g SAR.
- 0.4 W/kg for 1-g SAR and 1.0 W/kg for 10-g SAR, when the test separation distances is > 50 mm.

Body-worn Accessory Exposure Conditions

Max. tune-up tolerance limit		Min. test separation distance (mm)	Frequency (GHz)	SAR test exclusion Result*	Test Configuration	Estimated 1-g SAR (W/kg)
(dBm)	(mW)					
7.5	6	10	2.480	0.9	Rear/Front	0.118

Conclusion:

*: The computed value is < 3; therefore, Bluetooth qualifies for Standalone SAR test exclusion.

11. SAR Measurement Variability

In accordance with published RF Exposure KDB 865664 D01 SAR measurement 100 MHz to 6 GHz. These additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

- 1) Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg; steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.
- 3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg (~ 10% from the 1-g SAR limit).
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20.

Frequency Band (MHz)	Air Interface	RF Exposure Conditions	Test Position	Repeated SAR (Yes/No)	Highest Measured SAR (W/kg)	Repeated Measured SAR (W/kg)	Largest to Smallest SAR Ratio
700	LTE Band 13	Body-worn & Hotspot	Rear	Yes	0.828	0.814	1.02
800	CDMA BC0	Body-worn & Hotspot	Rear	No	0.744	N/A	N/A
	LTE Band 5	Body-worn & Hotspot	Rear	No	0.676	N/A	N/A
1700	LTE Band 4	Body-worn & Hotspot	Rear	Yes	1.22	1.15	1.06
1900	CDMA BC1	Body-worn & Hotspot	Rear	Yes	1.05	0.996	1.05
	LTE Band 2	Body-worn & Hotspot	Rear	No	0.943	N/A	N/A
2400	Wi-Fi 802.11b/g/n	Head	Left Touch	No	0.387	N/A	N/A

Note(s):

Second Repeated Measurement is not required since the ratio of the largest to smallest SAR for the original and first repeated measurement is not > 1.20.

12. Simultaneous Transmission SAR Analysis

Simultaneous Transmission Condition

RF Exposure Condition	Item	Capable Transmit Configurations		
Head	1	CDMA	+	Wi-Fi 2.4 GHz
	2	LTE	+	Wi-Fi 2.4 GHz
Body-w orn	1	CDMA	+	Wi-Fi 2.4 GHz
	2	CDMA	+	BT
	3	LTE	+	Wi-Fi 2.4 GHz
	4	LTE	+	BT
Hotspot & Wi-Fi Direct	1	CDMA	+	Wi-Fi 2.4 GHz
	2	LTE	+	Wi-Fi 2.4 GHz

Notes:

1. Wi-Fi 2.4GHz supports Hotspot.
2. CDMA and LTE support Hotspot.
3. VoIP is supported in CDMA and LTE.
4. Wi-Fi 2.4 GHz Radio cannot transmit simultaneously with Bluetooth Radio.

12.1. Sum of the SAR for WWAN & Wi-Fi & BT

RF Exposure Conditions	Test Position		Simultaneous Transmission Scenario			Σ 1-g SAR (mW/g)	SPLSR (Yes/ No)			
			WWAN	Wi-Fi(DTS)	Bluetooth					
Head	Left Touch	① + ②	0.781	0.444		1.225	No			
	Left Tilt	① + ②								
	Right Touch	① + ②	1.147	0.292		1.439	No			
	Right Tilt	① + ②								
Body-w orn Accessory & Hotspot	Rear	① + ②	1.277	0.091		1.368	No			
		① + ③								
	Front	① + ②						0.118	1.395	No
		① + ③								

Conclusion:

Simultaneous transmission SAR measurement (Volume Scan) is not required because either the sum of the 1-g SAR is < 1.6 W/kg or the SPLSR is < 0.04 for all circumstances that require SPLSR calculation.

Appendixes

Refer to separated files for the following appendixes.

A_15I19783v0 SAR Photos & Ant. Locations

B_15I19783v0 SAR Highest Test Plots

C_15I19783v0 SAR System Check Plots

D_15I19783v0 SAR Tissue Ingredients

E_15I19783v0 SAR Probe Cal. Certificates

F_15I19783v0 SAR Dipole Cal. Certificates

END OF REPORT