



**FCC 47 CFR PART 15 SUBPART B  
ICES-003 ISSUE 5**

**TEST REPORT**

**FOR**

**SMART WATCH with 2.4 DTS b/g/n + BT and BLE**

**MODEL NUMBER: LG-W110, W110, LGW110**

**FCC ID: ZNFW110  
IC ID: 2703C-W110**

**REPORT NUMBER: 14U18512-E4 REVISION A**

**ISSUE DATE: SEPTEMBER 10, 2014**

*Prepared for*  
**LG ELECTRONICS MOBILECOMM U.S.A., INC  
1000 SYLVAN AVENUE  
ENGLEWOOD CLIFFS,  
NEW JERSEY, 07632, U.S.A**

*Prepared by*  
**UL VERIFICATION SERVICES INC.  
47173 BENICIA STREET  
FREMONT, CA 94538, U.S.A.  
TEL: (510) 771-1000  
FAX: (510) 661-0888**



**NVLAP LAB CODE 200065-0**

Revision History

<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
--	09/01/14	Initial Issue	D. Corona
A	09/10/14	Update ANSI C63.4 version page 12 & 17, added test setup page 9	D. Corona

## TABLE OF CONTENTS

<b>1. ATTESTATION OF TEST RESULTS .....</b>	<b>4</b>
<b>2. FACILITIES AND ACCREDITATION .....</b>	<b>5</b>
<b>3. CALIBRATION AND UNCERTAINTY .....</b>	<b>5</b>
3.1. <i>MEASURING INSTRUMENT CALIBRATION .....</i>	<i>5</i>
3.2. <i>SAMPLE CALCULATION .....</i>	<i>5</i>
3.3. <i>MEASUREMENT UNCERTAINTY.....</i>	<i>5</i>
<b>4. EQUIPMENT UNDER TEST .....</b>	<b>6</b>
4.1. <i>DESCRIPTION OF EUT .....</i>	<i>6</i>
4.2. <i>PRELIMINARY TEST CONFIGURATIONS.....</i>	<i>7</i>
4.3. <i>MODE(S) OF OPERATION .....</i>	<i>7</i>
4.4. <i>DETAILS OF TESTED SYSTEM .....</i>	<i>8</i>
<b>5. TEST AND MEASUREMENT EQUIPMENT .....</b>	<b>11</b>
<b>6. APPLICABLE LIMITS AND TEST RESULTS .....</b>	<b>12</b>
6.1. <i>RADIATED EMISSIONS.....</i>	<i>12</i>
6.2. <i>AC MAINS LINE CONDUCTED EMISSIONS .....</i>	<i>17</i>
<b>7. SETUP PHOTOS.....</b>	<b>21</b>

# 1. ATTESTATION OF TEST RESULTS

**COMPANY NAME:** LG ELECTRONICS MOBILECOMM U.S.A., INC  
**EUT DESCRIPTION:** SMART WATCH with 2.4 DTS b/g/n + BT and BLE  
**MODEL:** LG-W110, W110, LGW110  
**SERIAL NUMBER:** (Radiated)  
**DATE TESTED:** AUGUST 28, 2014

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC PART 15 SUBPART B	Pass
ICES-003 ISSUE 5	Pass

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

**Note:** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For  
UL Verification Services Inc. By:

Tested By:



DAN CORONIA  
CONSUMER TECHNOLOGY DIVISION  
PROJECT LEAD  
UL Verification Services Inc.

VICKY NGUYEN  
CONSUMER TECHNOLOGY DIVISION  
LAB ENGINEER  
UL Verification Services Inc.

## 2. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 and 47266 Benicia Street, Fremont, California, USA. Line conducted emissions are measured only at the 47173 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

47173 Benicia Street	47266 Benicia Street
<input type="checkbox"/> Chamber A	<input type="checkbox"/> Chamber D
<input checked="" type="checkbox"/> Chamber B	<input type="checkbox"/> Chamber E
<input type="checkbox"/> Chamber C	<input type="checkbox"/> Chamber F

## 3. CALIBRATION AND UNCERTAINTY

### 3.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

### 3.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamp Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

### 3.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	±3.52 dB
Radiated Disturbance, 30 to 1000 MHz	±4.94 dB

Uncertainty figures are valid to a confidence level of 95%.

## 4. EQUIPMENT UNDER TEST

### 4.1. DESCRIPTION OF EUT

The EUT is a SMART WATCH with 2.4 DTS + BT and BLE.

#### GENERAL INFORMATION

Power Requirements	Input :100-240 VAC / 50-60 Hz Output: 5VDC, 0.85 A
List of frequencies generated or used by the EUT	19.2MHz

#### SUBASSEMBLIES

The EUT was constructed using the following sub-assemblies:

Subassembly Description	Manufacturer	Part Number
Cradle	LG	SDT-330
AC adapter	Sunlin	MCS-02WR
USB cable	Ningbo BROAD	EAD62377902

## 4.2. PRELIMINARY TEST CONFIGURATIONS

The following configurations were investigated during preliminary testing:

EUT Configuration	Description
1	EUT with Cradle and adapter
2	EUT with Laptop

The worst-case configuration was determined to be EUT with Laptop.

## 4.3. MODE(S) OF OPERATION

Mode	Description
1	EUT attached with BT call box and under standby mode; EUT docked in the charger with charging function enabled

#### 4.4. DETAILS OF TESTED SYSTEM

##### SUPPORT EQUIPMENT & PERIPHERALS

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
Cradle	LG	SDT-330	N/A	N/A
AC adapter	Sunlin	MCS-02WR	N/A	N/A
USB cable	Ningbo BROAD	EAD62289301	N/A	N/A
Laptop	Lenovo	T430	N/A	N/A
USB drive	kingstone	N/A	N/A	N/A


##### I/O CABLES


I/O CABLE LIST						
Cable No.	Port	No. of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	USB(Charger)	1	mini USB	USB	1	
1	USB(Laptop)	1	mini USB	USB	1	

##### TEST SETUP

The EUT is installed in a typical configuration. Test software exercised the EUT.

**TEST SETUP DIAGRAM**

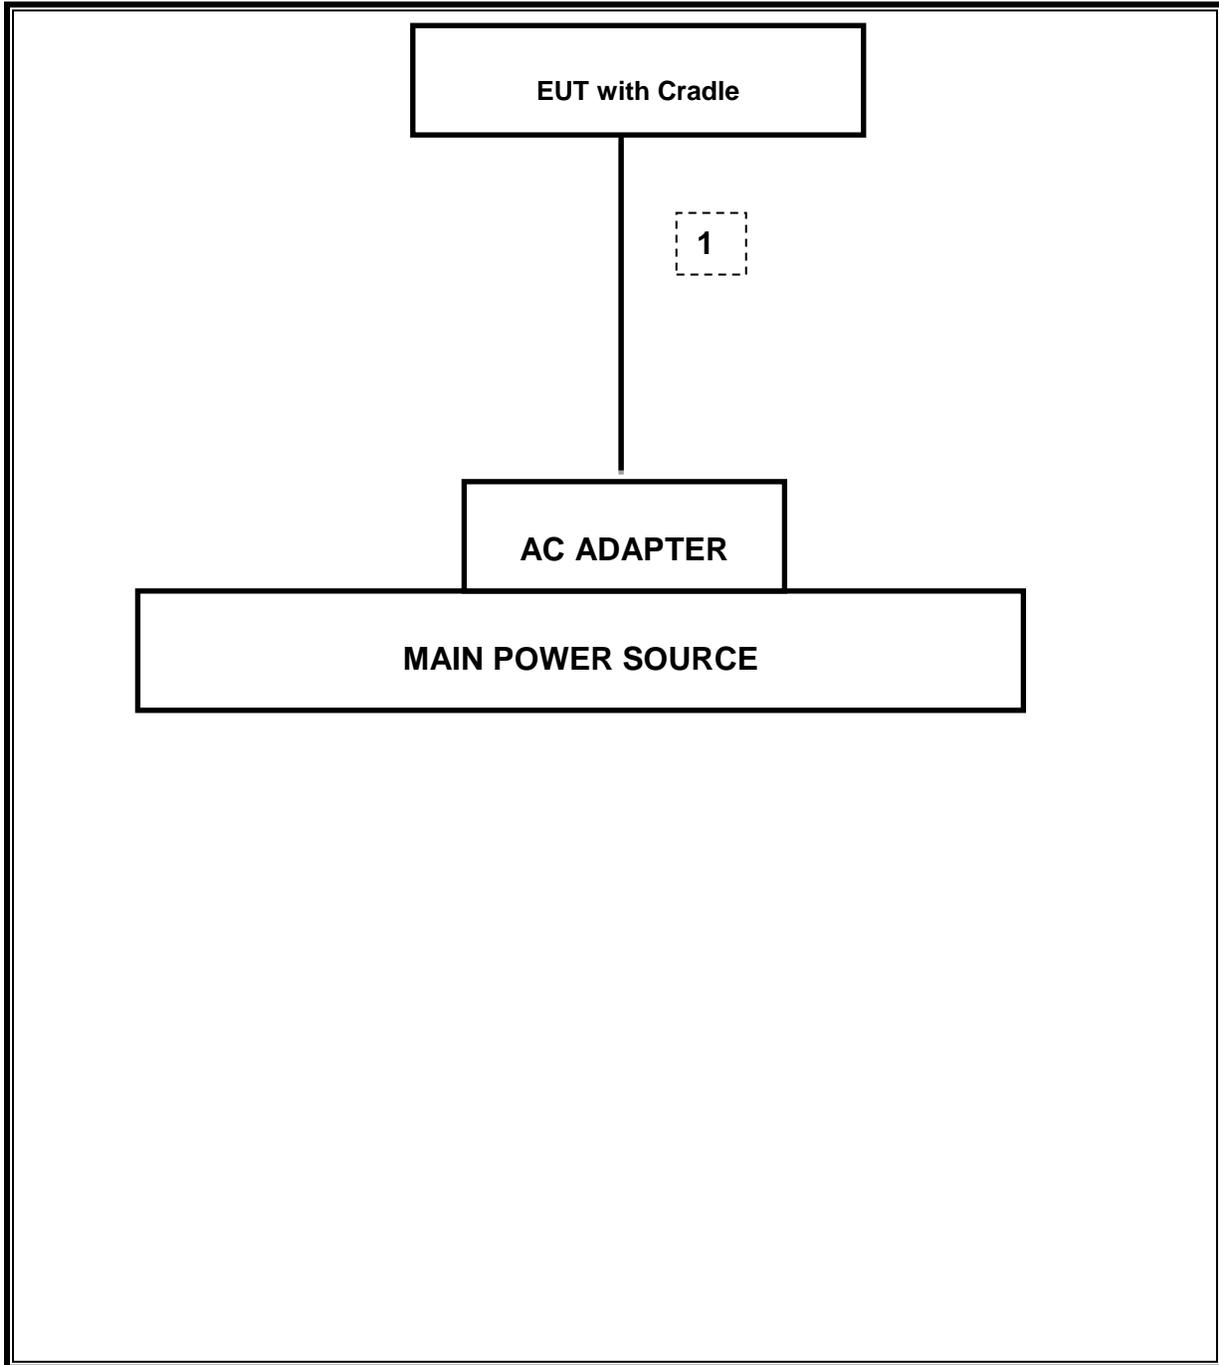

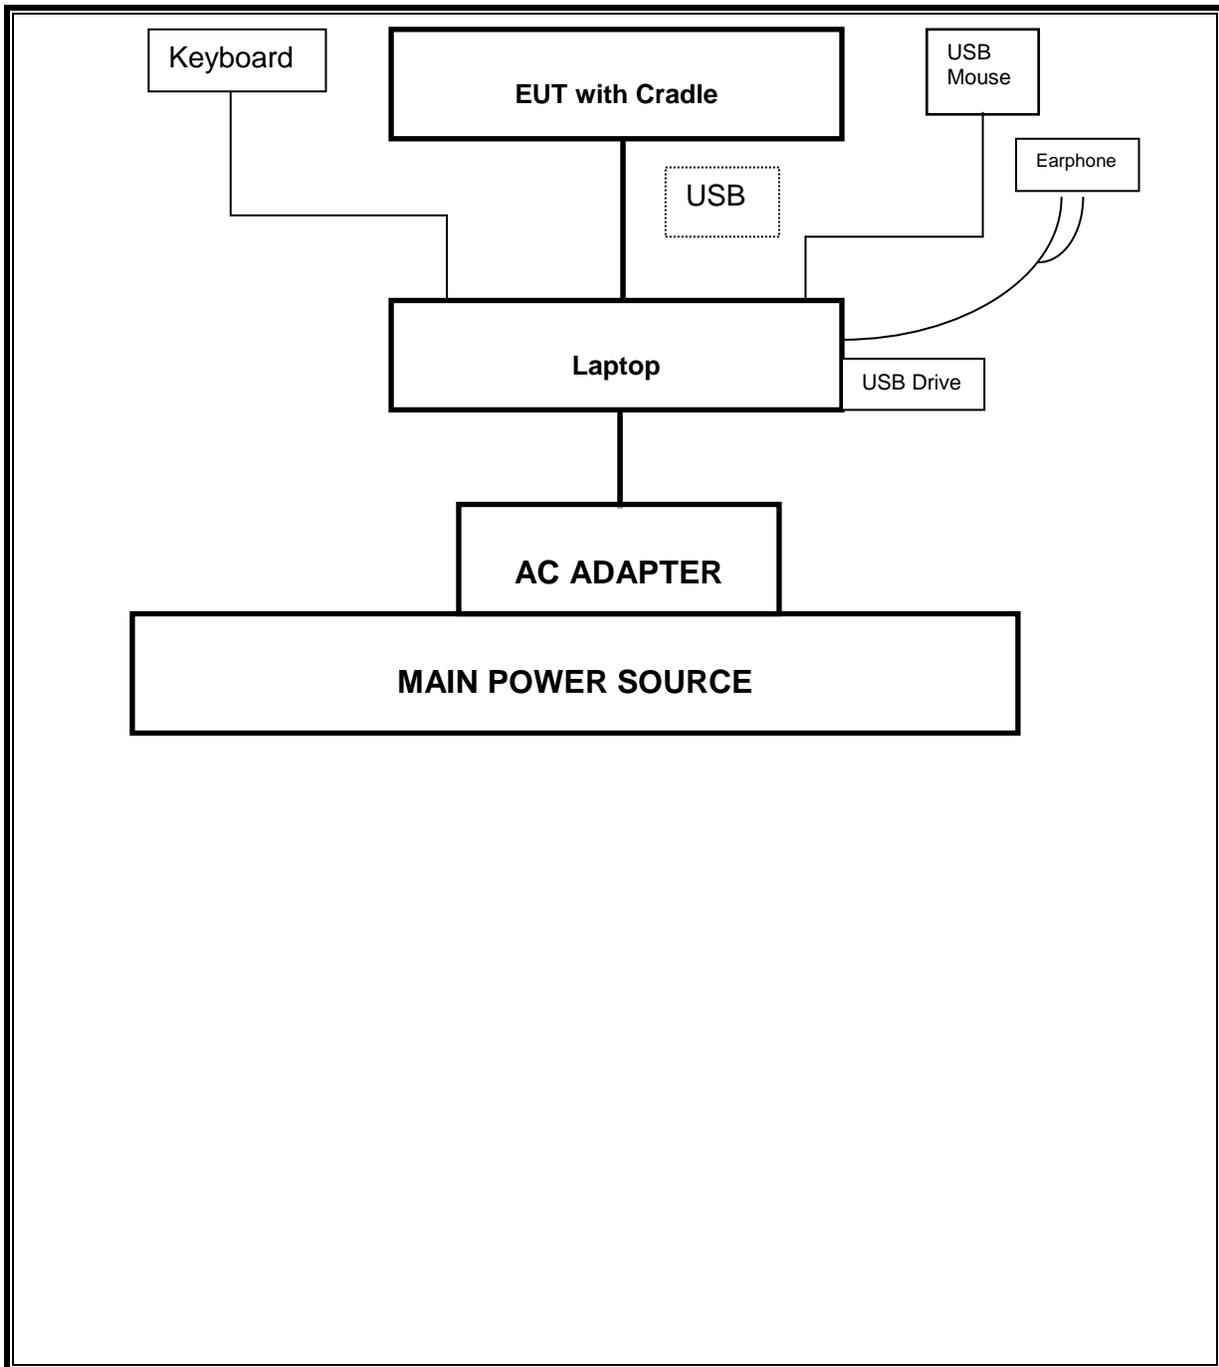

## 5. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Test Equipment List				
Description	Manufacturer	Model	S/N	Cal Due
Spectrum Analyzer, 44 GHz	Agilent / HP	E4446A	C01012	10/21/14
Preamplifier, 1300 MHz	Agilent / HP	8447D	C00885	01/16/15
ESA-E Spectrum Analyzer, 9kHz-26.5 GHz	Agilent / HP	E4407B	C01098	03/26/15
Antenna, Bilog, 30MHz-1 GHz	Sunol Sciences	JB1	C01171	02/12/15
OmniBER	HP	37717C	F00109	05/05/15
Spectrum Analyzer, 44 GHz	Agilent	N9030A	F00127	02/21/15
Antenna, Horn, 18 GHz	ETS	3117	F00131	02/19/15
EMI Test Receiver, 9 kHz-7GHz	R&S	ESCI 7	100935	08/14/15
LISN, 30 MHz	FCC	50/250-25-2	C00626	01/14/15

## 6. APPLICABLE LIMITS AND TEST RESULTS

### 6.1. RADIATED EMISSIONS

#### TEST PROCEDURE

ANSI C63.4: 2009  
RSS-Gen 7.2.4

The highest clock frequency generated or used in the EUT is 19.2MHz; therefore the frequency range was investigated from 30 MHz to 1000 MHz.



#### LIMIT

§15.109 (a) Except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Limits for radiated disturbance of Class B ITE at measuring distance of 3 m	
Frequency range (MHz)	Quasi-peak limits (dB $\mu$ V/m)
30 to 88	40
88 to 216	43.5
216 to 960	46
Above 960 MHz	54

Note: The lower limit shall apply at the transition frequency.

**EUT WITH LAPTOP BELOW 1GHZ RESULTS**

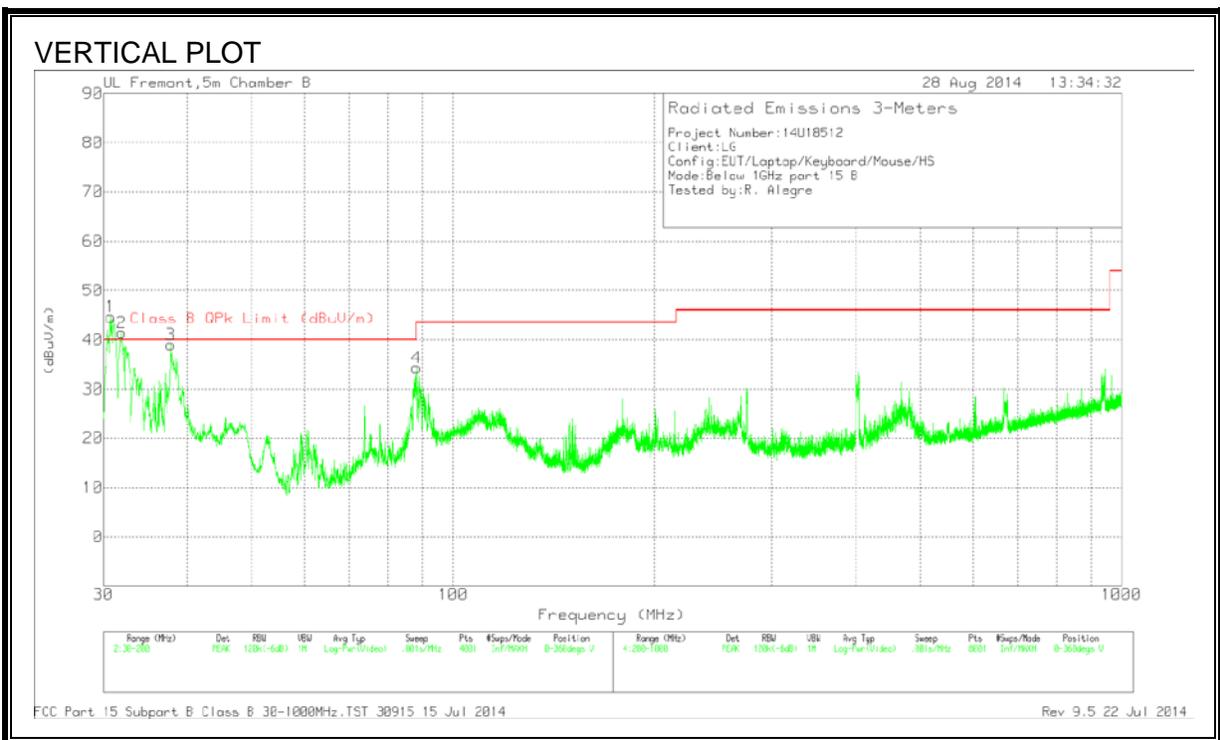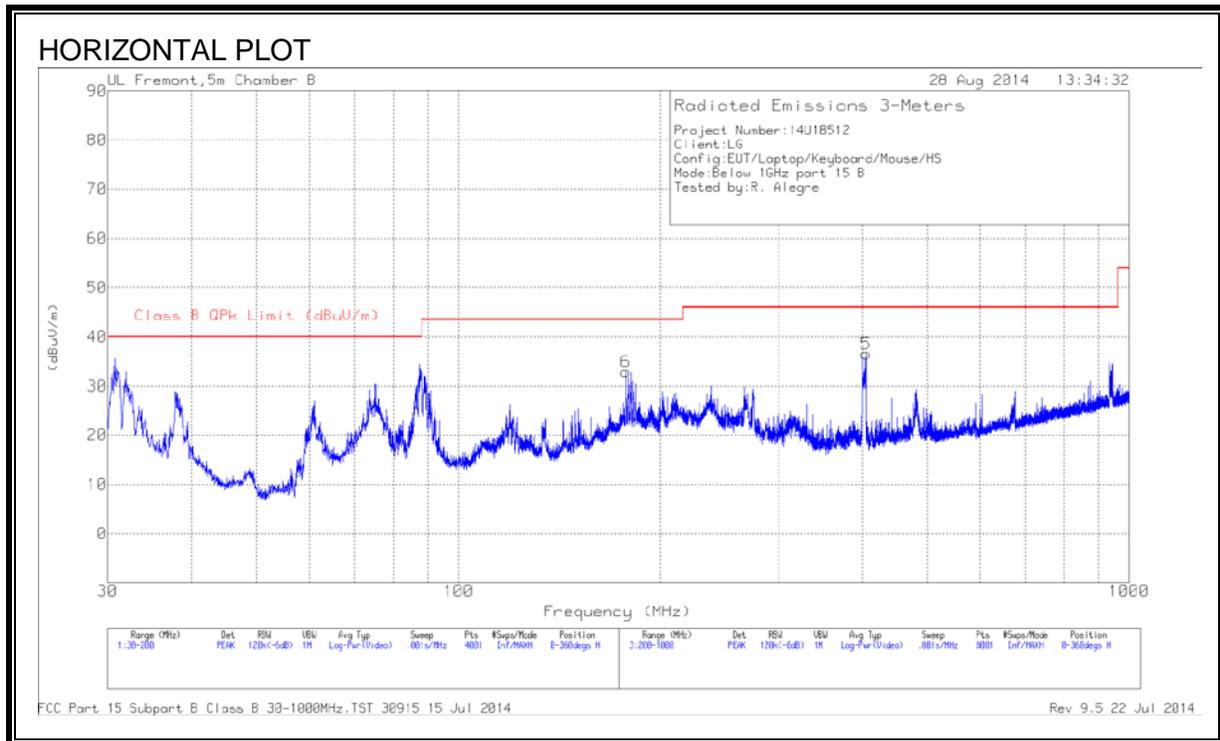

DATA

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF T243 (dB/m)	Amp/Cbl (dB)	Corrected Reading (dBuV/m)	Class B QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	30.765	52.56	PK	20.9	-28.8	44.66	40	4.66	0-360	101	V
2	31.9125	50.14	PK	20.1	-28.8	41.44	40	1.44	0-360	101	V
3	37.82	52.19	PK	15.5	-28.7	38.99	40	-1.01	0-360	101	V
4	88.0975	54.92	PK	7.5	-28.1	34.32	43.52	-9.2	0-360	101	V
6	177.7725	48.96	PK	11	-27.1	32.86	43.52	-10.66	0-360	200	H
5	404.8	46.64	PK	15.9	-26	36.54	46.02	-9.48	0-360	101	H



PK - Peak detector

Radiated Emissions

Frequency (MHz)	Meter Reading (dBuV)	Det	AF T243 (dB/m)	Amp/Cbl (dB)	Corrected Reading (dBuV/m)	Class B QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
30.7848	46.78	QP	20.9	-28.8	38.88	40	-1.12	279	101	V
31.9287	44.91	QP	20	-28.8	36.11	40	-3.89	285	102	V

QP - Quasi-Peak detector

**EUT WITH LAPTOP ABOVE 1GHZ RESULTS**

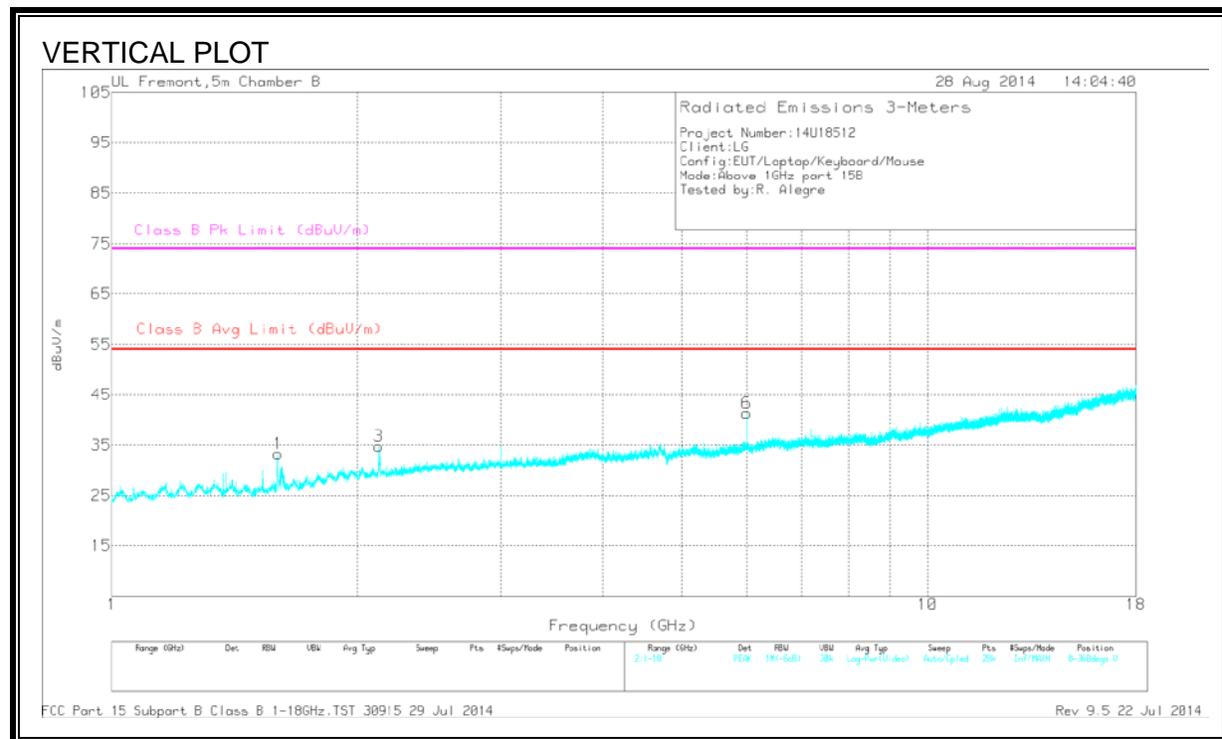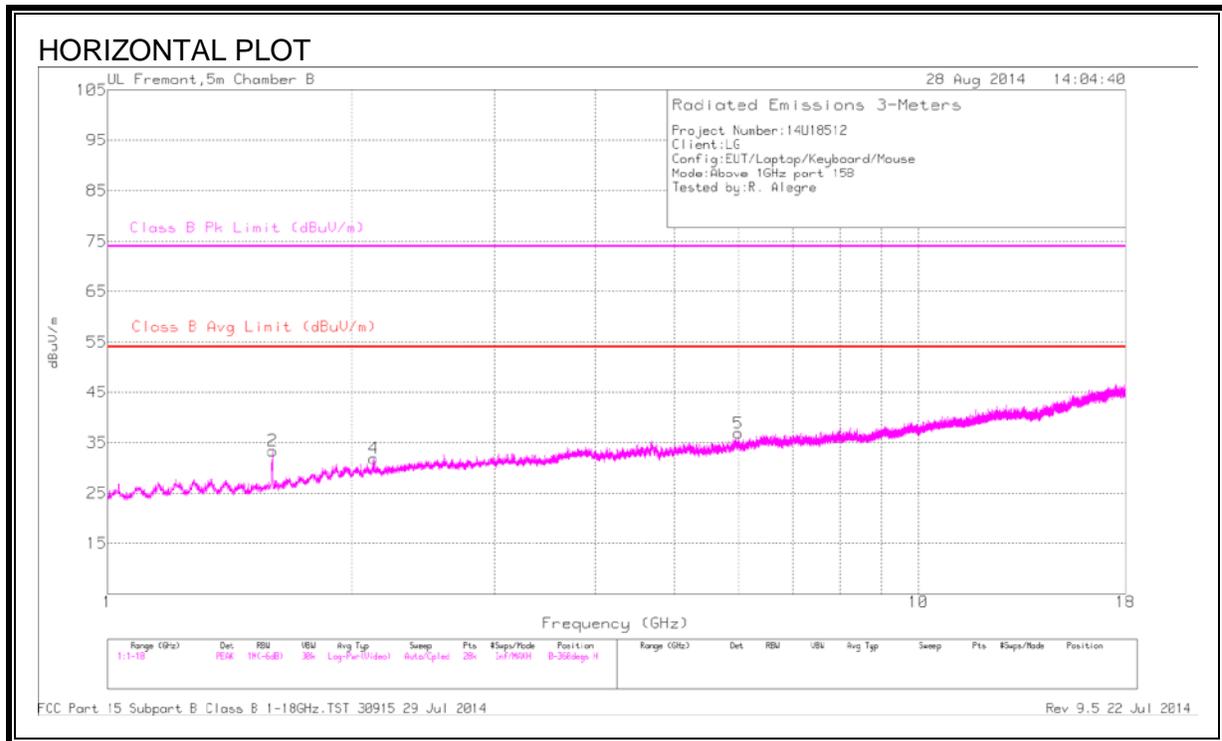

DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl (dB)	Corrected Reading dBuV/m	Class B Avg Limit (dBuV/m)	Av(CISPR) Margin (dB)	Class B Pk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	1.599	38.67	PK	28.5	-33.8	33.37	-	-	74	-40.63	0-360	199	H
1	1.599	38.56	PK	28.5	-33.8	33.26	-	-	74	-40.74	0-360	199	V
3	2.124	36.52	PK	31.3	-33.1	34.72	-	-	74	-39.28	0-360	101	V
4	2.132	33.78	PK	31.3	-33.2	31.88	-	-	74	-42.12	0-360	199	H
5	6	31.61	PK	35.3	-30	36.91	-	-	74	-37.09	0-360	199	H
6	6	35.99	PK	35.3	-30	41.29	-	-	74	-32.71	0-360	199	V

PK - Peak detector

**Note: additional above 1GHz testing performed to ensure the unit's performance purpose only.**

## 6.2. AC MAINS LINE CONDUCTED EMISSIONS

### TEST PROCEDURE

ANSI C63.4: 2009

### LIMIT

§15.107 (a) Except for Class A digital devices, for equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50  $\mu$ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the band edges.

Frequency range (MHz)	Limits (dB $\mu$ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

Notes:

1. The lower limit shall apply at the transition frequencies
2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

**EUT WITH LAPTOP RESULTS**

**6 WORST EMISSIONS**


**Line-L1 .15 - 30MHz**

<b>Trace Markers</b>										
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	T24 IL L1 (dB)	LC Cables 1&3 (dB)	Corrected Reading dBuV	CISPR 22 Class B QP	Margin to Limit (dB)	CISPR 22 Class B Avg	Margin to Limit (dB)
1	.1545	58.56	PK	1.3	0	59.86	65.8	-5.94	-	-
2	.1545	35.23	Av	1.3	0	36.53	-	-	55.8	-19.27
3	.5145	34.76	PK	.3	0	35.06	56	-20.94	-	-
4	.5145	20.23	Av	.3	0	20.53	-	-	46	-25.47
5	4.578	34.84	PK	.2	.1	35.14	56	-20.86	-	-
6	4.578	16.1	Av	.2	.1	16.4	-	-	46	-29.6
7	19.59	37.35	PK	.3	.2	37.85	60	-22.15	-	-
8	19.59	20.41	Av	.3	.2	20.91	-	-	50	-29.09

**Line-L2 .15 - 30MHz**

<b>Trace Markers</b>										
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	T24 IL L2 (dB)	LC Cables 2&3 (dB)	Corrected Reading dBuV	CISPR 22 Class B QP	Margin to Limit (dB)	CISPR 22 Class B Avg	Margin to Limit (dB)
9	.15	57.55	PK	1.5	0	59.05	66	-6.95	-	-
10	.15	33.3	Av	1.5	0	34.8	-	-	56	-21.2
11	.519	33.61	PK	.4	0	34.01	56	-21.99	-	-
12	.519	20	Av	.4	0	20.4	-	-	46	-25.6
13	4.605	33.5	PK	.2	.1	33.8	56	-22.2	-	-
14	4.605	12.69	Av	.2	.1	12.99	-	-	46	-33.01
15	19.644	37.01	PK	.3	.2	37.51	60	-22.49	-	-
16	19.644	18.62	Av	.3	.2	19.12	-	-	50	-30.88

**LINE 1 RESULTS**

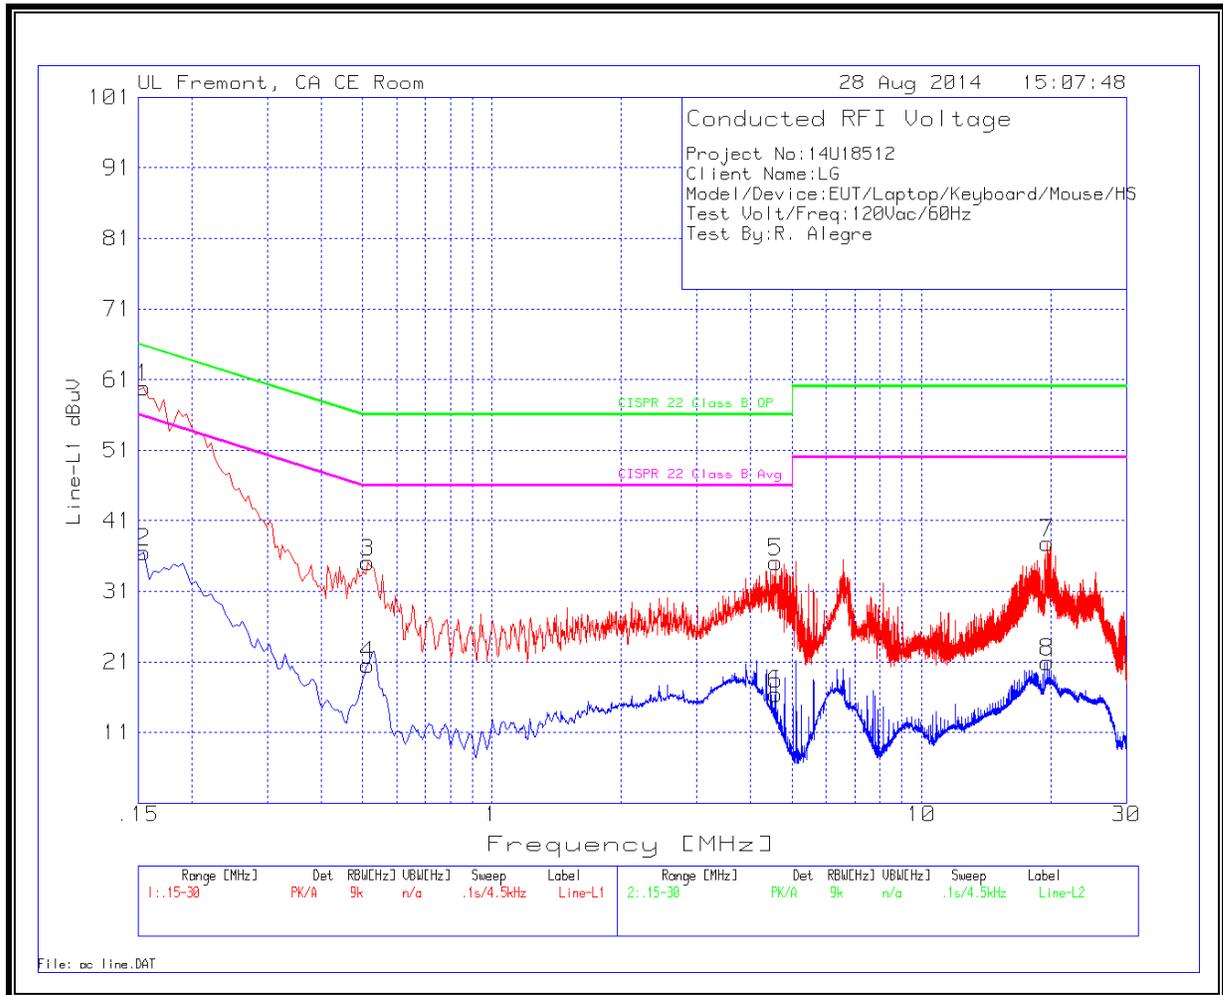

**LINE 2 RESULTS**

