

Attachment 3. – Probe Calibration Data

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 0108

Client **HCT (Dymstec)**

Certificate No: **EX3-3863_Apr18**

CALIBRATION CERTIFICATE

Object **EX3DV4 - SN:3863**

Calibration procedure(s) **QA CAL-01.v9, QA CAL-12.v9, QA CAL-14.v4, QA CAL-23.v5,
QA CAL-25.v6
Calibration procedure for dosimetric E-field probes**

Calibration date: **April 25, 2018**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	04-Apr-18 (No. 217-02672/02673)	Apr-19
Power sensor NRP-Z91	SN: 103244	04-Apr-18 (No. 217-02672)	Apr-19
Power sensor NRP-Z91	SN: 103245	04-Apr-18 (No. 217-02673)	Apr-19
Reference 20 dB Attenuator	SN: S5277 (20x)	04-Apr-18 (No. 217-02682)	Apr-19
Reference Probe ES3DV2	SN: 3013	30-Dec-17 (No. ES3-3013_Dec17)	Dec-18
DAE4	SN: 660	21-Dec-17 (No. DAE4-660_Dec17)	Dec-18
Secondary Standards	ID	Check Date (in house)	Scheduled Check
Power meter E4419B	SN: GB41293874	06-Apr-16 (in house check Jun-16)	In house check: Jun-18
Power sensor E4412A	SN: MY41498087	06-Apr-16 (in house check Jun-16)	In house check: Jun-18
Power sensor E4412A	SN: 000110210	06-Apr-16 (in house check Jun-16)	In house check: Jun-18
RF generator HP 8648C	SN: US3642U01700	04-Aug-99 (in house check Jun-16)	In house check: Jun-18
Network Analyzer HP 8753E	SN: US37390585	18-Oct-01 (in house check Oct-17)	In house check: Oct-18

Calibrated by:	Name Claudio Leubler	Function Laboratory Technician	Signature
Approved by:	Name Katja Polovic	Function Technical Manager	Signature
Issued: April 26, 2018			
This calibration certificate shall not be reproduced except in full without written approval of the laboratory.			

Certificate No: EX3-3863_Apr18

Page 1 of 39

결	담당자	확인자

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8804 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 0108**

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Glossary:

TSL	tissue simulating liquid
NORM _{x,y,z}	sensitivity in free space
ConvF	sensitivity in TSL / NORM _{x,y,z}
DCP	diode compression point
CF	crest factor (1/duty_cycle) of the RF signal
A, B, C, D	modulation dependent linearization parameters
Polarization φ	φ rotation around probe axis
Polarization θ	θ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\theta = 0$ is normal to probe axis
Connector Angle	information used in DASY system to align probe sensor X to the robot coordinate system

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Methods Applied and Interpretation of Parameters:

- NORM_{x,y,z}**: Assessed for E-field polarization $\theta = 0$ ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: R22 waveguide). NORM_{x,y,z} are only intermediate values, i.e., the uncertainties of NORM_{x,y,z} does not affect the E²-field uncertainty inside TSL (see below ConvF).
- NORM(f)_{x,y,z} = NORM_{x,y,z} * frequency_response** (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- DCP_{x,y,z}**: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- PAR**: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- A_{x,y,z}; B_{x,y,z}; C_{x,y,z}; D_{x,y,z}; VR_{x,y,z}**: A, B, C, D are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for $f \leq 800$ MHz) and inside waveguide using analytical field distributions based on power measurements for $f > 800$ MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM_{x,y,z} * ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- Spherical isotropy (3D deviation from isotropy)**: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- Connector Angle**: The angle is assessed using the information gained by determining the NORM_x (no uncertainty required).

EX3DV4 – SN:3863

April 25, 2018

Probe EX3DV4

SN:3863

Manufactured: February 2, 2012
Calibrated: April 25, 2018

Calibrated for DASY/EASY Systems
(Note: non-compatible with DASY2 system!)

EX3DV4- SN:3863

April 25, 2018

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3863

Basic Calibration Parameters

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm ($\mu\text{V}/(\text{V}/\text{m})^2$) ^A	0.35	0.34	0.45	$\pm 10.1 \%$
DCP (mV) ^B	99.7	103.9	103.3	

Modulation Calibration Parameters

UID	Communication System Name		A dB	B dB $\sqrt{\mu\text{V}}$	C	D dB	VR mV	Unc ^E (k=2)
0	CW	X	0.0	0.0	1.0	0.00	151.1	$\pm 3.5 \%$
		Y	0.0	0.0	1.0		153.4	
		Z	0.0	0.0	1.0		149.6	

Note: For details on UID parameters see Appendix.

Sensor Model Parameters

	C1 fF	C2 fF	α V^{-1}	T1 $\text{ms} \cdot \text{V}^{-2}$	T2 $\text{ms} \cdot \text{V}^{-1}$	T3 ms	T4 V^{-2}	T5 V^{-1}	T6
X	35.70	266.3	35.57	18.74	0.500	5.000	0.445	0.515	1.000
Y	23.67	174.6	34.99	6.322	0.441	5.000	1.481	0.043	1.003
Z	41.62	317.3	36.81	8.754	0.711	5.047	0.519	0.469	1.008

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

^A The uncertainties of Norm X,Y,Z do not affect the E^2 -field uncertainty inside TSL (see Pages 5 and 6).

^B Numerical linearization parameter; uncertainty not required.

^E Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

EX3DV4- SN:3863

April 25, 2018

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3863

Calibration Parameter Determined in Head Tissue Simulating Media

f (MHz) ^c	Relative Permittivity ^e	Conductivity (S/m) ^f	ConvF X	ConvF Y	ConvF Z	Alpha ^g	Depth ^g (mm)	Unc (k=2)
150	52.3	0.76	12.22	12.22	12.22	0.00	1.00	± 13.3 %
450	43.5	0.87	10.92	10.92	10.92	0.14	1.20	± 13.3 %
750	41.9	0.89	10.20	10.20	10.20	0.61	0.80	± 12.0 %
835	41.5	0.90	9.95	9.95	9.95	0.50	0.80	± 12.0 %
900	41.5	0.97	9.67	9.67	9.67	0.32	1.07	± 12.0 %
1450	40.5	1.20	8.78	8.78	8.78	0.34	0.80	± 12.0 %
1750	40.1	1.37	8.45	8.45	8.45	0.42	0.80	± 12.0 %
1900	40.0	1.40	8.19	8.19	8.19	0.36	0.80	± 12.0 %
2300	39.5	1.67	7.77	7.77	7.77	0.34	0.86	± 12.0 %
2450	39.2	1.80	7.62	7.62	7.62	0.36	0.85	± 12.0 %
2600	39.0	1.96	7.19	7.19	7.19	0.36	0.93	± 12.0 %
5250	35.9	4.71	5.04	5.04	5.04	0.40	1.80	± 13.1 %
5600	35.5	5.07	4.68	4.68	4.68	0.40	1.80	± 13.1 %
5750	35.4	5.22	5.08	5.08	5.08	0.40	1.80	± 13.1 %

^c Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

^e At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

^g Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

EX3DV4- SN:3863

April 25, 2018

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3863

Calibration Parameter Determined in Body Tissue Simulating Media

f (MHz) ^c	Relative Permittivity ^f	Conductivity (S/m) ^f	ConvF X	ConvF Y	ConvF Z	Alpha ^g	Depth ^h (mm)	Unc (k=2)
150	61.9	0.80	11.86	11.86	11.86	0.00	1.00	± 13.3 %
450	56.7	0.94	10.78	10.78	10.78	0.08	1.20	± 13.3 %
750	55.5	0.96	10.02	10.02	10.02	0.37	0.89	± 12.0 %
835	55.2	0.97	9.66	9.66	9.66	0.42	0.91	± 12.0 %
1750	53.4	1.49	8.18	8.18	8.18	0.40	0.80	± 12.0 %
1900	53.3	1.52	7.84	7.84	7.84	0.34	0.80	± 12.0 %
2300	52.9	1.81	7.68	7.68	7.68	0.29	0.90	± 12.0 %
2450	52.7	1.95	7.48	7.48	7.48	0.27	0.97	± 12.0 %
2600	52.5	2.16	7.27	7.27	7.27	0.17	1.05	± 12.0 %
5250	48.9	5.36	4.41	4.41	4.41	0.50	1.90	± 13.1 %
5600	48.5	5.77	3.88	3.88	3.88	0.50	1.90	± 13.1 %
5750	48.3	5.94	4.21	4.21	4.21	0.50	1.90	± 13.1 %

^c Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v1.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.


^f At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

^h Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

EX3DV4-- SN:3863

April 25, 2018

Frequency Response of E-Field (TEM-Cell:ifi110 EXX, Waveguide: R22)


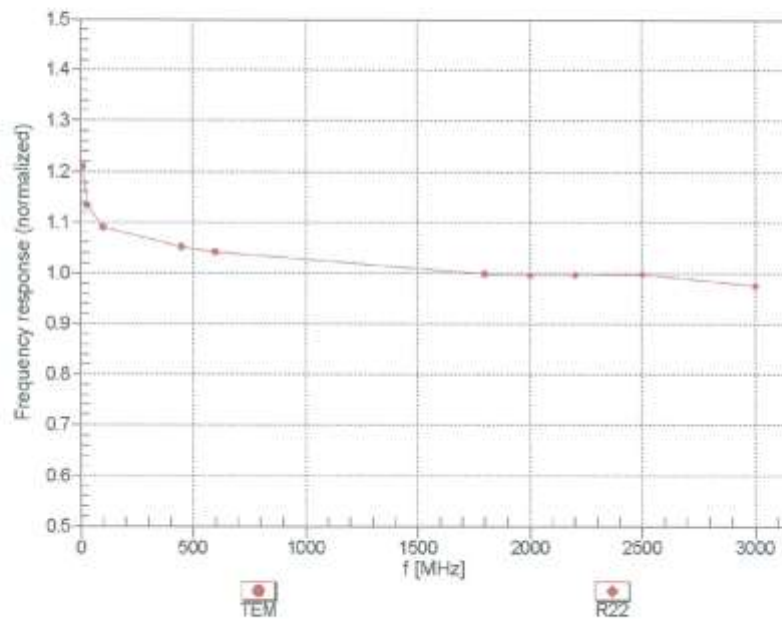


Uncertainty of Frequency Response of E-field: $\pm 6.3\%$ ($k=2$)

EX3DV4- SN:3863

April 25, 2018

Receiving Pattern (ϕ), $\theta = 0^\circ$

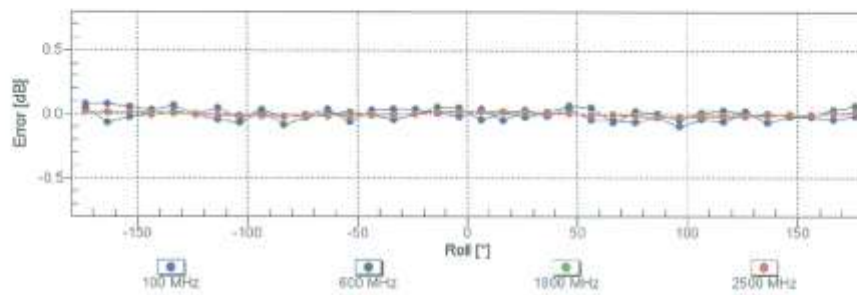
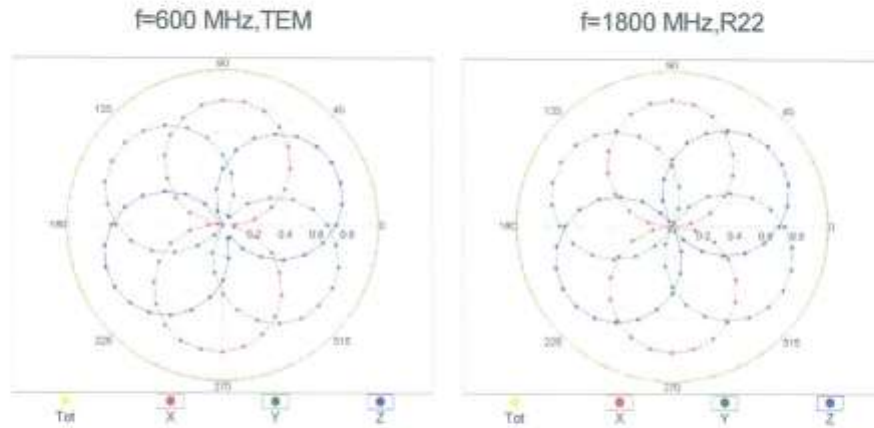


Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ ($k=2$)

EX3DV4- SN:3863

April 25, 2018

Dynamic Range $f(\text{SAR}_{\text{head}})$ (TEM cell, $f_{\text{eval}} = 1900 \text{ MHz}$)

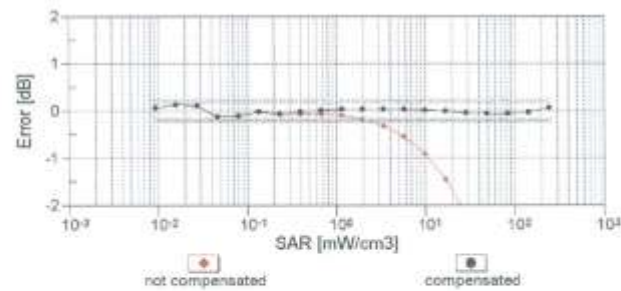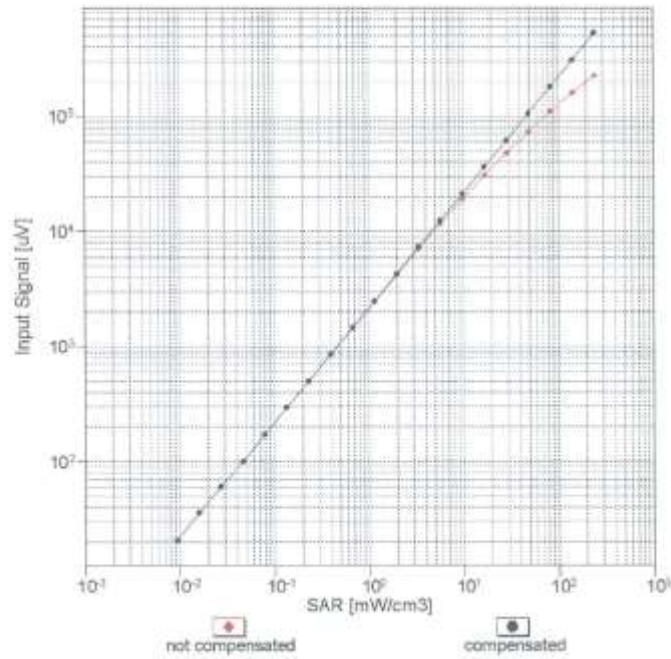


Uncertainty of Linearity Assessment: $\pm 0.6\%$ ($k=2$)

EX3DV4- SN:3663


April 25, 2018

Conversion Factor Assessment

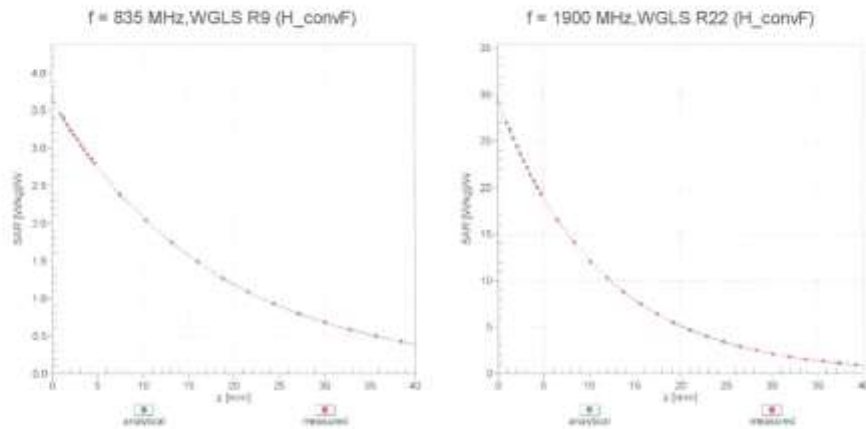

Deviation from Isotropy in Liquid

Error (ϕ, θ) , $f = 900 \text{ MHz}$

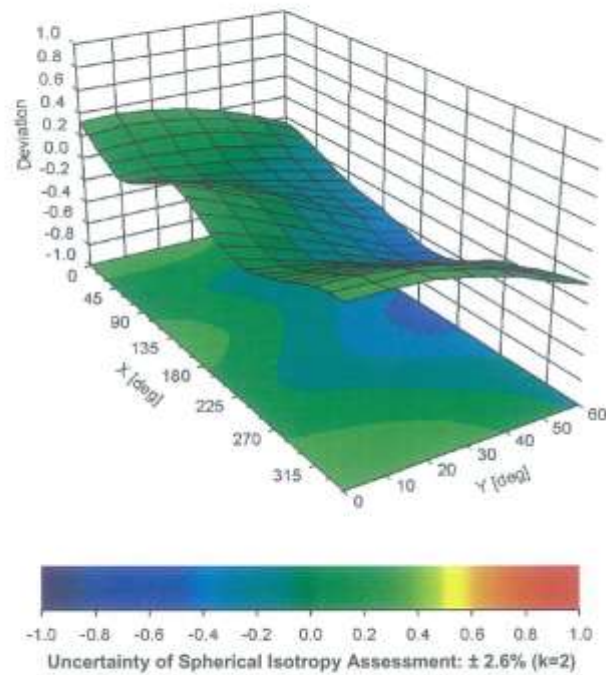

EX3DV4- SN:3863

April 25, 2018

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3863

Other Probe Parameters

Sensor Arrangement	Triangular
Connector Angle (°)	106.5
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disabled
Probe Overall Length	337 mm
Probe Body Diameter	10 mm
Tip Length	9 mm
Tip Diameter	2.5 mm
Probe Tip to Sensor X Calibration Point	1 mm
Probe Tip to Sensor Y Calibration Point	1 mm
Probe Tip to Sensor Z Calibration Point	1 mm
Recommended Measurement Distance from Surface	1.4 mm

EX30V4-- SN:3863

April 25, 2018

Appendix: Modulation Calibration Parameters

UID	Communication System Name		A dB	B dB-μV	C	D dB	VR mV	Max. Unc ^E (k=2)
0	CW	X	0.00	0.00	1.00	0.00	151.1	± 3.5 %
		Y	0.00	0.00	1.00		153.4	
		Z	0.00	0.00	1.00		149.6	
10010- CAA	SAR Validation (Square, 100ms, 10ms)	X	11.00	70.00	30.00	10.00	20.0	± 9.6 %
		Y	1.74	62.86	8.09		20.0	
		Z	2.07	64.28	9.36		20.0	
10011- CAB	UMTS-FDD (WCDMA)	X	0.92	66.96	14.69	0.00	150.0	± 9.6 %
		Y	1.23	73.72	17.72		150.0	
		Z	0.82	64.81	13.15		150.0	
10012- CAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps)	X	1.13	63.96	15.00	0.41	150.0	± 9.6 %
		Y	1.12	65.21	15.97		150.0	
		Z	1.04	62.64	14.13		150.0	
10013- CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps)	X	4.66	66.70	16.87	1.46	150.0	± 9.6 %
		Y	4.41	67.26	17.07		150.0	
		Z	4.70	66.40	16.80		150.0	
10021- DAC	GSM-FDD (TDMA, GMSK)	X	9.09	79.88	16.40	9.39	50.0	± 9.6 %
		Y	45.23	97.58	21.17		50.0	
		Z	100.00	110.54	25.67		50.0	
10023- DAC	GPRS-FDD (TDMA, GMSK, TN 0)	X	6.78	76.49	15.24	9.57	50.0	± 9.6 %
		Y	9.44	80.59	16.39		50.0	
		Z	67.38	105.58	24.50		50.0	
10024- DAC	GPRS-FDD (TDMA, GMSK, TN 0-1)	X	11.10	81.88	15.87	6.56	60.0	± 9.6 %
		Y	100.00	103.67	20.95		60.0	
		Z	100.00	108.28	23.45		60.0	
10025- DAC	EDGE-FDD (TDMA, 8PSK, TN 0)	X	3.31	63.37	21.37	12.57	50.0	± 9.6 %
		Y	4.23	71.81	26.71		50.0	
		Z	3.77	66.74	23.69		50.0	
10026- DAC	EDGE-FDD (TDMA, 8PSK, TN 0-1)	X	9.84	92.28	31.76	9.56	60.0	± 9.6 %
		Y	5.95	83.99	29.74		60.0	
		Z	7.19	86.26	30.24		60.0	
10027- DAC	GPRS-FDD (TDMA, GMSK, TN 0-1-2)	X	100.00	101.03	19.83	4.80	80.0	± 9.6 %
		Y	100.00	103.59	20.13		80.0	
		Z	100.00	106.91	22.02		80.0	
10028- DAC	GPRS-FDD (TDMA, GMSK, TN 0-1-2-3)	X	100.00	100.43	19.05	3.55	100.0	± 9.6 %
		Y	100.00	104.67	19.92		100.0	
		Z	100.00	105.33	20.65		100.0	
10029- DAC	EDGE-FDD (TDMA, 8PSK, TN 0-1-2)	X	8.41	82.79	27.10	7.80	80.0	± 9.6 %
		Y	4.05	75.66	25.13		80.0	
		Z	4.75	77.36	25.50		80.0	
10030- CAA	IEEE 802.15.1 Bluetooth (GFSK, DH1)	X	5.28	74.89	13.09	5.30	70.0	± 9.6 %
		Y	100.00	100.23	18.93		70.0	
		Z	100.00	105.72	21.80		70.0	
10031- CAA	IEEE 802.15.1 Bluetooth (GFSK, DH3)	X	4.88	76.31	11.58	1.88	100.0	± 9.6 %
		Y	0.28	61.23	5.16		100.0	
		Z	0.39	62.06	6.02		100.0	

EX3DV4-- SN:3863

April 25, 2018

10032-CAA	IEEE 802.15.1 Bluetooth (GFSK, DH5)	X	99.99	93.80	14.65	1.17	100.0	± 9.6 %
		Y	0.14	60.00	3.64		100.0	
		Z	0.18	60.00	3.83		100.0	
10033-CAA	IEEE 802.15.1 Bluetooth (PI/4-DQPSK, DH1)	X	6.63	80.89	18.62	5.30	70.0	± 9.6 %
		Y	3.59	74.26	15.11		70.0	
		Z	6.50	84.64	21.35		70.0	
10034-CAA	IEEE 802.15.1 Bluetooth (PI/4-DQPSK, DH3)	X	2.35	71.30	13.76	1.88	100.0	± 9.6 %
		Y	0.91	63.27	8.38		100.0	
		Z	1.79	70.18	14.28		100.0	
10035-CAA	IEEE 802.15.1 Bluetooth (PI/4-DQPSK, DH5)	X	1.70	69.13	12.72	1.17	100.0	± 9.6 %
		Y	0.67	61.91	7.34		100.0	
		Z	1.29	67.25	12.60		100.0	
10036-CAA	IEEE 802.15.1 Bluetooth (8-DPSK, DH1)	X	8.29	83.97	19.70	5.30	70.0	± 9.6 %
		Y	4.28	76.54	16.01		70.0	
		Z	8.57	88.94	22.82		70.0	
10037-CAA	IEEE 802.15.1 Bluetooth (8-DPSK, DH3)	X	2.17	70.51	13.42	1.88	100.0	± 9.6 %
		Y	0.85	62.76	8.13		100.0	
		Z	1.68	69.54	13.98		100.0	
10038-CAA	IEEE 802.15.1 Bluetooth (8-DPSK, DH5)	X	1.73	69.53	13.00	1.17	100.0	± 9.6 %
		Y	0.68	62.14	7.59		100.0	
		Z	1.29	67.51	12.89		100.0	
10039-CAB	CDMA2000 (1xRTT, RC1)	X	1.20	68.00	12.32	0.00	150.0	± 9.6 %
		Y	0.40	60.00	5.73		150.0	
		Z	1.08	65.78	11.49		150.0	
10042-CAB	IS-54 / IS-136 FDD (TDMA/FDM, PI/4-DQPSK, Halfrate)	X	3.96	71.13	12.28	7.78	50.0	± 9.6 %
		Y	4.33	73.40	12.83		50.0	
		Z	20.63	89.92	18.82		50.0	
10044-CAA	IS-91/EIA/TIA-553 FDD (FDMA, FM)	X	0.03	118.44	11.49	0.00	150.0	± 9.6 %
		Y	0.03	123.41	0.47		150.0	
		Z	0.10	121.86	6.25		150.0	
10048-CAA	DECT (TDD, TDMA/FDM, GFSK, Full Slot, 24)	X	4.53	70.04	14.07	13.80	25.0	± 9.6 %
		Y	4.85	69.08	13.50		25.0	
		Z	9.31	78.44	18.09		25.0	
10049-CAA	DECT (TDD, TDMA/FDM, GFSK, Double Slot, 12)	X	5.00	72.36	13.87	10.79	40.0	± 9.6 %
		Y	4.95	72.19	13.60		40.0	
		Z	10.49	82.35	18.31		40.0	
10056-CAA	UMTS-TDD (TD-SCDMA, 1.28 Mcps)	X	9.88	83.19	19.98	9.03	50.0	± 9.6 %
		Y	7.80	79.96	18.01		50.0	
		Z	13.55	90.17	23.36		50.0	
10058-DAC	EDGE-FDD (TDMA, 8PSK, TN 0-1-2-3)	X	4.96	77.96	24.46	6.55	100.0	± 9.6 %
		Y	3.33	72.13	22.83		100.0	
		Z	3.78	73.24	22.95		100.0	
10059-CAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 2 Mbps)	X	1.19	65.20	15.58	0.61	110.0	± 9.6 %
		Y	1.14	68.22	16.46		110.0	
		Z	1.06	63.47	14.60		110.0	
10060-CAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 5.5 Mbps)	X	18.28	106.21	26.40	1.30	110.0	± 9.6 %
		Y	100.00	142.43	36.78		110.0	
		Z	2.88	84.70	20.89		110.0	

EX3DV4- SN:3863

April 25, 2018

10061-CAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps)	X	3.45	81.46	21.39	2.04	110.0	± 9.6 %
		Y	2.51	81.17	22.36		110.0	
		Z	1.97	74.69	19.49		110.0	
10062-CAC	IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps)	X	4.45	66.68	16.34	0.49	100.0	± 9.6 %
		Y	4.22	67.27	16.54		100.0	
		Z	4.49	66.34	16.21		100.0	
10063-CAC	IEEE 802.11a/h WiFi 5 GHz (OFDM, 9 Mbps)	X	4.47	66.78	16.42	0.72	100.0	± 9.6 %
		Y	4.23	67.37	16.64		100.0	
		Z	4.51	66.43	16.31		100.0	
10064-CAC	IEEE 802.11a/h WiFi 5 GHz (OFDM, 12 Mbps)	X	4.71	66.95	16.61	0.86	100.0	± 9.6 %
		Y	4.42	67.49	16.78		100.0	
		Z	4.77	66.69	16.54		100.0	
10065-CAC	IEEE 802.11a/h WiFi 5 GHz (OFDM, 18 Mbps)	X	4.59	66.82	16.68	1.21	100.0	± 9.6 %
		Y	4.30	67.26	16.81		100.0	
		Z	4.65	66.56	16.62		100.0	
10066-CAC	IEEE 802.11a/h WiFi 5 GHz (OFDM, 24 Mbps)	X	4.60	66.82	16.82	1.46	100.0	± 9.6 %
		Y	4.29	67.17	16.89		100.0	
		Z	4.66	66.58	16.78		100.0	
10067-CAC	IEEE 802.11a/h WiFi 5 GHz (OFDM, 36 Mbps)	X	4.89	67.08	17.27	2.04	100.0	± 9.6 %
		Y	4.52	67.29	17.26		100.0	
		Z	4.96	66.83	17.27		100.0	
10068-CAC	IEEE 802.11a/h WiFi 5 GHz (OFDM, 48 Mbps)	X	4.93	67.01	17.42	2.55	100.0	± 9.6 %
		Y	4.61	67.41	17.54		100.0	
		Z	5.00	66.81	17.45		100.0	
10069-CAC	IEEE 802.11a/h WiFi 5 GHz (OFDM, 54 Mbps)	X	4.99	67.04	17.61	2.67	100.0	± 9.6 %
		Y	4.63	67.31	17.64		100.0	
		Z	5.07	66.84	17.65		100.0	
10071-CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 9 Mbps)	X	4.76	66.78	17.15	1.99	100.0	± 9.6 %
		Y	4.51	67.31	17.34		100.0	
		Z	4.79	66.48	17.11		100.0	
10072-CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 12 Mbps)	X	4.72	67.04	17.33	2.30	100.0	± 9.6 %
		Y	4.43	67.41	17.46		100.0	
		Z	4.76	66.75	17.30		100.0	
10073-CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 18 Mbps)	X	4.80	67.25	17.65	2.83	100.0	± 9.6 %
		Y	4.51	67.66	17.82		100.0	
		Z	4.82	66.92	17.62		100.0	
10074-CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 24 Mbps)	X	4.81	67.22	17.80	3.30	100.0	± 9.6 %
		Y	4.56	67.77	18.04		100.0	
		Z	4.81	66.83	17.77		100.0	
10075-CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 36 Mbps)	X	4.84	67.27	18.05	3.82	90.0	± 9.6 %
		Y	4.60	67.82	18.29		90.0	
		Z	4.85	66.90	18.05		90.0	
10076-CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 48 Mbps)	X	4.88	67.16	18.22	4.15	90.0	± 9.6 %
		Y	4.64	67.67	18.44		90.0	
		Z	4.88	66.75	18.20		90.0	
10077-CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 54 Mbps)	X	4.92	67.26	18.33	4.30	90.0	± 9.6 %
		Y	4.68	67.60	18.58		90.0	
		Z	4.90	66.83	18.30		90.0	

EX3DV4-- SN:3863

April 25, 2018

10081-CAB	CDMA2000 (1xRTT, RC3)	X	0.57	63.24	9.45	0.00	150.0	± 9.6 %
		Y	0.29	60.00	5.08		150.0	
		Z	0.55	61.98	8.86		150.0	
10082-CAB	IS-54 / IS-136 FDD (TDMA/FDM, PI4-DQPSK, Fullrate)	X	0.85	60.00	4.39	4.77	80.0	± 9.6 %
		Y	0.61	60.00	3.29		80.0	
		Z	0.85	61.10	4.43		80.0	
10090-DAC	GPRS-FDD (TDMA, GMSK, TN 0-4)	X	11.01	81.80	15.86	6.56	60.0	± 9.6 %
		Y	100.00	103.71	20.98		60.0	
		Z	100.00	108.37	23.51		60.0	
10097-CAB	UMTS-FDD (HSDPA)	X	1.75	68.14	15.41	0.00	150.0	± 9.6 %
		Y	2.15	73.36	17.10		150.0	
		Z	1.81	66.21	14.35		150.0	
10098-CAB	UMTS-FDD (HSUPA, Subtest 2)	X	1.71	68.07	15.37	0.00	150.0	± 9.6 %
		Y	2.11	73.35	17.12		150.0	
		Z	1.57	66.13	14.31		150.0	
10099-DAC	EDGE-FDD (TDMA, 8PSK, TN 0-4)	X	9.91	92.40	31.80	9.56	60.0	± 9.6 %
		Y	6.00	84.12	29.79		60.0	
		Z	7.24	86.38	30.27		60.0	
10100-CAD	LTE-FDD (SC-FDMA, 100% RB, 20 MHz, QPSK)	X	2.91	69.93	16.52	0.00	150.0	± 9.6 %
		Y	2.94	71.66	17.64		150.0	
		Z	2.79	68.74	15.72		150.0	
10101-CAD	LTE-FDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM)	X	3.05	67.27	15.75	0.00	150.0	± 9.6 %
		Y	2.96	68.14	16.32		150.0	
		Z	3.02	66.65	15.31		150.0	
10102-CAD	LTE-FDD (SC-FDMA, 100% RB, 20 MHz, 64-QAM)	X	3.16	67.31	15.88	0.00	150.0	± 9.6 %
		Y	3.06	68.19	16.41		150.0	
		Z	3.13	66.69	15.44		150.0	
10103-CAD	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, QPSK)	X	6.17	75.27	19.83	3.98	65.0	± 9.6 %
		Y	5.02	74.56	20.07		65.0	
		Z	5.58	74.23	19.78		65.0	
10104-CAD	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM)	X	6.38	74.05	20.09	3.98	65.0	± 9.6 %
		Y	4.96	71.85	19.45		65.0	
		Z	5.51	71.89	19.54		65.0	
10105-CAD	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 64-QAM)	X	5.67	71.78	19.42	3.98	65.0	± 9.6 %
		Y	4.68	70.50	19.12		65.0	
		Z	5.40	71.34	19.60		65.0	
10108-CAE	LTE-FDD (SC-FDMA, 100% RB, 10 MHz, QPSK)	X	2.50	69.27	16.35	0.00	150.0	± 9.6 %
		Y	2.53	71.57	17.63		150.0	
		Z	2.41	68.02	15.51		150.0	
10109-CAE	LTE-FDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM)	X	2.70	67.24	15.61	0.00	150.0	± 9.6 %
		Y	2.63	68.68	16.24		150.0	
		Z	2.66	66.45	15.11		150.0	
10110-CAE	LTE-FDD (SC-FDMA, 100% RB, 5 MHz, QPSK)	X	1.99	68.44	15.79	0.00	150.0	± 9.6 %
		Y	2.06	71.55	17.08		150.0	
		Z	1.92	67.04	14.92		150.0	
10111-CAE	LTE-FDD (SC-FDMA, 100% RB, 5 MHz, 16-QAM)	X	2.45	68.57	15.90	0.00	150.0	± 9.6 %
		Y	2.57	71.53	16.67		150.0	
		Z	2.35	67.12	15.16		150.0	

Certificate No: EX3-3863_Apr18

Page 15 of 39

EX3DV4- SN-3863

April 25, 2018

10112-CAE	LTE-FDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM)	X	2.83	67.33	15.71	0.00	150.0	± 9.6 %
		Y	2.76	68.82	16.33		150.0	
		Z	2.79	66.53	15.22		150.0	
10113-CAE	LTE-FDD (SC-FDMA, 100% RB, 5 MHz, 64-QAM)	X	2.60	68.79	16.07	0.00	150.0	± 9.6 %
		Y	2.70	71.55	16.71		150.0	
		Z	2.50	67.36	15.35		150.0	
10114-CAC	IEEE 802.11n (HT Greenfield, 13.5 Mbps, BPSK)	X	4.91	67.08	16.35	0.00	150.0	± 9.6 %
		Y	4.70	67.41	16.61		150.0	
		Z	4.96	66.85	16.19		150.0	
10115-CAC	IEEE 802.11n (HT Greenfield, 81 Mbps, 16-QAM)	X	5.16	67.16	16.39	0.00	150.0	± 9.6 %
		Y	4.93	67.53	16.63		150.0	
		Z	5.21	66.93	16.24		150.0	
10116-CAC	IEEE 802.11n (HT Greenfield, 135 Mbps, 64-QAM)	X	5.00	67.28	16.38	0.00	150.0	± 9.6 %
		Y	4.76	67.61	16.63		150.0	
		Z	5.04	67.03	16.21		150.0	
10117-CAC	IEEE 802.11n (HT Mixed, 13.5 Mbps, BPSK)	X	4.91	67.04	16.35	0.00	150.0	± 9.6 %
		Y	4.88	67.32	16.58		150.0	
		Z	4.93	66.73	16.15		150.0	
10118-CAC	IEEE 802.11n (HT Mixed, 81 Mbps, 16-QAM)	X	5.23	67.34	16.49	0.00	150.0	± 9.6 %
		Y	4.94	67.52	16.63		150.0	
		Z	5.30	67.14	16.35		150.0	
10119-CAC	IEEE 802.11n (HT Mixed, 135 Mbps, 64-QAM)	X	4.99	67.27	16.39	0.00	150.0	± 9.6 %
		Y	4.77	67.61	16.64		150.0	
		Z	5.03	67.00	16.20		150.0	
10140-CAD	LTE-FDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM)	X	3.18	67.31	15.78	0.00	150.0	± 9.6 %
		Y	3.06	68.22	16.30		150.0	
		Z	3.16	66.70	15.36		150.0	
10141-CAD	LTE-FDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM)	X	3.31	67.51	16.00	0.00	150.0	± 9.6 %
		Y	3.20	68.53	16.55		150.0	
		Z	3.29	66.86	15.57		150.0	
10142-CAD	LTE-FDD (SC-FDMA, 100% RB, 3 MHz, QPSK)	X	1.75	68.36	15.09	0.00	150.0	± 9.6 %
		Y	1.78	71.06	15.42		150.0	
		Z	1.66	66.67	14.20		150.0	
10143-CAD	LTE-FDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM)	X	2.25	68.96	15.03	0.00	150.0	± 9.6 %
		Y	1.94	68.61	13.51		150.0	
		Z	2.12	67.21	14.32		150.0	
10144-CAD	LTE-FDD (SC-FDMA, 100% RB, 3 MHz, 64-QAM)	X	1.90	65.74	12.89	0.00	150.0	± 9.6 %
		Y	1.39	63.90	10.43		150.0	
		Z	1.92	65.05	12.71		150.0	
10145-CAE	LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK)	X	0.74	61.13	7.80	0.00	150.0	± 9.6 %
		Y	0.44	60.00	4.49		150.0	
		Z	0.83	61.47	8.48		150.0	
10146-CAE	LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM)	X	0.98	60.10	6.33	0.00	150.0	± 9.6 %
		Y	0.63	60.00	3.77		150.0	
		Z	1.32	62.30	8.56		150.0	
10147-CAE	LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM)	X	1.02	60.37	6.56	0.00	150.0	± 9.6 %
		Y	0.63	60.00	3.82		150.0	
		Z	1.41	62.99	9.03		150.0	

EX3DV4-- SN:3863

April 25, 2018

10149-CAD	LTE-FDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM)	X	2.71	67.32	15.67	0.00	150.0	± 9.6 %
		Y	2.64	68.79	16.31		150.0	
		Z	2.67	66.51	15.16		150.0	
10150-CAD	LTE-FDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM)	X	2.84	67.40	15.76	0.00	150.0	± 9.6 %
		Y	2.77	68.91	16.39		150.0	
		Z	2.80	66.59	15.26		150.0	
10151-CAD	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK)	X	7.05	79.01	21.24	3.98	65.0	± 9.6 %
		Y	5.45	78.07	21.33		65.0	
		Z	5.61	76.01	20.56		65.0	
10152-CAD	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM)	X	5.87	73.86	19.52	3.98	65.0	± 9.6 %
		Y	4.45	71.66	18.62		65.0	
		Z	5.02	71.71	19.09		65.0	
10153-CAD	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM)	X	6.39	75.31	20.54	3.98	65.0	± 9.6 %
		Y	4.89	73.20	19.71		65.0	
		Z	5.39	72.79	19.96		65.0	
10154-CAE	LTE-FDD (SC-FDMA, 50% RB, 10 MHz, QPSK)	X	2.04	68.90	16.07	0.00	150.0	± 9.6 %
		Y	2.13	72.17	17.39		150.0	
		Z	1.95	67.39	15.15		150.0	
10155-CAE	LTE-FDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM)	X	2.46	68.61	15.94	0.00	150.0	± 9.6 %
		Y	2.59	71.66	16.74		150.0	
		Z	2.35	67.14	15.18		150.0	
10156-CAE	LTE-FDD (SC-FDMA, 50% RB, 5 MHz, QPSK)	X	1.56	68.06	14.48	0.00	150.0	± 9.6 %
		Y	1.39	68.73	13.43		150.0	
		Z	1.48	66.30	13.62		150.0	
10157-CAE	LTE-FDD (SC-FDMA, 50% RB, 5 MHz, 16-QAM)	X	1.70	65.86	12.52	0.00	150.0	± 9.6 %
		Y	1.07	62.55	8.97		150.0	
		Z	1.71	65.08	12.35		150.0	
10158-CAE	LTE-FDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM)	X	2.62	68.90	16.14	0.00	150.0	± 9.6 %
		Y	2.73	71.76	16.82		150.0	
		Z	2.51	67.43	15.40		150.0	
10159-CAE	LTE-FDD (SC-FDMA, 50% RB, 5 MHz, 64-QAM)	X	1.78	66.23	12.74	0.00	150.0	± 9.6 %
		Y	1.10	62.56	8.97		150.0	
		Z	1.78	65.42	12.58		150.0	
10160-CAD	LTE-FDD (SC-FDMA, 50% RB, 15 MHz, QPSK)	X	2.55	68.64	16.16	0.00	150.0	± 9.6 %
		Y	2.51	70.60	17.09		150.0	
		Z	2.49	67.55	15.47		150.0	
10161-CAD	LTE-FDD (SC-FDMA, 50% RB, 15 MHz, 16-QAM)	X	2.73	67.38	15.64	0.00	150.0	± 9.6 %
		Y	2.66	68.98	16.16		150.0	
		Z	2.69	66.51	15.14		150.0	
10162-CAD	LTE-FDD (SC-FDMA, 50% RB, 15 MHz, 64-QAM)	X	2.84	67.62	15.79	0.00	150.0	± 9.6 %
		Y	2.77	69.32	16.34		150.0	
		Z	2.80	66.72	15.29		150.0	
10166-CAE	LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK)	X	3.17	68.43	18.19	3.01	150.0	± 9.6 %
		Y	2.74	68.67	18.97		150.0	
		Z	3.37	69.16	18.82		150.0	
10167-CAE	LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM)	X	3.80	70.92	18.39	3.01	150.0	± 9.6 %
		Y	3.27	72.46	19.76		150.0	
		Z	4.11	71.94	19.16		150.0	

EX3DV4- SN:3863

April 25, 2018

10168-CAE	LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, 64-QAM)	X	4.33	73.72	20.04	3.01	150.0	± 9.6 %
		Y	3.93	76.52	22.01		150.0	
		Z	4.68	74.75	20.78		150.0	
10169-CAD	LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK)	X	2.69	67.32	17.58	3.01	150.0	± 9.6 %
		Y	2.43	68.05	18.61		150.0	
		Z	2.79	68.16	18.34		150.0	
10170-CAD	LTE-FDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM)	X	3.59	72.54	19.67	3.01	150.0	± 9.6 %
		Y	3.51	76.45	22.16		150.0	
		Z	3.83	74.10	20.71		150.0	
10171-AAD	LTE-FDD (SC-FDMA, 1 RB, 20 MHz, 64-QAM)	X	2.93	68.40	16.78	3.01	150.0	± 9.6 %
		Y	2.63	70.44	18.33		150.0	
		Z	3.08	69.59	17.69		150.0	
10172-CAD	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK)	X	4.62	78.65	22.60	6.02	65.0	± 9.6 %
		Y	2.94	76.24	23.12		65.0	
		Z	6.04	85.62	26.43		65.0	
10173-CAD	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM)	X	7.73	84.08	22.65	6.02	65.0	± 9.6 %
		Y	6.63	89.25	25.64		65.0	
		Z	9.82	91.06	26.34		65.0	
10174-CAD	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 64-QAM)	X	3.91	73.33	18.34	6.02	65.0	± 9.6 %
		Y	5.35	84.73	23.41		65.0	
		Z	6.55	83.31	23.20		65.0	
10175-CAE	LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK)	X	2.66	67.02	17.32	3.01	150.0	± 9.6 %
		Y	2.39	67.72	18.33		150.0	
		Z	2.76	67.84	18.07		150.0	
10176-CAE	LTE-FDD (SC-FDMA, 1 RB, 10 MHz, 16-QAM)	X	3.60	72.56	19.68	3.01	150.0	± 9.6 %
		Y	3.51	76.48	22.17		150.0	
		Z	3.84	74.12	20.72		150.0	
10177-CAG	LTE-FDD (SC-FDMA, 1 RB, 5 MHz, QPSK)	X	2.67	67.15	17.41	3.01	150.0	± 9.6 %
		Y	2.41	67.82	18.40		150.0	
		Z	2.78	67.99	18.17		150.0	
10178-CAE	LTE-FDD (SC-FDMA, 1 RB, 5 MHz, 16-QAM)	X	3.57	72.39	19.58	3.01	150.0	± 9.6 %
		Y	3.49	76.32	22.09		150.0	
		Z	3.80	73.91	20.61		150.0	
10179-CAE	LTE-FDD (SC-FDMA, 1 RB, 10 MHz, 64-QAM)	X	3.21	70.22	18.03	3.01	150.0	± 9.6 %
		Y	3.01	73.21	20.07		150.0	
		Z	3.41	71.63	19.02		150.0	
10180-CAE	LTE-FDD (SC-FDMA, 1 RB, 5 MHz, 64-QAM)	X	2.92	68.36	16.75	3.01	150.0	± 9.6 %
		Y	2.63	70.42	18.31		150.0	
		Z	3.08	69.53	17.64		150.0	
10181-CAD	LTE-FDD (SC-FDMA, 1 RB, 15 MHz, QPSK)	X	2.67	67.13	17.40	3.01	150.0	± 9.6 %
		Y	2.40	67.81	18.39		150.0	
		Z	2.78	67.97	18.16		150.0	
10182-CAD	LTE-FDD (SC-FDMA, 1 RB, 15 MHz, 16-QAM)	X	3.57	72.37	19.57	3.01	150.0	± 9.6 %
		Y	3.48	76.29	22.07		150.0	
		Z	3.79	73.88	20.60		150.0	
10183-AAC	LTE-FDD (SC-FDMA, 1 RB, 15 MHz, 64-QAM)	X	2.92	68.34	16.74	3.01	150.0	± 9.6 %
		Y	2.63	70.39	18.30		150.0	
		Z	3.07	69.51	17.63		150.0	

EX3DV4- SN:3863

April 25, 2018

10184-CAD	LTE-FDD (SC-FDMA, 1 RB, 3 MHz, QPSK)	X	2.88	87.17	17.42	3.01	150.0	± 9.6 %
		Y	2.41	67.84	18.41		150.0	
		Z	2.79	68.01	18.18		150.0	
10185-CAD	LTE-FDD (SC-FDMA, 1 RB, 3 MHz, 16-QAM)	X	3.58	72.44	19.61	3.01	150.0	± 9.6 %
		Y	3.50	76.39	22.12		150.0	
		Z	3.81	73.96	20.64		150.0	
10186-AAD	LTE-FDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM)	X	2.93	68.39	16.77	3.01	150.0	± 9.6 %
		Y	2.64	70.46	18.34		150.0	
		Z	3.09	69.57	17.67		150.0	
10187-CAE	LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK)	X	2.69	67.25	17.51	3.01	150.0	± 9.6 %
		Y	2.43	67.98	18.53		150.0	
		Z	2.80	68.08	18.26		150.0	
10188-CAE	LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM)	X	3.69	73.08	19.99	3.01	150.0	± 9.6 %
		Y	3.64	77.24	22.59		150.0	
		Z	3.94	74.67	21.05		150.0	
10189-AAE	LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM)	X	2.99	68.75	17.02	3.01	150.0	± 9.6 %
		Y	2.71	70.95	18.66		150.0	
		Z	3.15	69.99	17.95		150.0	
10193-CAC	IEEE 802.11n (HT Greenfield, 6.5 Mbps, BPSK)	X	4.32	66.74	16.06	0.00	150.0	± 9.6 %
		Y	4.14	67.59	16.37		150.0	
		Z	4.34	66.29	15.83		150.0	
10194-CAC	IEEE 802.11n (HT Greenfield, 39 Mbps, 16-QAM)	X	4.46	66.98	16.19	0.00	150.0	± 9.6 %
		Y	4.24	67.67	16.48		150.0	
		Z	4.50	66.57	15.96		150.0	
10195-CAC	IEEE 802.11n (HT Greenfield, 65 Mbps, 64-QAM)	X	4.50	66.99	16.21	0.00	150.0	± 9.6 %
		Y	4.25	67.61	16.46		150.0	
		Z	4.54	66.61	15.99		150.0	
10196-CAC	IEEE 802.11n (HT Mixed, 6.5 Mbps, BPSK)	X	4.31	66.74	16.05	0.00	150.0	± 9.6 %
		Y	4.11	67.51	16.32		150.0	
		Z	4.34	66.32	15.83		150.0	
10197-CAC	IEEE 802.11n (HT Mixed, 39 Mbps, 16-QAM)	X	4.47	66.98	16.20	0.00	150.0	± 9.6 %
		Y	4.24	67.66	16.48		150.0	
		Z	4.51	66.59	15.97		150.0	
10198-CAC	IEEE 802.11n (HT Mixed, 65 Mbps, 64-QAM)	X	4.49	66.99	16.21	0.00	150.0	± 9.6 %
		Y	4.24	67.60	16.45		150.0	
		Z	4.53	66.62	15.99		150.0	
10219-CAC	IEEE 802.11n (HT Mixed, 7.2 Mbps, BPSK)	X	4.26	66.77	16.02	0.00	150.0	± 9.6 %
		Y	4.07	67.62	16.34		150.0	
		Z	4.28	66.34	15.79		150.0	
10220-CAC	IEEE 802.11n (HT Mixed, 43.3 Mbps, 16-QAM)	X	4.47	66.94	16.18	0.00	150.0	± 9.6 %
		Y	4.23	67.62	16.46		150.0	
		Z	4.50	66.55	15.96		150.0	
10221-CAC	IEEE 802.11n (HT Mixed, 72.2 Mbps, 64-QAM)	X	4.51	66.94	16.20	0.00	150.0	± 9.6 %
		Y	4.26	67.58	16.45		150.0	
		Z	4.55	66.56	15.98		150.0	
10222-CAC	IEEE 802.11n (HT Mixed, 15 Mbps, BPSK)	X	4.88	67.02	16.33	0.00	150.0	± 9.6 %
		Y	4.67	67.32	16.57		150.0	
		Z	4.90	66.72	16.13		150.0	

EX3DV4- SN:3863

April 25, 2018

10223-CAC	IEEE 802.11n (HT Mixed, 90 Mbps, 16-QAM)	X	5.15	67.21	16.44	0.00	150.0	± 9.6 %
		Y	4.85	67.37	16.57		150.0	
		Z	5.20	66.97	16.28		150.0	
10224-CAC	IEEE 802.11n (HT Mixed, 150 Mbps, 64-QAM)	X	4.92	67.13	16.32	0.00	150.0	± 9.6 %
		Y	4.70	67.49	16.58		150.0	
		Z	4.94	66.83	16.11		150.0	
10225-CAB	UMTS-FDD (HSPA+)	X	2.60	66.16	14.83	0.00	150.0	± 9.6 %
		Y	2.41	67.00	14.35		150.0	
		Z	2.59	65.42	14.54		150.0	
10226-CAA	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM)	X	8.23	85.19	23.12	6.02	65.0	± 9.6 %
		Y	7.42	91.37	26.44		65.0	
		Z	10.58	92.51	26.91		65.0	
10227-CAA	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM)	X	7.55	82.84	21.72	6.02	65.0	± 9.6 %
		Y	6.51	87.87	24.49		65.0	
		Z	10.25	90.62	25.65		65.0	
10228-CAA	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK)	X	6.67	85.48	25.12	6.02	65.0	± 9.6 %
		Y	3.89	80.81	24.99		65.0	
		Z	6.44	87.27	27.13		65.0	
10229-CAB	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 16-QAM)	X	7.78	84.18	22.69	6.02	65.0	± 9.6 %
		Y	6.89	89.39	25.70		65.0	
		Z	9.90	91.18	26.39		65.0	
10230-CAB	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM)	X	7.14	81.92	21.34	6.02	65.0	± 9.6 %
		Y	5.85	86.04	23.80		65.0	
		Z	9.54	89.32	25.15		65.0	
10231-CAB	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, QPSK)	X	6.36	84.50	24.69	6.02	65.0	± 9.6 %
		Y	3.53	79.82	24.51		65.0	
		Z	6.16	86.30	26.70		65.0	
10232-CAD	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 16-QAM)	X	7.77	84.16	22.68	6.02	65.0	± 9.6 %
		Y	6.68	89.37	25.69		65.0	
		Z	9.88	91.16	26.38		65.0	
10233-CAD	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 64-QAM)	X	7.13	81.90	21.33	6.02	65.0	± 9.6 %
		Y	5.83	85.99	23.79		65.0	
		Z	9.51	89.29	25.14		65.0	
10234-CAD	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, QPSK)	X	6.09	83.61	24.25	6.02	65.0	± 9.6 %
		Y	3.42	79.13	24.11		65.0	
		Z	5.93	85.47	26.28		65.0	
10235-CAD	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 16-QAM)	X	7.78	84.19	22.69	6.02	65.0	± 9.6 %
		Y	6.68	89.41	25.71		65.0	
		Z	9.89	91.19	26.39		65.0	
10236-CAD	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 64-QAM)	X	7.18	81.98	21.35	6.02	65.0	± 9.6 %
		Y	5.91	86.16	23.84		65.0	
		Z	9.62	89.44	25.18		65.0	
10237-CAD	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK)	X	6.36	84.53	24.70	6.02	65.0	± 9.6 %
		Y	3.52	79.81	24.52		65.0	
		Z	6.16	86.34	26.72		65.0	
10238-CAD	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 16-QAM)	X	7.75	84.14	22.67	6.02	65.0	± 9.6 %
		Y	6.66	89.35	25.68		65.0	
		Z	9.86	91.13	26.37		65.0	

EX3DV4-- SN:3863

April 25, 2018

10239-CAD	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 64-QAM)	X	7.11	81.87	21.32	6.02	65.0	± 9.6 %
		Y	5.81	85.95	23.78		65.0	
		Z	9.48	89.25	25.13		65.0	
10240-CAD	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, QPSK)	X	6.34	84.51	24.69	6.02	65.0	± 9.6 %
		Y	3.52	79.81	24.52		65.0	
		Z	6.14	86.30	26.70		65.0	
10241-CAA	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM)	X	7.98	81.00	24.33	6.98	65.0	± 9.6 %
		Y	6.14	81.54	25.53		65.0	
		Z	7.26	79.71	24.84		65.0	
10242-CAA	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 64-QAM)	X	6.47	76.99	22.66	6.98	65.0	± 9.6 %
		Y	4.99	77.45	23.83		65.0	
		Z	6.91	78.72	24.15		65.0	
10243-CAA	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK)	X	5.40	74.34	22.44	6.98	65.0	± 9.6 %
		Y	4.21	73.63	23.07		65.0	
		Z	5.61	75.34	23.62		65.0	
10244-CAB	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM)	X	3.76	67.79	12.85	3.98	65.0	± 9.6 %
		Y	1.87	62.25	8.40		65.0	
		Z	4.41	71.62	16.01		65.0	
10245-CAB	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM)	X	3.71	67.43	12.64	3.98	65.0	± 9.6 %
		Y	1.87	62.05	8.24		65.0	
		Z	4.30	70.99	15.67		65.0	
10246-CAB	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, QPSK)	X	4.05	72.21	15.44	3.98	65.0	± 9.6 %
		Y	1.80	64.42	10.44		65.0	
		Z	3.80	73.10	16.90		65.0	
10247-CAD	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 16-QAM)	X	4.44	71.15	15.84	3.98	65.0	± 9.6 %
		Y	2.54	65.63	11.89		65.0	
		Z	4.00	70.77	16.63		65.0	
10248-CAD	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 64-QAM)	X	4.38	70.57	15.58	3.98	65.0	± 9.6 %
		Y	2.50	65.09	11.62		65.0	
		Z	4.00	70.27	16.39		65.0	
10249-CAD	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, QPSK)	X	6.22	78.94	19.39	3.98	65.0	± 9.6 %
		Y	3.43	72.93	16.18		65.0	
		Z	5.02	77.51	19.84		65.0	
10250-CAD	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM)	X	6.14	76.63	20.38	3.98	65.0	± 9.6 %
		Y	4.51	74.09	18.97		65.0	
		Z	5.00	73.95	19.97		65.0	
10251-CAD	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM)	X	5.56	73.72	18.77	3.98	65.0	± 9.6 %
		Y	3.95	70.70	16.95		65.0	
		Z	4.76	71.87	18.65		65.0	
10252-CAD	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, QPSK)	X	7.45	81.83	21.98	3.98	65.0	± 9.6 %
		Y	5.54	80.55	21.60		65.0	
		Z	5.55	78.23	21.33		65.0	
10253-CAD	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 16-QAM)	X	5.77	73.44	19.25	3.98	65.0	± 9.6 %
		Y	4.37	71.25	18.16		65.0	
		Z	4.94	71.30	18.85		65.0	
10254-CAD	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 64-QAM)	X	6.22	74.67	20.11	3.98	65.0	± 9.6 %
		Y	4.73	72.48	19.03		65.0	
		Z	5.27	72.27	19.61		65.0	

EX3DV4- SN:3863

April 25, 2018

10255-CAD	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, QPSK)	X	6.76	78.48	21.18	3.98	65.0	± 9.6 %
		Y	5.16	77.25	20.99		65.0	
		Z	5.37	75.38	20.49		65.0	
10256-CAA	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM)	X	2.78	64.16	9.93	3.98	65.0	± 9.6 %
		Y	1.36	60.00	5.83		65.0	
		Z	3.18	67.02	12.70		65.0	
10257-CAA	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM)	X	2.75	63.84	9.69	3.98	65.0	± 9.6 %
		Y	1.38	60.00	5.75		65.0	
		Z	3.11	66.43	12.31		65.0	
10258-CAA	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK)	X	2.69	66.45	11.77	3.98	65.0	± 9.6 %
		Y	1.25	60.72	7.00		65.0	
		Z	2.70	67.95	13.57		65.0	
10259-CAB	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM)	X	5.09	73.24	17.52	3.98	65.0	± 9.6 %
		Y	3.20	68.61	14.39		65.0	
		Z	4.40	72.09	17.89		65.0	
10260-CAB	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 64-QAM)	X	5.09	72.94	17.39	3.98	65.0	± 9.6 %
		Y	3.20	68.30	14.22		65.0	
		Z	4.44	71.81	17.78		65.0	
10261-CAB	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, QPSK)	X	6.43	79.43	20.17	3.98	65.0	± 9.6 %
		Y	4.14	75.58	18.12		65.0	
		Z	5.00	77.05	20.16		65.0	
10262-CAD	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 16-QAM)	X	6.11	76.51	20.31	3.98	65.0	± 9.6 %
		Y	4.48	73.95	18.88		65.0	
		Z	4.98	73.88	19.92		65.0	
10263-CAD	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 64-QAM)	X	5.55	73.70	18.77	3.98	65.0	± 9.6 %
		Y	3.94	70.69	16.95		65.0	
		Z	4.76	71.84	18.64		65.0	
10264-CAD	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, QPSK)	X	7.33	81.55	21.85	3.98	65.0	± 9.6 %
		Y	5.45	80.22	21.44		65.0	
		Z	5.49	78.02	21.23		65.0	
10265-CAD	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM)	X	5.87	73.86	19.53	3.98	65.0	± 9.6 %
		Y	4.46	71.68	18.63		65.0	
		Z	5.02	71.71	19.09		65.0	
10266-CAD	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM)	X	6.39	75.29	20.53	3.98	65.0	± 9.6 %
		Y	4.89	73.18	19.70		65.0	
		Z	5.38	72.78	19.95		65.0	
10267-CAD	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, QPSK)	X	7.04	78.96	21.22	3.98	65.0	± 9.6 %
		Y	5.43	77.99	21.30		65.0	
		Z	5.60	75.97	20.54		65.0	
10268-CAD	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM)	X	6.56	74.07	20.20	3.98	65.0	± 9.6 %
		Y	5.15	72.08	19.58		65.0	
		Z	5.68	71.86	19.63		65.0	
10269-CAD	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM)	X	6.55	73.70	20.08	3.98	65.0	± 9.6 %
		Y	5.19	71.84	19.47		65.0	
		Z	5.68	71.51	19.52		65.0	
10270-CAD	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, QPSK)	X	6.77	76.24	20.42	3.98	65.0	± 9.6 %
		Y	5.40	75.25	20.50		65.0	
		Z	5.66	73.75	19.79		65.0	

EX3DV4-- SN:3863

April 25, 2018

10274- CAB	UMTS-FDD (HSPA, Subtest 5, 3GPP Rel8.10)	X	2.43	66.71	14.85	0.00	150.0	±9.6 %
		Y	2.33	68.15	14.74		150.0	
		Z	2.38	65.72	14.40		150.0	
10275- CAB	UMTS-FDD (HSPA, Subtest 5, 3GPP Rel8.4)	X	1.47	67.75	15.10	0.00	150.0	±9.6 %
		Y	1.72	72.43	16.90		150.0	
		Z	1.36	65.94	13.97		150.0	
10277- CAA	PHS (QPSK)	X	1.92	60.08	5.51	9.03	50.0	±9.6 %
		Y	1.38	58.77	3.99		50.0	
		Z	1.86	60.78	6.41		50.0	
10278- CAA	PHS (QPSK, BW 884MHz, Roll-off 0.5)	X	3.08	65.19	10.55	9.03	50.0	±9.6 %
		Y	2.17	61.96	7.67		50.0	
		Z	3.52	67.85	12.76		50.0	
10279- CAA	PHS (QPSK, BW 884MHz, Roll-off 0.38)	X	3.15	65.40	10.71	9.03	50.0	±9.6 %
		Y	2.20	62.03	7.77		50.0	
		Z	3.61	68.12	12.94		50.0	
10290- AAB	CDMA2000, RC1, SO55, Full Rate	X	0.92	64.86	10.52	0.00	150.0	±9.6 %
		Y	0.39	60.00	5.42		150.0	
		Z	0.92	63.92	10.28		150.0	
10291- AAB	CDMA2000, RC3, SO55, Full Rate	X	0.56	63.07	9.34	0.00	150.0	±9.6 %
		Y	0.29	60.00	5.06		150.0	
		Z	0.54	61.87	8.78		150.0	
10292- AAB	CDMA2000, RC3, SO32, Full Rate	X	0.78	67.26	11.80	0.00	150.0	±9.6 %
		Y	0.28	60.00	5.38		150.0	
		Z	0.61	63.79	10.15		150.0	
10293- AAB	CDMA2000, RC3, SO3, Full Rate	X	2.07	76.82	16.86	0.00	150.0	±9.6 %
		Y	0.39	62.28	7.09		150.0	
		Z	0.82	67.12	12.27		150.0	
10295- AAB	CDMA2000, RC1, SO3, 1/8th Rate 25 fr.	X	10.77	83.93	21.20	9.03	50.0	±9.6 %
		Y	21.51	90.17	21.22		50.0	
		Z	9.58	84.17	22.47		50.0	
10297- AAC	LTE-FDD (SC-FDMA, 50% RB, 20 MHz, QPSK)	X	2.52	69.39	16.43	0.00	150.0	±9.6 %
		Y	2.55	71.75	17.73		150.0	
		Z	2.42	68.12	15.58		150.0	
10298- AAC	LTE-FDD (SC-FDMA, 50% RB, 3 MHz, QPSK)	X	1.11	64.88	11.35	0.00	150.0	±9.6 %
		Y	0.56	60.19	6.52		150.0	
		Z	1.13	64.17	11.22		150.0	
10299- AAC	LTE-FDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM)	X	1.42	62.80	9.08	0.00	150.0	±9.6 %
		Y	0.76	60.00	5.28		150.0	
		Z	1.91	65.84	11.56		150.0	
10300- AAC	LTE-FDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM)	X	1.21	60.93	7.40	0.00	150.0	±9.6 %
		Y	0.73	60.00	4.72		150.0	
		Z	1.52	62.72	9.26		150.0	
10301- AAA	IEEE 802.16e WiMAX (29:18, 5ms, 10MHz, QPSK, PUSC)	X	4.38	65.24	17.03	4.17	50.0	±9.6 %
		Y	4.10	66.08	16.99		50.0	
		Z	4.53	65.17	17.06		50.0	
10302- AAA	IEEE 802.16e WiMAX (29:18, 5ms, 10MHz, QPSK, PUSC, 3 CTRL symbols)	X	4.87	65.67	17.74	4.96	50.0	±9.6 %
		Y	4.52	66.36	17.57		50.0	
		Z	5.00	65.70	17.71		50.0	

EX30V4- SN:3663

April 25, 2018

10303-AAA	IEEE 802.16e WiMAX (31:15, 5ms, 10MHz, 64QAM, PUSC)	X	4.64	65.56	17.55	4.96	50.0	±9.6 %
		Y	4.40	66.71	17.70		50.0	
		Z	4.76	65.34	17.52		50.0	
10304-AAA	IEEE 802.16e WiMAX (29:16, 5ms, 10MHz, 64QAM, PUSC)	X	4.47	65.53	17.12	4.17	50.0	±9.6 %
		Y	4.17	66.24	17.01		50.0	
		Z	4.56	65.19	17.01		50.0	
10305-AAA	IEEE 802.16e WiMAX (31:15, 10ms, 10MHz, 64QAM, PUSC, 15 symbols)	X	4.18	67.59	18.77	6.02	35.0	±9.6 %
		Y	3.89	67.96	17.61		35.0	
		Z	4.33	67.73	19.13		35.0	
10306-AAA	IEEE 802.16e WiMAX (29:16, 10ms, 10MHz, 64QAM, PUSC, 18 symbols)	X	4.44	66.50	18.52	6.02	35.0	±9.6 %
		Y	4.16	67.24	17.98		35.0	
		Z	4.60	66.59	18.78		35.0	
10307-AAA	IEEE 802.16e WiMAX (29:16, 10ms, 10MHz, QPSK, PUSC, 18 symbols)	X	4.34	66.59	18.45	6.02	35.0	±9.6 %
		Y	4.05	67.23	17.84		35.0	
		Z	4.50	66.72	18.72		35.0	
10308-AAA	IEEE 802.16e WiMAX (29:16, 10ms, 10MHz, 16QAM, PUSC)	X	4.32	66.82	18.60	6.02	35.0	±9.6 %
		Y	4.06	67.54	18.06		35.0	
		Z	4.48	66.95	18.67		35.0	
10309-AAA	IEEE 802.16e WiMAX (29:16, 10ms, 10MHz, 16QAM, AMC 2x3, 18 symbols)	X	4.46	66.56	18.61	6.02	35.0	±9.6 %
		Y	4.17	67.31	18.10		35.0	
		Z	4.64	66.74	18.90		35.0	
10310-AAA	IEEE 802.16e WiMAX (29:16, 10ms, 10MHz, QPSK, AMC 2x3, 18 symbols)	X	4.40	66.58	18.52	6.02	35.0	±9.6 %
		Y	4.14	67.40	18.05		35.0	
		Z	4.55	66.67	18.76		35.0	
10311-AAC	LTE-FDD (SC-FDMA, 100% RB, 15 MHz, QPSK)	X	2.88	68.63	16.10	0.00	150.0	±9.6 %
		Y	2.88	70.38	17.20		150.0	
		Z	2.77	67.46	15.32		150.0	
10313-AAA	iDEN 1:3	X	3.55	71.03	14.37	6.99	70.0	±9.6 %
		Y	2.76	72.05	15.47		70.0	
		Z	2.49	69.17	14.17		70.0	
10314-AAA	iDEN 1:6	X	6.09	81.23	20.99	10.00	30.0	±9.6 %
		Y	7.74	88.37	24.07		30.0	
		Z	3.89	76.29	19.81		30.0	
10315-AAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 96pc duty cycle)	X	1.04	63.85	14.96	0.17	150.0	±9.6 %
		Y	1.05	65.58	16.18		150.0	
		Z	0.96	62.52	14.00		150.0	
10316-AAB	IEEE 802.11g WiFi 2.4 GHz (ERP-OFDM, 6 Mbps, 96pc duty cycle)	X	4.35	66.66	16.11	0.17	150.0	±9.6 %
		Y	4.12	67.27	16.33		150.0	
		Z	4.39	66.31	15.96		150.0	
10317-AAC	IEEE 802.11a WiFi 5 GHz (OFDM, 6 Mbps, 96pc duty cycle)	X	4.35	66.66	16.11	0.17	150.0	±9.6 %
		Y	4.12	67.27	16.33		150.0	
		Z	4.39	66.31	15.96		150.0	
10400-AAD	IEEE 802.11ac WiFi (20MHz, 64-QAM, 99pc duty cycle)	X	4.42	66.96	16.15	0.00	150.0	±9.6 %
		Y	4.13	67.43	16.34		150.0	
		Z	4.47	66.60	15.95		150.0	
10401-AAD	IEEE 802.11ac WiFi (40MHz, 64-QAM, 99pc duty cycle)	X	5.08	66.77	16.17	0.00	150.0	±9.6 %
		Y	5.02	67.75	16.71		150.0	
		Z	5.22	66.85	16.19		150.0	

EX3DV4- SN:3863

April 25, 2018

10402-AAD	IEEE 802.11ac WiFi (80MHz, 64-QAM, 99pc duty cycle)	X	5.43	67.35	16.36	0.00	150.0	± 9.6 %
		Y	5.23	67.61	16.59		150.0	
		Z	5.46	67.09	16.19		150.0	
10403-AAB	CDMA2000 (1xEV-DO, Rev. 0)	X	0.92	64.86	10.52	0.00	115.0	± 9.6 %
		Y	0.39	60.00	5.42		115.0	
		Z	0.92	63.92	10.28		115.0	
10404-AAB	CDMA2000 (1xEV-DO, Rev. A)	X	0.92	64.86	10.52	0.00	115.0	± 9.6 %
		Y	0.39	60.00	5.42		115.0	
		Z	0.92	63.92	10.28		115.0	
10406-AAB	CDMA2000, RC3, S032, SCH0, Full Rate	X	6.61	82.29	18.19	0.00	100.0	± 9.6 %
		Y	100.00	99.95	18.83		100.0	
		Z	45.79	108.43	26.26		100.0	
10410-AAD	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9, Subframe Conf=4)	X	3.30	74.41	15.15	3.23	80.0	± 9.6 %
		Y	16.11	98.20	22.53		80.0	
		Z	23.08	102.83	25.32		80.0	
10415-AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 99pc duty cycle)	X	0.96	62.96	14.43	0.00	150.0	± 9.6 %
		Y	0.99	64.96	15.77		150.0	
		Z	0.90	61.91	13.52		150.0	
10416-AAA	IEEE 802.11g WiFi 2.4 GHz (ERP-OFDM, 6 Mbps, 99pc duty cycle)	X	4.32	66.73	16.13	0.00	150.0	± 9.6 %
		Y	4.11	67.43	16.39		150.0	
		Z	4.34	66.32	15.91		150.0	
10417-AAB	IEEE 802.11a/n WiFi 5 GHz (OFDM, 6 Mbps, 99pc duty cycle)	X	4.32	66.73	16.13	0.00	150.0	± 9.6 %
		Y	4.11	67.43	16.39		150.0	
		Z	4.34	66.32	15.91		150.0	
10418-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps, 99pc duty cycle, Long preamble)	X	4.31	66.93	16.18	0.00	150.0	± 9.6 %
		Y	4.10	67.68	16.50		150.0	
		Z	4.33	66.49	15.93		150.0	
10419-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps, 99pc duty cycle, Short preamble)	X	4.33	66.86	16.17	0.00	150.0	± 9.6 %
		Y	4.11	67.59	16.46		150.0	
		Z	4.35	66.43	15.93		150.0	
10422-AAB	IEEE 802.11n (HT Greenfield, 7.2 Mbps, BPSK)	X	4.43	66.84	16.18	0.00	150.0	± 9.6 %
		Y	4.21	67.51	16.45		150.0	
		Z	4.46	66.43	15.95		150.0	
10423-AAB	IEEE 802.11n (HT Greenfield, 43.3 Mbps, 16-QAM)	X	4.56	67.09	16.27	0.00	150.0	± 9.6 %
		Y	4.30	67.73	16.52		150.0	
		Z	4.61	66.71	16.06		150.0	
10424-AAB	IEEE 802.11n (HT Greenfield, 72.2 Mbps, 64-QAM)	X	4.49	67.05	16.24	0.00	150.0	± 9.6 %
		Y	4.23	67.65	16.49		150.0	
		Z	4.53	66.66	16.03		150.0	
10425-AAB	IEEE 802.11n (HT Greenfield, 15 Mbps, BPSK)	X	5.11	67.24	16.43	0.00	150.0	± 9.6 %
		Y	4.85	67.48	16.62		150.0	
		Z	5.16	66.96	16.26		150.0	
10426-AAB	IEEE 802.11n (HT Greenfield, 90 Mbps, 16-QAM)	X	5.13	67.32	16.47	0.00	150.0	± 9.6 %
		Y	4.90	67.67	16.71		150.0	
		Z	5.16	67.07	16.30		150.0	

EX3DV4- SN:3863

April 25, 2018

10427-AAB	IEEE 802.11n (HT Greenfield, 150 Mbps, 64-QAM)	X	5.10	67.11	16.36	0.00	150.0	± 9.6 %
		Y	4.87	67.47	16.61		150.0	
		Z	5.17	66.96	16.24		150.0	
10430-AAB	LTE-FDD (OFDMA, 5 MHz, E-TM 3.1)	X	4.40	73.18	18.78	0.00	150.0	± 9.6 %
		Y	5.18	77.79	19.68		150.0	
		Z	4.07	70.86	17.81		150.0	
10431-AAB	LTE-FDD (OFDMA, 10 MHz, E-TM 3.1)	X	3.93	67.31	16.00	0.00	150.0	± 9.6 %
		Y	3.67	68.21	16.08		150.0	
		Z	3.97	66.78	15.76		150.0	
10432-AAB	LTE-FDD (OFDMA, 15 MHz, E-TM 3.1)	X	4.25	67.14	16.17	0.00	150.0	± 9.6 %
		Y	4.00	67.91	16.40		150.0	
		Z	4.29	66.70	15.93		150.0	
10433-AAB	LTE-FDD (OFDMA, 20 MHz, E-TM 3.1)	X	4.51	67.08	16.27	0.00	150.0	± 9.6 %
		Y	4.26	67.71	16.52		150.0	
		Z	4.65	66.70	16.05		150.0	
10434-AAB	W-CDMA (BS Test Model 1, 64 DPCH)	X	4.57	74.23	18.62	0.00	150.0	± 9.6 %
		Y	4.96	77.01	18.39		150.0	
		Z	4.13	71.55	17.59		150.0	
10435-AAC	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	3.22	74.05	14.97	3.23	80.0	± 9.6 %
		Y	12.58	95.13	21.66		80.0	
		Z	20.50	101.13	24.83		80.0	
10447-AAB	LTE-FDD (OFDMA, 5 MHz, E-TM 3.1, Clipping 44%)	X	3.16	67.07	14.83	0.00	150.0	± 9.6 %
		Y	2.72	66.94	13.70		150.0	
		Z	3.20	66.46	14.68		150.0	
10448-AAB	LTE-FDD (OFDMA, 10 MHz, E-TM 3.1, Clipping 44%)	X	3.80	67.10	15.87	0.00	150.0	± 9.6 %
		Y	3.57	68.05	15.98		150.0	
		Z	3.82	66.56	15.62		150.0	
10449-AAB	LTE-FDD (OFDMA, 15 MHz, E-TM 3.1, Clipping 44%)	X	4.09	66.96	16.07	0.00	150.0	± 9.6 %
		Y	3.88	67.77	16.33		150.0	
		Z	4.12	66.51	15.82		150.0	
10450-AAB	LTE-FDD (OFDMA, 20 MHz, E-TM 3.1, Clipping 44%)	X	4.31	66.86	16.12	0.00	150.0	± 9.6 %
		Y	4.10	67.50	16.40		150.0	
		Z	4.33	66.45	15.89		150.0	
10451-AAB	W-CDMA (BS Test Model 1, 64 DPCH, Clipping 44%)	X	2.96	66.79	14.05	0.00	150.0	± 9.6 %
		Y	2.28	65.25	11.94		150.0	
		Z	3.03	66.33	14.05		150.0	
10456-AAB	IEEE 802.11ac WiFi (160MHz, 64-QAM, 99pc duty cycle)	X	6.03	67.73	16.57	0.00	150.0	± 9.6 %
		Y	6.14	68.84	17.23		150.0	
		Z	6.09	67.66	16.51		150.0	
10457-AAB	UMTS-FDD (DC-HSDPA)	X	3.67	65.47	15.85	0.00	150.0	± 9.6 %
		Y	3.57	66.44	16.21		150.0	
		Z	3.68	65.00	15.61		150.0	
10458-AAB	CDMA2000 (1xEV-DO, Rev. B, 2 carriers)	X	3.82	71.77	16.94	0.00	150.0	± 9.6 %
		Y	2.33	66.01	12.18		150.0	
		Z	3.68	70.24	16.55		150.0	
10459-AAB	CDMA2000 (1xEV-DO, Rev. B, 3 carriers)	X	5.04	70.06	18.38	0.00	150.0	± 9.6 %
		Y	4.33	69.08	16.37		150.0	
		Z	4.93	68.74	17.97		150.0	

EX3DV4- SN:3863

April 25, 2018

10460-AAA	UMTS-FDD (WCDMA, AMR)	X	0.82	68.06	15.67	0.00	150.0	±9.6 %
		Y	1.52	80.43	21.00		150.0	
		Z	0.70	65.12	13.61		150.0	
10461-AAA	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	1.71	68.46	13.76	3.23	80.0	±9.6 %
		Y	18.73	104.14	25.37		80.0	
		Z	16.72	101.23	25.84		80.0	
10462-AAA	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	0.95	60.00	7.25	3.23	80.0	±9.6 %
		Y	0.26	55.18	3.00		80.0	
		Z	1.02	61.47	8.87		80.0	
10463-AAA	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	0.96	60.00	6.79	3.23	80.0	±9.6 %
		Y	3.83	65.07	6.10		80.0	
		Z	0.86	60.00	7.59		80.0	
10464-AAA	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	1.35	65.72	12.06	3.23	80.0	±9.6 %
		Y	3.75	82.77	18.52		80.0	
		Z	9.51	92.26	22.65		80.0	
10465-AAA	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	0.95	60.00	7.20	3.23	80.0	±9.6 %
		Y	0.25	55.06	2.87		80.0	
		Z	0.96	60.91	8.53		80.0	
10466-AAA	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	0.97	60.00	6.75	3.23	80.0	±9.6 %
		Y	3.08	64.36	5.91		80.0	
		Z	0.88	60.00	7.54		80.0	
10467-AAC	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	1.38	66.05	12.23	3.23	80.0	±9.6 %
		Y	4.97	86.13	19.58		80.0	
		Z	11.48	94.80	23.39		80.0	
10468-AAC	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	0.95	60.00	7.22	3.23	80.0	±9.6 %
		Y	0.26	55.12	2.95		80.0	
		Z	0.97	61.07	8.63		80.0	
10469-AAC	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	0.96	60.00	6.75	3.23	80.0	±9.6 %
		Y	3.73	65.04	6.11		80.0	
		Z	0.86	60.00	7.54		80.0	
10470-AAC	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	1.38	66.03	12.21	3.23	80.0	±9.6 %
		Y	5.04	86.32	19.63		80.0	
		Z	11.56	94.91	23.42		80.0	
10471-AAC	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	0.95	60.00	7.21	3.23	80.0	±9.6 %
		Y	0.25	55.11	2.92		80.0	
		Z	0.97	61.03	8.59		80.0	
10472-AAC	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	0.96	60.00	6.74	3.23	80.0	±9.6 %
		Y	8.84	67.69	6.73		80.0	
		Z	0.88	60.00	7.53		80.0	
10473-AAC	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	1.37	66.01	12.20	3.23	80.0	±9.6 %
		Y	4.94	86.08	19.55		80.0	
		Z	11.45	94.77	23.37		80.0	
10474-AAC	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	0.94	60.00	7.21	3.23	80.0	±9.6 %
		Y	0.25	55.09	2.91		80.0	
		Z	0.96	61.01	8.58		80.0	
10475-AAC	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	0.96	60.00	6.74	3.23	80.0	±9.6 %
		Y	5.48	65.71	6.11		80.0	
		Z	0.88	60.00	7.53		80.0	

EX3DV4- SN:3863

April 25, 2018

10477-AAC	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	0.94	80.00	7.19	3.23	80.0	± 9.6 %
		Y	0.25	55.02	2.82		80.0	
		Z	0.95	60.87	8.49		80.0	
10478-AAC	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	0.96	80.00	6.73	3.23	80.0	± 9.6 %
		Y	0.28	53.97	1.35		80.0	
		Z	0.88	60.00	7.52		80.0	
10479-AAC	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	3.21	72.74	16.33	3.23	80.0	± 9.6 %
		Y	39.60	110.75	27.52		80.0	
		Z	6.66	84.68	21.96		80.0	
10480-AAC	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	2.08	84.62	11.24	3.23	80.0	± 9.6 %
		Y	1.03	61.93	8.80		80.0	
		Z	4.36	74.13	16.27		80.0	
10481-AAC	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	1.78	62.75	10.02	3.23	80.0	± 9.6 %
		Y	0.84	60.00	7.33		80.0	
		Z	3.24	70.04	14.31		80.0	
10482-AAC	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	1.73	64.95	12.00	2.23	80.0	± 9.6 %
		Y	0.84	60.00	7.70		80.0	
		Z	1.75	65.57	13.09		80.0	
10483-AAC	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	1.61	61.02	9.13	2.23	80.0	± 9.6 %
		Y	1.09	60.00	6.49		80.0	
		Z	2.56	66.79	13.19		80.0	
10484-AAC	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	1.61	60.82	9.02	2.23	80.0	± 9.6 %
		Y	1.11	60.00	6.48		80.0	
		Z	2.45	66.04	12.85		80.0	
10485-AAC	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	2.62	70.06	15.66	2.23	80.0	± 9.6 %
		Y	1.92	68.50	13.94		80.0	
		Z	2.29	68.71	15.73		80.0	
10486-AAC	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	2.37	65.66	13.03	2.23	80.0	± 9.6 %
		Y	1.24	60.58	8.96		80.0	
		Z	2.33	65.66	13.73		80.0	
10487-AAC	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	2.37	65.34	12.86	2.23	80.0	± 9.6 %
		Y	1.24	60.28	8.75		80.0	
		Z	2.35	65.41	13.59		80.0	
10488-AAC	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	3.19	71.23	17.45	2.23	80.0	± 9.6 %
		Y	2.91	73.05	18.24		80.0	
		Z	2.77	69.32	17.00		80.0	
10489-AAC	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	3.21	68.38	16.16	2.23	80.0	± 9.6 %
		Y	2.80	68.89	15.94		80.0	
		Z	2.91	66.98	15.94		80.0	
10490-AAC	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	3.28	68.24	16.11	2.23	80.0	± 9.6 %
		Y	2.81	68.47	15.72		80.0	
		Z	3.00	66.92	15.92		80.0	
10491-AAC	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	3.47	70.14	17.34	2.23	80.0	± 9.6 %
		Y	3.03	70.90	17.92		80.0	
		Z	3.12	68.57	16.90		80.0	
10492-AAC	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	3.59	67.96	16.53	2.23	80.0	± 9.6 %
		Y	3.13	68.26	16.56		80.0	
		Z	3.32	66.68	16.23		80.0	

Certificate No: EX3-3863_Apr18

Page 28 of 39

EX3DV4- SN:3863

April 25, 2018

10493-AAC	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	3.65	67.84	16.48	2.23	80.0	± 9.6 %
		Y	3.17	68.05	16.43		80.0	
		Z	3.39	68.61	16.21		80.0	
10494-AAC	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	3.72	71.32	17.72	2.23	80.0	± 9.6 %
		Y	3.26	72.17	18.50		80.0	
		Z	3.30	69.67	17.25		80.0	
10495-AAC	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	3.62	68.25	16.75	2.23	80.0	± 9.6 %
		Y	3.18	68.50	16.94		80.0	
		Z	3.33	66.95	16.42		80.0	
10496-AAC	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	3.71	68.07	16.72	2.23	80.0	± 9.6 %
		Y	3.25	68.28	16.85		80.0	
		Z	3.43	66.81	16.39		80.0	
10497-AAA	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	1.07	60.00	8.19	2.23	80.0	± 9.6 %
		Y	0.87	60.00	5.66		80.0	
		Z	1.16	61.09	9.64		80.0	
10498-AAA	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	1.24	60.00	7.11	2.23	80.0	± 9.6 %
		Y	1.51	60.00	4.12		80.0	
		Z	1.24	60.00	7.97		80.0	
10499-AAA	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	1.26	60.00	6.97	2.23	80.0	± 9.6 %
		Y	1.84	60.00	3.85		80.0	
		Z	1.26	60.00	7.82		80.0	
10500-AAA	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	2.86	70.59	16.41	2.23	80.0	± 9.6 %
		Y	2.47	71.37	16.06		80.0	
		Z	2.47	68.90	16.23		80.0	
10501-AAA	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	2.77	67.13	14.41	2.23	80.0	± 9.6 %
		Y	1.82	64.08	11.77		80.0	
		Z	2.61	66.45	14.70		80.0	
10502-AAA	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	2.80	66.92	14.24	2.23	80.0	± 9.6 %
		Y	1.80	63.62	11.44		80.0	
		Z	2.65	66.33	14.58		80.0	
10503-AAC	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	3.15	71.01	17.34	2.23	80.0	± 9.6 %
		Y	2.85	72.73	18.09		80.0	
		Z	2.74	69.14	16.90		80.0	
10504-AAC	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	3.18	68.25	16.09	2.23	80.0	± 9.6 %
		Y	2.77	66.71	15.84		80.0	
		Z	2.89	66.89	15.87		80.0	
10505-AAC	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	3.26	68.13	16.04	2.23	80.0	± 9.6 %
		Y	2.78	68.31	15.63		80.0	
		Z	2.99	66.83	15.86		80.0	
10506-AAC	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	3.68	71.16	17.64	2.23	80.0	± 9.6 %
		Y	3.23	71.98	18.40		80.0	
		Z	3.28	69.54	17.18		80.0	
10507-AAC	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	3.60	68.17	16.71	2.23	80.0	± 9.6 %
		Y	3.16	68.41	16.88		80.0	
		Z	3.32	66.89	16.38		80.0	

EX3DV4- SN:3863

April 25, 2018

10508-AAC	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	3.69	67.98	16.67	2.23	80.0	± 9.6 %
		Y	3.23	68.18	16.79		80.0	
		Z	3.42	66.74	16.35		80.0	
10509-AAC	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	4.09	70.27	17.38	2.23	80.0	± 9.6 %
		Y	3.57	70.54	17.94		80.0	
		Z	3.72	66.92	16.97		80.0	
10510-AAC	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	4.09	67.97	16.86	2.23	80.0	± 9.6 %
		Y	3.56	67.74	16.96		80.0	
		Z	3.82	66.86	16.53		80.0	
10511-AAC	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	4.17	67.81	16.83	2.23	80.0	± 9.6 %
		Y	3.64	67.61	16.92		80.0	
		Z	3.90	66.70	16.51		80.0	
10512-AAC	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	4.18	71.35	17.66	2.23	80.0	± 9.6 %
		Y	3.66	71.62	18.28		80.0	
		Z	3.77	69.95	17.25		80.0	
10513-AAC	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	3.98	68.10	16.91	2.23	80.0	± 9.6 %
		Y	3.47	67.78	17.03		80.0	
		Z	3.70	66.98	16.58		80.0	
10514-AAC	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	4.02	67.80	16.84	2.23	80.0	± 9.6 %
		Y	3.52	67.49	16.93		80.0	
		Z	3.75	66.69	16.51		80.0	
10515-AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 2 Mbps, 99pc duty cycle)	X	0.92	63.12	14.48	0.00	150.0	± 9.6 %
		Y	0.96	65.32	15.94		150.0	
		Z	0.86	62.01	13.50		150.0	
10516-AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 5.5 Mbps, 99pc duty cycle)	X	0.54	70.00	16.71	0.00	150.0	± 9.6 %
		Y	2.46	99.33	28.61		150.0	
		Z	0.41	65.69	13.40		150.0	
10517-AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps, 99pc duty cycle)	X	0.76	64.84	14.98	0.00	150.0	± 9.6 %
		Y	0.86	68.98	17.56		150.0	
		Z	0.68	63.15	13.53		150.0	
10518-AAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 9 Mbps, 99pc duty cycle)	X	4.31	66.83	16.12	0.00	150.0	± 9.6 %
		Y	4.10	67.60	16.42		150.0	
		Z	4.33	66.40	15.88		150.0	
10519-AAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 12 Mbps, 99pc duty cycle)	X	4.45	66.99	16.21	0.00	150.0	± 9.6 %
		Y	4.21	67.71	16.48		150.0	
		Z	4.49	66.60	15.99		150.0	
10520-AAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 18 Mbps, 99pc duty cycle)	X	4.31	66.93	16.12	0.00	150.0	± 9.6 %
		Y	4.08	67.63	16.41		150.0	
		Z	4.35	66.53	15.90		150.0	
10521-AAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 24 Mbps, 99pc duty cycle)	X	4.24	66.89	16.10	0.00	150.0	± 9.6 %
		Y	4.01	67.52	16.35		150.0	
		Z	4.28	66.50	15.87		150.0	
10522-AAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 36 Mbps, 99pc duty cycle)	X	4.29	67.01	16.19	0.00	150.0	± 9.6 %
		Y	4.02	67.52	16.36		150.0	
		Z	4.34	66.64	15.98		150.0	

Certificate No: EX3-3863_Apr18

Page 30 of 39

EX3DV4-- SN:3863

April 25, 2018

10523-AAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 48 Mbps, 99pc duty cycle)	X	4.22	67.02	16.12	0.00	150.0	± 9.6 %
		Y	4.02	67.85	16.48		150.0	
		Z	4.24	66.53	15.84		150.0	
10524-AAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 54 Mbps, 99pc duty cycle)	X	4.25	66.98	16.19	0.00	150.0	± 9.6 %
		Y	4.00	67.65	16.47		150.0	
		Z	4.28	66.56	15.95		150.0	
10525-AAB	IEEE 802.11ac WiFi (20MHz, MCS0, 99pc duty cycle)	X	4.28	66.09	15.82	0.00	150.0	± 9.6 %
		Y	4.09	66.89	16.17		150.0	
		Z	4.29	65.63	15.56		150.0	
10526-AAB	IEEE 802.11ac WiFi (20MHz, MCS1, 99pc duty cycle)	X	4.40	66.37	15.93	0.00	150.0	± 9.6 %
		Y	4.16	67.06	16.24		150.0	
		Z	4.43	65.94	15.69		150.0	
10527-AAB	IEEE 802.11ac WiFi (20MHz, MCS2, 99pc duty cycle)	X	4.33	66.34	15.87	0.00	150.0	± 9.6 %
		Y	4.12	67.09	16.20		150.0	
		Z	4.36	65.89	15.62		150.0	
10528-AAB	IEEE 802.11ac WiFi (20MHz, MCS3, 99pc duty cycle)	X	4.35	66.35	15.90	0.00	150.0	± 9.6 %
		Y	4.12	67.05	16.21		150.0	
		Z	4.37	65.91	15.65		150.0	
10529-AAB	IEEE 802.11ac WiFi (20MHz, MCS4, 99pc duty cycle)	X	4.35	66.35	15.90	0.00	150.0	± 9.6 %
		Y	4.12	67.05	16.21		150.0	
		Z	4.37	65.91	15.65		150.0	
10531-AAB	IEEE 802.11ac WiFi (20MHz, MCS6, 99pc duty cycle)	X	4.31	66.37	15.88	0.00	150.0	± 9.6 %
		Y	4.07	67.03	16.17		150.0	
		Z	4.35	65.96	15.64		150.0	
10532-AAB	IEEE 802.11ac WiFi (20MHz, MCS7, 99pc duty cycle)	X	4.19	66.23	15.81	0.00	150.0	± 9.6 %
		Y	3.98	66.94	16.12		150.0	
		Z	4.22	65.81	15.56		150.0	
10533-AAB	IEEE 802.11ac WiFi (20MHz, MCS8, 99pc duty cycle)	X	4.35	66.43	15.91	0.00	150.0	± 9.6 %
		Y	4.13	67.21	16.24		150.0	
		Z	4.38	65.98	15.85		150.0	
10534-AAB	IEEE 802.11ac WiFi (40MHz, MCS0, 99pc duty cycle)	X	4.91	66.34	15.97	0.00	150.0	± 9.6 %
		Y	4.69	66.74	16.24		150.0	
		Z	4.94	66.04	15.77		150.0	
10535-AAB	IEEE 802.11ac WiFi (40MHz, MCS1, 99pc duty cycle)	X	4.95	66.47	16.03	0.00	150.0	± 9.6 %
		Y	4.71	66.81	16.28		150.0	
		Z	4.99	66.21	15.85		150.0	
10536-AAB	IEEE 802.11ac WiFi (40MHz, MCS2, 99pc duty cycle)	X	4.84	66.47	16.01	0.00	150.0	± 9.6 %
		Y	4.62	66.84	16.27		150.0	
		Z	4.87	66.16	15.80		150.0	
10537-AAB	IEEE 802.11ac WiFi (40MHz, MCS3, 99pc duty cycle)	X	4.90	66.47	16.01	0.00	150.0	± 9.6 %
		Y	4.71	66.93	16.32		150.0	
		Z	4.93	66.13	15.79		150.0	
10538-AAB	IEEE 802.11ac WiFi (40MHz, MCS4, 99pc duty cycle)	X	4.97	66.42	16.03	0.00	150.0	± 9.6 %
		Y	4.73	66.75	16.26		150.0	
		Z	5.00	66.13	15.84		150.0	
10540-AAB	IEEE 802.11ac WiFi (40MHz, MCS6, 99pc duty cycle)	X	4.90	66.35	16.03	0.00	150.0	± 9.6 %
		Y	4.67	66.70	16.26		150.0	
		Z	4.93	66.11	15.84		150.0	

EX3DV4- SN-3863

April 25, 2018

10541-AAB	IEEE 802.11ac WiFi (40MHz, MCS7, 99pc duty cycle)	X	4.86	66.31	15.97	0.00	150.0	± 9.6 %
		Y	4.67	66.70	16.23		150.0	
		Z	4.91	66.01	15.77		150.0	
10542-AAB	IEEE 802.11ac WiFi (40MHz, MCS8, 99pc duty cycle)	X	5.04	66.41	16.04	0.00	150.0	± 9.6 %
		Y	4.80	66.76	16.28		150.0	
		Z	5.07	66.11	15.85		150.0	
10543-AAB	IEEE 802.11ac WiFi (40MHz, MCS9, 99pc duty cycle)	X	5.11	66.49	16.11	0.00	150.0	± 9.6 %
		Y	4.85	66.80	16.33		150.0	
		Z	5.14	66.14	15.89		150.0	
10544-AAB	IEEE 802.11ac WiFi (80MHz, MCS0, 99pc duty cycle)	X	5.25	66.42	15.96	0.00	150.0	± 9.6 %
		Y	5.07	66.65	16.18		150.0	
		Z	5.27	66.15	15.78		150.0	
10545-AAB	IEEE 802.11ac WiFi (80MHz, MCS1, 99pc duty cycle)	X	5.42	66.84	16.13	0.00	150.0	± 9.6 %
		Y	5.21	67.04	16.34		150.0	
		Z	5.45	66.60	15.96		150.0	
10546-AAB	IEEE 802.11ac WiFi (80MHz, MCS2, 99pc duty cycle)	X	5.28	66.54	15.99	0.00	150.0	± 9.6 %
		Y	5.09	66.74	16.19		150.0	
		Z	5.31	66.30	15.82		150.0	
10547-AAB	IEEE 802.11ac WiFi (80MHz, MCS3, 99pc duty cycle)	X	5.36	66.65	16.04	0.00	150.0	± 9.6 %
		Y	5.22	67.07	16.36		150.0	
		Z	5.39	66.38	15.86		150.0	
10548-AAB	IEEE 802.11ac WiFi (80MHz, MCS4, 99pc duty cycle)	X	5.50	67.24	16.31	0.00	150.0	± 9.6 %
		Y	5.18	67.11	16.36		150.0	
		Z	5.58	67.16	16.22		150.0	
10550-AAB	IEEE 802.11ac WiFi (80MHz, MCS6, 99pc duty cycle)	X	5.34	66.72	16.10	0.00	150.0	± 9.6 %
		Y	5.22	67.23	16.45		150.0	
		Z	5.36	66.42	15.90		150.0	
10551-AAB	IEEE 802.11ac WiFi (80MHz, MCS7, 99pc duty cycle)	X	5.28	66.50	15.95	0.00	150.0	± 9.6 %
		Y	5.06	66.66	16.14		150.0	
		Z	5.33	66.34	15.82		150.0	
10552-AAB	IEEE 802.11ac WiFi (80MHz, MCS8, 99pc duty cycle)	X	5.26	66.54	15.97	0.00	150.0	± 9.6 %
		Y	5.07	66.82	16.21		150.0	
		Z	5.27	66.23	15.76		150.0	
10553-AAB	IEEE 802.11ac WiFi (80MHz, MCS9, 99pc duty cycle)	X	5.31	66.48	15.97	0.00	150.0	± 9.6 %
		Y	5.11	66.71	16.17		150.0	
		Z	5.34	66.23	15.80		150.0	
10554-AAC	IEEE 802.11ac WiFi (160MHz, MCS0, 99pc duty cycle)	X	5.67	66.75	16.04	0.00	150.0	± 9.6 %
		Y	5.52	66.90	16.21		150.0	
		Z	5.69	66.52	15.88		150.0	
10555-AAC	IEEE 802.11ac WiFi (160MHz, MCS1, 99pc duty cycle)	X	5.76	66.97	16.13	0.00	150.0	± 9.6 %
		Y	5.58	67.06	16.29		150.0	
		Z	5.80	66.79	16.00		150.0	
10556-AAC	IEEE 802.11ac WiFi (160MHz, MCS2, 99pc duty cycle)	X	5.80	67.08	16.18	0.00	150.0	± 9.6 %
		Y	5.63	67.23	16.36		150.0	
		Z	5.83	66.86	16.03		150.0	
10557-AAC	IEEE 802.11ac WiFi (160MHz, MCS3, 99pc duty cycle)	X	5.76	66.95	16.13	0.00	150.0	± 9.6 %
		Y	5.57	67.06	16.29		150.0	
		Z	5.78	66.73	15.98		150.0	

EX3DV4- SN:3863

April 25, 2018

10558-AAC	IEEE 802.11ac WiFi (160MHz, MCS4, 99pc duty cycle)	X	5.77	67.00	16.18	0.00	150.0	± 9.6 %
		Y	5.54	66.98	16.27		150.0	
		Z	5.82	66.87	16.07		150.0	
10560-AAC	IEEE 802.11ac WiFi (160MHz, MCS6, 99pc duty cycle)	X	5.79	66.93	16.18	0.00	150.0	± 9.6 %
		Y	5.57	66.97	16.30		150.0	
		Z	5.82	66.74	16.04		150.0	
10561-AAC	IEEE 802.11ac WiFi (160MHz, MCS7, 99pc duty cycle)	X	5.72	66.92	16.20	0.00	150.0	± 9.6 %
		Y	5.51	66.95	16.32		150.0	
		Z	5.75	66.73	16.07		150.0	
10562-AAC	IEEE 802.11ac WiFi (160MHz, MCS8, 99pc duty cycle)	X	5.77	67.08	16.28	0.00	150.0	± 9.6 %
		Y	5.56	67.09	16.39		150.0	
		Z	5.83	66.96	16.19		150.0	
10563-AAC	IEEE 802.11ac WiFi (160MHz, MCS9, 99pc duty cycle)	X	5.87	67.06	16.24	0.00	150.0	± 9.6 %
		Y	5.77	67.47	16.55		150.0	
		Z	5.92	66.90	16.12		150.0	
10564-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 9 Mbps, 99pc duty cycle)	X	4.62	66.82	16.22	0.46	150.0	± 9.6 %
		Y	4.39	67.43	16.46		150.0	
		Z	4.66	66.47	16.04		150.0	
10565-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 12 Mbps, 99pc duty cycle)	X	4.82	67.25	16.56	0.46	150.0	± 9.6 %
		Y	4.56	67.67	16.81		150.0	
		Z	4.86	66.91	16.38		150.0	
10566-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 18 Mbps, 99pc duty cycle)	X	4.65	67.05	16.34	0.46	150.0	± 9.6 %
		Y	4.40	67.63	16.58		150.0	
		Z	4.70	66.72	16.17		150.0	
10567-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 24 Mbps, 99pc duty cycle)	X	4.70	67.52	16.78	0.46	150.0	± 9.6 %
		Y	4.46	68.13	17.04		150.0	
		Z	4.73	67.13	16.55		150.0	
10568-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 36 Mbps, 99pc duty cycle)	X	4.54	66.72	16.04	0.46	150.0	± 9.6 %
		Y	4.23	67.04	16.12		150.0	
		Z	4.60	66.47	15.91		150.0	
10569-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 48 Mbps, 99pc duty cycle)	X	4.69	67.76	16.91	0.46	150.0	± 9.6 %
		Y	4.46	68.53	17.28		150.0	
		Z	4.70	67.29	16.65		150.0	
10570-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 54 Mbps, 99pc duty cycle)	X	4.68	67.52	16.79	0.46	150.0	± 9.6 %
		Y	4.43	68.13	17.07		150.0	
		Z	4.72	67.10	16.55		150.0	
10571-AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 90pc duty cycle)	X	1.13	64.43	15.18	0.46	130.0	± 9.6 %
		Y	1.09	65.61	16.13		130.0	
		Z	1.02	62.91	14.24		130.0	
10572-AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 2 Mbps, 90pc duty cycle)	X	1.14	65.04	15.56	0.46	130.0	± 9.6 %
		Y	1.11	66.40	16.63		130.0	
		Z	1.02	63.36	14.54		130.0	
10573-AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 5.5 Mbps, 90pc duty cycle)	X	2.01	84.38	21.80	0.46	130.0	± 9.6 %
		Y	35.15	138.74	38.20		130.0	
		Z	0.86	72.57	16.97		130.0	
10574-AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps, 90pc duty cycle)	X	1.29	71.29	18.68	0.46	130.0	± 9.6 %
		Y	1.41	75.83	21.40		130.0	
		Z	1.02	67.46	16.65		130.0	

EX3DV4- SN:3863

April 25, 2018

10575-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps, 90pc duty cycle)	X	4.40	66.56	16.20	0.46	130.0	± 9.6 %
		Y	4.16	67.14	16.39		130.0	
		Z	4.44	66.24	16.07		130.0	
10576-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 9 Mbps, 90pc duty cycle)	X	4.43	66.78	16.30	0.46	130.0	± 9.6 %
		Y	4.20	67.45	16.55		130.0	
		Z	4.46	66.42	16.14		130.0	
10577-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 12 Mbps, 90pc duty cycle)	X	4.59	67.02	16.46	0.46	130.0	± 9.6 %
		Y	4.33	67.64	16.68		130.0	
		Z	4.64	66.69	16.31		130.0	
10578-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 18 Mbps, 90pc duty cycle)	X	4.50	67.20	16.59	0.46	130.0	± 9.6 %
		Y	4.26	67.87	16.85		130.0	
		Z	4.54	66.83	16.41		130.0	
10579-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 24 Mbps, 90pc duty cycle)	X	4.24	66.27	15.75	0.46	130.0	± 9.6 %
		Y	3.96	66.67	15.85		130.0	
		Z	4.30	66.02	15.65		130.0	
10580-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 36 Mbps, 90pc duty cycle)	X	4.27	66.31	15.76	0.46	130.0	± 9.6 %
		Y	3.95	66.55	15.77		130.0	
		Z	4.34	66.08	15.68		130.0	
10581-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 48 Mbps, 90pc duty cycle)	X	4.41	67.27	16.55	0.46	130.0	± 9.6 %
		Y	4.19	68.04	16.88		130.0	
		Z	4.44	66.86	16.35		130.0	
10582-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 54 Mbps, 90pc duty cycle)	X	4.16	66.00	15.50	0.46	130.0	± 9.6 %
		Y	3.86	66.35	15.58		130.0	
		Z	4.23	65.78	15.42		130.0	
10583-AAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps, 90pc duty cycle)	X	4.40	66.56	16.20	0.46	130.0	± 9.6 %
		Y	4.16	67.14	16.39		130.0	
		Z	4.44	66.24	16.07		130.0	
10584-AAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 9 Mbps, 90pc duty cycle)	X	4.43	66.78	16.30	0.46	130.0	± 9.6 %
		Y	4.20	67.45	16.55		130.0	
		Z	4.46	66.42	16.14		130.0	
10585-AAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 12 Mbps, 90pc duty cycle)	X	4.59	67.02	16.46	0.46	130.0	± 9.6 %
		Y	4.33	67.64	16.68		130.0	
		Z	4.64	66.69	16.31		130.0	
10586-AAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 18 Mbps, 90pc duty cycle)	X	4.50	67.20	16.59	0.46	130.0	± 9.6 %
		Y	4.26	67.87	16.85		130.0	
		Z	4.54	66.83	16.41		130.0	
10587-AAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 24 Mbps, 90pc duty cycle)	X	4.24	66.27	15.75	0.46	130.0	± 9.6 %
		Y	3.96	66.67	15.85		130.0	
		Z	4.30	66.02	15.65		130.0	
10588-AAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 36 Mbps, 90pc duty cycle)	X	4.27	66.31	15.76	0.46	130.0	± 9.6 %
		Y	3.95	66.55	15.77		130.0	
		Z	4.34	66.08	15.68		130.0	
10589-AAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 48 Mbps, 90pc duty cycle)	X	4.41	67.27	16.55	0.46	130.0	± 9.6 %
		Y	4.19	68.04	16.88		130.0	
		Z	4.44	66.86	16.35		130.0	
10590-AAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 54 Mbps, 90pc duty cycle)	X	4.16	66.00	15.50	0.46	130.0	± 9.6 %
		Y	3.86	66.35	15.58		130.0	
		Z	4.23	65.78	15.42		130.0	

Certificate No: EX3-3863_Apr18

Page 34 of 39

EX3DV4-- SN:3863

April 25, 2018

10591-AAB	IEEE 802.11n (HT Mixed, 20MHz, MCS0, 90pc duty cycle)	X	4.56	66.67	16.34	0.46	130.0	± 9.6 %
		Y	4.32	67.28	16.57		130.0	
		Z	4.59	66.33	16.20		130.0	
10592-AAB	IEEE 802.11n (HT Mixed, 20MHz, MCS1, 90pc duty cycle)	X	4.67	66.95	16.47	0.46	130.0	± 9.6 %
		Y	4.40	67.50	16.66		130.0	
		Z	4.73	66.64	16.33		130.0	
10593-AAB	IEEE 802.11n (HT Mixed, 20MHz, MCS2, 90pc duty cycle)	X	4.59	66.81	16.31	0.46	130.0	± 9.6 %
		Y	4.33	67.38	16.52		130.0	
		Z	4.64	66.52	16.18		130.0	
10594-AAB	IEEE 802.11n (HT Mixed, 20MHz, MCS3, 90pc duty cycle)	X	4.65	67.01	16.49	0.46	130.0	± 9.6 %
		Y	4.38	67.56	16.71		130.0	
		Z	4.70	66.70	16.35		130.0	
10595-AAB	IEEE 802.11n (HT Mixed, 20MHz, MCS4, 90pc duty cycle)	X	4.61	66.98	16.39	0.46	130.0	± 9.6 %
		Y	4.34	67.53	16.61		130.0	
		Z	4.66	66.65	16.24		130.0	
10596-AAB	IEEE 802.11n (HT Mixed, 20MHz, MCS5, 90pc duty cycle)	X	4.54	66.93	16.37	0.46	130.0	± 9.6 %
		Y	4.25	67.39	16.55		130.0	
		Z	4.60	66.62	16.23		130.0	
10597-AAB	IEEE 802.11n (HT Mixed, 20MHz, MCS6, 90pc duty cycle)	X	4.49	66.79	16.22	0.46	130.0	± 9.6 %
		Y	4.22	67.27	16.39		130.0	
		Z	4.55	66.50	16.09		130.0	
10598-AAB	IEEE 802.11n (HT Mixed, 20MHz, MCS7, 90pc duty cycle)	X	4.49	67.08	16.53	0.46	130.0	± 9.6 %
		Y	4.26	67.70	16.78		130.0	
		Z	4.53	66.74	16.37		130.0	
10599-AAB	IEEE 802.11n (HT Mixed, 40MHz, MCS0, 90pc duty cycle)	X	5.23	67.11	16.59	0.46	130.0	± 9.6 %
		Y	5.12	67.88	17.03		130.0	
		Z	5.27	66.86	16.46		130.0	
10600-AAB	IEEE 802.11n (HT Mixed, 40MHz, MCS1, 90pc duty cycle)	X	5.32	67.43	16.72	0.46	130.0	± 9.6 %
		Y	5.06	67.70	16.91		130.0	
		Z	5.40	67.28	16.64		130.0	
10601-AAB	IEEE 802.11n (HT Mixed, 40MHz, MCS2, 90pc duty cycle)	X	5.23	67.24	16.64	0.46	130.0	± 9.6 %
		Y	5.01	67.64	16.90		130.0	
		Z	5.29	67.02	16.53		130.0	
10602-AAB	IEEE 802.11n (HT Mixed, 40MHz, MCS3, 90pc duty cycle)	X	5.32	67.24	16.55	0.46	130.0	± 9.6 %
		Y	5.04	67.46	16.72		130.0	
		Z	5.42	67.18	16.53		130.0	
10603-AAB	IEEE 802.11n (HT Mixed, 40MHz, MCS4, 90pc duty cycle)	X	5.39	67.57	16.87	0.46	130.0	± 9.6 %
		Y	5.05	67.60	16.95		130.0	
		Z	5.48	67.46	16.80		130.0	
10604-AAB	IEEE 802.11n (HT Mixed, 40MHz, MCS5, 90pc duty cycle)	X	5.28	67.19	16.65	0.46	130.0	± 9.6 %
		Y	5.00	67.36	16.79		130.0	
		Z	5.37	67.14	16.62		130.0	
10605-AAB	IEEE 802.11n (HT Mixed, 40MHz, MCS6, 90pc duty cycle)	X	5.31	67.30	16.70	0.46	130.0	± 9.6 %
		Y	5.01	67.43	16.83		130.0	
		Z	5.39	67.19	16.65		130.0	
10606-AAB	IEEE 802.11n (HT Mixed, 40MHz, MCS7, 90pc duty cycle)	X	5.10	66.73	16.26	0.46	130.0	± 9.6 %
		Y	4.93	67.27	16.59		130.0	
		Z	5.13	66.48	16.14		130.0	

Certificate No: EX3-3863_Apr18

Page 35 of 39

EX3DV4-- SN:3863

April 25, 2018

10607-AAB	IEEE 802.11ac WiFi (20MHz, MCS0, 90pc duty cycle)	X	4.40	66.00	15.99	0.46	130.0	± 9.6 %
		Y	4.19	66.71	16.28		130.0	
		Z	4.43	65.83	15.81		130.0	
10608-AAB	IEEE 802.11ac WiFi (20MHz, MCS1, 90pc duty cycle)	X	4.54	66.32	16.13	0.46	130.0	± 9.6 %
		Y	4.28	66.94	16.39		130.0	
		Z	4.59	65.99	15.97		130.0	
10609-AAB	IEEE 802.11ac WiFi (20MHz, MCS2, 90pc duty cycle)	X	4.43	66.14	15.93	0.46	130.0	± 9.6 %
		Y	4.18	66.77	16.19		130.0	
		Z	4.48	65.81	15.78		130.0	
10610-AAB	IEEE 802.11ac WiFi (20MHz, MCS3, 90pc duty cycle)	X	4.48	66.33	16.12	0.46	130.0	± 9.6 %
		Y	4.24	66.96	16.39		130.0	
		Z	4.53	65.98	15.95		130.0	
10611-AAB	IEEE 802.11ac WiFi (20MHz, MCS4, 90pc duty cycle)	X	4.40	66.11	15.95	0.46	130.0	± 9.6 %
		Y	4.14	66.70	16.20		130.0	
		Z	4.44	65.77	15.79		130.0	
10612-AAB	IEEE 802.11ac WiFi (20MHz, MCS5, 90pc duty cycle)	X	4.38	66.21	15.97	0.46	130.0	± 9.6 %
		Y	4.09	66.68	16.16		130.0	
		Z	4.44	65.90	15.83		130.0	
10613-AAB	IEEE 802.11ac WiFi (20MHz, MCS6, 90pc duty cycle)	X	4.37	66.02	15.81	0.46	130.0	± 9.6 %
		Y	4.10	66.52	16.00		130.0	
		Z	4.44	65.75	15.68		130.0	
10614-AAB	IEEE 802.11ac WiFi (20MHz, MCS7, 90pc duty cycle)	X	4.36	66.31	16.11	0.46	130.0	± 9.6 %
		Y	4.12	66.94	16.38		130.0	
		Z	4.40	65.96	15.94		130.0	
10615-AAB	IEEE 802.11ac WiFi (20MHz, MCS8, 90pc duty cycle)	X	4.38	65.89	15.68	0.46	130.0	± 9.6 %
		Y	4.11	66.48	15.90		130.0	
		Z	4.44	65.60	15.55		130.0	
10616-AAB	IEEE 802.11ac WiFi (40MHz, MCS0, 90pc duty cycle)	X	5.04	66.30	16.17	0.46	130.0	± 9.6 %
		Y	4.81	66.63	16.40		130.0	
		Z	5.08	66.07	16.04		130.0	
10617-AAB	IEEE 802.11ac WiFi (40MHz, MCS1, 90pc duty cycle)	X	5.07	66.41	16.20	0.46	130.0	± 9.6 %
		Y	4.82	66.67	16.40		130.0	
		Z	5.15	66.26	16.12		130.0	
10618-AAB	IEEE 802.11ac WiFi (40MHz, MCS2, 90pc duty cycle)	X	4.99	66.49	16.26	0.46	130.0	± 9.6 %
		Y	4.75	66.78	16.48		130.0	
		Z	5.04	66.28	16.14		130.0	
10619-AAB	IEEE 802.11ac WiFi (40MHz, MCS3, 90pc duty cycle)	X	5.01	66.29	16.09	0.46	130.0	± 9.6 %
		Y	4.79	66.70	16.36		130.0	
		Z	5.05	66.06	15.96		130.0	
10620-AAB	IEEE 802.11ac WiFi (40MHz, MCS4, 90pc duty cycle)	X	5.07	66.29	16.14	0.46	130.0	± 9.6 %
		Y	4.80	66.49	16.29		130.0	
		Z	5.13	66.09	16.03		130.0	
10621-AAB	IEEE 802.11ac WiFi (40MHz, MCS5, 90pc duty cycle)	X	5.09	66.45	16.35	0.46	130.0	± 9.6 %
		Y	4.85	66.75	16.57		130.0	
		Z	5.15	66.25	16.23		130.0	
10622-AAB	IEEE 802.11ac WiFi (40MHz, MCS6, 90pc duty cycle)	X	5.08	66.53	16.39	0.46	130.0	± 9.6 %
		Y	4.83	66.78	16.59		130.0	
		Z	5.14	66.36	16.28		130.0	

EX3DV4- SN:3863

April 25, 2018

10623-AAB	IEEE 802.11ac WiFi (40MHz, MCS7, 90pc duty cycle)	X	4.96	66.05	15.99	0.46	130.0	± 9.6 %
		Y	4.74	66.39	16.22		130.0	
		Z	5.02	65.88	15.90		130.0	
10624-AAB	IEEE 802.11ac WiFi (40MHz, MCS8, 90pc duty cycle)	X	5.16	66.32	16.20	0.46	130.0	± 9.6 %
		Y	4.91	66.60	16.40		130.0	
		Z	5.22	66.13	16.10		130.0	
10625-AAB	IEEE 802.11ac WiFi (40MHz, MCS9, 90pc duty cycle)	X	5.25	66.46	16.34	0.46	130.0	± 9.6 %
		Y	5.01	66.67	16.61		130.0	
		Z	5.43	66.66	16.42		130.0	
10626-AAB	IEEE 802.11ac WiFi (80MHz, MCS0, 90pc duty cycle)	X	5.37	66.32	16.13	0.46	130.0	± 9.6 %
		Y	5.18	66.52	16.32		130.0	
		Z	5.41	66.14	16.02		130.0	
10627-AAB	IEEE 802.11ac WiFi (80MHz, MCS1, 90pc duty cycle)	X	5.59	66.90	16.39	0.46	130.0	± 9.6 %
		Y	5.36	67.08	16.58		130.0	
		Z	5.64	66.75	16.30		130.0	
10628-AAB	IEEE 802.11ac WiFi (80MHz, MCS2, 90pc duty cycle)	X	5.36	66.27	16.00	0.46	130.0	± 9.6 %
		Y	5.15	66.43	16.17		130.0	
		Z	5.41	66.15	15.92		130.0	
10629-AAB	IEEE 802.11ac WiFi (80MHz, MCS3, 90pc duty cycle)	X	5.46	66.45	16.06	0.46	130.0	± 9.6 %
		Y	5.33	66.94	16.43		130.0	
		Z	5.50	66.26	15.98		130.0	
10630-AAB	IEEE 802.11ac WiFi (80MHz, MCS4, 90pc duty cycle)	X	5.68	67.33	16.53	0.46	130.0	± 9.6 %
		Y	5.30	67.01	16.48		130.0	
		Z	5.83	67.48	16.58		130.0	
10631-AAB	IEEE 802.11ac WiFi (80MHz, MCS5, 90pc duty cycle)	X	5.68	67.46	16.80	0.46	130.0	± 9.6 %
		Y	5.39	67.46	16.91		130.0	
		Z	5.77	67.39	16.74		130.0	
10632-AAB	IEEE 802.11ac WiFi (80MHz, MCS6, 90pc duty cycle)	X	5.60	67.13	16.65	0.46	130.0	± 9.6 %
		Y	5.50	67.73	17.05		130.0	
		Z	5.63	66.87	16.50		130.0	
10633-AAB	IEEE 802.11ac WiFi (80MHz, MCS7, 90pc duty cycle)	X	5.39	66.38	16.10	0.46	130.0	± 9.6 %
		Y	5.16	66.54	16.27		130.0	
		Z	5.48	66.37	16.07		130.0	
10634-AAB	IEEE 802.11ac WiFi (80MHz, MCS8, 90pc duty cycle)	X	5.42	66.59	16.25	0.46	130.0	± 9.6 %
		Y	5.22	66.63	16.48		130.0	
		Z	5.46	66.38	16.13		130.0	
10635-AAB	IEEE 802.11ac WiFi (80MHz, MCS9, 90pc duty cycle)	X	5.26	65.75	15.53	0.46	130.0	± 9.6 %
		Y	5.03	65.88	15.68		130.0	
		Z	5.33	65.66	15.49		130.0	
10636-AAB	IEEE 802.11ac WiFi (160MHz, MCS0, 90pc duty cycle)	X	5.80	66.66	16.21	0.46	130.0	± 9.6 %
		Y	5.64	66.80	16.37		130.0	
		Z	5.84	66.53	16.13		130.0	
10637-AAB	IEEE 802.11ac WiFi (160MHz, MCS1, 90pc duty cycle)	X	5.91	66.96	16.34	0.46	130.0	± 9.6 %
		Y	5.72	67.05	16.49		130.0	
		Z	5.98	66.89	16.30		130.0	
10638-AAB	IEEE 802.11ac WiFi (160MHz, MCS2, 90pc duty cycle)	X	5.94	67.02	16.35	0.46	130.0	± 9.6 %
		Y	5.77	67.21	16.55		130.0	
		Z	5.98	66.86	16.26		130.0	

Certificate No: EX3-3863_Apr18

Page 37 of 39

EX3DV4-SN:3863

April 25, 2018

10639-AAC	IEEE 802.11ac WiFi (160MHz, MCS3, 90pc duty cycle)	X	5.90	66.90	16.34	0.46	130.0	± 9.6 %
		Y	5.70	66.99	16.48		130.0	
		Z	5.95	66.76	16.26		130.0	
10640-AAC	IEEE 802.11ac WiFi (160MHz, MCS4, 90pc duty cycle)	X	5.85	66.77	16.21	0.46	130.0	± 9.6 %
		Y	5.60	66.70	16.28		130.0	
		Z	5.94	66.77	16.19		130.0	
10641-AAC	IEEE 802.11ac WiFi (160MHz, MCS5, 90pc duty cycle)	X	5.95	66.85	16.27	0.46	130.0	± 9.6 %
		Y	5.73	66.88	16.38		130.0	
		Z	6.01	66.77	16.22		130.0	
10642-AAC	IEEE 802.11ac WiFi (160MHz, MCS6, 90pc duty cycle)	X	5.98	67.10	16.57	0.46	130.0	± 9.6 %
		Y	5.76	67.11	16.68		130.0	
		Z	6.04	66.98	16.50		130.0	
10643-AAC	IEEE 802.11ac WiFi (160MHz, MCS7, 90pc duty cycle)	X	5.82	66.74	16.27	0.46	130.0	± 9.6 %
		Y	5.59	66.71	16.35		130.0	
		Z	5.88	66.67	16.23		130.0	
10644-AAC	IEEE 802.11ac WiFi (160MHz, MCS8, 90pc duty cycle)	X	5.88	66.93	16.39	0.46	130.0	± 9.6 %
		Y	5.65	66.92	16.48		130.0	
		Z	5.97	66.96	16.39		130.0	
10645-AAC	IEEE 802.11ac WiFi (160MHz, MCS9, 90pc duty cycle)	X	6.00	66.98	16.38	0.46	130.0	± 9.6 %
		Y	5.89	67.36	16.67		130.0	
		Z	6.11	67.04	16.40		130.0	
10646-AAD	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, QPSK, UL Subframe=2,7)	X	10.64	95.54	31.22	9.30	60.0	± 9.6 %
		Y	4.79	84.10	28.76		60.0	
		Z	10.44	97.20	33.10		60.0	
10647-AAC	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK, UL Subframe=2,7)	X	9.38	93.52	30.68	9.30	60.0	± 9.6 %
		Y	4.24	81.79	27.97		60.0	
		Z	9.23	95.05	32.51		60.0	
10648-AAA	CDMA2000 (1x Advanced)	X	0.45	60.96	7.58	0.00	150.0	± 9.6 %
		Y	0.27	60.00	4.46		150.0	
		Z	0.46	60.51	7.45		150.0	
10652-AAB	LTE-TDD (OFDMA, 5 MHz, E-TM 3.1, Clipping 44%)	X	3.44	66.86	15.90	2.23	80.0	± 9.6 %
		Y	3.11	67.55	15.78		80.0	
		Z	3.23	65.63	15.61		80.0	
10653-AAB	LTE-TDD (OFDMA, 10 MHz, E-TM 3.1, Clipping 44%)	X	4.00	66.30	16.33	2.23	80.0	± 9.6 %
		Y	3.63	66.57	16.36		80.0	
		Z	3.80	65.27	16.02		80.0	
10654-AAB	LTE-TDD (OFDMA, 15 MHz, E-TM 3.1, Clipping 44%)	X	4.02	65.95	16.40	2.23	80.0	± 9.6 %
		Y	3.68	66.02	16.44		80.0	
		Z	3.82	64.96	16.07		80.0	
10655-AAB	LTE-TDD (OFDMA, 20 MHz, E-TM 3.1, Clipping 44%)	X	4.10	65.87	16.44	2.23	80.0	± 9.6 %
		Y	3.77	65.78	16.47		80.0	
		Z	3.89	64.93	16.12		80.0	
10658-AAA	Pulse Waveform (200Hz, 10%)	X	3.96	69.40	12.41	10.00	50.0	± 9.6 %
		Y	3.54	68.64	11.84		50.0	
		Z	6.60	76.50	15.95		50.0	
10659-AAA	Pulse Waveform (200Hz, 20%)	X	3.35	69.24	11.38	6.99	60.0	± 9.6 %
		Y	2.54	68.41	10.67		60.0	
		Z	15.62	86.85	17.81		60.0	

EX3DV4- SN:3863

April 25, 2018

10660- AAA	Pulse Waveform (200Hz, 40%)	X	3.13	70.75	10.92	3.98	80.0	± 9.6 %
		Y	2.65	71.33	10.38		80.0	
		Z	100.00	100.70	18.97		80.0	
10661- AAA	Pulse Waveform (200Hz, 60%)	X	3.01	72.21	10.50	2.22	100.0	± 9.6 %
		Y	0.47	62.70	5.02		100.0	
		Z	0.86	65.62	7.78		100.0	
10662- AAA	Pulse Waveform (200Hz, 80%)	X	0.23	60.01	4.55	0.97	120.0	± 9.6 %
		Y	0.53	60.44	2.25		120.0	
		Z	0.27	60.00	2.59		120.0	

* Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client: **HCT (Dymstec)**

Certificate No: **EX3-3903_Sep17**

CALIBRATION CERTIFICATE

Object: **EX3DV4 - SN:3903**

Calibration procedure(s): **QA CAL-01.v9, QA CAL-12.v9, QA CAL-14.v4, QA CAL-23.v5,
QA CAL-25.v6
Calibration procedure for dosimetric E-field probes**

Calibration date: **September 28, 2017**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	04-Apr-17 (No. 217-02521/02522)	Apr-18
Power sensor NRP-Z91	SN: 103244	04-Apr-17 (No. 217-02521)	Apr-18
Power sensor NRP-Z91	SN: 103245	04-Apr-17 (No. 217-02525)	Apr-18
Reference 20 dB Attenuator	SN: S5277 (20x)	07-Apr-17 (No. 217-02528)	Apr-18
Reference Probe ES3DV2	SN: 3013	31-Dec-16 (No. ES3-3013_Dec16)	Dec-17
DAE4	SN: 660	7-Dec-16 (No. DAE4-660_Dec16)	Dec-17
Secondary Standards	ID	Check Date (in house)	Scheduled Check
Power meter E4419B	SN: GB41293874	06-Apr-16 (in house check Jun-16)	In house check: Jun-18
Power sensor E4412A	SN: MY41498087	06-Apr-16 (in house check Jun-16)	In house check: Jun-18
Power sensor E4412A	SN: 000110210	06-Apr-16 (in house check Jun-16)	In house check: Jun-18
RF generator HP 8648C	SN: US3642U01700	04-Aug-99 (in house check Jun-16)	In house check: Jun-18
Network Analyzer HP 8753E	SN: US37390585	18-Oct-01 (in house check Oct-16)	In house check: Oct-17

	Name	Function	Signature
Calibrated by:	Jeton Kastati	Laboratory Technician	
Approved by:	Katja Pokovic	Technical Manager	
This calibration certificate shall not be reproduced except in full without written approval of the laboratory.			

Issued: September 28, 2017

Certificate No: EX3-3903_Sep17

Page 1 of 38

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 0108

Glossary:

TSL	tissue simulating liquid
NORM _{x,y,z}	sensitivity in free space
ConvF	sensitivity in TSL / NORM _{x,y,z}
DCP	diode compression point
CF	crest factor (1/duty_cycle) of the RF signal
A, B, C, D	modulation dependent linearization parameters
Polarization ϕ	ϕ rotation around probe axis
Polarization θ	θ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\theta = 0$ is normal to probe axis
Connector Angle	information used in DASY system to align probe sensor X to the robot coordinate system

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 885664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Methods Applied and Interpretation of Parameters:

- NORM_{x,y,z}: Assessed for E-field polarization $\theta = 0$ ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: R22 waveguide). NORM_{x,y,z} are only intermediate values, i.e., the uncertainties of NORM_{x,y,z} does not affect the E²-field uncertainty inside TSL (see below ConvF).
- NORM(f)_{x,y,z} = NORM_{x,y,z} * frequency_response (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- DCPx,y,z: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- PAR: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- A_{x,y,z}; B_{x,y,z}; C_{x,y,z}; D_{x,y,z}; VR_{x,y,z}: A, B, C, D are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters: Assessed in flat phantom using E-field (or Temperature Transfer Standard for $f \leq 800$ MHz) and inside waveguide using analytical field distributions based on power measurements for $f > 800$ MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM_{x,y,z} * ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- Spherical isotropy (3D deviation from isotropy): in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- Connector Angle: The angle is assessed using the information gained by determining the NORM_x (no uncertainty required).

EX3DV4 – SN:3903

September 28, 2017

Probe EX3DV4

SN:3903

Manufactured: September 4, 2012
Calibrated: September 28, 2017

Calibrated for DASY/EASY Systems
(Note: non-compatible with DASY2 system!)

EX3DV4- SN:3903

September 28, 2017

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3903

Basic Calibration Parameters

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm ($\mu\text{V}/(\text{V/m})^2$) ^A	0.40	0.37	0.54	$\pm 10.1 \%$
DCP (mV) ^B	98.7	107.1	96.1	

Modulation Calibration Parameters

UID	Communication System Name		A dB	B dB $\sqrt{\mu\text{V}}$	C	D dB	VR mV	Unc ^E (k=2)
0	CW	X	0.0	0.0	1.0	0.00	132.4	$\pm 3.0 \%$
		Y	0.0	0.0	1.0		132.6	
		Z	0.0	0.0	1.0		136.9	

Note: For details on UID parameters see Appendix.

Sensor Model Parameters

	C1 fF	C2 fF	α V^{-1}	T1 ms.V^{-1}	T2 ms.V^{-1}	T3 ms	T4 V^{-1}	T5 V^{-1}	T6
X	54.67	404.0	34.85	15.93	0.684	5.047	0.627	0.424	1.008
Y	41.37	298.5	33.56	12.88	0.370	5.058	1.748	0.105	1.007
Z	61.12	460.1	36.00	24.52	0.981	5.100	0.007	0.646	1.011

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

^A The uncertainties of Norm X,Y,Z do not affect the E^2 -field uncertainty inside TSL (see Pages 5 and 6).

^B Numerical linearization parameter: uncertainty not required.

^E Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

EX3DV4- SN:3903

September 28, 2017

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3903

Calibration Parameter Determined in Head Tissue Simulating Media

f (MHz) ^C	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha ^G	Depth ^G (mm)	Unc (k=2)
600	42.7	0.88	11.00	11.00	11.00	0.09	1.15	± 13.3 %
750	41.9	0.89	10.92	10.92	10.92	0.50	0.80	± 12.0 %
835	41.5	0.90	10.29	10.29	10.29	0.46	0.80	± 12.0 %
900	41.5	0.97	9.95	9.95	9.95	0.51	0.80	± 12.0 %
1450	40.5	1.20	8.73	8.73	8.73	0.44	0.80	± 12.0 %
1750	40.1	1.37	8.64	8.64	8.64	0.34	0.80	± 12.0 %
1900	40.0	1.40	8.44	8.44	8.44	0.39	0.80	± 12.0 %
2450	39.2	1.80	7.56	7.56	7.56	0.39	0.83	± 12.0 %
2600	39.0	1.96	7.37	7.37	7.37	0.37	0.80	± 12.0 %
5250	35.9	4.71	5.45	5.45	5.45	0.35	1.80	± 13.1 %
5600	35.5	5.07	4.78	4.78	4.78	0.40	1.80	± 13.1 %
5750	35.4	5.22	5.07	5.07	5.07	0.40	1.80	± 13.1 %

^C Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

^F At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

^G Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

EX3DV4- SN:3903

September 28, 2017

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3903

Calibration Parameter Determined in Body Tissue Simulating Media

F (MHz) ^c	Relative Permittivity ^f	Conductivity (S/m) ^f	ConvF X	ConvF Y	ConvF Z	Alpha ^g	Depth ^h (mm)	Unc (k=2)
600	56.1	0.95	10.59	10.59	10.59	0.08	1.15	± 13.3 %
750	55.5	0.96	10.20	10.20	10.20	0.54	0.80	± 12.0 %
835	55.2	0.97	9.94	9.94	9.94	0.45	0.80	± 12.0 %
1750	53.4	1.49	8.38	8.38	8.38	0.48	0.80	± 12.0 %
1900	53.3	1.52	8.07	8.07	8.07	0.43	0.80	± 12.0 %
2450	52.7	1.95	7.65	7.65	7.65	0.37	0.85	± 12.0 %
2600	52.5	2.16	7.42	7.42	7.42	0.35	0.94	± 12.0 %
5250	48.9	5.36	4.75	4.75	4.75	0.40	1.90	± 13.1 %
5600	48.5	5.77	4.18	4.18	4.18	0.40	1.90	± 13.1 %
5750	48.3	5.94	4.42	4.42	4.42	0.45	1.90	± 13.1 %

^c Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.


^f At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

^h Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

EX3DV4- SN:3903

September 28, 2017

Frequency Response of E-Field (TEM-Cell:ifi110 EXX, Waveguide: R22)


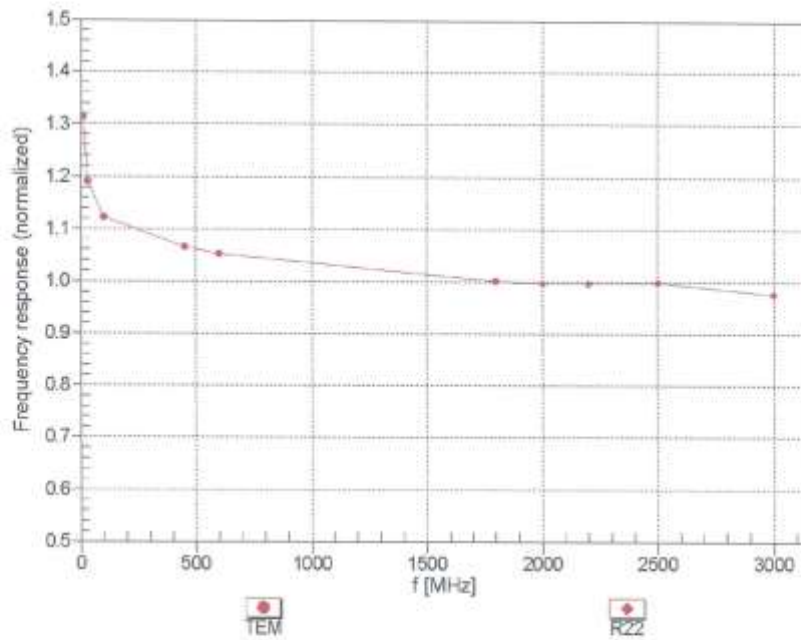


Uncertainty of Frequency Response of E-field: $\pm 6.3\%$ (k=2)

EX3DV4- SN:3903

September 28, 2017

Receiving Pattern (ϕ), $\theta = 0^\circ$

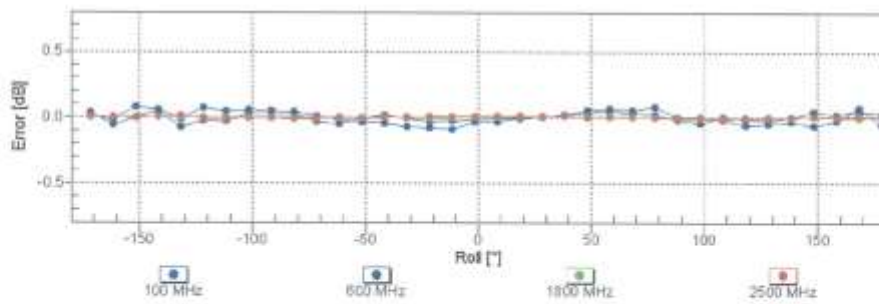
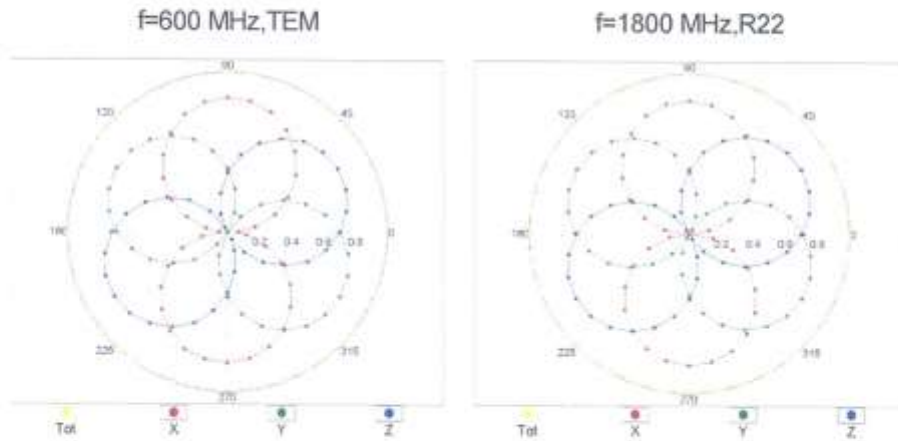


Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ ($k=2$)

EX3DV4- SN:3903

September 28, 2017

Dynamic Range $f(\text{SAR}_{\text{head}})$ (TEM cell, $f_{\text{eval}} = 1900 \text{ MHz}$)

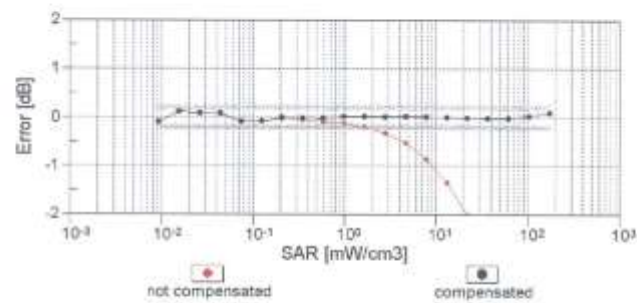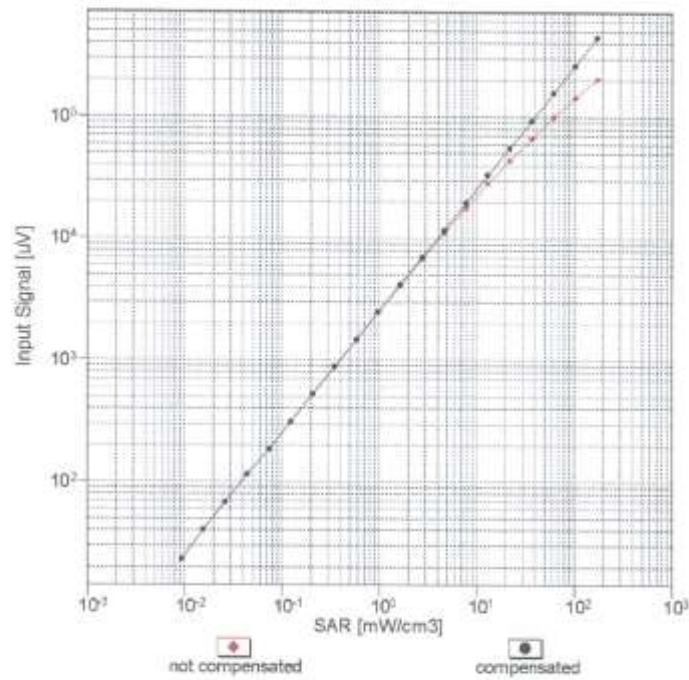


Uncertainty of Linearity Assessment: $\pm 0.6\%$ ($k=2$)


EX3DV4- SN:3903

September 28, 2017

Conversion Factor Assessment

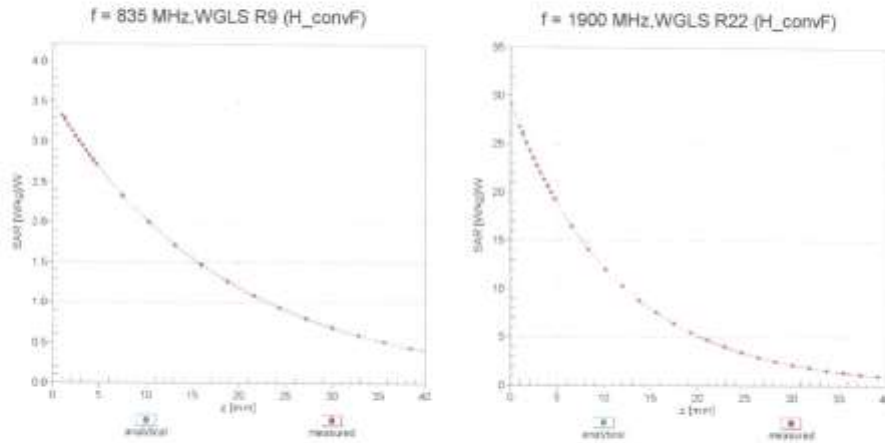

Deviation from Isotropy in Liquid Error (ϕ , θ), f = 900 MHz

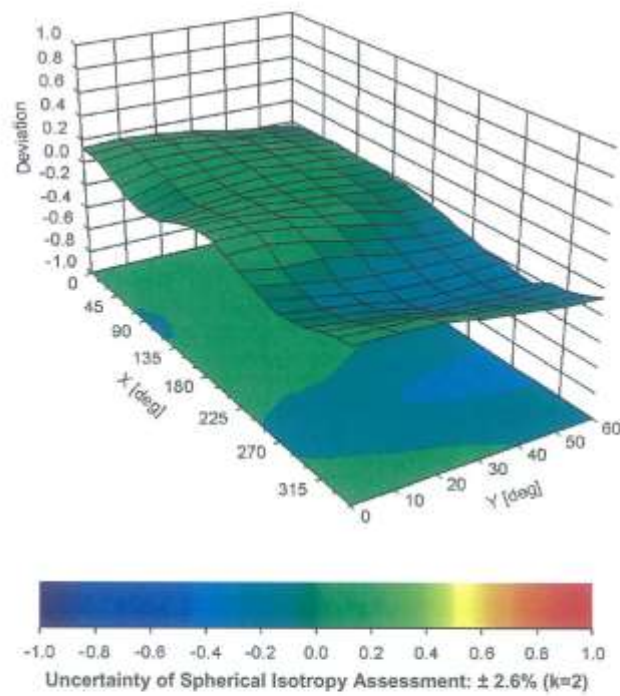

EX3DV4- SN:3903

September 28, 2017

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3903

Other Probe Parameters

Sensor Arrangement	Triangular
Connector Angle (°)	-31.6
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disabled
Probe Overall Length	337 mm
Probe Body Diameter	10 mm
Tip Length	9 mm
Tip Diameter	2.5 mm
Probe Tip to Sensor X Calibration Point	1 mm
Probe Tip to Sensor Y Calibration Point	1 mm
Probe Tip to Sensor Z Calibration Point	1 mm
Recommended Measurement Distance from Surface	1.4 mm

EX3DV4-SN:3903

September 28, 2017

Appendix: Modulation Calibration Parameters

UID	Communication System Name		A dB	B dB-μV	C	D dB	VR mV	Max Unc ^E (k=2)
0	CW	X	0.00	0.00	1.00	0.00	132.4	± 3.0 %
		Y	0.00	0.00	1.00		132.6	
		Z	0.00	0.00	1.00		136.9	
10010-CAA	SAR Validation (Square, 100ms, 10ms)	X	3.10	68.97	12.17	10.00	20.0	± 9.6 %
		Y	3.04	69.03	11.73		20.0	
		Z	8.15	80.06	17.36		20.0	
10011-CAB	UMTS-FDD (WCDMA)	X	0.91	64.67	13.46	0.00	150.0	± 9.6 %
		Y	0.98	67.08	15.00		150.0	
		Z	0.93	64.78	13.56		150.0	
10012-CAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps)	X	1.14	62.84	14.24	0.41	150.0	± 9.6 %
		Y	1.16	63.97	15.16		150.0	
		Z	1.19	63.29	14.60		150.0	
10013-CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps)	X	4.90	66.37	16.76	1.46	150.0	± 9.6 %
		Y	4.78	66.81	16.99		150.0	
		Z	5.03	66.53	17.01		150.0	
10021-DAC	GSM-FDD (TDMA, GMSK)	X	100.00	114.30	27.69	9.39	50.0	± 9.6 %
		Y	100.00	113.62	27.03		50.0	
		Z	100.00	115.50	30.38		50.0	
10023-DAC	GPRS-FDD (TDMA, GMSK, TN 0)	X	100.00	114.11	27.65	9.57	50.0	± 9.6 %
		Y	100.00	113.10	26.84		50.0	
		Z	100.00	118.42	30.39		50.0	
10024-DAC	GPRS-FDD (TDMA, GMSK, TN 0-1)	X	100.00	112.19	25.74	6.56	60.0	± 9.6 %
		Y	100.00	113.71	26.07		60.0	
		Z	100.00	115.79	28.15		60.0	
10025-DAC	EDGE-FDD (TDMA, 8PSK, TN 0)	X	3.82	66.19	23.20	12.57	50.0	± 9.6 %
		Y	4.84	75.19	28.75		50.0	
		Z	5.67	76.29	28.83		50.0	
10026-DAC	EDGE-FDD (TDMA, 8PSK, TN 0-1)	X	9.20	89.96	31.22	9.56	60.0	± 9.6 %
		Y	9.18	92.86	33.10		60.0	
		Z	15.82	101.69	35.55		60.0	
10027-DAC	GPRS-FDD (TDMA, GMSK, TN 0-1-2)	X	100.00	111.74	24.82	4.80	80.0	± 9.6 %
		Y	100.00	115.56	26.15		80.0	
		Z	100.00	115.05	27.06		80.0	
10028-DAC	GPRS-FDD (TDMA, GMSK, TN 0-1-2-3)	X	100.00	112.17	24.37	3.55	100.0	± 9.6 %
		Y	100.00	118.75	26.84		100.0	
		Z	100.00	115.22	26.45		100.0	
10029-DAC	EDGE-FDD (TDMA, 8PSK, TN 0-1-2)	X	6.23	81.41	26.76	7.80	80.0	± 9.6 %
		Y	5.70	81.61	27.48		80.0	
		Z	9.66	89.97	30.19		80.0	
10030-CAA	IEEE 802.15.1 Bluetooth (GFSK, DH1)	X	100.00	110.53	24.57	5.30	70.0	± 9.6 %
		Y	100.00	112.44	25.06		70.0	
		Z	100.00	114.20	26.98		70.0	
10031-CAA	IEEE 802.15.1 Bluetooth (GFSK, DH3)	X	100.00	110.02	22.22	1.88	100.0	± 9.6 %
		Y	100.00	119.26	25.67		100.0	
		Z	100.00	113.89	24.51		100.0	

EX3DV4- SN:3903

September 28, 2017

10032-CAA	IEEE 802.15.1 Bluetooth (GFSK, DH5)	X	100.00	112.37	22.35	1.17	100.0	± 9.6 %
		Y	100.00	129.03	28.59		100.0	
		Z	100.00	115.62	24.28		100.0	
10033-CAA	IEEE 802.15.1 Bluetooth (PI/4-DQPSK, DH1)	X	10.25	91.84	24.73	5.30	70.0	± 9.6 %
		Y	47.24	115.92	30.96		70.0	
		Z	42.81	114.44	31.75		70.0	
10034-CAA	IEEE 802.15.1 Bluetooth (PI/4-DQPSK, DH3)	X	2.53	73.99	17.16	1.88	100.0	± 9.6 %
		Y	4.90	83.92	20.21		100.0	
		Z	4.35	80.99	20.25		100.0	
10035-CAA	IEEE 802.15.1 Bluetooth (PI/4-DQPSK, DH5)	X	1.75	70.04	15.28	1.17	100.0	± 9.6 %
		Y	2.59	76.45	17.31		100.0	
		Z	2.43	73.88	17.27		100.0	
10036-CAA	IEEE 802.15.1 Bluetooth (8-DPSK, DH1)	X	13.93	96.93	26.37	5.30	70.0	± 9.6 %
		Y	100.00	127.83	33.86		70.0	
		Z	78.79	124.77	34.38		70.0	
10037-CAA	IEEE 802.15.1 Bluetooth (8-DPSK, DH3)	X	2.41	73.45	16.91	1.88	100.0	± 9.6 %
		Y	4.22	82.03	19.56		100.0	
		Z	4.16	80.41	20.00		100.0	
10038-CAA	IEEE 802.15.1 Bluetooth (8-DPSK, DH5)	X	1.75	70.29	15.48	1.17	100.0	± 9.6 %
		Y	2.82	76.90	17.61		100.0	
		Z	2.47	74.30	17.53		100.0	
10039-CAB	CDMA2000 (1xRTT, RC1)	X	1.50	68.23	14.17	0.00	150.0	± 9.6 %
		Y	1.73	71.98	15.18		150.0	
		Z	1.57	68.25	14.44		150.0	
10042-CAB	IS-54 / IS-136 FDD (TDMA/FDM, PI/4-DQPSK, Halfrate)	X	100.00	110.21	25.06	7.78	50.0	± 9.6 %
		Y	100.00	110.07	24.67		50.0	
		Z	100.00	113.98	27.50		50.0	
10044-CAA	IS-91/EIA/TIA-553 FDD (FDMA, FM)	X	0.03	103.49	3.55	0.00	150.0	± 9.6 %
		Y	0.00	98.92	4.21		150.0	
		Z	0.01	105.38	2.17		150.0	
10048-CAA	DECT (TDD, TDMA/FDM, GFSK, Full Slot, 24)	X	100.00	113.96	29.00	13.80	25.0	± 9.6 %
		Y	100.00	110.74	27.17		25.0	
		Z	100.00	120.91	32.88		25.0	
10049-CAA	DECT (TDD, TDMA/FDM, GFSK, Double Slot, 12)	X	100.00	113.88	27.87	10.79	40.0	± 9.6 %
		Y	100.00	111.73	26.53		40.0	
		Z	100.00	118.73	30.84		40.0	
10056-CAA	UMTS-TDD (TD-SCDMA, 1.28 Mcps)	X	19.49	97.51	26.70	9.03	50.0	± 9.6 %
		Y	100.00	123.01	32.83		50.0	
		Z	41.49	110.82	31.41		50.0	
10058-DAC	EDGE-FDD (TDMA, 8PSK, TN 0-1-2-3)	X	4.88	76.79	24.10	6.55	100.0	± 9.6 %
		Y	4.43	76.52	24.53		100.0	
		Z	7.02	83.39	26.90		100.0	
10059-CAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 2 Mbps)	X	1.18	63.82	14.78	0.61	110.0	± 9.6 %
		Y	1.20	65.12	15.81		110.0	
		Z	1.27	64.76	15.39		110.0	
10060-CAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 5.5 Mbps)	X	3.17	83.92	20.95	1.30	110.0	± 9.6 %
		Y	32.91	122.60	32.55		110.0	
		Z	15.79	105.09	27.17		110.0	

Certificate No: EX3-3903_Sep17

Page 13 of 38

EX3DV4- SN:3903

September 28, 2017

10061-CAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps)	X	2.52	76.36	20.07	2.04	110.0	± 9.6 %
		Y	3.20	82.75	23.16		110.0	
		Z	4.90	86.08	23.80		110.0	
10062-CAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps)	X	4.70	66.36	16.20	0.49	100.0	± 9.6 %
		Y	4.58	66.79	16.41		100.0	
		Z	4.80	66.41	16.35		100.0	
10063-CAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 9 Mbps)	X	4.72	66.45	16.30	0.72	100.0	± 9.6 %
		Y	4.59	66.89	16.51		100.0	
		Z	4.83	66.54	16.48		100.0	
10064-CAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 12 Mbps)	X	5.03	66.77	16.55	0.86	100.0	± 9.6 %
		Y	4.86	67.11	16.72		100.0	
		Z	5.16	66.90	16.75		100.0	
10065-CAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 18 Mbps)	X	4.90	66.66	16.64	1.21	100.0	± 9.6 %
		Y	4.73	67.00	16.82		100.0	
		Z	5.04	66.86	16.89		100.0	
10066-CAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 24 Mbps)	X	4.92	66.69	16.60	1.46	100.0	± 9.6 %
		Y	4.75	67.02	16.99		100.0	
		Z	5.07	66.93	17.09		100.0	
10067-CAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 36 Mbps)	X	5.20	66.79	17.22	2.04	100.0	± 9.6 %
		Y	5.04	67.23	17.45		100.0	
		Z	5.37	67.03	17.53		100.0	
10068-CAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 48 Mbps)	X	5.27	66.94	17.48	2.55	100.0	± 9.6 %
		Y	5.07	67.21	17.64		100.0	
		Z	5.47	67.30	17.86		100.0	
10069-CAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 54 Mbps)	X	5.35	66.88	17.64	2.67	100.0	± 9.6 %
		Y	5.15	67.21	17.82		100.0	
		Z	5.55	67.20	18.02		100.0	
10071-CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 9 Mbps)	X	5.00	66.46	17.06	1.99	100.0	± 9.6 %
		Y	4.87	66.89	17.29		100.0	
		Z	5.14	66.68	17.36		100.0	
10072-CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 12 Mbps)	X	4.99	66.80	17.26	2.30	100.0	± 9.6 %
		Y	4.84	67.19	17.51		100.0	
		Z	5.16	67.13	17.63		100.0	
10073-CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 18 Mbps)	X	5.04	66.94	17.59	2.83	100.0	± 9.6 %
		Y	4.91	67.37	17.84		100.0	
		Z	5.24	67.34	18.00		100.0	
10074-CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 24 Mbps)	X	5.02	66.83	17.75	3.30	100.0	± 9.6 %
		Y	4.90	67.28	18.00		100.0	
		Z	5.23	67.29	18.21		100.0	
10075-CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 36 Mbps)	X	5.07	67.01	18.08	3.82	90.0	± 9.6 %
		Y	4.93	67.35	18.29		90.0	
		Z	5.32	67.62	18.64		90.0	
10076-CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 48 Mbps)	X	5.06	66.74	18.16	4.15	90.0	± 9.6 %
		Y	4.95	67.18	18.43		90.0	
		Z	5.30	67.32	18.71		90.0	
10077-CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 54 Mbps)	X	5.08	66.79	18.25	4.30	90.0	± 9.6 %
		Y	4.98	67.26	18.53		90.0	
		Z	5.32	67.36	18.79		90.0	

Certificate No: EX3-3903_Sep17

Page 14 of 38

EX3DV4- SN:3903

September 28, 2017

10081-CAB	CDMA2000 (1xRTT, RC3)	X	0.78	63.86	11.57	0.00	150.0	± 9.6 %
		Y	0.77	65.61	11.89		150.0	
		Z	0.81	63.96	11.85		150.0	
10082-CAB	IS-54 / IS-136 FDD (TDMA/FDM, PI/4-DQPSK, Fullrate)	X	0.83	60.00	4.90	4.77	80.0	± 9.6 %
		Y	0.72	60.00	4.53		80.0	
		Z	1.15	60.48	5.88		80.0	
10090-DAC	GPRS-FDD (TDMA, GMSK, TN 0-4)	X	100.00	112.23	25.78	6.56	60.0	± 9.6 %
		Y	100.00	113.73	26.10		60.0	
		Z	100.00	115.86	28.20		60.0	
10097-CAB	UMTS-FDD (HSDPA)	X	1.71	65.90	14.58	0.00	150.0	± 9.6 %
		Y	1.80	67.98	15.60		150.0	
		Z	1.73	65.82	14.65		150.0	
10098-CAB	UMTS-FDD (HSUPA, Subtest 2)	X	1.67	65.82	14.53	0.00	150.0	± 9.6 %
		Y	1.76	67.92	15.57		150.0	
		Z	1.89	65.75	14.59		150.0	
10099-DAC	EDGE-FDD (TDMA, 8PSK, TN 0-4)	X	9.25	90.07	31.25	9.56	60.0	± 9.6 %
		Y	9.26	93.04	33.16		60.0	
		Z	15.91	101.78	35.58		60.0	
10100-CAD	LTE-FDD (SC-FDMA, 100% RB, 20 MHz, QPSK)	X	2.97	68.97	15.77	0.00	150.0	± 9.6 %
		Y	3.04	70.31	16.63		150.0	
		Z	3.03	69.04	15.82		150.0	
10101-CAD	LTE-FDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM)	X	3.20	66.87	15.37	0.00	150.0	± 9.6 %
		Y	3.15	67.51	15.81		150.0	
		Z	3.26	66.92	15.44		150.0	
10102-CAD	LTE-FDD (SC-FDMA, 100% RB, 20 MHz, 64-QAM)	X	3.31	66.89	15.50	0.00	150.0	± 9.6 %
		Y	3.26	67.52	15.92		150.0	
		Z	3.37	66.92	15.56		150.0	
10103-CAD	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, QPSK)	X	6.58	75.63	20.14	3.98	65.0	± 9.6 %
		Y	6.52	76.95	20.96		65.0	
		Z	8.11	78.36	21.38		65.0	
10104-CAD	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM)	X	6.49	73.60	20.10	3.98	65.0	± 9.6 %
		Y	6.19	74.04	20.49		65.0	
		Z	7.67	75.90	21.24		65.0	
10105-CAD	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 64-QAM)	X	6.32	73.02	20.18	3.98	65.0	± 9.6 %
		Y	5.89	72.93	20.31		65.0	
		Z	7.53	75.55	21.41		65.0	
10108-CAE	LTE-FDD (SC-FDMA, 100% RB, 10 MHz, QPSK)	X	2.61	68.16	15.56	0.00	150.0	± 9.6 %
		Y	2.63	69.52	16.43		150.0	
		Z	2.68	68.24	15.61		150.0	
10109-CAE	LTE-FDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM)	X	2.86	66.60	15.23	0.00	150.0	± 9.6 %
		Y	2.81	67.41	15.71		150.0	
		Z	2.92	66.63	15.31		150.0	
10110-CAE	LTE-FDD (SC-FDMA, 100% RB, 5 MHz, QPSK)	X	2.12	67.08	15.09	0.00	150.0	± 9.6 %
		Y	2.12	68.61	15.97		150.0	
		Z	2.19	67.18	15.19		150.0	
10111-CAE	LTE-FDD (SC-FDMA, 100% RB, 5 MHz, 16-QAM)	X	2.55	67.06	15.41	0.00	150.0	± 9.6 %
		Y	2.55	68.51	16.06		150.0	
		Z	2.61	66.97	15.48		150.0	

Certificate No: EX3-3903_Sep17

Page 15 of 38

EX3DV4- SN:3903

September 28, 2017

10112-CAE	LTE-FDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM)	X	2.99	66.64	15.32	0.00	150.0	± 9.6 %
		Y	2.94	67.45	15.78		150.0	
		Z	3.05	66.64	15.39		150.0	
10113-CAE	LTE-FDD (SC-FDMA, 100% RB, 5 MHz, 64-QAM)	X	2.71	67.25	15.59	0.00	150.0	± 9.6 %
		Y	2.71	68.70	16.21		150.0	
		Z	2.77	67.13	15.84		150.0	
10114-CAB	IEEE 802.11n (HT Greenfield, 13.5 Mbps, BPSK)	X	5.12	66.90	16.10	0.00	150.0	± 9.6 %
		Y	5.01	67.22	16.32		150.0	
		Z	5.17	66.83	16.14		150.0	
10115-CAB	IEEE 802.11n (HT Greenfield, 81 Mbps, 16-QAM)	X	5.47	67.18	16.26	0.00	150.0	± 9.6 %
		Y	5.27	67.28	16.35		150.0	
		Z	5.54	67.15	16.31		150.0	
10116-CAB	IEEE 802.11n (HT Greenfield, 135 Mbps, 64-QAM)	X	5.23	67.12	16.15	0.00	150.0	± 9.6 %
		Y	5.10	67.39	16.33		150.0	
		Z	5.30	67.09	16.19		150.0	
10117-CAB	IEEE 802.11n (HT Mixed, 13.5 Mbps, BPSK)	X	5.11	66.86	16.10	0.00	150.0	± 9.6 %
		Y	4.99	67.12	16.28		150.0	
		Z	5.18	66.85	16.16		150.0	
10118-CAB	IEEE 802.11n (HT Mixed, 81 Mbps, 16-QAM)	X	5.53	67.32	16.34	0.00	150.0	± 9.6 %
		Y	5.33	67.43	16.43		150.0	
		Z	5.61	67.30	16.39		150.0	
10119-CAB	IEEE 802.11n (HT Mixed, 135 Mbps, 64-QAM)	X	5.20	67.06	16.13	0.00	150.0	± 9.6 %
		Y	5.08	67.35	16.32		150.0	
		Z	5.27	67.03	16.18		150.0	
10140-CAD	LTE-FDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM)	X	3.35	66.90	15.43	0.00	150.0	± 9.6 %
		Y	3.29	67.52	15.83		150.0	
		Z	3.41	66.93	15.49		150.0	
10141-CAD	LTE-FDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM)	X	3.48	67.02	15.61	0.00	150.0	± 9.6 %
		Y	3.42	67.67	16.02		150.0	
		Z	3.54	67.02	15.67		150.0	
10142-CAD	LTE-FDD (SC-FDMA, 100% RB, 3 MHz, QPSK)	X	1.89	66.84	14.74	0.00	150.0	± 9.6 %
		Y	1.90	68.66	15.57		150.0	
		Z	1.95	66.91	14.88		150.0	
10143-CAD	LTE-FDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM)	X	2.39	67.48	15.12	0.00	150.0	± 9.6 %
		Y	2.43	69.36	15.70		150.0	
		Z	2.44	67.35	15.23		150.0	
10144-CAD	LTE-FDD (SC-FDMA, 100% RB, 3 MHz, 64-QAM)	X	2.23	65.70	13.78	0.00	150.0	± 9.6 %
		Y	2.12	66.54	13.80		150.0	
		Z	2.31	65.74	14.00		150.0	
10145-CAE	LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK)	X	1.26	64.58	11.92	0.00	150.0	± 9.6 %
		Y	1.05	64.11	10.65		150.0	
		Z	1.34	64.94	12.46		150.0	
10146-CAE	LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM)	X	2.26	67.70	13.01	0.00	150.0	± 9.6 %
		Y	1.63	64.75	10.06		150.0	
		Z	2.69	69.70	14.65		150.0	
10147-CAE	LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM)	X	2.72	70.17	14.30	0.00	150.0	± 9.6 %
		Y	1.92	66.48	11.01		150.0	
		Z	3.28	72.59	16.10		150.0	

EX3DV4- SN:3903

September 28, 2017

10149- CAD	LTE-FDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM)	X	2.87	66.66	15.27	0.00	150.0	± 9.6 %
		Y	2.82	67.47	15.76		150.0	
		Z	2.93	66.69	15.35		150.0	
10150- CAD	LTE-FDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM)	X	3.00	66.69	15.36	0.00	150.0	± 9.6 %
		Y	2.95	67.51	15.83		150.0	
		Z	3.06	66.69	15.43		150.0	
10151- CAD	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK)	X	6.73	77.37	20.93	3.98	65.0	± 9.6 %
		Y	7.02	79.92	22.22		65.0	
		Z	8.46	80.42	22.28		65.0	
10152- CAD	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM)	X	6.00	73.42	19.78	3.98	65.0	± 9.6 %
		Y	5.73	74.05	20.17		65.0	
		Z	7.24	75.98	21.06		65.0	
10153- CAD	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM)	X	6.38	74.39	20.58	3.96	65.0	± 9.6 %
		Y	6.16	75.20	21.04		65.0	
		Z	7.64	76.87	21.80		65.0	
10154- CAE	LTE-FDD (SC-FDMA, 50% RB, 10 MHz, QPSK)	X	2.17	67.49	15.36	0.00	150.0	± 9.6 %
		Y	2.17	69.05	16.24		150.0	
		Z	2.24	67.59	15.45		150.0	
10155- CAE	LTE-FDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM)	X	2.55	67.06	15.42	0.00	150.0	± 9.6 %
		Y	2.56	68.54	16.09		150.0	
		Z	2.61	66.96	15.48		150.0	
10156- CAE	LTE-FDD (SC-FDMA, 50% RB, 5 MHz, QPSK)	X	1.74	66.80	14.53	0.00	150.0	± 9.6 %
		Y	1.74	68.70	15.28		150.0	
		Z	1.81	66.90	14.72		150.0	
10157- CAE	LTE-FDD (SC-FDMA, 50% RB, 5 MHz, 16-QAM)	X	2.04	66.04	13.76	0.00	150.0	± 9.6 %
		Y	1.96	67.10	13.78		150.0	
		Z	2.12	66.07	14.00		150.0	
10158- CAE	LTE-FDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM)	X	2.72	67.30	15.63	0.00	150.0	± 9.6 %
		Y	2.72	68.78	16.27		150.0	
		Z	2.77	67.17	15.67		150.0	
10159- CAE	LTE-FDD (SC-FDMA, 50% RB, 5 MHz, 64-QAM)	X	2.15	66.50	14.06	0.00	150.0	± 9.6 %
		Y	2.07	67.61	14.09		150.0	
		Z	2.23	66.51	14.30		150.0	
10160- CAD	LTE-FDD (SC-FDMA, 50% RB, 15 MHz, QPSK)	X	2.64	67.34	15.42	0.00	150.0	± 9.6 %
		Y	2.63	68.59	16.16		150.0	
		Z	2.70	67.39	15.49		150.0	
10161- CAD	LTE-FDD (SC-FDMA, 50% RB, 15 MHz, 16-QAM)	X	2.90	66.59	15.29	0.00	150.0	± 9.6 %
		Y	2.84	67.48	15.75		150.0	
		Z	2.95	66.56	15.36		150.0	
10162- CAD	LTE-FDD (SC-FDMA, 50% RB, 15 MHz, 64-QAM)	X	3.00	66.71	15.40	0.00	150.0	± 9.6 %
		Y	2.95	67.67	15.88		150.0	
		Z	3.06	66.65	15.46		150.0	
10166- CAE	LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK)	X	3.62	68.88	18.60	3.01	150.0	± 9.6 %
		Y	3.52	70.22	19.37		150.0	
		Z	3.77	68.99	18.81		150.0	
10167- CAE	LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM)	X	4.43	71.60	19.04	3.01	150.0	± 9.6 %
		Y	4.53	74.32	20.26		150.0	
		Z	4.63	71.55	19.20		150.0	

Certificate No: EX3-3903_Sep17

Page 17 of 38

EX30V4- SN:3903

September 28, 2017

10168-CAE	LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, 64-QAM)	X	4.93	73.93	20.43	3.01	150.0	± 9.6 %
		Y	5.33	77.76	22.10		150.0	
		Z	5.06	73.48	20.39		150.0	
10169-CAD	LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK)	X	3.06	68.89	18.59	3.01	150.0	± 9.6 %
		Y	2.94	69.92	19.26		150.0	
		Z	3.29	69.46	18.99		150.0	
10170-CAD	LTE-FDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM)	X	4.29	75.16	21.09	3.01	150.0	± 9.6 %
		Y	4.78	79.57	23.07		150.0	
		Z	4.52	74.98	21.13		150.0	
10171-AAD	LTE-FDD (SC-FDMA, 1 RB, 20 MHz, 64-QAM)	X	3.42	70.48	18.07	3.01	150.0	± 9.6 %
		Y	3.49	73.03	19.29		150.0	
		Z	3.73	70.94	18.46		150.0	
10172-CAD	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK)	X	9.29	91.14	27.99	6.02	65.0	± 9.6 %
		Y	8.49	94.00	29.81		65.0	
		Z	19.13	103.68	32.31		65.0	
10173-CAD	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM)	X	16.60	97.76	28.27	6.02	65.0	± 9.6 %
		Y	61.39	125.43	36.25		65.0	
		Z	28.71	106.44	31.35		65.0	
10174-CAD	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 64-QAM)	X	10.24	88.51	24.87	6.02	65.0	± 9.6 %
		Y	31.17	111.50	31.99		65.0	
		Z	19.22	97.97	28.37		65.0	
10175-CAE	LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK)	X	3.01	68.53	18.31	3.01	150.0	± 9.6 %
		Y	2.89	69.54	18.99		150.0	
		Z	3.25	69.12	18.73		150.0	
10176-CAE	LTE-FDD (SC-FDMA, 1 RB, 10 MHz, 16-QAM)	X	4.29	75.18	21.10	3.01	150.0	± 9.6 %
		Y	4.79	79.61	23.09		150.0	
		Z	4.53	75.00	21.14		150.0	
10177-CAG	LTE-FDD (SC-FDMA, 1 RB, 5 MHz, QPSK)	X	3.04	68.72	18.43	3.01	150.0	± 9.6 %
		Y	2.92	69.72	19.10		150.0	
		Z	3.28	69.30	18.84		150.0	
10178-CAE	LTE-FDD (SC-FDMA, 1 RB, 5 MHz, 16-QAM)	X	4.23	74.85	20.93	3.01	150.0	± 9.6 %
		Y	4.71	79.28	22.93		150.0	
		Z	4.47	74.71	20.98		150.0	
10179-CAE	LTE-FDD (SC-FDMA, 1 RB, 10 MHz, 64-QAM)	X	3.79	72.57	19.39	3.01	150.0	± 9.6 %
		Y	4.05	76.03	20.99		150.0	
		Z	4.08	72.78	19.64		150.0	
10180-CAE	LTE-FDD (SC-FDMA, 1 RB, 5 MHz, 64-QAM)	X	3.41	70.38	18.00	3.01	150.0	± 9.6 %
		Y	3.48	72.93	19.23		150.0	
		Z	3.72	70.84	18.39		150.0	
10181-CAD	LTE-FDD (SC-FDMA, 1 RB, 15 MHz, QPSK)	X	3.04	68.70	18.42	3.01	150.0	± 9.6 %
		Y	2.91	68.69	19.09		150.0	
		Z	3.27	69.28	18.83		150.0	
10182-CAD	LTE-FDD (SC-FDMA, 1 RB, 15 MHz, 16-QAM)	X	4.22	74.83	20.92	3.01	150.0	± 9.6 %
		Y	4.70	79.25	22.92		150.0	
		Z	4.46	74.68	20.97		150.0	
10183-AAC	LTE-FDD (SC-FDMA, 1 RB, 15 MHz, 64-QAM)	X	3.40	70.35	17.99	3.01	150.0	± 9.6 %
		Y	3.47	72.90	19.21		150.0	
		Z	3.71	70.82	18.38		150.0	

EX3DV4- SN:3903

September 28, 2017

10184-CAD	LTE-FDD (SC-FDMA, 1 RB, 3 MHz, QPSK)	X	3.05	68.75	18.45	3.01	150.0	± 9.6 %
		Y	2.93	69.74	19.12		150.0	
		Z	3.28	69.33	18.86		150.0	
10185-CAD	LTE-FDD (SC-FDMA, 1 RB, 3 MHz, 16-QAM)	X	4.24	74.91	20.96	3.01	150.0	± 9.6 %
		Y	4.73	79.36	22.97		150.0	
		Z	4.48	74.75	21.01		150.0	
10186-AAD	LTE-FDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM)	X	3.42	70.42	18.02	3.01	150.0	± 9.6 %
		Y	3.49	72.99	19.25		150.0	
		Z	3.73	70.88	18.42		150.0	
10187-CAE	LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK)	X	3.05	68.78	18.49	3.01	150.0	± 9.6 %
		Y	2.94	69.82	19.19		150.0	
		Z	3.29	69.35	18.90		150.0	
10188-CAE	LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM)	X	4.42	75.75	21.43	3.01	150.0	± 9.6 %
		Y	4.98	80.43	23.50		150.0	
		Z	4.84	75.48	21.41		150.0	
10189-AAE	LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM)	X	3.51	70.89	18.33	3.01	150.0	± 9.6 %
		Y	3.61	73.60	19.61		150.0	
		Z	3.82	71.32	18.70		150.0	
10193-CAB	IEEE 802.11n (HT Greenfield, 6.5 Mbps, BPSK)	X	4.55	66.30	15.84	0.00	150.0	± 9.6 %
		Y	4.43	66.76	16.04		150.0	
		Z	4.61	66.24	15.90		150.0	
10194-CAB	IEEE 802.11n (HT Greenfield, 39 Mbps, 16-QAM)	X	4.73	66.64	15.96	0.00	150.0	± 9.6 %
		Y	4.58	67.03	16.16		150.0	
		Z	4.80	66.60	16.01		150.0	
10195-CAB	IEEE 802.11n (HT Greenfield, 65 Mbps, 64-QAM)	X	4.77	66.67	15.97	0.00	150.0	± 9.6 %
		Y	4.62	67.06	16.18		150.0	
		Z	4.84	66.62	16.02		150.0	
10196-CAB	IEEE 802.11n (HT Mixed, 6.5 Mbps, BPSK)	X	4.56	66.38	15.87	0.00	150.0	± 9.6 %
		Y	4.42	66.79	16.04		150.0	
		Z	4.63	66.33	15.93		150.0	
10197-CAB	IEEE 802.11n (HT Mixed, 39 Mbps, 16-QAM)	X	4.74	66.66	15.97	0.00	150.0	± 9.6 %
		Y	4.59	67.05	16.17		150.0	
		Z	4.82	66.62	16.02		150.0	
10198-CAB	IEEE 802.11n (HT Mixed, 65 Mbps, 64-QAM)	X	4.77	66.68	15.98	0.00	150.0	± 9.6 %
		Y	4.62	67.07	16.19		150.0	
		Z	4.85	66.63	16.03		150.0	
10219-CAB	IEEE 802.11n (HT Mixed, 7.2 Mbps, BPSK)	X	4.50	66.38	15.82	0.00	150.0	± 9.6 %
		Y	4.37	66.81	16.01		150.0	
		Z	4.57	66.33	15.89		150.0	
10220-CAB	IEEE 802.11n (HT Mixed, 43.3 Mbps, 16-QAM)	X	4.74	66.65	15.96	0.00	150.0	± 9.6 %
		Y	4.59	67.01	16.16		150.0	
		Z	4.82	66.61	16.02		150.0	
10221-CAB	IEEE 802.11n (HT Mixed, 72.2 Mbps, 64-QAM)	X	4.78	66.62	15.97	0.00	150.0	± 9.6 %
		Y	4.63	67.00	16.17		150.0	
		Z	4.86	66.57	16.03		150.0	
10222-CAB	IEEE 802.11n (HT Mixed, 15 Mbps, BPSK)	X	5.09	66.87	16.10	0.00	150.0	± 9.6 %
		Y	4.96	67.12	16.27		150.0	
		Z	5.16	66.87	16.16		150.0	

Certificate No: EX3-3903_Sep17

Page 19 of 38

EX3DV4- SN:3903

September 28, 2017

10223-CAB	IEEE 802.11n (HT Mixed, 90 Mbps, 16-QAM)	X	5.41	67.09	16.23	0.00	150.0	± 9.6 %
		Y	5.25	67.31	16.39		150.0	
		Z	5.53	67.20	16.36		150.0	
10224-CAB	IEEE 802.11n (HT Mixed, 150 Mbps, 64-QAM)	X	5.14	66.97	16.08	0.00	150.0	± 9.6 %
		Y	5.01	67.23	16.26		150.0	
		Z	5.21	66.97	16.14		150.0	
10225-CAB	UMTS-FDD (HSPA+)	X	2.80	65.47	14.89	0.00	150.0	± 9.6 %
		Y	2.72	66.29	15.12		150.0	
		Z	2.85	65.41	15.00		150.0	
10226-CAA	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM)	X	18.14	99.46	28.89	6.02	65.0	± 9.6 %
		Y	77.90	130.02	37.48		65.0	
		Z	31.24	108.14	31.93		65.0	
10227-CAA	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM)	X	16.19	96.00	27.24	6.02	65.0	± 9.6 %
		Y	71.53	125.49	35.50		65.0	
		Z	25.75	103.12	29.95		65.0	
10228-CAA	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK)	X	10.32	93.49	28.86	6.02	65.0	± 9.6 %
		Y	11.36	99.98	31.79		65.0	
		Z	21.15	106.16	33.17		65.0	
10229-CAB	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 16-QAM)	X	16.76	97.91	28.32	6.02	65.0	± 9.6 %
		Y	62.46	125.72	36.33		65.0	
		Z	28.88	106.53	31.39		65.0	
10230-CAB	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM)	X	15.01	94.60	26.73	6.02	65.0	± 9.6 %
		Y	57.05	121.39	34.41		65.0	
		Z	24.02	101.78	29.48		65.0	
10231-CAB	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, QPSK)	X	9.80	92.39	28.41	6.02	65.0	± 9.6 %
		Y	10.60	98.45	31.21		65.0	
		Z	19.87	104.80	32.68		65.0	
10232-CAD	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 16-QAM)	X	16.73	97.88	28.31	6.02	65.0	± 9.6 %
		Y	62.31	125.70	36.32		65.0	
		Z	28.85	106.52	31.38		65.0	
10233-CAD	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 64-QAM)	X	14.97	94.57	26.72	6.02	65.0	± 9.6 %
		Y	56.68	121.29	34.39		65.0	
		Z	24.00	101.77	29.48		65.0	
10234-CAD	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, QPSK)	X	9.36	91.35	27.95	6.02	65.0	± 9.6 %
		Y	10.03	97.14	30.67		65.0	
		Z	18.74	103.45	32.16		65.0	
10235-CAD	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 16-QAM)	X	16.73	97.91	28.32	6.02	65.0	± 9.6 %
		Y	62.61	125.80	36.35		65.0	
		Z	28.91	106.57	31.40		65.0	
10236-CAD	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 64-QAM)	X	15.13	94.73	26.76	6.02	65.0	± 9.6 %
		Y	58.37	121.74	34.49		65.0	
		Z	24.27	101.94	29.53		65.0	
10237-CAD	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK)	X	9.81	92.44	28.43	6.02	65.0	± 9.6 %
		Y	10.61	98.52	31.24		65.0	
		Z	19.96	104.93	32.72		65.0	
10238-CAD	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 16-QAM)	X	16.69	97.86	28.30	6.02	65.0	± 9.6 %
		Y	62.14	125.67	36.31		65.0	
		Z	28.83	106.52	31.38		65.0	

EX3DV4--SN:3903

September 28, 2017

10239-CAD	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 64-QAM)	X	14.92	94.54	26.71	6.02	65.0	± 9.6 %
		Y	56.30	121.21	34.37		65.0	
		Z	23.96	101.76	29.48		65.0	
10240-CAD	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, QPSK)	X	9.78	92.39	28.41	6.02	65.0	± 9.6 %
		Y	10.58	98.47	31.22		65.0	
		Z	19.91	104.87	32.70		65.0	
10241-CAA	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM)	X	8.10	79.93	24.72	6.98	65.0	± 9.6 %
		Y	8.56	84.00	26.53		65.0	
		Z	9.83	82.84	26.21		65.0	
10242-CAA	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 64-QAM)	X	7.76	79.05	24.29	6.98	65.0	± 9.6 %
		Y	7.73	81.89	25.63		65.0	
		Z	8.45	79.54	24.79		65.0	
10243-CAA	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK)	X	6.23	75.55	23.62	6.98	65.0	± 9.6 %
		Y	5.85	76.68	24.36		65.0	
		Z	7.71	79.17	25.51		65.0	
10244-CAB	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM)	X	6.57	76.95	19.34	3.98	65.0	± 9.6 %
		Y	6.36	77.20	18.47		65.0	
		Z	9.27	81.94	21.93		65.0	
10245-CAB	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM)	X	6.46	76.41	19.06	3.98	65.0	± 9.6 %
		Y	6.02	76.11	17.97		65.0	
		Z	9.07	81.31	21.64		65.0	
10246-CAB	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, QPSK)	X	5.76	78.11	19.82	3.98	65.0	± 9.6 %
		Y	6.19	80.48	20.17		65.0	
		Z	8.93	84.20	22.53		65.0	
10247-CAD	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 16-QAM)	X	5.28	73.89	18.74	3.98	65.0	± 9.6 %
		Y	5.07	74.50	18.49		65.0	
		Z	6.87	77.39	20.58		65.0	
10248-CAD	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 64-QAM)	X	5.29	73.38	18.50	3.98	65.0	± 9.6 %
		Y	4.95	73.62	18.09		65.0	
		Z	6.82	76.73	20.29		65.0	
10249-CAD	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, QPSK)	X	6.62	80.29	21.38	3.98	65.0	± 9.6 %
		Y	7.90	84.92	22.89		65.0	
		Z	9.74	85.74	23.70		65.0	
10250-CAD	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM)	X	6.07	75.79	20.89	3.98	65.0	± 9.6 %
		Y	6.01	77.20	21.45		65.0	
		Z	7.58	78.87	22.37		65.0	
10251-CAD	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM)	X	5.79	73.68	19.65	3.98	65.0	± 9.6 %
		Y	5.57	74.53	19.92		65.0	
		Z	7.09	76.38	21.04		65.0	
10252-CAD	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, QPSK)	X	6.80	79.71	21.89	3.98	65.0	± 9.6 %
		Y	7.58	83.63	23.56		65.0	
		Z	9.19	83.90	23.67		65.0	
10253-CAD	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 16-QAM)	X	5.85	72.84	19.56	3.98	65.0	± 9.6 %
		Y	5.62	73.56	19.91		65.0	
		Z	7.01	75.28	20.82		65.0	
10254-CAD	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 64-QAM)	X	6.22	73.76	20.29	3.98	65.0	± 9.6 %
		Y	6.00	74.59	20.68		65.0	
		Z	7.41	76.16	21.50		65.0	

Certificate No: EX3-3903_Sep17

Page 21 of 38

EX3DV4-- SN:3903

September 28, 2017

10255-CAD	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, QPSK)	X	6.40	76.66	20.88	3.98	65.0	± 9.6 %
		Y	6.61	79.02	22.06		65.0	
		Z	8.02	79.69	22.26		65.0	
10256-CAA	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM)	X	5.40	73.80	17.12	3.98	65.0	± 9.6 %
		Y	4.23	70.95	14.68		65.0	
		Z	8.35	79.97	20.39		65.0	
10257-CAA	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM)	X	5.26	73.05	16.71	3.98	65.0	± 9.6 %
		Y	4.00	69.85	14.08		65.0	
		Z	8.05	79.00	19.92		65.0	
10258-CAA	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK)	X	4.68	74.74	17.78	3.98	65.0	± 9.6 %
		Y	4.07	73.62	16.47		65.0	
		Z	7.62	81.35	20.90		65.0	
10259-CAB	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM)	X	5.58	74.54	19.48	3.98	65.0	± 9.6 %
		Y	5.46	75.59	19.60		65.0	
		Z	7.13	77.82	21.17		65.0	
10260-CAB	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 64-QAM)	X	5.63	74.34	19.41	3.98	65.0	± 9.6 %
		Y	5.44	75.19	19.42		65.0	
		Z	7.15	77.55	21.08		65.0	
10261-CAB	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, QPSK)	X	6.35	79.20	21.30	3.98	65.0	± 9.6 %
		Y	7.20	83.14	22.73		65.0	
		Z	8.95	84.00	23.38		65.0	
10262-CAD	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 16-QAM)	X	6.06	75.73	20.85	3.98	65.0	± 9.6 %
		Y	5.99	77.12	21.39		65.0	
		Z	7.57	78.82	22.34		65.0	
10263-CAD	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 64-QAM)	X	5.79	73.67	19.65	3.98	65.0	± 9.6 %
		Y	5.56	74.50	19.92		65.0	
		Z	7.09	76.37	21.04		65.0	
10264-CAD	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, QPSK)	X	6.74	79.53	21.80	3.98	65.0	± 9.6 %
		Y	7.48	83.37	23.43		65.0	
		Z	9.11	83.71	23.57		65.0	
10265-CAD	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM)	X	5.99	73.42	19.79	3.98	65.0	± 9.6 %
		Y	5.73	74.05	20.17		65.0	
		Z	7.24	75.98	21.07		65.0	
10266-CAD	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM)	X	6.38	74.38	20.57	3.98	65.0	± 9.6 %
		Y	6.15	75.19	21.03		65.0	
		Z	7.63	76.86	21.79		65.0	
10267-CAD	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, QPSK)	X	6.72	77.33	20.91	3.98	65.0	± 9.6 %
		Y	7.01	79.86	22.19		65.0	
		Z	8.44	80.37	22.26		65.0	
10268-CAD	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM)	X	6.64	73.44	20.17	3.98	65.0	± 9.6 %
		Y	6.34	73.90	20.53		65.0	
		Z	7.76	75.58	21.24		65.0	
10269-CAD	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM)	X	6.60	73.03	20.05	3.98	65.0	± 9.6 %
		Y	6.31	73.46	20.38		65.0	
		Z	7.68	75.09	21.11		65.0	
10270-CAD	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, QPSK)	X	6.65	75.10	20.15	3.98	65.0	± 9.6 %
		Y	6.63	76.56	21.01		65.0	
		Z	7.94	77.39	21.23		65.0	

EX3DV4- SN:3903

September 28, 2017

10274-CAB	UMTS-FDD (HSUPA, Subtest 5, 3GPP Rel8.10)	X	2.53	65.57	14.65	0.00	150.0	± 9.6 %
		Y	2.53	66.74	15.10		150.0	
		Z	2.56	65.46	14.72		150.0	
10275-CAB	UMTS-FDD (HSUPA, Subtest 5, 3GPP Rel8.4)	X	1.48	65.87	14.24	0.00	150.0	± 9.6 %
		Y	1.55	67.88	15.37		150.0	
		Z	1.52	65.92	14.34		150.0	
10277-CAA	PHS (QPSK)	X	2.48	62.66	8.33	9.03	50.0	± 9.6 %
		Y	1.98	61.13	6.63		50.0	
		Z	3.52	65.66	10.82		50.0	
10278-CAA	PHS (QPSK, BW 884MHz, Rolloff 0.5)	X	6.53	77.49	18.24	9.03	50.0	± 9.6 %
		Y	4.83	72.85	15.28		50.0	
		Z	13.66	88.94	23.38		50.0	
10279-CAA	PHS (QPSK, BW 884MHz, Rolloff 0.38)	X	6.70	77.77	18.39	9.03	50.0	± 9.6 %
		Y	4.98	73.19	15.48		50.0	
		Z	13.83	89.03	23.44		50.0	
10290-AAB	CDMA2000, RC1, SO55, Full Rate	X	1.31	66.30	12.99	0.00	150.0	± 9.6 %
		Y	1.29	68.05	13.15		150.0	
		Z	1.38	66.43	13.32		150.0	
10291-AAB	CDMA2000, RC3, SO55, Full Rate	X	0.77	63.71	11.47	0.00	150.0	± 9.6 %
		Y	0.75	65.39	11.76		150.0	
		Z	0.80	63.80	11.76		150.0	
10292-AAB	CDMA2000, RC3, SO32, Full Rate	X	0.85	65.76	12.92	0.00	150.0	± 9.6 %
		Y	1.05	70.57	14.62		150.0	
		Z	0.88	65.76	13.15		150.0	
10293-AAB	CDMA2000, RC3, SO3, Full Rate	X	1.05	68.66	14.76	0.00	150.0	± 9.6 %
		Y	2.22	80.80	19.11		150.0	
		Z	1.07	68.41	14.89		150.0	
10295-AAB	CDMA2000, RC1, SO3, 1/8th Rate 25 fr.	X	7.32	81.03	22.69	9.03	50.0	± 9.6 %
		Y	12.11	89.94	25.12		50.0	
		Z	9.74	85.91	25.23		50.0	
10297-AAC	LTE-FDD (SC-FDMA, 50% RB, 20 MHz, QPSK)	X	2.62	68.25	15.62	0.00	150.0	± 9.6 %
		Y	2.64	69.63	16.50		150.0	
		Z	2.69	68.33	15.67		150.0	
10298-AAC	LTE-FDD (SC-FDMA, 50% RB, 3 MHz, QPSK)	X	1.50	66.04	13.41	0.00	150.0	± 9.6 %
		Y	1.42	67.13	13.36		150.0	
		Z	1.58	66.22	13.75		150.0	
10299-AAC	LTE-FDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM)	X	2.76	69.76	14.77	0.00	150.0	± 9.6 %
		Y	2.64	70.02	13.68		150.0	
		Z	3.07	70.89	15.87		150.0	
10300-AAC	LTE-FDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM)	X	2.15	65.65	12.12	0.00	150.0	± 9.6 %
		Y	1.75	64.40	10.31		150.0	
		Z	2.42	66.68	13.20		150.0	
10301-AAA	IEEE 802.16e WiMAX (29:18, 5ms, 10MHz, QPSK, PUSC)	X	4.74	64.77	16.98	4.17	50.0	± 9.6 %
		Y	4.55	65.35	17.17		50.0	
		Z	5.10	65.69	17.55		50.0	
10302-AAA	IEEE 802.16e WiMAX (29:18, 5ms, 10MHz, QPSK, PUSC, 3 CTRL symbols)	X	5.25	65.52	17.75	4.96	50.0	± 9.6 %
		Y	5.08	66.07	17.91		50.0	
		Z	5.56	66.20	18.20		50.0	

Certificate No: EX3-3903_Sep17

Page 23 of 38

EX3DV4- SN:3903

September 28, 2017

10303-AAA	IEEE 802.16e WiMAX (31:15, 5ms, 10MHz, 64QAM, PUSC)	X	5.01	65.19	17.61	4.96	50.0	± 9.6 %
		Y	4.83	65.72	17.73		50.0	
		Z	5.35	66.00	18.13		50.0	
10304-AAA	IEEE 802.16e WiMAX (29:18, 5ms, 10MHz, 64QAM, PUSC)	X	4.80	65.03	17.09	4.17	50.0	± 9.6 %
		Y	4.65	65.64	17.26		50.0	
		Z	5.10	65.68	17.51		50.0	
10305-AAA	IEEE 802.16e WiMAX (31:15, 10ms, 10MHz, 64QAM, PUSC, 15 symbols)	X	4.43	66.69	19.15	6.02	35.0	± 9.6 %
		Y	4.31	67.59	19.20		35.0	
		Z	5.04	69.00	20.54		35.0	
10306-AAA	IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, 64QAM, PUSC, 18 symbols)	X	4.77	65.88	18.76	6.02	35.0	± 9.6 %
		Y	4.61	66.59	18.85		35.0	
		Z	5.22	67.43	19.77		35.0	
10307-AAA	IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, QPSK, PUSC, 18 symbols)	X	4.68	66.10	18.76	6.02	35.0	± 9.6 %
		Y	4.50	66.71	18.79		35.0	
		Z	5.17	67.85	19.86		35.0	
10308-AAA	IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, 16QAM, PUSC)	X	4.64	66.23	18.85	6.02	35.0	± 9.6 %
		Y	4.48	66.93	18.94		35.0	
		Z	5.14	68.04	19.98		35.0	
10309-AAA	IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, 16QAM, AMC 2x3, 18 symbols)	X	4.84	66.12	18.90	6.02	35.0	± 9.6 %
		Y	4.64	66.74	18.96		35.0	
		Z	5.31	67.73	19.94		35.0	
10310-AAA	IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, QPSK, AMC 2x3, 18 symbols)	X	4.72	65.94	18.73	6.02	35.0	± 9.6 %
		Y	4.56	66.66	18.83		35.0	
		Z	5.18	67.55	19.76		35.0	
10311-AAC	LTE-FDD (SC-FDMA, 100% RB, 15 MHz, QPSK)	X	2.96	67.69	15.36	0.00	150.0	± 9.6 %
		Y	3.01	68.96	16.18		150.0	
		Z	3.03	67.76	15.42		150.0	
10313-AAA	IDEN 1:3	X	3.76	72.87	15.92	6.99	70.0	± 9.6 %
		Y	4.91	78.01	18.07		70.0	
		Z	6.65	78.87	18.47		70.0	
10314-AAA	IDEN 1:6	X	5.25	80.37	21.71	10.00	30.0	± 9.6 %
		Y	10.18	92.92	26.15		30.0	
		Z	10.88	90.38	25.28		30.0	
10315-AAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 96pc duty cycle)	X	1.05	62.62	14.07	0.17	150.0	± 9.6 %
		Y	1.07	63.86	15.07		150.0	
		Z	1.07	62.88	14.31		150.0	
10316-AAB	IEEE 802.11g WiFi 2.4 GHz (ERP-OFDM, 6 Mbps, 96pc duty cycle)	X	4.60	66.34	15.95	0.17	150.0	± 9.6 %
		Y	4.47	66.77	16.17		150.0	
		Z	4.69	66.37	16.08		150.0	
10317-AAB	IEEE 802.11a WiFi 5 GHz (OFDM, 6 Mbps, 96pc duty cycle)	X	4.60	66.34	15.95	0.17	150.0	± 9.6 %
		Y	4.47	66.77	16.17		150.0	
		Z	4.69	66.37	16.08		150.0	
10400-AAC	IEEE 802.11ac WiFi (20MHz, 64-QAM, 99pc duty cycle)	X	4.73	66.67	15.93	0.00	150.0	± 9.6 %
		Y	4.56	67.05	16.14		150.0	
		Z	4.81	66.64	15.99		150.0	
10401-AAC	IEEE 802.11ac WiFi (40MHz, 64-QAM, 99pc duty cycle)	X	5.38	66.83	16.08	0.00	150.0	± 9.6 %
		Y	5.22	67.01	16.20		150.0	
		Z	5.44	66.77	16.12		150.0	

EX3DV4- SN:3903

September 28, 2017

10402-AAC	IEEE 802.11ac WiFi (80MHz, 64-QAM, 99pc duty cycle)	X	5.66	67.32	16.18	0.00	150.0	± 9.6 %
		Y	5.52	67.49	16.31		150.0	
		Z	5.74	67.32	16.25		150.0	
10403-AAB	CDMA2000 (1xEV-DO, Rev. 0)	X	1.31	66.30	12.99	0.00	115.0	± 9.6 %
		Y	1.29	68.05	13.15		115.0	
		Z	1.38	66.43	13.32		115.0	
10404-AAB	CDMA2000 (1xEV-DO, Rev. A)	X	1.31	66.30	12.99	0.00	115.0	± 9.6 %
		Y	1.29	68.05	13.15		115.0	
		Z	1.38	66.43	13.32		115.0	
10406-AAB	CDMA2000, RC3, SO32, SCH0, Full Rate	X	25.72	103.59	26.31	0.00	100.0	± 9.6 %
		Y	100.00	115.76	27.16		100.0	
		Z	11.25	93.04	24.33		100.0	
10410-AAC	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	72.84	116.60	29.06	3.23	80.0	± 9.6 %
		Y	100.00	123.52	30.54		80.0	
		Z	100.00	122.55	31.47		80.0	
10415-AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 99pc duty cycle)	X	0.98	61.90	13.55	0.00	150.0	± 9.6 %
		Y	1.00	63.07	14.51		150.0	
		Z	0.98	61.85	13.60		150.0	
10416-AAA	IEEE 802.11g WiFi 2.4 GHz (ERP-OFDM, 6 Mbps, 99pc duty cycle)	X	4.55	66.34	15.89	0.00	150.0	± 9.6 %
		Y	4.42	66.77	16.11		150.0	
		Z	4.61	66.27	15.94		150.0	
10417-AAA	IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps, 99pc duty cycle)	X	4.55	66.34	15.89	0.00	150.0	± 9.6 %
		Y	4.42	66.77	16.11		150.0	
		Z	4.61	66.27	15.94		150.0	
10418-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps, 99pc duty cycle, Long preamble)	X	4.53	66.47	15.89	0.00	150.0	± 9.6 %
		Y	4.42	66.96	16.14		150.0	
		Z	4.59	66.39	15.93		150.0	
10419-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps, 99pc duty cycle, Short preamble)	X	4.56	66.43	15.90	0.00	150.0	± 9.6 %
		Y	4.44	66.90	16.14		150.0	
		Z	4.62	66.36	15.95		150.0	
10422-AAA	IEEE 802.11n (HT Greenfield, 7.2 Mbps, BPSK)	X	4.68	66.45	15.93	0.00	150.0	± 9.6 %
		Y	4.55	66.88	16.15		150.0	
		Z	4.75	66.39	15.97		150.0	
10423-AAA	IEEE 802.11n (HT Greenfield, 43.3 Mbps, 16-QAM)	X	4.86	66.79	16.06	0.00	150.0	± 9.6 %
		Y	4.69	67.16	16.25		150.0	
		Z	4.95	66.76	16.11		150.0	
10424-AAA	IEEE 802.11n (HT Greenfield, 72.2 Mbps, 64-QAM)	X	4.78	66.73	16.02	0.00	150.0	± 9.6 %
		Y	4.62	67.12	16.22		150.0	
		Z	4.85	66.69	16.07		150.0	
10425-AAA	IEEE 802.11n (HT Greenfield, 15 Mbps, BPSK)	X	5.35	67.06	16.19	0.00	150.0	± 9.6 %
		Y	5.20	67.30	16.36		150.0	
		Z	5.42	67.02	16.24		150.0	
10426-AAA	IEEE 802.11n (HT Greenfield, 90 Mbps, 16-QAM)	X	5.35	67.06	16.19	0.00	150.0	± 9.6 %
		Y	5.21	67.33	16.37		150.0	
		Z	5.43	67.06	16.26		150.0	

Certificate No: EX3-3903_Sep17

Page 25 of 38

EX3DV4- SN:3903

September 28, 2017

10427-AAA	IEEE 802.11n (HT Greenfield, 150 Mbps, 64-QAM)	X	5.37	67.08	16.20	0.00	150.0	± 9.6 %
		Y	5.21	67.28	16.34		150.0	
		Z	5.45	67.08	16.26		150.0	
10430-AAB	LTE-FDD (OFDMA, 5 MHz, E-TM 3.1)	X	4.26	70.15	17.85	0.00	150.0	± 9.6 %
		Y	4.32	71.99	18.45		150.0	
		Z	4.27	69.61	17.72		150.0	
10431-AAB	LTE-FDD (OFDMA, 10 MHz, E-TM 3.1)	X	4.24	66.77	15.86	0.00	150.0	± 9.6 %
		Y	4.08	67.34	16.07		150.0	
		Z	4.33	66.71	15.94		150.0	
10432-AAB	LTE-FDD (OFDMA, 15 MHz, E-TM 3.1)	X	4.54	66.73	15.95	0.00	150.0	± 9.6 %
		Y	4.36	67.19	16.17		150.0	
		Z	4.62	66.68	16.01		150.0	
10433-AAB	LTE-FDD (OFDMA, 20 MHz, E-TM 3.1)	X	4.79	66.77	16.04	0.00	150.0	± 9.6 %
		Y	4.63	67.15	16.24		150.0	
		Z	4.87	66.73	16.10		150.0	
10434-AAA	W-CDMA (BS Test Model 1, 64 DPCH)	X	4.34	70.89	17.82	0.00	150.0	± 9.6 %
		Y	4.48	73.08	18.45		150.0	
		Z	4.34	70.24	17.68		150.0	
10435-AAC	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	64.35	114.75	28.58	3.23	80.0	± 9.6 %
		Y	100.00	123.24	30.41		80.0	
		Z	100.00	122.37	31.39		80.0	
10447-AAB	LTE-FDD (OFDMA, 5 MHz, E-TM 3.1, Clipping 44%)	X	3.52	66.62	15.20	0.00	150.0	± 9.6 %
		Y	3.36	67.32	15.25		150.0	
		Z	3.62	66.57	15.35		150.0	
10448-AAB	LTE-FDD (OFDMA, 10 MHz, E-TM 3.1, Clipping 44%)	X	4.07	66.54	15.71	0.00	150.0	± 9.6 %
		Y	3.93	67.13	15.93		150.0	
		Z	4.15	66.47	15.79		150.0	
10449-AAB	LTE-FDD (OFDMA, 15 MHz, E-TM 3.1, Clipping 44%)	X	4.34	66.55	15.84	0.00	150.0	± 9.6 %
		Y	4.21	67.03	16.07		150.0	
		Z	4.41	66.49	15.90		150.0	
10450-AAB	LTE-FDD (OFDMA, 20 MHz, E-TM 3.1, Clipping 44%)	X	4.53	66.52	15.89	0.00	150.0	± 9.6 %
		Y	4.42	66.94	16.11		150.0	
		Z	4.60	66.47	15.94		150.0	
10451-AAA	W-CDMA (BS Test Model 1, 64 DPCH, Clipping 44%)	X	3.42	66.78	14.87	0.00	150.0	± 9.6 %
		Y	3.21	67.36	14.74		150.0	
		Z	3.53	66.76	15.06		150.0	
10456-AAA	IEEE 802.11ac WiFi (160MHz, 64-QAM, 99pc duty cycle)	X	6.21	67.70	16.40	0.00	150.0	± 9.6 %
		Y	6.10	67.91	16.54		150.0	
		Z	6.28	67.72	16.47		150.0	
10457-AAA	UMTS-FDD (DC-HSDPA)	X	3.78	64.98	15.59	0.00	150.0	± 9.6 %
		Y	3.73	65.46	15.82		150.0	
		Z	3.81	64.91	15.64		150.0	
10458-AAA	CDMA2000 (1xEV-DO, Rev. B, 2 carriers)	X	3.94	69.89	17.15	0.00	150.0	± 9.6 %
		Y	4.03	71.98	17.58		150.0	
		Z	3.93	69.21	17.04		150.0	
10459-AAA	CDMA2000 (1xEV-DO, Rev. B, 3 carriers)	X	5.16	68.03	18.00	0.00	150.0	± 9.6 %
		Y	5.06	69.27	18.24		150.0	
		Z	5.17	67.42	17.84		150.0	

EX3DV4- SN:3903

September 28, 2017

10460-AAA	UMTS-FDD (WCDMA, AMR)	X	0.77	64.68	13.80	0.00	150.0	± 9.6 %
		Y	0.86	67.88	15.85		150.0	
		Z	0.78	64.75	13.87		150.0	
10461-AAA	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	30.17	107.58	27.80	3.29	80.0	± 9.6 %
		Y	100.00	130.51	33.74		80.0	
		Z	100.00	125.96	33.13		80.0	
10462-AAA	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	2.82	70.26	13.35	3.23	80.0	± 9.6 %
		Y	2.78	71.15	12.62		80.0	
		Z	100.00	110.76	25.93		80.0	
10463-AAA	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	1.71	64.63	10.58	3.23	80.0	± 9.6 %
		Y	0.93	61.17	8.01		80.0	
		Z	58.46	101.81	23.12		80.0	
10464-AAA	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	21.96	101.68	25.64	3.23	80.0	± 9.6 %
		Y	100.00	127.29	32.08		80.0	
		Z	100.00	123.96	32.04		80.0	
10465-AAA	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	2.32	68.22	12.49	3.23	80.0	± 9.6 %
		Y	1.83	67.43	11.20		80.0	
		Z	100.00	110.18	25.64		80.0	
10466-AAA	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	1.57	63.73	10.12	3.23	80.0	± 9.6 %
		Y	0.86	60.55	7.65		80.0	
		Z	21.22	90.62	20.27		80.0	
10467-AAC	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	26.20	104.15	26.31	3.23	80.0	± 9.6 %
		Y	100.00	127.69	32.26		80.0	
		Z	100.00	124.19	32.14		80.0	
10468-AAC	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	2.42	68.67	12.69	3.23	80.0	± 9.6 %
		Y	2.02	68.32	11.56		80.0	
		Z	100.00	110.35	25.72		80.0	
10469-AAC	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	1.57	63.75	10.13	3.23	80.0	± 9.6 %
		Y	0.86	60.56	7.66		80.0	
		Z	21.88	90.96	20.35		80.0	
10470-AAC	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	26.31	104.23	26.32	3.23	80.0	± 9.6 %
		Y	100.00	127.73	32.27		80.0	
		Z	100.00	124.22	32.15		80.0	
10471-AAC	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	2.41	68.60	12.65	3.23	80.0	± 9.6 %
		Y	1.99	68.12	11.47		80.0	
		Z	100.00	110.30	25.69		80.0	
10472-AAC	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	1.56	63.70	10.10	3.23	80.0	± 9.6 %
		Y	0.85	60.50	7.61		80.0	
		Z	21.82	90.91	20.32		80.0	
10473-AAC	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	26.16	104.13	26.29	3.23	80.0	± 9.6 %
		Y	100.00	127.69	32.25		80.0	
		Z	100.00	124.19	32.14		80.0	
10474-AAC	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	2.39	68.54	12.63	3.23	80.0	± 9.6 %
		Y	1.96	68.04	11.44		80.0	
		Z	100.00	110.31	25.69		80.0	
10475-AAC	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	1.55	63.68	10.09	3.23	80.0	± 9.6 %
		Y	0.85	60.48	7.61		80.0	
		Z	21.33	90.68	20.27		80.0	

Certificate No: EX3-3903_Sep17

Page 27 of 38

EX3DV4- SN:3903

September 28, 2017

10477-AAC	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	2.31	68.16	12.45	3.23	80.0	± 9.6 %
		Y	1.81	67.30	11.13		80.0	
		Z	100.00	110.14	25.61		80.0	
10478-AAC	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	1.55	63.62	10.05	3.23	80.0	± 9.6 %
		Y	0.85	60.43	7.57		80.0	
		Z	20.81	90.38	20.18		80.0	
10479-AAA	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	5.16	79.49	20.92	3.23	80.0	± 9.6 %
		Y	24.15	104.93	28.32		80.0	
		Z	8.87	87.46	24.29		80.0	
10480-AAA	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	5.95	77.61	18.64	3.23	80.0	± 9.6 %
		Y	30.64	98.91	23.94		80.0	
		Z	11.32	86.43	22.41		80.0	
10481-AAA	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	5.17	75.17	17.42	3.23	80.0	± 9.6 %
		Y	13.29	87.41	20.30		80.0	
		Z	10.14	84.16	21.36		80.0	
10482-AAA	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	2.57	68.99	15.63	2.23	80.0	± 9.6 %
		Y	3.04	72.92	16.76		80.0	
		Z	3.87	73.97	18.10		80.0	
10483-AAA	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	4.32	72.91	17.03	2.23	80.0	± 9.6 %
		Y	5.01	75.54	16.99		80.0	
		Z	7.43	80.32	20.50		80.0	
10484-AAA	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	4.14	72.08	16.71	2.23	80.0	± 9.6 %
		Y	4.36	73.57	16.26		80.0	
		Z	6.91	79.01	20.05		80.0	
10485-AAC	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	2.86	70.08	16.83	2.23	80.0	± 9.6 %
		Y	3.46	74.84	18.69		80.0	
		Z	4.07	74.54	18.96		80.0	
10486-AAC	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	3.01	67.74	15.48	2.23	80.0	± 9.6 %
		Y	3.16	69.98	16.02		80.0	
		Z	3.84	70.58	17.09		80.0	
10487-AAC	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	3.04	67.53	15.38	2.23	80.0	± 9.6 %
		Y	3.13	69.46	15.77		80.0	
		Z	3.85	70.25	16.95		80.0	
10488-AAC	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	3.28	70.14	17.37	2.23	80.0	± 9.6 %
		Y	3.55	73.22	18.91		80.0	
		Z	4.33	73.67	19.03		80.0	
10489-AAC	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	3.36	67.71	16.46	2.23	80.0	± 9.6 %
		Y	3.42	69.57	17.30		80.0	
		Z	4.01	69.84	17.65		80.0	
10490-AAC	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	3.47	67.63	16.46	2.23	80.0	± 9.6 %
		Y	3.50	69.36	17.22		80.0	
		Z	4.11	69.62	17.58		80.0	
10491-AAC	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	3.62	69.38	17.17	2.23	80.0	± 9.6 %
		Y	3.72	71.45	18.33		80.0	
		Z	4.47	72.05	18.47		80.0	
10492-AAC	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	3.76	67.37	16.58	2.23	80.0	± 9.6 %
		Y	3.72	68.59	17.23		80.0	
		Z	4.34	69.08	17.55		80.0	

Certificate No: EX3-3903_Sep17

Page 28 of 38

EX3DV4- SN:3903

September 28, 2017

10493-AAC	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	3.84	67.29	16.57	2.23	80.0	± 9.6 %
		Y	3.78	68.45	17.17		80.0	
		Z	4.41	68.93	17.51		80.0	
10494-AAC	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	3.86	70.63	17.53	2.23	80.0	± 9.6 %
		Y	4.06	73.05	18.86		80.0	
		Z	4.92	73.76	18.97		80.0	
10495-AAC	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	3.78	67.74	16.74	2.23	80.0	± 9.6 %
		Y	3.75	68.93	17.43		80.0	
		Z	4.40	69.59	17.75		80.0	
10496-AAC	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	3.88	67.55	16.71	2.23	80.0	± 9.6 %
		Y	3.83	68.66	17.34		80.0	
		Z	4.47	69.26	17.66		80.0	
10497-AAA	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	2.03	66.21	13.63	2.23	80.0	± 9.6 %
		Y	1.92	66.80	12.99		80.0	
		Z	3.14	71.28	16.37		80.0	
10498-AAA	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	1.88	62.85	11.10	2.23	80.0	± 9.6 %
		Y	1.31	60.35	8.66		80.0	
		Z	2.69	66.50	13.45		80.0	
10499-AAA	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	1.85	62.47	10.78	2.23	80.0	± 9.6 %
		Y	1.28	60.00	8.32		80.0	
		Z	2.65	66.02	13.11		80.0	
10500-AAA	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	2.99	69.84	16.96	2.23	80.0	± 9.6 %
		Y	3.42	73.85	18.66		80.0	
		Z	4.07	73.71	18.83		80.0	
10501-AAA	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	3.17	67.74	15.86	2.23	80.0	± 9.6 %
		Y	3.31	69.99	16.58		80.0	
		Z	3.91	70.20	17.27		80.0	
10502-AAA	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	3.24	67.68	15.80	2.23	80.0	± 9.6 %
		Y	3.35	69.80	16.43		80.0	
		Z	3.97	70.05	17.17		80.0	
10503-AAC	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	3.25	69.97	17.29	2.23	80.0	± 9.6 %
		Y	3.50	72.99	18.80		80.0	
		Z	4.27	73.46	18.94		80.0	
10504-AAC	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	3.35	67.63	16.41	2.23	80.0	± 9.6 %
		Y	3.40	69.46	17.24		80.0	
		Z	4.00	69.75	17.59		80.0	
10505-AAC	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	3.45	67.55	16.40	2.23	80.0	± 9.6 %
		Y	3.48	69.26	17.15		80.0	
		Z	4.08	69.53	17.53		80.0	
10506-AAC	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	3.83	70.50	17.46	2.23	80.0	± 9.6 %
		Y	4.02	72.88	18.76		80.0	
		Z	4.88	73.61	18.89		80.0	
10507-AAC	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	3.77	67.68	16.71	2.23	80.0	± 9.6 %
		Y	3.74	68.66	17.39		80.0	
		Z	4.38	69.52	17.71		80.0	

Certificate No: EX3-3903_Sep17

Page 29 of 38

EX3DV4- SN:3903

September 28, 2017

10508-AAC	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	3.86	67.49	16.67	2.23	80.0	± 9.6 %
		Y	3.81	68.58	17.30		80.0	
		Z	4.45	69.20	17.61		80.0	
10509-AAC	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	4.25	69.86	17.22	2.23	80.0	± 9.6 %
		Y	4.36	71.56	18.23		80.0	
		Z	5.12	72.20	18.35		80.0	
10510-AAC	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	4.29	67.71	16.81	2.23	80.0	± 9.6 %
		Y	4.20	68.50	17.35		80.0	
		Z	4.87	69.28	17.67		80.0	
10511-AAC	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	4.35	67.50	16.78	2.23	80.0	± 9.6 %
		Y	4.25	68.26	17.28		80.0	
		Z	4.91	68.96	17.60		80.0	
10512-AAC	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	4.35	71.07	17.56	2.23	80.0	± 9.6 %
		Y	4.58	73.19	18.76		80.0	
		Z	5.45	73.96	18.88		80.0	
10513-AAC	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	4.16	67.92	16.88	2.23	80.0	± 9.6 %
		Y	4.09	68.74	17.45		80.0	
		Z	4.78	69.66	17.81		80.0	
10514-AAC	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	4.19	67.57	16.80	2.23	80.0	± 9.6 %
		Y	4.11	68.32	17.32		80.0	
		Z	4.77	69.16	17.67		80.0	
10515-AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 2 Mbps, 99pc duty cycle)	X	0.94	61.98	13.54	0.00	150.0	± 9.6 %
		Y	0.96	63.23	14.56		150.0	
		Z	0.94	61.94	13.59		150.0	
10516-AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 5.5 Mbps, 99pc duty cycle)	X	0.45	64.32	13.38	0.00	150.0	± 9.6 %
		Y	0.55	69.14	16.68		150.0	
		Z	0.45	64.51	13.43		150.0	
10517-AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps, 99pc duty cycle)	X	0.76	62.97	13.58	0.00	150.0	± 9.6 %
		Y	0.80	64.90	15.09		150.0	
		Z	0.76	63.02	13.65		150.0	
10518-AAA	IEEE 802.11a/h WiFi 5 GHz (OFDM, 9 Mbps, 99pc duty cycle)	X	4.54	66.40	15.87	0.00	150.0	± 9.6 %
		Y	4.42	66.86	16.09		150.0	
		Z	4.60	68.34	15.92		150.0	
10519-AAA	IEEE 802.11a/h WiFi 5 GHz (OFDM, 12 Mbps, 99pc duty cycle)	X	4.74	66.67	16.00	0.00	150.0	± 9.6 %
		Y	4.58	67.05	16.19		150.0	
		Z	4.82	68.63	16.06		150.0	
10520-AAA	IEEE 802.11a/h WiFi 5 GHz (OFDM, 18 Mbps, 99pc duty cycle)	X	4.59	66.62	15.91	0.00	150.0	± 9.6 %
		Y	4.43	67.00	16.11		150.0	
		Z	4.67	68.59	15.97		150.0	
10521-AAA	IEEE 802.11a/h WiFi 5 GHz (OFDM, 24 Mbps, 99pc duty cycle)	X	4.52	66.61	15.89	0.00	150.0	± 9.6 %
		Y	4.37	66.99	16.10		150.0	
		Z	4.60	68.59	15.95		150.0	
10522-AAA	IEEE 802.11a/h WiFi 5 GHz (OFDM, 36 Mbps, 99pc duty cycle)	X	4.58	66.65	15.96	0.00	150.0	± 9.6 %
		Y	4.43	67.10	16.19		150.0	
		Z	4.65	68.57	15.99		150.0	

Certificate No: EX3-3903_Sep17

Page 30 of 38

EX3DV4- SN:3903

September 28, 2017

10523-AAA	IEEE 802.11a/h WiFi 5 GHz (OFDM, 48 Mbps, 99pc duty cycle)	X	4.45	66.53	15.80	0.00	150.0	± 9.6 %
		Y	4.33	67.04	16.08		150.0	
		Z	4.52	66.46	15.84		150.0	
10524-AAA	IEEE 802.11a/h WiFi 5 GHz (OFDM, 54 Mbps, 99pc duty cycle)	X	4.52	66.58	15.93	0.00	150.0	± 9.6 %
		Y	4.37	67.03	16.16		150.0	
		Z	4.60	66.53	15.98		150.0	
10525-AAA	IEEE 802.11ac WiFi (20MHz, MCS0, 99pc duty cycle)	X	4.49	65.63	15.52	0.00	150.0	± 9.6 %
		Y	4.38	66.13	15.78		150.0	
		Z	4.55	65.56	15.57		150.0	
10526-AAA	IEEE 802.11ac WiFi (20MHz, MCS1, 99pc duty cycle)	X	4.67	66.00	15.67	0.00	150.0	± 9.6 %
		Y	4.52	66.44	15.91		150.0	
		Z	4.75	65.95	15.71		150.0	
10527-AAA	IEEE 802.11ac WiFi (20MHz, MCS2, 99pc duty cycle)	X	4.59	65.96	15.61	0.00	150.0	± 9.6 %
		Y	4.45	66.41	15.85		150.0	
		Z	4.66	65.91	15.66		150.0	
10528-AAA	IEEE 802.11ac WiFi (20MHz, MCS3, 99pc duty cycle)	X	4.60	65.98	15.64	0.00	150.0	± 9.6 %
		Y	4.47	66.42	15.88		150.0	
		Z	4.68	65.93	15.69		150.0	
10529-AAA	IEEE 802.11ac WiFi (20MHz, MCS4, 99pc duty cycle)	X	4.60	65.98	15.64	0.00	150.0	± 9.6 %
		Y	4.47	66.42	15.88		150.0	
		Z	4.68	65.93	15.69		150.0	
10531-AAA	IEEE 802.11ac WiFi (20MHz, MCS6, 99pc duty cycle)	X	4.60	66.09	15.65	0.00	150.0	± 9.6 %
		Y	4.44	66.48	15.87		150.0	
		Z	4.69	66.06	15.71		150.0	
10532-AAA	IEEE 802.11ac WiFi (20MHz, MCS7, 99pc duty cycle)	X	4.46	65.94	15.58	0.00	150.0	± 9.6 %
		Y	4.32	66.35	15.81		150.0	
		Z	4.54	65.92	15.64		150.0	
10533-AAA	IEEE 802.11ac WiFi (20MHz, MCS8, 99pc duty cycle)	X	4.61	66.01	15.62	0.00	150.0	± 9.6 %
		Y	4.48	66.49	15.88		150.0	
		Z	4.69	65.96	15.67		150.0	
10534-AAA	IEEE 802.11ac WiFi (40MHz, MCS0, 99pc duty cycle)	X	5.13	66.17	15.74	0.00	150.0	± 9.6 %
		Y	5.00	66.47	15.93		150.0	
		Z	5.20	66.15	15.79		150.0	
10535-AAA	IEEE 802.11ac WiFi (40MHz, MCS1, 99pc duty cycle)	X	5.19	66.31	15.79	0.00	150.0	± 9.6 %
		Y	5.06	66.61	16.00		150.0	
		Z	5.26	66.28	15.84		150.0	
10536-AAA	IEEE 802.11ac WiFi (40MHz, MCS2, 99pc duty cycle)	X	5.06	66.28	15.76	0.00	150.0	± 9.6 %
		Y	4.94	66.60	15.97		150.0	
		Z	5.13	66.26	15.81		150.0	
10537-AAA	IEEE 802.11ac WiFi (40MHz, MCS3, 99pc duty cycle)	X	5.12	66.25	15.75	0.00	150.0	± 9.6 %
		Y	4.99	66.56	15.95		150.0	
		Z	5.20	66.24	15.80		150.0	
10538-AAA	IEEE 802.11ac WiFi (40MHz, MCS4, 99pc duty cycle)	X	5.23	66.31	15.82	0.00	150.0	± 9.6 %
		Y	5.07	66.55	15.99		150.0	
		Z	5.31	66.31	15.88		150.0	
10540-AAA	IEEE 802.11ac WiFi (40MHz, MCS6, 99pc duty cycle)	X	5.14	66.27	15.81	0.00	150.0	± 9.6 %
		Y	5.00	66.53	15.99		150.0	
		Z	5.21	66.25	15.86		150.0	

Certificate No: EX3-3903_Sep17

Page 31 of 38

EX3DV4- SN:3903

September 28, 2017

10541-AAA	IEEE 802.11ac WiFi (40MHz, MCS7, 99pc duty cycle)	X	5.12	66.18	15.76	0.00	150.0	± 9.6 %
		Y	4.99	66.45	15.94		150.0	
		Z	5.20	66.18	15.83		150.0	
10542-AAA	IEEE 802.11ac WiFi (40MHz, MCS8, 99pc duty cycle)	X	5.28	66.25	15.82	0.00	150.0	± 9.6 %
		Y	5.14	66.53	16.00		150.0	
		Z	5.35	66.23	15.87		150.0	
10543-AAA	IEEE 802.11ac WiFi (40MHz, MCS9, 99pc duty cycle)	X	5.36	66.29	15.85	0.00	150.0	± 9.6 %
		Y	5.20	66.54	16.02		150.0	
		Z	5.44	66.26	15.90		150.0	
10544-AAA	IEEE 802.11ac WiFi (80MHz, MCS0, 99pc duty cycle)	X	5.43	66.32	15.75	0.00	150.0	± 9.6 %
		Y	5.33	66.58	15.93		150.0	
		Z	5.48	66.29	15.80		150.0	
10545-AAA	IEEE 802.11ac WiFi (80MHz, MCS1, 99pc duty cycle)	X	5.61	66.67	15.87	0.00	150.0	± 9.6 %
		Y	5.49	66.91	16.05		150.0	
		Z	5.68	66.66	15.93		150.0	
10546-AAA	IEEE 802.11ac WiFi (80MHz, MCS2, 99pc duty cycle)	X	5.50	66.55	15.83	0.00	150.0	± 9.6 %
		Y	5.37	66.73	15.97		150.0	
		Z	5.57	66.56	15.89		150.0	
10547-AAA	IEEE 802.11ac WiFi (80MHz, MCS3, 99pc duty cycle)	X	5.58	66.60	15.85	0.00	150.0	± 9.6 %
		Y	5.44	66.77	15.99		150.0	
		Z	5.66	66.64	15.92		150.0	
10548-AAA	IEEE 802.11ac WiFi (80MHz, MCS4, 99pc duty cycle)	X	5.77	67.33	16.18	0.00	150.0	± 9.6 %
		Y	5.58	67.36	16.26		150.0	
		Z	5.90	67.49	16.31		150.0	
10550-AAA	IEEE 802.11ac WiFi (80MHz, MCS6, 99pc duty cycle)	X	5.52	66.53	15.83	0.00	150.0	± 9.6 %
		Y	5.40	66.78	16.01		150.0	
		Z	5.59	66.52	15.88		150.0	
10551-AAA	IEEE 802.11ac WiFi (80MHz, MCS7, 99pc duty cycle)	X	5.53	66.59	15.82	0.00	150.0	± 9.6 %
		Y	5.39	66.75	15.96		150.0	
		Z	5.60	66.59	15.88		150.0	
10552-AAA	IEEE 802.11ac WiFi (80MHz, MCS8, 99pc duty cycle)	X	5.45	66.40	15.74	0.00	150.0	± 9.6 %
		Y	5.35	66.68	15.93		150.0	
		Z	5.51	66.38	15.79		150.0	
10553-AAA	IEEE 802.11ac WiFi (80MHz, MCS9, 99pc duty cycle)	X	5.54	66.46	15.79	0.00	150.0	± 9.6 %
		Y	5.41	66.67	15.95		150.0	
		Z	5.61	66.44	15.84		150.0	
10554-AAB	IEEE 802.11ac WiFi (160MHz, MCS0, 99pc duty cycle)	X	5.82	66.70	15.85	0.00	150.0	± 9.6 %
		Y	5.74	66.91	16.00		150.0	
		Z	5.88	66.68	15.91		150.0	
10555-AAB	IEEE 802.11ac WiFi (160MHz, MCS1, 99pc duty cycle)	X	5.95	66.98	15.97	0.00	150.0	± 9.6 %
		Y	5.84	67.15	16.10		150.0	
		Z	6.02	67.00	16.03		150.0	
10556-AAB	IEEE 802.11ac WiFi (160MHz, MCS2, 99pc duty cycle)	X	5.97	67.01	15.98	0.00	150.0	± 9.6 %
		Y	5.86	67.20	16.12		150.0	
		Z	6.03	67.01	16.04		150.0	
10557-AAB	IEEE 802.11ac WiFi (160MHz, MCS3, 99pc duty cycle)	X	5.95	66.96	15.97	0.00	150.0	± 9.6 %
		Y	5.83	67.13	16.10		150.0	
		Z	6.02	66.98	16.04		150.0	

EX3DV4- SN:3903

September 28, 2017

10558-AAB	IEEE 802.11ac WiFi (160MHz, MCS4, 99pc duty cycle)	X	5.99	67.11	16.06	0.00	150.0	± 9.6 %
		Y	5.87	67.26	16.18		150.0	
		Z	6.07	67.15	16.14		150.0	
10560-AAB	IEEE 802.11ac WiFi (160MHz, MCS6, 99pc duty cycle)	X	6.00	67.00	16.04	0.00	150.0	± 9.6 %
		Y	5.87	67.14	16.16		150.0	
		Z	6.07	67.01	16.11		150.0	
10561-AAB	IEEE 802.11ac WiFi (160MHz, MCS7, 99pc duty cycle)	X	5.91	66.93	16.05	0.00	150.0	± 9.6 %
		Y	5.79	67.09	16.17		150.0	
		Z	5.98	66.95	16.12		150.0	
10562-AAB	IEEE 802.11ac WiFi (160MHz, MCS8, 99pc duty cycle)	X	6.03	67.30	16.23	0.00	150.0	± 9.6 %
		Y	5.87	67.35	16.30		150.0	
		Z	6.12	67.37	16.33		150.0	
10563-AAB	IEEE 802.11ac WiFi (160MHz, MCS9, 99pc duty cycle)	X	6.33	67.76	16.41	0.00	150.0	± 9.6 %
		Y	5.94	67.20	16.19		150.0	
		Z	6.42	67.82	16.50		150.0	
10564-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 9 Mbps, 99pc duty cycle)	X	4.87	66.51	16.04	0.46	150.0	± 9.6 %
		Y	4.73	66.89	16.22		150.0	
		Z	4.94	66.48	16.12		150.0	
10565-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 12 Mbps, 99pc duty cycle)	X	5.12	66.99	16.38	0.46	150.0	± 9.6 %
		Y	4.94	67.32	16.54		150.0	
		Z	5.20	66.98	16.45		150.0	
10566-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 18 Mbps, 99pc duty cycle)	X	4.94	66.83	16.18	0.46	150.0	± 9.6 %
		Y	4.78	67.15	16.35		150.0	
		Z	5.03	66.82	16.27		150.0	
10567-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 24 Mbps, 99pc duty cycle)	X	4.97	67.24	16.55	0.46	150.0	± 9.6 %
		Y	4.82	67.59	16.75		150.0	
		Z	5.06	67.20	16.61		150.0	
10568-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 36 Mbps, 99pc duty cycle)	X	4.85	66.54	15.91	0.46	150.0	± 9.6 %
		Y	4.68	66.89	16.09		150.0	
		Z	4.94	66.54	16.01		150.0	
10569-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 48 Mbps, 99pc duty cycle)	X	4.92	67.29	16.59	0.46	150.0	± 9.6 %
		Y	4.80	67.77	16.86		150.0	
		Z	4.99	67.23	16.63		150.0	
10570-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 54 Mbps, 99pc duty cycle)	X	4.96	67.12	16.51	0.46	150.0	± 9.6 %
		Y	4.81	67.54	16.74		150.0	
		Z	5.04	67.08	16.57		150.0	
10571-AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 90pc duty cycle)	X	1.13	63.18	14.39	0.46	130.0	± 9.6 %
		Y	1.15	64.40	15.38		130.0	
		Z	1.19	63.85	14.87		130.0	
10572-AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 2 Mbps, 90pc duty cycle)	X	1.13	63.61	14.67	0.46	130.0	± 9.6 %
		Y	1.16	64.96	15.74		130.0	
		Z	1.20	64.34	15.17		130.0	
10573-AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 5.5 Mbps, 90pc duty cycle)	X	0.92	71.08	16.74	0.46	130.0	± 9.6 %
		Y	1.60	82.35	22.16		130.0	
		Z	1.27	74.99	18.33		130.0	
10574-AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps, 90pc duty cycle)	X	1.14	67.38	16.80	0.46	130.0	± 9.6 %
		Y	1.25	70.54	18.66		130.0	
		Z	1.26	68.73	17.31		130.0	

Certificate No: EX3-3903_Sep17

Page 33 of 38

EX30V4-- SN:3903

September 28, 2017

10575-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps, 90pc duty cycle)	X	4.65	66.27	16.06	0.46	130.0	± 9.6 %
		Y	4.52	66.68	16.26		130.0	
		Z	4.74	66.30	16.19		130.0	
10576-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 9 Mbps, 90pc duty cycle)	X	4.68	66.43	16.13	0.46	130.0	± 9.6 %
		Y	4.55	66.87	16.35		130.0	
		Z	4.77	66.46	16.26		130.0	
10577-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 12 Mbps, 90pc duty cycle)	X	4.90	66.76	16.32	0.46	130.0	± 9.6 %
		Y	4.73	67.13	16.50		130.0	
		Z	5.00	66.79	16.44		130.0	
10578-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 18 Mbps, 90pc duty cycle)	X	4.79	66.91	16.41	0.46	130.0	± 9.6 %
		Y	4.63	67.30	16.62		130.0	
		Z	4.89	66.95	16.54		130.0	
10579-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 24 Mbps, 90pc duty cycle)	X	4.55	66.17	15.70	0.46	130.0	± 9.6 %
		Y	4.38	66.47	15.86		130.0	
		Z	4.66	66.28	15.87		130.0	
10580-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 36 Mbps, 90pc duty cycle)	X	4.59	66.17	15.70	0.46	130.0	± 9.6 %
		Y	4.42	66.52	15.88		130.0	
		Z	4.71	66.26	15.87		130.0	
10581-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 48 Mbps, 90pc duty cycle)	X	4.68	66.93	16.34	0.46	130.0	± 9.6 %
		Y	4.54	67.35	16.58		130.0	
		Z	4.79	66.99	16.47		130.0	
10582-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 54 Mbps, 90pc duty cycle)	X	4.50	65.91	15.48	0.46	130.0	± 9.6 %
		Y	4.31	66.20	15.62		130.0	
		Z	4.62	66.03	15.67		130.0	
10583-AAA	IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps, 90pc duty cycle)	X	4.65	66.27	16.06	0.46	130.0	± 9.6 %
		Y	4.52	66.68	16.26		130.0	
		Z	4.74	66.30	16.19		130.0	
10584-AAA	IEEE 802.11a/h WiFi 5 GHz (OFDM, 9 Mbps, 90pc duty cycle)	X	4.68	66.43	16.13	0.46	130.0	± 9.6 %
		Y	4.55	66.87	16.35		130.0	
		Z	4.77	66.46	16.26		130.0	
10585-AAA	IEEE 802.11a/h WiFi 5 GHz (OFDM, 12 Mbps, 90pc duty cycle)	X	4.90	66.76	16.32	0.46	130.0	± 9.6 %
		Y	4.73	67.13	16.50		130.0	
		Z	5.00	66.79	16.44		130.0	
10586-AAA	IEEE 802.11a/h WiFi 5 GHz (OFDM, 18 Mbps, 90pc duty cycle)	X	4.79	66.91	16.41	0.46	130.0	± 9.6 %
		Y	4.63	67.30	16.62		130.0	
		Z	4.89	66.95	16.54		130.0	
10587-AAA	IEEE 802.11a/h WiFi 5 GHz (OFDM, 24 Mbps, 90pc duty cycle)	X	4.55	66.17	15.70	0.46	130.0	± 9.6 %
		Y	4.38	66.47	15.86		130.0	
		Z	4.66	66.28	15.87		130.0	
10588-AAA	IEEE 802.11a/h WiFi 5 GHz (OFDM, 36 Mbps, 90pc duty cycle)	X	4.59	66.17	15.70	0.46	130.0	± 9.6 %
		Y	4.42	66.52	15.88		130.0	
		Z	4.71	66.26	15.87		130.0	
10589-AAA	IEEE 802.11a/h WiFi 5 GHz (OFDM, 48 Mbps, 90pc duty cycle)	X	4.68	66.93	16.34	0.46	130.0	± 9.6 %
		Y	4.54	67.35	16.58		130.0	
		Z	4.79	66.99	16.47		130.0	
10590-AAA	IEEE 802.11a/h WiFi 5 GHz (OFDM, 54 Mbps, 90pc duty cycle)	X	4.50	65.91	15.48	0.46	130.0	± 9.6 %
		Y	4.31	66.20	15.62		130.0	
		Z	4.62	66.03	15.67		130.0	

EX3DV4- SN:3903

September 28, 2017

10591-AAA	IEEE 802.11n (HT Mixed, 20MHz, MCS0, 90pc duty cycle)	X	4.81	66.36	16.18	0.46	130.0	± 9.6 %
		Y	4.87	66.76	16.38		130.0	
		Z	4.90	66.39	16.31		130.0	
10592-AAA	IEEE 802.11n (HT Mixed, 20MHz, MCS1, 90pc duty cycle)	X	4.97	66.70	16.31	0.46	130.0	± 9.6 %
		Y	4.81	67.07	16.51		130.0	
		Z	5.07	66.73	16.43		130.0	
10593-AAA	IEEE 802.11n (HT Mixed, 20MHz, MCS2, 90pc duty cycle)	X	4.89	66.61	16.19	0.46	130.0	± 9.6 %
		Y	4.72	66.95	16.37		130.0	
		Z	4.99	66.67	16.33		130.0	
10594-AAA	IEEE 802.11n (HT Mixed, 20MHz, MCS3, 90pc duty cycle)	X	4.95	66.78	16.35	0.46	130.0	± 9.6 %
		Y	4.78	67.14	16.54		130.0	
		Z	5.05	66.82	16.47		130.0	
10595-AAA	IEEE 802.11n (HT Mixed, 20MHz, MCS4, 90pc duty cycle)	X	4.91	66.72	16.24	0.46	130.0	± 9.6 %
		Y	4.75	67.09	16.44		130.0	
		Z	5.02	66.78	16.38		130.0	
10596-AAA	IEEE 802.11n (HT Mixed, 20MHz, MCS5, 90pc duty cycle)	X	4.85	66.70	16.23	0.46	130.0	± 9.6 %
		Y	4.68	67.07	16.43		130.0	
		Z	4.95	66.76	16.36		130.0	
10597-AAA	IEEE 802.11n (HT Mixed, 20MHz, MCS6, 90pc duty cycle)	X	4.80	66.61	16.12	0.46	130.0	± 9.6 %
		Y	4.63	66.95	16.29		130.0	
		Z	4.90	66.69	16.27		130.0	
10598-AAA	IEEE 802.11n (HT Mixed, 20MHz, MCS7, 90pc duty cycle)	X	4.78	66.87	16.39	0.46	130.0	± 9.6 %
		Y	4.62	67.21	16.58		130.0	
		Z	4.88	66.94	16.53		130.0	
10599-AAA	IEEE 802.11n (HT Mixed, 40MHz, MCS0, 90pc duty cycle)	X	5.47	66.96	16.40	0.46	130.0	± 9.6 %
		Y	5.31	67.15	16.54		130.0	
		Z	5.56	67.01	16.52		130.0	
10600-AAA	IEEE 802.11n (HT Mixed, 40MHz, MCS1, 90pc duty cycle)	X	5.59	67.31	16.54	0.46	130.0	± 9.6 %
		Y	5.40	67.43	16.65		130.0	
		Z	5.73	67.50	16.74		130.0	
10601-AAA	IEEE 802.11n (HT Mixed, 40MHz, MCS2, 90pc duty cycle)	X	5.49	67.09	16.45	0.46	130.0	± 9.6 %
		Y	5.32	67.29	16.60		130.0	
		Z	5.60	67.21	16.61		130.0	
10602-AAA	IEEE 802.11n (HT Mixed, 40MHz, MCS3, 90pc duty cycle)	X	5.57	67.07	16.36	0.46	130.0	± 9.6 %
		Y	5.42	67.35	16.54		130.0	
		Z	5.69	67.20	16.52		130.0	
10603-AAA	IEEE 802.11n (HT Mixed, 40MHz, MCS4, 90pc duty cycle)	X	5.67	67.43	16.67	0.46	130.0	± 9.6 %
		Y	5.51	67.70	16.86		130.0	
		Z	5.79	67.56	16.83		130.0	
10604-AAA	IEEE 802.11n (HT Mixed, 40MHz, MCS5, 90pc duty cycle)	X	5.47	66.90	16.40	0.46	130.0	± 9.6 %
		Y	5.38	67.34	16.66		130.0	
		Z	5.57	66.98	16.53		130.0	
10605-AAA	IEEE 802.11n (HT Mixed, 40MHz, MCS6, 90pc duty cycle)	X	5.58	67.15	16.51	0.46	130.0	± 9.6 %
		Y	5.41	67.39	16.68		130.0	
		Z	5.68	67.23	16.66		130.0	
10606-AAA	IEEE 802.11n (HT Mixed, 40MHz, MCS7, 90pc duty cycle)	X	5.35	66.65	16.13	0.46	130.0	± 9.6 %
		Y	5.17	66.78	16.23		130.0	
		Z	5.45	66.75	16.28		130.0	

Certificate No: EX3-3903_Sep17

Page 35 of 38

EX3DV4- SN:3903

September 28, 2017

10607-AAA	IEEE 802.11ac WiFi (20MHz, MCS0, 90pc duty cycle)	X	4.63	65.63	15.78	0.46	130.0	± 9.6 %
		Y	4.52	66.11	16.03		130.0	
		Z	4.72	65.64	15.89		130.0	
10608-AAA	IEEE 802.11ac WiFi (20MHz, MCS1, 90pc duty cycle)	X	4.83	66.04	15.94	0.46	130.0	± 9.6 %
		Y	4.68	66.47	16.18		130.0	
		Z	4.93	66.07	16.06		130.0	
10609-AAA	IEEE 802.11ac WiFi (20MHz, MCS2, 90pc duty cycle)	X	4.71	65.88	15.78	0.46	130.0	± 9.6 %
		Y	4.57	66.30	16.00		130.0	
		Z	4.81	65.93	15.91		130.0	
10610-AAA	IEEE 802.11ac WiFi (20MHz, MCS3, 90pc duty cycle)	X	4.77	66.05	15.94	0.46	130.0	± 9.6 %
		Y	4.62	66.47	16.18		130.0	
		Z	4.87	66.09	16.07		130.0	
10611-AAA	IEEE 802.11ac WiFi (20MHz, MCS4, 90pc duty cycle)	X	4.68	65.85	15.79	0.46	130.0	± 9.6 %
		Y	4.54	66.27	16.02		130.0	
		Z	4.79	65.92	15.93		130.0	
10612-AAA	IEEE 802.11ac WiFi (20MHz, MCS5, 90pc duty cycle)	X	4.69	65.98	15.81	0.46	130.0	± 9.6 %
		Y	4.53	66.40	16.05		130.0	
		Z	4.80	66.04	15.95		130.0	
10613-AAA	IEEE 802.11ac WiFi (20MHz, MCS6, 90pc duty cycle)	X	4.70	65.88	15.71	0.46	130.0	± 9.6 %
		Y	4.53	66.24	15.91		130.0	
		Z	4.81	65.97	15.86		130.0	
10614-AAA	IEEE 802.11ac WiFi (20MHz, MCS7, 90pc duty cycle)	X	4.64	66.08	15.95	0.46	130.0	± 9.6 %
		Y	4.49	66.48	16.18		130.0	
		Z	4.74	66.15	16.09		130.0	
10615-AAA	IEEE 802.11ac WiFi (20MHz, MCS8, 90pc duty cycle)	X	4.68	65.86	15.55	0.46	130.0	± 9.6 %
		Y	4.53	66.08	15.78		130.0	
		Z	4.79	65.73	15.70		130.0	
10616-AAA	IEEE 802.11ac WiFi (40MHz, MCS0, 90pc duty cycle)	X	5.28	66.20	16.01	0.46	130.0	± 9.6 %
		Y	5.15	66.47	16.19		130.0	
		Z	5.37	66.25	16.12		130.0	
10617-AAA	IEEE 802.11ac WiFi (40MHz, MCS1, 90pc duty cycle)	X	5.33	66.30	16.02	0.46	130.0	± 9.6 %
		Y	5.20	66.61	16.24		130.0	
		Z	5.43	66.34	16.14		130.0	
10618-AAA	IEEE 802.11ac WiFi (40MHz, MCS2, 90pc duty cycle)	X	5.23	66.35	16.07	0.46	130.0	± 9.6 %
		Y	5.10	66.67	16.28		130.0	
		Z	5.32	66.41	16.19		130.0	
10619-AAA	IEEE 802.11ac WiFi (40MHz, MCS3, 90pc duty cycle)	X	5.25	66.17	15.91	0.46	130.0	± 9.6 %
		Y	5.11	66.44	16.10		130.0	
		Z	5.35	66.24	16.04		130.0	
10620-AAA	IEEE 802.11ac WiFi (40MHz, MCS4, 90pc duty cycle)	X	5.35	66.25	16.00	0.46	130.0	± 9.6 %
		Y	5.19	66.46	16.16		130.0	
		Z	5.46	66.35	16.15		130.0	
10621-AAA	IEEE 802.11ac WiFi (40MHz, MCS5, 90pc duty cycle)	X	5.35	66.38	16.19	0.46	130.0	± 9.6 %
		Y	5.21	66.65	16.37		130.0	
		Z	5.44	66.43	16.30		130.0	
10622-AAA	IEEE 802.11ac WiFi (40MHz, MCS6, 90pc duty cycle)	X	5.34	66.47	16.22	0.46	130.0	± 9.6 %
		Y	5.20	66.74	16.41		130.0	
		Z	5.43	66.52	16.33		130.0	

EX3DV4- SN:3903

September 28, 2017

10623-AAA	IEEE 802.11ac WiFi (40MHz, MCS7, 90pc duty cycle)	X	5.23	66.04	15.88	0.46	130.0	± 9.6 %
		Y	5.09	66.29	16.05		130.0	
		Z	5.33	66.12	16.02		130.0	
10624-AAA	IEEE 802.11ac WiFi (40MHz, MCS8, 90pc duty cycle)	X	5.42	66.24	16.05	0.46	130.0	± 9.6 %
		Y	5.28	66.50	16.22		130.0	
		Z	5.52	66.30	16.17		130.0	
10625-AAA	IEEE 802.11ac WiFi (40MHz, MCS9, 90pc duty cycle)	X	5.77	67.14	16.55	0.46	130.0	± 9.6 %
		Y	5.49	67.00	16.53		130.0	
		Z	5.88	67.23	16.66		130.0	
10626-AAA	IEEE 802.11ac WiFi (80MHz, MCS0, 90pc duty cycle)	X	5.56	66.29	15.96	0.46	130.0	± 9.6 %
		Y	5.46	66.54	16.15		130.0	
		Z	5.83	66.32	16.09		130.0	
10627-AAA	IEEE 802.11ac WiFi (80MHz, MCS1, 90pc duty cycle)	X	5.78	66.76	16.17	0.46	130.0	± 9.6 %
		Y	5.66	67.01	16.36		130.0	
		Z	5.87	66.82	16.29		130.0	
10628-AAA	IEEE 802.11ac WiFi (80MHz, MCS2, 90pc duty cycle)	X	5.60	66.38	15.92	0.46	130.0	± 9.6 %
		Y	5.46	66.53	16.05		130.0	
		Z	5.69	66.47	16.05		130.0	
10629-AAA	IEEE 802.11ac WiFi (80MHz, MCS3, 90pc duty cycle)	X	5.69	66.48	15.96	0.46	130.0	± 9.6 %
		Y	5.54	66.60	16.08		130.0	
		Z	5.78	66.54	16.08		130.0	
10630-AAA	IEEE 802.11ac WiFi (80MHz, MCS4, 90pc duty cycle)	X	6.06	67.73	16.58	0.46	130.0	± 9.6 %
		Y	5.78	67.53	16.54		130.0	
		Z	6.24	68.07	16.84		130.0	
10631-AAA	IEEE 802.11ac WiFi (80MHz, MCS5, 90pc duty cycle)	X	6.02	67.75	16.79	0.46	130.0	± 9.6 %
		Y	5.80	67.70	16.83		130.0	
		Z	6.16	67.94	16.96		130.0	
10632-AAA	IEEE 802.11ac WiFi (80MHz, MCS6, 90pc duty cycle)	X	5.77	66.89	16.38	0.46	130.0	± 9.6 %
		Y	5.65	67.14	16.57		130.0	
		Z	5.86	66.93	16.48		130.0	
10633-AAA	IEEE 802.11ac WiFi (80MHz, MCS7, 90pc duty cycle)	X	5.68	66.56	16.05	0.46	130.0	± 9.6 %
		Y	5.53	66.74	16.19		130.0	
		Z	5.79	66.72	16.20		130.0	
10634-AAA	IEEE 802.11ac WiFi (80MHz, MCS8, 90pc duty cycle)	X	5.66	66.62	16.13	0.46	130.0	± 9.6 %
		Y	5.53	66.81	16.26		130.0	
		Z	5.77	66.72	16.26		130.0	
10635-AAA	IEEE 802.11ac WiFi (80MHz, MCS9, 90pc duty cycle)	X	5.55	65.94	15.52	0.46	130.0	± 9.6 %
		Y	5.38	66.05	15.62		130.0	
		Z	5.65	66.06	15.67		130.0	
10636-AAB	IEEE 802.11ac WiFi (160MHz, MCS0, 90pc duty cycle)	X	5.97	66.68	16.06	0.46	130.0	± 9.6 %
		Y	5.87	66.88	16.23		130.0	
		Z	6.04	66.72	16.19		130.0	
10637-AAB	IEEE 802.11ac WiFi (160MHz, MCS1, 90pc duty cycle)	X	6.11	67.01	16.23	0.46	130.0	± 9.6 %
		Y	6.00	67.18	16.37		130.0	
		Z	6.20	67.09	16.35		130.0	
10638-AAB	IEEE 802.11ac WiFi (160MHz, MCS2, 90pc duty cycle)	X	6.11	66.99	16.20	0.46	130.0	± 9.6 %
		Y	6.01	67.20	16.35		130.0	
		Z	6.20	67.06	16.32		130.0	

Certificate No: EX3-3903_Sep17

Page 37 of 38

EX3DV4- SN:3903

September 28, 2017

10639-AAB	IEEE 802.11ac WiFi (160MHz, MCS3, 90pc duty cycle)	X	6.11	66.99	16.25	0.46	130.0	± 9.6 %
		Y	5.98	67.14	16.37		130.0	
		Z	6.20	67.09	16.38		130.0	
10640-AAB	IEEE 802.11ac WiFi (160MHz, MCS4, 90pc duty cycle)	X	6.11	67.00	16.18	0.46	130.0	± 9.6 %
		Y	5.97	67.10	16.29		130.0	
		Z	6.22	67.13	16.34		130.0	
10641-AAB	IEEE 802.11ac WiFi (160MHz, MCS5, 90pc duty cycle)	X	6.14	66.85	16.13	0.46	130.0	± 9.6 %
		Y	6.03	67.04	16.28		130.0	
		Z	6.23	66.91	16.25		130.0	
10642-AAB	IEEE 802.11ac WiFi (160MHz, MCS6, 90pc duty cycle)	X	6.21	67.19	16.48	0.46	130.0	± 9.6 %
		Y	6.08	67.34	16.60		130.0	
		Z	6.30	67.26	16.59		130.0	
10643-AAB	IEEE 802.11ac WiFi (160MHz, MCS7, 90pc duty cycle)	X	6.03	66.81	16.18	0.46	130.0	± 9.6 %
		Y	5.91	66.97	16.31		130.0	
		Z	6.12	66.91	16.31		130.0	
10644-AAB	IEEE 802.11ac WiFi (160MHz, MCS8, 90pc duty cycle)	X	6.20	67.34	16.46	0.46	130.0	± 9.6 %
		Y	6.01	67.30	16.49		130.0	
		Z	6.33	67.63	16.65		130.0	
10645-AAB	IEEE 802.11ac WiFi (160MHz, MCS9, 90pc duty cycle)	X	6.58	68.03	16.75	0.46	130.0	± 9.6 %
		Y	6.10	67.22	16.41		130.0	
		Z	6.66	68.05	16.85		130.0	
10646-AAB	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, QPSK, UL Subframe=2,7)	X	14.16	100.58	33.72	9.30	60.0	± 9.6 %
		Y	16.39	109.36	37.64		60.0	
		Z	26.10	114.77	38.50		60.0	
10647-AAB	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK, UL Subframe=2,7)	X	12.81	98.94	33.31	9.30	60.0	± 9.6 %
		Y	13.55	105.58	36.60		60.0	
		Z	25.78	113.54	38.28		60.0	
10648-AAB	CDMA2000 (1x Advanced)	X	0.68	62.37	10.24	0.00	150.0	± 9.6 %
		Y	0.61	62.94	9.90		150.0	
		Z	0.71	62.50	10.56		150.0	
10652-AAB	LTE-TDD (OFDMA, 5 MHz, E-TM 3.1, Clipping 44%)	X	3.56	65.99	15.98	2.23	80.0	± 9.6 %
		Y	3.54	67.19	16.46		80.0	
		Z	3.93	67.04	16.69		80.0	
10653-AAB	LTE-TDD (OFDMA, 10 MHz, E-TM 3.1, Clipping 44%)	X	4.12	65.70	16.25	2.23	80.0	± 9.6 %
		Y	4.04	66.39	16.60		80.0	
		Z	4.46	66.56	16.82		80.0	
10654-AAB	LTE-TDD (OFDMA, 15 MHz, E-TM 3.1, Clipping 44%)	X	4.10	65.42	16.26	2.23	80.0	± 9.6 %
		Y	4.04	66.01	16.60		80.0	
		Z	4.40	66.25	16.82		80.0	
10655-AAB	LTE-TDD (OFDMA, 20 MHz, E-TM 3.1, Clipping 44%)	X	4.15	65.45	16.31	2.23	80.0	± 9.6 %
		Y	4.10	65.96	16.63		80.0	
		Z	4.46	66.30	16.86		80.0	

* Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

Attachment 4. – Dipole Calibration Data

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
C Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **HCT (Dymstec)**

Certificate No: **D2450V2-965_Feb18**

CALIBRATION CERTIFICATE

Object **D2450V2 - SN:965**

Calibration procedure(s) **QA CAL-05.v9**
Calibration procedure for dipole validation kits above 700 MHz

Calibration date: **February 16, 2018**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3 °C) and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	04-Apr-17 (No. 217-02521/02522)	Apr-18
Power sensor NRP-Z91	SN: 103244	04-Apr-17 (No. 217-02521)	Apr-18
Power sensor NRP-Z91	SN: 103245	04-Apr-17 (No. 217-02522)	Apr-18
Reference 20 dB Attenuator	SN: 5058 (20k)	07-Apr-17 (No. 217-02528)	Apr-18
Type-N mismatch combination	SN: 5047.2 / 06327	07-Apr-17 (No. 217-02529)	Apr-18
Reference Probe EX3DV4	SN: 7349	30-Dec-17 (No. EX3-7349_Dec17)	Dec-18
DAE4	SN: 601	26-Oct-17 (No. DAE4-601_Oct17)	Oct-18
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power meter EPM-442A	SN: GB37480704	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
Power sensor HP 8461A	SN: US37292783	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
Power sensor HP 8461A	SN: MY41092317	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
RF generator R&S SMT-06	SN: 100972	15-Jun-15 (in house check Oct-16)	In house check: Oct-18
Network Analyzer HP 8753E	SN: US37390585	18-Oct-01 (in house check Oct-17)	In house check: Oct-18

Calibrated by: **Michael Weber** Function: **Laboratory Technician** Signature: *M. Weber*

Approved by: **Katja Pokovic** Technical Manager Signature: *K. Pokovic*

Issued: February 19, 2018

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Certificate No: D2450V2-965_Feb18

Page 1 of 8

결	담당자	확인자
제	<i>Jim</i>	<i>Jim</i>
적용일	6W 18.03.20	6W 18.03.20
일 자	2018 1.03.06	2018 1.03.06

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Glossary:

TSL tissue simulating liquid
ConvF sensitivity in TSL / NORM x,y,z
N/A not applicable or not measured

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

- DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.10.0
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	2450 MHz $\pm$ 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	39.2	1.80 mho/m
Measured Head TSL parameters	(22.0 $\pm$ 0.2) °C	37.9 $\pm$ 6 %	1.87 mho/m $\pm$ 6 %
Head TSL temperature change during test	< 0.5 °C	---	---

SAR result with Head TSL

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	13.1 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	51.1 W/kg $\pm$ 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	6.07 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	23.9 W/kg $\pm$ 16.5 % (k=2)

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	52.7	1.95 mho/m
Measured Body TSL parameters	(22.0 $\pm$ 0.2) °C	51.4 $\pm$ 6 %	2.04 mho/m $\pm$ 6 %
Body TSL temperature change during test	< 0.5 °C	---	---

SAR result with Body TSL

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	12.9 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	50.2 W/kg $\pm$ 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	250 mW input power	5.96 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	23.6 W/kg $\pm$ 16.5 % (k=2)

Appendix (Additional assessments outside the scope of SCS 0108)**Antenna Parameters with Head TSL**

Impedance, transformed to feed point	$54.9 \Omega + 4.2 j\Omega$
Return Loss	- 24.2 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	$50.9 \Omega + 6.3 j\Omega$
Return Loss	- 24.0 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.163 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	November 19, 2014

DASY5 Validation Report for Head TSL

Date: 16.02.2018

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN: 965

Communication System: UID 0 - CW; Frequency: 2450 MHz

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.87$ S/m; $\epsilon_r = 37.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(7.88, 7.88, 7.88); Calibrated: 30.12.2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 26.10.2017
- Phantom: Flat Phantom 5.0 (front); Type: QD 000 P50 AA; Serial: 1001
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 112.7 V/m; Power Drift = -0.05 dB


Peak SAR (extrapolated) = 26.2 W/kg

SAR(1 g) = 13.1 W/kg; SAR(10 g) = 6.07 W/kg

Maximum value of SAR (measured) = 20.7 W/kg

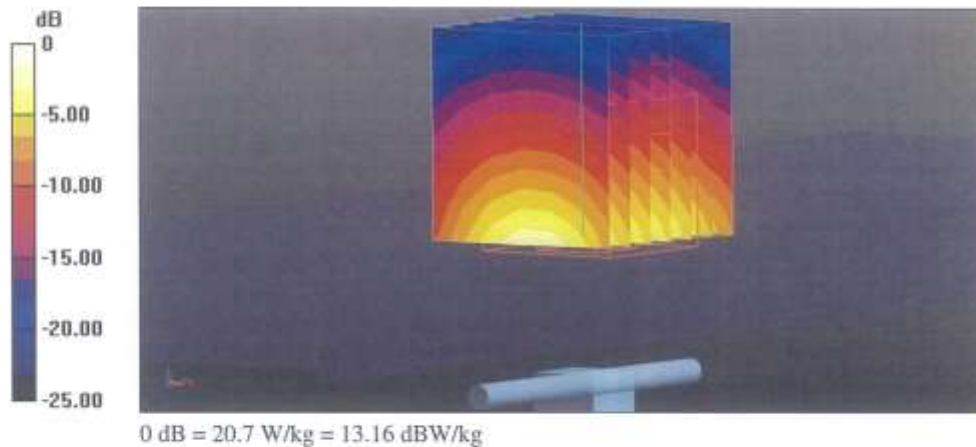

Impedance Measurement Plot for Head TSL

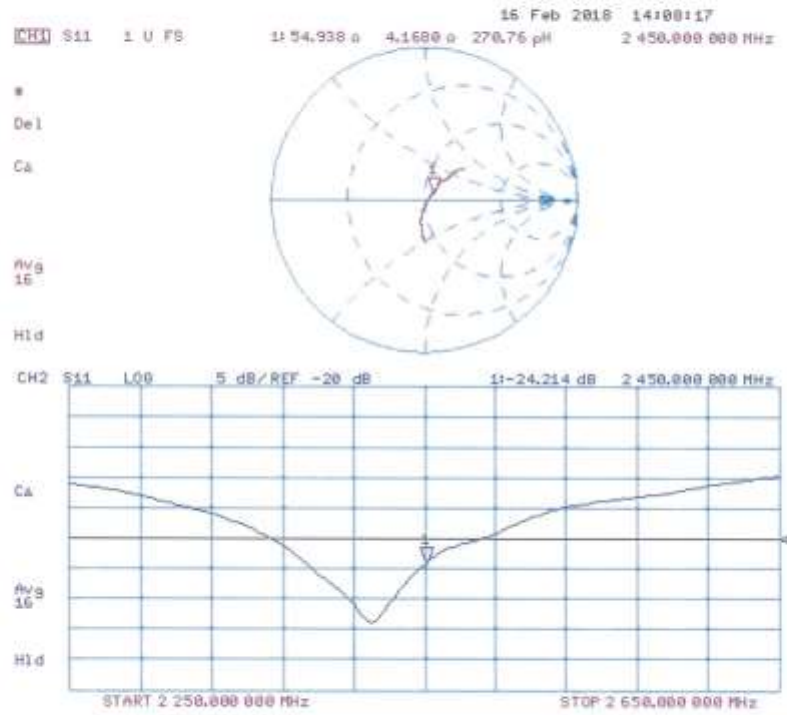

DASY5 Validation Report for Body TSL

Date: 16.02.2018

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN: 965

Communication System: UID 0 - CW; Frequency: 2450 MHz

Medium parameters used: $f = 2450$ MHz; $\sigma = 2.04$ S/m; $\epsilon_r = 51.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(8.01, 8.01, 8.01); Calibrated: 30.12.2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 26.10.2017
- Phantom: Flat Phantom 5.0 (back); Type: QD 000 P50 AA; Serial: 1002
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

Dipole Calibration for Body Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 104.7 V/m; Power Drift = -0.03 dB


Peak SAR (extrapolated) = 25.8 W/kg

SAR(1 g) = 12.9 W/kg; SAR(10 g) = 5.98 W/kg

Maximum value of SAR (measured) = 20.0 W/kg

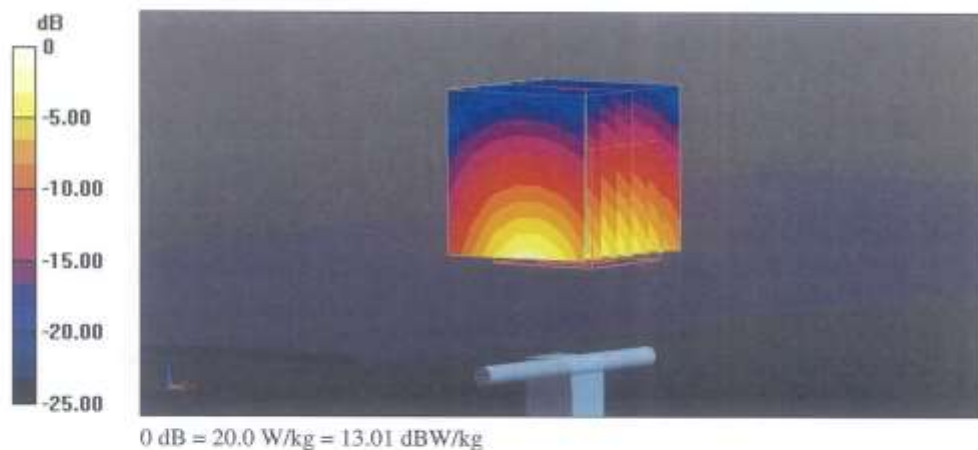

Impedance Measurement Plot for Body TSL

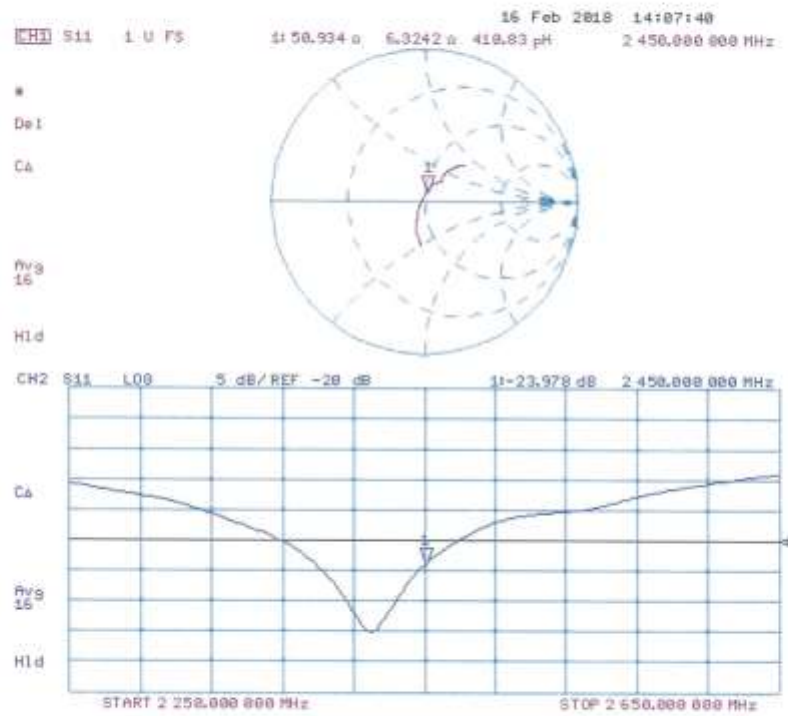

Attachment 5. – SAR Tissue Characterization

The brain and muscle mixtures consist of a viscous gel using hydrox-ethyl cellulose (HEC) gelling agent and saline solution (see Table 3.1). Preservation with a bactericide is added and visual inspection is made to make sure air bubbles are not trapped during the mixing process. The mixture is calibrated to obtain proper dielectric constant (permittivity) and conductivity of the desired tissue. The mixture characterizations used for the brain and muscle tissue simulating liquids are according to the data by C. Gabriel and G. Harts grove.

Ingredients (% by weight)	Frequency (MHz)	
	2 450 – 2 700	
Tissue Type	Head	Body
Water	71.88	73.2
Salt (NaCl)	0.16	0.1
Sugar	0.0	0.0
HEC	0.0	0.0
Bactericide	0.0	0.0
Triton X-100	19.97	0.0
DGBE	7.99	26.7
Diethylene glycol hexyl ether	-	-

Salt:	99 % Pure Sodium Chloride	Sugar:	98 % Pure Sucrose
Water:	De-ionized, 16M resistivity	HEC:	Hydroxyethyl Cellulose
DGBE:	99 % Di(ethylene glycol) butyl ether,[2-(2-butoxyethoxy) ethanol]		
Triton X-100(ultra-pure):	Polyethylene glycol mono[4-(1,1,3,3-tetramethylbutyl)phenyl] ether		

Composition of the Tissue Equivalent Matter

Attachment 6. – SAR SYSTEM VALIDATION

Per FCC KCB 865664 D02v01r02, SAR system validation status should be document to confirm measurement accuracy. The SAR systems (including SAR probes, system components and software versions) used for this device were validated against its performance specifications prior to the SAR measurements. Reference dipoles were used with the required tissue- equivalent media for system validation, according to the procedures outlined in IEEE 1528-2013 and FCC KDB 865664 D01v01r04. Since SAR probe calibrations are frequency dependent, each probe calibration point was validated at a frequency within the valid frequency range of the probe calibration point, using the system that normally operates with the probe for routine SAR measurements and according to the required tissue-equivalent media.

A tabulated summary of the system validation status including the validation date(s), measurement frequencies, SAR probes and tissue dielectric parameters has been included.

SAR System No.	Probe	Probe Type	Probe Calibration Point		Dipole	Date	Dielectric Parameters		CW Validation			Modulation Validation		
							Measured Permittivity	Measured Conductivity	Sensitivity	Probe Linearity	Probe Isotropy	MOD. Type	Duty Factor	PAR
1	3863	EX3DV4	Head	2450	965	2018-05-15	39.4	1.81	PASS	PASS	PASS	OFDM	N/A	PASS

SAR System Validation Summary 1g

SAR System No.	Probe	Probe Type	Probe Calibration Point		Dipole	Date	Dielectric Parameters		CW Validation			Modulation Validation		
							Measured Permittivity	Measured Conductivity	Sensitivity	Probe Linearity	Probe Isotropy	MOD. Type	Duty Factor	PAR
5	3903	EX3DV4	Body	2450	965	2018-02-26	52.8	1.94	PASS	PASS	PASS	OFDM	N/A	PASS

SAR System Validation Summary – Extremity SAR Considerations

Note;

All measurement were performed using probes calibrated for CW signal only. Modulations in the table above represent test configurations for which the measurement system has been validated per FCC KDB Publication 865664 D01v01r04. SAR system were validated for modulated signals with a periodic duty cycle, such as GMSK, or with a high peak to average ratio (>5 dB), such as OFDM according to KDB 865664 D01v01r04.