

**MEASUREMENT REPORT**
LTE**Applicant Name:**LG Electronics MobileComm U.S.A
1000 Sylvan Avenue
Englewood Cliffs, NJ 07632
United States**Date of Testing:**

3/14 - 5/17/2018

Test Site/Location:

PCTEST Lab. Columbia, MD, USA

Test Report Serial No.:

1M1803140041-03-R3.ZNF

FCC ID:**ZNFX410AS****APPLICANT:****LG Electronics MobileComm U.S.A****Application Type:**

Certification

Model:

LM-X410AS

Additional Model(s):

LMX410AS, X410AS, LM-X410ASR, LMX410ASR, X410ASR

EUT Type:

Portable Handset

Classification:

PCS Licensed Transmitter Held to Ear (PCE)

FCC Rule Part(s):

22, 24, & 27

Test Procedure(s):

ANSI C63.26-2015, ANSI/TIA-603-E-2016, KDB 971168 D01 v03

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in §2.947. Test results reported herein relate only to the item(s) tested.

This revised Test Report (S/N: 1M1803140041-03-R3.ZNF) supersedes and replaces the previously issued test reports (S/N: 1M1803140041-03.ZNF & 1M1803140041-03-R1.ZNF & 1M1803140041-03-R2.ZNF) on the same subject device for the same type of testing as indicated. Please discard or destroy the previously issued test report(s) and dispose of it accordingly.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.


Randy Ortanez
President

FCC ID: ZNFX410AS	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1803140041-03-R3.ZNF	Test Dates: 3/14 - 5/17/2018	EUT Type: Portable Handset	Page 1 of 123

TABLE OF CONTENTS


1.0	INTRODUCTION	4
1.1	Scope	4
1.2	PCTEST Test Location	4
1.3	Test Facility / Accreditations	4
2.0	PRODUCT INFORMATION	5
2.1	Equipment Description	5
2.2	Device Capabilities	5
2.3	Test Configuration	5
2.4	EMI Suppression Device(s)/Modifications	5
3.0	DESCRIPTION OF TESTS	6
3.1	Measurement Procedure	6
3.2	Block A Frequency Range	6
3.3	Cellular - Base Frequency Blocks	6
3.4	Cellular - Mobile Frequency Blocks	6
3.5	PCS - Base Frequency Blocks	7
3.6	PCS - Mobile Frequency Blocks	7
3.7	AWS - Base Frequency Blocks	7
3.8	AWS - Mobile Frequency Blocks	7
3.9	Radiated Power and Radiated Spurious Emissions	8
4.0	MEASUREMENT UNCERTAINTY	9
5.0	TEST EQUIPMENT CALIBRATION DATA	10
6.0	SAMPLE CALCULATIONS	11
7.0	TEST RESULTS	12
7.1	Summary	12
7.2	Occupied Bandwidth	14
7.3	Spurious and Harmonic Emissions at Antenna Terminal	35
7.4	Band Edge Emissions at Antenna Terminal	56
7.5	Peak-Average Ratio	91
7.6	Radiated Power (ERP/EIRP)	98
7.7	Radiated Spurious Emissions Measurements	104
7.8	Frequency Stability / Temperature Variation	114
8.0	CONCLUSION	123

FCC ID: ZNFX410AS		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1803140041-03-R3.ZNF	Test Dates: 3/14 - 5/17/2018	EUT Type: Portable Handset	Page 2 of 123	



MEASUREMENT REPORT

Part 22, 24, & 27



Mode	FCC Rule Part	Tx Frequency (MHz)	ERP		EIRP		Emission Designator	Modulation
			Max. Power (W)	Max. Power (dBm)	Max. Power (W)	Max. Power (dBm)		
LTE Band 12	27	699.7 - 715.3	0.090	19.55	0.148	21.70	1M10G7D	QPSK
LTE Band 12	27	699.7 - 715.3	0.057	17.56	0.093	19.71	1M10W7D	16QAM
LTE Band 12	27	700.5 - 714.5	0.097	19.85	0.158	22.00	2M71G7D	QPSK
LTE Band 12	27	700.5 - 714.5	0.062	17.93	0.102	20.08	2M71W7D	16QAM
LTE Band 12	27	701.5 - 713.5	0.083	19.18	0.136	21.33	4M54G7D	QPSK
LTE Band 12	27	701.5 - 713.5	0.060	17.82	0.099	19.97	4M52W7D	16QAM
LTE Band 12	27	704 - 711	0.082	19.14	0.134	21.29	8M99G7D	QPSK
LTE Band 12	27	704 - 711	0.072	18.60	0.119	20.75	9M01W7D	16QAM
LTE Band 5	22H	824.7 - 848.3	0.223	23.49	0.366	25.64	1M11G7D	QPSK
LTE Band 5	22H	824.7 - 848.3	0.180	22.56	0.296	24.71	1M11W7D	16QAM
LTE Band 5	22H	825.5 - 847.5	0.230	23.61	0.377	25.76	2M71G7D	QPSK
LTE Band 5	22H	825.5 - 847.5	0.186	22.68	0.304	24.83	2M71W7D	16QAM
LTE Band 5	22H	826.5 - 846.5	0.240	23.81	0.394	25.96	4M55G7D	QPSK
LTE Band 5	22H	826.5 - 846.5	0.206	23.15	0.339	25.30	4M52W7D	16QAM
LTE Band 5	22H	829 - 844	0.223	23.49	0.366	25.64	9M06G7D	QPSK
LTE Band 5	22H	829 - 844	0.193	22.86	0.317	25.01	9M03W7D	16QAM

EUT Overview (<1GHz)

Mode	FCC Rule Part	Tx Frequency (MHz)	EIRP		Emission Designator	Modulation
			Max. Power (W)	Max. Power (dBm)		
LTE Band 4	27	1710.7 - 1754.3	0.142	21.52	1M10G7D	QPSK
LTE Band 4	27	1710.7 - 1754.3	0.118	20.73	1M09W7D	16QAM
LTE Band 4	27	1711.5 - 1753.5	0.146	21.64	2M72G7D	QPSK
LTE Band 4	27	1711.5 - 1753.5	0.119	20.76	2M71W7D	16QAM
LTE Band 4	27	1712.5 - 1752.5	0.145	21.61	4M57G7D	QPSK
LTE Band 4	27	1712.5 - 1752.5	0.122	20.85	4M52W7D	16QAM
LTE Band 4	27	1715 - 1750	0.146	21.65	9M02G7D	QPSK
LTE Band 4	27	1715 - 1750	0.120	20.79	9M05W7D	16QAM
LTE Band 4	27	1717.5 - 1747.5	0.147	21.69	13M5G7D	QPSK
LTE Band 4	27	1717.5 - 1747.5	0.124	20.94	13M5W7D	16QAM
LTE Band 4	27	1720 - 1745	0.153	21.84	18M0G7D	QPSK
LTE Band 4	27	1720 - 1745	0.106	20.24	17M9W7D	16QAM
LTE Band 2	24E	1850.7 - 1909.3	0.197	22.94	1M10G7D	QPSK
LTE Band 2	24E	1850.7 - 1909.3	0.152	21.81	1M10W7D	16QAM
LTE Band 2	24E	1851.5 - 1908.5	0.200	23.01	2M72G7D	QPSK
LTE Band 2	24E	1851.5 - 1908.5	0.141	21.50	2M72W7D	16QAM
LTE Band 2	24E	1852.5 - 1907.5	0.221	23.45	4M59G7D	QPSK
LTE Band 2	24E	1852.5 - 1907.5	0.194	22.89	4M54W7D	16QAM
LTE Band 2	24E	1855 - 1905	0.207	23.16	9M02G7D	QPSK
LTE Band 2	24E	1855 - 1905	0.146	21.65	9M03W7D	16QAM
LTE Band 2	24E	1857.5 - 1902.5	0.203	23.07	13M5G7D	QPSK
LTE Band 2	24E	1857.5 - 1902.5	0.154	21.88	13M5W7D	16QAM
LTE Band 2	24E	1860 - 1900	0.195	22.91	18M0G7D	QPSK
LTE Band 2	24E	1860 - 1900	0.186	22.69	18M0W7D	16QAM

EUT Overview (>1GHz)

FCC ID: ZNFX410AS		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1803140041-03-R3-ZNF	Test Dates: 3/14 - 5/17/2018	EUT Type: Portable Handset		Page 3 of 123

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.

1.2 PCTEST Test Location

These measurement tests were conducted at the PCTEST Engineering Laboratory, Inc. facility located at 7185 Oakland Mills Road, Columbia, MD 21046. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014.

1.3 Test Facility / Accreditations

Measurements were performed at PCTEST Engineering Lab located in Columbia, MD 21046, U.S.A.

- PCTEST is an ISO 17025-2005 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.01 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for and Innovation, Science, and Economic Development Canada rules.
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of Rules and ISSED Standards (RSS).
- PCTEST facility is a registered (2451B) test laboratory with the site description on file with ISSED.

FCC ID: ZNFX410AS		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1803140041-03-R3.ZNF	Test Dates: 3/14 - 5/17/2018	EUT Type: Portable Handset	Page 4 of 123	

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **LG Portable Handset FCC ID: ZNFX410AS**. The test data contained in this report pertains only to the emissions due to the EUT's LTE function.

Test Device Serial No.: 1223, 1413, 1231

2.2 Device Capabilities

This device contains the following capabilities:

850/1900 GSM/GPRS/EDGE, 850/1700/1900 WCDMA/HSPA, Multi-band LTE, 802.11b/g/n WLAN, 802.11a/n/ac UNII, Bluetooth (1x, EDR, LE)

2.3 Test Configuration

The EUT was tested per the guidance of ANSI/TIA-603-E-2016 and KDB 971168 D01 v03. See Section 7.0 of this test report for a description of the radiated and antenna port conducted emissions tests.

2.4 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

FCC ID: ZNFX410AS		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1803140041-03-R3.ZNF	Test Dates: 3/14 - 5/17/2018	EUT Type: Portable Handset	Page 5 of 123	

3.0 DESCRIPTION OF TESTS

3.1 Measurement Procedure


The measurement procedures described in the document titled "Land Mobile FM or PM – Communications Equipment – Measurements and Performance Standards" (ANSI/TIA-603-E-2016) and "Procedures for Compliance Measurement of the Fundamental Emission Power of Licensed Wideband (> 1 MHz) Digital Transmission Systems" (KDB 971168 D01 v03) were used in the measurement of the EUT.

3.2 Block A Frequency Range

698-746 MHz band. The following frequencies are available for licensing pursuant to this part in the 698-746 MHz band: (1) Three paired channel blocks of 12 megahertz each are available for assignment as follows:

Block A: 698-704 MHz and 728-734 MHz;
Block B: 704-710 MHz and 734-740 MHz; and
Block C: 710-716 MHz and 740-746 MHz.


3.3 Cellular - Base Frequency Blocks

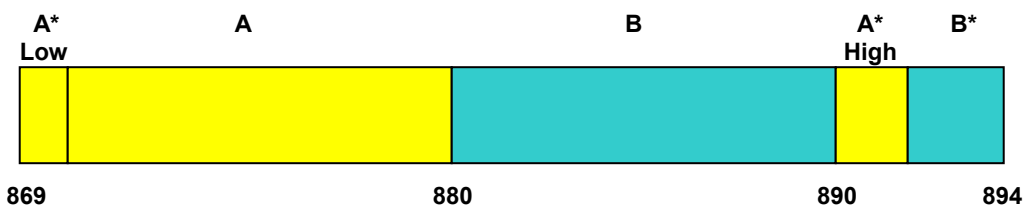

BLOCK 1: 869 – 880 MHz (A* Low + A)
BLOCK 2: 880 – 890 MHz (B)

BLOCK 3: 890 – 891.5 MHz (A* High)
BLOCK 4: 891.5 – 894 MHz (B*)

3.4 Cellular - Mobile Frequency Blocks

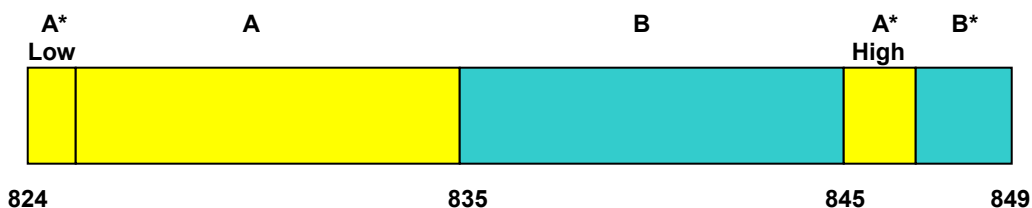


BLOCK 1: 824 – 835 MHz (A* Low + A)
BLOCK 2: 835 – 845 MHz (B)


BLOCK 3: 845 – 846.5 MHz (A* High)
BLOCK 4: 846.5 – 849 MHz (B*)

FCC ID: ZNFX410AS	 MEASUREMENT REPORT (CERTIFICATION) 		Approved by: Quality Manager
Test Report S/N: 1M1803140041-03-R3.ZNF	Test Dates: 3/14 - 5/17/2018	EUT Type: Portable Handset	Page 6 of 123


3.5 PCS - Base Frequency Blocks

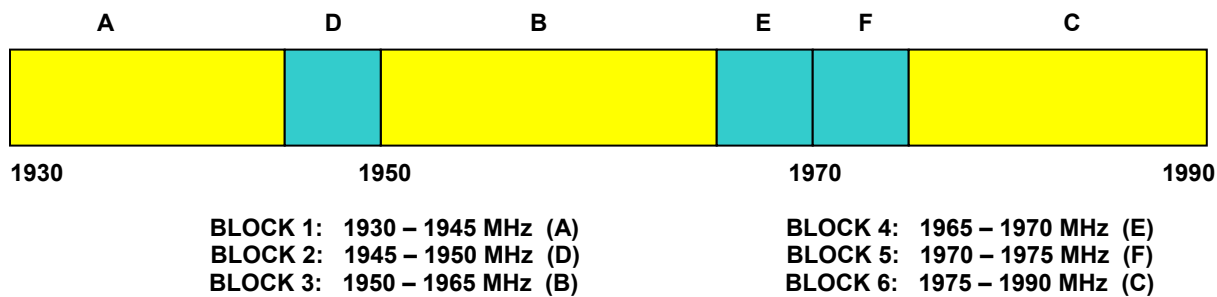


3.6 PCS - Mobile Frequency Blocks

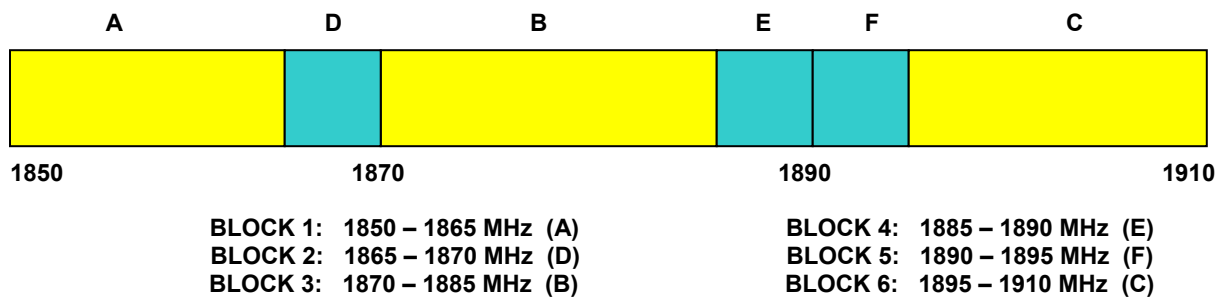

3.7 AWS - Base Frequency Blocks

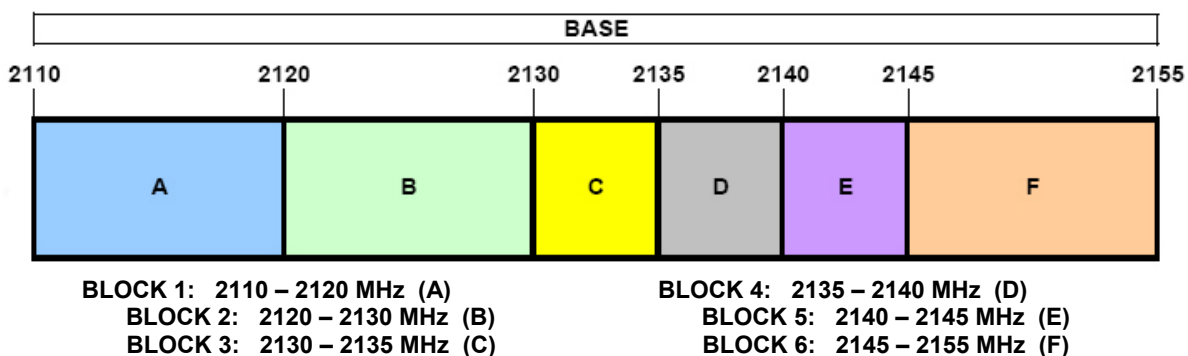

3.8 AWS - Mobile Frequency Blocks

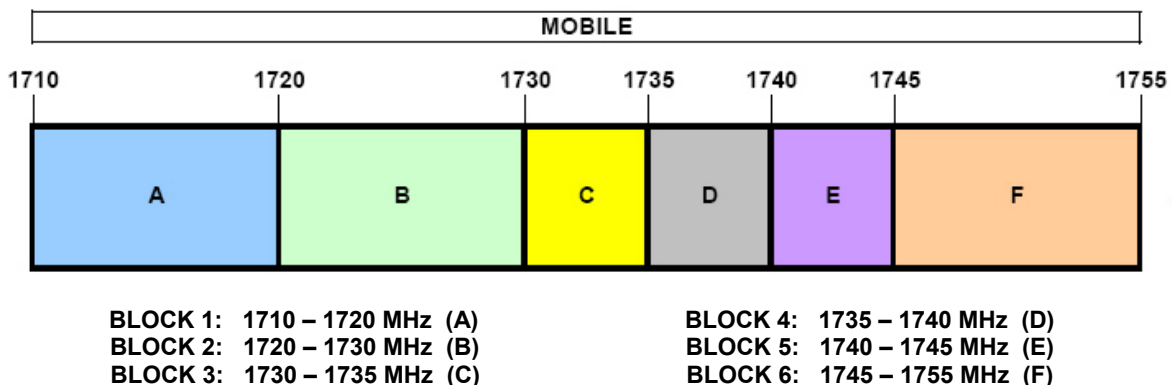

FCC ID: ZNFX410AS		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1803140041-03-R3-ZNF	Test Dates: 3/14 - 5/17/2018	EUT Type: Portable Handset	Page 7 of 123	

3.9 Radiated Power and Radiated Spurious Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. For measurements below 1GHz, the absorbers are removed. A raised turntable is used for radiated measurement. The turn table is a continuously rotatable, remote-controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm tall test table made of Styrodur is placed on top of the turn table. A Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

The equipment under test was transmitting while connected to its integral antenna and is placed on a turntable 3 meters from the receive antenna. The receive antenna height is adjusted between 1 and 4 meter height, the turntable is rotated through 360 degrees, and the EUT is manipulated through all orthogonal planes representative of its typical use to achieve the highest reading on the receive spectrum analyzer. Radiated power levels are also investigated with the receive antenna horizontally and vertically polarized. The maximized power level is recorded using the spectrum analyzer "Channel Power" function with the integration band set to the emissions' occupied bandwidth, a RMS detector, RBW = 100kHz, VBW = 300kHz, and a 1 second sweep time over a minimum of 10 sweeps, per the guidelines of KDB 971168 D01 v03.

Per the guidance of ANSI/TIA-603-E-2016, a half-wave dipole is then substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator with the level of the signal generator being adjusted to obtain the same receive spectrum analyzer level previously recorded from the spurious emission from the EUT. The power of the emission is calculated using the following formula:

$$P_d \text{ [dBm]} = P_g \text{ [dBm]} - \text{cable loss [dB]} + \text{antenna gain [dBd/dBi]}$$

Where, P_d is the dipole equivalent power, P_g is the generator output into the substitution antenna, and the antenna gain is the gain of the substitute antenna used relative to either a half-wave dipole (dBd) or an isotropic source (dBi). The substitute level is equal to $P_g \text{ [dBm]} - \text{cable loss [dB]}$.

The calculated P_d levels are then compared to the absolute spurious emission limit of -13dBm which is equivalent to the required minimum attenuation of $43 + 10\log_{10}(\text{Power [Watts]})$. **MEASUREMENT UNCERTAINTY**

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4-2014. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

FCC ID: ZNFX410AS		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1803140041-03-R3.ZNF	Test Dates: 3/14 - 5/17/2018	EUT Type: Portable Handset	Page 8 of 123	

4.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4-2014. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty ($\pm$ dB)
Conducted Bench Top Measurements	1.13
Radiated Disturbance (<1GHz)	4.98
Radiated Disturbance (>1GHz)	5.07
Radiated Disturbance (>18GHz)	5.09

FCC ID: ZNFX410AS		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1803140041-03-R3.ZNF	Test Dates: 3/14 - 5/17/2018	EUT Type: Portable Handset		Page 9 of 123

5.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
-	RE1	Radiated Emissions Cable Set (UHF/EHF)	6/21/2017	Annual	6/21/2018	RE1
-	LTx3	Licensed Transmitter Cable Set	8/10/2017	Annual	8/10/2018	LTx3
Agilent	N9020A	MXA Signal Analyzer	1/24/2018	Annual	1/24/2019	US46470561
Agilent	N9038A	MXE EMI Receiver	4/26/2017	Annual	4/26/2018	MY51210133
Agilent	N9030A	PXA Signal Analyzer (44GHz)	3/27/2017	Annual	3/27/2018	MY52350166
Com-Power	AL-130	9kHz - 30MHz Loop Antenna	10/10/2017	Biennial	10/10/2019	121034
Com-Power	PAM-103	Pre-Amplifier (1-1000MHz)	6/21/2017	Annual	6/21/2018	441119
EMCO	3160-09	Small Horn (18 - 26.5GHz)	8/23/2016	Biennial	8/23/2018	135427
Espec	ESX-2CA	Environmental Chamber	3/28/2018	Annual	3/28/2019	17620
ETS Lindgren	3117	1-18 GHz DRG Horn (Medium)	12/1/2016	Biennial	12/1/2018	125518
ETS Lindgren	3164-08	Quad Ridge Horn Antenna	12/5/2016	Biennial	12/5/2018	128338
Mini Circuits	TVA-11-422	RF Power Amp	N/A			QA1317001
Mini Circuits	PWR-SEN-4GHS	USB Power Sensor	3/30/2018	Annual	3/30/2019	11401010036
Mini-Circuits	SSG-4000HP	Synthesized Signal Generator	N/A			11403100002
Rohde & Schwarz	CMW500	Radio Communication Tester	N/A			100976
Rohde & Schwarz	TS-PR26	18-26.5 GHz Pre-Amplifier	5/11/2017	Annual	5/11/2018	100040
Rohde & Schwarz	FSW67	Signal / Spectrum Analyzer	8/11/2017	Annual	8/11/2018	103200
Rohde & Schwarz	SFUNIT-Rx	Shielded Filter Unit	7/3/2017	Annual	7/3/2018	102133

Table 5-1. Test Equipment

Notes:

- For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.
- Equipment with a calibration date of "N/A" shown in this list was not used to make direct calibrated measurements.

FCC ID: ZNFX410AS		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1803140041-03-R3.ZNF	Test Dates: 3/14 - 5/17/2018	EUT Type: Portable Handset	Page 10 of 123	

6.0 SAMPLE CALCULATIONS

Emission Designator

QPSK Modulation

Emission Designator = 8M62G7D

LTE BW = 8.62 MHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Data transmission, telemetry, telecommand

QAM Modulation

Emission Designator = 8M45W7D

LTE BW = 8.45 MHz

W = Amplitude/Angle Modulated

7 = Quantized/Digital Info

D = Data transmission, telemetry, telecommand

Spurious Radiated Emission – LTE Band

Example: Middle Channel LTE Mode 2nd Harmonic (1564 MHz)

The average spectrum analyzer reading at 3 meters with the EUT on the turntable was –81.0 dBm. The gain of the substituted antenna is 8.1 dBi. The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of –81.0 dBm on the spectrum analyzer. The loss of the cable between the signal generator and the terminals of the substituted antenna is 2.0 dB at 1564 MHz. So 6.1 dB is added to the signal generator reading of –30.9 dBm yielding –24.80 dBm. The fundamental EIRP was 25.501 dBm so this harmonic was 25.501 dBm – (–24.80).

FCC ID: ZNFX410AS		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1803140041-03-R3.ZNF	Test Dates: 3/14 - 5/17/2018	EUT Type: Portable Handset		Page 11 of 123

7.0 TEST RESULTS

7.1 Summary

Company Name: LG Electronics MobileComm U.S.A
 FCC ID: ZNFX410AS
 Classification: PCS Licensed Transmitter Held to Ear (PCE)
 Mode(s): LTE

Part Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
2.1049	Occupied Bandwidth	N/A	CONDUCTED	PASS	Section 7.2
2.1051 2.917(a) 24.238(a) 27.53(g) 27.53(h)	Out of Band Emissions	> 43 + 10log ₁₀ (P[Watts]) at Band Edge and for all out-of-band emissions		PASS	Section 7.3, 7.4
24.232(d)	Peak-Average Ratio	< 13 dB		PASS	Section 7.5
2.1046	Transmitter Conducted Output Power	N/A		PASS	See RF Exposure Report
2.1055 22.355 24.235 27.54	Frequency Stability	< 2.5 ppm (Part 22) and fundamental emissions stay within authorized frequency block (Part 24, 27)		PASS	Section 7.8

Table 7-1. Summary of Conducted Test Results

FCC ID: ZNFX410AS		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1803140041-03-R3-ZNF	Test Dates: 3/14 - 5/17/2018	EUT Type: Portable Handset	Page 12 of 123	

Part Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
22.913(a)(5)	Effective Radiated Power / Equivalent Isotropic Radiated Power (Band 5)	< 7 Watts max. ERP	RADIATED	PASS	Section 7.6
27.50(c)(10)	Effective Radiated Power / Equivalent Isotropic Radiated Power (Band 12)	< 3 Watts max. ERP		PASS	Section 7.6
24.232(c)	Equivalent Isotropic Radiated Power (Band 2)	< 2 Watts max. EIRP		PASS	Section 7.6
27.50(d)(4)	Equivalent Isotropic Radiated Power (Band 4)	< 1 Watts max. EIRP		PASS	Section 7.6
2.1053 22.917(a) 24.238(a) 27.53(g) 27.53(h)	Undesirable Emissions	> 43 + 10log ₁₀ (P[Watts]) for all out-of-band emissions		PASS	Section 7.7

Table 7-2. Summary of Radiated Test Results

Notes:

- 1) All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots (Sections 7.2, 7.3, 7.4, 7.5) were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables, directional couplers, and attenuators used as part of the system to maintain a link between the call box and the EUT at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables, attenuators, and couplers.
- 4) For conducted spurious emissions, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is PCTEST "LTE Automation," Version 4.8.
- 5) For operation <1GHz, the EIRP limits in the table above are referenced to the specifications written in the relevant Radio Standards Specifications for Innovation, Science, and Economic Development Canada.

FCC ID: ZNFX410AS		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1803140041-03-R3.ZNF	Test Dates: 3/14 - 5/17/2018	EUT Type: Portable Handset	Page 13 of 123	

7.2 Occupied Bandwidth

Test Overview

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Procedure Used

KDB 971168 D01 v03 – Section 4.2

Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5% of the expected OBW
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5% of the 99% occupied bandwidth observed in Step 7

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

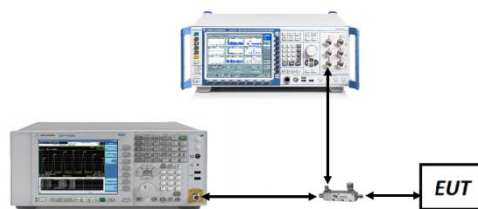


Figure 7-1. Test Instrument & Measurement Setup

Test Notes


For LTE B2, OBW measurements have been verified to be correct.

FCC ID: ZNFX410AS	 MEASUREMENT REPORT (CERTIFICATION) 		Approved by: Quality Manager
Test Report S/N: 1M1803140041-03-R3.ZNF	Test Dates: 3/14 - 5/17/2018	EUT Type: Portable Handset	Page 14 of 123

Band 12




Plot 7-1. Occupied Bandwidth Plot (Band 12 - 1.4MHz QPSK - Full RB Configuration)

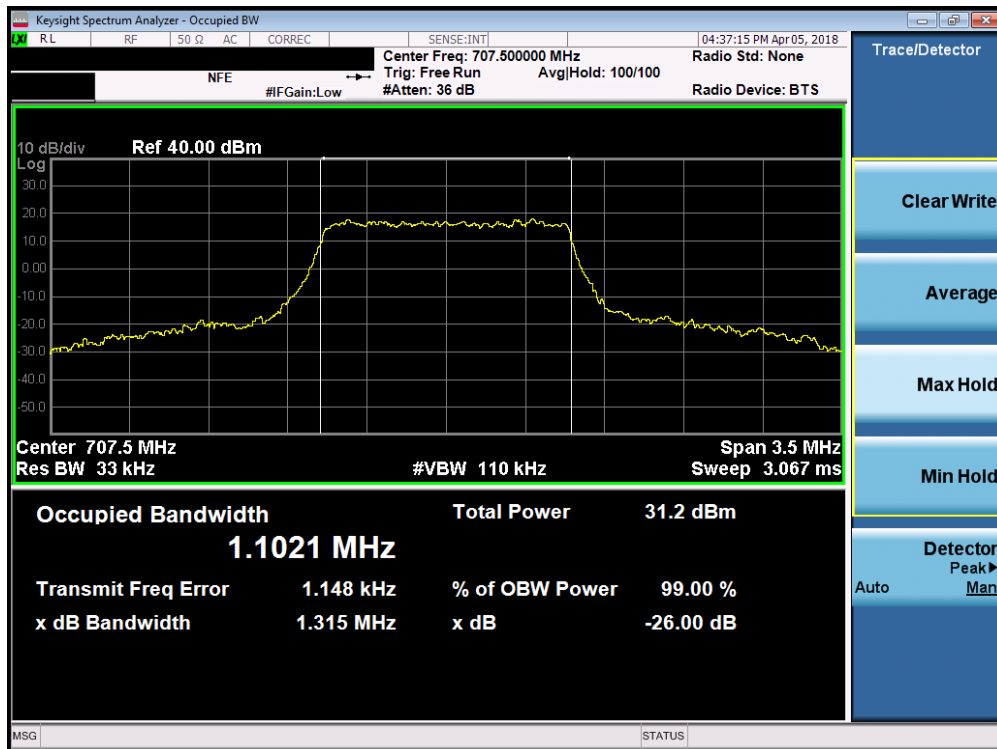


Plot 7-2. Occupied Bandwidth Plot (Band 12 - 1.4MHz 16-QAM - Full RB Configuration)

FCC ID: ZNFX410AS	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1803140041-03-R3.ZNF	Test Dates: 3/14 - 5/17/2018	EUT Type: Portable Handset	Page 15 of 123

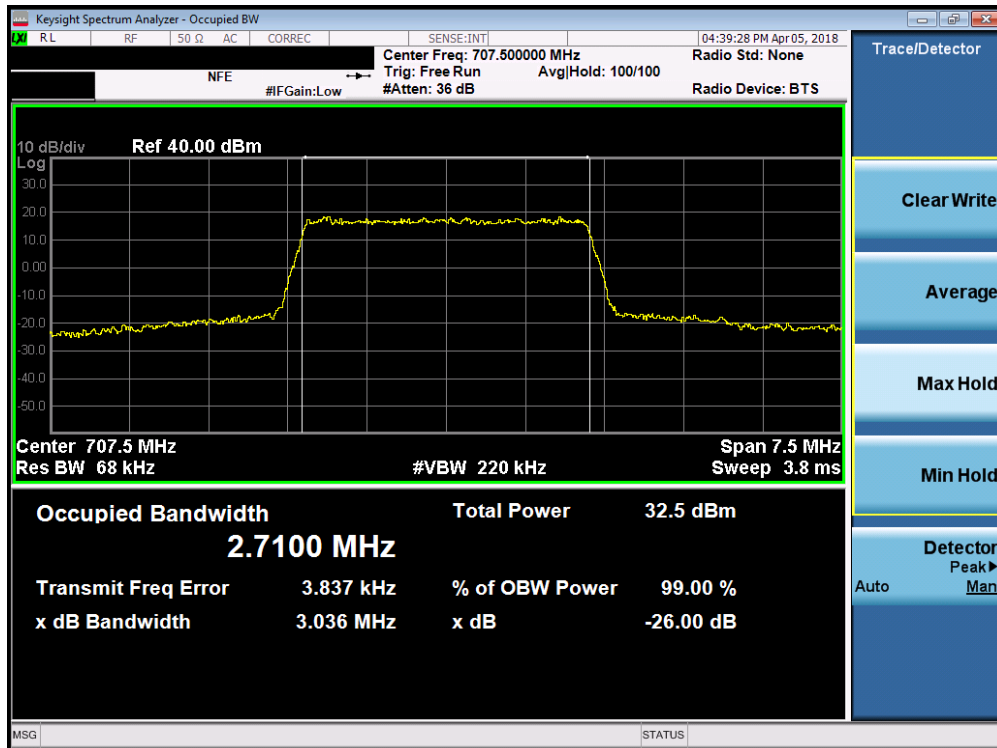


Plot 7-3. Occupied Bandwidth Plot (Band 12 - 3.0MHz QPSK - Full RB Configuration)

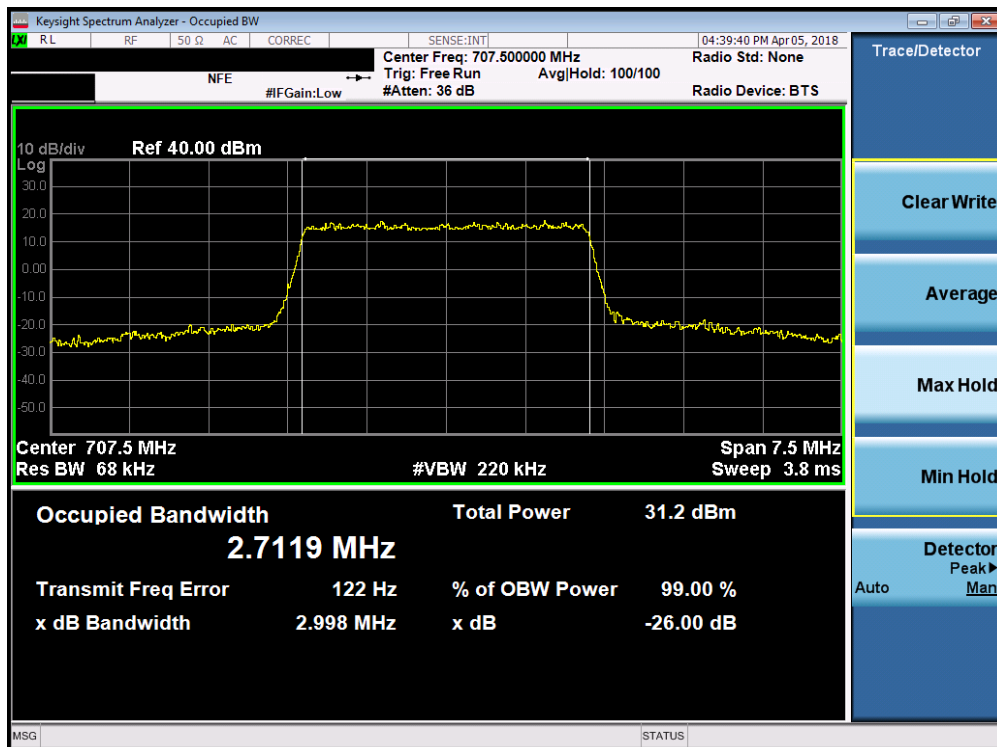


Plot 7-4. Occupied Bandwidth Plot (Band 12 - 3.0MHz 16-QAM - Full RB Configuration)

FCC ID: ZNFX410AS	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1803140041-03-R3.ZNF	Test Dates: 3/14 - 5/17/2018	EUT Type: Portable Handset		Page 16 of 123

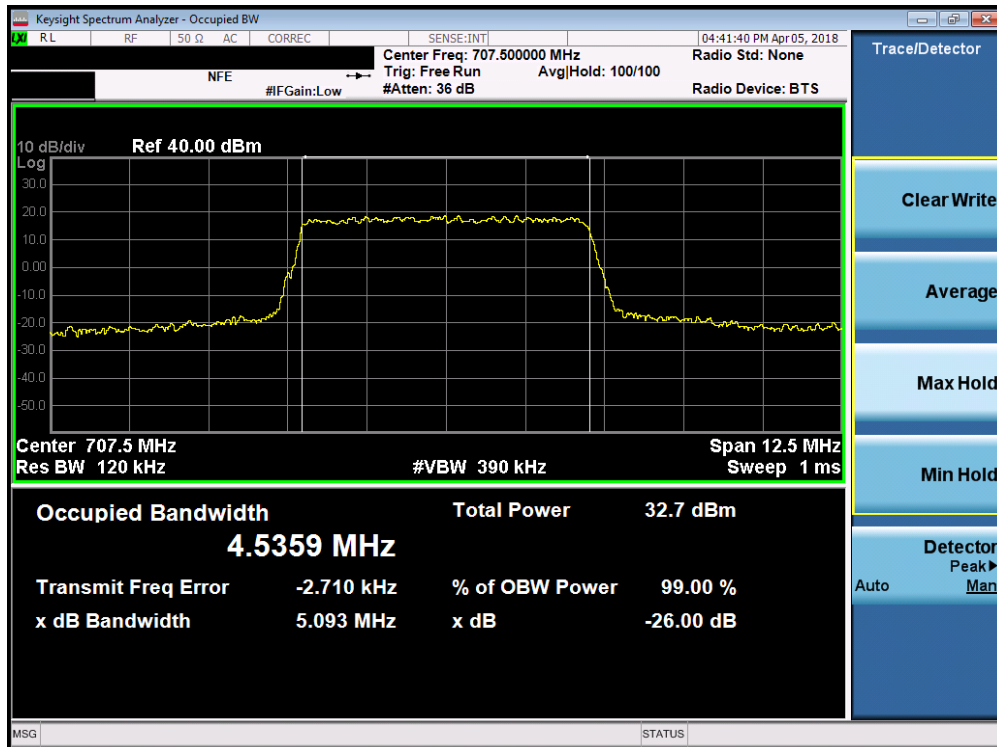


Plot 7-5. Occupied Bandwidth Plot (Band 12 - 5.0MHz QPSK - Full RB Configuration)

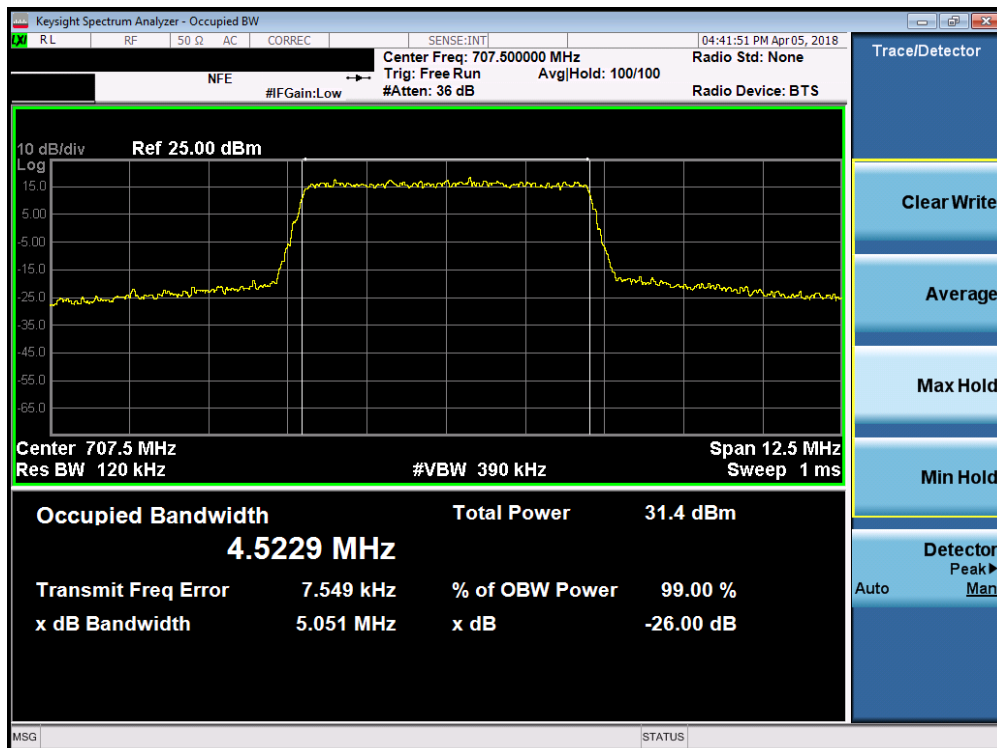


Plot 7-6. Occupied Bandwidth Plot (Band 12 - 5.0MHz 16-QAM - Full RB Configuration)

FCC ID: ZNFX410AS	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1803140041-03-R3-ZNF	Test Dates: 3/14 - 5/17/2018	EUT Type: Portable Handset		Page 17 of 123

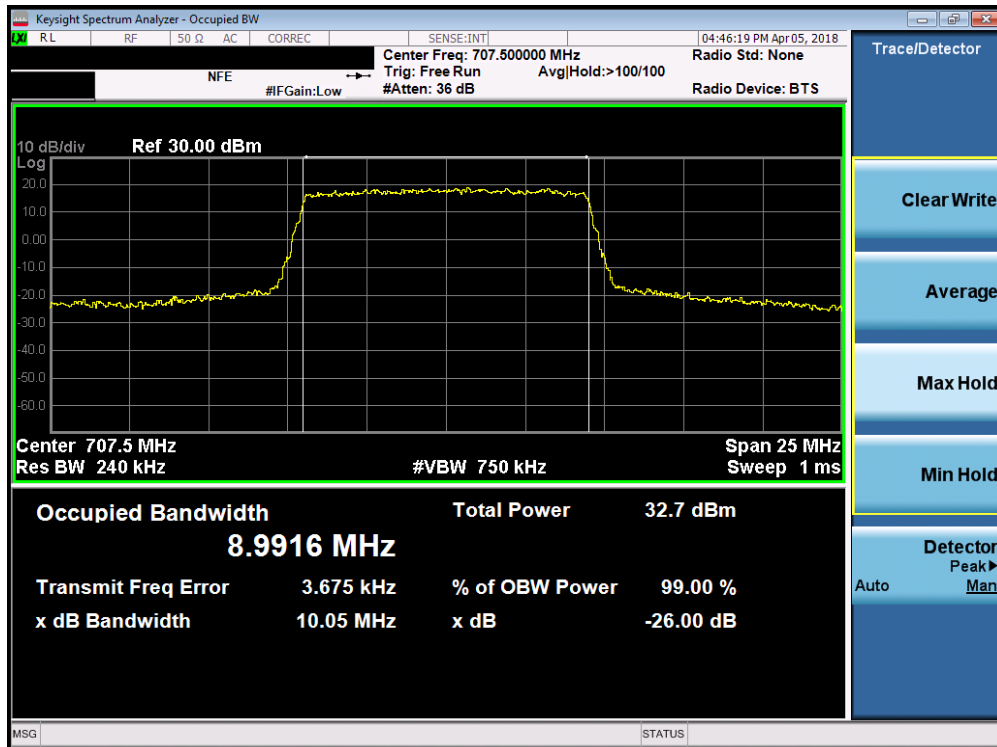


Plot 7-7. Occupied Bandwidth Plot (Band 12 - 10.0MHz QPSK - Full RB Configuration)

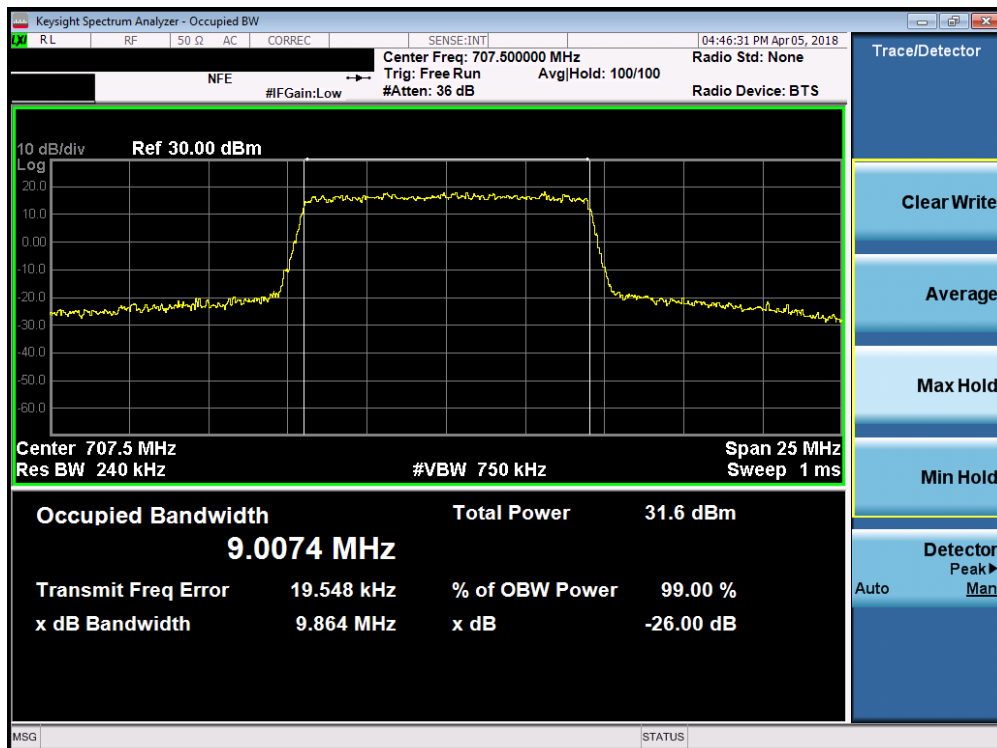


Plot 7-8. Occupied Bandwidth Plot (Band 12 - 10.0MHz 16-QAM - Full RB Configuration)

FCC ID: ZNFX410AS	MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M1803140041-03-R3-ZNF	Test Dates: 3/14 - 5/17/2018	EUT Type: Portable Handset		Page 18 of 123

Band 5

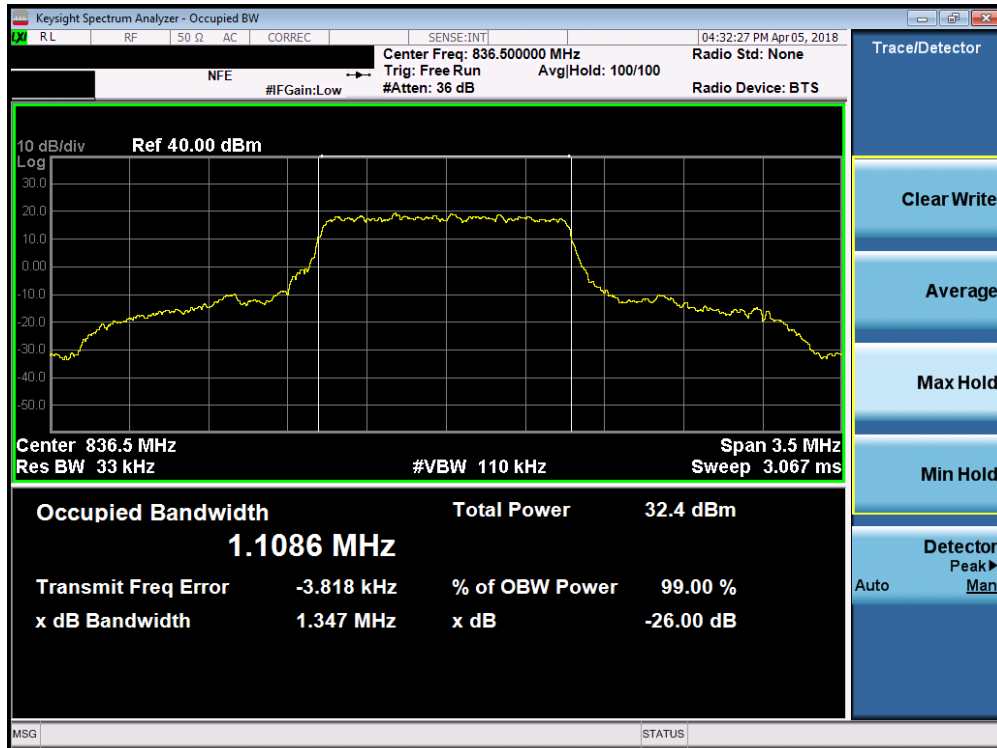


Plot 7-9. Occupied Bandwidth Plot (Band 5 - 1.4MHz QPSK - Full RB Configuration)

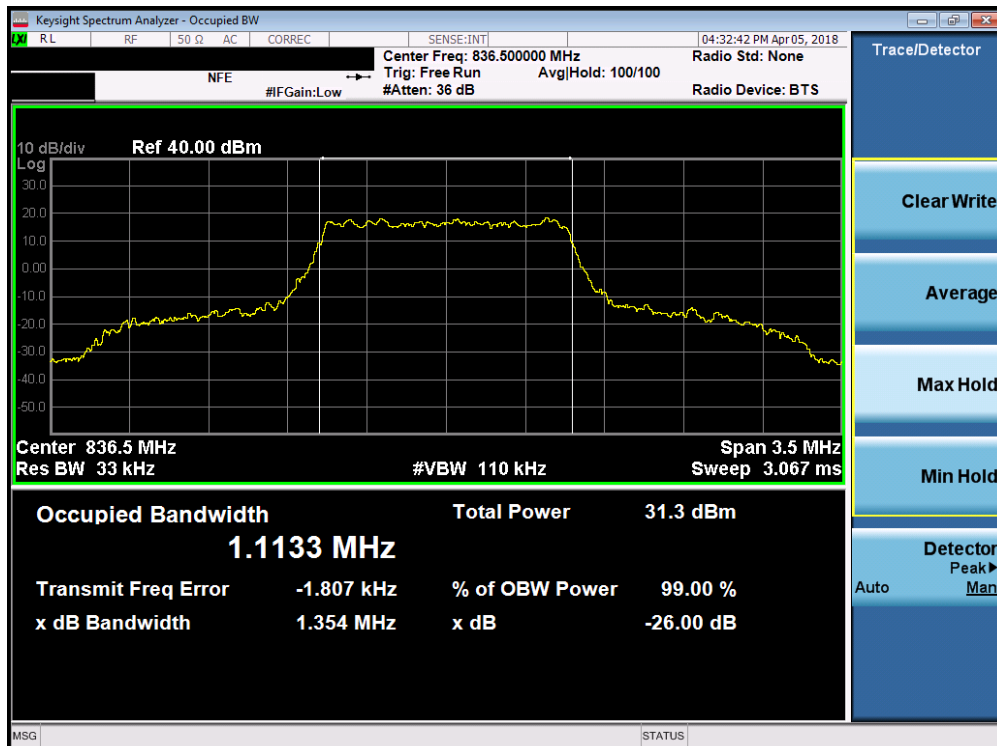


Plot 7-10. Occupied Bandwidth Plot (Band 5 - 1.4MHz 16-QAM - Full RB Configuration)

FCC ID: ZNFX410AS	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1803140041-03-R3-ZNF	Test Dates: 3/14 - 5/17/2018	EUT Type: Portable Handset		Page 19 of 123

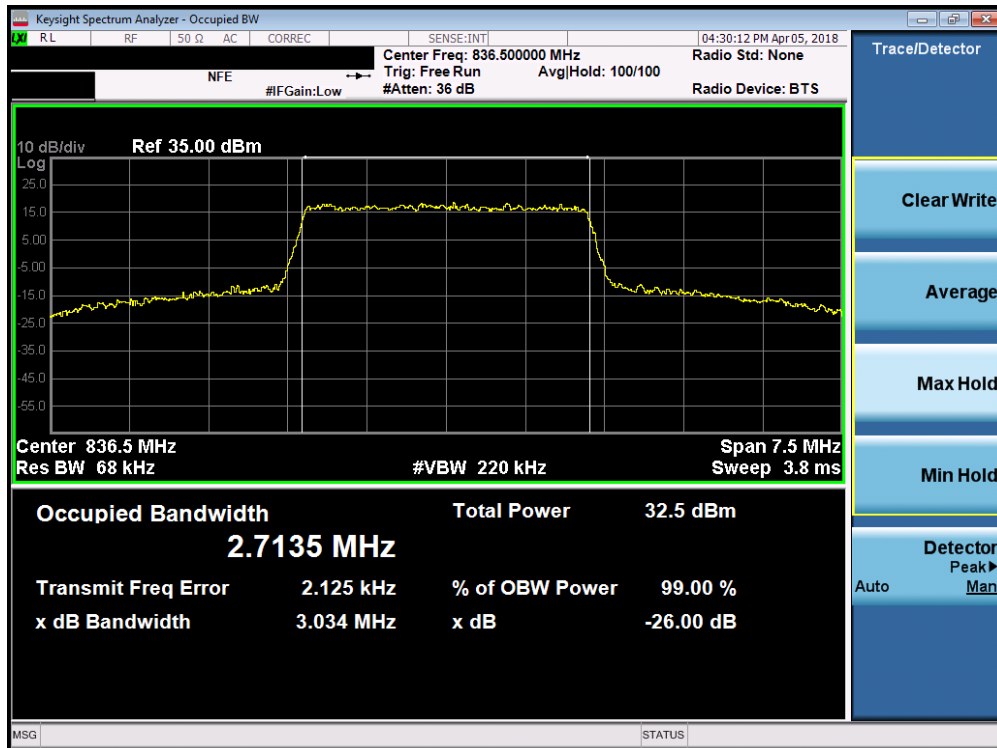


Plot 7-11. Occupied Bandwidth Plot (Band 5 - 3.0MHz QPSK - Full RB Configuration)

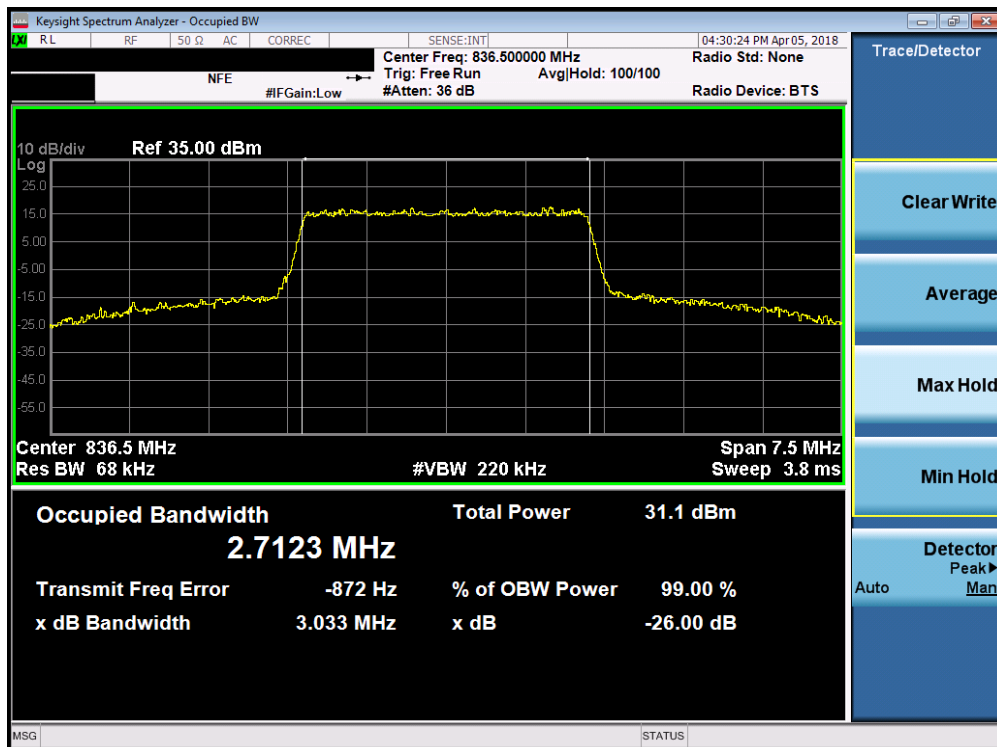


Plot 7-12. Occupied Bandwidth Plot (Band 5 - 3.0MHz 16-QAM - Full RB Configuration)

FCC ID: ZNFX410AS	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1803140041-03-R3.ZNF	Test Dates: 3/14 - 5/17/2018	EUT Type: Portable Handset		Page 20 of 123

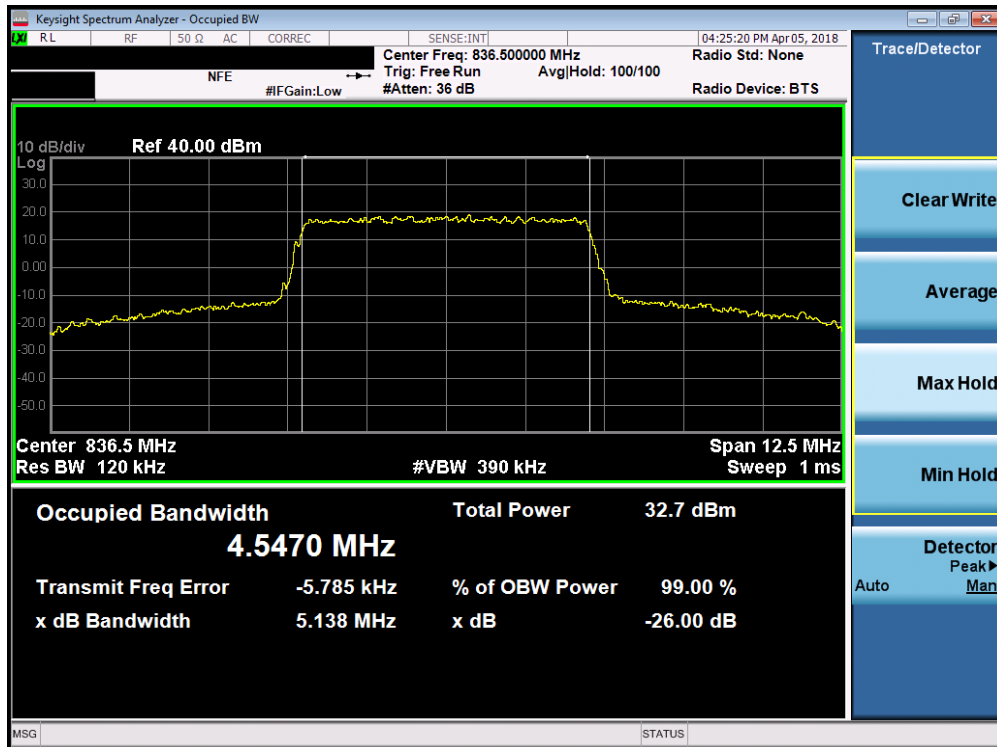


Plot 7-13. Occupied Bandwidth Plot (Band 5 - 5.0MHz QPSK - Full RB Configuration)

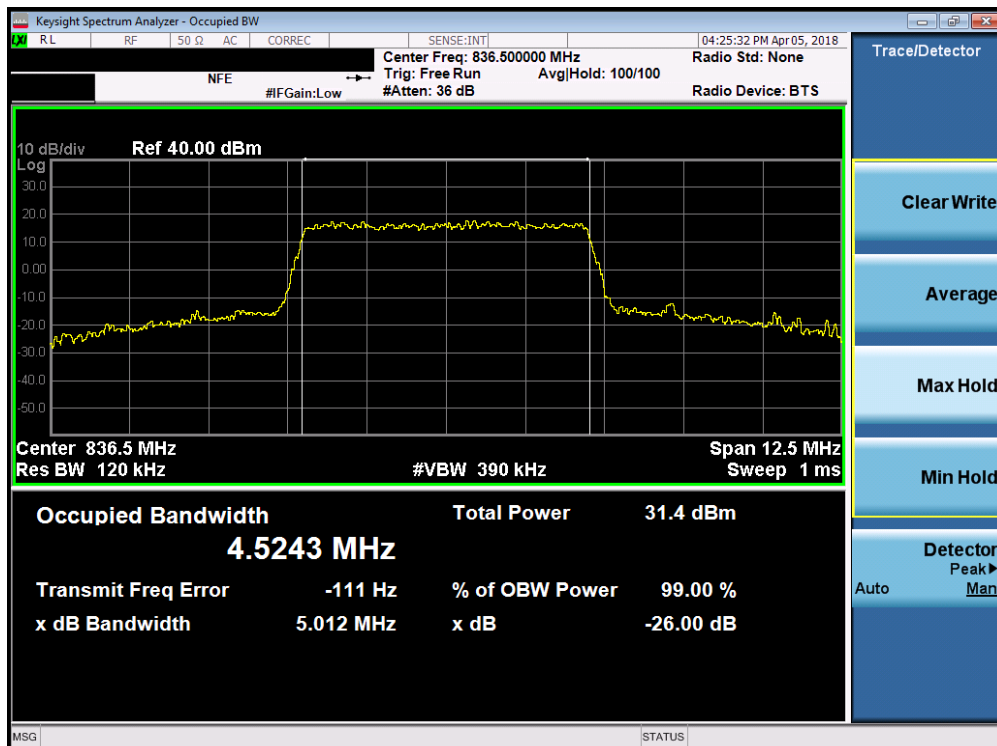

Plot 7-14. Occupied Bandwidth Plot (Band 5 - 5.0MHz 16-QAM - Full RB Configuration)

FCC ID: ZNFX410AS	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1803140041-03-R3-ZNF	Test Dates: 3/14 - 5/17/2018	EUT Type: Portable Handset		Page 21 of 123

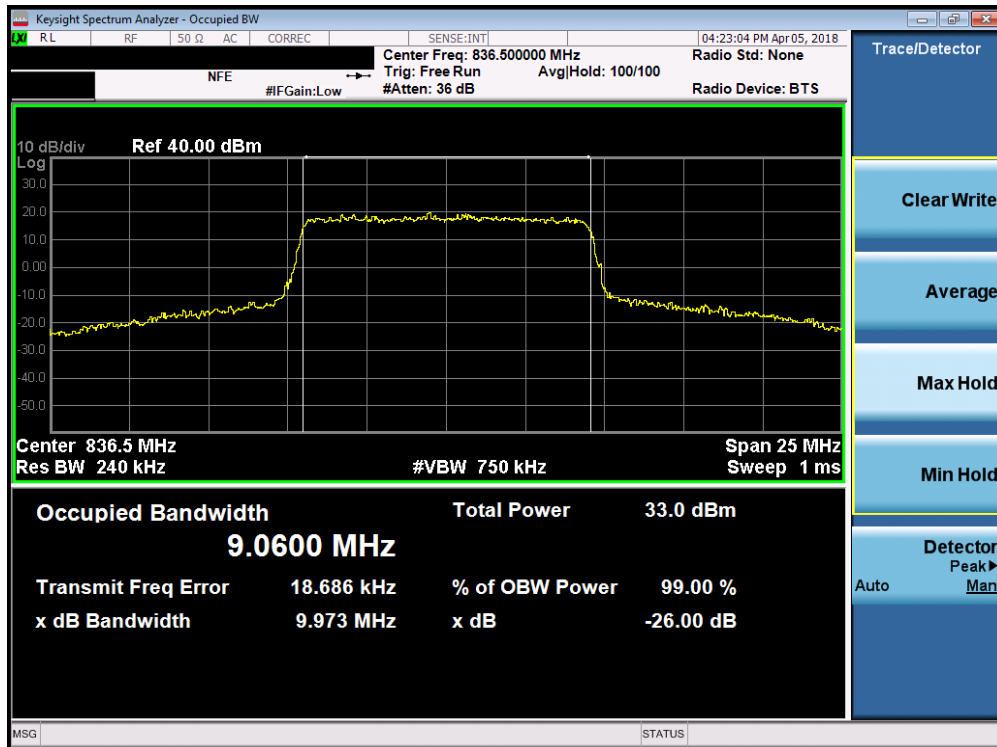


Plot 7-15. Occupied Bandwidth Plot (Band 5 - 10.0MHz QPSK - Full RB Configuration)




Plot 7-16. Occupied Bandwidth Plot (Band 5 - 10.0MHz 16-QAM - Full RB Configuration)

FCC ID: ZNFX410AS	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1803140041-03-R3-ZNF	Test Dates: 3/14 - 5/17/2018	EUT Type: Portable Handset		Page 22 of 123

Band 4

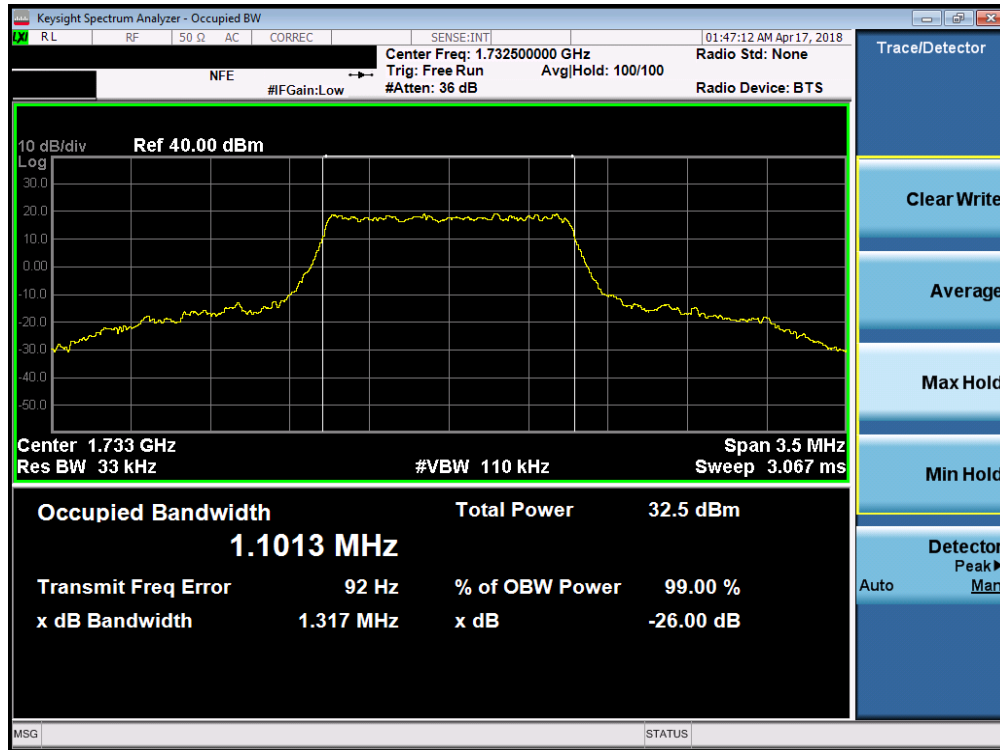


Plot 7-17. Occupied Bandwidth Plot (Band 4/66 - 1.4MHz QPSK - Full RB Configuration)

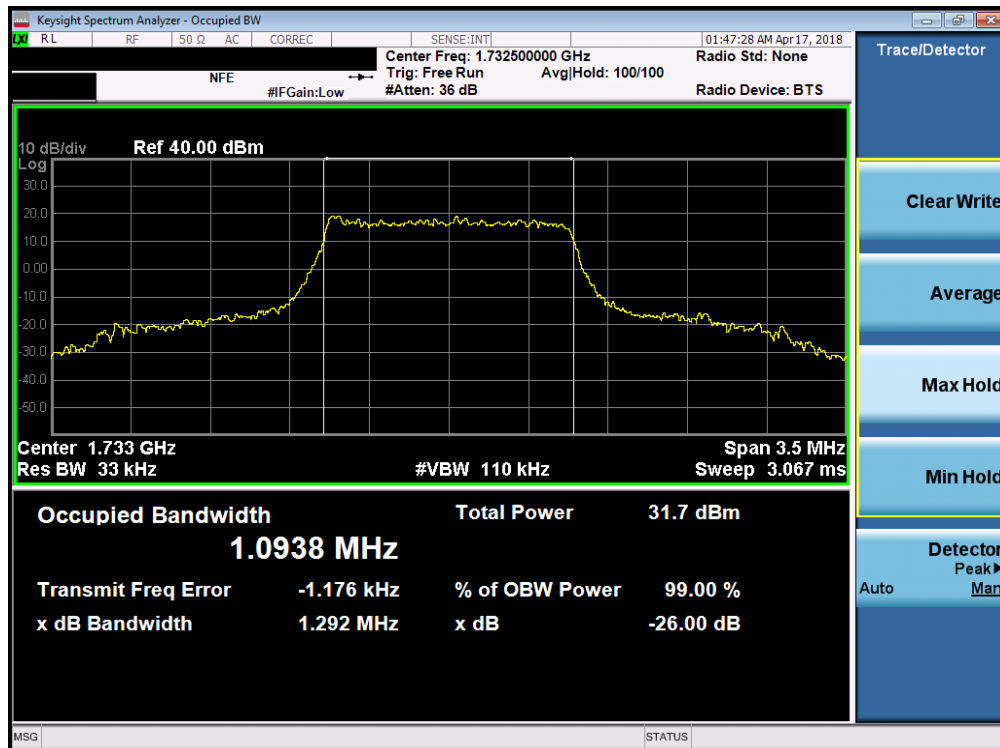


Plot 7-18. Occupied Bandwidth Plot (Band 4/66 - 1.4MHz 16-QAM - Full RB Configuration)

FCC ID: ZNFX410AS	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1803140041-03-R3-ZNF	Test Dates: 3/14 - 5/17/2018	EUT Type: Portable Handset		Page 23 of 123

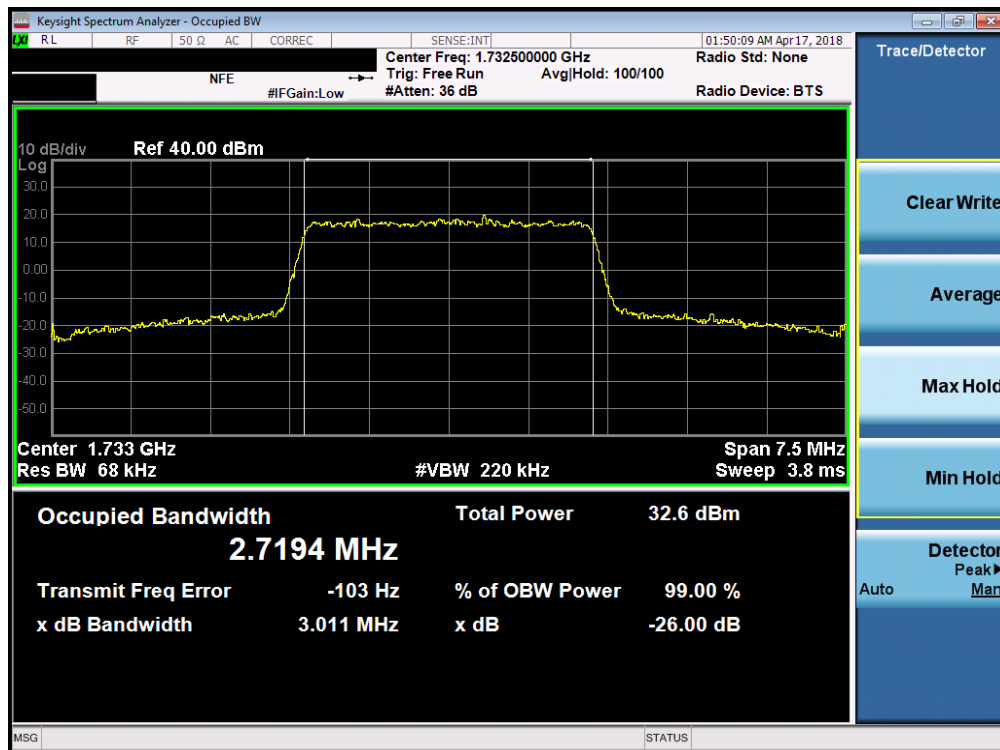


Plot 7-19. Occupied Bandwidth Plot (Band 4/66 - 3.0MHz QPSK - Full RB Configuration)

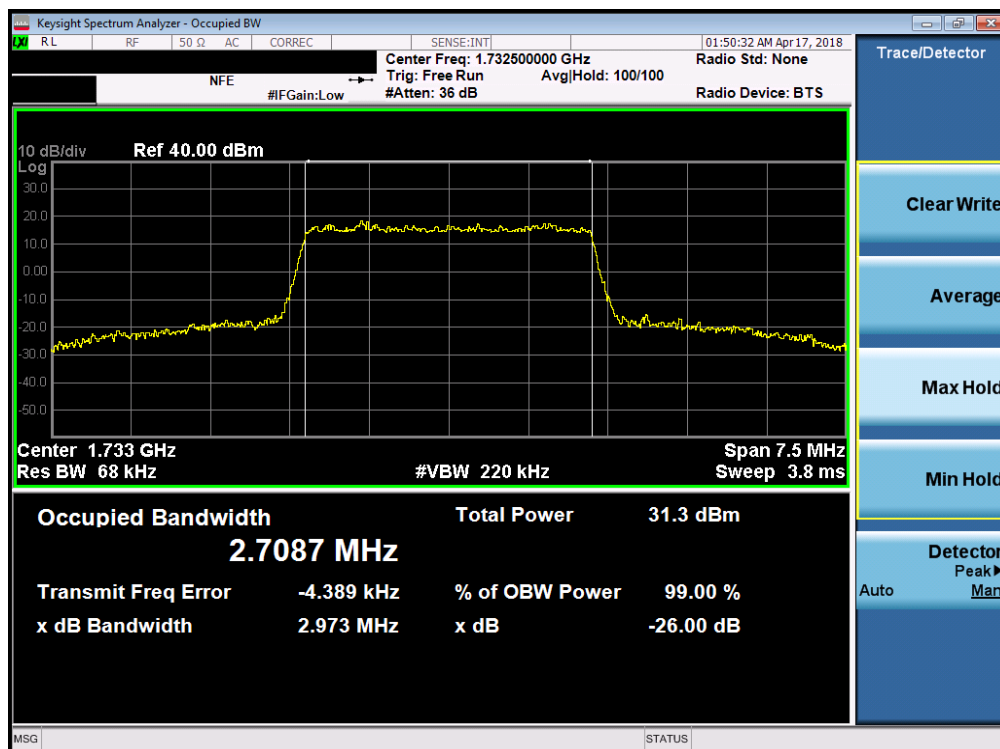


Plot 7-20. Occupied Bandwidth Plot (Band 4/66 - 3.0MHz 16-QAM - Full RB Configuration)

FCC ID: ZNFX410AS	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1803140041-03-R3-ZNF	Test Dates: 3/14 - 5/17/2018	EUT Type: Portable Handset		Page 24 of 123

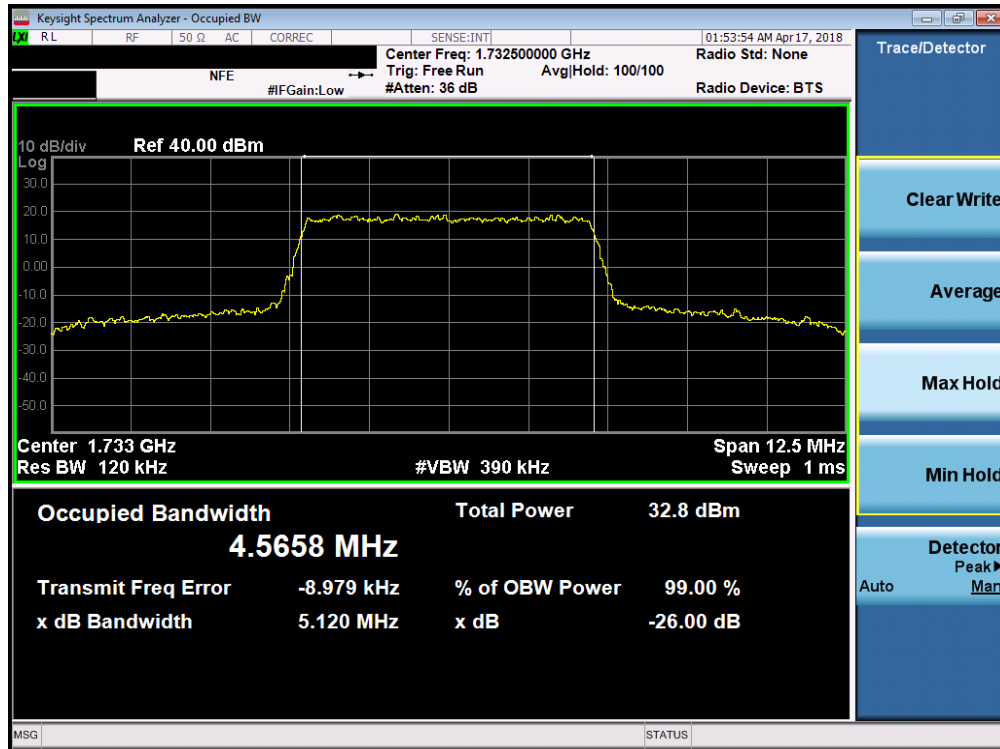


Plot 7-21. Occupied Bandwidth Plot (Band 4/66 - 5.0MHz QPSK - Full RB Configuration)

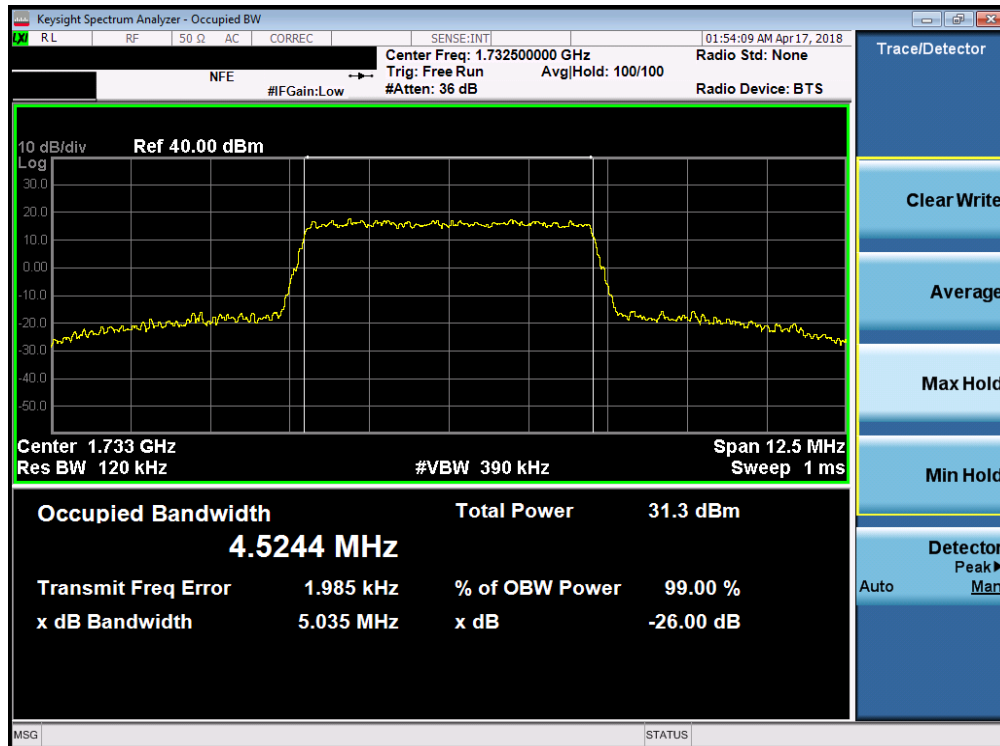


Plot 7-22. Occupied Bandwidth Plot (Band 4/66 - 5.0MHz 16-QAM - Full RB Configuration)

FCC ID: ZNFX410AS	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1803140041-03-R3-ZNF	Test Dates: 3/14 - 5/17/2018	EUT Type: Portable Handset		Page 25 of 123

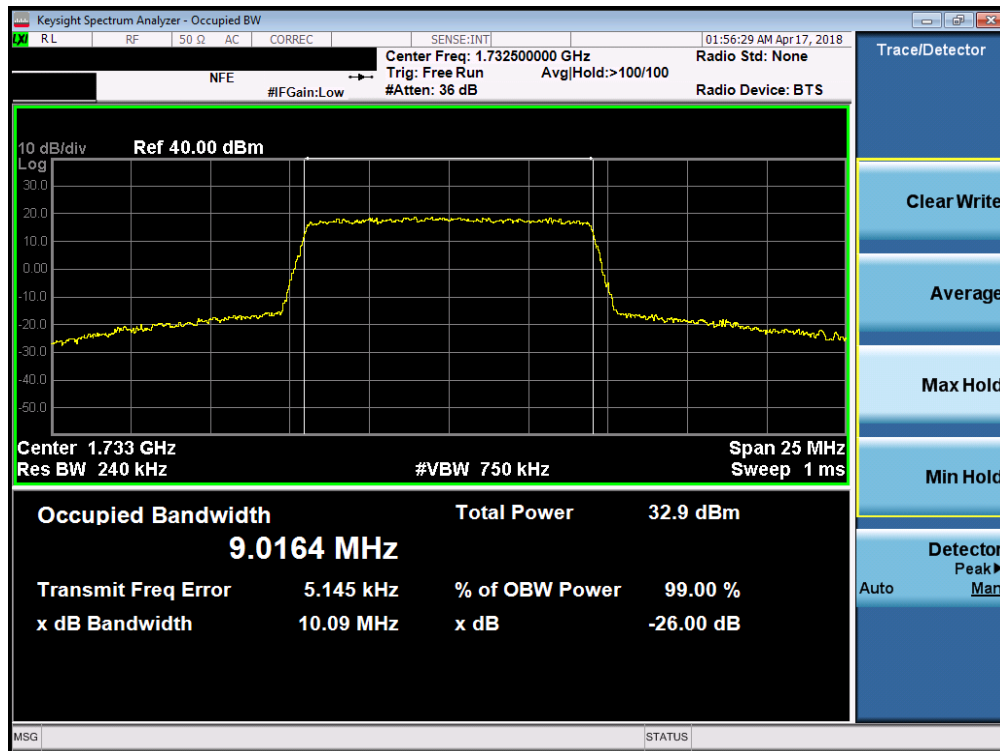


Plot 7-23. Occupied Bandwidth Plot (Band 4/66 - 10.0MHz QPSK - Full RB Configuration)

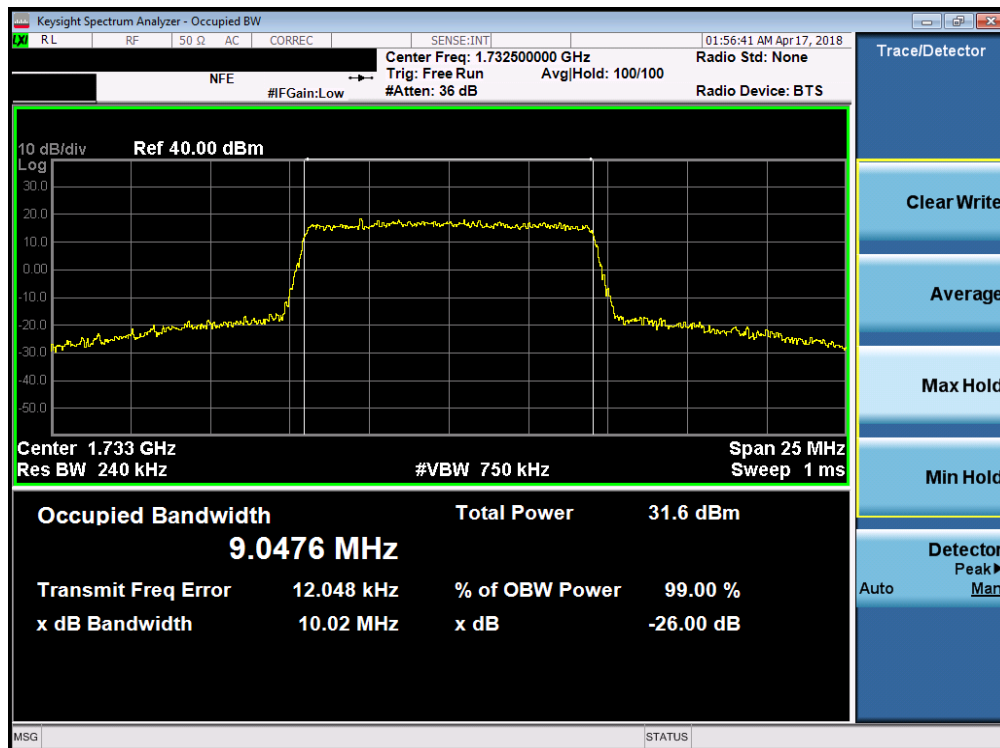


Plot 7-24. Occupied Bandwidth Plot (Band 4/66 - 10.0MHz 16-QAM - Full RB Configuration)

FCC ID: ZNFX410AS	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1803140041-03-R3-ZNF	Test Dates: 3/14 - 5/17/2018	EUT Type: Portable Handset		Page 26 of 123

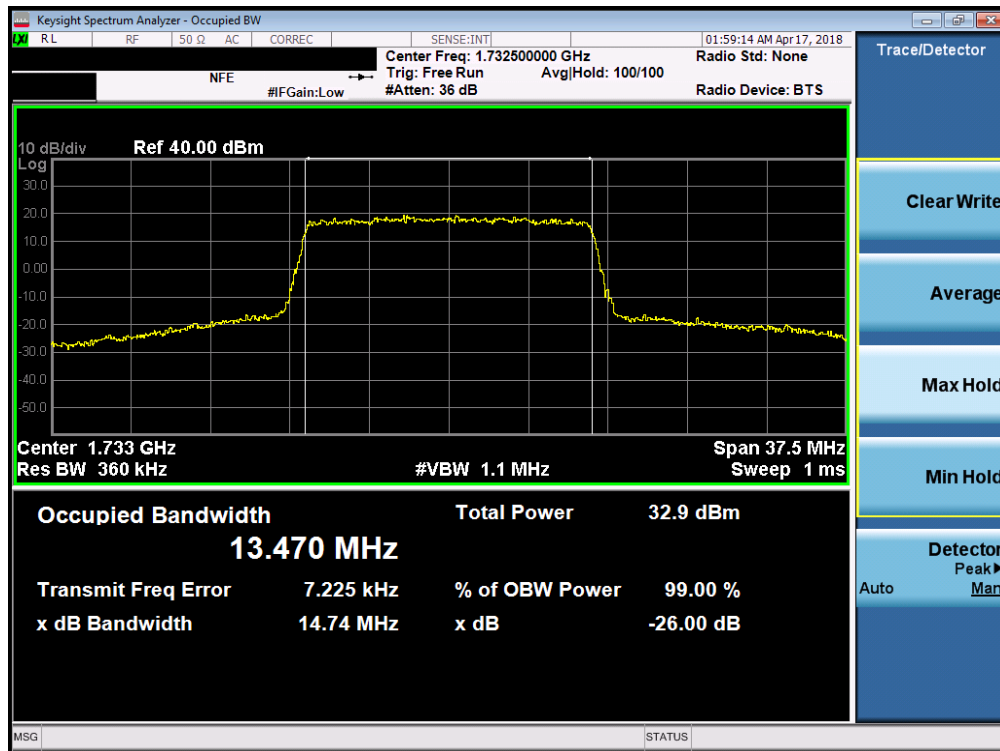


Plot 7-25. Occupied Bandwidth Plot (Band 4/66 - 15.0MHz QPSK - Full RB Configuration)

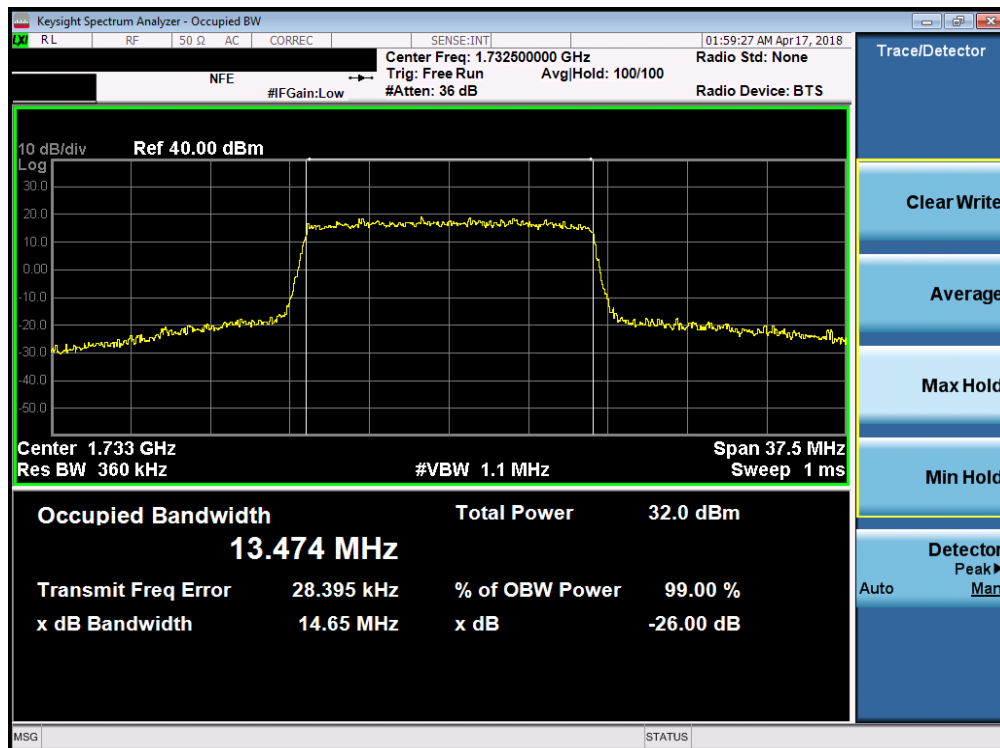


Plot 7-26. Occupied Bandwidth Plot (Band 4/66 - 15.0MHz 16-QAM - Full RB Configuration)

FCC ID: ZNFX410AS	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1803140041-03-R3-ZNF	Test Dates: 3/14 - 5/17/2018	EUT Type: Portable Handset		Page 27 of 123

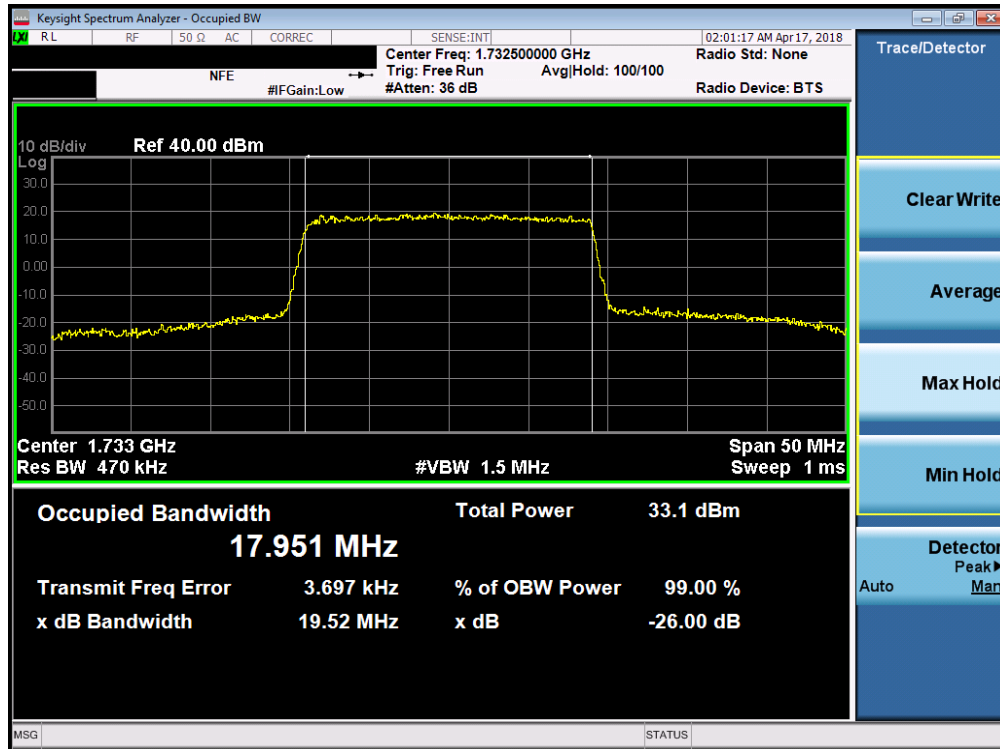


Plot 7-27. Occupied Bandwidth Plot (Band 4/66 - 20.0MHz QPSK - Full RB Configuration)

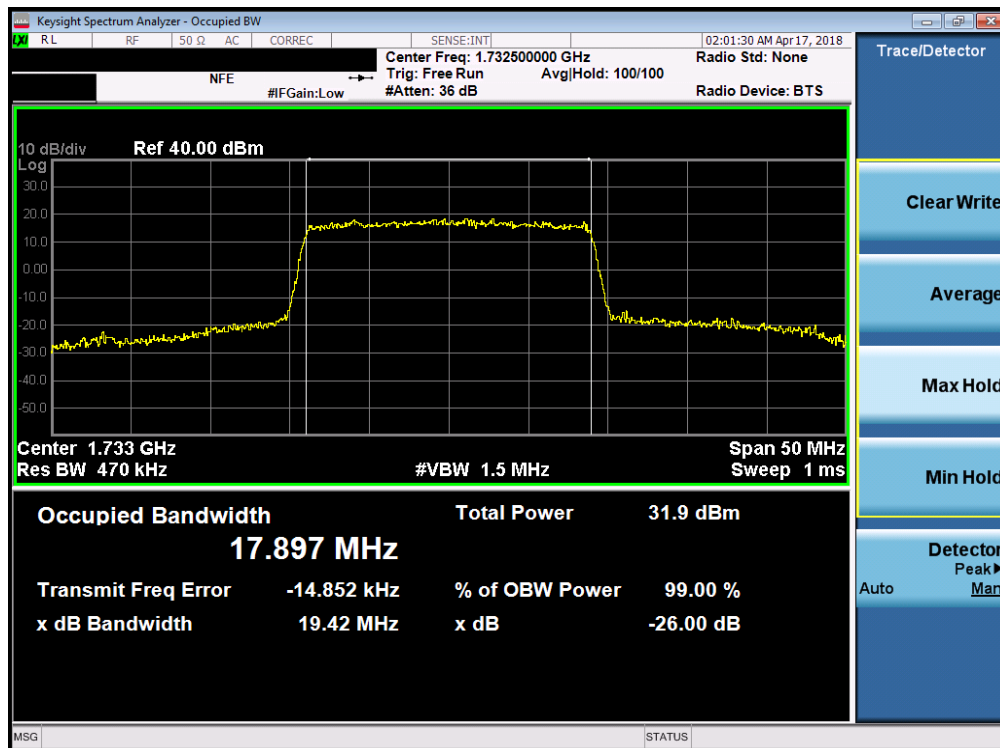


Plot 7-28. Occupied Bandwidth Plot (Band 4/66 - 20.0MHz 16-QAM - Full RB Configuration)

FCC ID: ZNFX410AS	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1803140041-03-R3-ZNF	Test Dates: 3/14 - 5/17/2018	EUT Type: Portable Handset		Page 28 of 123

Band 2

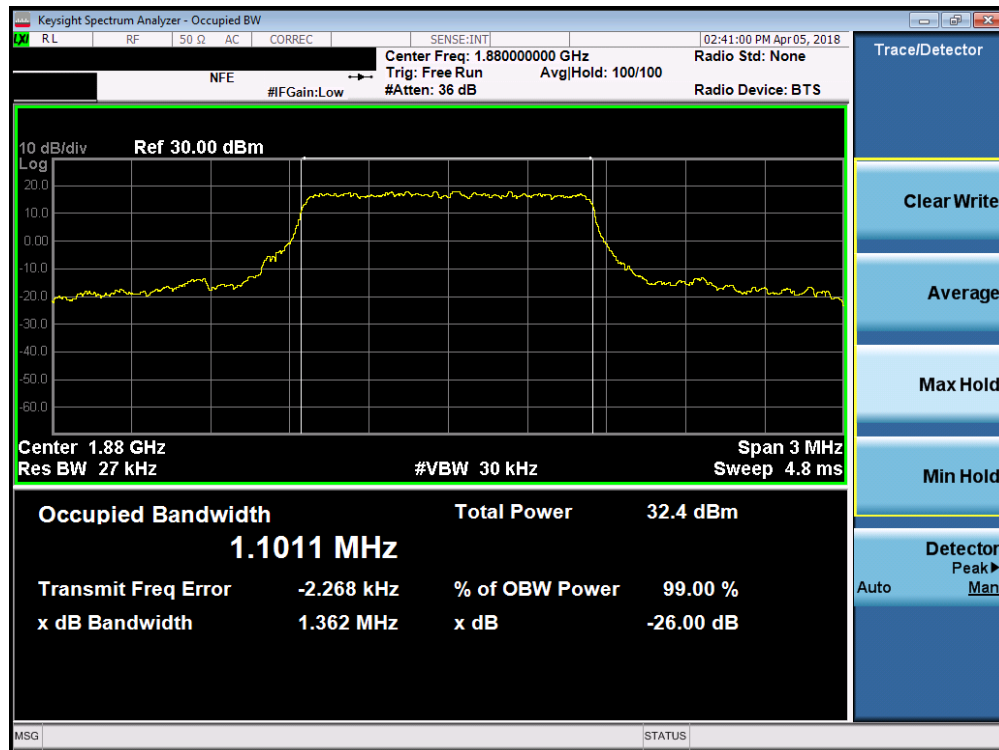


Plot 7-29. Occupied Bandwidth Plot (Band 2 - 1.4MHz QPSK - Full RB Configuration)

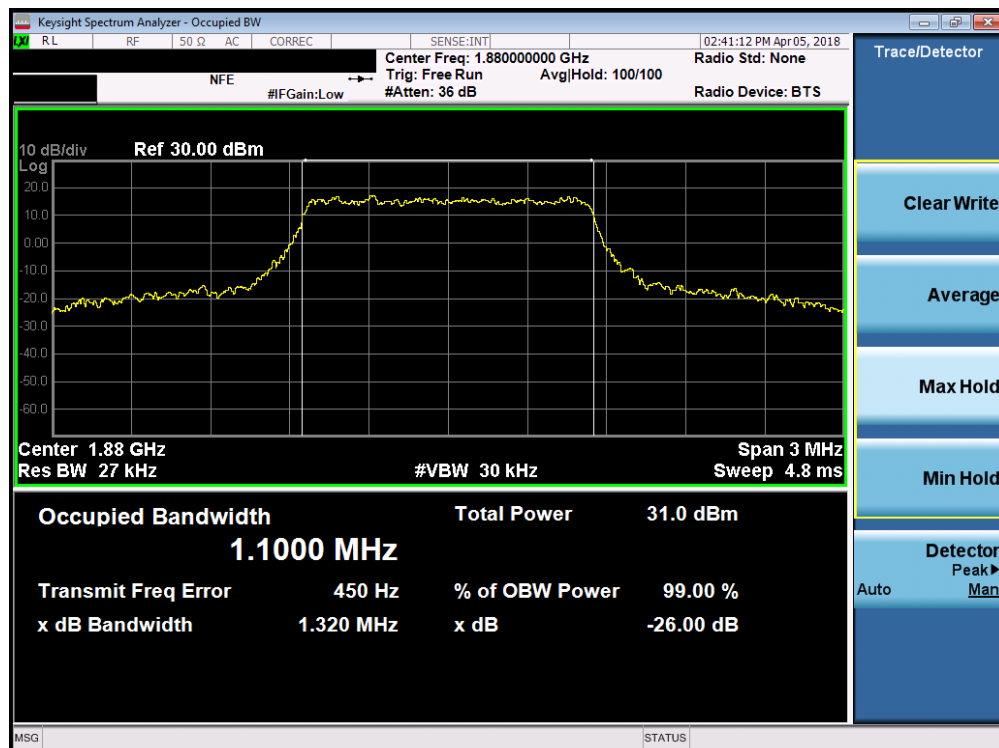


Plot 7-30. Occupied Bandwidth Plot (Band 2 - 1.4MHz 16-QAM - Full RB Configuration)

FCC ID: ZNFX410AS	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1803140041-03-R3-ZNF	Test Dates: 3/14 - 5/17/2018	EUT Type: Portable Handset		Page 29 of 123

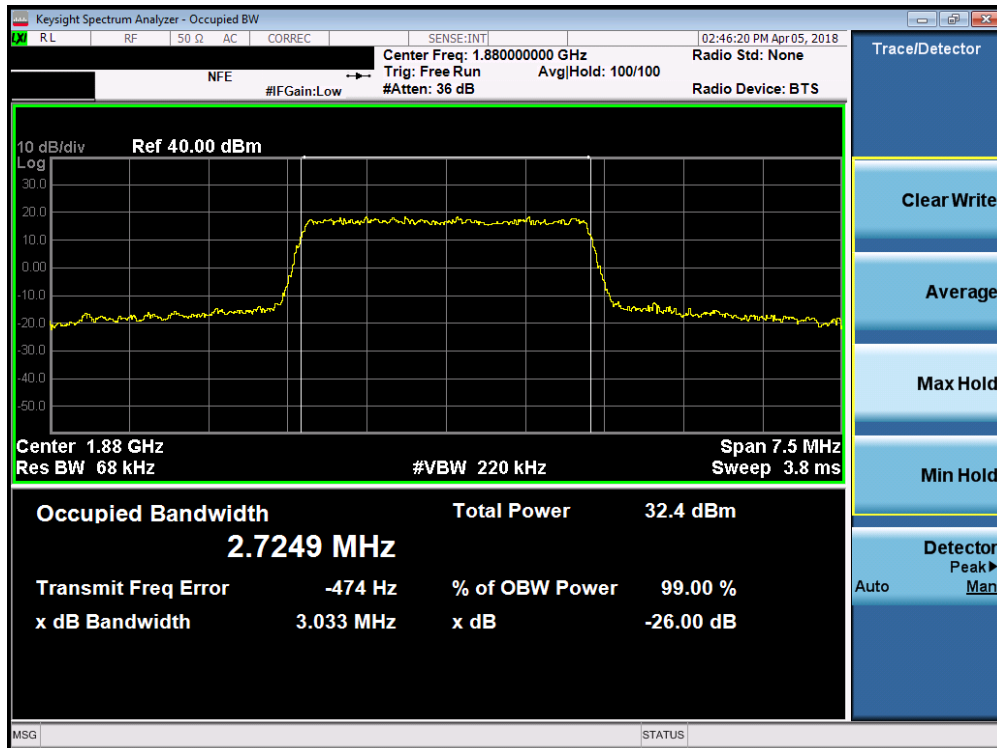


Plot 7-31. Occupied Bandwidth Plot (Band 2 - 3.0MHz QPSK - Full RB Configuration)

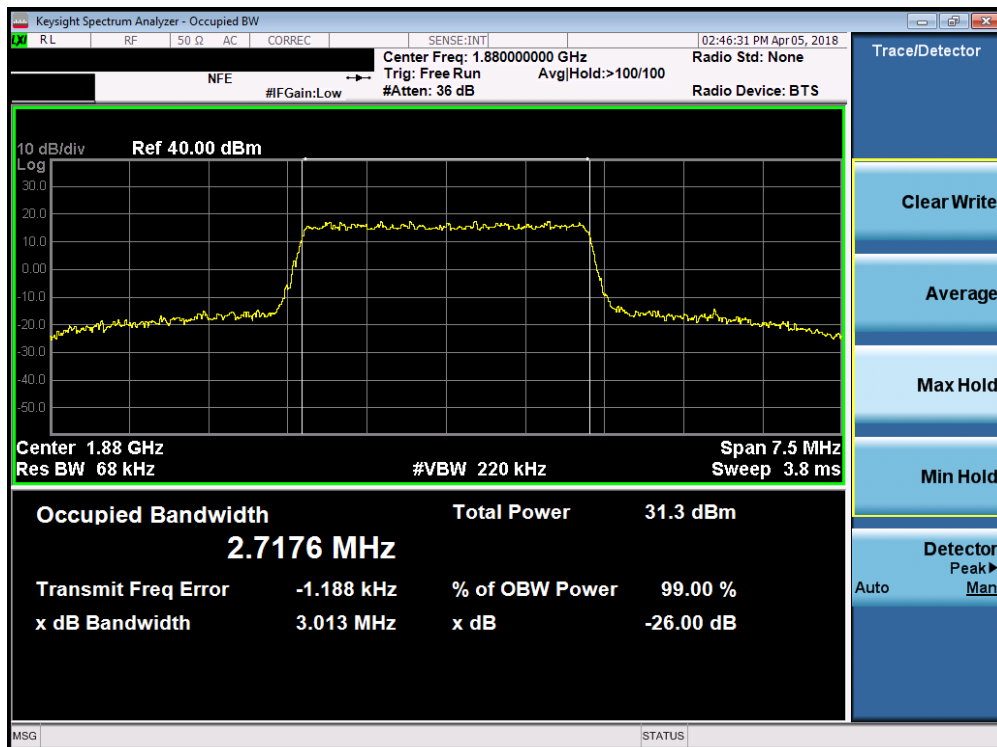


Plot 7-32. Occupied Bandwidth Plot (Band 2 - 3.0MHz 16-QAM - Full RB Configuration)

FCC ID: ZNFX410AS	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1803140041-03-R3-ZNF	Test Dates: 3/14 - 5/17/2018	EUT Type: Portable Handset		Page 30 of 123

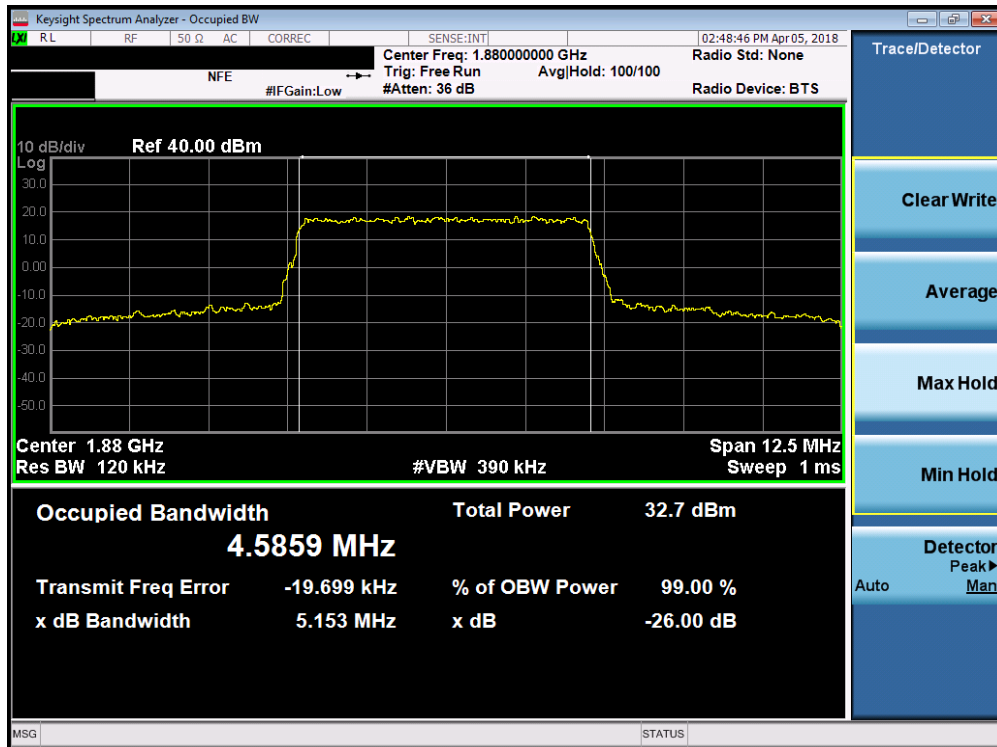


Plot 7-33. Occupied Bandwidth Plot (Band 2 - 5.0MHz QPSK - Full RB Configuration)

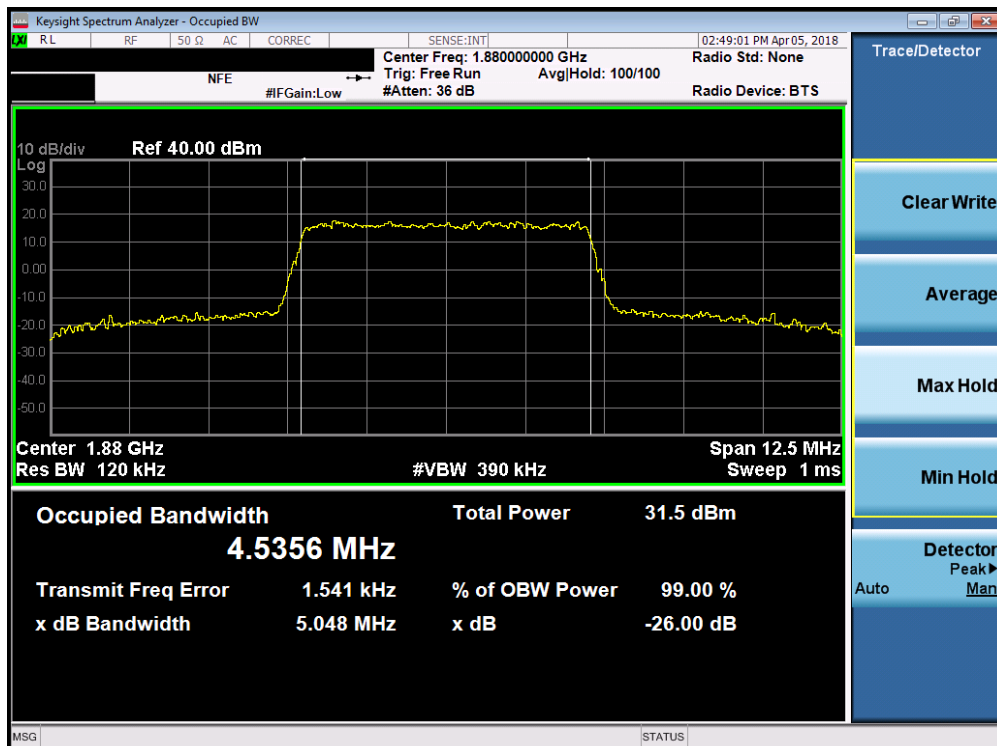


Plot 7-34. Occupied Bandwidth Plot (Band 2 - 5.0MHz 16-QAM - Full RB Configuration)

FCC ID: ZNFX410AS	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1803140041-03-R3-ZNF	Test Dates: 3/14 - 5/17/2018	EUT Type: Portable Handset		Page 31 of 123

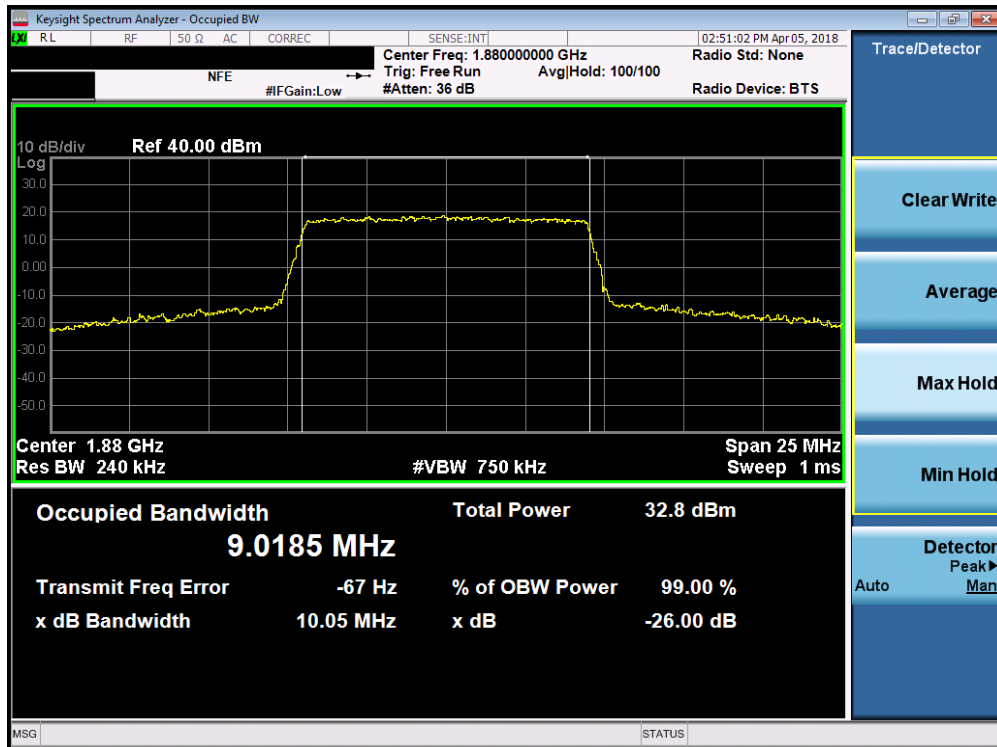


Plot 7-35. Occupied Bandwidth Plot (Band 2 - 10.0MHz QPSK - Full RB Configuration)

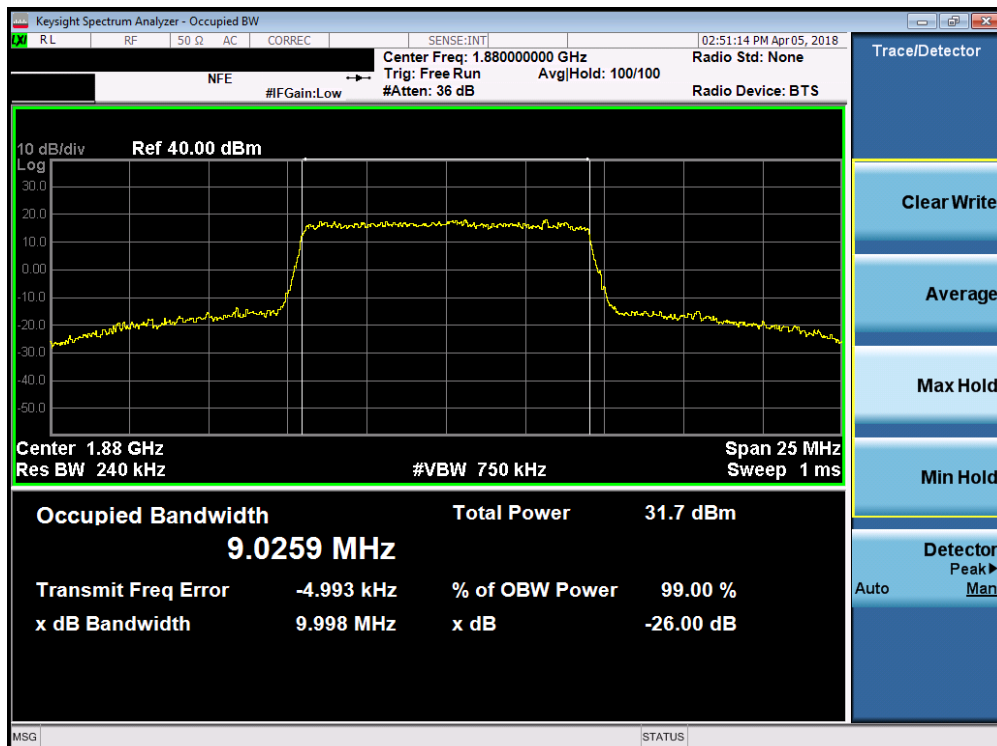


Plot 7-36. Occupied Bandwidth Plot (Band 2 - 10.0MHz 16-QAM - Full RB Configuration)

FCC ID: ZNFX410AS	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1803140041-03-R3-ZNF	Test Dates: 3/14 - 5/17/2018	EUT Type: Portable Handset		Page 32 of 123

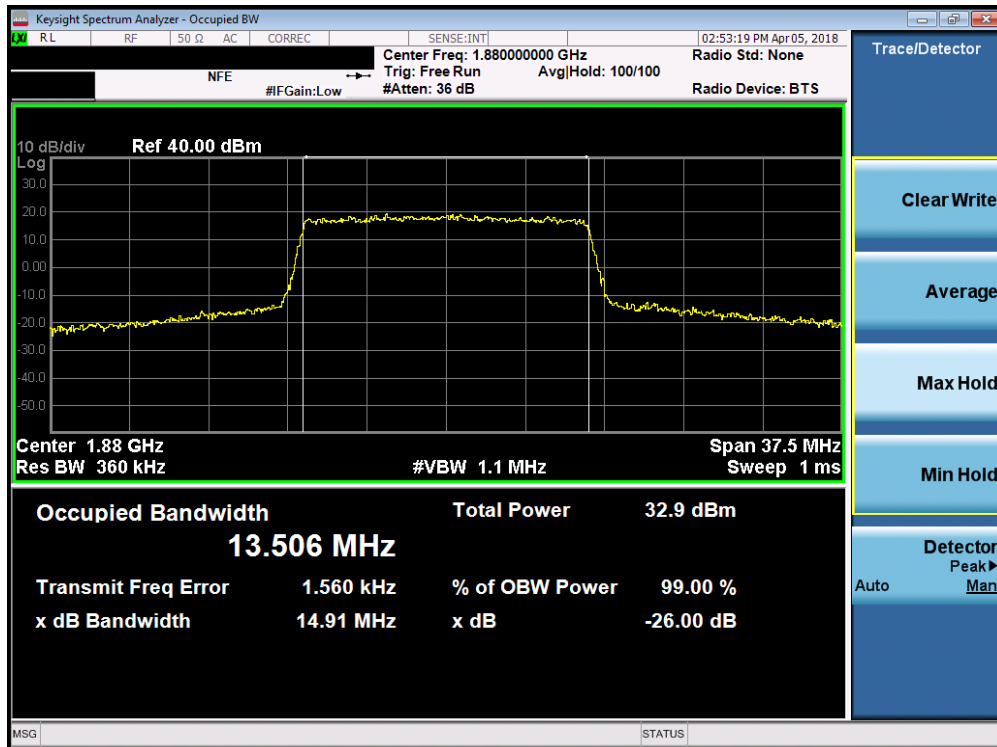


Plot 7-37. Occupied Bandwidth Plot (Band 2 - 15.0MHz QPSK - Full RB Configuration)

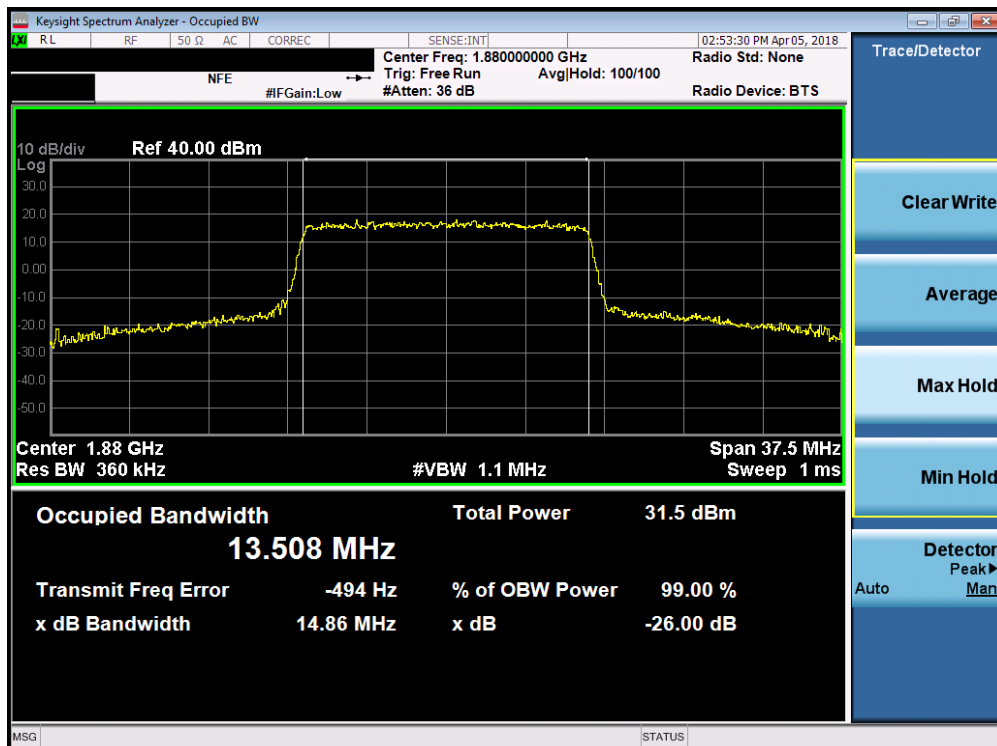


Plot 7-38. Occupied Bandwidth Plot (Band 2 - 15.0MHz 16-QAM - Full RB Configuration)

FCC ID: ZNFX410AS	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1803140041-03-R3-ZNF	Test Dates: 3/14 - 5/17/2018	EUT Type: Portable Handset		Page 33 of 123

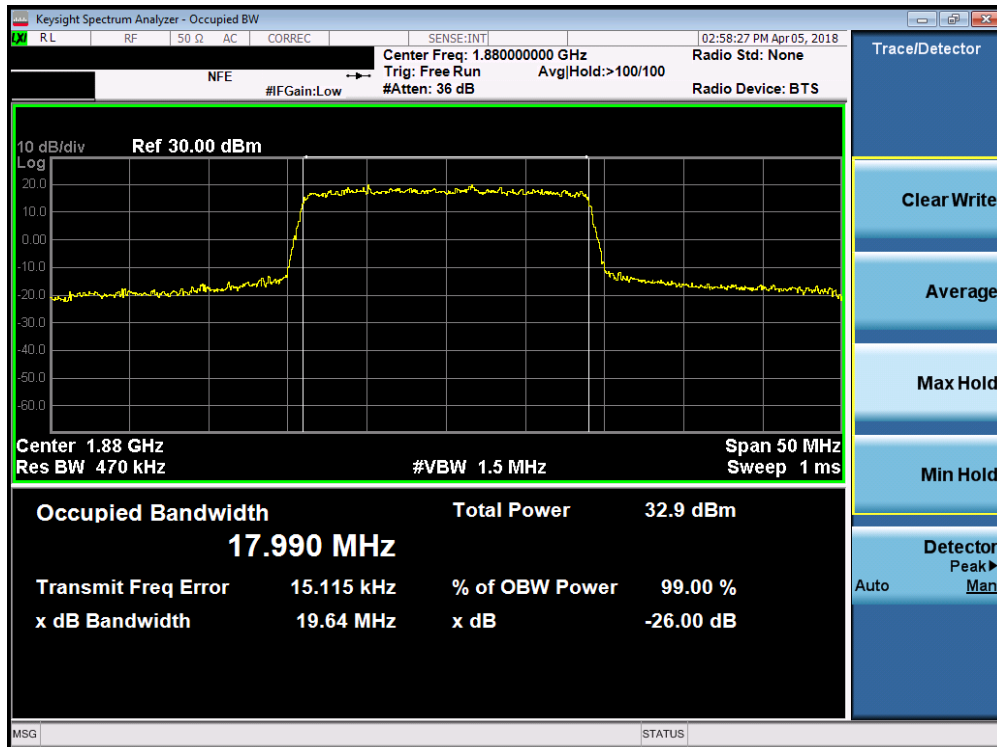

Plot 7-39. Occupied Bandwidth Plot (Band 2 - 20.0MHz QPSK - Full RB Configuration)

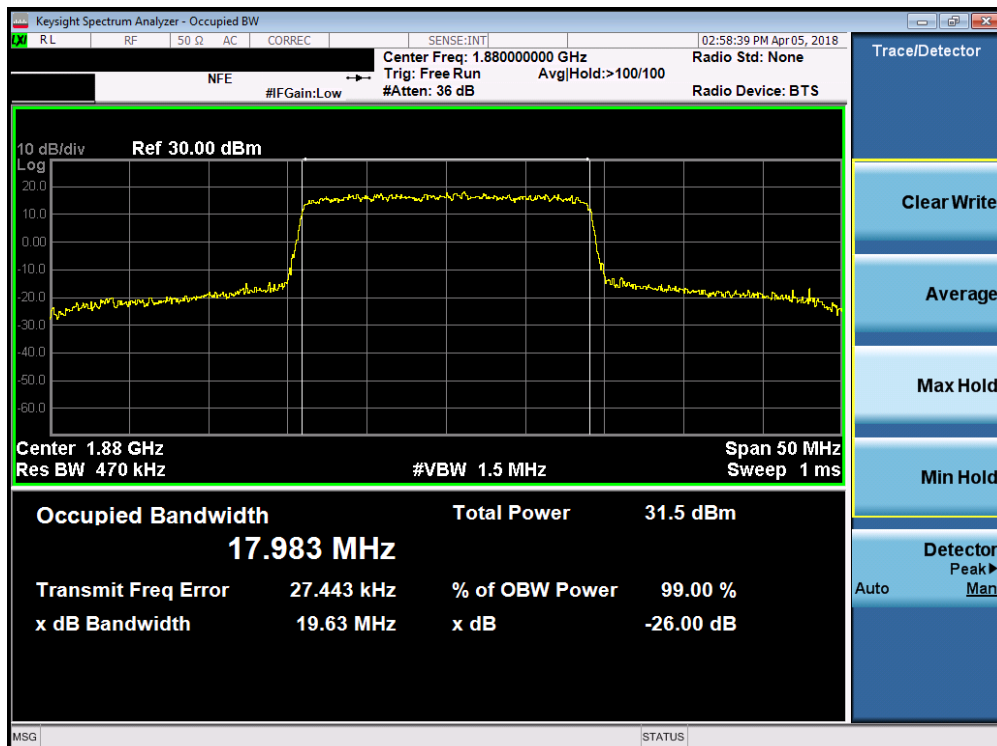

Plot 7-40. Occupied Bandwidth Plot (Band 2 - 20.0MHz 16-QAM - Full RB Configuration)

FCC ID: ZNFX410AS	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1803140041-03-R3-ZNF	Test Dates: 3/14 - 5/17/2018	EUT Type: Portable Handset		Page 34 of 123

7.3 Spurious and Harmonic Emissions at Antenna Terminal

Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

The minimum permissible attenuation level of any spurious emission is $43 + \log_{10}(P_{[Watts]})$, where P is the transmitter power in Watts.

Test Procedure Used

KDB 971168 D01 v03 – Section 6.0

Test Settings

1. Start frequency was set to 30MHz and stop frequency was set to at least 10 * the fundamental frequency (separated into at least two plots per channel)
2. Detector = RMS
3. Trace mode = trace average
4. Sweep time = auto couple
5. The trace was allowed to stabilize
6. Please see test notes below for RBW and VBW settings

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

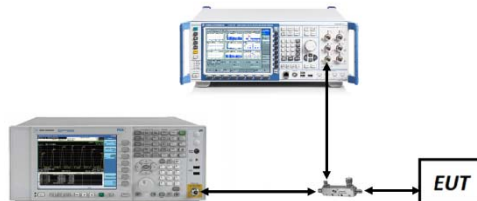



Figure 7-2. Test Instrument & Measurement Setup

Test Notes


Compliance with the applicable limits is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater for frequencies less than 1 GHz and 1 MHz or greater for frequencies greater than 1 GHz. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.

FCC ID: ZNFX410AS	 MEASUREMENT REPORT (CERTIFICATION) 		Approved by: Quality Manager
Test Report S/N: 1M1803140041-03-R3.ZNF	Test Dates: 3/14 - 5/17/2018	EUT Type: Portable Handset	Page 35 of 123

Band 12

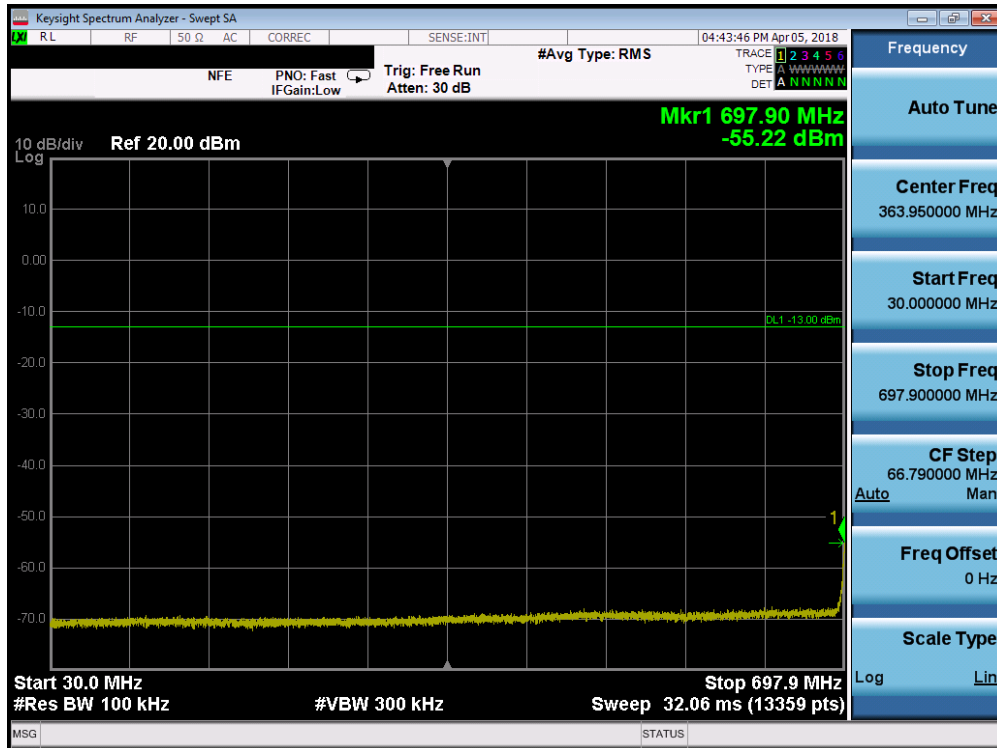

Plot 7-41. Conducted Spurious Plot (Band 12 - 5.0MHz QPSK - RB Size 1, RB Offset 0 - Low Channel)

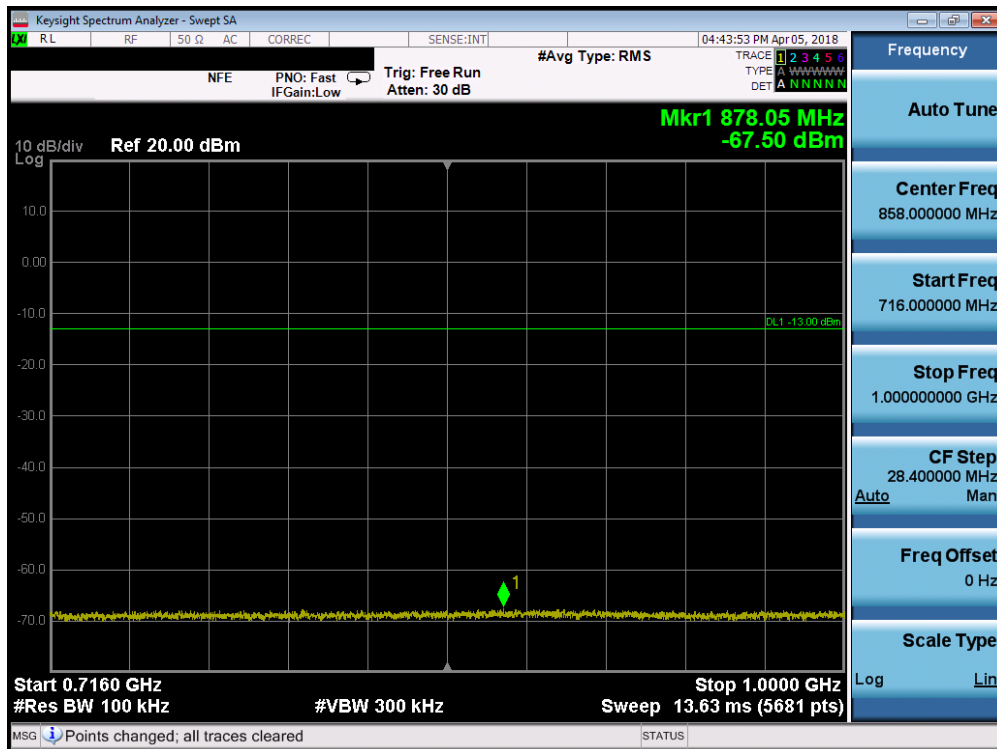


Plot 7-42. Conducted Spurious Plot (Band 12 - 5.0MHz QPSK - RB Size 1, RB Offset 0 - Low Channel)

FCC ID: ZNFX410AS	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1803140041-03-R3-ZNF	Test Dates: 3/14 - 5/17/2018	EUT Type: Portable Handset		Page 36 of 123




Plot 7-43. Conducted Spurious Plot (Band 12 - 5.0MHz QPSK - RB Size 1, RB Offset 0 - Low Channel)

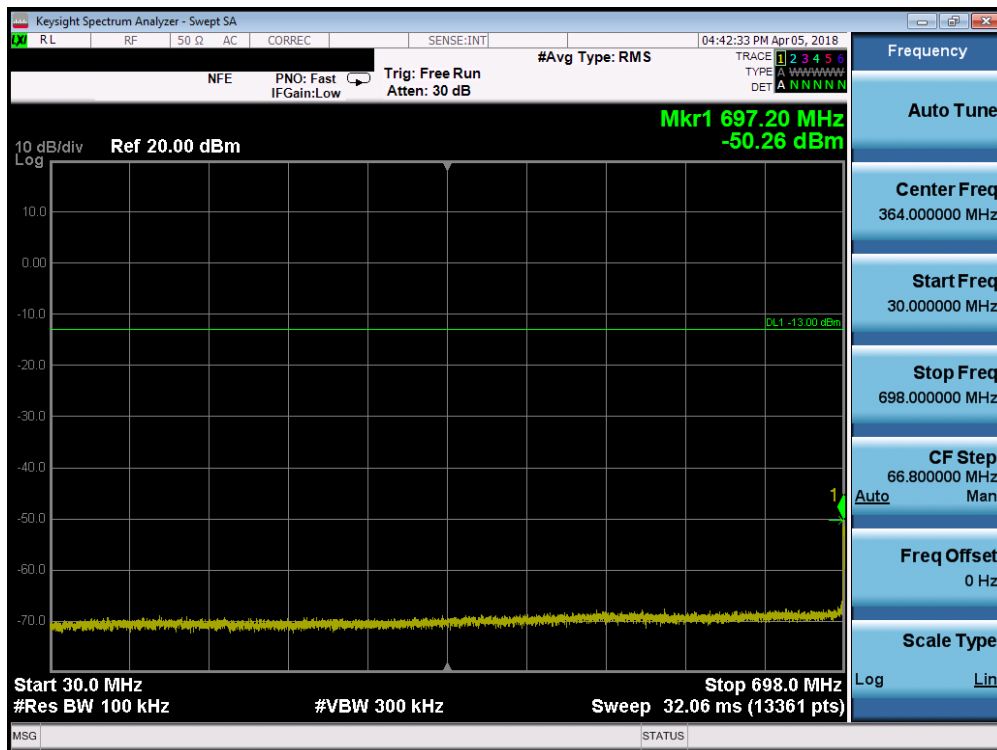

Plot 7-44. Conducted Spurious Plot (Band 12 - 5.0MHz QPSK - RB Size 1, RB Offset 0 - Mid Channel)

FCC ID: ZNFX410AS	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1803140041-03-R3-ZNF	Test Dates: 3/14 - 5/17/2018	EUT Type: Portable Handset		Page 37 of 123

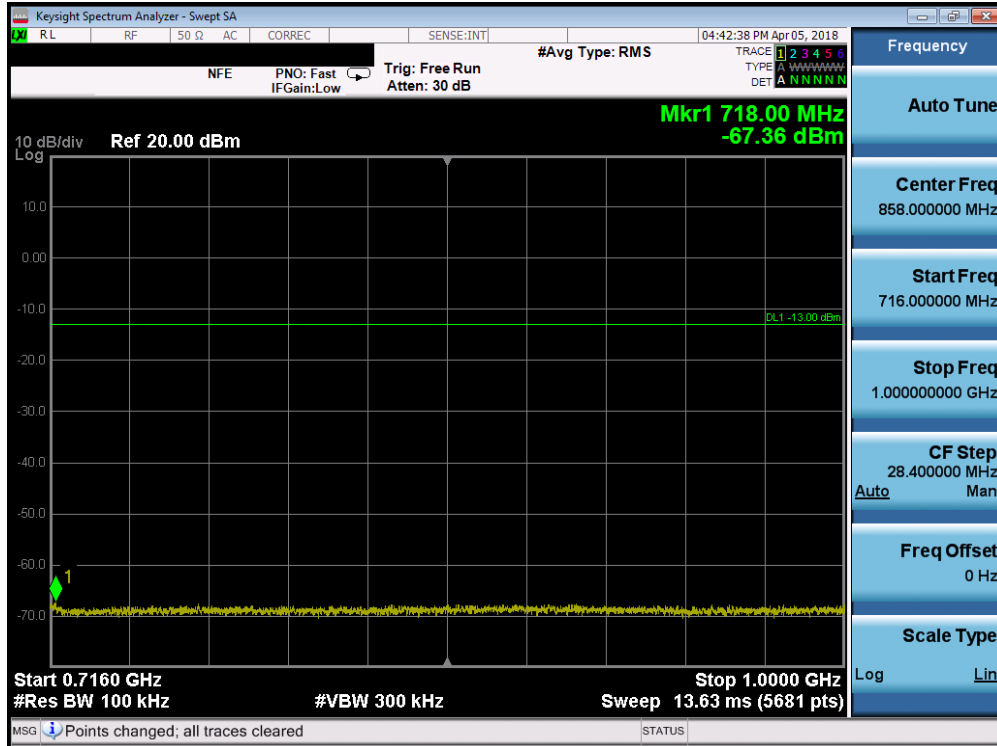


Plot 7-45. Conducted Spurious Plot (Band 12 - 5.0MHz QPSK - RB Size 1, RB Offset 0 - Mid Channel)




Plot 7-46. Conducted Spurious Plot (Band 12 - 5.0MHz QPSK - RB Size 1, RB Offset 0 - Mid Channel)

FCC ID: ZNFX410AS	MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M1803140041-03-R3-ZNF	Test Dates: 3/14 - 5/17/2018	EUT Type: Portable Handset		Page 38 of 123

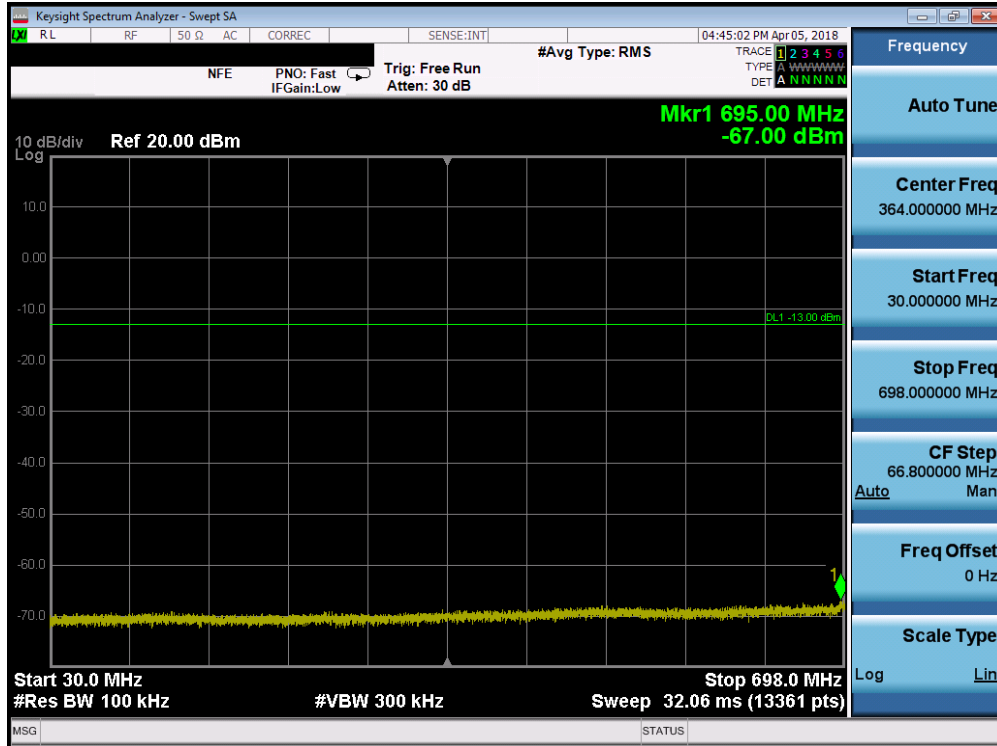

Plot 7-47. Conducted Spurious Plot (Band 12 - 5.0MHz QPSK - RB Size 1, RB Offset 0 - High Channel)

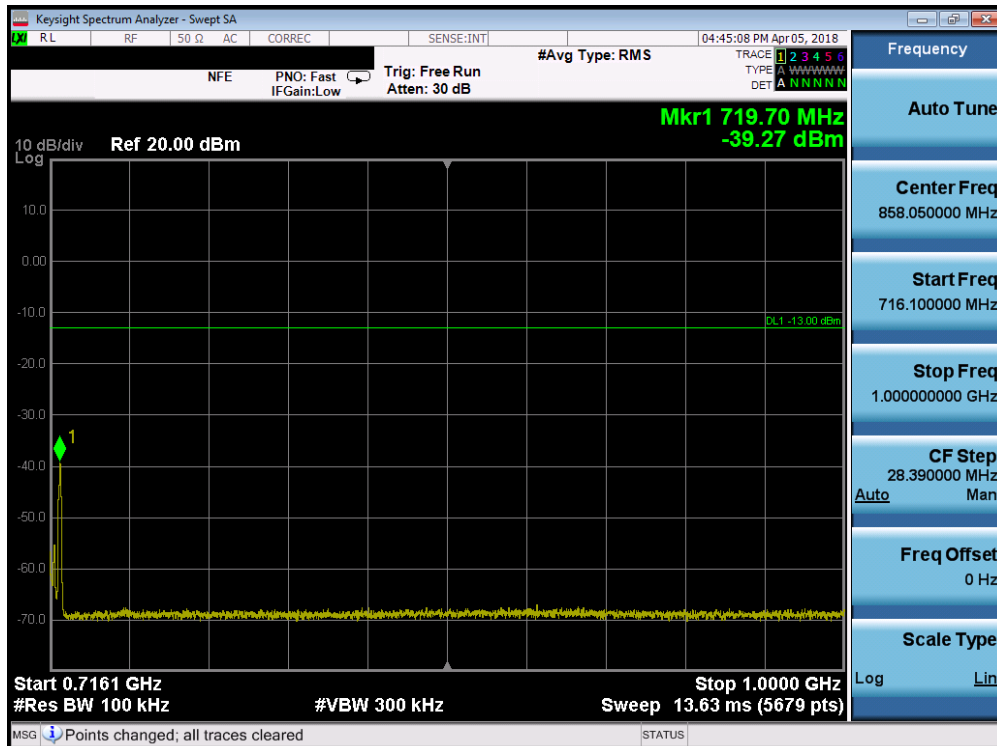

Plot 7-48. Conducted Spurious Plot (Band 12 - 5.0MHz QPSK - RB Size 1, RB Offset 0 - High Channel)


FCC ID: ZNFX410AS	 MEASUREMENT REPORT (CERTIFICATION) 		Approved by: Quality Manager
Test Report S/N: 1M1803140041-03-R3-ZNF	Test Dates: 3/14 - 5/17/2018	EUT Type: Portable Handset	Page 39 of 123




Plot 7-49. Conducted Spurious Plot (Band 12 - 5.0MHz QPSK - RB Size 1, RB Offset 0 - High Channel)

FCC ID: ZNFX410AS		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1803140041-03-R3-ZNF	Test Dates: 3/14 - 5/17/2018	EUT Type: Portable Handset		Page 40 of 123

Band 5

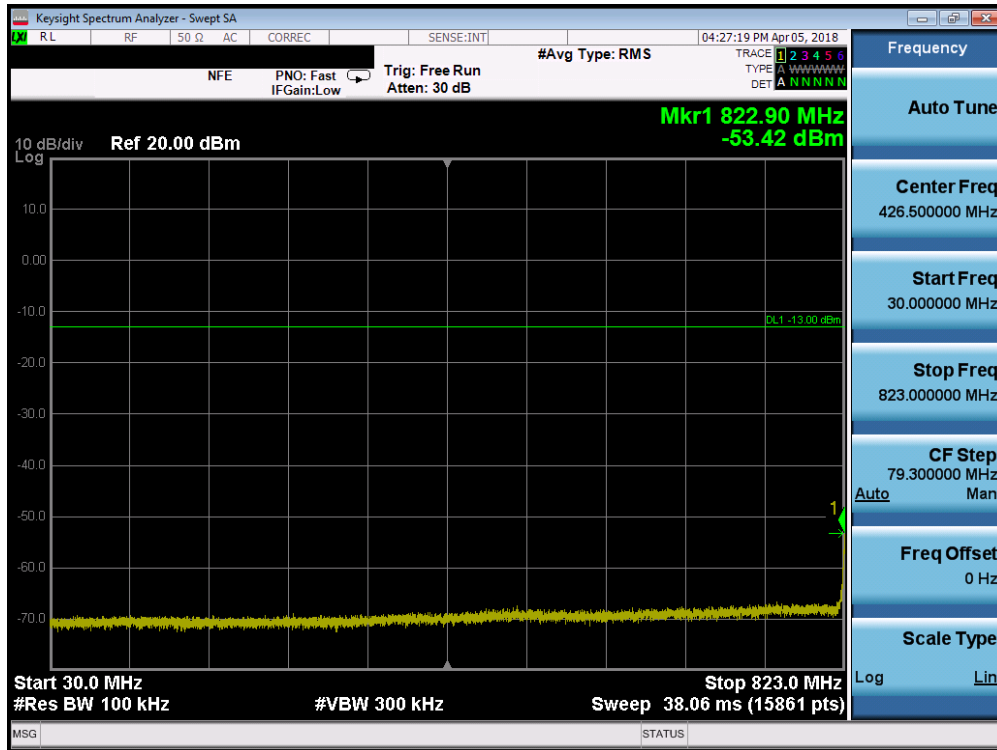


Plot 7-50. Conducted Spurious Plot (Band 5 - 5.0MHz QPSK - RB Size 1, RB Offset 0 - Low Channel)

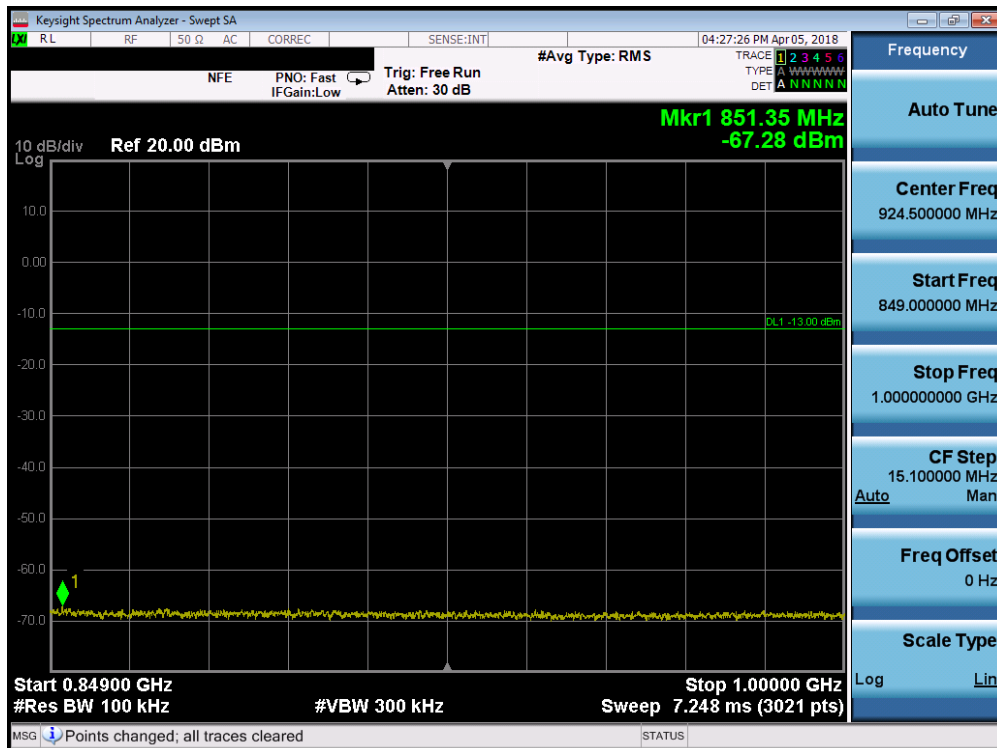


Plot 7-51. Conducted Spurious Plot (Band 5 - 5.0MHz QPSK - RB Size 1, RB Offset 0 - Low Channel)

FCC ID: ZNFX410AS	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1803140041-03-R3.ZNF	Test Dates: 3/14 - 5/17/2018	EUT Type: Portable Handset		Page 41 of 123

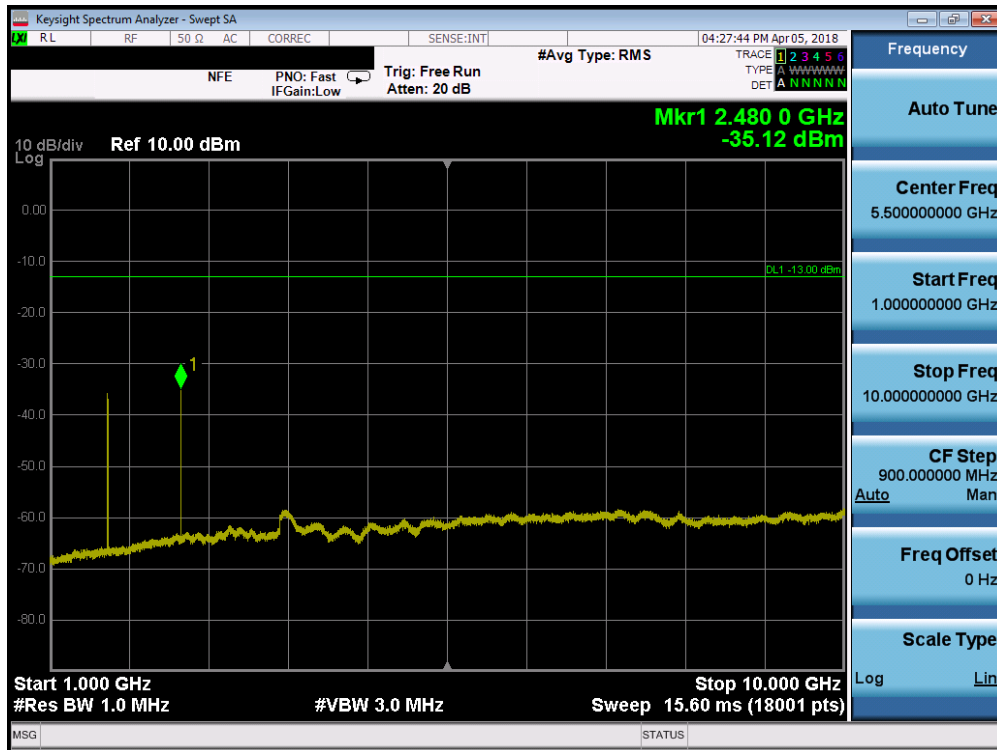


Plot 7-52. Conducted Spurious Plot (Band 5 - 5.0MHz QPSK - RB Size 1, RB Offset 0 - Low Channel)

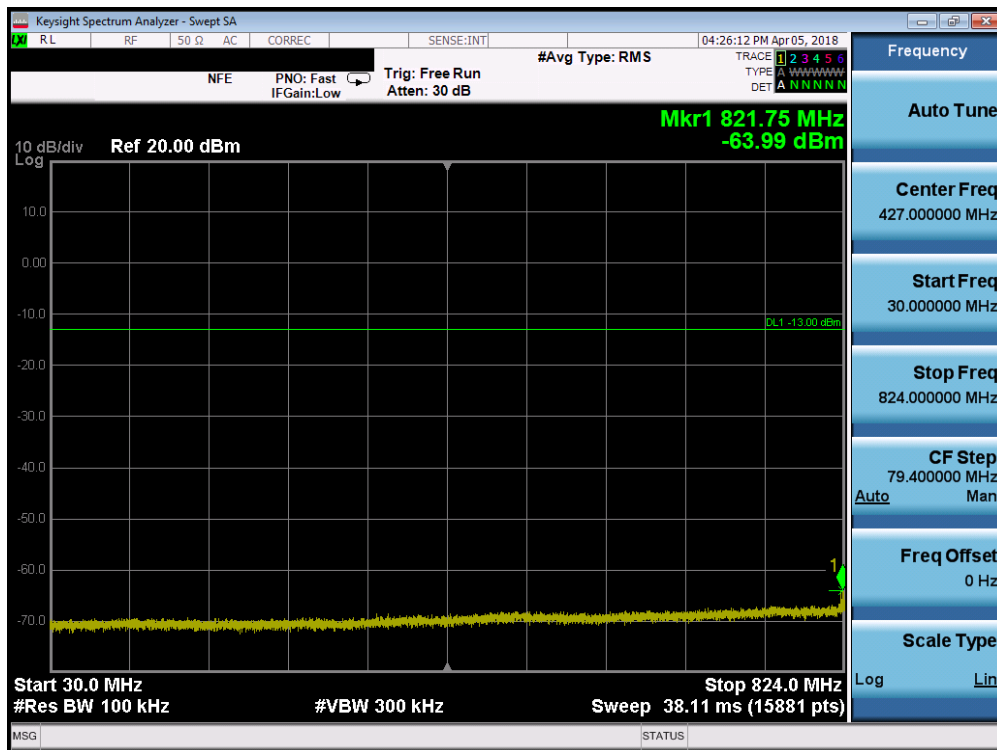


Plot 7-53. Conducted Spurious Plot (Band 5 - 5.0MHz QPSK - RB Size 1, RB Offset 0 - Mid Channel)

FCC ID: ZNFX410AS	MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M1803140041-03-R3-ZNF	Test Dates: 3/14 - 5/17/2018	EUT Type: Portable Handset		Page 42 of 123

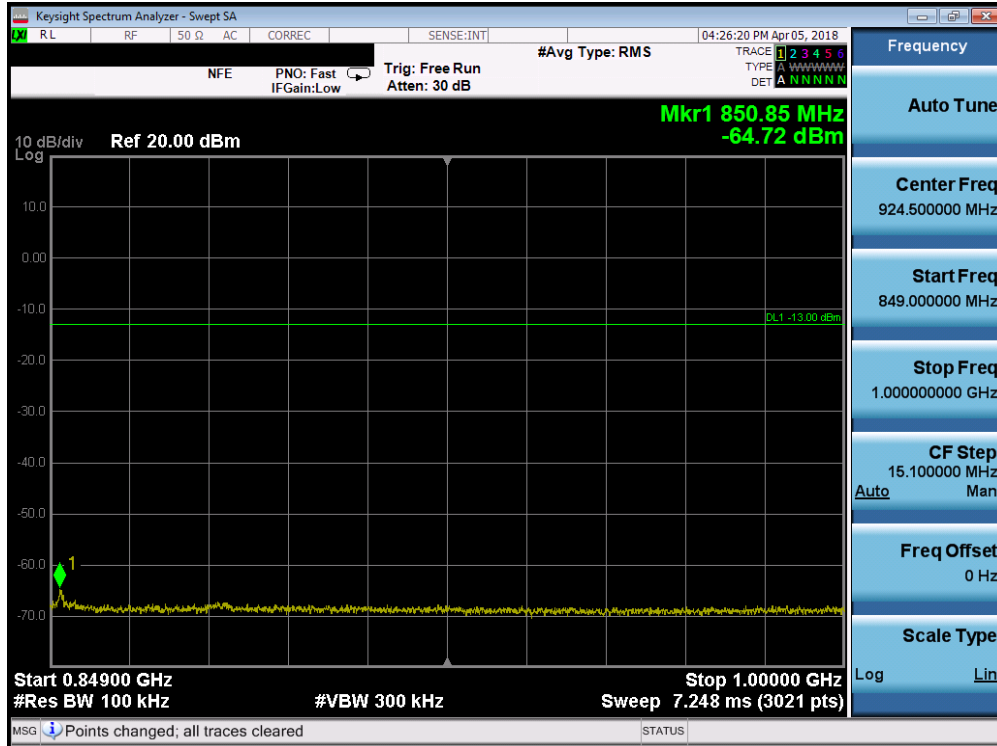


Plot 7-54. Conducted Spurious Plot (Band 5 - 5.0MHz QPSK - RB Size 1, RB Offset 0 - Mid Channel)

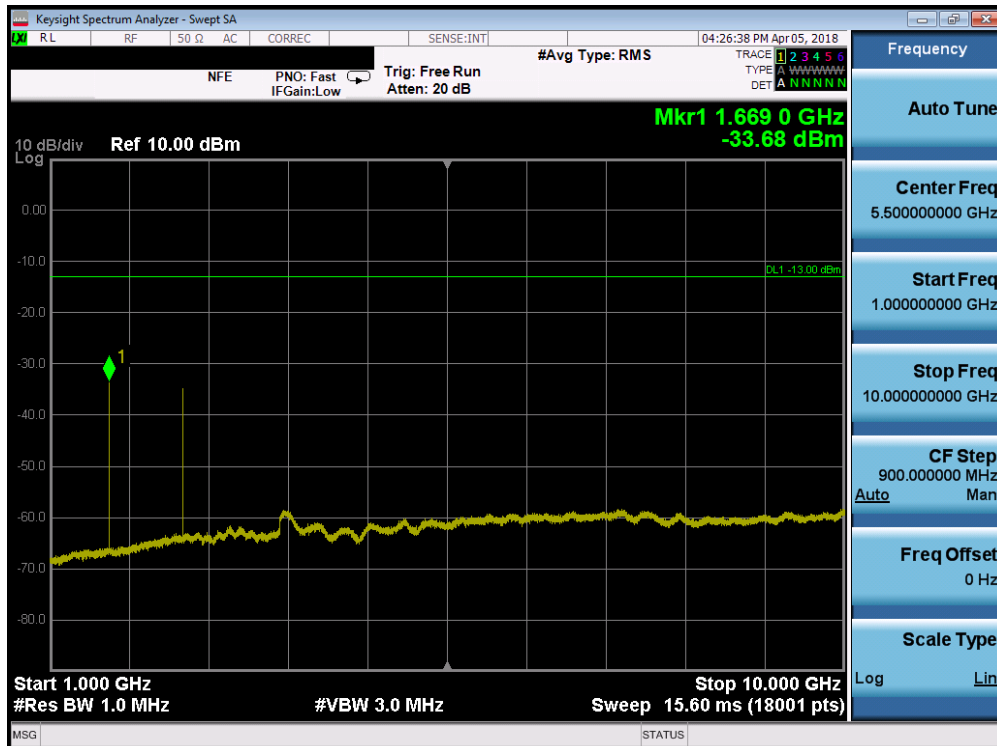


Plot 7-55. Conducted Spurious Plot (Band 5 - 5.0MHz QPSK - RB Size 1, RB Offset 0 - Mid Channel)

FCC ID: ZNFX410AS	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1803140041-03-R3-ZNF	Test Dates: 3/14 - 5/17/2018	EUT Type: Portable Handset		Page 43 of 123

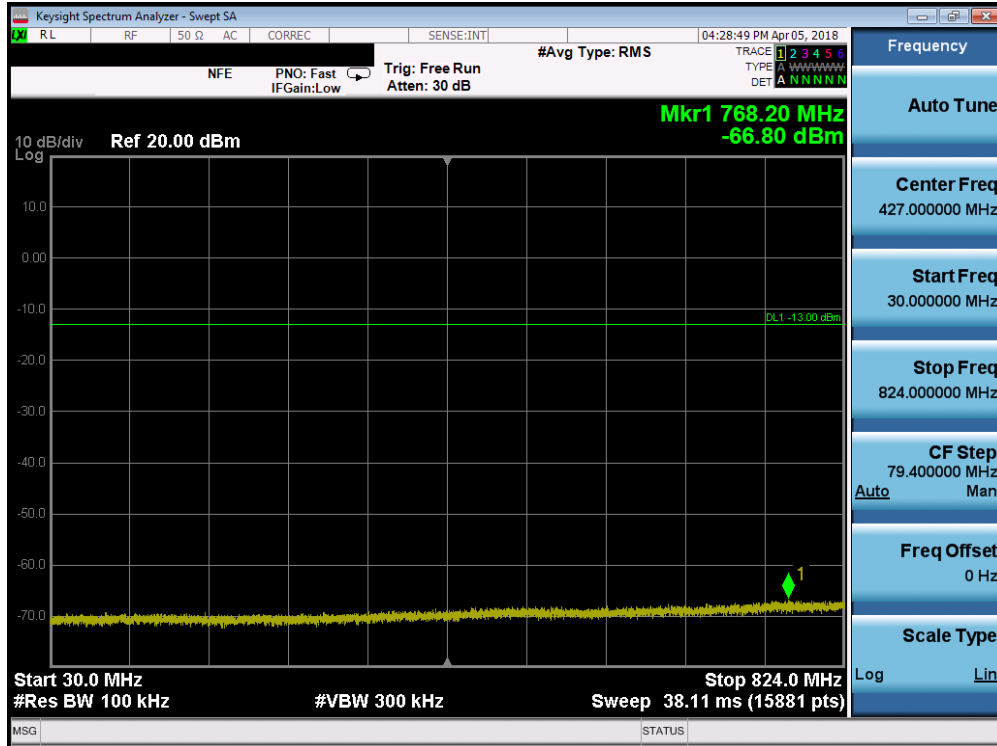


Plot 7-56. Conducted Spurious Plot (Band 5 - 5.0MHz QPSK - RB Size 1, RB Offset 0 - High Channel)

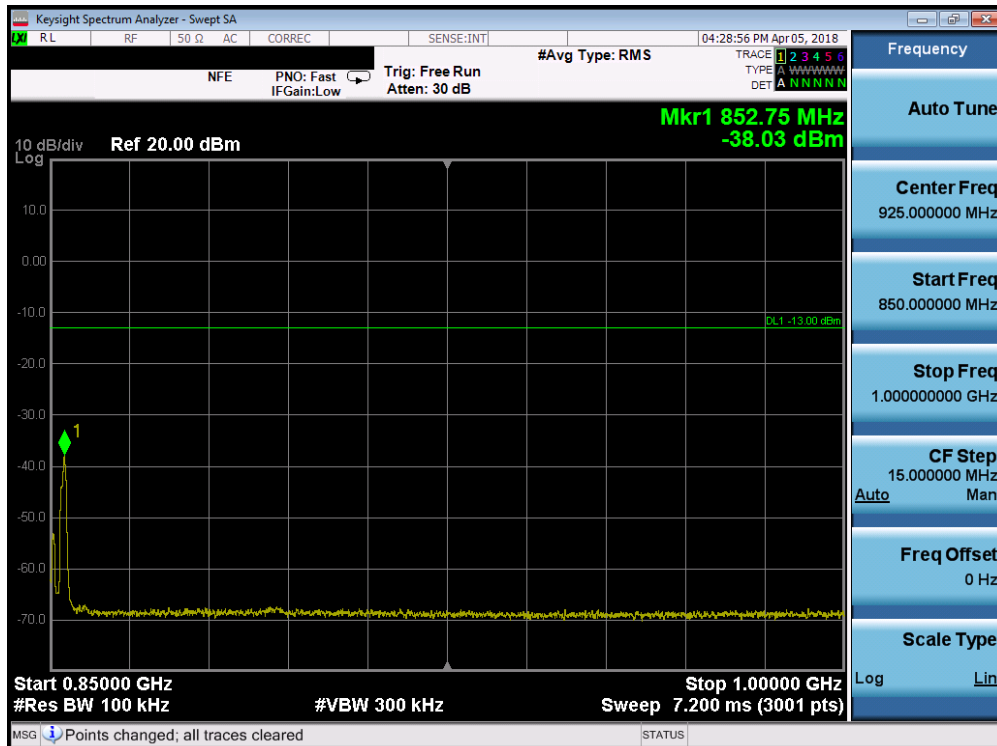

Plot 7-57. Conducted Spurious Plot (Band 5 - 5.0MHz QPSK - RB Size 1, RB Offset 0 - High Channel)


FCC ID: ZNFX410AS	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1803140041-03-R3-ZNF	Test Dates: 3/14 - 5/17/2018	EUT Type: Portable Handset		Page 44 of 123

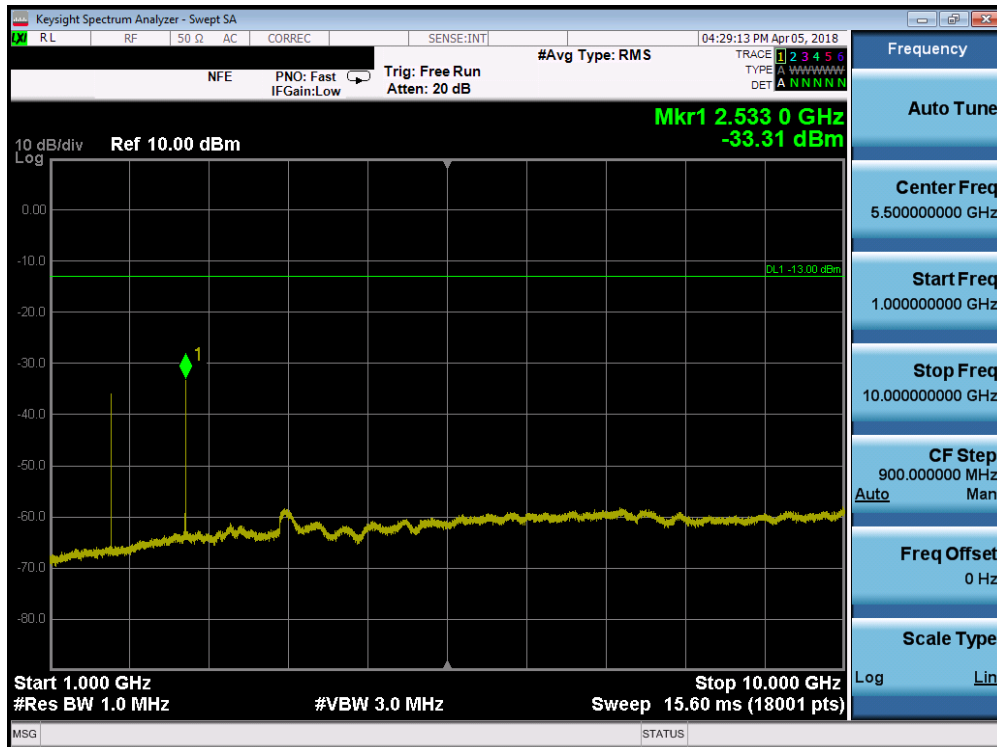


Plot 7-58. Conducted Spurious Plot (Band 5 - 5.0MHz QPSK - RB Size 1, RB Offset 0 - High Channel)

FCC ID: ZNFX410AS	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1803140041-03-R3-ZNF	Test Dates: 3/14 - 5/17/2018	EUT Type: Portable Handset		Page 45 of 123

Band 4

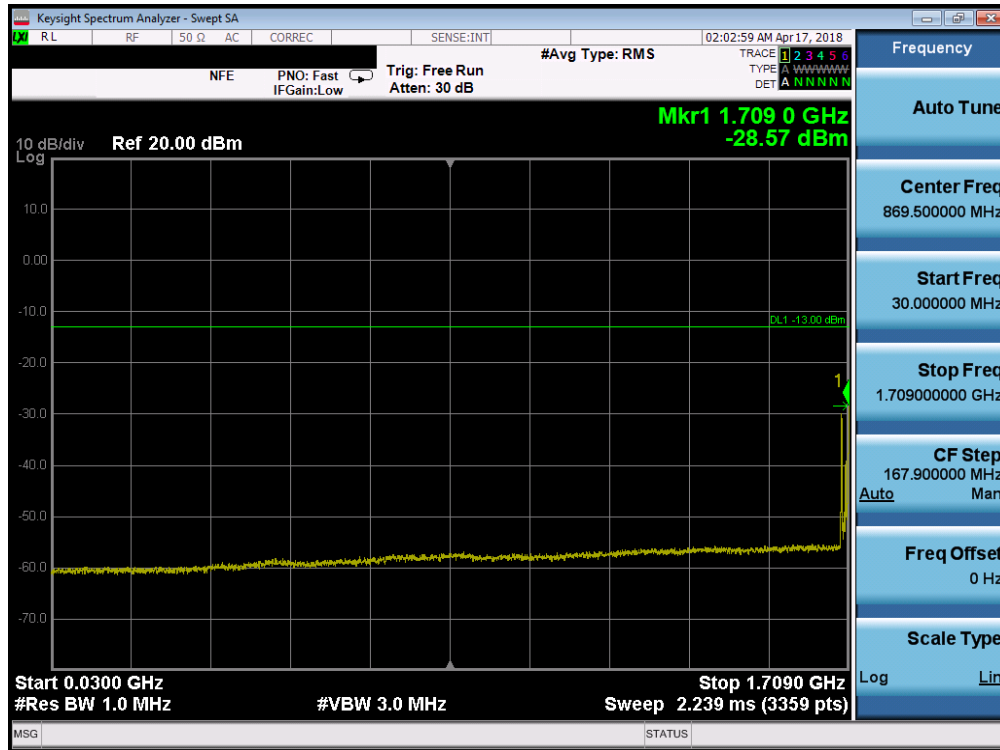


Plot 7-59. Conducted Spurious Plot (Band 4/66 - 10.0MHz QPSK - RB Size 1, RB Offset 0 - Low Channel)

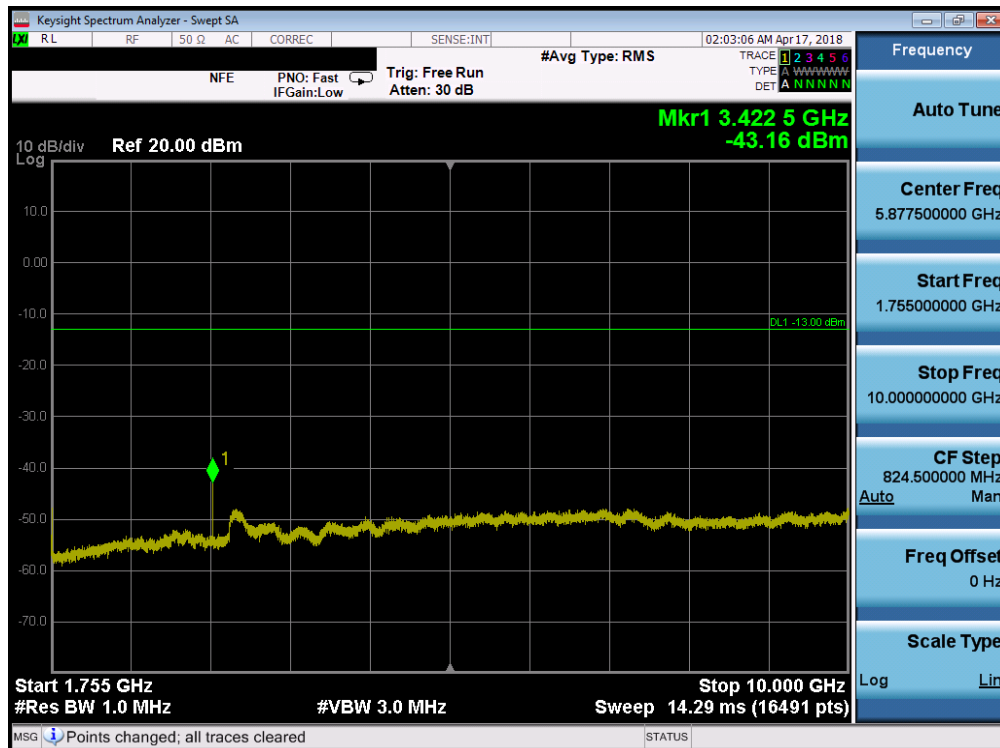


Plot 7-60. Conducted Spurious Plot (Band 4/66 - 10.0MHz QPSK - RB Size 1, RB Offset 0 - Low Channel)

FCC ID: ZNFX410AS	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1803140041-03-R3.ZNF	Test Dates: 3/14 - 5/17/2018	EUT Type: Portable Handset		Page 46 of 123

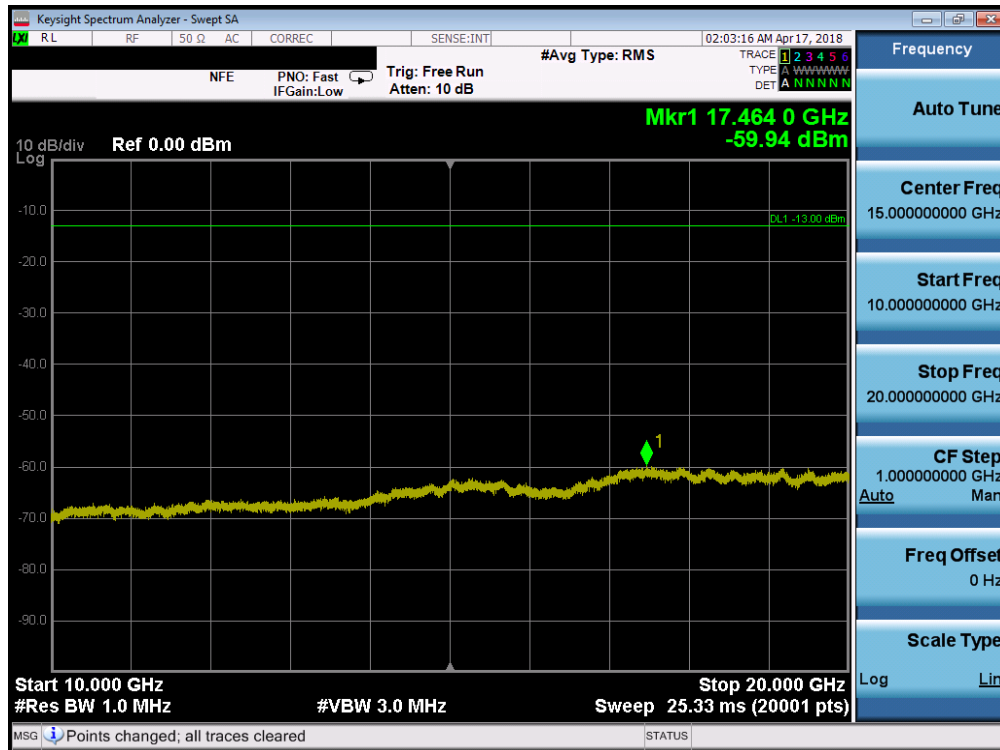


Plot 7-61. Conducted Spurious Plot (Band 4/66 - 10.0MHz QPSK - RB Size 1, RB Offset 0 - Low Channel)

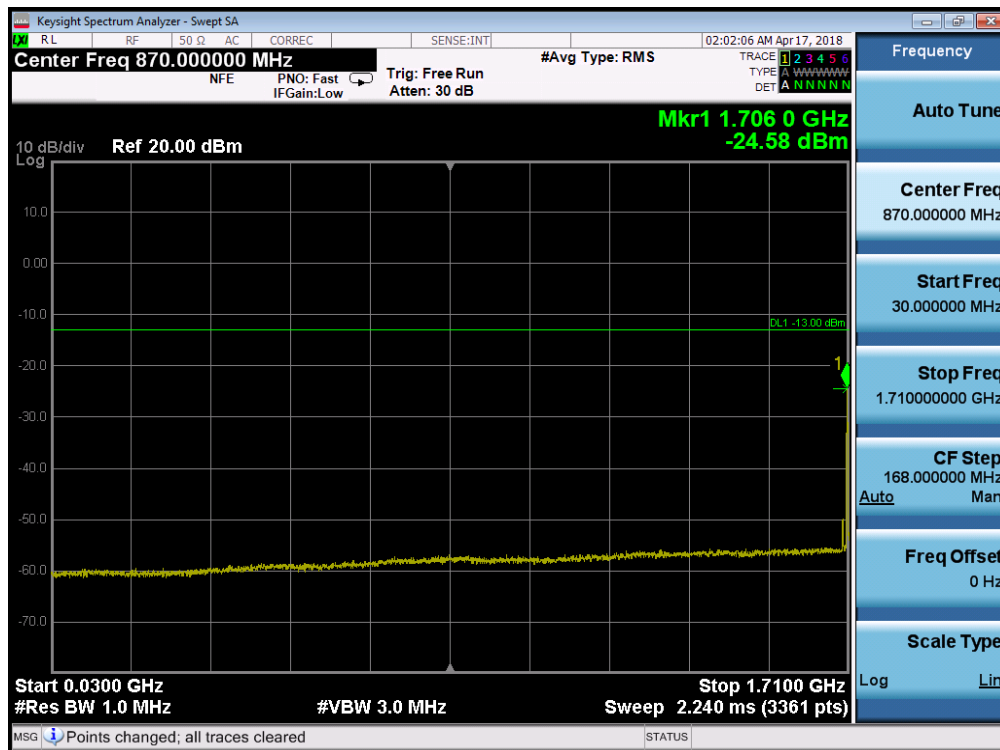


Plot 7-62. Conducted Spurious Plot (Band 4/66 - 10.0MHz QPSK - RB Size 1, RB Offset 0 - Mid Channel)

FCC ID: ZNFX410AS	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1803140041-03-R3.ZNF	Test Dates: 3/14 - 5/17/2018	EUT Type: Portable Handset		Page 47 of 123

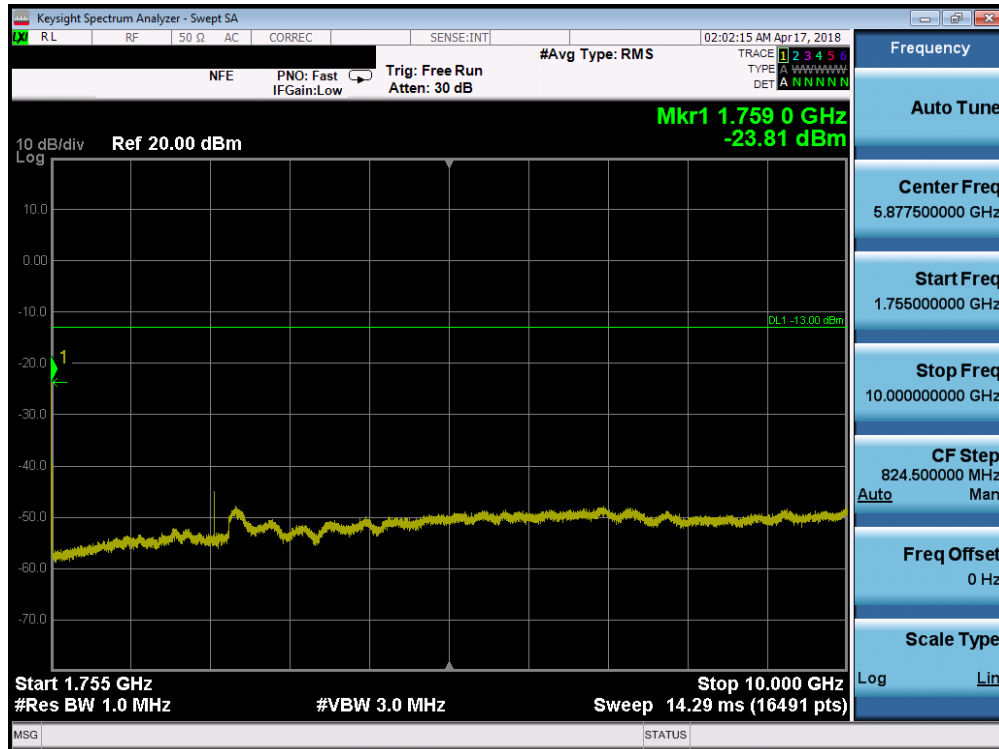


Plot 7-63. Conducted Spurious Plot (Band 4/66 - 10.0MHz QPSK - RB Size 1, RB Offset 0 - Mid Channel)

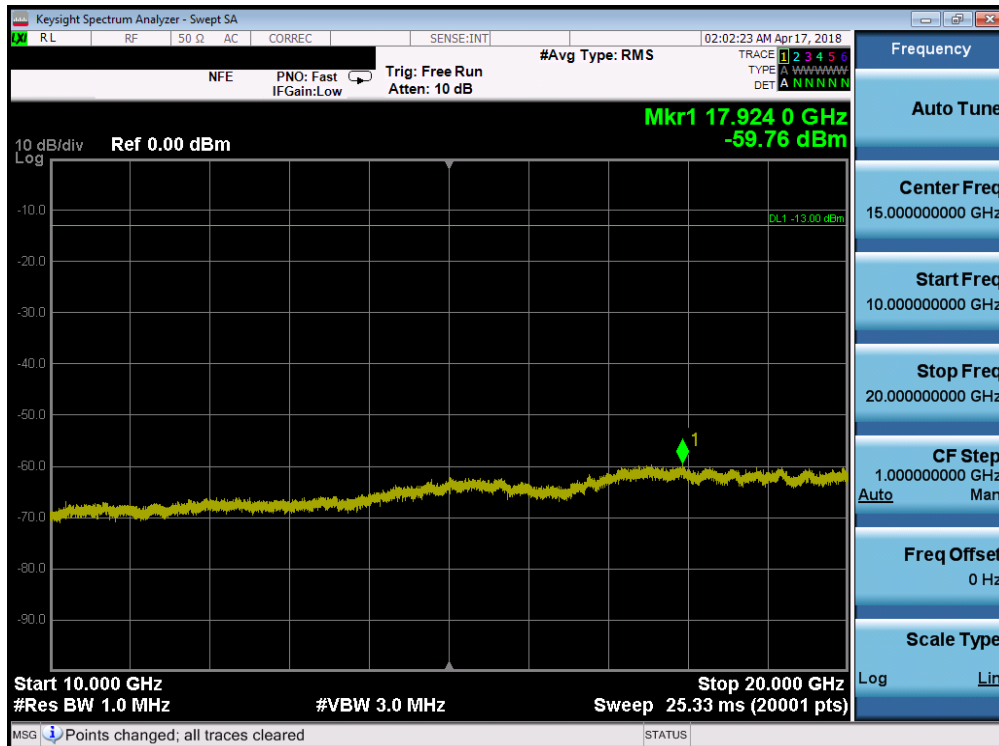


Plot 7-64. Conducted Spurious Plot (Band 4/66 - 10.0MHz QPSK - RB Size 1, RB Offset 0 - Mid Channel)

FCC ID: ZNFX410AS	MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M1803140041-03-R3-ZNF	Test Dates: 3/14 - 5/17/2018	EUT Type: Portable Handset		Page 48 of 123

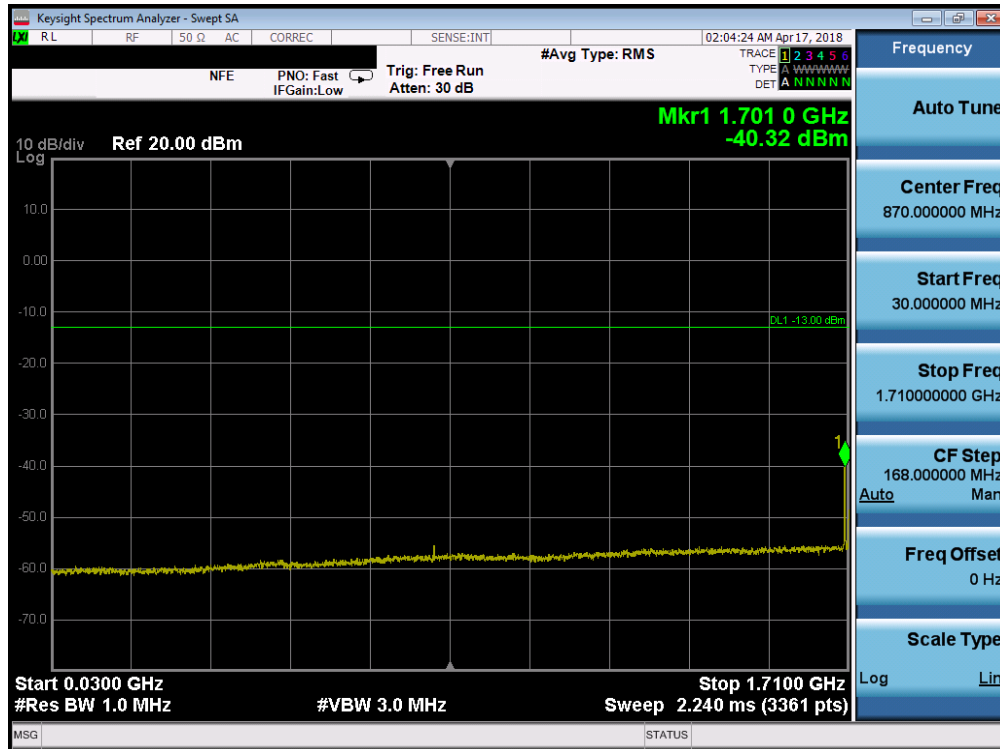


Plot 7-65. Conducted Spurious Plot (Band 4/66 - 10.0MHz QPSK - RB Size 1, RB Offset 0 - High Channel)

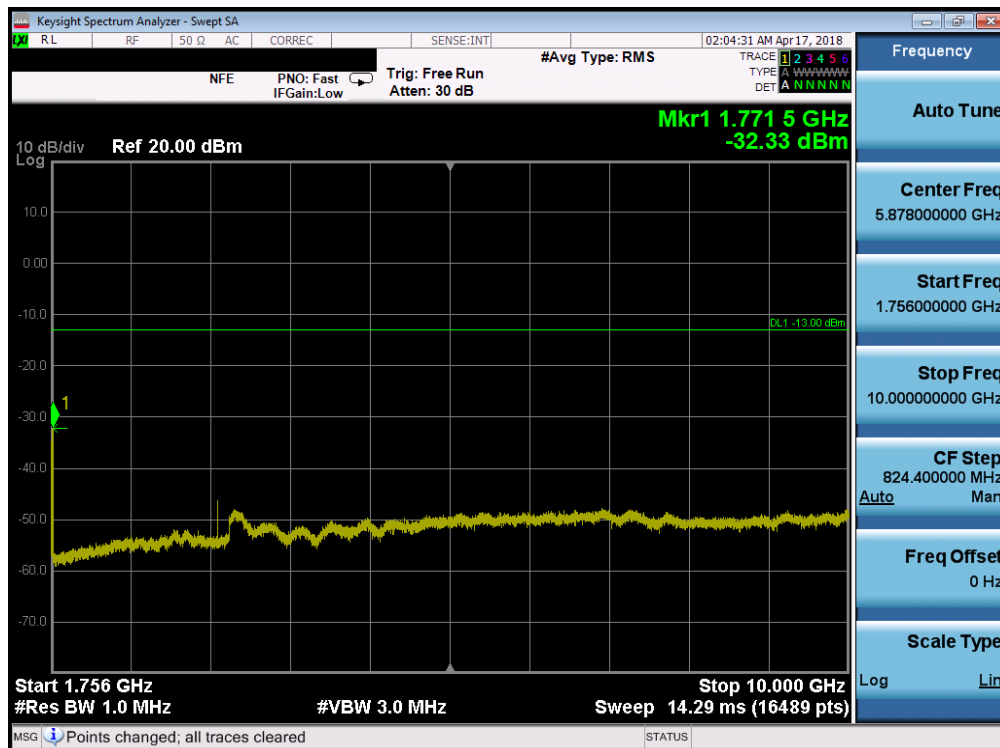

Plot 7-66. Conducted Spurious Plot (Band 4/66 - 10.0MHz QPSK - RB Size 1, RB Offset 0 - High Channel)


FCC ID: ZNFX410AS	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1803140041-03-R3-ZNF	Test Dates: 3/14 - 5/17/2018	EUT Type: Portable Handset		Page 49 of 123

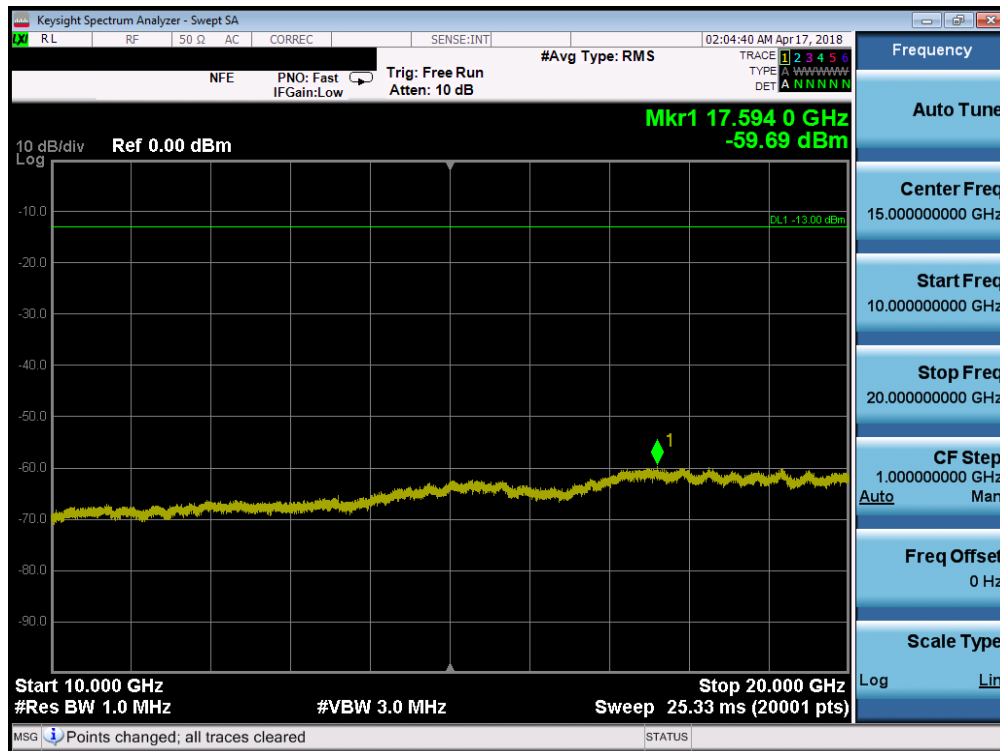


Plot 7-67. Conducted Spurious Plot (Band 4/66 - 10.0MHz QPSK - RB Size 1, RB Offset 0 - High Channel)

FCC ID: ZNFX410AS	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1803140041-03-R3-ZNF	Test Dates: 3/14 - 5/17/2018	EUT Type: Portable Handset		Page 50 of 123

Band 2

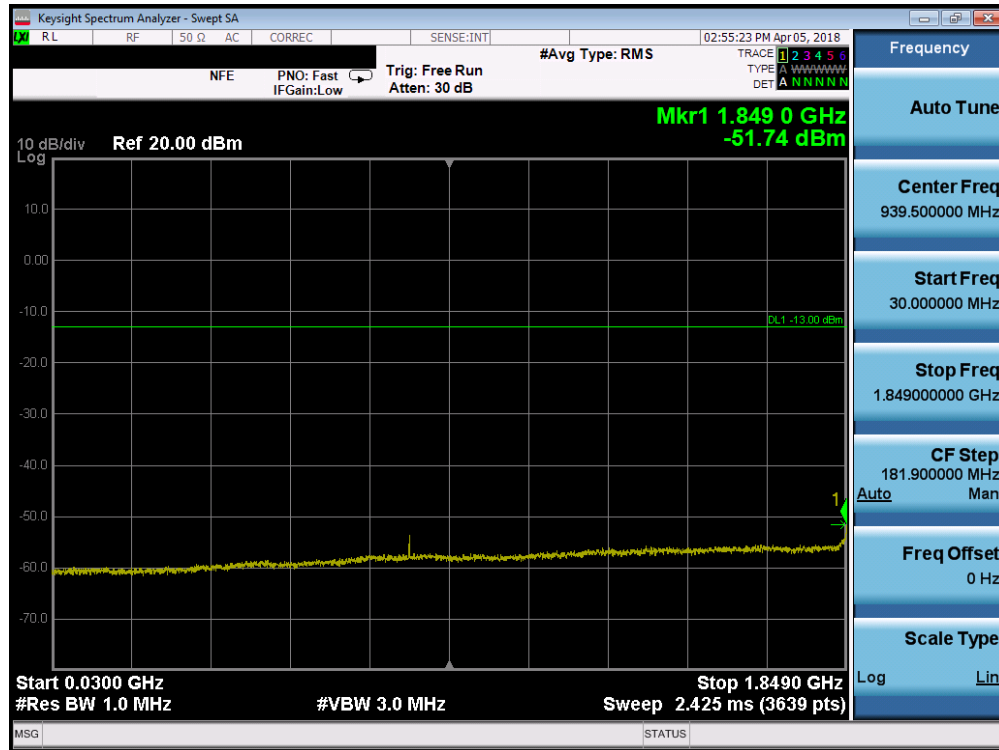


Plot 7-68. Conducted Spurious Plot (Band 2 - 15.0MHz QPSK - RB Size 1, RB Offset 0 - Low Channel)

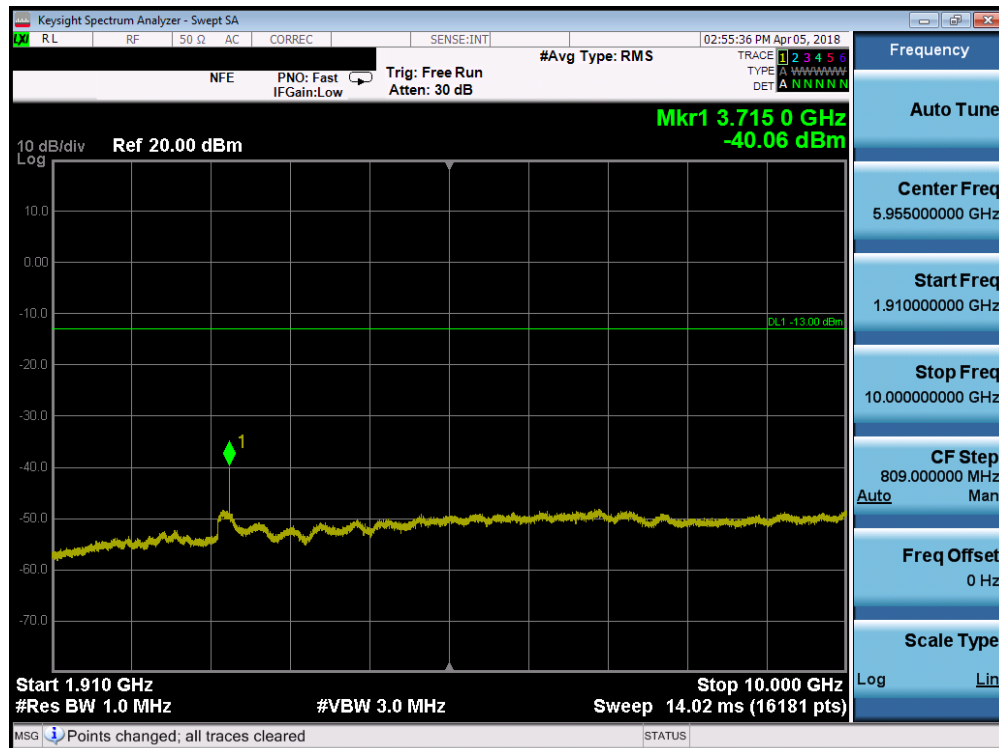


Plot 7-69. Conducted Spurious Plot (Band 2 - 15.0MHz QPSK - RB Size 1, RB Offset 0 - Low Channel)

FCC ID: ZNFX410AS	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1803140041-03-R3.ZNF	Test Dates: 3/14 - 5/17/2018	EUT Type: Portable Handset		Page 51 of 123

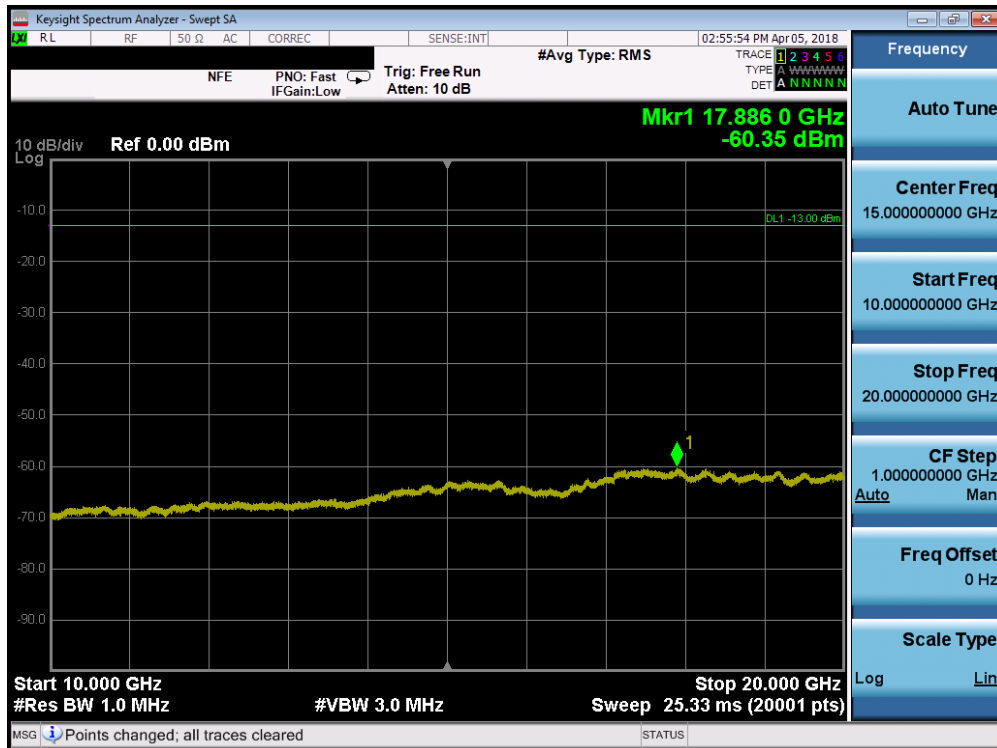


Plot 7-70. Conducted Spurious Plot (Band 2 - 15.0MHz QPSK - RB Size 1, RB Offset 0 - Low Channel)

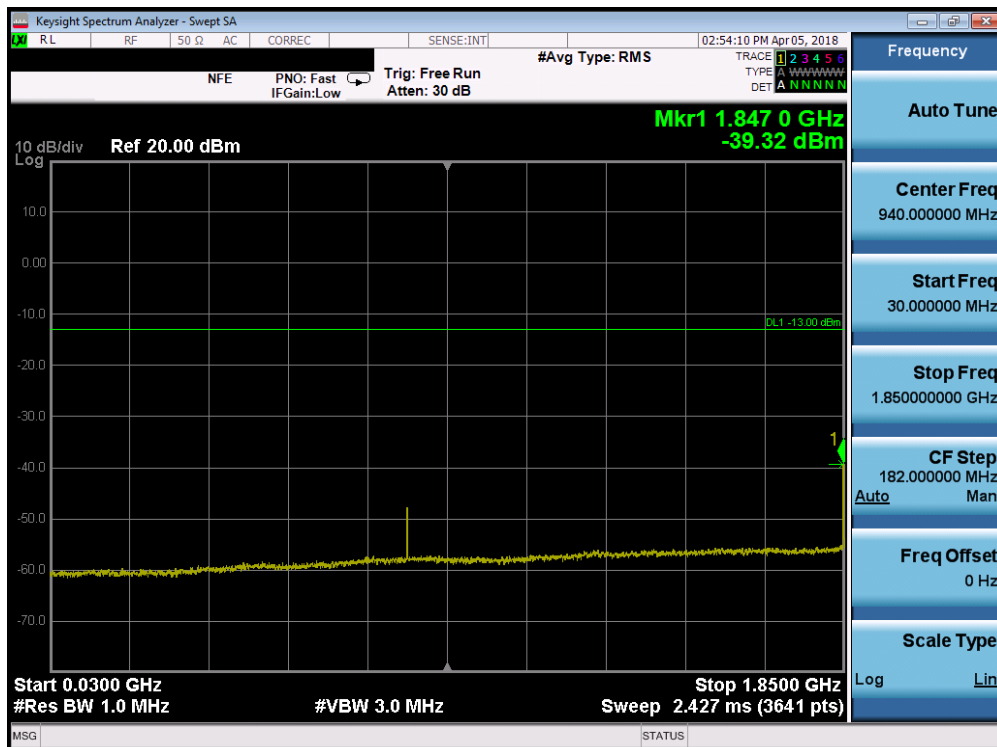


Plot 7-71. Conducted Spurious Plot (Band 2 - 15.0MHz QPSK - RB Size 1, RB Offset 0 - Mid Channel)

FCC ID: ZNFX410AS	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1803140041-03-R3-ZNF	Test Dates: 3/14 - 5/17/2018	EUT Type: Portable Handset		Page 52 of 123

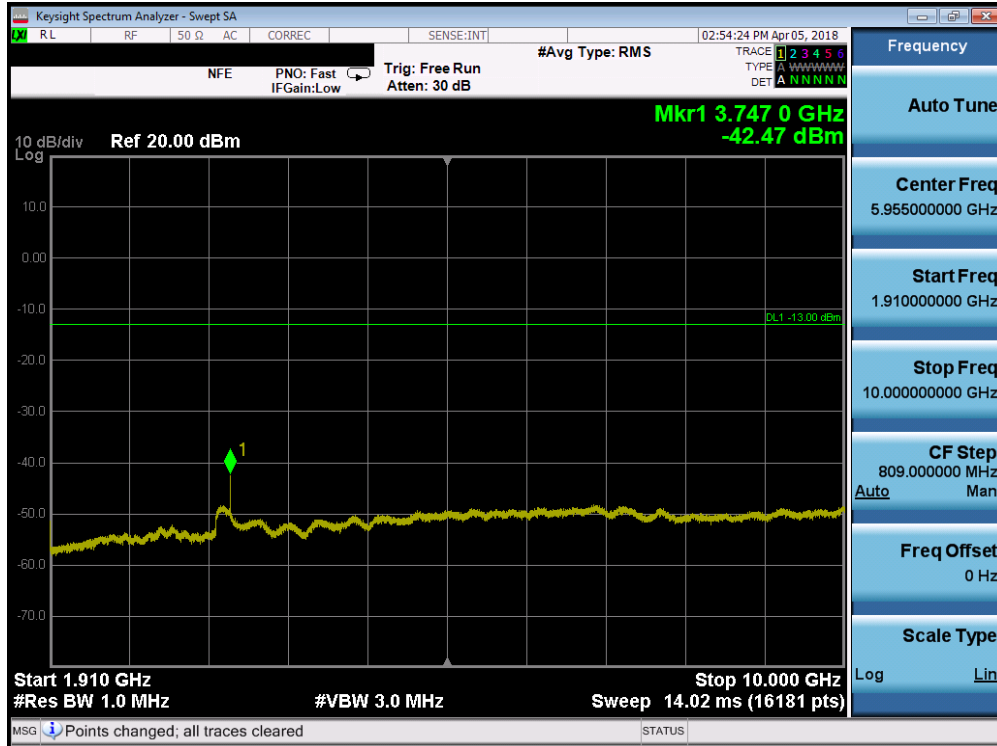


Plot 7-72. Conducted Spurious Plot (Band 2 - 15.0MHz QPSK - RB Size 1, RB Offset 0 - Mid Channel)

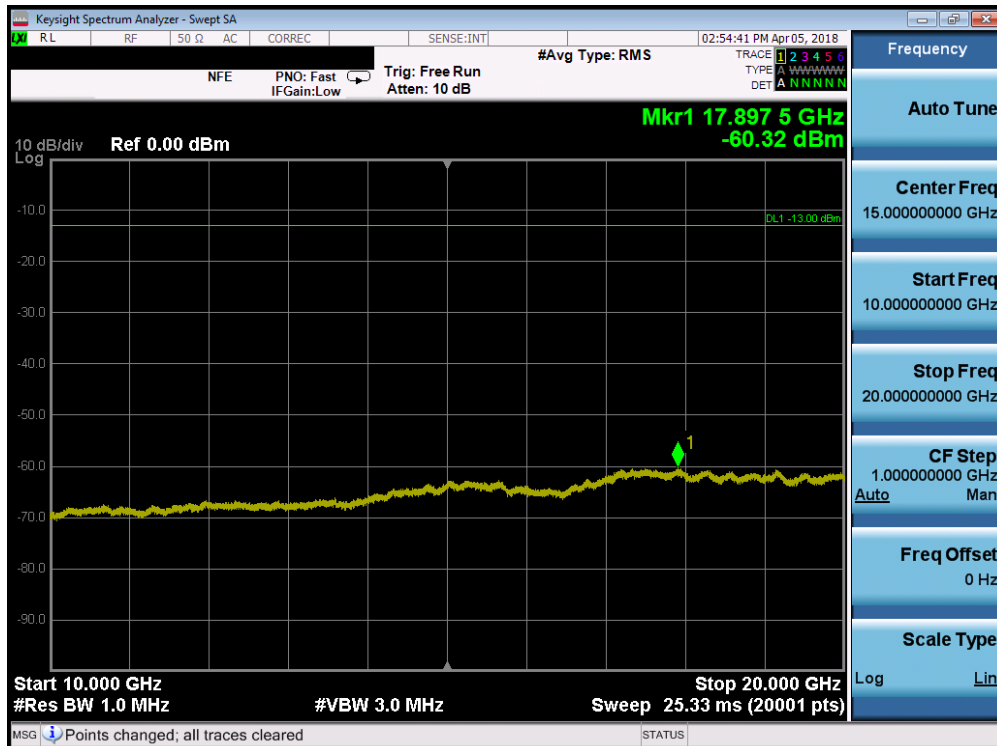


Plot 7-73. Conducted Spurious Plot (Band 2 - 15.0MHz QPSK - RB Size 1, RB Offset 0 - Mid Channel)

FCC ID: ZNFX410AS		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1803140041-03-R3-ZNF	Test Dates: 3/14 - 5/17/2018	EUT Type: Portable Handset		Page 53 of 123

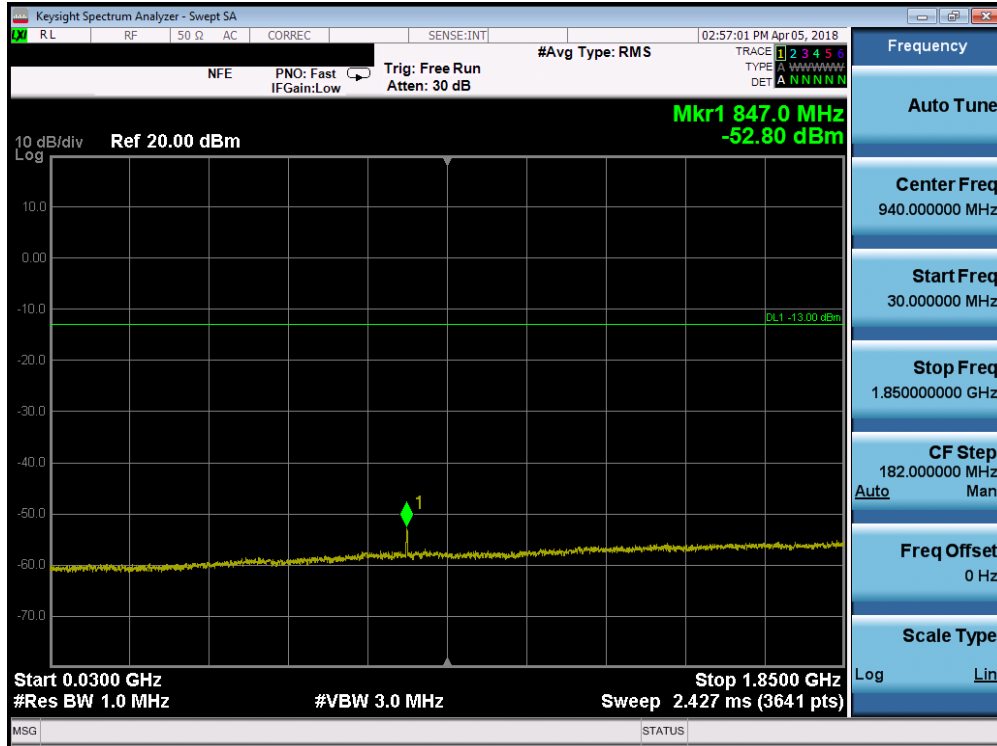


Plot 7-74. Conducted Spurious Plot (Band 2 - 15.0MHz QPSK - RB Size 1, RB Offset 0 - High Channel)

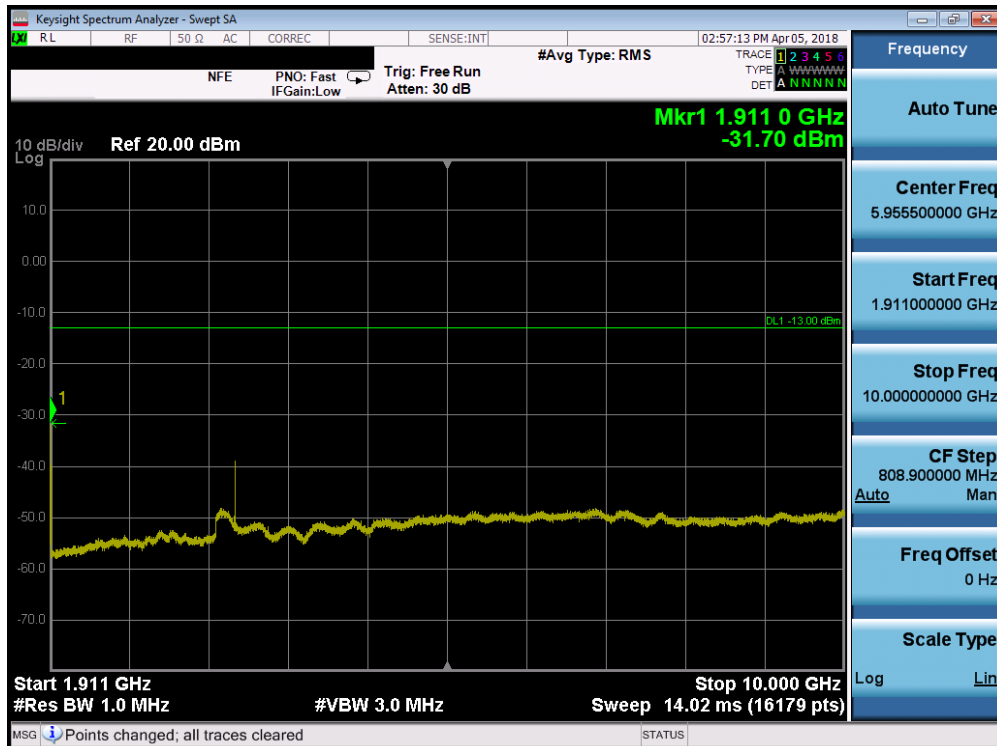

Plot 7-75. Conducted Spurious Plot (Band 2 - 15.0MHz QPSK - RB Size 1, RB Offset 0 - High Channel)

FCC ID: ZNFX410AS	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1803140041-03-R3-ZNF	Test Dates: 3/14 - 5/17/2018	EUT Type: Portable Handset		Page 54 of 123

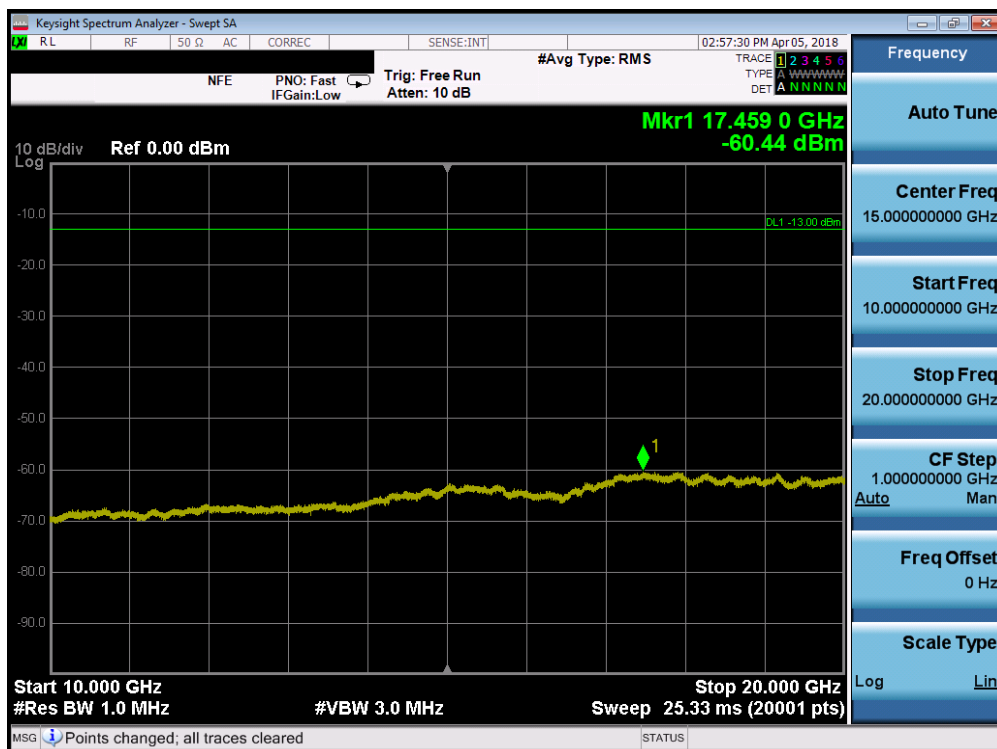

Plot 7-76. Conducted Spurious Plot (Band 2 - 15.0MHz QPSK - RB Size 1, RB Offset 0 - High Channel)

FCC ID: ZNFX410AS	 MEASUREMENT REPORT (CERTIFICATION) 		Approved by: Quality Manager
Test Report S/N: 1M1803140041-03-R3.ZNF	Test Dates: 3/14 - 5/17/2018	EUT Type: Portable Handset	Page 55 of 123

7.4 Band Edge Emissions at Antenna Terminal

Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

The minimum permissible attenuation level of any spurious emission is $43 + \log_{10}(P_{[Watts]})$, where P is the transmitter power in Watts.

Test Procedure Used

KDB 971168 D01 v03 – Section 6.0

Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW $\geq$ 1% of the emission bandwidth
4. VBW $\geq$ 3 x RBW
5. Detector = RMS
6. Number of sweep points $\geq$ 2 x Span/RBW
7. Trace mode = trace average
8. Sweep time = auto couple
9. The trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

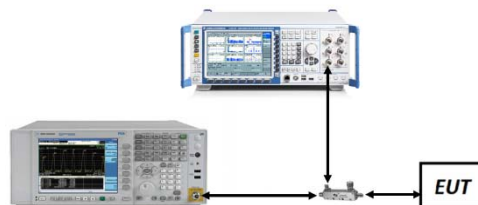


Figure 7-3. Test Instrument & Measurement Setup

FCC ID: ZNFX410AS	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1803140041-03-R3.ZNF	Test Dates: 3/14 - 5/17/2018	EUT Type: Portable Handset		Page 56 of 123


Test Notes

Per 22.917(b), 24.238(a) and 27.53(h) in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed to demonstrate compliance with the out-of-band emissions limit. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.


Per 27.53(g) for operations in the 698-746 MHz band, in the 100 kHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least 30 kHz may be employed to demonstrate compliance with the out-of-band emissions limit.

FCC ID: ZNFX410AS		MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M1803140041-03-R3.ZNF	Test Dates: 3/14 - 5/17/2018	EUT Type: Portable Handset			Page 57 of 123

Band 12

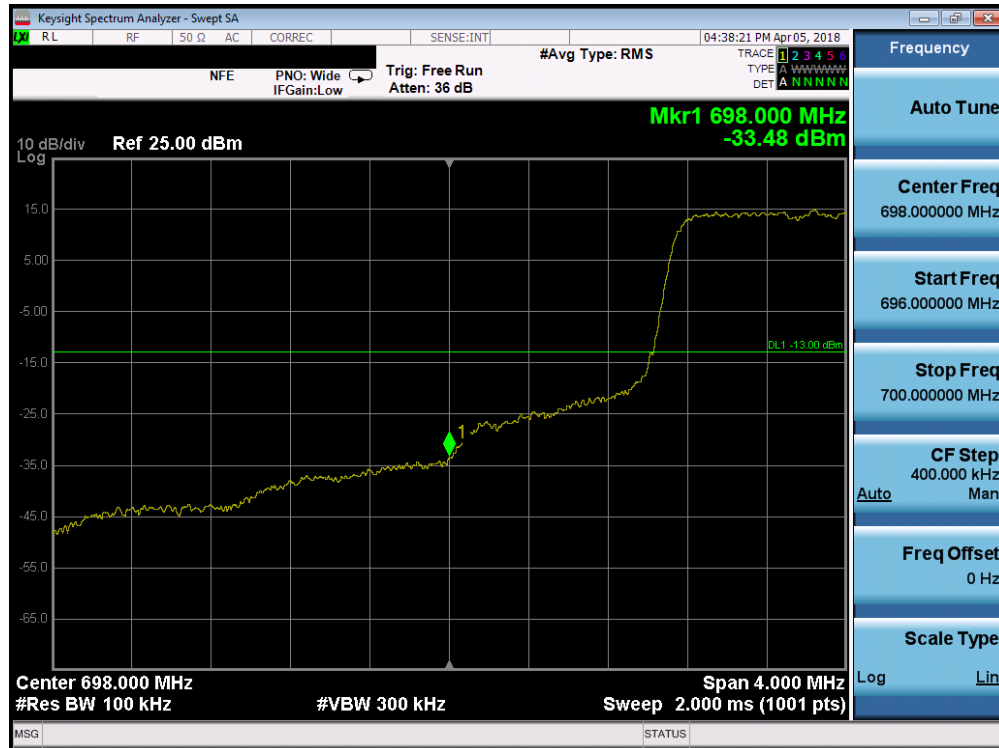


Plot 7-77. Lower Band Edge Plot (Band 12 - 1.4MHz QPSK - Full RB Configuration)

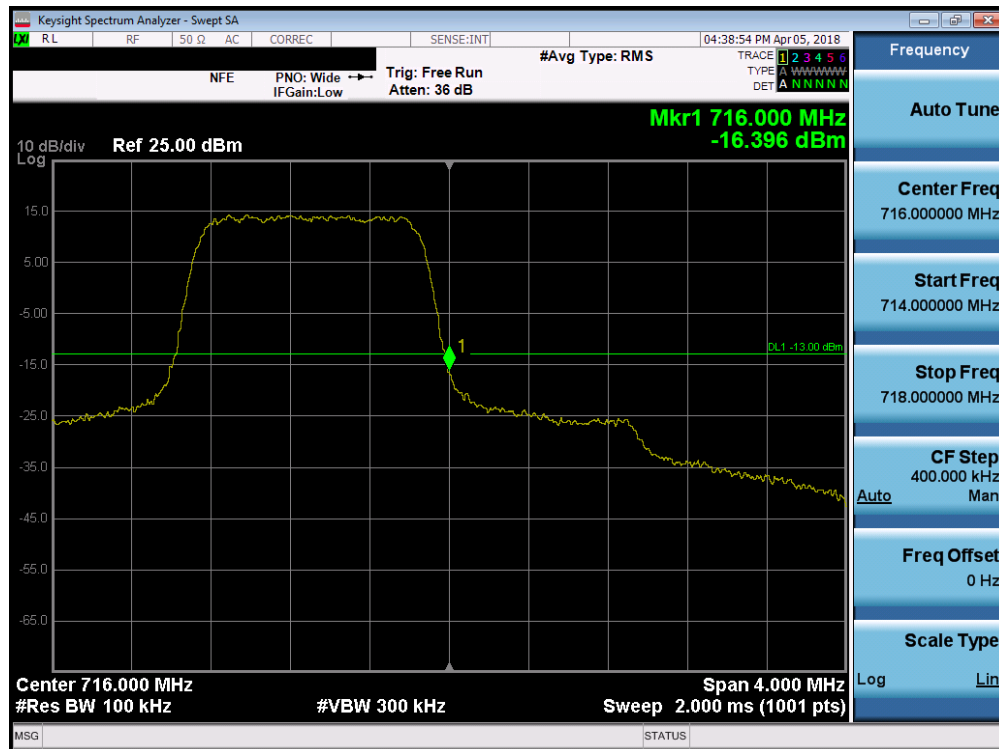


Plot 7-78. Upper Band Edge Plot (Band 12 - 1.4MHz QPSK - Full RB Configuration)

FCC ID: ZNFX410AS	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1803140041-03-R3-ZNF	Test Dates: 3/14 - 5/17/2018	EUT Type: Portable Handset		Page 58 of 123

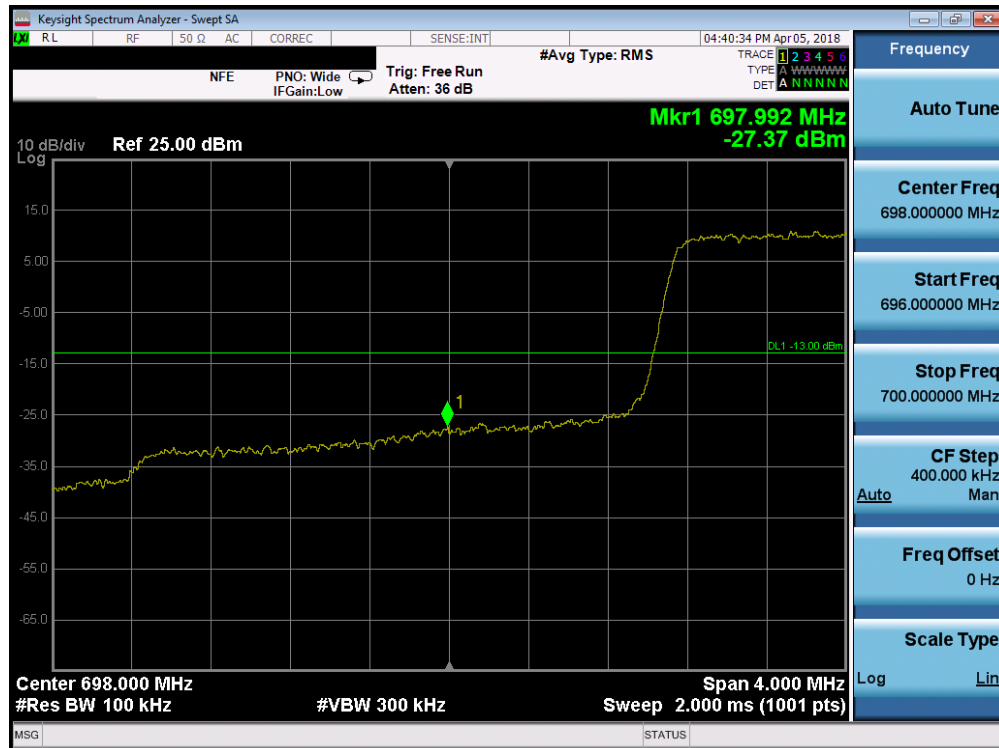


Plot 7-79. Lower Band Edge Plot (Band 12 - 3.0MHz QPSK - Full RB Configuration)

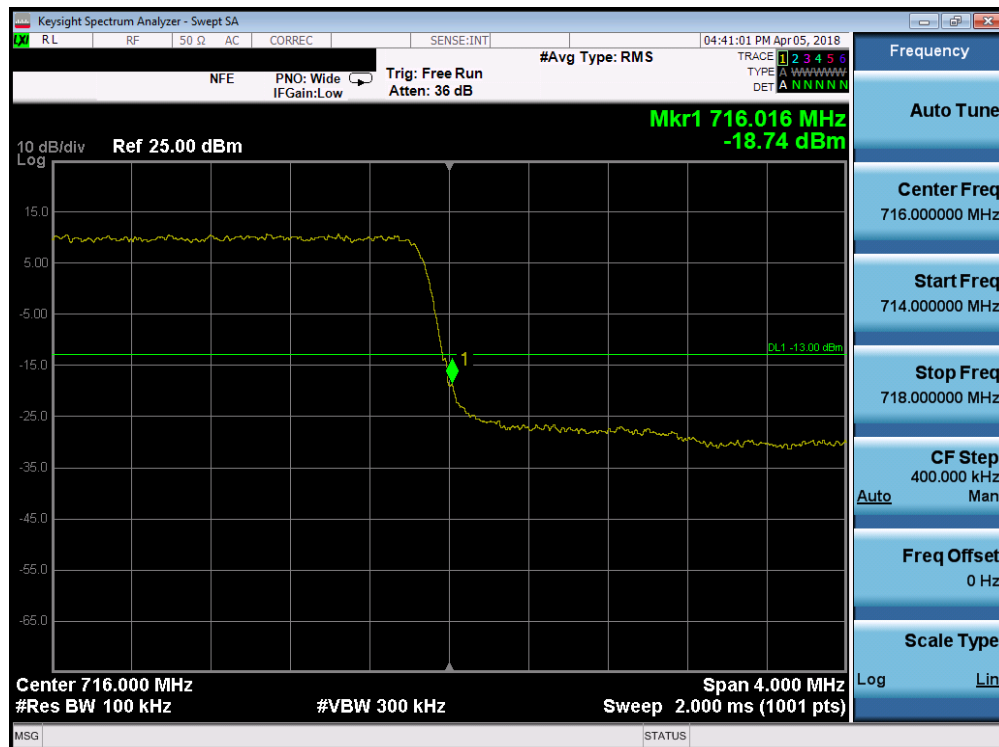

Plot 7-80. Upper Band Edge Plot (Band 12 - 3.0MHz QPSK - Full RB Configuration)

FCC ID: ZNFX410AS	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1803140041-03-R3-ZNF	Test Dates: 3/14 - 5/17/2018	EUT Type: Portable Handset	Page 59 of 123

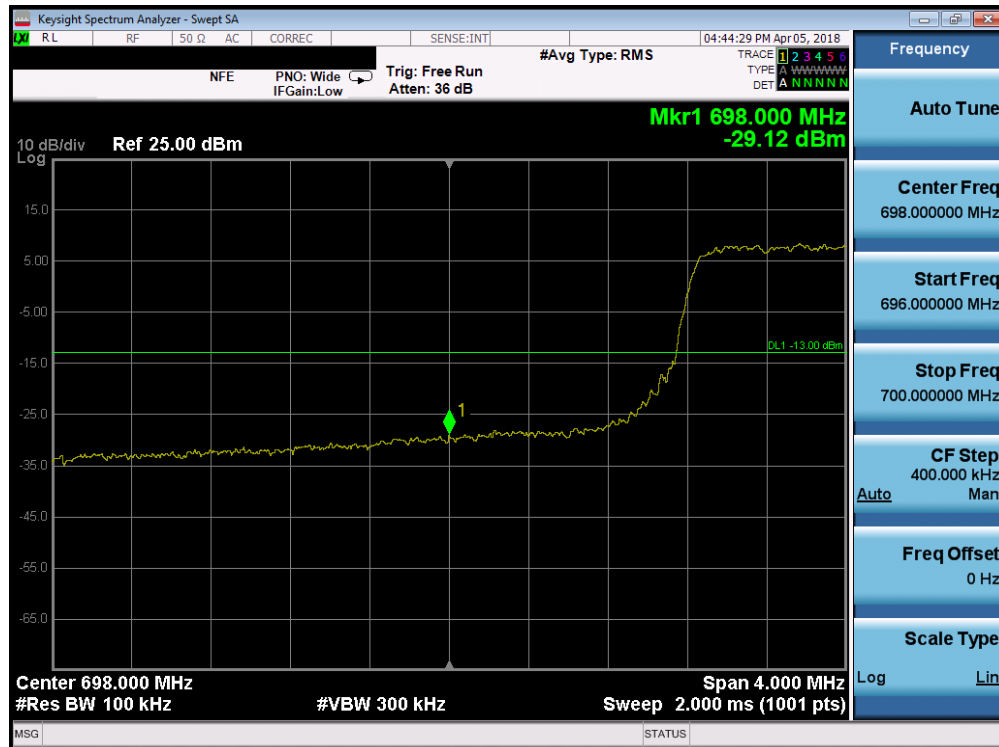


Plot 7-81. Lower Band Edge Plot (Band 12 - 5.0MHz QPSK - Full RB Configuration)



Plot 7-82. Upper Band Edge Plot (Band 12 - 5.0MHz QPSK - Full RB Configuration)

FCC ID: ZNFX410AS	MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M1803140041-03-R3-ZNF	Test Dates: 3/14 - 5/17/2018	EUT Type: Portable Handset		Page 60 of 123

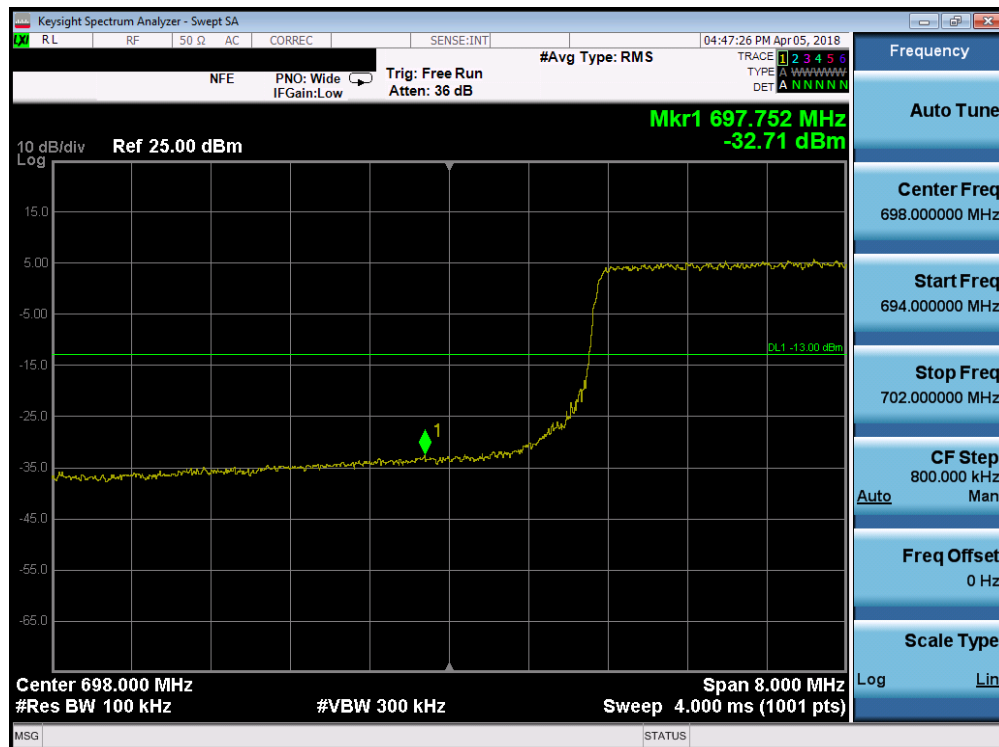


Plot 7-83. Lower Band Edge Plot (Band 12 - 10.0MHz QPSK - Full RB Configuration)




Plot 7-84. Upper Band Edge Plot (Band 12 - 10.0MHz QPSK - Full RB Configuration)

FCC ID: ZNFX410AS	MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M1803140041-03-R3-ZNF	Test Dates: 3/14 - 5/17/2018	EUT Type: Portable Handset		Page 61 of 123

Band 5

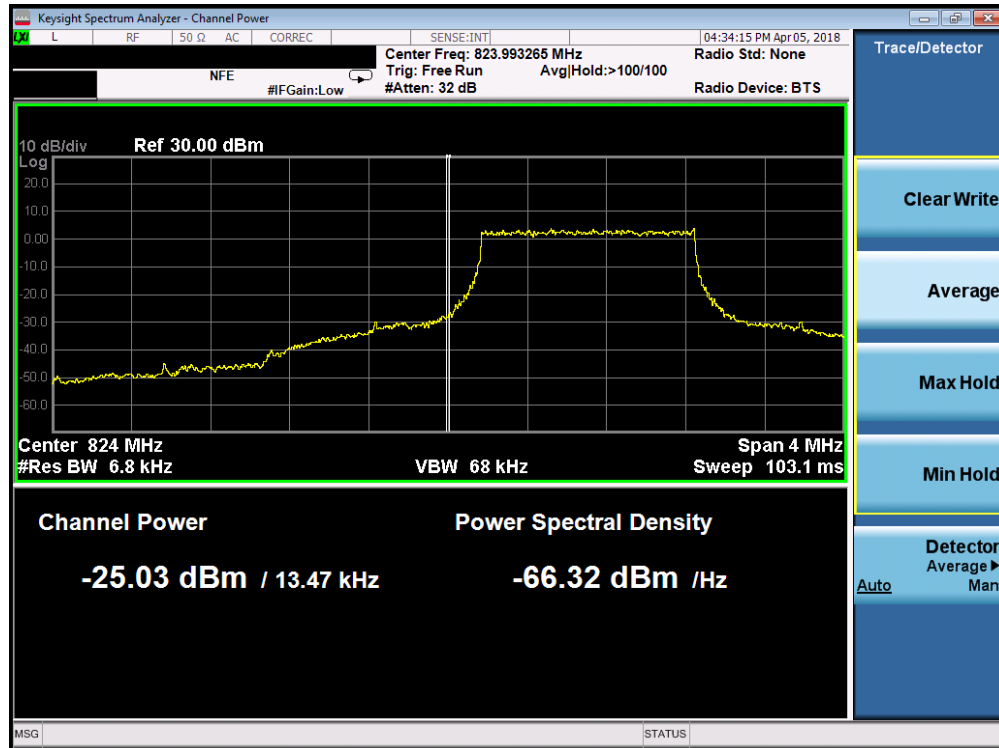


Plot 7-85. Lower Band Edge Plot (Band 5 - 1.4MHz QPSK - Full RB Configuration)

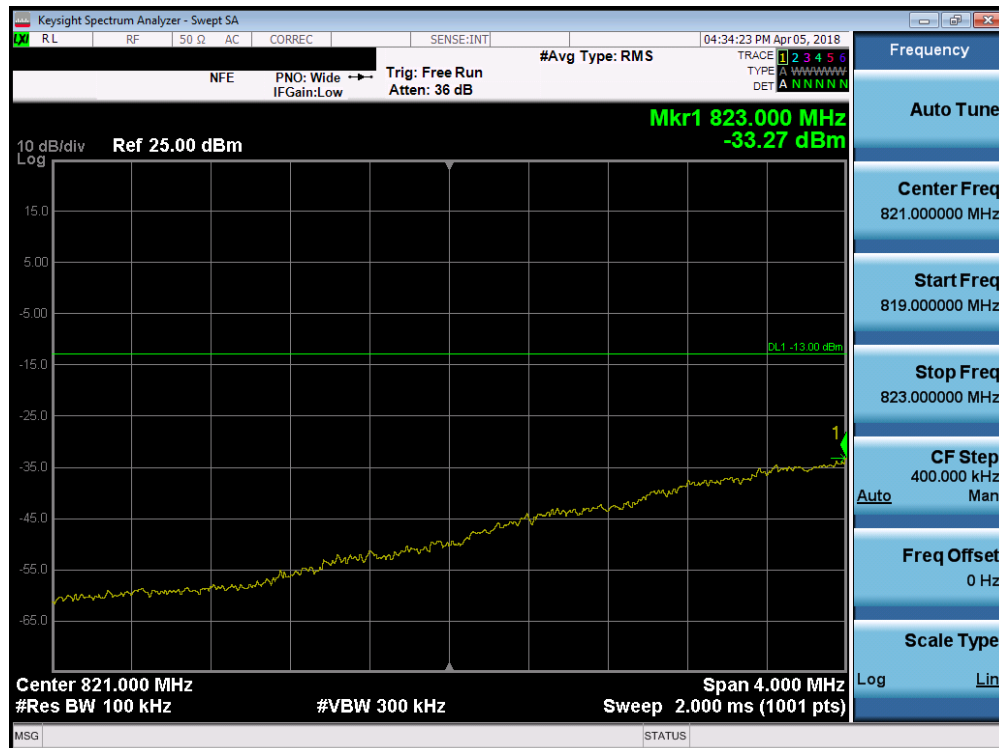

Plot 7-86. Lower Extended Band Edge Plot (Band 5 - 1.4MHz QPSK - Full RB Configuration)

FCC ID: ZNFX410AS	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1803140041-03-R3.ZNF	Test Dates: 3/14 - 5/17/2018	EUT Type: Portable Handset		Page 62 of 123

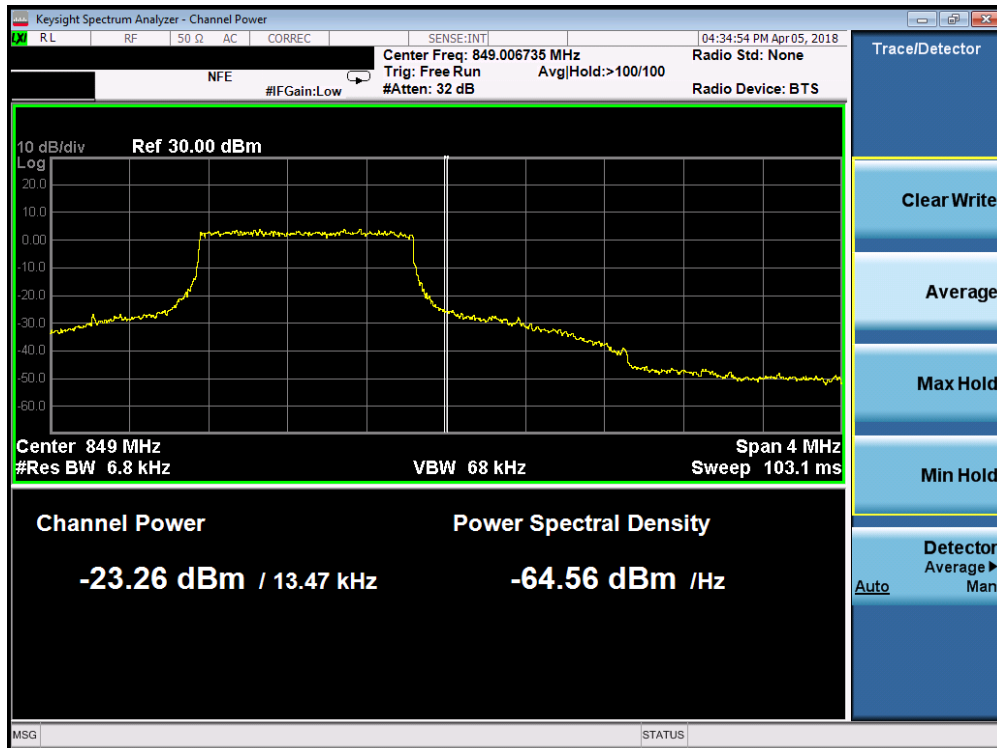


Plot 7-87. Upper Band Edge Plot (Band 5 - 1.4MHz QPSK - Full RB Configuration)




Plot 7-88. Upper Extended Band Edge Plot (Band 5 - 1.4MHz QPSK - Full RB Configuration)

FCC ID: ZNFX410AS	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1803140041-03-R3-ZNF	Test Dates: 3/14 - 5/17/2018	EUT Type: Portable Handset		Page 63 of 123

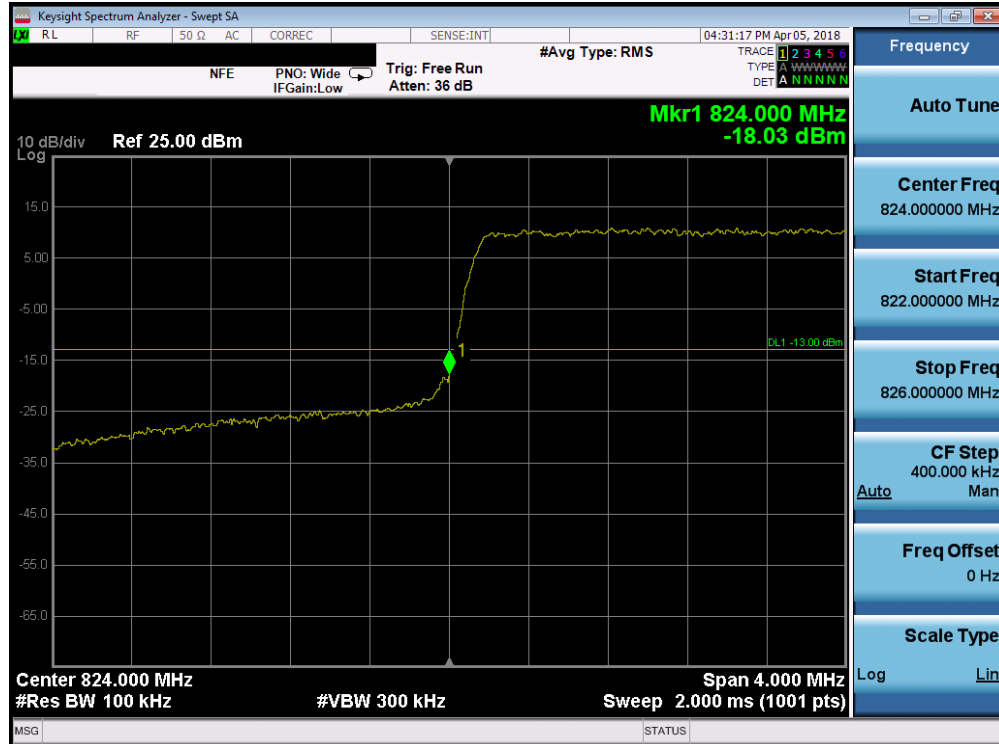


Plot 7-89. Lower Band Edge Plot (Band 5 - 3.0MHz QPSK - Full RB Configuration)

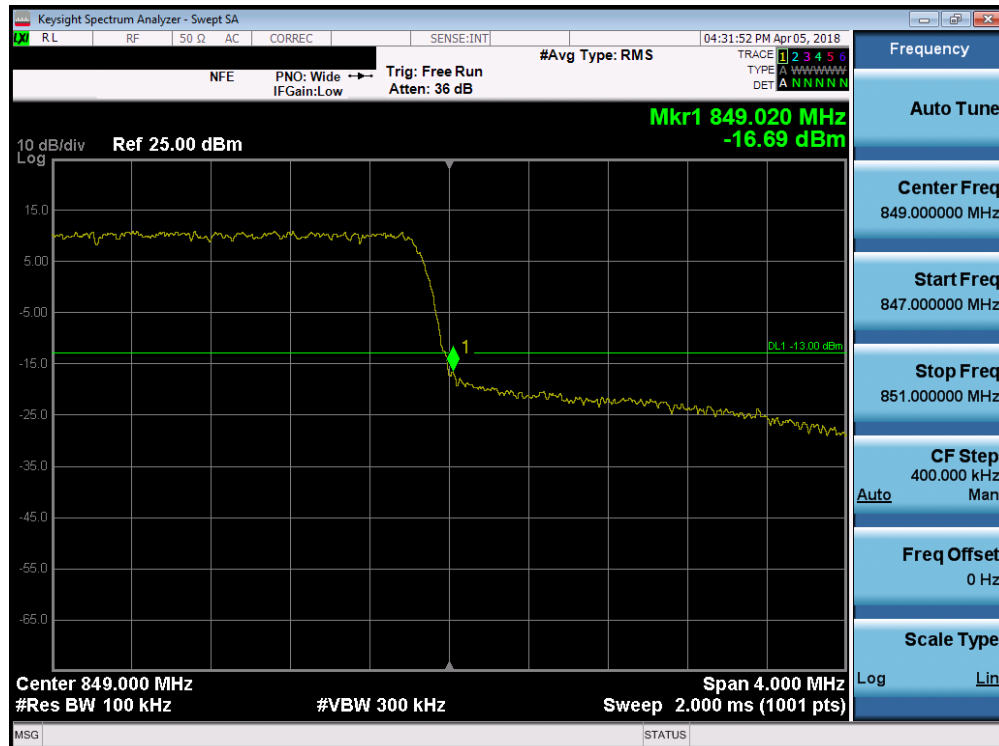


Plot 7-90. Upper Band Edge Plot (Band 5 - 3.0MHz QPSK - Full RB Configuration)

FCC ID: ZNFX410AS	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1803140041-03-R3-ZNF	Test Dates: 3/14 - 5/17/2018	EUT Type: Portable Handset		Page 64 of 123

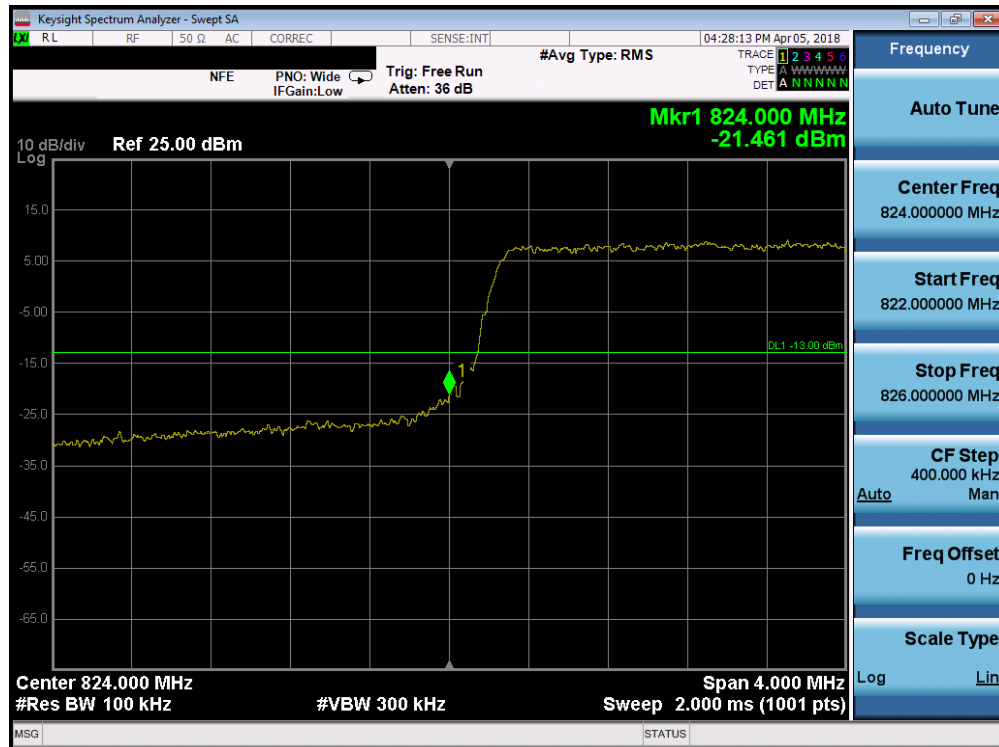


Plot 7-91. Lower Band Edge Plot (Band 5 - 5.0MHz QPSK - Full RB Configuration)

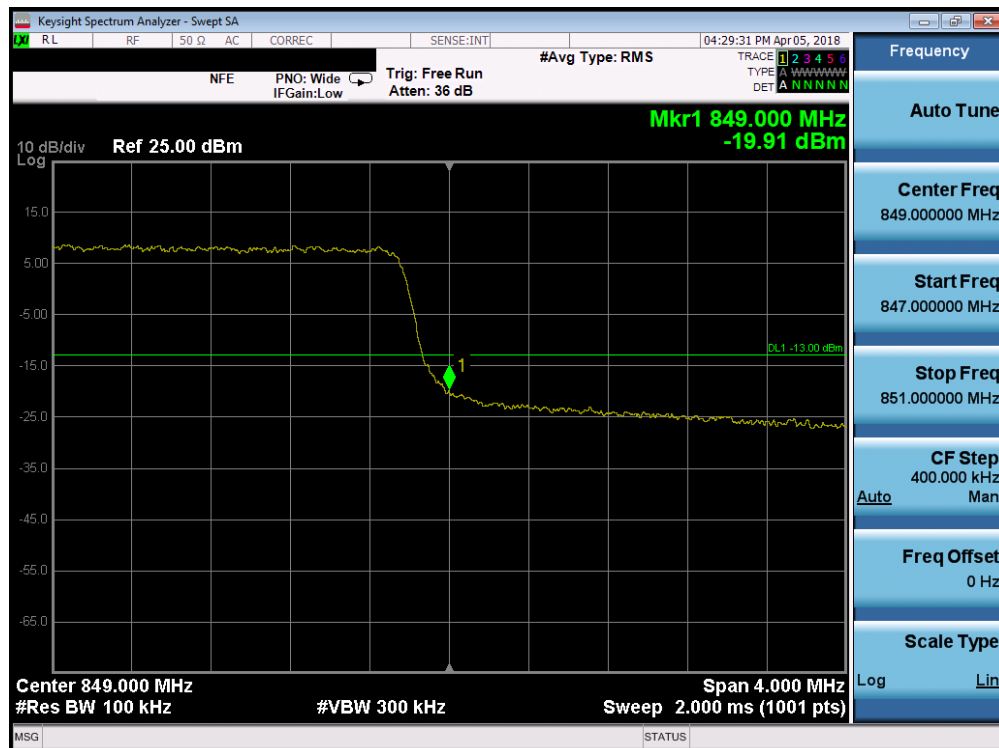

Plot 7-92. Upper Band Edge Plot (Band 5 - 5.0MHz QPSK - Full RB Configuration)

FCC ID: ZNFX410AS	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1803140041-03-R3-ZNF	Test Dates: 3/14 - 5/17/2018	EUT Type: Portable Handset		Page 65 of 123

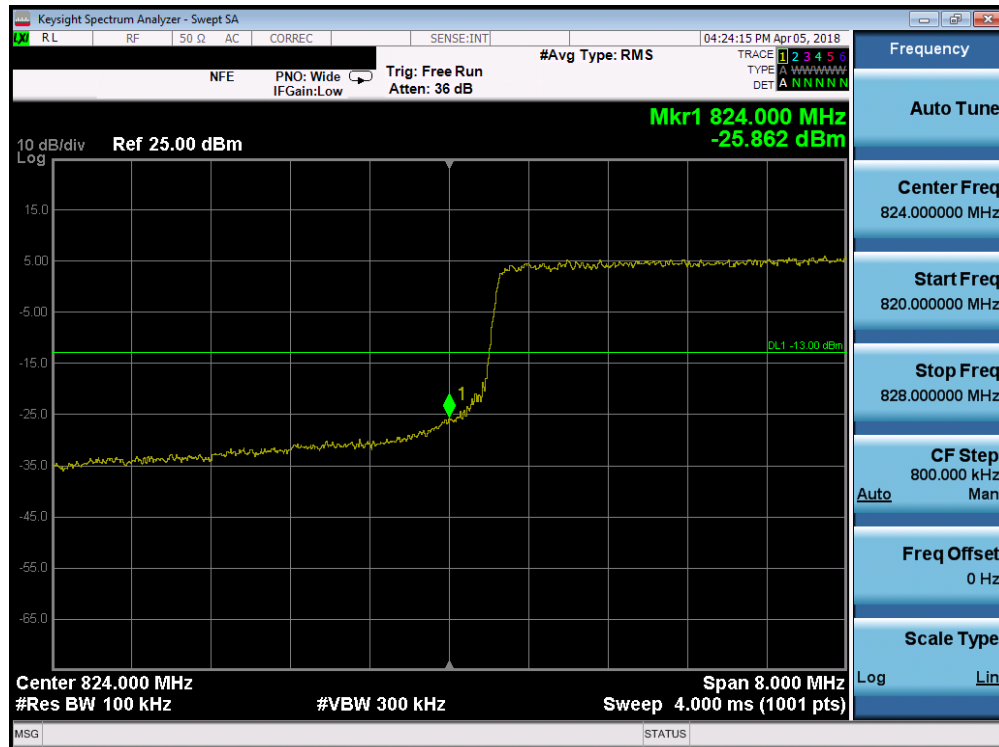


Plot 7-93. Lower Band Edge Plot (Band 5 - 10.0MHz QPSK - Full RB Configuration)




Plot 7-94. Upper Band Edge Plot (Band 5 - 10.0MHz QPSK - Full RB Configuration)

FCC ID: ZNFX410AS	MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M1803140041-03-R3-ZNF	Test Dates: 3/14 - 5/17/2018	EUT Type: Portable Handset	Page 66 of 123	

Band 4

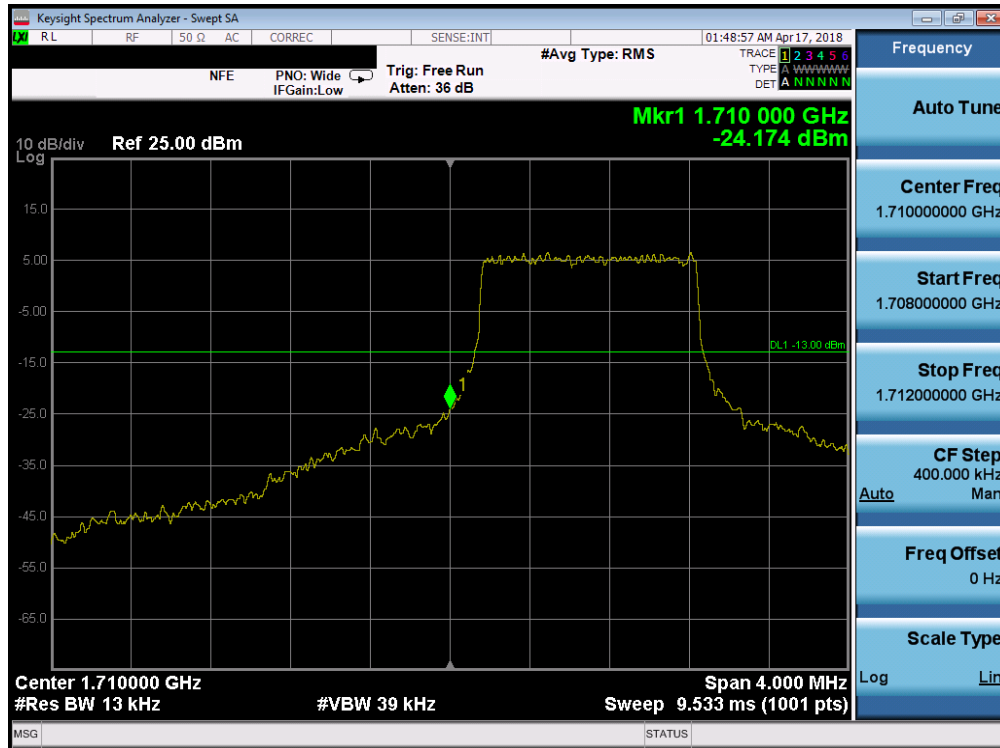

Plot 7-95. Lower Band Edge Plot (Band 4/66 - 1.4MHz QPSK - Full RB Configuration)

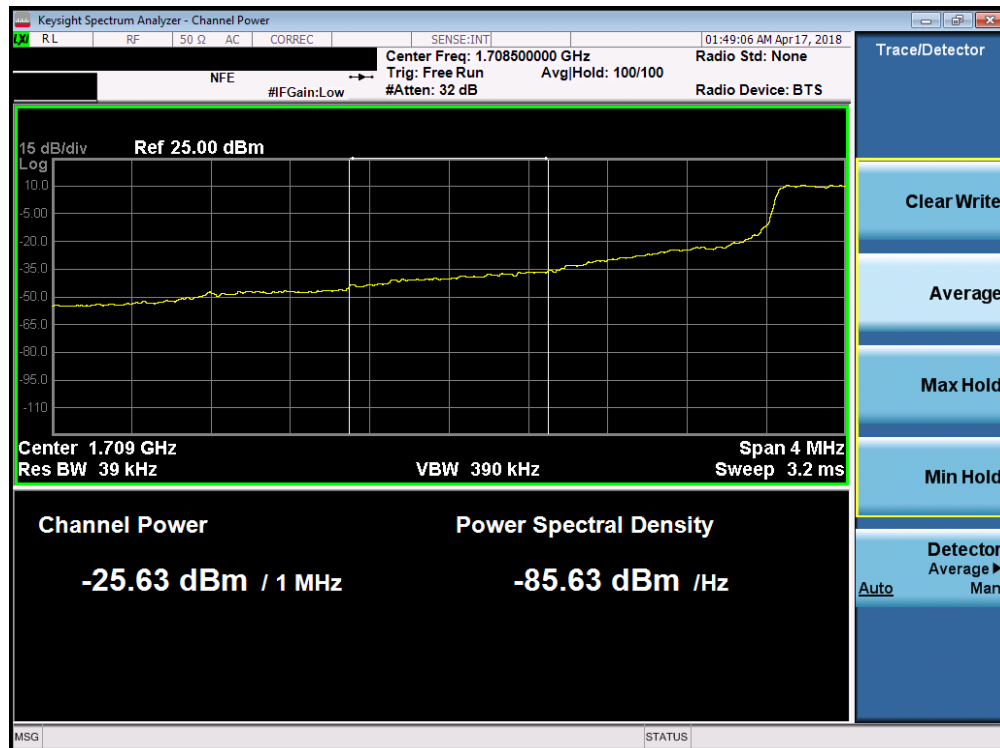


Plot 7-96. Extended Lower Band Edge Plot (Band 4/66 - 1.4MHz QPSK - Full RB Configuration)

FCC ID: ZNFX410AS	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1803140041-03-R3.ZNF	Test Dates: 3/14 - 5/17/2018	EUT Type: Portable Handset		Page 67 of 123




Plot 7-97. Upper Band Edge Plot (Band 4 - 1.4MHz QPSK - Full RB Configuration)

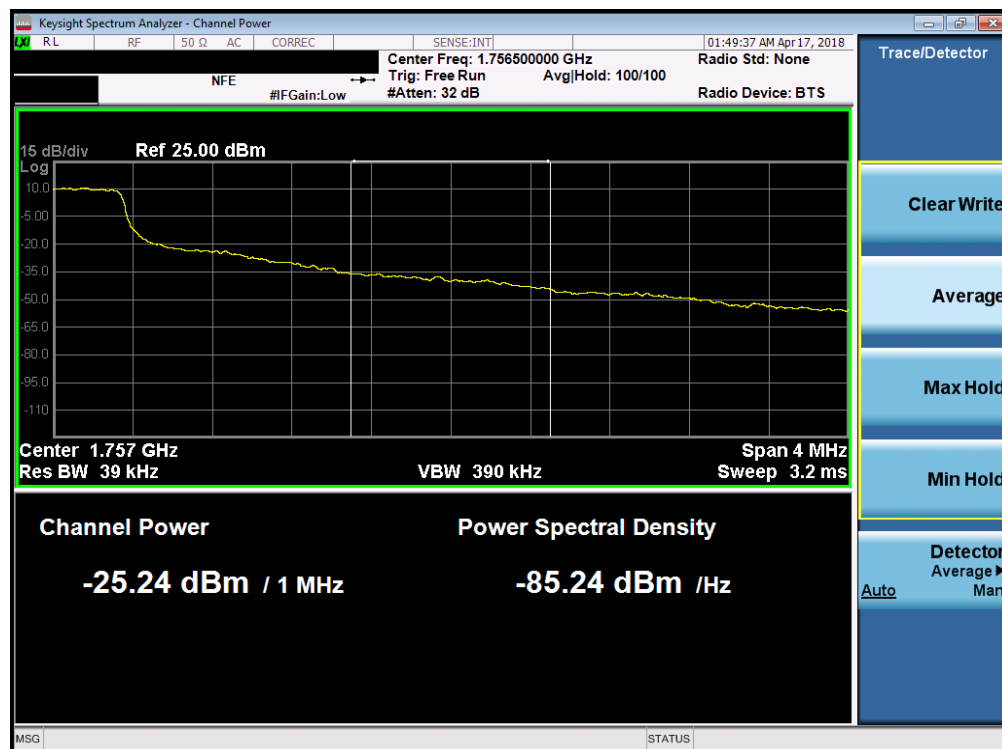


Plot 7-98. Extended Upper Band Edge Plot (Band 4 - 1.4MHz QPSK - Full RB Configuration)

FCC ID: ZNFX410AS	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1803140041-03-R3.ZNF	Test Dates: 3/14 - 5/17/2018	EUT Type: Portable Handset		Page 68 of 123

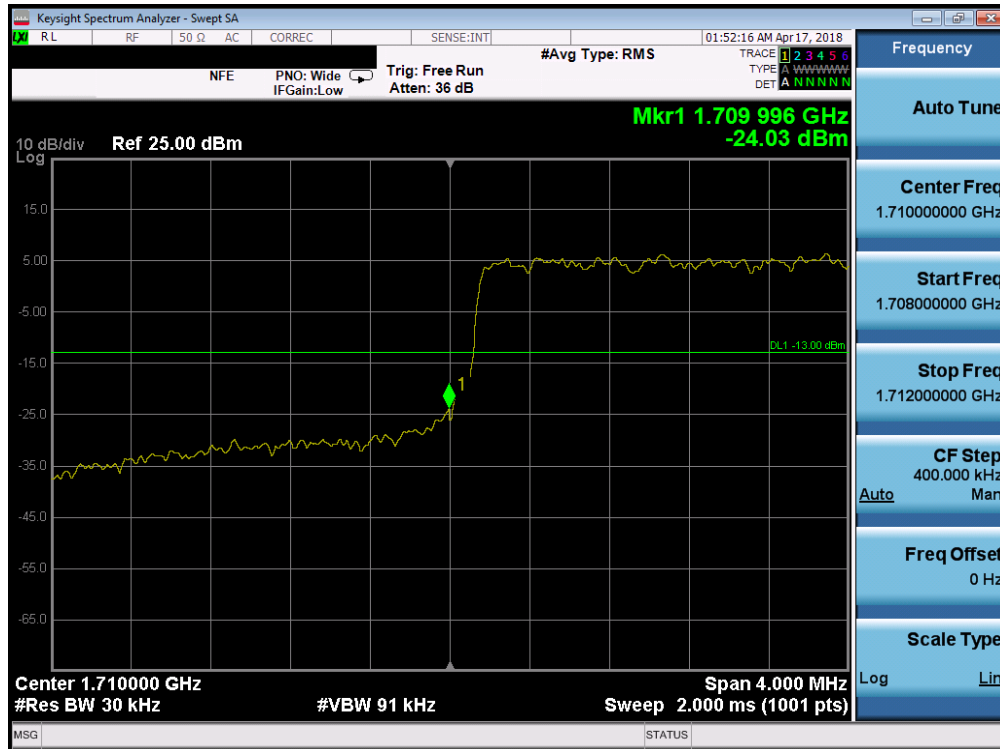


Plot 7-99. Lower Band Edge Plot (Band 4/66 - 3.0MHz QPSK - Full RB Configuration)

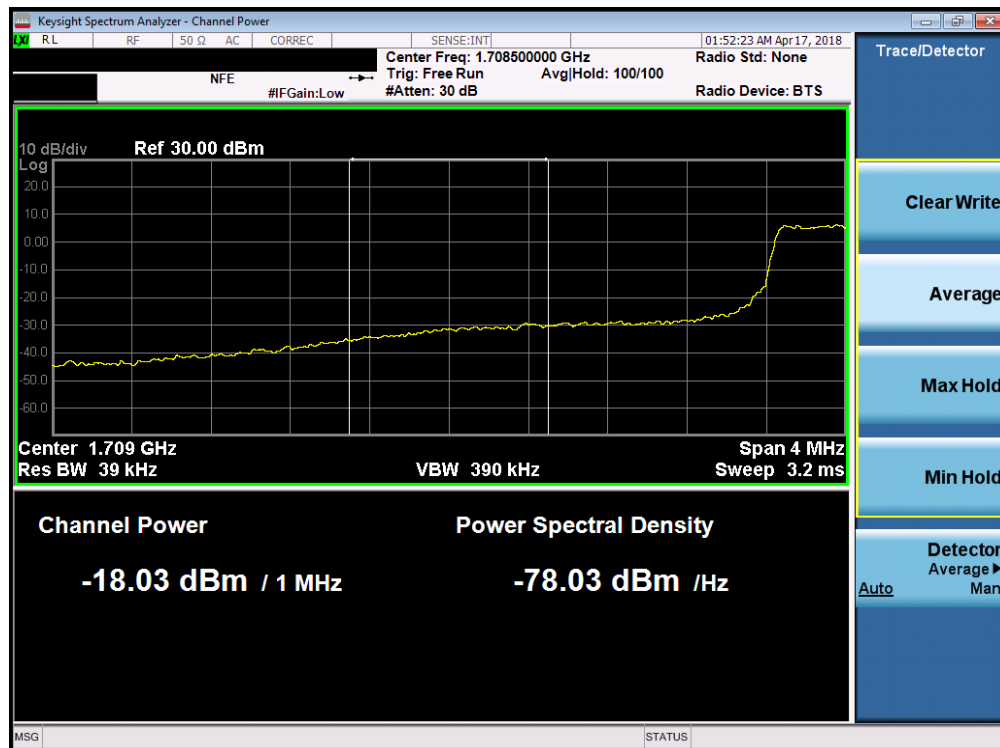


Plot 7-100. Extended Lower Band Edge Plot (Band 4/66 - 3.0MHz QPSK - Full RB Configuration)

FCC ID: ZNFX410AS	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1803140041-03-R3.ZNF	Test Dates: 3/14 - 5/17/2018	EUT Type: Portable Handset		Page 69 of 123

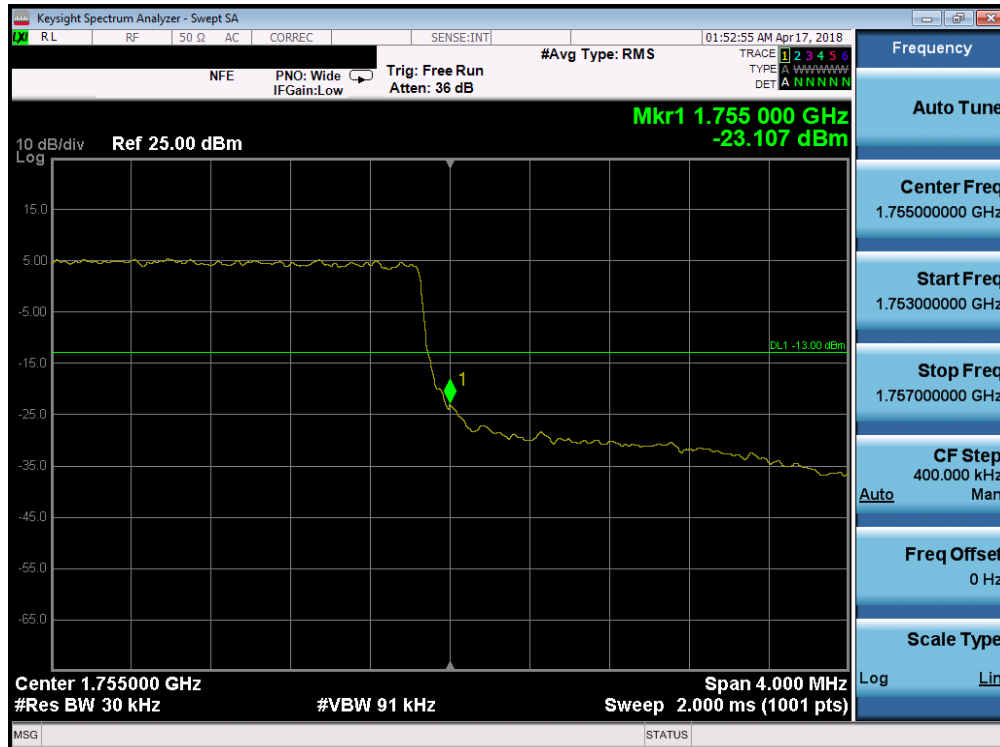


Plot 7-101. Upper Band Edge Plot (Band 4 - 3.0MHz QPSK - Full RB Configuration)

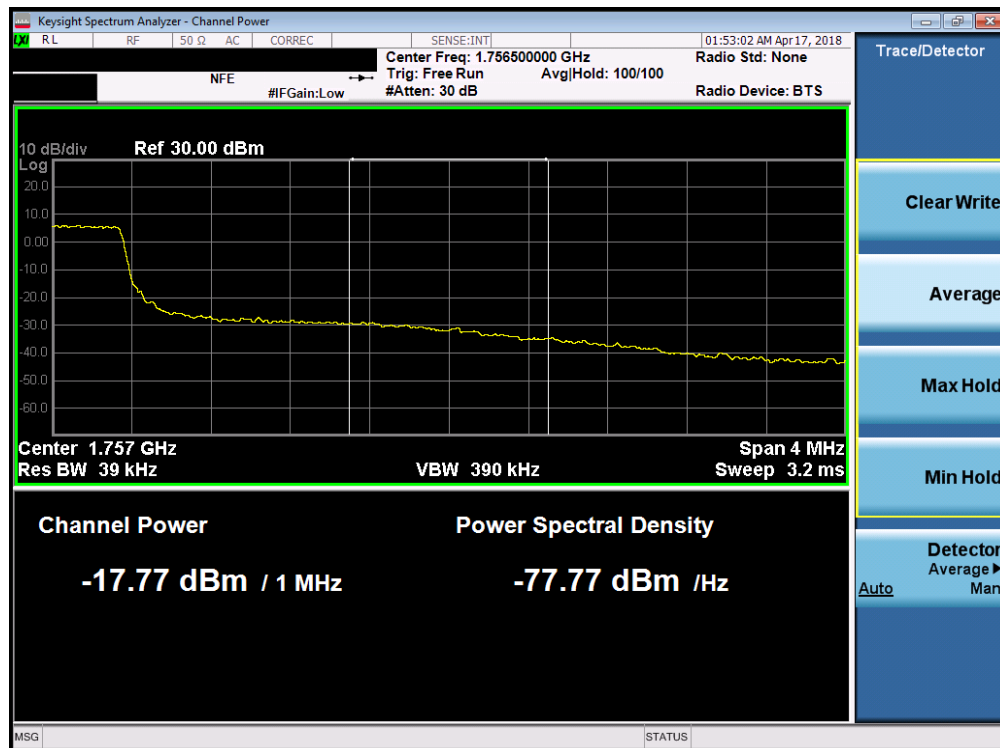


Plot 7-102. Extended Upper Band Edge Plot (Band 4 - 3.0MHz QPSK - Full RB Configuration)

FCC ID: ZNFX410AS	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1803140041-03-R3-ZNF	Test Dates: 3/14 - 5/17/2018	EUT Type: Portable Handset		Page 70 of 123

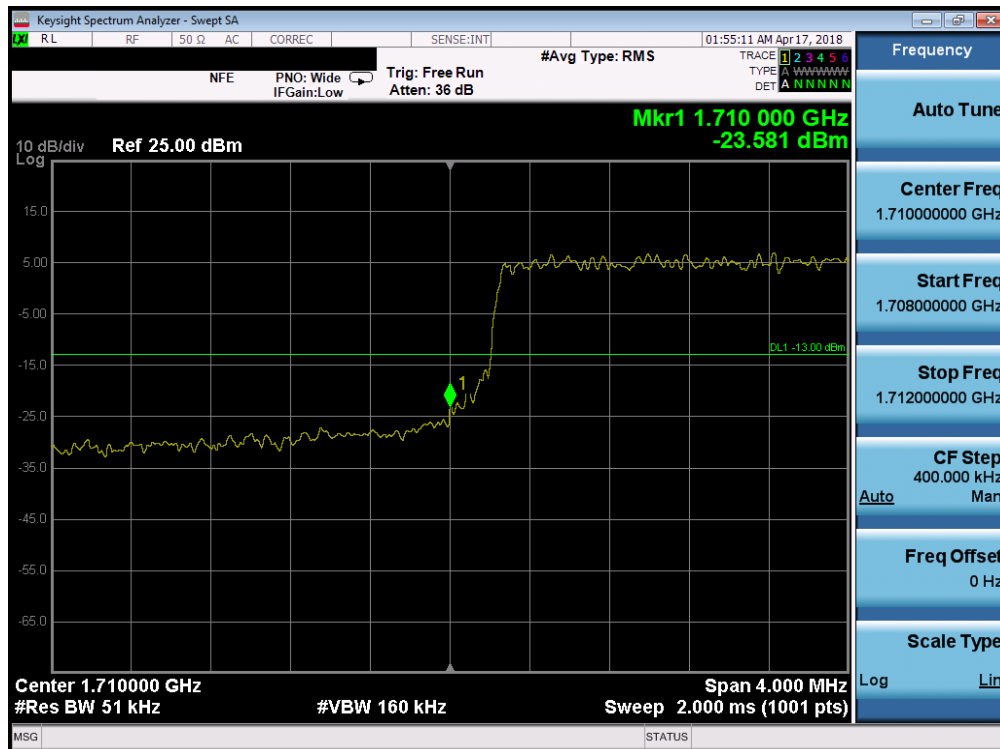

Plot 7-103. Lower Band Edge Plot (Band 4/66 - 5.0MHz QPSK - Full RB Configuration)

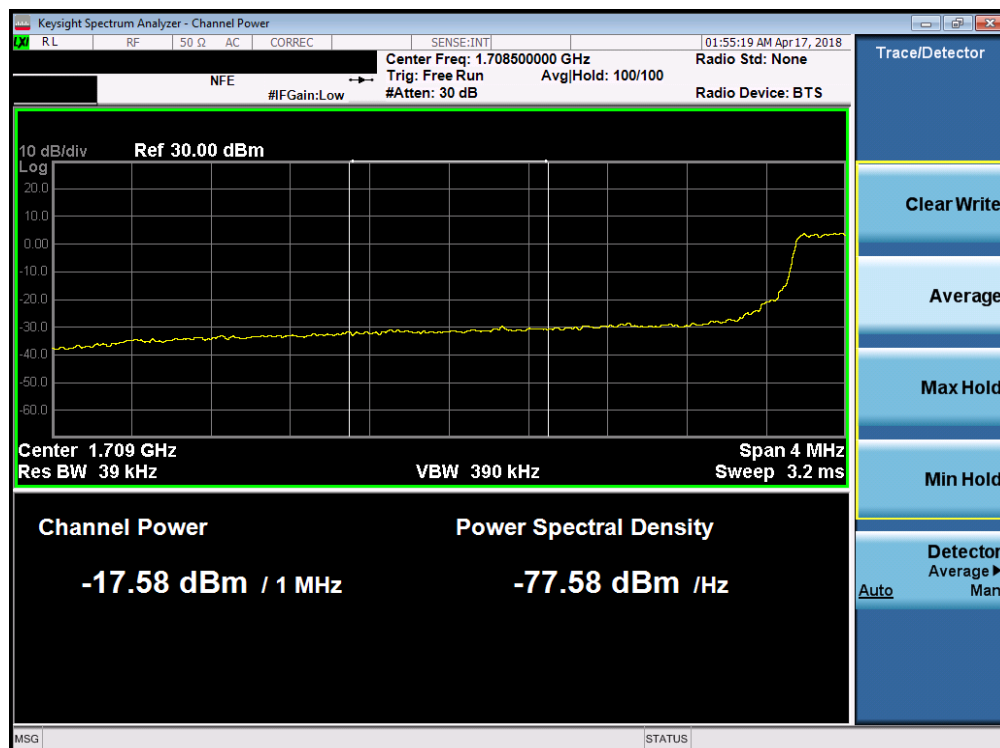

Plot 7-104. Extended Lower Band Edge Plot (Band 4/66 - 5.0MHz QPSK - Full RB Configuration)

FCC ID: ZNFX410AS	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1803140041-03-R3-ZNF	Test Dates: 3/14 - 5/17/2018	EUT Type: Portable Handset		Page 71 of 123