

EMI TEST REPORT

FCC CERTIFICATION

Applicant:

LG Electronics MobileComm U.S.A., Inc.
1000 Sylvan Avenue, Englewood Cliffs NJ 07632
United States

Date of Receipt: June 07, 2018

Date of Issue: June 19, 2018

Test Report No. HCT-EM-1806-FC005

FCC ID :

ZNFX410PM


Rule Part(s) / Standard(s) : 47 CFR PART 15 Subpart B Class B, ANSI C63.4-2014
FCC Classification : JBP (Part 15 B – Class B Computing Device Peripheral)
EUT Type : Multi-band GSM/WCDMA/LTE/CDMA Phone with BT and WLAN
Model Name : LM-X410PM
Additional Model Name : LMX410PM, X410PM
Date of Test : June 08, 2018 – June 14, 2018

The device bearing the trade name and model specified above, has been shown to comply with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.4-2014. (See Test Report if any modifications were made for compliance)

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

HCT certifies that no party to application has been denied the FCC benefits pursuant to Section 5301 of the Anti-Drug Abuse Act of 1988, 21 U.S.C 862

Tested By



Wook Yi
Test Engineer
EMC Team
Certification Division

Reviewed By



Jeong-Hyun Choi
Technical Manager
EMC Team
Certification Division

This report only responds to the tested sample and may not be reproduced, except in full, without written approval of the HCT Co., Ltd.



REVISION HISTORY

The revision history for this document is shown in table.

Report No.	Issue Date	Information About Changes
HCT-EM-1806-FC005	June 19, 2018	Initial Release



TABLE OF CONTENTS

	PAGE
1. GENERAL INFORMATION	4
1.1 Description of EUT	4
1.2 Related Submittal(s) / Grant(s)	5
1.3 Test Facility	5
1.4 Calibration of Measuring Instrument	5
1.5 Tested System Details	6
1.6 Cable Description	7
1.7 Noise Suppression Parts on Cable. (I/O Cable)	7
2. MEASUREMENT UNCERTAINTY	8
3. DESCRIPTION OF TEST	9
3.1 Measurement of Conducted Emission.....	9
3.2 Measurement of Radiated Measurements	10
4. PRELIMINARY TEST	12
4.1 Conducted Emission Test	12
4.2 Radiated Emission Test	12
5. CONDUCTED AND RADIATED EMISSION TEST SUMMARY	13
5.1 Conducted Emission Test	13
5.2 Radiated Emission Test	20
6. LIST OF TEST EQUIPMENT.....	22
7. CONCLUSION.....	23
8. APPENDIX A_ TEST SETUP PHOTOGRAPHS	24



1. GENERAL INFORMATION

1.1 Description of EUT

Its basic purpose is used for communications.

FCC ID	ZNFX410PM
Model	LM-X410PM
Additional Model	LMX410PM, X410PM
EUT Type	Multi-band GSM/WCDMA/LTE/CDMA Phone with BT and WLAN
TX Frequency	824.70 MHz to 848.31 MHz (CDMA BC0) 1 851.25 MHz to 1 908.75 MHz (CDMA BC1) 817.90 MHz to 823.10 MHz (CDMA BC10) 824.2 MHz to 848.8 MHz (GSM 850) 1 850.2 MHz to 1 909.8 MHz (GSM 1 900) 1 852.4 MHz to 1 907.6 MHz (WCDMA B2) 1712.4 MHz to 1752.6 MHz (WCDMA B4) 826.4 MHz to 846.6 MHz (WCDMA B5) 1 850.7 MHz to 1 909.3 MHz (LTE B2) 1 710 MHz to 1 755 MHz (LTE B4) 824 MHz to 849 MHz (LTE B5) 699 MHz to 716 MHz (LTE B12) 777 MHz to 787 MHz (LTE B13) 1 850 MHz to 1 915 MHz (LTE B25) 814 MHz to 849 MHz (LTE B26) 2 496 MHz to 2 690 MHz (LTE B41) 2 402 MHz to 2 480 MHz (Bluetooth) 2 412 MHz to 2 462 MHz (WiFi 2.4 GHz) 5 180 MHz to 5 240 MHz (WiFi 5 GHz_UNII 1) 5 260 MHz to 5 320 MHz (WiFi 5 GHz_UNII 2A) 5 500 MHz to 5 720 MHz (WiFi 5 GHz_UNII 2C) 5 745 MHz to 5 825 MHz (WiFi 5 GHz_UNII 3)
RX Frequency	869.70 MHz to 893.31 MHz (CDMA BC0) 1 931.25 MHz to 1 988.75 MHz (CDMA BC1) 862.00 MHz to 894.00 MHz (CDMA BC10) 869 MHz to 894 MHz (CDMA BC0) 1 930 MHz to 1 990 MHz (CDMA BC1) 869.2 MHz to 893.8 MHz (GSM 850) 1 930.2 MHz to 1 989.8 MHz (GSM 1 900) 1 932.4 MHz to 1 987.6 MHz (WCDMA B2) 2 112.4 MHz to 2 152.6 MHz (WCDMA B4) 871.4 MHz to 891.6 MHz (WCDMA B5) 1 930 MHz to 1 990 MHz (LTE B2) 2 110 MHz to 2 155 MHz (LTE B4) 869 MHz to 894 MHz (LTE B5) 729 MHz to 746 MHz (LTE B12) 746 MHz to 756 MHz (LTE B13)



RX Frequency	1 925 MHz to 1 990 MHz (LTE B25) 859 MHz to 894 MHz (LTE B26) 2 496 MHz to 2 690 MHz (LTE B41) 2 402 MHz to 2 480 MHz (Bluetooth) 2 412 MHz to 2 462 MHz (WiFi 2.4 GHz) 5 180 MHz to 5 240 MHz (WiFi 5 GHz_UNII 1) 5 260 MHz to 5 320 MHz (WiFi 5 GHz_UNII 2A) 5 500 MHz to 5 720 MHz (WiFi 5 GHz_UNII 2C) 5 745 MHz to 5 825 MHz (WiFi 5 GHz_UNII 3)
--------------	---

1.2 Related Submittal(s) / Grant(s)

Original submittal only.

1.3 Test Facility

Test site is located at 74, SEOICHEON-RO, 578BEON-GIL, MAJANG-MYEON, ICHEON-SI, GYEONGGI-DO, SOUTH KOREA. Those measurement facilities are constructed in conformance with the requirements of ANSI C63.4-2014. The Normalized site attenuations (30 MHz to 1 GHz) and Site validation (1 GHz to 18 GHz) were performed in accordance with the standard in ANSI C63.4-2014

Measurement Facilities	Registration Number
Radiated Field strength measurement facility 3 m Semi Anechoic chamber	90661
Radiated Field strength measurement facility 10 m Semi Anechoic chamber	

1.4 Calibration of Measuring Instrument

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturers recommendations for utilizing calibration equipments, which is traceable to recognized national standards. Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2006).



1.5 Tested System Details

All equipment descriptions used in the tested system (including inserted cards) are:

Device Type	Model Name	Serial Number	Manufacturer	FCC ID / DoC
EUT	LM-X410PM	-	LG	ZNFX410PM
Data cable	EAD62377922	-	KSD	-
Data cable	EAD62377927	-	Ningbo	-
Earphone	EAB64168741	-	CRESYN	-
Notebook PC	ProBook6560b	5CB2053MXF	HP	DoC
Notebook PC adaptor	Series PPP009L-E	-	LITE-On Technology	-
RJ45 cable	-	-	-	-
Gateway	TL-WR747N	-	TP-LINK	-
Gateway adaptor	T090060-2H1	-	TP-LINK	-
Serial mouse	Serial 2 button mouse	02031069	Radio shack	FSUGMZE3
Micro SD card	SAMSUNG EVO +microSDXC CLASS10 UHS-1 (256 GB)	-	SAMSUNG	-



1.6 Cable Description

Product Name	Port	Power Cord Shielded (Y/N)	I/O Cable Shielded (Y/N)	Length (m)
EUT	Micro USB	Y	Y	(P,D)1.0
	Earphone	N/A	Y	(D)1.2
Notebook PC	RJ 45	N/A	N	(D)1.6
	Serial (Mouse)	N/A	Y	(D)1.8
	DC in	N	N/A	(P)1.8
Gateway	DC in	N	N/A	(P)1.8

* The marked “(D)” means the data cable and “(P)” means the power cable.

1.7 Noise Suppression Parts on Cable. (I/O Cable)

Product Name	Port	Ferrite Bead (Y/N)	Location	Metal Hood (Y/N)	Location
EUT	Micro USB	N	N/A	Y	Both End
	Earphone	N	N/A	Y	EUT End
Notebook PC	RJ 45	N	N/A	N	N/A
	Serial (Mouse)	N	N/A	Y	Notebook PC End



2. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4-2014.

All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95 % level of confidence. The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty (dB)
Conducted Emission (0.15 MHz to 30 MHz)	1.82 dB ($k = 2$)
Radiated Emissions (30 MHz to 1 GHz)	5.20 dB ($k = 2$)
Radiated Emissions (1 GHz to 18 GHz)	5.24 dB ($k = 2$)
Radiated Emissions (18 GHz to 40 GHz)	5.40 dB ($k = 2$)



3. DESCRIPTION OF TEST

3.1 Measurement of Conducted Emission

The test procedure was in accordance with ANSI C63.4-2014, Clause 7.3

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN).
If the EUT is connected to the PC through USB, the AC power-line adapter of the PC is directly connected to a line impedance stabilization network (LISN).
Other support units were connected to the power mains through another LISN. The two LISNs provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both conducted lines are measured in Quasi-Peak and Average mode, including the worst-case data points for each tested configuration.
- c. The frequency range from 150 kHz to 30 MHz was searched.

[Conducted Emission Limits]

Frequency (MHz)	Resolution Bandwidth (kHz)	Quasi-Peak (dB(μV))	Average (dB(μV))
0.15 to 0.5	9	66 to 56*	56 to 46*
0.5 to 5	9	56	46
5 to 30	9	60	50

**Decreases with the logarithm of the frequency.*



3.2 Measurement of Radiated Emission

The test procedure was in accordance with ANSI C63.4-2014, Clause 8.3

- a. The EUT was placed on the top of a turn table 0.8 meters above the ground at a semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 m away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from 1 m to 4 m above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 m to 4 m and the turn table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to Peak and Average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz.
- g. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response.(1 GHz to 40 GHz)

[Radiated Emission Limits]

Frequency (MHz)	Antenna Distance (m)	Field Strength ($\mu\text{V}/\text{m}$)	Quasi-Peak ($\text{dB}(\mu\text{V})/\text{m}$)
30 to 88	3	100	40.0
88 to 216	3	150	43.5
216 to 960	3	200	46.0
Above 960	3	500	54.0
Frequency (MHz)	Antenna Distance (m)	Peak ($\text{dB}(\mu\text{V})/\text{m}$)	Average ($\text{dB}(\mu\text{V})/\text{m}$)
Above 1 000	3	74	54




3.2.1 Frequency Range of Radiated Measurements

An unintentional radiator, including a digital device, the spectrum shall be investigated from the lowest radio frequency signal generated or used in the device, without going below the lowest frequency for which a Radiated Emission limit is specified, up to the frequency shown in the following table

Highest frequency generated or used in the device or on which the device operates or tunes (MHz)	Upper frequency of measurement range (MHz)
Below 1.705	30
1.705 to 108	1 000
108 to 500	2 000
500 to 1 000	5 000
Above 1 000	5 th harmonic of the highest frequency or 40 GHz, whichever is lower

3.3 Configuration of Tested System

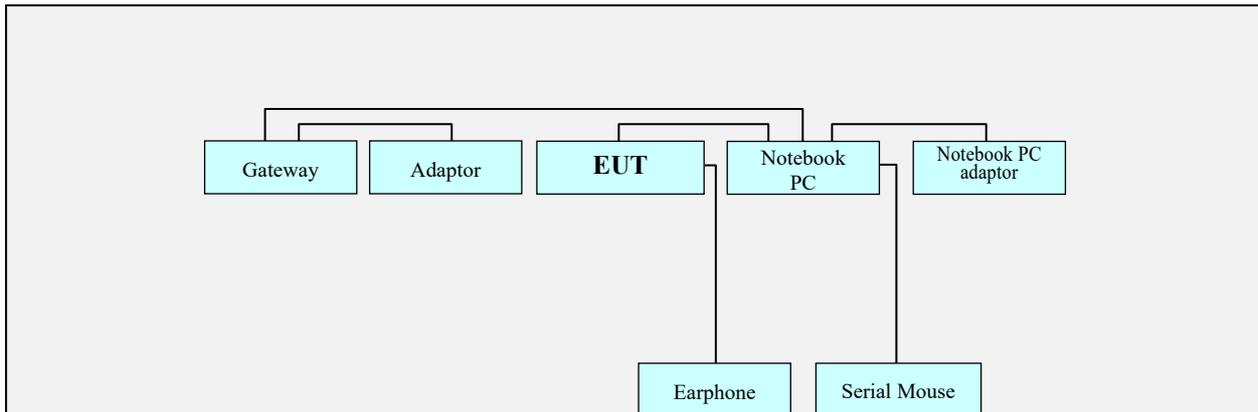

Non-Conductive Table
 Power Line: 120 VAC, 60 Hz



4. PRELIMINARY TEST

4.1 Conducted Emission Test

It was tested the following operating mode, after connecting all peripheral devices.

Operation Mode: Data Communication mode

4.2 Radiated Emission Test

It was tested the following operating mode, after connecting all peripheral devices.

Operation Mode: Data Communication mode



5. CONDUCTED AND RADIATED EMISSION TEST SUMMARY

5.1 Conducted Emission Test

The test results of conducted emission at mains ports provide the following information:


Rule Part / Standard	FCC PART 15 Subpart B Class B
Detector	Quasi-Peak, CISPR-Average
Bandwidth	9 kHz (6 dB)
Operation Mode	Data Communication mode
Worst Data Cable	EAD62377922 (KSD)
Kind of Test Site	Shielded Room
Temperature	25.0 °C
Relative Humidity	45.3 %
Test Date	June 14, 2018

- Calculation Formula:

1. Conductor L1 = Hot, Conductor N = Neutral
2. Corr. = LISN Factor + Cable Loss
3. QuasiPeak or CAverage= Receiver Reading + Corr.
4. Margin = Limit – QuasiPeak or CAverage



Figure 1: Conducted Emission, AC Main Port, Line (L1)

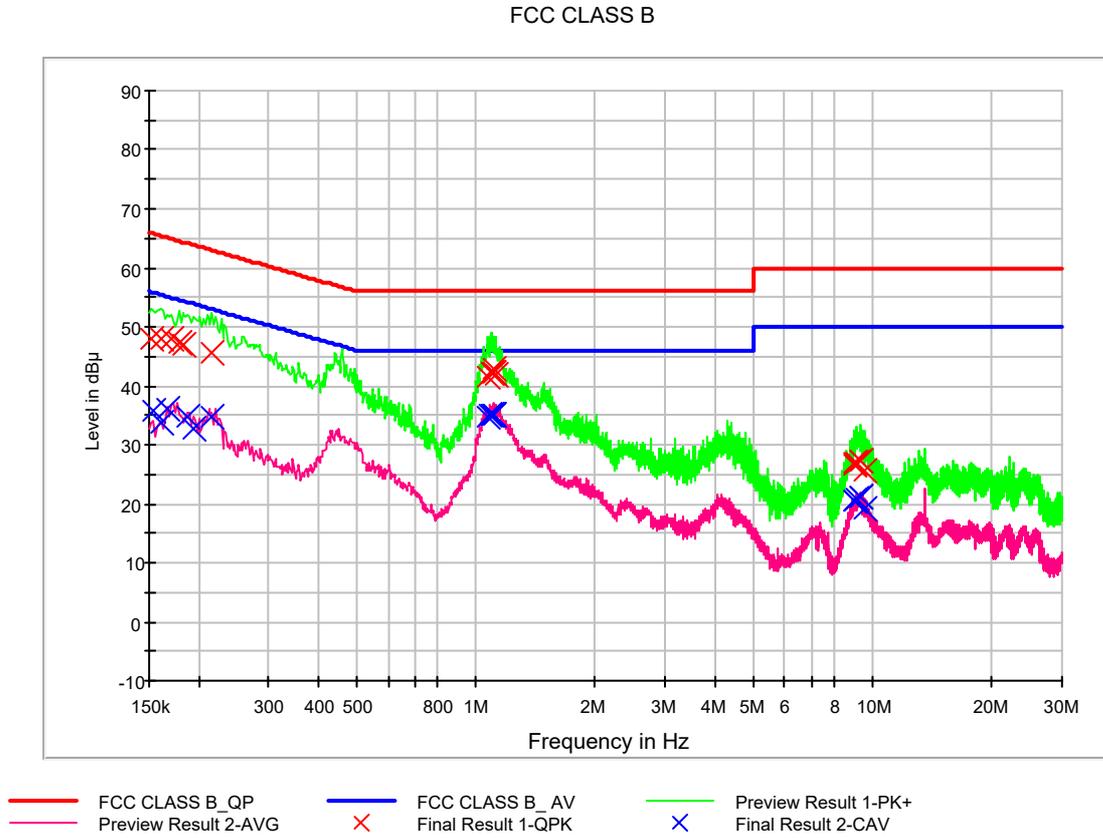



QuasiPeak Final Result, Line (L1)

Frequency (MHz)	QuasiPeak (dBuV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.152000	47.8	9.000	L1	9.6	18.1	65.9
0.160000	48.0	9.000	L1	9.6	17.5	65.5
0.170000	47.9	9.000	L1	9.6	17.0	65.0
0.178000	47.4	9.000	L1	9.6	17.2	64.6
0.182000	47.0	9.000	L1	9.6	17.4	64.4
0.216000	45.5	9.000	L1	9.6	17.5	63.0
1.074000	41.5	9.000	L1	9.7	14.5	56.0
1.090000	42.4	9.000	L1	9.7	13.6	56.0
1.096000	42.1	9.000	L1	9.7	13.9	56.0
1.102000	42.1	9.000	L1	9.7	13.9	56.0
1.106000	43.0	9.000	L1	9.7	13.0	56.0
1.122000	42.0	9.000	L1	9.7	14.0	56.0
9.038000	26.8	9.000	L1	9.9	33.2	60.0
9.044000	26.6	9.000	L1	9.9	33.4	60.0
9.090000	27.0	9.000	L1	9.9	33.0	60.0
9.284000	27.1	9.000	L1	9.9	32.9	60.0
9.298000	27.2	9.000	L1	9.9	32.8	60.0
9.572000	25.6	9.000	L1	10.0	34.4	60.0




CAverage Final Result, Line (L1)

Frequency (MHz)	CAverage (dBuV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.154000	35.6	9.000	L1	9.6	20.1	55.8
0.160000	33.9	9.000	L1	9.6	21.6	55.5
0.166000	35.9	9.000	L1	9.6	19.2	55.2
0.188000	34.8	9.000	L1	9.6	19.3	54.1
0.194000	32.7	9.000	L1	9.6	21.1	53.9
0.216000	34.8	9.000	L1	9.6	18.2	53.0
1.074000	34.7	9.000	L1	9.7	11.3	46.0
1.088000	35.2	9.000	L1	9.7	10.8	46.0
1.092000	35.1	9.000	L1	9.7	10.9	46.0
1.096000	35.2	9.000	L1	9.7	10.8	46.0
1.102000	35.2	9.000	L1	9.7	10.8	46.0
1.106000	35.2	9.000	L1	9.7	10.8	46.0
9.038000	20.4	9.000	L1	9.9	29.6	50.0
9.044000	20.5	9.000	L1	9.9	29.5	50.0
9.090000	20.8	9.000	L1	9.9	29.2	50.0
9.284000	21.1	9.000	L1	9.9	28.9	50.0
9.298000	21.2	9.000	L1	9.9	28.8	50.0
9.572000	19.0	9.000	L1	10.0	31.0	50.0



Figure 2: Conducted Emission, AC Main Port, Line (N)

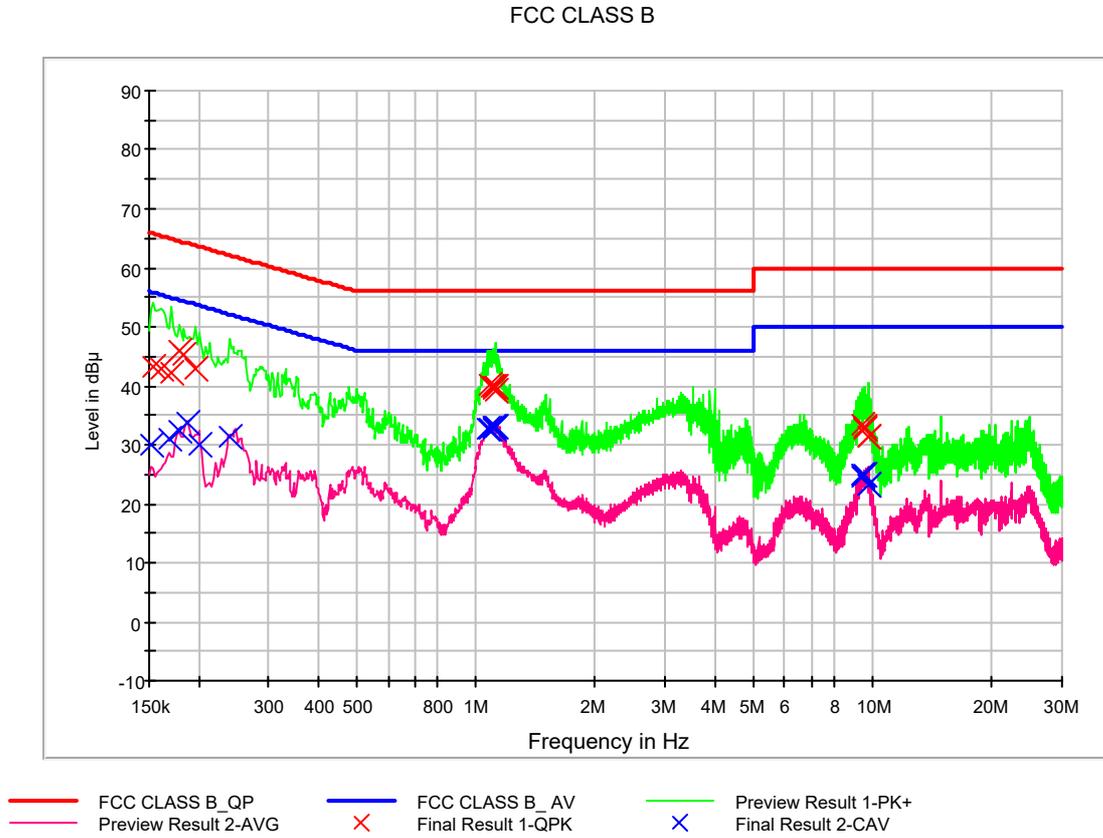



QuasiPeak Final Result, Line (N)

Frequency (MHz)	QuasiPeak (dBuV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.154000	43.1	9.000	N	9.6	22.7	65.8
0.160000	42.8	9.000	N	9.6	22.7	65.5
0.170000	42.3	9.000	N	9.6	22.7	65.0
0.178000	45.9	9.000	N	9.6	18.7	64.6
0.184000	45.3	9.000	N	9.6	19.0	64.3
0.196000	42.9	9.000	N	9.6	20.9	63.8
1.086000	40.1	9.000	N	9.7	15.9	56.0
1.098000	40.0	9.000	N	9.7	16.0	56.0
1.104000	39.7	9.000	N	9.7	16.3	56.0
1.112000	39.4	9.000	N	9.7	16.6	56.0
1.122000	39.8	9.000	N	9.7	16.2	56.0
1.126000	39.3	9.000	N	9.7	16.7	56.0
9.476000	33.4	9.000	N	10.0	26.6	60.0
9.490000	33.1	9.000	N	10.0	26.9	60.0
9.530000	32.9	9.000	N	10.0	27.1	60.0
9.578000	32.9	9.000	N	10.0	27.1	60.0
9.760000	31.2	9.000	N	10.0	28.8	60.0
9.764000	31.2	9.000	N	10.0	28.8	60.0



CAverage Final Result, Line (N)

Frequency (MHz)	CAverage (dBuV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.152000	29.9	9.000	N	9.6	26.0	55.9
0.168000	30.9	9.000	N	9.6	24.1	55.1
0.178000	32.4	9.000	N	9.6	22.1	54.6
0.188000	33.6	9.000	N	9.6	20.5	54.1
0.200000	30.0	9.000	N	9.6	23.6	53.6
0.240000	31.5	9.000	N	9.6	20.6	52.1
1.072000	32.6	9.000	N	9.7	13.4	46.0
1.086000	32.7	9.000	N	9.7	13.3	46.0
1.104000	33.2	9.000	N	9.7	12.8	46.0
1.108000	32.9	9.000	N	9.7	13.1	46.0
1.112000	32.9	9.000	N	9.7	13.1	46.0
1.126000	33.0	9.000	N	9.7	13.0	46.0
9.420000	25.0	9.000	N	10.0	25.0	50.0
9.424000	24.8	9.000	N	10.0	25.2	50.0
9.428000	24.4	9.000	N	10.0	25.6	50.0
9.578000	24.8	9.000	N	10.0	25.2	50.0
9.760000	23.3	9.000	N	10.0	26.7	50.0
9.764000	23.1	9.000	N	10.0	26.9	50.0



5.2 Radiated Emission Test

The test results of radiated emission provide the following information:

-For Measurement Below 1 GHz

Rule Part / Standard	FCC PART 15 Subpart B Class B
Detector	Quasi-Peak
Bandwidth	120 kHz (6 dB)
Operation Mode	Data Communication mode
Worst Data Cable	EAD62377922 (KSD)
Kind of Test Site	3 m semi anechoic chamber
Temperature	23.5 °C
Relative Humidity	44.3 %
Test Date	June 08, 2018

Frequency (MHz)	Quasi Peak (dB μ V/m)	Antenna Height (cm)	POL. (H/V)	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dB μ V/m)
54.189600	28.4	99.7	V	25.0	20.1	11.6	40.0
81.238400	25.3	274.7	H	110.0	15.5	14.7	40.0
125.012000	31.1	274.8	H	60.0	18.2	12.4	43.5
265.566400	33.7	99.9	H	161.0	19.4	12.3	46.0
375.011200	34.9	99.8	H	218.0	22.4	11.1	46.0
499.995200	35.8	125.1	H	127.0	25.2	10.2	46.0

- Calculation Formula:

1. POL. H = Horizontal, POL. V = Vertical
2. QuasiPeak = Reading (Receiver Reading) + Corr.
3. Corr. (Correction Factor) = Antenna Factor + Cable Loss
4. Margin = Limit - QuasiPeak



-For Measurement Above 1 GHz

Rule Part / Standard	FCC PART 15 Subpart B Class B
Detector	Peak mode: Peak (RBW: 1 MHz, VBW: 3 MHz) CISPR-Average mode: Peak (RBW: 1 MHz, VBW: 10 Hz)
Highest Frequency	5 825 MHz
Tested Frequency Range	1 GHz to 30 GHz
Operation Mode	Data Communication mode
Worst Data Cable	EAD62377922 (KSD)
Kind of Test Site	3 m semi anechoic chamber
Temperature	23.1 °C
Relative Humidity	44.0 %
Test Date	June 11, 2018

Frequency (MHz)	Peak (dB μ V/m)	Antenna Height (cm)	POL. (H/V)	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dB μ V/m)
1329.305000	45.7	290.4	V	71.0	-28.7	28.3	74.0
1498.920000	43.8	304.5	V	0.0	-28.3	30.2	74.0
2017.810000	47.0	113.4	V	53.0	-26.9	27.0	74.0
2662.215000	49.2	99.9	V	4.0	-23.9	24.8	74.0
5994.540000	44.5	307.4	V	106.0	-16.6	29.5	74.0
7782.110000	41.4	289.6	H	50.0	-12.0	32.6	74.0

Frequency (MHz)	CAverage (dB μ V/m)	Antenna Height (cm)	POL. (H/V)	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dB μ V/m)
1329.305000	19.3	290.4	V	71.0	-28.7	34.7	54.0
1498.920000	37.5	304.5	V	0.0	-28.3	16.5	54.0
2017.810000	22.8	113.4	V	53.0	-26.9	31.2	54.0
2662.215000	22.0	99.9	V	4.0	-23.9	32.0	54.0
5994.540000	28.0	307.4	V	106.0	-16.6	26.0	54.0
7782.110000	28.9	289.6	H	50.0	-12.0	25.1	54.0

- Calculation Formula:

1. POL. H = Horizontal, POL. V = Vertical
2. Peak or CAverage = Reading (Receiver Reading) + Corr.
3. Corr. (Correction Factor) = Antenna Factor+ Cable Loss –Amplifier Gain
4. Margin = Limit - Peak or CAverage



6. LIST OF TEST EQUIPMENT

<u>Type</u>	<u>Manufacturer</u>	<u>Model Name</u>	<u>Serial Number</u>	<u>Calibration Cycle</u>	<u>CAL Date</u>
<u>Conducted Emission</u>					
<input type="checkbox"/> EMI Test Receiver	Rohde & Schwarz	ESCI	100584	1 year	06.20.2017
<input checked="" type="checkbox"/> EMI Test Receiver	Rohde & Schwarz	ESCI	100033	1 year	06.27.2017
<input checked="" type="checkbox"/> LISN	Rohde & Schwarz	ENV216	102245	1 year	12.20.2017
<input checked="" type="checkbox"/> LISN	Rohde & Schwarz	ENV216	100073	1 year	07.18.2017
<input checked="" type="checkbox"/> Software	Rohde & Schwarz	EMC32 VER8.54.0	-	-	-
<u>Radiated Emission</u>					
-For measurement below 1 GHz					
<input checked="" type="checkbox"/> EMI Test Receiver	Rohde & Schwarz	ESU40	100524	1 year	08.16.2017
<input checked="" type="checkbox"/> Trilog Antenna	Schwarzbeck	VULB 9168	760	2 year	04.06.2017
<input checked="" type="checkbox"/> Antenna master	INNCO Systems	MA4640-XP-ET	-	N/A	-
<input checked="" type="checkbox"/> Antenna master controller	INNCO Systems	CO 3000	CO3000/870/ 35990515/L	N/A	-
<input checked="" type="checkbox"/> Turn Table	INNCO Systems	1060-2M	-	N/A	-
<input checked="" type="checkbox"/> Turn Table controller	INNCO Systems	CO2000	CO2000/095/ 7590304/L	N/A	-
<input type="checkbox"/> EMI Test Receiver	Rohde & Schwarz	ESU26	100241	1 year	08.16.2017
<input type="checkbox"/> Antenna master	INNCO Systems	MA4000-EP	MA4000/283	N/A	-
<input type="checkbox"/> Turn Table	INNCO Systems	DT3000-3T	DT3000/69	N/A	-
<input checked="" type="checkbox"/> Software	Rohde & Schwarz	EMC32 VER8.40.0	-	-	-
-For measurement above 1 GHz					
<input checked="" type="checkbox"/> EMI Test Receiver	Rohde & Schwarz	ESU40	100524	1 year	08.16.2017
<input checked="" type="checkbox"/> Antenna master	INNCO Systems	MA4640-XP-ET	-	N/A	-
<input checked="" type="checkbox"/> Antenna master controller	INNCO Systems	CO 3000	CO 3000/870/ 35990515/L	N/A	-
<input checked="" type="checkbox"/> Turn Table	INNCO Systems	1060-2M	-	N/A	-
<input checked="" type="checkbox"/> Turn Table controller	INNCO Systems	CO2000	CO2000/095/ 7590304/L	N/A	-
<input checked="" type="checkbox"/> Horn Antenna	Schwarzbeck	BBHA 9120D	296	2 year	10.12.2016
<input checked="" type="checkbox"/> Low Noise Amplifier	TESTEK	TK-PA18H	170034-L	1 year	03.06.2018
<input checked="" type="checkbox"/> Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170#786	2 year	12.05.2017
<input checked="" type="checkbox"/> Power Amplifier	TESTEK	TK-PA1840H	170030-L	1 year	12.20.2017
<input type="checkbox"/> Antenna master controller	HD GmbH	HD 100	100/637	N/A	-
<input type="checkbox"/> Power Amplifier	CERNEX	CBLU1183540	21691	1 year	06.28.2017
<input type="checkbox"/> Antenna master	HD GmbH	MA240	240/520	N/A	-
<input type="checkbox"/> Horn Antenna	Schwarzbeck	BBHA 9120D	1300	2 year	06.30.2017
<input type="checkbox"/> EMI Test Receiver	Rohde & Schwarz	ESU26	100241	1 year	08.16.2017
<input type="checkbox"/> Turn Table	INNCO Systems	DT3000-3T	DT3000/69	N/A	-
<input checked="" type="checkbox"/> Software	Rohde & Schwarz	EMC32 VER8.40.0	-	-	-



7. CONCLUSION

The data collected shows that the **EUT Type: Multi-band GSM/WCDMA/LTE/CDMA Phone with BT and WLAN, FCC ID: ZNFX410PM, Model: LM-X410PM** complies with §15.107 and §15.109 of the FCC rules.



8. APPENDIX A. TEST SETUP PHOTOGRAPHS

Please refer to Appendix A