

FCC CERTIFICATION TEST REPORT

Report No.: DDT-B21120603-1E03

Applicant	:	LG Electronics USA, Inc.
Address	:	1000 Sylvan Ave. Englewood Cliffs, New Jersey, United States 07632
Equipment under Test	:	Mobile Handset
Model No.	:	LM-X430FMW, LM-X430HM
Trade Mark	:	LG
FCC ID	:	ZNFX430HM
Manufacturer	:	Huaqin Telecom Technology Co., Ltd.
Address	:	No.1 Building, No.9 Building, No.399, Keyuan Road, Zhangjiang Hi-tech Park, Shanghai, P. R. China

Issued By: Tianjin Dongdian Testing Service Co., Ltd.

Address: Building D-1, No. 19, Weisi Road, Microelectronics Industrial Park
Development Area, Tianjin, China.

Tel: +86-22-58038033, E-mail: ddt@dgddt.com, <http://www.ddttest.com>



REPORT

TABLE OF CONTENTS

	Test report declares.....	3
1.	Summary of Test Results.....	5
2.	General Test Information	6
2.1.	Description of EUT	6
2.2.	Difference of Model Number.....	7
2.3.	Accessories of EUT	8
2.4.	Assistant equipment used for test.....	8
2.5.	Block diagram of EUT configuration for test.....	8
2.6.	Deviations of test standard	8
2.7.	Test environment conditions.....	9
2.8.	Test laboratory	9
2.9.	Measurement uncertainty	10
3.	Equipment Used During Test.....	11
4.	Maximum Peak Output Power	12
4.1.	Re-Test statement.....	12
4.2.	Block diagram of test setup	12
4.3.	Limits	12
4.4.	Test procedure	12
4.5.	Test result.....	13
5.	Radiated Emission	14
5.1.	Block diagram of test setup	14
5.2.	Limit.....	15
5.3.	Test Procedure.....	16
5.4.	Test result.....	18
6.	Band Edge Compliance (Radiated Method).....	33
6.1.	Block diagram of test setup	33
6.2.	Limit.....	33
6.3.	Test Procedure.....	33
6.4.	Test result.....	33
7.	Appendixes	38
8.	Test Setup Photograph - DTS	39
8.1.	Test setup of Tianjin Dongdian Testing Service Co., Ltd.....	39
8.2.	Test setup of SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch	
	41	

Test Report Declare

Applicant	:	LG Electronics USA, Inc.
Address	:	1000 Sylvan Ave. Englewood Cliffs, New Jersey, United States 07632
Equipment under Test	:	Mobile Handset
Model No.	:	LM-X430FMW, LM-X430HM
Trade Mark	:	LG
Manufacturer	:	Huaqin Telecom Technology Co., Ltd.
Address	:	No.1 Building, No.9 Building, No.399, Keyuan Road, Zhangjiang Hi-tech Park, Shanghai, P.R.China

Test Standard Used:

FCC Rules and Regulations Part 15 Subpart C.

Test Procedure Used:

ANSI C63.10:2013

We Declare:

The equipment described above is tested by Tianjin Dongdian Testing Service Co., Ltd. and in the configuration tested the equipment complied with the standards specified above. The test results are contained in this test report and Tianjin Dongdian Testing Service Co., Ltd. is assumed of full responsibility for the accuracy and completeness of these tests.

After test and evaluation, our opinion is that the equipment provided for test compliance with the requirement of the above FCC standards.

Report No.:	DDT-B21120603-1E03		
Date of Receipt:	Dec. 06, 2021	Date of Test:	Dec. 06, 2021 ~ Dec. 14, 2021

Prepared By:

Sunny Zhang

Sunny Zhang/Engineer

Approved By:

Aaron Zhang

Aaron Zhang/EMC Manager

Note: This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Tianjin Dongdian Testing Service Co., Ltd.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.



Revision History

Rev.	Revisions	Issue Date	Revised By
---	Initial issue	Dec. 14, 2021	

1. Summary of Test Results

Description of Test Item	Standard	Verdict
Peak Output Power	FCC Part 15: 15.247 ANSI C63.10:2013	Pass ²
6dB Bandwidth and 99% Bandwidth	FCC Part 15: 15.247 ANSI C63.10:2013	Pass ¹
Power Spectral Density	FCC Part 15:15.247 ANSI C63.10:2013	Pass ¹
Band Edge Compliance (conducted method)	FCC Part 15: 15.209 FCC Part 15: 15.247 ANSI C63.10: 2013	Pass ¹
RF Conducted Spurious Emissions	FCC Part 15: 15.209 FCC Part 15: 15.247 ANSI C63.10: 2013	Pass ¹
Power Line Conducted Emission	FCC Part 15: 15.207 ANSI C63.10: 2013	Pass ¹
Radiated Emission	FCC Part 15: 15.205 FCC Part 15: 15.209 FCC Part 15: 15.247(d) ANSI C63.10:2013	Pass ²
Emission in restricted frequency bands	FCC Part 15: 15.205 FCC Part 15: 15.209 FCC Part 15: 15.247(d) ANSI C63.10:2013	Pass ²

Note1:

The above "pass¹" items data are refer from the original report issued by SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch (Date of Test: 2019/7/31 ~ 2019/8/26), The detailed data can refer to Appendix-BLE.

Note2:

The above "pass²" item is tested by Tianjin Dongdian Testing Service Co., Ltd.

2. General Test Information

2.1. Description of EUT

EUT* Name	: Mobile Handset
Model Number	: LM-X430FMW, LM-X430HM
EUT Function Description	: Please reference user manual of this device
Power Supply	: AC/DC Adapter
Radio Specification	: Bluetooth V4.0
Operation Frequency	: 2402 MHz - 2480 MHz
Modulation	: GFSK
Data Rate	: 1 Mbps
Antenna Type	: Integrated antenna, maximum PK gain: -2.0 dBi
Sample Type	: Portable Device

Note: EUT is the ab. of equipment under test.

Channel information					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	14	2430	28	2458
1	2404	15	2432	29	2460
2	2406	16	2434	30	2462
3	2408	17	2436	31	2464
4	2410	18	2438	32	2466
5	2412	19	2440	33	2468
6	2414	20	2442	34	2470
7	2416	21	2444	35	2472
8	2418	22	2446	36	2474
9	2420	23	2448	37	2476
10	2422	24	2450	38	2478
11	2424	25	2452	39	2480
12	2426	26	2454		
13	2428	27	2456		

2.2. Difference of Model Number

The difference between LM-X430FMW, LM-X430HM and LM-X430FMW, LM-X430HM is show in the below table:

		LM-X430FMW (Updated approval)	LM-X430HM (Updated approval)	LM-X430FMW, LM-X430HM (Full approval)
	Software version	different	different	different
Licensed Frequency	LTE	B1/ B2/B3/ B4/B5/B7/B8/B12/B13/B1 7/B28/B38/B40/B66	B1/ B2/B3/ B4/B5/B7/B8/B12/B13/B1 7/B28/B38/B40/B66	B1/ B3/ B7/B8/B20/B38
	CA	Not support	Not support	Not support
	UMTS	B1,B2,B4,B5,B8	B1,B2,B4,B5,B8	B1,B2,B5,B8
	GSM	the same	the same	the same
	IC	the same	the same	the same
	Antenna	the same	the same	the same
Unlicensed Frequency	Bluetooth	the same	the same	the same
	2.4G Wi-Fi	the same	the same	the same
	IC	the same	the same	the same
	Antenna	the same	the same	the same
Hardware	Ram / Rom	2G/32G	2G/32G	2G/32G
	Camera	the same	the same	the same
	PCB	the same	the same	the same
	USB Port	the same	the same	the same
	NFC	Not support	Not support	support
	FM	support	support	Not support
Appearance	Dimension	the same	the same	the same
	Color	the same	the same	the same
Accessory	Battery	the same	the same	the same
	External Charger	the same	the same	the same
	USB Cable	the same	the same	the same
other	SIM card	Double SIM	Single SIM	Double SIM

According to the difference above, there were no test on LM-X430FMW, LM-X430HM, the data were copied from the report of LM-X430FMW, LM-X430HM (DDT-B21120602-1E02), and the worst case data spot check on LM-X430FMW, LM-X430HM, and the data displayed in the sport check attachment.


2.3. Accessories of EUT

Description of Accessories	Manufacturer	Model number	Description	SN
N/A	N/A	N/A	N/A	N/A

2.4. Assistant equipment used for test

Assistant equipment	Manufacturer	Model number	EMC Compliance	SN
N/A	N/A	N/A	N/A	N/A

2.5. Block diagram of EUT configuration for test



Test software: Internal software by EUT

The test software was used to control EUT work in Continuous Tx mode, and select test channel, wireless mode as below table.

Tested mode, channel, information			
Mode	Setting Tx Power	Channel	Frequency (MHz)
GFSK	Default	CH0	2402
	Default	CH19	2440
	Default	CH39	2480

2.6. Deviations of test standard

No deviation.

2.7. Test environment conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature range:	21-25 °C
Humidity range:	25-75%
Pressure range:	86-106 kPa

2.8. Test laboratory

Tianjin Dongdian Testing Service Co., Ltd.

Address: Building D-1, No. 19, Weisi Road, Microelectronics Industrial Park Development Area, Tianjin, China.

Tel: +86-22-58038033, <http://www.ddttest.com>, Email: ddt@dgddt.com

NVLAP (National Voluntary Laboratory Accreditation Program) CODE: 500036-0

CNAS (China National Accreditation Service for Conformity Assessment) CODE: L13402

FCC Designation Number: CN5004; FCC Test Firm Registration Number: 368676

ISED (Innovation, Science and Economic Development Canada) Company Number: 27768

Conformity Assessment Body Identifier: CN0125

VCCI Facility Registration Number: C-20089, T-20093, R-20125, G-20122

2.9. Measurement uncertainty

Test Item	Uncertainty
Bandwidth	0.14%
Peak Output Power (Conducted) (Spectrum Analyzer)	0.12 dB (10 MHz ≤ f < 3.6 GHz);
	0.32 dB (3.6 GHz ≤ f < 8 GHz)
Peak Output Power (Conducted) (Power Sensor)	0.51 dB
Power Spectral Density	0.12 dB (10 MHz ≤ f < 3.6 GHz);
	0.32 dB (3.6 GHz ≤ f < 8 GHz)
Frequencies Stability	6.7×10^{-8} (Antenna couple method)
	3.4×10^{-8} (Conducted method)
Conducted Spurious Emissions	0.12 dB (10 MHz ≤ f < 3.6 GHz);
	0.32 dB (3.6 GHz ≤ f < 8 GHz)
	0.52 dB (8 GHz ≤ f < 22 GHz)
Uncertainty for Radio Frequency (RBW < 20 kHz)	3×10^{-7}
Temperature	±2°C
Humidity	±1%
Uncertainty for Radiation Emission Test (30 MHz - 1 GHz)	2.72 dB (Antenna Polarize: V)
	2.72 dB (Antenna Polarize: H)
Uncertainty for Radiation Emission Test (1 GHz - 40 GHz)	2.74 dB (1 - 6 GHz)
	2.72 dB (6 GHz - 18 GHz)
	3.54 dB (18 GHz - 26 GHz)
	4.30 dB (26 GHz - 40 GHz)
Uncertainty for Power Line Conduction Emission Test	3.40 dB (150 kHz - 30 MHz)
Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	

3. Equipment Used During Test


Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
RF Connected Test (MWRFtest system)					
Microwave Signal Generator	R&S	SMF100A	101396	2021/06/08	1 Year
MXG Vector Signal Generator	Agilent	N5182A	MY50143288	2021/03/08	1 Year
EMI Test Receiver	R&S	ESU26	100243	2021/03/03	1 Year
Wideband Radio Communication Tester	R&S	CMW500	158800	2021/05/25	1 Year
Power Detector	MWRFtest	MW100-PS B	MW201203008	2021/03/31	1 Year
DC Power Supply	inSTEK	PSP-2010	EH131319	2021/02/27	1 Year
Test Software	MWRFtest	MTS8310	V03	N/A	N/A
Radiated Emission -10m EMI Chamber					
EXA Signal Analyzer	Keysight	N9010A	MY53281492	2021/03/31	1 Year
Active Loop Antenna	R&S	HFH2-Z2	100269	2021/05/08	1 Year
Double-Ridged Guide Horn Antenna	ETS-LINDGR EN	3115	00102808	2021/03/16	1 Year
Broad Band Horn Antenna	Schwarzbeck	BBHA 9170	790	2021/04/21	1 Year
Broadband Horn Antenna	TESEQ	BHA 9118	31754	2021/10/12	1 Year
Low noise amplifier	MITEQ	TPA0118-36	0914	2021/02/03	1 Year
EMI Test Receiver	R&S	ESCI	101024	2021/03/03	1 Year
EMI Test Receiver	R&S	ESCI	101030	2021/05/15	1 Year
Bilog Antenna	TESEQ	CBL6112D	29068	2020/10/12	2 Year
Bilog Antenna	TESEQ	CBL6112D	29069	2020/10/12	2 Year
Amplifier	Sonoma	310N	300913	2021/03/03	1 Year
Amplifier	Sonoma	310N	300914	2021/03/03	1 Year
Ant Mast	Innco	MA4000	N/A	N/A	N/A
Ant Mast	Innco	MA4000	N/A	N/A	N/A
Mast Controller	Innco	CO2000	N/A	N/A	N/A
Mast Controller	Innco	CO2000	N/A	N/A	N/A
RF Selector 4CH	TOYO	NS4904N	Selector1	N/A	N/A
RF Selector 4CH	TOYO	NS4904N	Selector2	N/A	N/A
Test software	TOYO	EP5/RSE	Ver 1.9.1	N/A	N/A
Test software	Audix	E3	V 6.11111b	N/A	N/A
Power Line Conducted Emissions Test					
Test Receiver	R&S	ESCI	101397	2021/03/03	1 Year
LISN	R&S	ENV216	101122	2021/03/31	1 Year
Test software	TOYO	EP5/CE	V 5.4.40	N/A	N/A

4. Maximum Peak Output Power

4.1. Re-Test statement

The EUT is operating at the same power level with the original testing of SGS-CSTC Standards Technical Services, Co., Ltd. Shenzhen Branch.

4.2. Block diagram of test setup

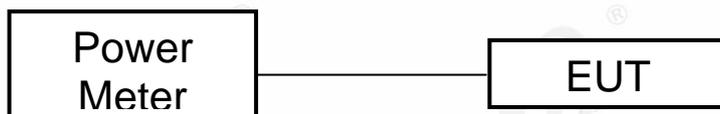

4.3. Limits

For frequency hopping systems operating in the 2400-2483.5MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band is 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band is 0.125 watts, the E.I.R.P shall not exceed 4W.

4.4. Test procedure

Connect each EUT's antenna output to power sensor by RF cable and attenuator. Measure the PK output power of each antenna port by power sensor.

4.5. Test result

Remark

	The Original Reports	Re-Test Reports
File name:	test report BLE	DDT-B21120602-1E03
Test location:	SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch	Tianjin Dongdian Testing Service Co., Ltd.


Power

Mode	Test Channel	The Original Reports Level [dBm]	Re-Test Reports Level [dBm]	Power level
GFSK	Lowest	11.18	11.04	Default
	Middle	12.44	12.26	Default
	Highest	11.76	11.58	Default


5. Radiated Emission

5.1. Block diagram of test setup


Anechoic Chamber, test setup diagram for 9 kHz - 30 MHz:

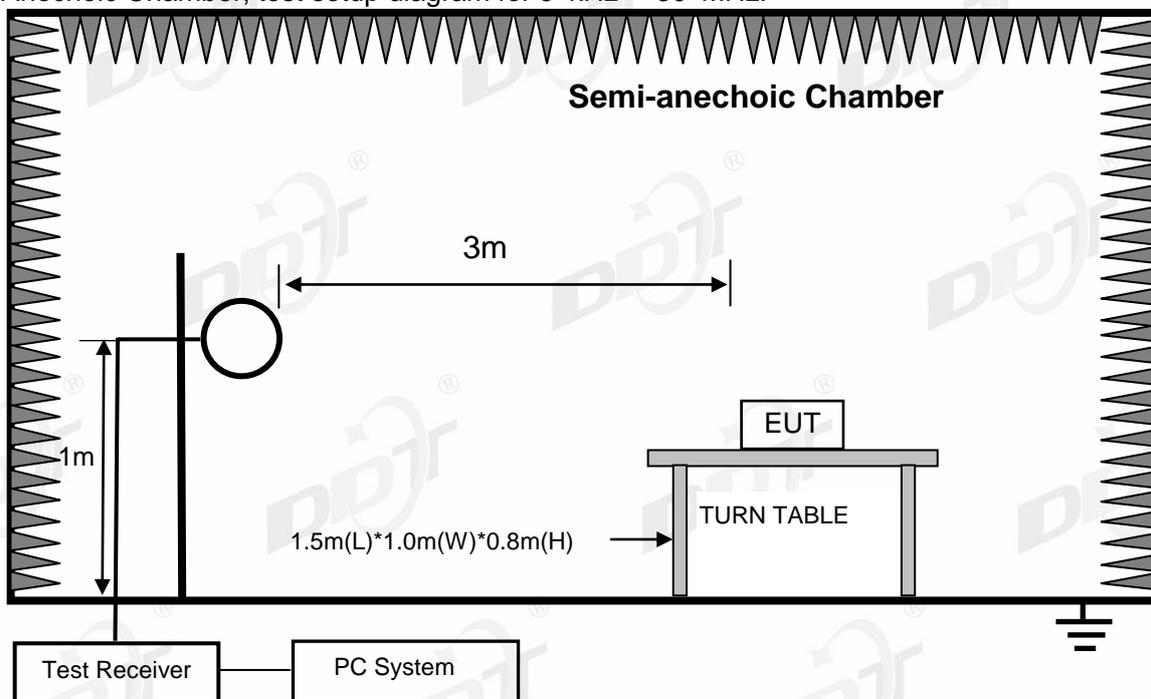

Anechoic Chamber, test setup diagram for 30 MHz - 1 GHz:

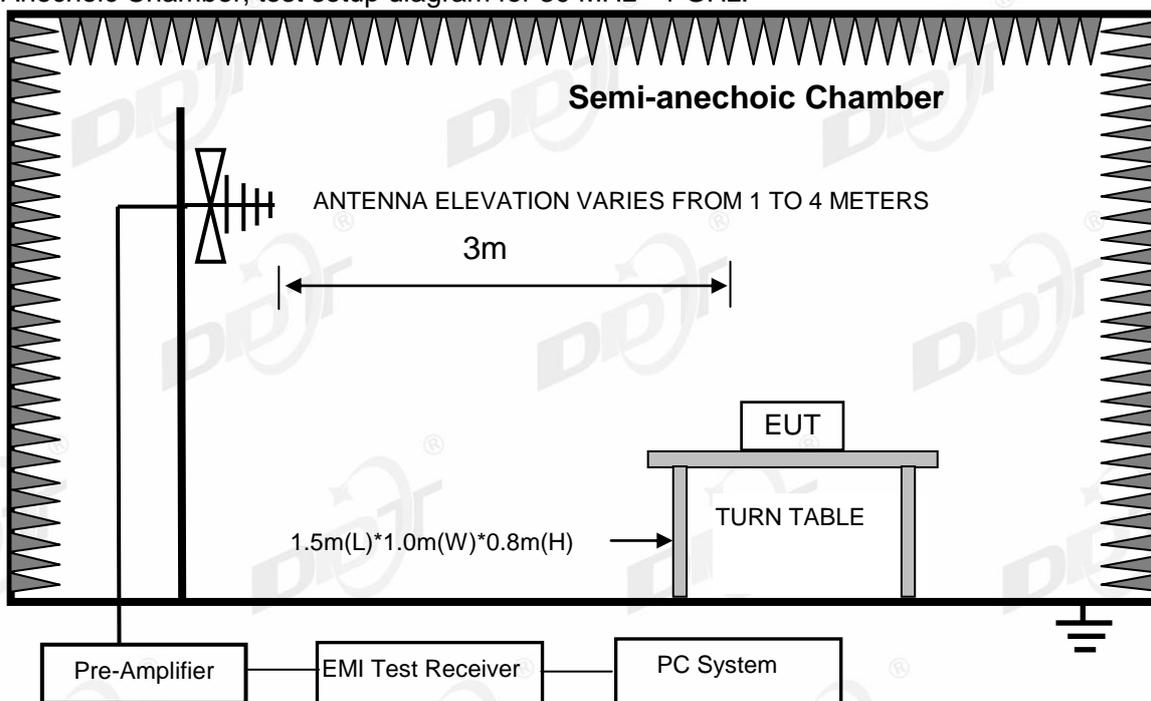

Anechoic Chamber, test setup diagram for frequency above 1 GHz:

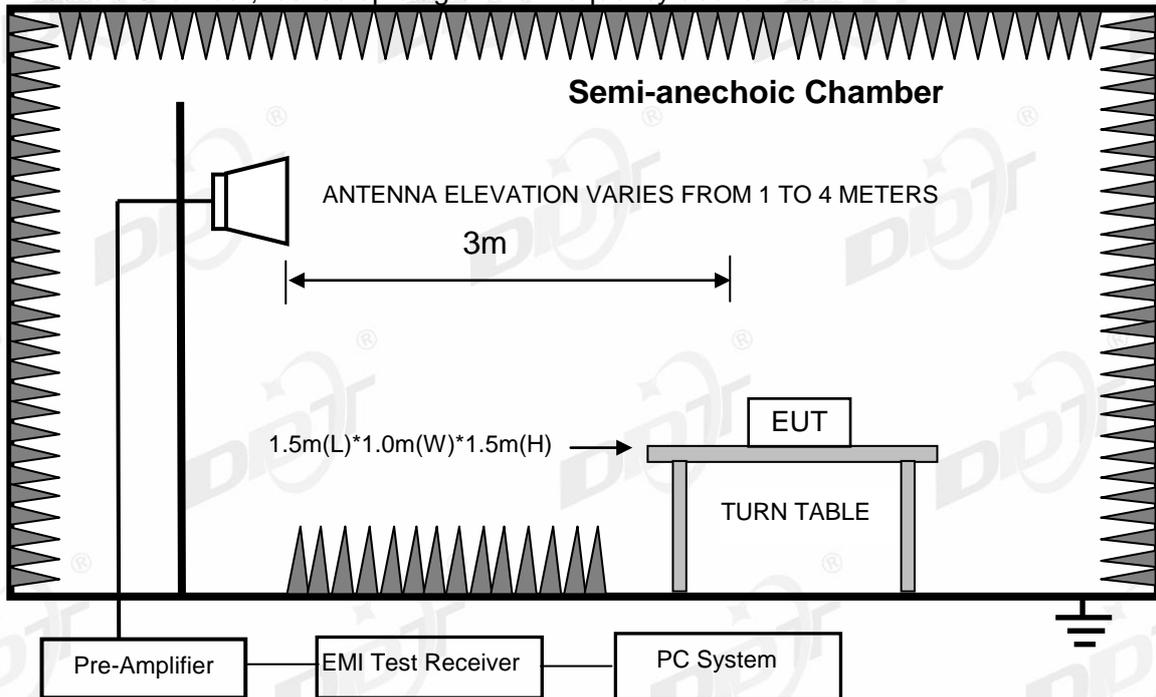

Note: For harmonic emissions test an appropriate high pass filter was inserted in the input port of AMP.

5.2. Limit

(1) FCC 15.205 Restricted frequency band

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.1772&4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.2072&4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			

¹Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

²Above 38.6

(2) FCC 15.209 Limit.

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		$\mu\text{V}/\text{m}$	$\text{dB}(\mu\text{V})/\text{m}$
0.009 ~ 0.490	300	2400/F(kHz)	67.6-20log(F)
0.490 ~ 1.705	30	24000/F(kHz)	87.6-20log(F)
1.705 ~ 30.0	30	30	29.54
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	74.0 dB(μV)/m (Peak) 54.0 dB(μV)/m (Average)	

Note: (1) The emission limits shown in the above table are based on measurements employing a CISPR QP detector except for the frequency bands 9 - 90 kHz, 110 - 490 kHz and above 1000 MHz, radiated emissions limits in these three bands are based on measurements employing an average detector.

(2) At frequencies below 30 MHz, measurement may be performed at a distance closer than that specified, and the limit at closer measurement distance can be extrapolated by below formula:

$$\text{Limit}_{3\text{m}}(\text{dB}\mu\text{V}/\text{m}) = \text{Limit}_{30\text{m}}(\text{dB}\mu\text{V}/\text{m}) + 40\text{Log}(30\text{m}/3\text{m})$$

(3) Limit for this EUT

All the emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions shall be at least 20 dB below the fundamental emissions or comply with 15.209 limits.

5.3. Test Procedure

(1) EUT was placed on a non-metallic table, 80 cm above the ground plane inside a semi-anechoic chamber for below 1G and 150 cm above the ground plane inside a fully-anechoic chamber for above 1G.

(2) Test antenna was located 3 m from the EUT on an adjustable mast, and the antenna used as below table.

Test frequency range	Test antenna used	Test antenna distance
9 kHz - 30 MHz	Active Loop antenna	3 m
30 MHz - 1 GHz	Trilog Broadband Antenna	3 m
1 GHz - 18 GHz	Double Ridged Horn Antenna (1 GHz - 18 GHz)	3 m
18 GHz - 40 GHz	Horn Antenna (18 GHz - 40 GHz)	3 m

According ANSI C63.10:2013 clause 6.4.4.2 and 6.5.3, for measurements below 30 MHz, the loop antenna was positioned with its plane vertical from the EUT and rotated about its vertical axis for maximum response at each azimuth position around the EUT. And the loop antenna also

is positioned with its plane horizontal at the specified distance from the EUT. The center of the loop is 1 m above the ground. For measurement above 30 MHz, the trilob Broadband Antenna or Horn Antenna was located 3 m from EUT, Measurements were made with the antenna positioned in both the horizontal and vertical planes of Polarization, and the measurement antenna was varied from 1 m to 4 m. in height above the reference ground plane to obtain the maximum signal strength.

(3) Below pre-scan procedure was first performed in order to find prominent frequency spectrum radiated emissions from 9 kHz to 25 GHz:

(a) Scanning the peak frequency spectrum with the antenna specified in step (3), and the EUT was rotated 360 degree, the antenna height was varied from 1 m to 4 m (Except loop antenna, it's fixed 1 m above ground.)

(b) Change work frequency or channel of device if practicable.

(c) Change modulation type of device if practicable.

(d) Change power supply range from 85% to 115% of the rated supply voltage

(e) Rotated EUT though three orthogonal axes to determine the attitude of EUT arrangement produces highest emissions.

Spectrum frequency from 9 kHz to 25 GHz (tenth harmonic of fundamental frequency) was investigated, and no any obvious emission were detected from 18 GHz to 25 GHz, so below final test was performed with frequency range from 9 kHz to 18 GHz.

(4) For final emissions measurements at each frequency of interest, the EUT was rotated and the antenna height was varied between 1 m and 4 m in order to maximize the emission. Measurements in both horizontal and vertical polarities were made and the data was recorded. In order to find the maximum emission, the relative positions of equipment and all of the interface cables were changed according to ANSI C63.10:2013 on Radiated Emission test.

(5) The emissions from 9 kHz to 1 GHz were measured based on CISPR QP detector except for the frequency bands 9 - 90 kHz, 110 - 490 kHz, for emissions from 9 kHz - 90 kHz, 110 kHz - 490 kHz and above 1 GHz were measured based on average detector, for emissions above 1 GHz, peak emissions also be measured and need comply with Peak limit.

(6) The emissions from 9 kHz to 1 GHz, QP or average values were measured with EMI receiver with below RBW.

Frequency band	RBW
9 kHz - 150 kHz	200 Hz
150 kHz - 30 MHz	9 kHz
30 MHz - 1 GHz	120 kHz

(7) For emissions above 1GHz, both Peak and Average level were measured with Spectrum Analyzer, and the RBW is set at 1 MHz, VBW is set at 3 MHz for Peak measure; According ANSI C63.10:2013 clause 4.1.4.2.2 procedure for average measure.

(8) X axis, Y axis, Z axis are tested, and worse setup X axis is reported.

5.4. Test result

Pass. (See below detailed test result)

All the emissions except fundamental emission from 9 kHz to 25 GHz were comply with 15.209 limits.

Note1: According exploratory test, the emission levels are 20 dB below the limit detected from 9 kHz to 30 MHz and 18 GHz to 25 GHz, so the final test was performed with frequency range from 30 MHz to 18 GHz and recorded in below.

Note2: For emissions below 1 GHz, according exploratory explorer test, when change Tx mode and channel, have no distinct influence on emissions level, so for emissions below 1 GHz, the final test was only performed with EUT working in BLE transmitting and charging mode.

Note3: For emissions above 1 GHz. If peak results comply with AV limit, AV Result is deemed to comply with AV limit.

Radiated Emission test (below 1 GHz)

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 12-14-2021

Tested By : Sunny

EUT : Mobile Handset


Model Number : LM-X430FMW, LM-X430HM

Power Supply : AC 120V/60Hz

Test Mode : Tx mode

Memo : BLE

Data: 85

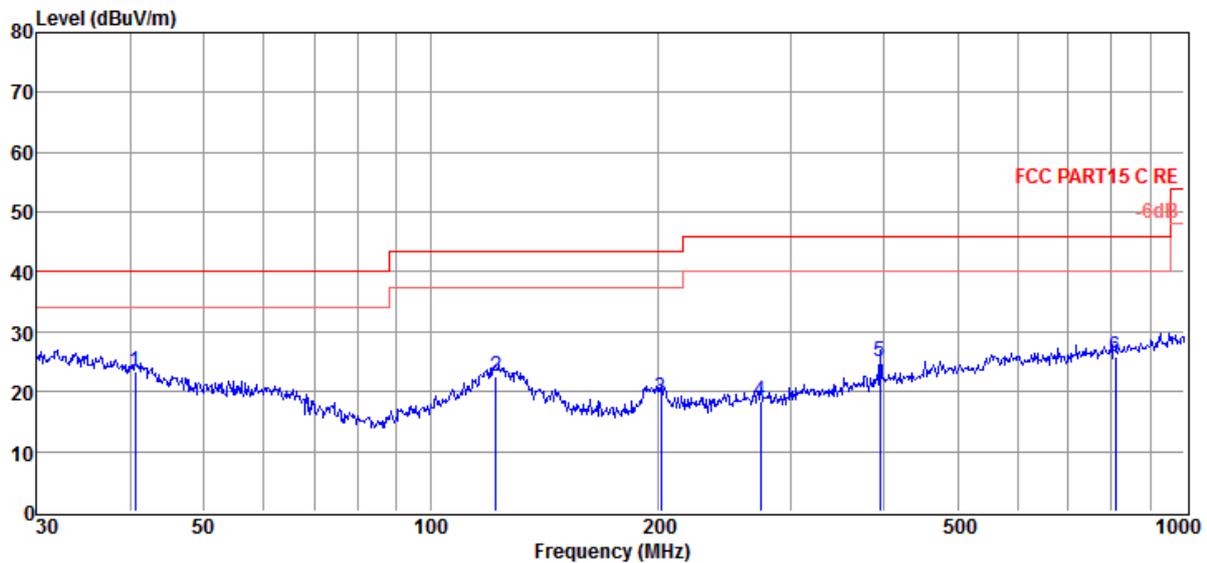

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/ m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	40.56	-12.90	23.32	40.00	-16.68	169	276	QP	VERTICAL
2	121.98	-17.24	22.58	43.50	-20.92	170	186	QP	VERTICAL
3	202.10	-18.47	19.10	43.50	-24.40	163	167	QP	VERTICAL
4	274.19	-16.86	18.52	46.00	-27.48	169	298	QP	VERTICAL
5	394.86	-13.56	24.97	46.00	-21.03	162	243	QP	VERTICAL
6	810.27	-8.99	25.87	46.00	-20.13	151	60	QP	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. Margin QP (Quasi-Peak) = Level QP - Limit

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 12-14-2021

Tested By : Sunny

EUT : Mobile Handset


Model Number : LM-X430FMW, LM-X430HM

Power Supply : AC 120V/60Hz

Test Mode : Tx mode

Memo : BLE

Data: 86

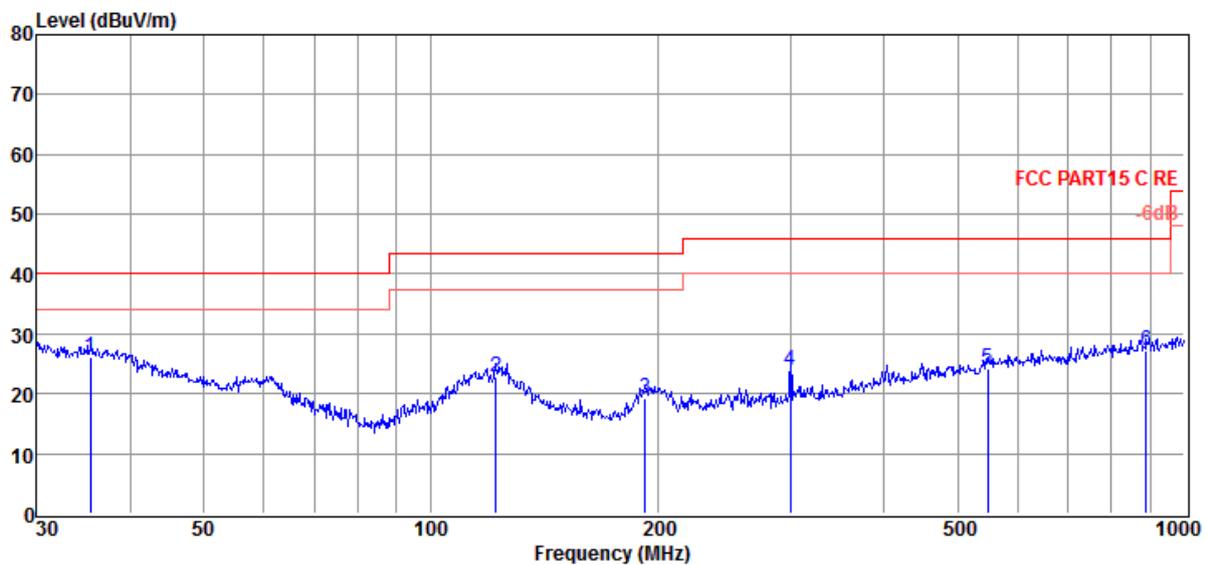

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dB μ V/m)	Limit Line (dB μ V/ m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	35.38	-10.11	25.99	40.00	-14.01	183	77	QP	HORIZONTAL
2	121.98	-17.24	22.92	43.50	-20.58	160	299	QP	HORIZONTAL
3	192.42	-18.87	19.28	43.50	-24.22	160	182	QP	HORIZONTAL
4	300.37	-16.28	23.88	46.00	-22.12	172	166	QP	HORIZONTAL
5	549.02	-10.53	24.07	46.00	-21.93	177	267	QP	HORIZONTAL
6	890.73	-8.51	27.23	46.00	-18.77	162	37	QP	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. Margin QP (Quasi-Peak) = Level QP - Limit

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

Radiated Emission test (1 GHz – 3GHz)

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 12-07-2021

Tested By : Sunny

EUT : Mobile Handset


Model Number : LM-X430FMW, LM-X430HM

Power Supply : AC 120V/60Hz

Test Mode : Tx mode

Memo : BLE 2402MHz

Data: 95

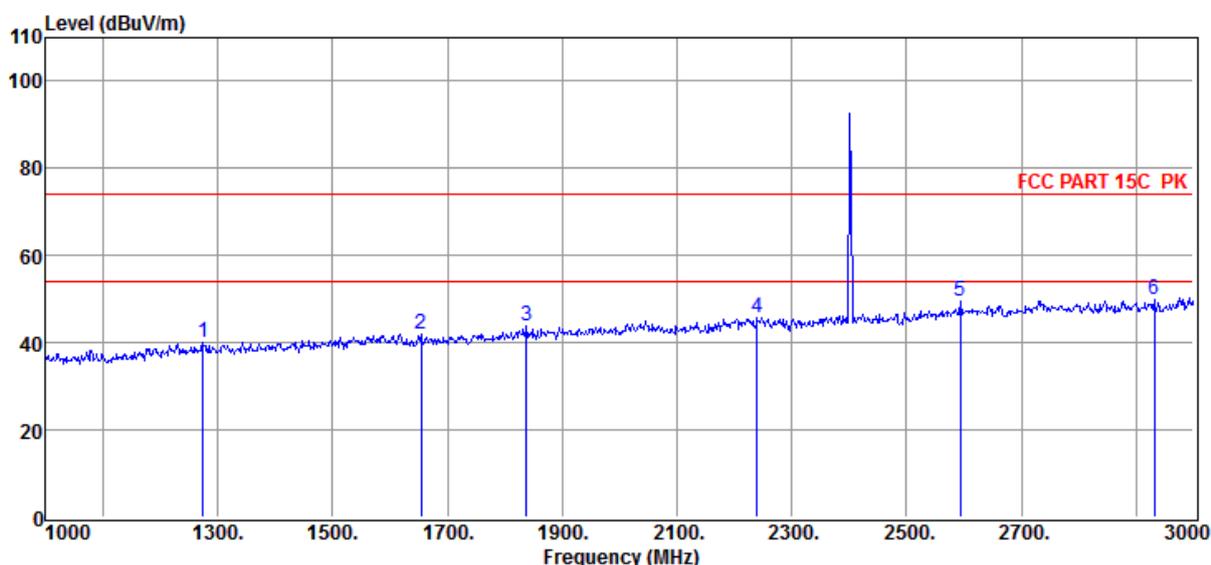

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dB μ V/m)	Limit Line (dB μ V/ m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1274.00	-4.71	39.90	74.00	-34.10	190	335	Peak	HORIZONTAL
2	1654.00	-2.32	42.06	74.00	-31.94	190	243	Peak	HORIZONTAL
3	1838.00	-0.52	43.73	74.00	-30.27	189	46	Peak	HORIZONTAL
4	2240.00	2.37	45.92	74.00	-28.08	157	242	Peak	HORIZONTAL
5	2594.00	5.78	49.65	74.00	-24.35	183	84	Peak	HORIZONTAL
6	2932.00	6.76	49.83	74.00	-24.17	171	343	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 12-07-2021

Tested By : Sunny

EUT : Mobile Handset


Model Number : LM-X430FMW, LM-X430HM

Power Supply : AC 120V/60Hz

Test Mode : Tx mode

Memo : BLE 2402MHz

Data: 96

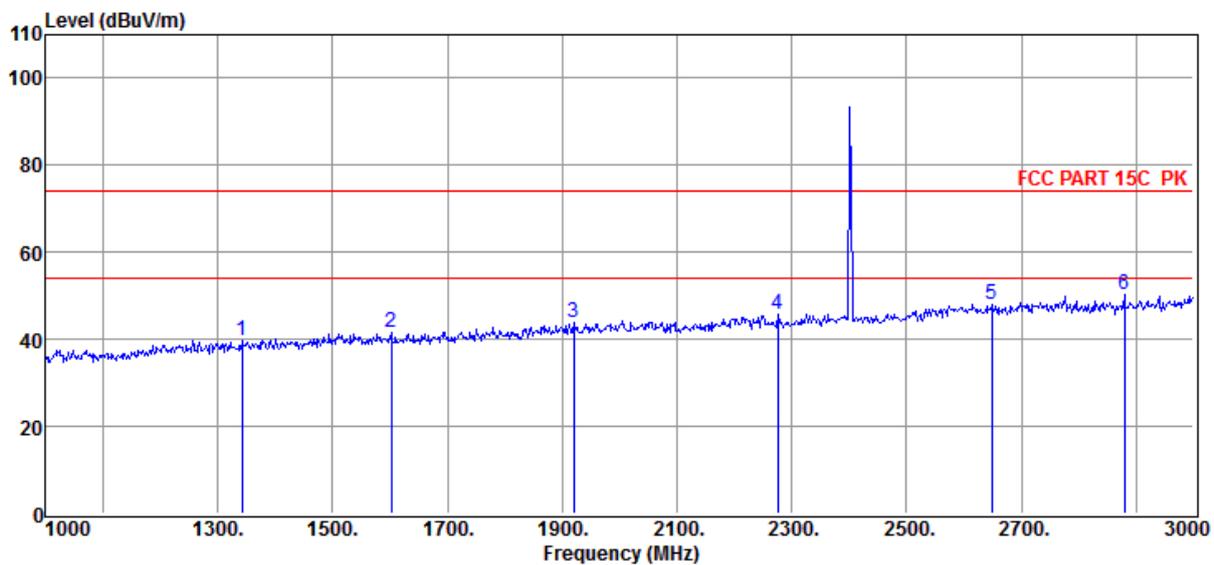

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dB μ V/m)	Limit Line (dB μ V/ m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1342.00	-4.41	39.54	74.00	-34.46	181	155	Peak	VERTICAL
2	1602.00	-2.28	41.65	74.00	-32.35	189	253	Peak	VERTICAL
3	1920.00	0.08	43.87	74.00	-30.13	169	50	Peak	VERTICAL
4	2276.00	2.12	45.56	74.00	-28.44	151	149	Peak	VERTICAL
5	2648.00	5.33	48.15	74.00	-25.85	184	216	Peak	VERTICAL
6	2880.00	6.88	50.16	74.00	-23.84	186	44	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 12-07-2021

Tested By : Sunny

EUT : Mobile Handset


Model Number : LM-X430FMW, LM-X430HM

Power Supply : AC 120V/60Hz

Test Mode : Tx mode

Memo : BLE 2440MHz

Data: 97

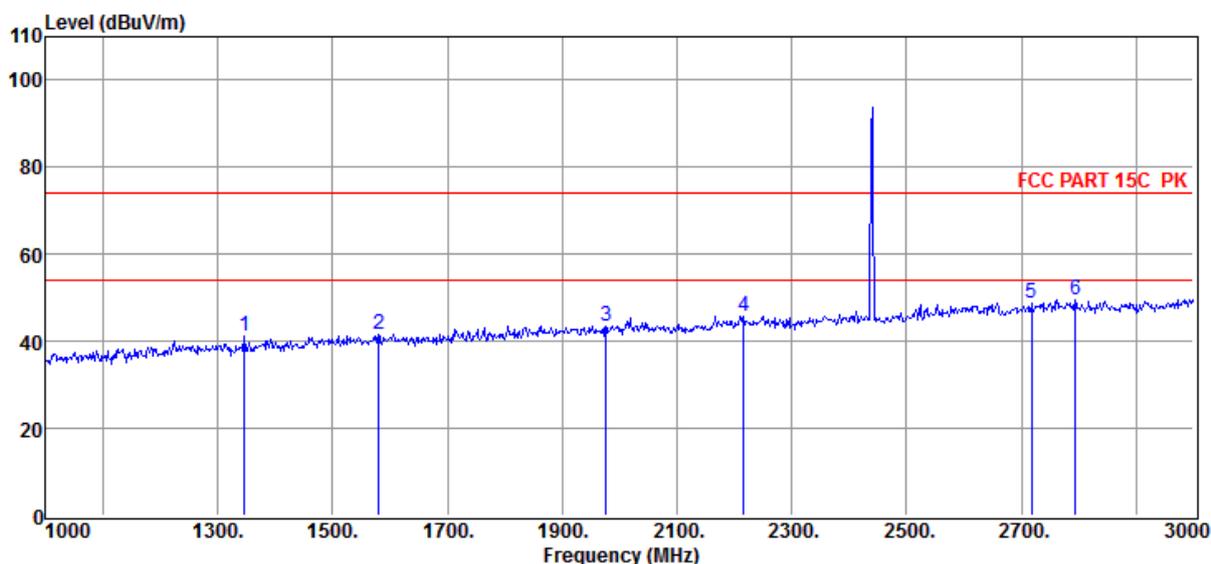

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dB μ V/m)	Limit Line (dB μ V/ m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1346.00	-4.39	41.07	74.00	-32.93	168	241	Peak	VERTICAL
2	1580.00	-2.35	41.58	74.00	-32.42	167	110	Peak	VERTICAL
3	1976.00	0.26	43.63	74.00	-30.37	188	143	Peak	VERTICAL
4	2216.00	2.37	45.92	74.00	-28.08	159	155	Peak	VERTICAL
5	2718.00	6.18	48.71	74.00	-25.29	188	356	Peak	VERTICAL
6	2794.00	6.41	49.45	74.00	-24.55	164	283	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 12-07-2021

Tested By : Sunny

EUT : Mobile Handset


Model Number : LM-X430FMW, LM-X430HM

Power Supply : AC 120V/60Hz

Test Mode : Tx mode

Memo : BLE 2440MHz

Data: 98

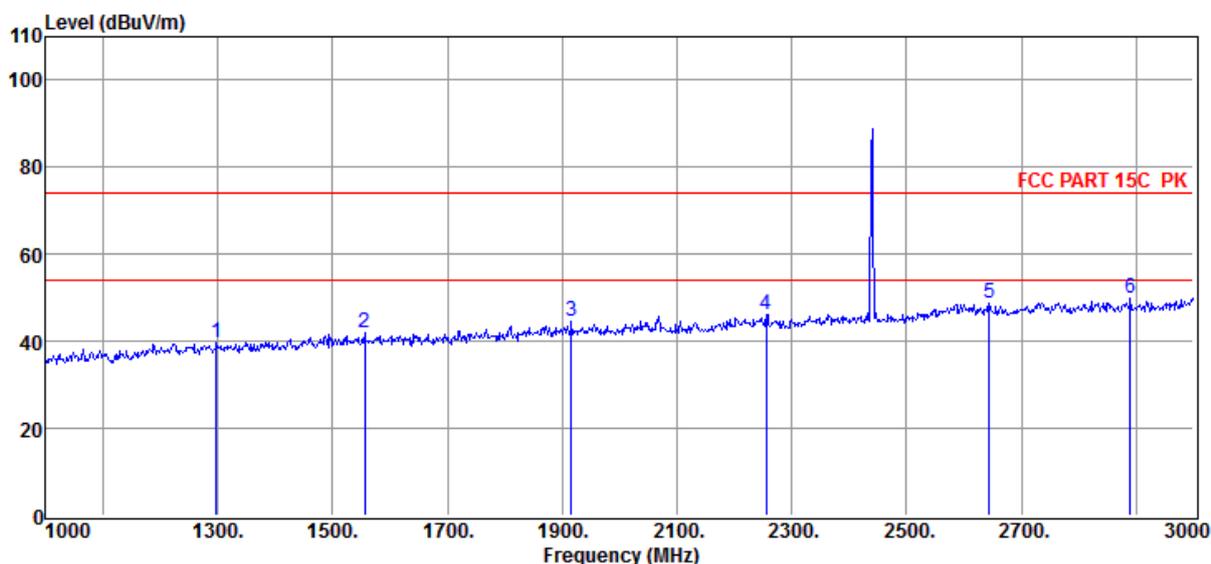

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dB μ V/m)	Limit Line (dB μ V/ m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1298.00	-4.69	39.66	74.00	-34.34	156	147	Peak	HORIZONTAL
2	1556.00	-2.44	41.92	74.00	-32.08	171	356	Peak	HORIZONTAL
3	1916.00	0.05	44.54	74.00	-29.46	184	172	Peak	HORIZONTAL
4	2256.00	2.31	46.25	74.00	-27.75	172	238	Peak	HORIZONTAL
5	2644.00	5.38	48.83	74.00	-25.17	156	275	Peak	HORIZONTAL
6	2890.00	6.93	50.01	74.00	-23.99	161	355	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 12-07-2021

Tested By : Sunny

EUT : Mobile Handset


Model Number : LM-X430FMW, LM-X430HM

Power Supply : AC 120V/60Hz

Test Mode : Tx mode

Memo : BLE 2480MHz

Data: 99

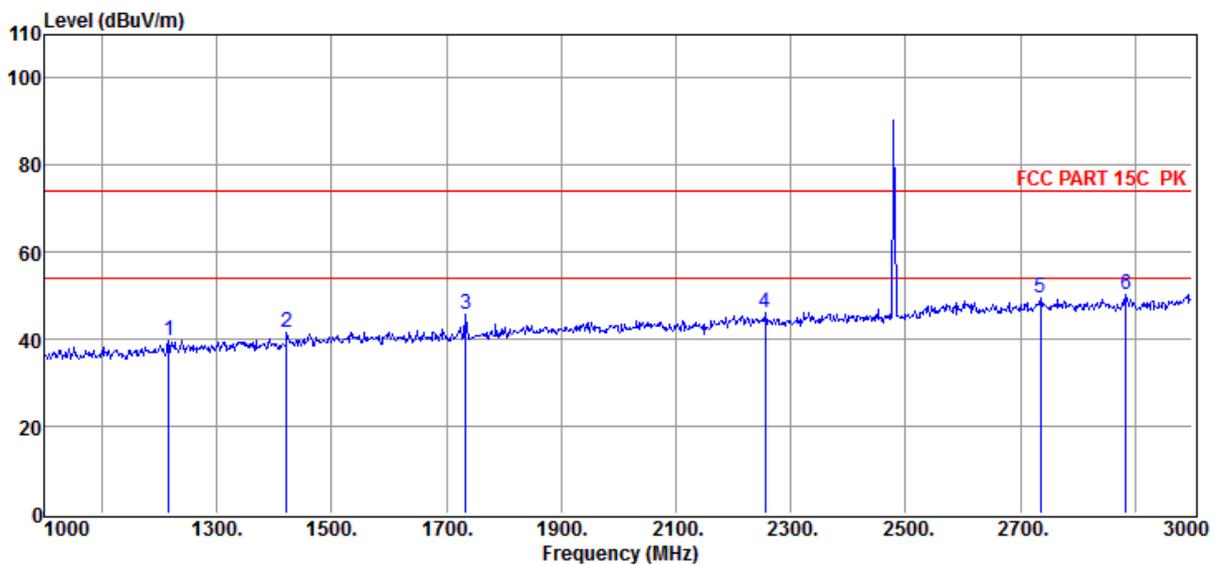

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dB μ V/m)	Limit Line (dB μ V/ m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1216.00	-5.13	39.73	74.00	-34.27	177	58	Peak	HORIZONTAL
2	1422.00	-3.83	41.62	74.00	-32.38	176	313	Peak	HORIZONTAL
3	1734.00	-1.62	45.86	74.00	-28.14	162	33	Peak	HORIZONTAL
4	2256.00	2.31	46.00	74.00	-28.00	179	141	Peak	HORIZONTAL
5	2736.00	6.44	49.66	74.00	-24.34	166	241	Peak	HORIZONTAL
6	2884.00	6.90	50.15	74.00	-23.85	156	351	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 12-07-2021

Tested By : Sunny

EUT : Mobile Handset


Model Number : LM-X430FMW, LM-X430HM

Power Supply : AC 120V/60Hz

Test Mode : Tx mode

Memo : BLE 2480MHz

Data: 100

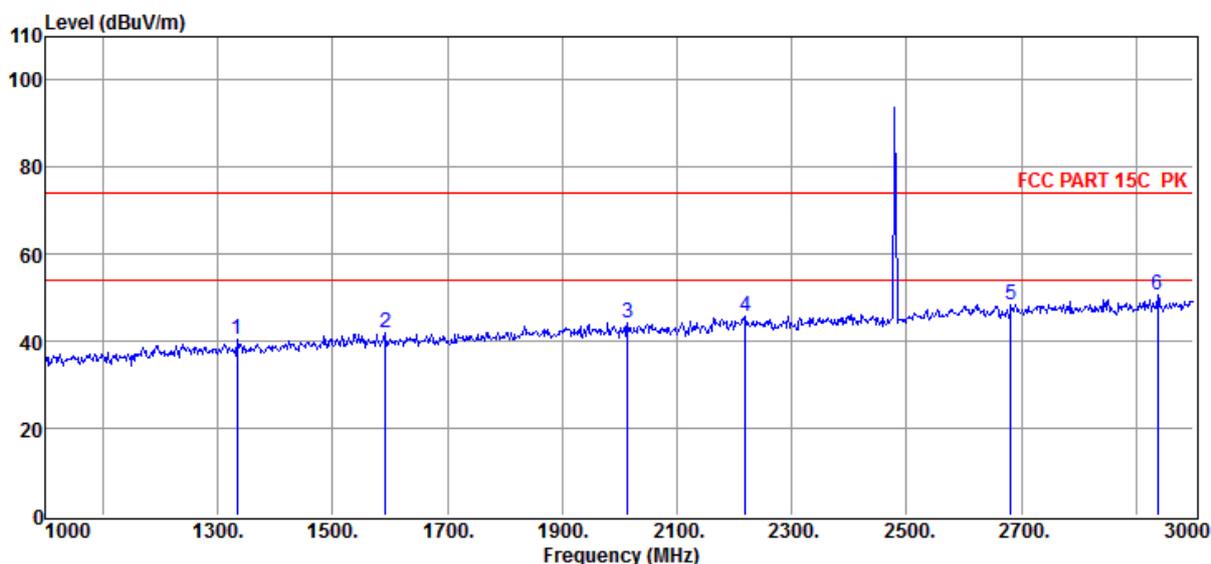

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/ m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1334.00	-4.46	40.26	74.00	-33.74	187	297	Peak	VERTICAL
2	1592.00	-2.31	41.78	74.00	-32.22	183	158	Peak	VERTICAL
3	2014.00	0.49	44.18	74.00	-29.82	158	79	Peak	VERTICAL
4	2220.00	2.37	45.85	74.00	-28.15	153	328	Peak	VERTICAL
5	2682.00	5.69	48.41	74.00	-25.59	190	243	Peak	VERTICAL
6	2938.00	6.71	50.52	74.00	-23.48	157	146	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission test (3 GHz – 18GHz)

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 12-07-2021

Tested By : Sunny

EUT : Mobile Handset


Model Number : LM-X430FMW, LM-X430HM

Power Supply : AC 120V/60Hz

Test Mode : Tx mode

Memo : BLE 2402MHz

Data: 35

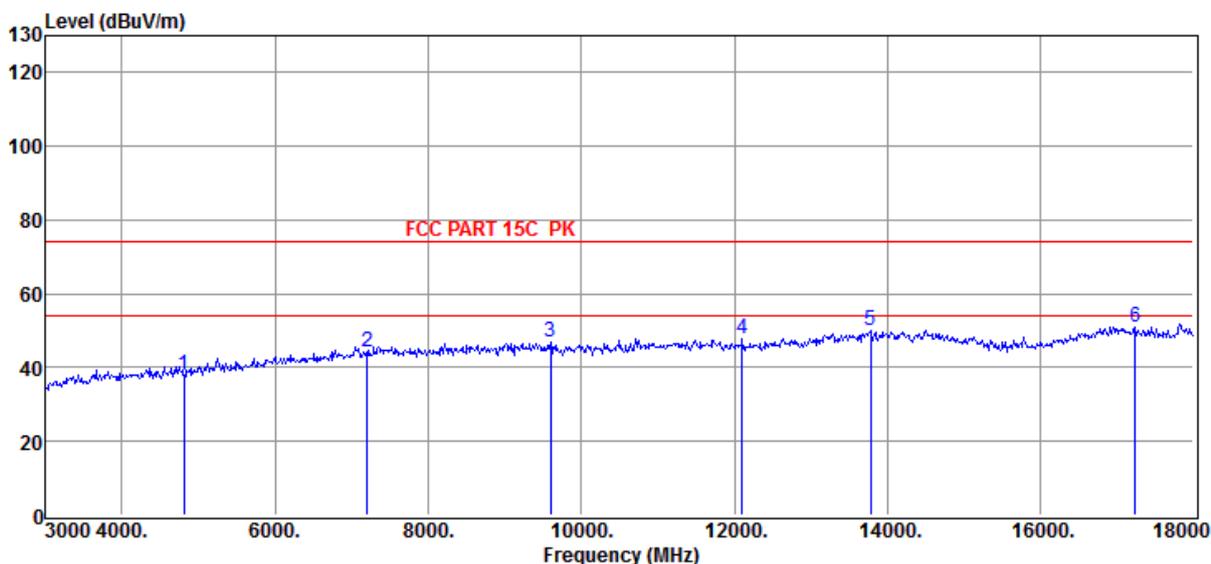

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dB μ V/m)	Limit Line (dB μ V/ m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	4804.00	0.78	37.93	74.00	-36.07	165	248	Peak	VERTICAL
2	7206.00	5.72	44.09	74.00	-29.91	152	317	Peak	VERTICAL
3	9600.00	8.09	47.10	74.00	-26.90	169	322	Peak	VERTICAL
4	12105.00	9.85	47.59	74.00	-26.41	157	347	Peak	VERTICAL
5	13785.00	11.99	49.99	74.00	-24.01	167	251	Peak	VERTICAL
6	17235.00	15.65	51.00	74.00	-23.00	188	109	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 12-07-2021

Tested By : Sunny

EUT : Mobile Handset


Model Number : LM-X430FMW, LM-X430HM

Power Supply : AC 120V/60Hz

Test Mode : Tx mode

Memo : BLE 2402MHz

Data: 36

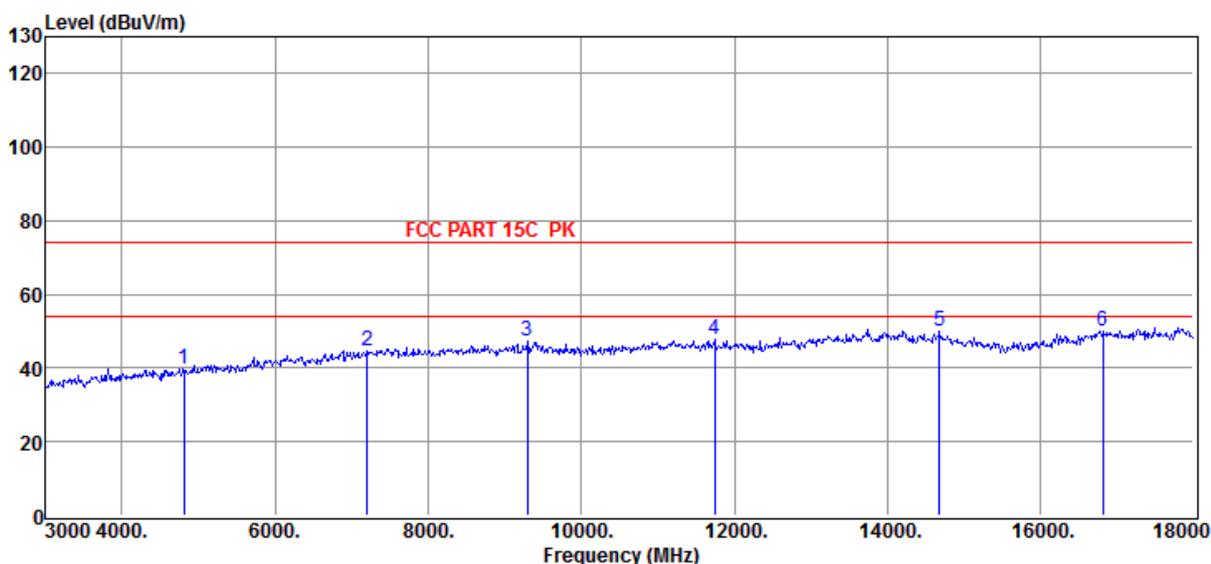

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dB μ V/m)	Limit Line (dB μ V/ m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	4804.00	0.78	39.68	74.00	-34.32	178	254	Peak	HORIZONTAL
2	7206.00	5.72	44.55	74.00	-29.45	168	274	Peak	HORIZONTAL
3	9300.00	7.67	47.14	74.00	-26.86	185	341	Peak	HORIZONTAL
4	11745.00	10.02	47.79	74.00	-26.21	157	329	Peak	HORIZONTAL
5	14685.00	12.65	50.03	74.00	-23.97	188	68	Peak	HORIZONTAL
6	16815.00	15.35	50.20	74.00	-23.80	162	119	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 12-07-2021

Tested By : Sunny

EUT : Mobile Handset


Model Number : LM-X430FMW, LM-X430HM

Power Supply : AC 120V/60Hz

Test Mode : Tx mode

Memo : BLE 2440MHz

Data: 37

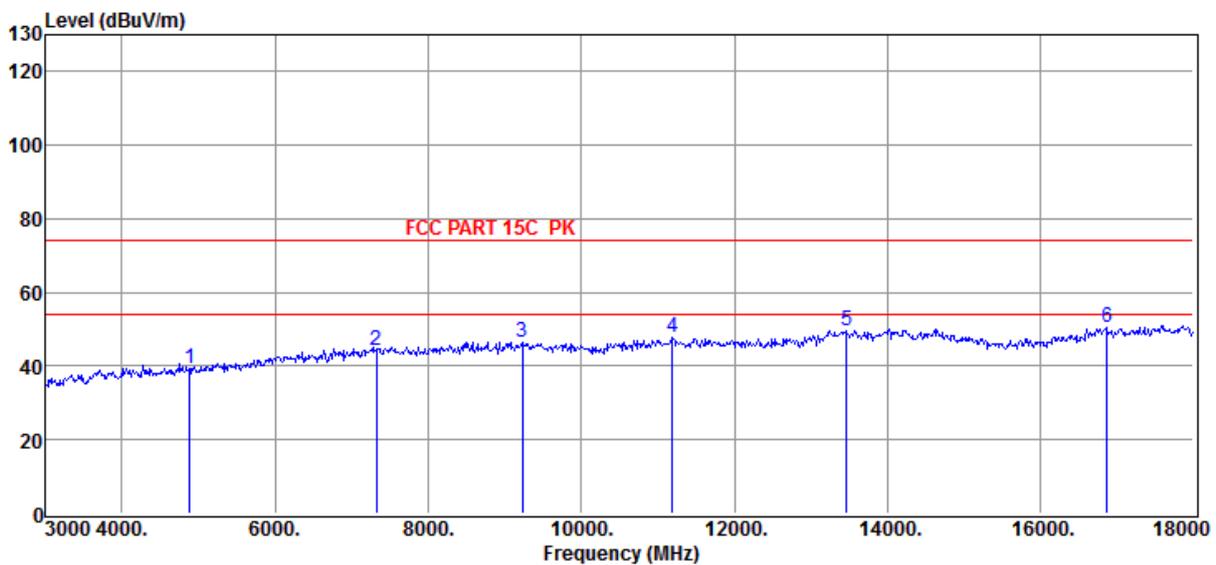

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/ m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	4880.00	0.92	39.23	74.00	-34.77	188	57	Peak	HORIZONTAL
2	7320.00	6.39	44.42	74.00	-29.58	157	348	Peak	HORIZONTAL
3	9225.00	7.37	46.63	74.00	-27.37	164	246	Peak	HORIZONTAL
4	11190.00	10.36	47.99	74.00	-26.01	183	154	Peak	HORIZONTAL
5	13470.00	11.18	49.66	74.00	-24.34	176	137	Peak	HORIZONTAL
6	16875.00	15.02	50.45	74.00	-23.55	186	195	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 12-07-2021

Tested By : Sunny

EUT : Mobile Handset


Model Number : LM-X430FMW, LM-X430HM

Power Supply : AC 120V/60Hz

Test Mode : Tx mode

Memo : BLE 2440MHz

Data: 38

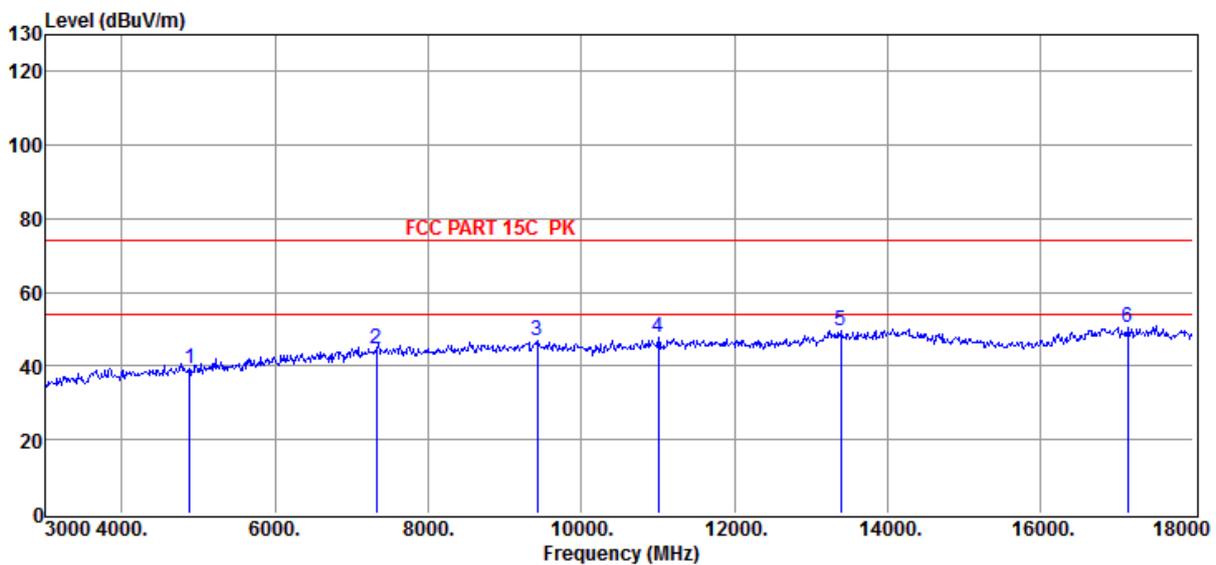

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/ m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	4880.00	0.92	39.34	74.00	-34.66	175	122	Peak	VERTICAL
2	7320.00	6.39	44.68	74.00	-29.32	186	341	Peak	VERTICAL
3	9420.00	8.11	46.74	74.00	-27.26	159	28	Peak	VERTICAL
4	11010.00	9.87	47.78	74.00	-26.22	157	37	Peak	VERTICAL
5	13395.00	10.80	49.57	74.00	-24.43	186	302	Peak	VERTICAL
6	17145.00	15.55	50.61	74.00	-23.39	157	179	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 12-07-2021

Tested By : Sunny

EUT : Mobile Handset


Model Number : LM-X430FMW, LM-X430HM

Power Supply : AC 120V/60Hz

Test Mode : Tx mode

Memo : BLE 2480MHz

Data: 39

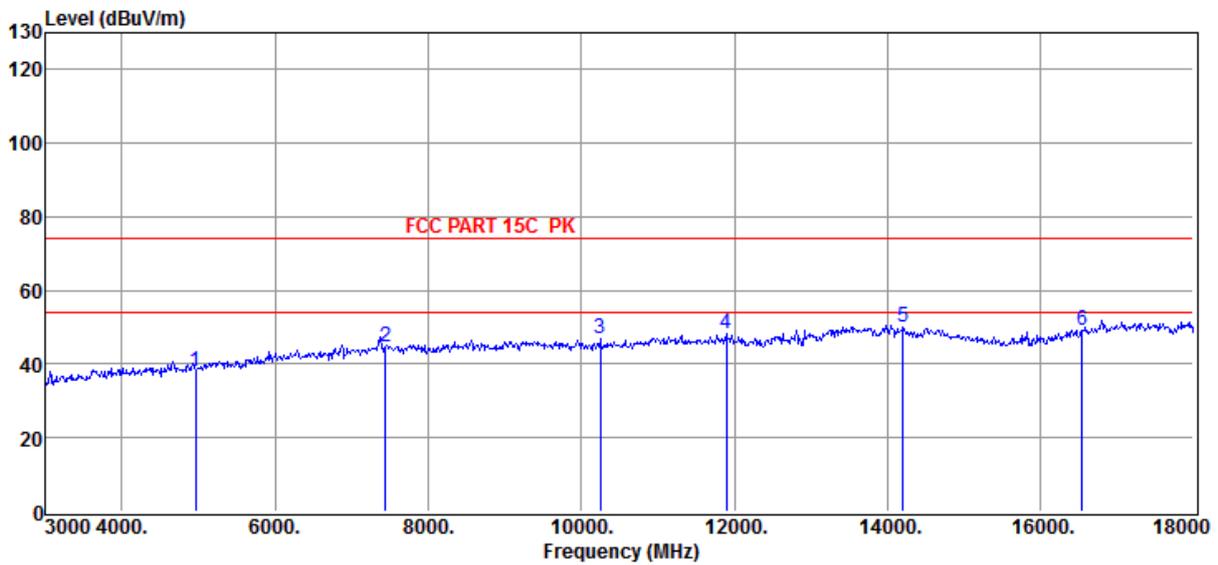

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/ m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	4960.00	1.19	38.18	74.00	-35.82	167	338	Peak	VERTICAL
2	7440.00	6.43	44.77	74.00	-29.23	182	143	Peak	VERTICAL
3	10245.00	8.29	46.71	74.00	-27.29	193	137	Peak	VERTICAL
4	11895.00	10.01	48.14	74.00	-25.86	169	157	Peak	VERTICAL
5	14205.00	14.01	50.14	74.00	-23.86	186	89	Peak	VERTICAL
6	16545.00	13.49	49.33	74.00	-24.67	176	156	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 12-07-2021

Tested By : Sunny

EUT : Mobile Handset


Model Number : LM-X430FMW, LM-X430HM

Power Supply : AC 120V/60Hz

Test Mode : Tx mode

Memo : BLE 2480MHz

Data: 40

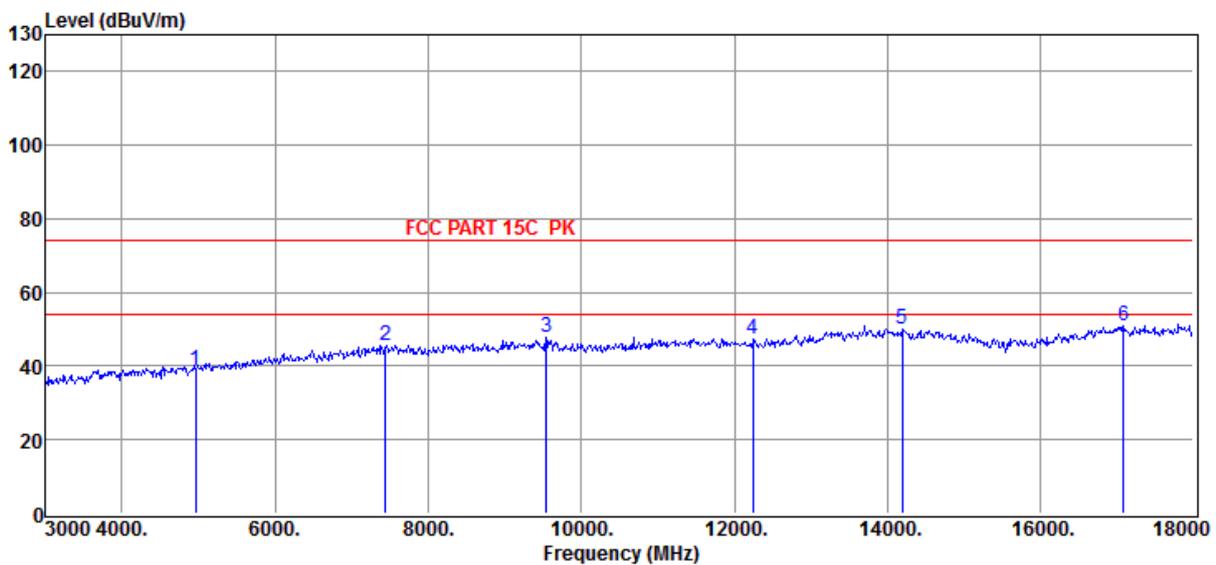

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/ m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	4960.00	1.19	39.07	74.00	-34.93	178	254	Peak	HORIZONTAL
2	7440.00	6.43	45.37	74.00	-28.63	165	347	Peak	HORIZONTAL
3	9540.00	7.90	47.86	74.00	-26.14	154	78	Peak	HORIZONTAL
4	12240.00	9.51	47.21	74.00	-26.79	168	108	Peak	HORIZONTAL
5	14190.00	13.97	50.03	74.00	-23.97	173	217	Peak	HORIZONTAL
6	17085.00	15.67	51.12	74.00	-22.88	189	352	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

6. Band Edge Compliance (Radiated Method)

6.1. Block diagram of test setup

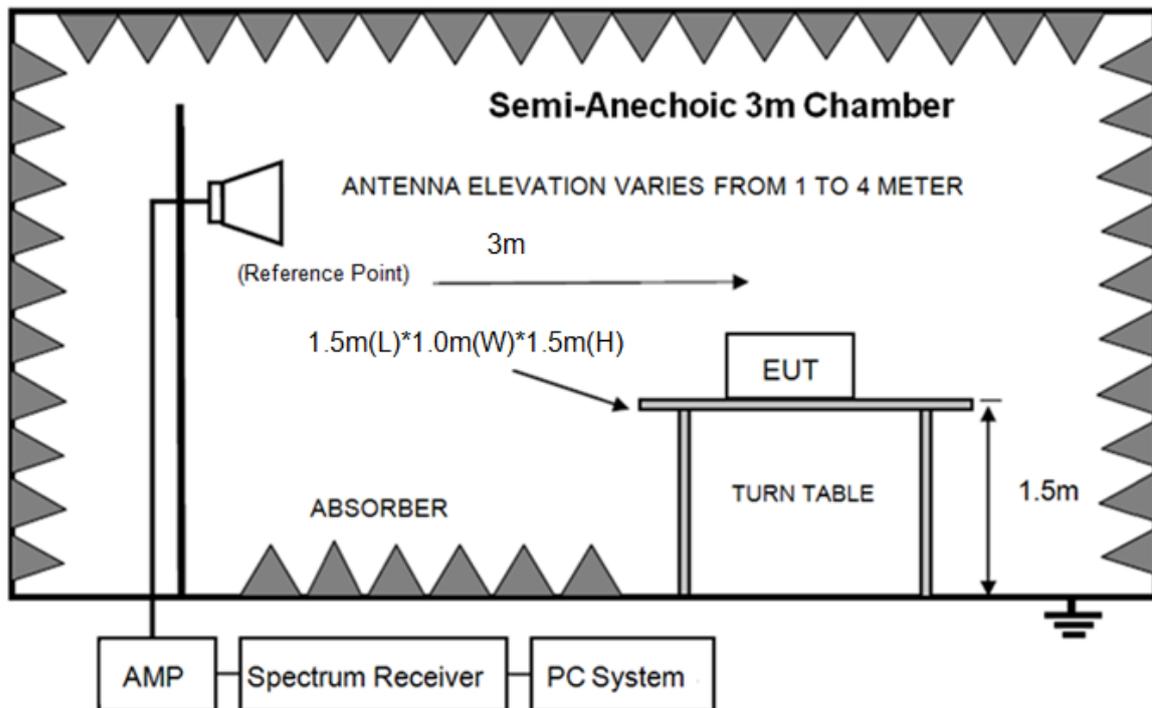

6.2. Limit

All restriction band should comply with 15.209, other emission should be at least 20 dB below the fundamental.

6.3. Test Procedure

Same with clause 10.3 except change investigated frequency range .

Remark: All restriction band have been tested, and only the worst case is shown in report.

6.4. Test result

Pass. (See below detailed test result)

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 12-07-2021

Tested By : Sunny

EUT : Mobile Handset


Model Number : LM-X430FMW, LM-X430HM

Power Supply : AC 120V/60Hz

Test Mode : Tx mode

Memo : BLE 2402MHz

Data: 15

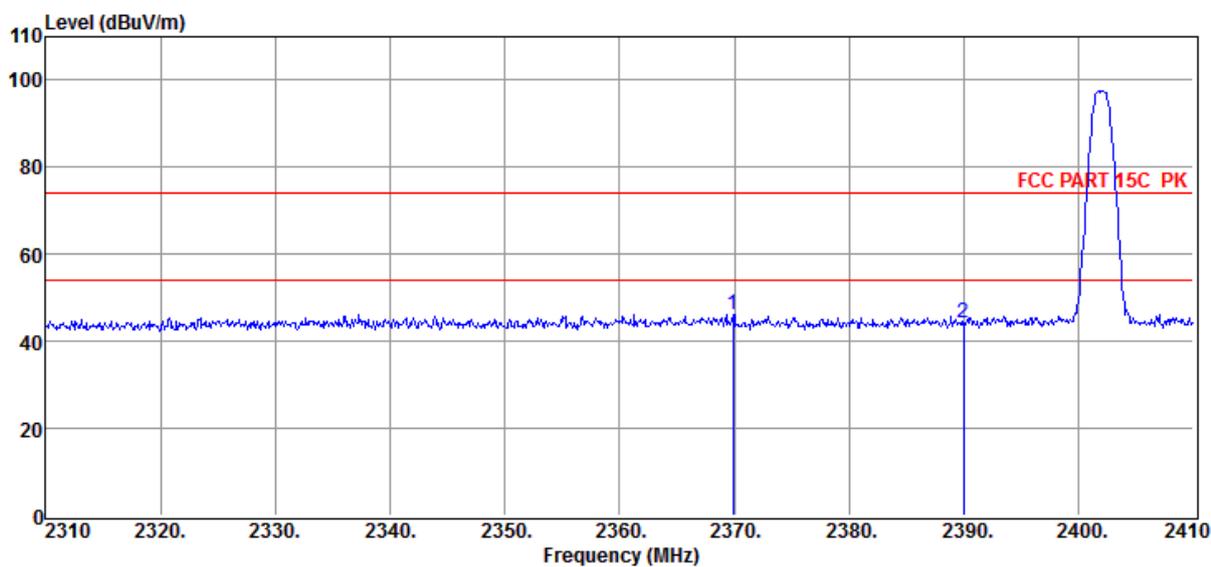

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/ m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	2369.90	3.25	46.10	74.00	-27.90	173	291	Peak	VERTICAL
2	2390.00	3.30	44.30	74.00	-29.70	154	119	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 12-07-2021

Tested By : Sunny

EUT : Mobile Handset


Model Number : LM-X430FMW, LM-X430HM

Power Supply : AC 120V/60Hz

Test Mode : Tx mode

Memo : BLE 2402MHz

Data: 16

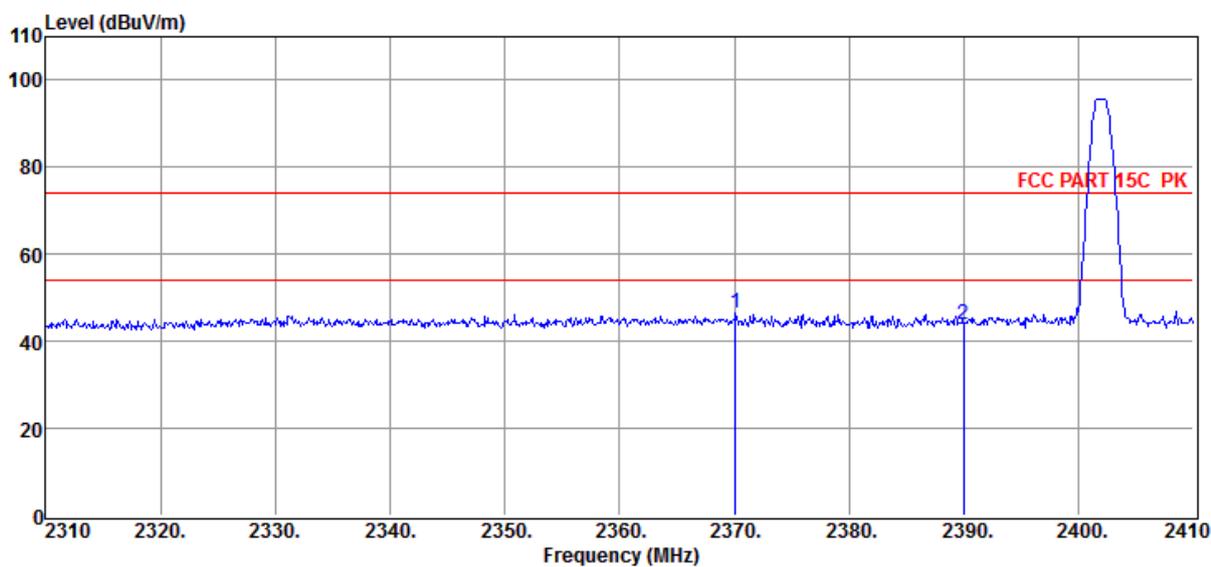

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/ m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	2370.10	3.25	46.39	74.00	-27.61	156	111	Peak	HORIZONTAL
2	2390.00	3.30	44.00	74.00	-30.00	187	198	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 12-07-2021

Tested By : Sunny

EUT : Mobile Handset


Model Number : LM-X430FMW, LM-X430HM

Power Supply : AC 120V/60Hz

Test Mode : Tx mode

Memo : BLE 2480MHz

Data: 13

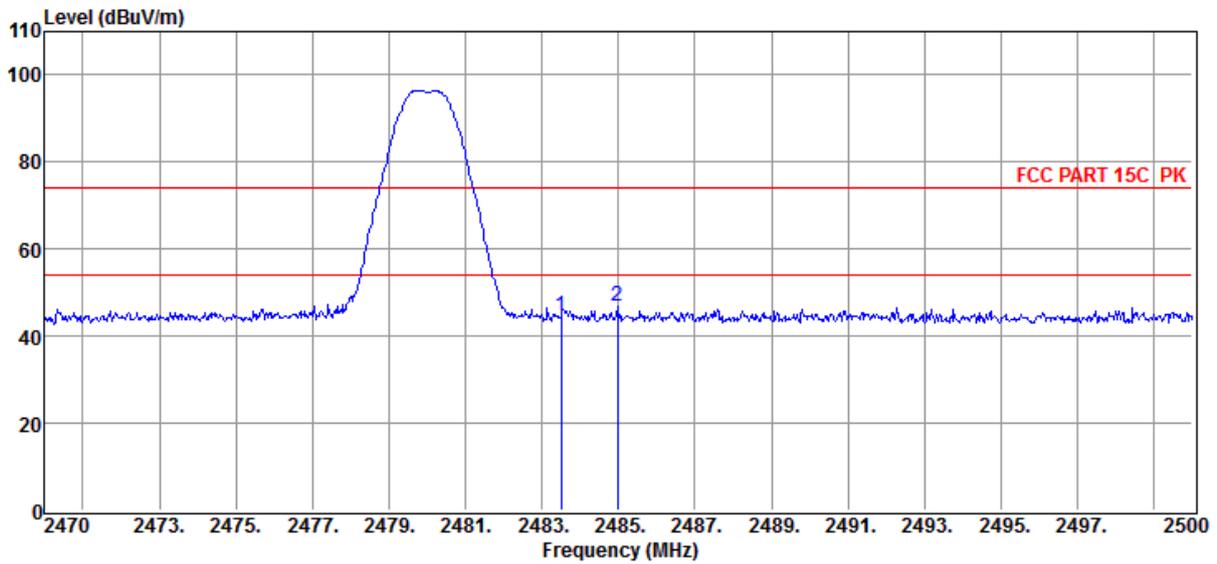

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/ m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	2483.50	3.52	44.64	74.00	-29.36	168	339	Peak	HORIZONTAL
2	2484.97	3.53	46.69	74.00	-27.31	172	37	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 12-07-2021

Tested By : Sunny

EUT : Mobile Handset


Model Number : LM-X430FMW, LM-X430HM

Power Supply : AC 120V/60Hz

Test Mode : Tx mode

Memo : BLE 2480MHz

Data: 14

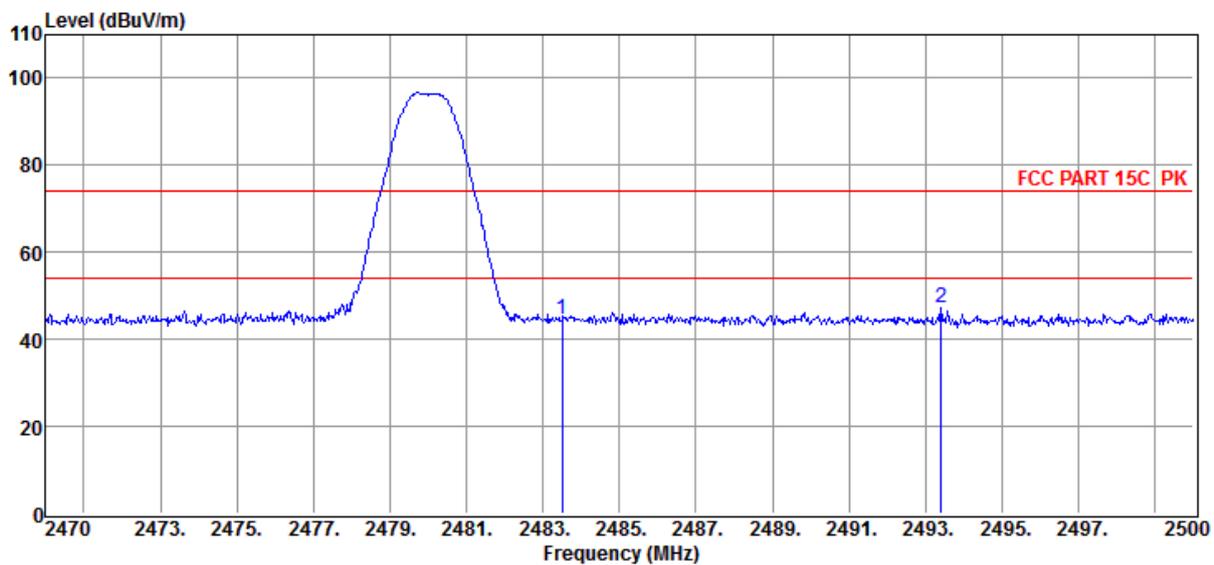

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dB μ V/m)	Limit Line (dB μ V/ m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	2483.50	3.52	44.59	74.00	-29.41	159	23	Peak	VERTICAL
2	2493.40	3.59	47.07	74.00	-26.93	186	328	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

7. APPENDIXES

The below appendix was detail result tested by SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch (Date of Test: 2019/7/31 ~ 2019/8/26)

Appendix	Item
Appendix	BLE