# **FCC PART 15.247**

### **TEST REPORT**

### For

## Shenzhen Century Xinyang Tech Co., Ltd

## **Wireless Router**

Model No.: SL-R6801

Prepared for : Shenzhen Century Xinyang Tech Co., Ltd

Address : Room 3001-3002, East Tower 30/F, Nanshan Software Park,

Shenzhen, China

Prepared by : SHENZHEN LCS CERTIFICATION SERVICES INC. Address : Xingyuan Industrial Park, Tongda Road, Bao'an Blvd,

Bao'an District, Shenzhen, Guangdong, China

Report Number : LCS1106010882F

Date of Test : June 1, 2011 – June 10, 2011

Date of Report : June 10, 2011

# TABLE OF CONTENTS

1. TEST RESULT CERTIFICATION	3
2. GENERAL INFORMATION	4
2.1. PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
2.3. RELATED SUBMITTAL(S)/GRANT(S)  2.4. TEST METHODOLOGY  2.5. FACILITIES	4
2.6. EXTERNAL I/O CABLE 2.7. LABORATORY ACCREDITATIONS AND LISTINGS	5
3. SYSTEM TEST CONFIGURATION	6
3.1. JUSTIFICATION 3.2. EUT EXERCISE SOFTWARE 3.3. SPECIAL ACCESSORIES	6
3.4. BLOCK DIAGRAM/SCHEMATICS. 3.5. EQUIPMENT MODIFICATIONS. 3.6. BLOCK DIAGRAM OF TEST SETUP.	6
4. SUMMARY OF TEST RESULTS	7
5. TEST RESULT	8
5.1. MAXIMUM CONDUCTED OUTPUT POWER MEASUREMENT 5.2. POWER SPECTRAL DENSITY MEASUREMENT 5.3. 6 DB SPECTRUM BANDWIDTH MEASUREMENT	
5.4. RADIATED EMISSIONS MEASUREMENT	29
5.6. POWER LINE CONDUCTED EMISSIONS	
6. LIST OF MEASURING EQUIPMENTS	51
7 MANUFACTURER/APPROVAL HOLDER DECLARATION	52

## 1. TEST RESULT CERTIFICATION

Applicant : Shenzhen Century Xinyang Tech Co., Ltd

Manufacturer : Shenzhen Century Xinyang Tech Co., Ltd

EUT : Wireless Router

Model No. : SL-R6801

Serial Number : N/A

Test Rule Part(s) : 47 CRR FCC Part Subpart C §15.247

Date of Test : June 1, 2011 – June 10, 2011

APPLICABLE STANDARDS			
STANDARD TESTRESULT			
FCC PART 15.247 (2010) No non-compliance noted			

SHENZHEN LCS CERTIFICATION SERVICES INC. as requested by the applicant to evaluate the EMC performance of the product Sample received on April 06, 2010 would like to declare that the tested sample has been evaluated And found to be in compliance with the tested rule parts. The data recorded as well as the test Configuration specified is true and accurate for showing the sample's EMC nature.

Compiled by:	Supervised by:	Approved by:
Boho Li	Nito Gas	Gavin liang
Bobo Li/ File administrators	Vito/ Technique principal	Gavin Liang/ Manager

## 2. GENERAL INFORMATION

## 2.1. Product Description for Equipment Under Test (EUT)

Applicant : Shenzhen Century Xinyang Tech Co., Ltd

Address Room 3001-3002, East Tower 30/F, Nanshan Software Park,

Shenzhen, China

Manufacturer : Shenzhen Century Xinyang Tech Co., Ltd

Address Room 3001-3002, East Tower 30/F, Nanshan Software Park,

Shenzhen, China

EUT : Wireless Router

Model No. : SL-R6801

Serial Number : N/A

Input Voltage : DC 5V

EUT Description : 130mm L x 86.5mm W x 18cm H

File Number : LCS1106010882F

Date of Test : June 1, 2011 – June 10, 2011

#### 2.2. Objective

This Type approval report is prepared on behalf of Shenzhen Century Xinyang Tech Co., Ltd in accordance with Part 2, Subpart J, Part 15, Subparts A, B and C of the Federal Communication Commissions rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.209 and 15.247 rules.

## 2.3. Related Submittal(s)/Grant(s)

No Related Submittals.

#### 2.4. Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2003, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

## 2.5. Facilities

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22.

#### 2.6. External I/O Cable

N/A

## 2.7. Laboratory Accreditations And Listings

Site Description

EMC Lab. : CNAS-Lab Code: L3503

> Anbotek Compliance Laboratory Limited. has been assessed and proved to be in compliance with CNAS-CL01: 2006 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC 17025: 2005 General Requirements) for the Competence of Testing and Calibration Laboratories.

## FCC-Registration No.: 752021

Anbotek Compliance Laboratory Limited. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). Theacceptance letter from the FCC is maintained in our files.

Registration No. August 20, 2010.

Name of Firm : Anbotek Compliance Laboratory Limited.

Site Location : 1/F, 1 /Build, SEC Industrial Park, No. 4 Qianhai Road, Nanshan

District, Shenzhen, Guangdong, China

## 3. SYSTEM TEST CONFIGURATION

### 3.1. Justification

The system was configured for testing in a typical fashion (as normally used by a typical user).

#### 3.2. EUT Exercise Software

N/A

## 3.3. Special Accessories

The special accessories were supplied by SHENZHEN LCS CERTIFICATION SERVICES INC.


## 3.4. Block Diagram/Schematics

Please refer to the report

## 3.5. Equipment Modifications

SHENZHEN LCS CERTIFICATION SERVICES INC has not done any modification on the EUT.

## 3.6. Block Diagram of Test Setup

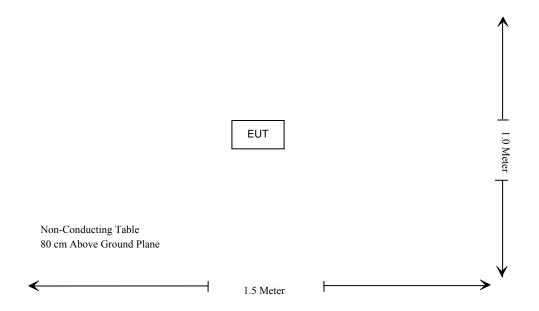

# 4. SUMMARY OF TEST RESULTS

Applied Standard: 47 CFR FCC Part 15 Subpart C				
FCC Rules	Result			
§15.247(b)(3)	Maximum Conducted Output Power	Compliant		
§15.247(e)	Power Spectral Density	Compliant		
15.247(a)(2)	6dB Spectrum Bandwidth	Compliant		
§15.247(d)	Radiated Emissions	Compliant		
§15.247(d)	Band Edge Emissions	Compliant		
§15.207	Conducted Emissions	Compliant		
§15.203	Antenna Requirements	Compliant		
§15.111	Antenna port spurious emission (Conducted ) Compliant			
§15.247(i)§2.1093§1.1307	RF Exposure	Compliant		

Test Items	Uncertainty	Remark
Maximum Conducted Output Power	$\pm$ 0.8dB	Confidence levels of 95%
Power Spectral Density	$\pm$ 0.5dB	Confidence levels of 95%
6dB Spectrum Bandwidth	$\pm 8.5 \times 10^{-8}$	Confidence levels of 95%
Radiated Emissions (9kHz~30MHz)	$\pm 0.8$ dB	Confidence levels of 95%
Radiated Emissions (30MHz~1000MHz)	$\pm$ 1.9dB	Confidence levels of 95%
Radiated / Band Edge Emissions (1GHz~18GHz)	$\pm$ 1.9dB	Confidence levels of 95%
Radiated Emissions (18GHz~40GHz)	$\pm$ 1.9dB	Confidence levels of 95%
Temperature	±0.7℃	Confidence levels of 95%
Humidity	±3.2%	Confidence levels of 95%
DC / AC Power Source	±1.4%	Confidence levels of 95%

## 5. TEST RESULT

## 5.1. Maximum Conducted Output Power Measurement

### 5.1.1. Limit

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. The limited has to be reduced by the amount in dB that the gain of the antenna exceed 6dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.

## 5.1.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RB	1000 kHz
VB	1000 kHz
Detector	RMS
Trace	RMS
Sweep Time	Auto

#### 5.1.3. Test Procedures

- 1. The transmitter output (antenna port) was connected to the spectrum analyzer.
- 2. Test was performed in accordance with Measurement of Digital Transmission Systems Operating under Section 15.247.

### 5.1.4. Test Setup Layout



## 5.1.5. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

## 5.1.6. Test Result of Maximum Conducted Output Power

Temperature	25℃	Humidity	60%
Test Engineer	Vito Cao	Configurations	802.11b,g,n

### 802.11b


Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
1	2412	16.81	30	Complies
6	2437	18.61	30	Complies
11	2462	17.72	30	Complies

## 802.11g


Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
1	2412	15.96	30	Complies
6	2437	15.86	30	Complies
11	2462	15.26	30	Complies

### 802.11n


Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
1	2412	15.52	30	Complies
6	2437	14.82	30	Complies
11	2462	15.42	30	Complies

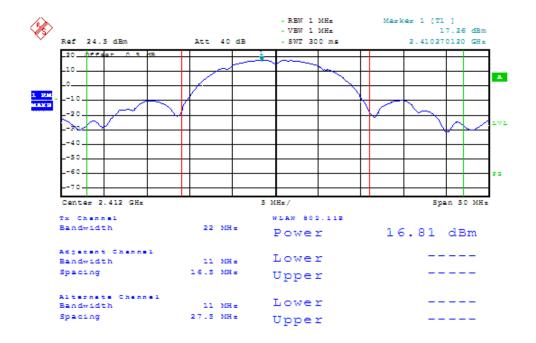


802.11b, low channel, output power Date: June 7, 2011

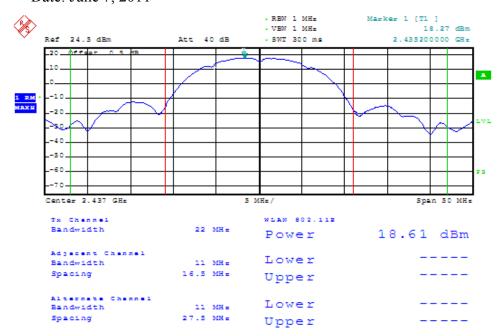


802.11b, middle channel, output power Date: June 7, 2011

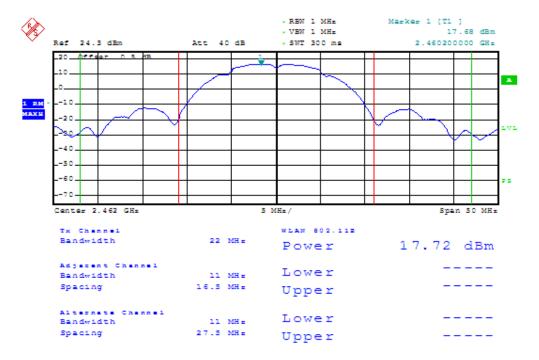


802.11b, high channel, output power Date: June 7, 2011

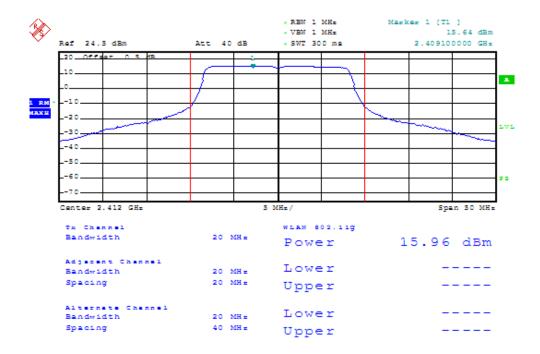


802.11g, low channel, output power Date: June 7, 2011

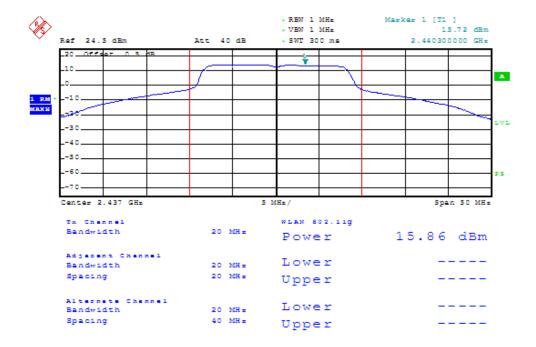


802.11g, middle channel, output power Date: June 7, 2011

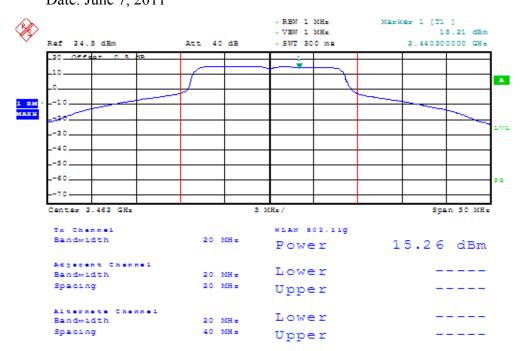


802.11g, high channel, output power

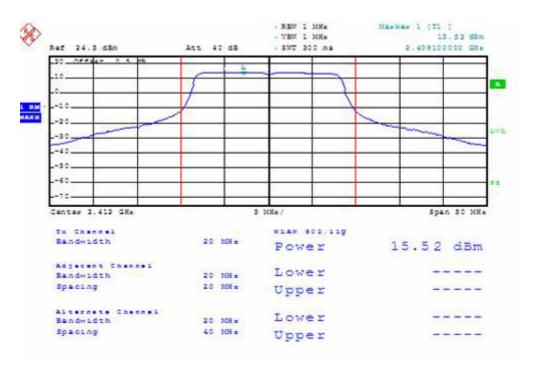

802.11n, low channel, output power Date: June 7, 2011

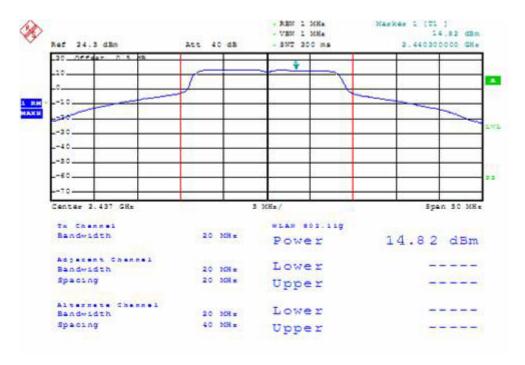

802.11n, middle channel, output power Date: June 7, 2011

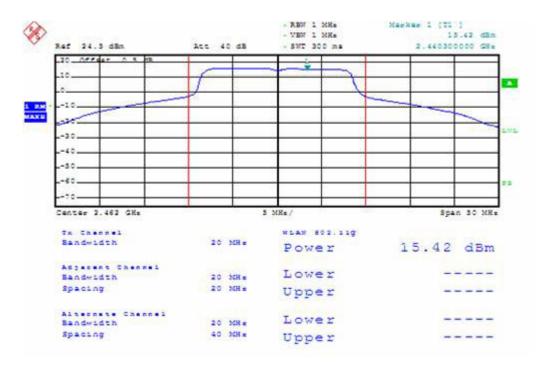

802.11n, high channel, output power

## 5.2. Power Spectral Density Measurement

### 5.2.1. Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

## 5.2.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of Spectrum Analyzer.


Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	30MHz
RB	3 kHz
VB	10 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	10s

5

### 5.2.3. Test Procedures

- 1. The transmitter output (antenna port) was connected to the spectrum analyser.
- 2. Set RBW of spectrum analyzer to 3kHz and VBW to 10kHz. Set Detector to Peak, Trace to Max Hold.
- 3. Mark the frequency with maximum peak power as the center of the display of the spectrum.
- 4. Set the span to 1.5MHz and the sweep time to 500s and record the maximum peak value.

#### 5.2.4. Test Setup Layout



### 5.2.5. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

## 5.2.6. Test Result of Power Spectral Density

Temperature	<b>25</b> ℃	Humidity	60%
Test Engineer	Vito Cao	Configurations	802.11b,g,n

## 802.11b


Channel	Frequency	Power Density (dBm)	Max. Limit (dBm)	Result
1	2412	0.84	8	Complies
6	2437	-0.68	8	Complies
11	2462	2.37	8	Complies

## 802.11g


Channel	Frequency	Power Density (dBm)	Max. Limit (dBm)	Result
1	2412	-3.58	8	Complies
6	2437	1.64	8	Complies
11	2462	1.63	8	Complies

## 802.11n


Channel	Frequency	Power Density (dBm)	Max. Limit (dBm)	Result
1	2412	-0.64	8	Complies
6	2437	1.62	8	Complies
11	2462	1.65	8	Complies

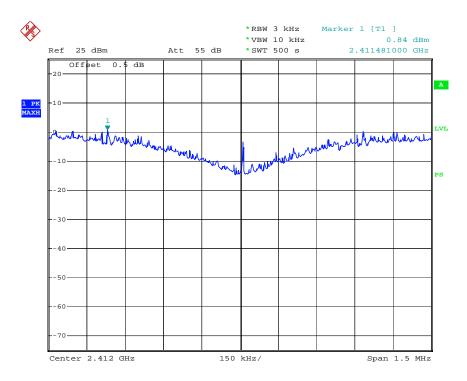


802.11b, low channel power density

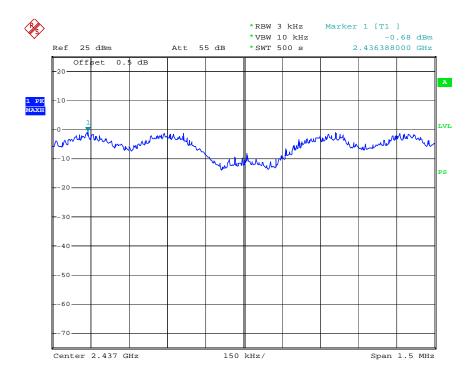


802.11g, middle channel power density

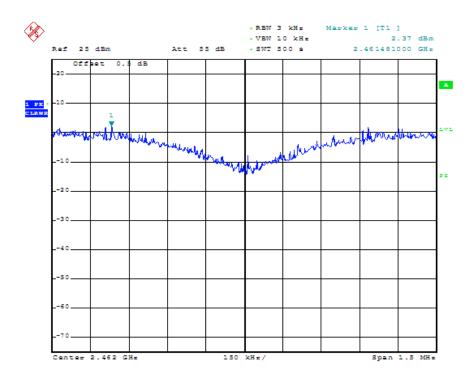


802.11b, high channel power density



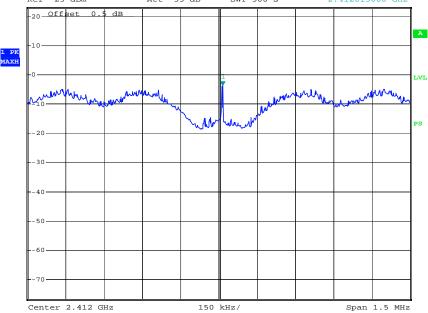


802.11g, low channel power density

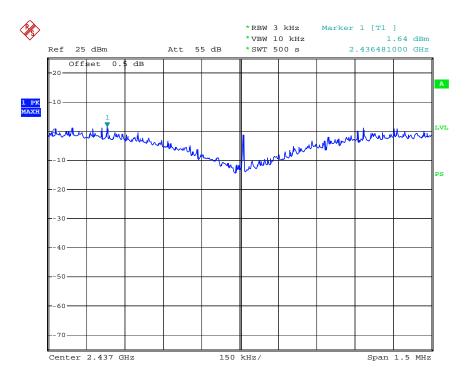


802.11g, middle channel power density

Date: June 7, 2011

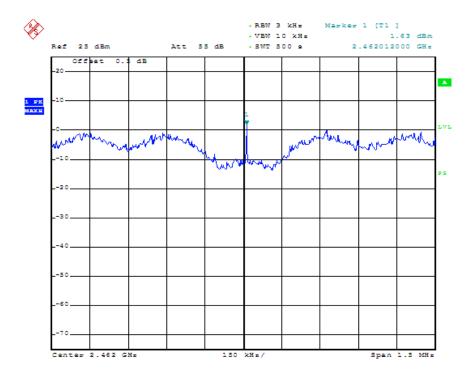


802.11g, high channel power density

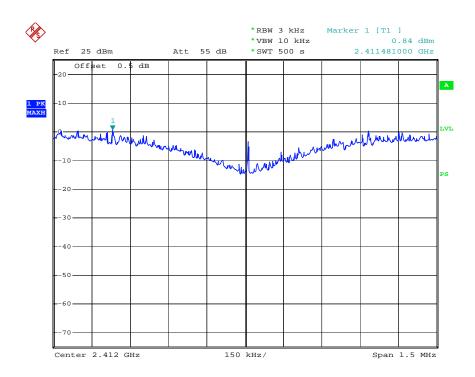


802.11n, low channel power density



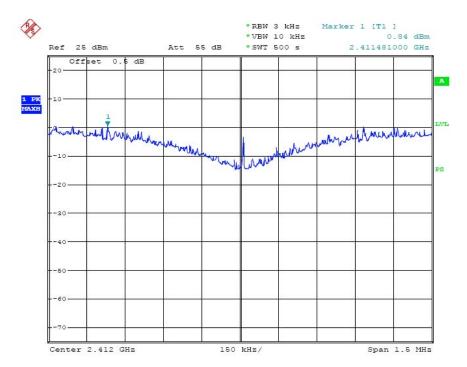

802.11n, middle channel power density

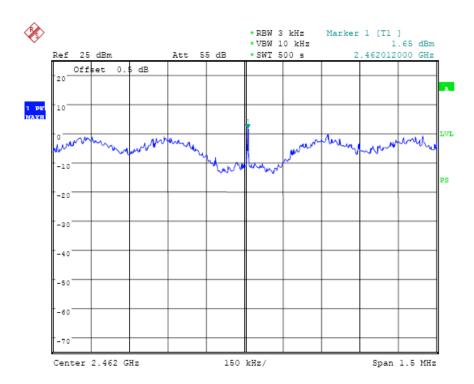

802.11n, high channel power density

## 5.3. 6 dB Spectrum Bandwidth Measurement

### 5.3.1. Limit

For digital modulation systems, the minimum 6 dB bandwidth shall be at least 500 kHz.

## 5.3.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the Spectrum Analyzer.


Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	> 6dB Bandwidth
RB	100kHz
VB	300kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

5

### 5.3.3. Test Procedures

- 1. The transmitter output (antenna port) was connected to the spectrum analyser in peak hold mode.
- 2. The resolution bandwidth of 100 kHz and the video bandwidth of 300 kHz were used.
- 3. Measured the spectrum width with power higher than 6dB below carrier.

#### 5.3.4. Test Setup Layout



## 5.3.5. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

## 5.3.6. Test Result of 6dB Spectrum Bandwidth

Temperature	<b>25</b> ℃	Humidity	60%
Test Engineer	Vito Cao	Configurations	802.11b,g,n

## 802.11b


Channel	Frequency	6dB Bandwidth (MHz)	Min. Limit (kHz)	Result
1	2412	12.5	500	Complies
6	2437	12.3	500	Complies
11	2462	12.2	500	Complies

## 802.11g


Channel	Frequency	6dB Bandwidth (MHz)	Min. Limit (kHz)	Result
1	2412	16.5	500	Complies
6	2437	16.6	500	Complies
11	2462	16.4	500	Complies

### 802.11n


Channel	Frequency	6dB Bandwidth (MHz)	Min. Limit (kHz)	Result
1	2412	16.7	500	Complies
6	2437	16.8	500	Complies
11	2462	16.9	500	Complies

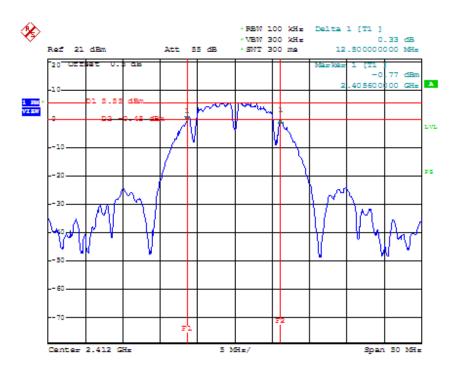


802.11b, low channel, 6dB bandwidth

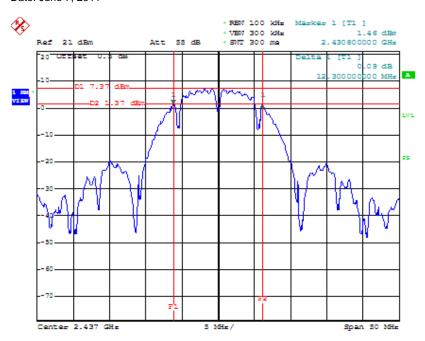


802.11b, middle channel, 6dB bandwidth

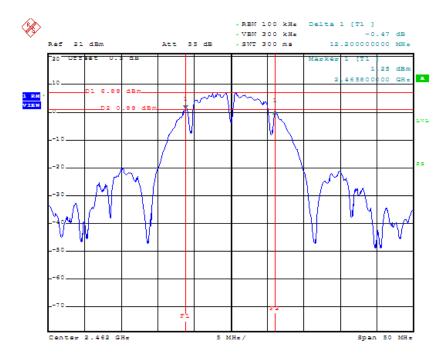

802.11b, high channel, 6dB bandwidth

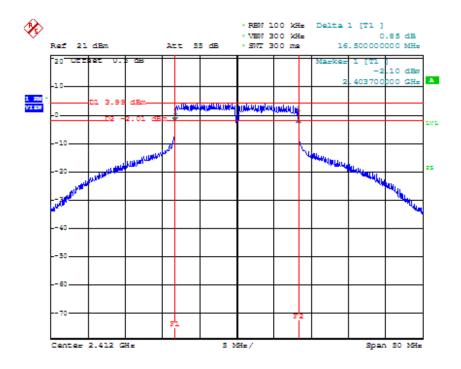


802.11g, low channel, 6dB bandwidth

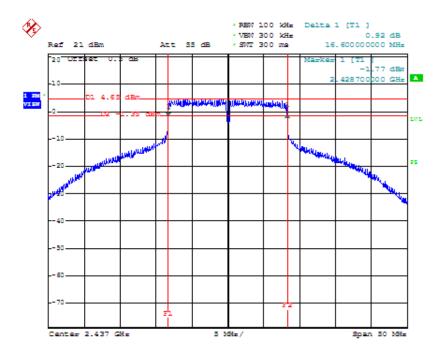


802.11g, middle channel, 6dB bandwidth




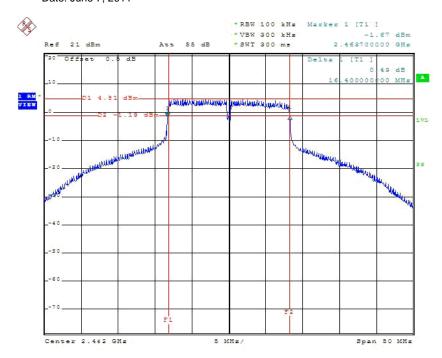

802.11g, high channel, 6dB bandwidth

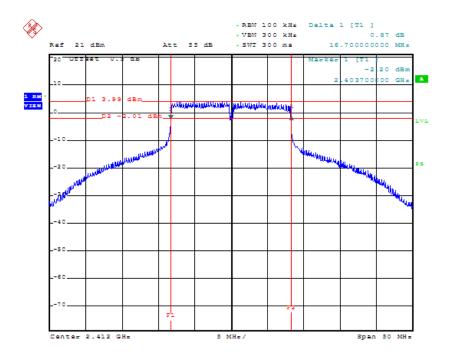

802.11n, low channel, 6dB bandwidth

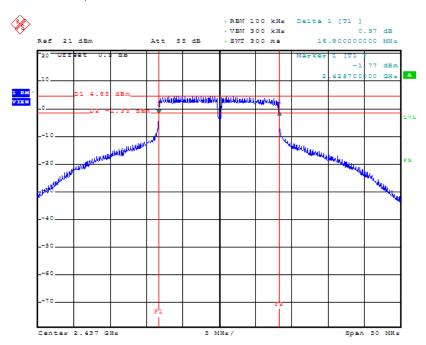

802.11n, middle channel, 6dB bandwidth



802.11n, high channel, 6dB bandwidth

### **5.4. Radiated Emissions Measurement**

## 5.4.1. Limit

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies(MHz)	Field Strength(micorvolts/meter)	Measurement Distance(meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

## 5.4.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (Emission in restricted band)	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (Emission in non-restricted band)	1000KHz / 1000KHz for peak


Spectrum Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

#### 5.4.3. Test Procedures


- 1. Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emissions, the antenna tower was scan (from 1 m to 4 m) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading
- 5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
- 8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

### 5.4.4. Test Setup Layout

For radiated emissions below 30MHz

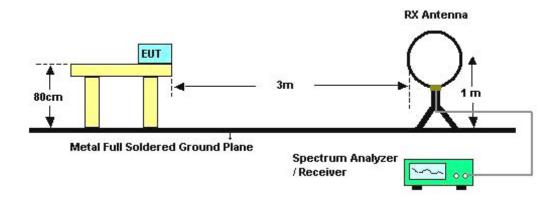

For radiated emissions above 30MHz

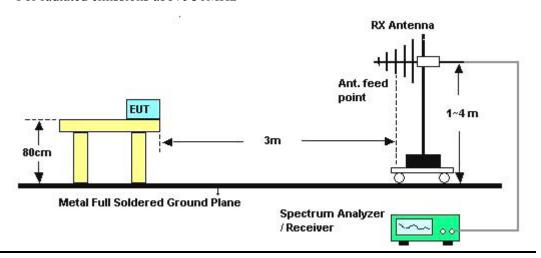

Above 10 GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade form 3m to 1.5m.

Distance extrapolation factor = 20 log (specific distanc [3m] / test distance [1.5m]) (dB); Limit line = specific limits (dBuV) + distance extrapolation factor [6 dB].

## 5.4.5. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

### 5.4.6. Results of Radiated Emissions (9kHz~30MHz)

Temperature	25℃	Humidity	60%
Test Engineer	Vito Cao	Configurations	802.11b,g,n

Freq. (MHz)	Level (dBuV)	Over Limit (dB)	Over Limit (dBuV)	Remark
-	-	-	-	See Note

#### Note:


The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.


Distance extrapolation factor = 40 log (specific distance / test distance) (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

## 5.4.7. Results of Radiated Emissions (30MHz~1GHz)

Temperature	<b>25</b> ℃	Humidity	60%
Test Engineer	Vito Cao	Configurations	802.11b,g,n

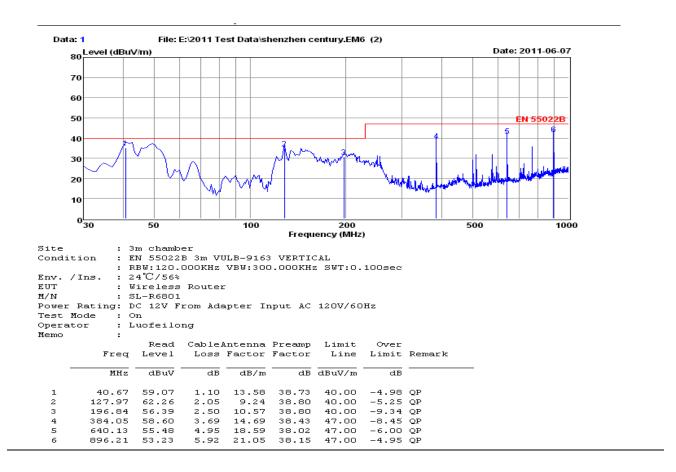

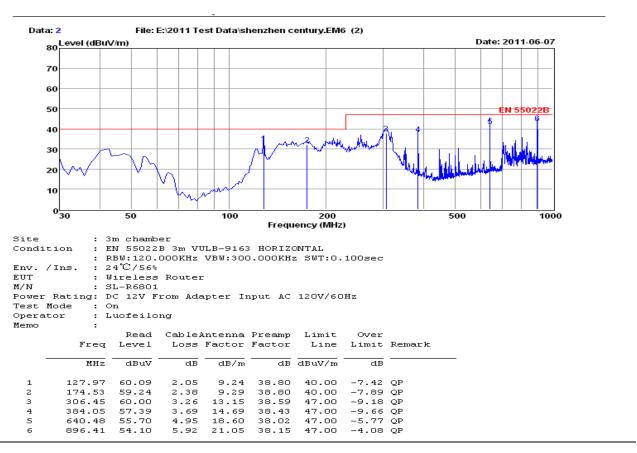

#### Note:

The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

## 5.4.8. Results for Radiated Emissions (1GHz~10th Harmonic)

802.11b

## Channel 1

Freq MHz	Level dBuV/m	Read Level dBuV	Ant. Fac dB/m	Pre. Fac dB	Cab.Los dB	Over limit dB	Remark	Pol/Phase
4824.12	47.67	45.71	33.06	35.04	3.94	-26.33	Peak	Horizontal
4824.23	39.21	37.25	33.06	35.04	3.94	-14.79	Average	Horizontal
4824.12	48.24	46.28	33.06	35.04	3.94	-25.76	Peak	Vertical
4824.25	40.12	38.16	33.06	35.04	3.94	-13.88	Average	Vertical

### Channel 6

Freq MHz	Level dBuV/m	Read Level dBuV	Ant. Fac dB/m	Pre. Fac dB	Cab.Los dB	Over limit dB	Remark	Pol/Phase
4874.65	47.86	45.89	33.16	35.15	3.96	-26.14	Peak	Horizontal
4874.65	36.09	34.12	33.16	35.15	3.96	-17.91	Average	Horizontal

4874.65	46.28	44.31	33.16	35.15	3.96	-27.72	Peak	Vertical
4874.65	35.76	33.79	33.16	35.15	3.96	-18.24	Average	Vertical

### Channel 11

Freq MHz	Level dBuV/m	Read Level dBuV	Ant. Fac dB/m	Pre. Fac dB	Cab.Los dB	Over limit dB	Remark	Pol/Phase
4924.37	46.36	44.26	33.26	35.14	3.98	-27.64	Peak	Horizontal
4924.37	34.78	32.68	33.26	35.14	3.98	-19.22	Average	Horizontal
4924.37	45.27	43.17	33.26	35.14	3.98	-28.73	Peak	Vertical
4924.37	34.05	31.95	33.26	35.14	3.98	-19.95	Average	Vertical

802.11g

## Channel 1

Freq MHz	Level dBuV/m	Read Level dBuV	Ant. Fac dB/m	Pre. Fac dB	Cab.Los dB	Over limit dB	Remark	Pol/Phase
4824.75	47.33	45.37	33.06	35.04	3.94	-26.67	Peak	Horizontal
4824.96	37.58	35.62	33.06	35.04	3.94	-16.42	Average	Horizontal
4824.75	46.7	44.74	33.06	35.04	3.94	-27.3	Peak	Vertical
4824.96	35.65	33.69	33.06	35.04	3.94	-18.35	Average	Vertical

## Channel 6

Freq MHz	Level dBuV/m	Read Level dBuV	Ant. Fac dB/m	Pre. Fac dB	Cab.Los dB	Over limit dB	Remark	Pol/Phase
4874.38	48.25	46.28	33.16	35.15	3.96	-25.75	Peak	Horizontal
4874.38	40.13	38.16	33.16	35.15	3.96	-13.87	Average	Horizontal
4874.38	47.74	45.77	33.16	35.15	3.96	-26.26	Peak	Vertical
4874.38	41.42	39.45	33.16	35.15	3.96	-12.58	Average	Vertical

## Channel 11

Freq MHz	Level dBuV/m	Read Level dBuV	Ant. Fac dB/m	Pre. Fac dB	Cab.Los dB	Limit Line dBuV/m	Over limit dB	Remark	Pol/Phase
4924.85	50.82	48.72	33.26	35.14	3.98	74	-23.18	Peak	Horizontal
4924.85	41.28	39.18	33.26	35.14	3.98	54	-12.72	Average	Horizontal
4924.85	48.32	46.22	33.26	35.14	3.98	74	-25.68	Peak	Vertical
4924.85	42.39	40.29	33.26	35.14	3.98	54	-11.61	Average	Vertical

802.11n

## Channel 1

Freq MHz	Level dBuV/m	Read Level dBuV	Ant. Fac dB/m	Pre. Fac dB	Cab.Los dB	Limit Line dBuV/m	Over limit dB	Remark	Pol/Phase
4824.75	45.33	43.23	33.06	35.04	3.94	74	-28.67	Peak	Horizontal
4824.96	35.84	33.74	33.06	35.04	3.94	54	-18.16	Average	Horizontal

4824.75	44.29	42.19	33.06	35.04	3.94	74	-29.71	Peak	Vertical
4824.96	34.63	32.53	33.06	35.04	3.94	54	-19.37	Average	Vertical

### Channel 6

Freq MHz	Level dBuV/m	Read Level dBuV	Ant. Fac dB/m	Pre. Fac dB	Cab.Lo s dB	Limit Line dBuV/m	Over limit dB	Remark	Pol/Phase
4874.42	46.8	44.7	33.16	35.15	3.96	74	-27.2	Peak	Horizontal
4874.42	36.29	34.19	33.16	35.15	3.96	54	-17.71	Average	Horizontal
4874.42	45.33	43.23	33.16	35.15	3.96	74	-28.67	Peak	Vertical
4874.42	35.66	33.56	33.16	35.15	3.96	54	-18.34	Average	Vertical


## Channel 11


Freq MHz	Level dBuV/m	Read Level dBuV	Ant. Fac dB/m	Pre. Fac dB	Cab.Los dB	Limit Line dBuV/m	Over limit dB	Remark	Pol/Phase
4924.68	49.61	47.51	33.26	35.14	3.98	74	-24.39	Peak	Horizontal
4924.68	40.34	38.24	33.26	35.14	3.98	54	-13.66	Average	Horizontal
4924.68	47.88	45.78	33.26	35.14	3.98	74	-26.12	Peak	Vertical
4924.68	41.93	39.83	33.26	35.14	3.98	54	-12.07	Average	Vertical

#### **Conducted emission test data:**


Test Mode: IEEE 802.11b TX


Test CH1: 2412MHz







## Test CH6: 2437MHz






### Test CH11: 2462MHz







Test Mode: IEEE 802.11g TX


Test CH1: 2412MHz



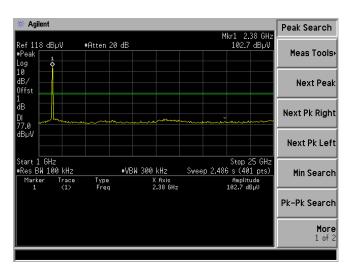



#### Test CH6: 2437MHz






#### Test CH11: 2462MHz







Test Mode: IEEE 802.11n TX


Test CH1: 2412MHz







#### Test CH6: 2437MHz





#### Test CH11: 2462MHz





## **5.5. Band Edge Emissions Measurement**

#### 5.5.1. Limit

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies(MHz)	Field Strength(micorvolts/meter)	Measurement Distance(meters)		
0.009~0.490	2400/F(KHz)	300		
0.490~1.705	24000/F(KHz)	30		
1.705~30.0	30	30		
30~88	100	3		
88~216	150	3		
216~960	200	3		
Above 960	500	3		

#### 5.5.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	100 MHz
RB / VB (Emission in restricted band)	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (Emission in non-restricted band)	100 KHz /100 KHz for Peak

#### 5.5.3. Test Procedures

- 1. The test procedure is the same as section 5.4.3, only the frequency range investigated is limited to 100MHz around bandedges.
- 2. In case the emission is fail due to the used RB/VB is too wide, marker-delta method of FCC Public Notice DA00-705 will be followed.

## 5.5.4. Test Setup Layout

This test setup layout is the same as that shown in section 5.4.4.

#### 5.5.5. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

# 5.5.6. Test Result of Band Edge and Fundamental Emissions

Temperature	25℃	Humidity	60%	
Test Engineer	Vito Cao	Configurations	802.11b	

#### Channel 1

Freq MHz	Level dBuV/m	Read Level dBuV	Ant. Fac dB/m	Pre. Fac dB	Cab.Los dB	Limit Line dBuV/m	Over limit dB	Remark	Pol/Phase
2385.8	48.63	17.74	28.17	0	2.71	74	-5.37	Peak	Horizontal
2386.0	59.32	28.44	28.17	0	2.71	54	-14.68	Average	Horizontal
2409.4	101.64	70.70	28.21	0	2.73	74	47.64	Peak	Vertical
2413.6	106.22	75.28	28.21	0	2.73	54	32.22	Average	Vertical

Item 3, 4 are the fundamental frequency at 2412 MHz.

#### Channel 6

Freq MHz	Level dBuV/m	Read Level dBuV	Ant. Fac dB/m	Pre. Fac dB	Cab.Los dB	Limit Line dBuV/m	Over limit dB	Remark	Pol/Phase
2381.6	55.44	24.59	28.13	0	2.71	74	-18.56	Peak	Horizontal
2381.6	44.32	13.47	28.13	0	2.71	54	-9.68	Average	Horizontal
2438.6	103.12	72.09	28.29	0	2.73	74	29.12	Peak	Vertical
2439.8	98.56	67.53	28.29	0	2.73	54	44.56	Average	Vertical

Item 3, 4 are the fundamental frequency at 2437MHz.

## Channel 11

Freq MHz	Level dBuV/m	Read Level dBuV	Ant. Fac dB/m	Pre. Fac dB	Cab.Los dB	Limit Line dBuV/m	Over limit dB	Remark	Pol/Phase
2463.8	101.33	70.24	28.33	0	2.76	74	27.33	Peak	Horizontal
2464.8	97.01	65.93	28.33	0	2.76	54	43.01	Average	Horizontal
2487.9	60.82	29.63	28.41	0	2.77	74	-13.18	Peak	Vertical
2488.3	52.62	21.44	28.41	0	2.77	54	-1.38	Average	Vertical

Item 1, 2 are the fundamental frequency at 2462 MHz.

Temperature	Temperature 25°C		60%	
Test Engineer	Vito Cao	Configurations	802.11g	

#### Channel 1

Freq MHz	Level dBuV/m	Read Level dBuV	Ant. Fac dB/m	Pre. Fac dB	Cab.Los dB	Limit Line dBuV/m	Over limit dB	Remark	Pol/Phase
2390.1	63.13	32.25	28.17	0	2.71	74	-10.87	Peak	Horizontal
2390.1	48.58	17.70	28.17	0	2.71	54	-5.42	Average	Horizontal
2408.8	95.43	64.50	28.21	0	2.73	74	41.43	Peak	Vertical
2408.8	104.41	73.47	28.21	0	2.73	54	30.41	Average	Vertical

Item 3, 4 are the fundamental frequency at 2412 MHz

#### Channel 6

Freq MHz	Level dBuV/m	Read Level dBuV	Ant. Fac dB/m	Pre. Fac dB	Cab.Los dB	Limit Line dBuV/m	Over limit dB	Remark	Pol/Phase
2384.2	55.14	24.25	28.17	0	2.71	74	-18.86	Peak	Horizontal
2384.2	44.60	13.72	28.17	0	2.71	54	-9.40	Average	Horizontal
2441.8	91.12	60.09	28.29	0	2.74	74	37.12	Peak	Vertical
2441.8	101.10	70.07	28.29	0	2.74	54	27.10	Average	Vertical

Item 3, 4 are the fundamental frequency at 2437MHz.

#### Channel 11

Freq MHz	Level dBuV/m	Read Level dBuV	Ant. Fac dB/m	Pre. Fac dB	Cab.Los dB	Limit Line dBuV/m	Over limit dB	Remark	Pol/Phase
2468.8	99.49	68.36	28.37	0	2.76	74	25.49	Peak	Horizontal
2468.8	92.56	61.43	28.37	0	2.76	54	38.56	Average	Horizontal
2483.5	47.89	16.74	28.37	0	2.77	74	-6.11	Peak	Vertical
2483.7	65.91	34.77	28.37	0	2.77	54	-8.09	Average	Vertical

Item 1, 2 are the fundamental frequency at 2462 MHz.

Temperature	Temperature 25°C		60%	
Test Engineer	Vito Cao	Configurations	802.11n	

## Channel 1

Freq MHz	Level dBuV/m	Read Level dBuV	Ant. Fac dB/m	Pre. Fac dB	Cab.Los dB	Limit Line dBuV/m	Over limit dB	Remark	Pol/Phase
2389.8	69.85	38.97	28.17	0	2.71	74	-4.15	Peak	Horizontal
2390.0	48.04	17.16	28.17	0	2.71	54	-5.96	Average	Horizontal
2410.2	101.37	70.43	28.21	0	2.73	74	27.37	Peak	Vertical
2410.2	90.64	59.70	28.21	0	2.73	54	36.64	Average	Vertical

Item 3, 4 are the fundamental frequency at 2412 MHz

## Channel 6


Freq MHz	Level dBuV/m	Read Level dBuV	Ant. Fac dB/m	Pre. Fac dB	Cab.Los dB	Limit Line dBuV/m	Over limit dB	Remark	Pol/Phase
2380.2	55.61	24.77	28.17	0	2.71	74	-18.39	Peak	Horizontal
2380.2	42.94	12.06	28.17	0	2.71	54	-11.06	Average	Horizontal
2440.2	100.27	69.24	28.29	0	2.74	74	26.27	Peak	Vertical
2440.2	89.42	58.39	28.29	0	2.74	54	35.42	Average	Vertical

Item 3, 4 are the fundamental frequency at 2437MHz.

#### Channel 11


Freq MHz	Level dBuV/m	Read Level dBuV	Ant. Fac dB/m	Pre. Fac dB	Cab.Los dB	Limit Line dBuV/m	Over limit dB	Remark	Pol/Phase
2465.2	91.10	62.02	28.33	0	2.76	74	39.10	Peak	Horizontal
2465.4	104.20	73.12	28.33	0	2.76	54	30.20	Average	Horizontal
2483.9	47.15	16.01	28.37	0	2.77	74	-6.85	Peak	Vertical
2483.7	65.76	34.58	28.37	0	2.77	54	-8.24	Average	Vertical

Item 1, 2 are the fundamental frequency at 2462 MHz.

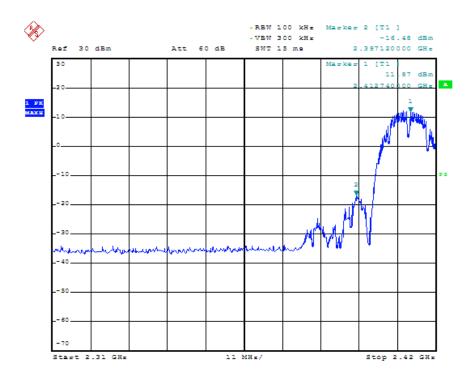


802.11b out of bandedge, left

Date: June 7, 2011

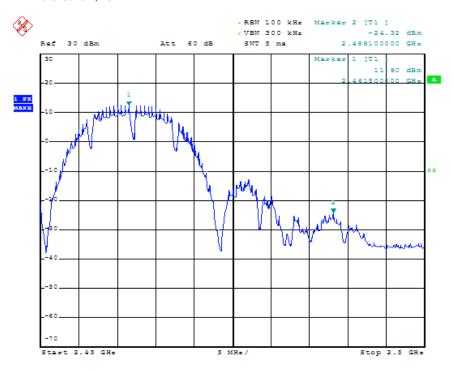


802.11b out of bandedge, right

Date: June 7, 2011

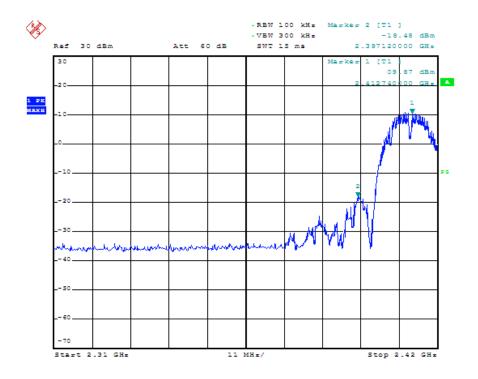


802.11g, out of bandedge, left

Date: June 7, 2011

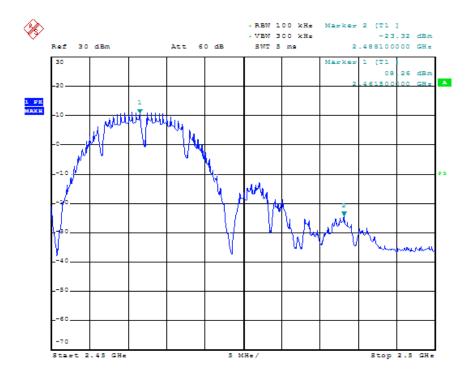

802.11g, out of bandedge, right

Date: June 7, 2011

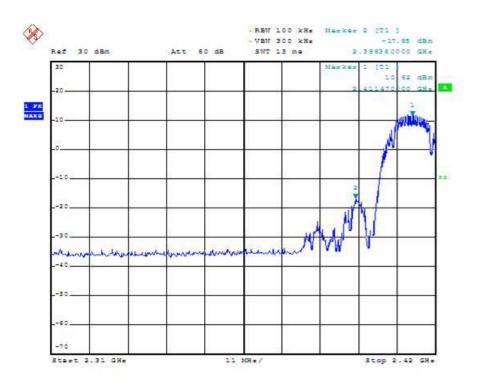

802.11n out of bandedge, left



802.11n out of bandedge, right


Date: June 7, 2011

## **Band edge:**

Frequency	Data Rate	Delta Value	Limit	Ref	Result				
(MHz)	(Mbps)	(dBc)	(dBc)	Plot					
	802.11b								
2397.12	11	28.35	20	PLOT1	PASS				
2488.10	11	36.22	20	PLOT2	PASS				
	802.11g								
2399.68	54	28.25	20	PLOT3	PASS				
2484.00	54	35.58	20	PLOT4	PASS				
802.11n									
2398.36	150	27.47	20	PLOT5	PASS				
2485.92	150	35.29	20	PLOT6	PASS				

#### 5.6. Power line conducted emissions

## 5.6.1 Block Diagram of Test Setup

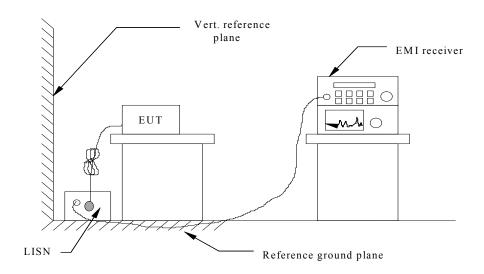

#### 5.6.2 Conducted Emission Limit


For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolts (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range is listed as follows:

Frequency Range	Limits ( $dB\mu V$ )				
(MHz)	Quasi-peak	Average			
0.15 to 0.50	66 to 56	56 to 46			
0.50 to 5	56	46			
5 to 30	60	50			

#### 5.6.3 Test Results

#### PASS.

The test data please refer to following page.

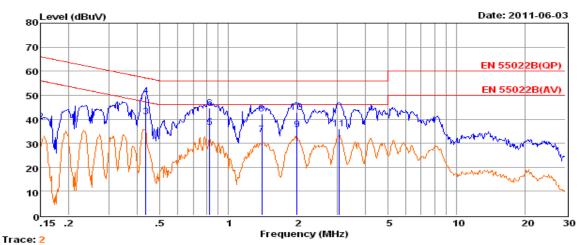

Env. Ins: 24\*/56% EUT: Wireless Router M/N:

SL-R6801 DC 12V From Adapter Input AC 120V/60Hz


Power Rating: Test Mode: Operator: Luofeilong

Memo:

Pol: LINE

	Freq	Reading	LisnFac	CabLos	Measured	Limit	0ver	Remark
	MHz	dBu∀	dB	dB	dBuV/m	dBuV/m	dBuV/m	
1	0.15	24.60	9.57	0.02	34.19	56.00	-21.81	Average
2	0.15	29.30	9.57	0.02	38.89	66.00	-27.11	QP
3	0.44	31.50	9.62	0.04	41.16	47.15	-5.99	Average
4	0.44	40.10	9.62	0.04	49.76	57.15	-7.39	OP
5	0.83	27.00	9.64	0.04	36.68	46.00	-9.32	Average
6	0.83	34.90	9.64	0.04	44.58	56.00	-11.42	QP
7	1.40	24.00	9.63	0.05	33.68	46.00	-12.32	Average
8	1.40	32.40	9.63	0.05	42.08	56.00	-13.92	QP
9	2.00	26.10	9.64	0.05	35.79	46.00	-10.21	Average
10	2.00	33.00	9.64	0.05	42.69	56.00	-13.31	QP
11	3.06	26.40	9.64	0.06	36.10	46.00	-9.90	Average

Remarks: C.F (Correction Factor) = Insertion loss + Cable loss

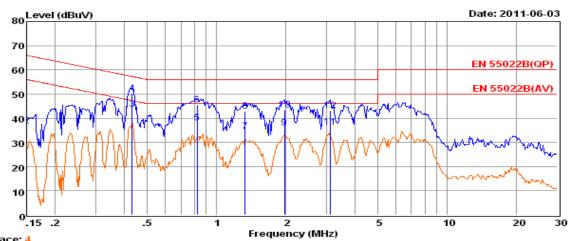

Trace: 4

Env. Ins: 24\*/56% EUT: Wireless Router

M/N: SL-R6801 Power Rating: DC 12V From Adapter Input AC 120V/60Hz

Test Mode: On

Operator: Luofeilong
Memo:
Pol: NEUTRAL

	Freq	Reading	LisnFac	CabLos	Measured	Limit	0ver	Remark
	MHz	dBu∀	dB	dB	dBuV/m	dBuV/m	dBuV/m	
1	0.15	20.90	9.70	0.02	30.62	56.00	-25.38	Average
2	0.15	27.20	9.70	0.02	36.92	66.00	-29.08	QP
3	0.43	34.09	9.62	0.04	43.75	47.24	-3.49	Average
4	0.43	40.59	9.62	0.04	50.25	57.24	-6.99	QP
5	0.83	28.40	9.63	0.04	38.07	46.00	-7.93	Average
6	0.83	35.80	9.63	0.04	45.47	56.00	-10.53	QP
7	1.33	24.90	9.63	0.05	34.58	46.00	-11.42	Average
8	1.33	33.00	9.63	0.05	42.68	56.00	-13.32	QP
9	1.97	26.20	9.63	0.05	35.88	46.00	-10.12	Average
10	1.97	33.70	9.63	0.05	43.38	56.00	-12.62	QP
11	3.11	26.50	9.64	0.06	36.20	46.00	-9.80	Average
12	3.11	33.40	9.64	0.06	43.10	56.00	-12.90	QP

Remarks: C.F (Correction Factor) = Insertion loss + Cable loss

## **5.7.** Antenna Requirements

## 5.7.1. Standard Applicable

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

#### 5.7.2. Antenna Connector Construction

The EUT has a component antenna, which, in accordance to the above sections, is considered sufficient to comply with the provisions of these sections. Please see EUT photo for details.

## 5.7.3. Result: Compliance.

# 6. LIST OF MEASURING EQUIPMENTS

Instrument	Manufactur er	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMC Receiver	R&S	ESCS 30	100174	9kHz – 2.75GHz	May 23,2011	Conduction (CO04-HY)
LISN	MESS Tec	NNB-2/16Z	99079	9KHz-30MHz	May 23,2011	Conduction (CO04-HY)
LISN (Support Unit)	EMCO	3819/2NM	9703-1839	9KHz-30MHz	May 23,2011	Conduction (CO04-HY)
RF Cable-CON	UTIFLEX	3102-26886-4	CB049	9KHz-30MHz	May 23,2011	Conduction (CO04-HY)
ISN	SCHAFFNER	ISN ST08	21653	9KHz-30MHz	May 23,2011	Conduction (CO04-HY)
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	30M-1GHz 3m	May 23,2011	Radiation (03CH03-HY)
Amplifier	SCHAFFNER	COA9231A	18667	9kHz-2GHzz	May 23,2011	Radiation (03CH03-HY)
Amplifier	Agilent	8449B	3008A02120	1GHz-26.5GHz	May 23,2011	Radiation (03CH03-HY)
Amplifier	MITEQ	AMF-6F-260400	9121372	26.5GHz-40GHz	May 23,2011	Radiation (03CH03-HY)
Spectrum Analyzer	R&S	FSP30	100023	9k-30GHz	May 23,2011	Radiation (03CH03-HY)
Spectrum Analyzer	Agilent	E4446A	MY41440292	3Hz-44GHz	May 23,2011	Radiation (03CH03-HY)
Loop Antenna	R&S	HFH2-Z2	860004/001	9k-30MHz	May 23,2011	Radiation (03CH03-HY)
By-log Antenna	SCHAFFNER	CBL 6112D	22237	30MHz-1GHz	May 23,2011	Radiation (03CH03-HY)
Horn Antenna	EMCO	3115	6741	1GHz-18GHz	May 23,2011	Radiation (03CH03-HY)
Horn Antenna	SCHWARZBEC K	BBHA9170	BBHA9170154	15GHz-40GHz	May 23,2011	Radiation (03CH03-HY)
RF Cable-R03m	Jye Bao	RG142	CB021	30MHz-1GHz	May 23,2011	Radiation (03CH03-HY)
RF Cable-HIGH	SUHNER	SUCOFLEX 106	03CH03-HY	1GHz-40GHz	May 23,2011	Radiation (03CH03-HY)
Spectrum Meter	R&S	FSP 30	100023	9kHz-30GHz	May 23,2011	Conducted (TH01-HY)
Power Meter	R&S	NRVS	100444	DC-40GHz	May 23,2011	Conducted (TH01-HY)
Power Sensor	R&S	NRV-Z51	100458	DC-30GHz	May 23,2011	Conducted (TH01-HY)
Power Sensor	R&S	NRV-Z32	10057	30MHz-6GHz	May 23,2011	Conducted (TH01-HY)
AC Power Source	HPC	HPA-500E	HPA-9100024	AC 0~300V	May 23,2011	Conducted (TH01-HY)
DC power Soure	GW	GPC-6030D	C671845	DC 1V-60V	May 23,2011	Conducted (TH01-HY)
Temp. and Humidigy Chamber	Giant Force	GTH-225-20-S	MAB0103-00	N/A	May 23,2011	Conducted (TH01-HY)
RF CABLE-1m	JYE Bao	RG142	CB034-1m	20MHz-7GHz	May 23,2011	Conducted (TH01-HY)
RF CABLE-2m	JYE Bao	RG142	CB)35-2m	20MHz-1GHz	May 23,2011	Conducted (TH01-HY)
Vector signal Generator	R&S	SMU200A	102098	100kHz~6GHz	May 23,2011	Conducted (TH01-HY)
Signal Generator	R&S	SMR40	10016	10MHz~4oGHa	May 23,2011	Conducted (TH01-HY)
Oscilloscope	Tektonix	TDS380	B016197	400MHz/2GRS	May 23,2011	Conducted (TH01-HY)

# 7. MANUFACTURER/ APPROVAL HOLDER DECLARATION

The following identical model(s):

SL-R6802	SL-R7201	SL-R7202	SL-R7203	SL-R7205	SL-R7206
SL-R7207	TK-R6801	TK-R7202	TK-R7206	SAI-BCS-104	SAI-BC-B209
SAI-SCS-103					

Belong to the tested device:

Product description: Wireless Router

Model name: SL-R6801

No additional models were tested.