FCC Test Report

Report No.: AGC14G110901F2A

FCC ID : ZOJNERO

PRODUCT DESIGNATION: Mobile Phone

BRAND NAME : MOBO

TEST MODEL : NERO

CLIENT: MOBO USA CORP

DATE OF ISSUE : Oct. 8, 2011

STANDARD(S) : FCC Part 22H & 24E Rules

Attestation of Global Compliance Co., Ltd.

CAUTION: This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.

Page 1 of 52

VERIFICATION OF COMPLIANCE

Applicant	MOBO USA CORP		
Applicant:	6000 NW 97 AV unit 14 Miami Florida 33178 USA		
	ZXD TECHNOLOGY DEVELOPMENT LTD.		
Manufacturer:	5F,Block R1-A,MCM Bldg,South Keyuan Road,Hi-Tech Park,Nanshan District, Shenzhen,518057,P.R.China		
Product Description:	Mobile Phone		
Brand Name:	мово		
Model Name:	NERO		
FCC ID:	ZOJNERO		
Report Number:	AGC14G110901F2A		
Date of Test:	Sep.27, 2011 to Oct.7, 2011		

We hereby certify that:

The above equipment was tested by Attestation of Global Compliance Co., Ltd. The data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C 63.4:2003 and TIA/EIA 603. The sample tested as described in this report is in compliance with the FCC Rules Part 22H and 24E

The test results of this report relate only to the tested sample identified in this report.

Tested By:

Curoky Chen Oct.8, 2011

Reviewed By:

Forrest Lei Oct.8, 2011

Approved By:

Solger Zhang Oct.8, 2011

TABLE OF CONTENTS

1. GENERAL INFORMATION	4
1.1 PRODUCT DESCRIPTION	4
1.2RELATED SUBMITTAL(S) / GRANT (S)	4
1.3 TEST METHODOLOGY	4
1.4 TEST FACILITY	5
1.5 MEASUREMENT INSTRUMENTS	5
1.6 SPECIAL ACCESSORIES	5
1.7 EQUIPMENT MODIFICATIONS	5
2. SYSTEM TEST CONFIGURATION	6
2.1EUT CONFIGURATION	6
2.2 EUT EXERCISE	6
2.3 GENERAL TECHNICAL REQUIREMENTS	6
2.4 CONFIGURATION OF EUT SYSTEM	6
3. SUMMARY OF TEST RESULTS	7
4. DESCRIPTION OF TEST MODES	7
5. OUTPUT POWER	8
5.1 CONDUCTED OUTPUT POWER	8
5.2 RADIATED OUTPUT POWER	10
6. SPURIOUS EMISSION	12
6.1 CONDUCTED SPURIOUS EMISSION	12
6.2 RADIATED SPURIOUS EMISSION	14
7. CONDUCTED EMISSION	17
7.1 MEASUREMENT METHOD	18
7.2 PROVISIONS APPLICABLE	18

7.3 MEASUREMENT RESULT	18
8. FREQUENCY STABILITY	21
8.1 MEASUREMENT METHOD	21
8.2 PROVISIONS APPLICABLE	21
8.3 MEASUREMENT RESULT	22
9. OCCUPIED BANDWIDTH	24
9.1 MEASUREMENT METHOD	24
9.2 PROVISIONS APPLICABLE	24
9.3 MEASUREMENT RESULT	24
10. EMISSION BANDWIDTH	25
10.1 MEASUREMENT METHOD	25
10.2 PROVISIONS APPLICABLE	25
10.3 MEASUREMENT RESULT	25
11. BAND EDGE	26
11.1 MEASUREMENT METHOD	26
11.2 PROVISIONS APPLICABLE	26
11.3 MEASUREMENT RESULT	26
APPENDIX I_TEST PLOTS FOR CONDUCTED SPURIOUS EMISSION	27
APPENDIX II_TEST PLOTS FOR OCCUPIED BANDWIDTH (99%)	35
APPENDIX III_TEST PLOTS FOR BAND EDGES	39
APPENDIX IV_PHOTOGRAPHS OF TEST SETUP	42
APPENDIX V PHOTOGRAPHS OF EUT	44

Page 4 of 52

1. GENERAL INFORMATION

1.1 PRODUCT DESCRIPTION

A major technical description of EUT is described as following:

Product Designation:	Mobile Phone
FCC ID:	ZOJNERO
Frequency Bands:	GSM 850: 824.2- 848.8MHz PCS 1900: 1850.2-1909.8MHz
Antenna:	Integrated Antenna
Power Supply:	DC3.7V by Built-in Li-ion Battery
Battery parameter:	750MAH / 3.7V
Adapter Input:	AC100-240V, 50-60Hz
Adapter Output:	DC5V, 500mA
Output Power:	30.55dBm Maximum ERP measured for GSM 850 for SIM1 33.96dBm Maximum Conducted Power for GSM 850 for SIM1 28.73dBm Maximum EIRP measured for GSM 1900 for SIM1 29.95dBm Maximum Conducted Power for GSM 1900 for SIM1
Dual SIM Card	The result for SIM1 is the worst case which was only recorded
GPRS Class	12
Extreme Vol. Limits:	DC3.4 V to 4.2 V (Nominal DC3.7 V)
Extreme Temp. Tolerance	-10℃ to +50℃

^{**} Note: The High Voltage 4.2V and Low Voltage 3.4V was declared by manufacturer, The EUT couldn't be operate normally with higher or lower voltage.

Other function have been performed according to verification procedure except for Bluetooth, WIFI and MS function.

SIM1 can not transmit with SIM2 simultaneously

1.2 RELATED SUBMITTAL(S) / GRANT (S)

This submittal(s) (test report) is intended for **FCC ID**: **ZOJNERO** filing to comply with the FCC Part 22H and 24E requirements.

1.3 TEST METHODOLOGY

The radiated emission testing was performed according to the procedures of ANSI C 63.4: 2003; TIA/EIA 603 and FCC CFR 47 Rules of 2.1046, 2.1047, 2.1049, 2.1051, 2.1053, 2.1055, 2.1057.

Page 5 of 52

1.4 TEST FACILITY

The test site used to collect the radiated data is located at:

Attestation of Global Compliance Co., Ltd.

1F., No.2 Building, Huafeng No.1 Technical Industrial Park, Sanwei, Xixiang, Baoan District, Shenzhen

The test site is constructed and calibrated to meet the FCC requirements in documents ANSI C63.4: 2003.

FCC register No.: 259865

1.5 MEASUREMENT INSTRUMENTS

NAME OF EQUIPMENT	MANUFACTURER	MODEL	SERIAL NUMBER	NEXT CAL. DATE
SPECTRUM ANALYZER	AGILENT	E4440A	US44300399	2012.6.26
TEST RECEIVER	R&S	ESCI	A0304218	2012.6.26
COMMUNICATION TESTER	AGILENT	8960	3104A03367	2012.6.26
COMMUNICATION TESTER	R&S	CMU200	A0304247	2012.6.26
TEST RECEIVER	R&S	FCKL1528	A0304230	2012.6.26
LISN	SCHWARZBECK	NSLK8127	A0304233	2012.6.26
CLIMATE CHAMBER	ALBATROSS			2012.6.26
LOOP ANTENNA	R&S	HFH2-Z2	A0304220	2012.6.26
BROADBAND ANT.	R&S	HL562	A0304224	2012.6.26
HORN ANT.	R&S	HF906	100150	2012.6.26

1.6 SPECIAL ACCESSORIES

The battery and the charger, earphone supplied by the applicant were used as accessories and being tested with EUT intended for FCC grant together.

1.7 EQUIPMENT MODIFICATIONS

Not available for this EUT intended for grant.

Page 6 of 52

2. SYSTEM TEST CONFIGURATION

2.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT EXERCISE

The Transmitter was operated in the maximum output power mode through Communication Tester. The TX frequency was fixed which was for the purpose of the measurements.

2.3 GENERAL TECHNICAL REQUIREMENTS

Item Number	Item Description			FCC Rules
1	Output Power	Conducted		22.012(a) / 24.232 (b)
I	Output Power	Radiated		22.913(a) / 24.232 (b)
		Conducted	Spurious	
2	Spurious	Emission		2.1051 / 22.917 / 24.238
2	Emission	Radiated	Spurious	2.1051/22.91//24.236
		Emission		
3	Mains Conducted E	mission		15.107 / 15.207
4	Frequency Stability			2.1055 /24.235
5	Occupied Bandwidth		2.1049 (h)(i)	
6	Emission Bandwidth			22.917(b) / 24.238 (b)
7	Band Edge			22.917(b) / 24.238 (b)

2.4 CONFIGURATION OF EUT SYSTEM

Fig. 2-1 Configuration of EUT System



		<u>' '</u>	-	
Item	Equipment	Model No.	ID or Specification	Note
1	Mobile Phone	NERO	FCC ID: ZOJNERO	EUT
2	ADAPTER	N/A	5V / 500mA	Accessory
3	BATTERY	N/A	1000 mAh /3.7V	Accessory
4	EARPHONE	N/A	N/A	Accessory
5	USB Cable	N/A	N/A	Accessory

Note: All the accessories have been used during the test, the following "EUT" in setup diagram means EUT system.

Page 7 of 52

3. SUMMARY OF TEST RESULTS

Item Number	Item Description			FCC Rules	Result	
		Conducted	Output	22.913(a) / 24.232		
1	Output Power	Power		(b)	Pass	
		Radiated Out	put Power	(6)		
		Conducted	Spurious			
2	Spurious	Emission		2.1051 / 22.917 /	Door	
2	Emission	Radiated	Spurious	24.238	Pass	
		Emission				
3	Mains Conducted	l Emission		15.107 / 15.207	Pass	
4	Frequency Stabili	ity		2.1055 /24.235	Pass	
5	Occupied Bandwi	idth		2.1049 (h)(i)	Pass	
6	Emission Bandwi	dth		22.917(b) / 24.238	Page	
6	EIIIISSIOII Dalluwi	Emission Bandwidth		(b)	Pass	
7	Pand Edga			22.917(b) / 24.238	Page	
/	Band Edge			(b)	Pass	

4. DESCRIPTION OF TEST MODES

During the testing, the EUT (GSM Dual Band GPRS Digital Mobile Phone) was controlled via Rhode & Schwarz Digital Radio Communication Tester (CMU 200) to ensure max power transmission and proper modulation. Three channels (The top channel, the middle channel and the bottom channel) were chosen for testing on both GSM and PCS frequency band.

Note: GSM and GPRS modes have been tested during the test. the worst condition (GSM) be recorded in the test report if no other modes test data.

Page 8 of 52

5. OUTPUT POWER

5.1 Conducted Output Power

5.1.1 MEASUREMENT METHOD

The EUT was setup for the max output power with pseudo random data modulation. Power was measured with Spectrum Analyzer. The measurements were performed on all modes(GSM, GPRS,) at 3 typical channels(the Top Channel, the Middle Channel and the Bottom Channel) for both GSM band and PCS band.

5.1.2 PROVISIONS APPLICABLE

Conducted Output Power Limits for GSM 850 MHZ					
Mode Power Step Nominal Peak Power Tolerance(dE					
GSM	5	33 dBm (2W)	± 1		
GPRS	3	33 dBm (2W)	± 1		

Conducted Output Power Limits for PCS 1900 MHZ					
Mode Power Step Nominal Peak Power Tolerance					
GSM	0	29 dBm (1W)	± 1		
GPRS	3	29 dBm (1W)	± 1		

5.1.3 MEASUREMENT RESULT

Conducted Output Power for GSM 850 MHZ					
	Reference Measured Result				
Mode	Frequency	Power	Peak Power	Tolerance	Conclusion
		(dBm)	(dBM)	(dB)	
	824.2	33	33.96	0.96	Pass
GSM	836.6	33	33.85	0.85	Pass
	848.8	33	33.56	0.56	Pass
CDDC	824.2	33	33.54	0.54	Pass
GPRS	836.6	33	33.67	0.67	Pass
1 slot	848.8	33	33.63	0.63	Pass
CDDC	824.2	30	29.62	-0.38	Pass
GPRS 2 slots	836.6	30	29.82	-0.18	Pass
2 81018	848.8	30	29.31	-0.69	Pass
CDDC	824.2	28.22	27.83	-0.39	Pass
GPRS	836.6	28.22	28.16	-0.06	Pass
3 slots	848.8	28.22	27.71	-0.51	Pass
CDDC	824.2	27	26.55	-0.45	Pass
GPRS	836.6	27	26.84	-0.16	Pass
4 slots	848.8	27	26.39	-0.61	Pass

Page 9 of 52

	824.2	33	33.59	0.59	Pass
GSM(SIM2)	836.6	33	33.53	0.53	Pass
	848.8	33	33.16	0.16	Pass

1	Condu	icted Output Po	wer for PCS 1900	MHZ	
		Reference	Resu	lt	
Mode	Frequency	Power	Peak Power	Tolerance	Conclusion
		(dBm)	(dBM)	(dB)	
	1850.2	29	29.84	0.84	Pass
GSM	1880.0	29	29.95	0.95	Pass
	1909.8	29	29.62	0.62	Pass
GPRS -	1850.2	29	29.63	0.63	Pass
1slot	1880.0	29	29.81	0.81	Pass
15101	1909.8	29	29.60	0.60	Pass
GPRS -	1850.2	27	26.74	-0.26	Pass
2 slots	1880.0	27	26.85	-0.15	Pass
2 81018	1909.8	27	26.72	-0.28	Pass
GPRS -	1850.2	25.22	24.93	-0.29	Pass
3 slots	1880.0	25.22	25.20	-0.02	Pass
3 81018	1909.8	25.22	24.81	-0.41	Pass
CDDC	1850.2	24	23.60	-0.4	Pass
GPRS -	1880.0	24	23.95	-0.05	Pass
4 slots	1909.8	24	23.42	-0.58	Pass
	1850.2	29	29.45	0.45	Pass
GSM(SIM2)	1880.0	29	29.62	0.62	Pass
	1909.8	29	29.28	0.28	Pass

Page 10 of 52

5.2 Radiated Output Power

5.2.1 MEASUREMENT METHOD

The measurements procedures specified in TIA-603C-2004 were applied.

- In an anechoic antenna test chamber, a half-wave dipole antenna for the frequency band of interest is placed at the reference centre of the chamber. An RF Signal source for the frequency band of interest is connected to the dipole with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A known (measured) power (Pin) is applied to the input of the dipole, and the power received (Pr) at the chamber's probe antenna is recorded.
- The substitution method is used. Substitution values at each frequency are measured before and saved to the test software. A "reference path loss" is established as ARpl=Pin + 2.15 Pr. The ARpl is the attenuation of "reference path loss", and including the gain of receive antenna, the cable loss and the air loss. The measurement results are obtained as described below: Power=PMea+ARpl
- 3 The EUT is substituted for the dipole at the reference centre of the chamber and a scan is performed to obtain the radiation pattern.
- 4 From the radiation pattern, the co-ordinates where the maximum antenna gain occurs are identified.
- 5 The EUT is then put into continuously transmitting mode at its maximum power level.
- Power mode measurements are performed with the receiving antenna placed at the coordinates determined in Step 3 to determine the output power as defined in Rule 24.232 (b) and (c). The "reference path loss" from Step1 is added to this result.
- 7 This value is EIRP since the measurement is calibrated using a half-wave dipole antenna of known gain (2.15 dBi) and known input power (Pin).
- 8 ERP can be calculated from EIRP by subtracting the gain of the dipole, ERP = EIRP -2.15dBi..

5.2.2 PROVISIONS APPLICABLE

This is the test for the maximum radiated power from the EUT. Rule Part 24.232(b) specifies, "Mobile/portable stations are limited to 2 watts e.i.r.p. Peak power" and 24.232(c) specifies that "Peak transmit power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage." Rule Part 22.913(a) specifies "Maximum ERP. The effective radiated power (ERP) of base transmitters and cellular repeaters must not exceed 500 Watts. The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts."

Radiated Power Limits for GSM 850 MHZ (ERP)						
Mode Power Step Nominal Peak Power						
GSM	5	<=38.45 dBm (7W)				
GPRS	3	<=38.45 dBm (7W)				

Radiated Power Limits for PCS 1900 MHZ (E.I.R.P.)					
Mode Power Step Nominal Peak Power					
GSM	0	<=33 dBm (2W)			
GPRS	3	<=33 dBm (2W)			

Report No.: AGC14G110901F2A Page 11 of 52

5.2.3 MEASUREMENT RESULT

	Radiated Power (ERP) for GSM 850 MHZ							
			Res	ult				
Mode	Frequency	Power Step	Max. Peak ERP	Polarization	Conclusion			
			(dBm)	Of Max. ERP				
	824.2	5	30.55	Horizontal	Pass			
GSM	836.6	5	30.54	Horizontal	Pass			
	848.8	5	30.47	Horizontal	Pass			
CDDC	824.2	3	30.35	Horizontal	Pass			
1 slot	836.6	3	30.46	Horizontal	Pass			
	848.8	3	30.53	Horizontal	Pass			
ODDO	824.2	3		Horizontal	Pass			
GPRS	836.6	3		Horizontal	Pass			
2 slots	848.8	3		Horizontal	Pass			
CDDC	824.2	2	l can than	Horizontal	Pass			
GPRS	836.6	2	Less than	Horizontal	Pass			
3 slots	ots 848.8 2 27 dBm	Horizontal	Pass					
CDDC	824.2	2]	Horizontal	Pass			
GPRS	836.6	2]	Horizontal	Pass			
4 slots	848.8	2	1	Horizontal	Pass			

Radiated Power (E.I.R.P) for PCS 1900 MHZ

				esult	
Mode	Frequency	Power Step	Max. Peak	Polarization	Conclusion
			E.I.R.P.(dBm)	Of Max. E.I.R.P.	
	1850.2	0	28.73	Horizontal	Pass
GSM	1880.0	0	28.64	Horizontal	Pass
	1909.8	0	28.65	Horizontal	Pass
CDDC	1850.2	3	28.67	Horizontal	Pass
1slot 1909.8	3	28.64	Horizontal	Pass	
	3	28.62	Horizontal	Pass	
GPRS	1850.2	3		Horizontal	Pass
2 slots	1880.0	3		Horizontal	Pass
2 51015	1909.8	3		Horizontal	Pass
GPRS	1850.2	2	Less than	Horizontal	Pass
3 slots	1880.0	2	27 dBm	Horizontal	Pass
3 81018	1909.8 2	27 UDIII	Horizontal	Pass	
CDDS	1850.2	2		Horizontal	Pass
GPRS 4 slots	1880.0	2		Horizontal	Pass
4 51015	1909.8	2		Horizontal	Pass

Page 12 of 52

6. SPURIOUS EMISSION

6.1 CONDUCTED SPURIOUS EMISSION

6.1.1 MEASUREMENT METHOD

The following steps outline the procedure used to measure the conducted emissions from the EUT.

- 1, Determine frequency range for measurements: From CFR 2.1057 the spectrum should be investigated from the lowest radio frequency generated in the equipment up to at least the 10th harmonic of the carrier frequency. For the equipment of PCS1900 band, this equates to a frequency range of 30 MHz to 19.1 GHz, data taken from 30 MHz to 20 GHz. For GSM850, data taken from 30 MHz to 9 GHz.
- 2, Determine EUT transmit frequencies: the following typical channels were chosen to conducted emissions testing.

Typical Channels for testing of GSM 850 MHz					
Channel	Frequency (MHz)				
128	824.2				
190	836.6				
251	848.8				

Typical Channels for testing of PCS 1900 MHz					
Channel	Frequency (MHz)				
512	1850.2				
661	1880.0				
810	1909.8				

6.1.2 PROVISIONS APPLICABLE

On any frequency outside frequency band of the USPCS spectrum, the power of any emission shall be attenuated below the transmitter power (P, in Watts) by at least 43+10Log(P) dB. For all power levels +30 dBm to 0 dBm, this becomes a constant specification limit of -13 dBm.

Page 13 of 52

6.1.3 MEASUREMENT RESULT

	Conducted Spurious Emission for GSM 850 MHz							
Harmonic	Tx ch. 128 Freq. (MHz)	Level (dBm)	Tx ch. 190 Freq. (MHz)	Level (dBm)	Tx ch. Freq. (MHz) 251	Level (dBm)		
2	1648.4	B.I.N.F	1673.2	B.I.N.F	1697.6	B.I.N.F		
3	2472.6	B.I.N.F	2509.8	B.I.N.F	2546.4	B.I.N.F		
4	3296.8	B.I.N.F	3346.4	B.I.N.F	3395.2	B.I.N.F		
5	4121	B.I.N.F	4183	B.I.N.F	4244	B.I.N.F		
6	4945.2	B.I.N.F	5019.6	B.I.N.F	5092.8	B.I.N.F		
7	5769.4	B.I.N.F	5856.2	B.I.N.F	5941.6	B.I.N.F		
8	6593.6	B.I.N.F	6692.8	B.I.N.F	6790.4	B.I.N.F		
9	7417.8	B.I.N.F	7529.4	B.I.N.F	7639.2	B.I.N.F		
10	8242	B.I.N.F	8366	B.I.N.F	8488	B.I.N.F		
B.I.N.F	B.I.N.F: Below Instruments Noise floor							

Conducted Spurious Emission for PCS 1900 MHz								
Harmonic	Tx ch. 512 Freq. (MHz)	Level (dBm)	Tx ch. 661 Freq. (MHz)	Level (dBm)	Tx ch. 810 Freq. (MHz)	Level (dBm)		
2	3700.4	B.I.N.F	3760	B.I.N.F	3819.6	B.I.N.F		
3	5550.6	B.I.N.F	5640	B.I.N.F	5729.4	B.I.N.F		
4	7400.8	B.I.N.F	7520	B.I.N.F	7639.2	B.I.N.F		
5	9251.0	B.I.N.F	9400	B.I.N.F	9549.0	B.I.N.F		
6	11101.2	B.I.N.F	11280	B.I.N.F	11458.8	B.I.N.F		
7	12951.4	B.I.N.F	13160	B.I.N.F	13368.6	B.I.N.F		
8	14801.6	B.I.N.F	15040	B.I.N.F	15278.4	B.I.N.F		
9	16651.8	B.I.N.F	16920	B.I.N.F	17188.2	B.I.N.F		
10	18502.0	B.I.N.F	18800	B.I.N.F	19098.0	B.I.N.F		
B.I.N.F								

Note: Below 30MHZ no Spurious found and The GSM modes is the worst condition.

Page 14 of 52


6.2 Radiated Spurious Emission

6.2.1 MEASUREMENT METHOD

The measurements procedures specified in TIA-603C-2004 were used for testing. The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment. The resolution bandwidth is set 1MHz as outlined in Part 24.238. The measurements were performed on all modes(GSM, GPRS) at 3 typical channels(the Top Channel, the Middle Channel and the Bottom Channel) for both GSM band and PCS band.


The procedure of radiated spurious emissions is as follows:

a) Pre-calibration With pre-calibration method, the Radiated Spurious Emissions(RSE) is calculated as, RSE=Rx(dBuV)+CL(dB)+SA(dB)+Gain(dBi)-107(dBuV to dBm) The SA is calibrated using following setup.

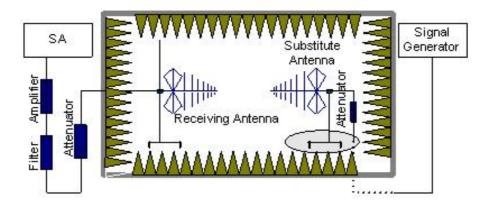

b) EUT was placed on a 0.8 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the test item for emission measurements. The height of receiving antenna is 0.8m. The test setup refers to figure below. Detected emissions were maximized at each frequency by rotating the test item and adjusting the receiving antenna polarization. The radiated emission measurements of all non-harmonic and harmonics of the transmit frequency through the 10th harmonic were measured with peak detector and 1MHz bandwidth.

Page 15 of 52

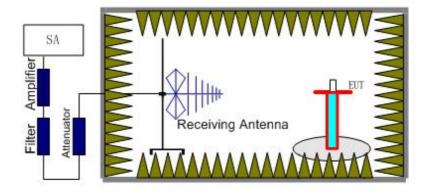

Radiated emissions measurements were made only at the upper, middle, and lower carrier frequencies of the PCS band (1850.2 MHz, 1880 MHz and 1909.8 MHz) ,GSM850 band (824.2MHz, 836.6MHz, 848.8MHz) . It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of the PCS1900 ,GSM850 into any of the other blocks.

The substitution method is used. Substitution values at each frequency are measured before and saved to the test software. A "reference path loss" is established and the A_{Rpl} is the attenuation of "reference path loss", and including the gain of receive antenna, the gain of the preamplifier, the cable loss and the air loss. The measurement results are obtained as described below: Power=P_{Mea}+A_{Rpl}

6.2.2 PROVISIONS APPLICABLE

(a) On any frequency outside a IMOBOnsee's frequency block (e.g. A, D, B, etc.) within the USPCS spectrum, the power of any emission shall be attenuated below the transmitter power (P, in Watts) by at least 43+10Log(P) dB. The specification that emissions shall be attenuated below the transmitter power (P) by at least 43 + 10 log (P) dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

Report No.: AGC14G110901F2A Page 16 of 52

6.2.3 MEASUREMENT RESULT

The Worst Test Results for Channel 128 / 824.2 MHz								
Frequency(MHz) Power(dBm) A _{Rpl} (dBm) P _{Mea} (dBm) Limit (dBm) Polarity								
1648.00	-36.83	-4.08	-40.91	-13.00	Horizontal			
1967.72	-36.68	-3.09	-39.77	-13.00	Vertical			
2717.49	-36.79	2.46	-34.33	-13.00	Horizontal			
9331.27	-39.16	2.7	-36.46	-13.00	Horizontal			

The Worst Test Results for Channel 190/836.6 MHz							
Frequency(MHz) Power(dBm) A _{Rpl} (dBm) P _{Mea} (dBm) Limit (dBm) Polarity							
1673.00	-42.10	-3.14	-45.24	-13.00	Horizontal		
2063.36	-38.64	-0.71	-39.35	-13.00	Vertical		
9276.02	-40.30	3.05	-37.25	-13.00	Vertical		

The Wayst Test Decille for Chemnel 254/949 9 MUs							
The Worst Test Results for Channel 251/848.8 MHz							
Frequency(MHz) Power(dBm) A _{Rpl} (dBm) P _{Mea} (dBm) Limit (dBm) Polarity							
1698.00	-39.47	-2.73	-42.20	-13.00	Horizontal		
2041.92	-40.97	-3.73	-44.71	-13.00	Vertical		
2394.54	-46.04	-1.94	-47.98	-13.00	Vertical		
9383.91	-38.44	8.56	-29.88	-13.00	Horizontal		

	The Worst Test Results for Channel 512/1850.2 MHz						
Frequency(MHz)	Power(dBm)	A _{Rpl} (dBm)	Р _{меа} (dВm)	Limit (dBm)	Polarity		
1999.00	-41.48	9.27	-32.20	-13.00	Horizontal		
3881.56	-38.27	7.39	-30.88	-13.00	Horizontal		
13121.91	-37.89	12.31	-25.57	-13.00	Vertical		
18125.57	-41.63	17.85	-23.77	-13.00	Vertical		

Report No.: AGC14G110901F2A Page 17 of 52

	The Worst Test Results for Channel 661/1880.0 MHz						
Frequency(MHz)	Power(dBm)	A _{Rpl} (dBm)	Рмеа(dBm)	Limit (dBm)	Polarity		
2000.50	-43.88	8.78	-35.10	-13.00	Vertical		
9538.06	-38.36	11.01	-27.35	-13.00	Vertical		
13328.57	-37.05	14.56	-22.49	-13.00	Horizontal		
15224.78	-39.87	14.61	-25.26	-13.00	Vertical		
18131.40	-44.04	20.31	-23.73	-13.00	Horizontal		
	The Worst Tes	t Results for	Channel 810	1909.8 MHz			
Frequency(MHz)	Power(dBm)	A _{Rpl} (dBm)	Рмеа(dBm)	Limit (dBm)	Polarity		
2000.00	-36.48	9.90	-26.58	-13.00	Vertical		
9660.39	-32.95	10.33	-22.62	-13.00	Horizontal		
13663.75	-41.77	11.31	-30.46	-13.00	Horizontal		
15553.66	-37.45	15.62	-21.83	-13.00	Vertical		
18156.75	-38.37	19.30	-19.07	-13.00	Horizontal		

 $\textbf{Note:} \ \ \textbf{Below 30MHZ no Spurious found and The GSM modes is the worst condition}.$

Page 18 of 52

7. MAINS CONDUCTED EMISSION

7.1 MEASUREMENT METHOD

The measurement procedure specified in ANSI C63.4-2003 was used for testing. Conducted Emission was measured with travel charger.

7.2 PROVISIONS APPLICABLE

Frequency of Emission (MHz)	Conducted Limit(dBuV)				
, , ,	Quasi-Peak	Average			
0.15 – 0.5	66 to 56 *	56 to 46 *			
0.5 – 5	56	46			
5 – 30	60	50			
* Decreases with the logarithm of the frequency.					


7.3 MEASUREMENT RESULT

Humidity: 60 %

Page 19 of 52

LINE CONDUCTED EMISSION - L

Conducted Emission Measurement

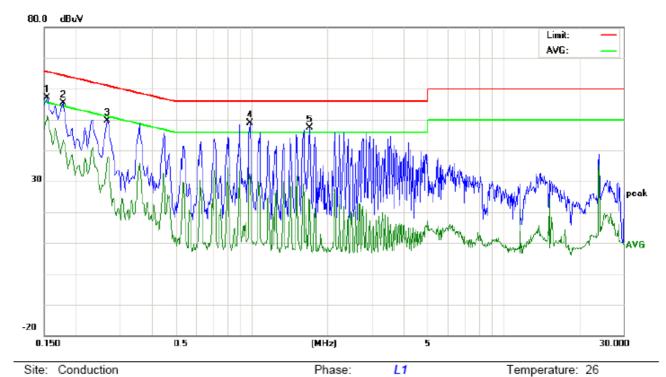

Limit: FCC Class B Conduction(QP) Power:

EUT: Mobile Phone


M/N: NERO Mode: Call Note:

No.	Freq.	Rea	ading_L (dBuV)		Correct Factor		asuren (dBuV)		1	nit uV)	Mai (d	rgin fB)	P/F	Comment
	(MHz)	Peak	QP	AVG	dB	Peak	QP	AVG	QP	AVG	QP	AVG		
1	0.1539	46.93		41.21	10.16	57.09		51.37	65.78	55.78	-8.69	-4.41	Р	
2	0.1780	45.28		33.08	10.19	55.47		43.27	64.57	54.57	-9.10	-11.30	Р	
3	0.2660	39.42		27.27	10.28	49.70		37.55	61.24	51.24	-11.54	-13.69	Р	
4	0.9860	38.47		20.96	10.38	48.85		31.34	56.00	46.00	-7.15	-14.66	Р	
5	1.7020	36.95		13.54	10.32	47.27		23.86	56.00	46.00	-8.73	-22.14	Р	

Page 20 of 52

LINE CONDUCTED EMISSION - N

Conducted Emission Measurement

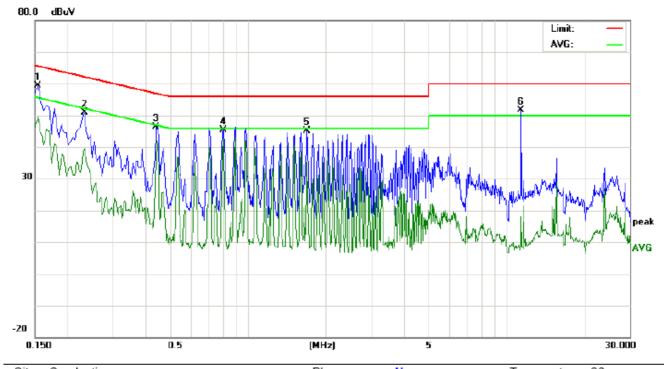

Site: Conduction Phase: N Temperature: 26
Limit: FCC Class B Conduction(QP) Power: Humidity: 60 %

EUT: Mobile Phone

M/N: NERO Mode: Call Note:

No.	Freq.	Rea	ading_L (dBuV)		Correct Factor		asuren (dBuV)		1	nit uV)	Mai (d	rgin IB)	P/F	Comment
	(MHz)	Peak	QP	AVG	dB	Peak	QP	AVG	QP	AVG	QP	AVG		
1	0.1539	49.25		39.14	10.16	59.41		49.30	65.78	55.78	-6.37	-6.48	Р	
2	0.2340	40.54		29.31	10.25	50.79		39.56	62.30	52.30	-11.51	-12.74	Р	
3	0.4420	36.08		28.34	10.36	46.44		38.70	57.02	47.02	-10.58	-8.32	Р	
4	0.8059	35.15		29.03	10.29	45.44		39.32	56.00	46.00	-10.56	-6.68	Р	
5	1.6940	34.88		25.10	10.32	45.20		35.42	56.00	46.00	-10.80	-10.58	Р	
6	11.4020	41.45		7.99	10.12	51.57		18.11	60.00	50.00	-8.43	-31.89	Р	

Note: The GSM850 modes is the worst condition.

Page 21 of 52

8. FREQUENCY STABILITY

8.1 MEASUREMENT METHOD

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the EUT in a "call mode". This is accomplished with the use of R&S CMU200 DIGITAL RADIO COMMUNICATION TESTER.

- 1 , Measure the carrier frequency at room temperature.
- 2 , Subject the EUT to overnight soak at -10 °C.
- 3 , With the EUT, powered via nominal voltage, connected to the CMU200 and in a simulated call on channel 661 for PCS 1900 , channel 190 for GSM850 measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
- 4 , Repeat the above measurements at 10° C increments from -10 $^{\circ}$ C to +50 $^{\circ}$ C. Allow at least 1 1/2 hours at each temperature, unpowered, before making measurements.
- 5 , Re-measure carrier frequency at room temperature with nominal voltage. Vary supply voltage from minimum voltage to maximum voltage, in 0.1Volt increments re-measuring carrier frequency at each voltage. Pause at nominal voltage for 1 1/2 hours unpowered, to allow any self-heating to stabilize, before continuing.
- 6 , Subject the EUT to overnight soak at $+50^{\circ}$ C.
- 7 , With the EUT, powered via nominal voltage, connected to the CMU200 and in a simulated call on the centre channel, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
- 8 , Repeat the above measurements at 10° C increments from +50°C to -10°C. Allow at least 1 1/2 hours at each temperature, unpowered, before making measurements.
- 9 , At all temperature levels hold the temperature to +/- 0.5 ℃ during the measurement procedure.

8.2 PROVISIONS APPLICABLE

8.2.1 For Hand carried battery powered equipment

According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. As this transceiver is considered "Hand carried, battery powered equipment" Section 2.1055(d)(2) applies. This requires that the lower voltage for frequency stability testing be specified by the manufacturer. This transceiver is specified to operate with an input voltage of between 3.4VDC and 4.2VDC, with a nominal voltage of 3.7VDC. Operation above or below these voltage limits is prohibited by transceiver software in order to prevent improper operation as well as to protect components from overstress. These voltages represent a tolerance of -10 % and +12.5 %. For the purposes of measuring frequency stability these voltage limits are to be used.

Page 22 of 52

8.2.2 For equipment powered by primary supply voltage

According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. For this EUT section 2.1055(d)(1) applies. This requires varying primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.

8.3 MEASUREMENT RESULT

Frequency Error Against Voltage for GSM 850 MHz						
Voltage(V)	Frequency error(Hz)	Frequency error(ppm)				
3.4	19	0.023				
3.7	16	0.019				
4.2	15	0.018				

Frequen	Frequency Error Against Temperature for GSM 850 MHz						
temperature(℃)	Frequency error(Hz)	Frequency error(ppm)					
-10	35	0.042					
0	31	0.037					
10	26	0.031					
20	20	0.024					
30	26	0.031					
40	29	0.035					
50	40	0.048					

Note: The EUT doesn't work below -10 °C

Page 23 of 52

Frequency Error Against Voltage for PCS 1900 MHz						
Voltage(V)	Frequency error(Hz)	Frequency error(ppm)				
3.4	30	0.016				
3.7	29	0.015				
4.2	34	0.018				

	Frequency Error Against Temperature for PCS 1900 MHz					
temperature(℃)	Frequency error(Hz)	Frequency error(ppm)				
-10	43	0.023				
0	37	0.020				
10	32	0.017				
20	30	0.016				
30	31	0.016				
40	37	0.020				
50	43	0.023				

Note: The EUT doesn't work below -10 $^{\circ}\mathrm{C}$

Page 24 of 52

9. OCCUPIED BANDWIDTH

9.1 MEASUREMENT METHOD

The test set up and general procedure is similar to conducted peak output power test. Only different for setting the measurement configuration of the measuring instrument of Spectrum Analyzer.

9.2 PROVISIONS APPLICABLE

The occupied bandwidth (99%) shall not exceed 300 KHz.

9.3 MEASUREMENT RESULT

Occupied Bandwidth (99%) for GSM 850 MHz					
Mode	Frequency(MHz)	Occupied Bandwidth (99%)(kHz)			
Low Channel	824.2	245.59			
Middle Channel	836.6	248.90			
High Channel	848.8	248.36			

Occupied Bandwidth (99%) for PCS 1900 MHz					
Mode	Frequency(MHz)	Occupied Bandwidth (99%)(kHz)			
Low Channel	1850.2	245.66			
Middle Channel	1880.0	248.16			
High Channel	1909.8	245.17			

Page 25 of 52

10. EMISSION BANDWIDTH

10.1 MEASUREMENT METHOD

The test set up and general procedure is similar to conducted peak output power test. Only different for setting the measurement configuration of the measuring instrument of Spectrum Analyzer.

10.2 PROVISIONS APPLICABLE

The emission bandwidth is defined as two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26dB below the transmitter power

10.3 MEASUREMENT RESULT

Emission Bandwidth (-26dBc) for GSM 850 MHz					
Mode	Frequency(MHz)	Emission Bandwidth (-26dBc)(kHz)			
Low Channel	824.2	315.78			
Middle Channel	836.6	315.39			
High Channel	848.8	308.18			

Emission Bandwidth (-26dBc) for PCS 1900 MHz		
Mode	Frequency(MHz)	Emission Bandwidth (-26dBc)(kHz)
Low Channel	1850.2	306.90
Middle Channel	1880.0	307.22
High Channel	1909.8	316.44

Page 26 of 52

11. BAND EDGE

11.1 MEASUREMENT METHOD

The test set up and general procedure is similar to conducted peak output power test. Only different for setting the measurement configuration of the measuring instrument of Spectrum Analyzer.

11.2 PROVISIONS APPLICABLE

as Specified in FCC rules of 22.917(b) and 24.238(b)

11.3 MEASUREMENT RESULT

Please refers to Appendix III for compliance test plots for band edges


Page 27 of 52

APPENDIX I


TEST PLOTS FOR CONDUCTED SPURIOUS EMISSION

Page 28 of 52

CONDUCTED EMISSION IN GSM BAND Conducted Emission Transmitting Mode CH 128 30MHz – 1GHz

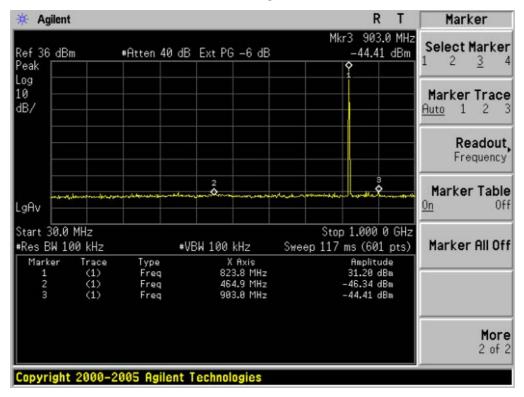


Conducted Emission Transmitting Mode CH 128 1GHz – 9GHz

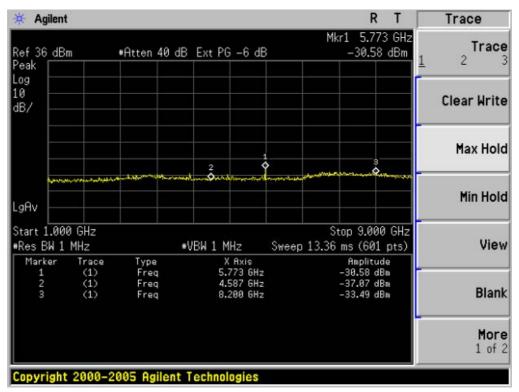


Report No.: AGC14G110901F2A Page 29 of 52

Conducted Emission Transmitting Mode CH 190 30MHz - 1GHz

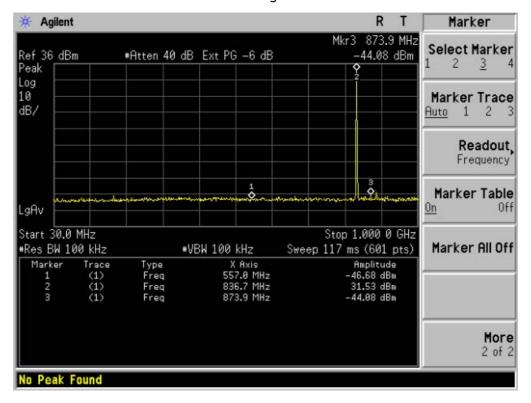


Conducted Emission Transmitting Mode CH 190 1GHz - 9GHz

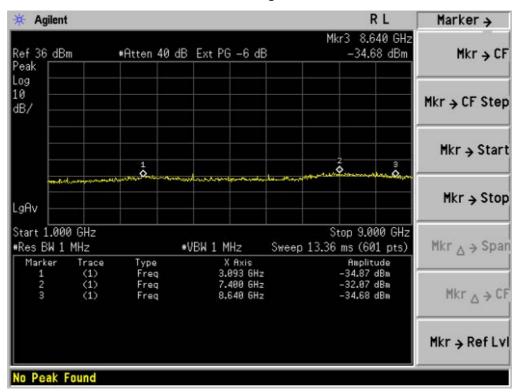


Report No.: AGC14G110901F2A Page 30 of 52

Conducted Emission Transmitting Mode CH 251 30MHz - 1GHz

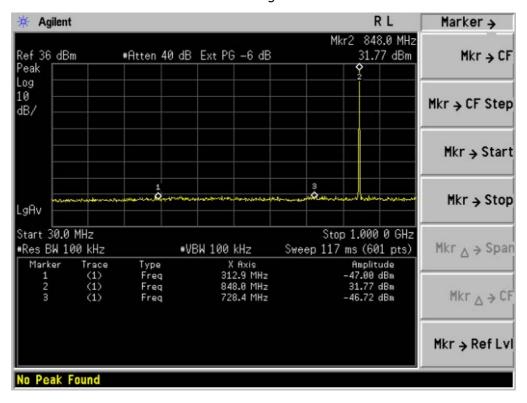


Conducted Emission Transmitting Mode CH 251 1GHz - 9GHz

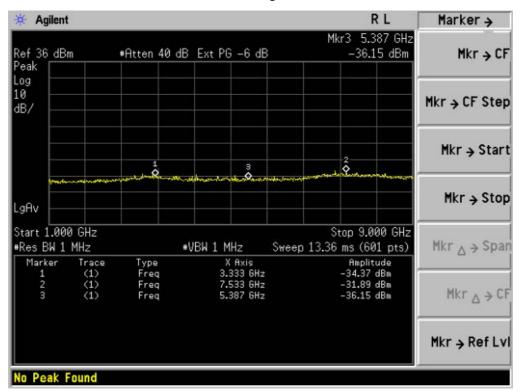


Report No.: AGC14G110901F2A Page 31 of 52

Conducted Emission Idle Mode 30MHz - 1GHz

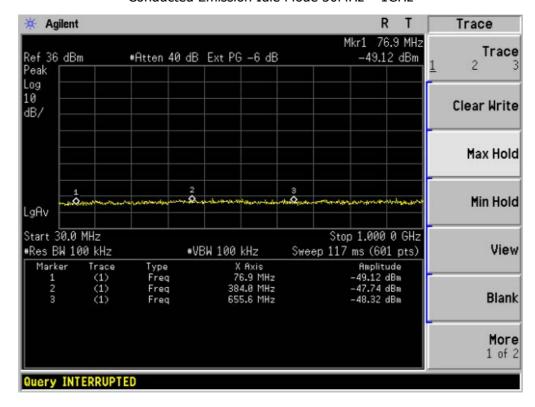


Conducted Emission Idle Mode 1GHz - 9GHz

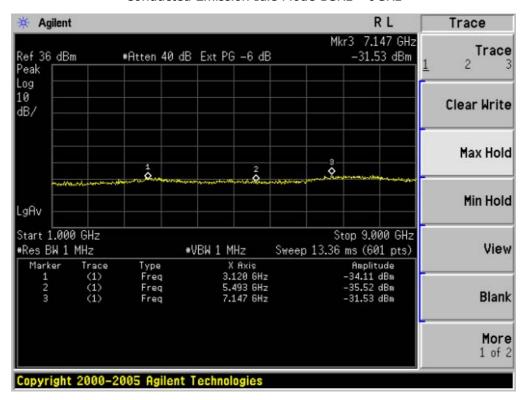


Page 32 of 52

CONDUCTED EMISSION IN PCS BAND Conducted Emission Transmitting Mode CH 512 30MHz – 1GHz

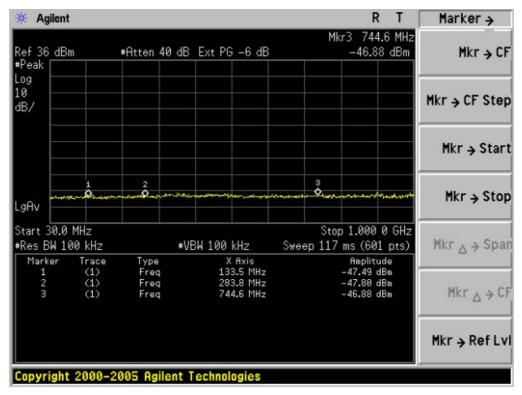


Conducted Emission Transmitting Mode CH 512 1GHz - 20GHz

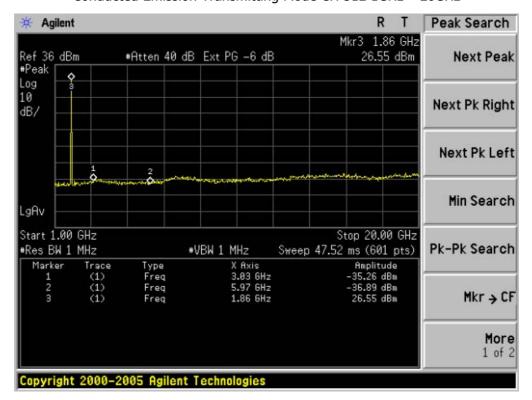


Page 33 of 52

Conducted Emission Transmitting Mode CH 661 30MHz - 1GHz

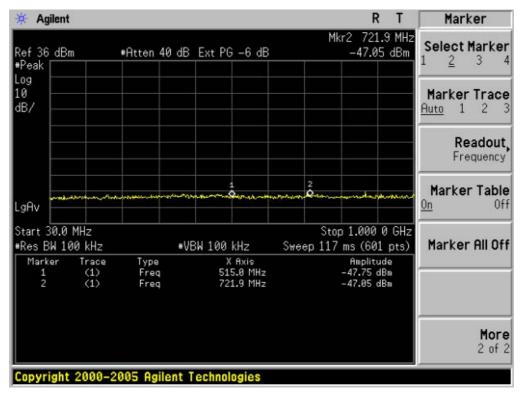


Conducted Emission Transmitting Mode CH 661 1GHz - 20GHz

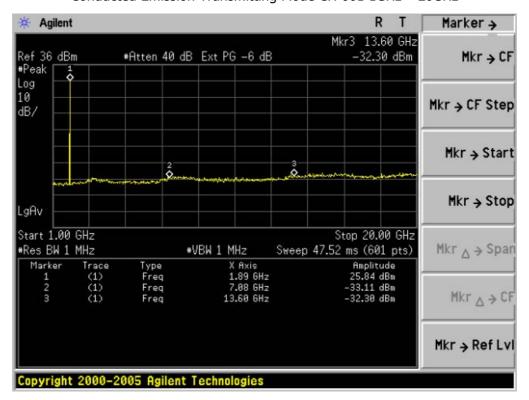


Page 34 of 52

Conducted Emission Transmitting Mode CH 810 30MHz - 1GHz

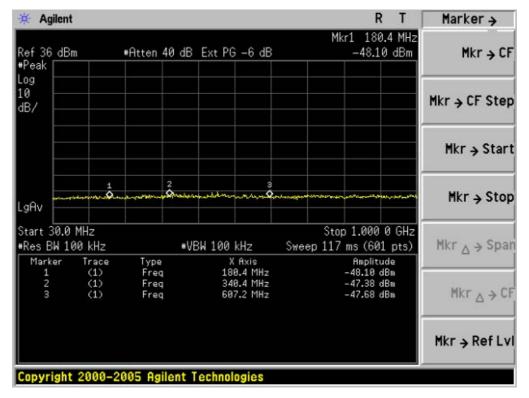

Conducted Emission Transmitting Mode CH 810 1GHz – 20GHz

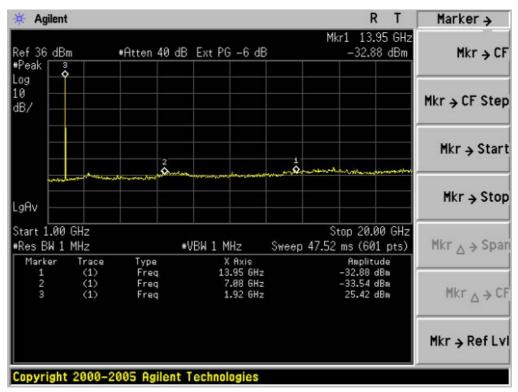


Page 35 of 52

APPENDIX II

TEST PLOTS FOR OCCUPIED BANDWIDTH (99%) EMISSION BANDWIDTH (-26dBC)

Page 36 of 52

Occupied Bandwidth (99%) GSM 850 BAND CH 128

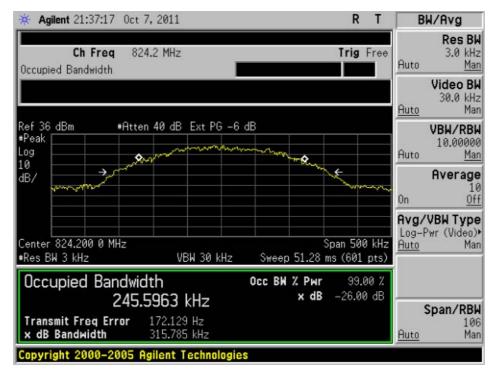

Occupied Bandwidth (99%) GSM 850 BAND CH 190




Page 37 of 52

Occupied Bandwidth (99%) GSM 850 BAND CH 251




Occupied Bandwidth (99%) PCS 1900 BAND CH 512

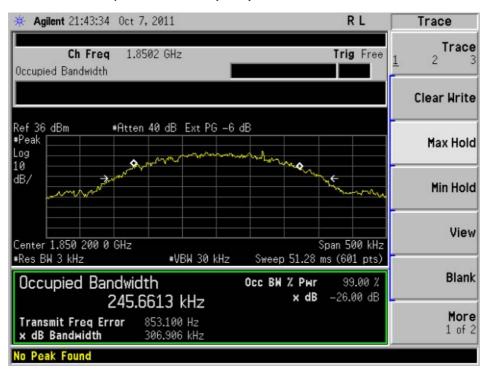


Page 38 of 52

Occupied Bandwidth (99%) PCS 1900 BAND CH 661

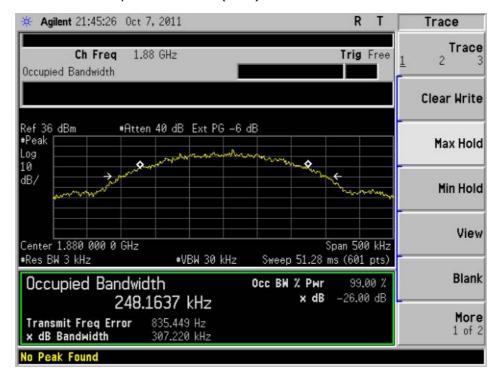

Occupied Bandwidth (99%) PCS 1900 BAND CH 810

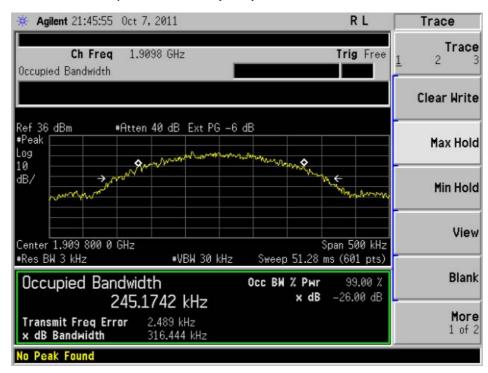


Page 39 of 52

APPENDIX III


TEST PLOTS FOR BAND EDGES

Report No.: AGC14G110901F2A Page 40 of 52

Low Band Edge GSM 850 BAND CH 128

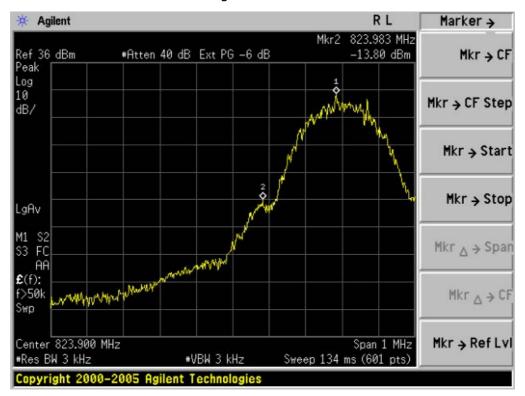


High Band Edge GSM 850 BAND CH 251

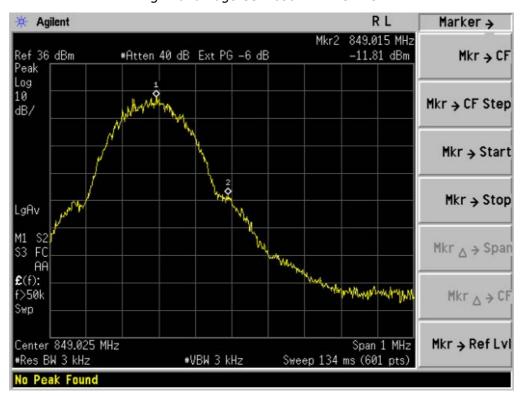


Report No.: AGC14G110901F2A Page 41 of 52

Low Band Edge PCS 1900 BAND CH 512

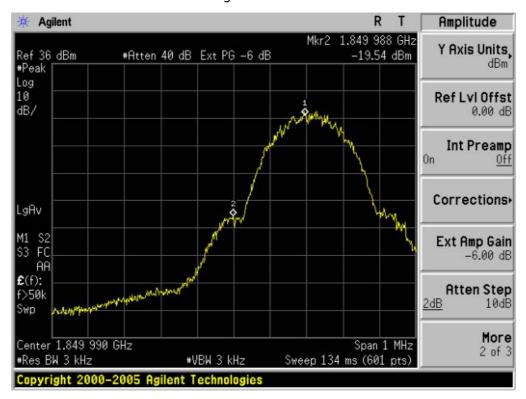

High Band Edge PCS 1900 BAND CH 810

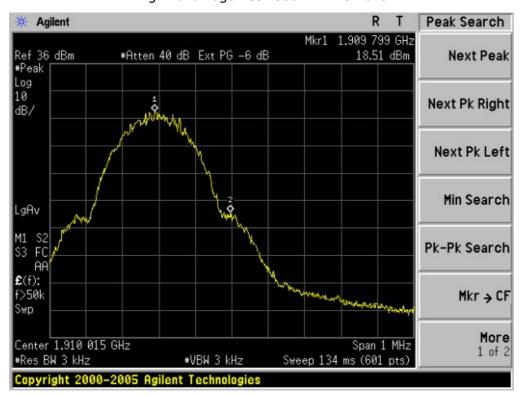

Page 42 of 52

APPENDIX IV


PHOTOGRAPHS OF TEST SETUP

Report No.: AGC14G110901F2A Page 43 of 52

CONDUCTED EMISSION



RADIATED SPURIOUS EMISSION

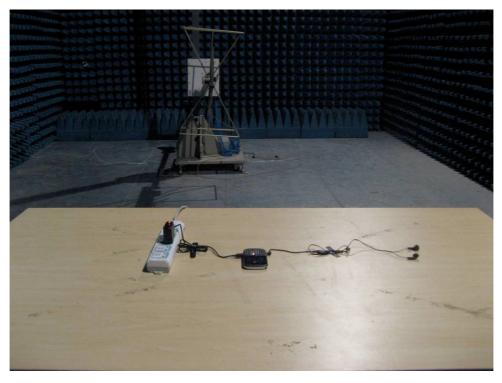

Page 44 of 52

APPENDIX V

PHOTOGRAPHS OF EUT

Page 45 of 52

TOP VIEW OF SAMPLE



BOTTOM VIEW OF SAMPLE



Page 46 of 52

LEFT VIEW OF SAMPLE



RIGHT VIEW OF SAMPLE



Report No.: AGC14G110901F2A Page 47 of 52



BACK VEIW OF SAMPLE



Page 48 of 52

ALL VIEW OF SAMPLE



OPEN VIEW OF SAMPLE-1




Page 49 of 52

OPEN VIEW OF SAMPLE-2




OPEN VIEW OF SAMPLE -3

GSM Antenna

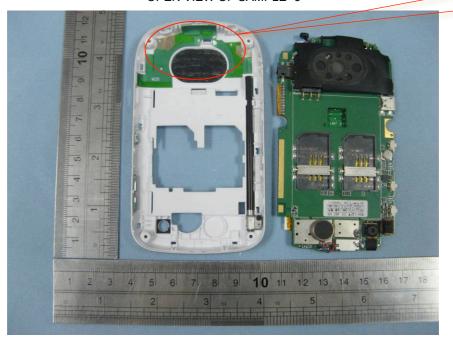


Page 50 of 52

INTERNAL VIEW OF SAMPLE - 1

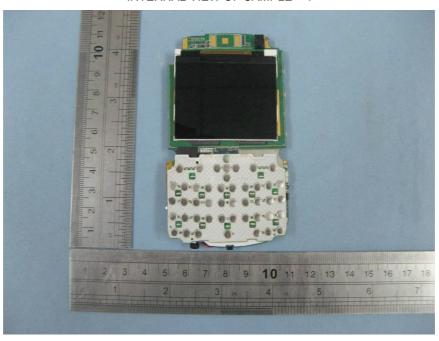


INTERNAL VIEW OF SAMPLE - 2

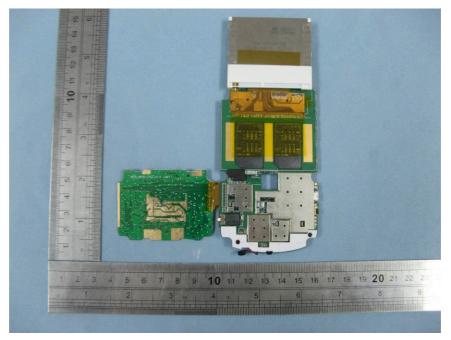


Report No.: AGC14G110901F2A Page 51 of 52

INTERNAL VIEW OF SAMPLE - 3

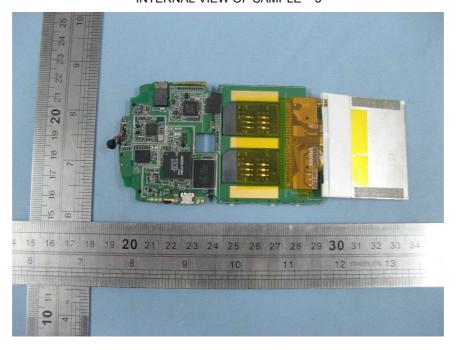


INTERNAL VIEW OF SAMPLE - 4

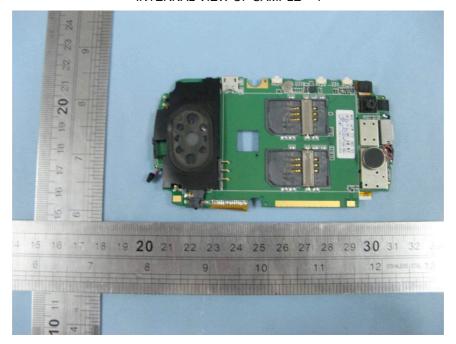

Page 52 of 52

INTERNAL VIEW OF SAMPLE - 5

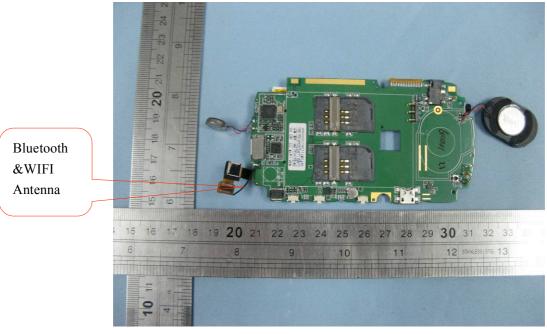

----END OF REPORT----